



# FCC RF Test Report

**APPLICANT** : Lenovo(Shanghai) Electronics Technology Co., Ltd.  
**EQUIPMENT** : Notebook Computer  
**BRAND NAME** : Lenovo  
**MODEL NAME** : Lenovo YB-J912L  
**FCC ID** : O57YBJ912L  
**STANDARD** : FCC 47 CFR Part 2, and 90(S)  
**CLASSIFICATION** : PCS Licensed Transmitter (PCB)

The product were integrated the WWAN module (Brand Name: Fibocom, Model Name: L850-GL, FCC ID: ZMOL850GL) and the BT/WLAN module (Brand Name: Intel®, Model Name: 8265D2W, FCC ID: PD98265D2) during the test.

The product was received on Jan. 03, 2018 and testing was completed on Feb. 05, 2018. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI/TIA-603-E and has been in compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Laboratory SPORTON INTERNATIONAL INC.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

*James Huang*



Approved by: James Huang / Manager

***Sporton International (Kunshan) Inc.***

***No.3-2 Ping-Xiang Rd, Kunshan Development Zone Kunshan City Jiangsu Province  
215335 China***



## TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT .....	4
<b>1 GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1 Applicant.....	5
1.2 Manufacturer .....	5
1.3 Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test .....	6
1.5 Modification of EUT .....	6
1.6 Maximum Conducted Power .....	6
1.7 Testing Site.....	7
1.8 Applied Standards .....	8
<b>2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....</b>	<b>9</b>
2.1 Test Mode.....	9
2.2 Connection Diagram of Test System .....	10
2.3 Support Unit used in test configuration and system.....	10
2.4 Frequency List of Low/Middle/High Channels.....	11
<b>3 TEST RESULT .....</b>	<b>12</b>
3.1 Conducted Output Power Measurement.....	12
3.2 Field Strength of Spurious Radiation Measurement .....	13
<b>4 LIST OF MEASURING EQUIPMENT .....</b>	<b>15</b>
<b>5 UNCERTAINTY OF EVALUATION .....</b>	<b>16</b>
<b>APPENDIX A. TEST RESULTS OF CONDUCTED TEST</b>	
<b>APPENDIX B. TEST RESULTS OF RADIATED TEST</b>	
<b>APPENDIX C. SETUP PHOTOGRAPHS</b>	



## REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FW810315	Rev. 01	Initial issue of report	Mar. 30, 2018

## SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	§2.1046	Conducted Output Power	Reporting only	PASS	-
-	§2.1049 §90.209	Occupied Bandwidth and 26dB Bandwidth	Reporting only	PASS	1
-	§2.1051 §90.691	Emission masks – In-band emissions	$< 50 + 10 \log_{10}(P[\text{Watts}])$	PASS	1
-	§2.1051 §90.691	Emission masks – Out of band emissions	$< 43 + 10 \log_{10}(P[\text{Watts}])$	PASS	1
3.2	§2.1053 §90.691	Field Strength of Spurious Radiation	$< 43 + 10 \log_{10}(P[\text{Watts}])$	PASS	Under limit 29.79 dB at 2444.00 MHz
-	§2.1055 §90.213	Frequency Stability for Temperature & Voltage	$< 2.5 \text{ ppm}$	PASS	1
<b>Remark 1:</b> The conducted test items can be referred to module RF report “RF170106C02-5”.					



# 1 General Description

## 1.1 Applicant

**Lenovo(Shanghai) Electronics Technology Co., Ltd.**

NO.68 BUILDING, 199 FENJU RD, Pilot Free Trade Zone, 200131, China

## 1.2 Manufacturer

**Lenovo PC HK Limited**

23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong

## 1.3 Feature of Equipment Under Test

Product Feature	
<b>Equipment</b>	Notebook Computer
<b>Brand Name</b>	Lenovo
<b>Model Name</b>	Lenovo YB-J912L
<b>FCC ID</b>	O57YBJ912L
<b>EUT supports Radios application</b>	WCDMA/HSPA/DC-HSDPA/ HSPA+ (16QAM uplink is not supported)/LTE WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth v3.0+EDR/ Bluetooth v4.0 LE/ Bluetooth v4.1 LE/ Bluetooth v4.2 LE
<b>IMEI Code</b>	Radiation: N/A
<b>HW Version</b>	Lenovo YB-J912L
<b>SW Version</b>	Windows 10
<b>EUT Stage</b>	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
<b>Tx Frequency</b>	LTE Band 26 : 814.7 ~ 823.3 MHz
<b>Rx Frequency</b>	LTE Band 26 : 859.7 ~ 868.3 MHz
<b>Bandwidth</b>	1.4MHz / 3MHz / 5MHz / 10MHz
<b>Maximum Output Power to Antenna</b>	22.93 dBm
<b>Antenna Type</b>	Fixed Internal Antenna
<b>Type of Modulation</b>	QPSK / 16QAM

**Remark:** This test report recorded only product characteristics and test results of PCS Licensed Transmitter (PCB).

## 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

## 1.6 Maximum Conducted Power

FCC Rule	System	Type of Modulation	BW	Maximum Conducted power(W)
Part 90S	LTE Band 26	QPSK	1.4 MHz	0.1963
Part 90S	LTE Band 26	16QAM	1.4 MHz	0.1585
Part 90S	LTE Band 26	QPSK	3 MHz	0.1959
Part 90S	LTE Band 26	16QAM	3 MHz	0.1578
Part 90S	LTE Band 26	QPSK	5 MHz	0.1954
Part 90S	LTE Band 26	16QAM	5 MHz	0.1567
Part 90S	LTE Band 26	QPSK	10 MHz	0.1866
Part 90S	LTE Band 26	16QAM	10 MHz	0.1552

## 1.7 Testing Site

Sporton International (Kunshan) Inc. is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600155-0) and the FCC designation No. is CN5013.

<b>Test Site</b>	Sporton International (Kunshan) Inc.	
<b>Test Site Location</b>	No.3-2 Ping-Xiang Rd, Kunshan Development Zone Kunshan City Jiangsu Province 215335 China TEL : +86-512-57900158 FAX : +86-512-57900958	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Test Firm Registration No.</b>
	TH01-KS	630927

SPORTON INTERNATIONAL INC. is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and under the FCC-recognized accredited testing laboratories by Mutual Recognition Agreement (MRA) in FCC Test.

<b>Test Site</b>	SPORTON INTERNATIONAL INC.		
<b>Test Site Location</b>	No.58, Aly. 75, Ln. 564 Wenhua 3rd Rd. Guishan Dist. Taoyuan City Taiwan TEL: +886-3-327-3456 FAX: +886-3-328-4978		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC designation No.</b>	<b>FCC Test Firm Registration No.</b>
	03CH12-HY	TW0007	214511

**Note:**

1. The test site complies with ANSI C63.4 2014 requirement.
2. Test data subcontracted: Radiated spurious emission in section 3.2 of this report.



## **1.8 Applied Standards**

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC 47 CFR Part 2, 90
- ♦ ANSI/TIA-603-E
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03
- ♦ FCC KDB 971168 D02 Misc Rev Approv License Devices v02

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

## 2 Test Configuration of Equipment Under Test


### 2.1 Test Mode

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission.

Frequency range investigated for radiated emission is 30 MHz to 10th harmonic.

Test Items	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Max. Output Power	26	v	v	v	v	-	-	v	v	v	v	v	v	v	v
Radiated Spurious Emission	26					-	-	v		v			v		
Note	1. The mark "v" means that this configuration is chosen for testing 2. The mark "-" means that this bandwidth is not supported.														

## 2.2 Connection Diagram of Test System

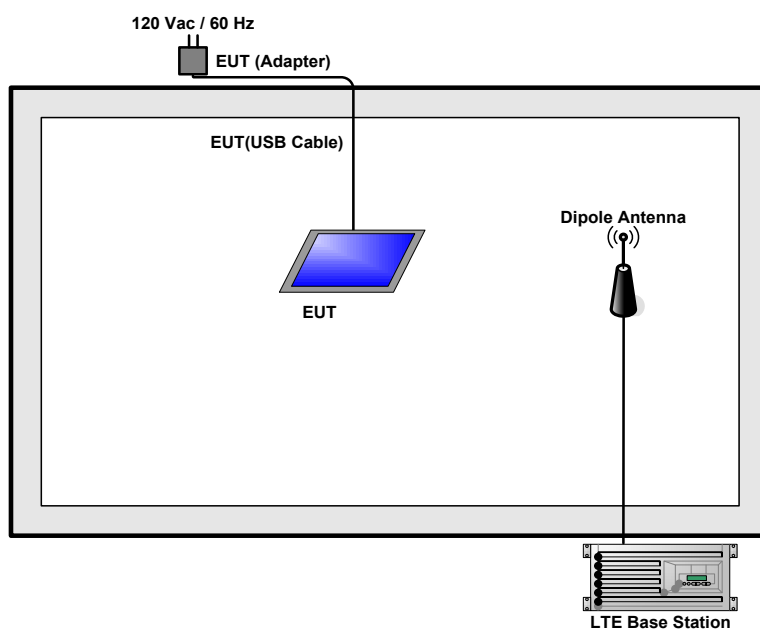

## 2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m

## 2.4 Frequency List of Low/Middle/High Channels

LTE Band 26 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	26740	-
	Frequency	-	819	-
5	Channel	26715	26740	26765
	Frequency	816.5	819	821.5
3	Channel	26705	26740	26775
	Frequency	815.5	819	822.5
1.4	Channel	26697	26740	26783
	Frequency	814.7	819	823.3

### 3 Test Result

#### 3.1 Conducted Output Power Measurement

##### 3.1.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.

##### 3.1.4 Test Setup

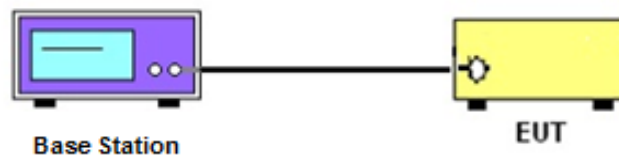

##### 3.1.5 Test Result of Conducted Output Power

Please refer to Appendix A.

## 3.2 Field Strength of Spurious Radiation Measurement

### 3.2.1 Description of Field Strength of Spurious Radiated Measurement

The radiated spurious emission was measured by substitution method according to ANSI/TIA-603-E. The power of any emission FCC Part 90.691 on any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth at least  $43 + 10 \log (P)$  dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log_{10}(P[\text{Watts}])$  dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### 3.2.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures


1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10.  $\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$
11.  $\text{ERP (dBm)} = \text{EIRP} - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
13. The limit line is derived from  $43 + 10 \log(P)$  dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10 \log(P)] \text{ (dB)}$   
 $= [30 + 10 \log(P)] \text{ (dBm)} - [43 + 10 \log(P)] \text{ (dB)}$   
 $= -13 \text{ dBm}.$

### 3.2.4 Test Setup

For radiated test from 30MHz to 1GHz

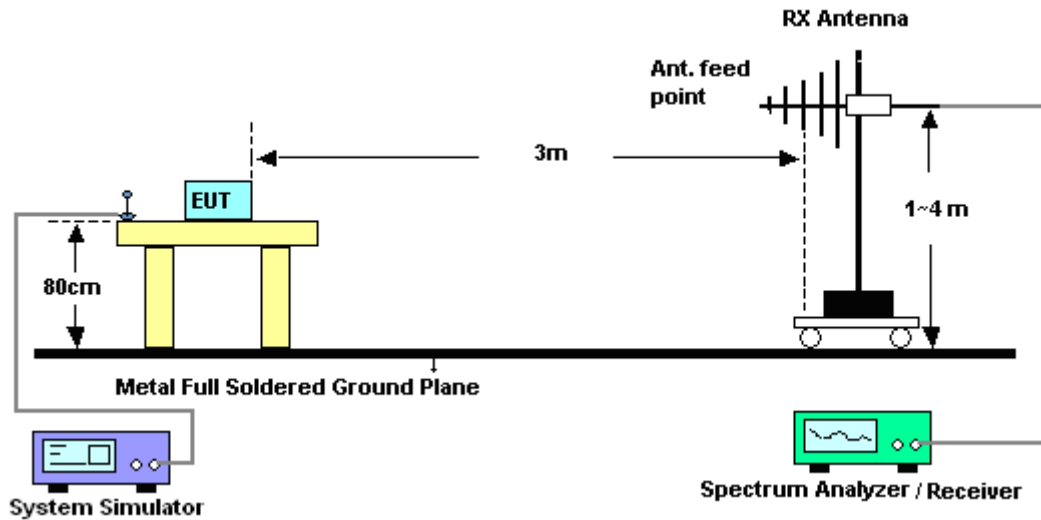

For radiated test above 1GHz

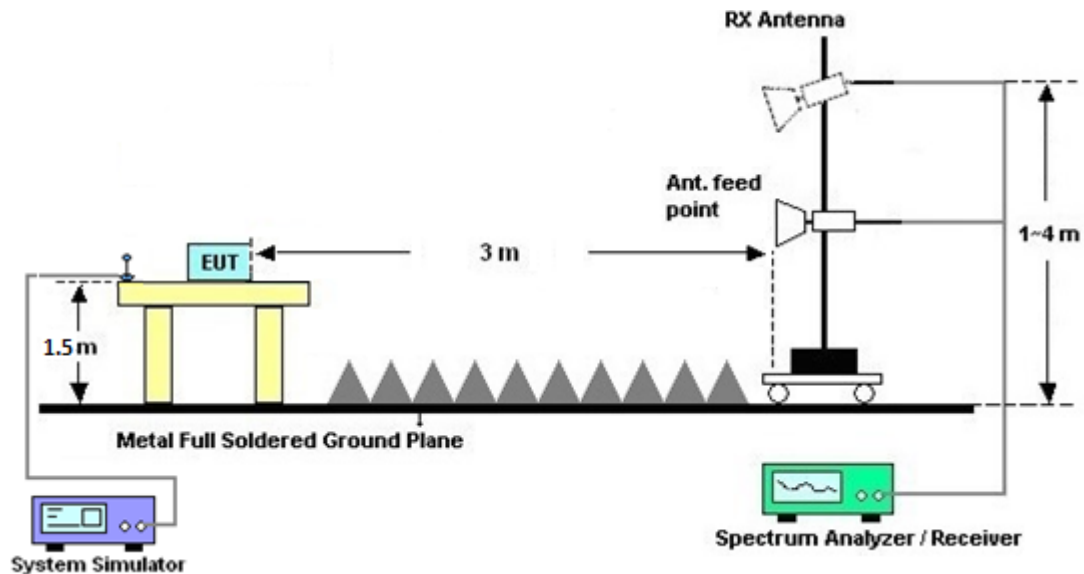

### 3.2.5 Test Result of Field Strength of Spurious Radiated

Please refer to Appendix B.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Radio communication analyzer	Anritsu	MT8820C	6201300652	2G/3G/LTE_ full band	Aug. 08, 2017	Jan. 31, 2018	Aug. 07, 2018	Conducted (TH01-KS)
EMI Test Receiver	Rohde & Schwarz	ESU26	100390	20Hz~26.5GHz	Dec. 25, 2017	Jan. 27, 2018 ~ Feb. 05, 2018	Dec. 24, 2018	Radiation (03CH12-HY)
Spectrum Analyzer	Keysight	N9010A	MY55370526	10Hz~44GHz	Mar. 15, 2017	Jan. 27, 2018 ~ Feb. 05, 2018	Mar. 14, 2018	Radiation (03CH12-HY)
Signal Generator	Rohde & Schwarz	SMF100A	101107	100kHz~40GHz	May. 22, 2017	Jan. 27, 2018 ~ Feb. 05, 2018	May. 21, 2018	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CBL 6111D&N-6-06	35414&AT-N 0602	30MHz~1GHz	Oct. 14, 2017	Jan. 27, 2018 ~ Feb. 05, 2018	Oct. 13, 2018	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1328	1GHz ~ 18GHz	Oct. 20, 2017	Jan. 27, 2018 ~ Feb. 05, 2018	Oct. 19, 2018	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170576	18GHz ~ 40GHz	Apr. 27, 2017	Jan. 27, 2018 ~ Feb. 05, 2018	Apr. 26, 2018	Radiation (03CH12-HY)
Preamplifier	COM-POWER	PA-103	161075	10MHz~1GHz	Mar. 23, 2017	Jan. 27, 2018 ~ Feb. 05, 2018	Mar. 22, 2018	Radiation (03CH12-HY)
Preamplifier	Keysight	83017A	MY53270148	1GHz~26.5GHz	Jan. 15, 2018	Jan. 27, 2018 ~ Feb. 05, 2018	Jan. 14, 2019	Radiation (03CH12-HY)
Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz, VSWR : 2.5:1 max	Jul. 18, 2017	Jan. 27, 2018 ~ Feb. 05, 2018	Jul. 17, 2018	Radiation (03CH12-HY)
Hygrometer	TECEPIL	DTM-303B	TP140349	N/A	Oct. 12, 2017	Jan. 27, 2018 ~ Feb. 05, 2018	Oct. 11, 2018	Radiation (03CH12-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Jan. 27, 2018 ~ Feb. 05, 2018	N/A	Radiation (03CH12-HY)
Antenna Mast	EMEC	AM-BS-450 0-B	N/A	1m~4m	N/A	Jan. 27, 2018 ~ Feb. 05, 2018	N/A	Radiation (03CH12-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Jan. 27, 2018 ~ Feb. 05, 2018	N/A	Radiation (03CH12-HY)

## 5 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2U_c(y)$ )	3.4dB
---	-------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2U_c(y)$ )	3.7dB
---	-------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2U_c(y)$ )	4.0dB
---	-------



## Appendix A. Test Results of Conducted Test

### Conducted Output Power (Average power)

LTE Band 26 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK		22.71	
10	1	24			22.47	
10	1	49			22.53	
10	25	0			21.64	
10	25	12			21.55	
10	25	24			21.54	
10	50	0			21.54	
10	1	0	16-QAM		21.91	
10	1	24			21.81	
10	1	49			21.89	
10	25	0			20.71	
10	25	12			20.59	
10	25	24			20.62	
10	50	0			20.58	
5	1	0	QPSK	22.91	22.54	22.56
5	1	12		22.82	22.40	22.57
5	1	24		22.82	22.44	22.57
5	12	0		21.92	21.51	21.62
5	12	6		21.84	21.43	21.58
5	12	11		21.84	21.44	21.51
5	25	0		21.88	21.47	21.60
5	1	0	16-QAM	21.93	21.80	21.80
5	1	12		21.95	21.66	21.83
5	1	24		21.93	21.73	21.84
5	12	0		20.97	20.50	20.69
5	12	6		20.90	20.46	20.62
5	12	11		20.93	20.48	20.56
5	25	0		20.91	20.45	20.60



LTE Band 26 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0	QPSK	22.85	22.43	22.54
3	1	7		22.92	22.41	22.55
3	1	14		22.81	22.40	22.50
3	8	0		21.89	21.46	21.56
3	8	4		21.90	21.41	21.51
3	8	7		21.84	21.42	21.52
3	15	0		21.86	21.35	21.46
3	1	0	16-QAM	21.96	21.67	21.78
3	1	7		21.96	21.73	21.80
3	1	14		21.98	21.69	21.84
3	8	0		20.94	20.50	20.63
3	8	4		20.95	20.44	20.56
3	8	7		20.93	20.48	20.60
3	15	0		20.91	20.43	20.50
1.4	1	0	QPSK	22.92	22.45	22.56
1.4	1	2		22.86	22.43	22.55
1.4	1	5		22.93	22.46	22.57
1.4	3	0		22.89	22.41	22.54
1.4	3	1		22.88	22.42	22.51
1.4	3	2		22.90	22.44	22.51
1.4	6	0		21.93	21.46	21.57
1.4	1	0	16-QAM	21.91	21.75	21.93
1.4	1	2		21.99	21.77	21.87
1.4	1	5		21.91	21.78	21.93
1.4	3	0		22.00	21.52	21.66
1.4	3	1		22.00	21.54	21.72
1.4	3	2		21.92	21.53	21.67
1.4	6	0		20.97	20.48	20.60



## Appendix B. Test Results of Radiated Test

LTE Band 26 / 10MHz / QPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1629	-49.75	-13	-36.75	-59.26	-55.07	1.22	8.69	H
	2444	-42.79	-13	-29.79	-55.4	-49.66	1.43	10.46	H
	4072	-55.87	-13	-42.87	-71.09	-63.71	2.11	12.10	H
	4888	-50.09	-13	-37.09	-67.72	-57.77	2.27	12.10	H
	1629	-54.91	-13	-41.91	-63.3	-60.23	1.22	8.69	V
	2444	-51.99	-13	-38.99	-64.33	-58.86	1.43	10.46	V
	4072	-59.53	-13	-46.53	-74.73	-67.37	2.11	12.10	V
	4888	-53.55	-13	-40.55	-71.6	-61.23	2.27	12.10	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.