

## **CERTIFICATE OF COMPLIANCE** **FCC PART 90 CERTIFICATION**

### **Test Lab:**

**CELLTECH RESEARCH INC.**  
Testing and Engineering Services  
1955 Moss Court  
Kelowna, B.C.  
V1Y 9L3 Canada  
Phone: 250 - 860-3130  
Fax: 250 - 860-3110  
Toll Free: 1-877-545-6287  
e-mail: [celltech@globuswireless.com](mailto:celltech@globuswireless.com)  
web site: [www.globuswireless.com](http://www.globuswireless.com)

### **Applicant Name:**

**ITRONIX CORPORATION**  
801 South Stevens Street  
Spokane, WA 99024  
Attn: Fred Phillips, Certification Engineer  
Phone: 509-742-1506  
Fax: 509-626-4204

<b>FCC Classification:</b>	<b>Non-Broadcast Station Transmitter (TNB)</b>
<b>FCC Rule Part(s):</b>	<b>§90, §2</b>
<b>FCC ID:</b>	<b>KBCIX250RIM902</b>
<b>Model(s):</b>	<b>IX250</b>
<b>Equipment Type:</b>	<b>Rugged Laptop PC with RIM 902 Mobitex Radio Modem</b>
<b>Tx Frequency Range:</b>	<b>896 - 902 MHz</b>
<b>Rx Frequency Range:</b>	<b>935 - 941 MHz</b>
<b>Max. RF Output Power:</b>	<b>1.76 Watts</b>
<b>Frequency Tolerance:</b>	<b>1.5 PPM</b>
<b>Emission Designator:</b>	<b>12K8F1D</b>

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Celltech Research Inc. certifies that no party to this application has been denied FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 853(a).



**Shawn McMillen**  
**General Manager**  
**Celltech Research Inc.**



## **TABLE OF CONTENTS**

<b>1.1 GENERAL INFORMATION</b>	<b>1</b>
<b>2.1 MEASUREMENT PROCEDURES</b>	<b>2</b>
Occupied Bandwidth (2.1049)	2
Spurious/Harmonic Emissions at Antenna Terminal (2.1051)	3
Radiated Spurious & Harmonic Emissions (2.1053)	3
Frequency Stability/Temperature Variation (2.1055)	3
<b>3.1 TEST DATA</b>	<b>4</b>
Effective Radiated Power Output	4
Field Strength of Spurious Radiation	5-6
Frequency Stability	7-8
<b>4.1 LIST OF TEST EQUIPMENT</b>	<b>9</b>
<b>5.1 CONCLUSION</b>	<b>10</b>

<b>ATTACHMENT A:</b>	<b>COVER LETTER(S)</b>
<b>ATTACHMENT B:</b>	<b>ATTESTATION STATEMENT(S)</b>
<b>ATTACHMENT C:</b>	<b>TEST REPORT</b>
<b>ATTACHMENT D:</b>	<b>TEST PLOTS</b>
<b>ATTACHMENT E:</b>	<b>FCC ID LABEL &amp; LOCATION</b>
<b>ATTACHMENT F:</b>	<b>TEST SETUP PHOTOGRAPHS</b>
<b>ATTACHMENT G:</b>	<b>EXTERNAL EUT PHOTOGRAPHS</b>
<b>ATTACHMENT H:</b>	<b>INTERNAL EUT PHOTOGRAPHS</b>
<b>ATTACHMENT I:</b>	<b>BLOCK DIAGRAM(S)</b>
<b>ATTACHMENT J:</b>	<b>CIRCUIT DIAGRAMS / DESCRIPTION</b>
<b>ATTACHMENT K:</b>	<b>PARTS LIST / TUNE UP PROCEDURE</b>
<b>ATTACHMENT L:</b>	<b>OPERATIONAL DESCRIPTION</b>
<b>ATTACHMENT M:</b>	<b>USER'S MANUAL / RF EXPOSURE WARNING</b>
<b>ATTACHMENT N:</b>	<b>SAR MEASUREMENT REPORT</b>
<b>ATTACHMENT O:</b>	<b>MPE MEASUREMENT REPORT</b>

## **MEASUREMENT REPORT - FCC PART 90**

### **1.1 SCOPE**

Measurement and determination of electromagnetic emissions (EME) from radio frequency devices for compliance with the technical rules and regulations of the Federal Communications Commission.

### ***§2.1033(a) General Information***

**APPLICANT:**

**ITRONIX CORPORATION**  
**801 South Stevens Street**  
**Spokane, WA 99024**  
**Attn: Fred Phillips, Certification Engineer**  
**Phone: 509-742-1506**  
**Fax: 509-626-4204**

<b>FCC ID</b>	<b>KBCIX250RIM902</b>
<b>Model(s)</b>	<b>IX250</b>
<b>EUT Type</b>	<b>Rugged Laptop PC with RIM 902 Mobitex Radio Modem</b>
<b>Classification</b>	<b>Licensed Non-Broadcast Station Transmitter (TNB)</b>
<b>Rule Part(s)</b>	<b>§90 , §2</b>
<b>Max. RF Output Power</b>	<b>1.76 Watts</b>
<b>Tx Freq. Range</b>	<b>896-902 MHz</b>
<b>Rx Freq. Range</b>	<b>935-941 MHz</b>
<b>Emission Designator</b>	<b>12K8F1D</b>
<b>Signal Modulation</b>	<b>GMSK</b>
<b>Modes Tested</b>	<b>Unmodulated Carrier, Modulated Carrier</b>

## **2.1 MEASUREMENT PROCEDURES**

### **2.2 OCCUPIED BANDWIDTH - §2.1049(c)**

The antenna output terminal of the EUT was connected to the input of a 50Ω spectrum analyzer through a matched 30dB attenuator. The radio transmitter was operating at maximum output power with and without internal data modulation.

#### ***Test Results***

##### **A. UNMODULATED CARRIER – High power**

30.0dBm conducted power with a 30dB matched attenuator and coaxial cable with a total loss of 1.0dB.

##### **B. INTERNAL MODULATION**

Please see attached test plots. 100% of the in-band modulation is below the specified mask per 90.210(j).

#### **Emission Mask - 896-901MHz (Mobitex)**

<b>FREQUENCY (MHz)</b>	<b>FORMULA</b>	<b>LIMIT (dBc)</b>
-26500	$50 + 10 \log (P)$	- 53
-0.0115	$157 \log (f_d / 5.3)$	- 53
-0.0095	$157 \log (f_d / 5.3)$ or $103 \log (f_d / 3.9)$	- 39.8
-0.0062	$103 \log (f_d / 3.9)$ or $53 \log (f_d / 2.5)$	- 21.1
-0.0025	$53 \log (f_d / 2.5)$	0.0
0.0025	$53 \log ((f_d / 2.5))$	0.0
0.0062	$103 \log (f_d / 3.9)$ or $53 \log (f_d / 2.5)$	- 21.1

### ***2.3 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL - §2.1051***

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from 10MHz to 20GHz. The transmitter is modulated with a 2500Hz tone at a level of 16dB greater than that required to provide 50% modulation. The antenna output terminal of the EUT was connected to the input of a 50Ω spectrum analyzer through a matched 30dB attenuator and coaxial cable. The transmitter was operating at maximum power with and without internal data modulation.

### ***2.4 RADIATED SPURIOUS AND HARMONIC EMISSIONS - §2.1053***

Radiated and harmonic emissions above 1 GHz were measured at our 3-meter outdoor site. The EUT is placed on the turntable with the integral antenna loaded. A receiving antenna located 3 meters from the turntable receives any signal radiated from the transmitter and its operating accessories. The receiving antenna is varied from 1 to 4 meters and the polarization is varied (horizontal and vertical) to determine the worst-case emission level.

### ***2.5 FREQUENCY STABILITY/TEMPERATURE VARIATION - §2.1055***

The frequency stability of the transmitter is measured by:

- a) Temperature: The temperature is varied from -30°C to +60°C using an environmental chamber.
- b) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied. The EUT is tested down to the battery endpoint.

*Specification – The minimum frequency stability shall be +/- 0.00025% at any time during normal operation.*

Time Period and Procedure:

1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature (25°C to 27°C to provide a reference).
2. The equipment is subjected to an overnight “soak” at -30°C without any power applied.
3. After the overnight “soak” at -30°C (usually 14-16 hours), the equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter and the individual oscillators is made within a three-minute interval after applying power to the transmitter.
4. Frequency measurements were made at 10°C intervals up to +60°C then back to room temperature. A minimum period of one and one half-hour is provided to allow stabilization of the equipment at each temperature level.

### **3.1 TEST DATA**

### **3.2 EFFECTIVE RADIATED POWER OUTPUT - §2.1046**

Freq. Tuned (MHz)	EUT Conducted Power (dBm)	Max. Field Strength of EUT (dBm)		Dipole Gain (dBd)	Dipole Forward Conducted Power (dBm)	ERP of EUT Dipole Gain + Dipole Forward Conducted Power	
		V	H			dBm	Watts
896	33.0	- 7.03	- 4.625	- 0.84	32.98	32.14	1.64
901	33.0	- 4.121	- 4.975	- 0.84	33.29	32.45	1.76

Notes:

ERP Measurements by Substitution Method:

The EUT was placed on a turntable 3-meters from the receive antenna. The field of maximum intensity was found by rotating the EUT approximately 360 degrees and changing the height of the receive antenna from 1 to 4 meters. The field strength was recorded from a calibrated spectrum analyzer for each channel being tested. A half-wave dipole was substituted in place of the EUT. The dipole was fed through a directional coupler and the power at the coupler port was monitored. A signal generator and power amplifier controlled the dipole, and the input level of the dipole was adjusted to the same field strength level as the EUT. The feed point for the dipole was then connected to a calibrated power meter and the power adjusted to read the same as the coupler port previously recorded, this is to account for any mismatch in impedance, which may occur at the dipole antenna. The conducted power at the antenna feed point was recorded. The forward power for the dipole was then determined and the ERP level was determined by adding the forward dipole power and the dipole gain in dB. For readings above 1GHz the above method is repeated using standard gain horn antennas.

### 3.3 FIELD STRENGTH OF SPURIOUS RADIATION – §2.1053

Operating Frequency: 896 MHz  
Channel: Low  
Measured Conducted Power: 33.00dBm  
Modulation: unmodulated carrier  
Distance: 3 meters  
Limit:  $43 + 10 \log_{10} (W) = 39.47 \text{ dBc}$

Frequency (MHz)	Level (dBm)	AFCL (dB)	POL (H/V)	ERP (dBm)	(dBc)
1792	$\leq -97.75$	30.72	H	- 54.91	87.05
2688	$\leq -97.30$	34.41	H	- 50.77	82.91
3584	$\leq -96.89$	37.33	H	- 47.44	79.58
4480	$\leq -99.10$	40.46	H	- 46.52	78.66
5376	$< -100$				

#### Notes:

1. The bandwidth is set per §90.210 (RBW = 1MHz, VBW = 1MHz).
2. The spectrum was checked from 10 MHz up to 20GHz.
3.  $< -100\text{dBm}$  is below the floor of the spectrum analyzer.
4. The EUT is manipulated through 3 orthogonal axis and the worst-case emission are reported.
5. The EUT is placed 3.0 meters away from the receiving antenna and the ERP is calculated using the formula.  

$$\text{ERP (dBm)} = 10 \log_{10} ((r(\text{mV/m})/1 \times 10^6)^2 / 49.2/1 \times 10^{-3})$$

$$\text{ERP (dBm)} = 10 \log_{10} [(3 \times \text{FS}/1 \times 10^6)^2 / (49.2) \times 1000]$$

$$\text{ERP (Watts)} = \{(3 \times \text{FS})/1 \times 10^6\}^2 / 49.2$$

Note: The antenna factor and cable loss were determined prior to the test.

Operating Frequency: 901 MHz  
Channel: High  
Measured Conducted Power: 33.00dBm  
Modulation: unmodulated carrier  
Distance: 3 meters  
Limit:  $43 + 10 \log_{10} (W) = 39.47 \text{ dBc}$

Frequency (MHz)	Level (dBm)	AFCL (dB)	POL (H/V)	ERP (dBm)	(dBc)
1802	$\leq -97.24$	30.75	H	- 54.37	86.82
2703	$\leq -95.97$	34.42	H	- 49.43	81.88
3604	$\leq -99.02$	37.35	H	- 49.55	82.00
4505	$\leq -98.79$	40.52	H	- 46.15	78.60
5406	< -100				

Notes:

1. The bandwidth is set per §90.210 (RBW = 1MHz, VBW = 1MHz).
2. The spectrum was checked from 10 MHz up to 20GHz.
3. < -100dBm is below the floor of the spectrum analyzer.
4. The EUT is manipulated through 3 orthogonal axis and the worst-case emission are reported.
5. The EUT is placed 3.0 meters away from the receiving antenna and the ERP is calculated using the formula:

$$\text{ERP (dBm)} = 10 \log_{10} (((r(\text{mV/m})/1 \times 10^6)^2 / 49.2/1 \times 10^{-3})$$

$$\text{ERP (dBm)} = 10 \log_{10} [(3 \times \text{FS}/1 \times 10^6)^2 / (49.2) \times 1000]$$

$$\text{ERP (Watts)} = \{(3 \times \text{FS})/1 \times 10^6\}^2 / 49.2$$

Note: The antenna factor and cable loss were determined prior to the test.




### 3.4 FREQUENCY STABILITY - § 2.1055

Operating Frequency: 901,000,000 Hz  
Channel: High  
Reference Voltage: 4.75 VDC  
Deviation Limit: ± 0.00015 % or 1.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQ. (Hz)	Deviation (%)
100 %	4.75	+ 20 (Ref)	901,000,000	0.000000
100 %		- 30	901,000,126	-0.000014
100 %		- 20	901,000,121	-0.000013
100 %		- 10	901,000,099	-0.000011
100 %		0	901,000,083	-0.000009
100 %		+ 10	901,000,060	-0.000007
100 %		+ 20	901,000,045	-0.000005
100 %		+ 25	901,000,032	-0.000004
100 %		+ 30	901,000,066	-0.000007
100 %		+ 40	901,000,081	-0.000009
100 %		+ 50	901,000,114	-0.000013
100 %		+ 60	901,000,133	-0.000015
85 %	N/A	+ 20	901,000,000	0.000000
115 %	N/A	+ 20	901,000,000	0.000000
BATT. ENDPOINT	N/A	+ 20	901,000,000	0.000000

**FREQUENCY STABILITY - § 2.1055**

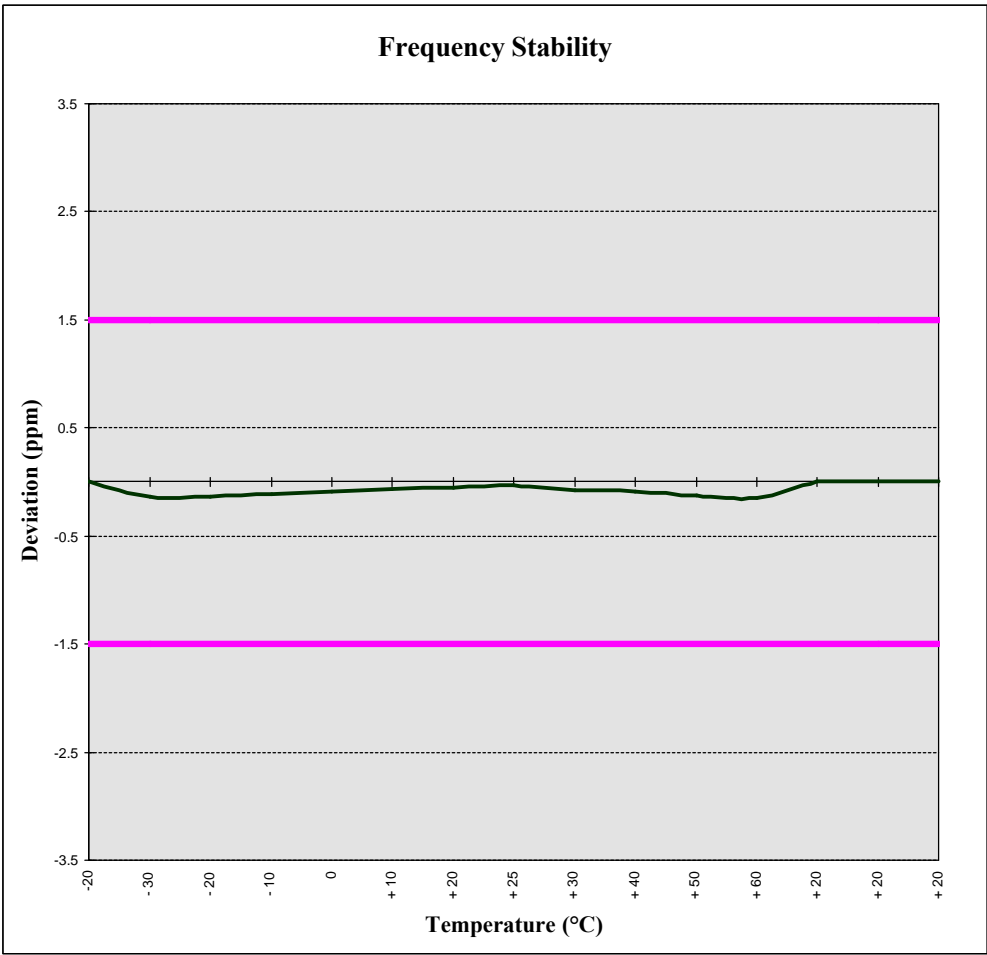

#### **4.1 TEST EQUIPMENT**

<b><u>Type</u></b>	<b><u>Model</u></b>	<b><u>Calib. Date</u></b>	<b><u>Serial No.</u></b>
Signal Generator	HP 8648D (9kHz-4.0GHz)	Nov 1999	3847A00611
Gigatronics Power Meter	8652A	Oct 1999	1835272
Gigatronics Power Sensor (2)	80701A (0.05-18GHz)	Oct 1999	1833535, 1833542
Amplifier Research Power Amp.	5S1G4 (5W, 800MHz-4.2GHz)	N/A	26235
Microwave System Amplifier	HP 83017A (0.5-26.5GHz)	N/A	3123A00587
Network Analyzer	HP 8753E (30kHz-3GHz)	Nov 1999	US38433013
Audio Analyzer	HP 8903B	March 1999	3729A18691
Modulation Analyzer	HP 8901A	March 1999	3749A07154
Frequency Counter	HP 53181A (3GHz)	May 1999	3736A05175
DC Power Supply	HP E3611A	N/A	KR83015294
Multi-Device Controller	EMCO 2090	N/A	9912-1484
MiniMast	EMCO 2075	N/A	0001-2277
Turntable	EMCO 2080-1.2/1.5	N/A	0002-1002
Horn Antenna	Chase BBHA 9120-A (0.7-4.8GHz)	Sept 1998	9120A-239
Horn Antenna	Chase BBHA 9120-A (0.7-4.8GHz)	Sept 1998	9120A-240
Roberts Dipoles	Compliance Design (2 sets) 3121C	June 2000	
Spectrum Analyzer	HP 8594E	March 2000	3543A02721
Spectrum Analyzer	HP E4408B	Nov 1999	US39240170
Shielded Screen Room	Lindgren R.F. 18W-2/2-0	N/A	16297
Environmental Chamber	ESPEC ECT-2 (Temperature/Humidity)	Feb 2000	0510154-B


### ***5.1 CONCLUSION***

The data collected shows that the Itronix IX250 Rugged Laptop PC with RIM 902 Mobitex Radio Modem FCC ID: KBCIX250RIM902 complies with all the requirements of Parts 2 and 90 of the FCC rules.


# TEST PLOTS

---


## CONDUCTED SPURIOUS Channel 896

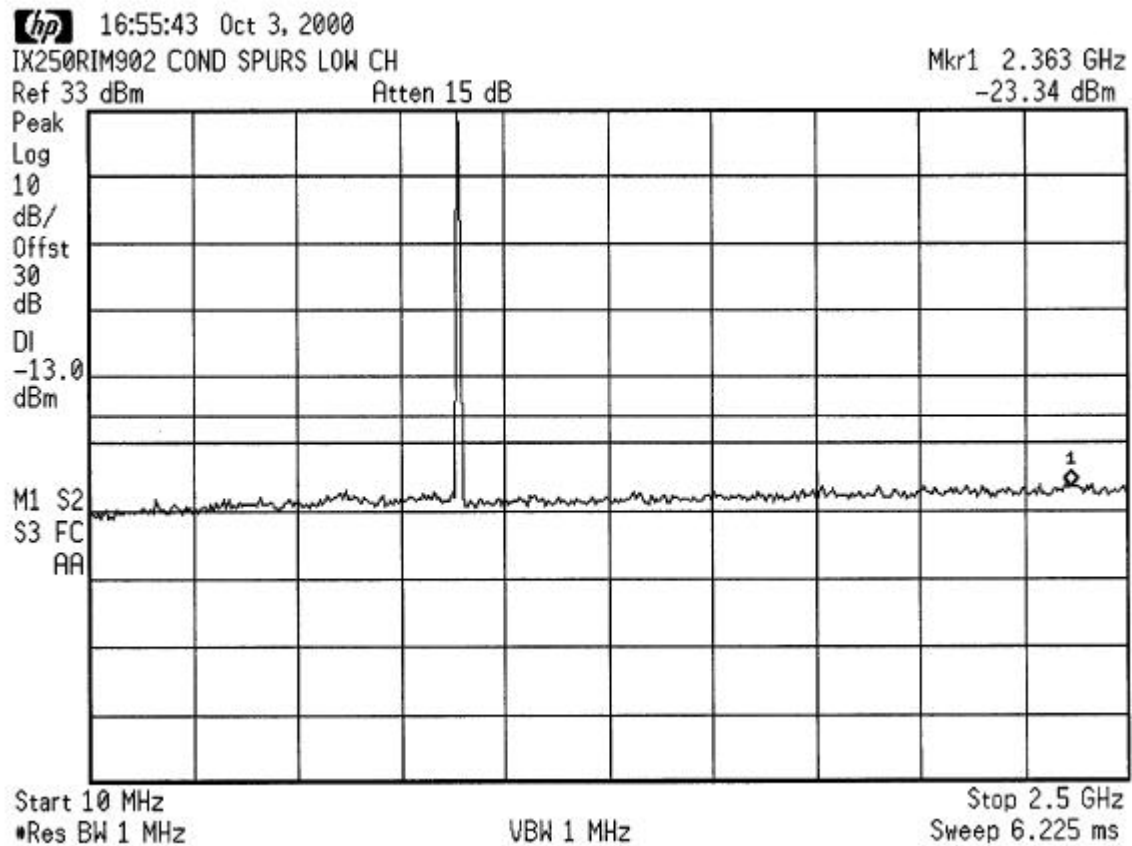

## CONDUCTED SPURIOUS Channel 896

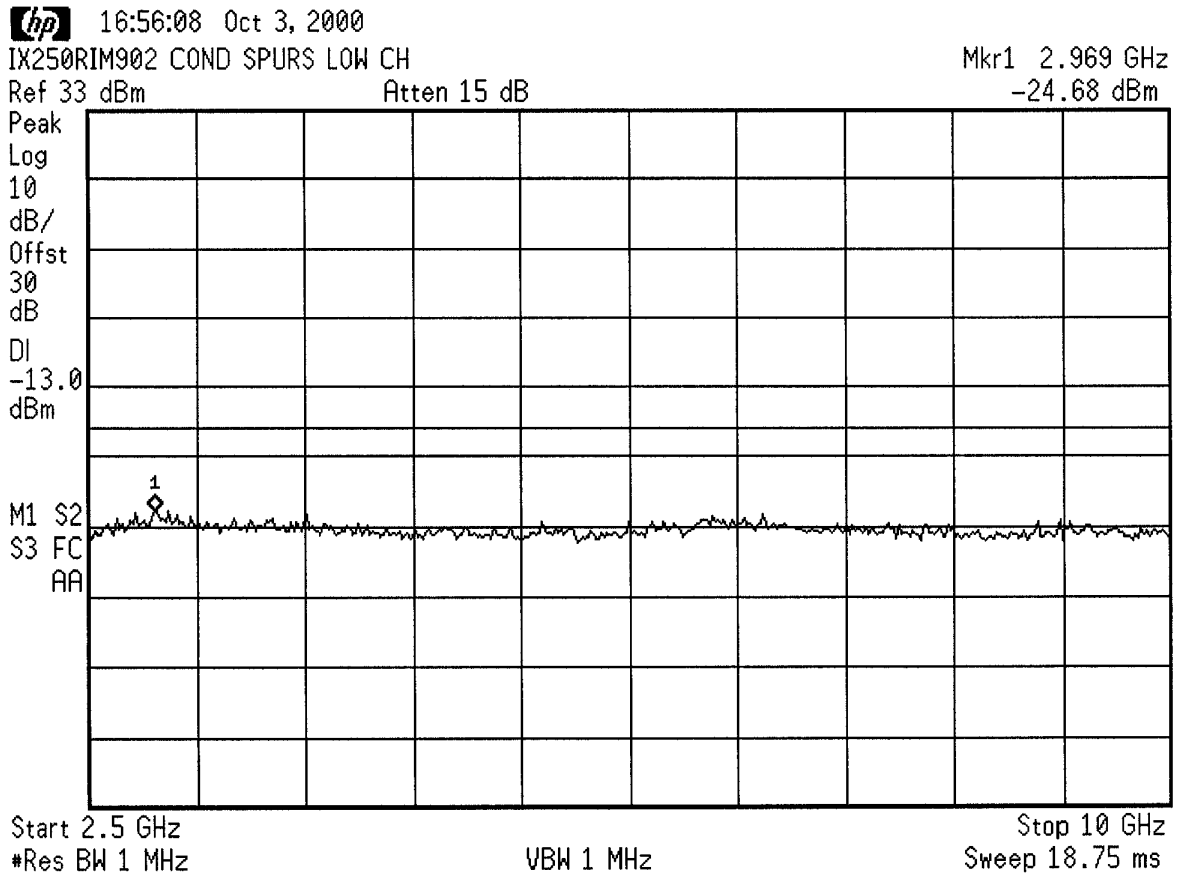


## CONDUCTED SPURIOUS Channel 896

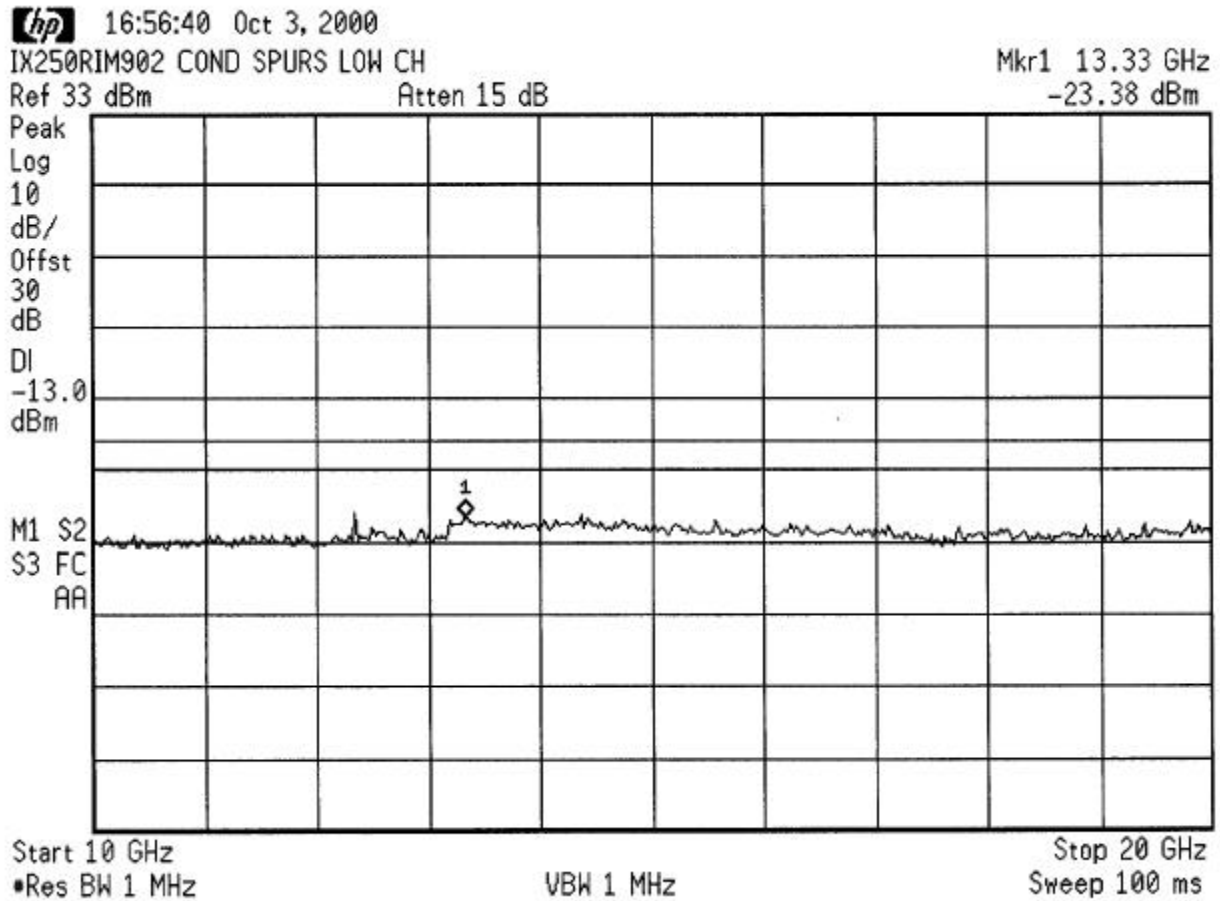





## CONDUCTED SPURIOUS Channel 901

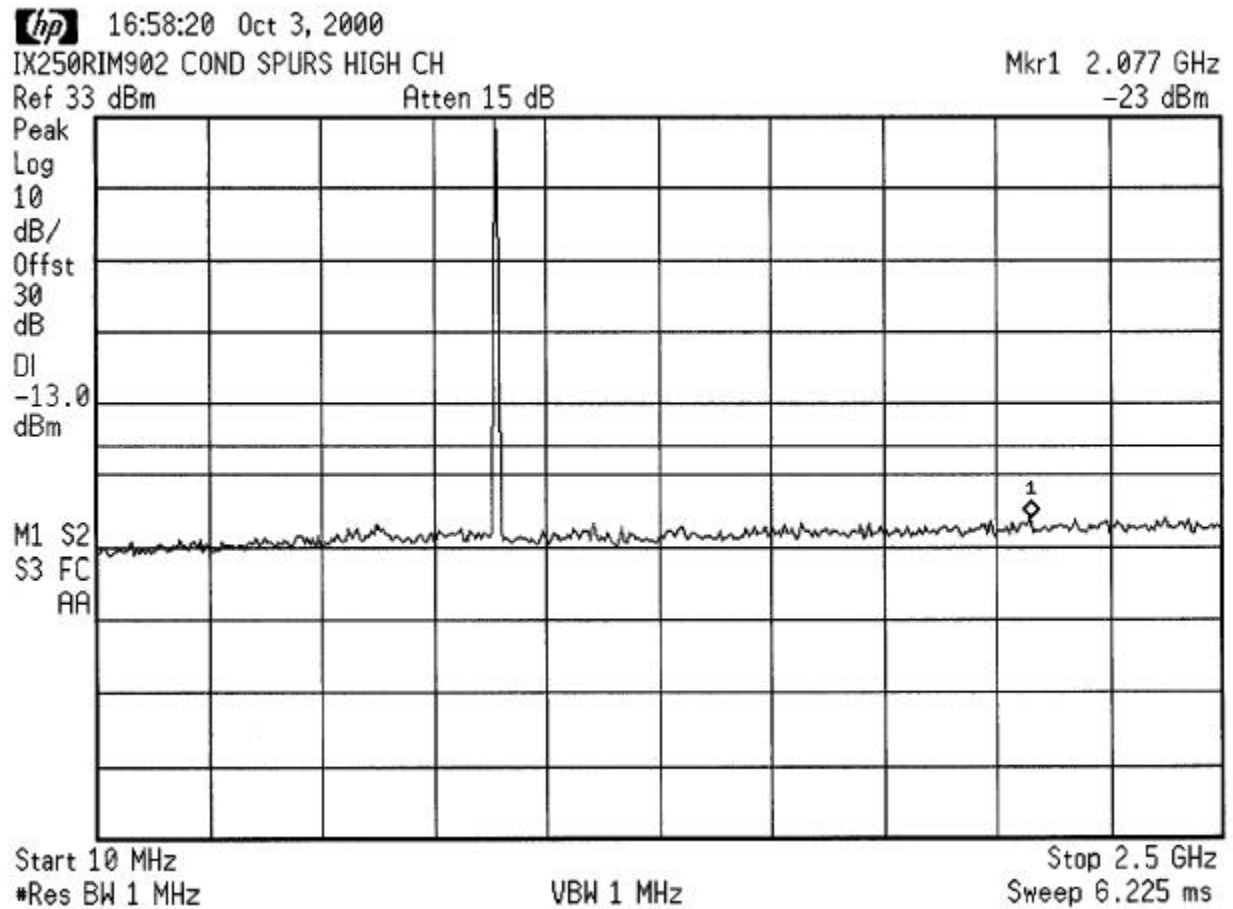


## CONDUCTED SPURIOUS Channel 901

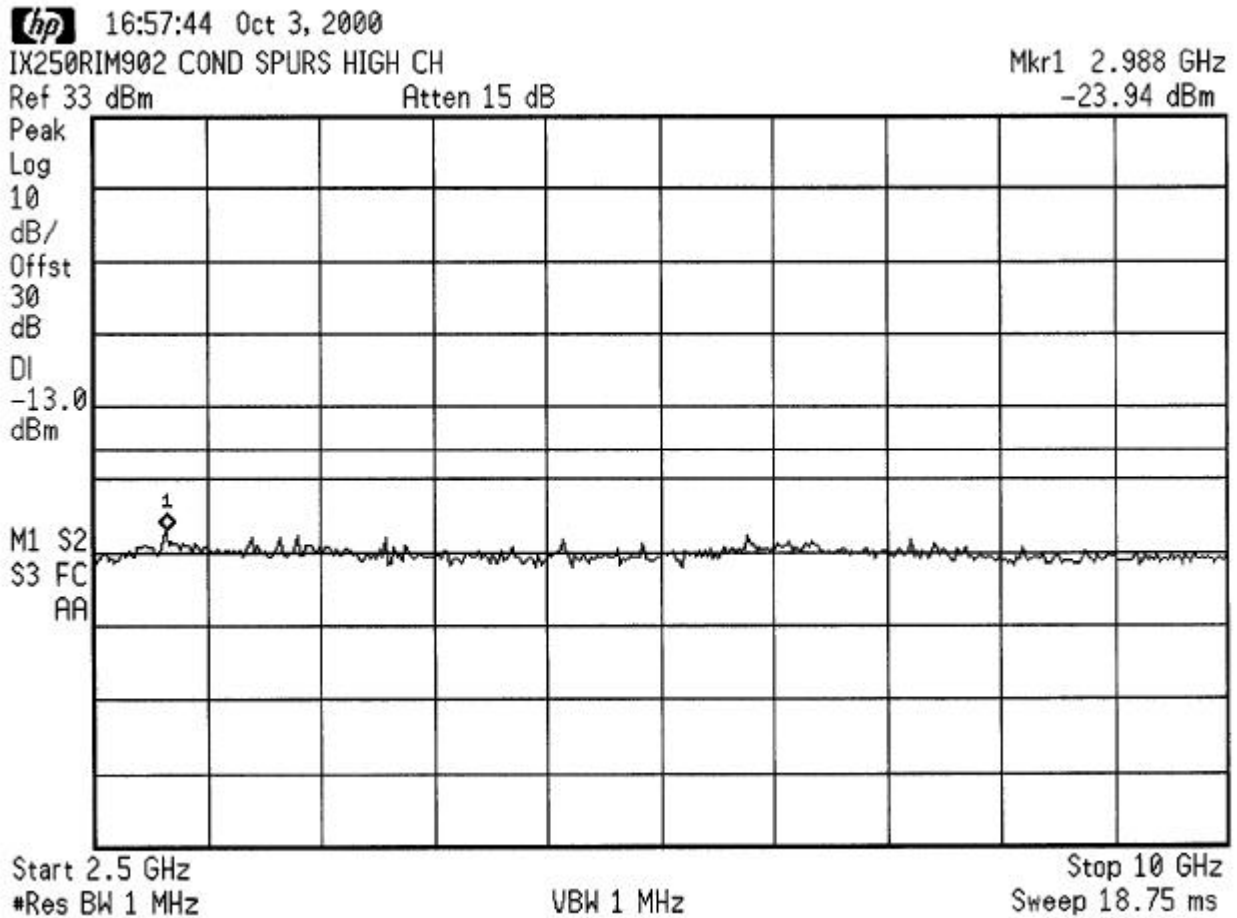

# CONDUCTED SPURIOUS Channel 901

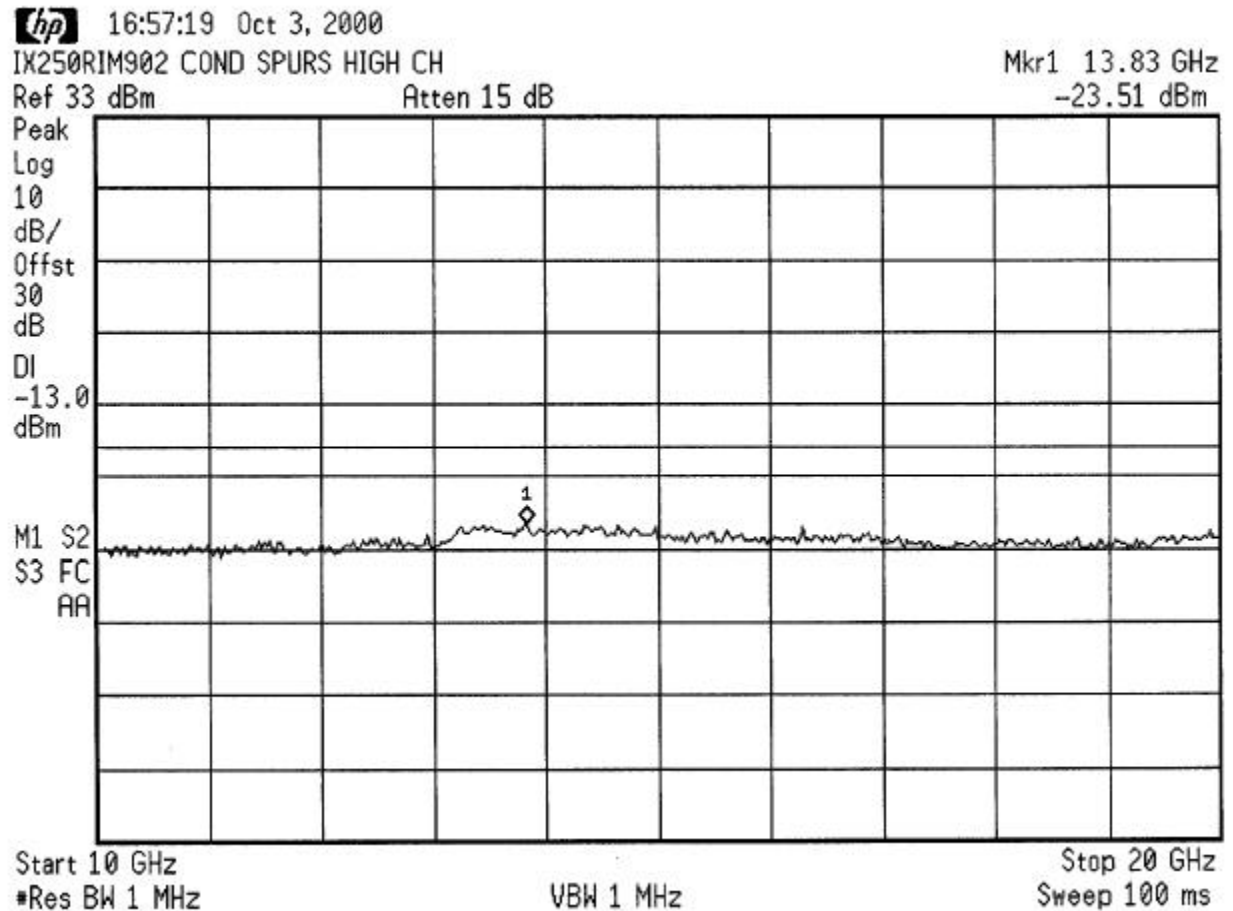

## OCCUPIED BANDWIDTH Unmodulated Carrier

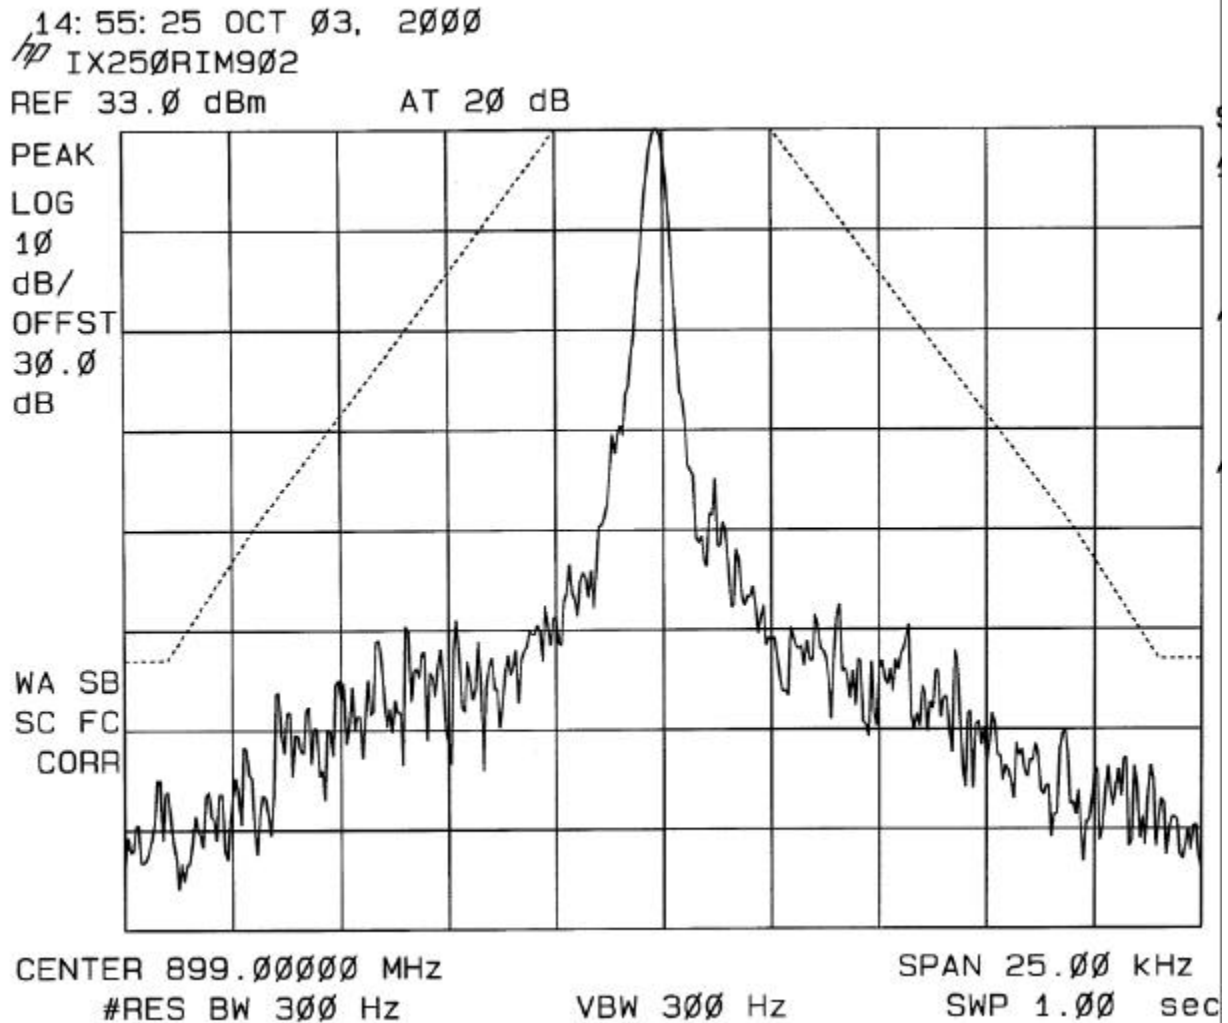

## OCCUPIED BANDWIDTH Modulated Carrier

14: 54: 39 OCT 03, 2000

IX250RIM902

REF 33.0 dBm

AT 20 dB

