





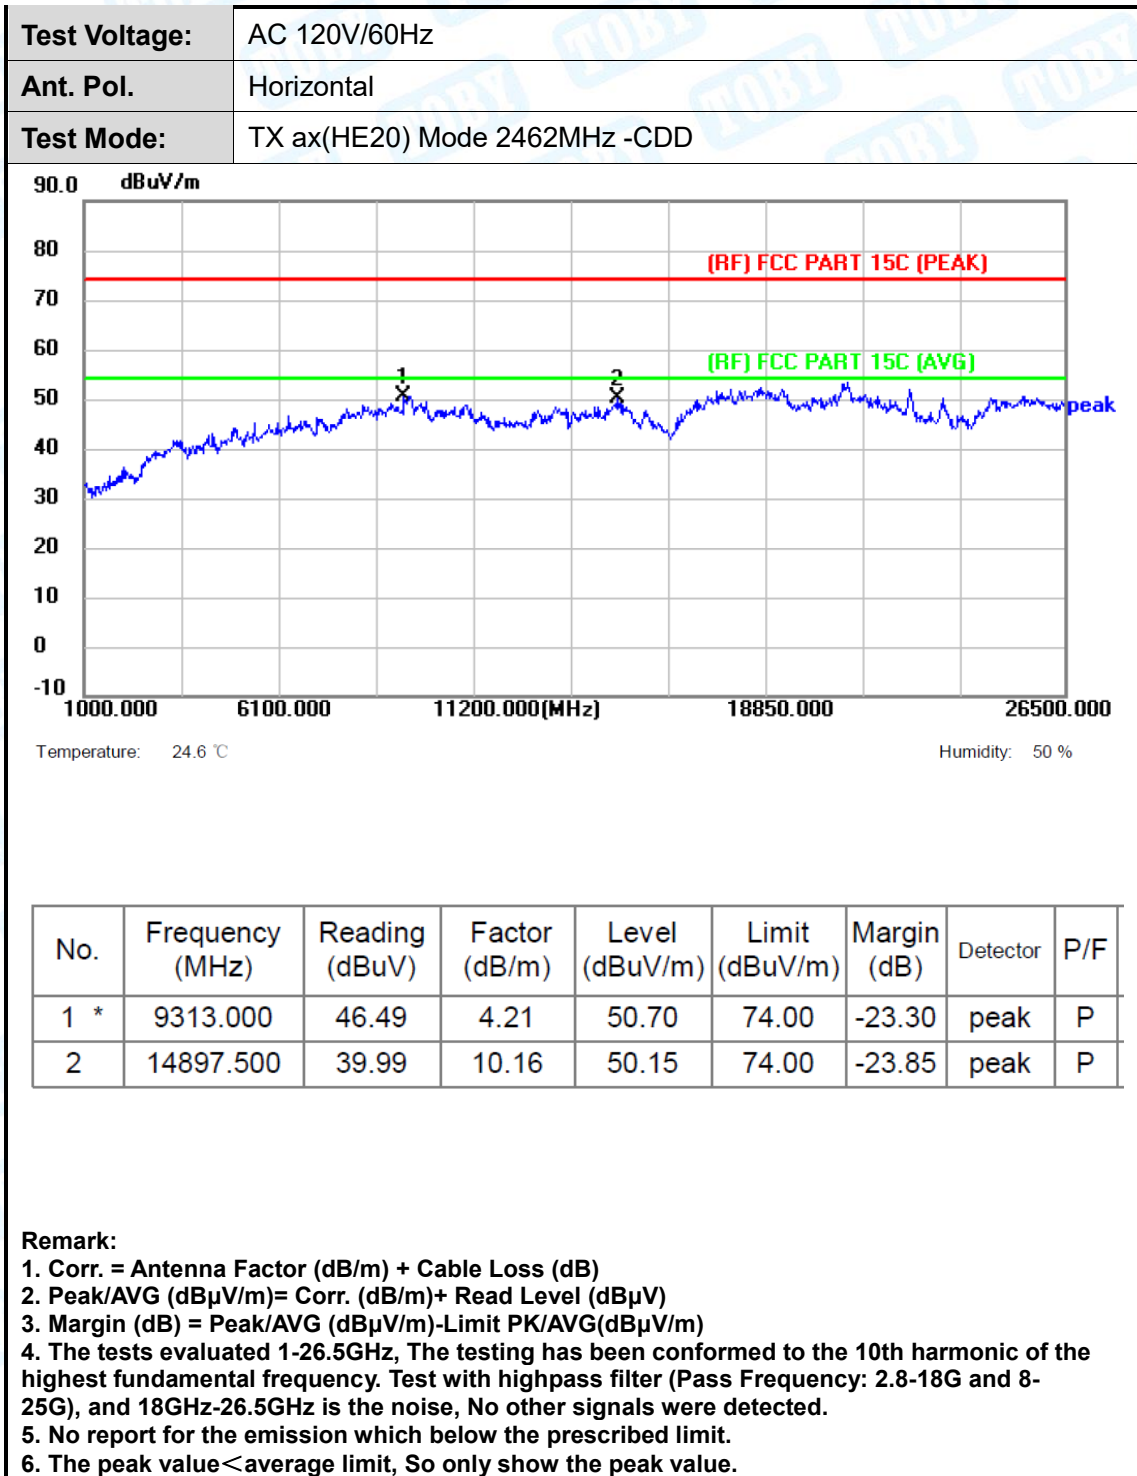


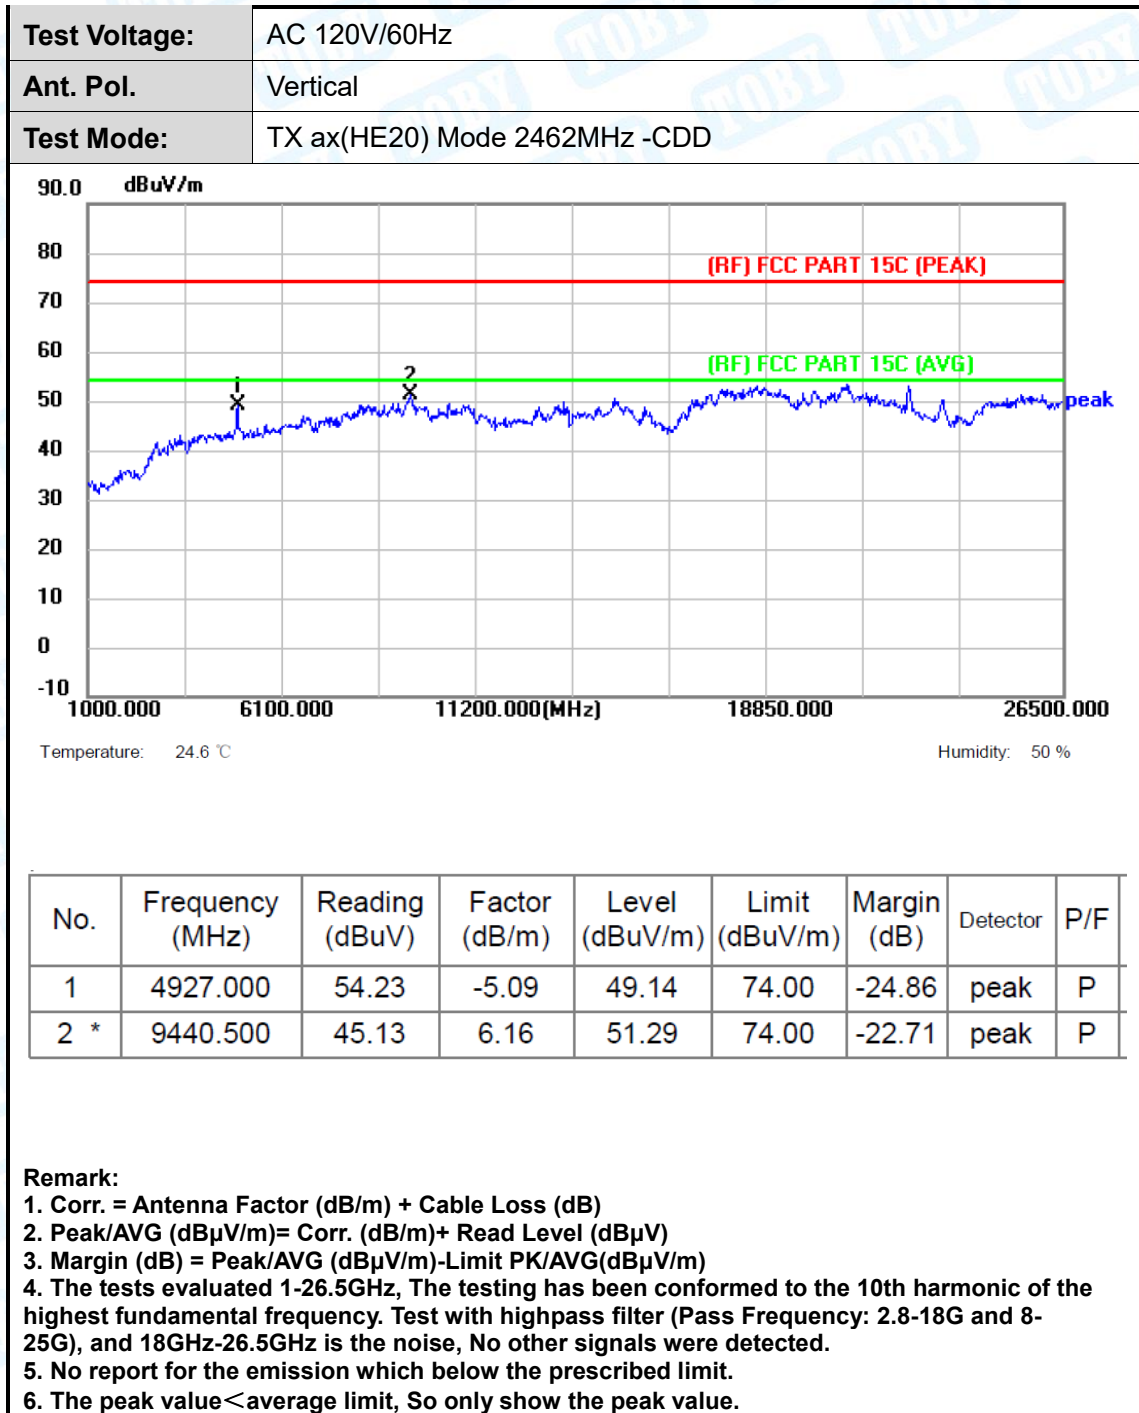

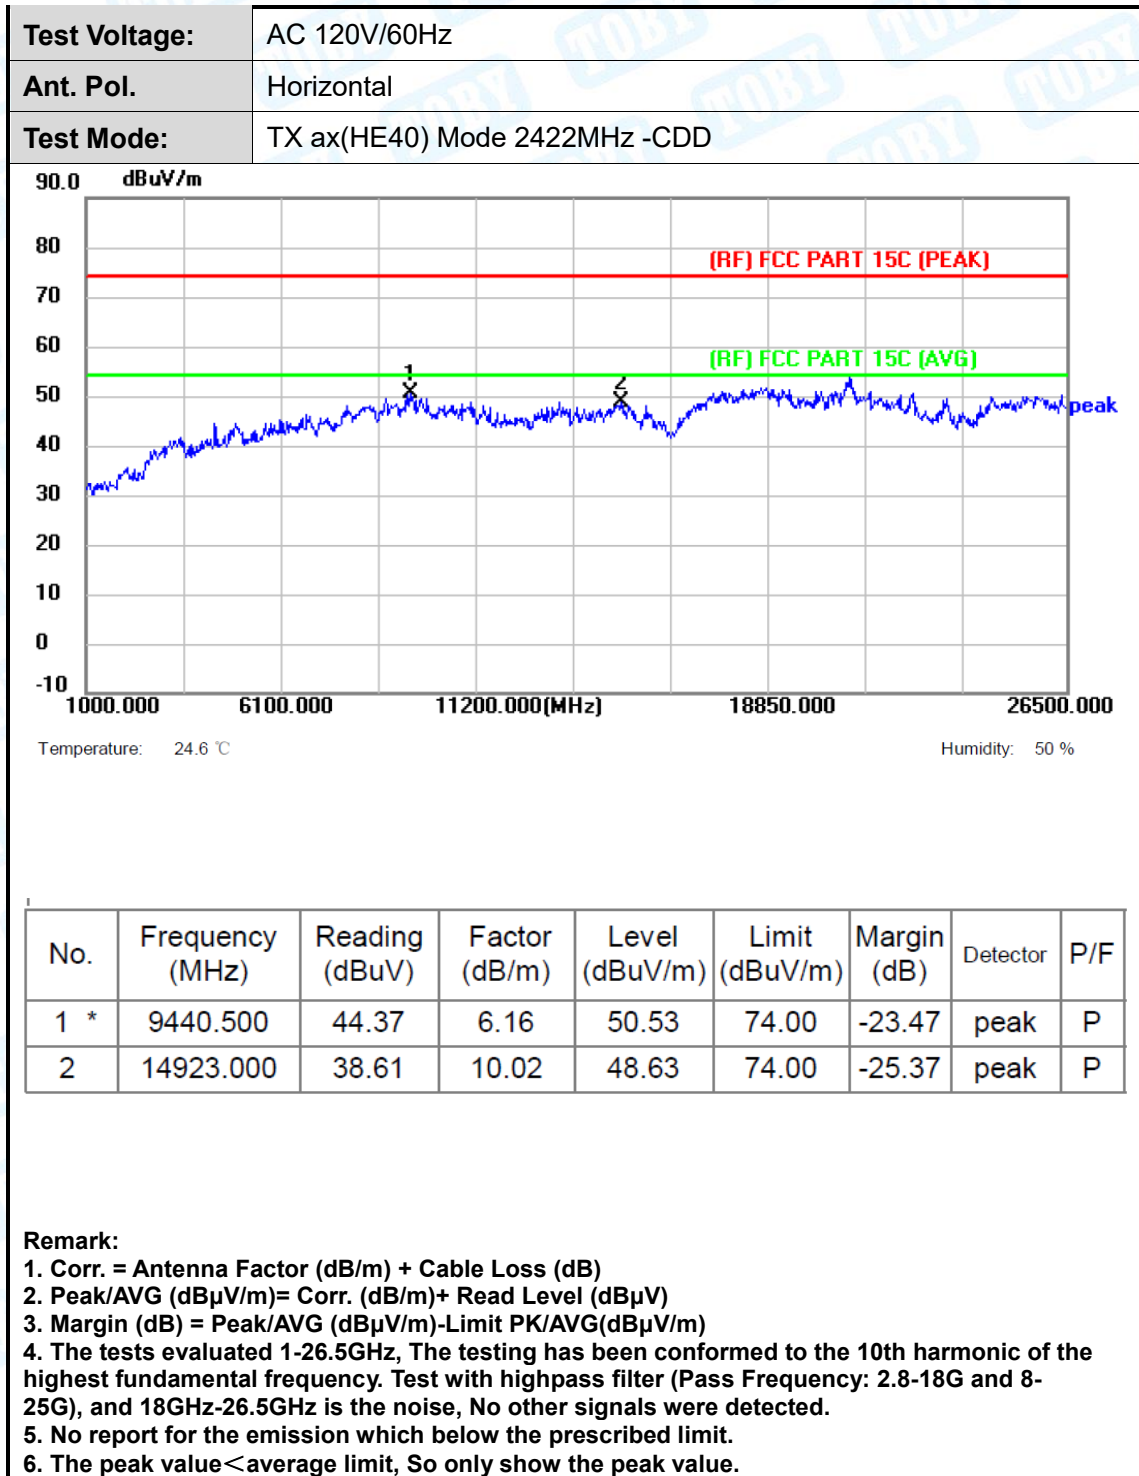

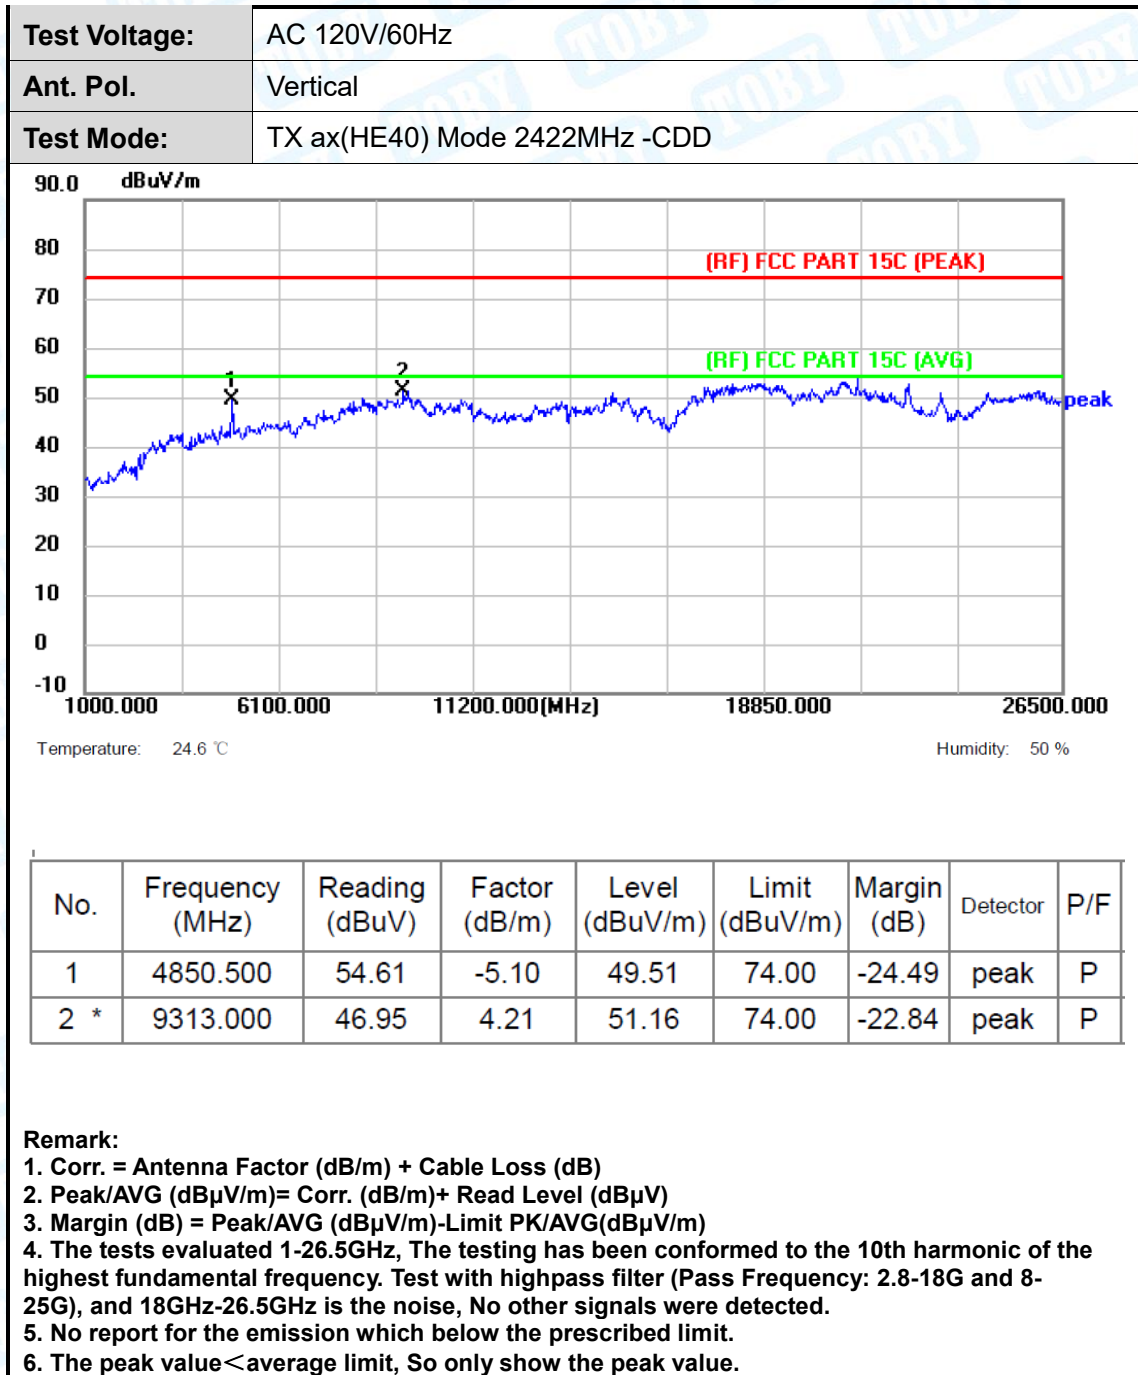

Test Voltage:	AC 120V/60Hz
Ant. Pol.	Horizontal
Test Mode:	TX ax(HE40) Mode 2437MHz -CDD

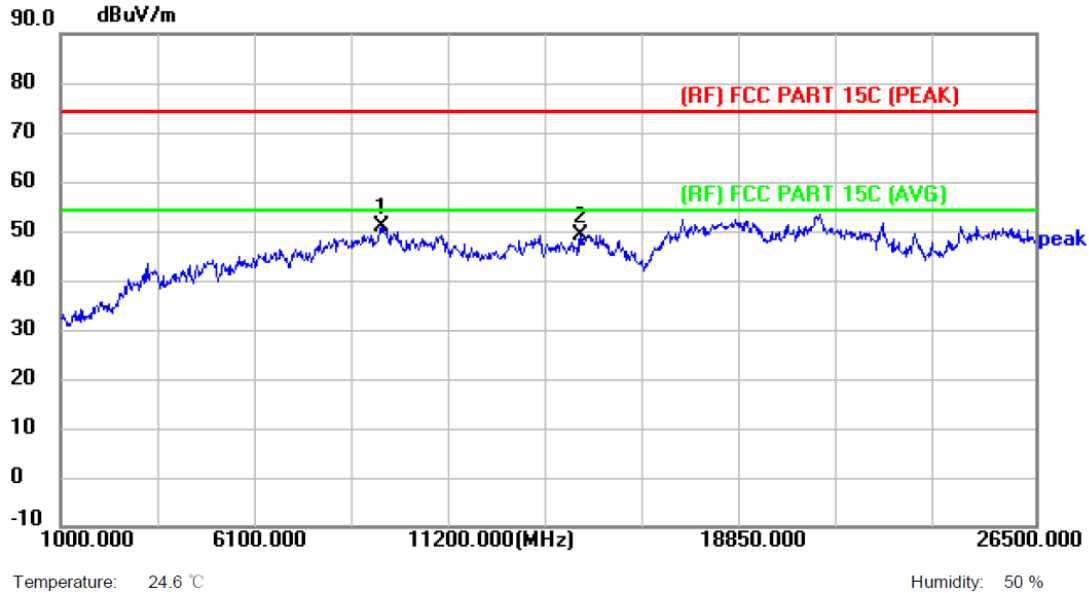



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	9415.000	45.00	5.76	50.76	74.00	-23.24	peak	P
2	14617.000	40.43	8.85	49.28	74.00	-24.72	peak	P


Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.
5. No report for the emission which below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



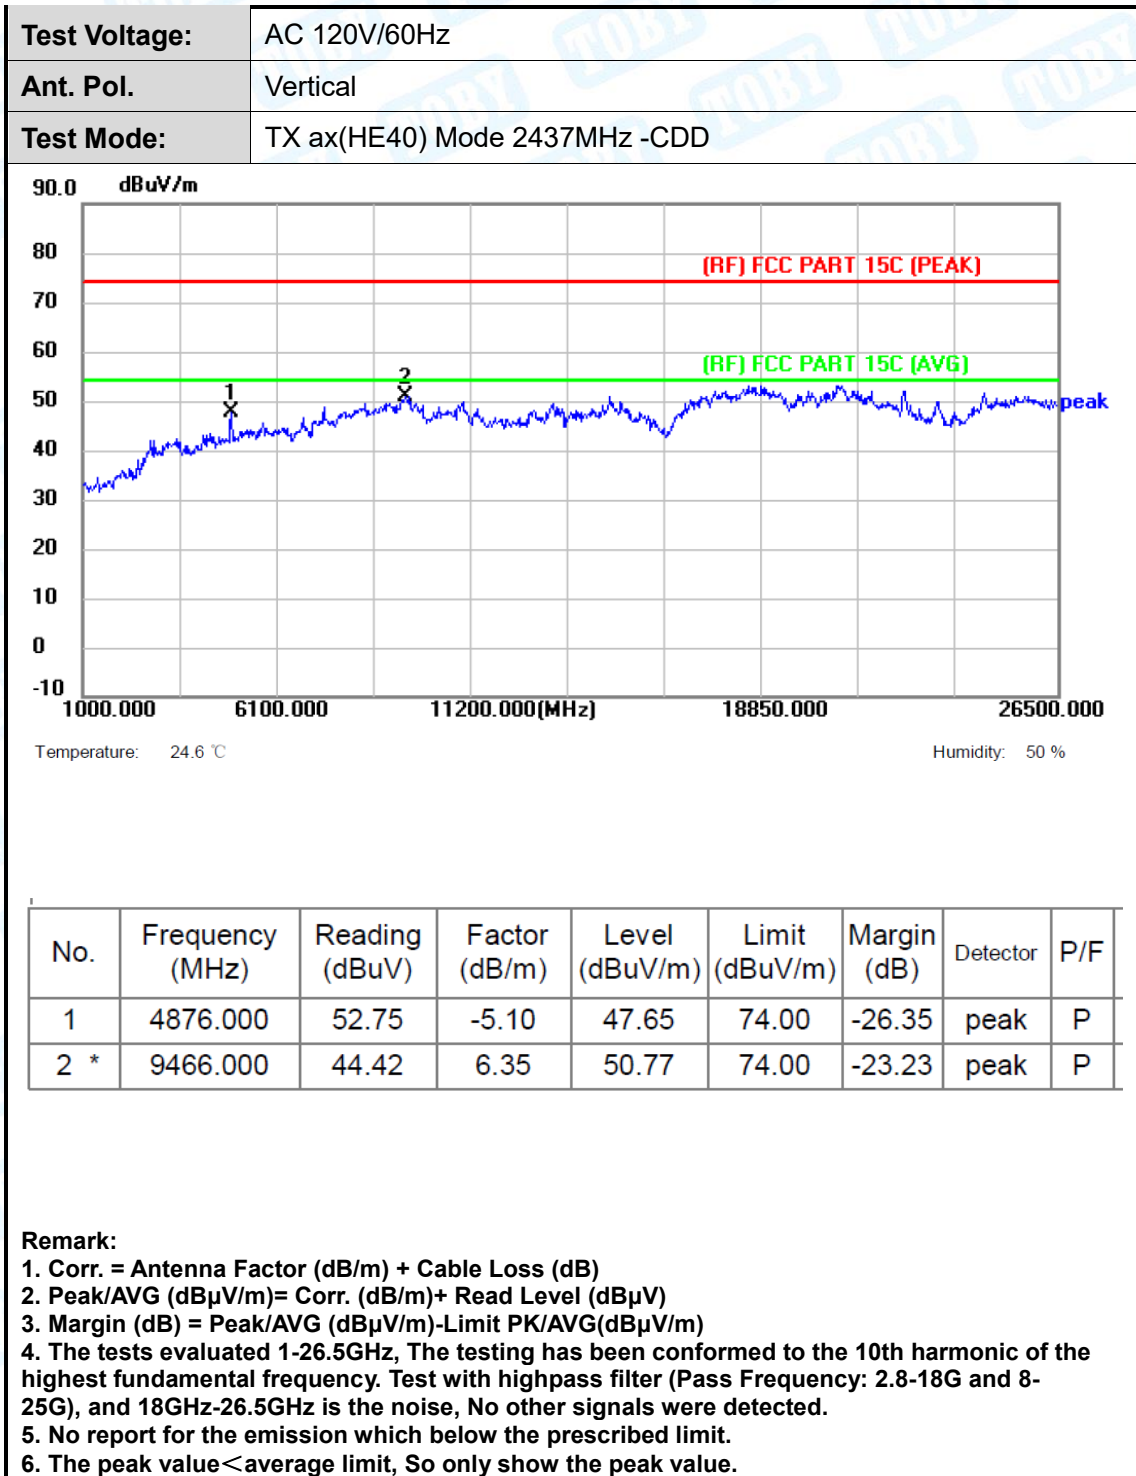


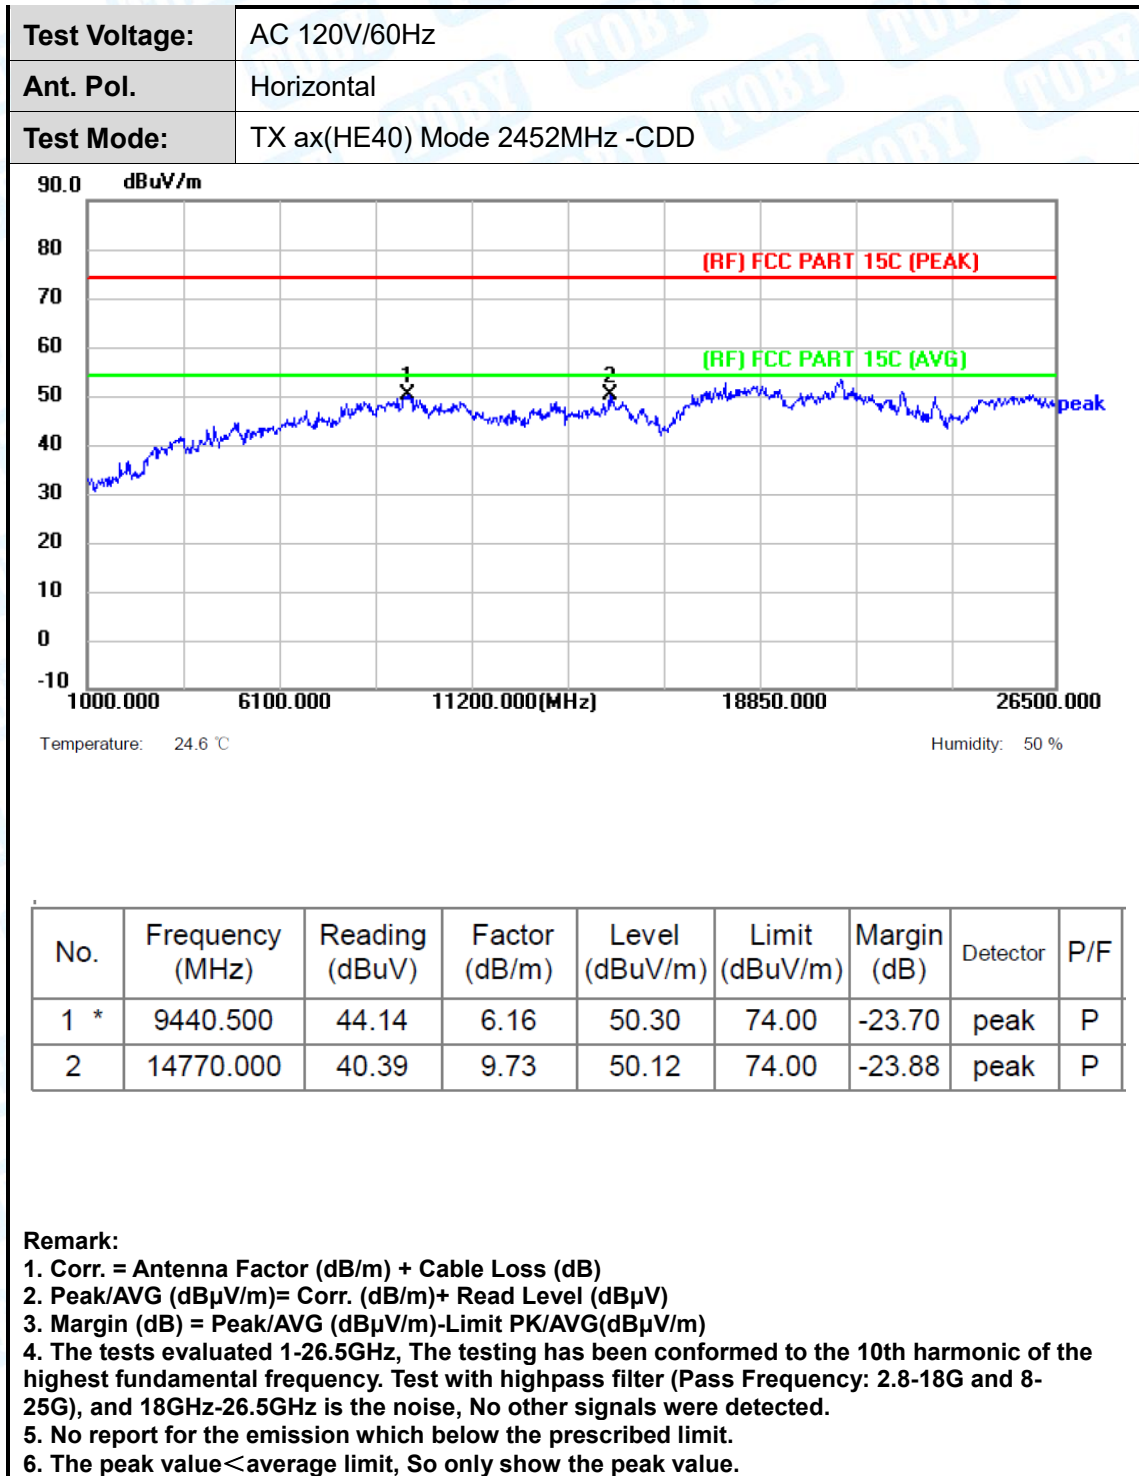

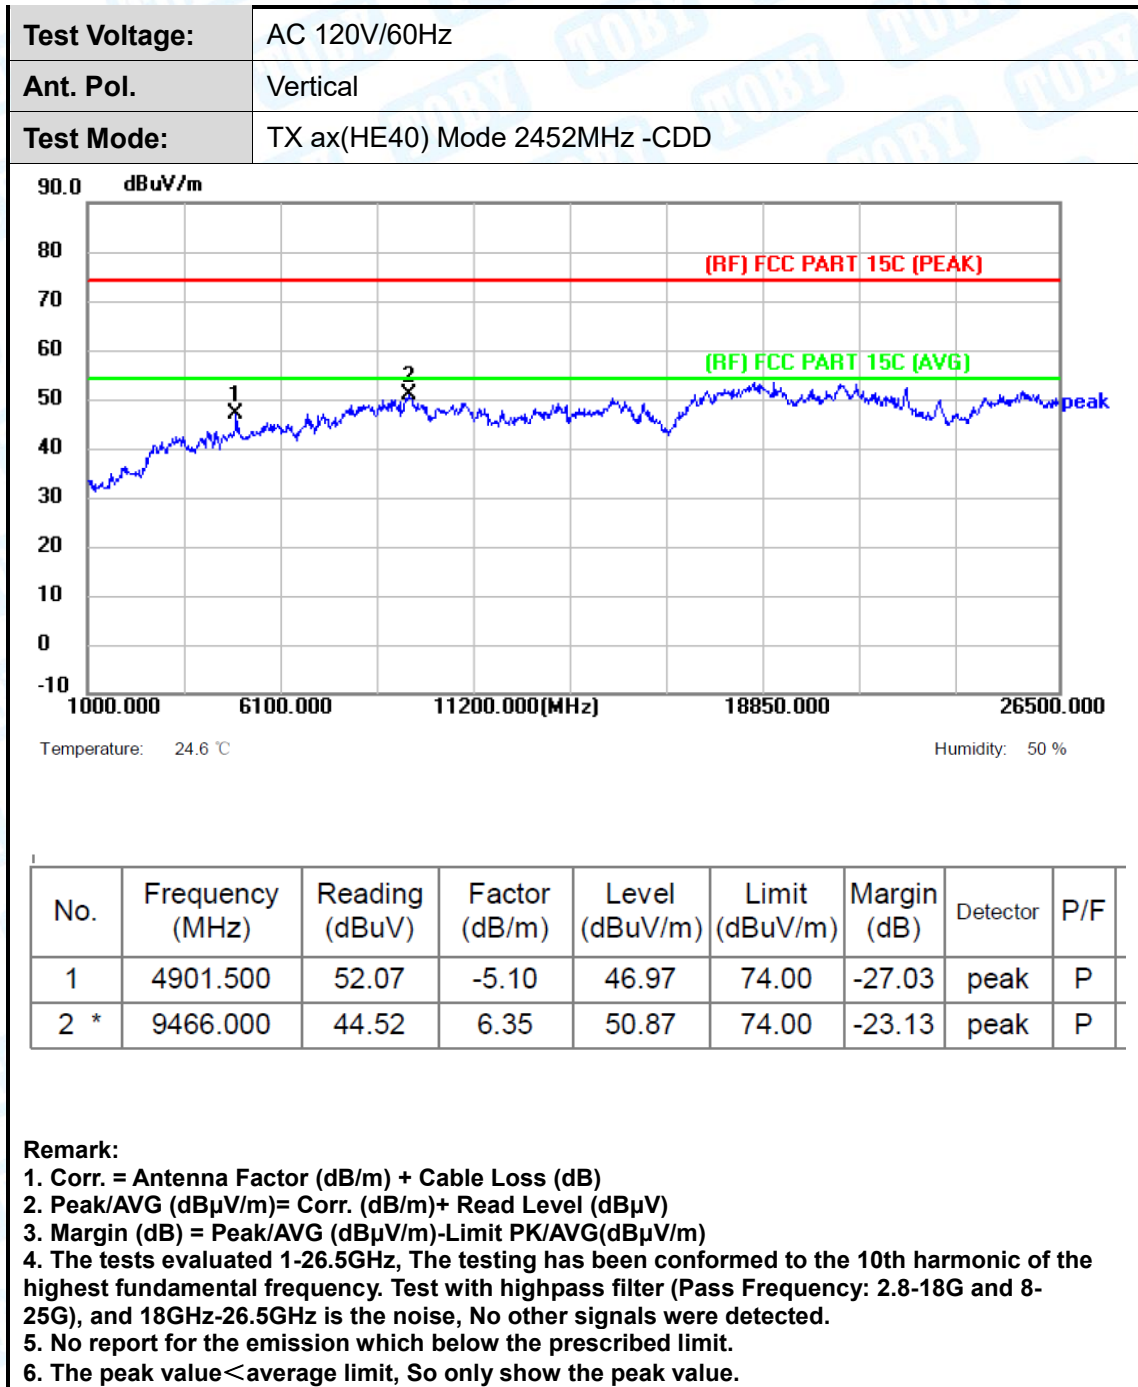


Attachment C-- Restricted Bands Requirement Test Data

Radiation Test

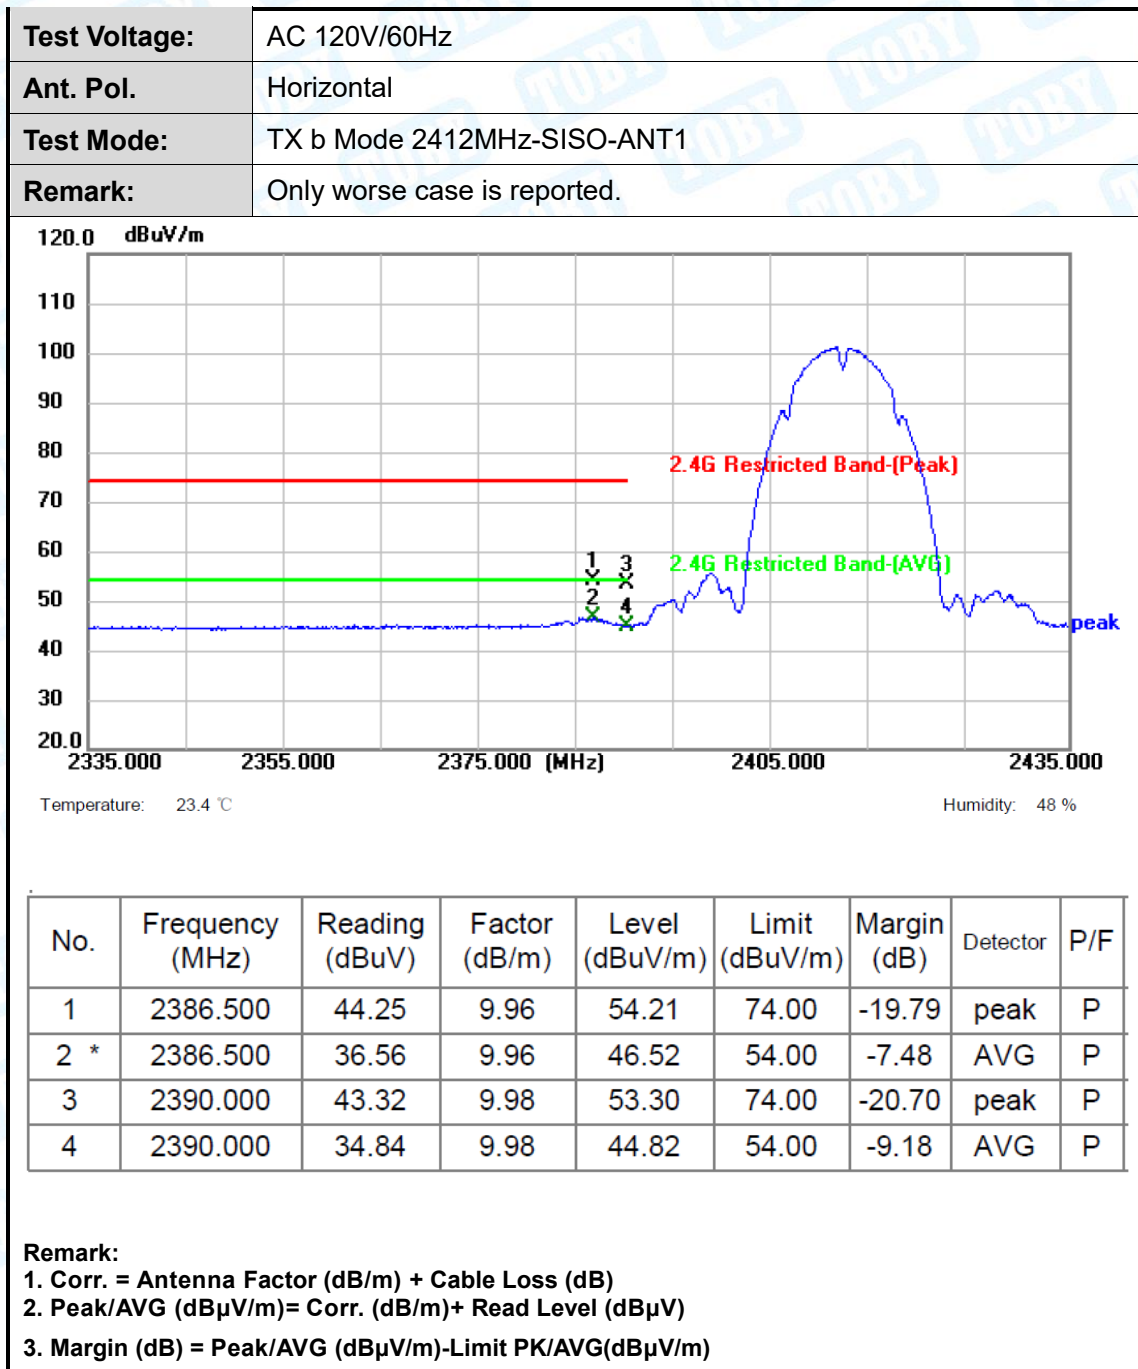

Test Voltage:	AC 120V/60Hz
Ant. Pol.	Vertical
Test Mode:	TX b Mode 2412MHz-SISO-ANT1
Remark:	Only worse case is reported.

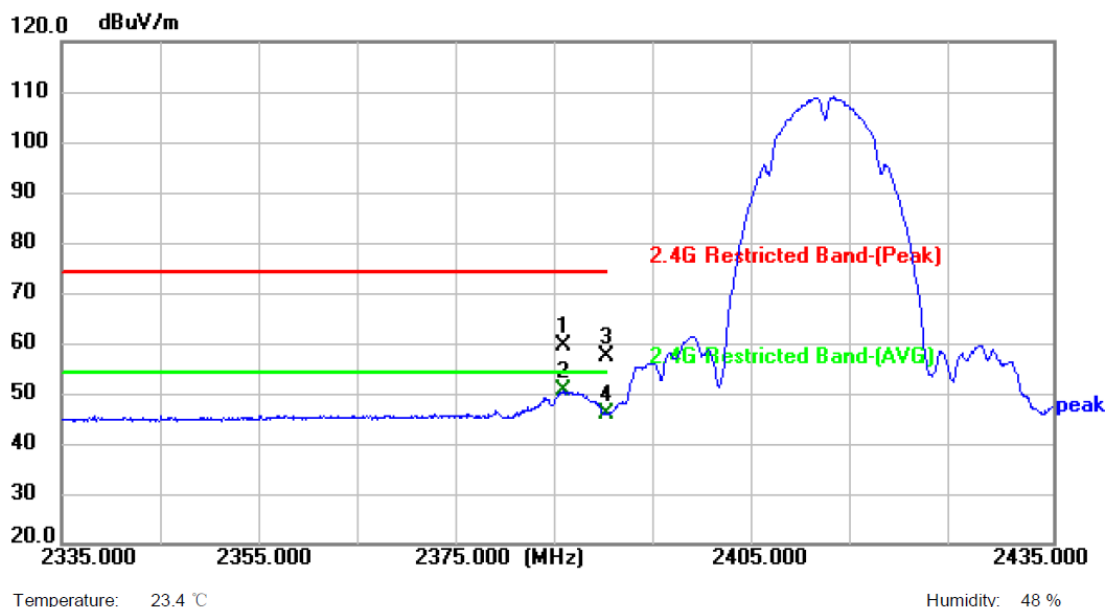


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2385.600	49.37	9.95	59.32	74.00	-14.68	peak	P
2 *	2385.600	40.46	9.95	50.41	54.00	-3.59	AVG	P
3	2390.000	47.40	9.98	57.38	74.00	-16.62	peak	P
4	2390.000	36.08	9.98	46.06	54.00	-7.94	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Horizontal
Test Mode:	TX b Mode 2462MHz-SISO-ANT1
Remark:	Only worse case is reported.

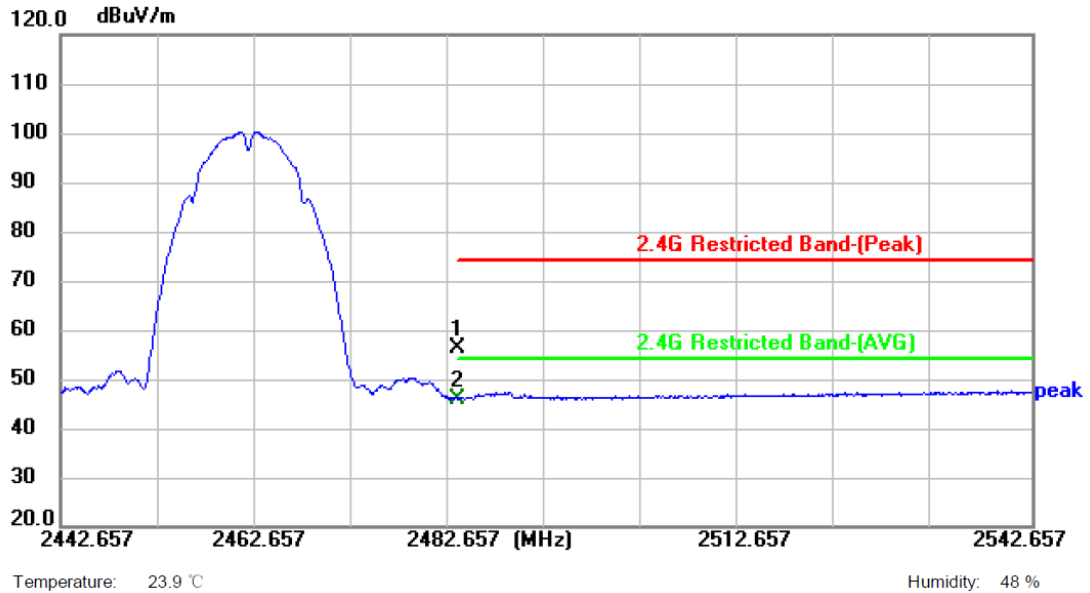



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2483.500	46.16	10.20	56.36	74.00	-17.64	peak	P
2 *	2483.500	35.76	10.20	45.96	54.00	-8.04	AVG	P


Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)




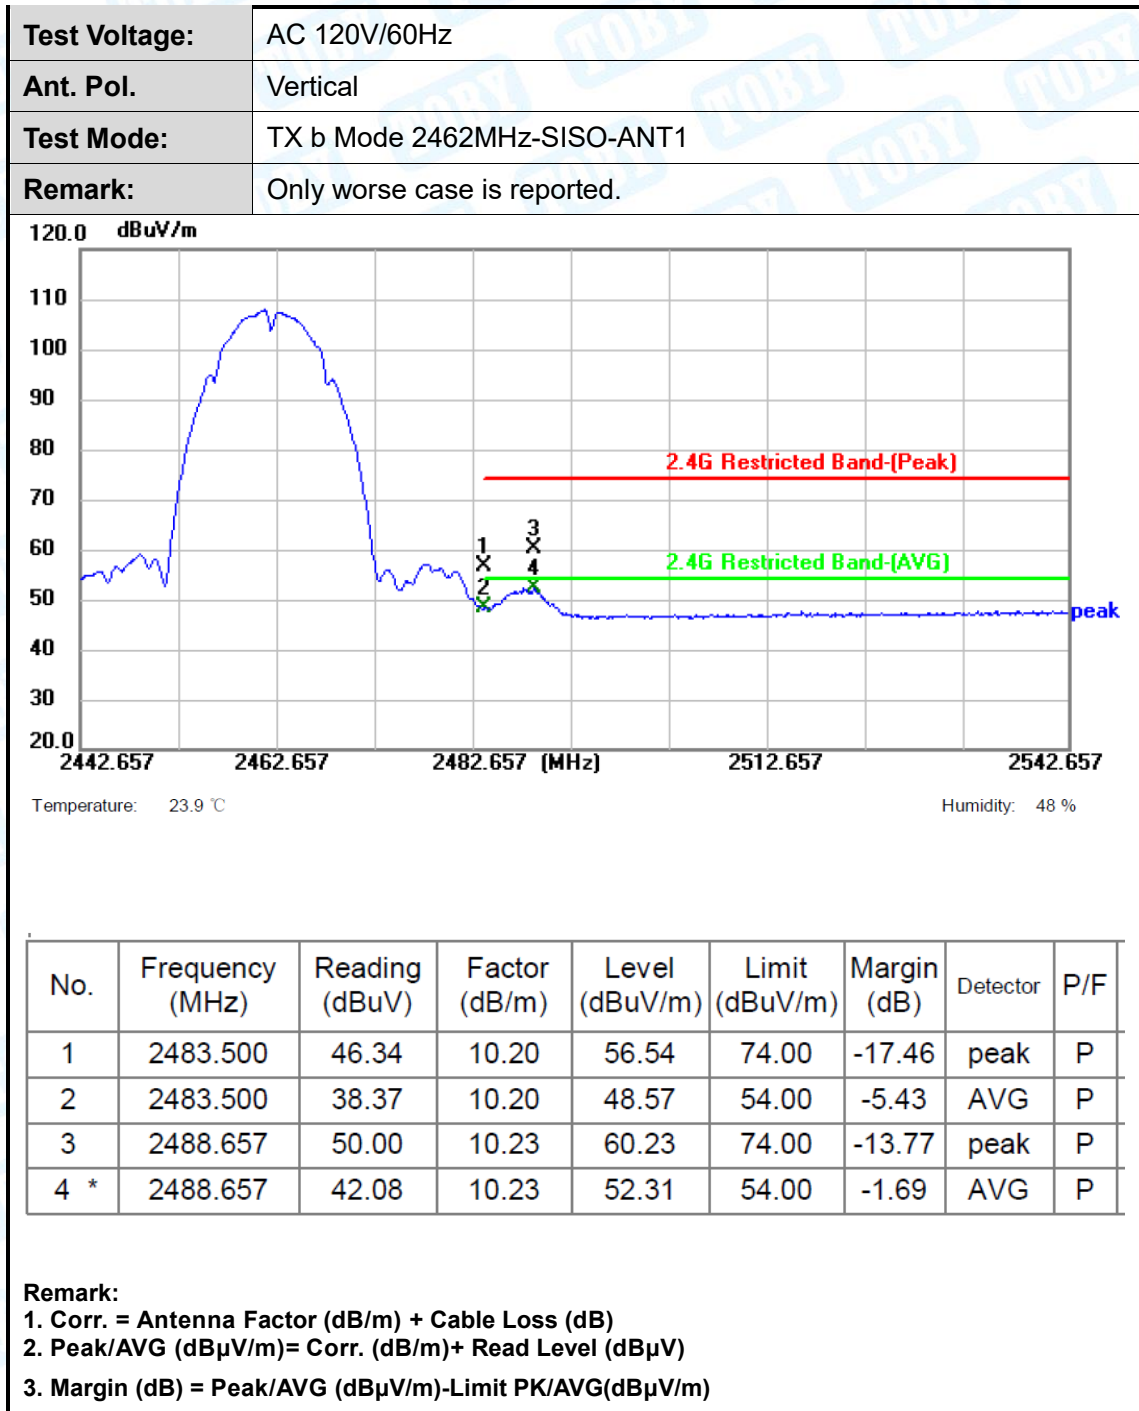

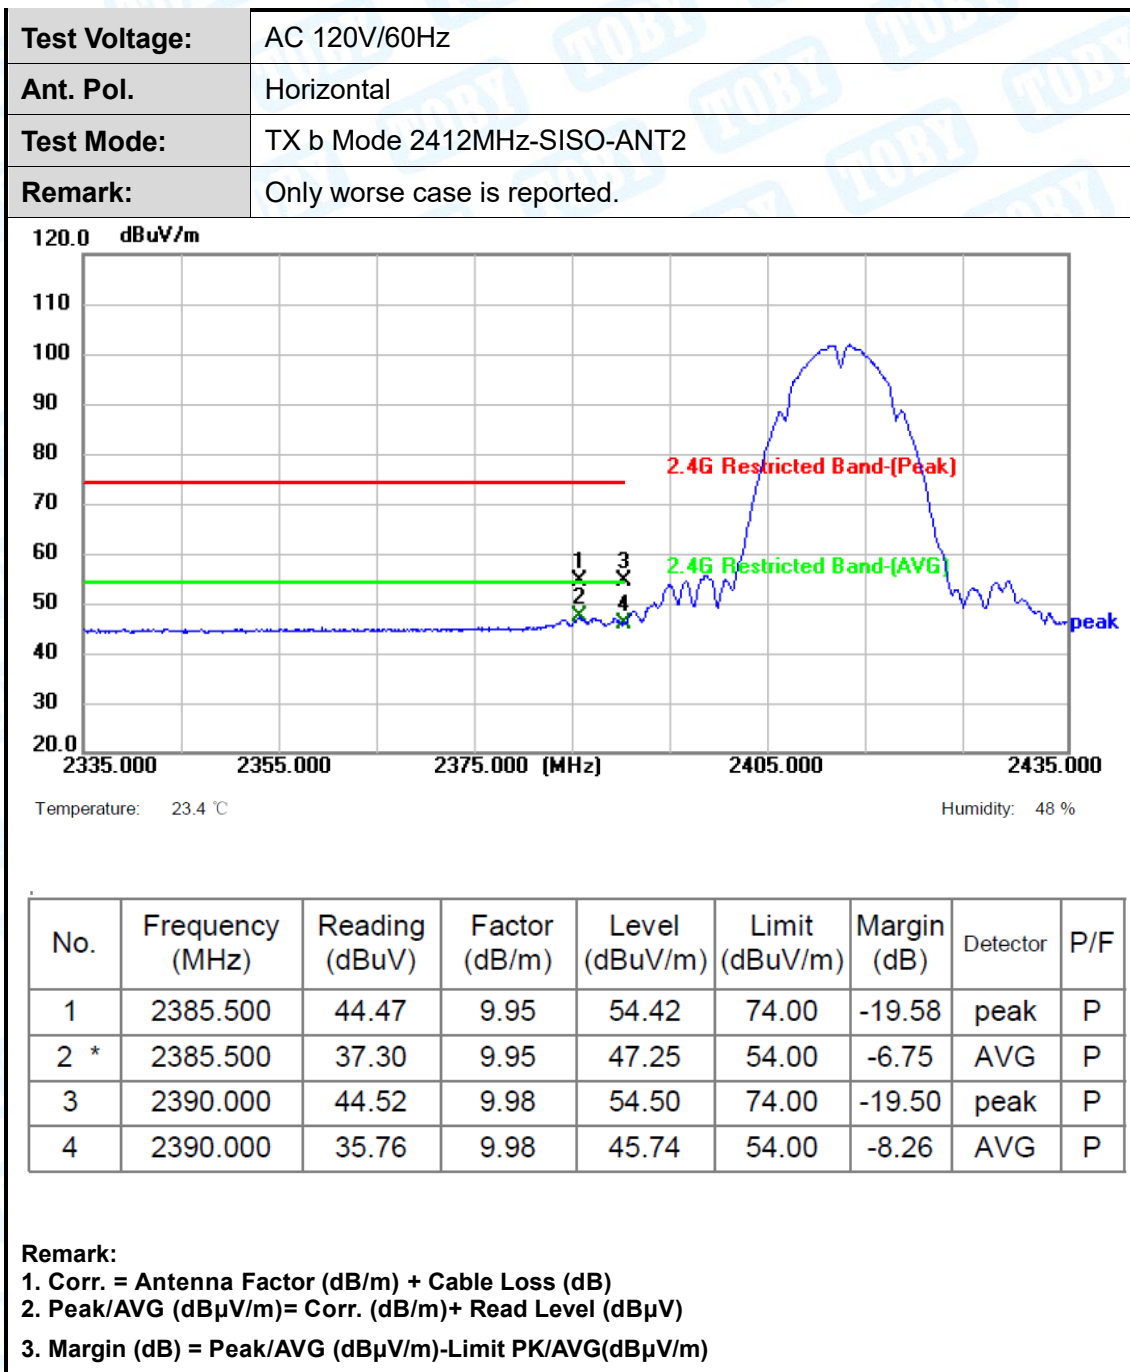

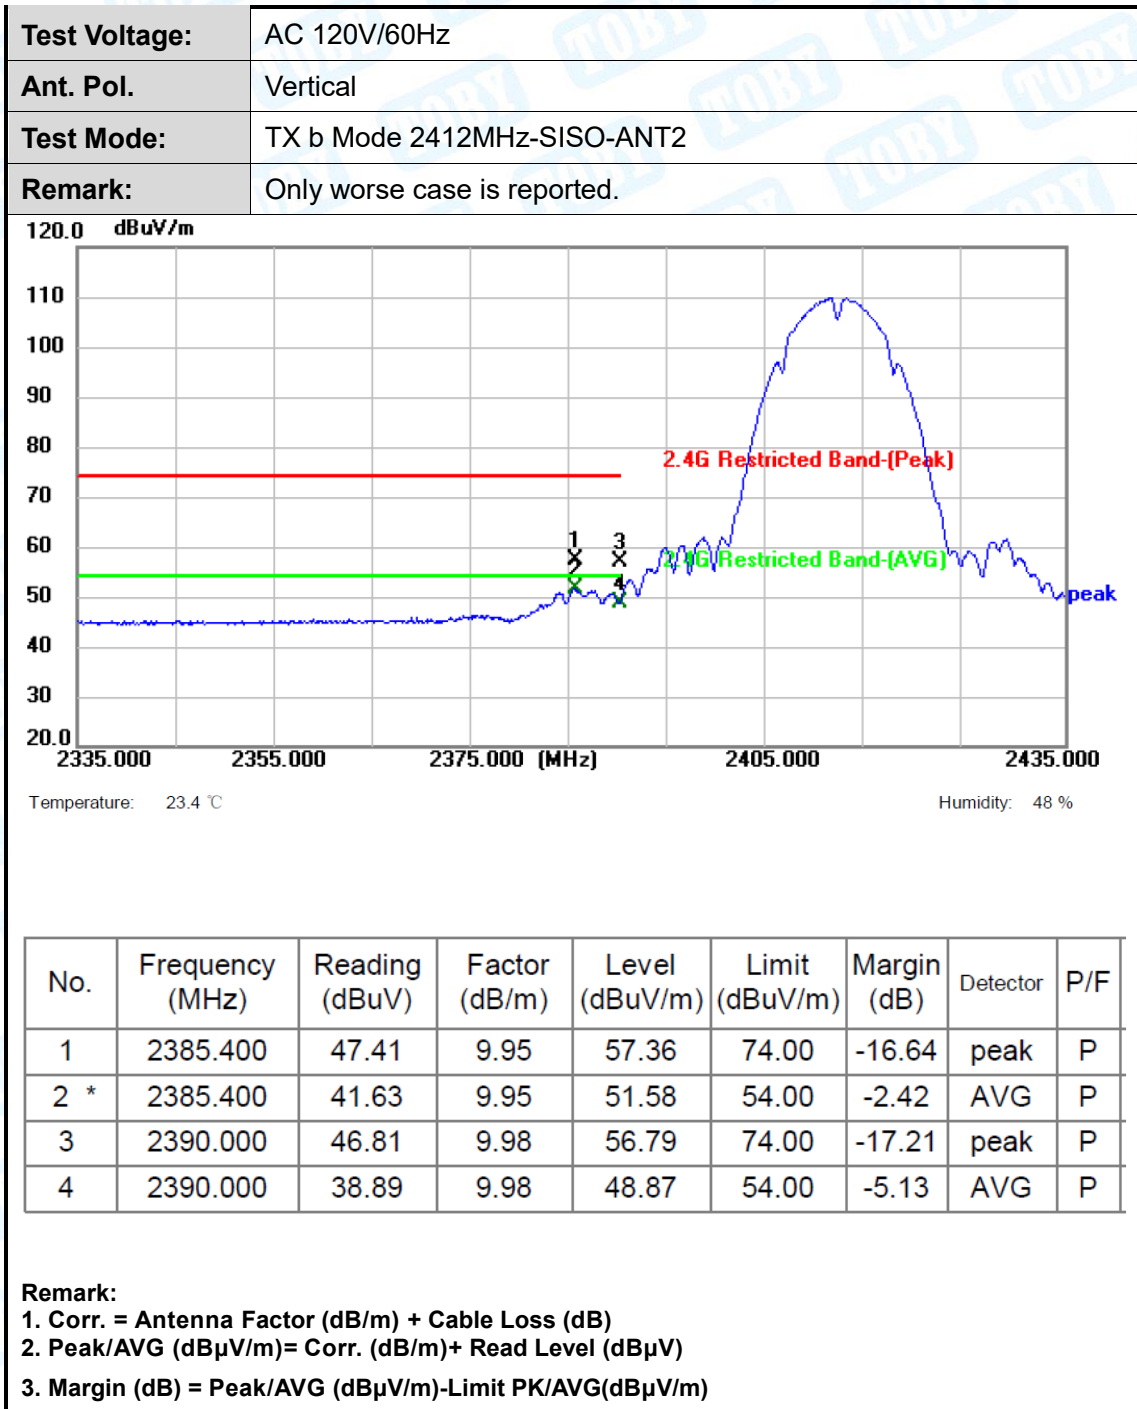

Test Voltage:	AC 120V/60Hz
Ant. Pol.	Horizontal
Test Mode:	TX b Mode 2462MHz-SISO-ANT2
Remark:	Only worse case is reported.

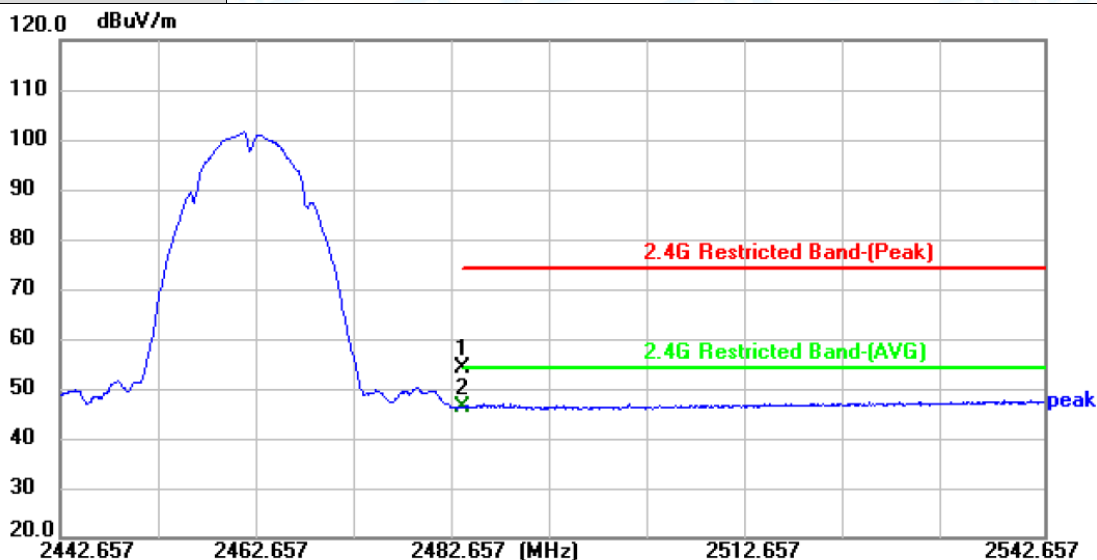

Temperature: 23.9 °C


Humidity: 48 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2483.500	44.03	10.20	54.23	74.00	-19.77	peak	P
2 *	2483.500	35.96	10.20	46.16	54.00	-7.84	AVG	P


Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



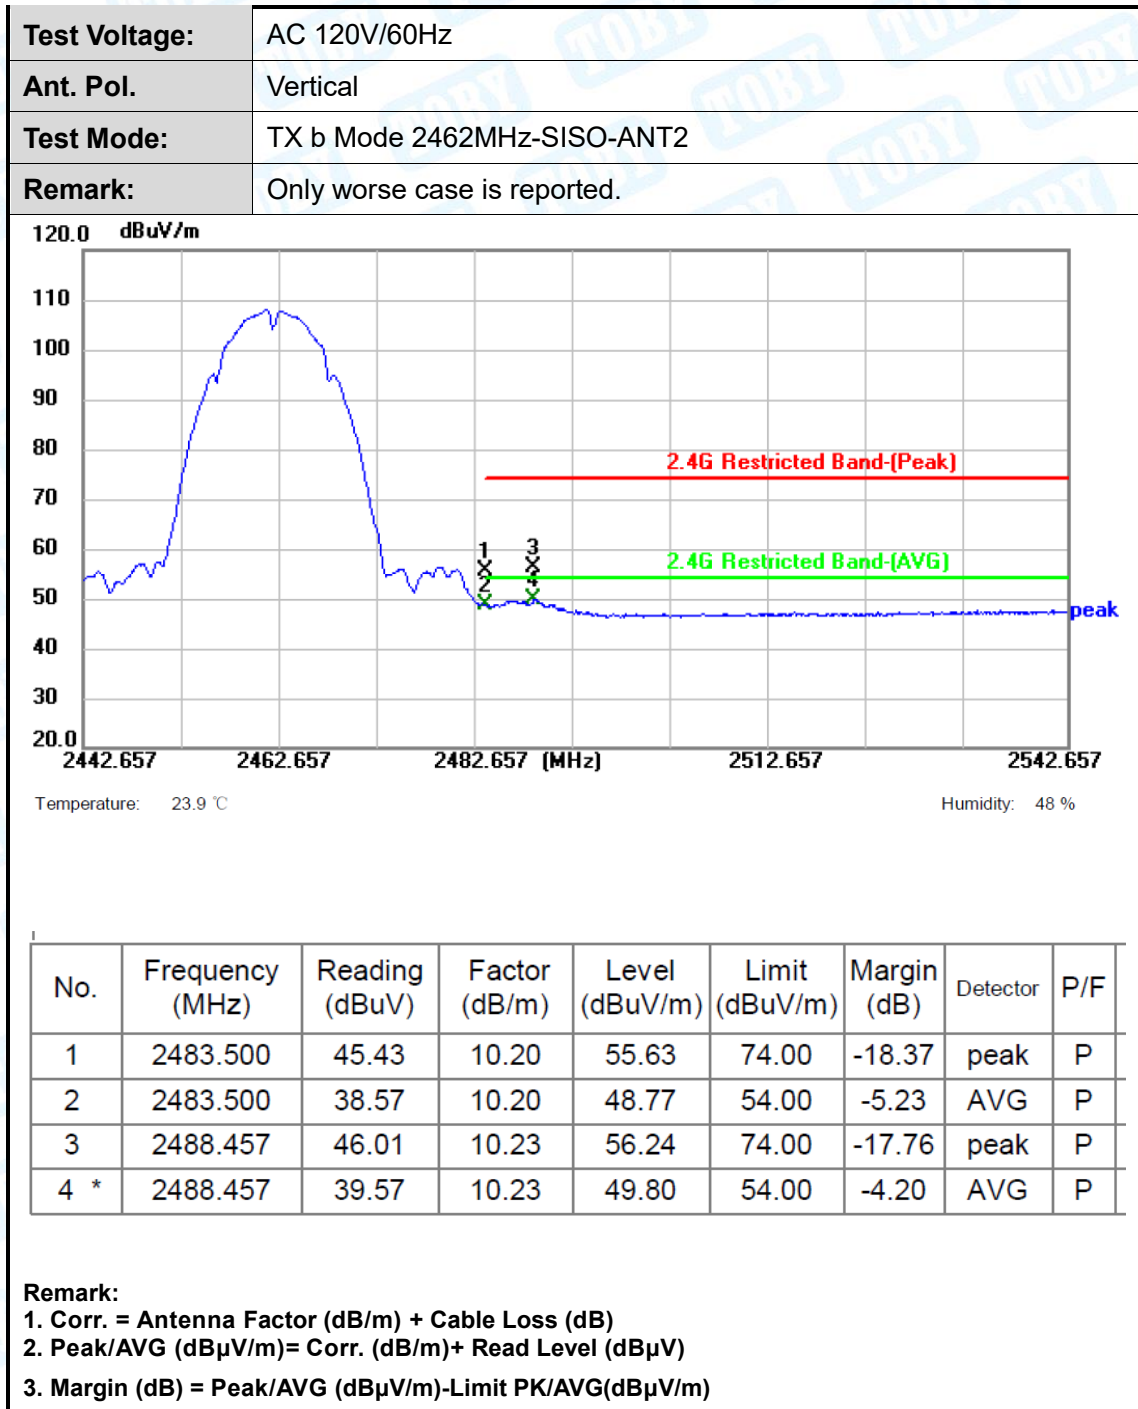

Test Voltage:	AC 120V/60Hz
Ant. Pol.	Horizontal
Test Mode:	TX g Mode 2412MHz-SISO-ANT1
Remark:	Only worse case is reported.

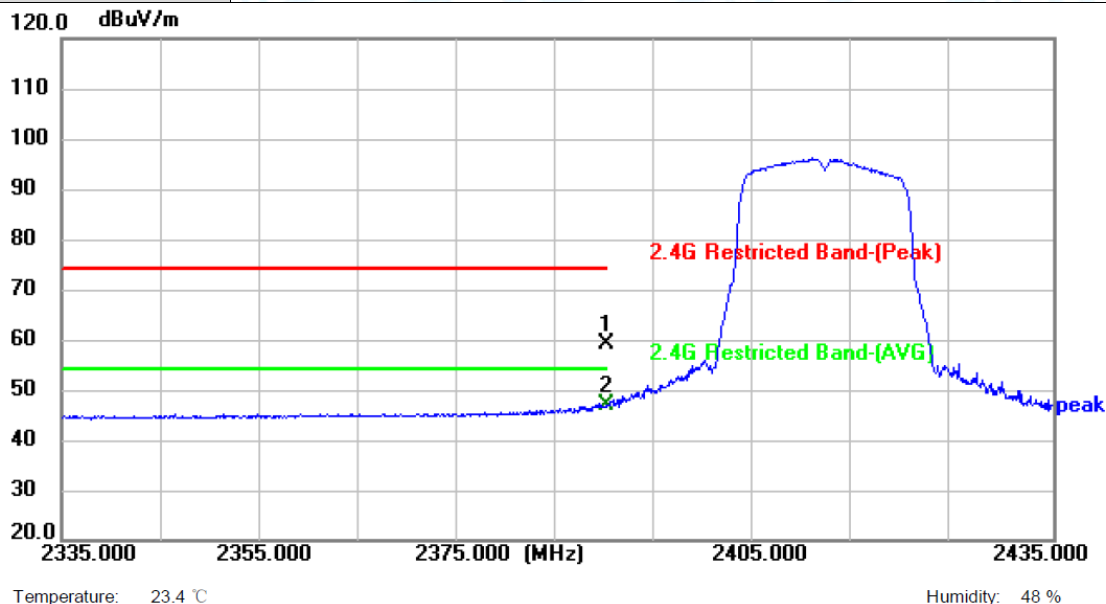


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2390.000	49.14	9.98	59.12	74.00	-14.88	peak	P
2 *	2390.000	37.03	9.98	47.01	54.00	-6.99	AVG	P


Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



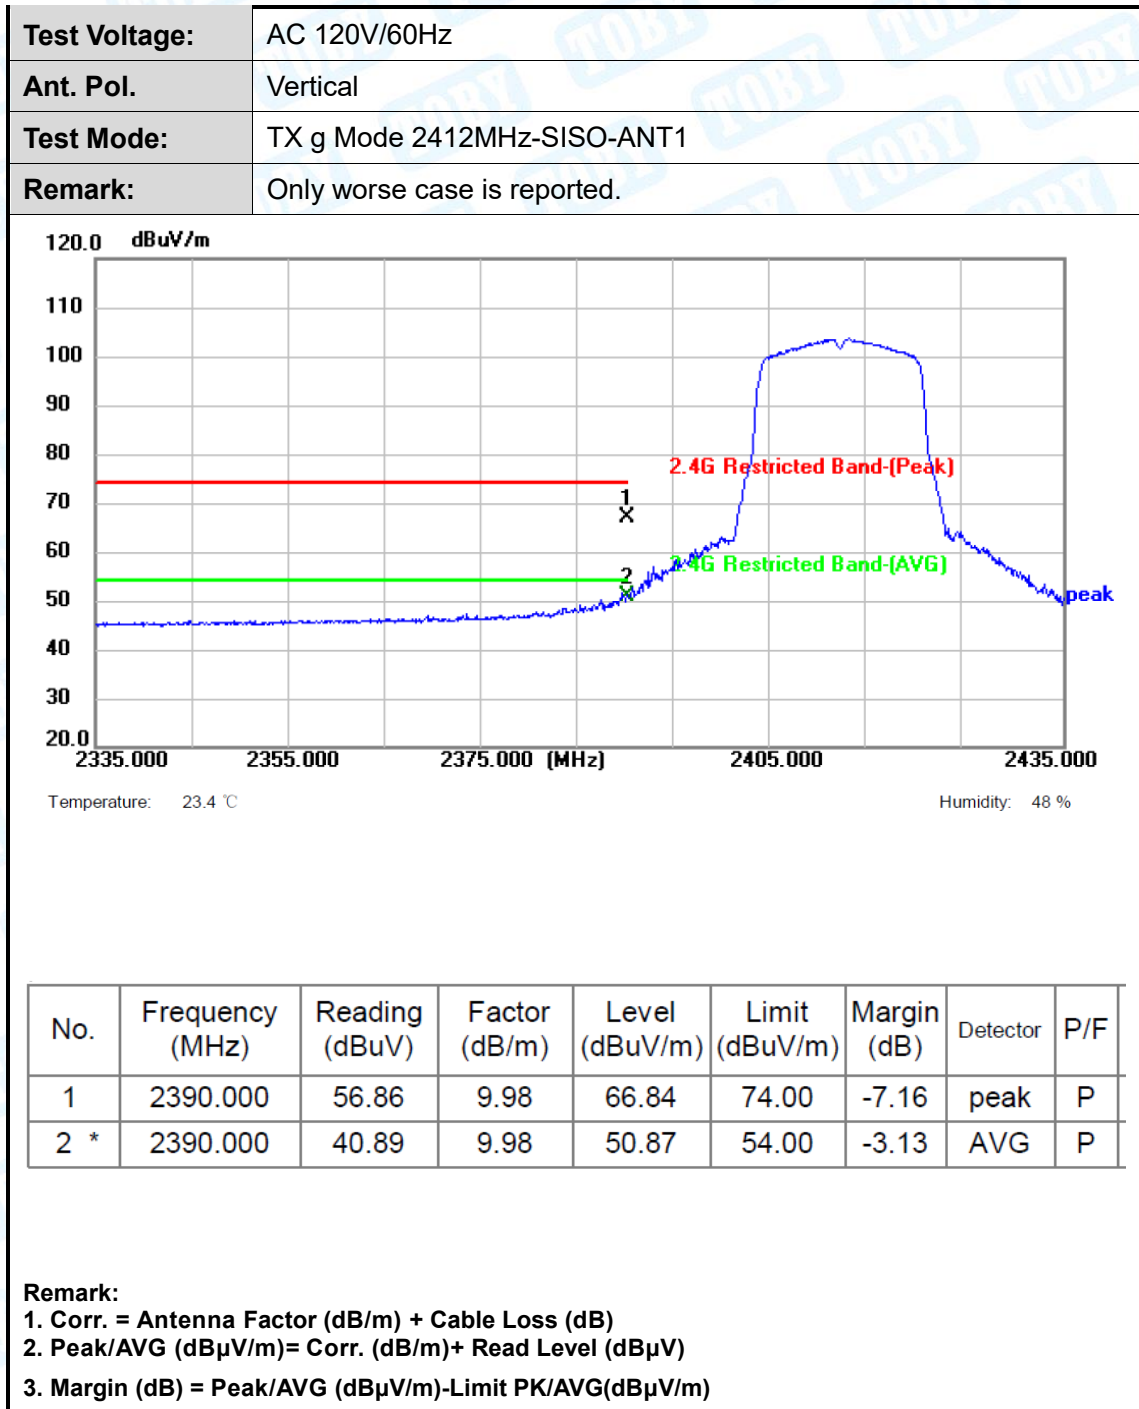

Test Voltage:	AC 120V/60Hz
Ant. Pol.	Horizontal
Test Mode:	TX g Mode 2462MHz-SISO-ANT1
Remark:	Only worse case is reported.

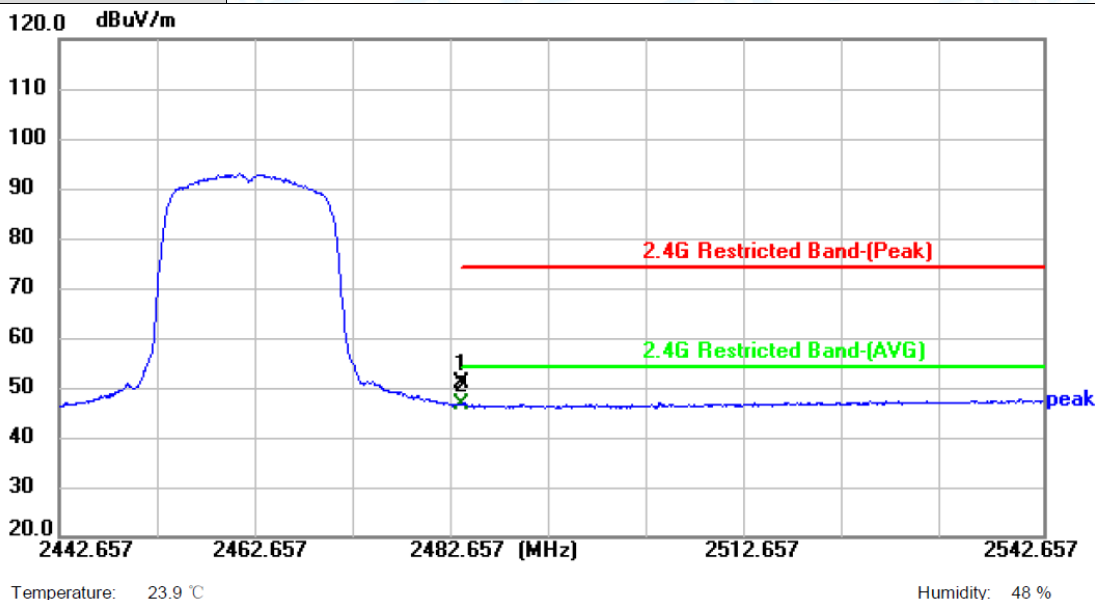



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2483.500	40.52	10.20	50.72	74.00	-23.28	peak	P
2 *	2483.500	36.27	10.20	46.47	54.00	-7.53	AVG	P

Remark:


1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



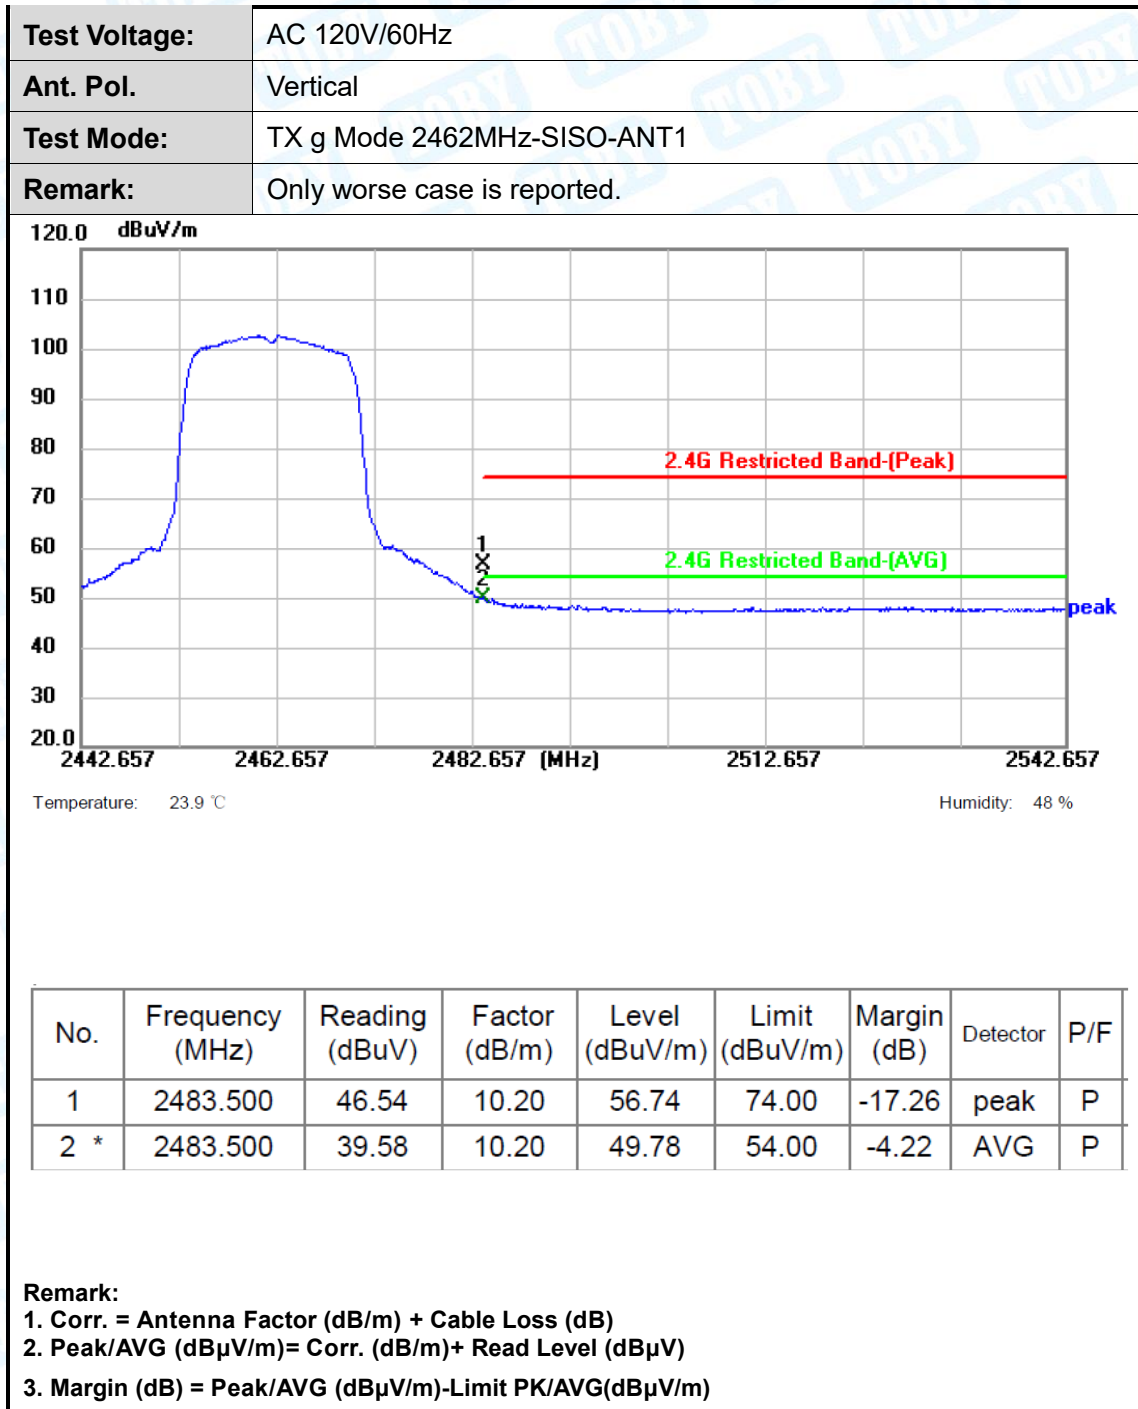

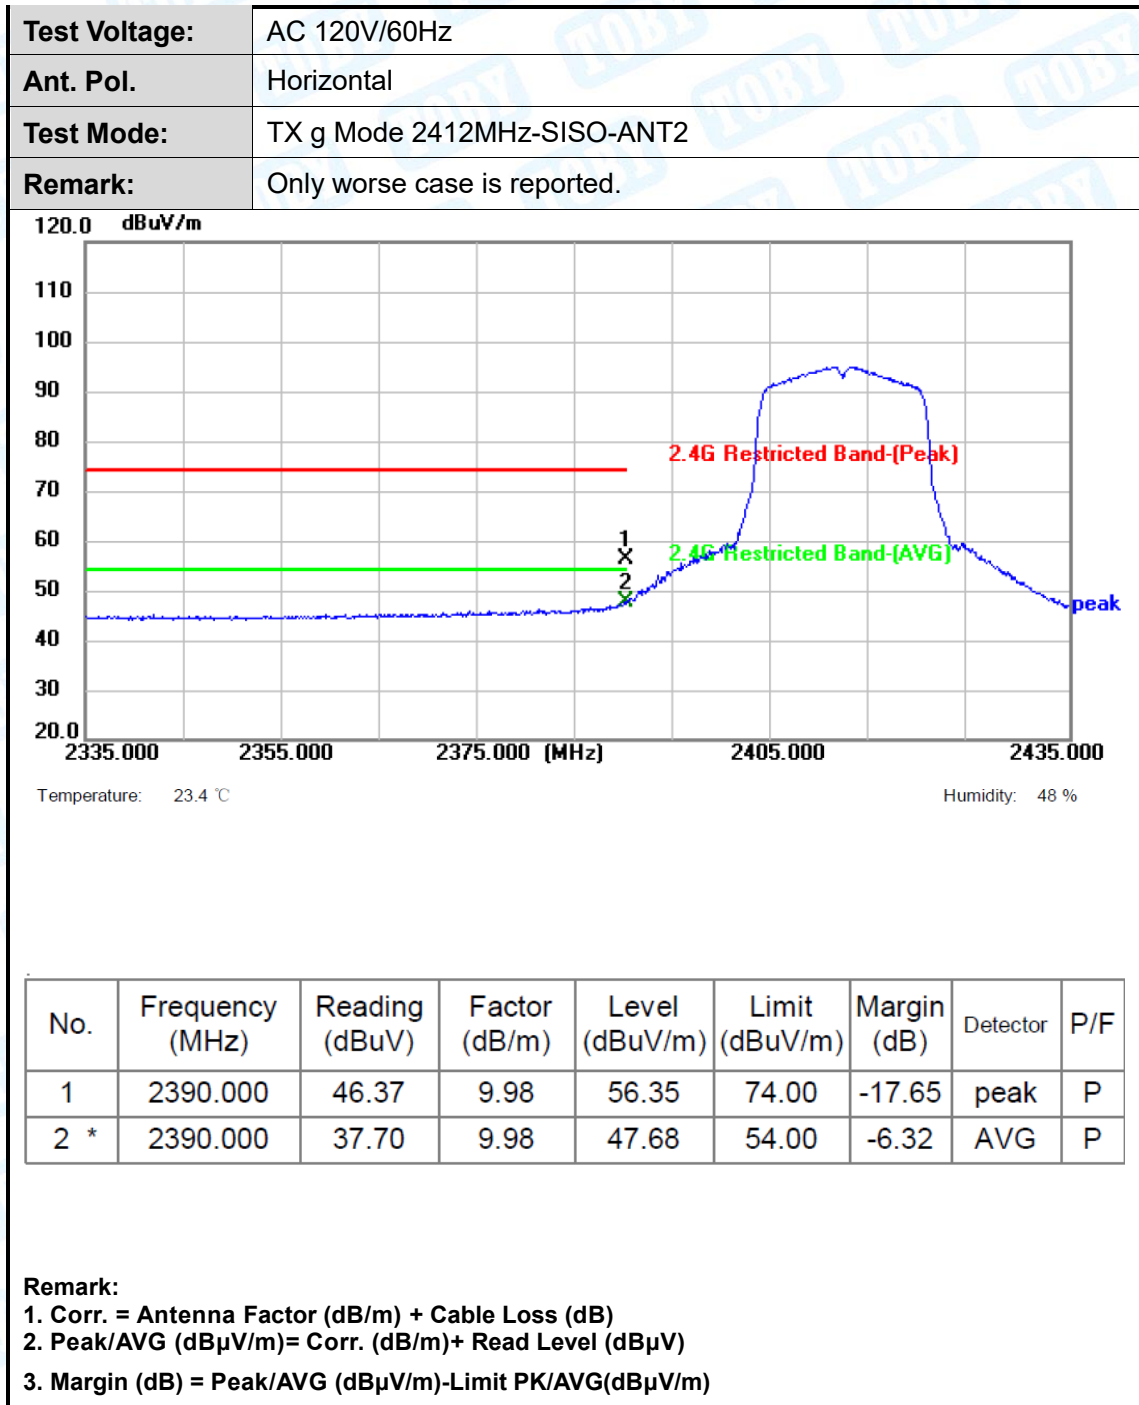

Test Voltage:	AC 120V/60Hz
Ant. Pol.	Vertical
Test Mode:	TX g Mode 2412MHz-SISO-ANT2
Remark:	Only worse case is reported.

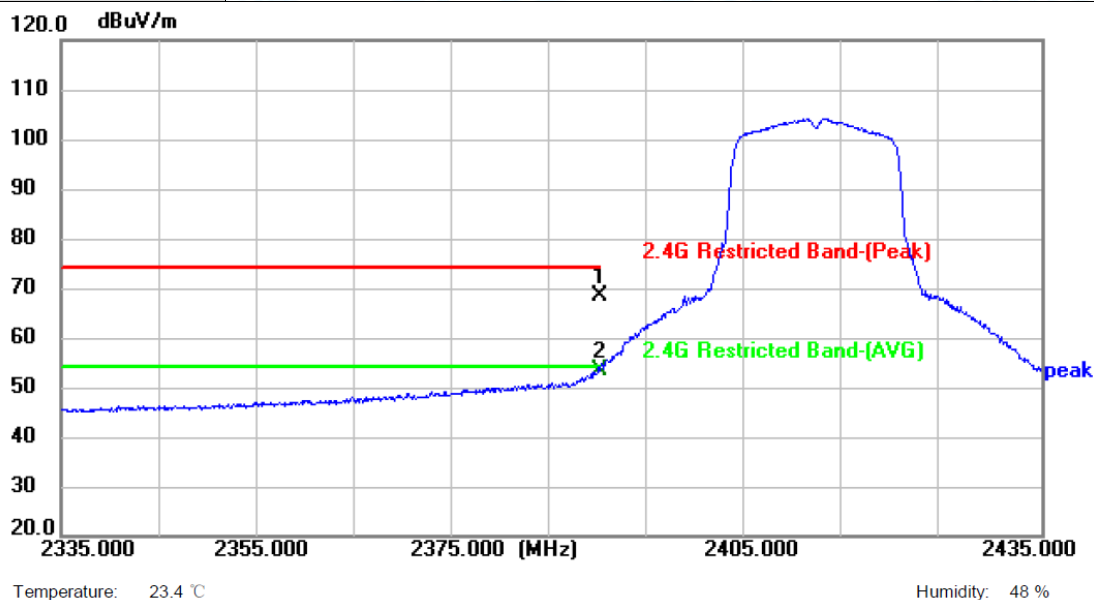



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2390.000	58.57	9.98	68.55	74.00	-5.45	peak	P
2 *	2390.000	43.46	9.98	53.44	54.00	-0.56	AVG	P


Remark:


1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)




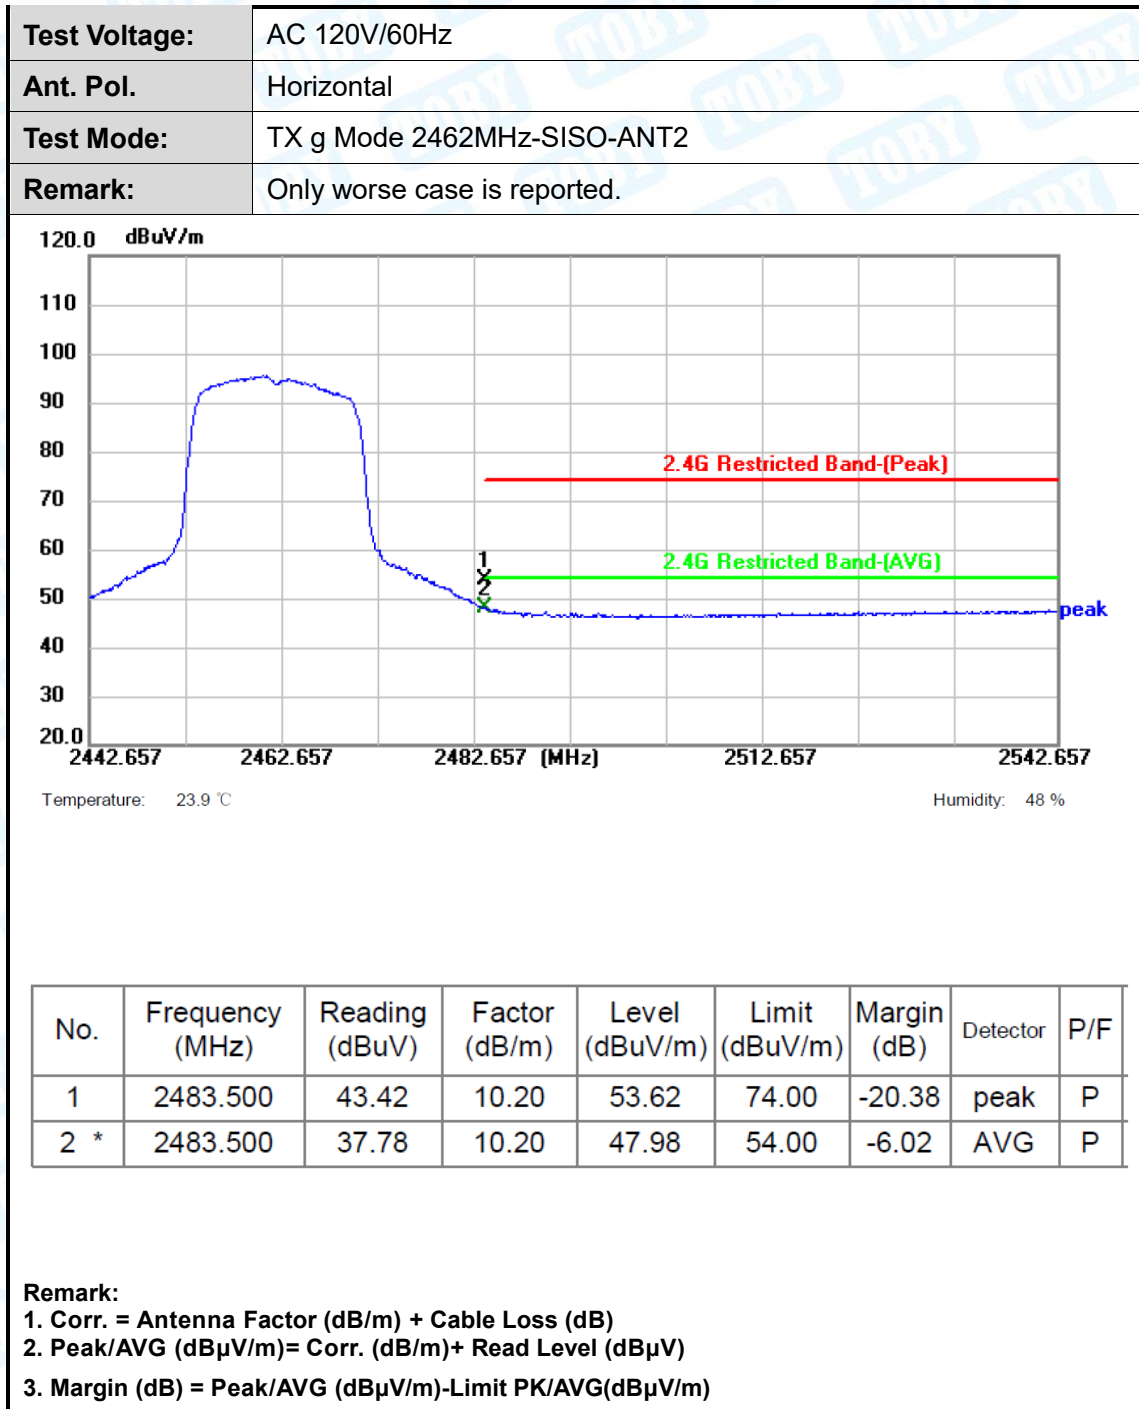


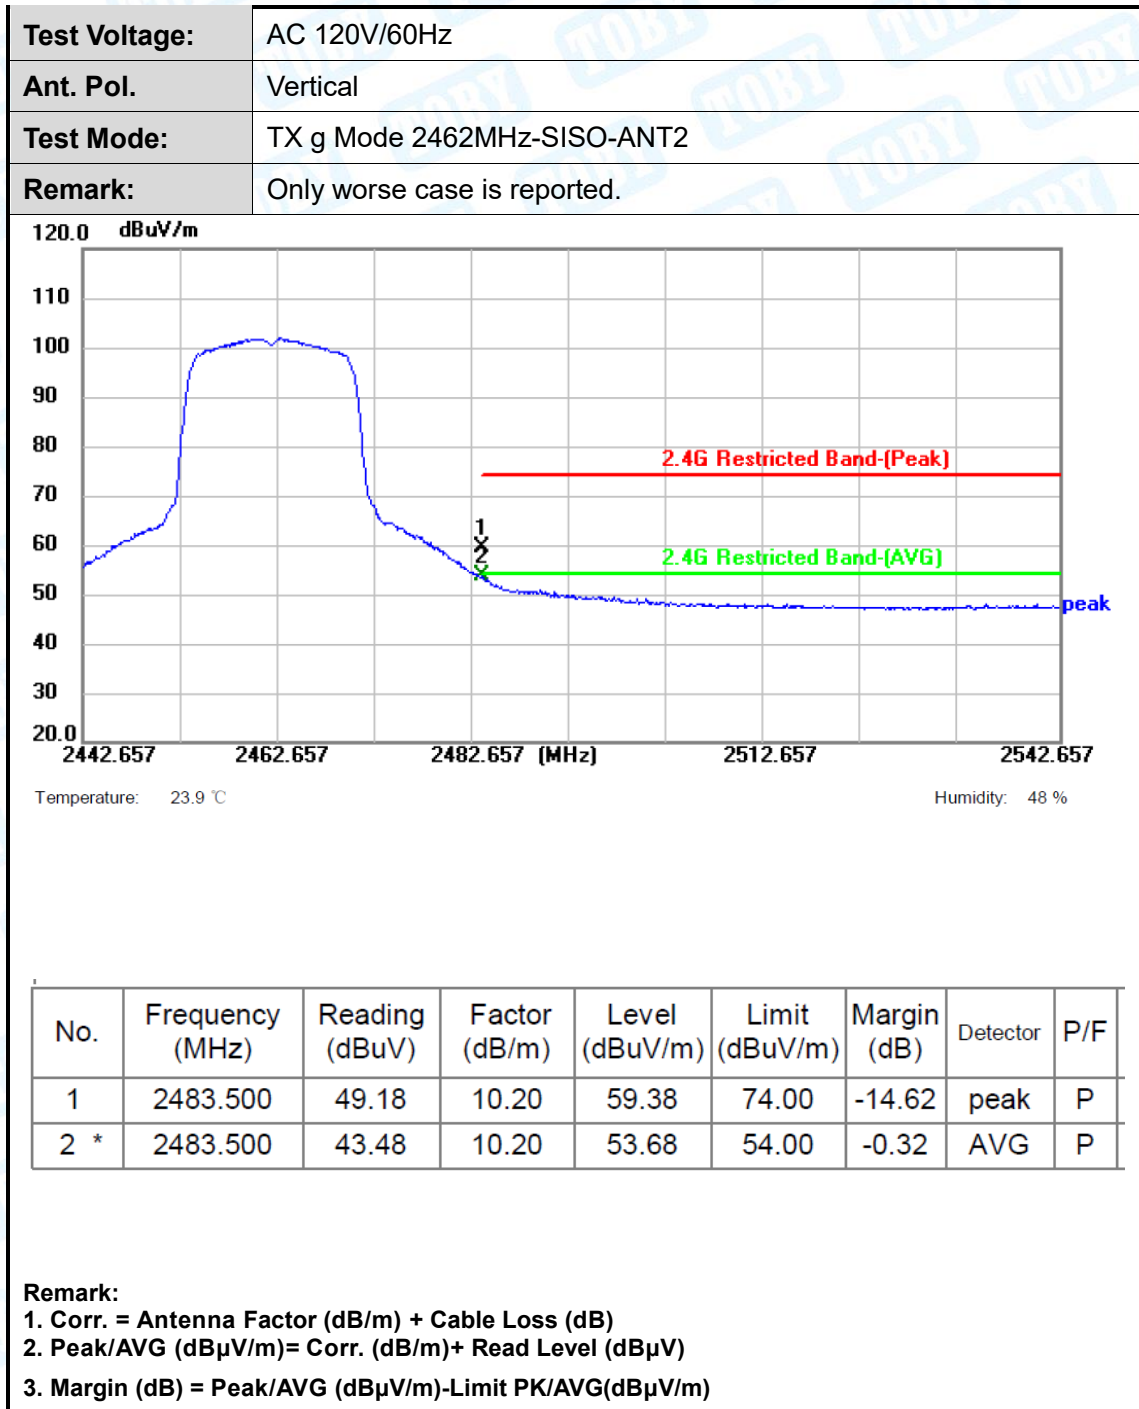


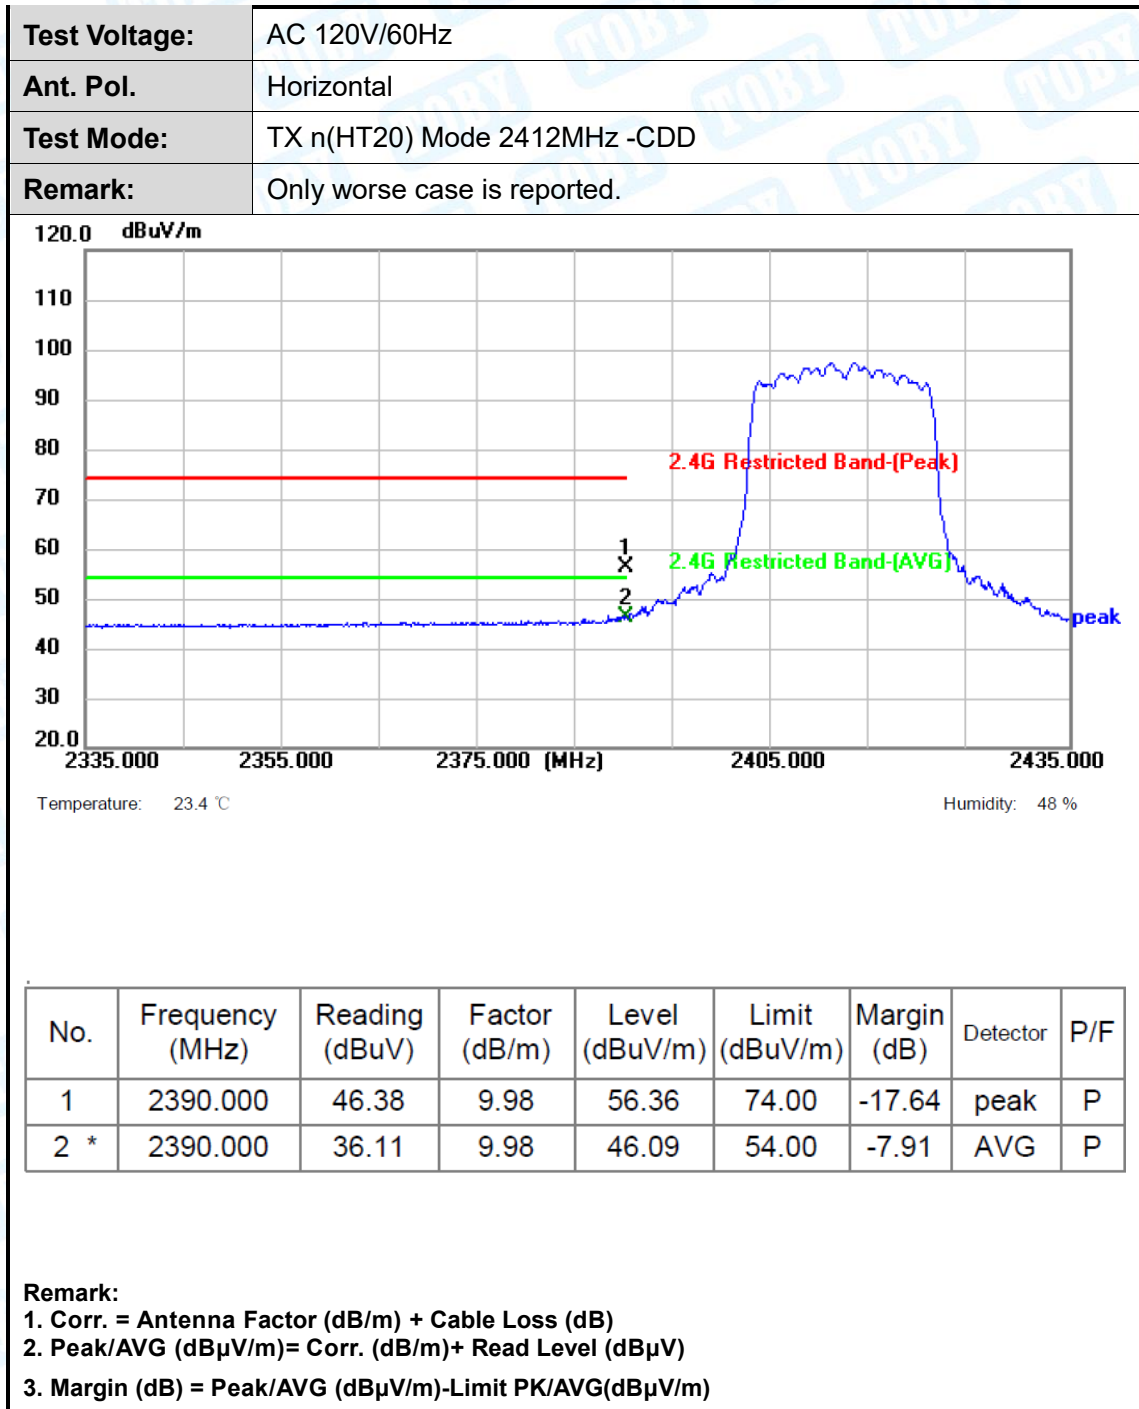


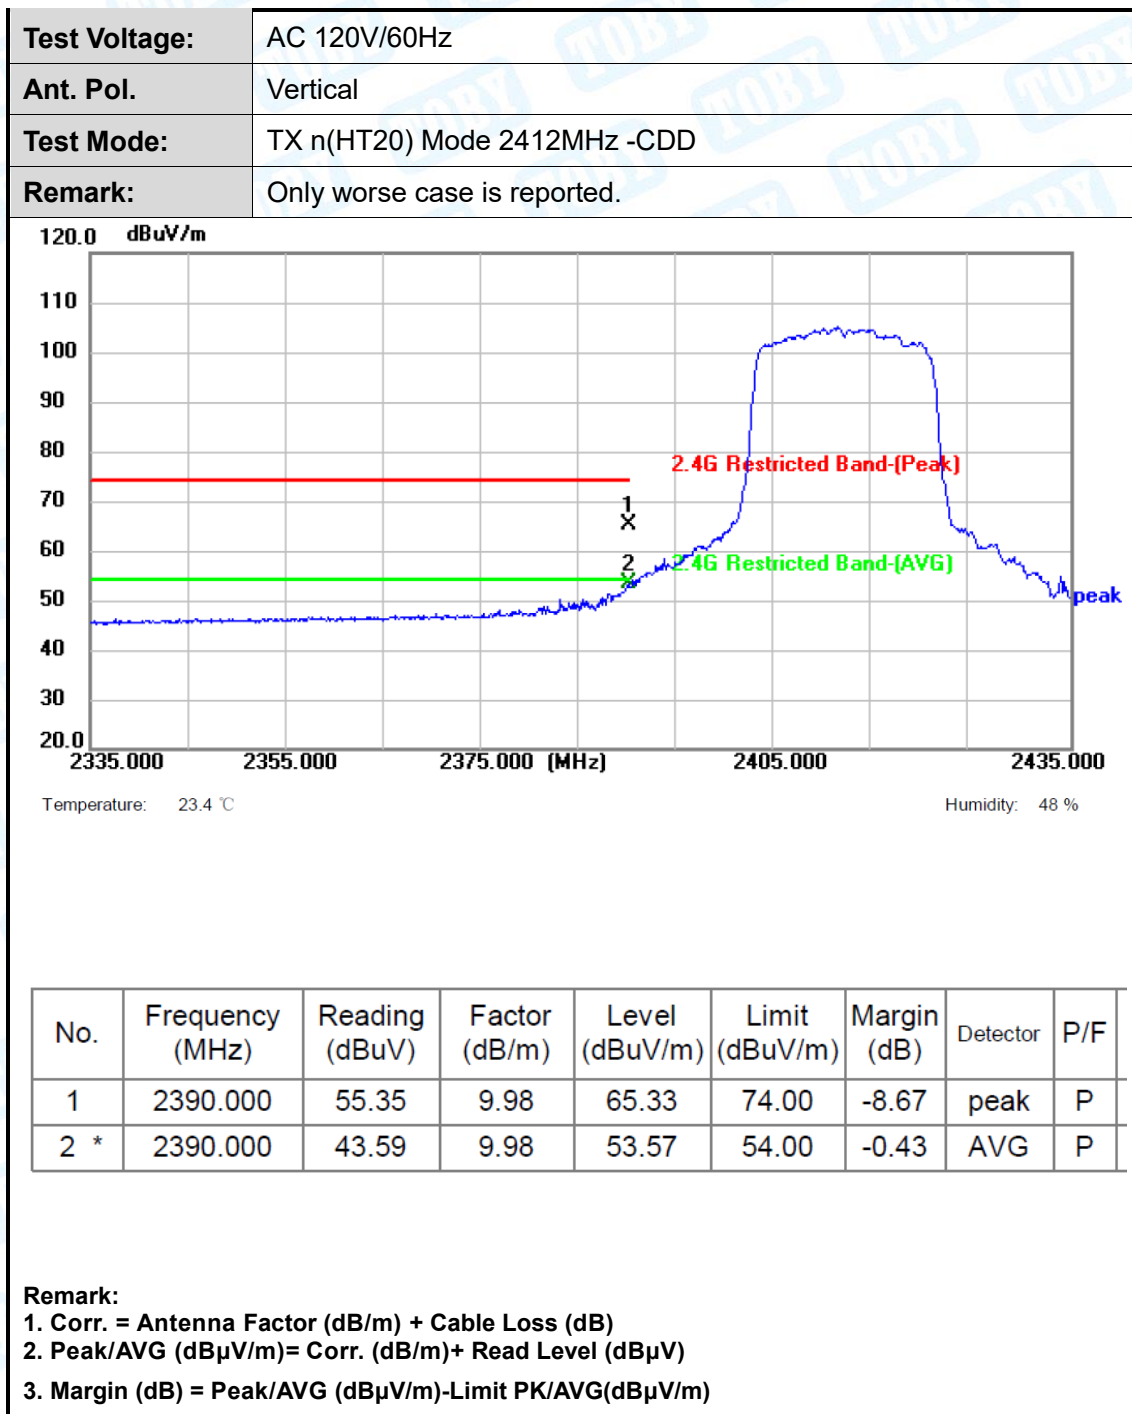


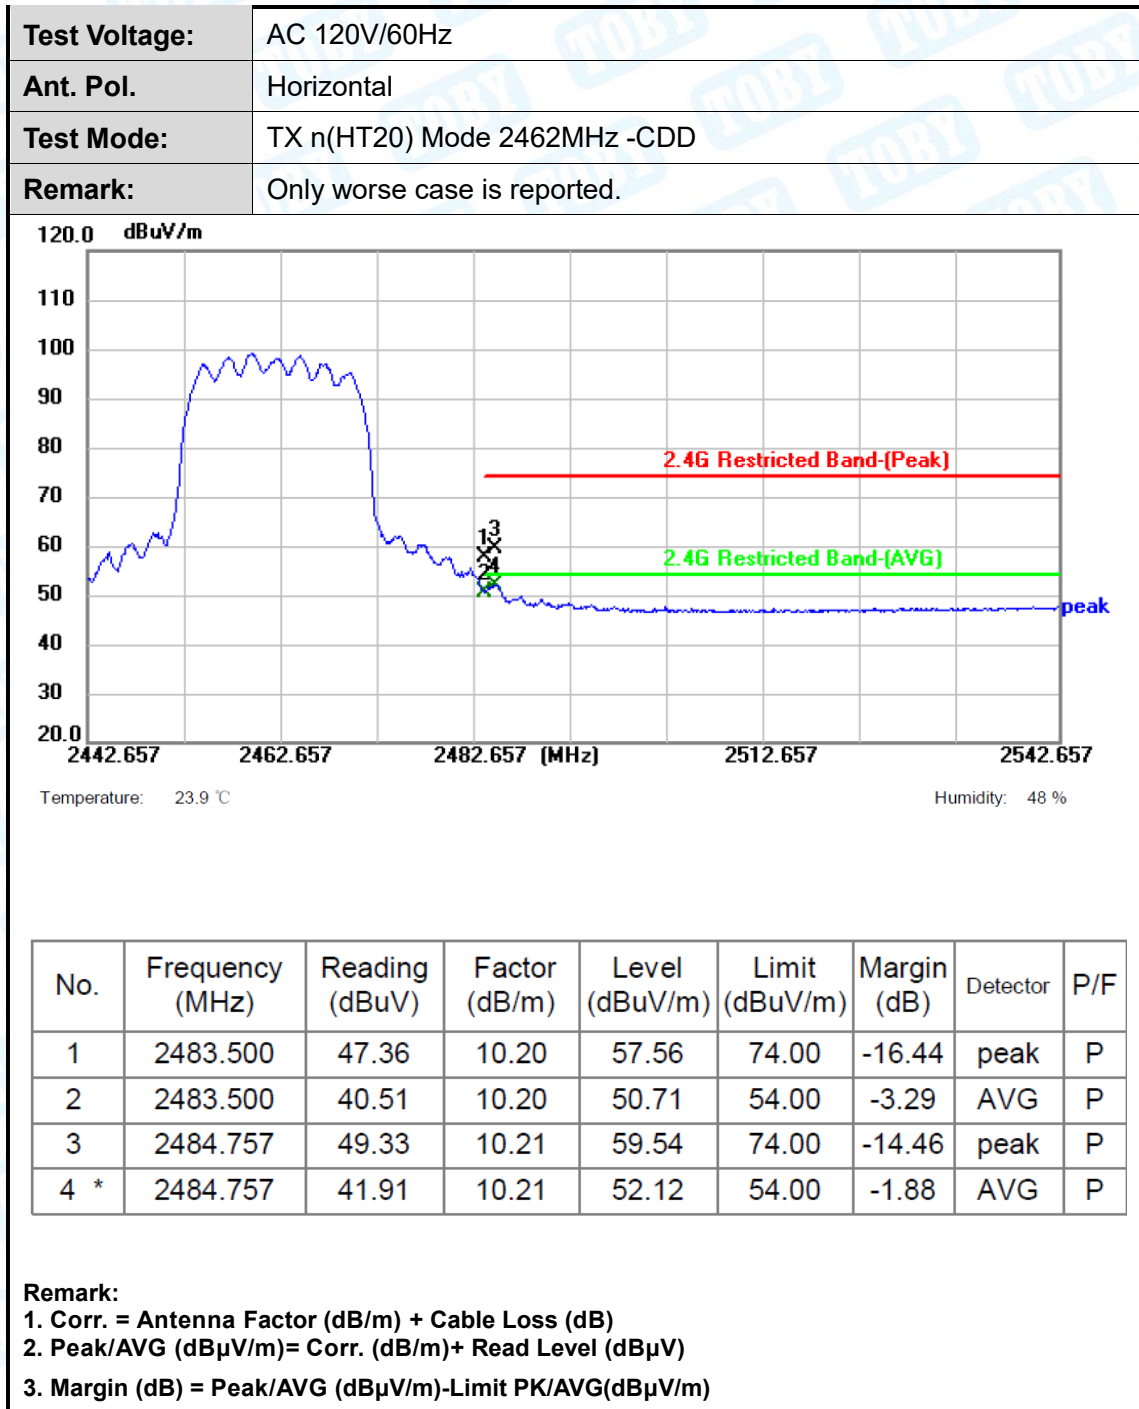

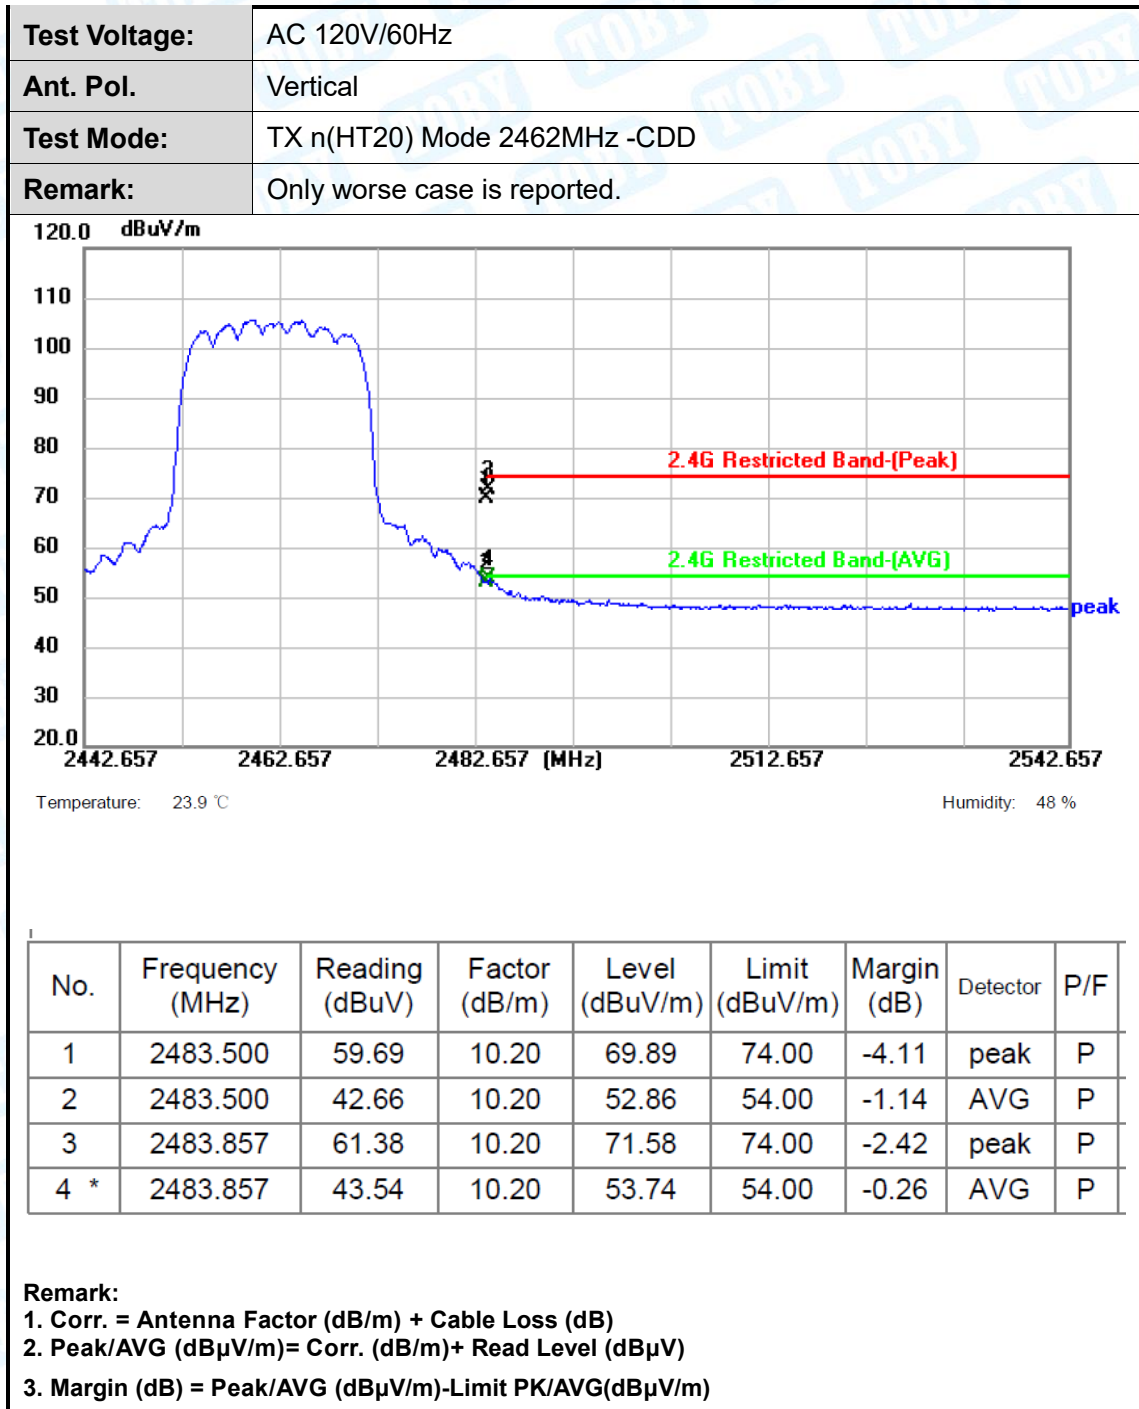


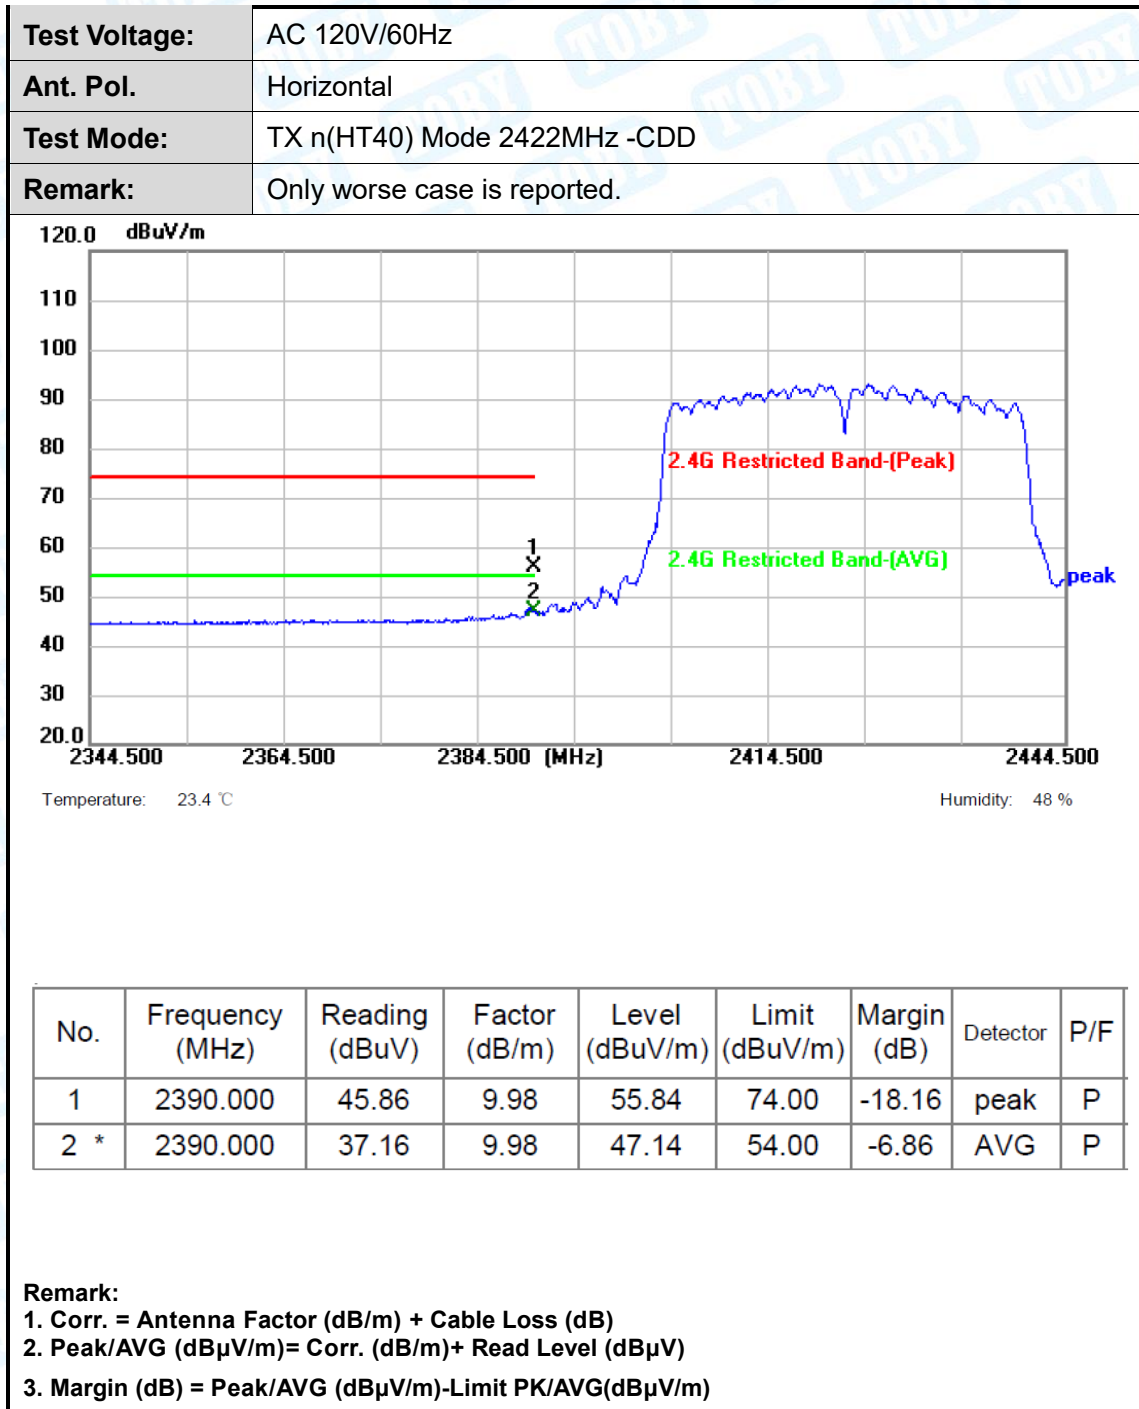

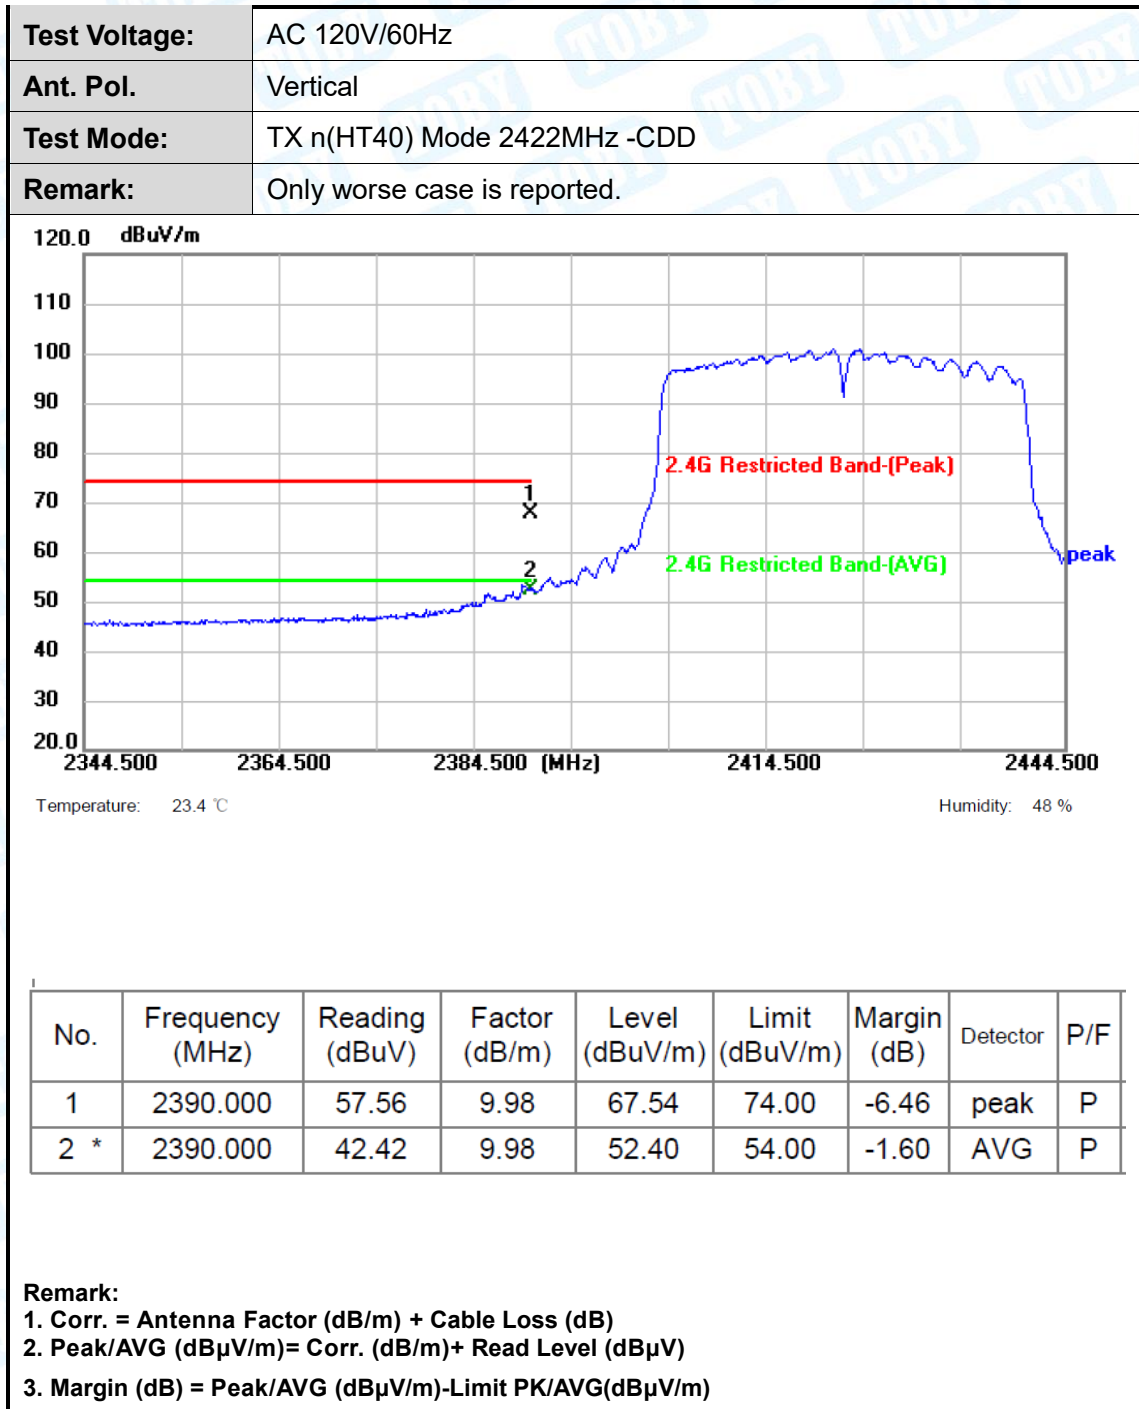

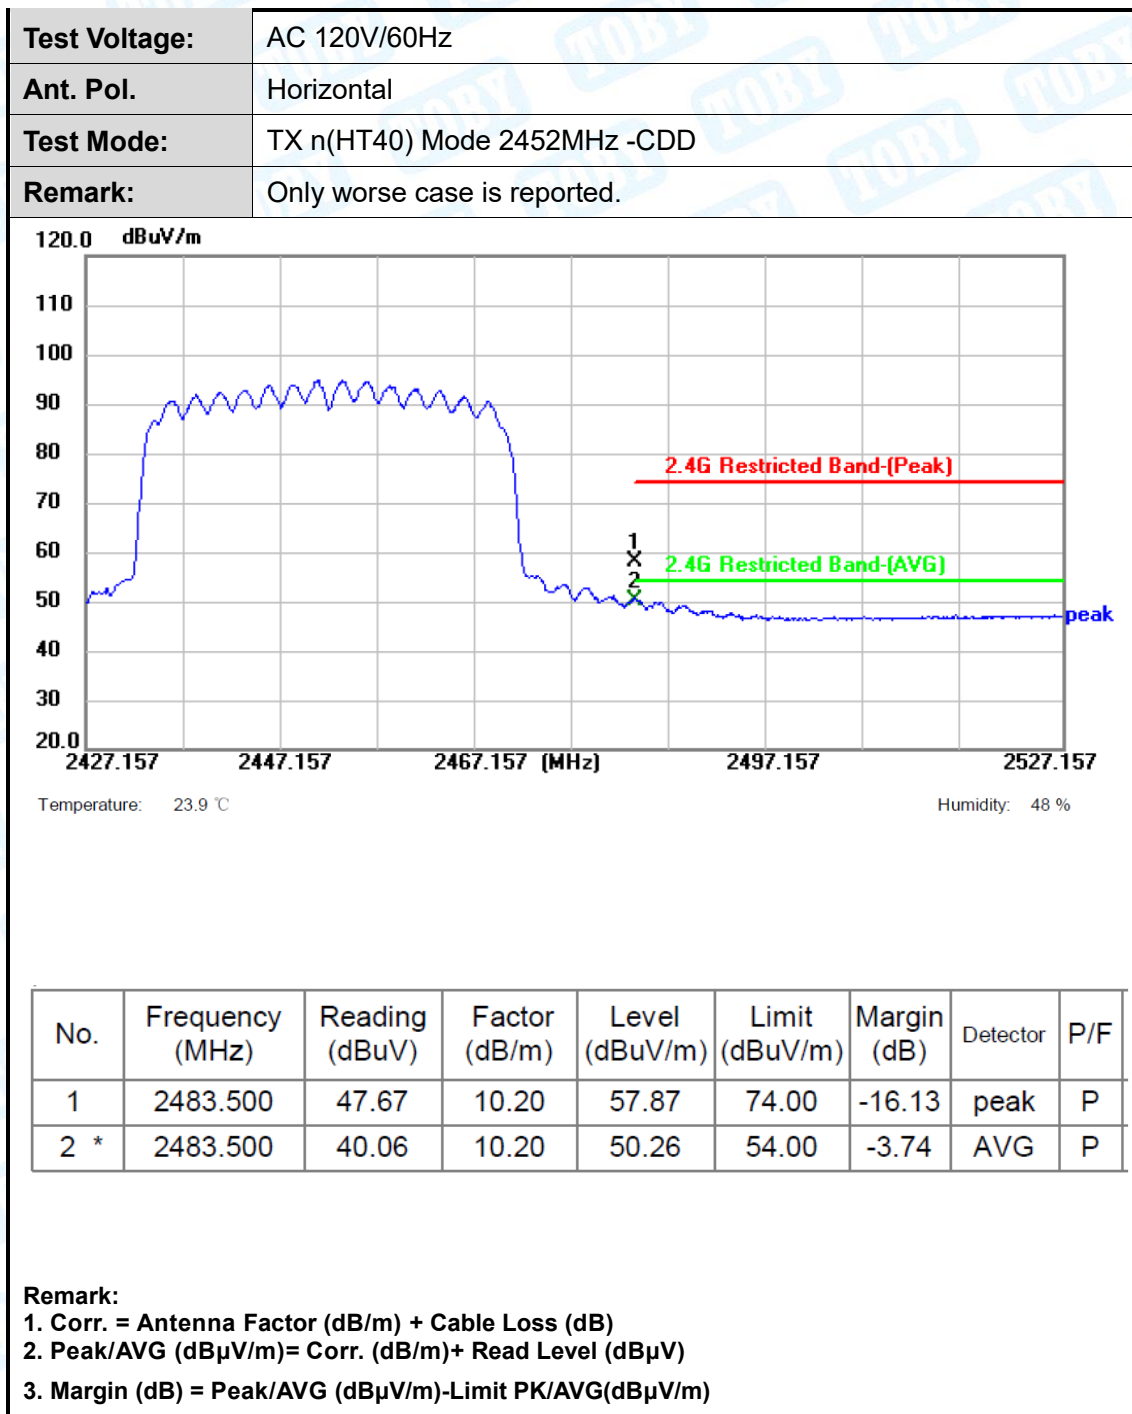

Test Voltage:	AC 120V/60Hz
Ant. Pol.	Vertical
Test Mode:	TX n(HT40) Mode 2452MHz -CDD
Remark:	Only worse case is reported.

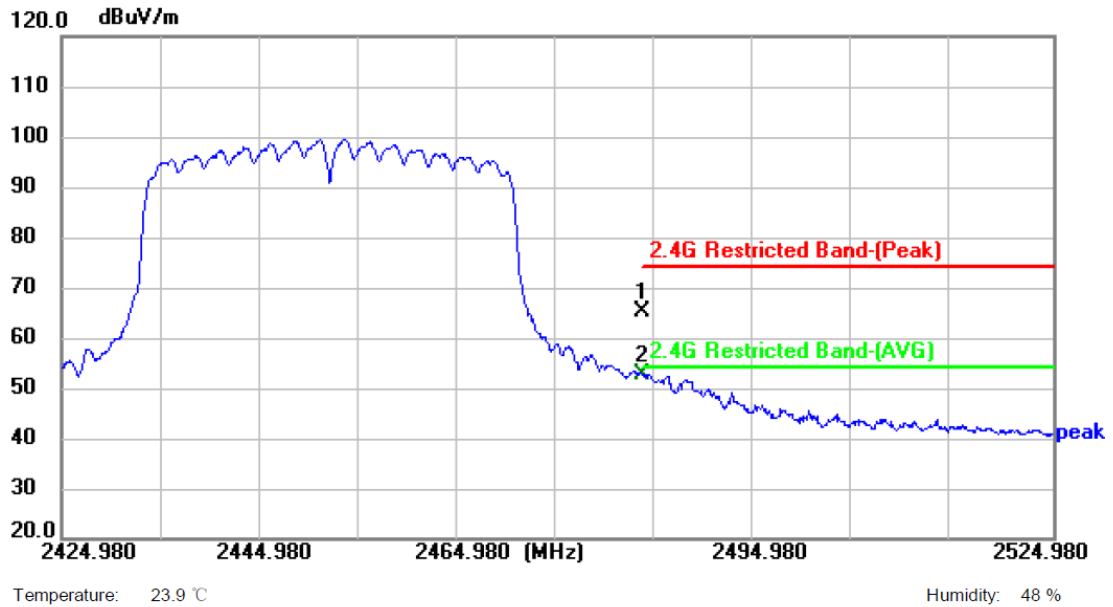



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2483.500	59.13	6.20	65.33	74.00	-8.67	peak	P
2 *	2483.500	46.58	6.20	52.78	54.00	-1.22	AVG	P

Remark:


1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



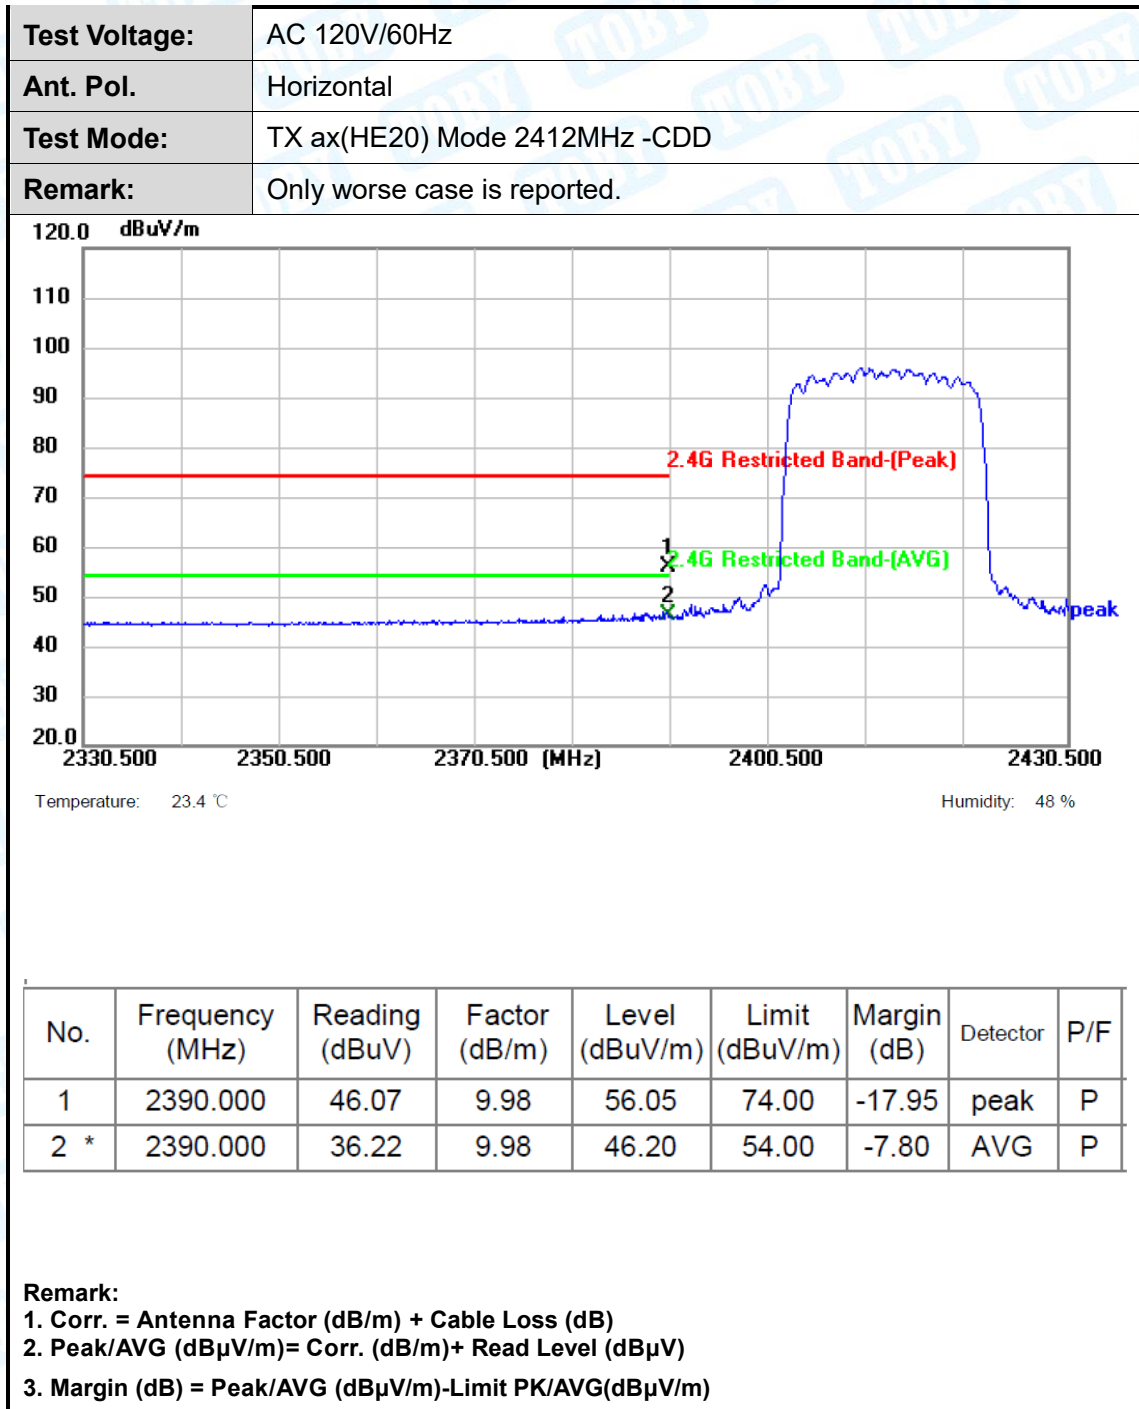

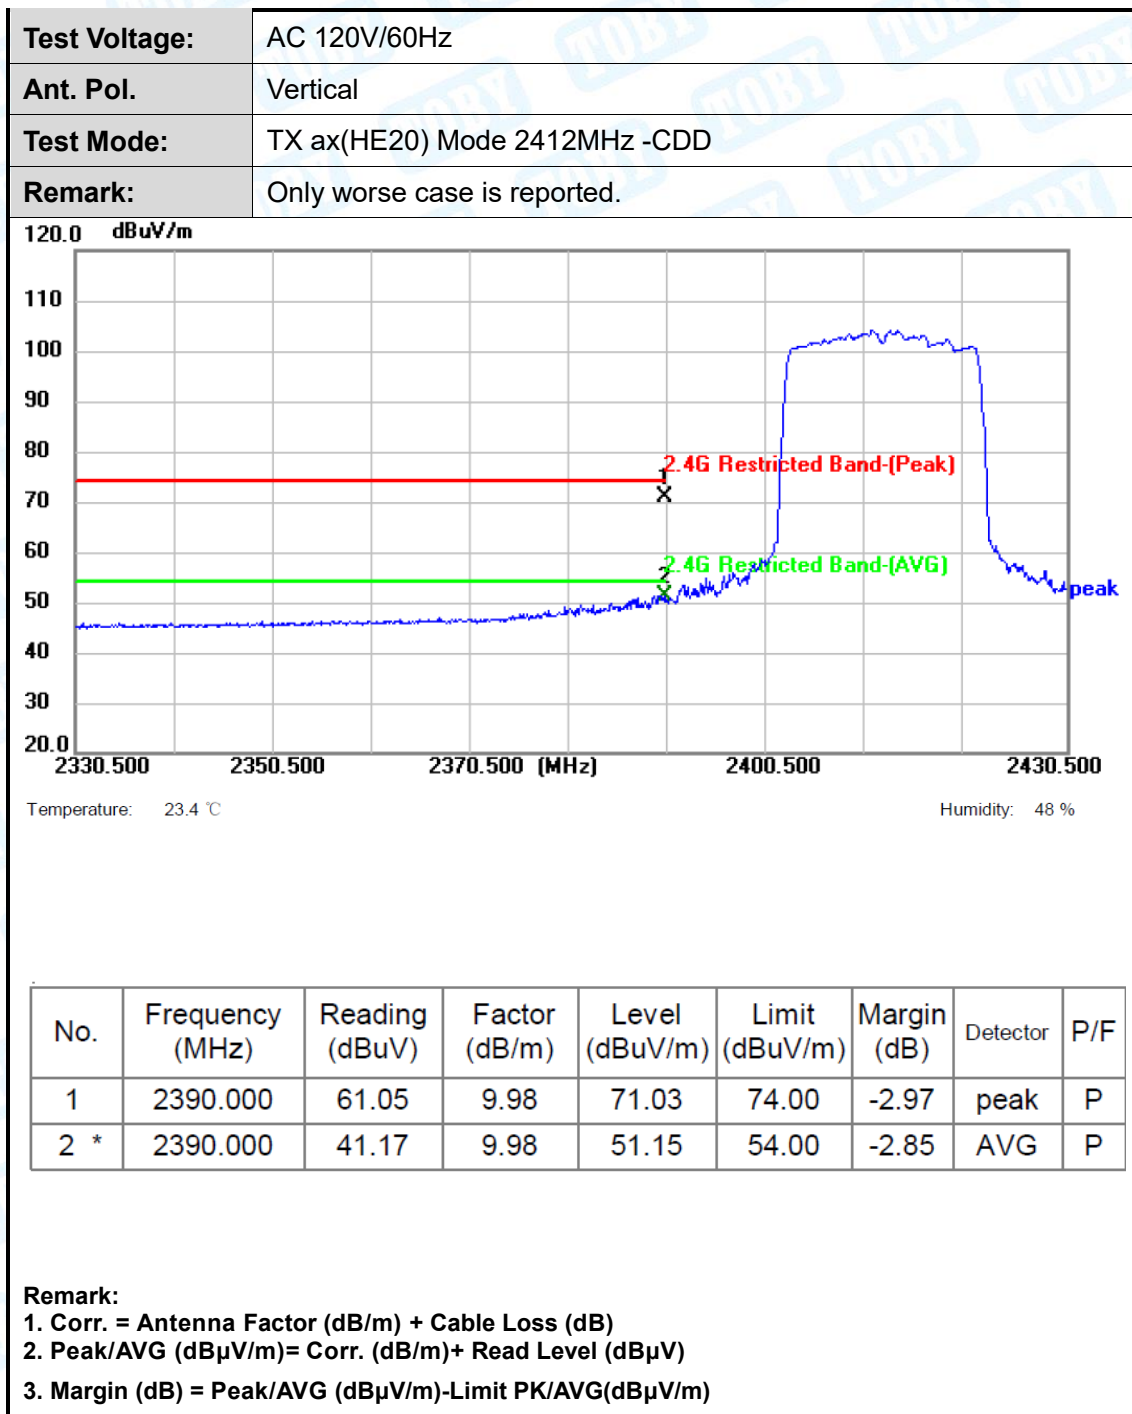

Test Voltage:	AC 120V/60Hz
Ant. Pol.	Horizontal
Test Mode:	TX ax(HE20) Mode 2462MHz -CDD
Remark:	Only worse case is reported.

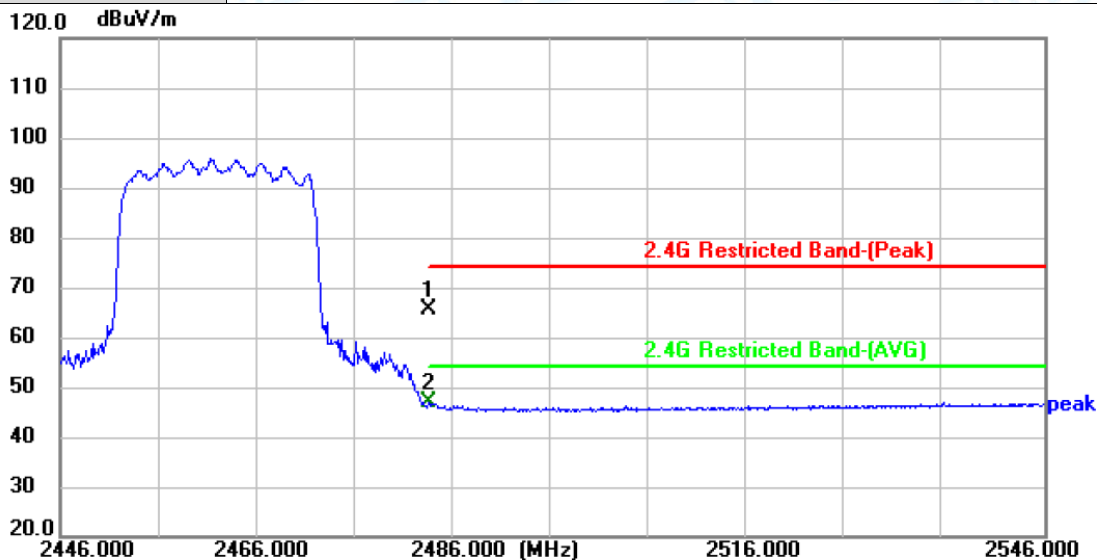

Temperature: 23.4 °C

Humidity: 48 %


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2483.500	55.28	10.20	65.48	74.00	-8.52	peak	P
2 *	2483.500	36.62	10.20	46.82	54.00	-7.18	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Vertical
Test Mode:	TX ax(HE20) Mode 2462MHz -CDD
Remark:	Only worse case is reported.

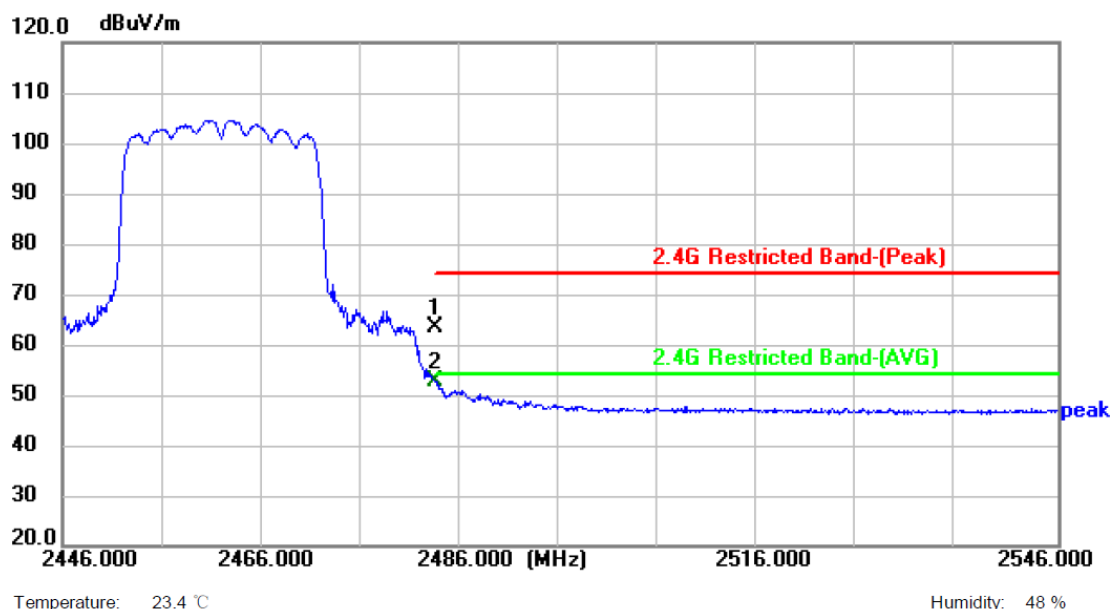



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2483.500	53.05	10.20	63.25	74.00	-10.75	peak	P
2 *	2483.500	42.64	10.20	52.84	54.00	-1.16	AVG	P


Remark:


1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



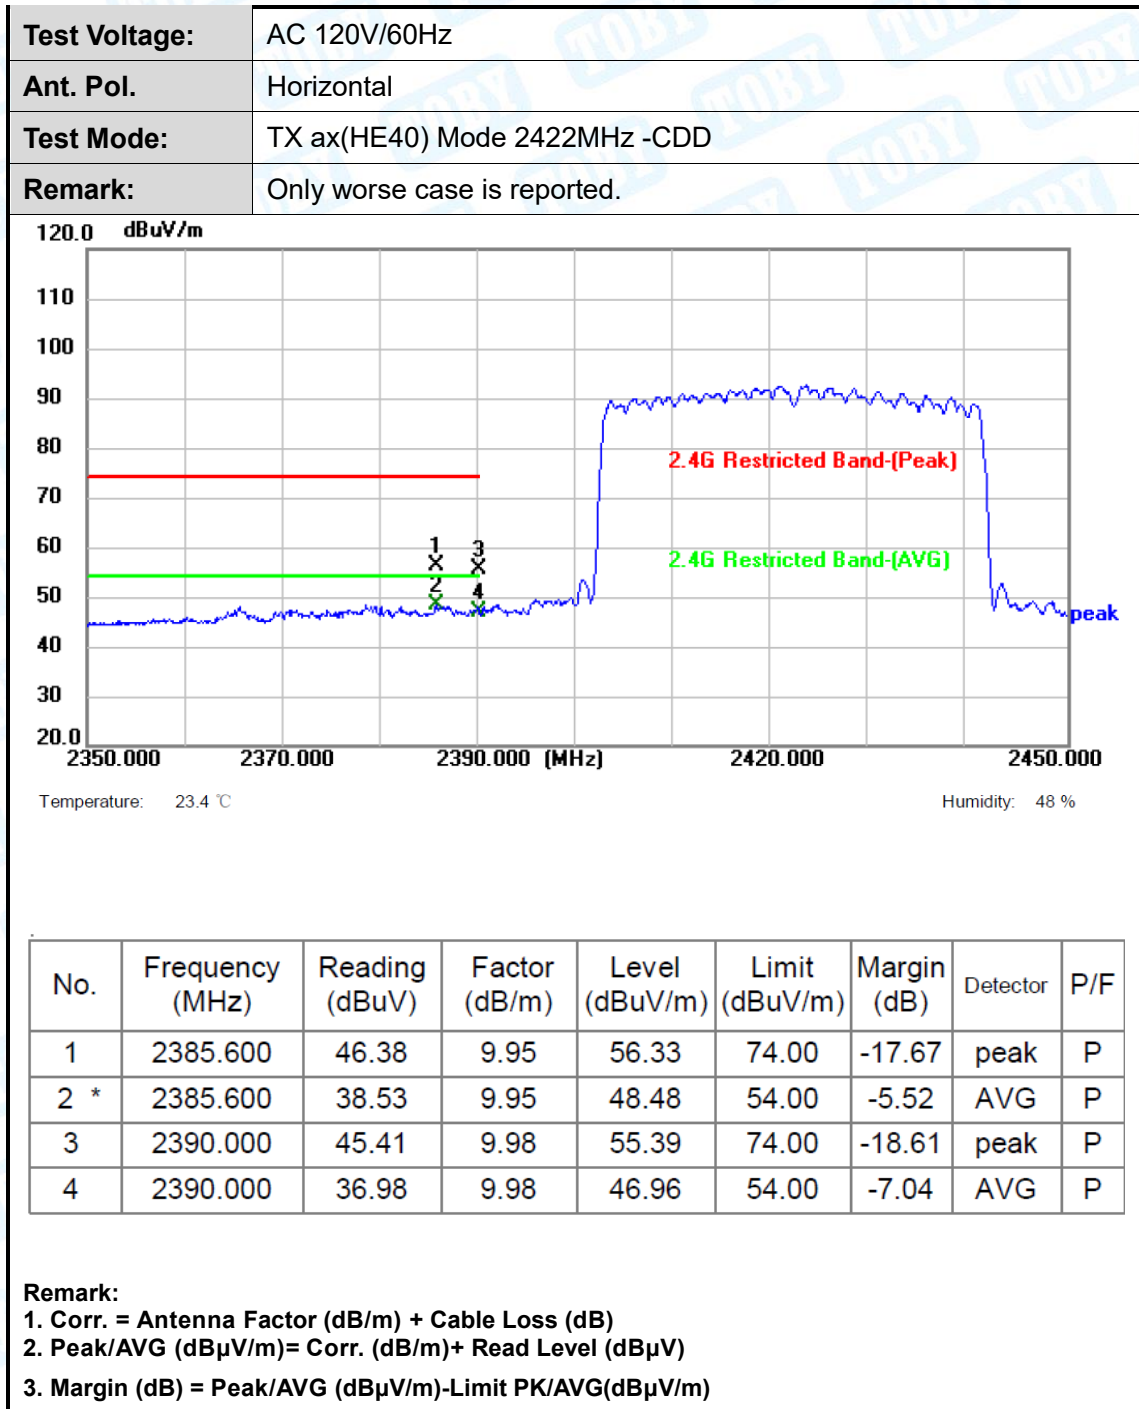

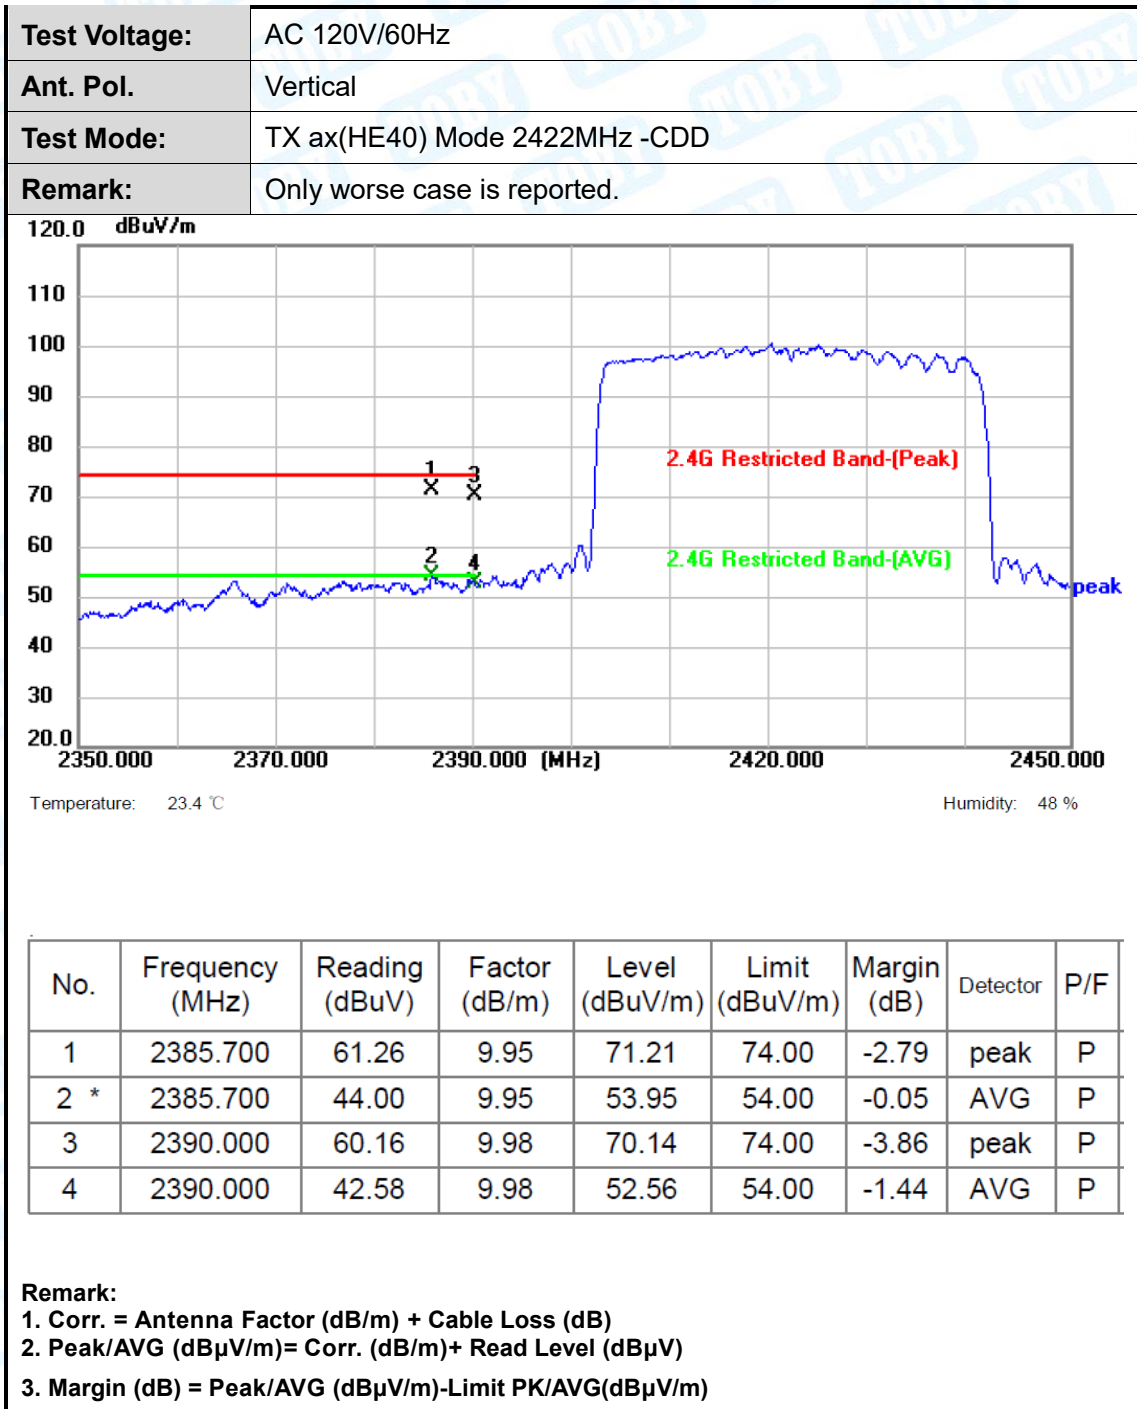

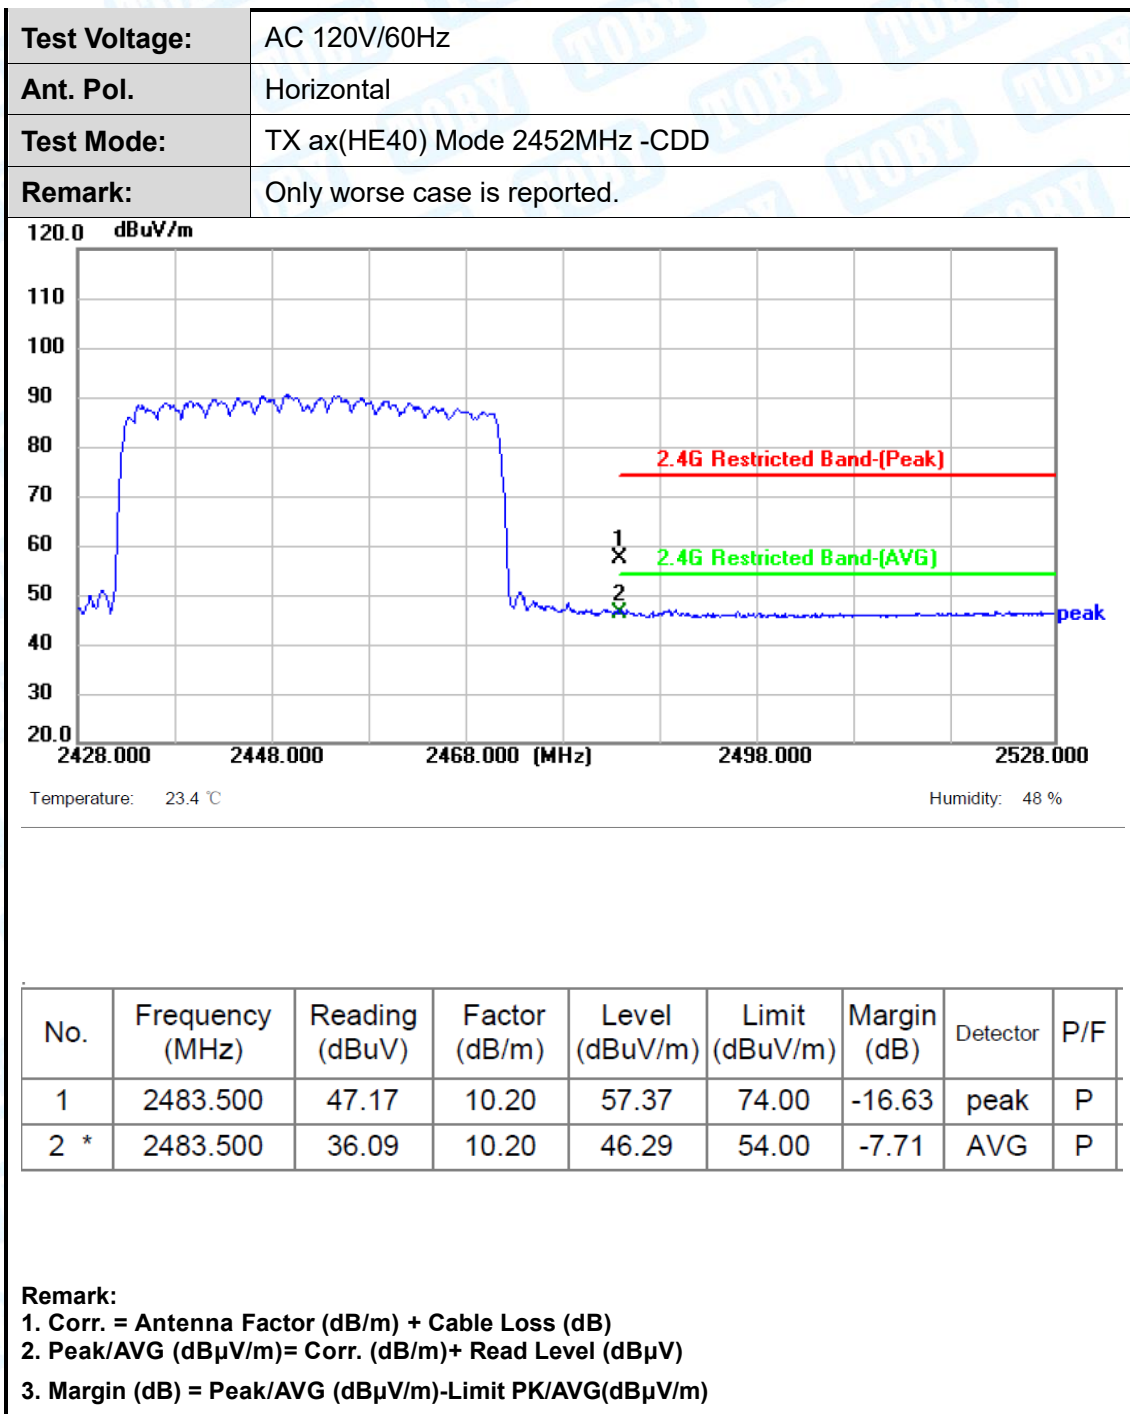

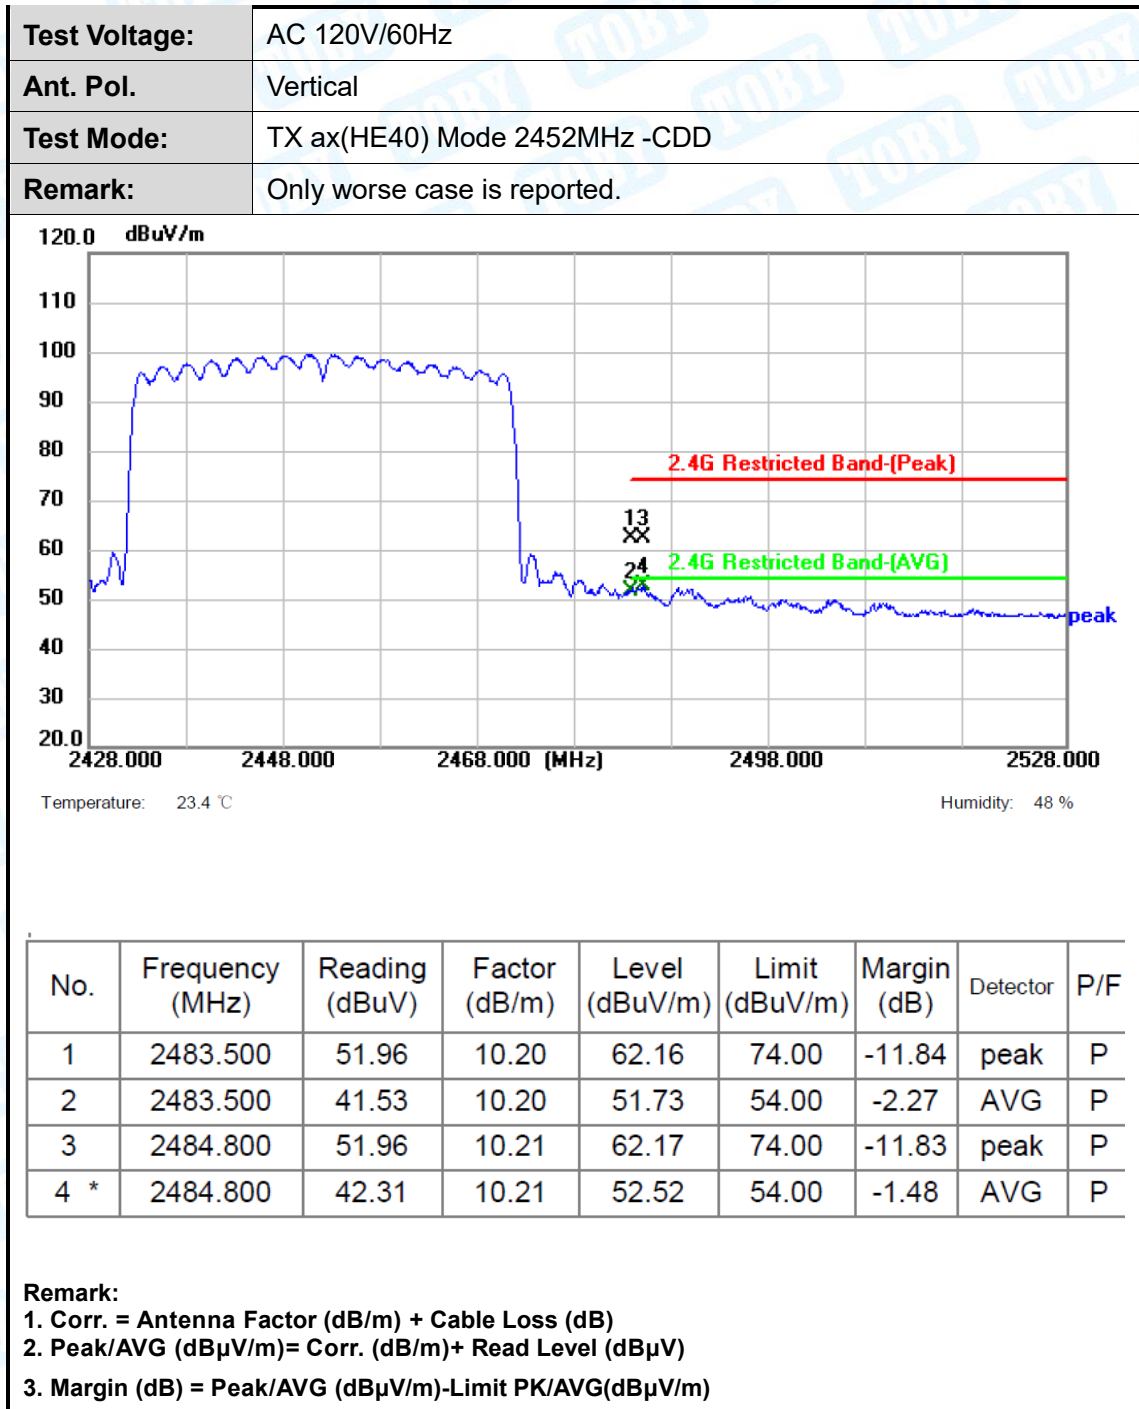

-----END OF THE REPORT-----

