

TABLE OF CONTENTS


A.1 CONDUCTED EMISSION.....	2
A.2 RADIATED EMISSION	6
A.2.1 Emissions within Restricted Frequency Bands.....	6
A.2.2 Emissions outside the frequency band:.....	212
A.2.3 Emissions in Non-restricted Frequency Bands:.....	221
A.3 DTS/OCCUPIED BANDWIDTH.....	222
A.3.1 DTS/Occupied Bandwidth Result.....	222
A.3.2 Measurement Plots	224
A.4 MAXIMUM PEAK OUTPUT POWER	232
A.4.1 Peak Output Power	232
A.4.2 Average Output Power (Reporting only).....	242
A.5 EMISSION LIMITATIONS	250
A.6 POWER SPECTRAL DENSITY	284
A.6.1 Power Spectral Density Result	284
A.6.2 Measurement Plots	287

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.1 CONDUCTED EMISSION

Test Date	2024/11/28	Temp./Hum.	21°C/52%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Byron Wu
Antenna	INPOAQ		

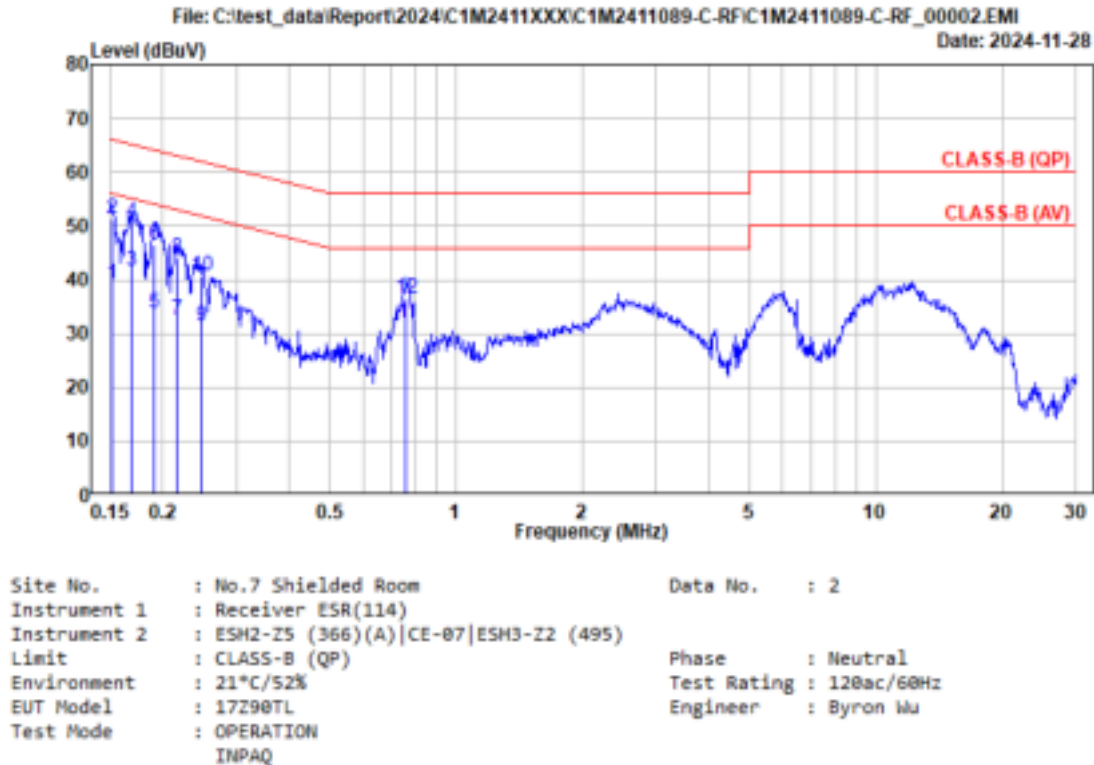


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.152	0.17	0.05	9.86	29.07	39.15	55.92	16.77	Average
2	0.152	0.17	0.05	9.86	41.24	51.32	65.92	14.60	QP
3	0.168	0.17	0.05	9.86	31.46	41.54	55.05	13.51	Average
4	0.168	0.17	0.05	9.86	40.69	50.77	65.05	14.28	QP
5	0.191	0.17	0.05	9.87	23.66	33.75	54.01	20.26	Average
6	0.191	0.17	0.05	9.87	36.46	46.55	64.01	17.46	QP
7	0.216	0.17	0.05	9.87	22.38	32.47	52.98	20.51	Average
8	0.216	0.17	0.05	9.87	34.00	44.09	62.98	18.89	QP
9	0.247	0.17	0.05	9.86	21.34	31.42	51.86	20.44	Average
10	0.247	0.17	0.05	9.86	30.61	40.69	61.86	21.17	QP
11	0.762	0.19	0.06	9.87	21.85	31.97	46.00	14.03	Average
12	0.762	0.19	0.06	9.87	26.29	36.41	56.00	19.59	QP

Remarks: 1. Emission Level(dBuV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBuV).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303


Test Date	2024/11/28	Temp./Hum.	21°C/52%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Byron Wu
Antenna	INPOAQ		

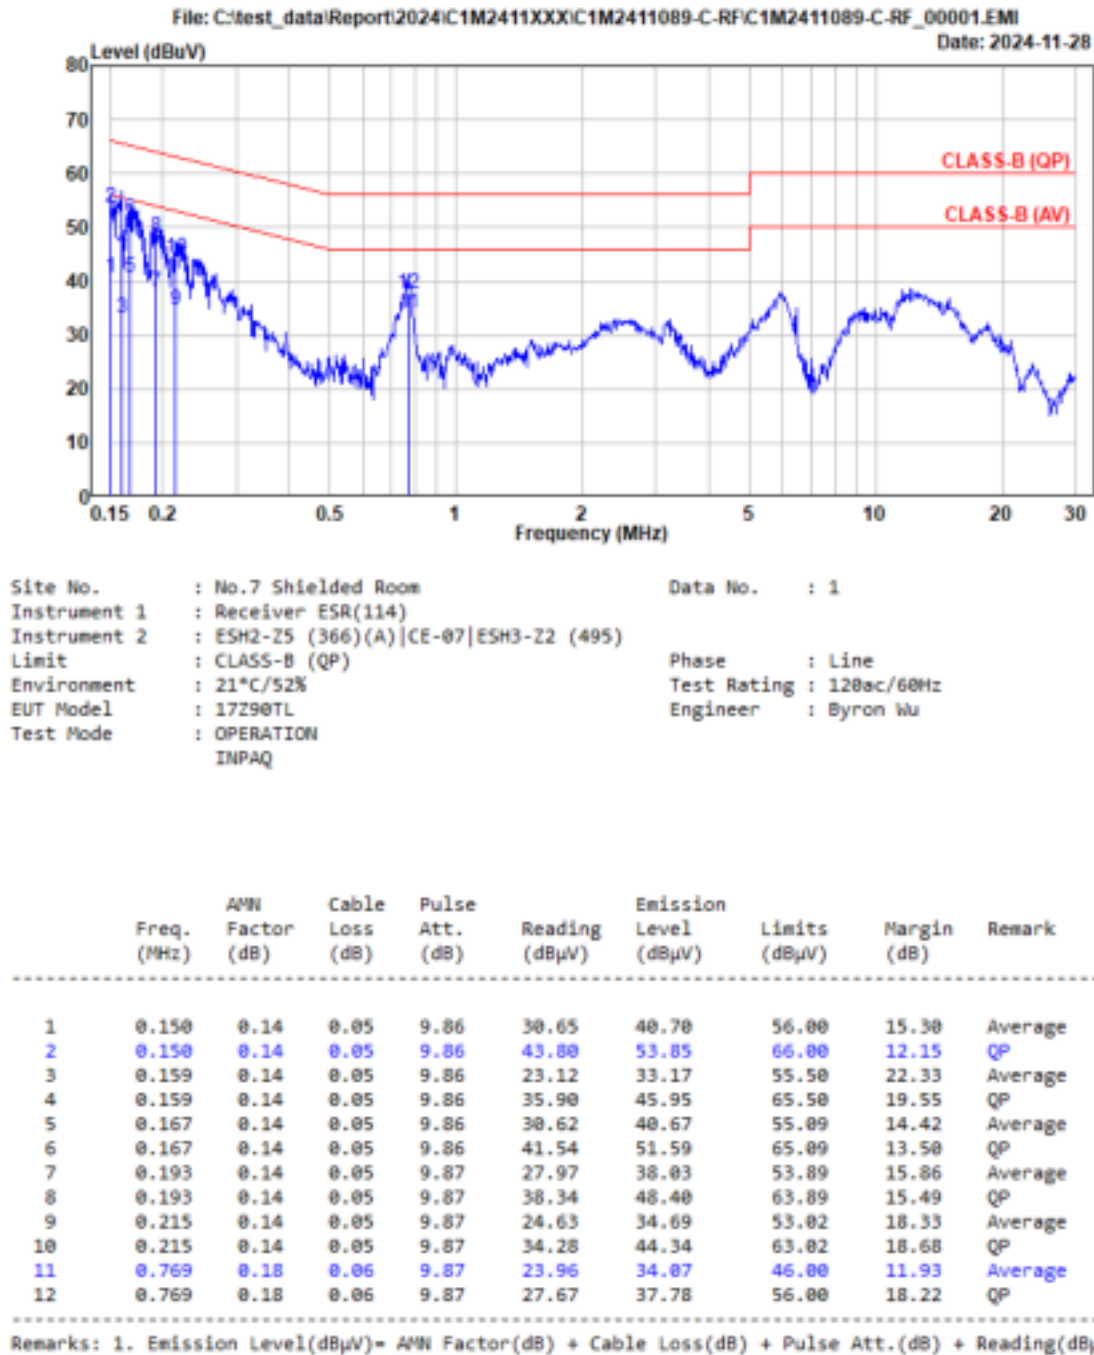

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2024/11/28	Temp./Hum.	21°C/52%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Byron Wu
Antenna	LUXSHARE-ICT		

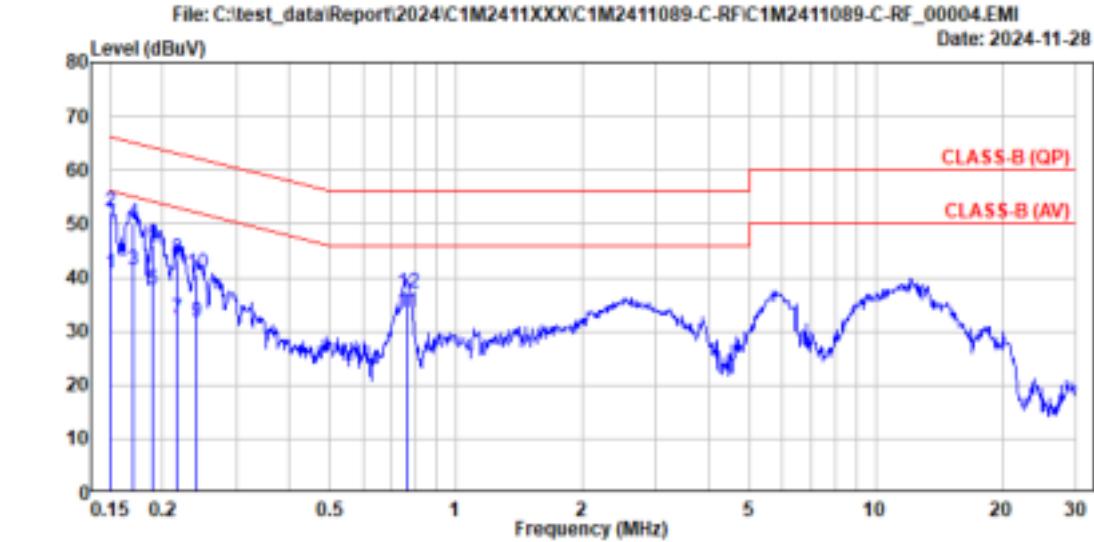

Site No.	: No.7 Shielded Room	Data No.	: 4
Instrument 1	: Receiver ESR(114)		
Instrument 2	: ESH2-Z5 (366)(A) CE-07 ESH3-Z2 (495)		
Limit	: CLASS-B (QP)	Phase	: Neutral
Environment	: 21°C/52%	Test Rating	: 120vac/60Hz
EUT Model	: 17Z90TL	Engineer	: Byron Wu
Test Mode	: OPERATION		
	LUXSHARE		


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.150	0.17	0.05	9.86	30.64	40.72	56.00	15.28	Average
2	0.150	0.17	0.05	9.86	42.11	52.19	66.00	13.81	QP
3	0.171	0.17	0.05	9.86	31.30	41.38	54.92	13.54	Average
4	0.171	0.17	0.05	9.86	40.16	50.24	64.92	14.68	QP
5	0.190	0.17	0.05	9.87	27.52	37.61	54.05	16.44	Average
6	0.190	0.17	0.05	9.87	36.18	46.27	64.05	17.78	QP
7	0.216	0.17	0.05	9.87	22.17	32.26	52.98	20.72	Average
8	0.216	0.17	0.05	9.87	33.45	43.54	62.98	19.44	QP
9	0.241	0.17	0.05	9.87	21.76	31.85	52.07	20.22	Average
10	0.241	0.17	0.05	9.87	30.68	40.77	62.07	21.30	QP
11	0.765	0.19	0.06	9.87	23.46	33.58	46.00	12.42	Average
12	0.765	0.19	0.06	9.87	27.15	37.27	56.00	18.73	QP

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2024/11/28	Temp./Hum.	21°C/52%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Byron Wu
Antenna	LUXSHARE-ICT ANT		

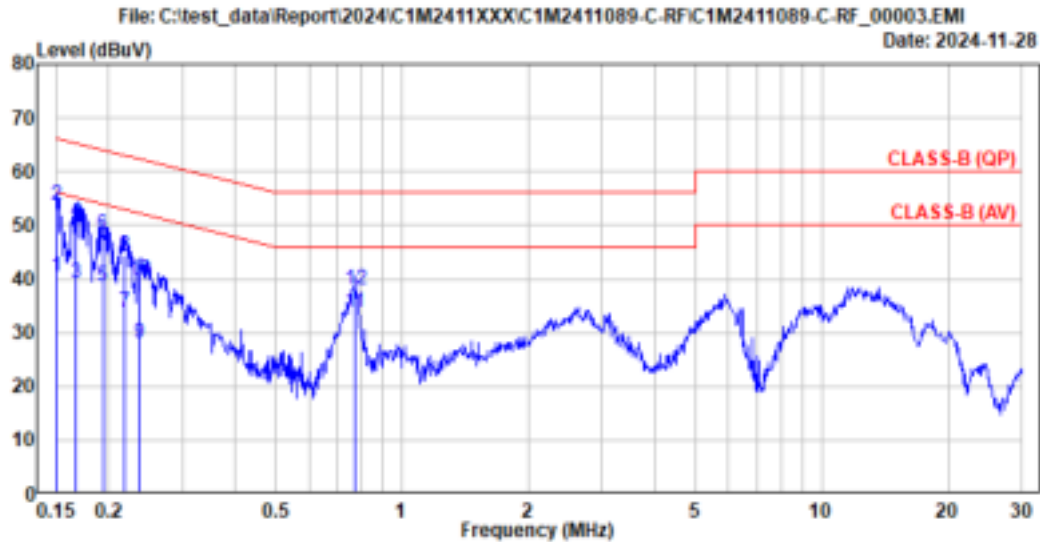

Site No.	: No.7 Shielded Room	Data No.	: 3
Instrument 1	: Receiver ESR(114)		
Instrument 2	: ESH2-Z5 (366)(A) CE-07 ESH3-Z2 (495)		
Limit	: CLASS-B (QP)	Phase	: Line
Environment	: 21°C/52%	Test Rating	: 120ac/60Hz
EUT Model	: 17Z90TL	Engineer	: Byron Wu
Test Mode	: OPERATION		
	LUXSHARE		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.150	0.14	0.05	9.86	30.53	40.58	55.99	15.41	Average
2	0.150	0.14	0.05	9.86	43.66	53.71	65.99	12.28	QP
3	0.166	0.14	0.05	9.86	29.15	39.20	55.14	15.94	Average
4	0.166	0.14	0.05	9.86	40.60	50.65	65.14	14.49	QP
5	0.194	0.14	0.05	9.87	28.51	38.57	53.88	15.31	Average
6	0.194	0.14	0.05	9.87	38.19	48.25	63.88	15.63	QP
7	0.218	0.14	0.05	9.87	23.71	33.77	52.90	19.13	Average
8	0.218	0.14	0.05	9.87	34.34	44.40	62.90	18.50	QP
9	0.237	0.14	0.05	9.87	18.11	28.17	52.19	24.02	Average
10	0.237	0.14	0.05	9.87	29.77	39.83	62.19	22.36	QP
11	0.773	0.18	0.06	9.87	23.66	33.77	46.00	12.23	Average
12	0.773	0.18	0.06	9.87	27.80	37.91	56.00	18.09	QP

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

A.2 RADIATED EMISSION

Test Date	2024/12/02 ~ 16	Temp./Hum.	20 ~ 24°C/48 ~ 57%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Kuper Hsu

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz.

Antenna: INPAQ

Mode	802.11ax-HE40	Frequency	TX 2432MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
35.500	21.98	1.31	26.51	37.11	33.89	40.00	6.11	Peak
158.000	16.42	2.96	25.98	34.33	27.73	43.50	15.77	Peak
378.000	21.16	5.28	26.34	30.66	30.76	46.00	15.24	Peak
710.500	24.79	7.37	27.39	27.11	31.89	46.00	14.11	Peak
864.500	25.78	8.46	27.12	26.90	34.01	46.00	11.99	Peak
973.500	26.84	9.13	26.83	26.85	35.98	54.00	18.02	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
35.500	21.98	1.31	26.51	37.23	34.01	40.00	5.99	Peak
155.000	16.61	2.93	25.99	34.77	28.31	43.50	15.19	Peak
378.000	21.16	5.28	26.34	31.40	31.50	46.00	14.50	Peak
682.000	24.67	7.21	27.40	28.03	32.51	46.00	13.49	Peak
824.000	25.47	8.14	27.22	27.37	33.76	46.00	12.24	Peak
990.000	27.00	9.22	26.79	26.82	36.25	54.00	17.75	Peak

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
35.000	22.30	1.30	26.51	36.41	33.50	40.00	6.50	Peak
157.500	16.45	2.95	25.98	34.22	27.65	43.50	15.85	Peak
378.000	21.16	5.28	26.34	32.12	32.22	46.00	13.78	Peak
696.000	24.71	7.28	27.40	28.22	32.82	46.00	13.18	Peak
869.000	25.80	8.49	27.11	27.25	34.43	46.00	11.57	Peak
980.000	26.89	9.16	26.81	27.71	36.95	54.00	17.05	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
35.000	22.30	1.30	26.51	36.75	33.84	40.00	6.16	Peak
190.000	15.44	3.29	25.85	35.03	27.91	43.50	15.59	Peak
378.000	21.16	5.28	26.34	31.50	31.61	46.00	14.40	Peak
710.500	24.79	7.37	27.39	30.23	35.00	46.00	11.00	Peak
842.000	25.60	8.28	27.18	27.52	34.23	46.00	11.77	Peak
971.000	26.80	9.12	26.84	28.50	37.57	54.00	16.43	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Antenna: LUXSHARE-ICT

Mode	802.11ax-HE40	Frequency	TX 2432MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
35.000	21.86	1.44	26.50	38.20	35.00	40.00	5.00	Peak
123.500	17.76	2.79	26.17	33.06	27.43	43.50	16.07	Peak
159.500	15.62	3.16	25.99	37.18	29.96	43.50	13.54	Peak
206.500	15.32	3.61	25.82	34.38	27.49	43.50	16.01	Peak
378.000	20.60	5.54	26.36	32.93	32.72	46.00	13.28	Peak
488.000	22.64	6.55	27.14	28.13	30.17	46.00	15.83	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
35.500	21.55	1.45	26.50	38.43	34.93	40.00	5.07	Peak
124.000	17.73	2.79	26.17	34.01	28.37	43.50	15.13	Peak
160.500	15.57	3.17	25.99	36.83	29.58	43.50	13.92	Peak
210.500	15.58	3.65	25.81	33.46	26.89	43.50	16.61	Peak
378.000	20.60	5.54	26.36	32.97	32.76	46.00	13.24	Peak
529.000	23.21	6.69	27.30	27.87	30.47	46.00	15.53	Peak

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
35.500	21.55	1.45	26.50	38.26	34.76	40.00	5.24	Peak
124.000	17.73	2.79	26.17	33.11	27.47	43.50	16.03	Peak
160.500	15.57	3.17	25.99	37.40	30.15	43.50	13.35	Peak
206.000	15.29	3.60	25.82	34.37	27.45	43.50	16.05	Peak
378.000	20.60	5.54	26.36	32.10	31.88	46.00	14.12	Peak
482.500	22.55	6.50	27.11	29.07	31.01	46.00	14.99	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
35.500	21.55	1.45	26.50	38.25	34.75	40.00	5.25	Peak
48.000	14.96	1.69	26.49	34.64	24.80	40.00	15.20	Peak
124.000	17.73	2.79	26.17	33.26	27.62	43.50	15.88	Peak
160.500	15.57	3.17	25.99	37.81	30.56	43.50	12.94	Peak
378.000	20.60	5.54	26.36	32.31	32.09	46.00	13.91	Peak
486.000	22.61	6.53	27.13	27.70	29.71	46.00	16.29	Peak


A.2.1.3 Frequency Above 1 GHz to 10th harmonics

Band Edge:

Antenna: INPAQ


- Wireless LAN Mode

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

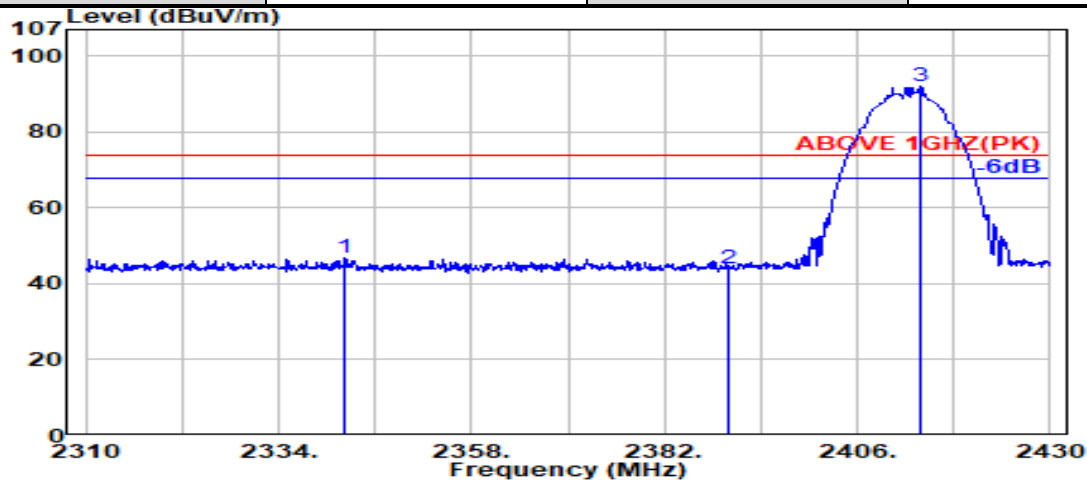

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2342.200	28.25	5.66	39.88	52.68	46.71	74.00	27.29	Peak
2390.000	28.14	5.72	39.88	50.22	44.20	74.00	29.80	Peak
@ 2413.900	28.16	5.75	39.88	97.93	91.96	---	---	Peak

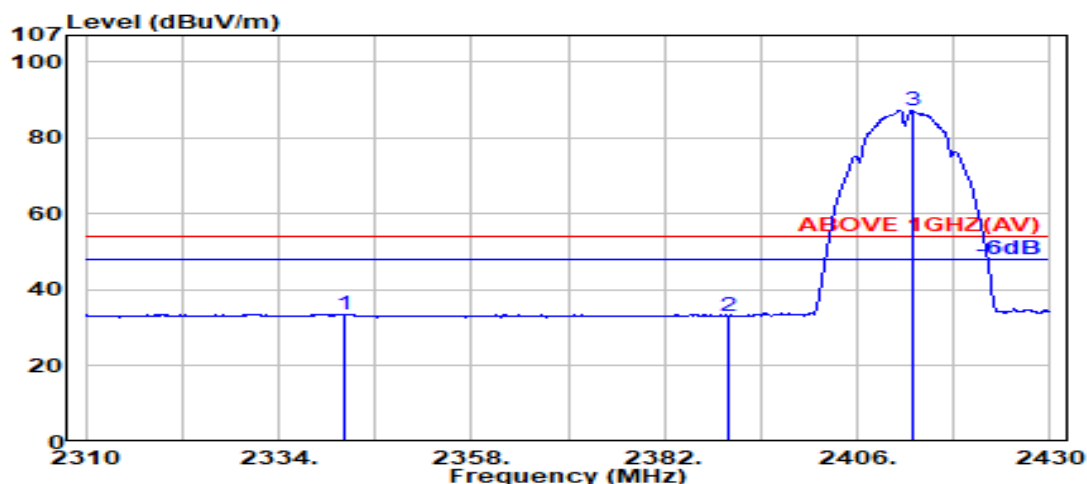

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2342.100	28.25	5.66	39.88	39.66	33.69	54.00	20.31	Average
2390.000	28.14	5.72	39.88	39.28	33.27	54.00	20.73	Average
@ 2412.800	28.15	5.75	39.88	93.09	87.12	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

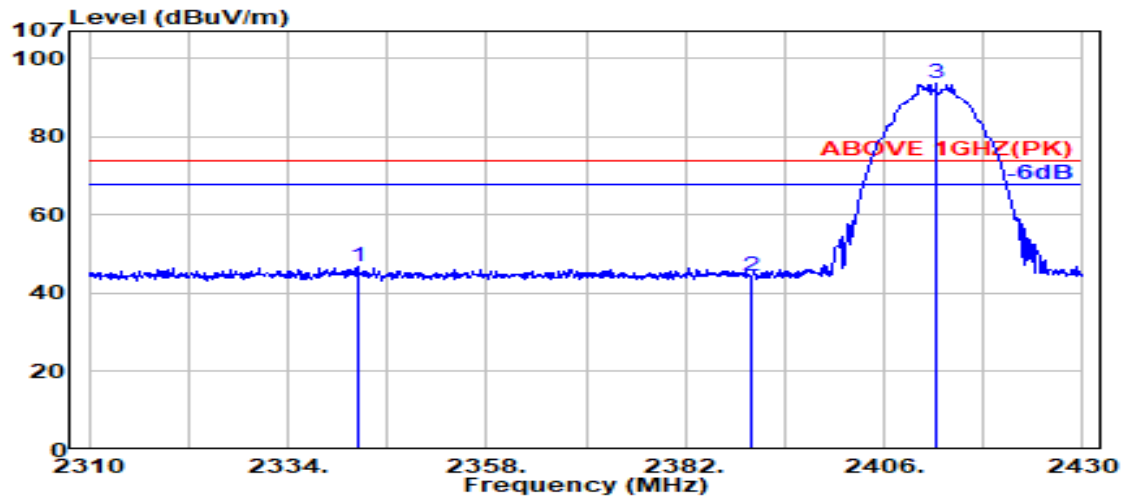

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2342.400	28.25	5.66	39.88	52.67	46.70	74.00	27.30	Peak
2390.000	28.14	5.72	39.88	50.34	44.32	74.00	29.68	Peak
@ 2412.300	28.15	5.75	39.88	99.58	93.60	---	---	Peak

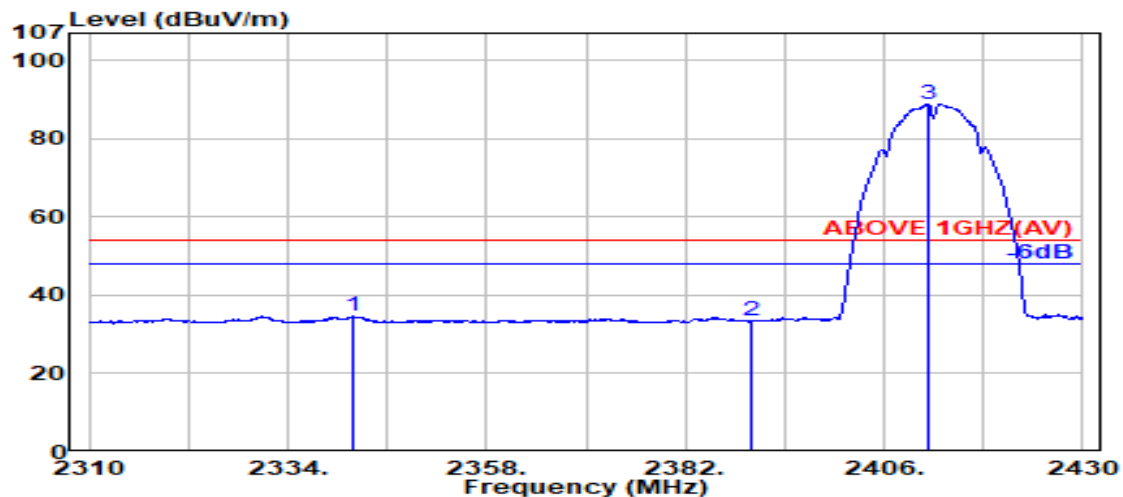

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2342.000	28.25	5.66	39.88	40.56	34.59	54.00	19.41	Average
2390.000	28.14	5.72	39.88	39.35	33.33	54.00	20.67	Average
@ 2411.300	28.15	5.75	39.88	94.91	88.93	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

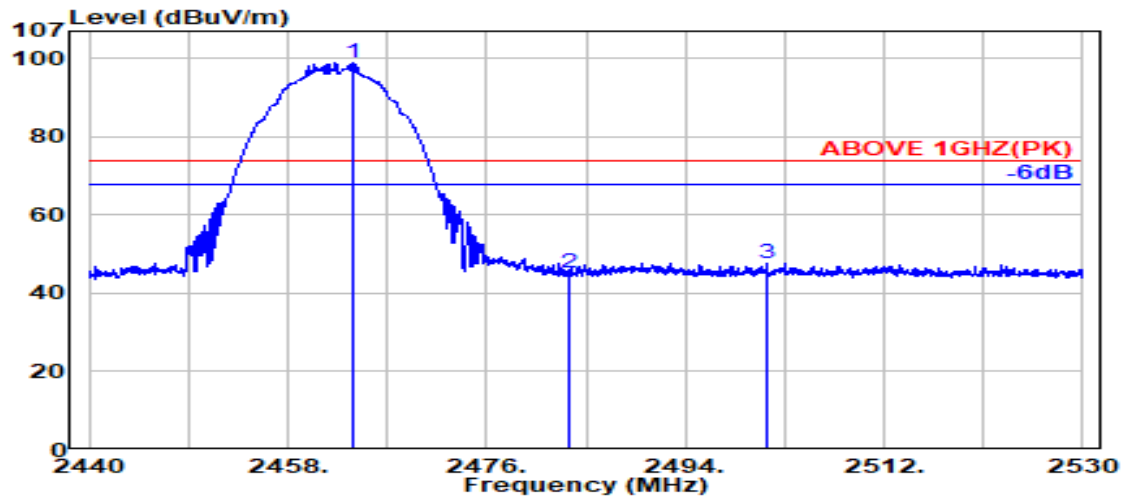

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2463.900	28.33	5.81	39.87	104.66	98.93	---	---	Peak
	2483.500	28.37	5.83	39.87	51.08	45.41	74.00	28.59	Peak
	2501.450	28.41	5.85	39.87	53.43	47.82	74.00	26.18	Peak

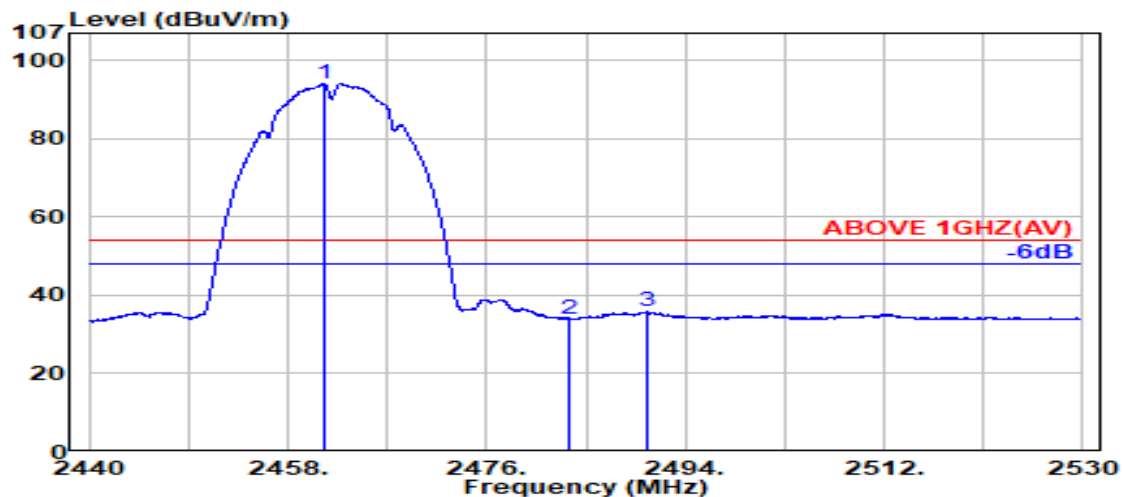

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2461.250	28.32	5.81	39.87	99.82	94.08	---	---	Average
	2483.500	28.37	5.83	39.87	39.73	34.05	54.00	19.95	Average
	2490.550	28.38	5.84	39.87	41.45	35.80	54.00	18.20	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

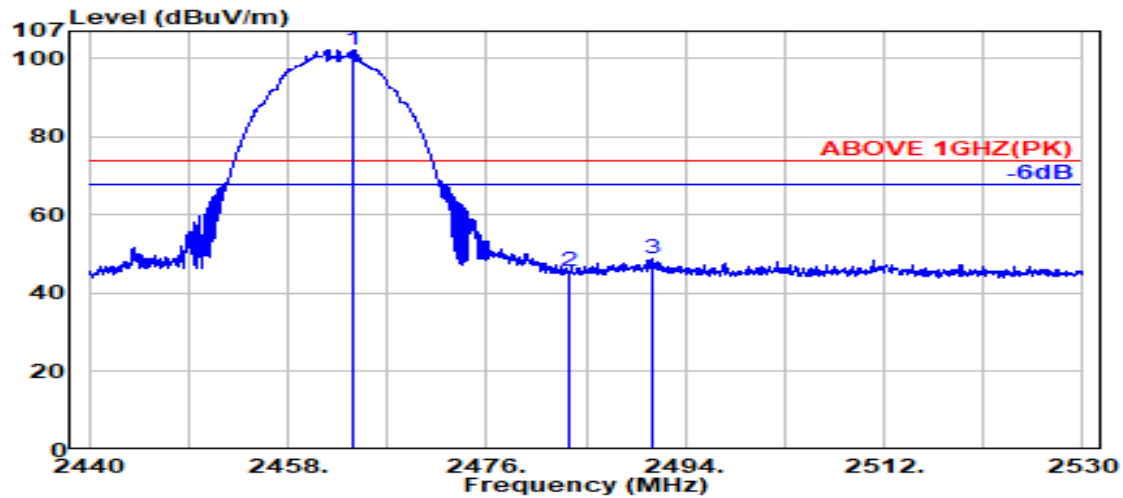

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.950	28.33	5.81	39.87	107.83	102.09	---	---	Peak
2483.500	28.37	5.83	39.87	51.33	45.66	74.00	28.34	Peak
2491.050	28.38	5.84	39.87	54.55	48.90	74.00	25.10	Peak

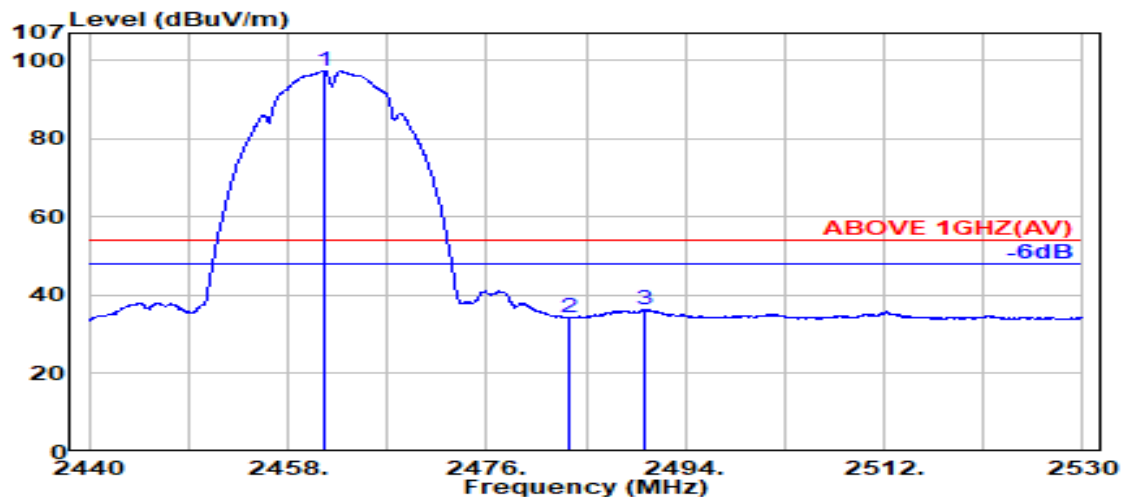

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.250	28.32	5.81	39.87	103.21	97.47	---	---	Average
2483.500	28.37	5.83	39.87	40.03	34.36	54.00	19.64	Average
2490.400	28.38	5.84	39.87	41.99	36.34	54.00	17.66	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2467 MHz
------	---------	-----------	-------------

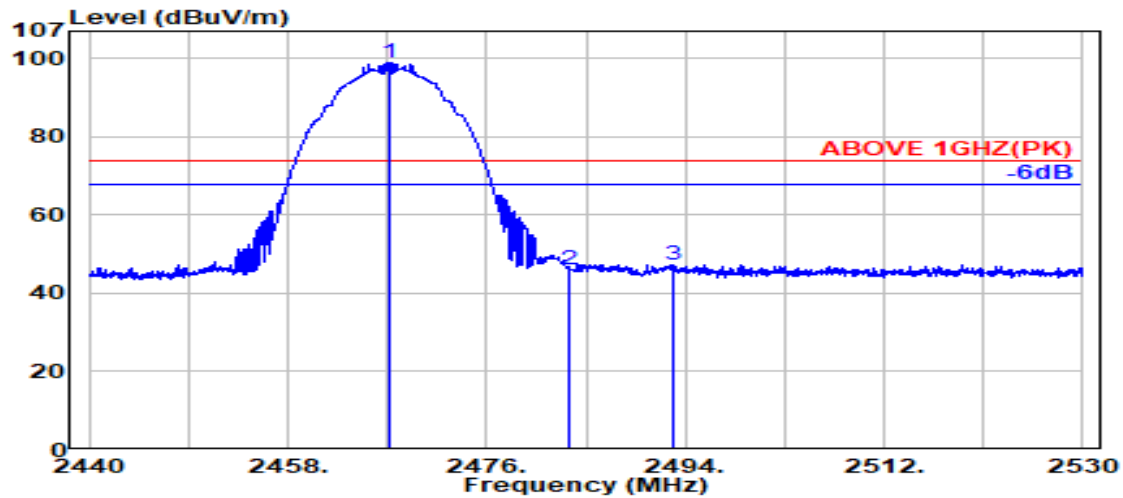

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.200	28.33	5.81	39.87	104.49	98.77	---	---	Peak
2483.500	28.37	5.83	39.87	51.86	46.18	74.00	27.82	Peak
2492.800	28.39	5.84	39.87	53.08	47.44	74.00	26.56	Peak

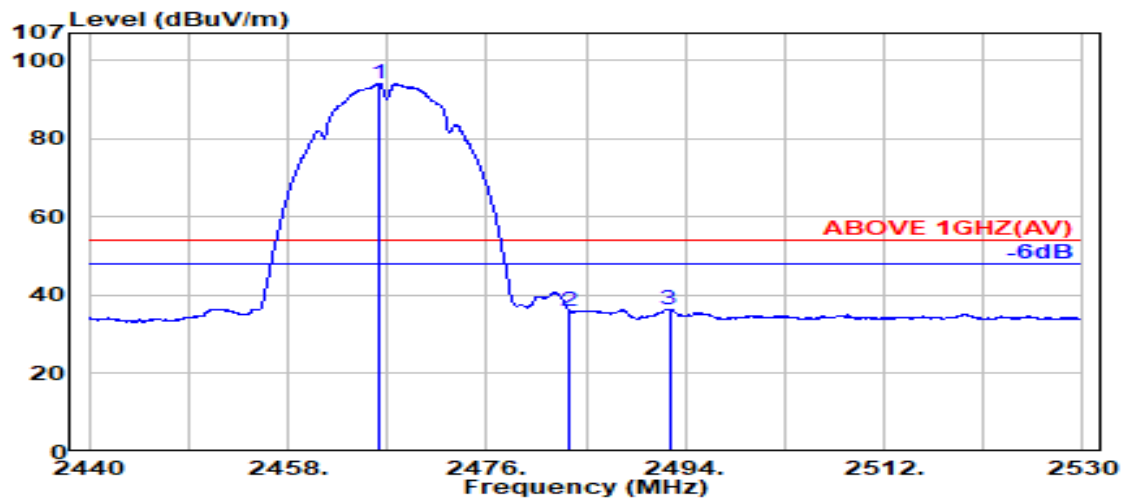

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.250	28.33	5.81	39.87	99.78	94.06	---	---	Average
2483.500	28.37	5.83	39.87	41.72	36.05	54.00	17.95	Average
2492.550	28.39	5.84	39.87	42.15	36.50	54.00	17.50	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2467 MHz
------	---------	-----------	-------------

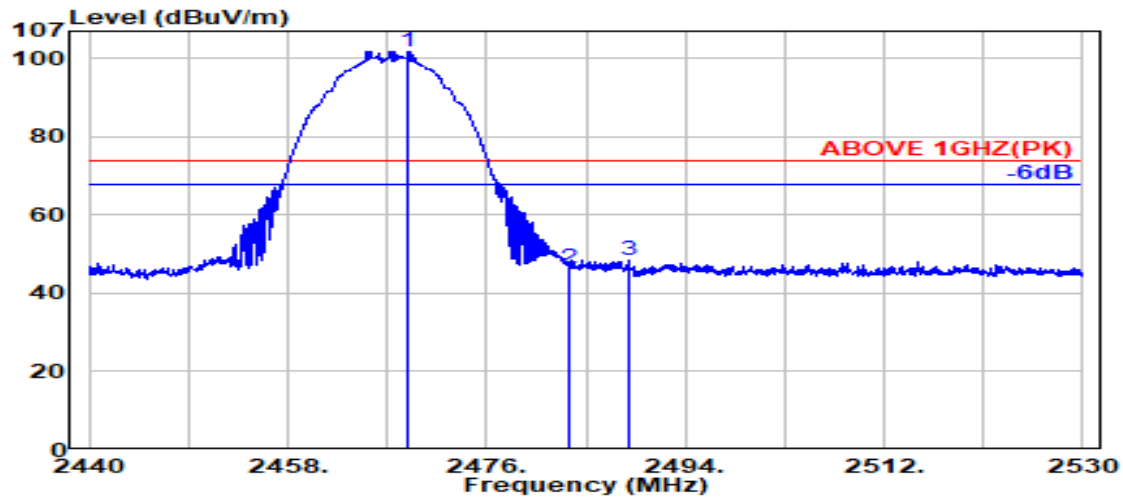

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.800	28.34	5.81	39.87	107.62	101.90	---	---	Peak
2483.500	28.37	5.83	39.87	51.97	46.30	74.00	27.70	Peak
2488.950	28.38	5.84	39.87	54.29	48.64	74.00	25.36	Peak

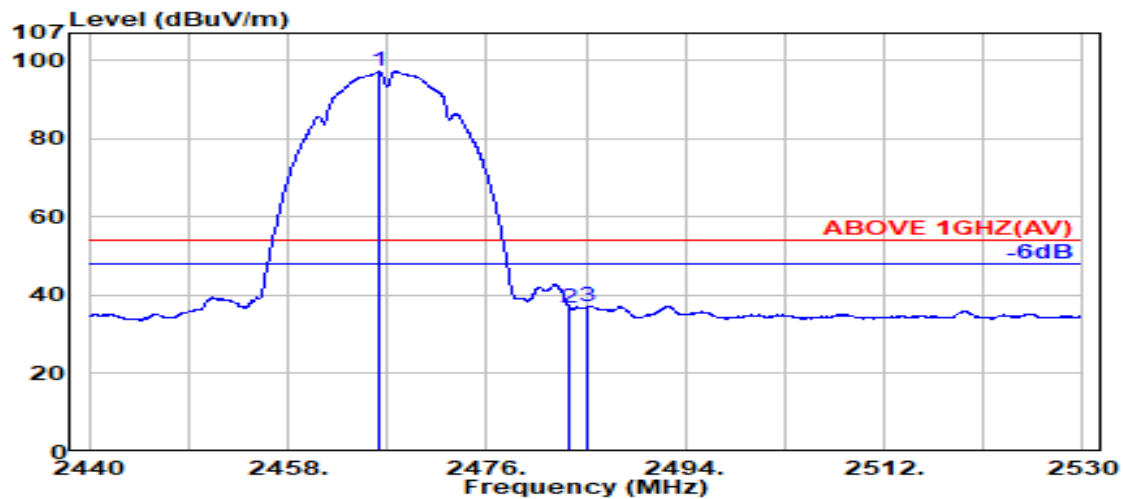

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.250	28.33	5.81	39.87	102.92	97.19	---	---	Average
2483.500	28.37	5.83	39.87	42.48	36.81	54.00	17.19	Average
2485.200	28.37	5.83	39.87	42.87	37.20	54.00	16.80	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2472 MHz
------	---------	-----------	-------------

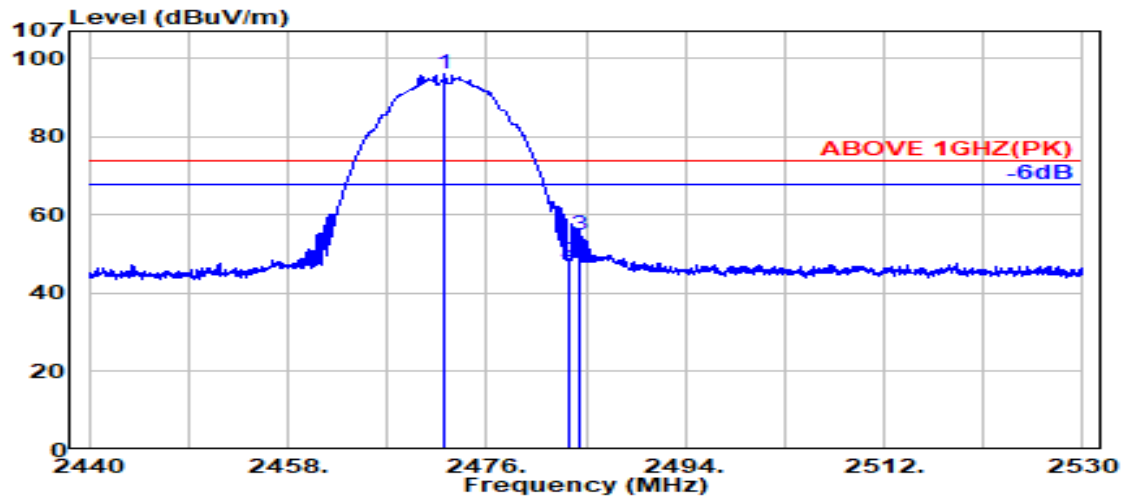

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2472.200	28.34	5.82	39.87	101.84	96.13	---	---	Peak
	2483.500	28.37	5.83	39.87	53.83	48.16	74.00	25.84	Peak
	2484.500	28.37	5.83	39.87	60.66	54.99	74.00	19.01	Peak

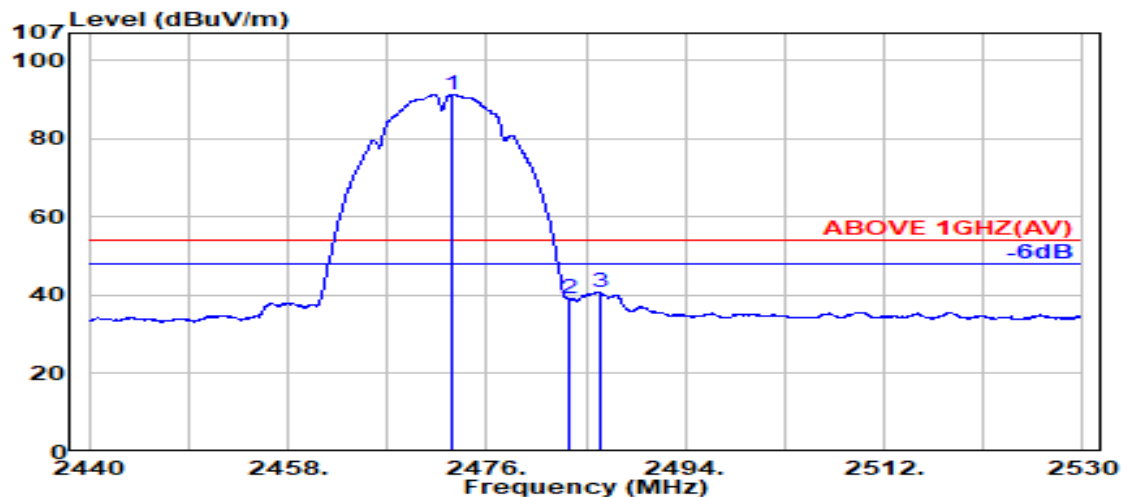

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2472.800	28.35	5.82	39.87	97.13	91.42	---	---	Average
	2483.500	28.37	5.83	39.87	44.78	39.10	54.00	14.90	Average
	2486.300	28.37	5.83	39.87	46.51	40.85	54.00	13.15	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2472 MHz
------	---------	-----------	-------------

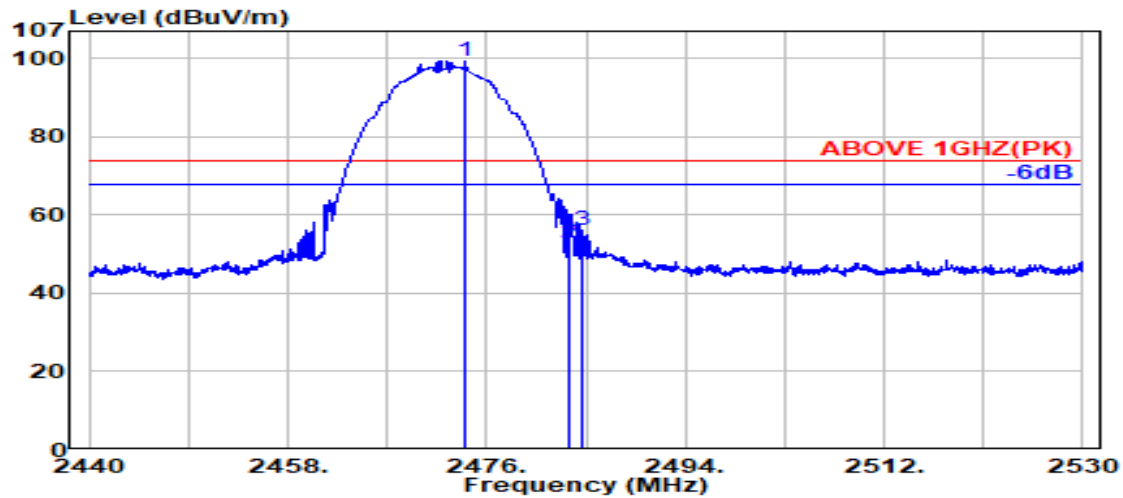

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.000	28.35	5.82	39.87	105.06	99.36	---	---	Peak
2483.500	28.37	5.83	39.87	58.39	52.72	74.00	21.28	Peak
2484.650	28.37	5.83	39.87	61.87	56.20	74.00	17.80	Peak

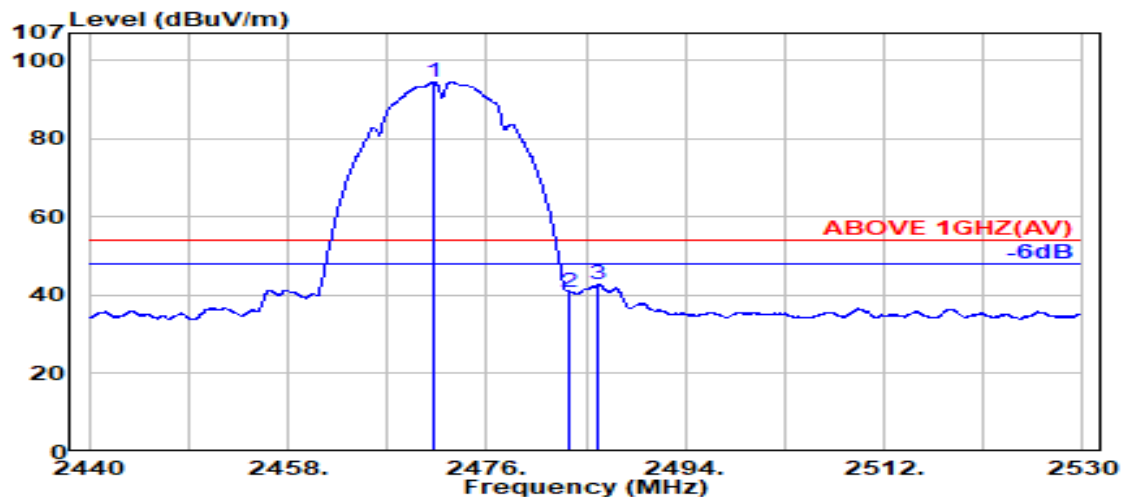

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.250	28.34	5.82	39.87	100.25	94.54	---	---	Average
2483.500	28.37	5.83	39.87	46.65	40.98	54.00	13.02	Average
2486.000	28.37	5.83	39.87	48.30	42.63	54.00	11.37	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

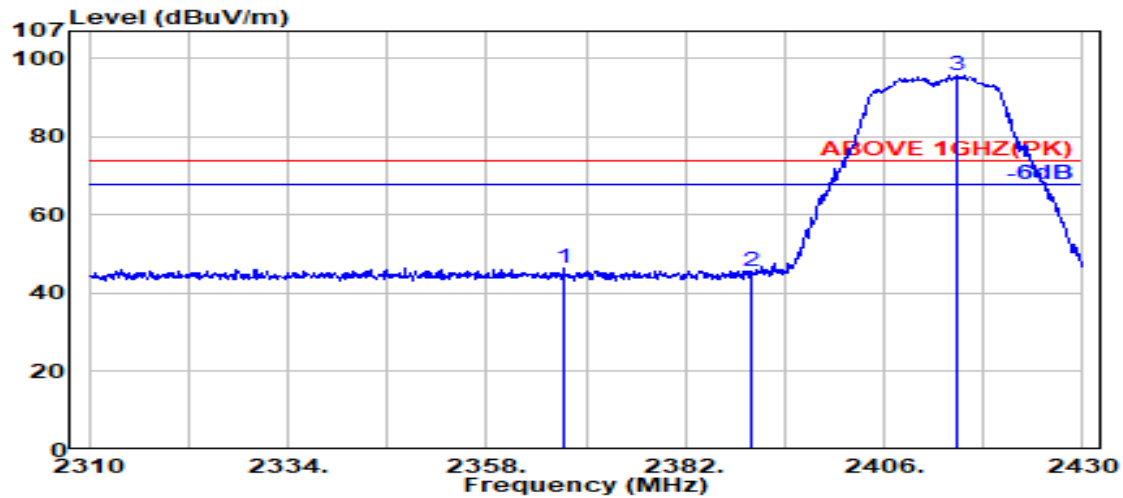

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2367.300	28.23	5.69	39.88	52.51	46.55	74.00	27.45	Peak
2390.000	28.14	5.72	39.88	51.62	45.60	74.00	28.40	Peak
@ 2414.800	28.16	5.75	39.88	101.74	95.77	---	---	Peak

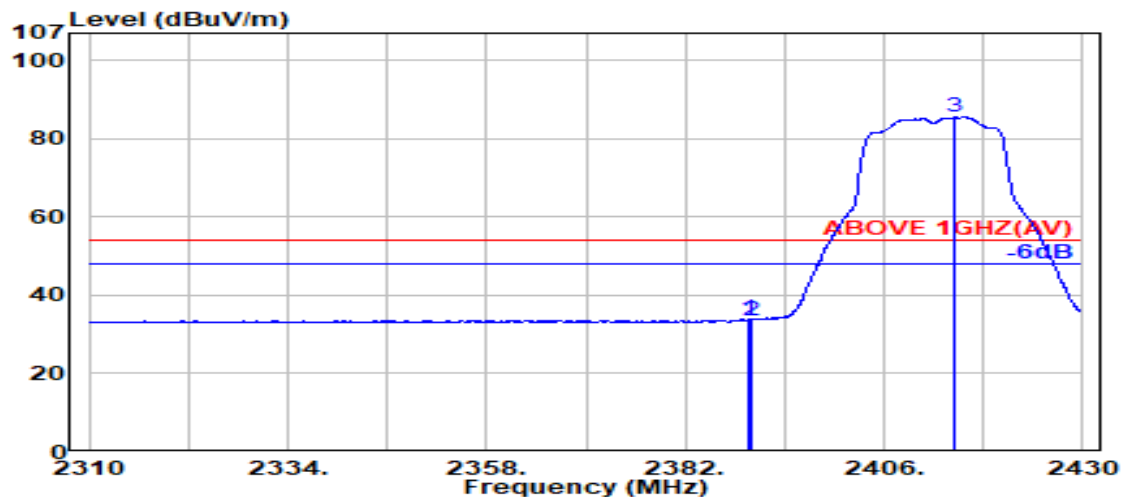

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	39.85	33.83	54.00	20.17	Average
2390.000	28.14	5.72	39.88	39.71	33.69	54.00	20.31	Average
@ 2414.500	28.16	5.75	39.88	91.58	85.61	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

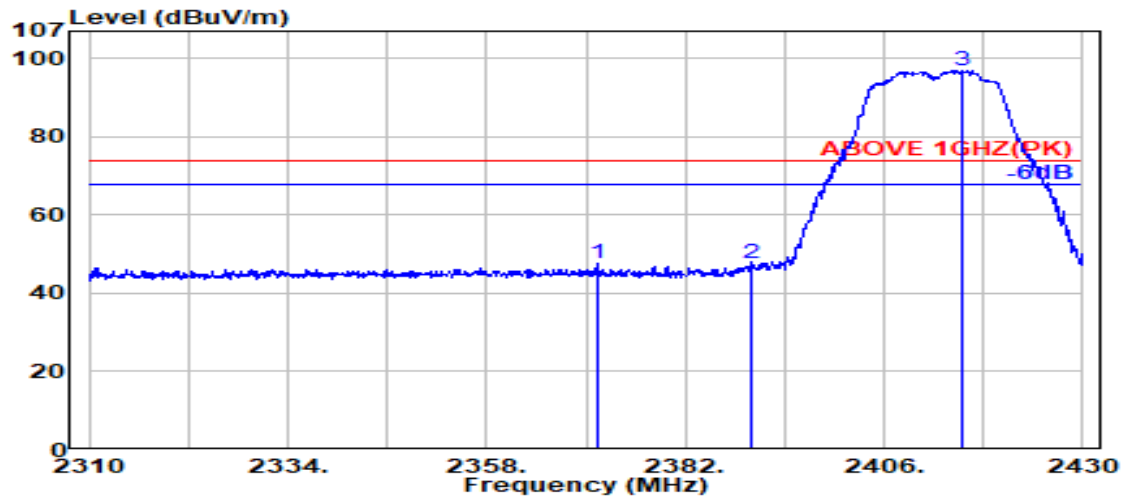

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2371.300	28.21	5.70	39.88	53.53	47.56	74.00	26.44	Peak
2390.000	28.14	5.72	39.88	53.79	47.78	74.00	26.22	Peak
@ 2415.300	28.16	5.75	39.88	102.94	96.97	---	---	Peak

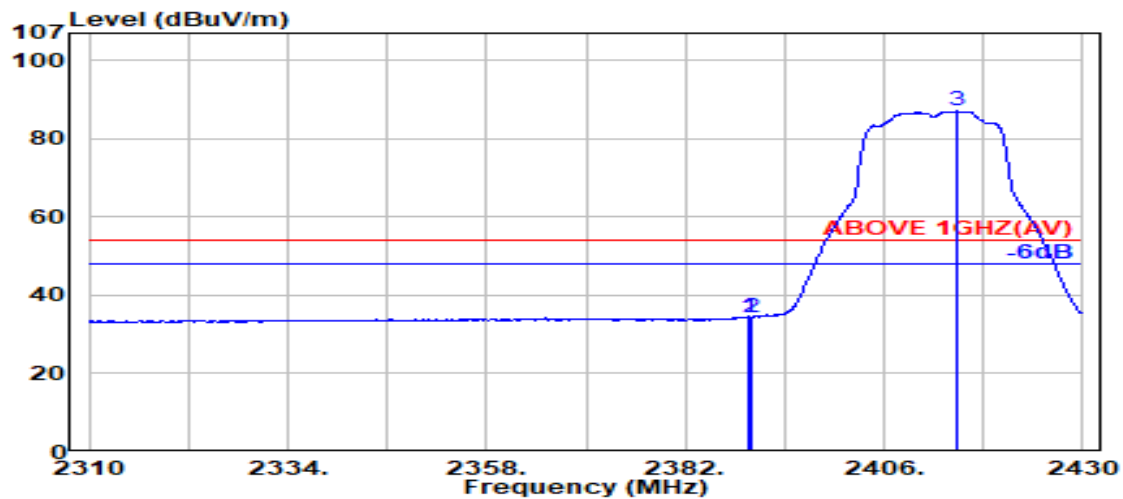

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	40.53	34.51	54.00	19.49	Average
2390.000	28.14	5.72	39.88	40.47	34.45	54.00	19.55	Average
@ 2414.800	28.16	5.75	39.88	93.00	87.03	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

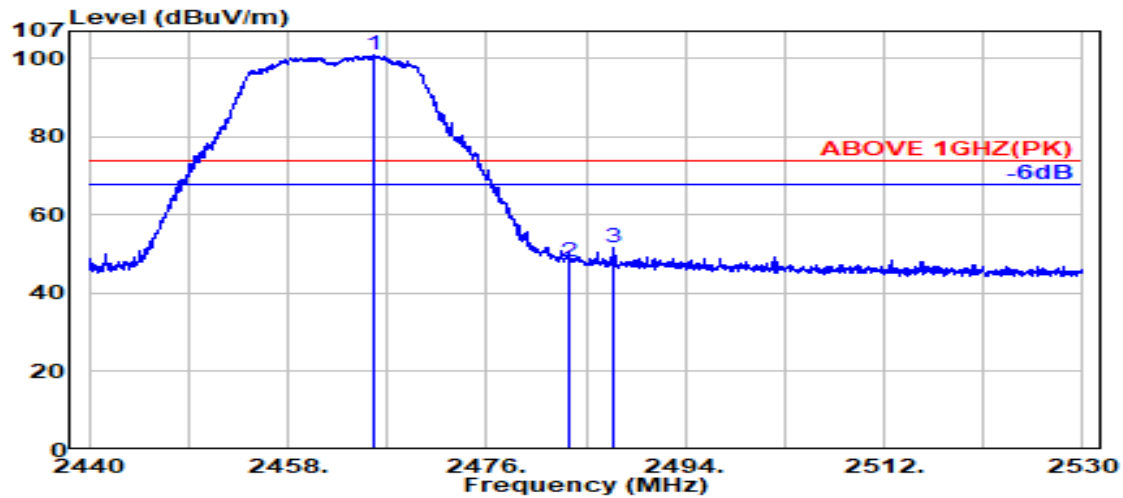

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.900	28.33	5.81	39.87	106.69	100.96	---	---	Peak
2483.500	28.37	5.83	39.87	53.65	47.98	74.00	26.02	Peak
2487.550	28.38	5.84	39.87	57.26	51.60	74.00	22.40	Peak

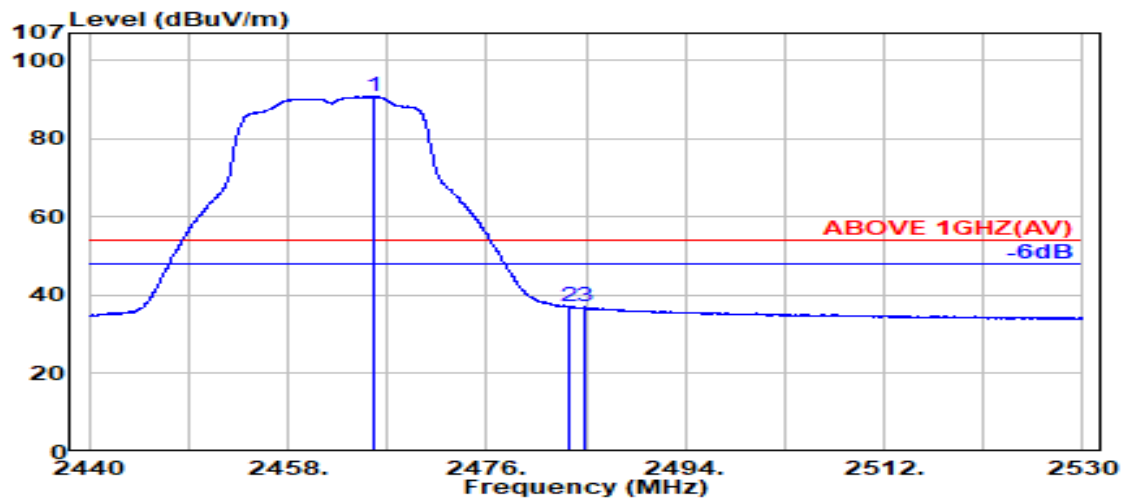

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.850	28.33	5.81	39.87	96.62	90.89	---	---	Average
2483.500	28.37	5.83	39.87	42.83	37.16	54.00	16.84	Average
2484.900	28.37	5.83	39.87	42.69	37.02	54.00	16.98	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

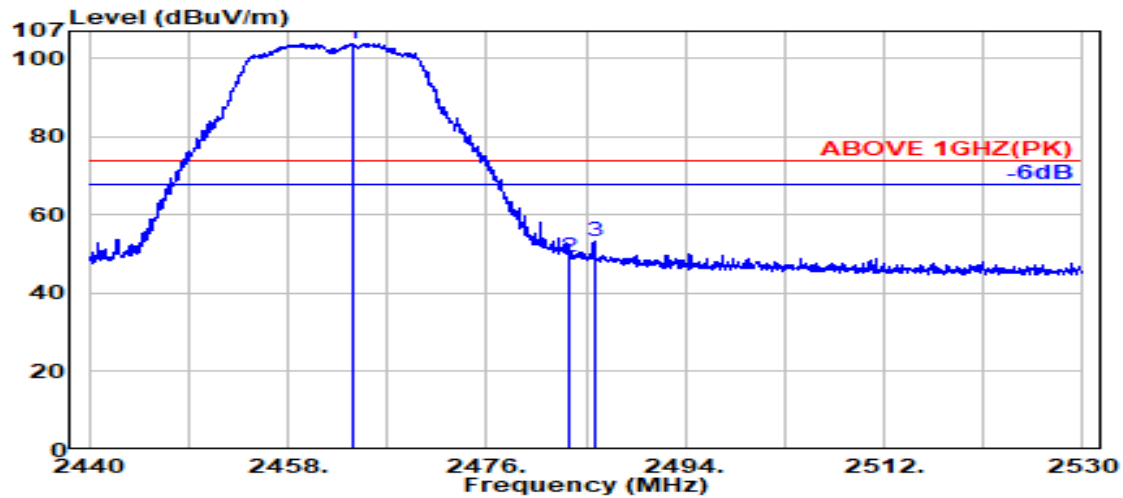

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.850	28.33	5.81	39.87	109.50	103.77	---	---	Peak
2483.500	28.37	5.83	39.87	55.08	49.40	74.00	24.60	Peak
2485.750	28.37	5.83	39.87	58.99	53.33	74.00	20.67	Peak

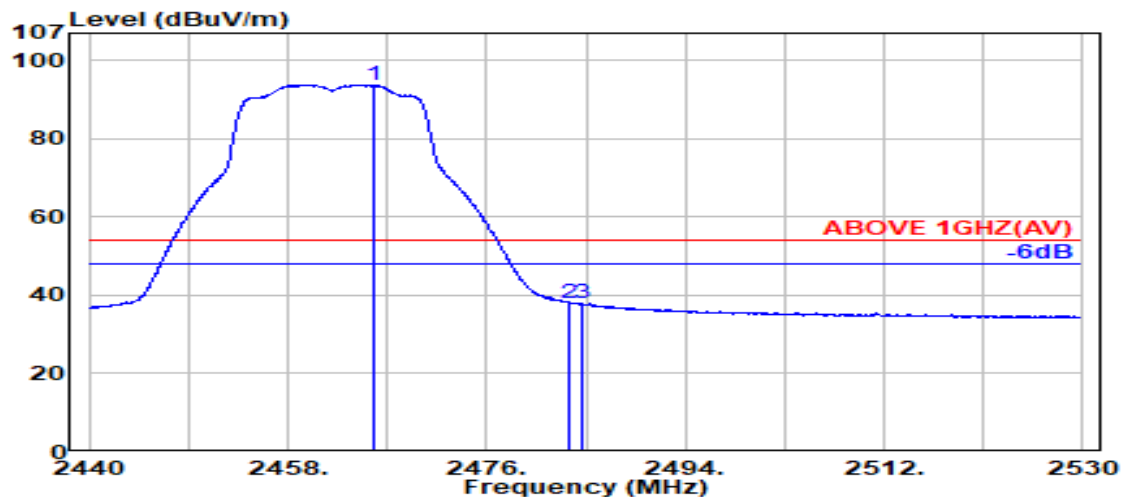

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.850	28.33	5.81	39.87	99.51	93.78	---	---	Average
2483.500	28.37	5.83	39.87	43.78	38.11	54.00	15.89	Average
2484.550	28.37	5.83	39.87	43.50	37.83	54.00	16.17	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2467 MHz
------	---------	-----------	-------------

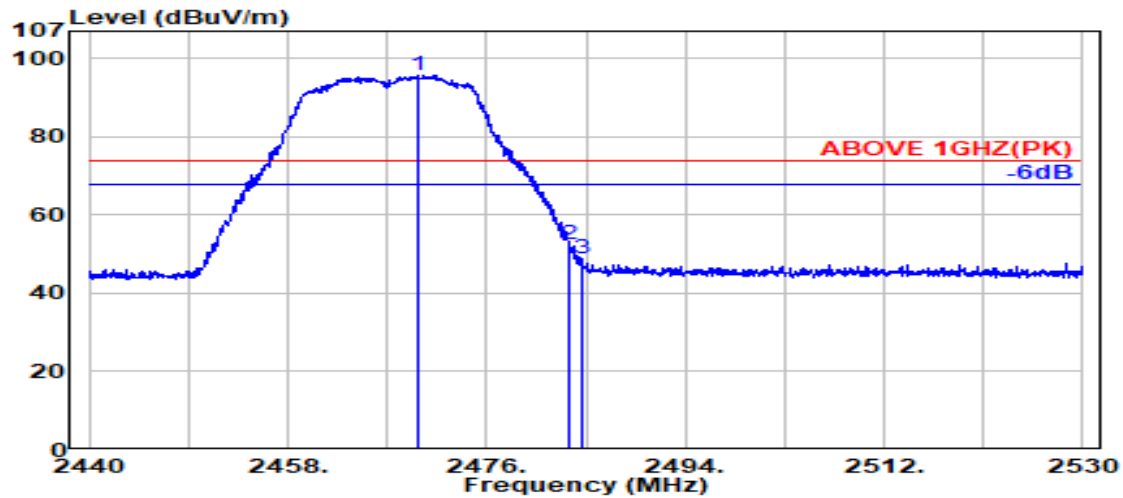

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2469.900	28.34	5.82	39.87	101.39	95.67	---	---	Peak
	2483.500	28.37	5.83	39.87	58.34	52.67	74.00	21.33	Peak
	2484.550	28.37	5.83	39.87	54.57	48.90	74.00	25.10	Peak

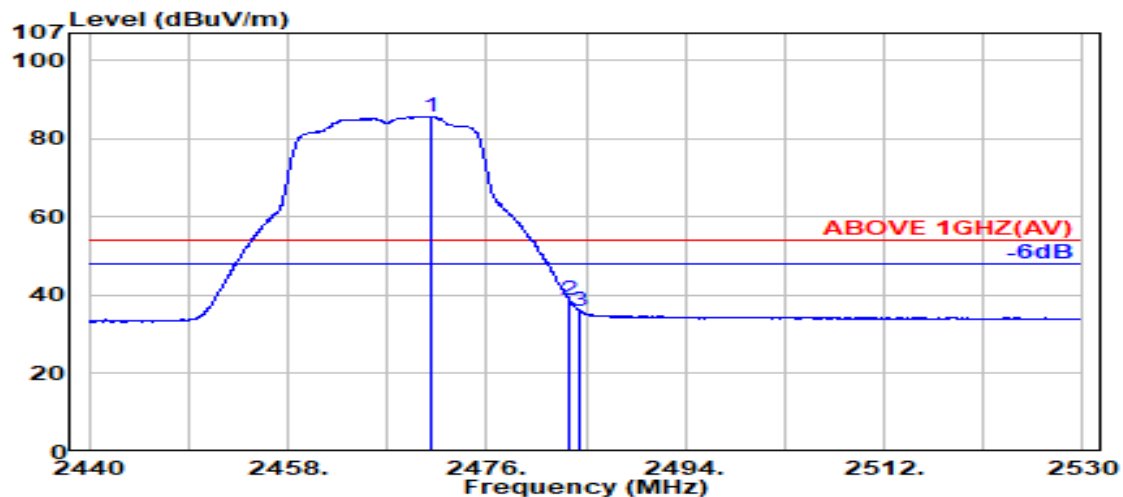

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2471.000	28.34	5.82	39.87	91.47	85.76	---	---	Average
	2483.500	28.37	5.83	39.87	44.49	38.82	54.00	15.18	Average
	2484.500	28.37	5.83	39.87	41.72	36.05	54.00	17.95	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2467 MHz
------	---------	-----------	-------------

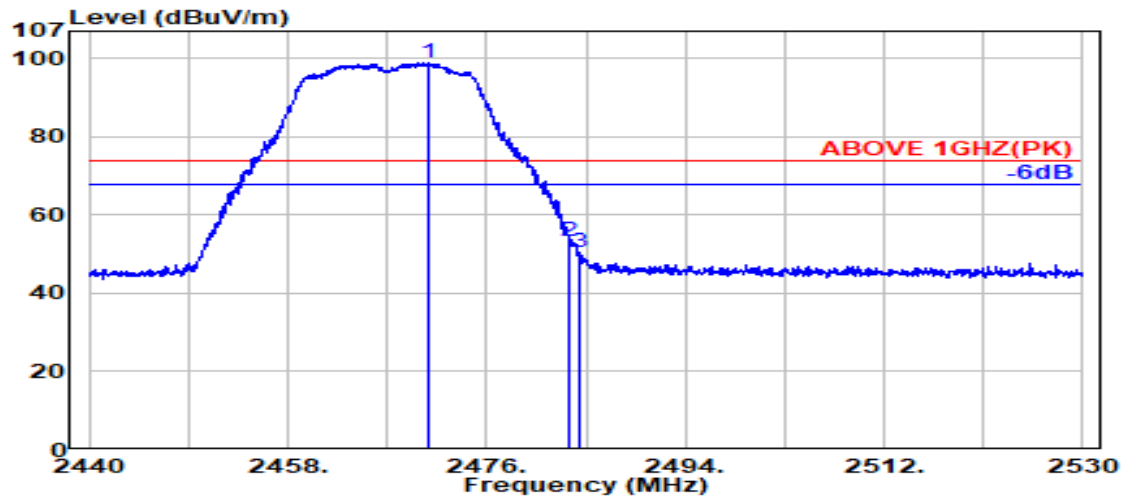

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.850	28.34	5.82	39.87	104.64	98.93	---	---	Peak
2483.500	28.37	5.83	39.87	58.89	53.22	74.00	20.78	Peak
2484.500	28.37	5.83	39.87	56.23	50.56	74.00	23.44	Peak

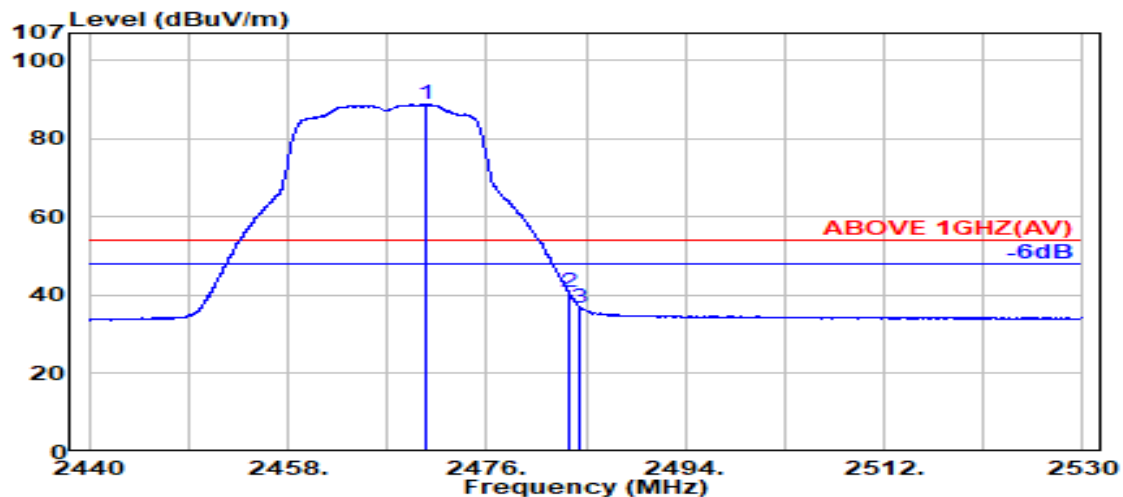

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.500	28.34	5.82	39.87	94.53	88.81	---	---	Average
2483.500	28.37	5.83	39.87	46.28	40.61	54.00	13.39	Average
2484.500	28.37	5.83	39.87	42.59	36.92	54.00	17.08	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2472 MHz
------	---------	-----------	-------------

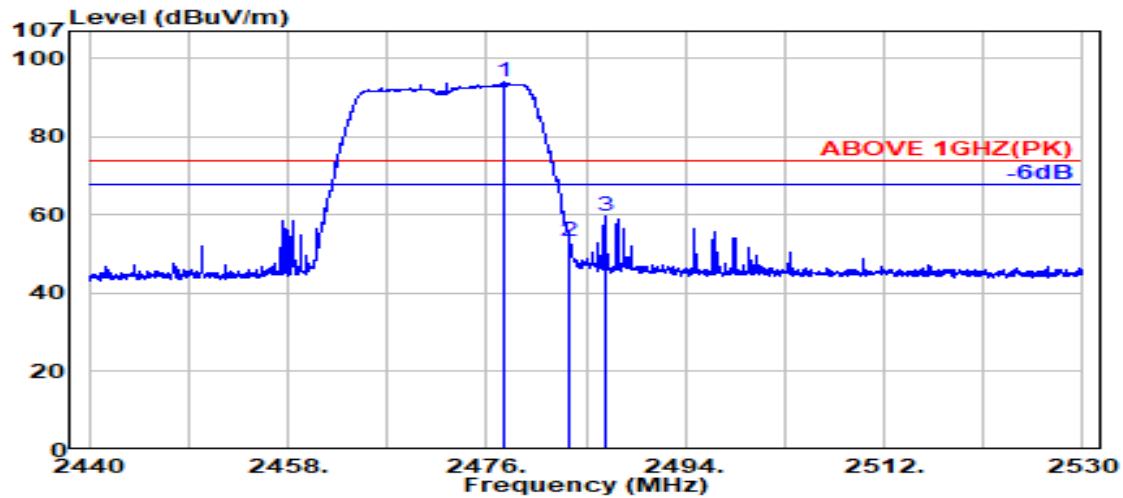

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2477.500	28.36	5.82	39.87	99.75	94.06	---	---	Peak
	2483.500	28.37	5.83	39.87	58.84	53.17	74.00	20.83	Peak
	2486.700	28.37	5.83	39.87	65.50	59.84	74.00	14.16	Peak

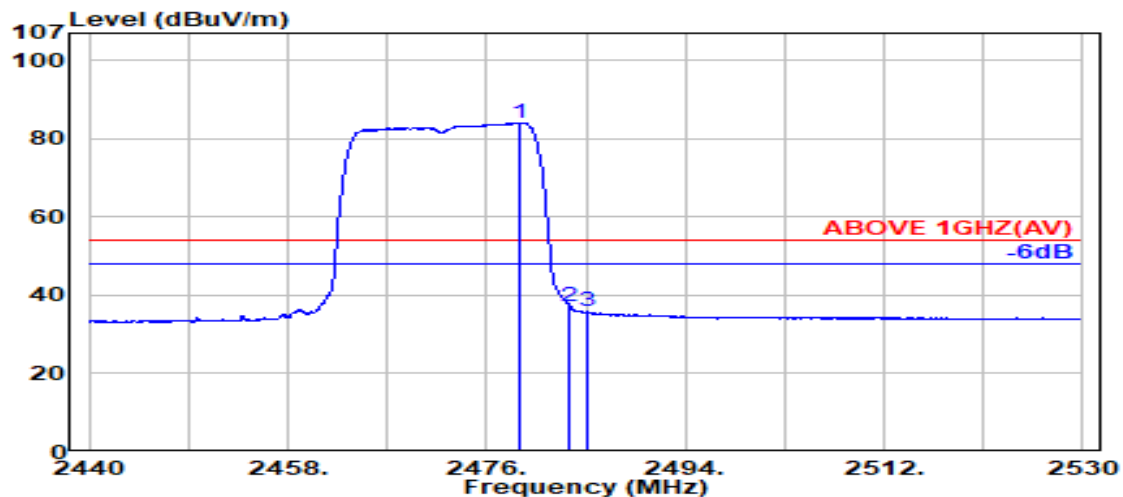

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2479.050	28.36	5.83	39.87	89.81	84.12	---	---	Average
	2483.500	28.37	5.83	39.87	42.84	37.16	54.00	16.84	Average
	2485.050	28.37	5.83	39.87	41.52	35.85	54.00	18.15	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2472 MHz
------	---------	-----------	-------------

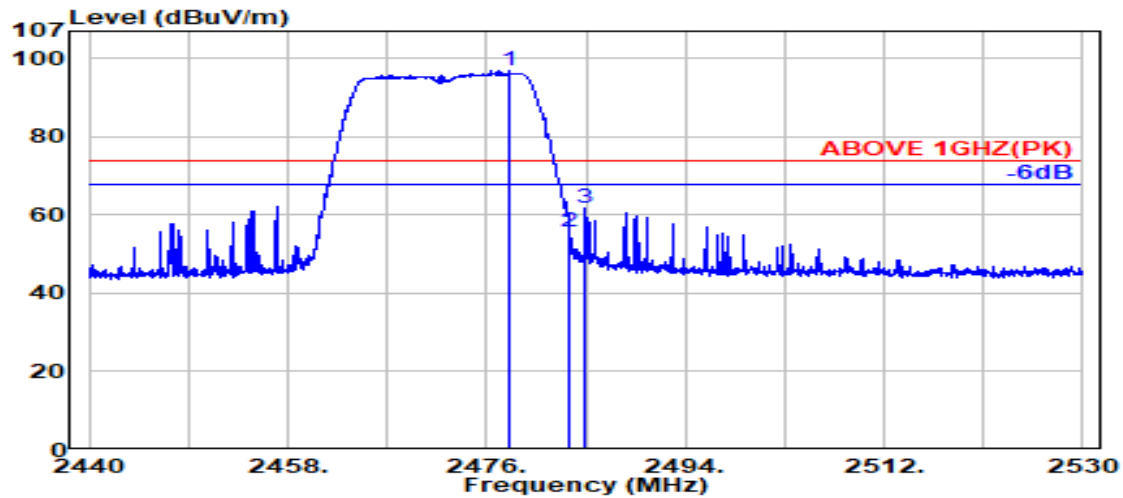

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.150	28.36	5.82	39.87	102.57	96.88	---	---	Peak
2483.500	28.37	5.83	39.87	61.29	55.62	74.00	18.38	Peak
2484.950	28.37	5.83	39.87	67.46	61.79	74.00	12.21	Peak

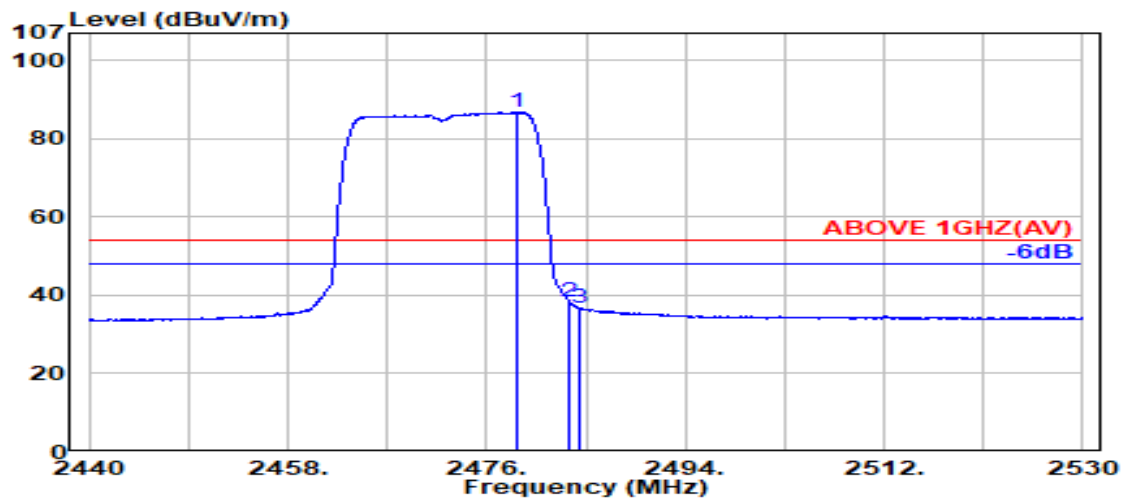

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.700	28.36	5.83	39.87	92.45	86.76	---	---	Average
2483.500	28.37	5.83	39.87	44.16	38.49	54.00	15.51	Average
2484.500	28.37	5.83	39.87	42.57	36.90	54.00	17.10	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

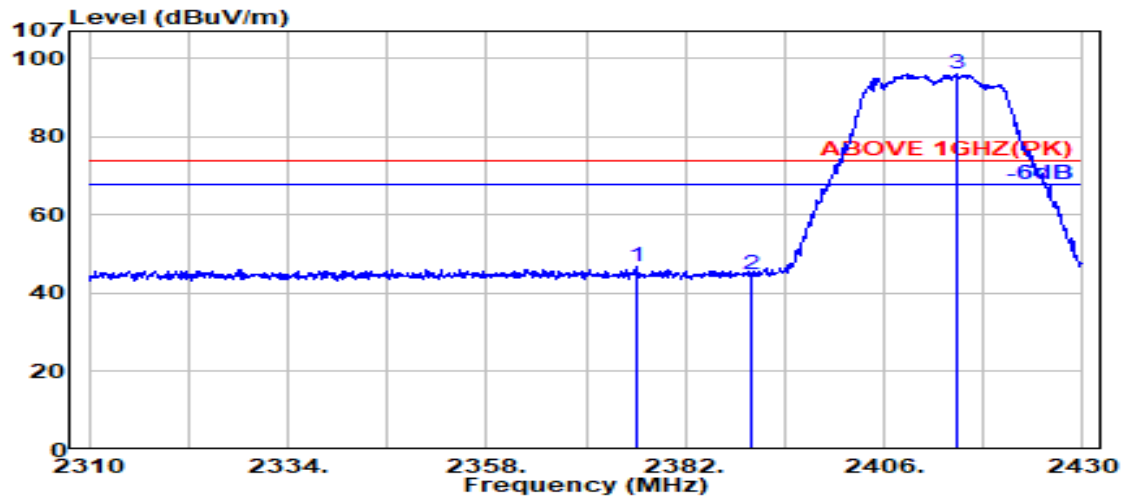

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2376.000	28.20	5.70	39.88	52.64	46.67	74.00	27.33	Peak
2390.000	28.14	5.72	39.88	50.83	44.81	74.00	29.19	Peak
@ 2414.900	28.16	5.75	39.88	102.03	96.06	---	---	Peak

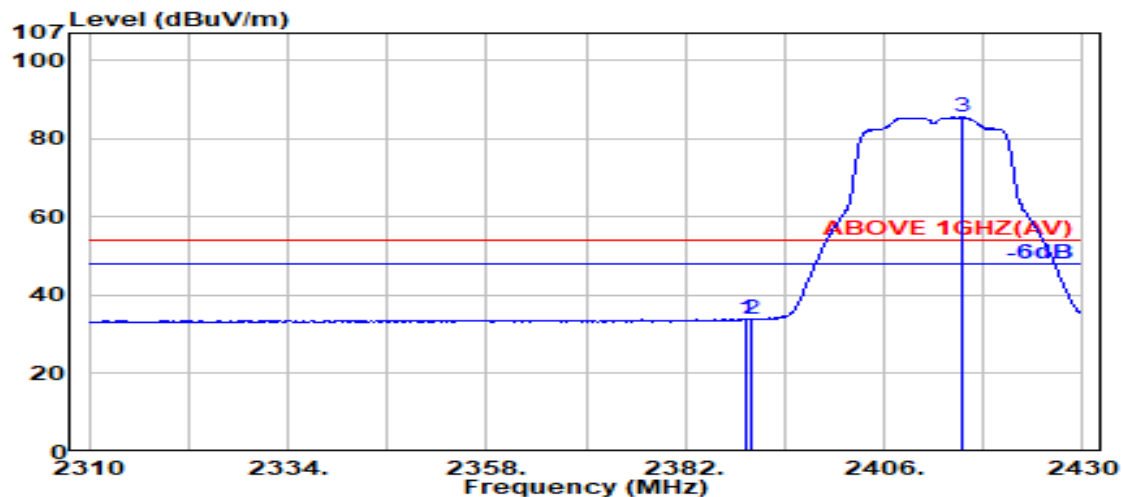

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	28.14	5.72	39.88	39.94	33.92	54.00	20.08	Average
2390.000	28.14	5.72	39.88	39.94	33.93	54.00	20.07	Average
@ 2415.500	28.16	5.75	39.88	91.43	85.47	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

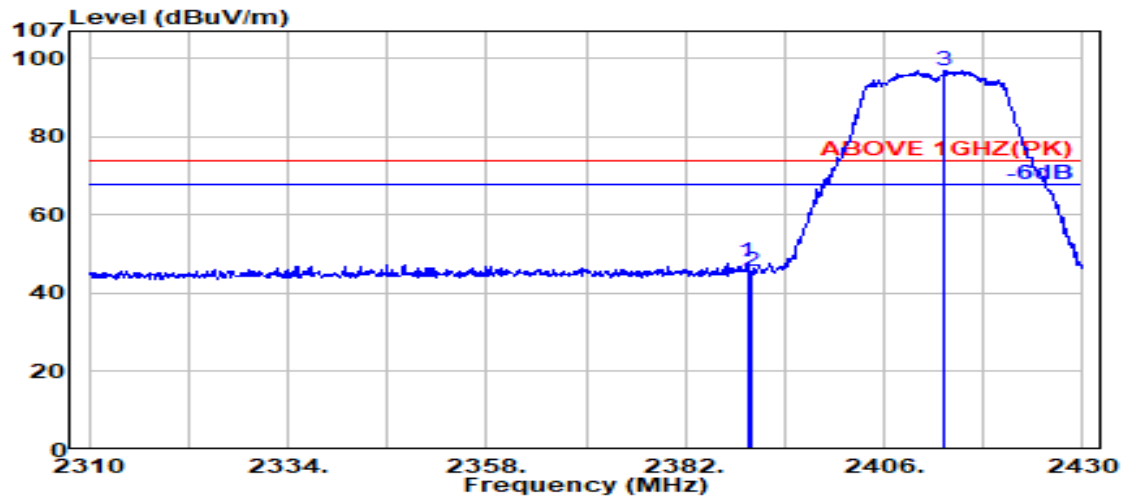

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.14	5.72	39.88	54.15	48.13	74.00	25.87	Peak
2390.000	28.14	5.72	39.88	51.56	45.54	74.00	28.46	Peak
@ 2413.300	28.15	5.75	39.88	102.81	96.84	---	---	Peak

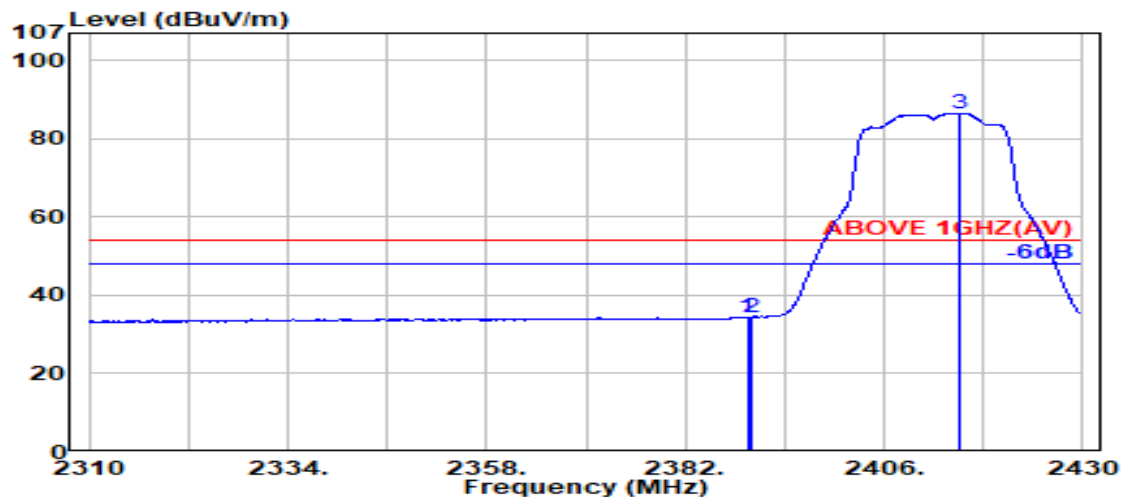

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.14	5.72	39.88	40.42	34.41	54.00	19.59	Average
2390.000	28.14	5.72	39.88	40.40	34.38	54.00	19.62	Average
@ 2415.200	28.16	5.75	39.88	92.53	86.56	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

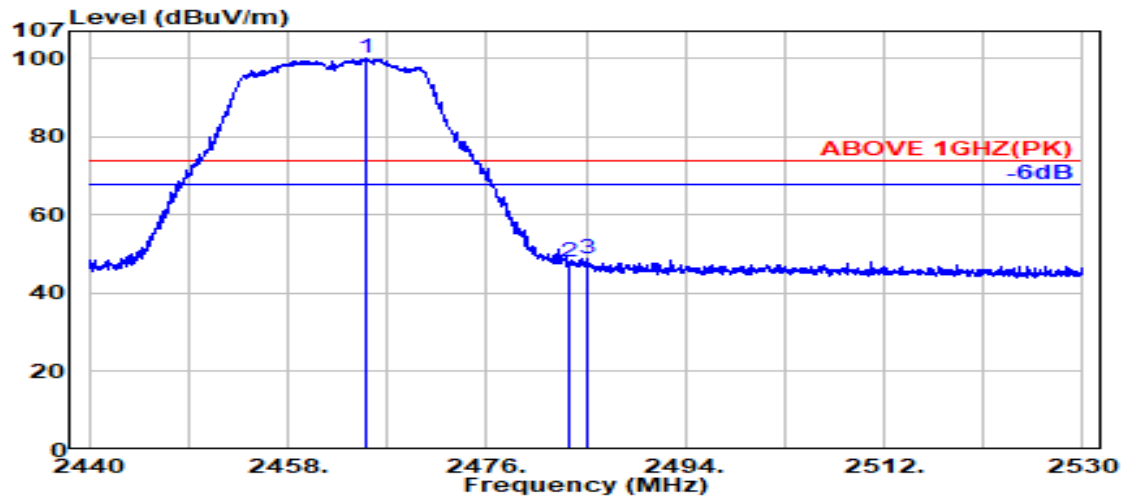

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.150	28.33	5.81	39.87	105.70	99.96	---	---	Peak
2483.500	28.37	5.83	39.87	53.78	48.11	74.00	25.89	Peak
2485.150	28.37	5.83	39.87	54.44	48.77	74.00	25.23	Peak

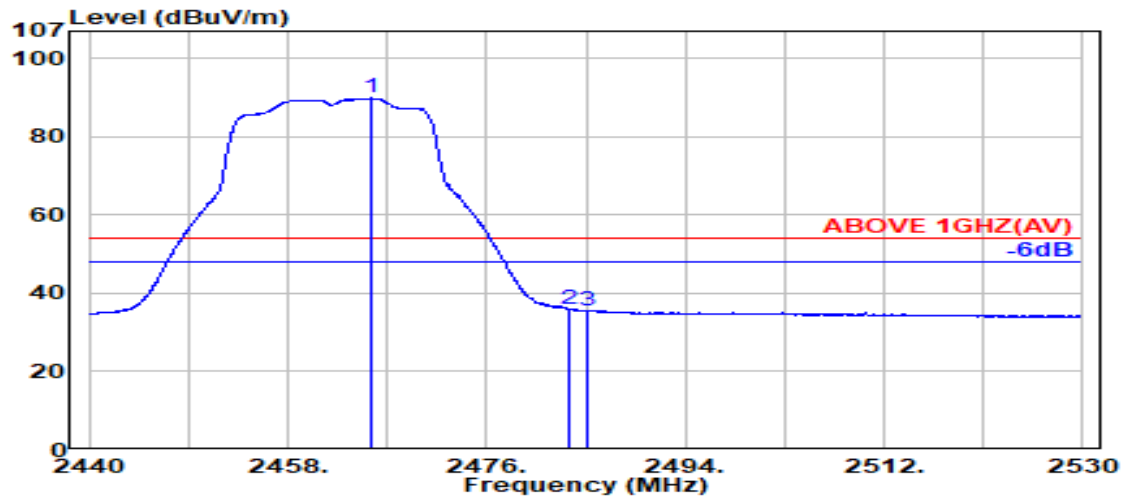

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.500	28.33	5.81	39.87	95.57	89.84	---	---	Average
2483.500	28.37	5.83	39.87	41.65	35.98	54.00	18.02	Average
2485.100	28.37	5.83	39.87	41.40	35.73	54.00	18.27	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

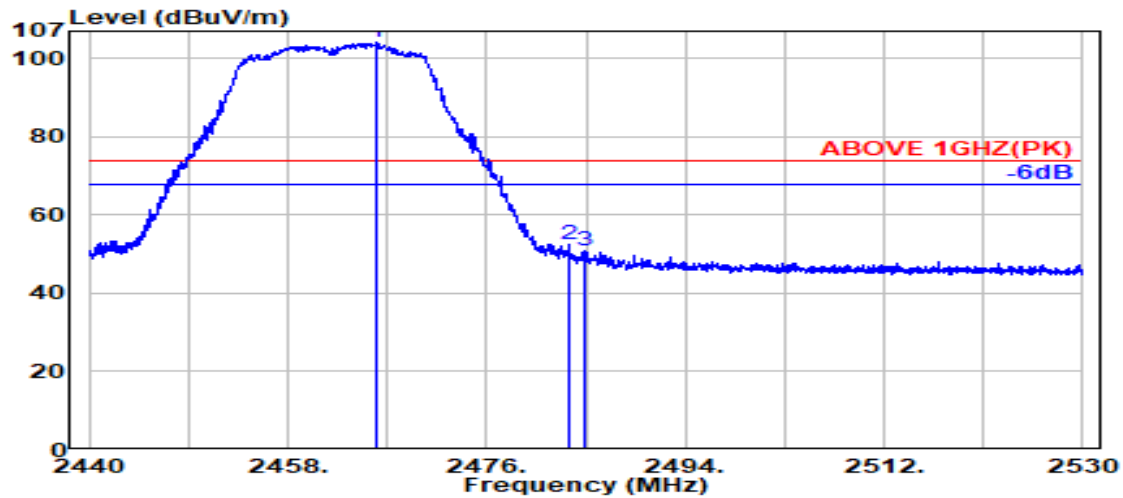

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.050	28.33	5.81	39.87	109.74	104.01	---	---	Peak
2483.500	28.37	5.83	39.87	58.30	52.63	74.00	21.37	Peak
2484.800	28.37	5.83	39.87	56.43	50.76	74.00	23.24	Peak

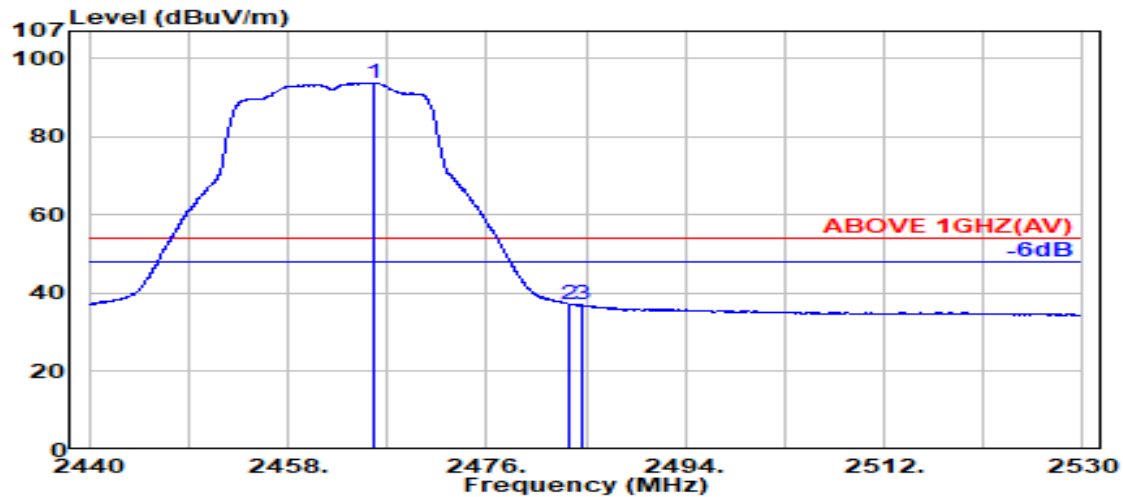

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.850	28.33	5.81	39.87	99.48	93.75	---	---	Average
2483.500	28.37	5.83	39.87	42.91	37.23	54.00	16.77	Average
2484.550	28.37	5.83	39.87	42.64	36.97	54.00	17.03	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2467 MHz
------	--------------	-----------	-------------

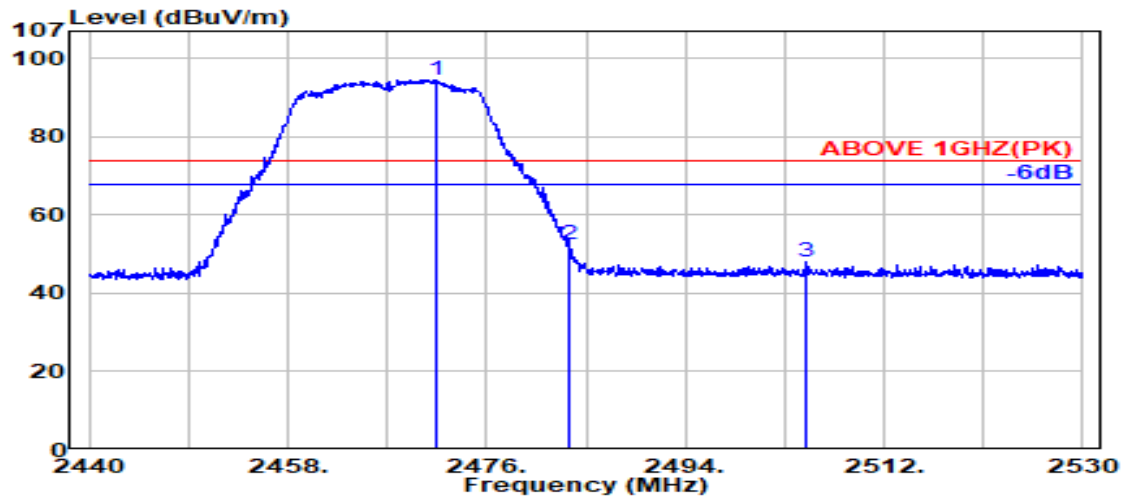

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.350	28.34	5.82	39.87	100.37	94.66	---	---	Peak
2483.500	28.37	5.83	39.87	58.06	52.39	74.00	21.61	Peak
2504.900	28.43	5.86	39.87	53.62	48.03	74.00	25.97	Peak

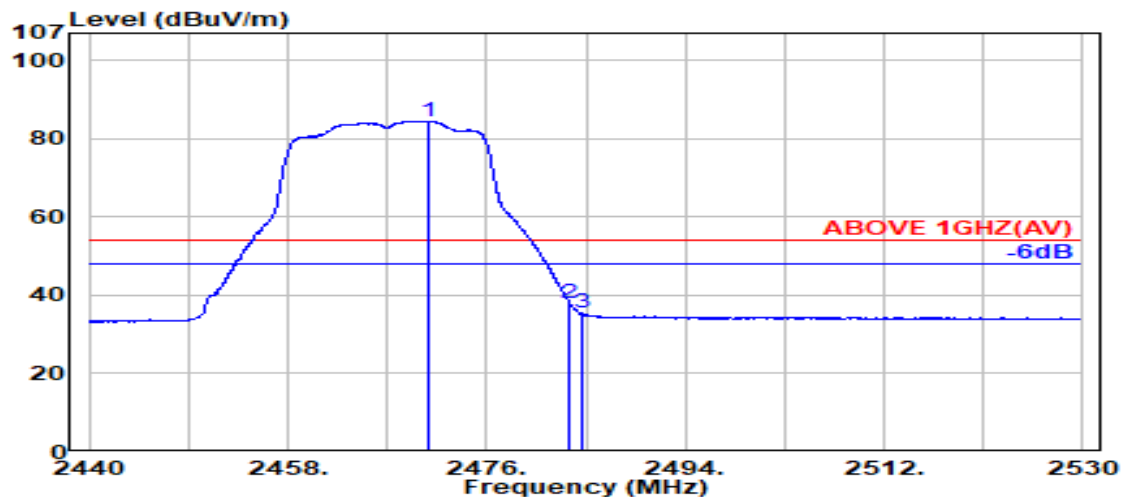

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.800	28.34	5.82	39.87	90.27	84.55	---	---	Average
2483.500	28.37	5.83	39.87	43.83	38.15	54.00	15.85	Average
2484.600	28.37	5.83	39.87	41.01	35.34	54.00	18.66	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2467 MHz
------	--------------	-----------	-------------

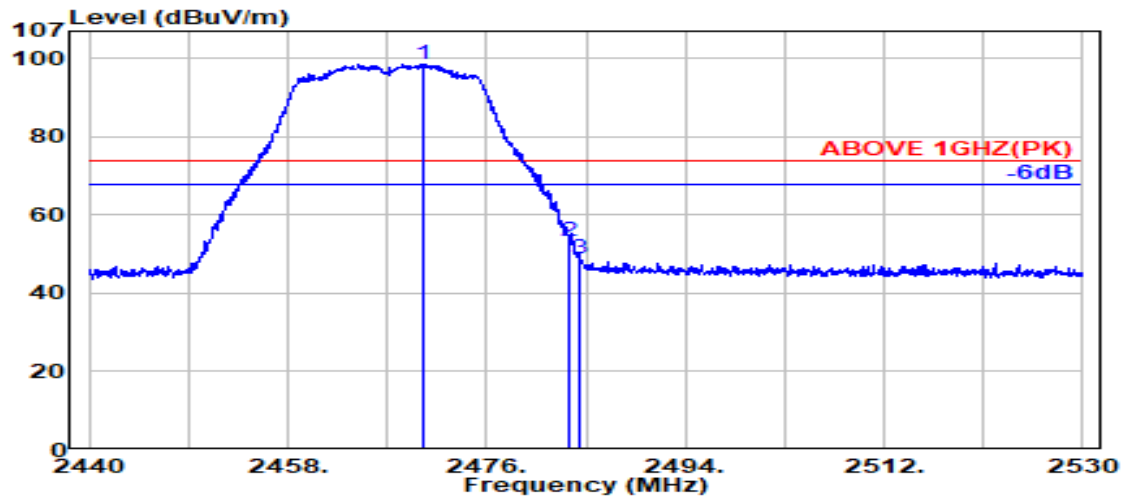

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.350	28.34	5.82	39.87	104.43	98.72	---	---	Peak
2483.500	28.37	5.83	39.87	59.02	53.35	74.00	20.65	Peak
2484.500	28.37	5.83	39.87	54.72	49.05	74.00	24.95	Peak

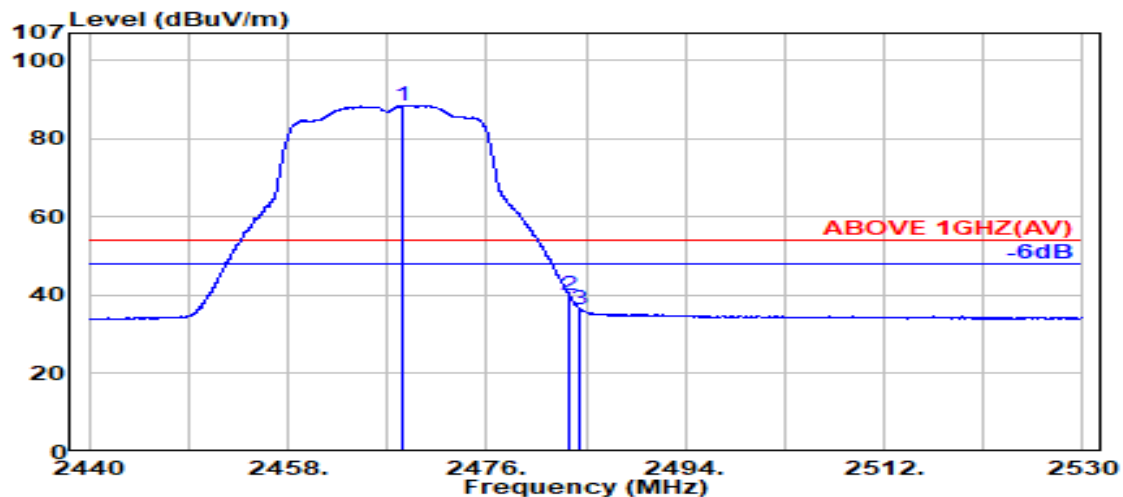

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.350	28.34	5.81	39.87	94.18	88.46	---	---	Average
2483.500	28.37	5.83	39.87	45.81	40.14	54.00	13.86	Average
2484.500	28.37	5.83	39.87	42.11	36.44	54.00	17.56	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2472 MHz
------	--------------	-----------	-------------

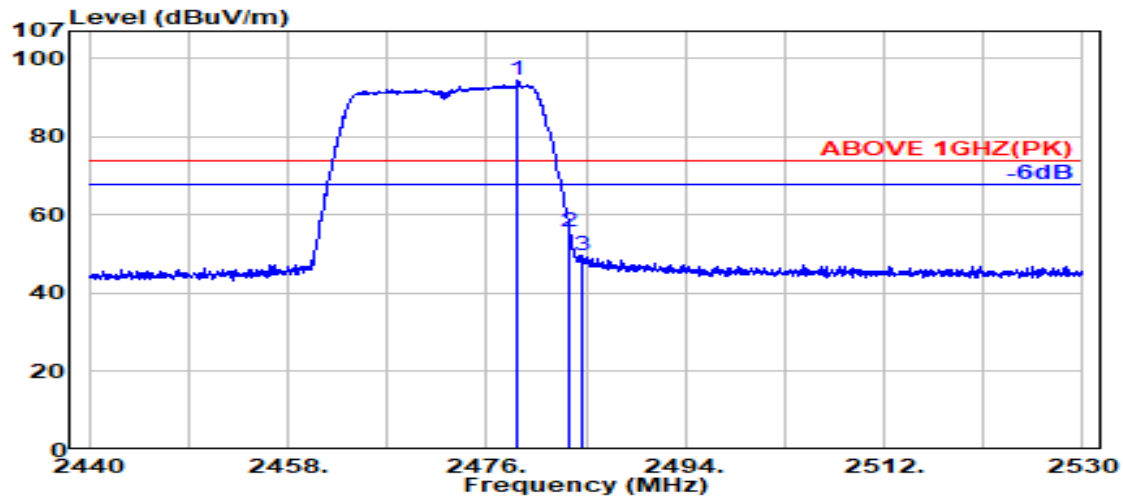

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.850	28.36	5.83	39.87	100.19	94.50	---	---	Peak
2483.500	28.37	5.83	39.87	61.54	55.86	74.00	18.14	Peak
2484.750	28.37	5.83	39.87	55.50	49.83	74.00	24.17	Peak

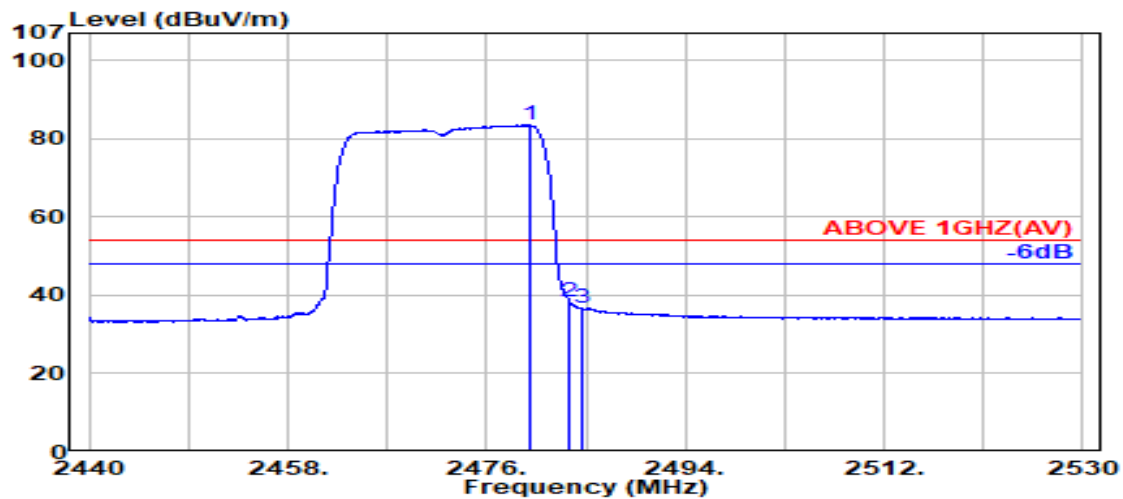

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.950	28.36	5.83	39.87	89.27	83.59	---	---	Average
2483.500	28.37	5.83	39.87	44.19	38.52	54.00	15.48	Average
2484.550	28.37	5.83	39.87	42.39	36.72	54.00	17.28	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2472 MHz
------	--------------	-----------	-------------

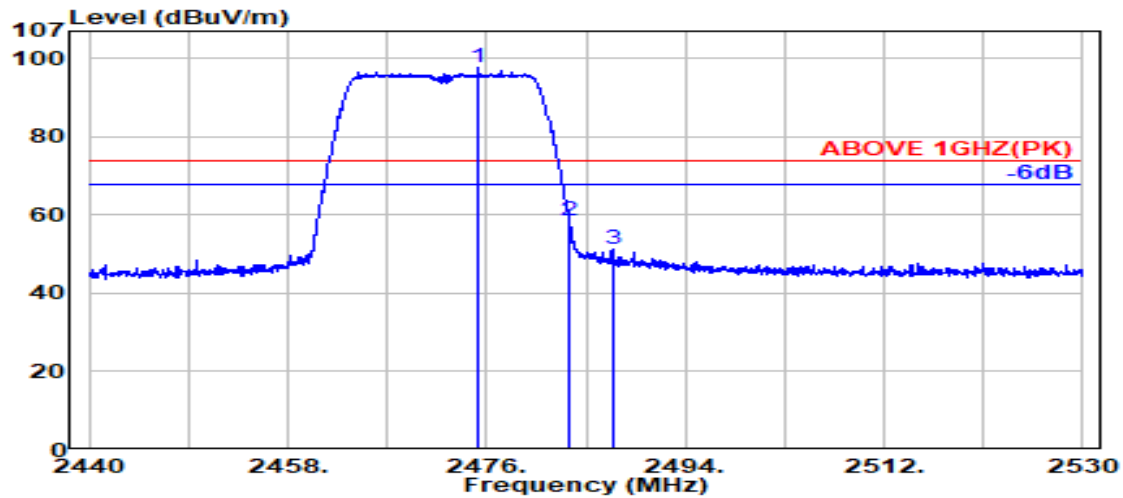

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2475.300	28.35	5.82	39.87	103.25	97.55	---	---	Peak
	2483.500	28.37	5.83	39.87	64.29	58.61	74.00	15.39	Peak
	2487.400	28.37	5.84	39.87	56.95	51.28	74.00	22.72	Peak

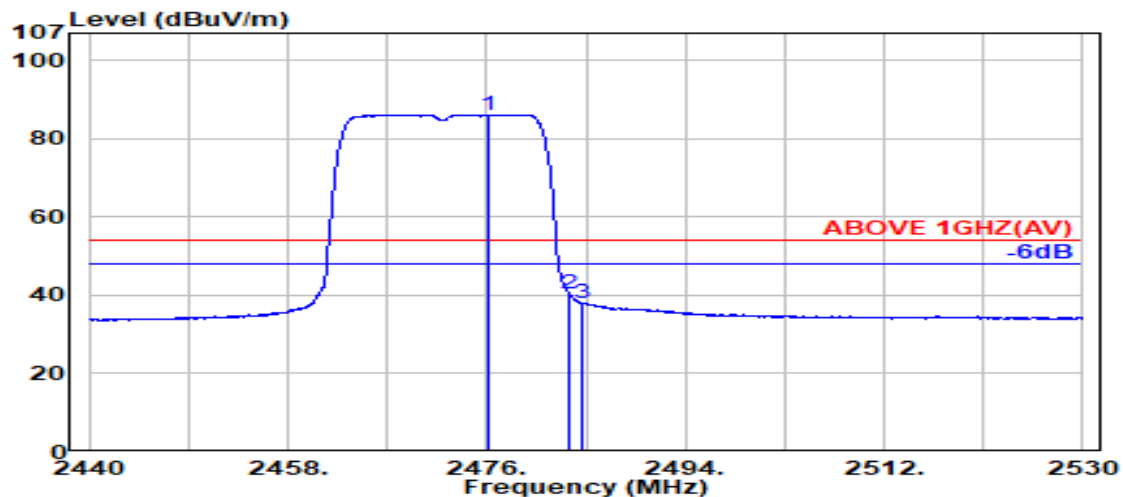

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2476.100	28.35	5.82	39.87	91.89	86.19	---	---	Average
	2483.500	28.37	5.83	39.87	46.14	40.47	54.00	13.53	Average
	2484.600	28.37	5.83	39.87	43.82	38.15	54.00	15.85	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2422 MHz
------	--------------	-----------	-------------

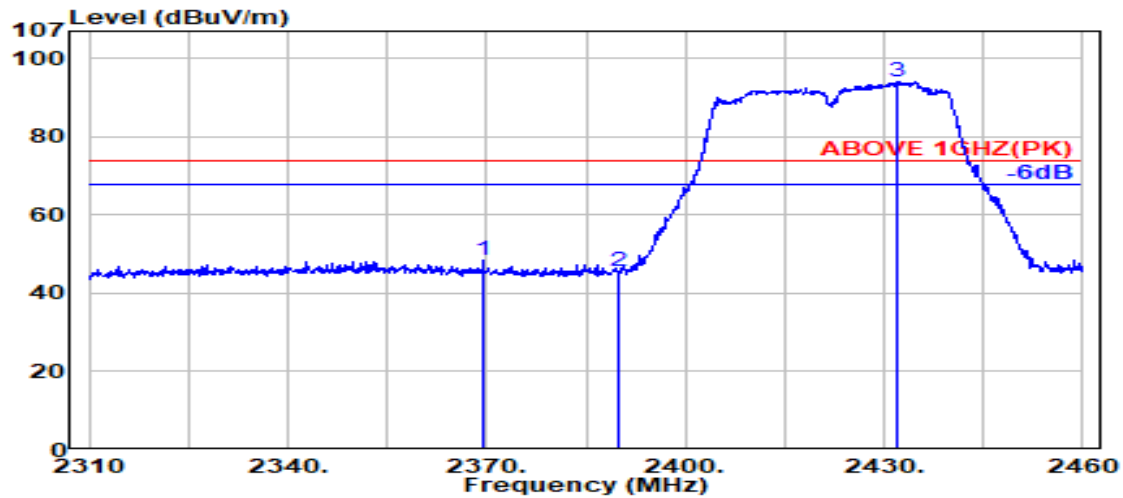

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2369.500	28.22	5.70	39.88	54.22	48.26	74.00	25.74	Peak
2390.000	28.14	5.72	39.88	51.71	45.70	74.00	28.30	Peak
@ 2432.000	28.23	5.77	39.87	99.93	94.06	---	---	Peak

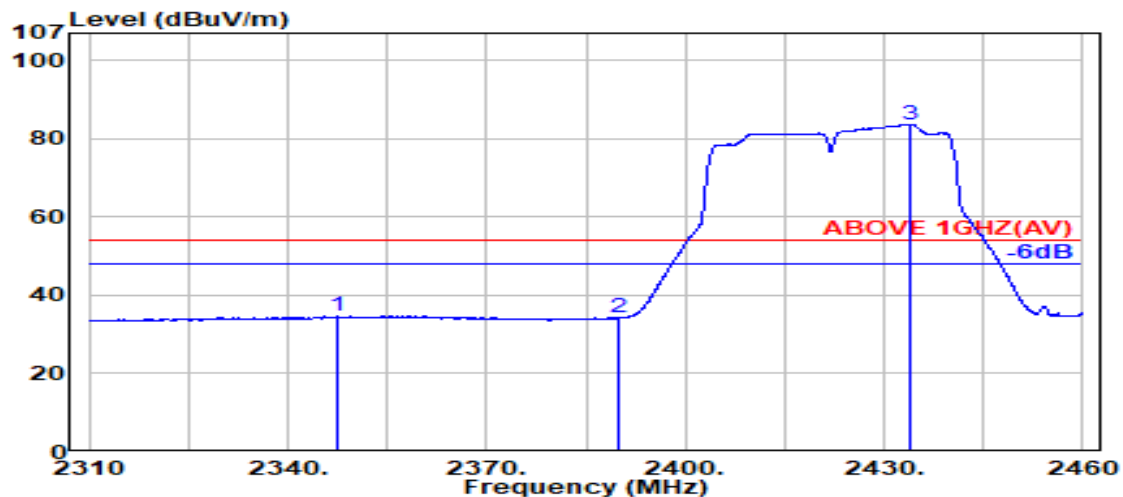

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2347.500	28.29	5.67	39.88	40.55	34.62	54.00	19.38	Average
2390.000	28.14	5.72	39.88	40.25	34.23	54.00	19.77	Average
@ 2434.000	28.24	5.77	39.87	89.53	83.66	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2422 MHz
------	--------------	-----------	-------------

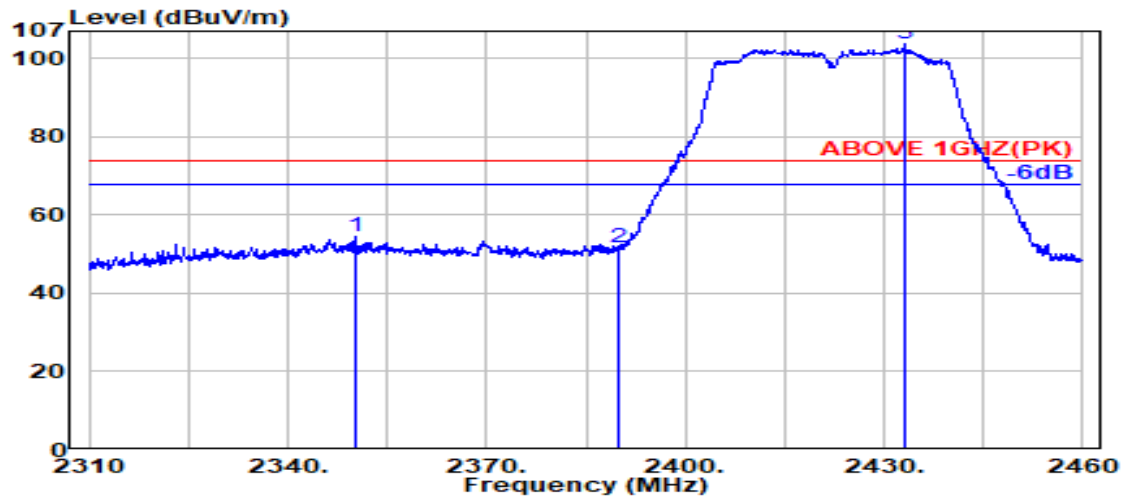

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2350.300	28.30	5.67	39.88	60.27	54.36	74.00	19.64	Peak
2390.000	28.14	5.72	39.88	57.84	51.82	74.00	22.18	Peak
@ 2433.100	28.23	5.77	39.87	109.51	103.64	---	---	Peak

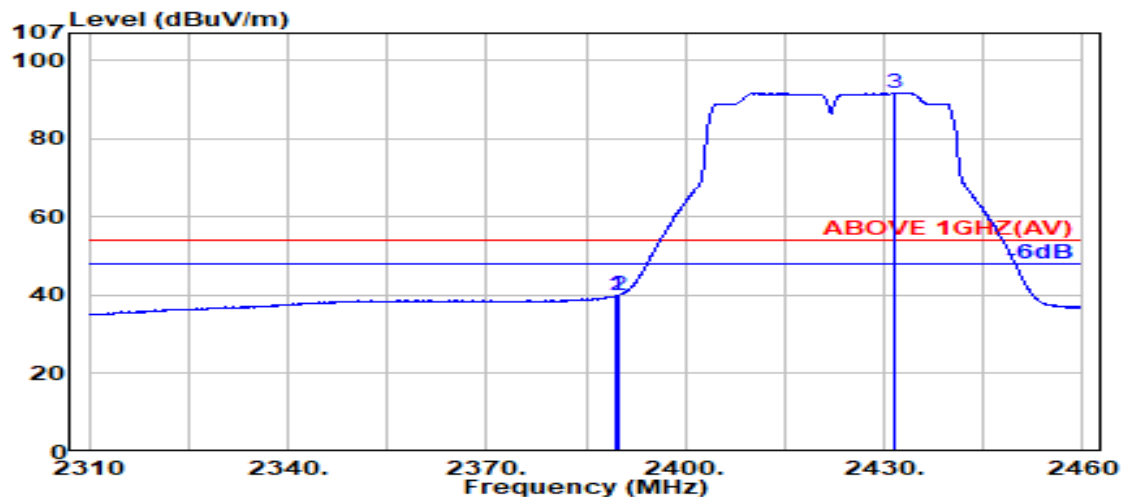

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	45.86	39.84	54.00	14.16	Average
2390.000	28.14	5.72	39.88	45.96	39.94	54.00	14.06	Average
@ 2431.600	28.23	5.77	39.87	97.67	91.79	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2452 MHz
------	--------------	-----------	-------------

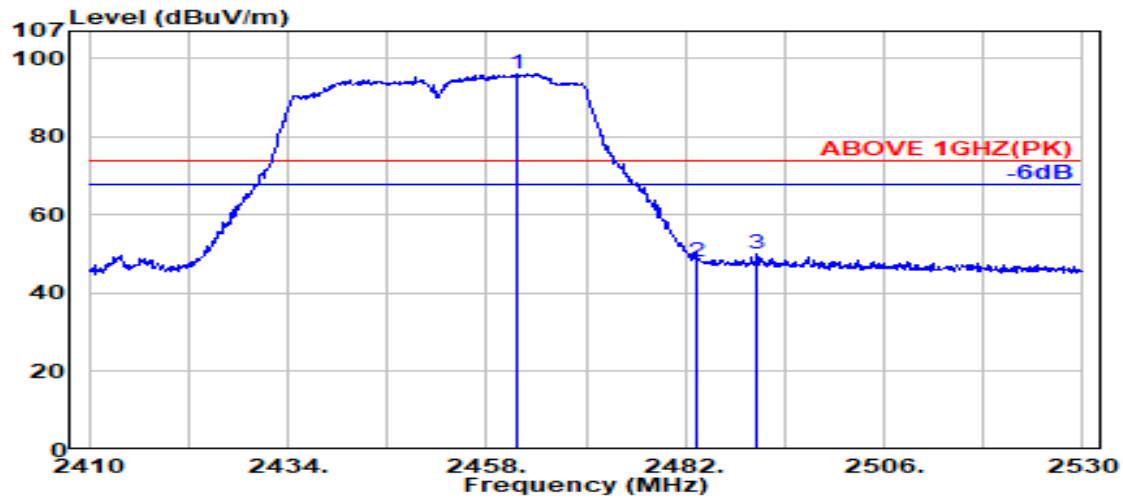

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2461.700	28.32	5.81	39.87	101.94	96.20	---	---	Peak
	2483.500	28.37	5.83	39.87	53.87	48.20	74.00	25.80	Peak
	2490.700	28.38	5.84	39.87	55.68	50.03	74.00	23.97	Peak

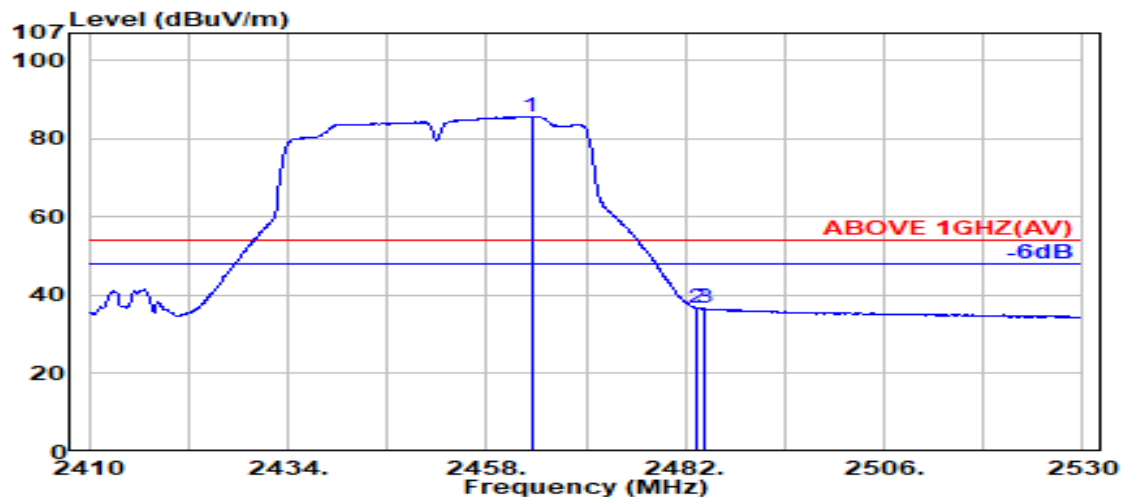

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2463.400	28.33	5.81	39.87	91.49	85.76	---	---	Average
	2483.500	28.37	5.83	39.87	42.45	36.78	54.00	17.22	Average
	2484.400	28.37	5.83	39.87	42.32	36.65	54.00	17.35	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2452 MHz
------	--------------	-----------	-------------

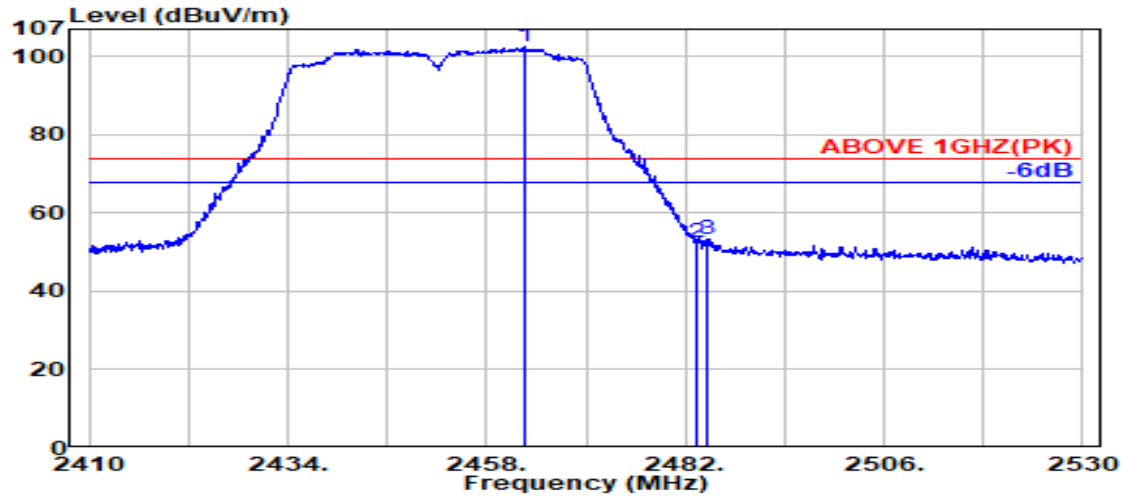

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.500	28.33	5.81	39.87	108.36	102.62	---	---	Peak
2483.500	28.37	5.83	39.87	58.15	52.48	74.00	21.52	Peak
2484.500	28.37	5.83	39.87	59.06	53.39	74.00	20.61	Peak

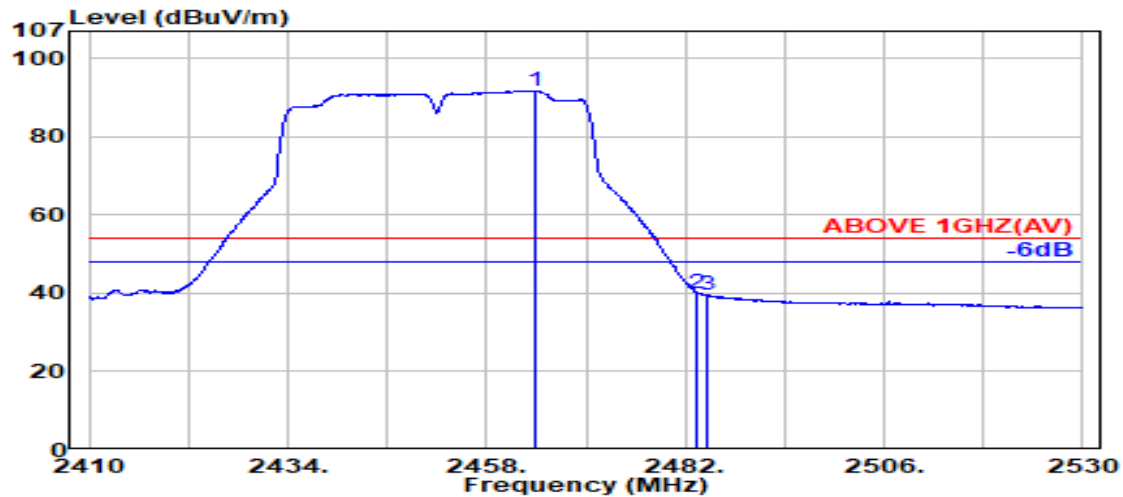

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.800	28.33	5.81	39.87	97.56	91.83	---	---	Average
2483.500	28.37	5.83	39.87	45.84	40.17	54.00	13.83	Average
2484.500	28.37	5.83	39.87	45.29	39.63	54.00	14.37	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2457 MHz
------	--------------	-----------	-------------

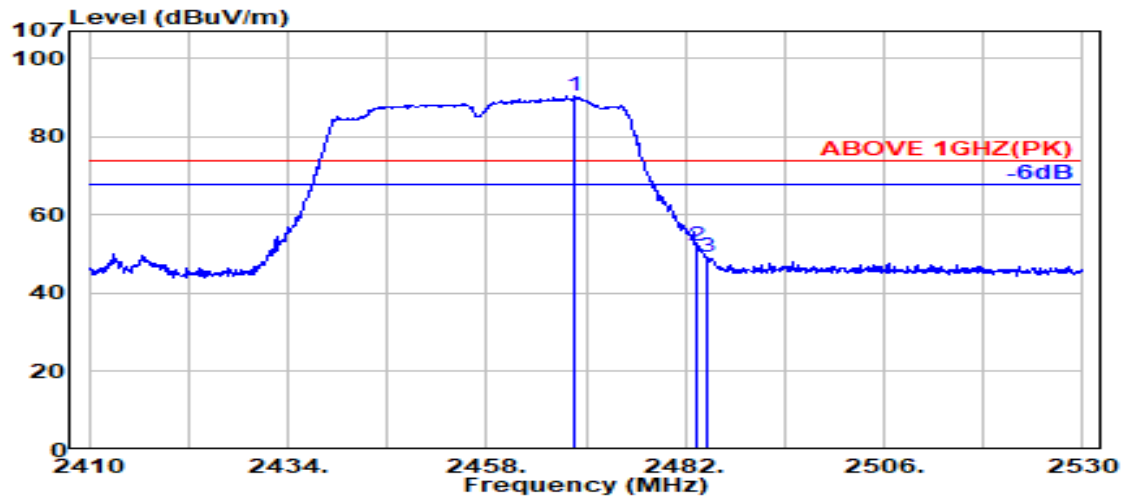

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2468.700	28.34	5.81	39.87	96.06	90.34	---	---	Peak
	2483.500	28.37	5.83	39.87	57.69	52.02	74.00	21.98	Peak
	2484.500	28.37	5.83	39.87	55.12	49.45	74.00	24.55	Peak

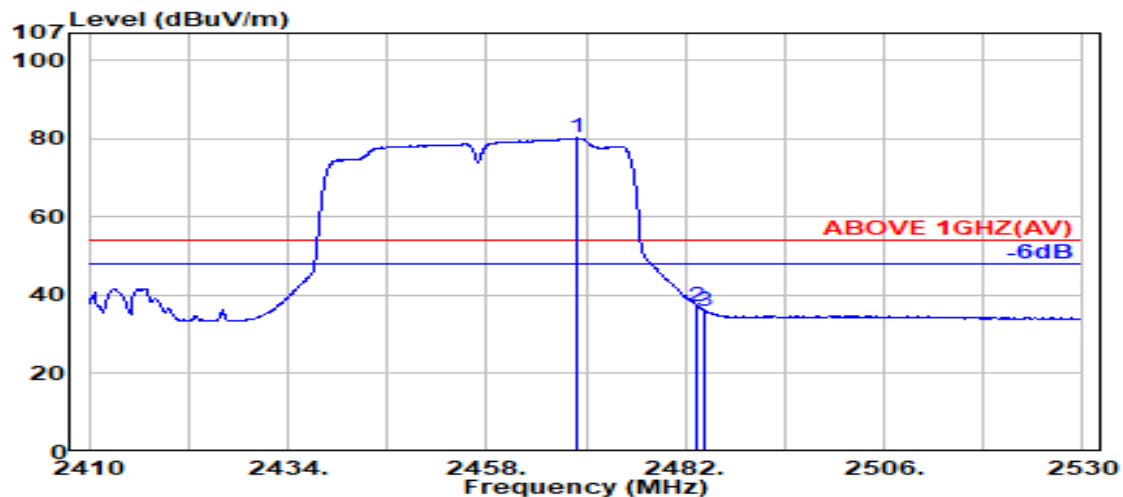

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2469.000	28.34	5.81	39.87	85.88	80.16	---	---	Average
	2483.500	28.37	5.83	39.87	42.80	37.12	54.00	16.88	Average
	2484.400	28.37	5.83	39.87	41.61	35.94	54.00	18.06	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2457 MHz
------	--------------	-----------	-------------

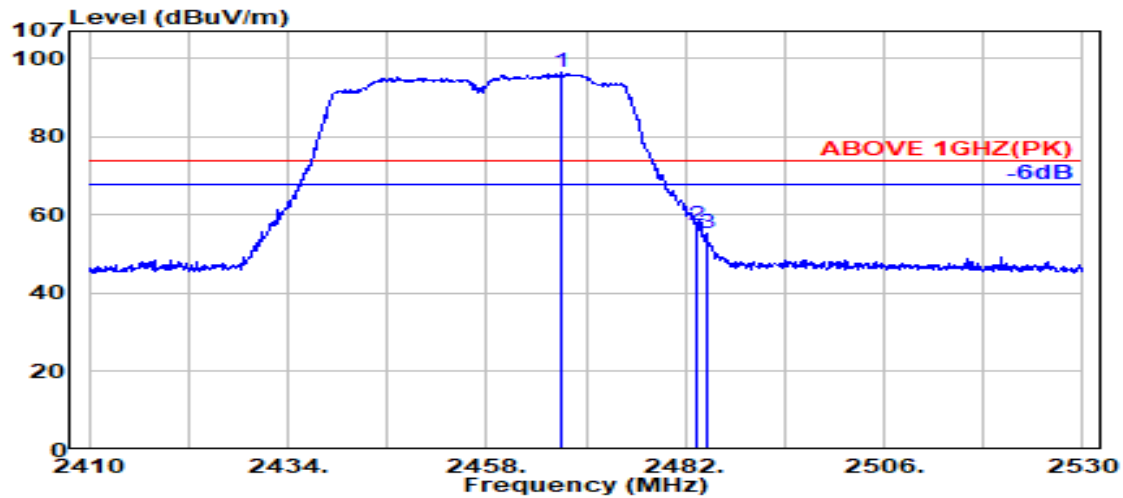

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.100	28.33	5.81	39.87	102.20	96.48	---	---	Peak
2483.500	28.37	5.83	39.87	62.95	57.28	74.00	16.72	Peak
2484.500	28.37	5.83	39.87	60.81	55.14	74.00	18.86	Peak

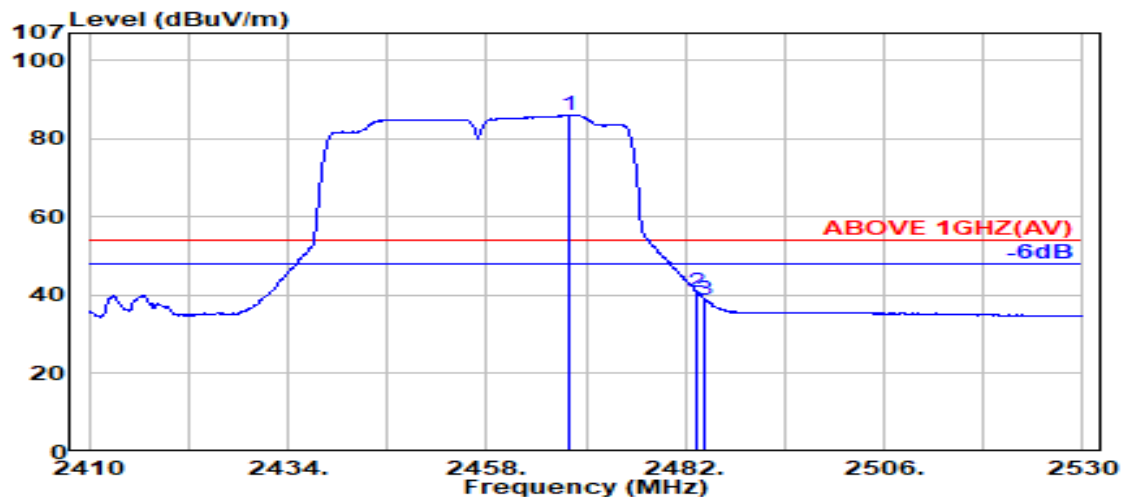

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.000	28.34	5.81	39.87	91.79	86.07	---	---	Average
2483.500	28.37	5.83	39.87	46.50	40.82	54.00	13.18	Average
2484.400	28.37	5.83	39.87	44.60	38.93	54.00	15.07	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2462 MHz
------	--------------	-----------	-------------

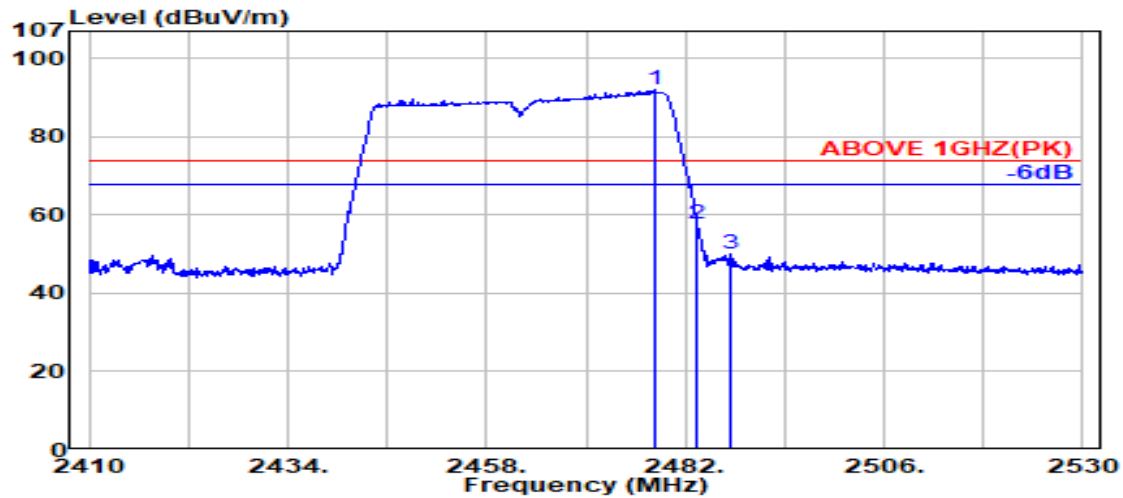

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2478.300	28.36	5.82	39.87	97.83	92.14	---	---	Peak
	2483.500	28.37	5.83	39.87	63.45	57.78	74.00	16.22	Peak
	2487.600	28.38	5.84	39.87	55.67	50.01	74.00	23.99	Peak

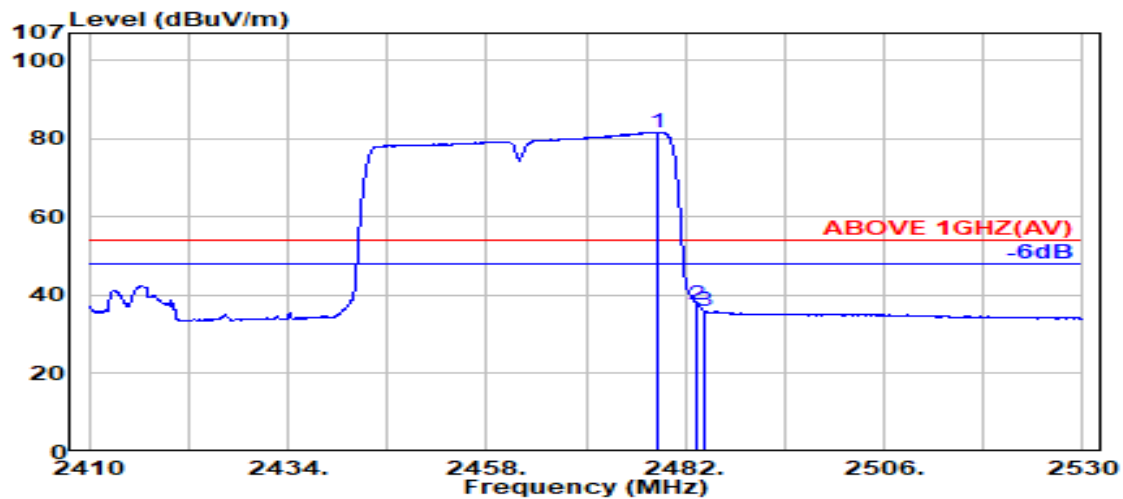

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2478.700	28.36	5.83	39.87	87.42	81.74	---	---	Average
	2483.500	28.37	5.83	39.87	43.23	37.56	54.00	16.44	Average
	2484.400	28.37	5.83	39.87	41.49	35.82	54.00	18.18	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2462 MHz
------	--------------	-----------	-------------

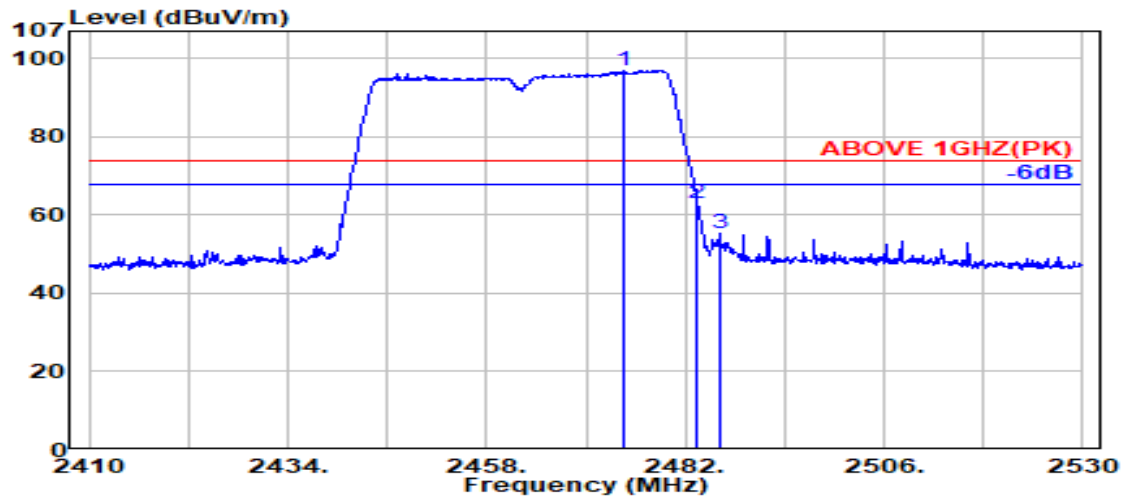

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.600	28.35	5.82	39.87	102.73	97.03	---	---	Peak
2483.500	28.37	5.83	39.87	68.56	62.89	74.00	11.11	Peak
2486.100	28.37	5.83	39.87	61.01	55.35	74.00	18.65	Peak

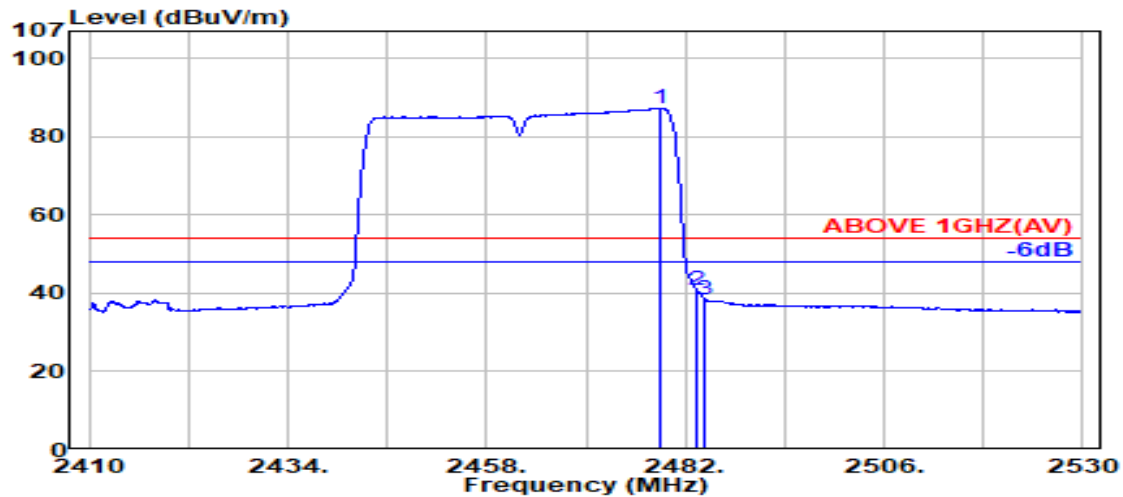

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.100	28.36	5.83	39.87	92.85	87.16	---	---	Average
2483.500	28.37	5.83	39.87	46.25	40.58	54.00	13.42	Average
2484.400	28.37	5.83	39.87	44.00	38.33	54.00	15.67	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
------	---------------	-----------	-------------

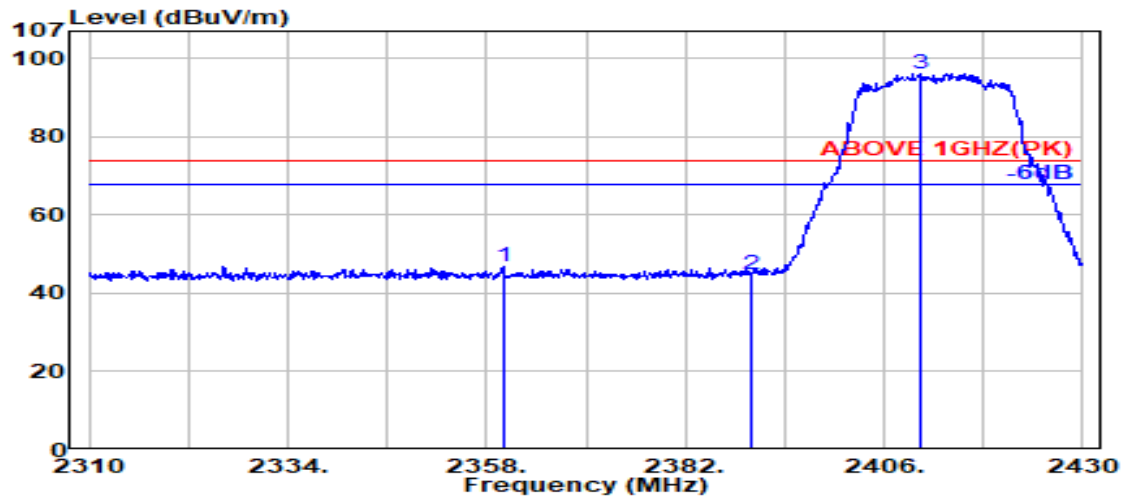

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2360.000	28.26	5.68	39.88	52.68	46.75	74.00	27.25	Peak
2390.000	28.14	5.72	39.88	50.98	44.96	74.00	29.04	Peak
@ 2410.300	28.14	5.75	39.88	102.25	96.26	---	---	Peak

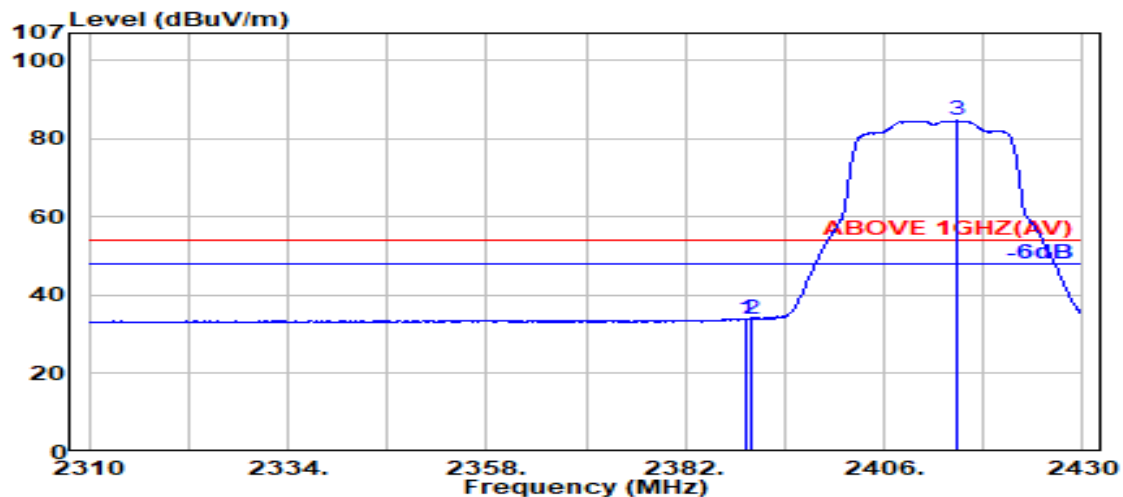

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	28.14	5.72	39.88	40.08	34.07	54.00	19.93	Average
2390.000	28.14	5.72	39.88	40.04	34.02	54.00	19.98	Average
@ 2414.900	28.16	5.75	39.88	90.57	84.61	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
------	---------------	-----------	-------------

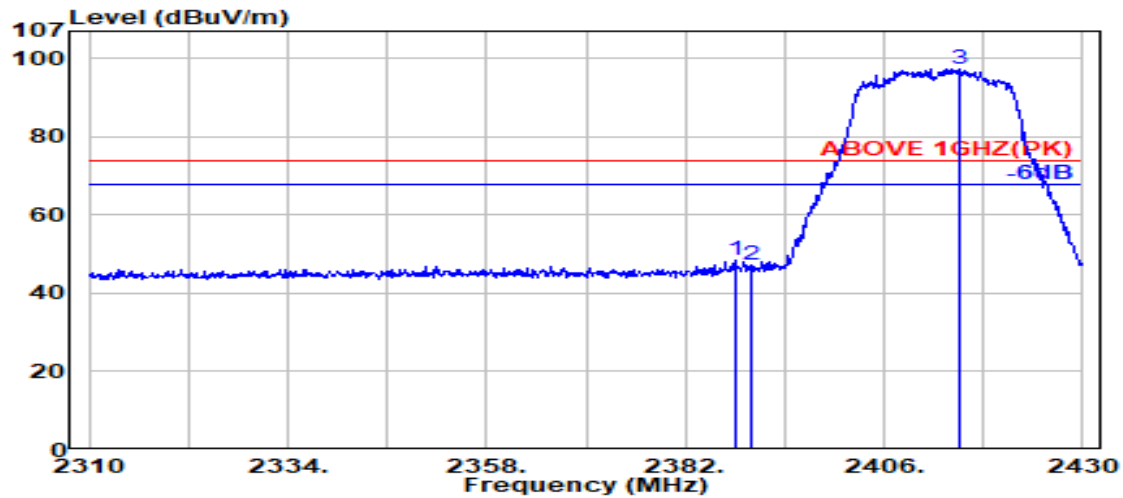

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.000	28.15	5.72	39.88	54.61	48.60	74.00	25.40	Peak
2390.000	28.14	5.72	39.88	53.35	47.33	74.00	26.67	Peak
@ 2415.000	28.16	5.75	39.88	103.41	97.45	---	---	Peak

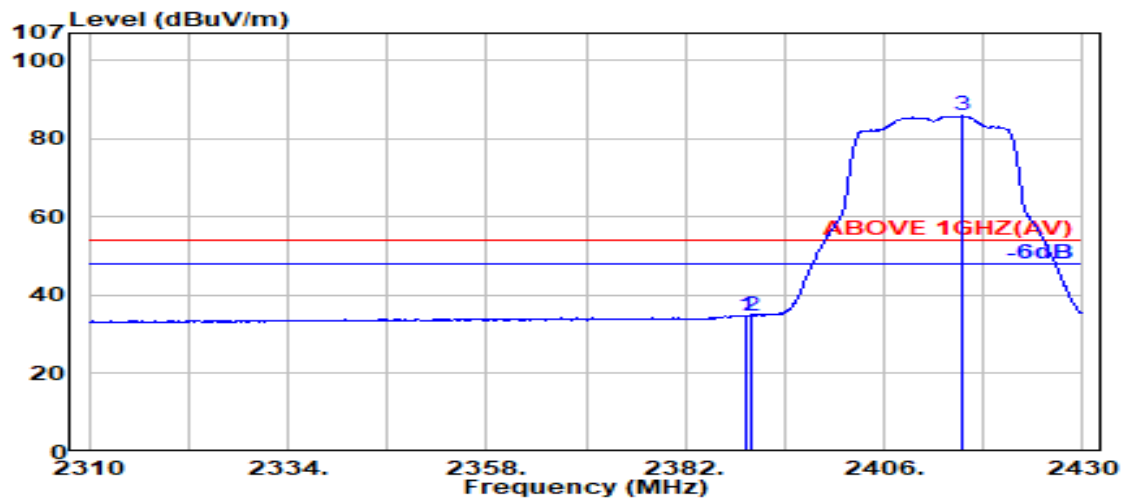

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	28.14	5.72	39.88	40.94	34.93	54.00	19.07	Average
2390.000	28.14	5.72	39.88	40.81	34.80	54.00	19.20	Average
@ 2415.500	28.16	5.75	39.88	91.82	85.86	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2462 MHz
------	---------------	-----------	-------------

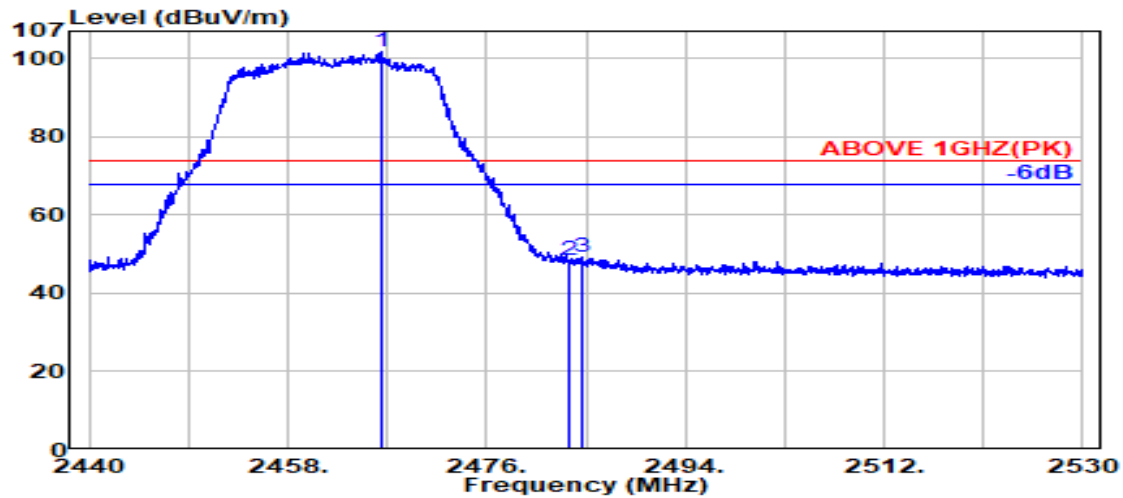

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.600	28.33	5.81	39.87	107.29	101.56	---	---	Peak
2483.500	28.37	5.83	39.87	53.97	48.30	74.00	25.70	Peak
2484.550	28.37	5.83	39.87	54.82	49.15	74.00	24.85	Peak

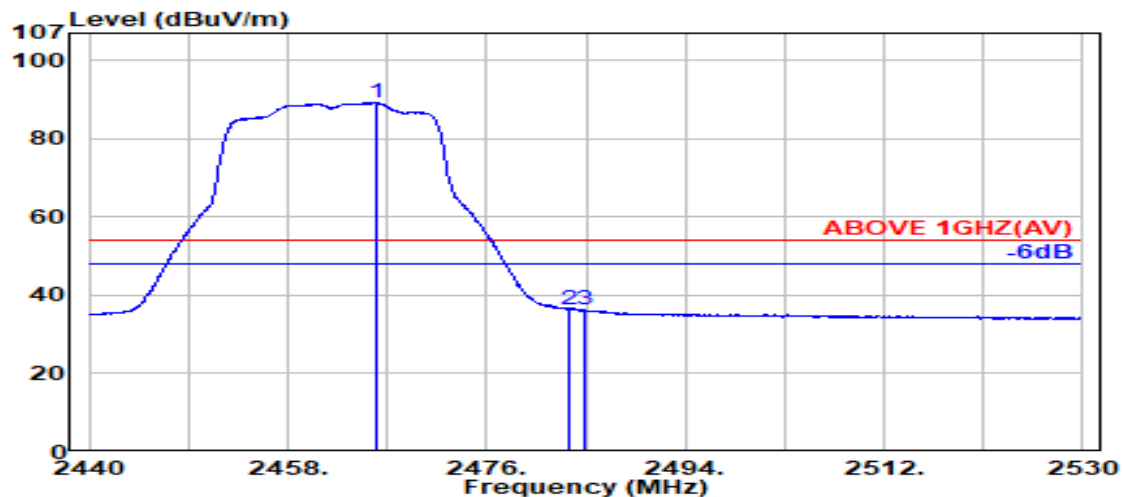

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.100	28.33	5.81	39.87	94.90	89.17	---	---	Average
2483.500	28.37	5.83	39.87	42.10	36.43	54.00	17.57	Average
2484.850	28.37	5.83	39.87	41.96	36.29	54.00	17.71	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2462 MHz
------	---------------	-----------	-------------

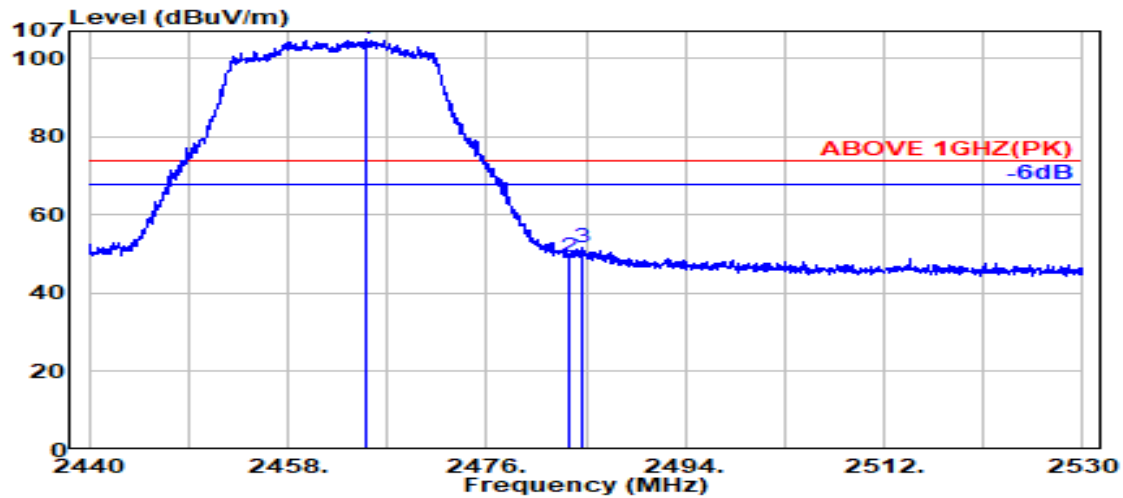

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.100	28.33	5.81	39.87	110.82	105.08	---	---	Peak
2483.500	28.37	5.83	39.87	54.85	49.18	74.00	24.82	Peak
2484.700	28.37	5.83	39.87	57.36	51.69	74.00	22.31	Peak

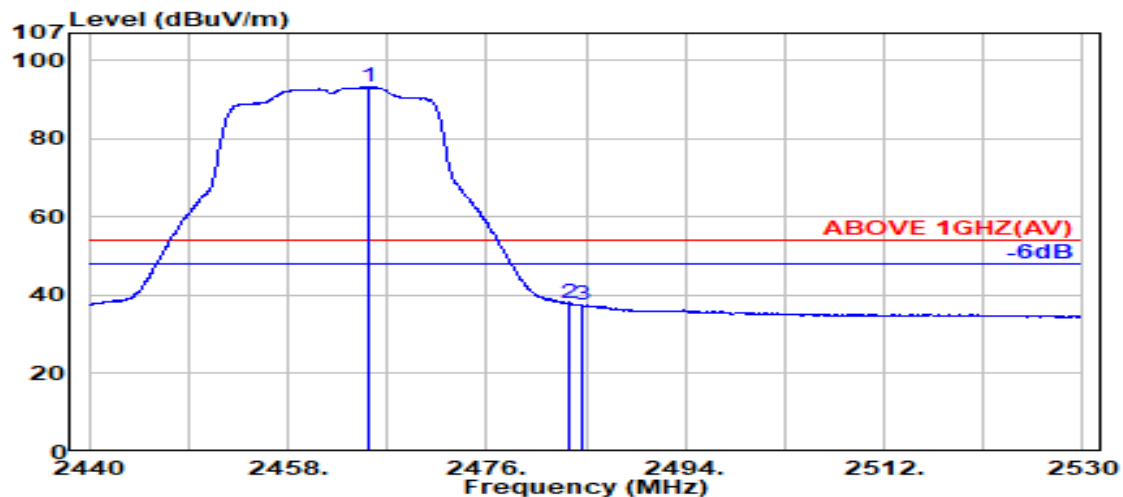

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.350	28.33	5.81	39.87	98.98	93.25	---	---	Average
2483.500	28.37	5.83	39.87	43.48	37.80	54.00	16.20	Average
2484.550	28.37	5.83	39.87	43.17	37.50	54.00	16.50	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2467 MHz
------	---------------	-----------	-------------

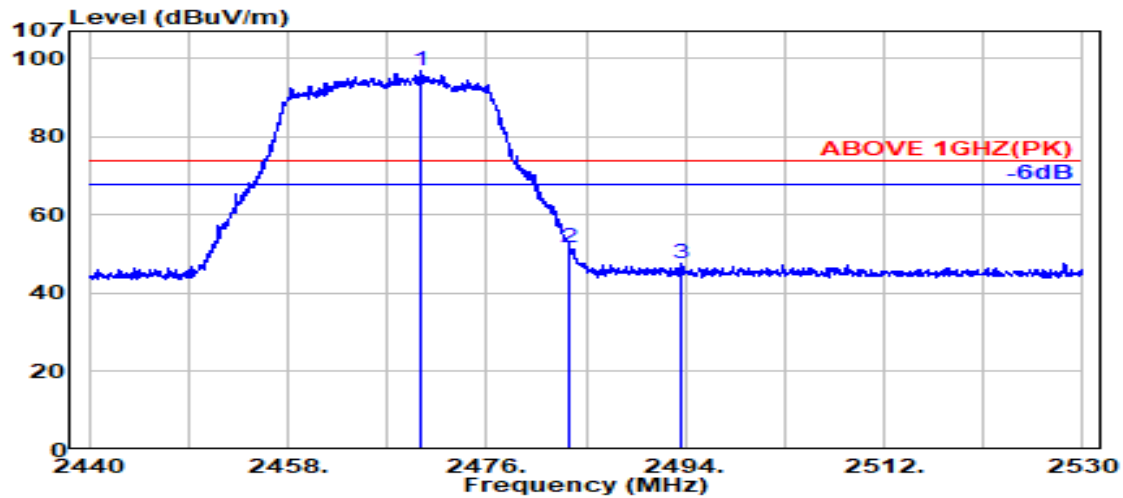

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.950	28.34	5.82	39.87	102.45	96.74	---	---	Peak
2483.500	28.37	5.83	39.87	57.21	51.54	74.00	22.46	Peak
2493.700	28.39	5.84	39.87	53.38	47.74	74.00	26.26	Peak

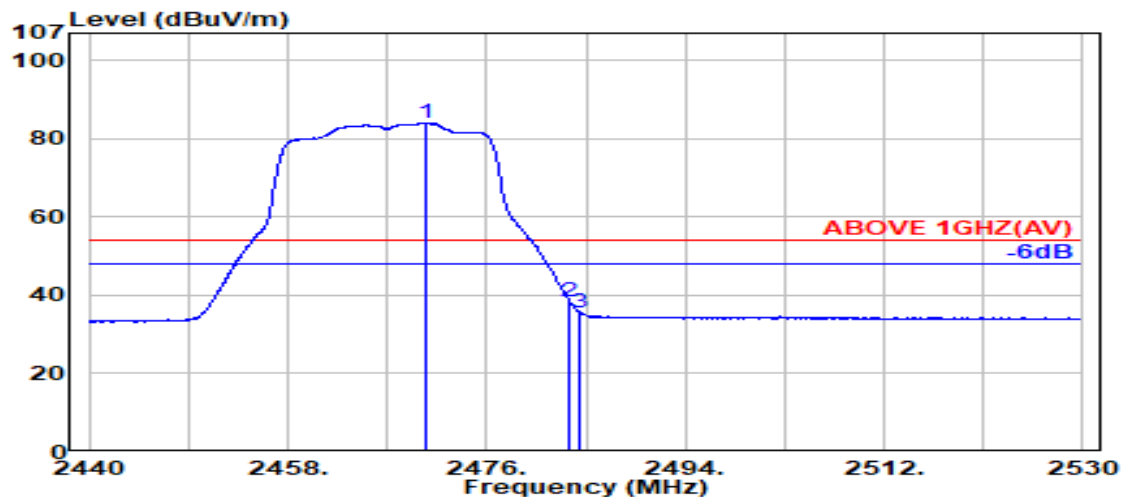

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.600	28.34	5.82	39.87	89.65	83.94	---	---	Average
2483.500	28.37	5.83	39.87	44.11	38.43	54.00	15.57	Average
2484.500	28.37	5.83	39.87	41.15	35.48	54.00	18.52	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2467 MHz
------	---------------	-----------	-------------

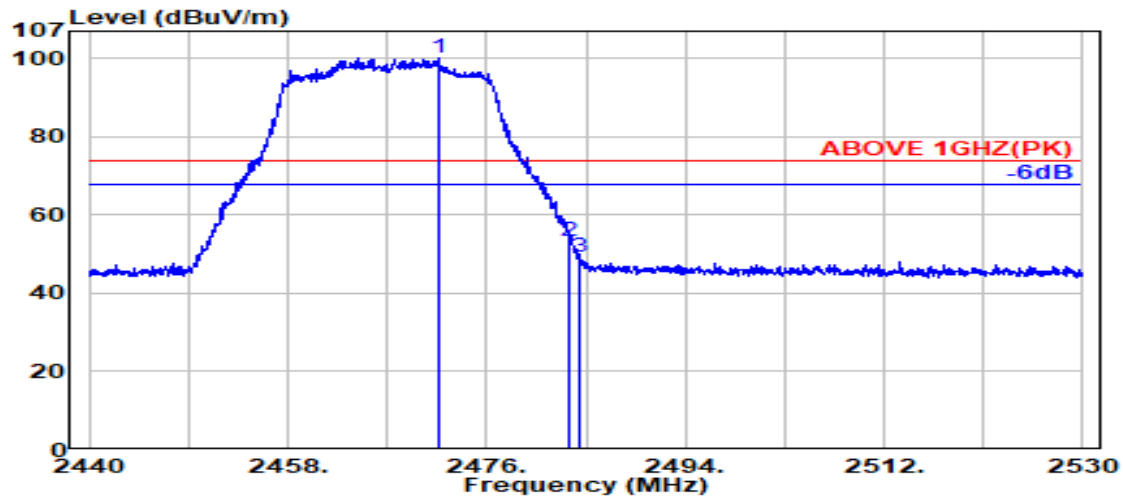

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.600	28.34	5.82	39.87	105.91	100.19	---	---	Peak
2483.500	28.37	5.83	39.87	58.80	53.13	74.00	20.87	Peak
2484.500	28.37	5.83	39.87	54.75	49.08	74.00	24.92	Peak

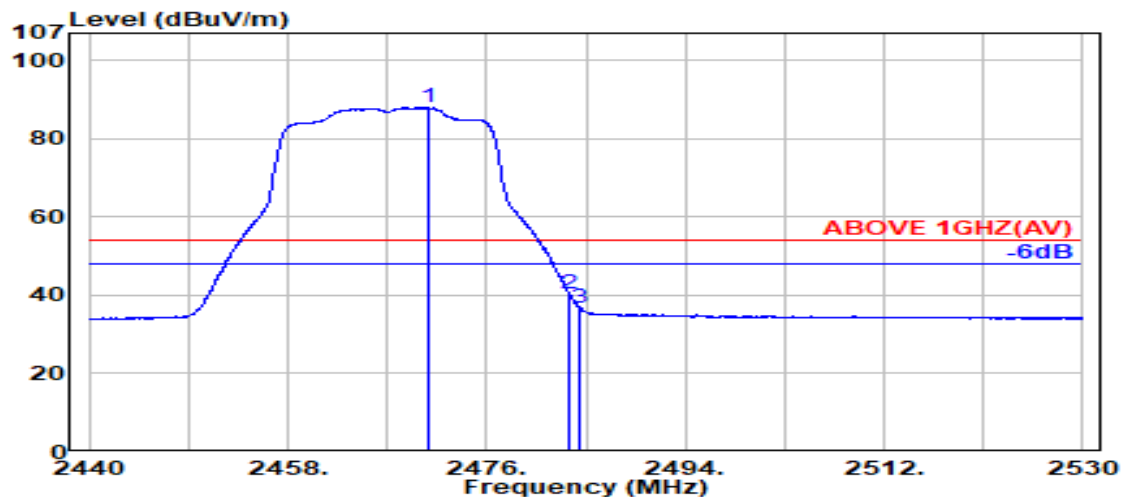

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.650	28.34	5.82	39.87	93.68	87.97	---	---	Average
2483.500	28.37	5.83	39.87	46.09	40.41	54.00	13.59	Average
2484.500	28.37	5.83	39.87	42.30	36.63	54.00	17.37	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
------	---------------	-----------	-------------

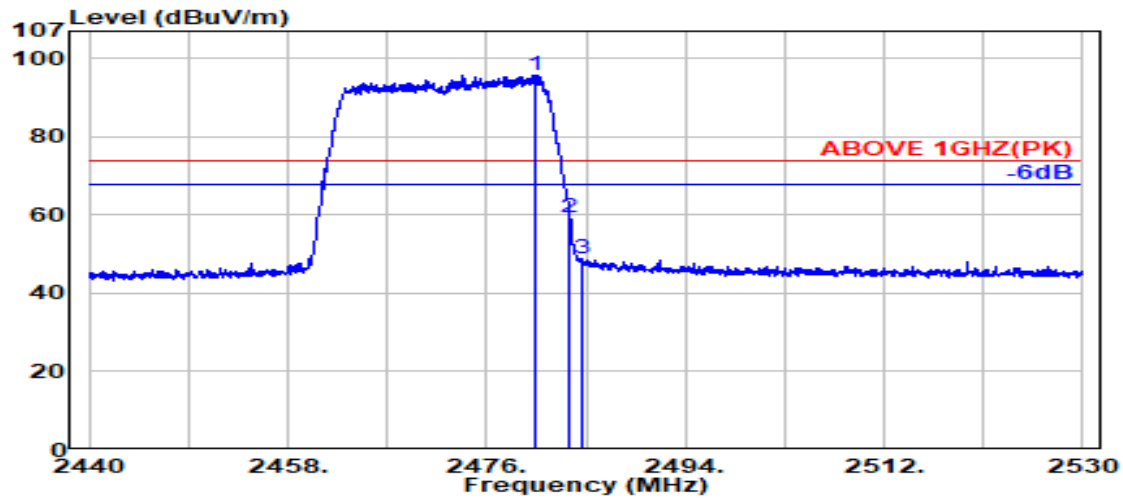

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.450	28.36	5.83	39.87	101.40	95.72	---	---	Peak
2483.500	28.37	5.83	39.87	64.93	59.25	74.00	14.75	Peak
2484.700	28.37	5.83	39.87	54.54	48.88	74.00	25.12	Peak

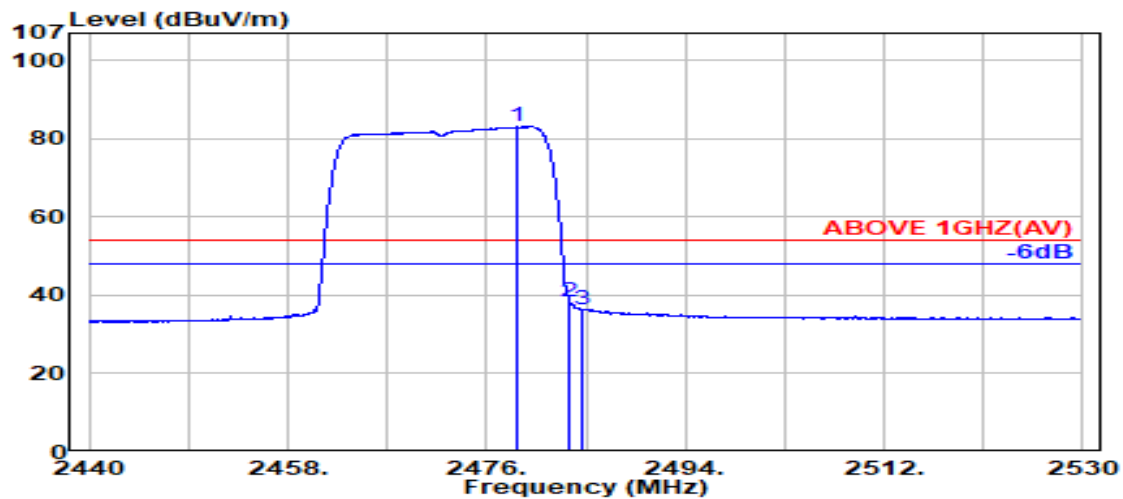

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.700	28.36	5.83	39.87	88.86	83.17	---	---	Average
2483.500	28.37	5.83	39.87	44.04	38.37	54.00	15.63	Average
2484.650	28.37	5.83	39.87	42.21	36.54	54.00	17.46	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
------	---------------	-----------	-------------

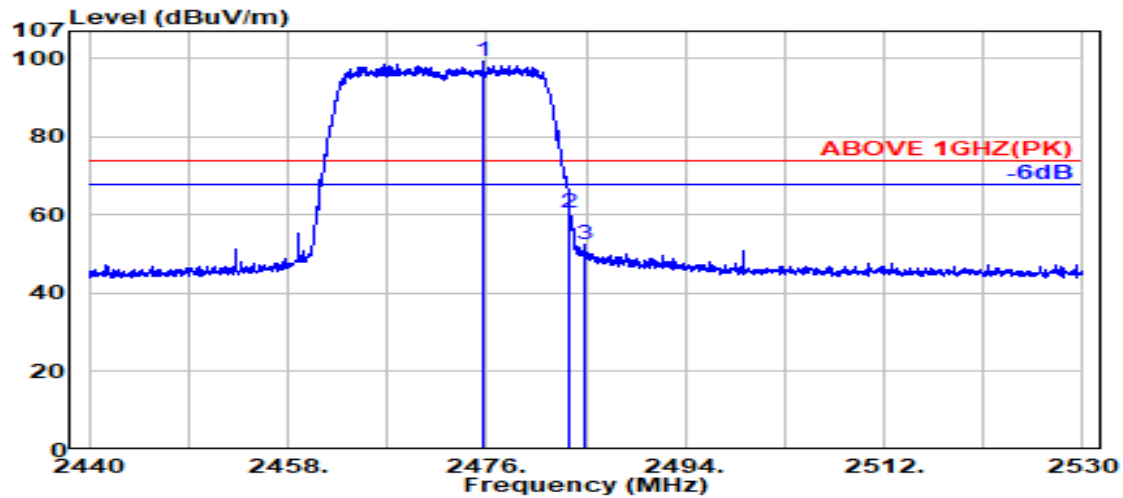

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.750	28.35	5.82	39.87	105.17	99.47	---	---	Peak
2483.500	28.37	5.83	39.87	66.28	60.61	74.00	13.39	Peak
2484.850	28.37	5.83	39.87	58.02	52.35	74.00	21.65	Peak

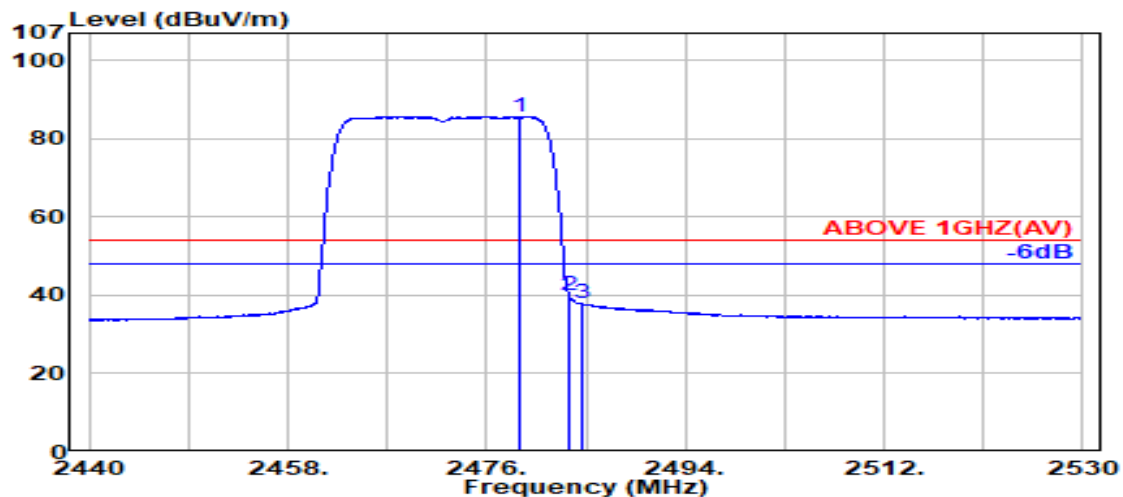

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.050	28.36	5.83	39.87	91.29	85.60	---	---	Average
2483.500	28.37	5.83	39.87	45.49	39.82	54.00	14.18	Average
2484.550	28.37	5.83	39.87	43.58	37.91	54.00	16.09	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

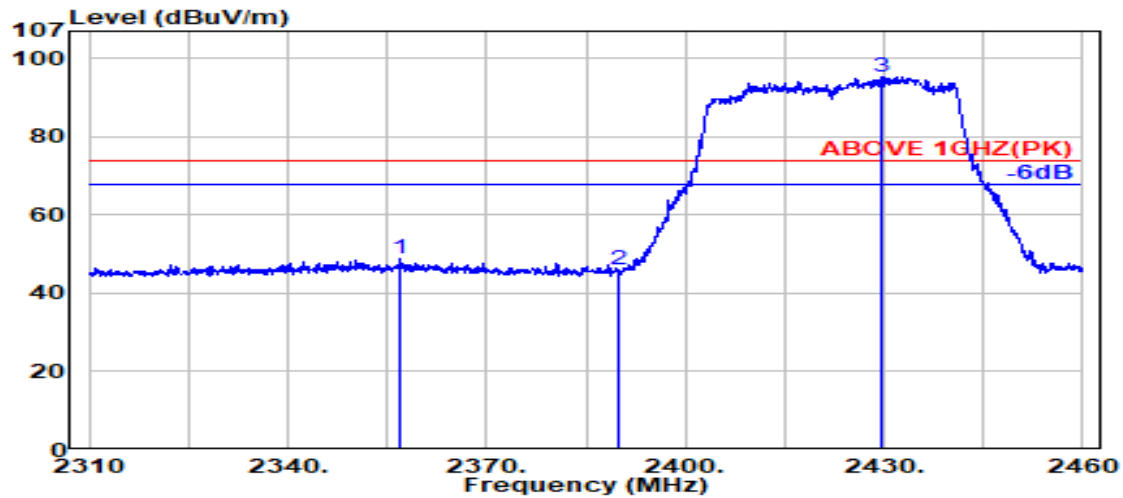

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2357.000	28.27	5.68	39.88	54.68	48.75	74.00	25.25	Peak
2390.000	28.14	5.72	39.88	52.05	46.03	74.00	27.97	Peak
@ 2429.600	28.22	5.77	39.88	101.34	95.45	---	---	Peak

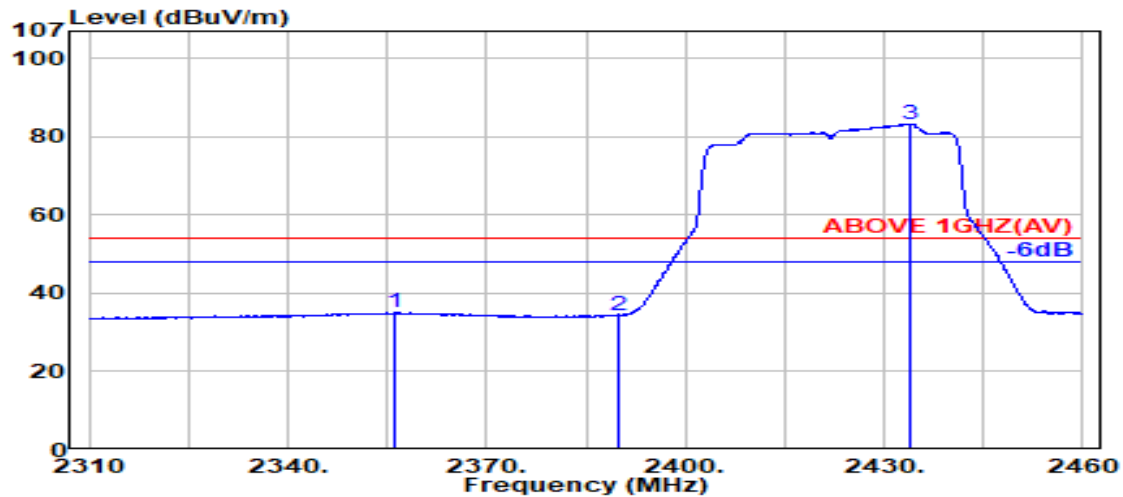

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2356.100	28.28	5.68	39.88	41.07	35.15	54.00	18.85	Average
2390.000	28.14	5.72	39.88	40.37	34.36	54.00	19.64	Average
@ 2433.800	28.24	5.77	39.87	89.09	83.22	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

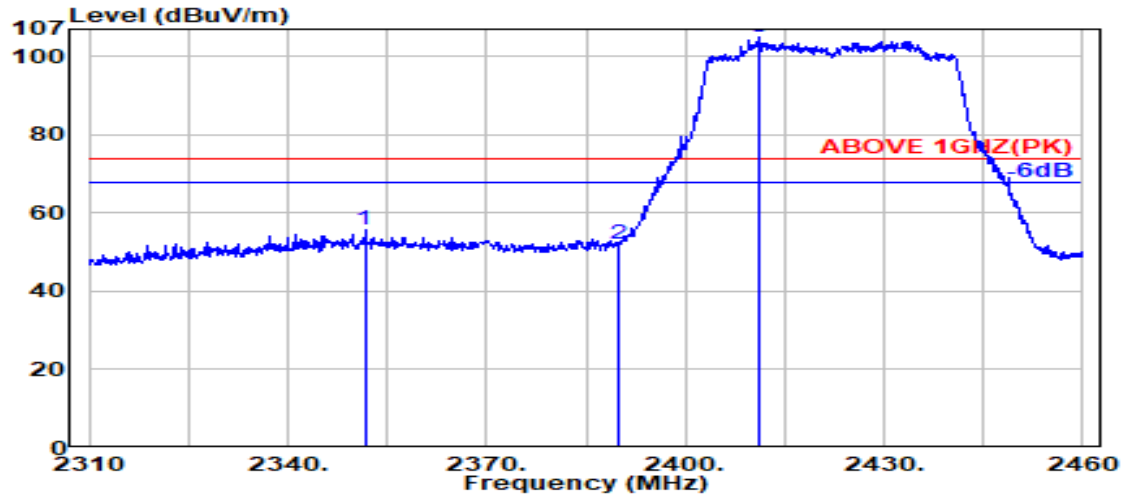

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2351.600	28.29	5.67	39.88	61.81	55.90	74.00	18.10	Peak
2390.000	28.14	5.72	39.88	58.19	52.17	74.00	21.83	Peak
@ 2411.300	28.15	5.75	39.88	110.85	104.87	---	---	Peak

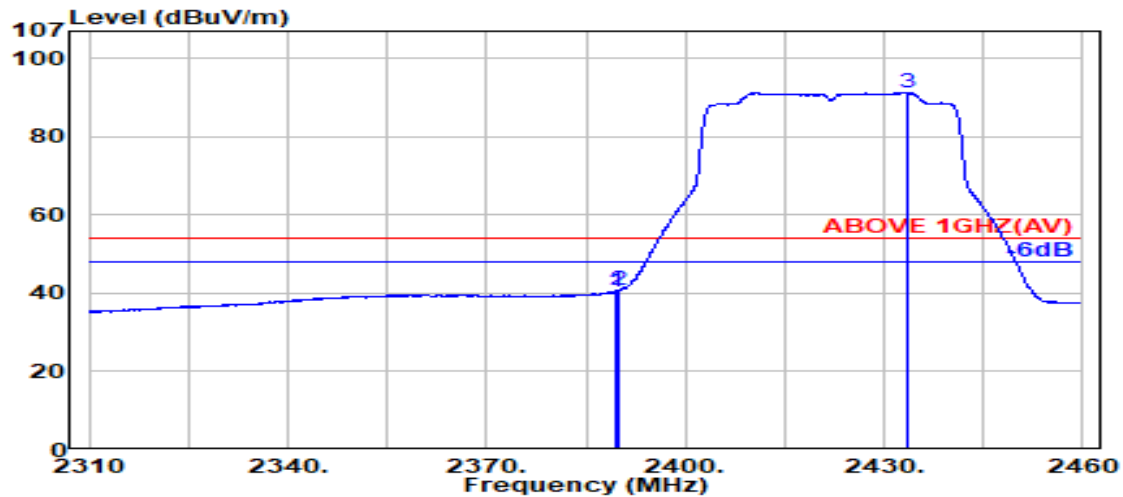

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	46.38	40.37	54.00	13.63	Average
2390.000	28.14	5.72	39.88	46.79	40.78	54.00	13.22	Average
@ 2433.500	28.23	5.77	39.87	97.18	91.31	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

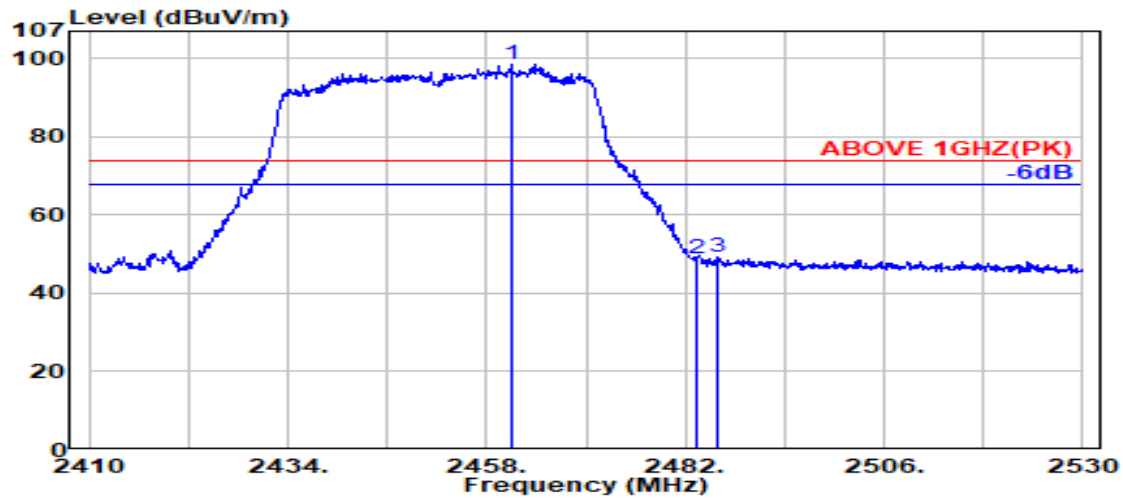

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.000	28.32	5.80	39.87	104.34	98.59	---	---	Peak
2483.500	28.37	5.83	39.87	54.42	48.75	74.00	25.25	Peak
2486.000	28.37	5.83	39.87	55.12	49.45	74.00	24.55	Peak

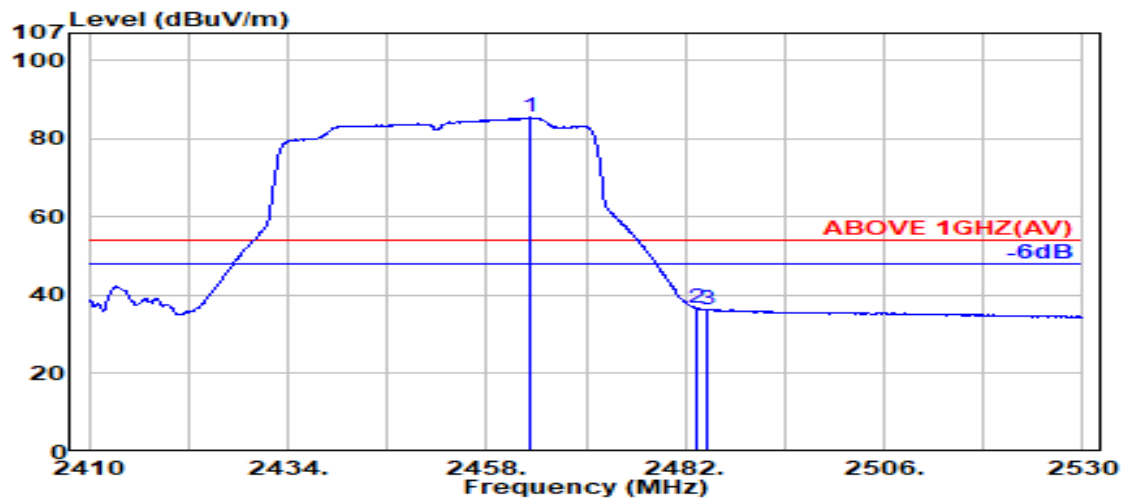

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.300	28.33	5.81	39.87	91.15	85.41	---	---	Average
2483.500	28.37	5.83	39.87	42.24	36.57	54.00	17.43	Average
2484.600	28.37	5.83	39.87	42.03	36.36	54.00	17.64	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

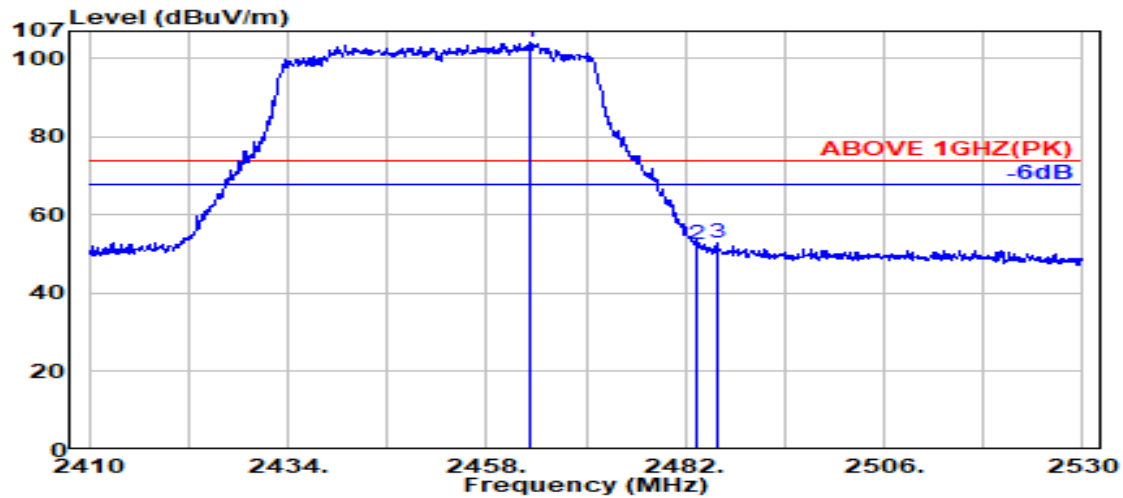

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.300	28.33	5.81	39.87	110.04	104.30	---	---	Peak
2483.500	28.37	5.83	39.87	57.99	52.32	74.00	21.68	Peak
2485.900	28.37	5.83	39.87	58.51	52.84	74.00	21.16	Peak

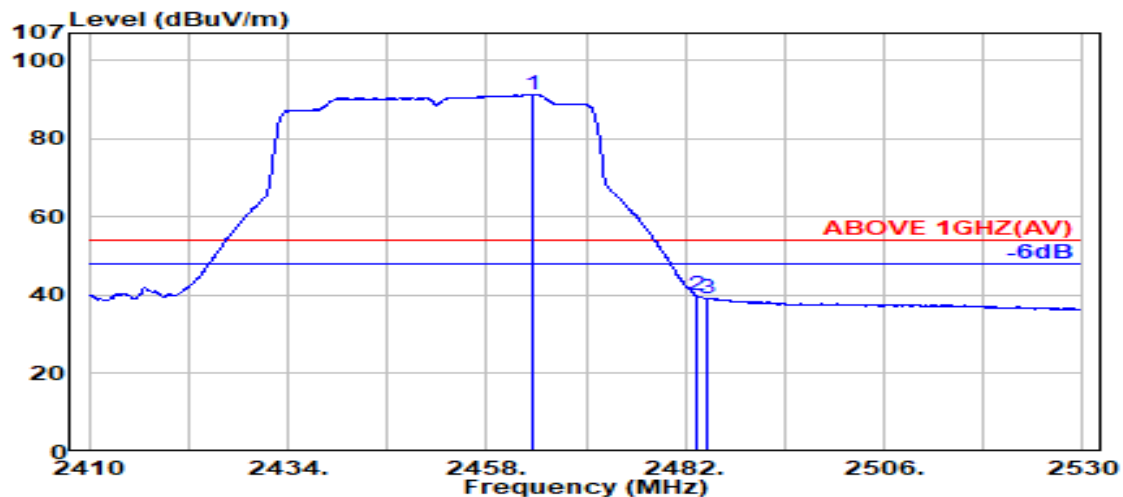

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.600	28.33	5.81	39.87	97.06	91.32	---	---	Average
2483.500	28.37	5.83	39.87	45.48	39.81	54.00	14.19	Average
2484.500	28.37	5.83	39.87	45.00	39.33	54.00	14.67	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

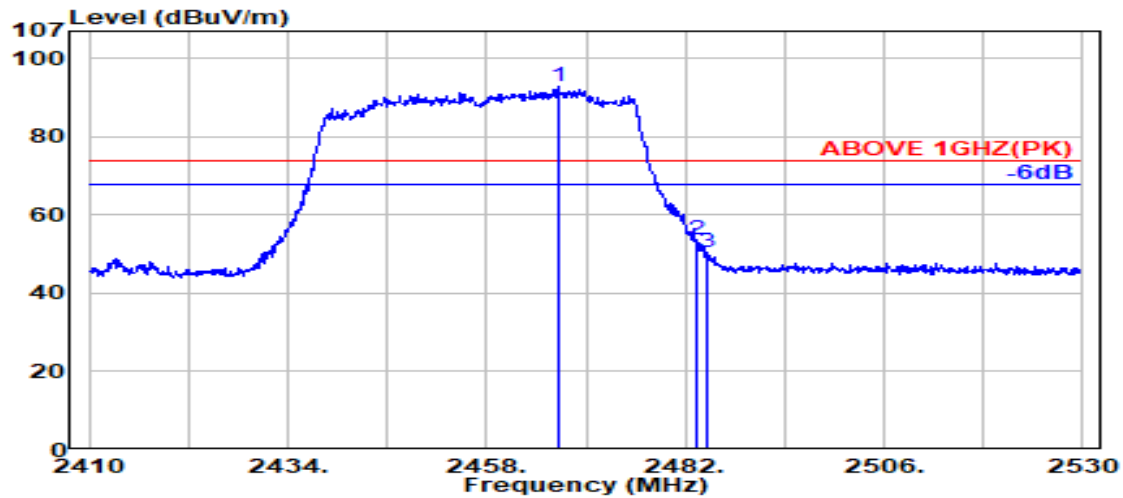

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2466.600	28.33	5.81	39.87	98.42	92.69	---	---	Peak
	2483.500	28.37	5.83	39.87	59.32	53.64	74.00	20.36	Peak
	2484.500	28.37	5.83	39.87	56.07	50.40	74.00	23.60	Peak

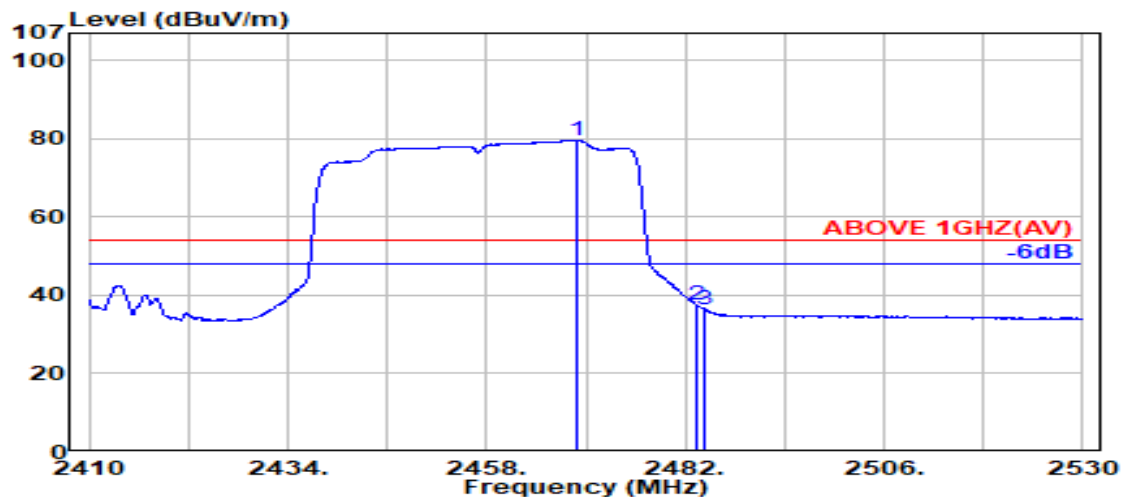

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2468.800	28.34	5.81	39.87	85.30	79.58	---	---	Average
	2483.500	28.37	5.83	39.87	43.03	37.36	54.00	16.64	Average
	2484.400	28.37	5.83	39.87	41.95	36.28	54.00	17.72	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

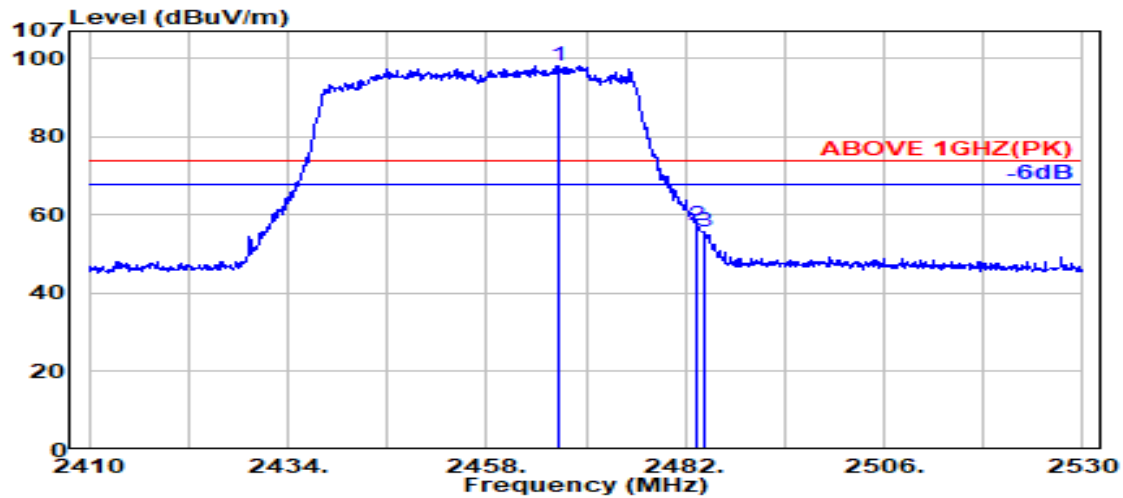

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.800	28.33	5.81	39.87	103.88	98.15	---	---	Peak
2483.500	28.37	5.83	39.87	62.84	57.17	74.00	16.83	Peak
2484.400	28.37	5.83	39.87	61.29	55.62	74.00	18.38	Peak

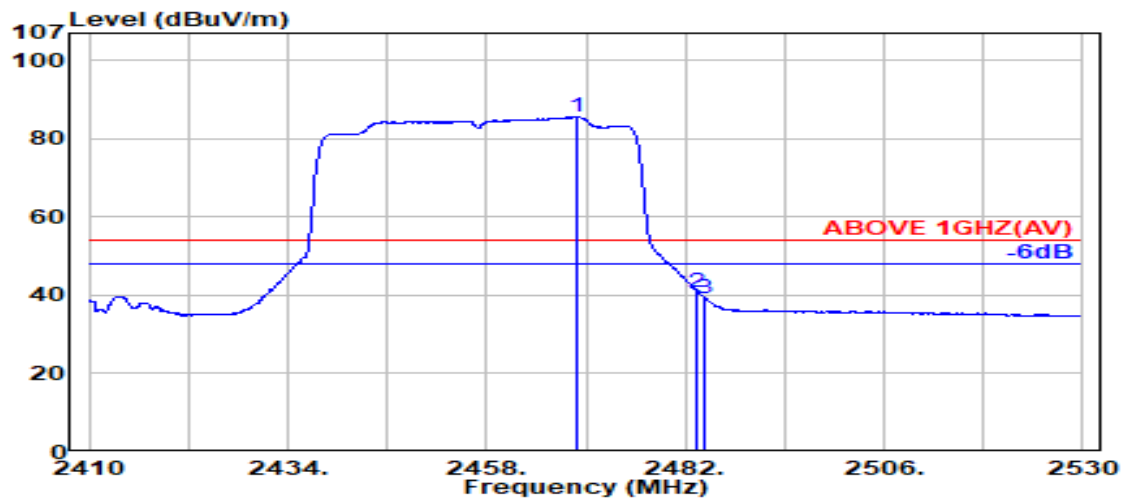

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.900	28.34	5.81	39.87	91.30	85.58	---	---	Average
2483.500	28.37	5.83	39.87	46.50	40.83	54.00	13.17	Average
2484.400	28.37	5.83	39.87	44.85	39.18	54.00	14.82	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

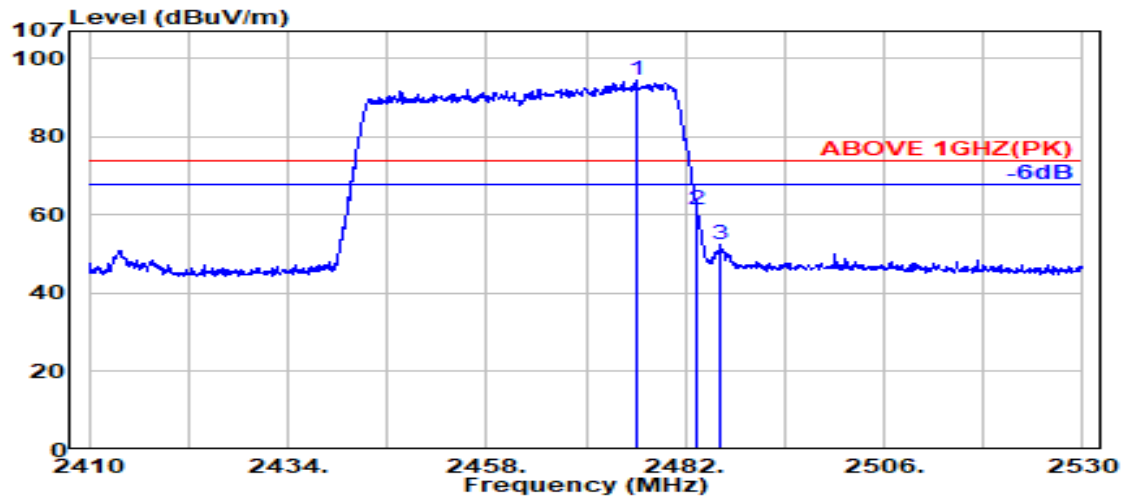

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2476.100	28.35	5.82	39.87	100.30	94.60	---	---	Peak
	2483.500	28.37	5.83	39.87	67.18	61.51	74.00	12.49	Peak
	2486.200	28.37	5.83	39.87	58.04	52.37	74.00	21.63	Peak

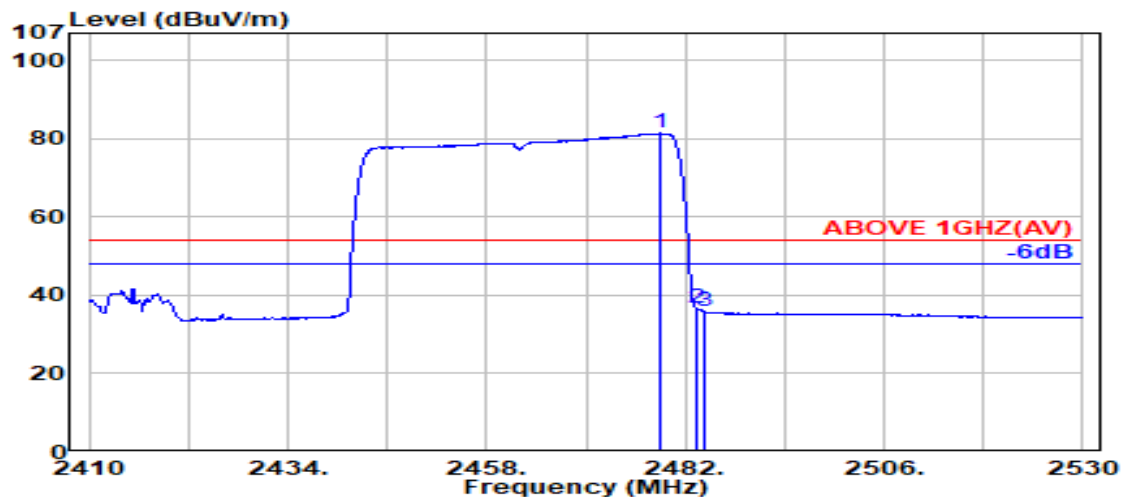

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2479.100	28.36	5.83	39.87	87.12	81.43	---	---	Average
	2483.500	28.37	5.83	39.87	42.27	36.60	54.00	17.40	Average
	2484.400	28.37	5.83	39.87	41.49	35.82	54.00	18.18	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

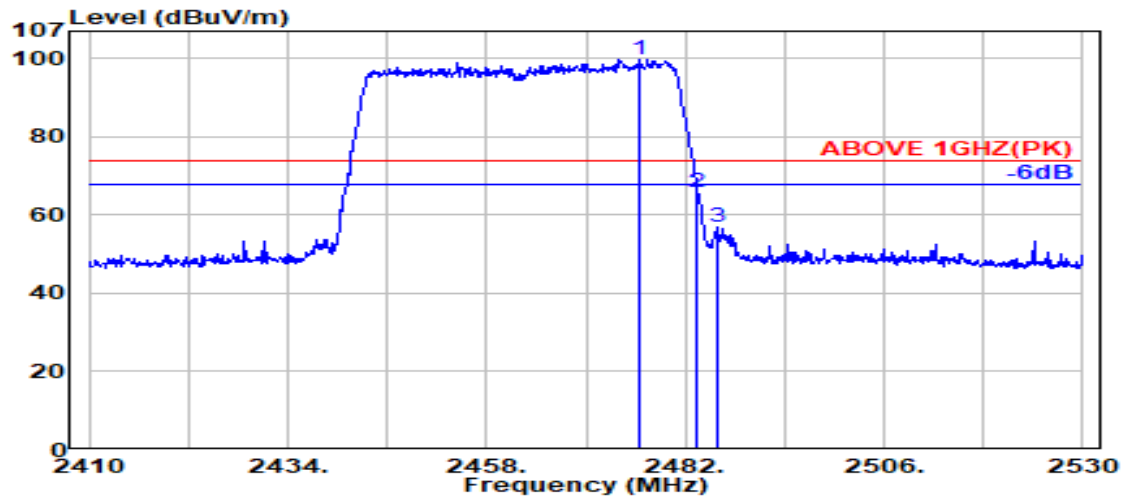

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.500	28.35	5.82	39.87	105.63	99.93	---	---	Peak
2483.500	28.37	5.83	39.87	71.64	65.97	74.00	8.03	Peak
2485.800	28.37	5.83	39.87	62.63	56.97	74.00	17.03	Peak

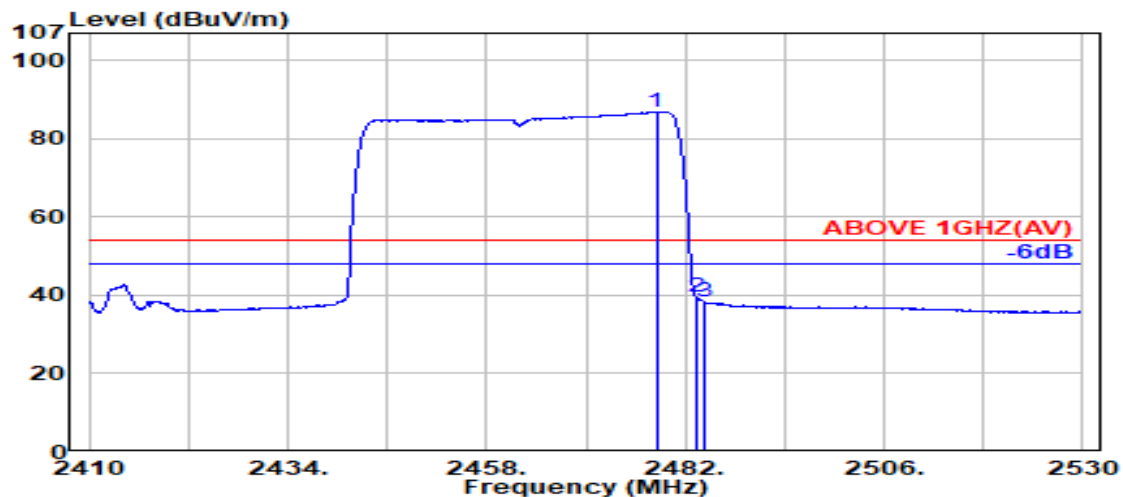

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.500	28.36	5.83	39.87	92.70	87.01	---	---	Average
2483.500	28.37	5.83	39.87	45.05	39.38	54.00	14.62	Average
2484.400	28.37	5.83	39.87	44.02	38.35	54.00	15.65	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412MHz
------	----------------	-----------	------------

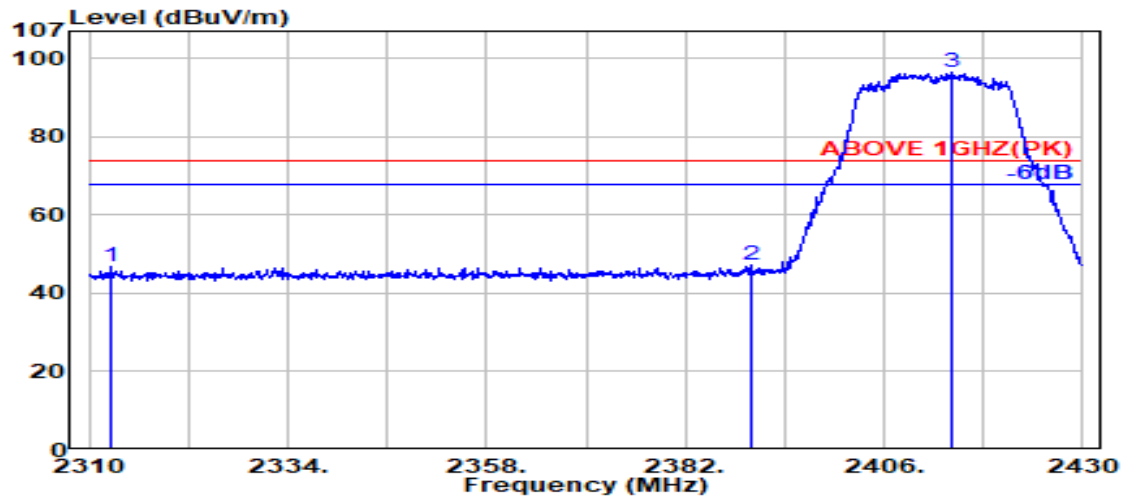

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2312.600	28.08	5.63	39.88	53.17	46.99	74.00	27.01	Peak
2390.000	28.14	5.72	39.88	53.26	47.25	74.00	26.75	Peak
@ 2414.100	28.16	5.75	39.88	102.35	96.38	---	---	Peak

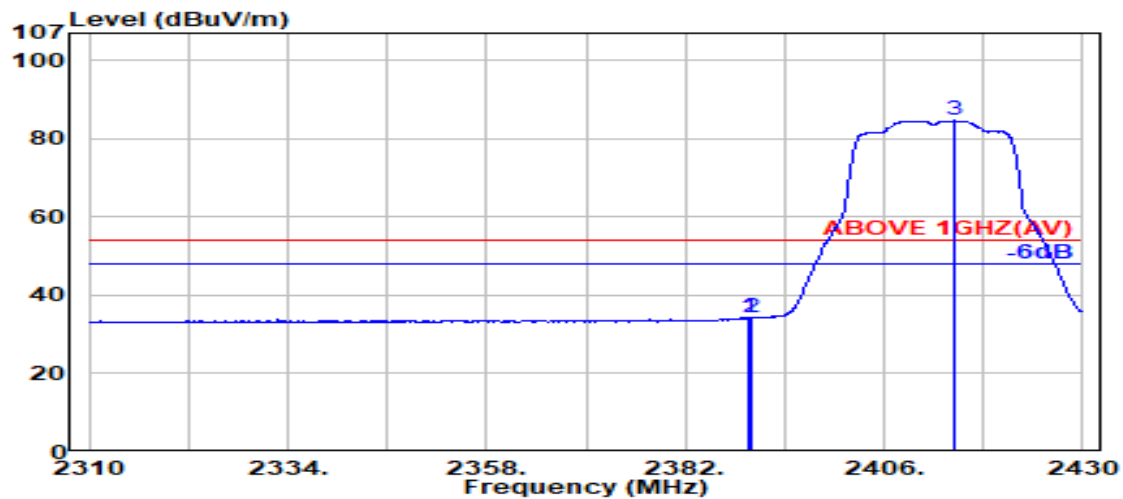

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	40.44	34.43	54.00	19.57	Average
2390.000	28.14	5.72	39.88	40.21	34.20	54.00	19.80	Average
@ 2414.600	28.16	5.75	39.88	90.56	84.59	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412MHz
------	----------------	-----------	------------

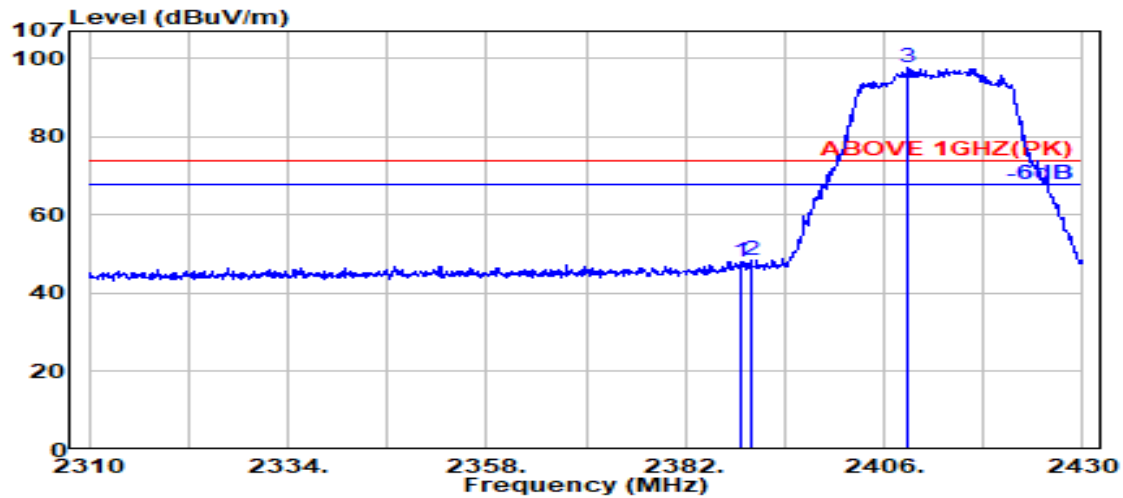

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.600	28.15	5.72	39.88	53.94	47.93	74.00	26.07	Peak
2390.000	28.14	5.72	39.88	54.36	48.34	74.00	25.66	Peak
@ 2408.900	28.14	5.74	39.88	103.59	97.59	---	---	Peak

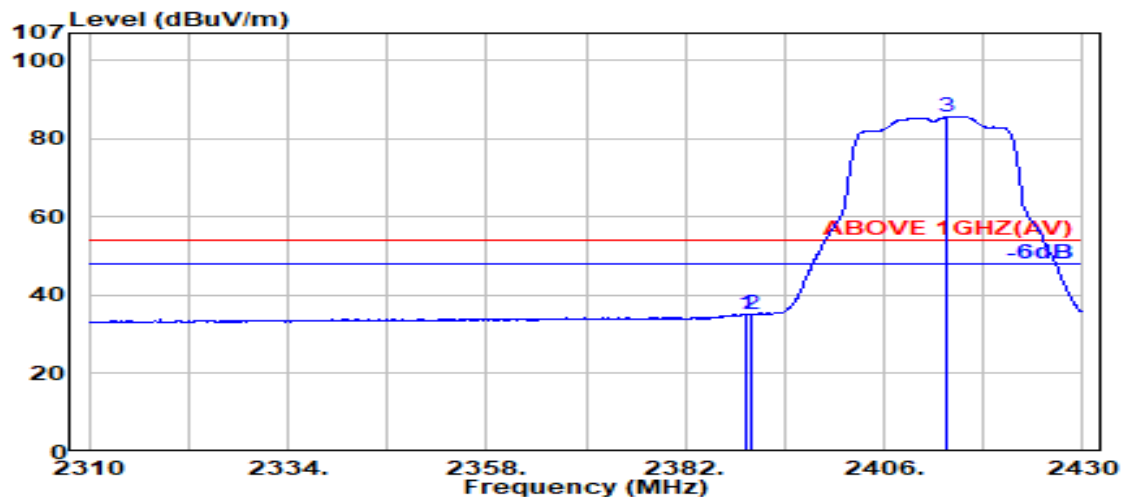

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	28.14	5.72	39.88	41.23	35.21	54.00	18.79	Average
2390.000	28.14	5.72	39.88	41.19	35.17	54.00	18.83	Average
@ 2413.600	28.15	5.75	39.88	91.58	85.61	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2462MHz
------	----------------	-----------	------------

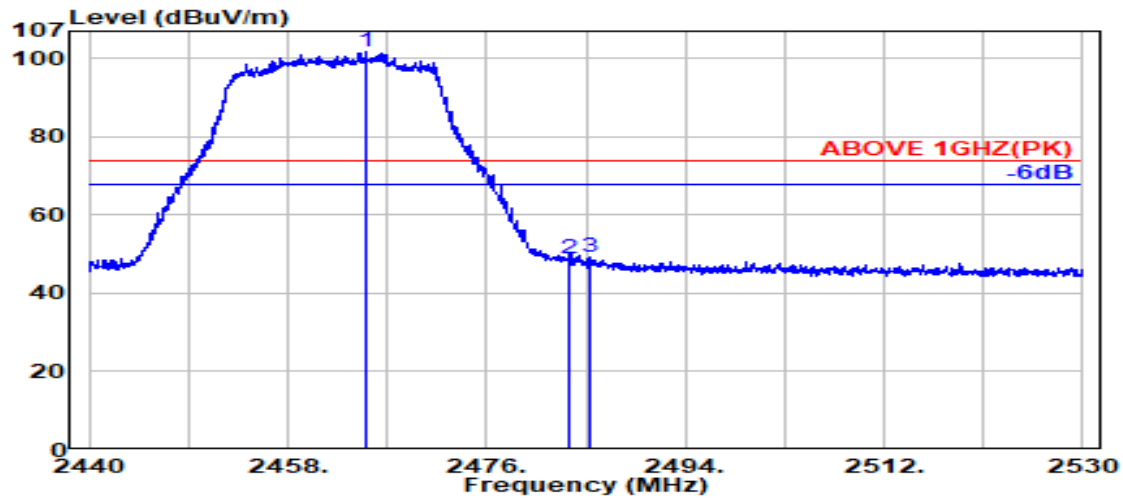

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.100	28.33	5.81	39.87	107.46	101.73	---	---	Peak
2483.500	28.37	5.83	39.87	54.33	48.66	74.00	25.34	Peak
2485.250	28.37	5.83	39.87	54.79	49.12	74.00	24.88	Peak

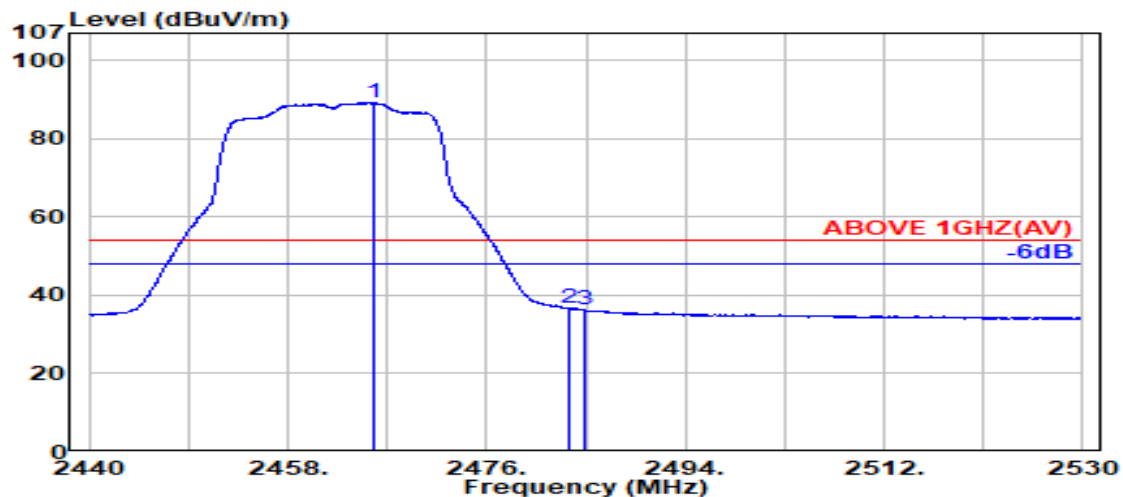

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.850	28.33	5.81	39.87	94.95	89.22	---	---	Average
2483.500	28.37	5.83	39.87	42.27	36.60	54.00	17.40	Average
2484.850	28.37	5.83	39.87	42.03	36.36	54.00	17.64	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2462MHz
------	----------------	-----------	------------

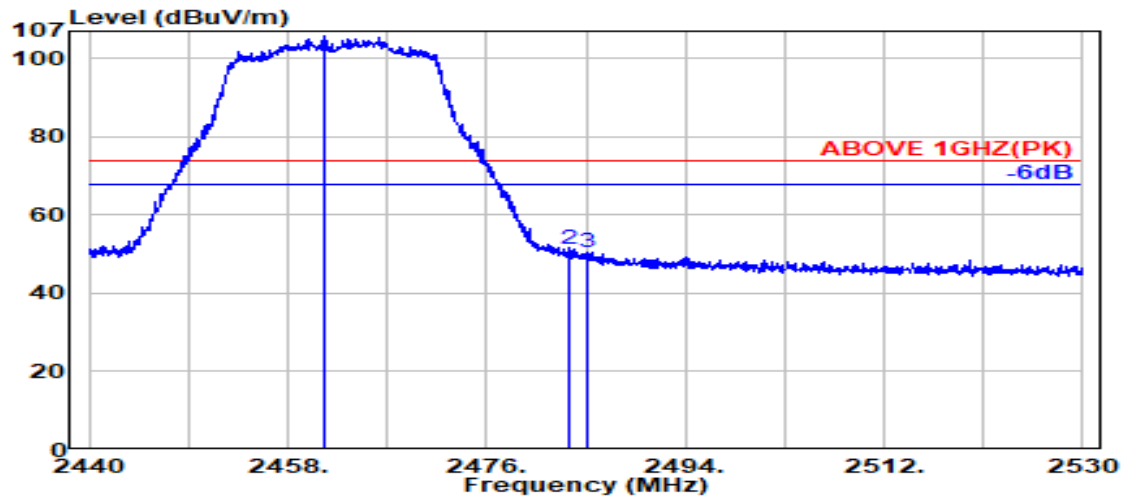

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.400	28.32	5.81	39.87	111.40	105.66	---	---	Peak
2483.500	28.37	5.83	39.87	56.88	51.20	74.00	22.80	Peak
2485.200	28.37	5.83	39.87	56.25	50.58	74.00	23.42	Peak

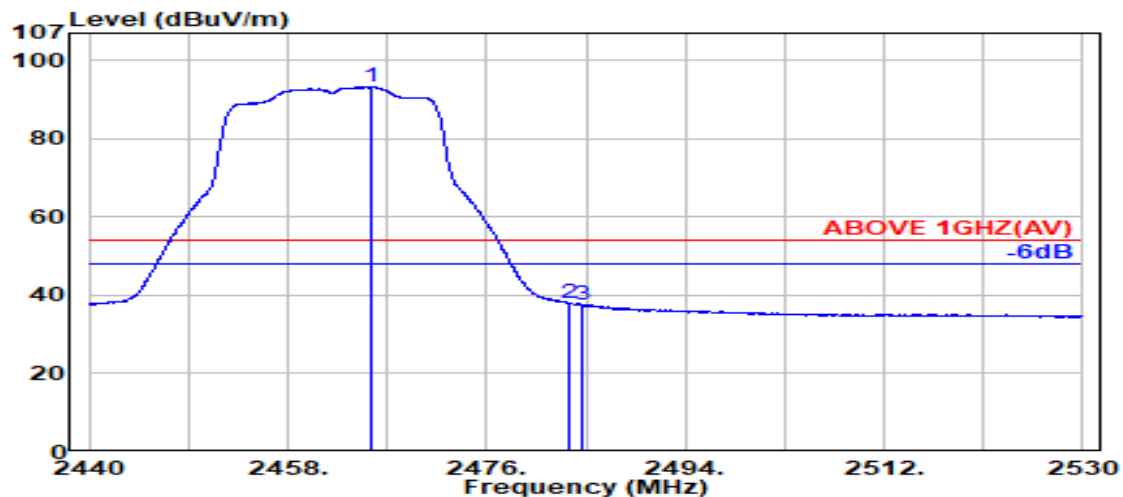

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.550	28.33	5.81	39.87	99.02	93.29	---	---	Average
2483.500	28.37	5.83	39.87	43.66	37.99	54.00	16.01	Average
2484.600	28.37	5.83	39.87	43.27	37.60	54.00	16.40	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2467MHz
------	----------------	-----------	------------

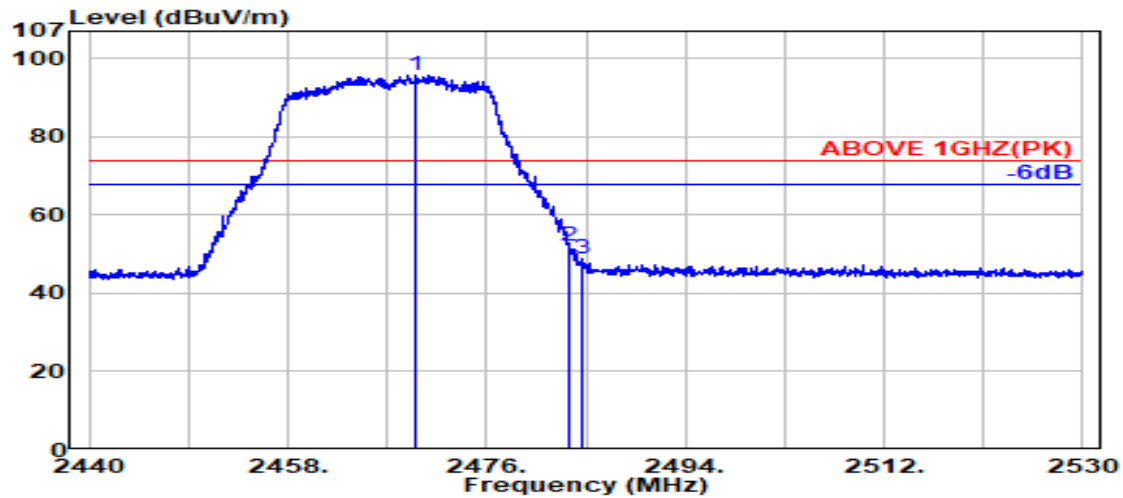

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.650	28.34	5.81	39.87	101.48	95.76	---	---	Peak
2483.500	28.37	5.83	39.87	57.96	52.29	74.00	21.71	Peak
2484.750	28.37	5.83	39.87	54.34	48.67	74.00	25.33	Peak

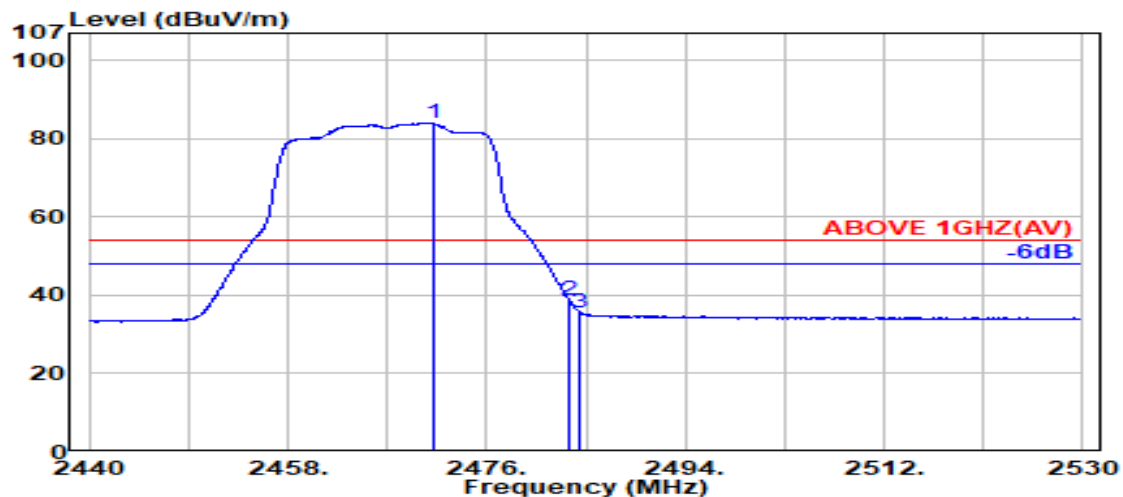

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.150	28.34	5.82	39.87	89.72	84.01	---	---	Average
2483.500	28.37	5.83	39.87	44.24	38.57	54.00	15.43	Average
2484.500	28.37	5.83	39.87	41.23	35.56	54.00	18.44	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2467MHz
------	----------------	-----------	------------

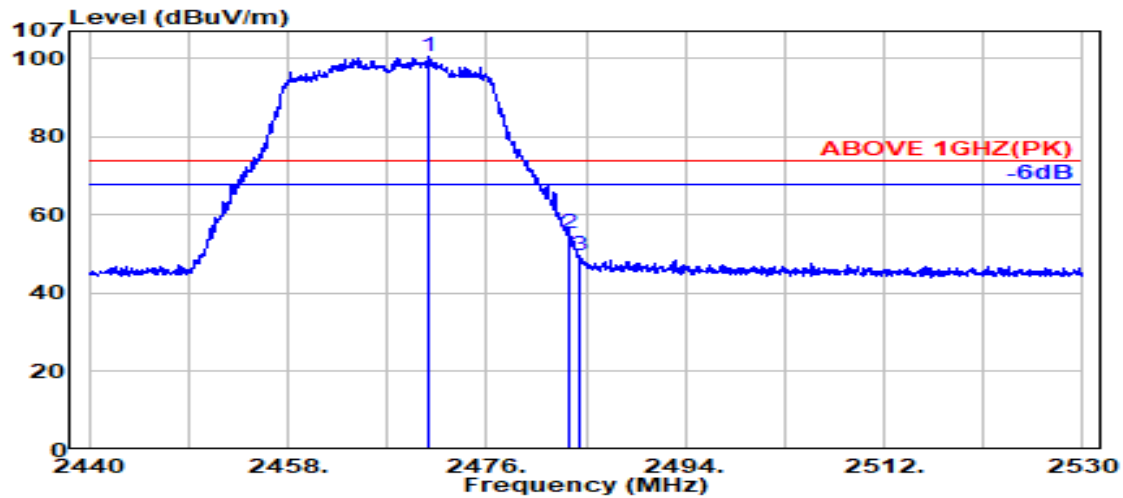

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.850	28.34	5.82	39.87	106.23	100.52	---	---	Peak
2483.500	28.37	5.83	39.87	60.97	55.29	74.00	18.71	Peak
2484.500	28.37	5.83	39.87	55.49	49.82	74.00	24.18	Peak

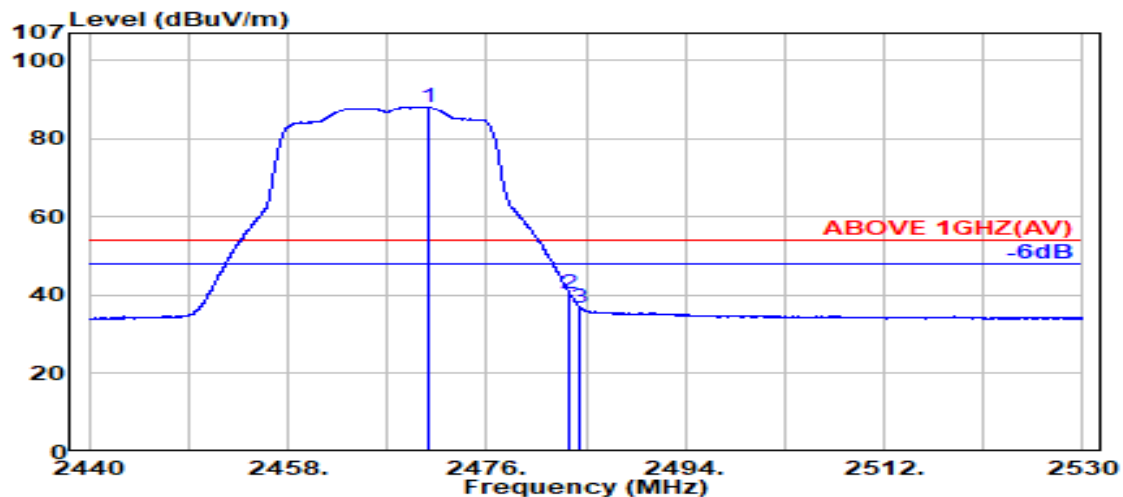

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.850	28.34	5.82	39.87	93.77	88.06	---	---	Average
2483.500	28.37	5.83	39.87	46.12	40.45	54.00	13.55	Average
2484.500	28.37	5.83	39.87	42.50	36.83	54.00	17.17	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
------	----------------	-----------	------------

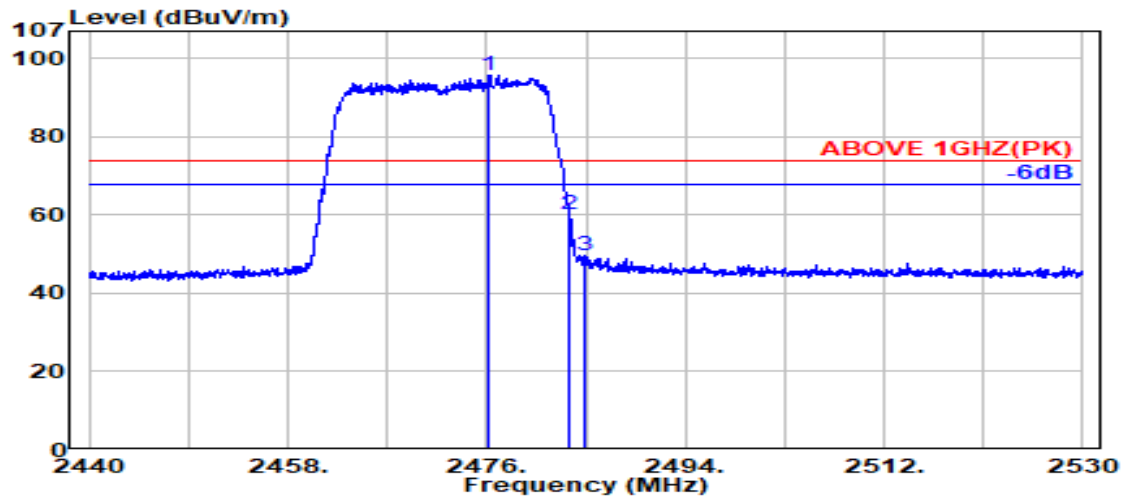

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2476.250	28.35	5.82	39.87	101.42	95.72	---	---	Peak
	2483.500	28.37	5.83	39.87	65.71	60.03	74.00	13.97	Peak
	2484.900	28.37	5.83	39.87	55.19	49.52	74.00	24.48	Peak

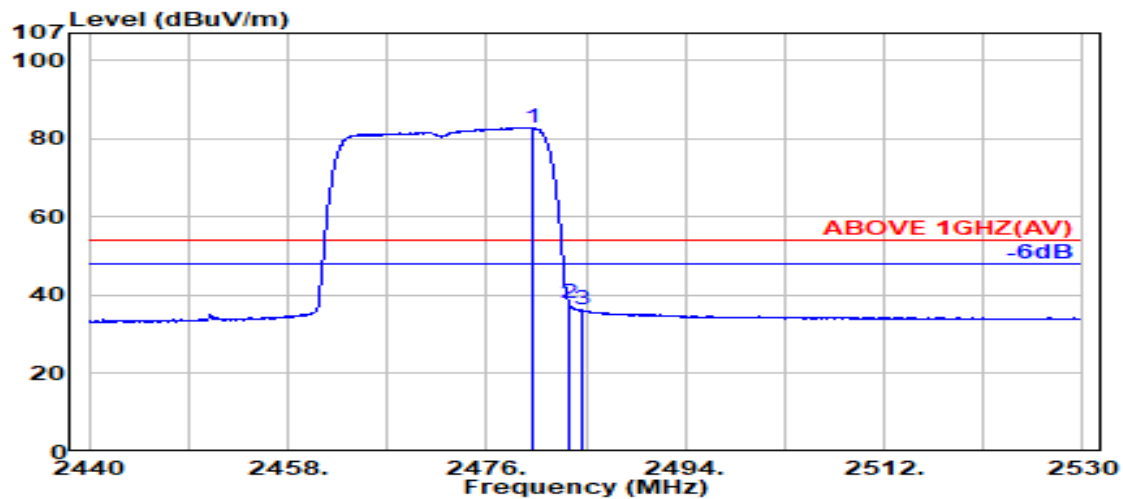

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.150	28.36	5.83	39.87	88.52	82.84	---	---	Average
	2483.500	28.37	5.83	39.87	43.46	37.79	54.00	16.21	Average
	2484.550	28.37	5.83	39.87	41.87	36.20	54.00	17.80	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
------	----------------	-----------	------------

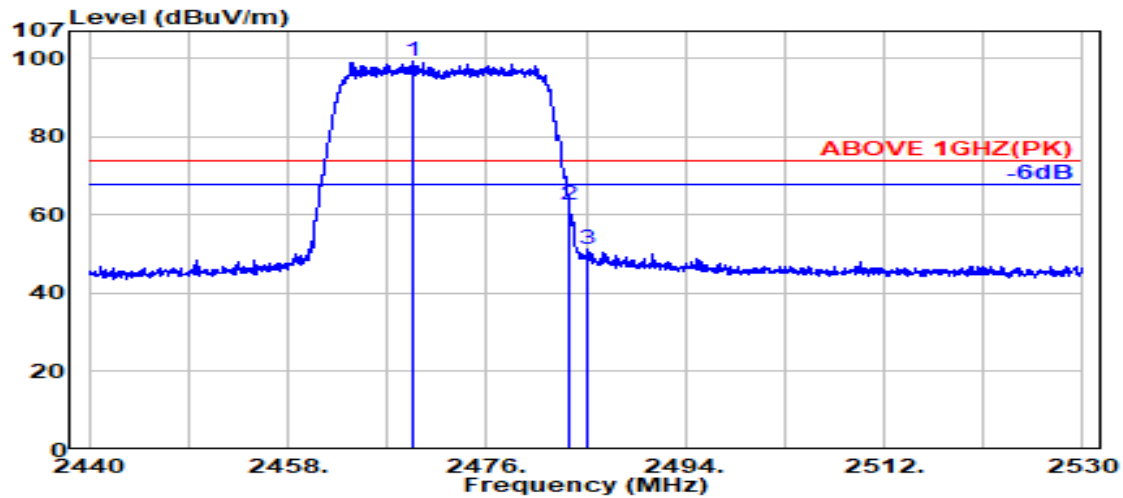

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.250	28.34	5.81	39.87	104.86	99.14	---	---	Peak
2483.500	28.37	5.83	39.87	68.38	62.71	74.00	11.29	Peak
2485.150	28.37	5.83	39.87	57.09	51.42	74.00	22.58	Peak

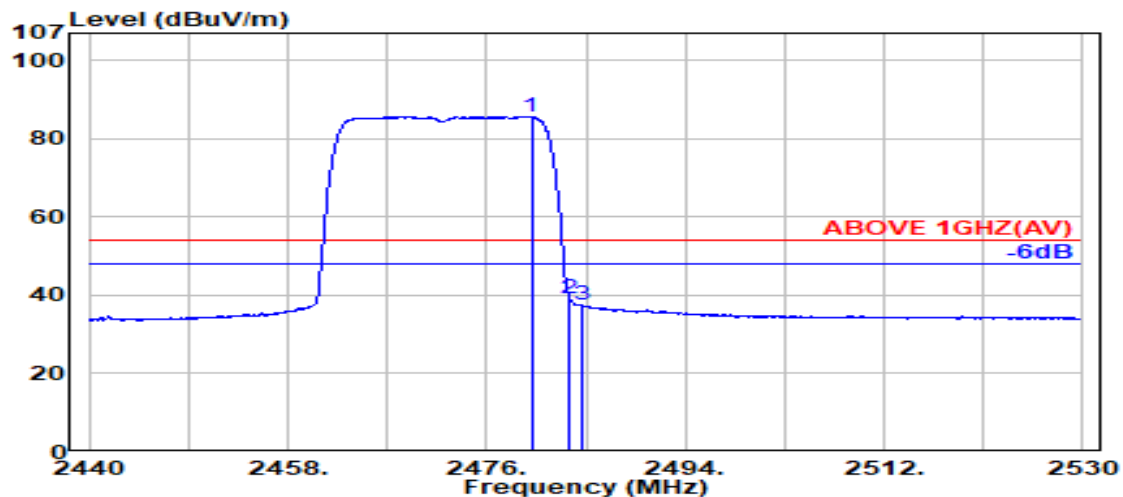

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.050	28.36	5.83	39.87	91.39	85.70	---	---	Average
2483.500	28.37	5.83	39.87	44.86	39.18	54.00	14.82	Average
2484.600	28.37	5.83	39.87	43.21	37.54	54.00	16.46	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2422MHz
------	----------------	-----------	------------

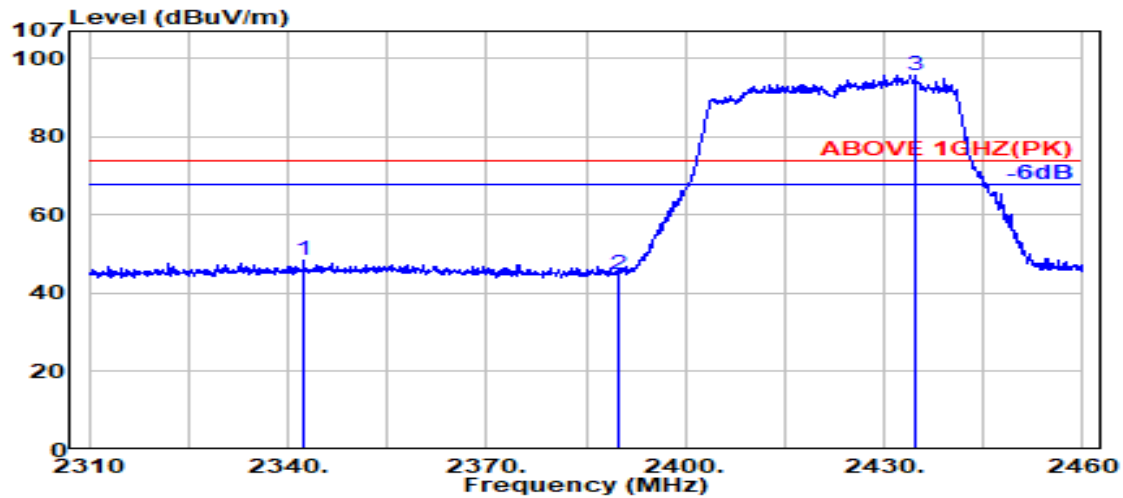

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2342.300	28.25	5.66	39.88	54.38	48.41	74.00	25.59	Peak
2390.000	28.14	5.72	39.88	50.82	44.80	74.00	29.20	Peak
@ 2434.700	28.24	5.77	39.87	101.55	95.69	---	---	Peak

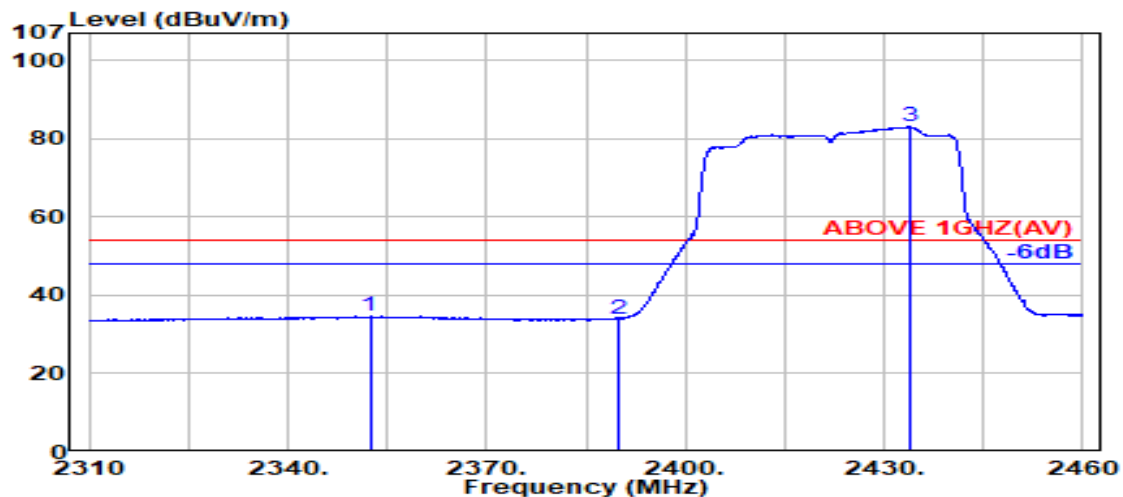

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2352.400	28.29	5.68	39.88	40.51	34.59	54.00	19.41	Average
2390.000	28.14	5.72	39.88	40.11	34.09	54.00	19.91	Average
@ 2434.000	28.24	5.77	39.87	89.00	83.14	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2422MHz
------	----------------	-----------	------------

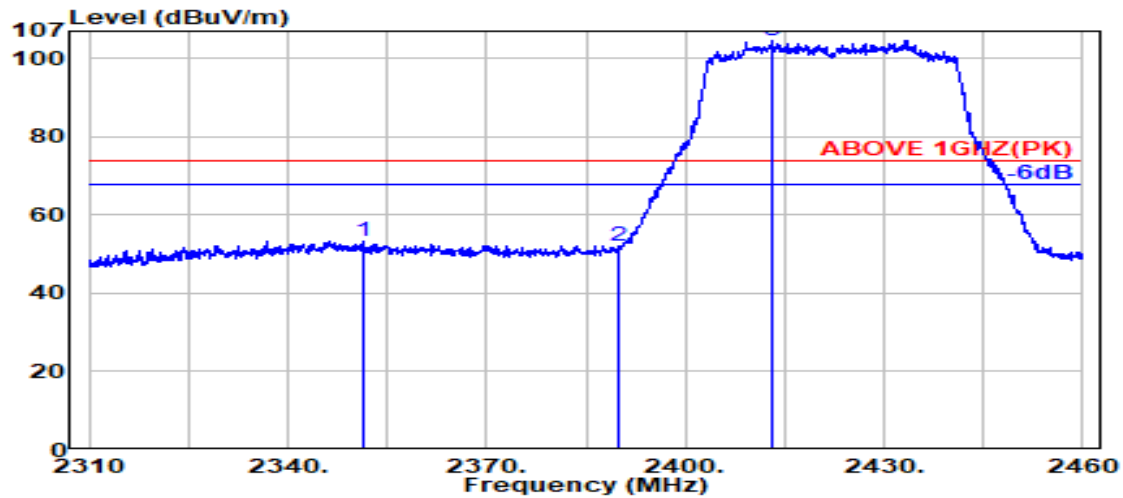

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2351.300	28.29	5.67	39.88	59.10	53.18	74.00	20.82	Peak
2390.000	28.14	5.72	39.88	58.25	52.24	74.00	21.76	Peak
@ 2413.100	28.15	5.75	39.88	110.51	104.54	---	---	Peak

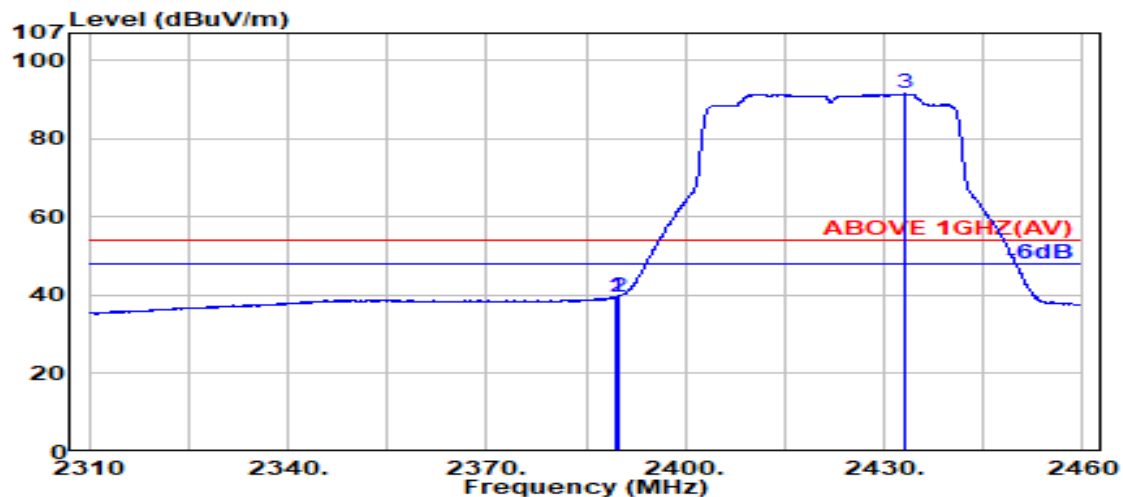

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	45.64	39.62	54.00	14.38	Average
2390.000	28.14	5.72	39.88	45.71	39.69	54.00	14.31	Average
@ 2433.300	28.23	5.77	39.87	97.38	91.51	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2452MHz
------	----------------	-----------	------------

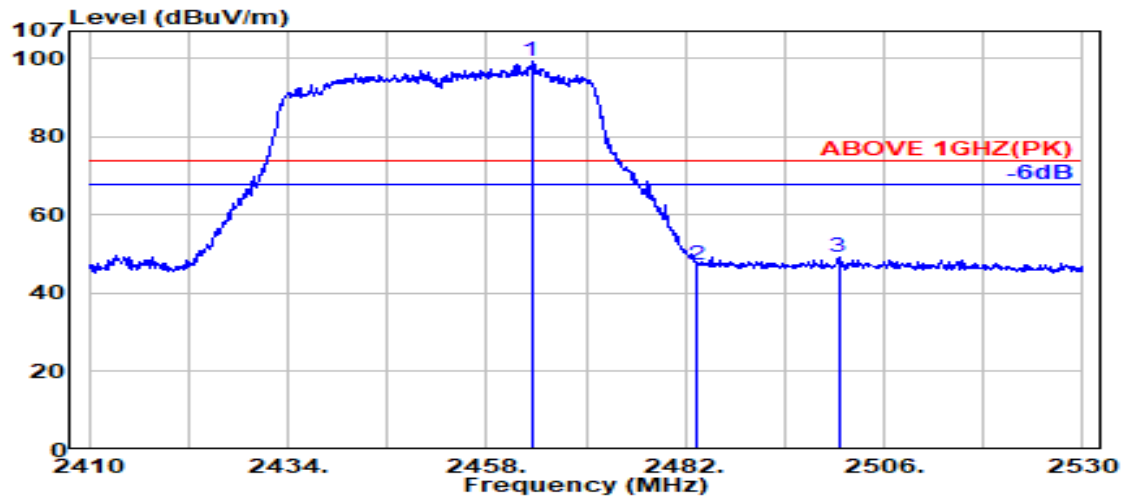

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.400	28.33	5.81	39.87	104.96	99.23	---	---	Peak
2483.500	28.37	5.83	39.87	52.87	47.20	74.00	26.80	Peak
2500.500	28.40	5.85	39.87	54.97	49.35	74.00	24.65	Peak

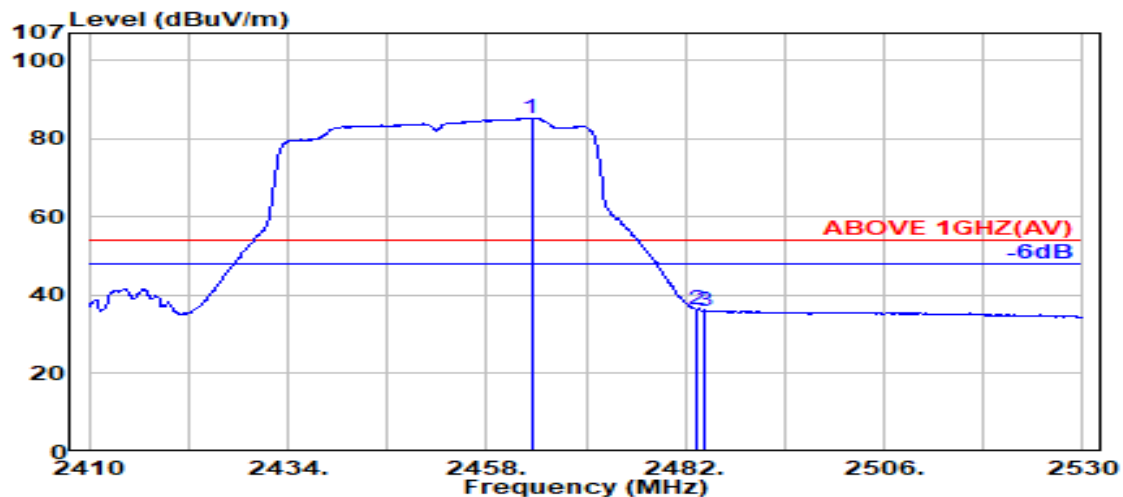

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.400	28.33	5.81	39.87	90.98	85.25	---	---	Average
2483.500	28.37	5.83	39.87	41.95	36.28	54.00	17.72	Average
2484.400	28.37	5.83	39.87	41.79	36.12	54.00	17.88	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2452MHz
------	----------------	-----------	------------

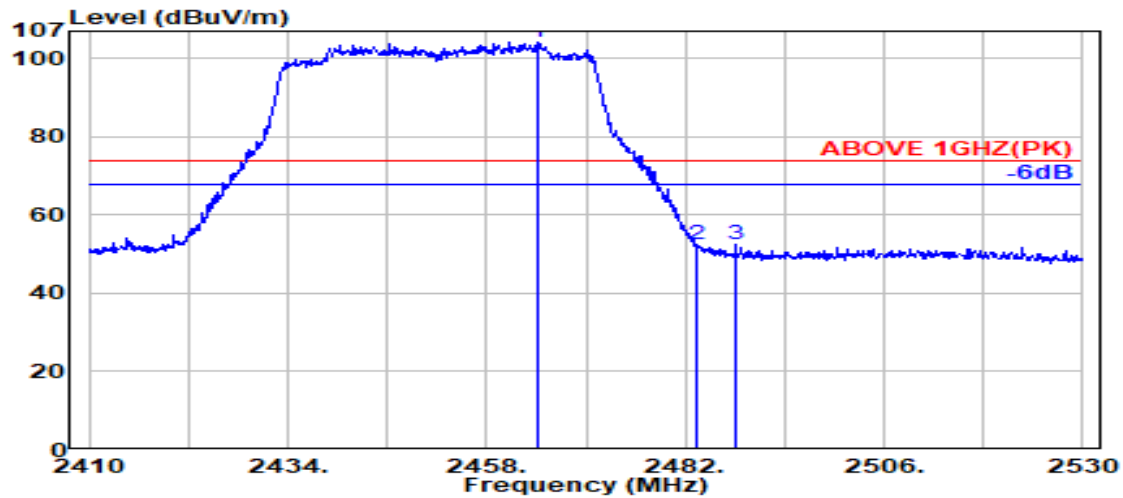

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.100	28.33	5.81	39.87	109.88	104.14	---	---	Peak
2483.500	28.37	5.83	39.87	57.98	52.31	74.00	21.69	Peak
2488.100	28.38	5.84	39.87	58.16	52.50	74.00	21.50	Peak

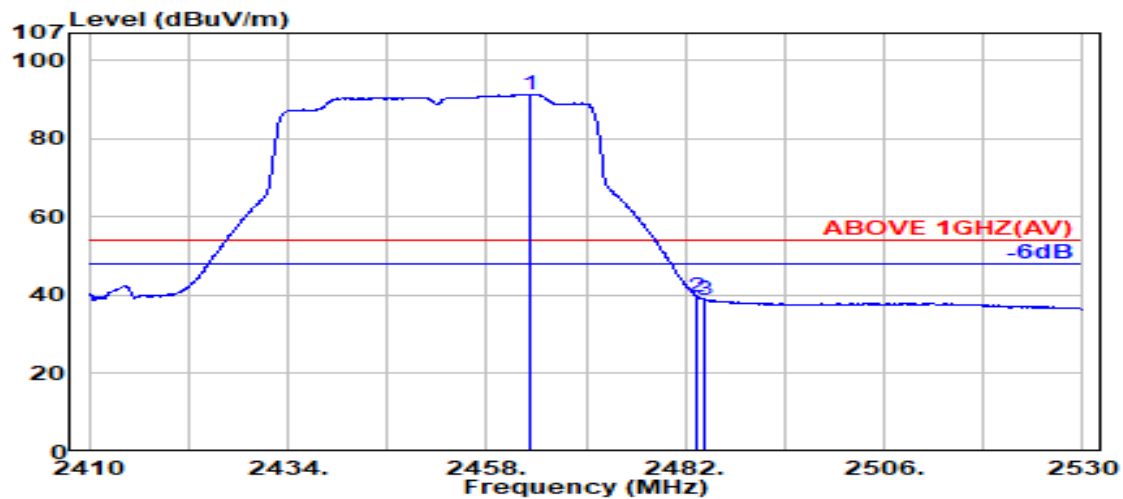

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.100	28.33	5.81	39.87	97.15	91.41	---	---	Average
2483.500	28.37	5.83	39.87	45.24	39.57	54.00	14.43	Average
2484.400	28.37	5.83	39.87	44.51	38.84	54.00	15.16	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2457MHz
------	----------------	-----------	------------

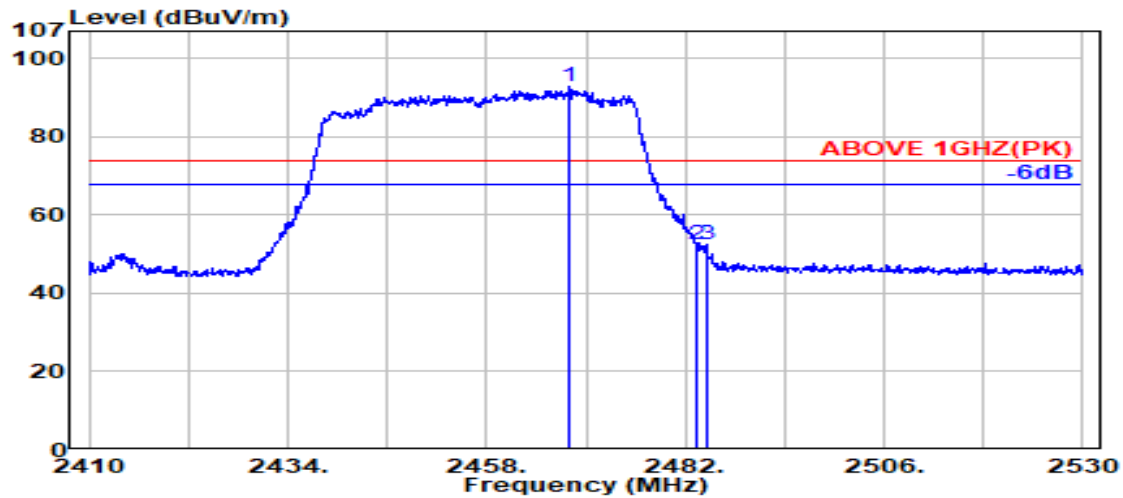

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2467.900	28.34	5.81	39.87	98.40	92.67	---	---	Peak
	2483.500	28.37	5.83	39.87	58.37	52.69	74.00	21.31	Peak
	2484.500	28.37	5.83	39.87	58.31	52.64	74.00	21.36	Peak

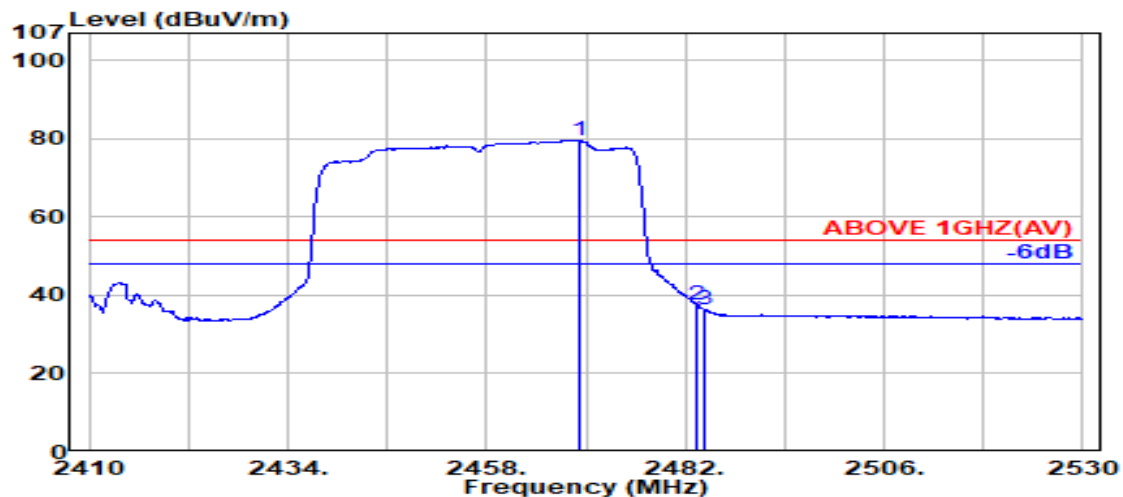

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2469.100	28.34	5.81	39.87	85.37	79.65	---	---	Average
	2483.500	28.37	5.83	39.87	43.30	37.62	54.00	16.38	Average
	2484.400	28.37	5.83	39.87	41.87	36.20	54.00	17.80	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2457MHz
------	----------------	-----------	------------

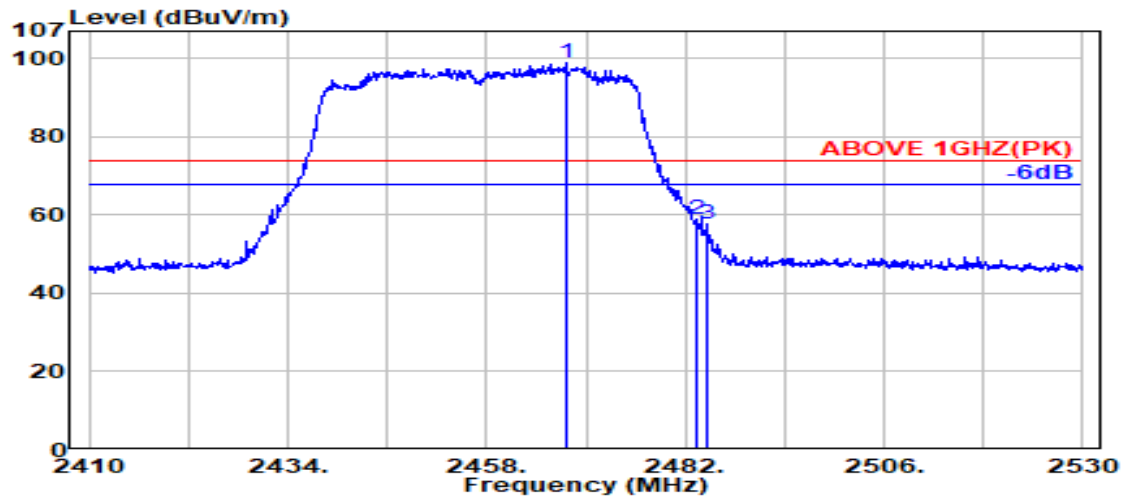

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.500	28.34	5.81	39.87	104.69	98.96	---	---	Peak
2483.500	28.37	5.83	39.87	64.50	58.83	74.00	15.17	Peak
2484.600	28.37	5.83	39.87	63.30	57.63	74.00	16.37	Peak

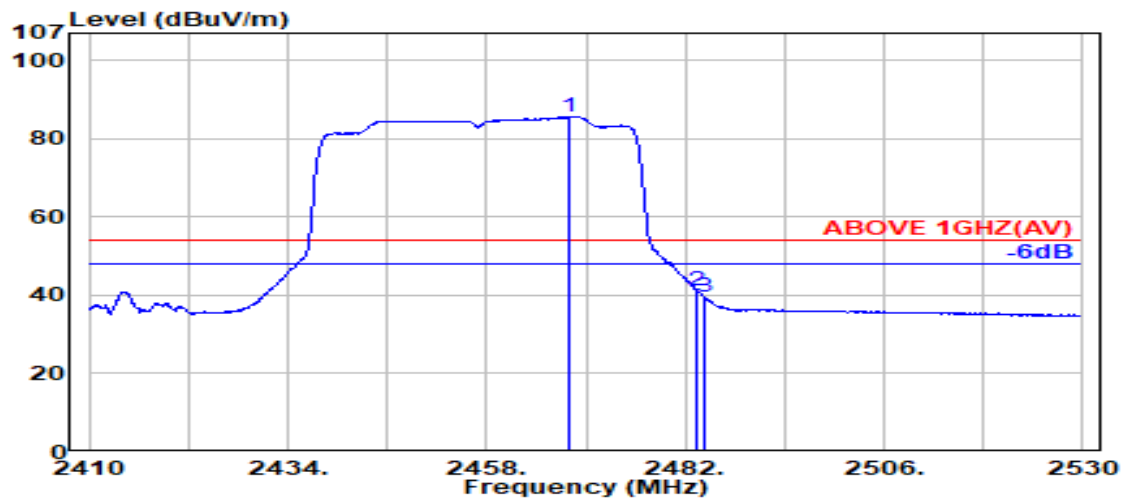

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.100	28.34	5.81	39.87	91.33	85.61	---	---	Average
2483.500	28.37	5.83	39.87	46.68	41.01	54.00	12.99	Average
2484.400	28.37	5.83	39.87	45.05	39.38	54.00	14.62	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2462MHz
------	----------------	-----------	------------

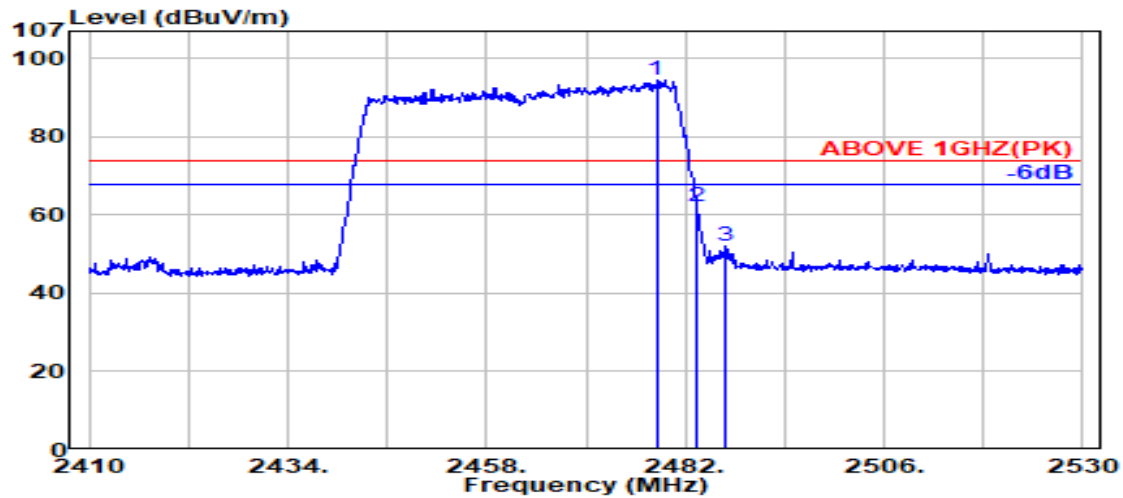

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2478.500	28.36	5.83	39.87	100.23	94.54	---	---	Peak
2483.500	28.37	5.83	39.87	67.98	62.31	74.00	11.69	Peak
2486.700	28.37	5.83	39.87	57.87	52.20	74.00	21.80	Peak

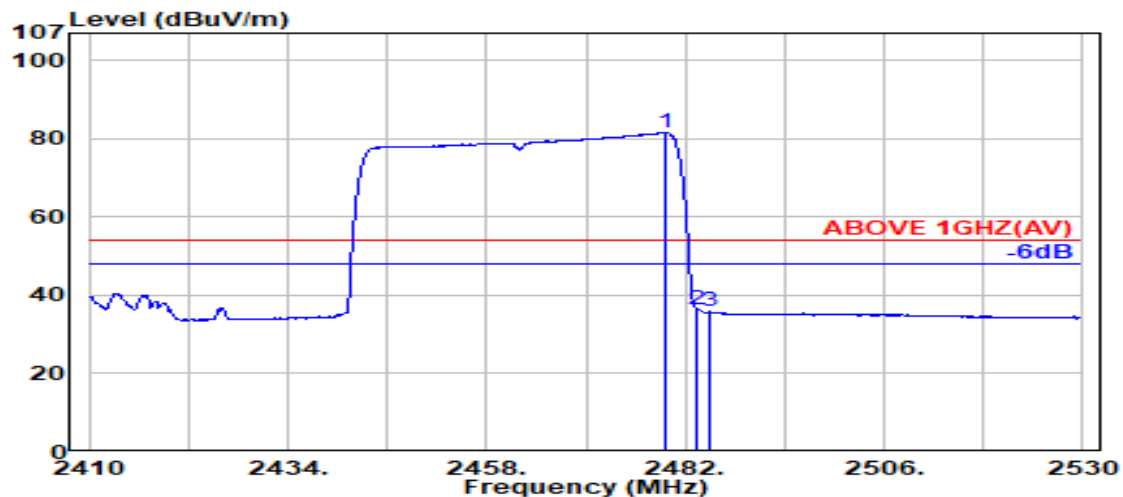

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2479.700	28.36	5.83	39.87	87.34	81.65	---	---	Average
2483.500	28.37	5.83	39.87	42.19	36.51	54.00	17.49	Average
2485.000	28.37	5.83	39.87	41.44	35.77	54.00	18.23	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2462MHz
------	----------------	-----------	------------

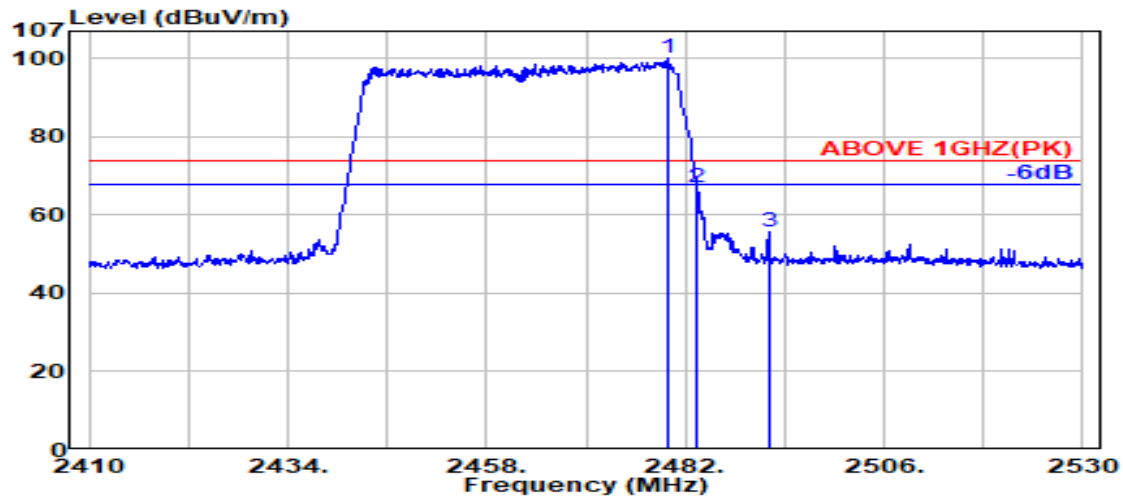

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2479.800	28.36	5.83	39.87	105.63	99.95	---	---	Peak
	2483.500	28.37	5.83	39.87	72.86	67.19	74.00	6.81	Peak
	2492.100	28.38	5.84	39.87	61.39	55.74	74.00	18.26	Peak

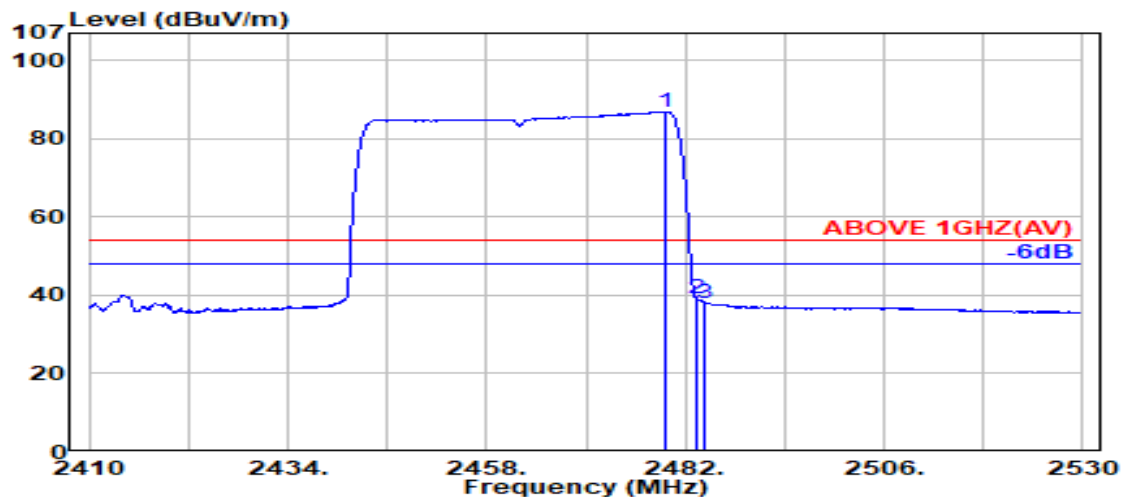

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2479.600	28.36	5.83	39.87	92.64	86.95	---	---	Average
	2483.500	28.37	5.83	39.87	44.74	39.07	54.00	14.93	Average
	2484.400	28.37	5.83	39.87	43.81	38.14	54.00	15.86	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	26/0		

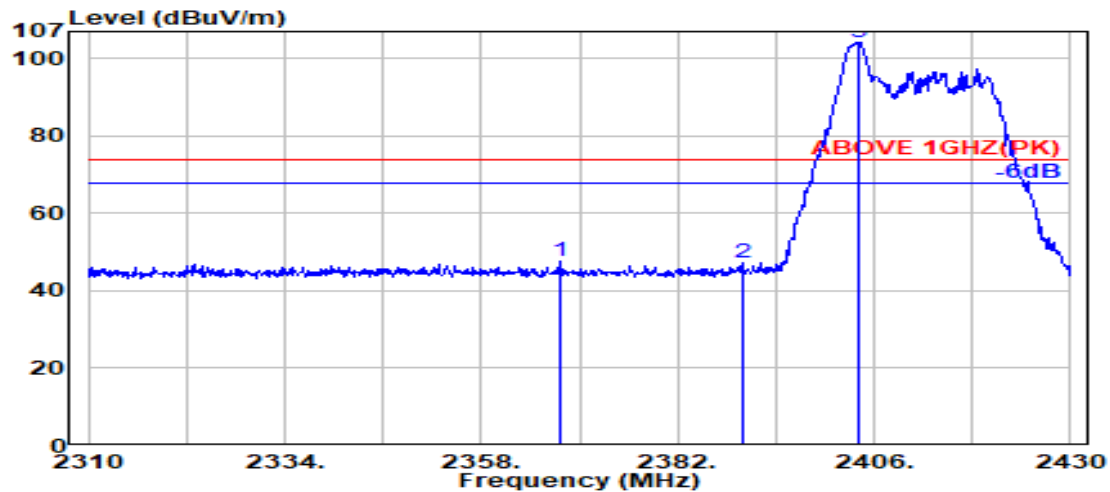

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV/m)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2367.500	28.23	5.69	39.88	53.46	47.50	74.00	26.50	Peak
2390.000	28.14	5.72	39.88	53.15	47.13	74.00	26.87	Peak
@ 2404.100	28.12	5.74	39.88	110.18	104.16	---	---	Peak

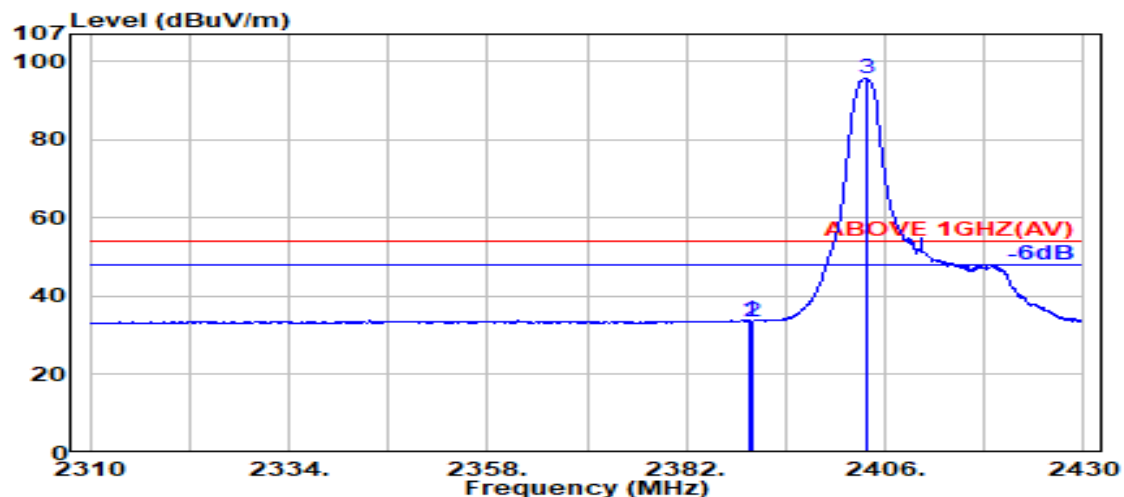

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV/m)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	39.83	33.81	54.00	20.19	Average
2390.000	28.14	5.72	39.88	39.65	33.63	54.00	20.37	Average
@ 2403.700	28.11	5.74	39.88	101.84	95.81	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	26/0		

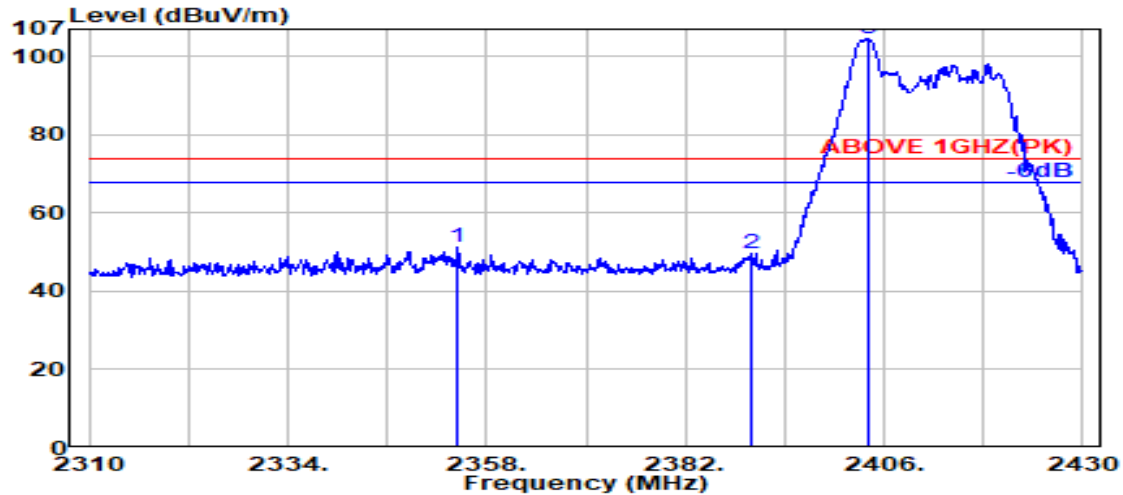

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2354.400	28.28	5.68	39.88	57.04	51.12	74.00	22.88	Peak
2390.000	28.14	5.72	39.88	55.75	49.73	74.00	24.27	Peak
@ 2404.000	28.12	5.74	39.88	110.66	104.63	---	---	Peak

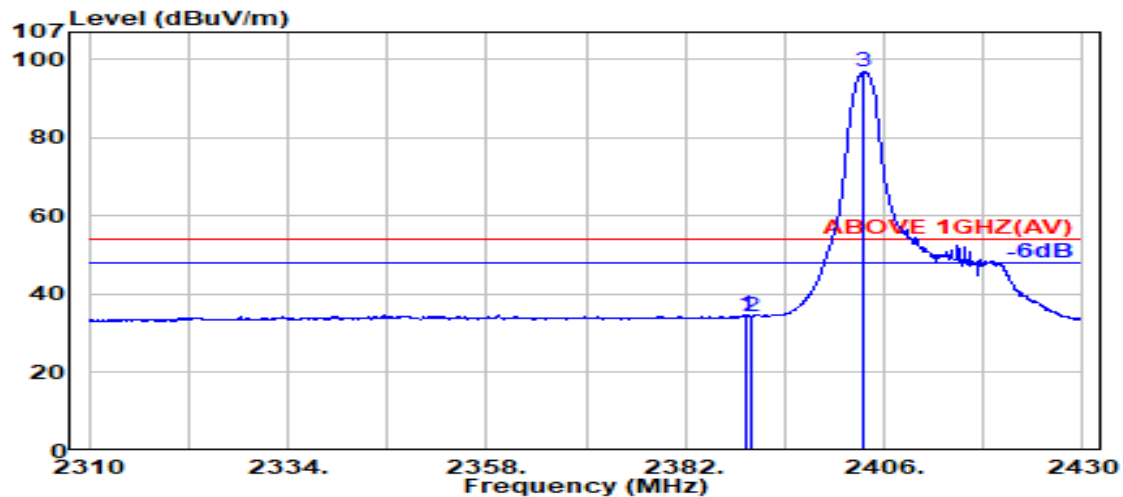

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	28.14	5.72	39.88	40.74	34.72	54.00	19.28	Average
2390.000	28.14	5.72	39.88	40.37	34.36	54.00	19.64	Average
@ 2403.500	28.11	5.74	39.88	102.90	96.88	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	52/37		

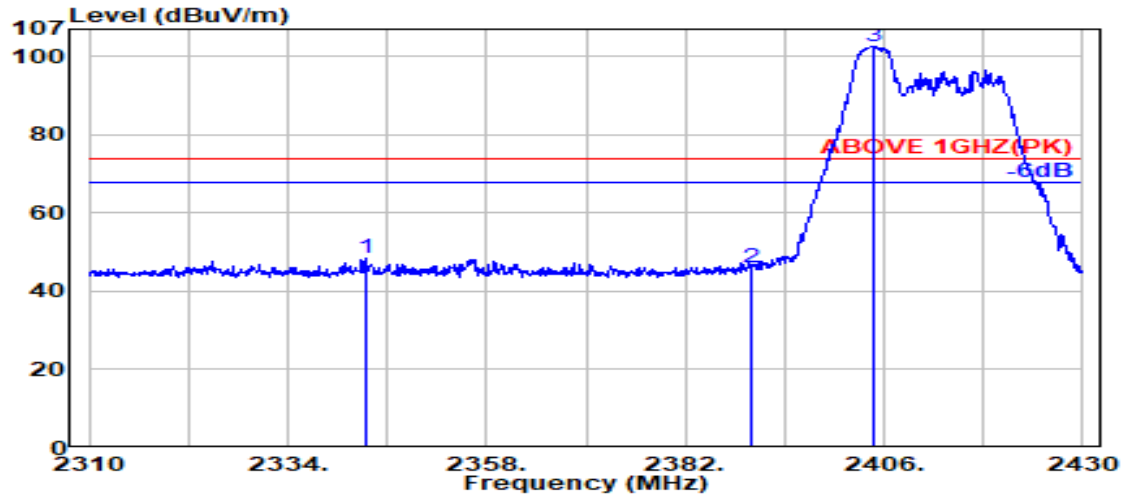

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2343.400	28.26	5.66	39.88	54.39	48.44	74.00	25.56	Peak
2390.000	28.14	5.72	39.88	51.91	45.90	74.00	28.10	Peak
@ 2404.600	28.12	5.74	39.88	108.63	102.61	---	---	Peak

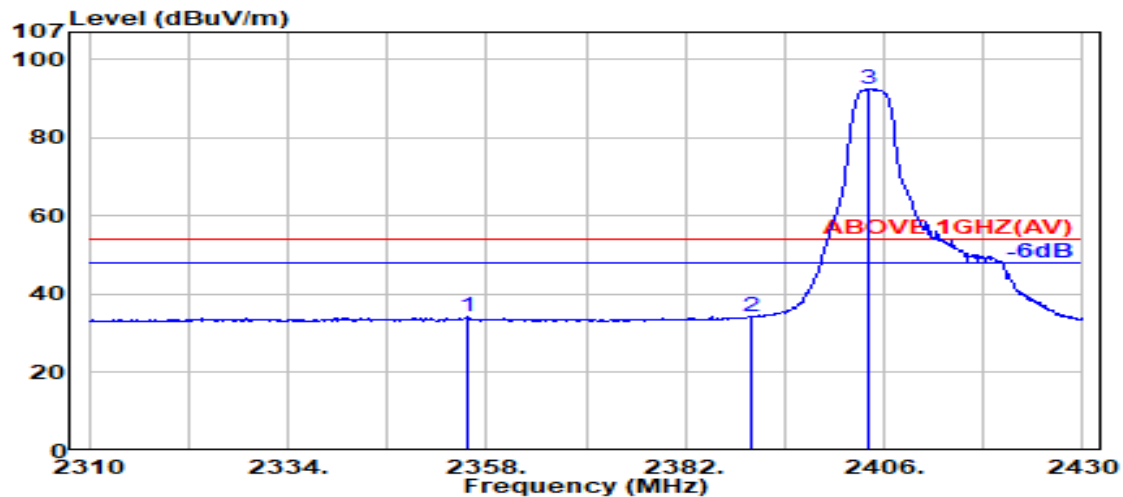

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2355.700	28.28	5.68	39.88	40.20	34.27	54.00	19.73	Average
2390.000	28.14	5.72	39.88	40.37	34.35	54.00	19.65	Average
@ 2404.100	28.12	5.74	39.88	98.50	92.47	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	52/37		

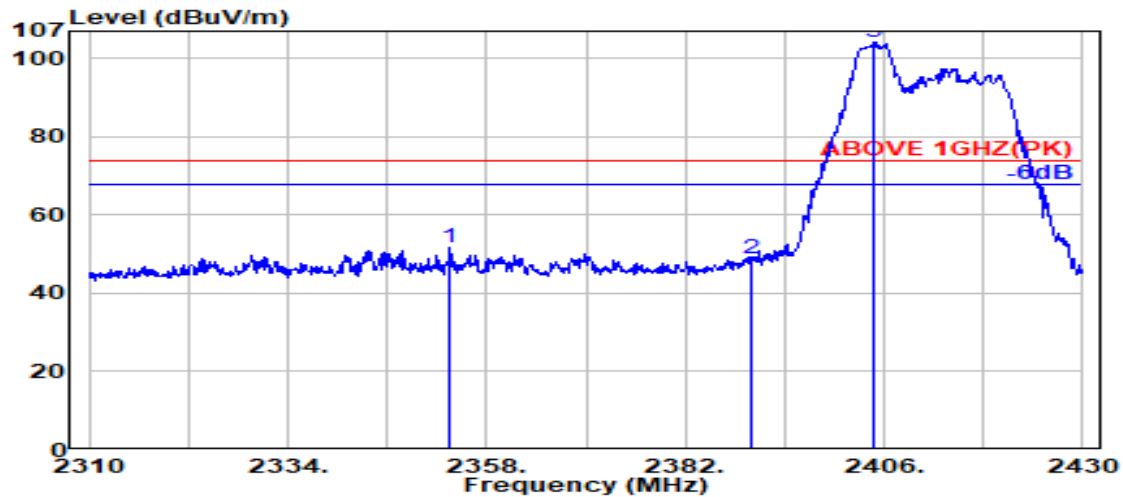

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2353.600	28.29	5.68	39.88	57.51	51.59	74.00	22.41	Peak
2390.000	28.14	5.72	39.88	54.87	48.85	74.00	25.15	Peak
@ 2404.800	28.12	5.74	39.88	110.20	104.18	---	---	Peak

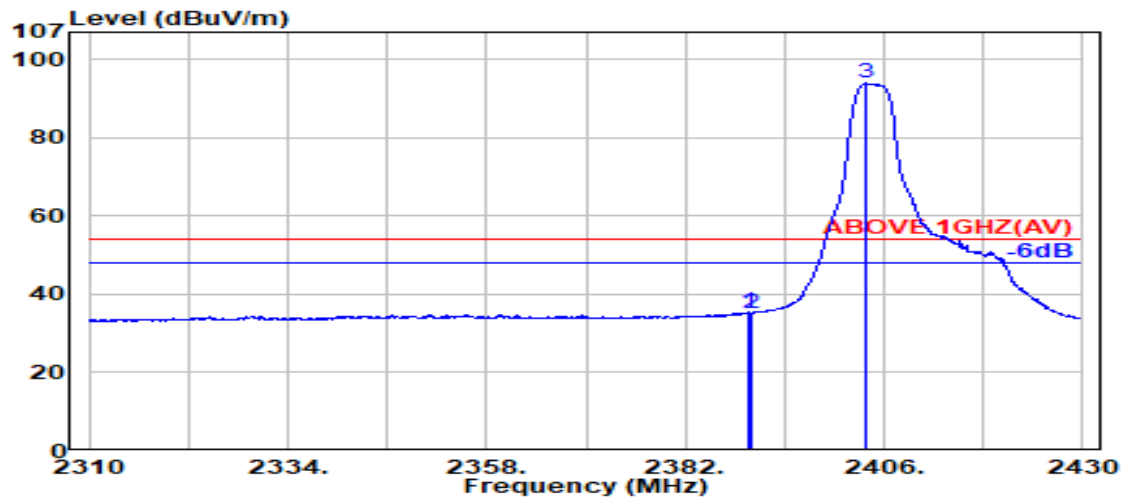

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	41.46	35.44	54.00	18.56	Average
2390.000	28.14	5.72	39.88	41.31	35.29	54.00	18.71	Average
@ 2403.800	28.12	5.74	39.88	99.90	93.88	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	106/53		

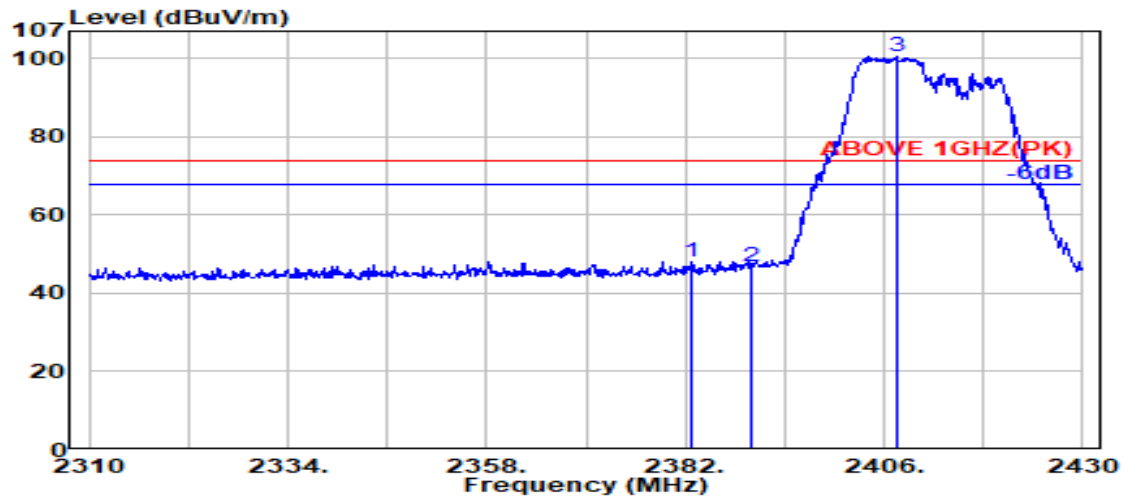

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2382.700	28.17	5.71	39.88	54.25	48.25	74.00	25.75	Peak
2390.000	28.14	5.72	39.88	52.99	46.97	74.00	27.03	Peak
@ 2407.500	28.13	5.74	39.88	106.58	100.57	---	---	Peak

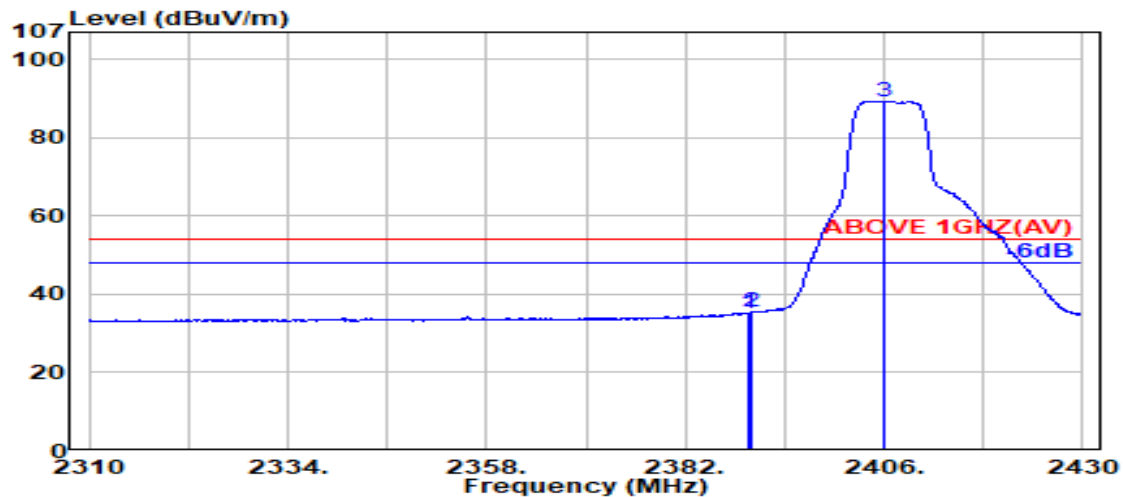

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	41.21	35.19	54.00	18.81	Average
2390.000	28.14	5.72	39.88	41.42	35.40	54.00	18.60	Average
@ 2406.000	28.12	5.74	39.88	95.41	89.40	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	106/53		

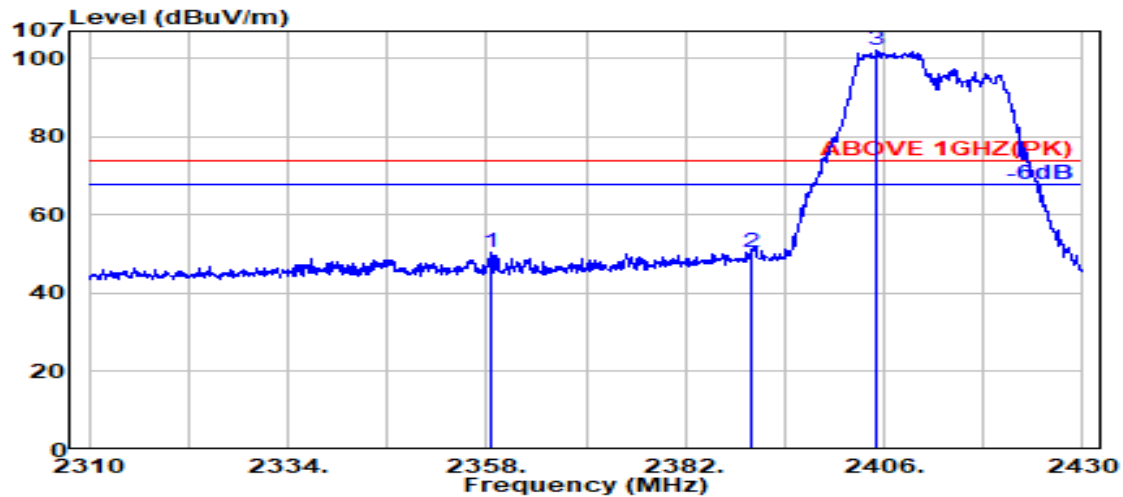

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2358.500	28.27	5.68	39.88	56.46	50.53	74.00	23.47	Peak
2390.000	28.14	5.72	39.88	56.60	50.58	74.00	23.42	Peak
@ 2405.200	28.12	5.74	39.88	108.00	101.98	---	---	Peak

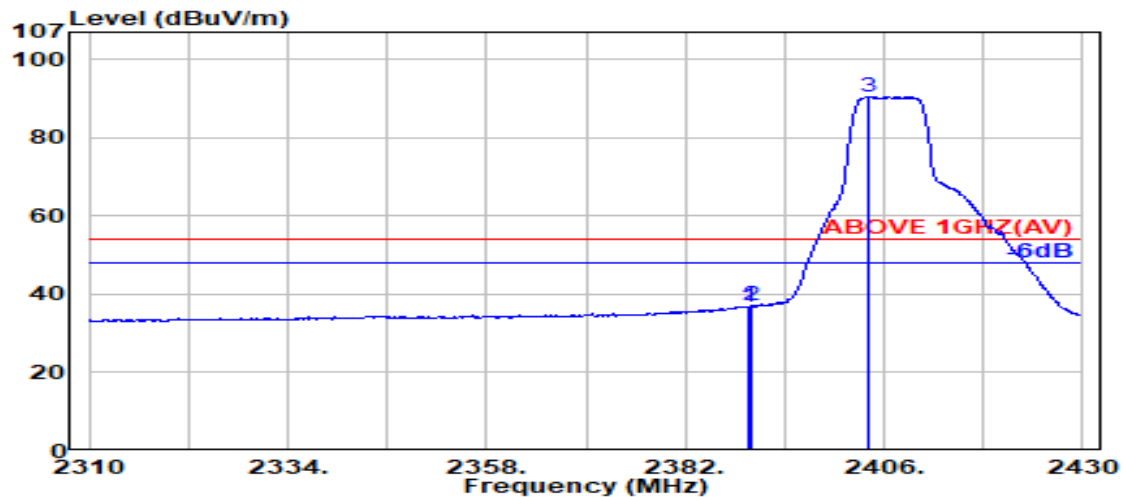

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	42.90	36.88	54.00	17.12	Average
2390.000	28.14	5.72	39.88	43.00	36.99	54.00	17.01	Average
@ 2404.000	28.12	5.74	39.88	96.46	90.43	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	26/8		

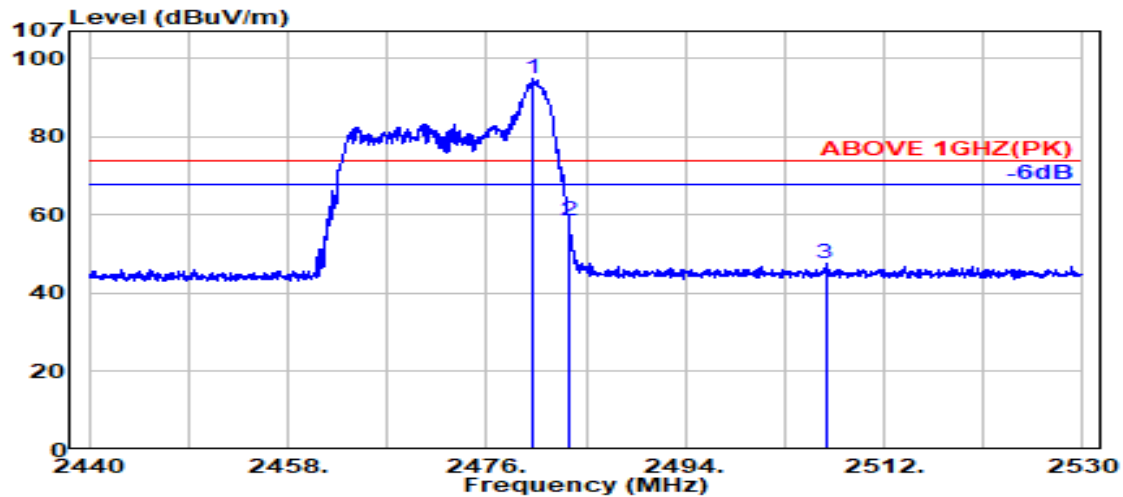

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.100	28.36	5.83	39.87	100.67	94.98	---	---	Peak
	2483.500	28.37	5.83	39.87	64.17	58.50	74.00	15.50	Peak
	2506.700	28.44	5.86	39.87	53.18	47.61	74.00	26.39	Peak

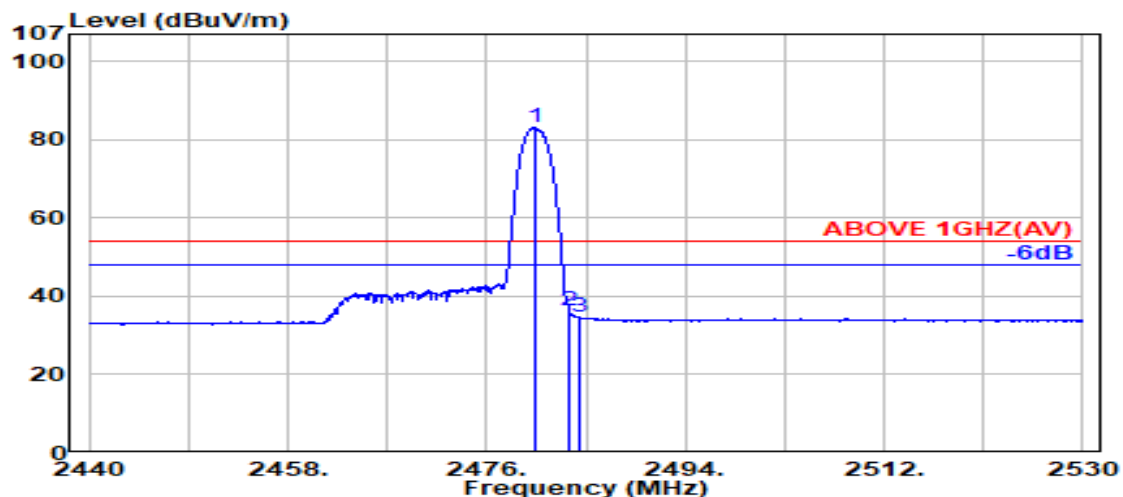

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.350	28.36	5.83	39.87	88.73	83.05	---	---	Average
	2483.500	28.37	5.83	39.87	42.01	36.34	54.00	17.66	Average
	2484.500	28.37	5.83	39.87	40.29	34.62	54.00	19.38	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	26/8		

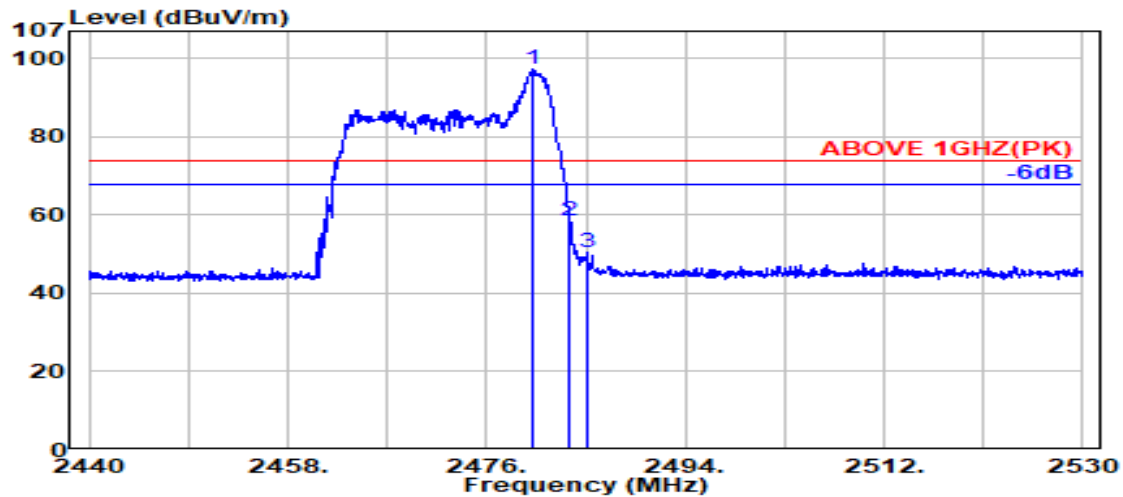

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.200	28.36	5.83	39.87	103.00	97.31	---	---	Peak
	2483.500	28.37	5.83	39.87	64.37	58.70	74.00	15.30	Peak
	2485.100	28.37	5.83	39.87	56.32	50.66	74.00	23.34	Peak

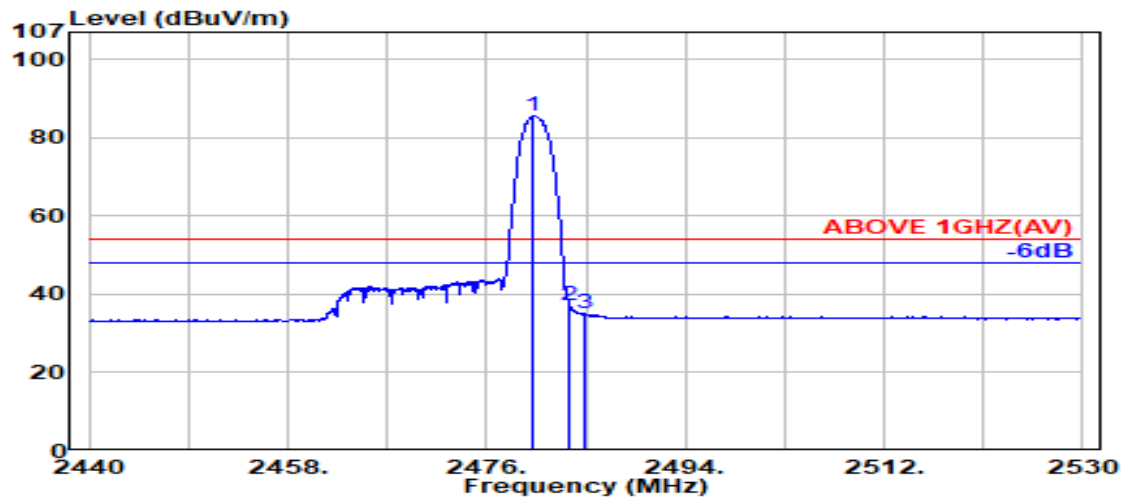

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.250	28.36	5.83	39.87	91.28	85.59	---	---	Average
	2483.500	28.37	5.83	39.87	42.89	37.22	54.00	16.78	Average
	2484.850	28.37	5.83	39.87	40.76	35.09	54.00	18.91	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	52/40		

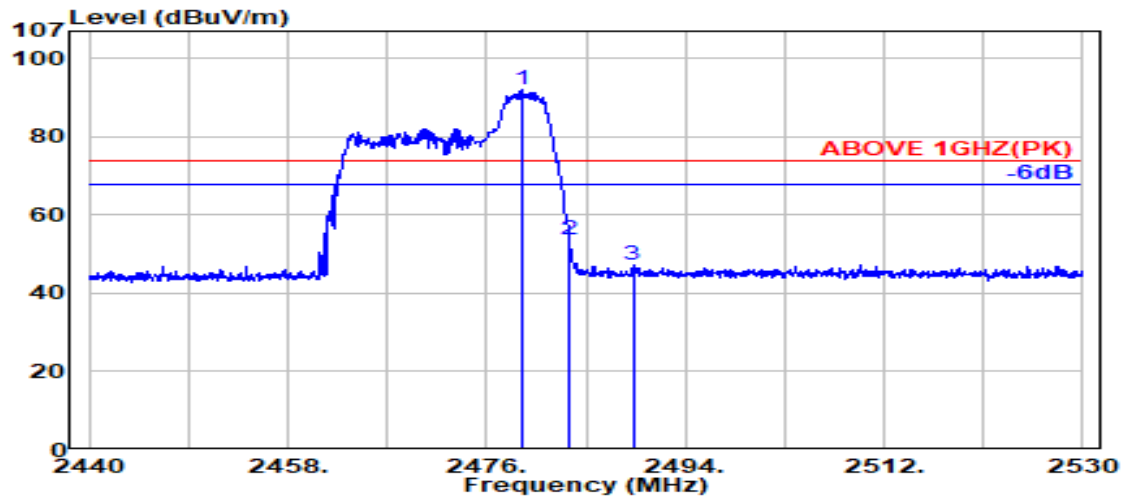

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.150	28.36	5.83	39.87	97.69	92.01	---	---	Peak
2483.500	28.37	5.83	39.87	59.29	53.61	74.00	20.39	Peak
2489.250	28.38	5.84	39.87	52.93	47.28	74.00	26.72	Peak

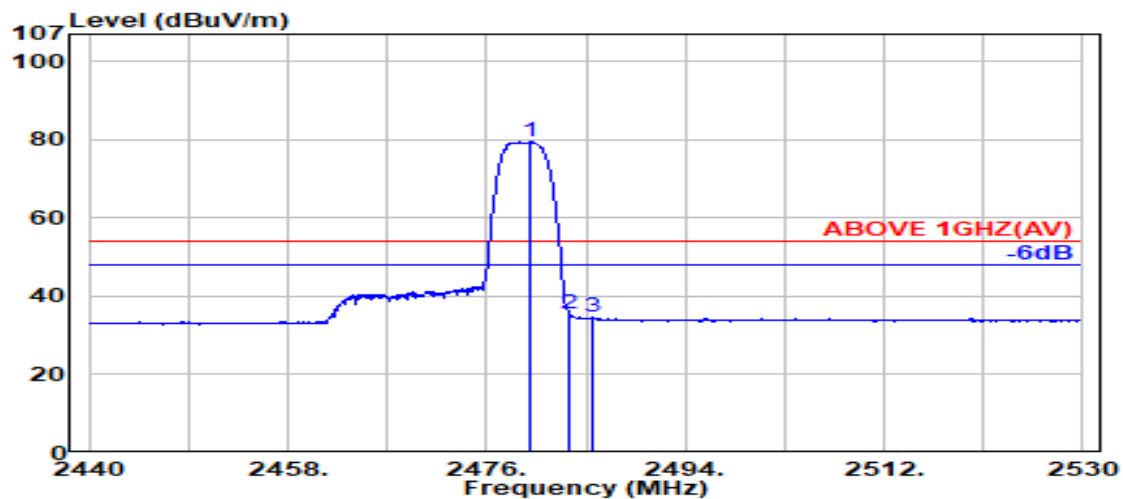

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.900	28.36	5.83	39.87	85.14	79.45	---	---	Average
2483.500	28.37	5.83	39.87	41.11	35.44	54.00	18.56	Average
2485.700	28.37	5.83	39.87	40.23	34.56	54.00	19.44	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	52/40		

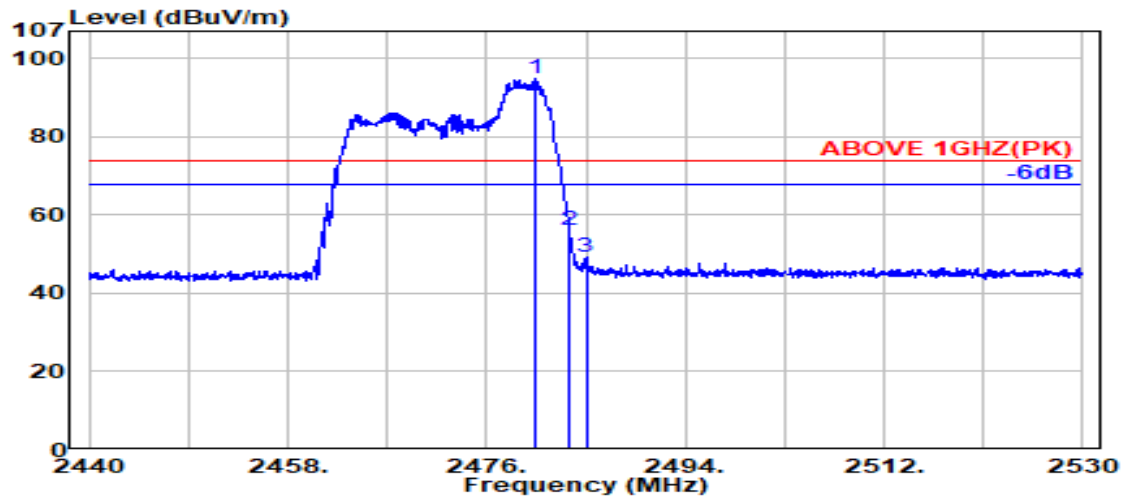

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.350	28.36	5.83	39.87	100.49	94.80	---	---	Peak
	2483.500	28.37	5.83	39.87	61.61	55.94	74.00	18.06	Peak
	2485.000	28.37	5.83	39.87	54.76	49.09	74.00	24.91	Peak

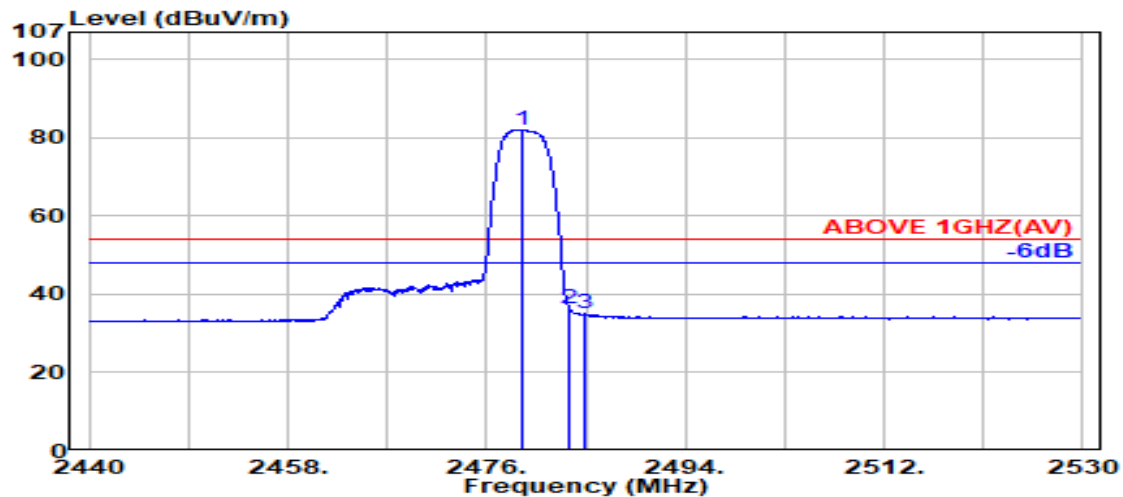

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2479.200	28.36	5.83	39.87	87.76	82.08	---	---	Average
	2483.500	28.37	5.83	39.87	41.95	36.28	54.00	17.72	Average
	2484.900	28.37	5.83	39.87	40.63	34.96	54.00	19.04	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	106/54		

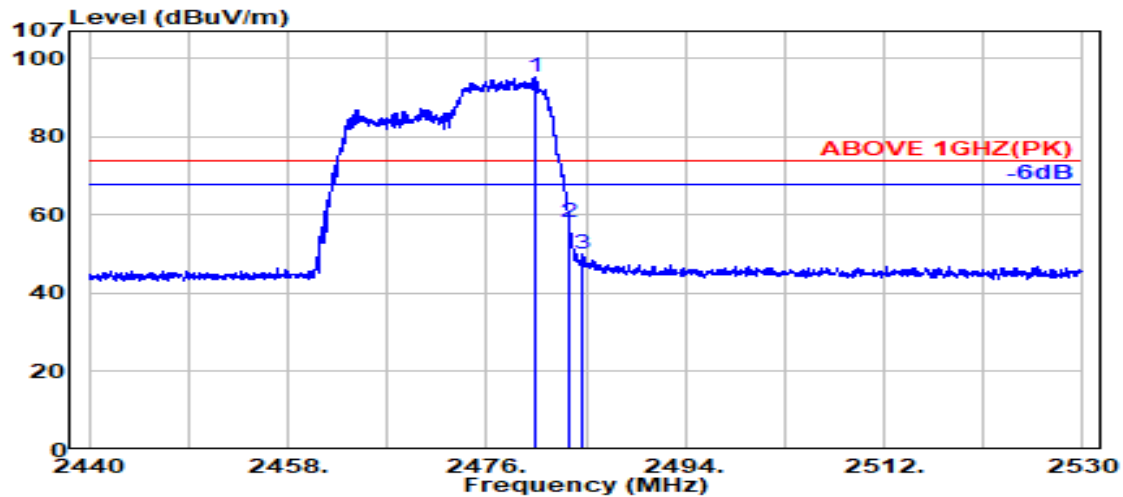

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.300	28.36	5.83	39.87	101.04	95.35	---	---	Peak
	2483.500	28.37	5.83	39.87	63.77	58.10	74.00	15.90	Peak
	2484.750	28.37	5.83	39.87	55.59	49.92	74.00	24.08	Peak

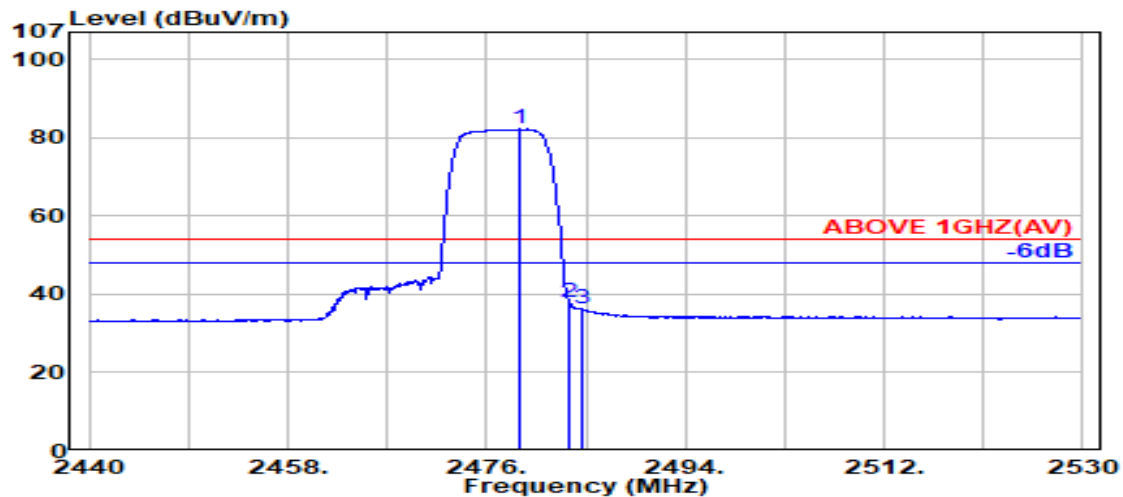

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2478.950	28.36	5.83	39.87	87.91	82.22	---	---	Average
	2483.500	28.37	5.83	39.87	43.46	37.79	54.00	16.21	Average
	2484.550	28.37	5.83	39.87	41.96	36.29	54.00	17.71	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	106/54		

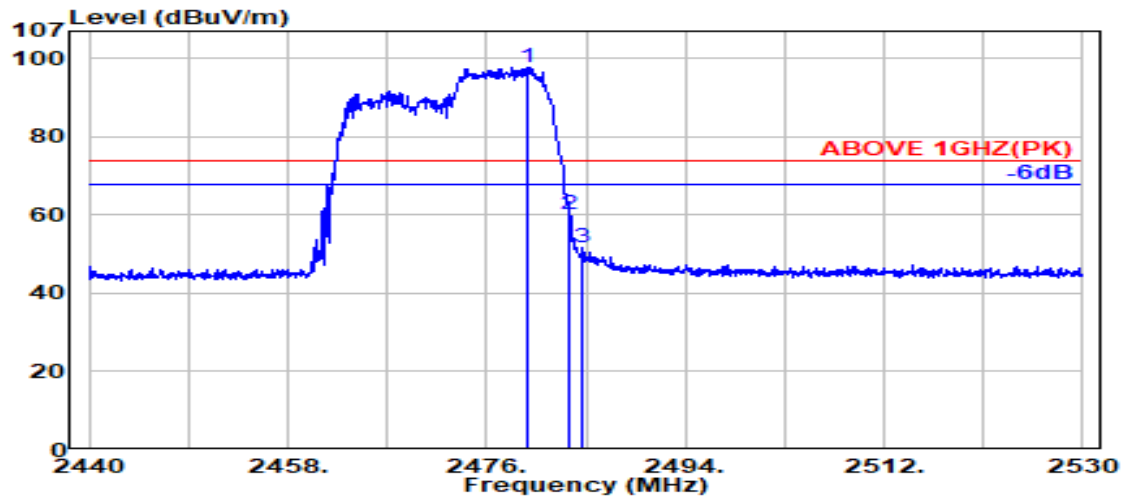

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.650	28.36	5.83	39.87	103.38	97.69	---	---	Peak
2483.500	28.37	5.83	39.87	66.00	60.33	74.00	13.67	Peak
2484.600	28.37	5.83	39.87	57.43	51.76	74.00	22.24	Peak

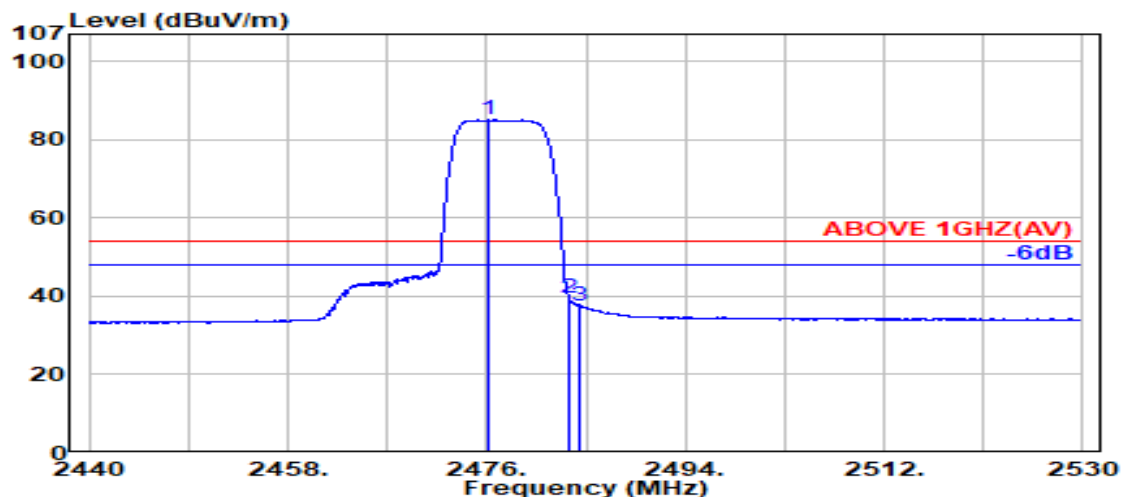

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.100	28.35	5.82	39.87	90.76	85.06	---	---	Average
2483.500	28.37	5.83	39.87	45.21	39.53	54.00	14.47	Average
2484.500	28.37	5.83	39.87	43.19	37.52	54.00	16.48	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
RU Configuration	242/61		

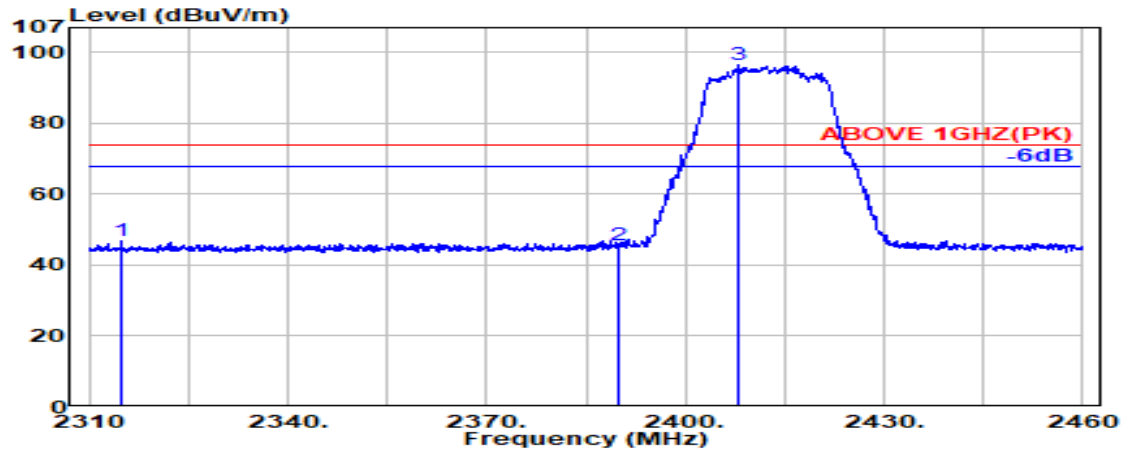

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2314.900	28.09	5.63	39.88	53.02	46.85	74.00	27.15	Peak
2390.000	28.14	5.72	39.88	51.75	45.73	74.00	28.27	Peak
@ 2407.900	28.13	5.74	39.88	102.45	96.44	---	---	Peak

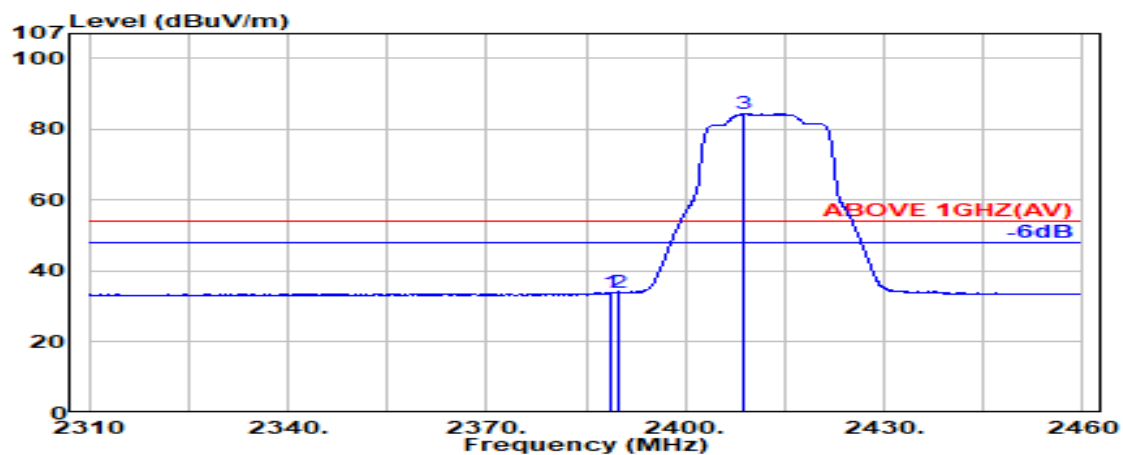

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.700	28.14	5.72	39.88	40.10	34.08	54.00	19.92	Average
2390.000	28.14	5.72	39.88	40.00	33.98	54.00	20.02	Average
@ 2408.600	28.13	5.74	39.88	90.38	84.38	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
RU Configuration	242/61		

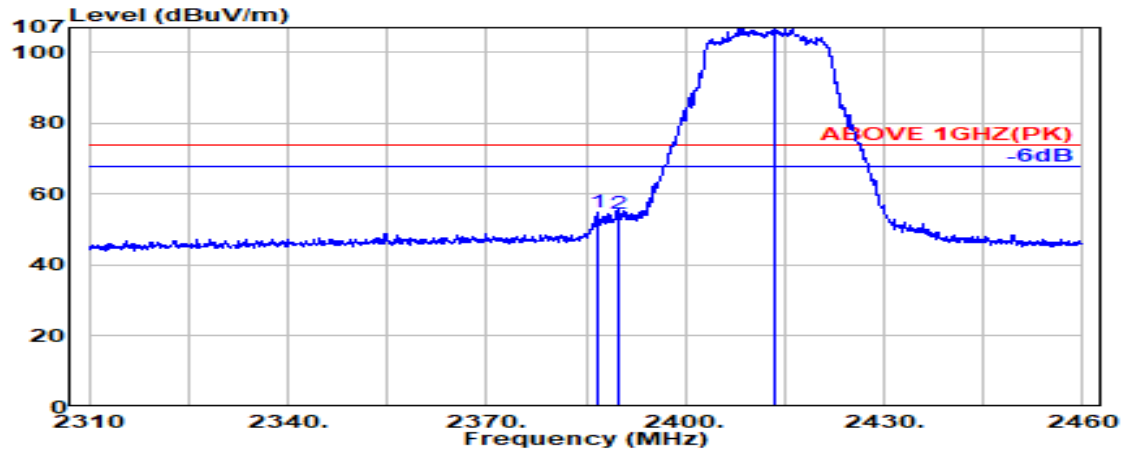

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2386.600	28.15	5.72	39.88	60.81	54.81	74.00	19.19	Peak
2390.000	28.14	5.72	39.88	60.45	54.43	74.00	19.57	Peak
@ 2413.400	28.15	5.75	39.88	113.11	107.14	---	---	Peak

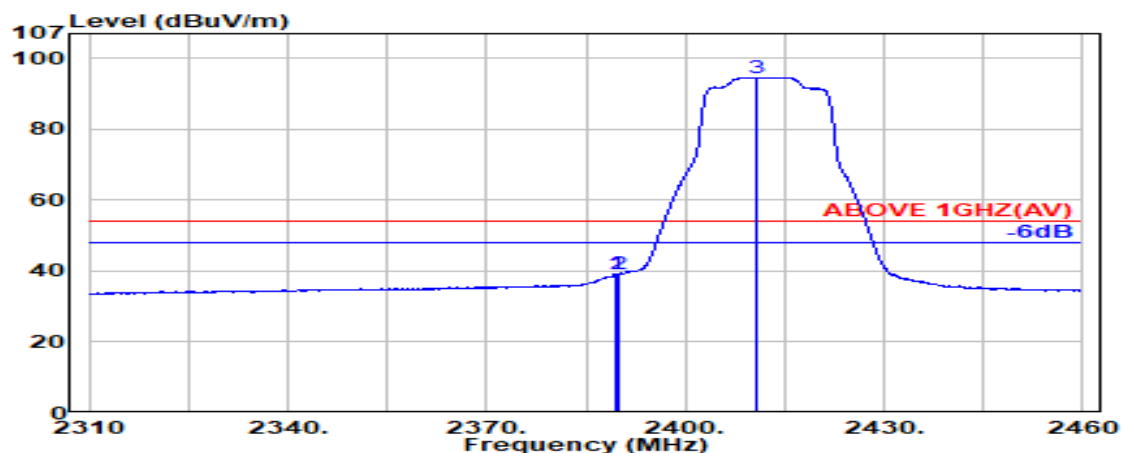

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.400	28.14	5.72	39.88	45.09	39.08	54.00	14.92	Average
2390.000	28.14	5.72	39.88	45.07	39.05	54.00	14.95	Average
@ 2410.700	28.14	5.75	39.88	100.63	94.64	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
RU Configuration	242/62		

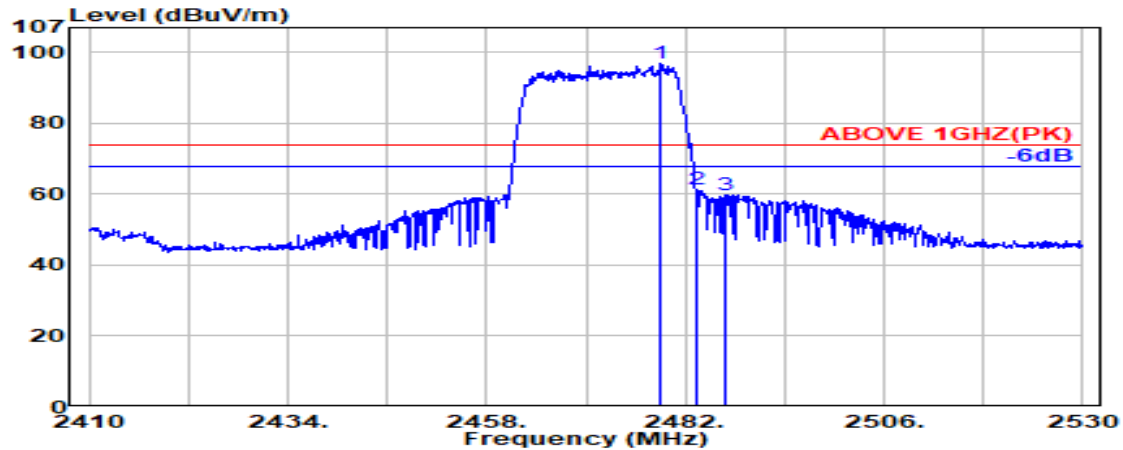

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.100	28.36	5.83	39.87	102.64	96.96	---	---	Peak
2483.500	28.37	5.83	39.87	66.89	61.22	74.00	12.78	Peak
2486.900	28.37	5.83	39.87	65.51	59.85	74.00	14.15	Peak

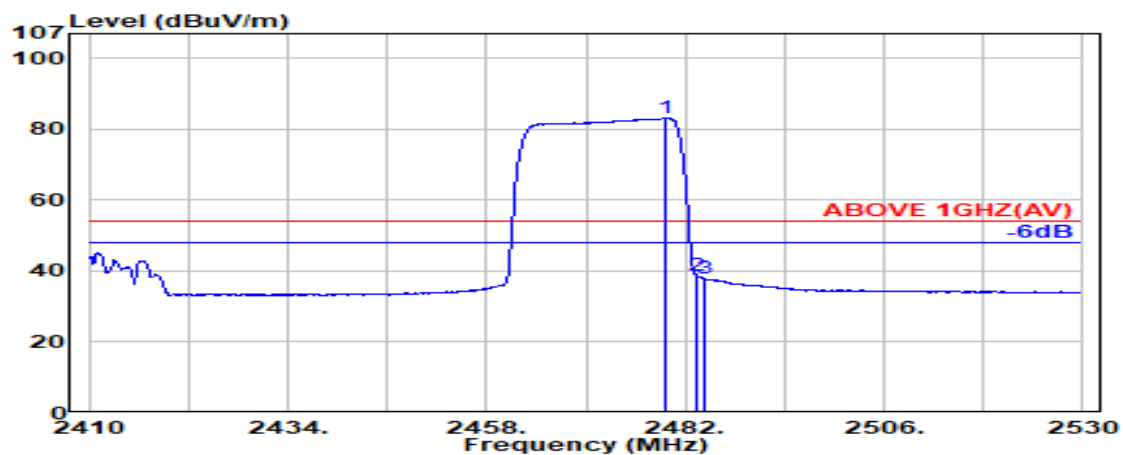

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.700	28.36	5.83	39.87	88.86	83.18	---	---	Average
2483.500	28.37	5.83	39.87	44.33	38.65	54.00	15.35	Average
2484.400	28.37	5.83	39.87	43.51	37.84	54.00	16.16	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
RU Configuration	242/62		

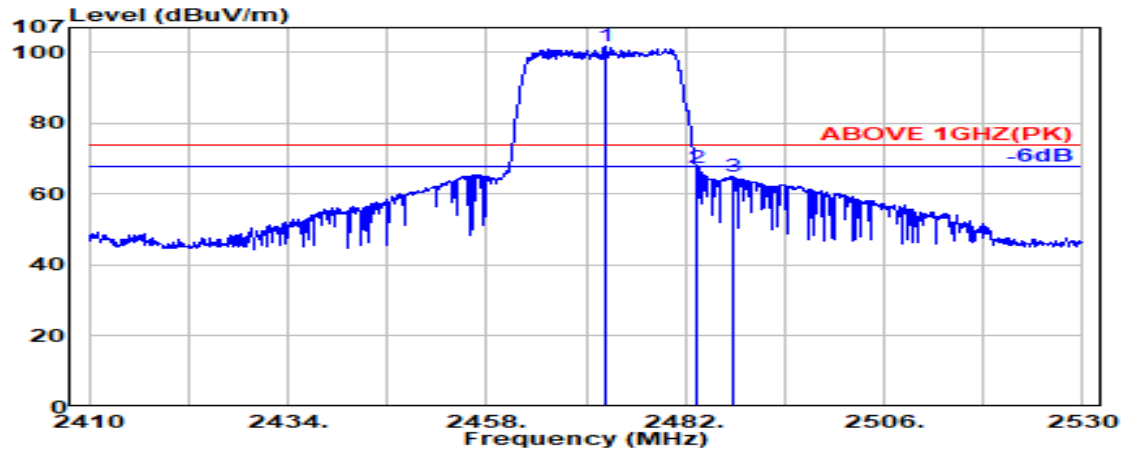

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.300	28.34	5.82	39.87	107.31	101.60	---	---	Peak
2483.500	28.37	5.83	39.87	73.14	67.47	74.00	6.53	Peak
2487.800	28.38	5.84	39.87	70.66	65.00	74.00	9.00	Peak

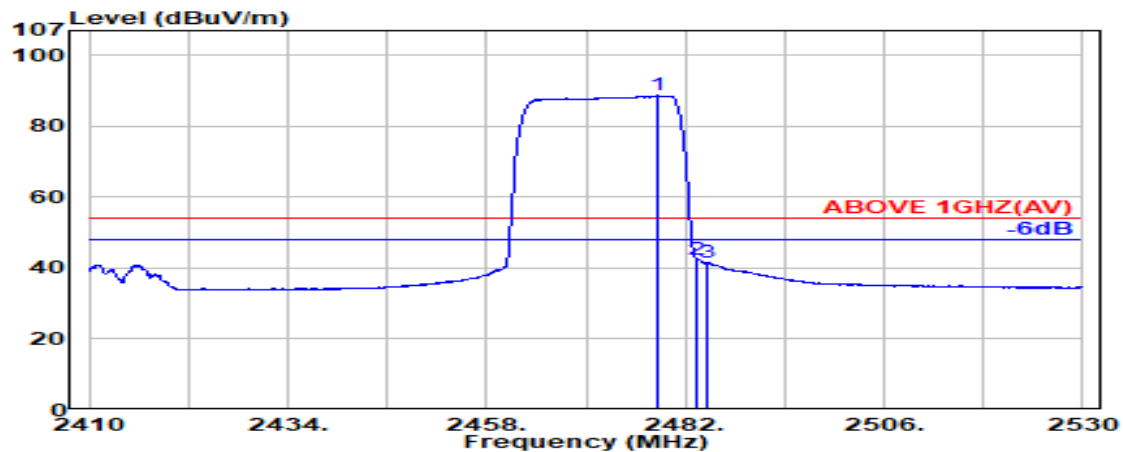

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.800	28.36	5.83	39.87	94.33	88.65	---	---	Average
2483.500	28.37	5.83	39.87	48.25	42.57	54.00	11.43	Average
2484.700	28.37	5.83	39.87	47.21	41.54	54.00	12.46	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	26/0		

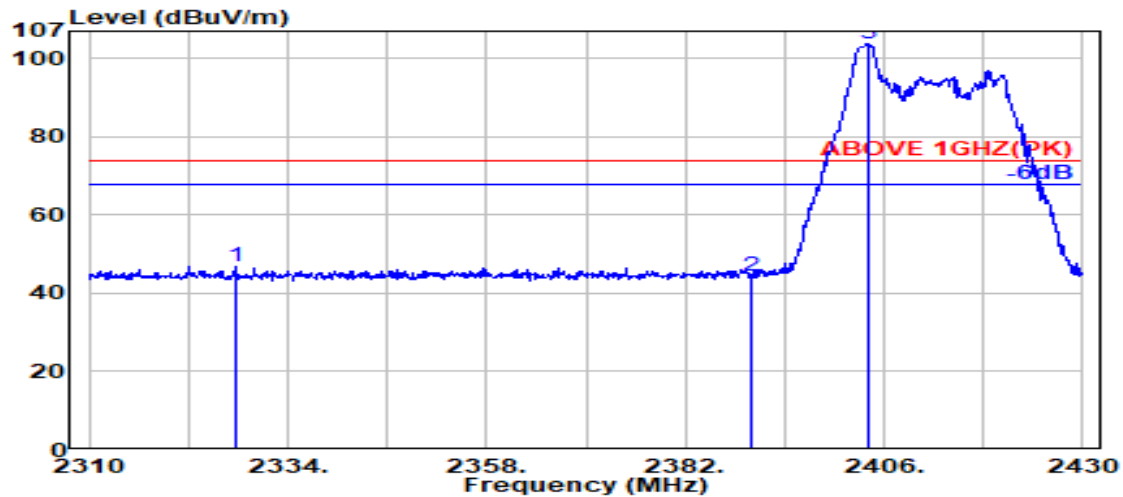

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2327.600	28.17	5.65	39.88	53.02	46.94	74.00	27.06	Peak
2390.000	28.14	5.72	39.88	50.60	44.58	74.00	29.42	Peak
@ 2404.100	28.12	5.74	39.88	109.91	103.89	---	---	Peak

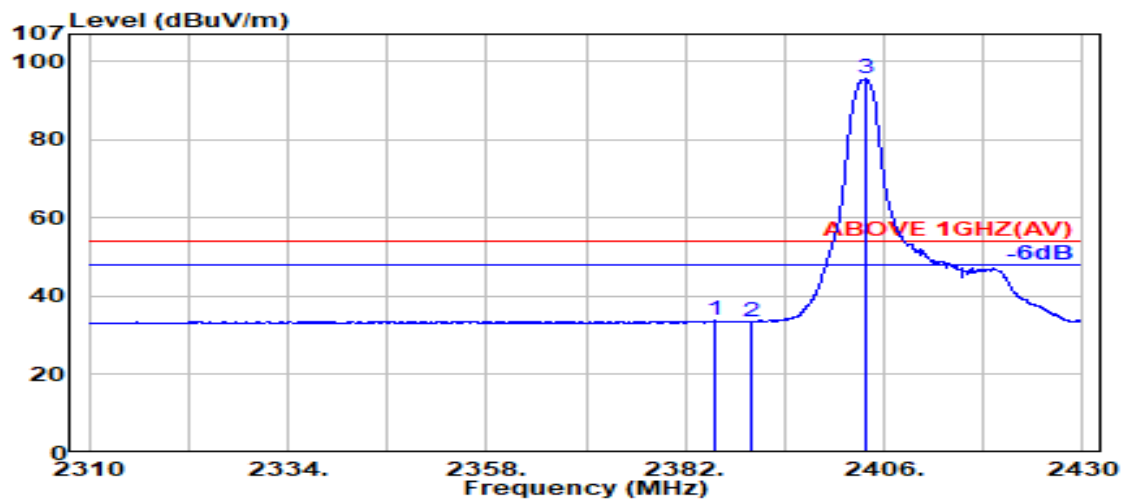

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.500	28.16	5.72	39.88	39.73	33.72	54.00	20.28	Average
2390.000	28.14	5.72	39.88	39.67	33.65	54.00	20.35	Average
@ 2403.800	28.12	5.74	39.88	101.53	95.50	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	26/0		

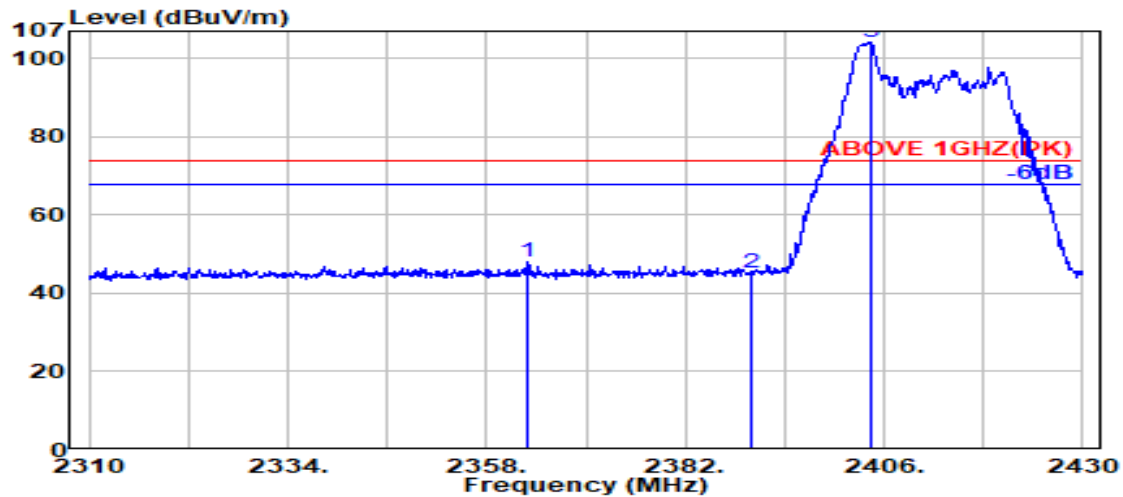

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2363.000	28.25	5.69	39.88	54.06	48.12	74.00	25.88	Peak
2390.000	28.14	5.72	39.88	51.11	45.10	74.00	28.90	Peak
@ 2404.300	28.12	5.74	39.88	110.31	104.28	---	---	Peak

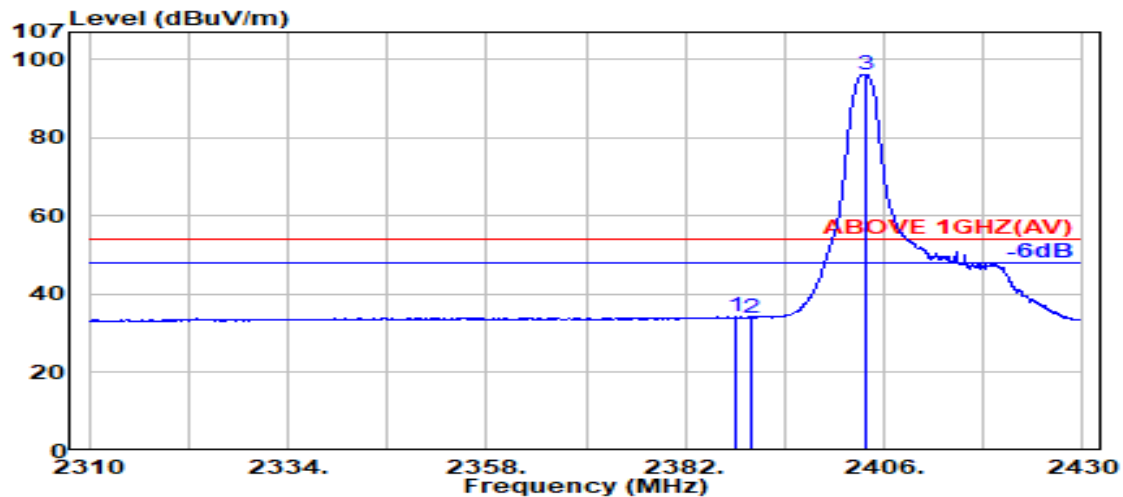

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.200	28.15	5.72	39.88	40.23	34.22	54.00	19.78	Average
2390.000	28.14	5.72	39.88	40.11	34.09	54.00	19.91	Average
@ 2403.700	28.11	5.74	39.88	102.30	96.27	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	52/37		

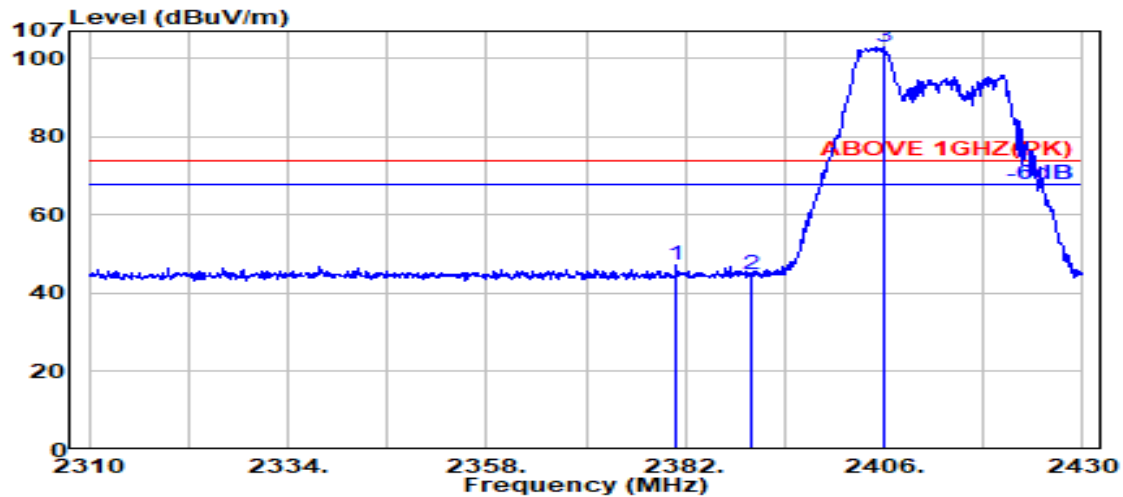

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2381.000	28.18	5.71	39.88	53.30	47.31	74.00	26.69	Peak
2390.000	28.14	5.72	39.88	50.79	44.77	74.00	29.23	Peak
@ 2406.000	28.12	5.74	39.88	108.91	102.90	---	---	Peak

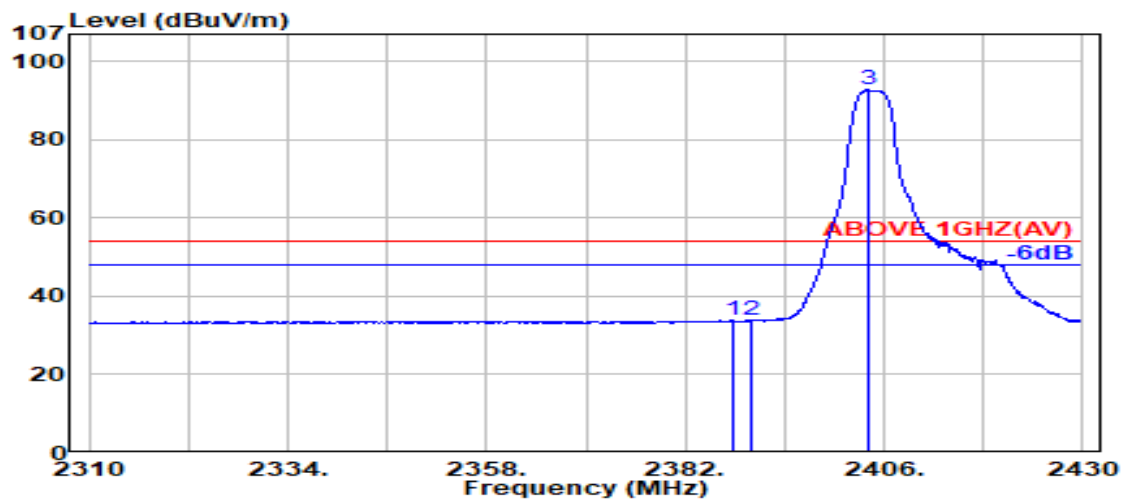

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2387.700	28.15	5.72	39.88	39.77	33.76	54.00	20.24	Average
2390.000	28.14	5.72	39.88	39.86	33.85	54.00	20.15	Average
@ 2404.100	28.12	5.74	39.88	98.81	92.78	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	52/37		

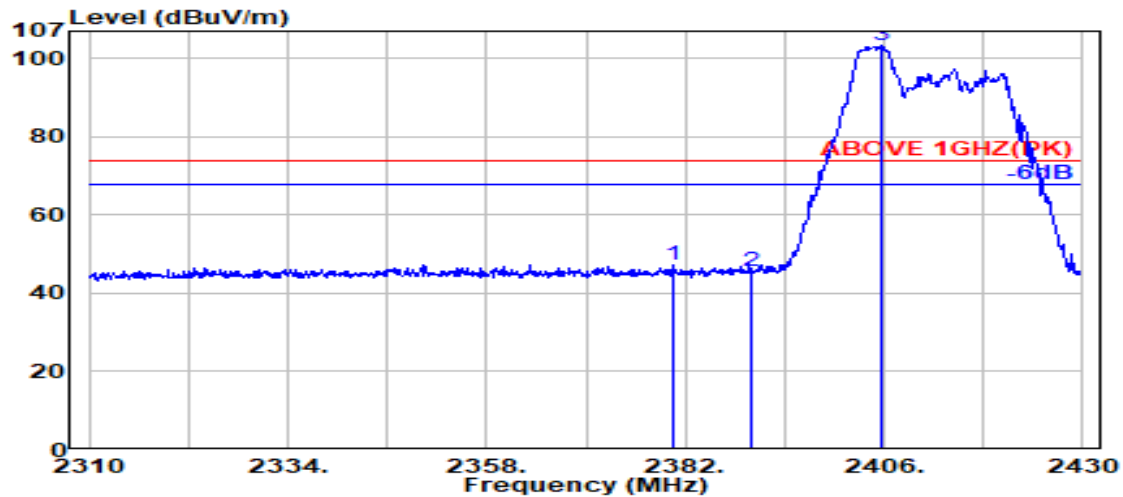

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2380.400	28.18	5.71	39.88	53.14	47.15	74.00	26.85	Peak
2390.000	28.14	5.72	39.88	51.51	45.49	74.00	28.51	Peak
@ 2405.700	28.12	5.74	39.88	109.50	103.49	---	---	Peak

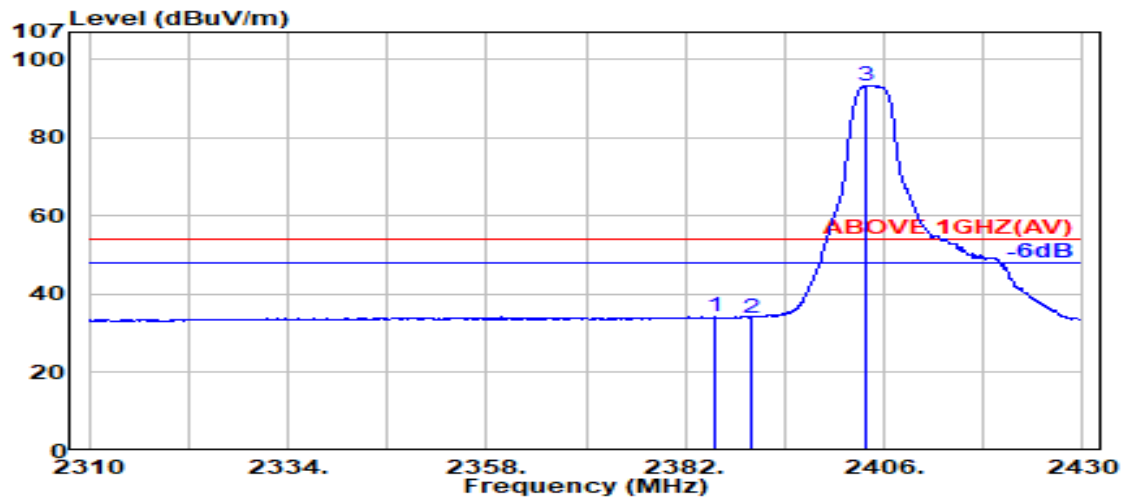

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.700	28.16	5.72	39.88	40.30	34.30	54.00	19.70	Average
2390.000	28.14	5.72	39.88	40.08	34.06	54.00	19.94	Average
@ 2403.700	28.11	5.74	39.88	99.50	93.47	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	106/53		

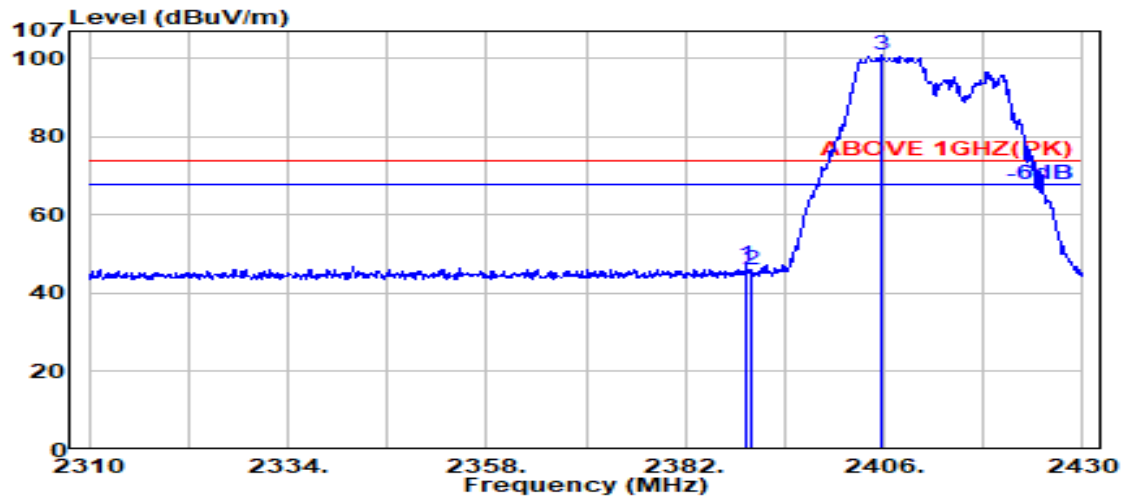

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	28.14	5.72	39.88	53.26	47.25	74.00	26.75	Peak
2390.000	28.14	5.72	39.88	51.90	45.88	74.00	28.12	Peak
@ 2405.600	28.12	5.74	39.88	106.83	100.82	---	---	Peak

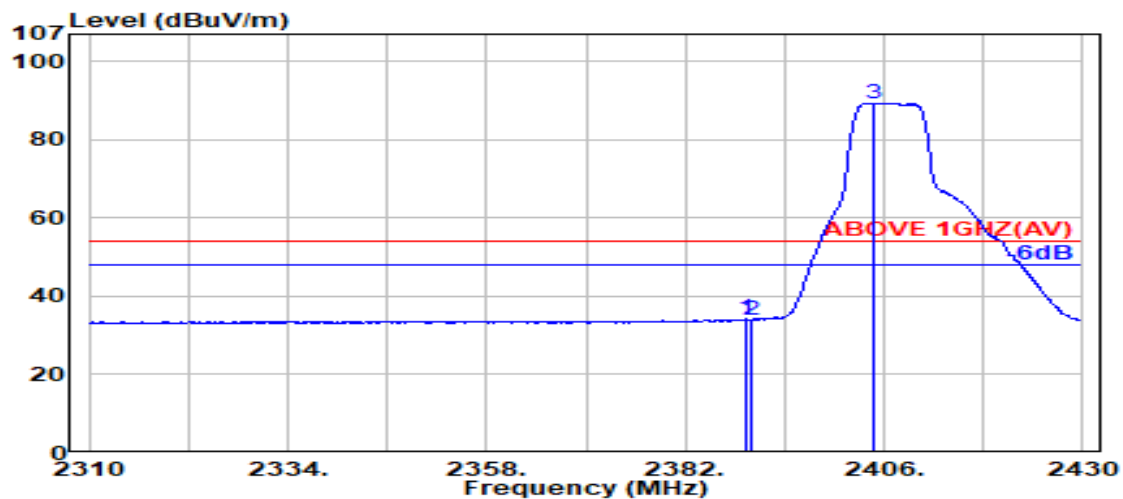

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	28.14	5.72	39.88	40.24	34.22	54.00	19.78	Average
2390.000	28.14	5.72	39.88	40.13	34.11	54.00	19.89	Average
@ 2404.800	28.12	5.74	39.88	95.44	89.42	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	106/53		

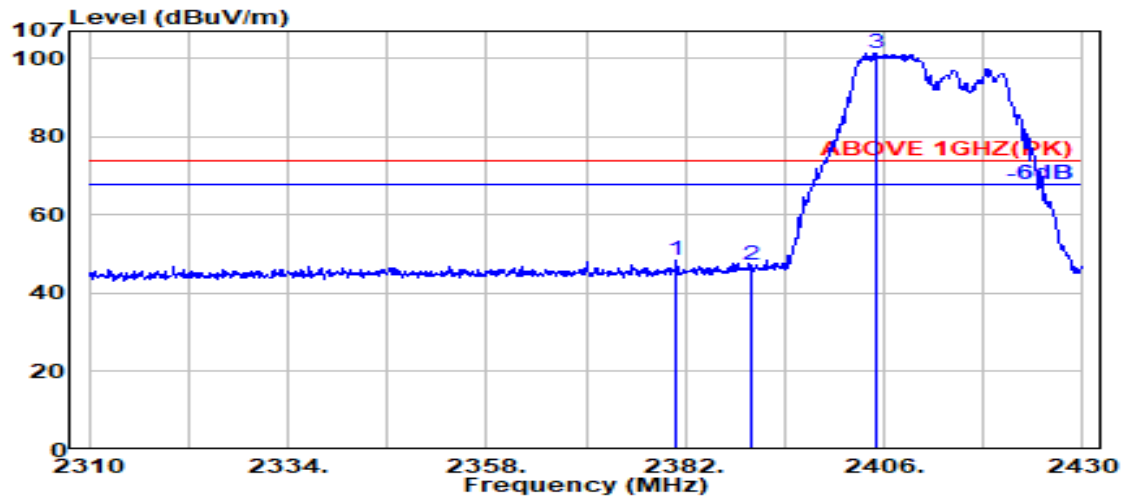

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV/m)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2381.000	28.18	5.71	39.88	54.62	48.63	74.00	25.37	Peak
2390.000	28.14	5.72	39.88	53.20	47.18	74.00	26.82	Peak
@ 2405.100	28.12	5.74	39.88	107.54	101.52	---	---	Peak

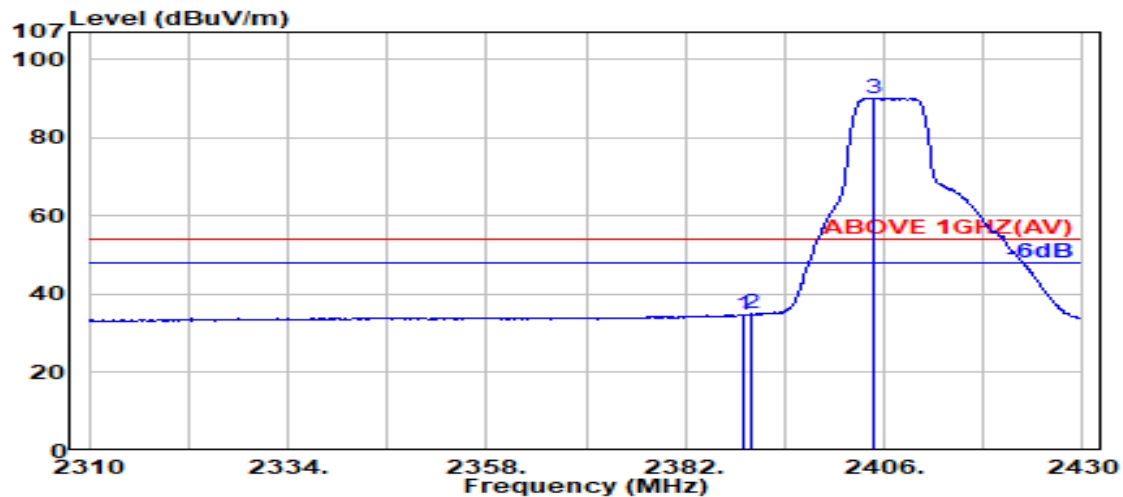

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV/m)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.000	28.14	5.72	39.88	40.91	34.90	54.00	19.10	Average
2390.000	28.14	5.72	39.88	41.16	35.14	54.00	18.86	Average
@ 2404.700	28.12	5.74	39.88	96.15	90.13	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	26/8		

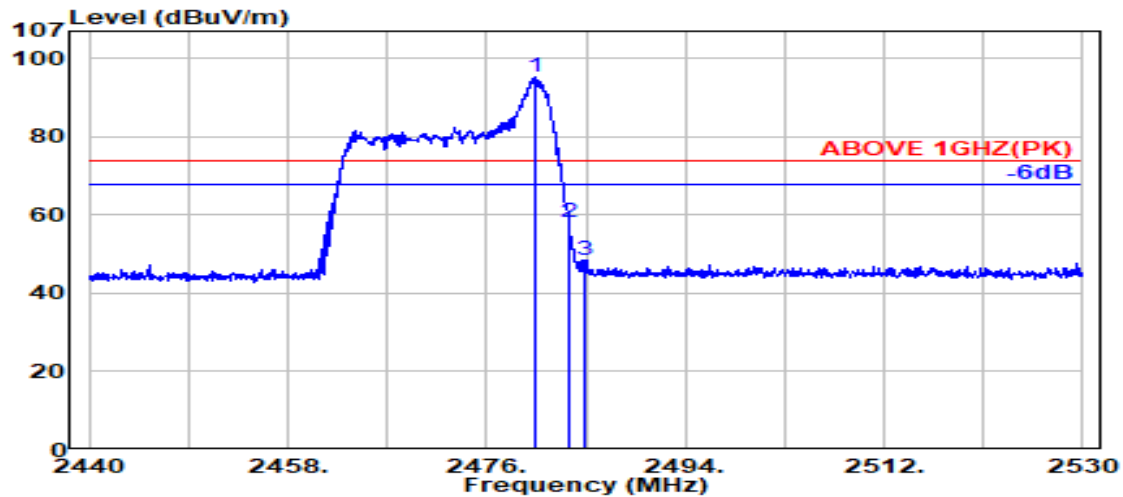

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.400	28.36	5.83	39.87	100.80	95.12	---	---	Peak
2483.500	28.37	5.83	39.87	63.86	58.19	74.00	15.81	Peak
2484.800	28.37	5.83	39.87	54.28	48.61	74.00	25.39	Peak

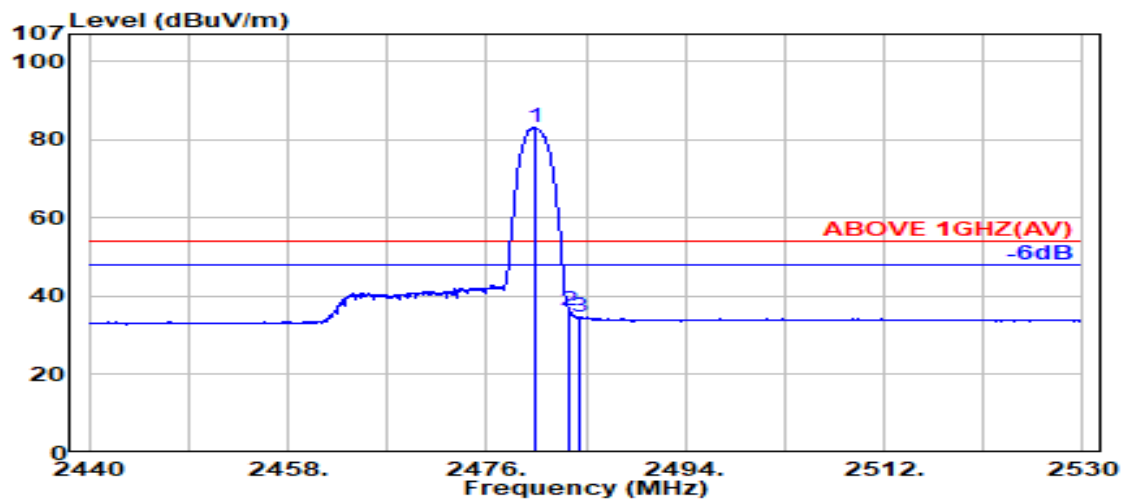

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.300	28.36	5.83	39.87	88.79	83.11	---	---	Average
2483.500	28.37	5.83	39.87	41.81	36.14	54.00	17.86	Average
2484.500	28.37	5.83	39.87	40.30	34.63	54.00	19.37	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	26/8		

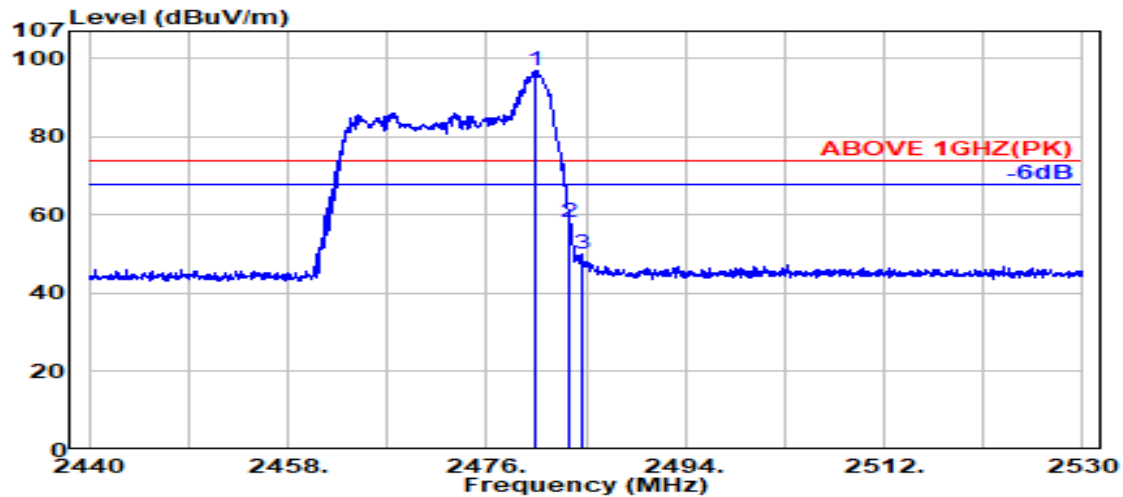

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.500	28.36	5.83	39.87	102.56	96.88	---	---	Peak
	2483.500	28.37	5.83	39.87	63.82	58.14	74.00	15.86	Peak
	2484.550	28.37	5.83	39.87	55.86	50.19	74.00	23.81	Peak

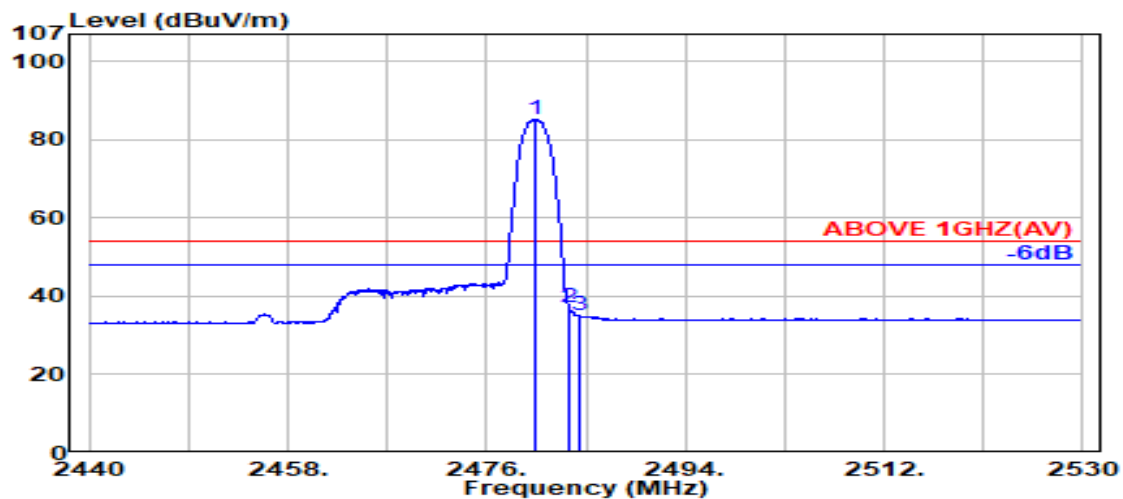

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.350	28.36	5.83	39.87	90.98	85.30	---	---	Average
	2483.500	28.37	5.83	39.87	42.62	36.95	54.00	17.05	Average
	2484.500	28.37	5.83	39.87	40.65	34.98	54.00	19.02	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	52/40		

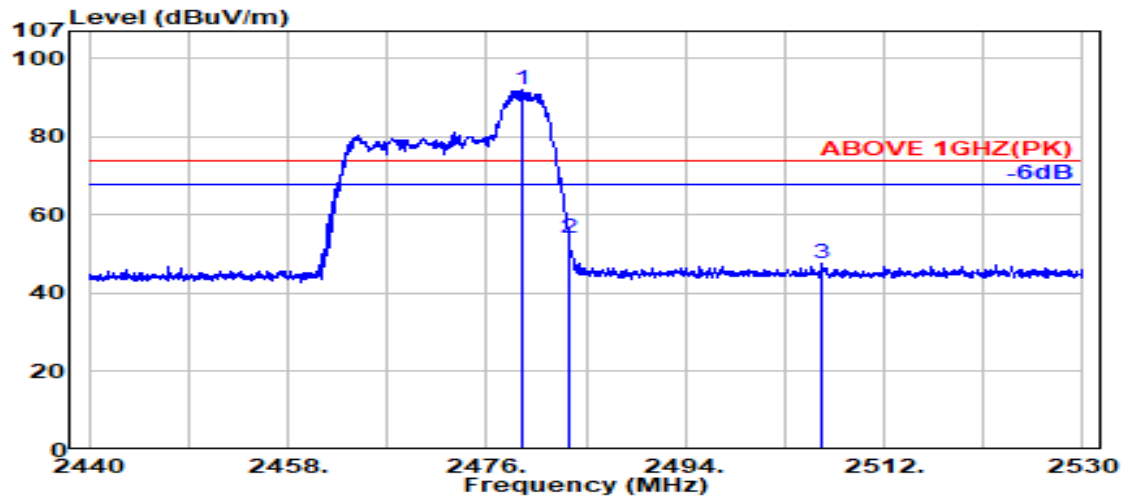

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.150	28.36	5.83	39.87	97.82	92.13	---	---	Peak
2483.500	28.37	5.83	39.87	59.61	53.93	74.00	20.07	Peak
2506.450	28.44	5.86	39.87	53.36	47.78	74.00	26.22	Peak

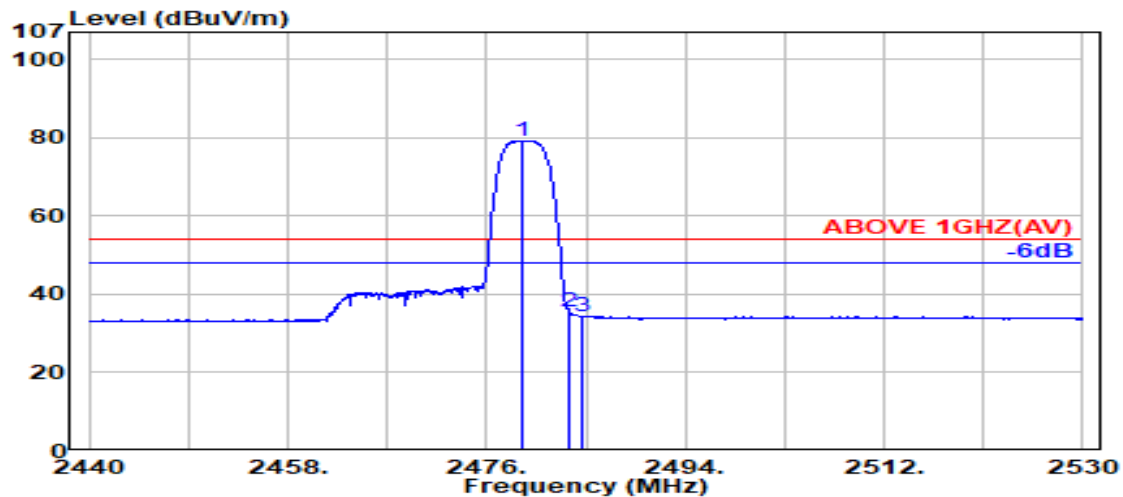

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.250	28.36	5.83	39.87	84.84	79.15	---	---	Average
2483.500	28.37	5.83	39.87	41.01	35.34	54.00	18.66	Average
2484.550	28.37	5.83	39.87	40.06	34.39	54.00	19.61	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	52/40		

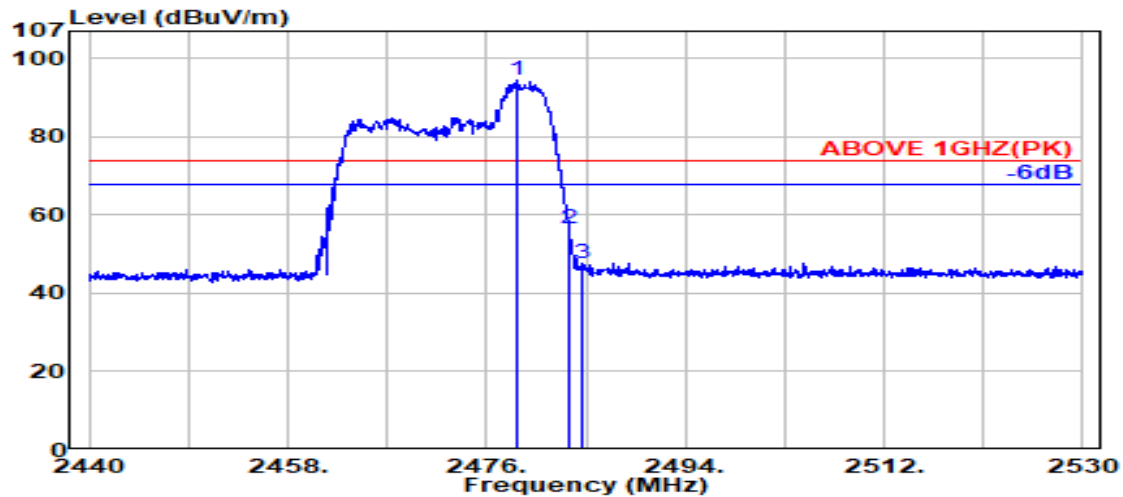

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.800	28.36	5.83	39.87	100.09	94.40	---	---	Peak
2483.500	28.37	5.83	39.87	62.04	56.36	74.00	17.64	Peak
2484.650	28.37	5.83	39.87	53.47	47.80	74.00	26.20	Peak

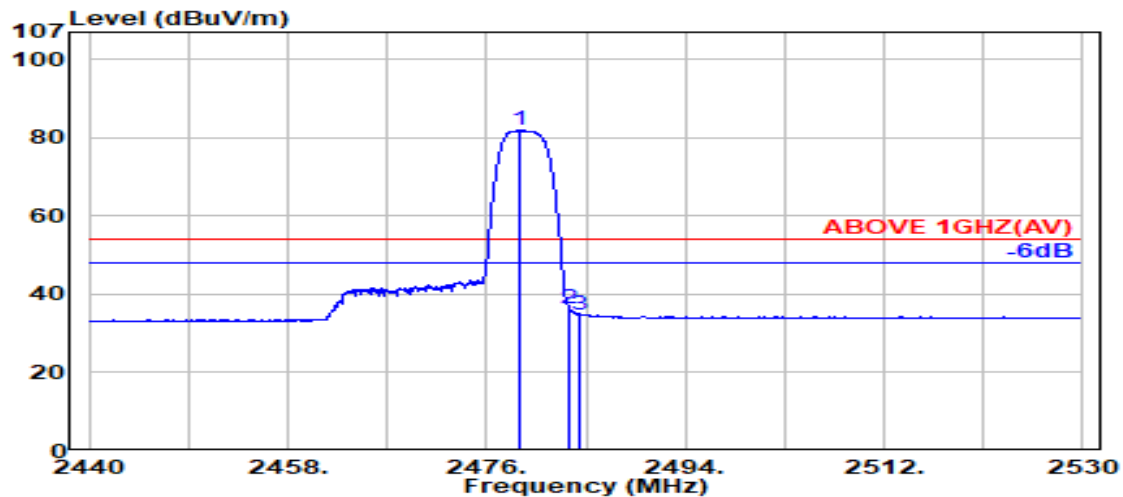

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.900	28.36	5.83	39.87	87.61	81.93	---	---	Average
2483.500	28.37	5.83	39.87	41.84	36.17	54.00	17.83	Average
2484.500	28.37	5.83	39.87	40.50	34.83	54.00	19.17	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	106/54		

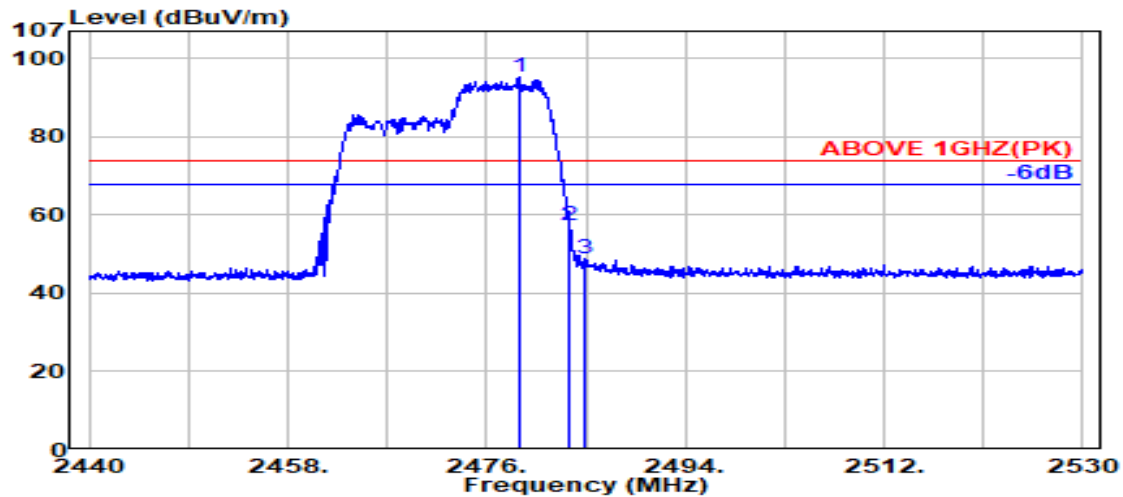

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.950	28.36	5.83	39.87	100.89	95.20	---	---	Peak
2483.500	28.37	5.83	39.87	63.14	57.47	74.00	16.53	Peak
2484.950	28.37	5.83	39.87	54.70	49.03	74.00	24.97	Peak

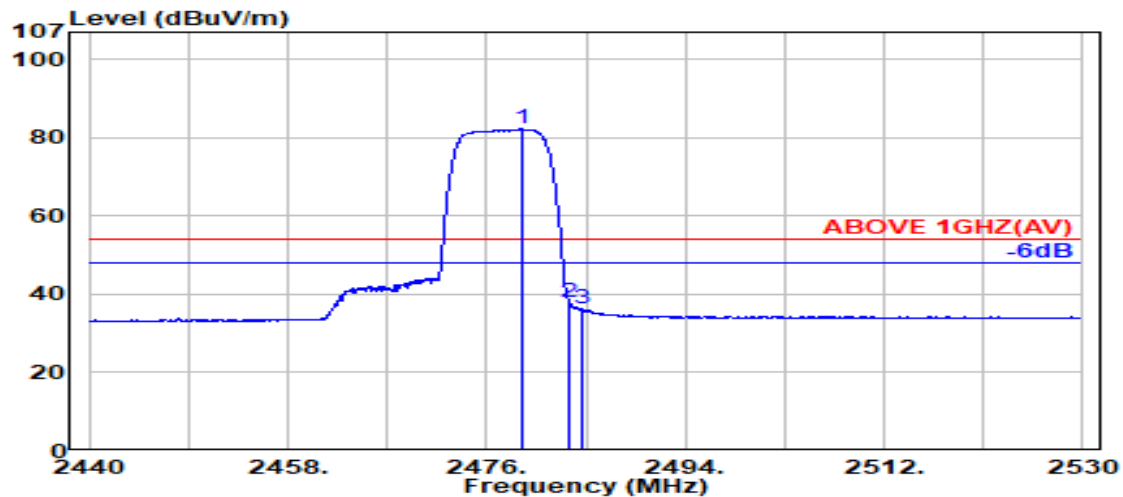

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.150	28.36	5.83	39.87	87.95	82.26	---	---	Average
2483.500	28.37	5.83	39.87	43.45	37.78	54.00	16.22	Average
2484.600	28.37	5.83	39.87	41.95	36.28	54.00	17.72	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	106/54		

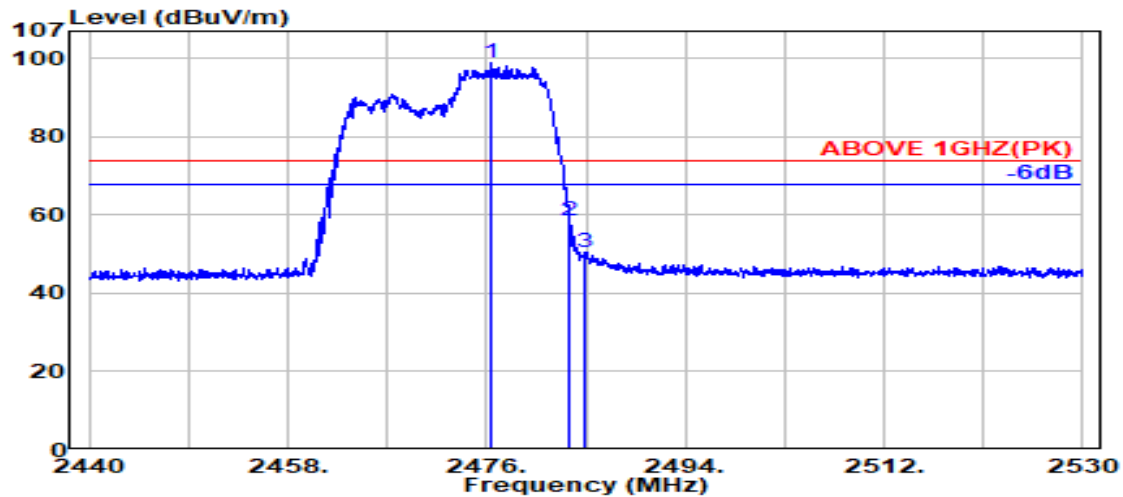

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.450	28.35	5.82	39.87	104.80	99.11	---	---	Peak
2483.500	28.37	5.83	39.87	64.42	58.75	74.00	15.25	Peak
2484.800	28.37	5.83	39.87	56.18	50.51	74.00	23.49	Peak

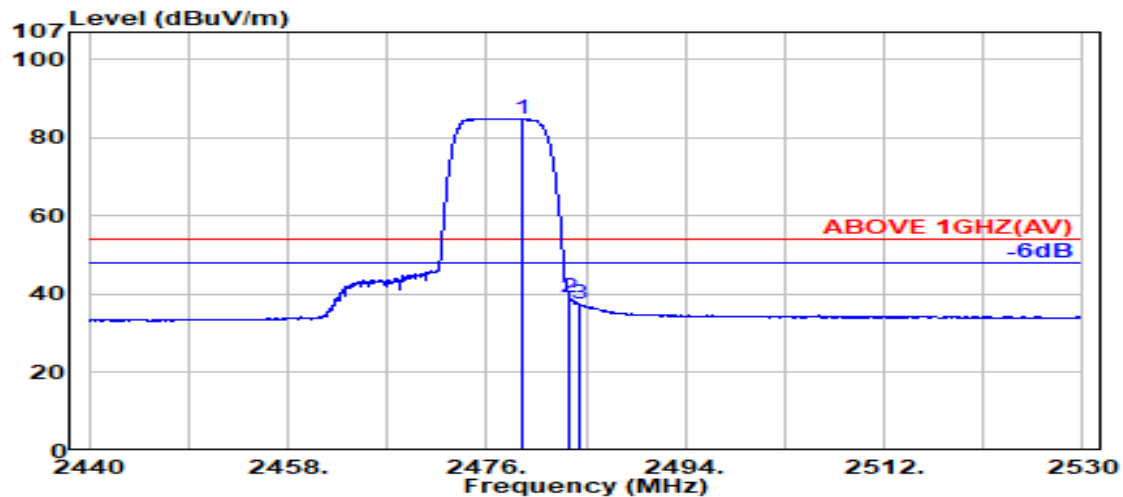

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.200	28.36	5.83	39.87	90.54	84.85	---	---	Average
2483.500	28.37	5.83	39.87	44.99	39.31	54.00	14.69	Average
2484.500	28.37	5.83	39.87	43.03	37.36	54.00	16.64	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2422MHz
RU Configuration	242/61		

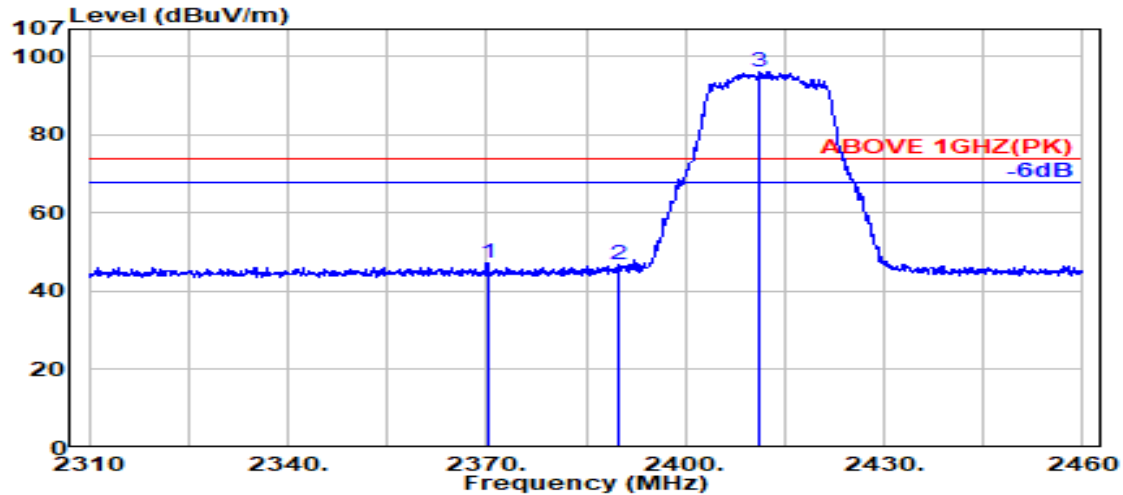

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2370.100	28.22	5.70	39.88	53.22	47.25	74.00	26.75	Peak
2390.000	28.14	5.72	39.88	52.67	46.65	74.00	27.35	Peak
@ 2411.300	28.15	5.75	39.88	102.27	96.29	---	---	Peak

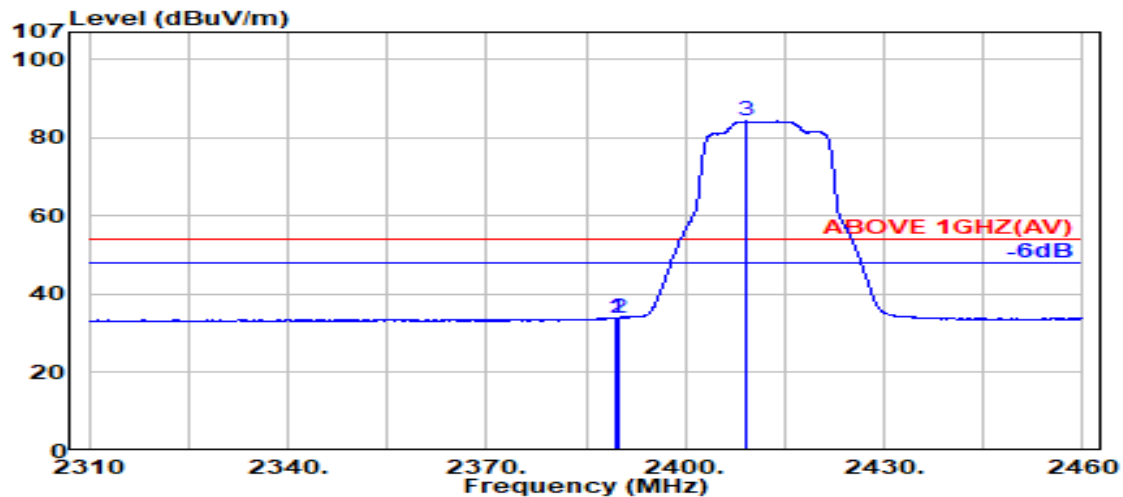

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	40.11	34.09	54.00	19.91	Average
2390.000	28.14	5.72	39.88	39.97	33.95	54.00	20.05	Average
@ 2409.100	28.14	5.74	39.88	90.28	84.29	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2422MHz
RU Configuration	242/61		

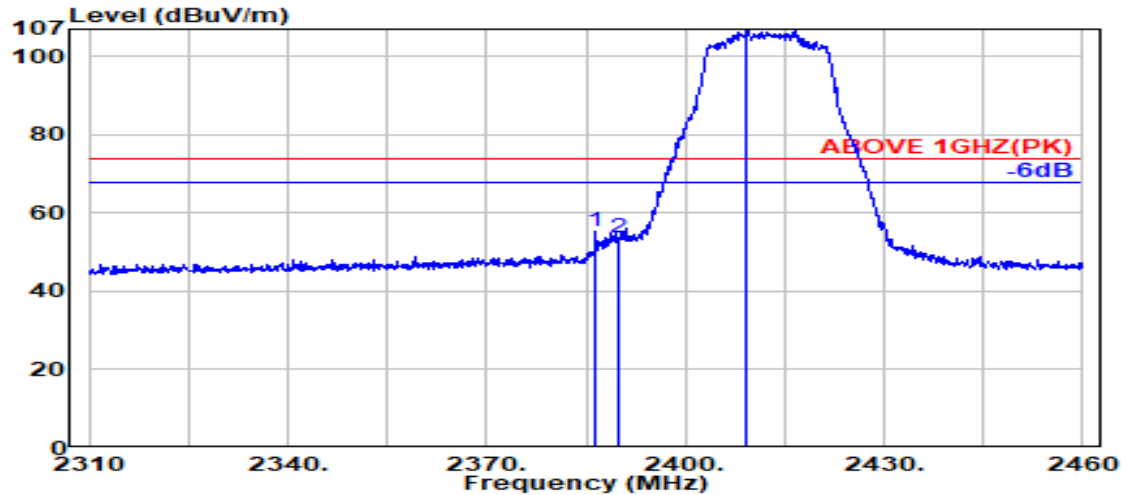

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.500	28.15	5.72	39.88	61.22	55.21	74.00	18.79	Peak
2390.000	28.14	5.72	39.88	59.57	53.55	74.00	20.45	Peak
@ 2409.200	28.14	5.74	39.88	113.00	107.00	---	---	Peak

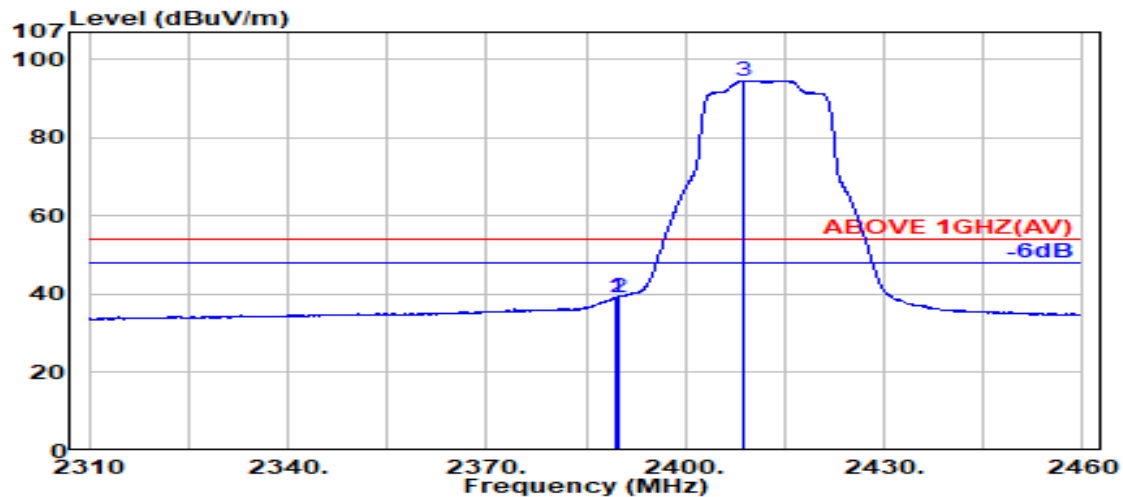

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.14	5.72	39.88	45.14	39.13	54.00	14.87	Average
2390.000	28.14	5.72	39.88	45.35	39.34	54.00	14.66	Average
@ 2408.900	28.14	5.74	39.88	100.68	94.68	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2462MHz
RU Configuration	242/62		

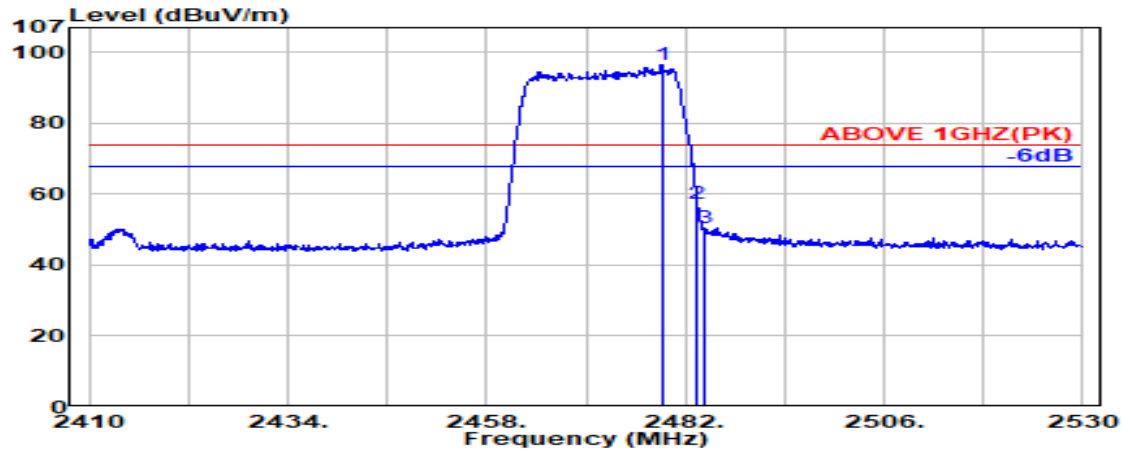

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2479.200	28.36	5.83	39.87	102.27	96.58	---	---	Peak
	2483.500	28.37	5.83	39.87	63.17	57.49	74.00	16.51	Peak
	2484.400	28.37	5.83	39.87	56.11	50.44	74.00	23.56	Peak

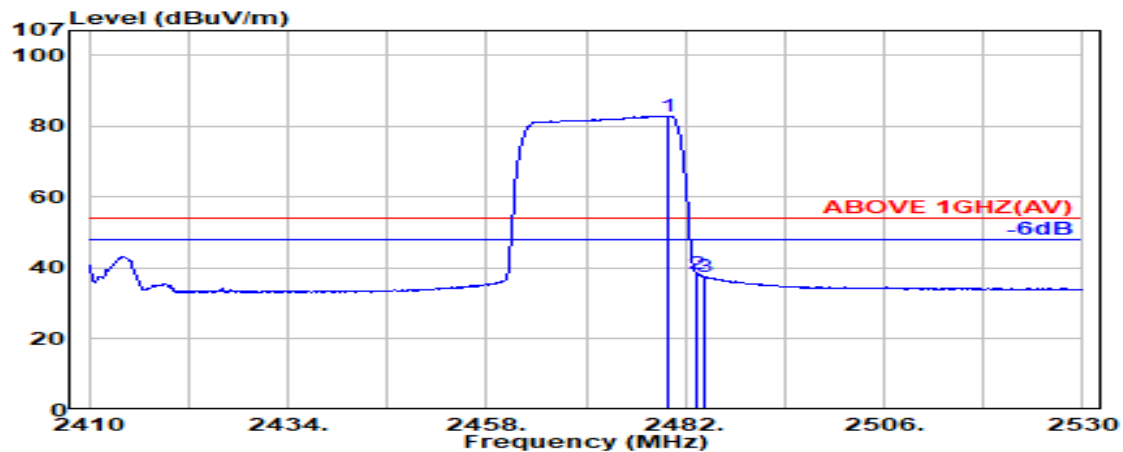

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2479.800	28.36	5.83	39.87	88.62	82.94	---	---	Average
	2483.500	28.37	5.83	39.87	43.97	38.30	54.00	15.70	Average
	2484.400	28.37	5.83	39.87	43.11	37.44	54.00	16.56	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2462MHz
RU Configuration	242/62		

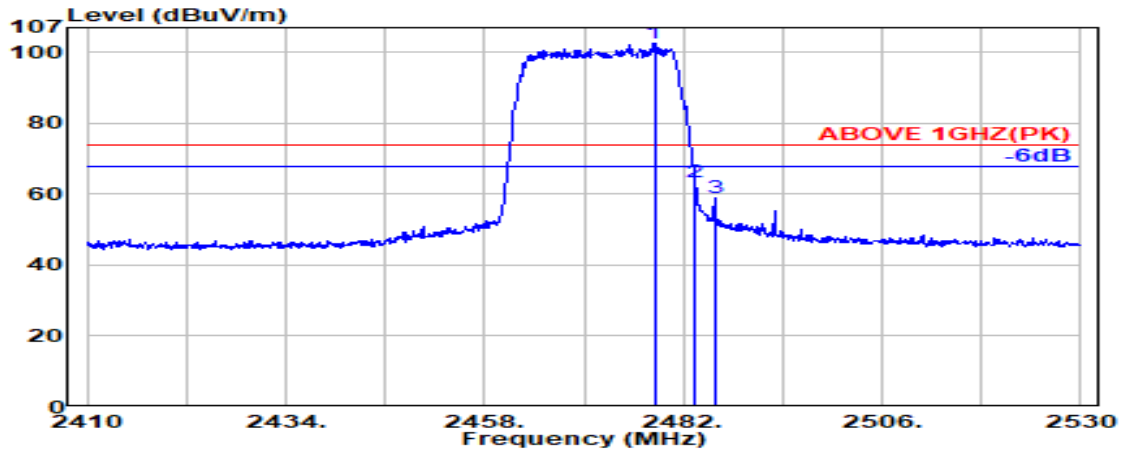

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.500	28.36	5.83	39.87	108.12	102.43	---	---	Peak
2483.500	28.37	5.83	39.87	69.15	63.47	74.00	10.53	Peak
2485.800	28.37	5.83	39.87	64.62	58.95	74.00	15.05	Peak

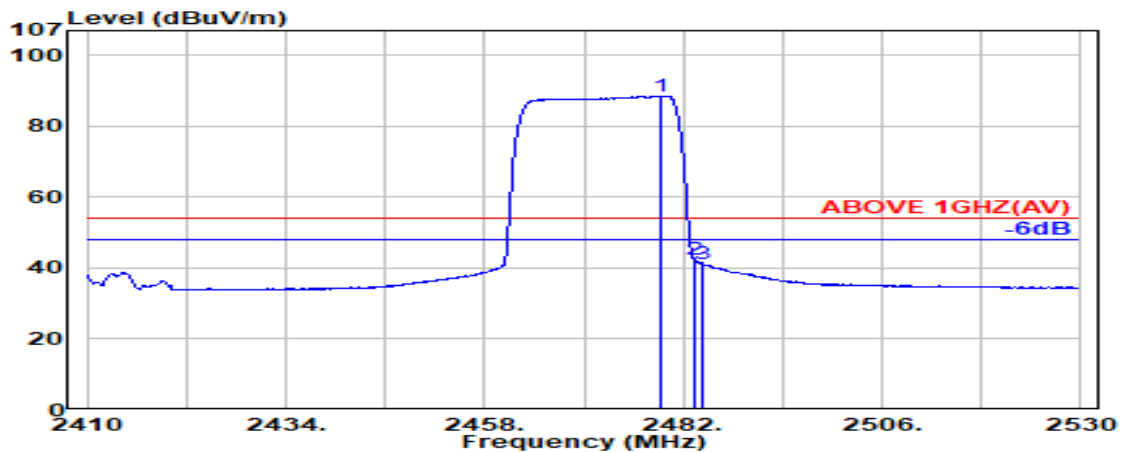

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.400	28.36	5.83	39.87	94.21	88.52	---	---	Average
2483.500	28.37	5.83	39.87	47.94	42.27	54.00	11.73	Average
2484.400	28.37	5.83	39.87	46.84	41.17	54.00	12.83	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

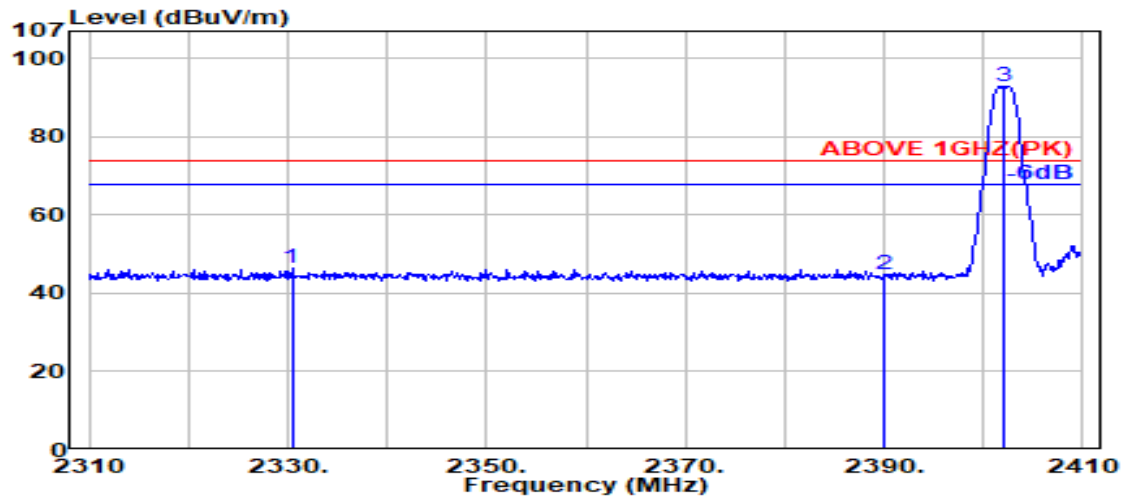

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2330.400	28.18	5.65	39.88	52.34	46.29	74.00	27.71	Peak
2390.000	28.14	5.72	39.88	50.98	44.96	74.00	29.04	Peak
@ 2402.100	28.11	5.74	39.88	98.78	92.74	---	---	Peak

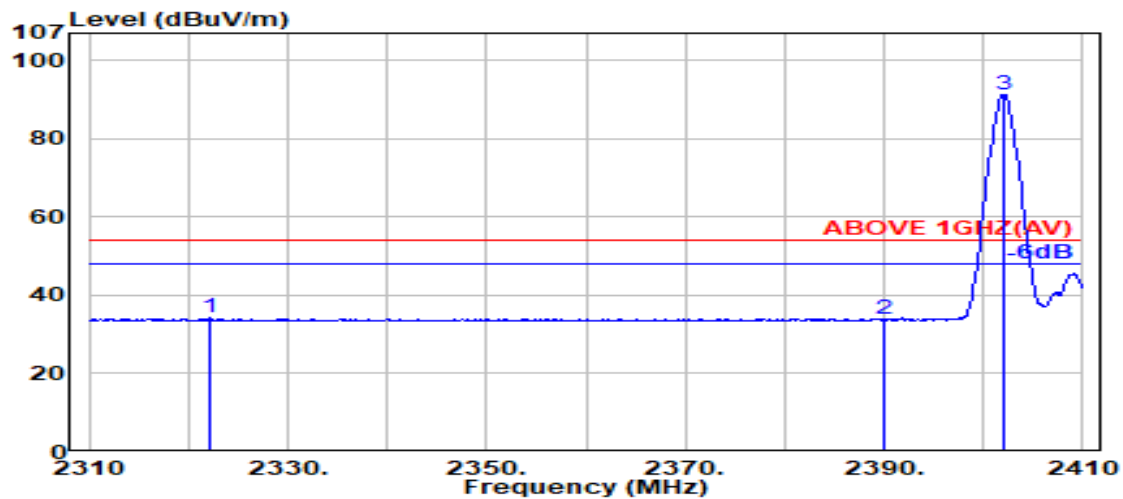

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2322.100	28.13	5.64	39.88	40.24	34.12	54.00	19.88	Average
2390.000	28.14	5.72	39.88	39.82	33.80	54.00	20.20	Average
@ 2402.100	28.11	5.74	39.88	97.42	91.38	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

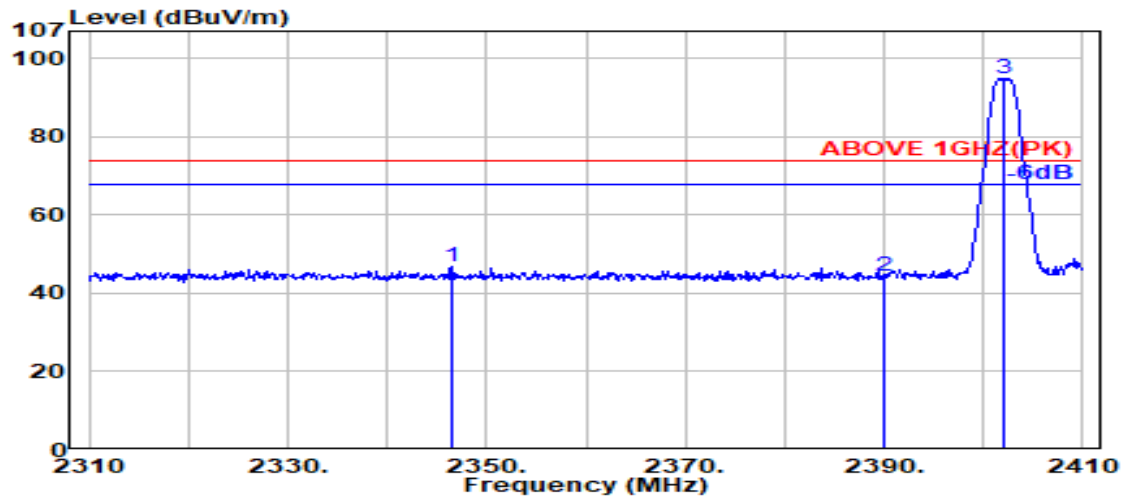

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2346.400	28.28	5.67	39.88	52.62	46.69	74.00	27.31	Peak
2390.000	28.14	5.72	39.88	50.52	44.51	74.00	29.49	Peak
@ 2402.100	28.11	5.74	39.88	100.79	94.76	---	---	Peak

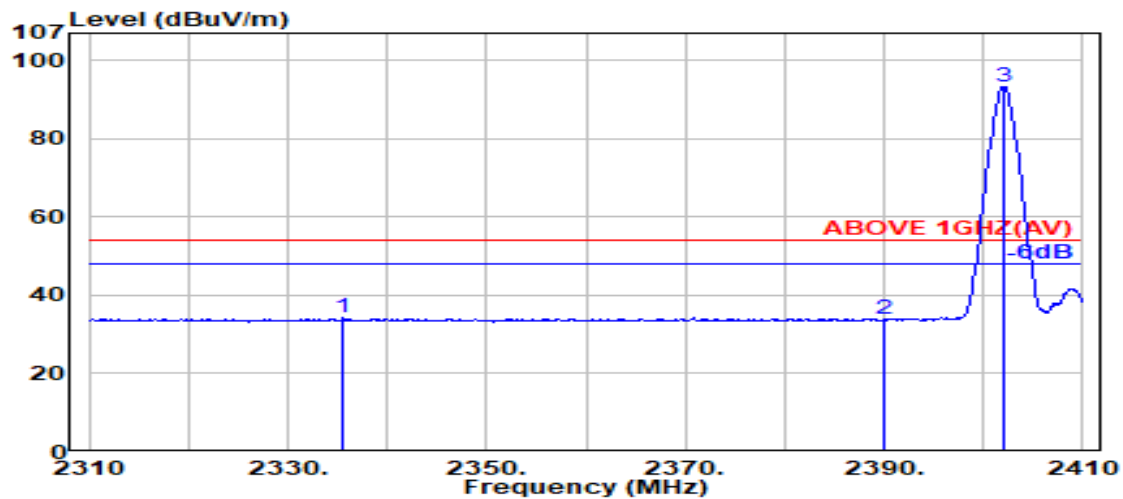

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2335.600	28.21	5.65	39.88	40.30	34.29	54.00	19.71	Average
2390.000	28.14	5.72	39.88	39.80	33.78	54.00	20.22	Average
@ 2402.100	28.11	5.74	39.88	99.41	93.38	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2Mbps)	Frequency	TX 2480 MHz
------	-------------	-----------	-------------

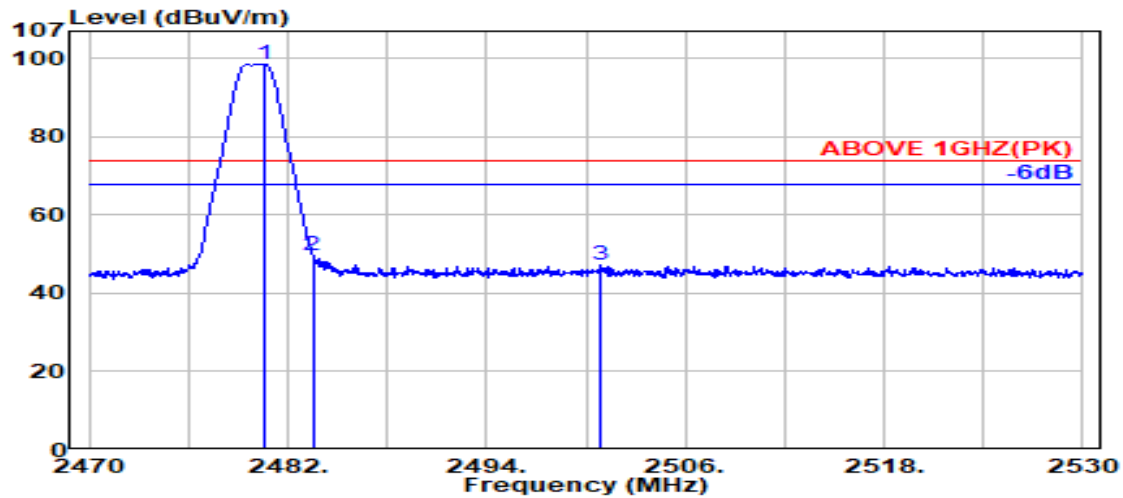

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.550	28.36	5.83	39.87	104.34	98.65	---	---	Peak
	2483.500	28.37	5.83	39.87	55.27	49.59	74.00	24.41	Peak
	2500.850	28.41	5.85	39.87	52.90	47.29	74.00	26.71	Peak

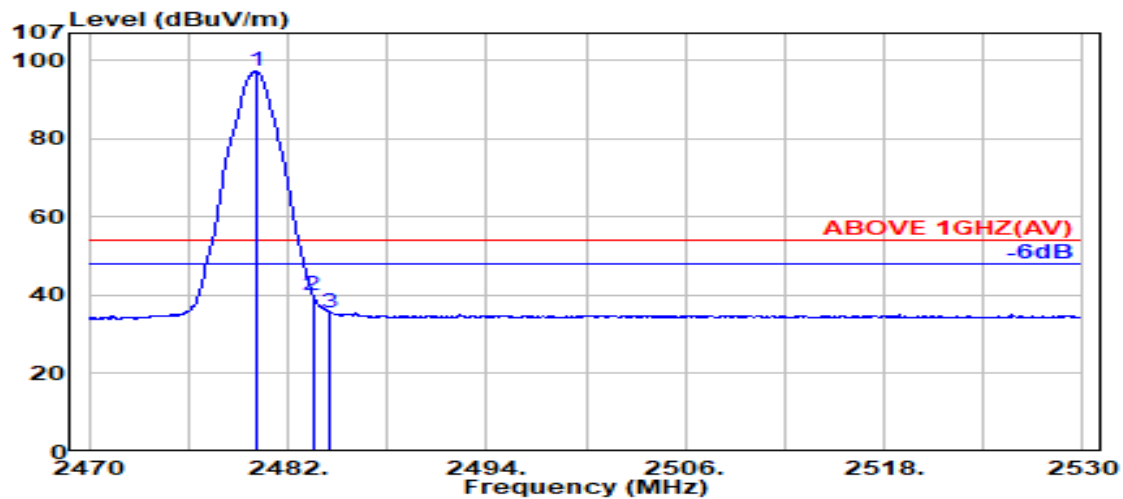

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.050	28.36	5.83	39.87	102.86	97.18	---	---	Average
	2483.500	28.37	5.83	39.87	45.60	39.93	54.00	14.07	Average
	2484.550	28.37	5.83	39.87	41.39	35.72	54.00	18.28	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2Mbps)	Frequency	TX 2480 MHz
------	-------------	-----------	-------------

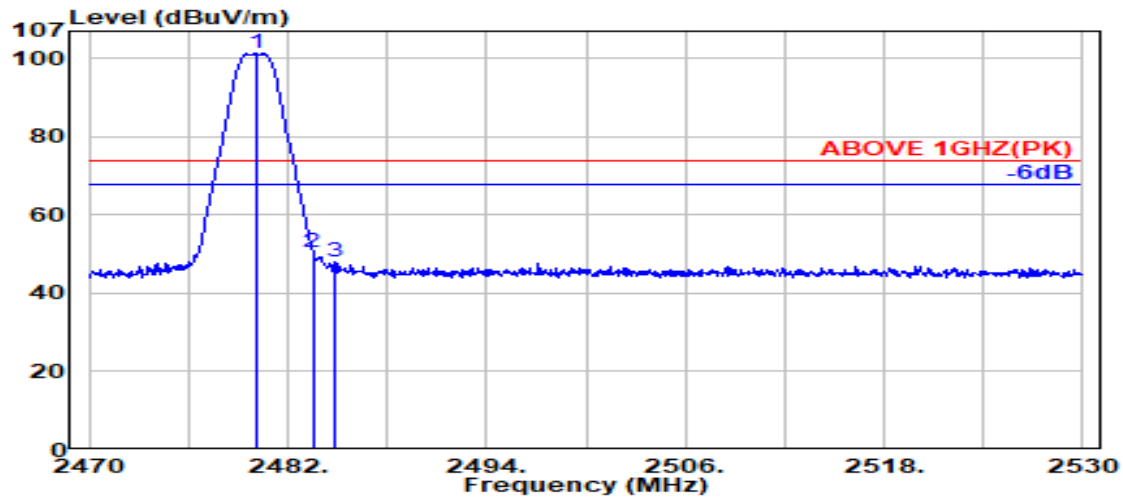

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.050	28.36	5.83	39.87	106.88	101.20	---	---	Peak
2483.500	28.37	5.83	39.87	56.25	50.58	74.00	23.42	Peak
2484.800	28.37	5.83	39.87	53.58	47.91	74.00	26.09	Peak

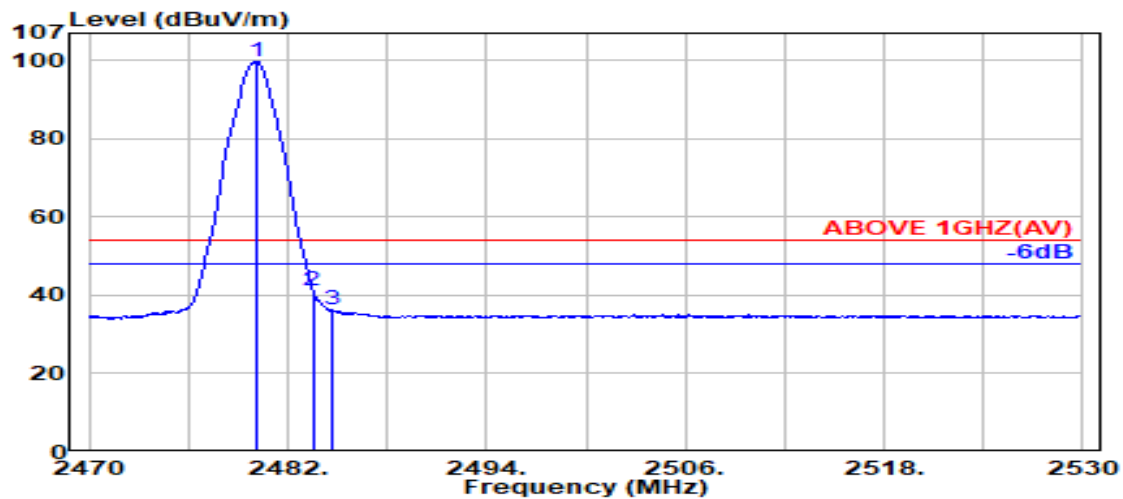

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.050	28.36	5.83	39.87	105.44	99.76	---	---	Average
2483.500	28.37	5.83	39.87	47.06	41.39	54.00	12.61	Average
2484.700	28.37	5.83	39.87	42.00	36.33	54.00	17.67	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Antenna: LUXSHARE-ICT


● Wireless LAN Mode

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

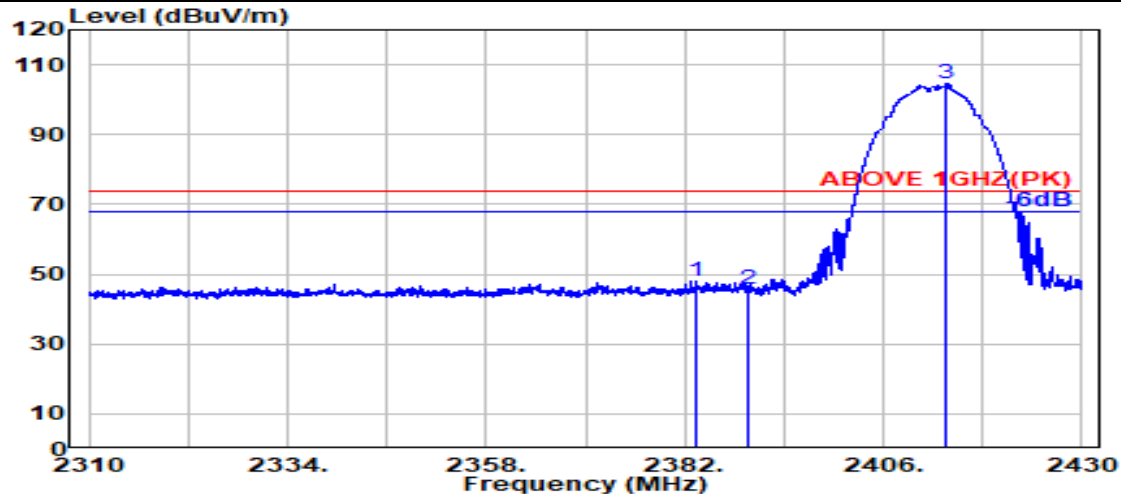

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2383.400	28.23	6.03	34.50	48.17	47.93	74.00	26.07	Peak
2389.800	28.18	6.03	34.50	45.87	45.59	74.00	28.41	Peak
@ 2413.650	28.18	6.07	34.50	104.88	104.63	---	---	Peak

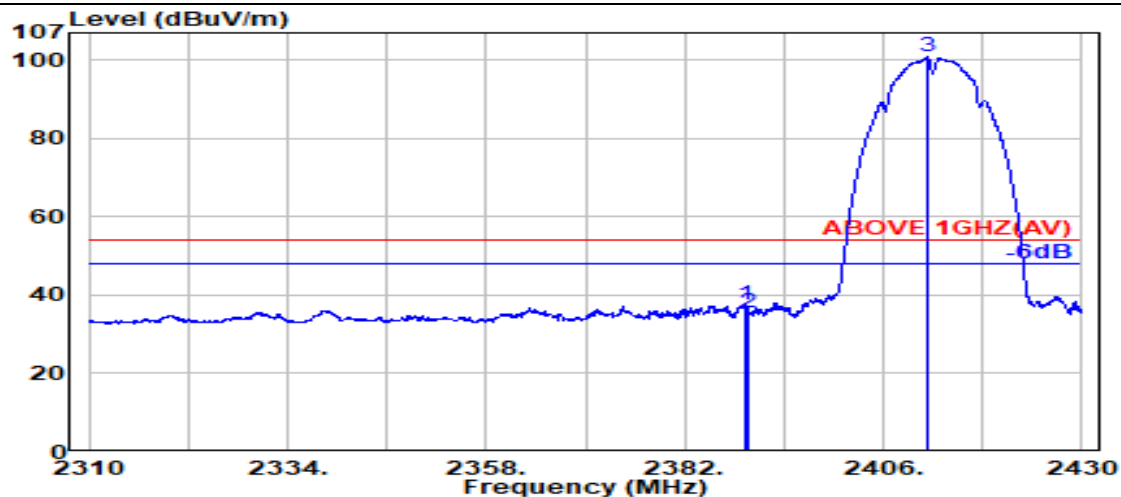

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	28.18	6.03	34.50	37.79	37.52	54.00	16.48	Average
2389.800	28.18	6.03	34.50	35.68	35.40	54.00	18.60	Average
@ 2411.250	28.17	6.07	34.50	101.05	100.78	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

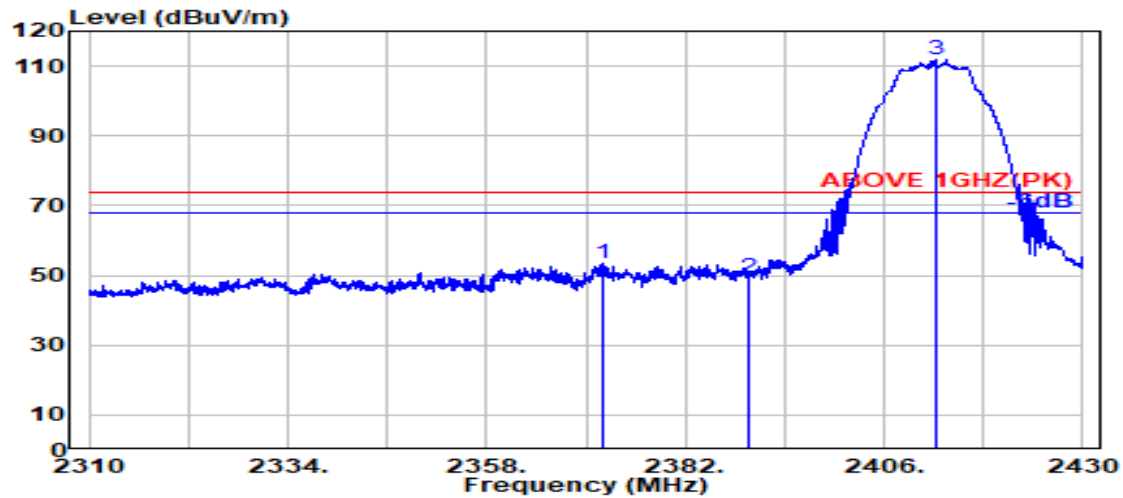

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2371.950	28.32	6.01	34.49	53.68	53.51	74.00	20.49	Peak
2389.800	28.18	6.03	34.50	49.68	49.40	74.00	24.60	Peak
@ 2412.150	28.17	6.07	34.50	111.99	111.73	---	---	Peak

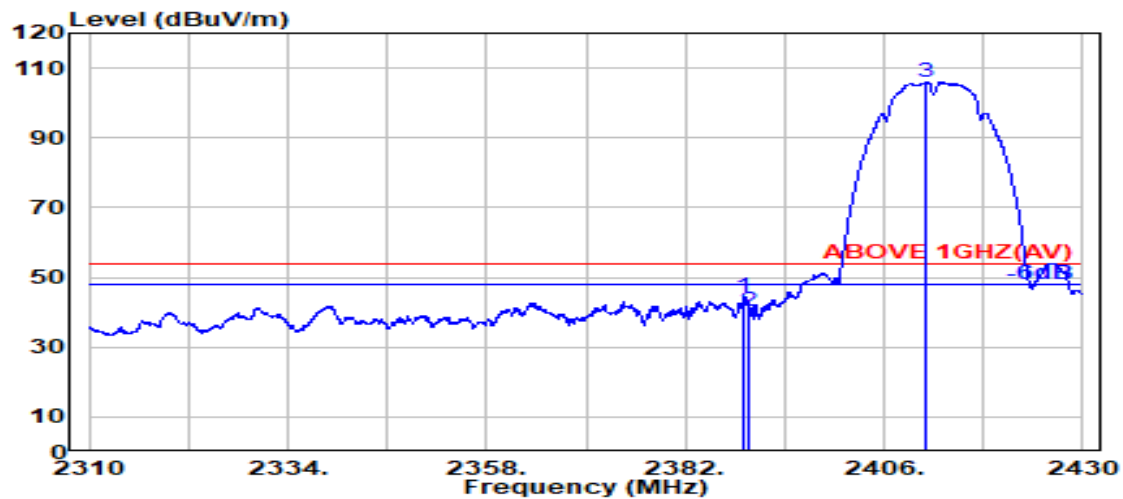

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.150	28.19	6.03	34.50	44.86	44.58	54.00	9.42	Average
2389.800	28.18	6.03	34.50	40.45	40.17	54.00	13.83	Average
@ 2411.150	28.17	6.07	34.50	106.43	106.16	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

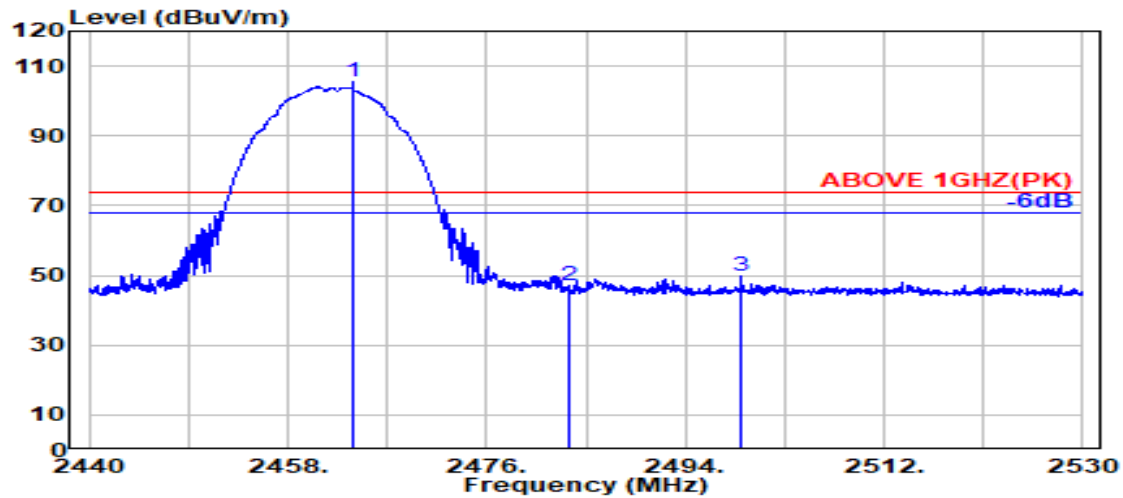

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.850	28.43	6.14	34.51	105.36	105.41	---	---	Peak
2483.500	28.47	6.17	34.52	47.01	47.13	74.00	26.87	Peak
2499.050	28.50	6.19	34.52	49.60	49.77	74.00	24.23	Peak

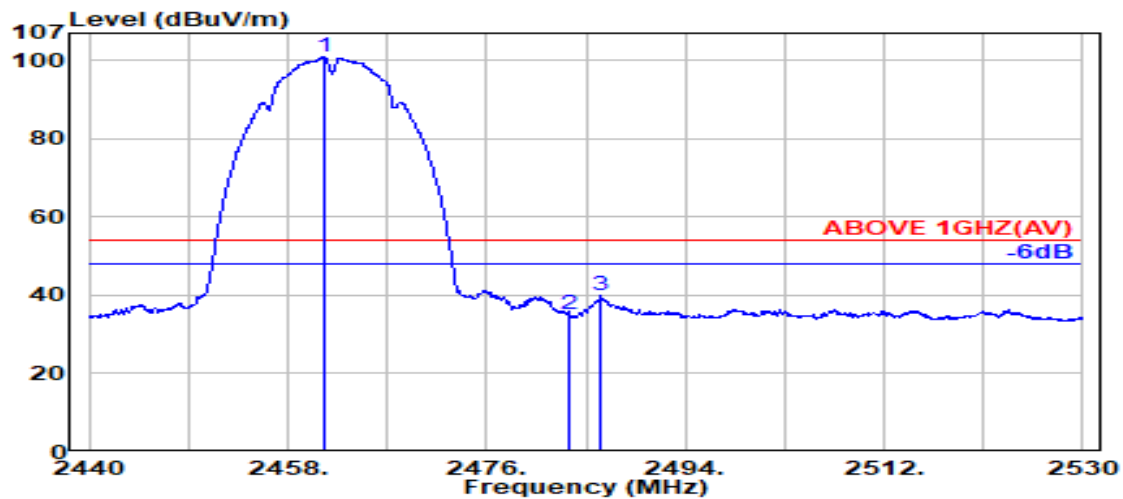

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.300	28.42	6.14	34.51	100.80	100.85	---	---	Average
2483.500	28.47	6.17	34.52	34.88	35.00	54.00	19.00	Average
2486.300	28.47	6.17	34.52	39.75	39.88	54.00	14.12	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

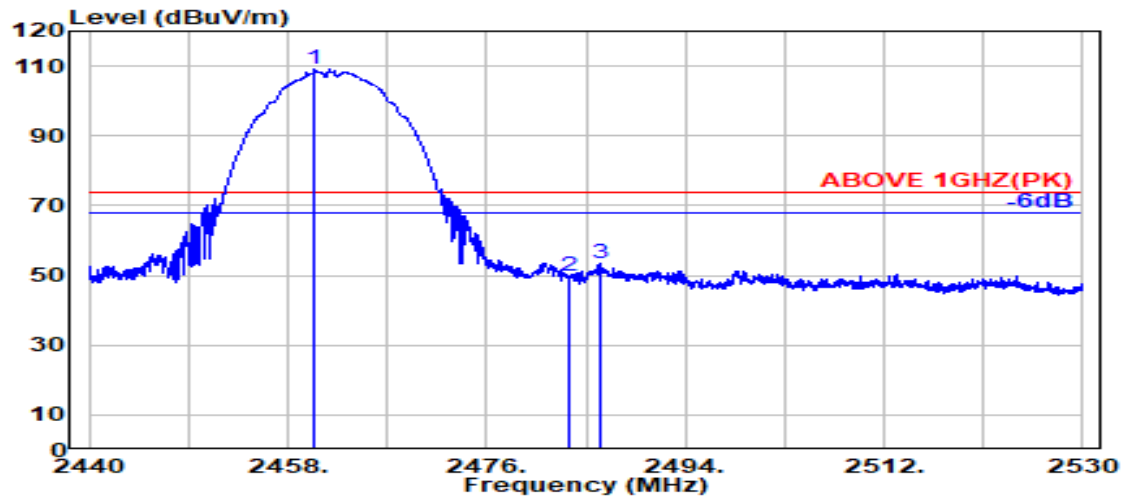

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.400	28.42	6.13	34.51	109.05	109.10	---	---	Peak
2483.500	28.47	6.17	34.52	49.81	49.93	74.00	24.07	Peak
2486.350	28.47	6.17	34.52	53.15	53.28	74.00	20.72	Peak

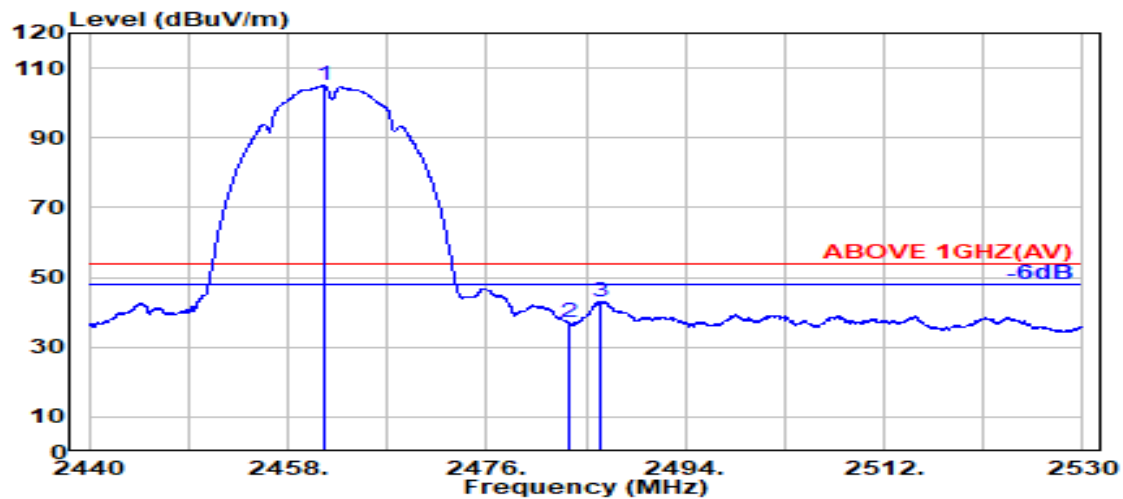

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.300	28.42	6.14	34.51	105.01	105.06	---	---	Average
2483.500	28.47	6.17	34.52	37.09	37.20	54.00	16.80	Average
2486.350	28.47	6.17	34.52	43.11	43.23	54.00	10.77	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2467 MHz
------	---------	-----------	-------------

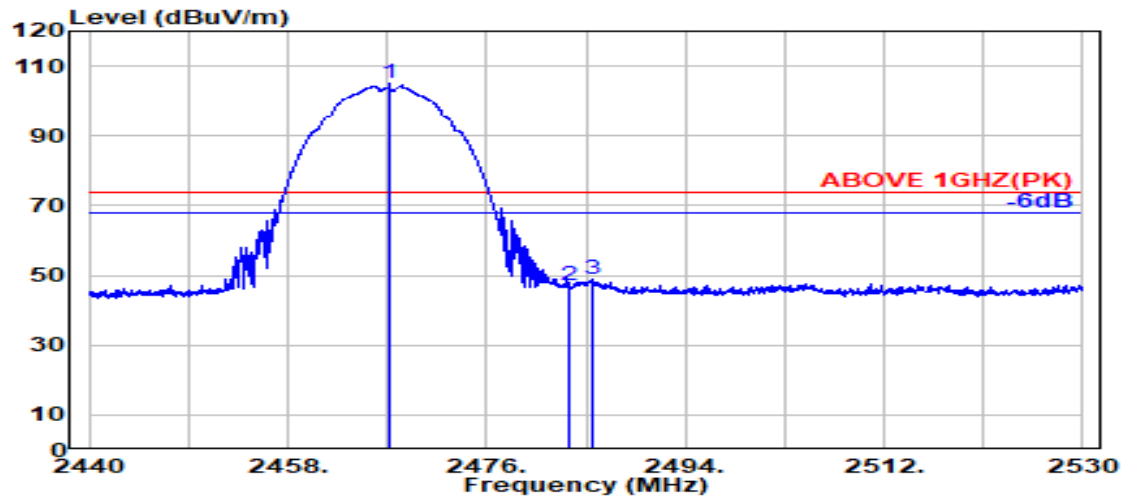

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.250	28.43	6.14	34.51	104.83	104.90	---	---	Peak
2483.500	28.47	6.17	34.52	47.15	47.27	74.00	26.73	Peak
2485.500	28.47	6.17	34.52	48.62	48.75	74.00	25.25	Peak

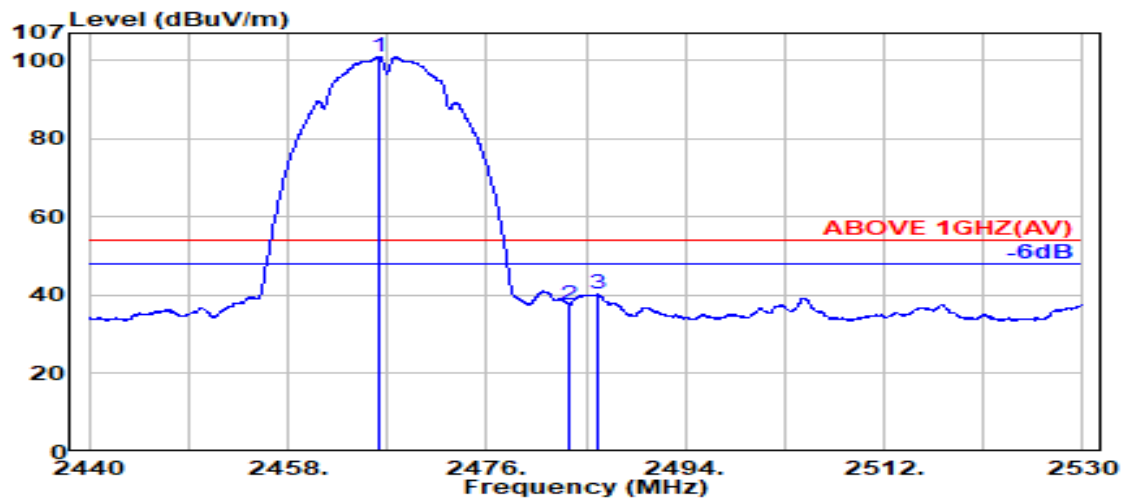

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.250	28.43	6.14	34.51	100.83	100.90	---	---	Average
2483.500	28.47	6.17	34.52	37.40	37.52	54.00	16.48	Average
2486.050	28.47	6.17	34.52	40.08	40.21	54.00	13.79	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2467 MHz
------	---------	-----------	-------------

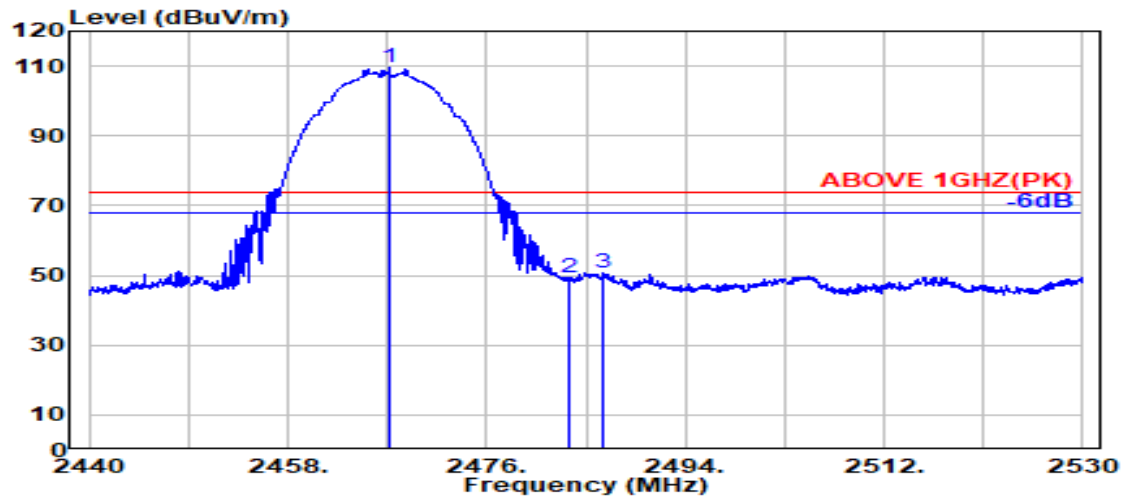

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2467.250	28.43	6.14	34.51	109.32	109.38	---	---	Peak
2483.500	28.47	6.17	34.52	49.07	49.19	74.00	24.81	Peak
2486.500	28.47	6.17	34.52	50.59	50.72	74.00	23.28	Peak

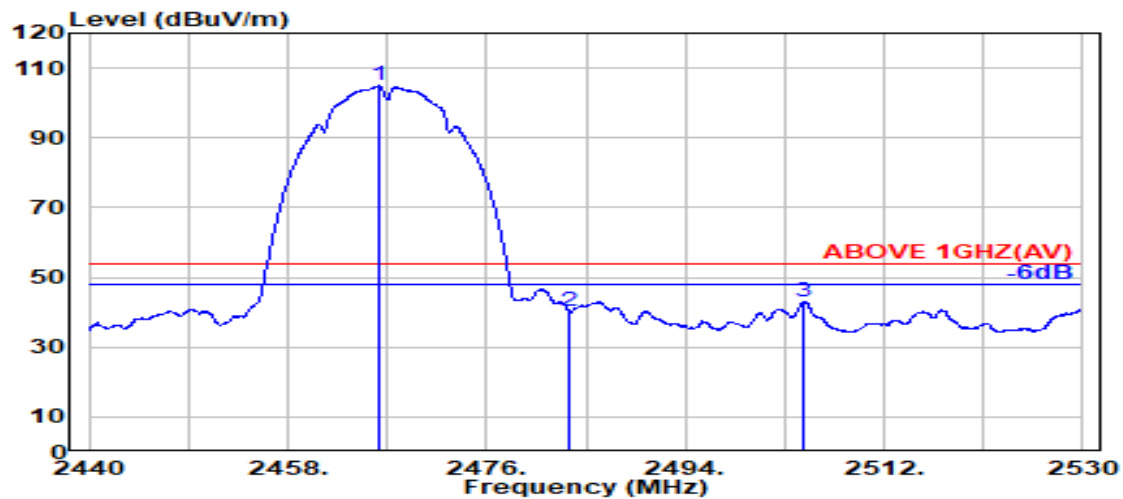

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2466.250	28.43	6.14	34.51	104.85	104.92	---	---	Average
2483.500	28.47	6.17	34.52	40.08	40.19	54.00	13.81	Average
2504.800	28.53	6.20	34.52	42.97	43.17	54.00	10.83	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2472 MHz
------	---------	-----------	-------------

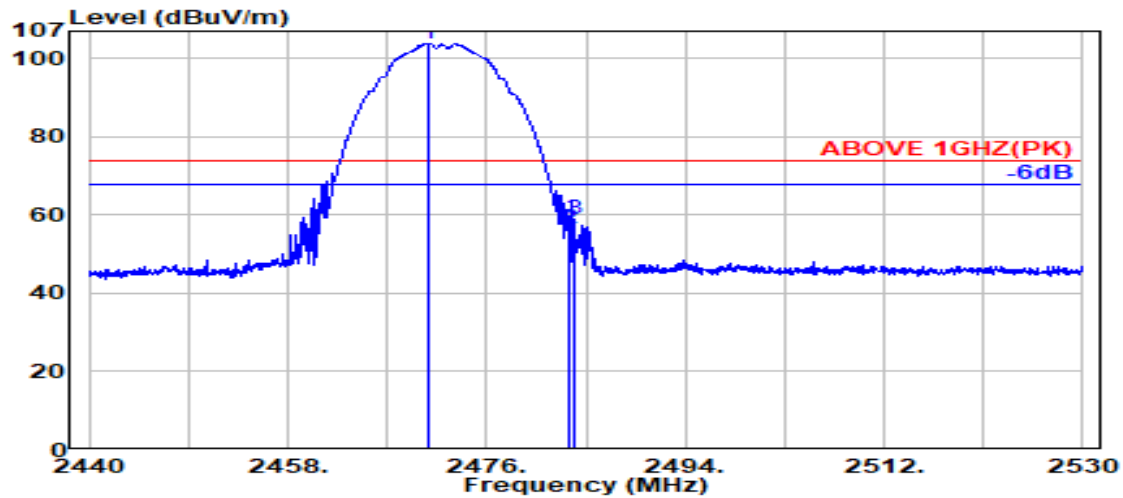

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.850	28.44	6.15	34.51	103.72	103.79	---	---	Peak
2483.500	28.47	6.17	34.52	56.35	56.46	74.00	17.54	Peak
2484.000	28.47	6.17	34.52	58.66	58.78	74.00	15.22	Peak

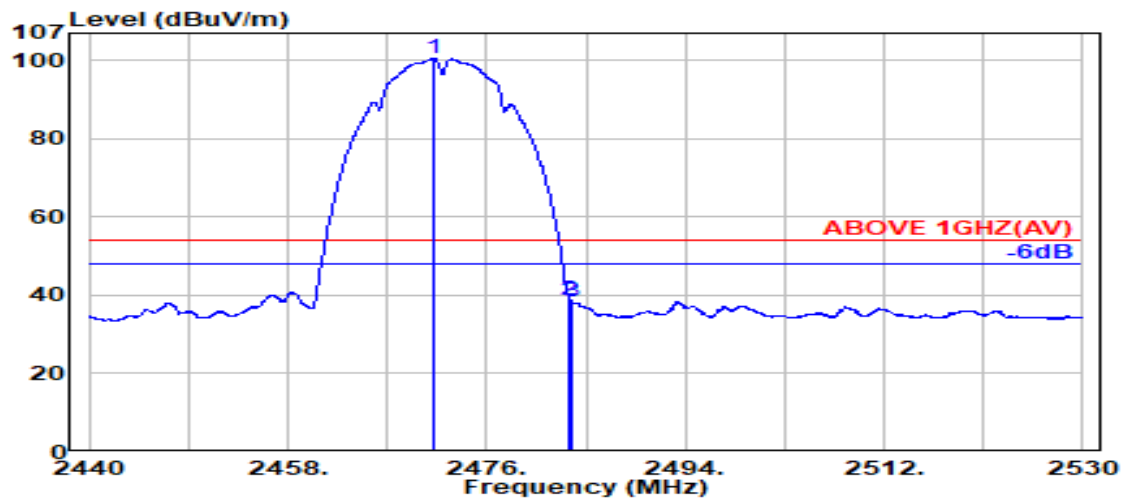

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.250	28.44	6.15	34.51	100.51	100.59	---	---	Average
2483.500	28.47	6.17	34.52	38.83	38.95	54.00	15.05	Average
2483.700	28.47	6.17	34.52	38.29	38.41	54.00	15.59	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2472 MHz
------	---------	-----------	-------------

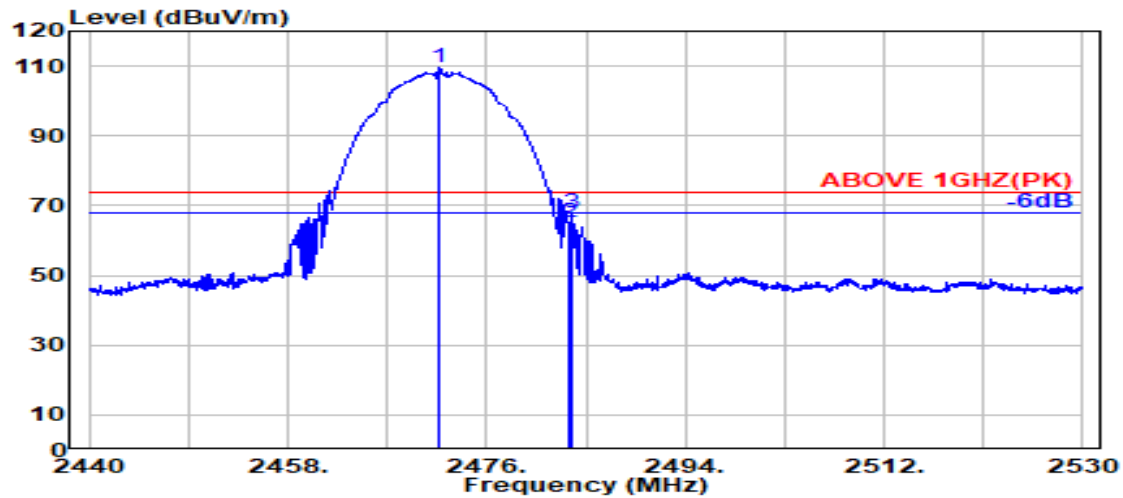

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.750	28.44	6.15	34.51	109.29	109.37	---	---	Peak
2483.500	28.47	6.17	34.52	65.18	65.30	74.00	8.70	Peak
2483.700	28.47	6.17	34.52	67.72	67.84	74.00	6.16	Peak

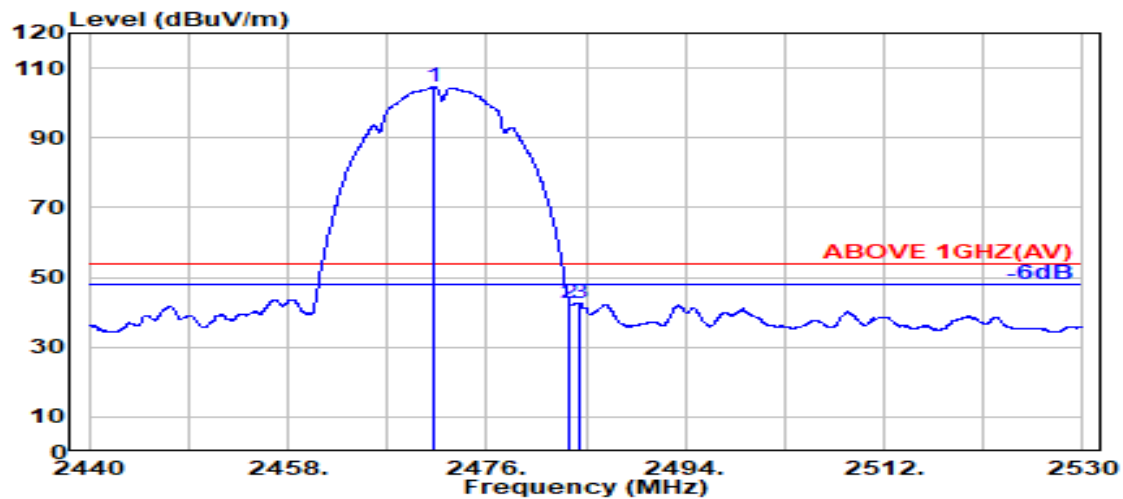

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.250	28.44	6.15	34.51	104.61	104.69	---	---	Average
2483.500	28.47	6.17	34.52	42.48	42.59	54.00	11.41	Average
2484.350	28.47	6.17	34.52	42.63	42.75	54.00	11.25	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

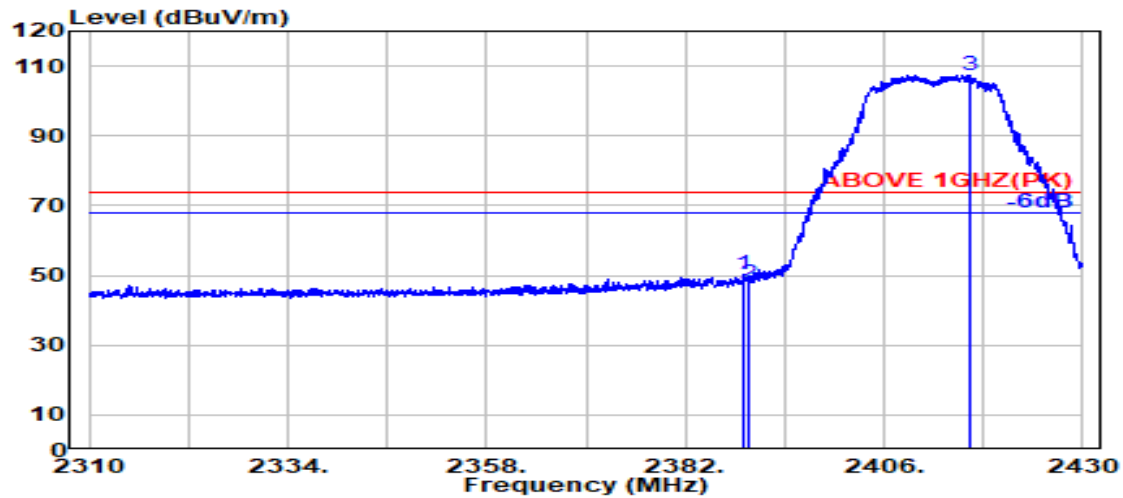

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.950	28.19	6.03	34.50	50.71	50.43	74.00	23.57	Peak
2389.800	28.18	6.03	34.50	47.68	47.40	74.00	26.60	Peak
@ 2416.450	28.20	6.07	34.50	107.74	107.51	---	---	Peak

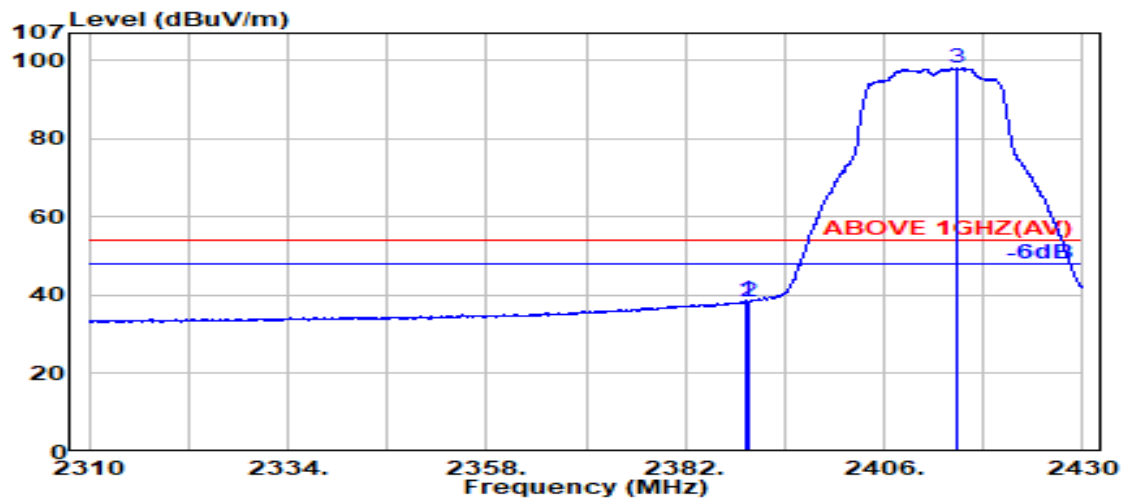

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.250	28.19	6.03	34.50	38.94	38.66	54.00	15.34	Average
2389.800	28.18	6.03	34.50	38.68	38.40	54.00	15.60	Average
@ 2414.900	28.19	6.07	34.50	98.24	98.00	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

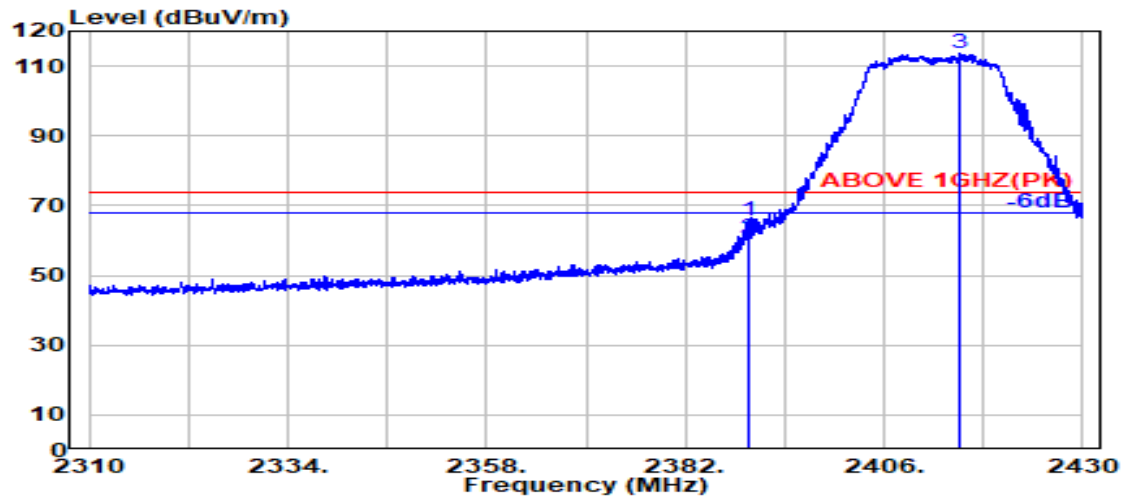

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.50	65.84	65.56	74.00	8.44	Peak
2389.800	28.18	6.03	34.50	60.98	60.69	74.00	13.31	Peak
@ 2415.250	28.19	6.07	34.50	113.86	113.62	---	---	Peak

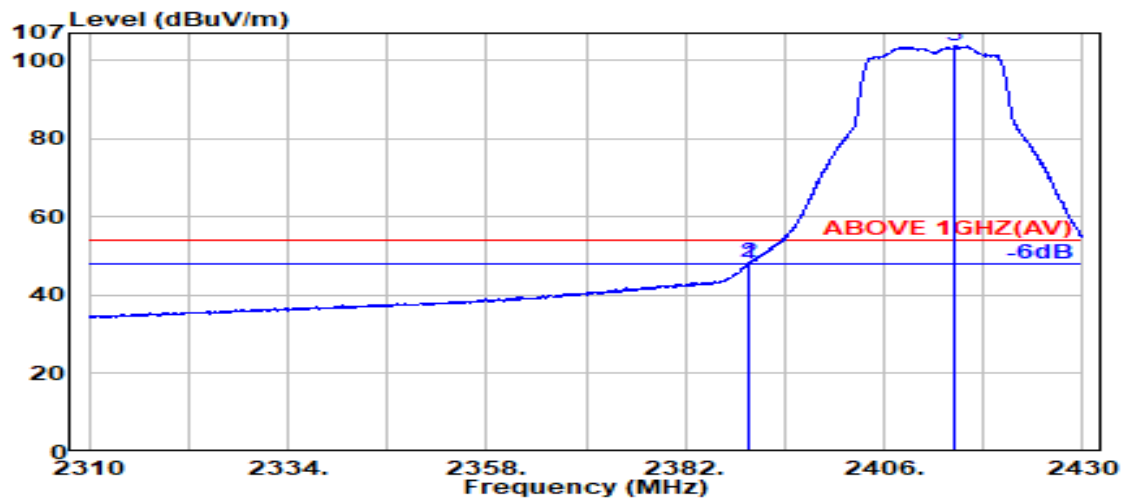

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.50	48.48	48.20	54.00	5.80	Average
2389.800	28.18	6.03	34.50	48.58	48.30	54.00	5.70	Average
@ 2414.600	28.19	6.07	34.50	103.98	103.73	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

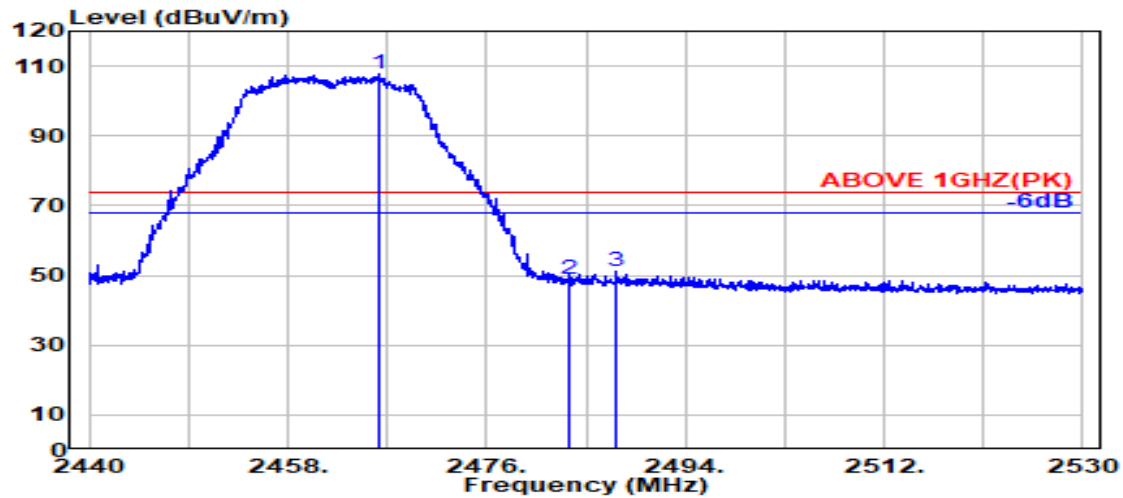

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.250	28.43	6.14	34.51	107.71	107.77	---	---	Peak
2483.500	28.47	6.17	34.52	48.94	49.06	74.00	24.94	Peak
2487.700	28.48	6.17	34.52	50.97	51.10	74.00	22.90	Peak

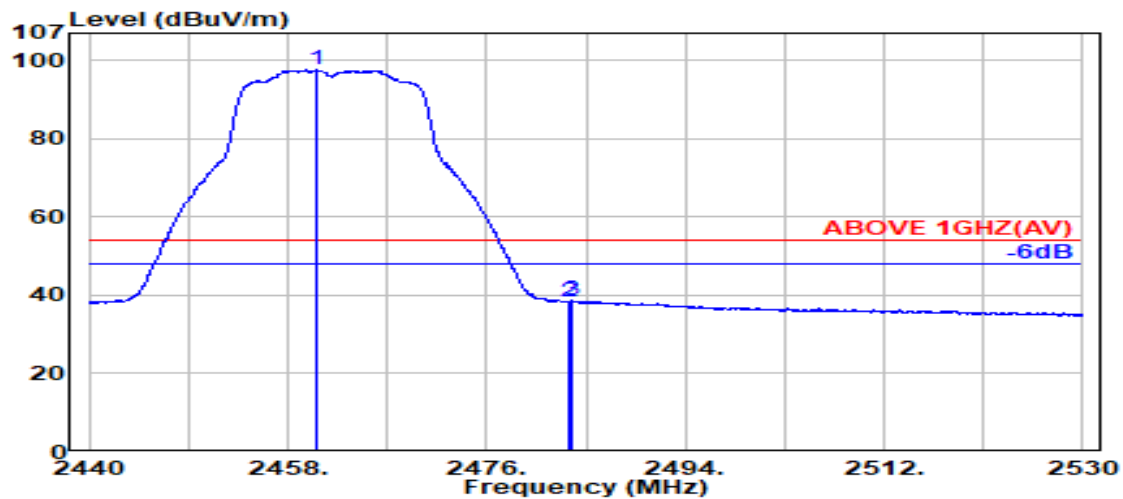

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.650	28.42	6.14	34.51	97.61	97.65	---	---	Average
2483.500	28.47	6.17	34.52	38.42	38.54	54.00	15.46	Average
2483.750	28.47	6.17	34.52	38.48	38.60	54.00	15.40	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

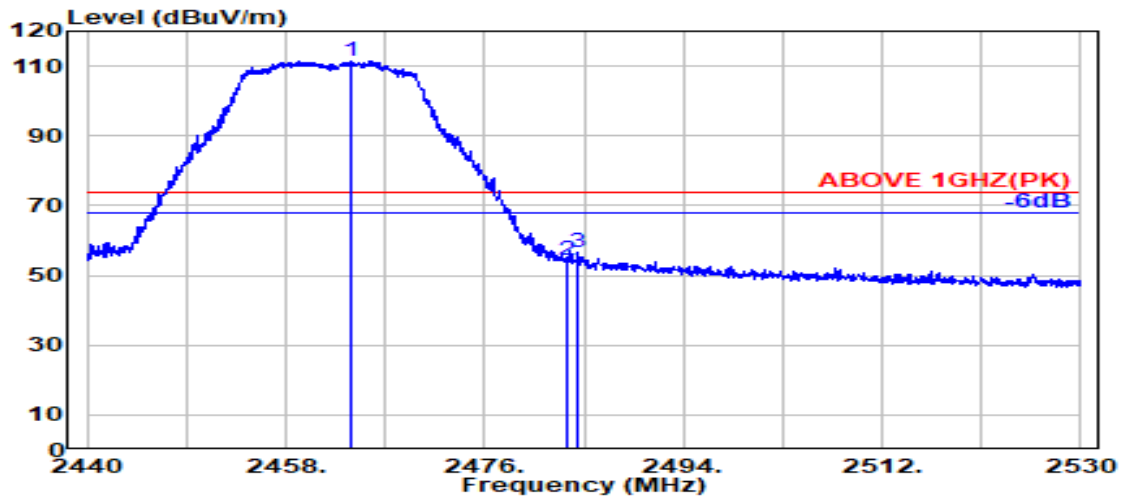

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.000	28.43	6.14	34.51	111.42	111.47	---	---	Peak
2483.500	28.47	6.17	34.52	54.37	54.49	74.00	19.51	Peak
2484.400	28.47	6.17	34.52	56.67	56.79	74.00	17.21	Peak

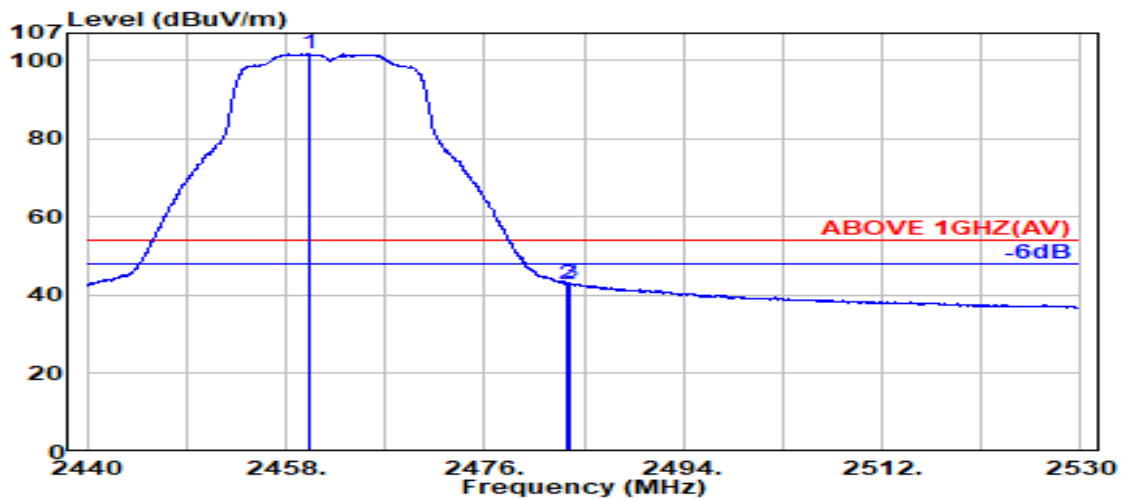

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.100	28.42	6.13	34.51	101.62	101.66	---	---	Average
2483.500	28.47	6.17	34.52	42.87	42.98	54.00	11.02	Average
2483.750	28.47	6.17	34.52	43.00	43.11	54.00	10.89	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2467 MHz
------	---------	-----------	-------------

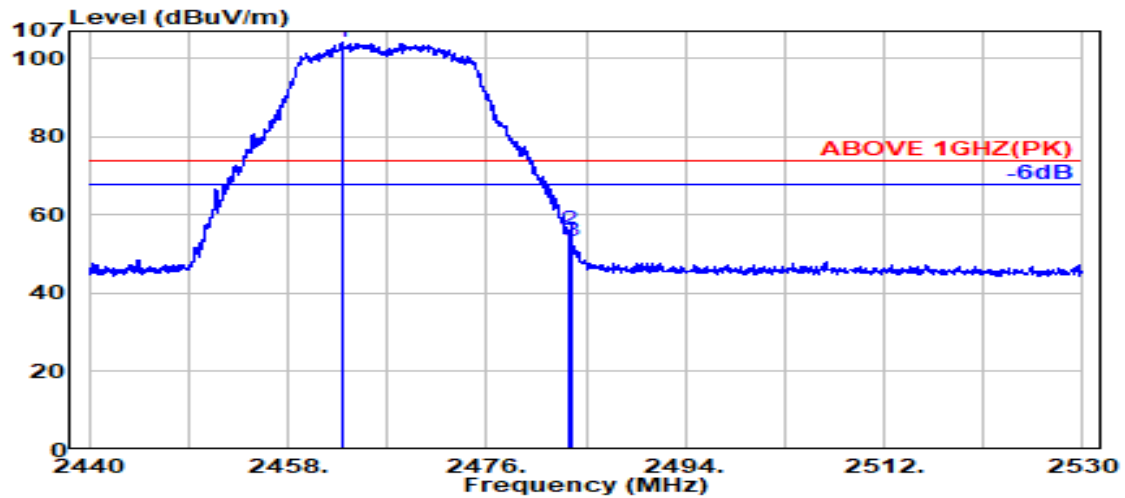

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.850	28.43	6.14	34.51	104.11	104.16	---	---	Peak
2483.500	28.47	6.17	34.52	55.97	56.09	74.00	17.91	Peak
2483.800	28.47	6.17	34.52	52.99	53.11	74.00	20.89	Peak

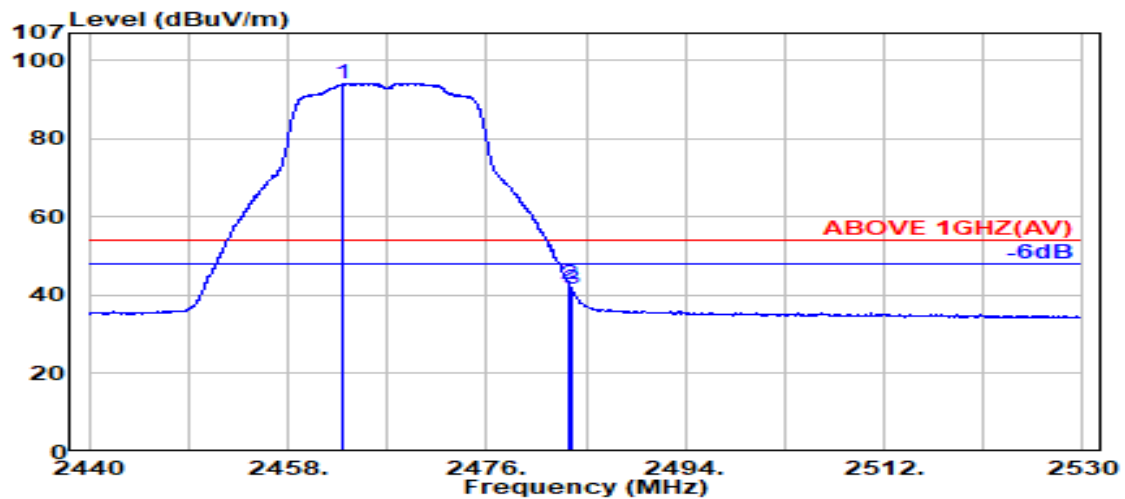

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.950	28.43	6.14	34.51	94.14	94.19	---	---	Average
2483.500	28.47	6.17	34.52	42.56	42.68	54.00	11.32	Average
2483.700	28.47	6.17	34.52	41.53	41.65	54.00	12.35	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2467 MHz
------	---------	-----------	-------------

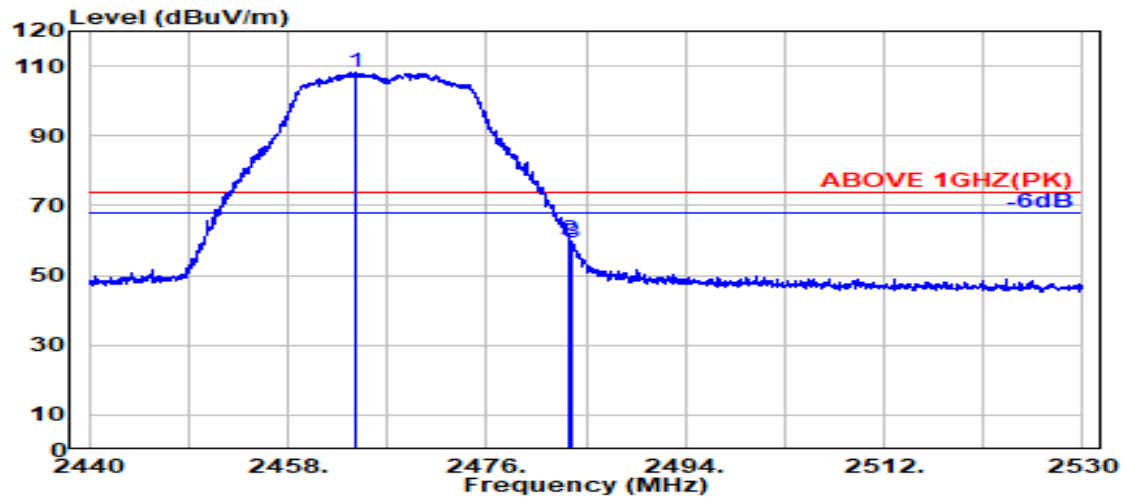

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.200	28.43	6.14	34.51	107.99	108.05	---	---	Peak
2483.500	28.47	6.17	34.52	60.19	60.31	74.00	13.69	Peak
2483.700	28.47	6.17	34.52	59.20	59.32	74.00	14.68	Peak

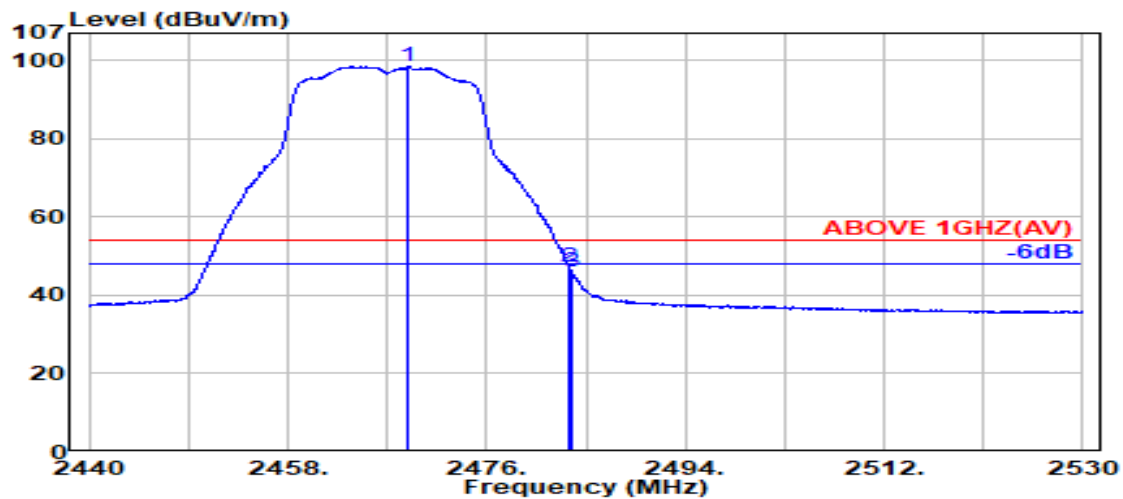

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.950	28.44	6.15	34.51	98.38	98.45	---	---	Average
2483.500	28.47	6.17	34.52	47.06	47.18	54.00	6.82	Average
2483.700	28.47	6.17	34.52	46.00	46.12	54.00	7.88	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2472 MHz
------	---------	-----------	-------------

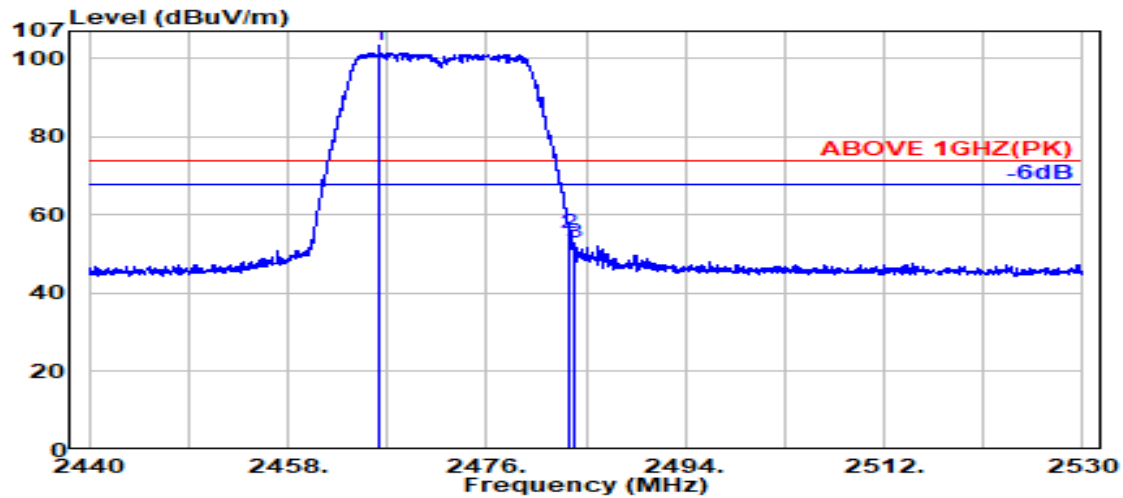

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.200	28.43	6.14	34.51	103.26	103.32	---	---	Peak
2483.500	28.47	6.17	34.52	55.06	55.18	74.00	18.82	Peak
2484.050	28.47	6.17	34.52	52.98	53.09	74.00	20.91	Peak

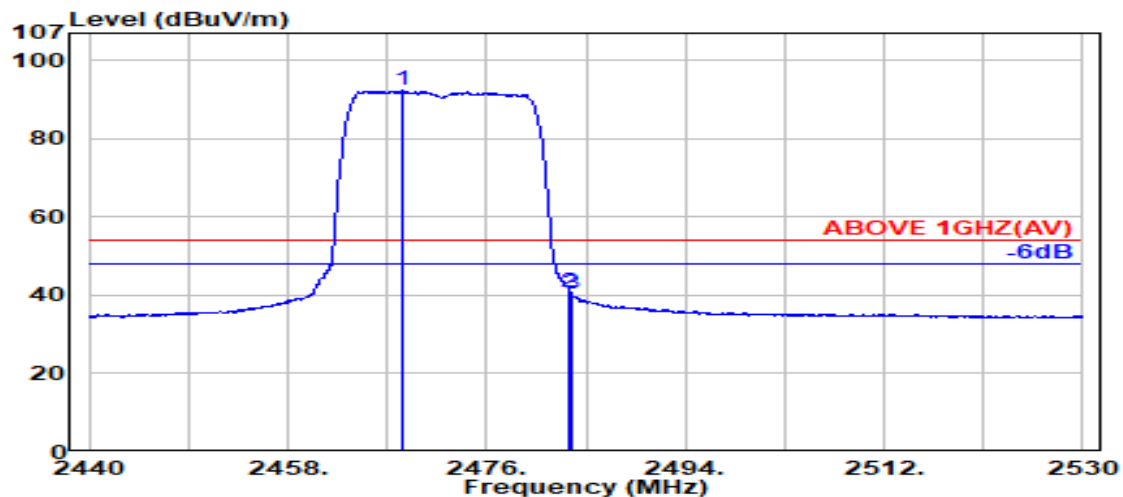

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.350	28.44	6.15	34.51	92.23	92.30	---	---	Average
2483.500	28.47	6.17	34.52	40.85	40.97	54.00	13.03	Average
2483.700	28.47	6.17	34.52	40.41	40.53	54.00	13.47	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2472 MHz
------	---------	-----------	-------------

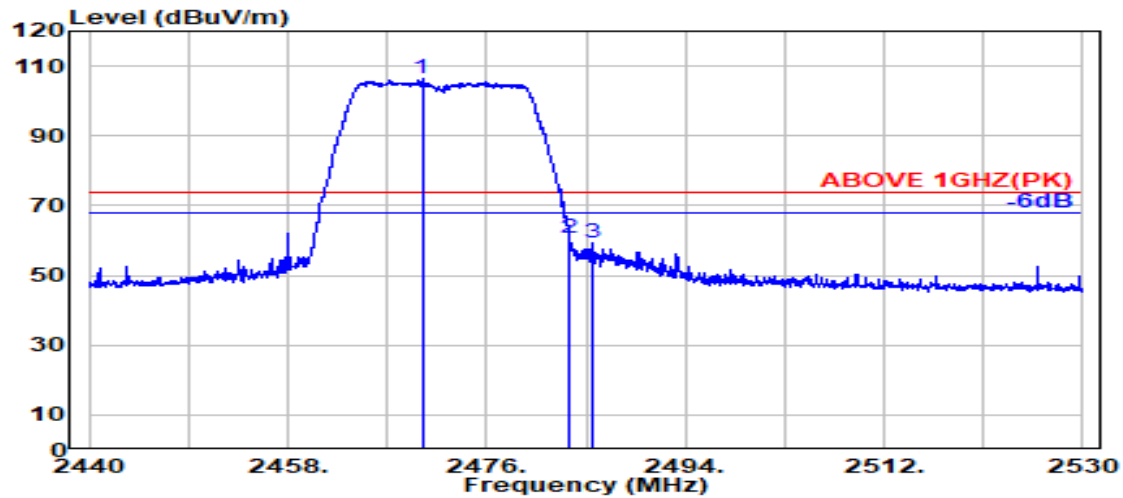

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2470.150	28.44	6.15	34.51	106.31	106.38	---	---	Peak
	2483.500	28.47	6.17	34.52	60.57	60.69	74.00	13.31	Peak
	2485.550	28.47	6.17	34.52	59.04	59.17	74.00	14.83	Peak

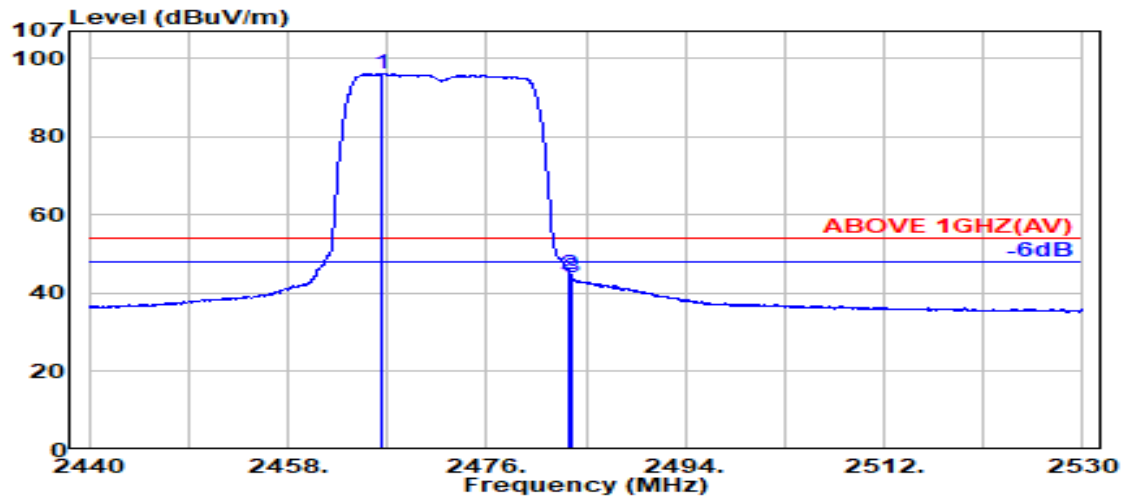

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2466.550	28.43	6.14	34.51	96.04	96.10	---	---	Average
	2483.500	28.47	6.17	34.52	44.87	44.98	54.00	9.02	Average
	2483.700	28.47	6.17	34.52	44.07	44.19	54.00	9.81	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

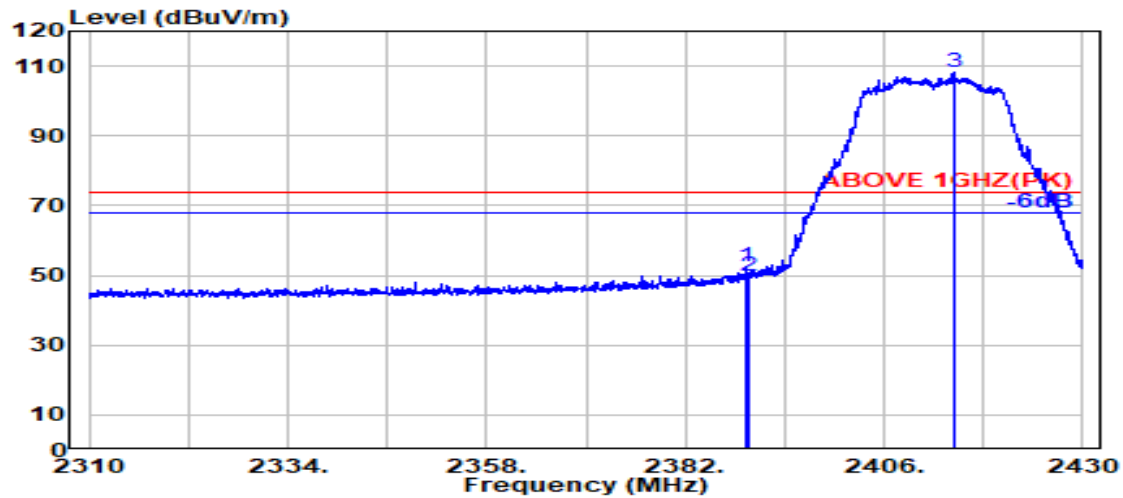

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	28.18	6.03	34.50	52.74	52.46	74.00	21.54	Peak
2389.800	28.18	6.03	34.50	50.07	49.78	74.00	24.22	Peak
@ 2414.500	28.19	6.07	34.50	108.32	108.07	---	---	Peak

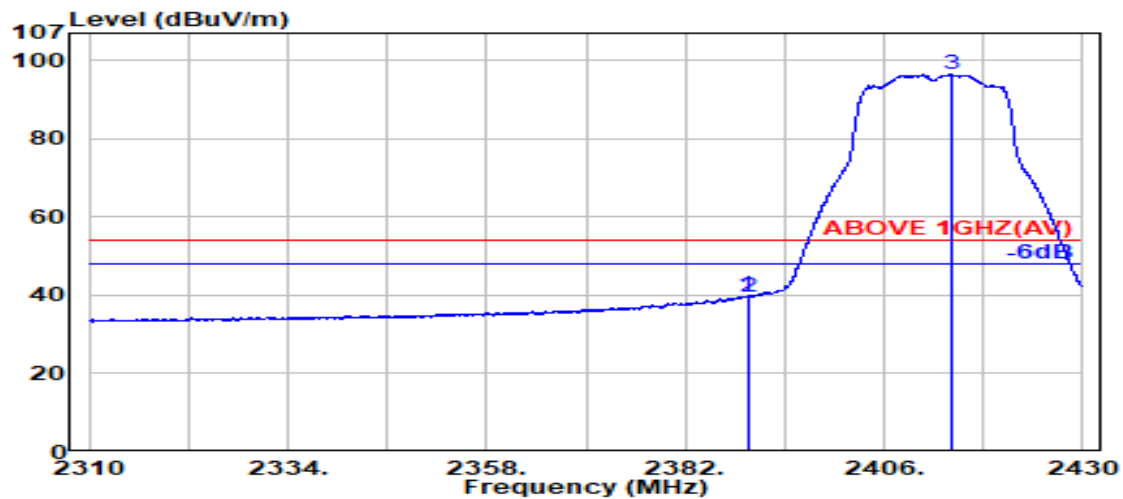

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.18	6.03	34.50	40.14	39.86	54.00	14.14	Average
2389.800	28.18	6.03	34.50	39.98	39.70	54.00	14.30	Average
@ 2414.050	28.18	6.07	34.50	96.67	96.42	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

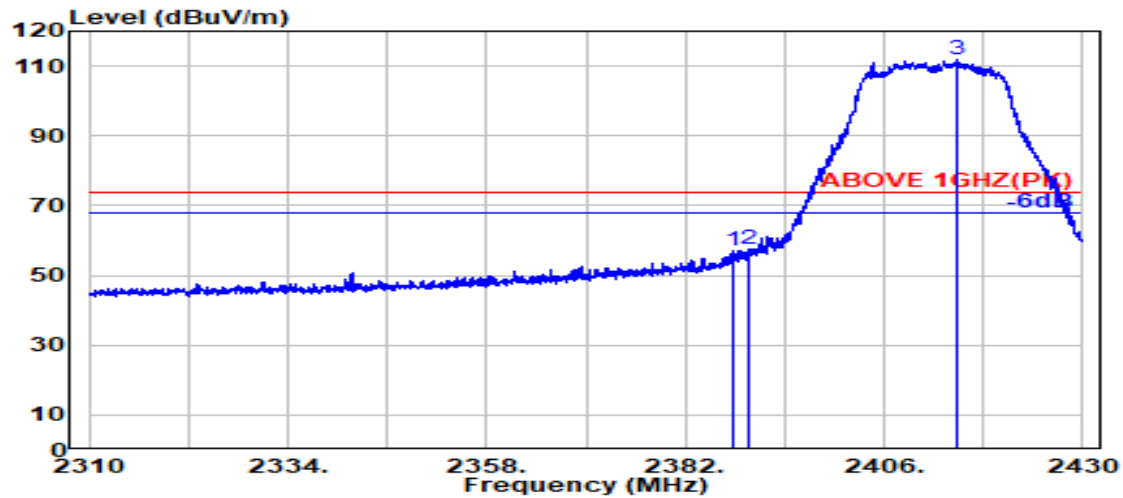

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.900	28.20	6.03	34.50	57.39	57.12	74.00	16.88	Peak
2389.800	28.18	6.03	34.50	57.70	57.42	74.00	16.58	Peak
@ 2414.950	28.19	6.07	34.50	111.94	111.70	---	---	Peak

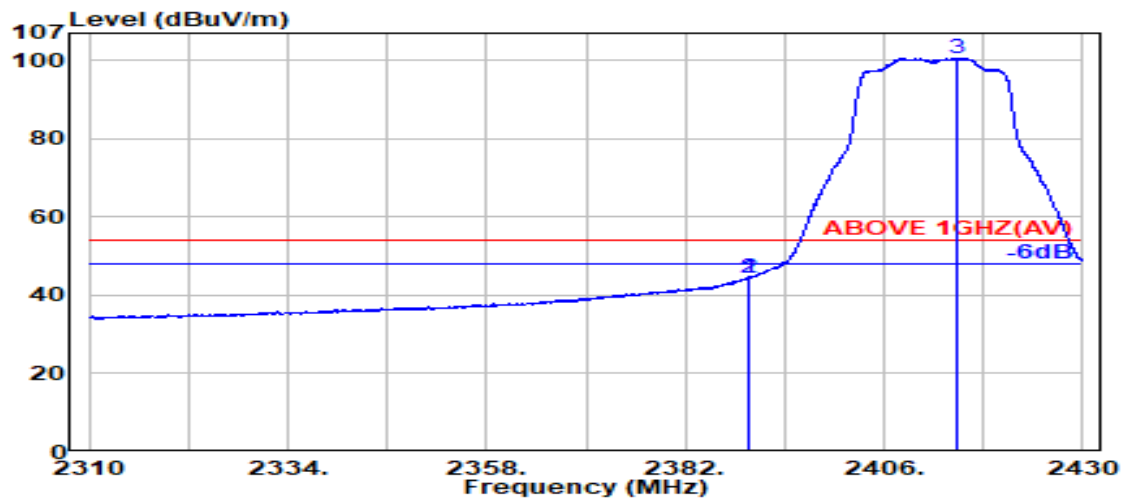

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.550	28.18	6.03	34.50	44.86	44.58	54.00	9.42	Average
2389.800	28.18	6.03	34.50	44.88	44.59	54.00	9.41	Average
@ 2414.900	28.19	6.07	34.50	100.97	100.72	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

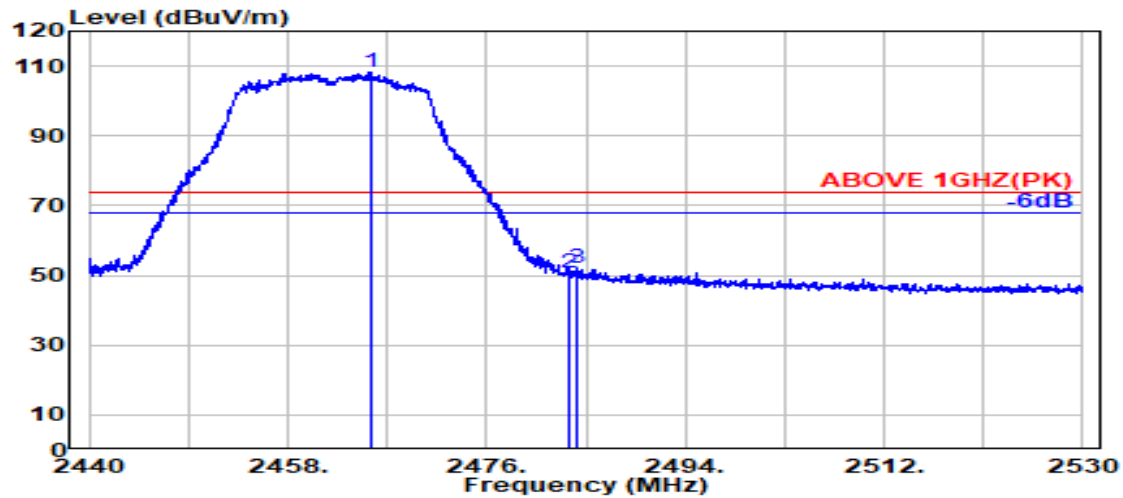

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.600	28.43	6.14	34.51	108.19	108.25	---	---	Peak
2483.500	28.47	6.17	34.52	50.60	50.72	74.00	23.28	Peak
2484.200	28.47	6.17	34.52	51.97	52.09	74.00	21.91	Peak

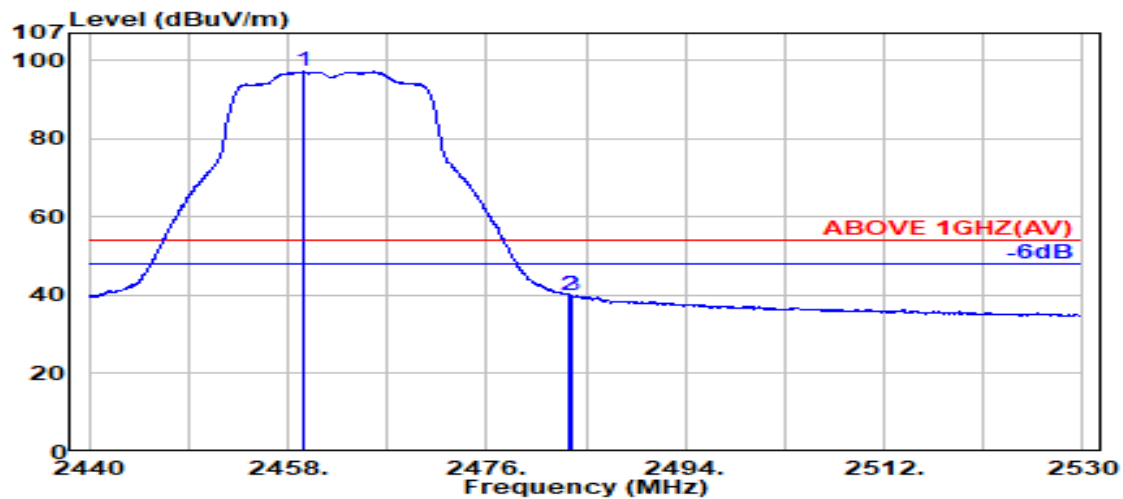

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.500	28.42	6.13	34.51	97.08	97.13	---	---	Average
2483.500	28.47	6.17	34.52	39.98	40.10	54.00	13.90	Average
2483.750	28.47	6.17	34.52	39.85	39.97	54.00	14.03	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

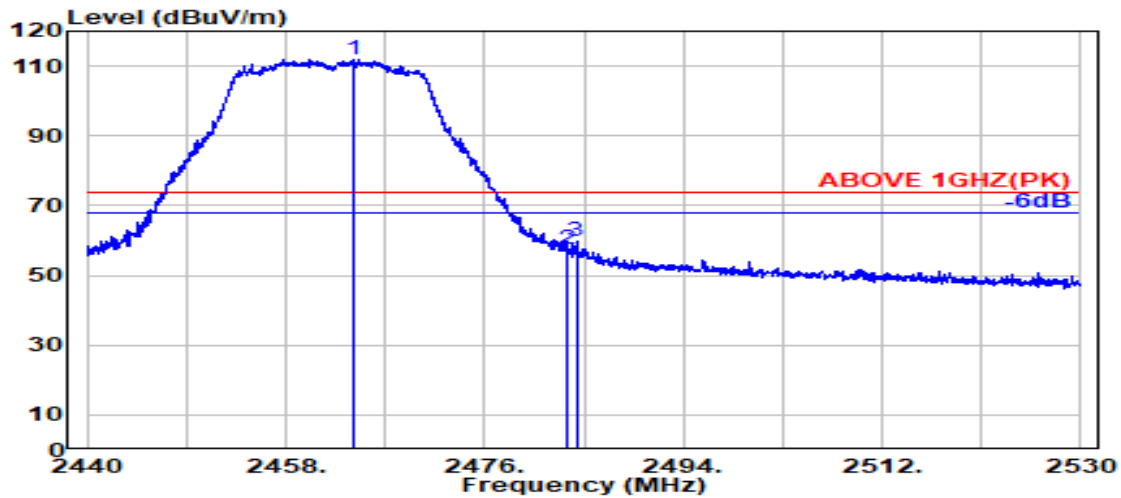

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.100	28.43	6.14	34.51	111.96	112.02	---	---	Peak
2483.500	28.47	6.17	34.52	57.40	57.52	74.00	16.48	Peak
2484.300	28.47	6.17	34.52	59.61	59.73	74.00	14.27	Peak

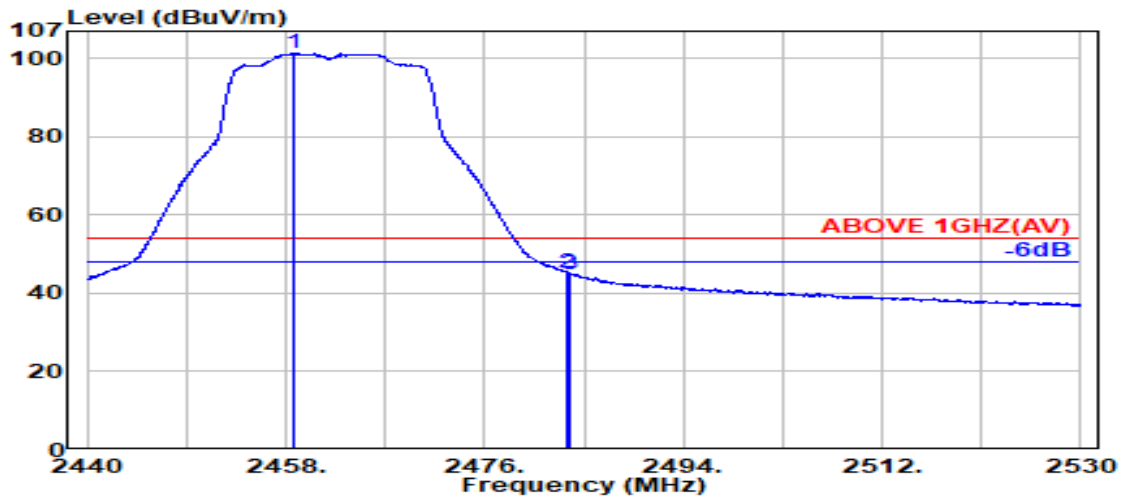

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.650	28.42	6.13	34.51	101.37	101.41	---	---	Average
2483.500	28.47	6.17	34.52	45.24	45.36	54.00	8.64	Average
2483.750	28.47	6.17	34.52	44.88	45.00	54.00	9.00	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2467 MHz
------	--------------	-----------	-------------

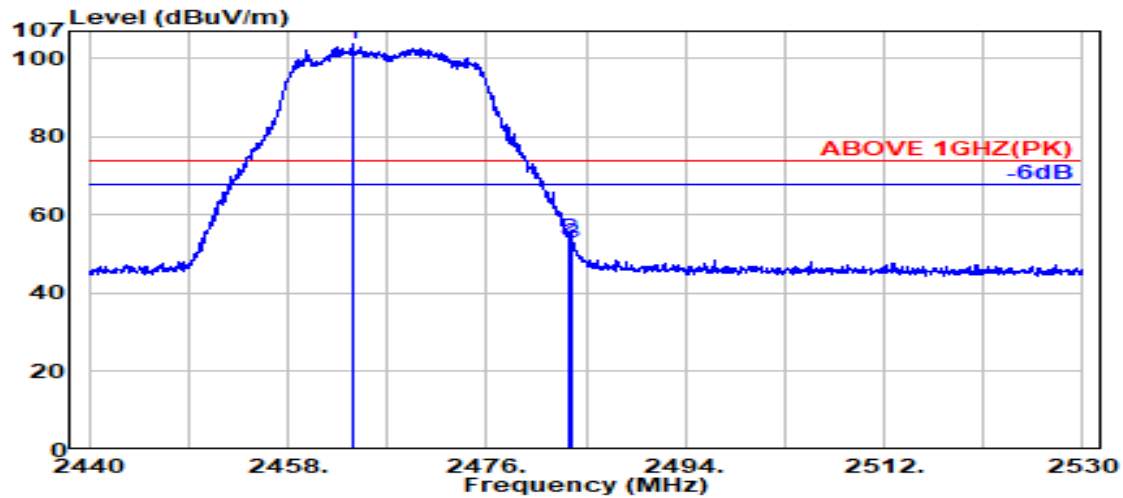

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.800	28.43	6.14	34.51	103.79	103.84	---	---	Peak
2483.500	28.47	6.17	34.52	54.12	54.24	74.00	19.76	Peak
2483.700	28.47	6.17	34.52	52.85	52.97	74.00	21.03	Peak

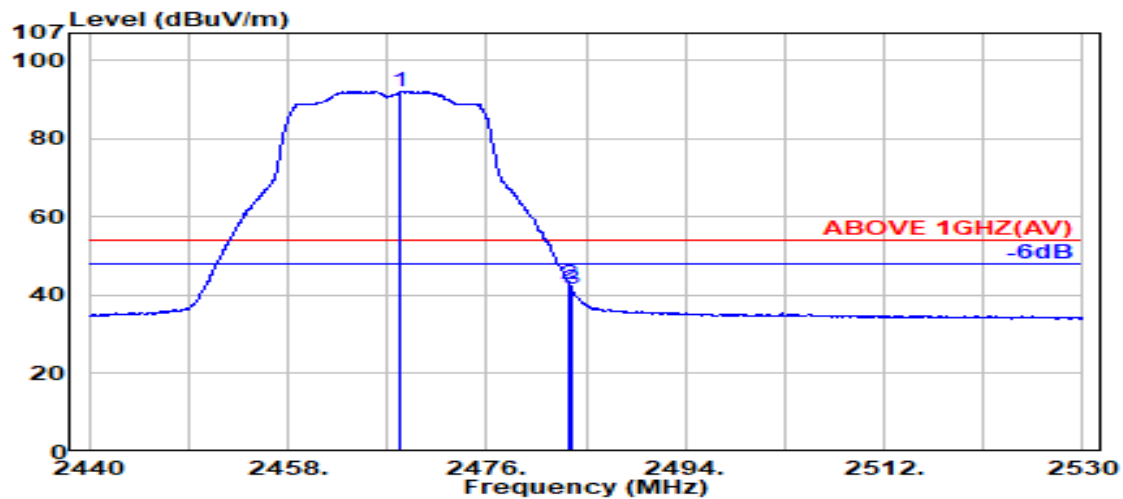

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.200	28.44	6.15	34.51	92.09	92.16	---	---	Average
2483.500	28.47	6.17	34.52	42.69	42.80	54.00	11.20	Average
2483.700	28.47	6.17	34.52	41.51	41.63	54.00	12.37	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2467 MHz
------	--------------	-----------	-------------

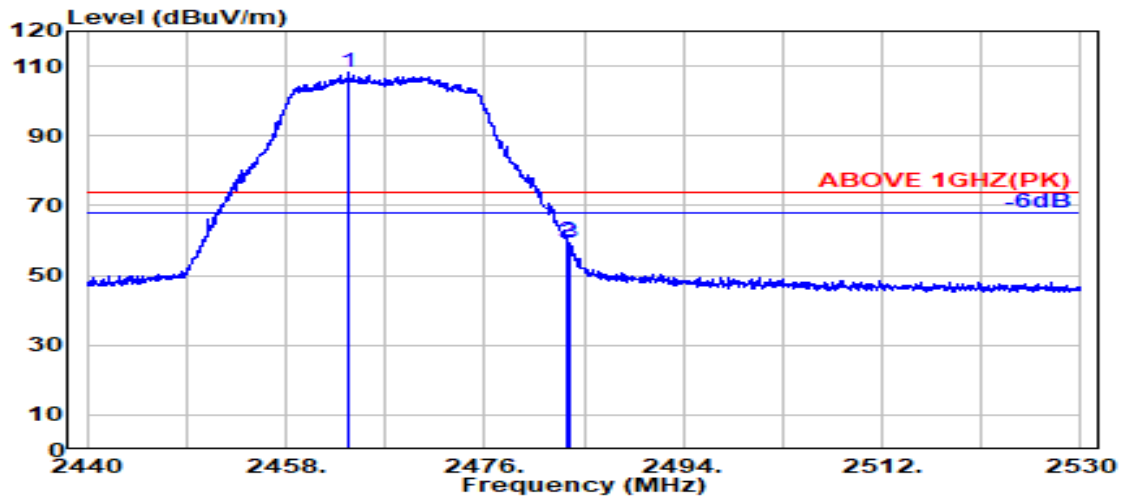

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.600	28.43	6.14	34.51	108.06	108.11	---	---	Peak
2483.500	28.47	6.17	34.52	59.66	59.78	74.00	14.22	Peak
2483.750	28.47	6.17	34.52	59.24	59.35	74.00	14.65	Peak

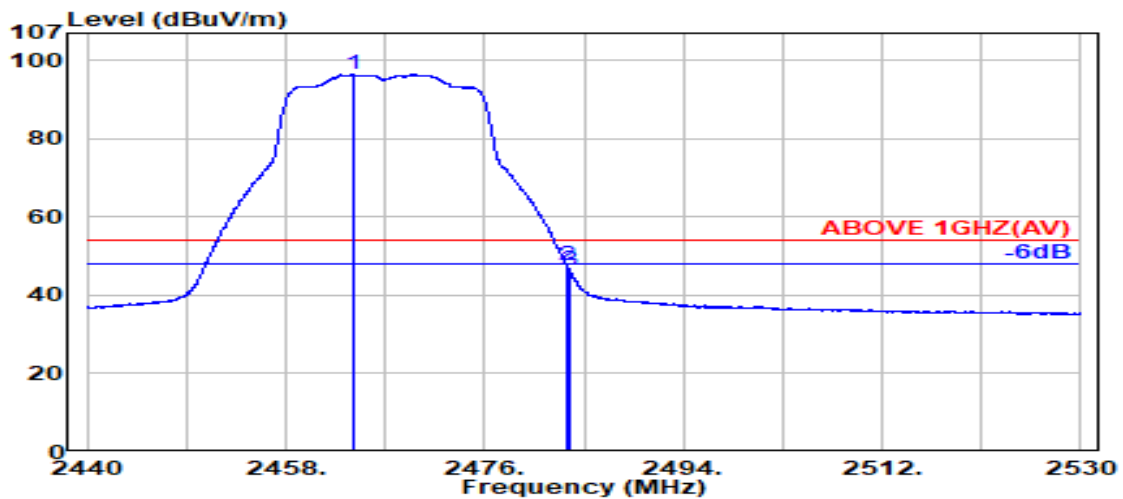

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.100	28.43	6.14	34.51	96.39	96.45	---	---	Average
2483.500	28.47	6.17	34.52	47.52	47.64	54.00	6.36	Average
2483.700	28.47	6.17	34.52	46.20	46.32	54.00	7.68	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2472 MHz
------	--------------	-----------	-------------

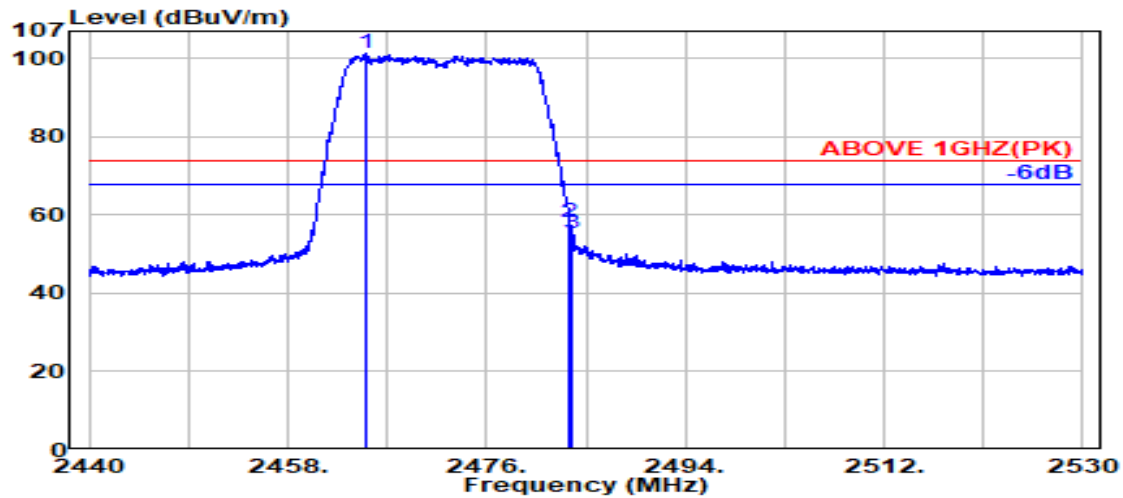

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2465.150	28.43	6.14	34.51	101.14	101.20	---	---	Peak
	2483.500	28.47	6.17	34.52	58.14	58.26	74.00	15.74	Peak
	2483.700	28.47	6.17	34.52	55.33	55.45	74.00	18.55	Peak

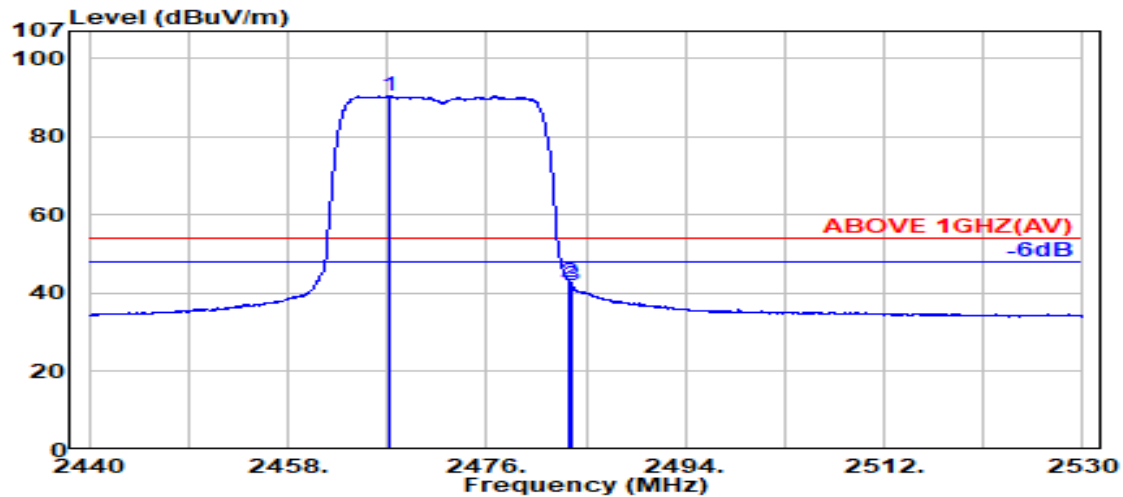

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2467.300	28.43	6.14	34.51	90.26	90.33	---	---	Average
	2483.500	28.47	6.17	34.52	42.69	42.81	54.00	11.19	Average
	2483.750	28.47	6.17	34.52	41.90	42.02	54.00	11.98	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2472 MHz
------	--------------	-----------	-------------

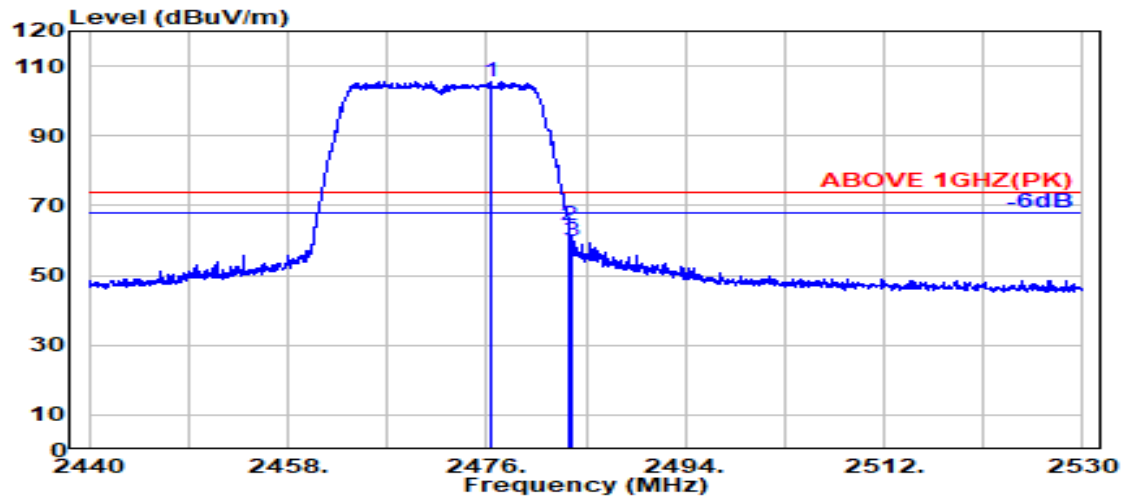

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.400	28.45	6.16	34.52	105.52	105.62	---	---	Peak
2483.500	28.47	6.17	34.52	64.19	64.31	74.00	9.69	Peak
2483.700	28.47	6.17	34.52	59.74	59.86	74.00	14.14	Peak

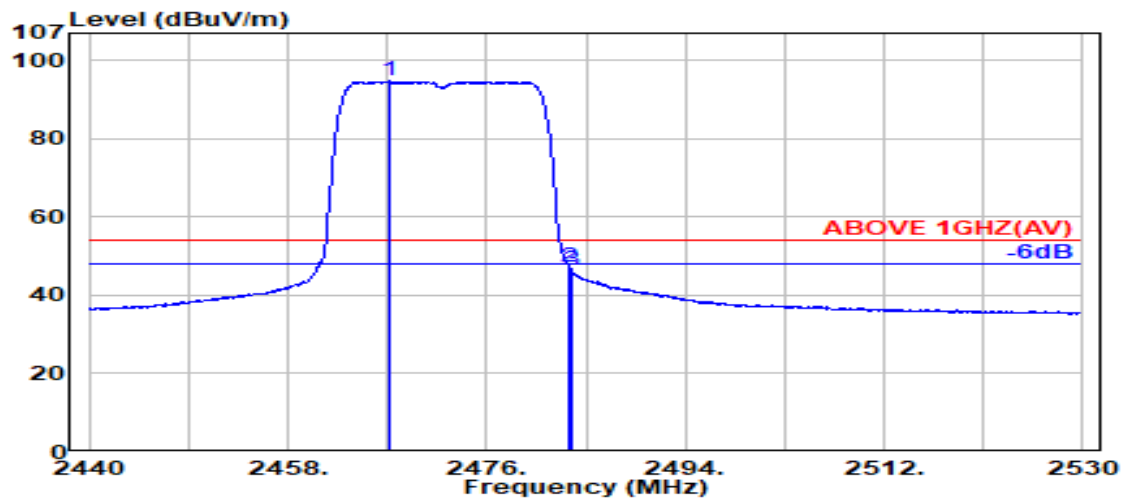

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.150	28.43	6.14	34.51	94.65	94.71	---	---	Average
2483.500	28.47	6.17	34.52	47.14	47.26	54.00	6.74	Average
2483.700	28.47	6.17	34.52	46.26	46.38	54.00	7.62	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2422 MHz
------	--------------	-----------	-------------

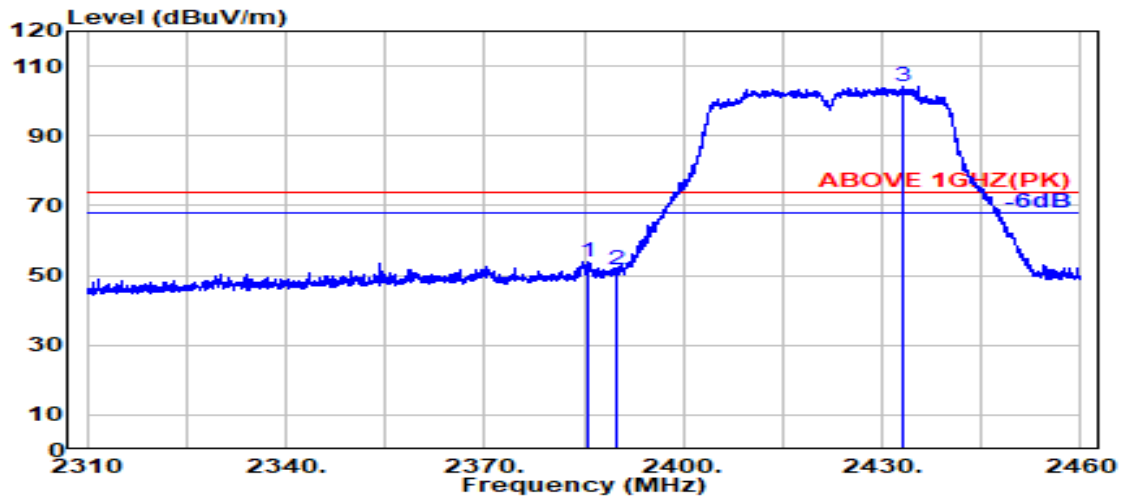

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.650	28.21	6.03	34.50	54.31	54.06	74.00	19.94	Peak
2389.800	28.18	6.03	34.50	51.77	51.49	74.00	22.51	Peak
@ 2433.250	28.30	6.10	34.51	104.27	104.16	---	---	Peak

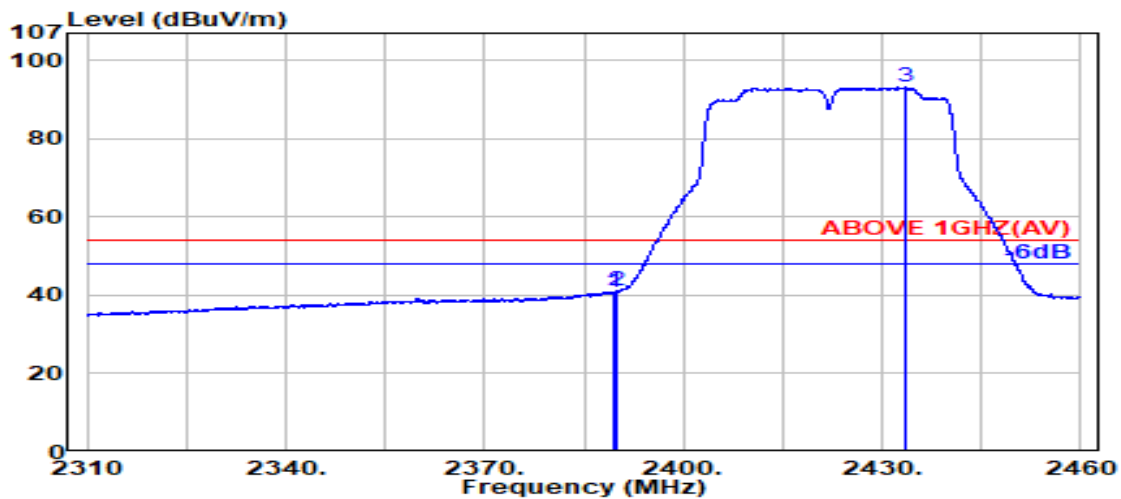

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.550	28.18	6.03	34.50	41.25	40.97	54.00	13.03	Average
2389.800	28.18	6.03	34.50	41.29	41.01	54.00	12.99	Average
@ 2433.400	28.30	6.10	34.51	93.23	93.12	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2422 MHz
------	--------------	-----------	-------------

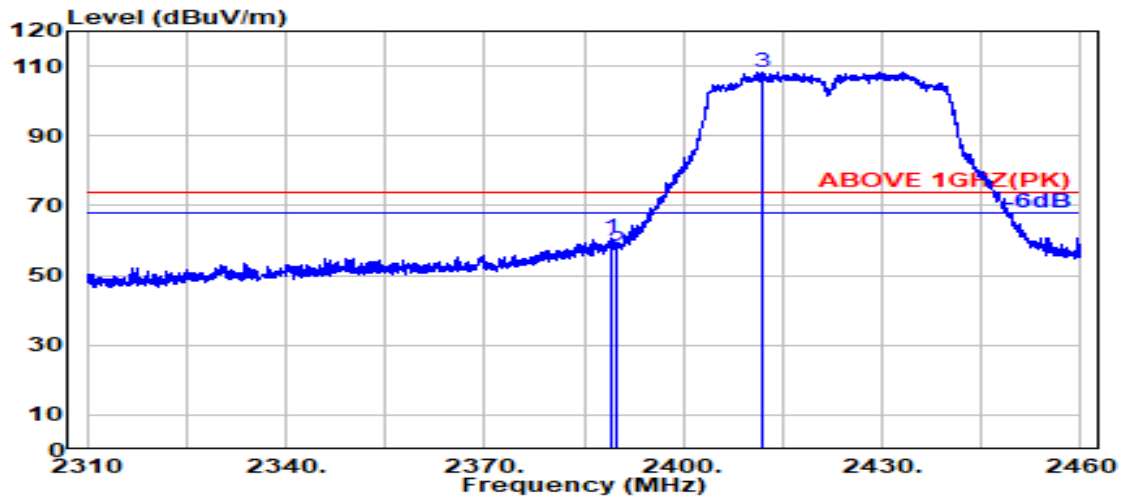

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.000	28.19	6.03	34.50	60.90	60.62	74.00	13.38	Peak
2389.800	28.18	6.03	34.50	57.41	57.13	74.00	16.87	Peak
@ 2411.750	28.17	6.07	34.50	108.72	108.45	---	---	Peak

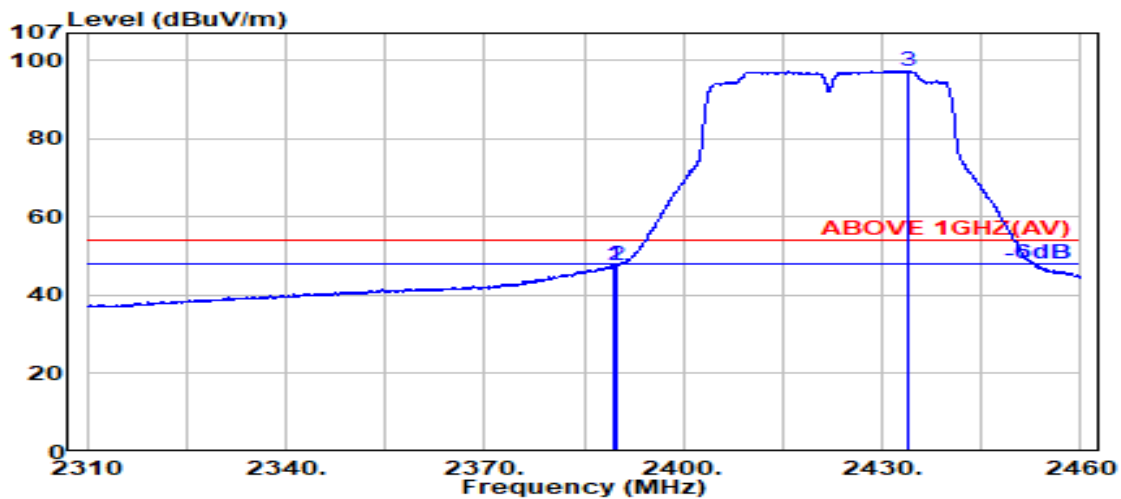

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.550	28.18	6.03	34.50	47.93	47.65	54.00	6.35	Average
2389.800	28.18	6.03	34.50	47.86	47.58	54.00	6.42	Average
@ 2433.800	28.30	6.10	34.51	97.59	97.48	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2452 MHz
------	--------------	-----------	-------------

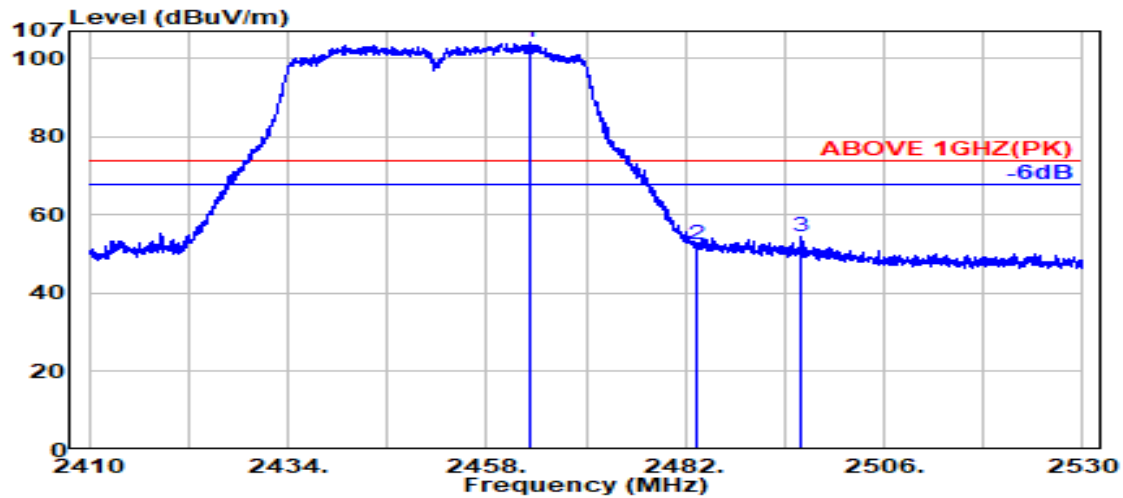

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.250	28.43	6.14	34.51	104.27	104.33	---	---	Peak
2483.500	28.47	6.17	34.52	52.51	52.63	74.00	21.37	Peak
2495.950	28.49	6.18	34.52	54.39	54.54	74.00	19.46	Peak

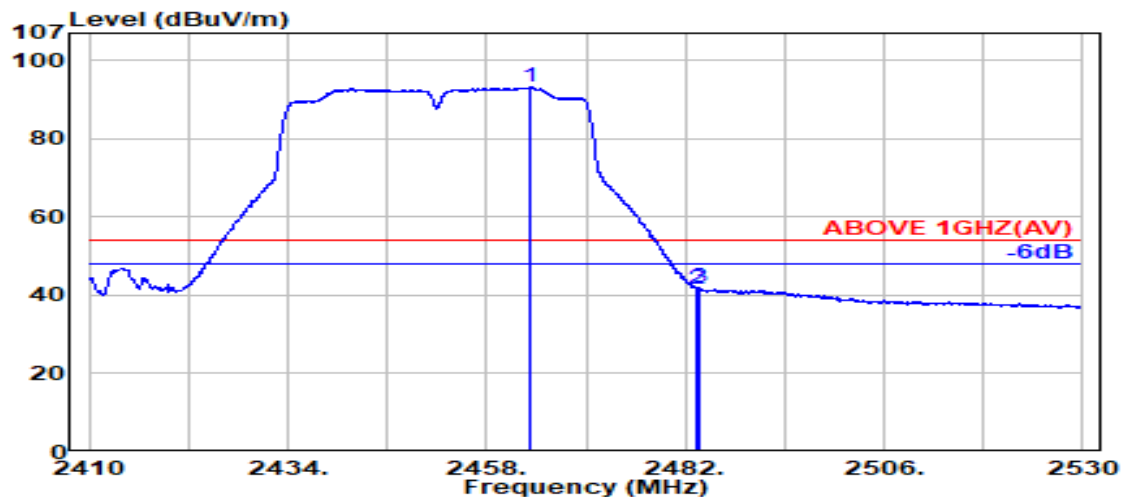

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.100	28.43	6.14	34.51	93.06	93.12	---	---	Average
2483.500	28.47	6.17	34.52	41.57	41.68	54.00	12.32	Average
2483.700	28.47	6.17	34.52	41.70	41.81	54.00	12.19	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2452 MHz
------	--------------	-----------	-------------

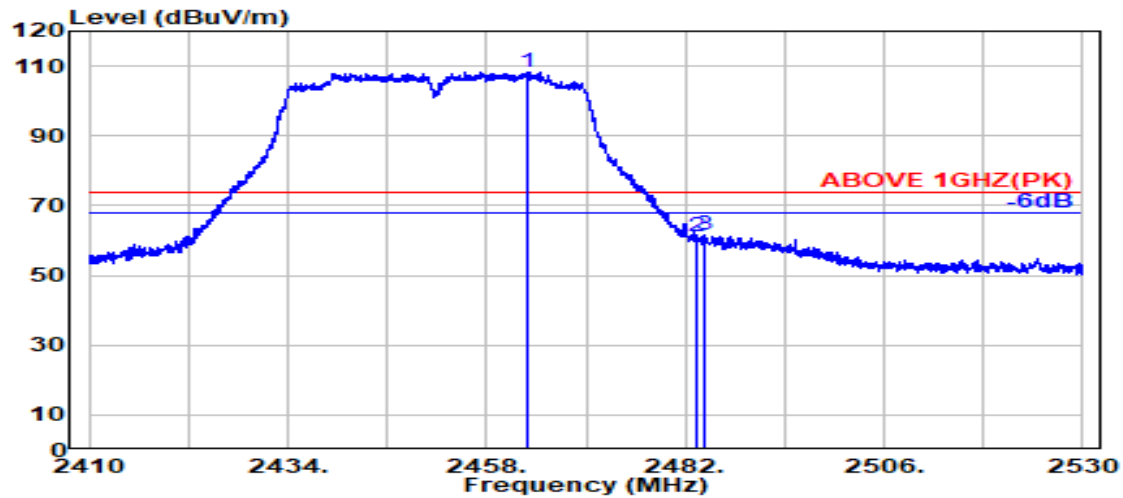

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.800	28.43	6.14	34.51	108.27	108.32	---	---	Peak
2483.500	28.47	6.17	34.52	61.19	61.31	74.00	12.69	Peak
2484.350	28.47	6.17	34.52	61.64	61.76	74.00	12.24	Peak

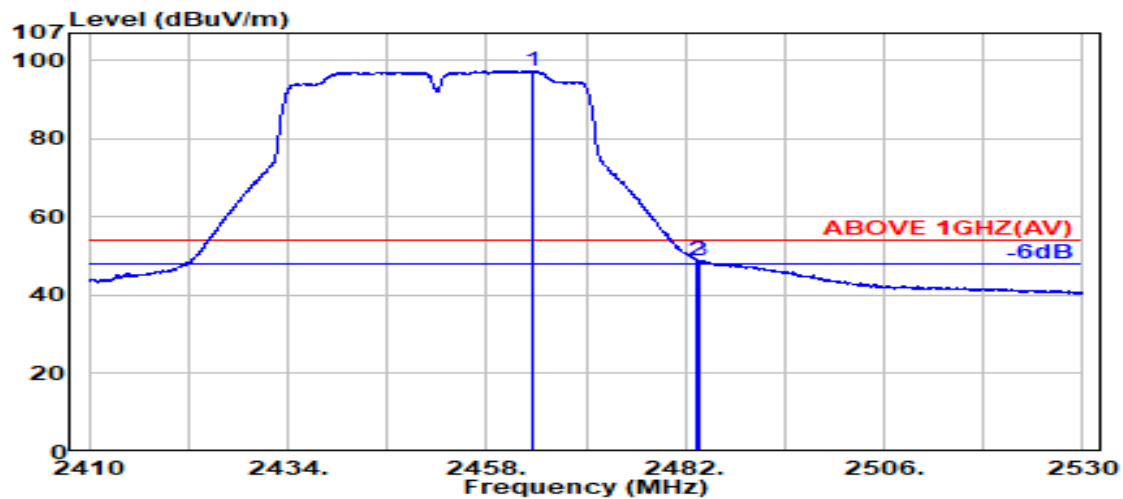

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.700	28.43	6.14	34.51	97.32	97.38	---	---	Average
2483.500	28.47	6.17	34.52	48.77	48.89	54.00	5.11	Average
2483.750	28.47	6.17	34.52	48.71	48.83	54.00	5.17	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2457 MHz
------	--------------	-----------	-------------

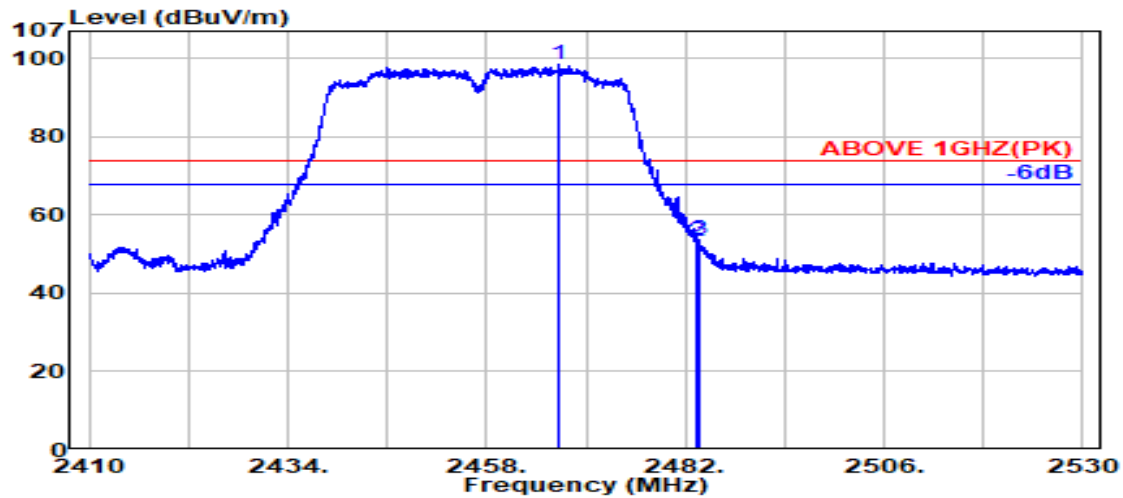

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.800	28.43	6.14	34.51	98.48	98.54	---	---	Peak
2483.500	28.47	6.17	34.52	53.38	53.50	74.00	20.50	Peak
2483.700	28.47	6.17	34.52	53.48	53.60	74.00	20.40	Peak

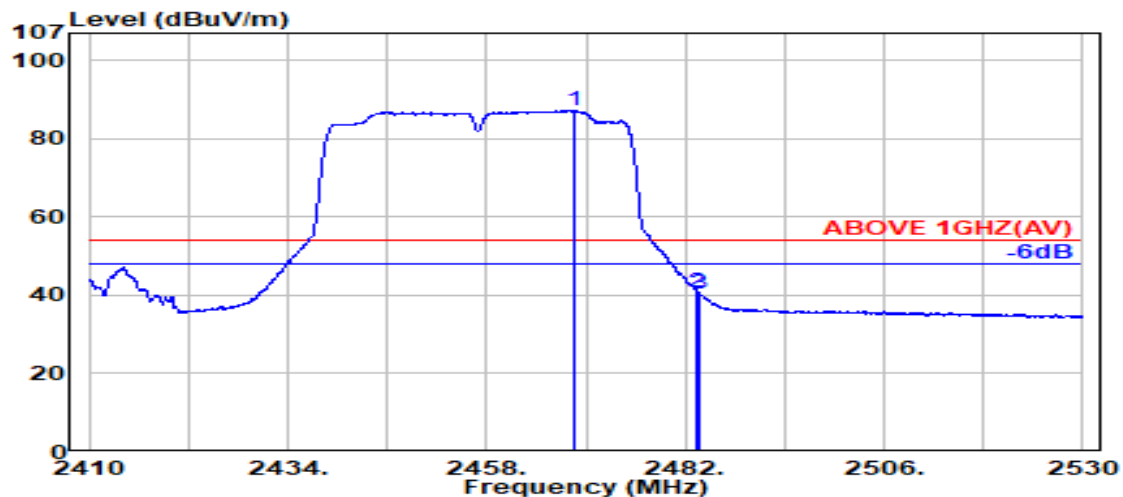

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.500	28.44	6.15	34.51	87.22	87.29	---	---	Average
2483.500	28.47	6.17	34.52	40.74	40.86	54.00	13.14	Average
2483.750	28.47	6.17	34.52	40.30	40.42	54.00	13.58	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2457 MHz
------	--------------	-----------	-------------

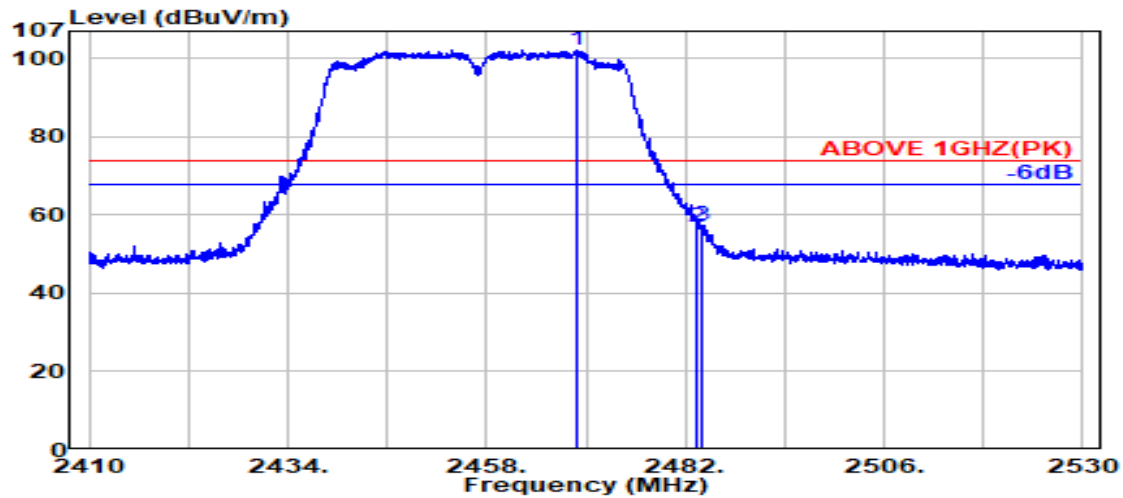

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.900	28.44	6.15	34.51	101.96	102.03	---	---	Peak
2483.500	28.47	6.17	34.52	56.63	56.75	74.00	17.25	Peak
2483.900	28.47	6.17	34.52	57.37	57.49	74.00	16.51	Peak

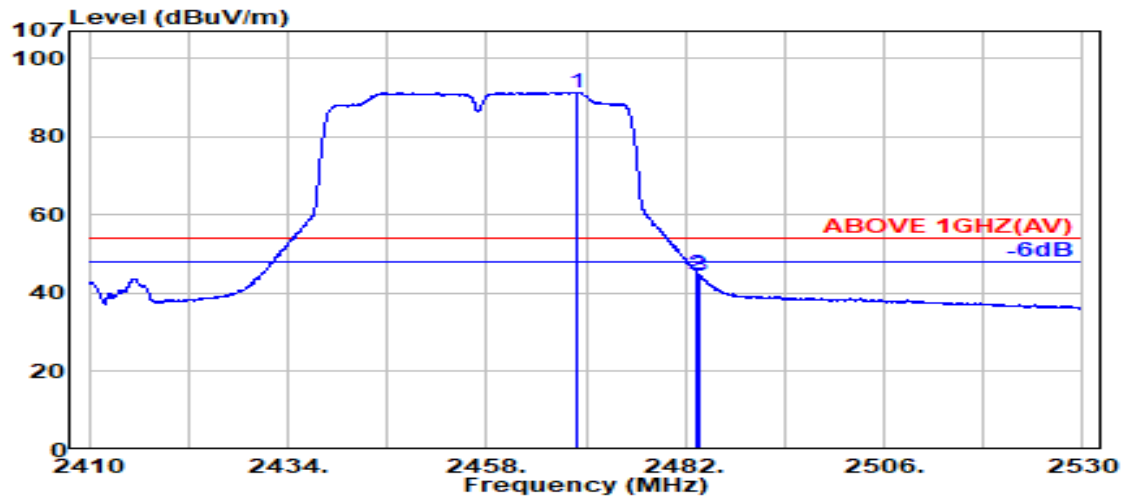

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.800	28.44	6.15	34.51	91.34	91.41	---	---	Average
2483.500	28.47	6.17	34.52	44.89	45.01	54.00	8.99	Average
2483.700	28.47	6.17	34.52	44.48	44.60	54.00	9.40	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2462 MHz
------	--------------	-----------	-------------

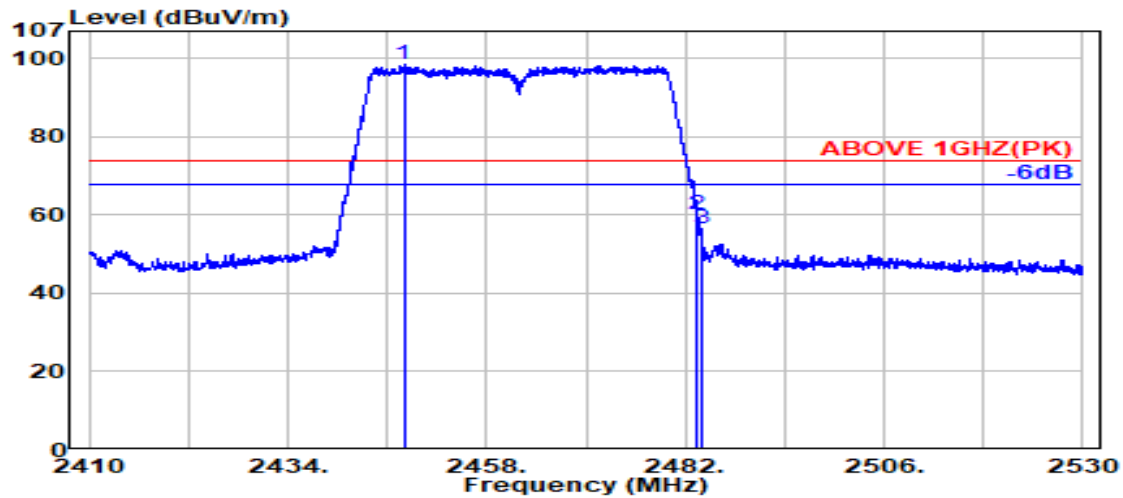

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2448.000	28.39	6.12	34.51	98.53	98.52	---	---	Peak
2483.500	28.47	6.17	34.52	60.07	60.18	74.00	13.82	Peak
2483.900	28.47	6.17	34.52	56.32	56.44	74.00	17.56	Peak

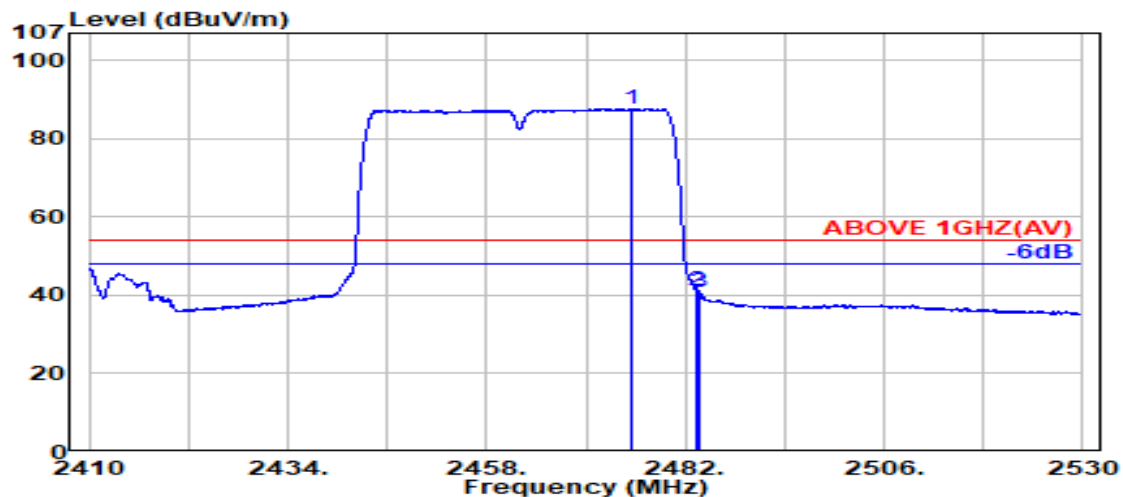

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.650	28.45	6.16	34.52	87.70	87.79	---	---	Average
2483.500	28.47	6.17	34.52	41.08	41.19	54.00	12.81	Average
2483.700	28.47	6.17	34.52	40.59	40.71	54.00	13.29	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2462 MHz
------	--------------	-----------	-------------

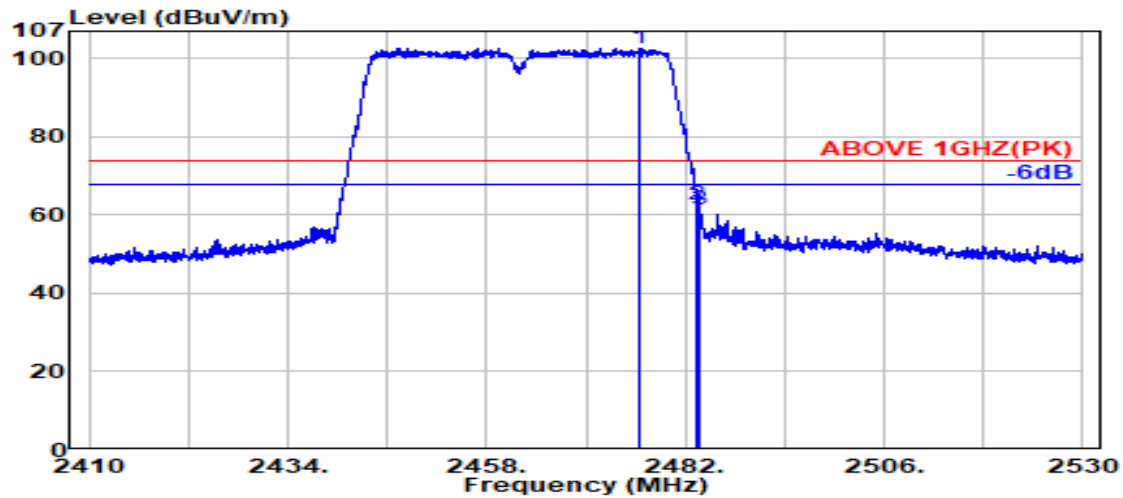

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.500	28.45	6.16	34.52	102.55	102.64	---	---	Peak
2483.500	28.47	6.17	34.52	62.58	62.70	74.00	11.30	Peak
2483.800	28.47	6.17	34.52	61.08	61.19	74.00	12.81	Peak

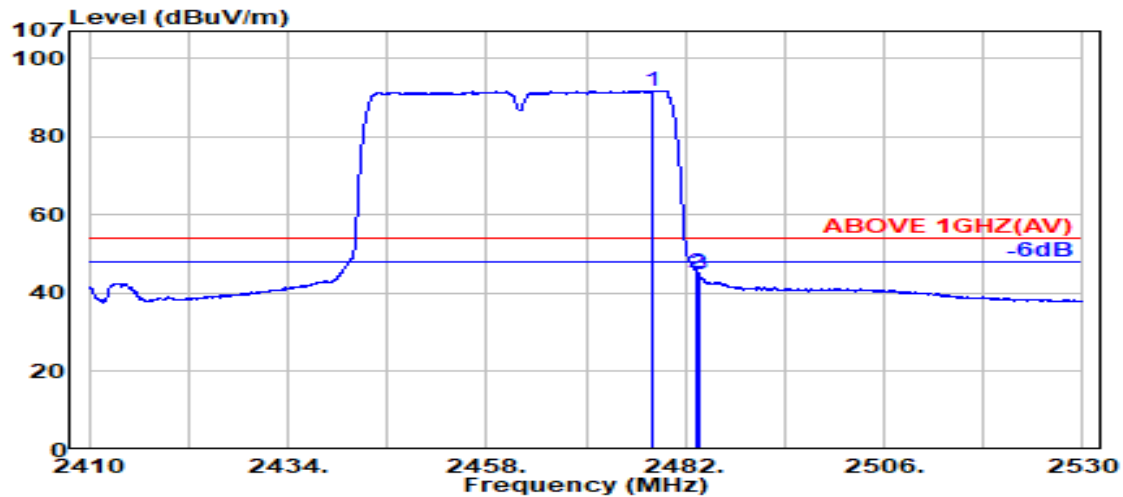

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.150	28.46	6.16	34.52	91.69	91.79	---	---	Average
2483.500	28.47	6.17	34.52	45.01	45.12	54.00	8.88	Average
2483.700	28.47	6.17	34.52	44.61	44.73	54.00	9.27	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
------	---------------	-----------	-------------

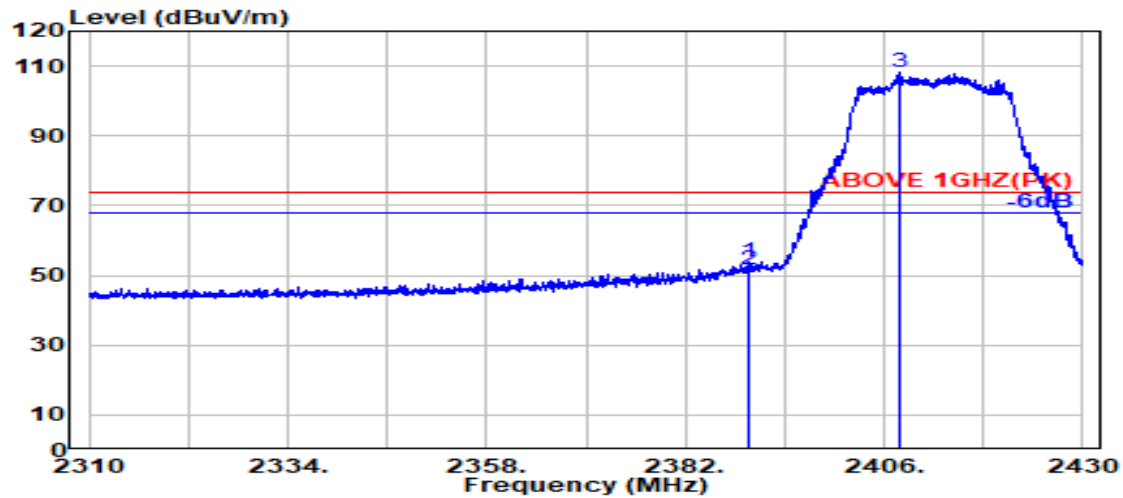

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.50	54.16	53.88	74.00	20.12	Peak
2389.800	28.18	6.03	34.50	51.89	51.61	74.00	22.39	Peak
@ 2407.900	28.15	6.06	34.50	108.37	108.07	---	---	Peak

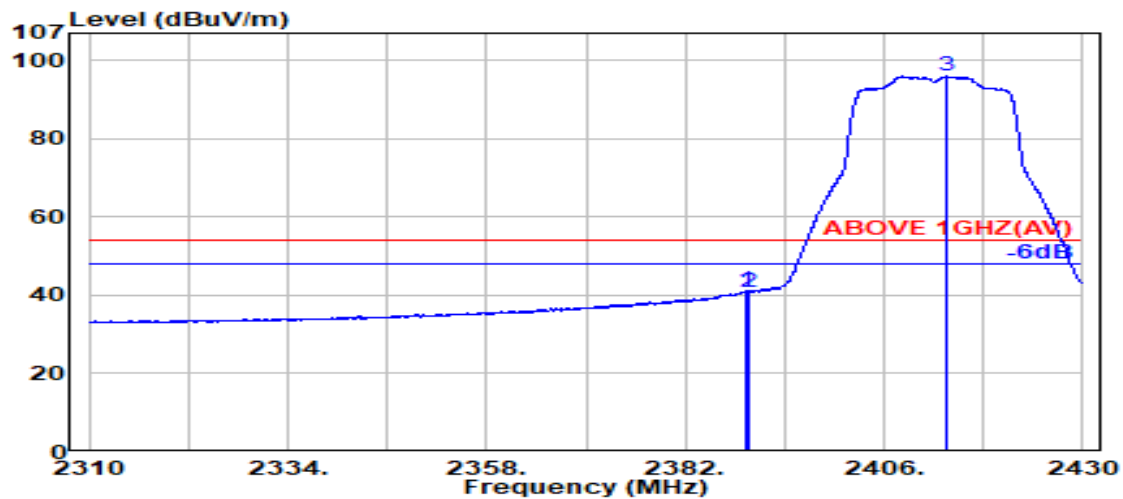

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.450	28.18	6.03	34.50	41.35	41.07	54.00	12.93	Average
2389.800	28.18	6.03	34.50	41.11	40.83	54.00	13.17	Average
@ 2413.600	28.18	6.07	34.50	96.35	96.10	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
------	---------------	-----------	-------------

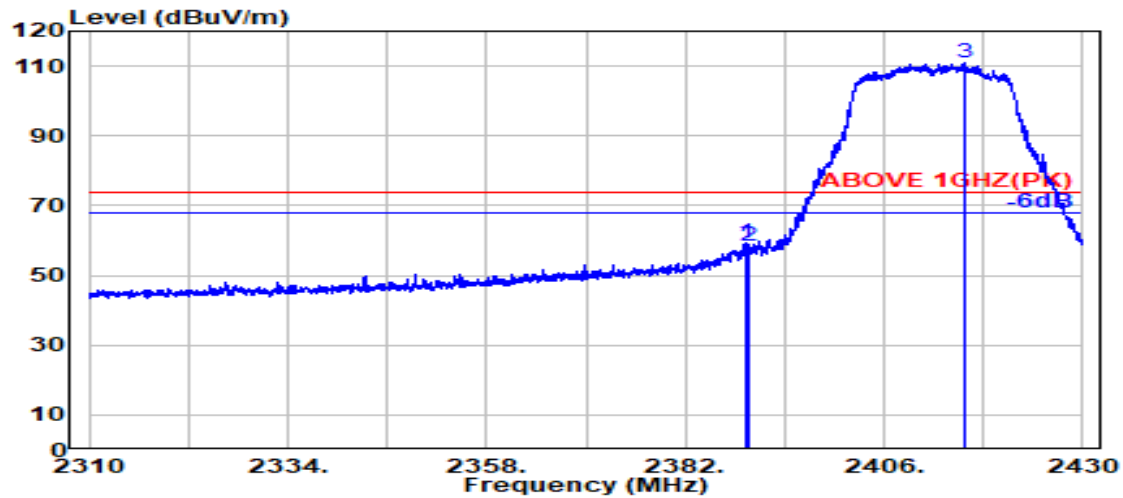

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.450	28.18	6.03	34.50	59.73	59.45	74.00	14.55	Peak
2389.800	28.18	6.03	34.50	58.80	58.52	74.00	15.48	Peak
@ 2415.800	28.20	6.07	34.50	111.00	110.77	---	---	Peak

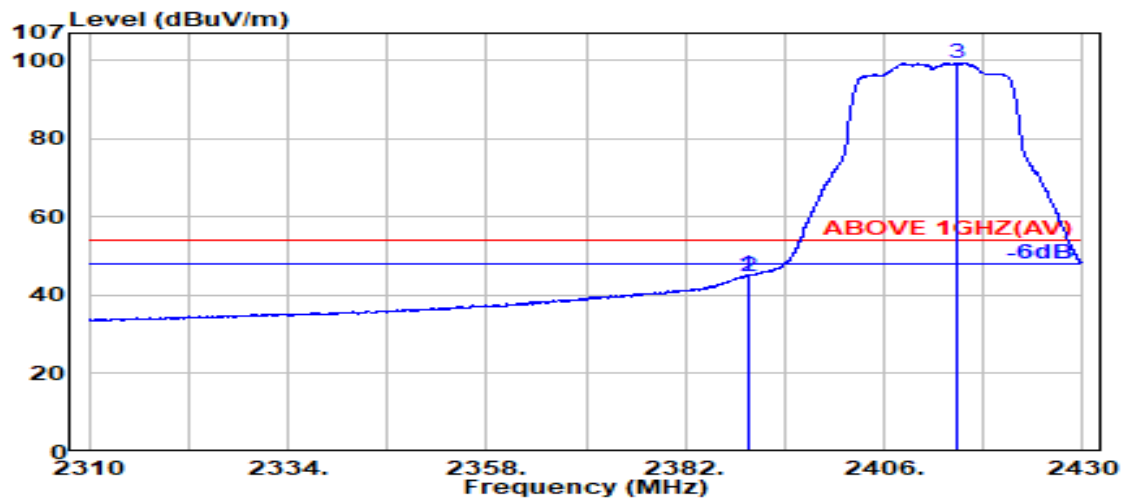

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.18	6.03	34.50	45.53	45.25	54.00	8.75	Average
2389.800	28.18	6.03	34.50	45.26	44.98	54.00	9.02	Average
@ 2414.750	28.19	6.07	34.50	99.71	99.46	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2462 MHz
------	---------------	-----------	-------------

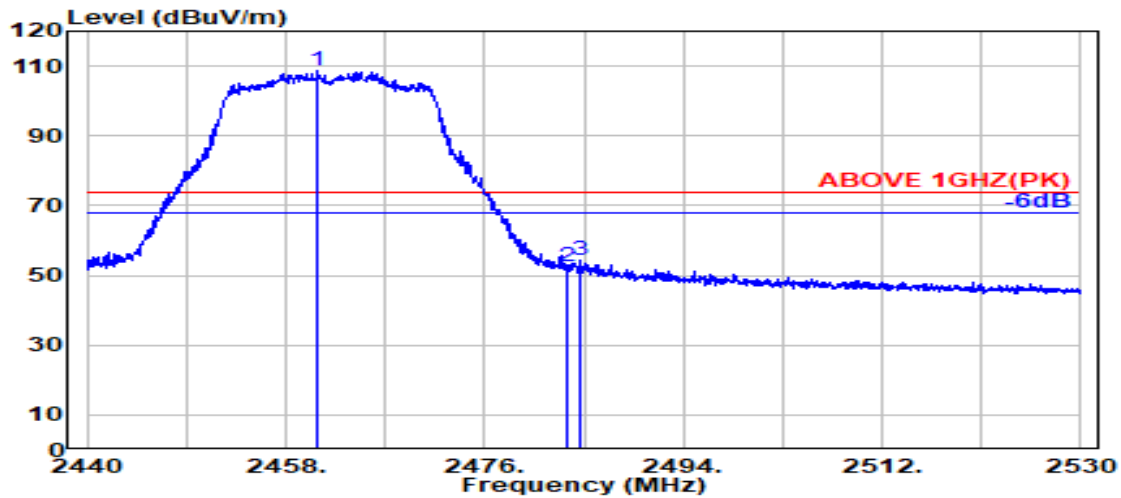

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.950	28.42	6.14	34.51	108.68	108.72	---	---	Peak
2483.500	28.47	6.17	34.52	52.31	52.42	74.00	21.58	Peak
2484.600	28.47	6.17	34.52	54.06	54.18	74.00	19.82	Peak

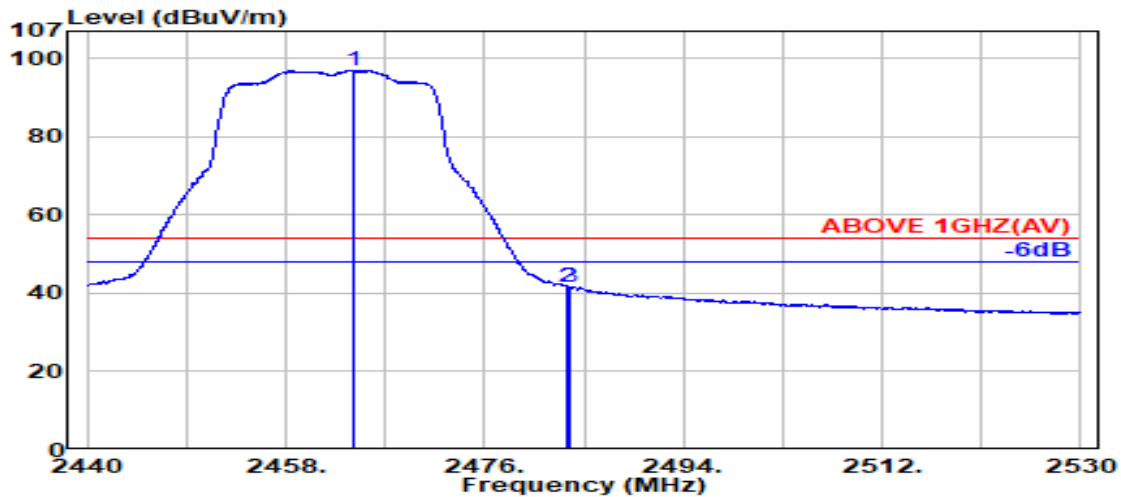

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.100	28.43	6.14	34.51	96.95	97.01	---	---	Average
2483.500	28.47	6.17	34.52	41.64	41.76	54.00	12.24	Average
2483.700	28.47	6.17	34.52	41.58	41.70	54.00	12.30	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2462 MHz
------	---------------	-----------	-------------

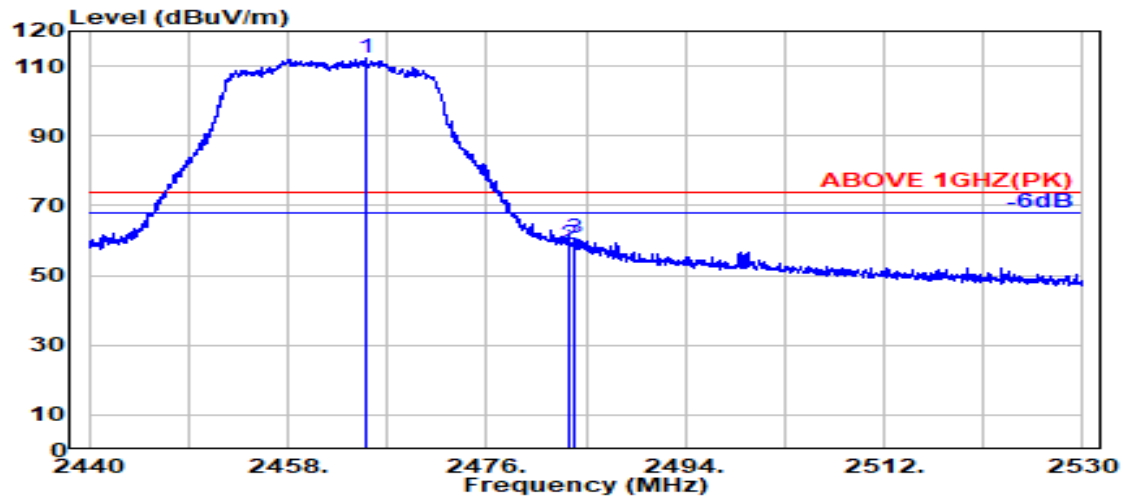

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.100	28.43	6.14	34.51	112.18	112.24	---	---	Peak
2483.500	28.47	6.17	34.52	58.86	58.98	74.00	15.02	Peak
2483.950	28.47	6.17	34.52	60.77	60.89	74.00	13.11	Peak

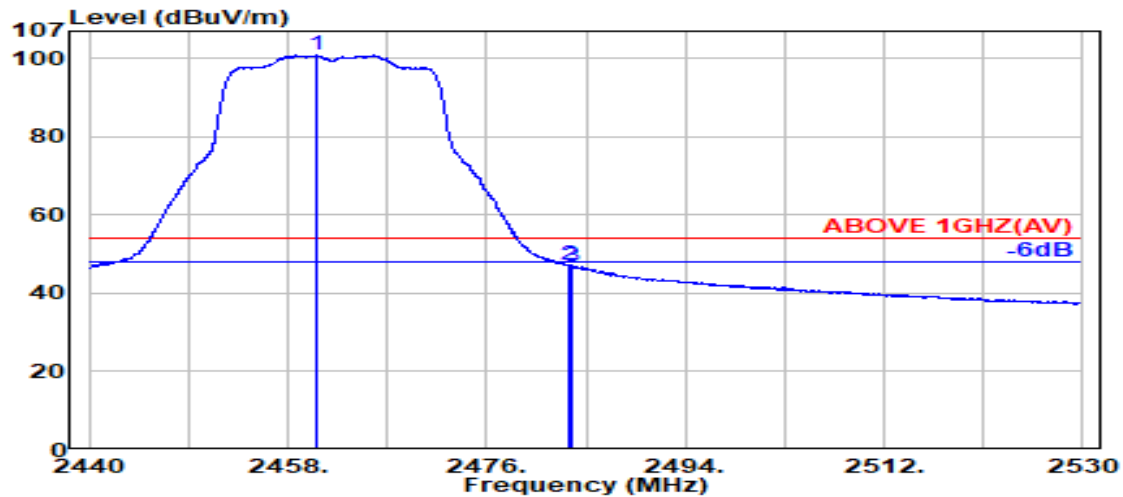

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.650	28.42	6.14	34.51	100.89	100.94	---	---	Average
2483.500	28.47	6.17	34.52	47.10	47.22	54.00	6.78	Average
2483.700	28.47	6.17	34.52	46.86	46.98	54.00	7.02	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2467 MHz
------	---------------	-----------	-------------

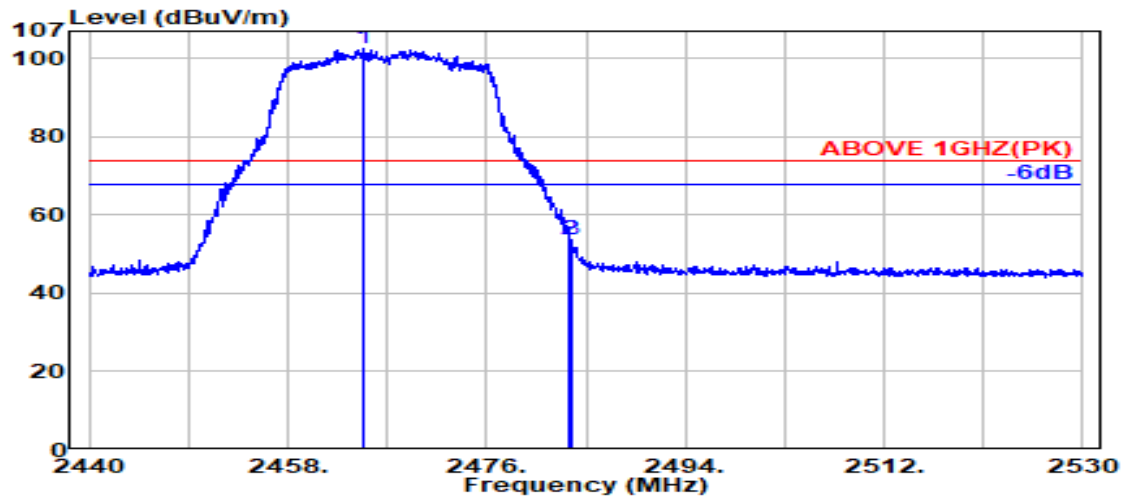

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.750	28.43	6.14	34.51	102.66	102.72	---	---	Peak
2483.500	28.47	6.17	34.52	53.64	53.76	74.00	20.24	Peak
2483.700	28.47	6.17	34.52	53.63	53.75	74.00	20.25	Peak

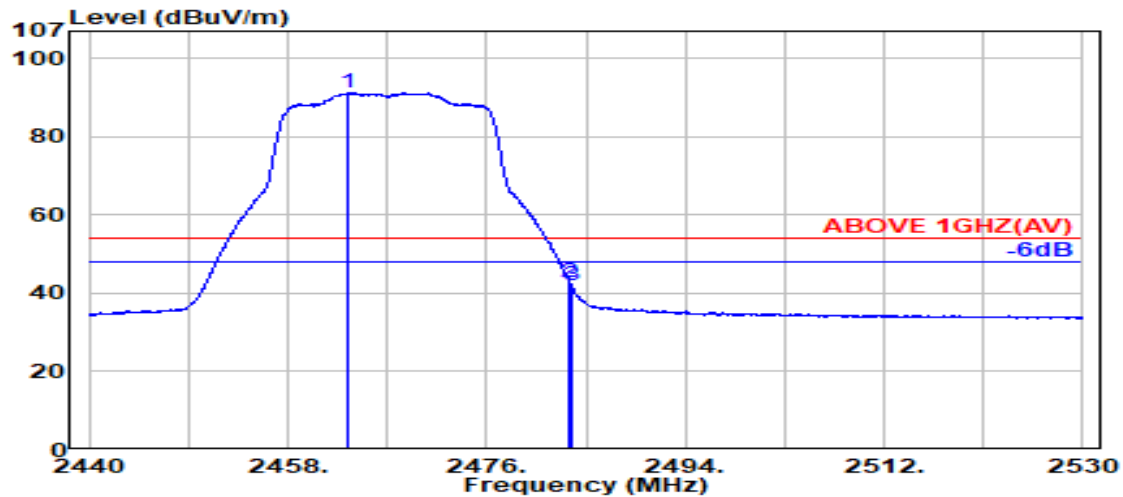

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.500	28.43	6.14	34.51	91.32	91.38	---	---	Average
2483.500	28.47	6.17	34.52	42.79	42.91	54.00	11.09	Average
2483.700	28.47	6.17	34.52	41.85	41.97	54.00	12.03	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2467 MHz
------	---------------	-----------	-------------

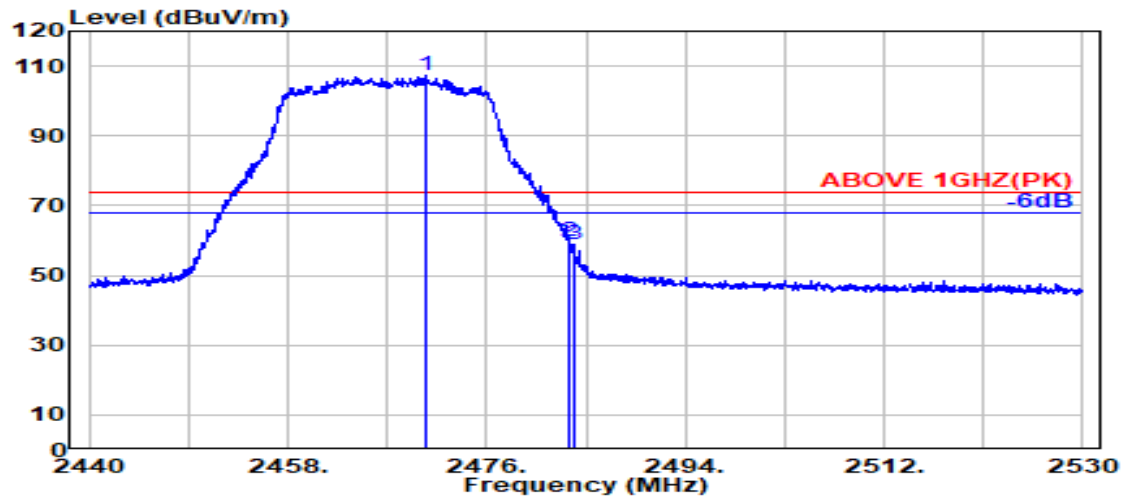

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.500	28.44	6.15	34.51	107.35	107.43	---	---	Peak
2483.500	28.47	6.17	34.52	59.56	59.67	74.00	14.33	Peak
2483.850	28.47	6.17	34.52	58.67	58.79	74.00	15.21	Peak

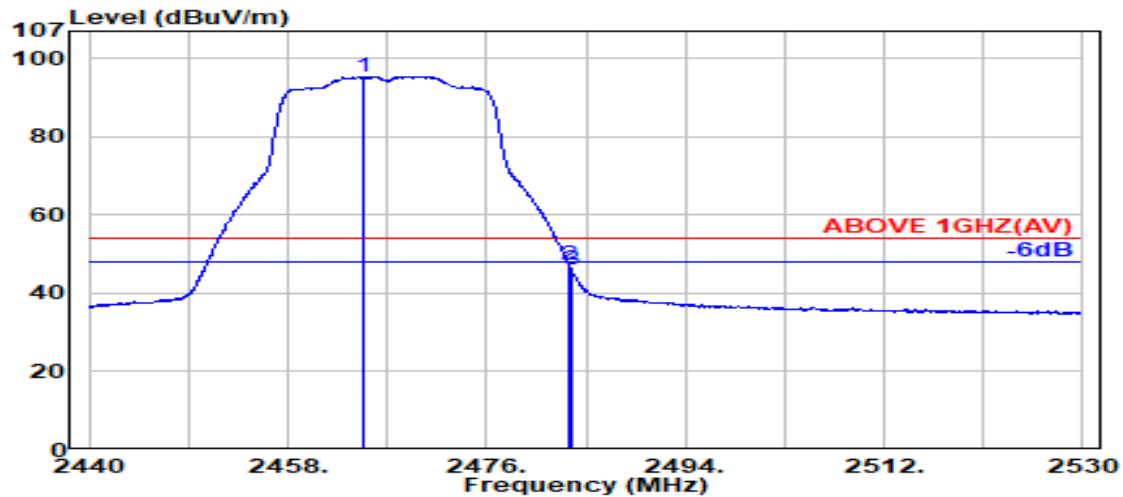

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.900	28.43	6.14	34.51	95.40	95.46	---	---	Average
2483.500	28.47	6.17	34.52	47.00	47.12	54.00	6.88	Average
2483.700	28.47	6.17	34.52	45.91	46.03	54.00	7.97	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
------	---------------	-----------	-------------

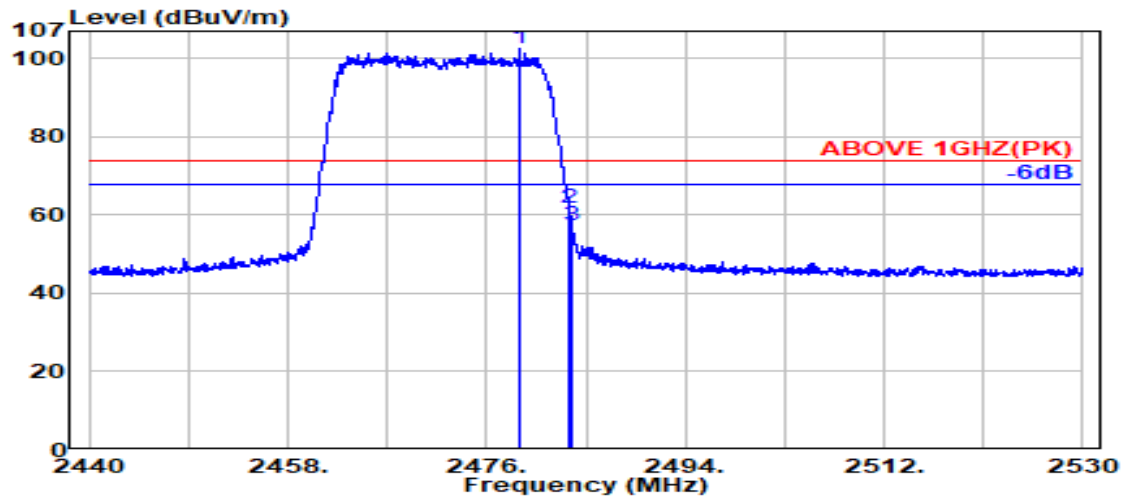

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.050	28.46	6.16	34.52	102.34	102.45	---	---	Peak
2483.500	28.47	6.17	34.52	61.64	61.76	74.00	12.24	Peak
2483.700	28.47	6.17	34.52	57.08	57.20	74.00	16.80	Peak

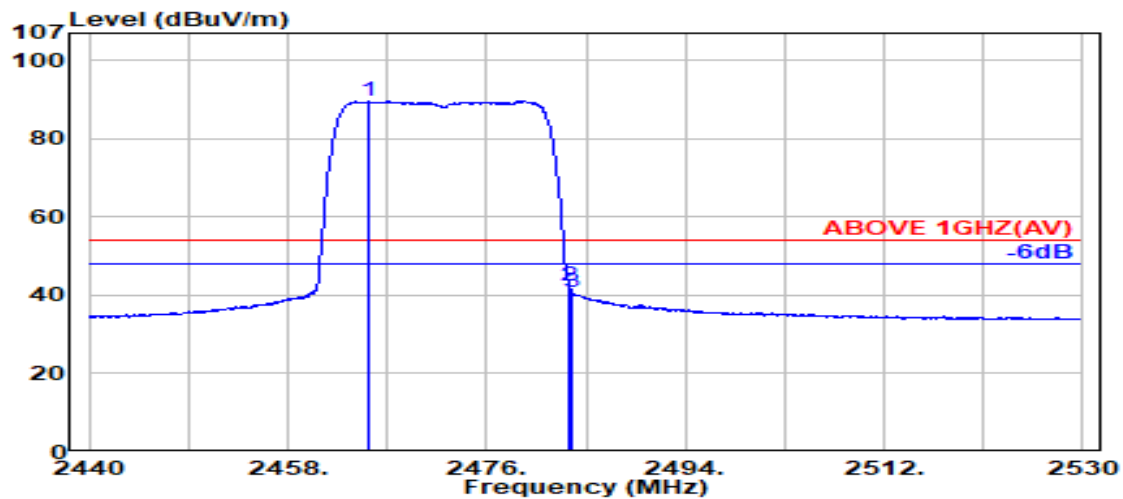

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.250	28.43	6.14	34.51	89.68	89.73	---	---	Average
2483.500	28.47	6.17	34.52	42.28	42.39	54.00	11.61	Average
2483.700	28.47	6.17	34.52	40.80	40.91	54.00	13.09	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
------	---------------	-----------	-------------

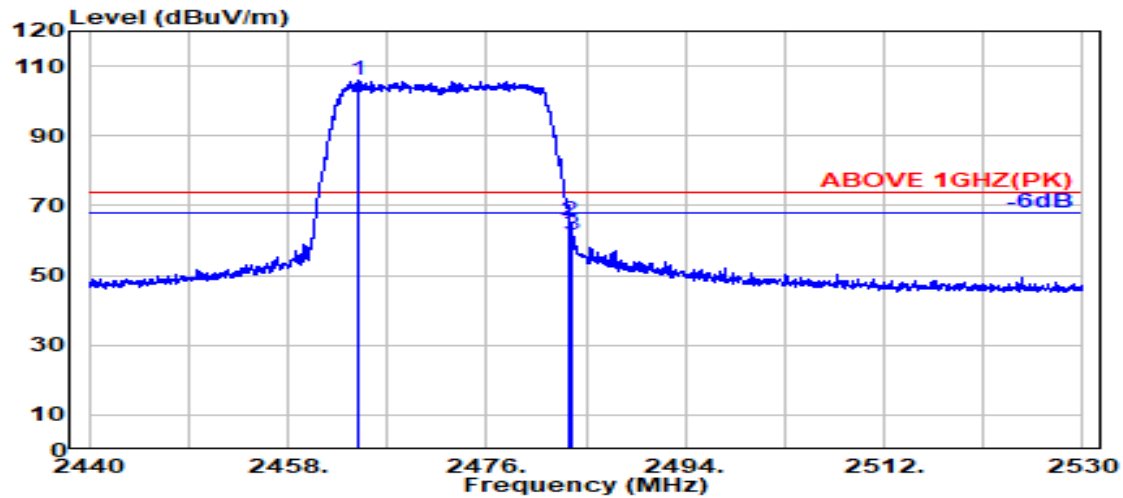

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.450	28.43	6.14	34.51	105.68	105.74	---	---	Peak
2483.500	28.47	6.17	34.52	65.45	65.57	74.00	8.43	Peak
2483.700	28.47	6.17	34.52	61.44	61.55	74.00	12.45	Peak

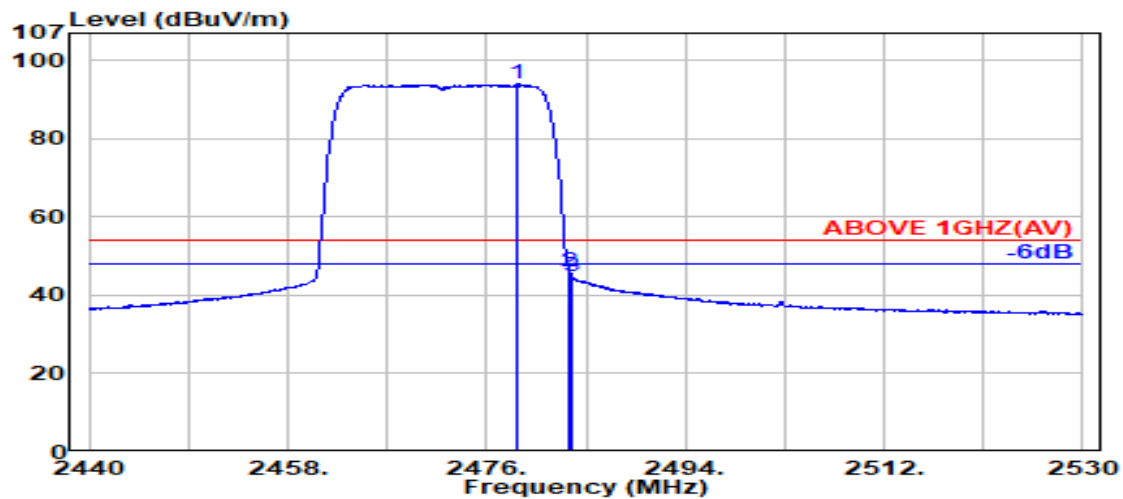

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.850	28.46	6.16	34.52	93.89	94.00	---	---	Average
2483.500	28.47	6.17	34.52	45.91	46.03	54.00	7.97	Average
2483.700	28.47	6.17	34.52	44.83	44.95	54.00	9.05	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

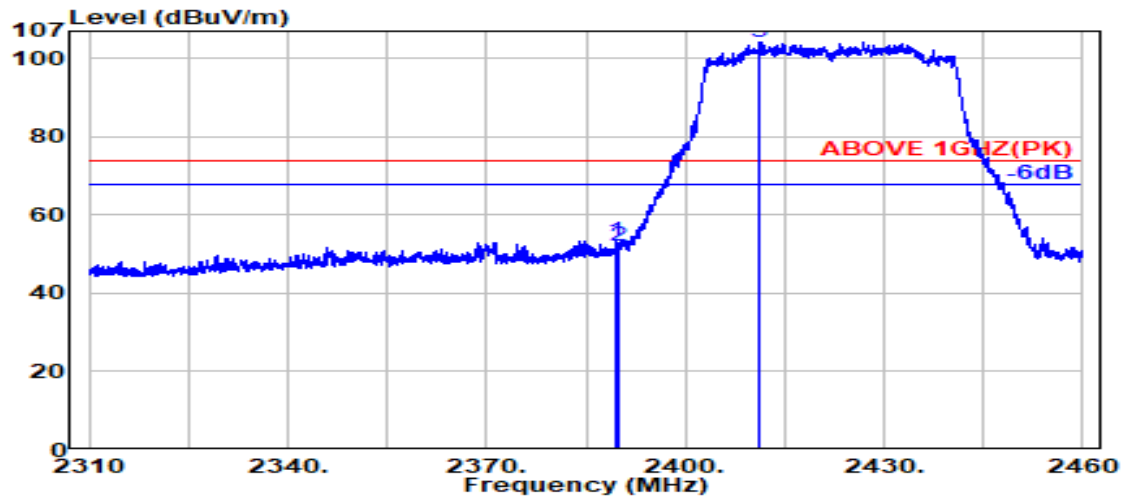

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.450	28.18	6.03	34.50	53.64	53.36	74.00	20.64	Peak
2389.800	28.18	6.03	34.50	52.29	52.00	74.00	22.00	Peak
@ 2411.300	28.17	6.07	34.50	104.63	104.36	---	---	Peak

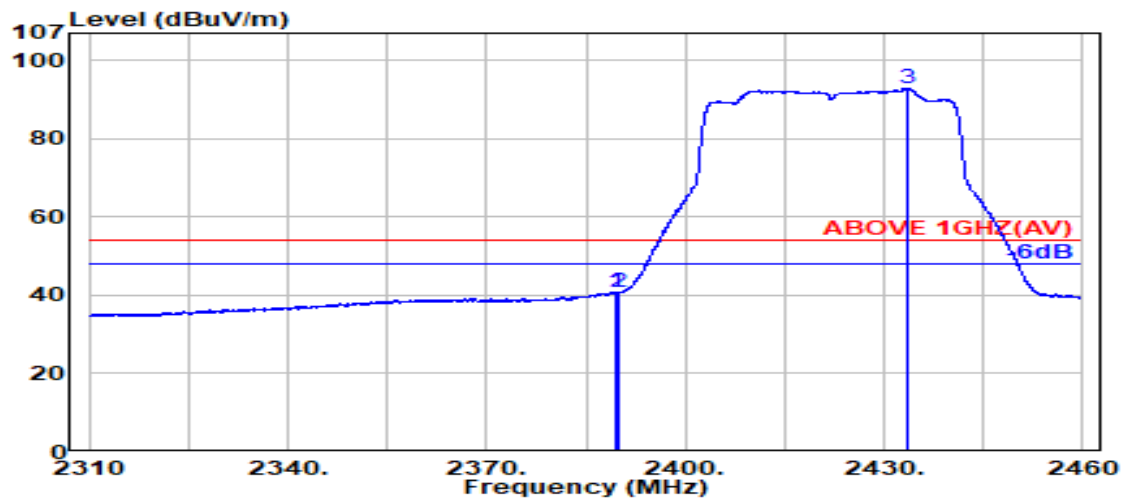

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.550	28.18	6.03	34.50	41.13	40.85	54.00	13.15	Average
2389.800	28.18	6.03	34.50	40.89	40.61	54.00	13.39	Average
@ 2433.500	28.30	6.10	34.51	92.92	92.81	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

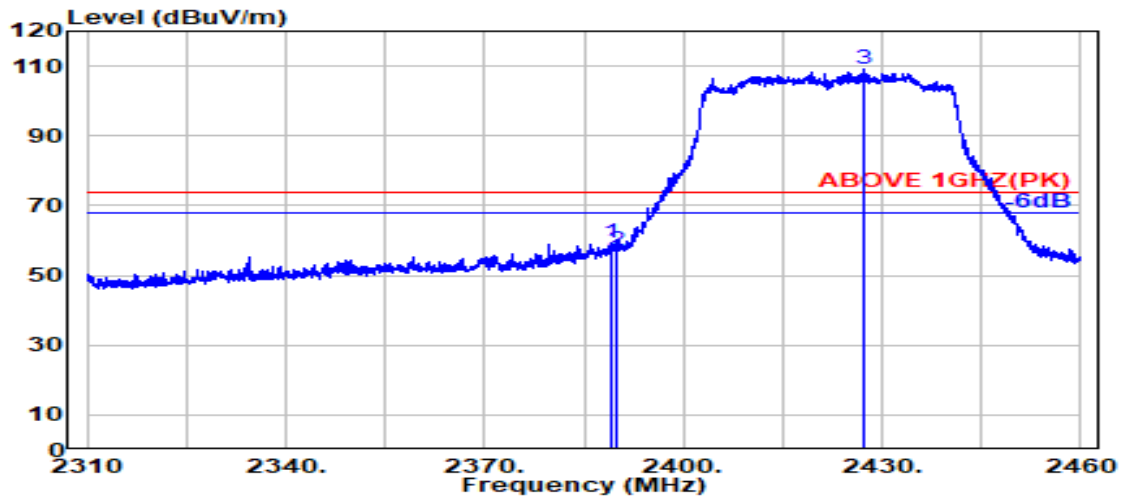

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	28.18	6.03	34.50	59.39	59.11	74.00	14.89	Peak
2389.800	28.18	6.03	34.50	57.35	57.07	74.00	16.93	Peak
@ 2427.350	28.26	6.09	34.51	109.16	109.01	---	---	Peak

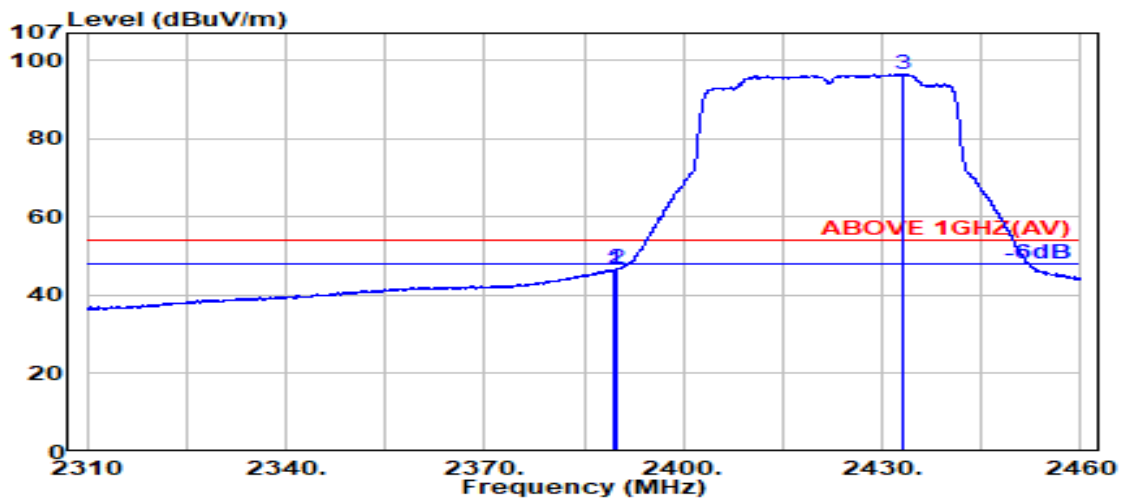

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	28.18	6.03	34.50	46.91	46.63	54.00	7.37	Average
2389.800	28.18	6.03	34.50	47.08	46.79	54.00	7.21	Average
@ 2433.300	28.30	6.10	34.51	96.50	96.39	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2447MHz
------	---------------	-----------	------------

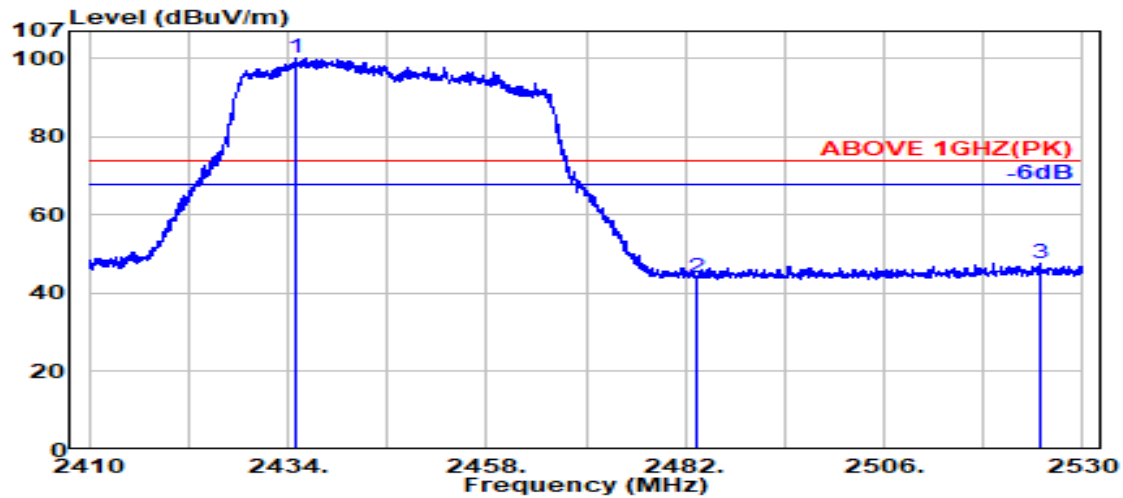

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2435.100	28.31	6.10	34.51	100.34	100.24	---	---	Peak
2483.500	28.47	6.17	34.52	43.84	43.96	74.00	30.04	Peak
2524.850	28.65	6.22	34.53	47.29	47.63	74.00	26.37	Peak

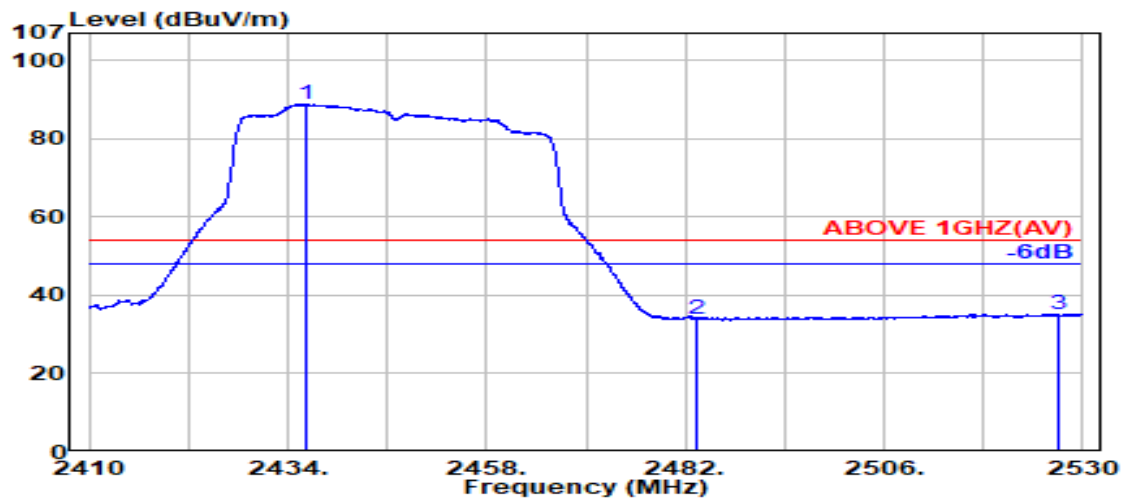

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2436.250	28.32	6.10	34.51	88.87	88.78	---	---	Average
2483.500	28.47	6.17	34.52	33.77	33.89	54.00	20.11	Average
2527.000	28.66	6.22	34.53	34.78	35.14	54.00	18.86	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2447MHz
------	---------------	-----------	------------

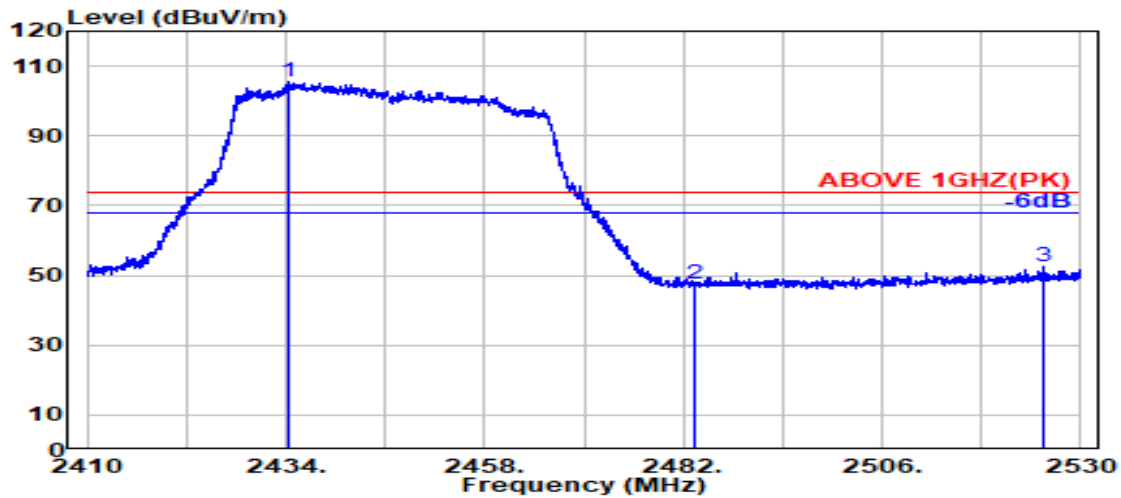

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2434.450	28.31	6.10	34.51	105.44	105.34	---	---	Peak
2483.500	28.47	6.17	34.52	47.48	47.59	74.00	26.41	Peak
2525.550	28.65	6.22	34.53	52.14	52.49	74.00	21.51	Peak

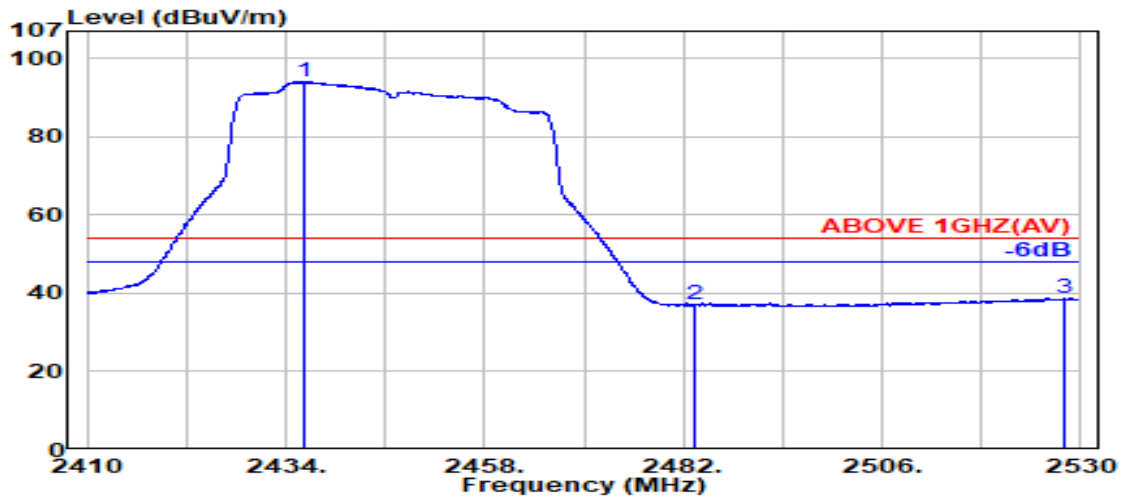

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2436.200	28.32	6.10	34.51	94.20	94.11	---	---	Average
2483.500	28.47	6.17	34.52	36.94	37.06	54.00	16.94	Average
2528.100	28.67	6.22	34.53	38.31	38.68	54.00	15.32	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

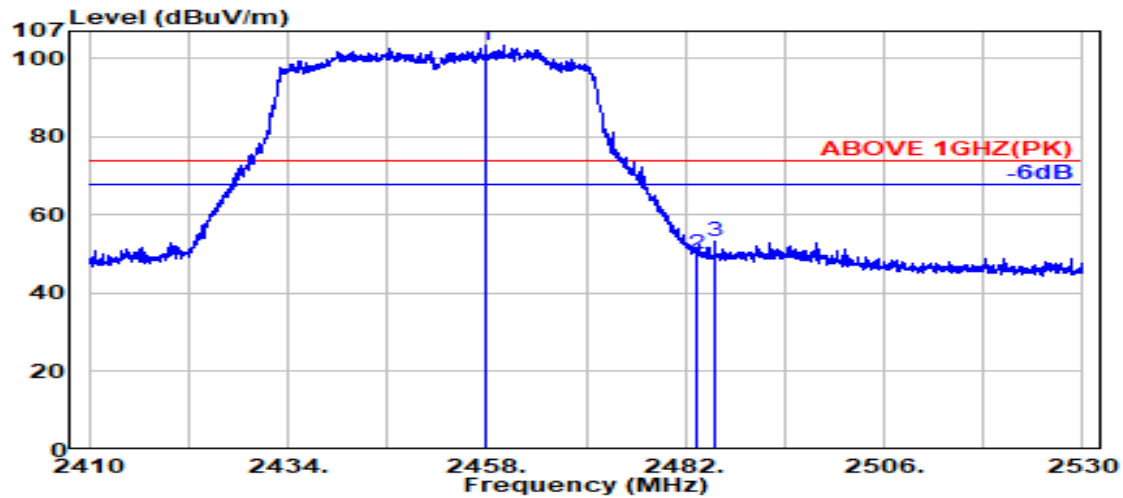

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2457.850	28.42	6.13	34.51	103.36	103.39	---	---	Peak
2483.500	28.47	6.17	34.52	50.04	50.16	74.00	23.84	Peak
2485.550	28.47	6.17	34.52	53.14	53.26	74.00	20.74	Peak

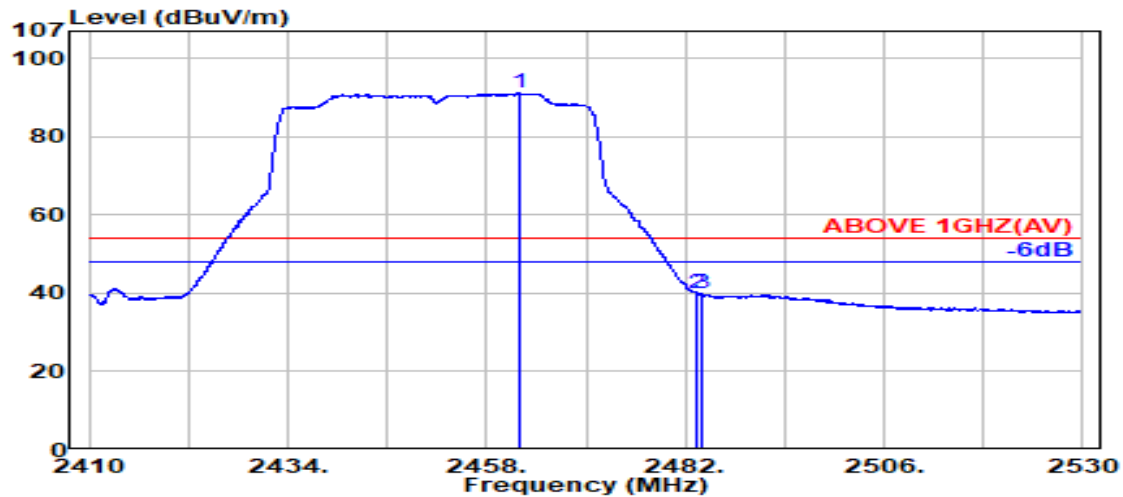

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.900	28.42	6.14	34.51	91.14	91.18	---	---	Average
2483.500	28.47	6.17	34.52	39.70	39.82	54.00	14.18	Average
2484.100	28.47	6.17	34.52	39.79	39.91	54.00	14.09	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

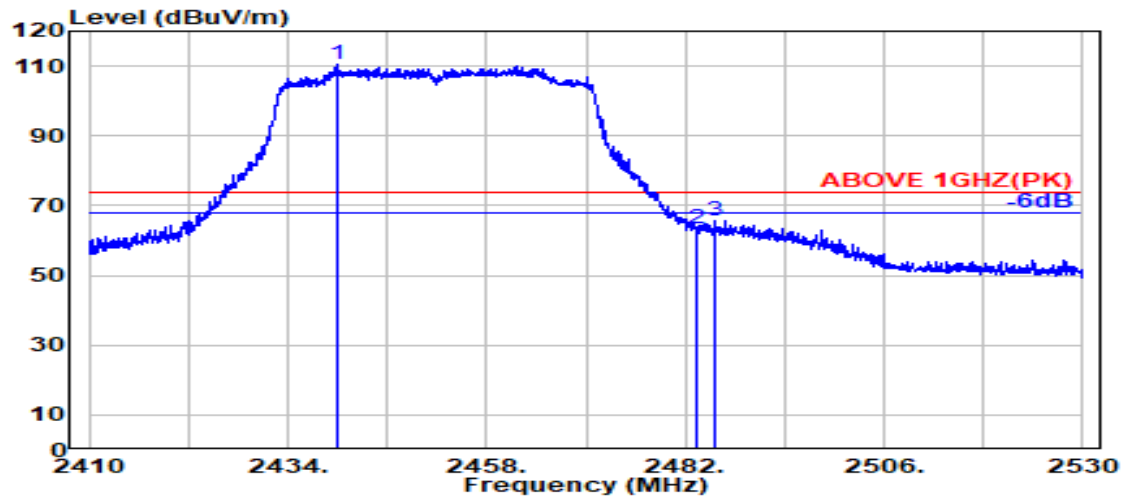

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2440.050	28.34	6.11	34.51	110.47	110.41	---	---	Peak
2483.500	28.47	6.17	34.52	63.35	63.46	74.00	10.54	Peak
2485.500	28.47	6.17	34.52	65.50	65.62	74.00	8.38	Peak

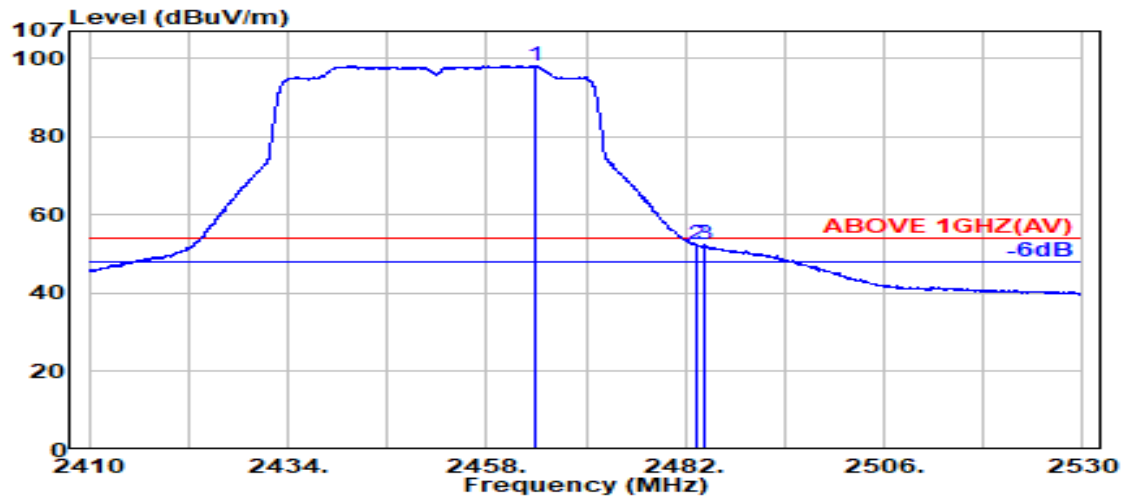

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.850	28.43	6.14	34.51	98.17	98.22	---	---	Average
2483.500	28.47	6.17	34.52	52.43	52.55	54.00	1.45	Average
2484.350	28.47	6.17	34.52	52.23	52.36	54.00	1.64	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

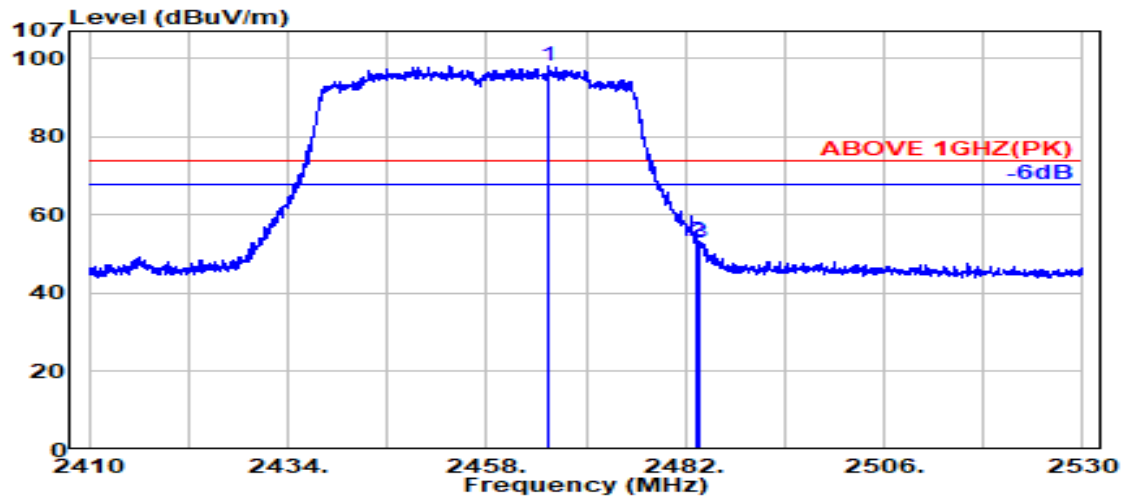

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.500	28.43	6.14	34.51	97.98	98.04	---	---	Peak
2483.500	28.47	6.17	34.52	53.15	53.27	74.00	20.73	Peak
2483.800	28.47	6.17	34.52	52.79	52.91	74.00	21.09	Peak

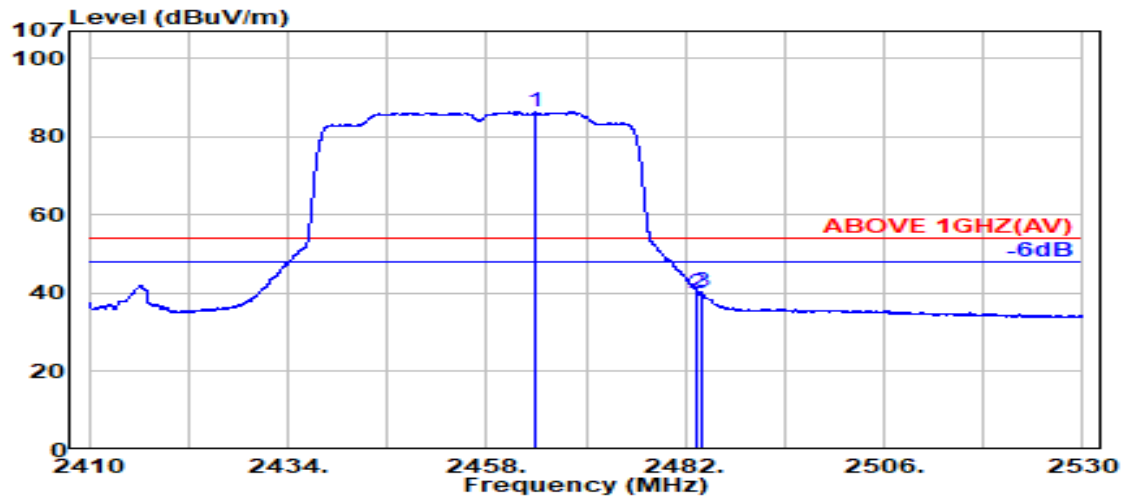

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.950	28.43	6.14	34.51	86.29	86.34	---	---	Average
2483.500	28.47	6.17	34.52	39.92	40.03	54.00	13.97	Average
2483.850	28.47	6.17	34.52	40.12	40.24	54.00	13.76	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

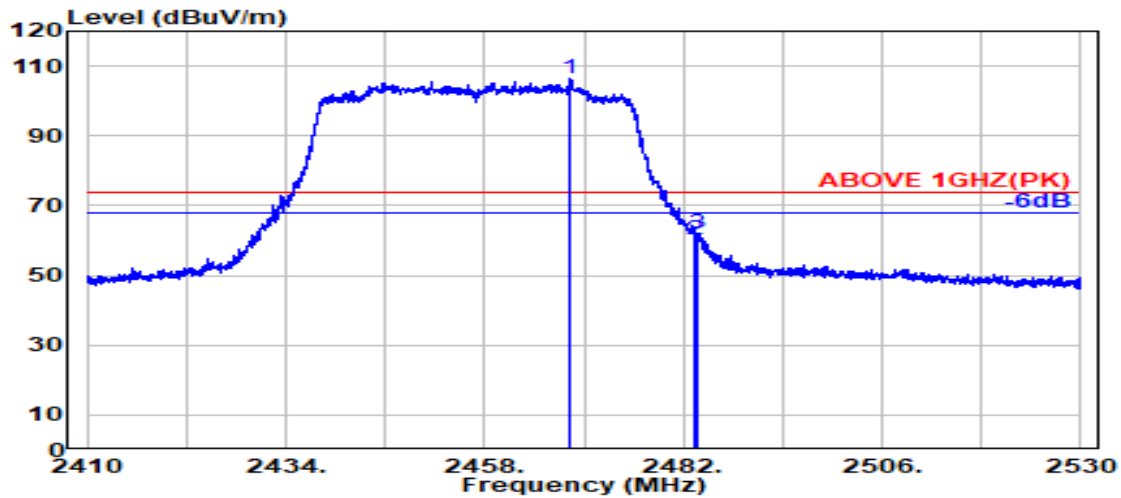

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.400	28.44	6.15	34.51	106.39	106.46	---	---	Peak
2483.500	28.47	6.17	34.52	59.91	60.03	74.00	13.97	Peak
2483.700	28.47	6.17	34.52	61.88	62.00	74.00	12.00	Peak

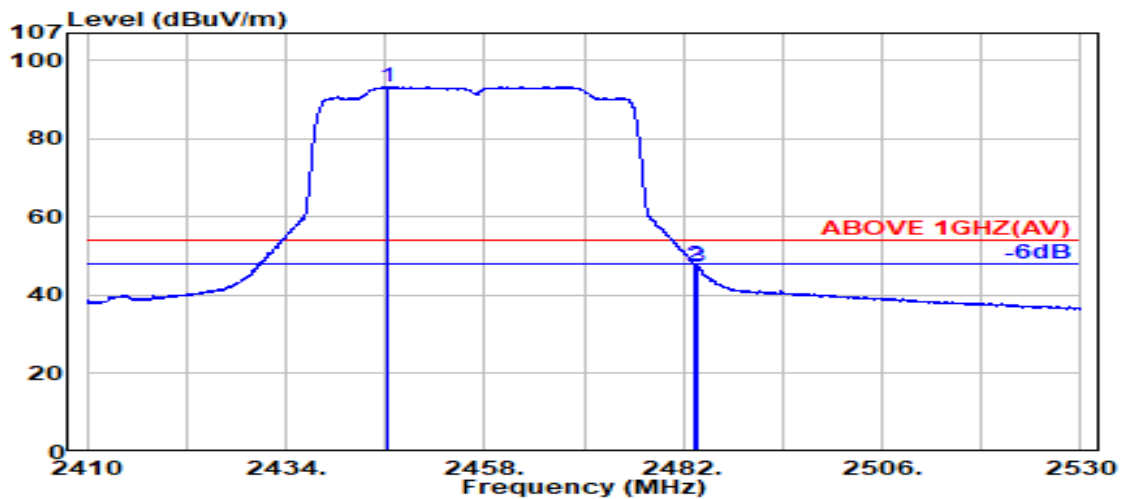

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2446.300	28.38	6.12	34.51	93.37	93.35	---	---	Average
2483.500	28.47	6.17	34.52	47.56	47.68	54.00	6.32	Average
2483.700	28.47	6.17	34.52	47.06	47.18	54.00	6.82	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

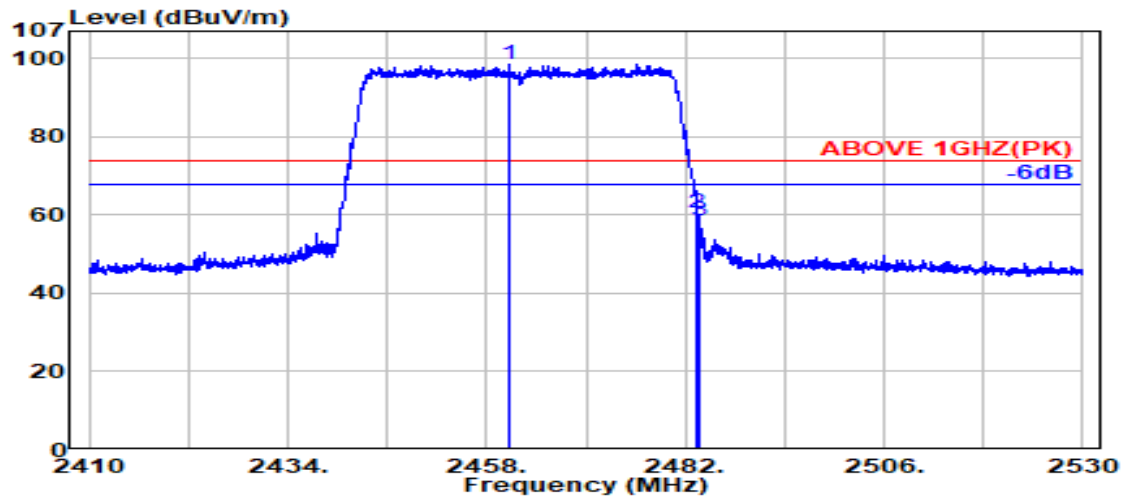

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2460.750	28.42	6.14	34.51	98.43	98.48	---	---	Peak
	2483.500	28.47	6.17	34.52	60.42	60.54	74.00	13.46	Peak
	2483.750	28.47	6.17	34.52	58.36	58.48	74.00	15.52	Peak

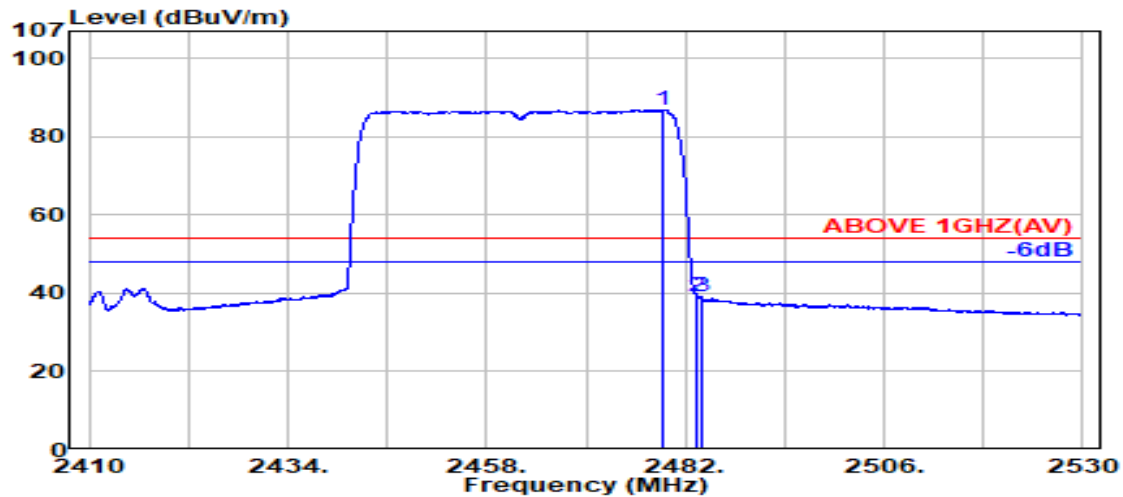

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2479.150	28.46	6.16	34.52	86.83	86.94	---	---	Average
	2483.500	28.47	6.17	34.52	39.23	39.35	54.00	14.65	Average
	2483.900	28.47	6.17	34.52	39.20	39.32	54.00	14.68	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

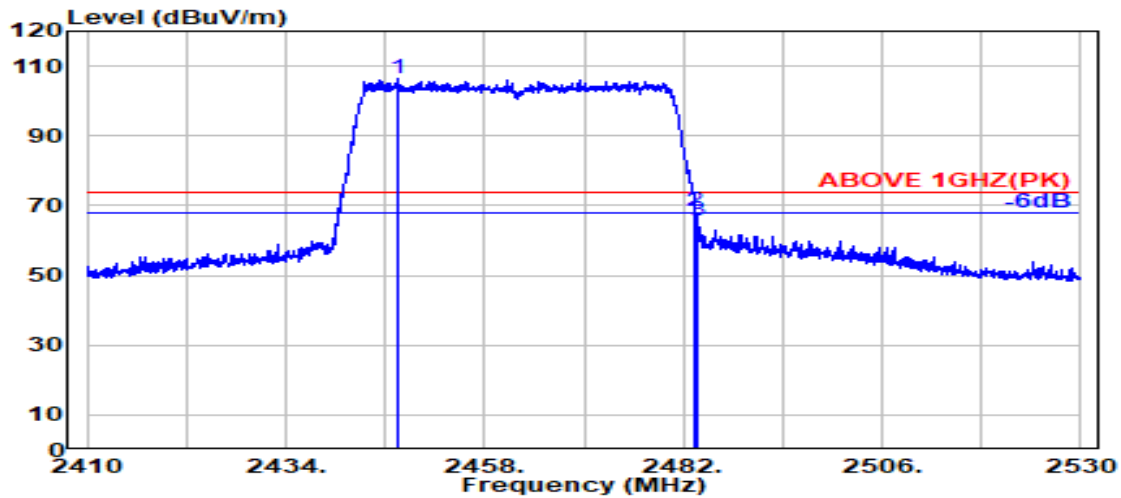

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2447.500	28.39	6.12	34.51	106.20	106.19	---	---	Peak
2483.500	28.47	6.17	34.52	68.21	68.32	74.00	5.68	Peak
2483.750	28.47	6.17	34.52	65.35	65.47	74.00	8.53	Peak

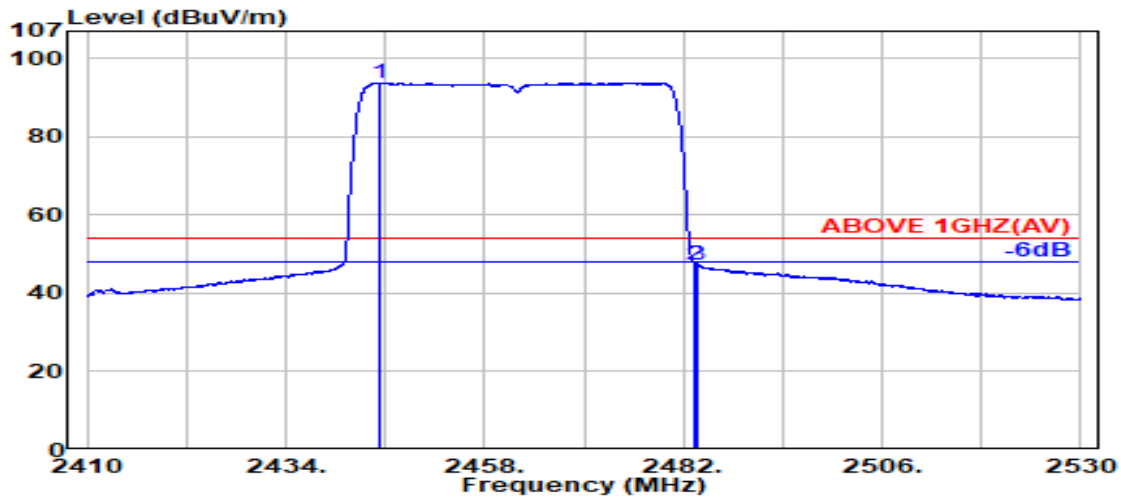

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2445.250	28.37	6.11	34.51	93.90	93.87	---	---	Average
2483.500	28.47	6.17	34.52	47.31	47.42	54.00	6.58	Average
2483.700	28.47	6.17	34.52	47.22	47.34	54.00	6.66	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412MHz
------	----------------	-----------	------------

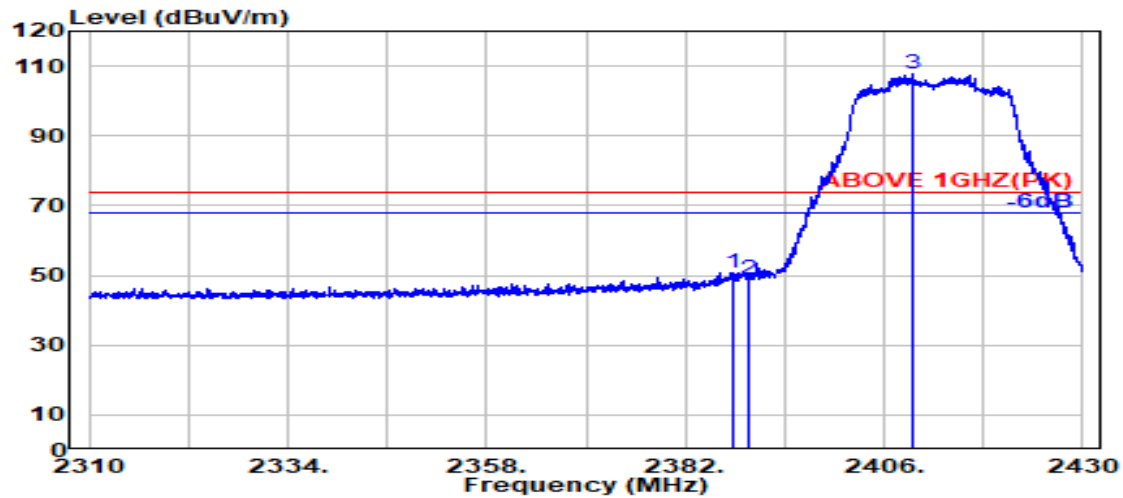

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.700	28.20	6.03	34.50	51.20	50.94	74.00	23.06	Peak
2389.800	28.18	6.03	34.50	49.29	49.00	74.00	25.00	Peak
@ 2409.350	28.16	6.06	34.50	107.99	107.71	---	---	Peak

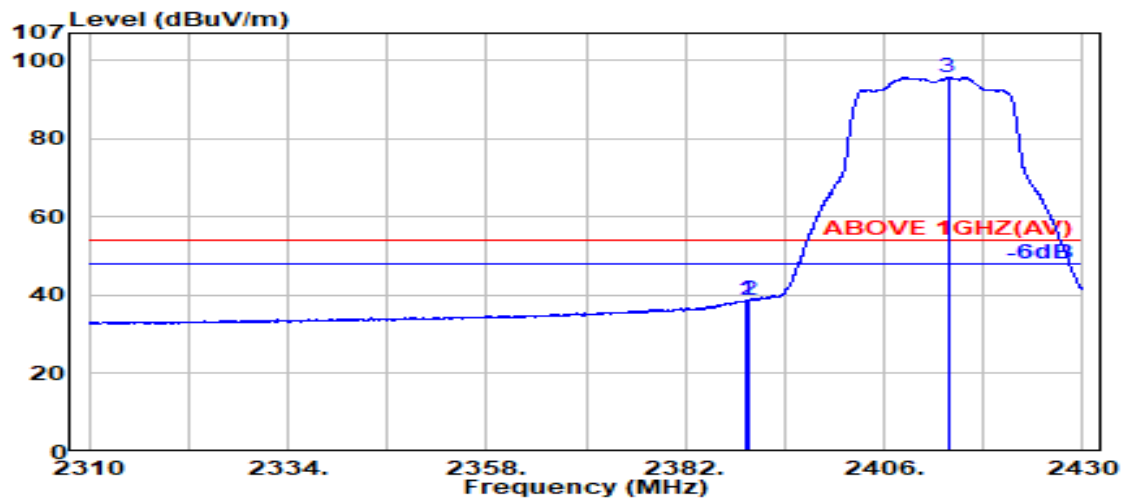

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.350	28.18	6.03	34.50	39.13	38.85	54.00	15.15	Average
2389.800	28.18	6.03	34.50	38.89	38.60	54.00	15.40	Average
@ 2413.700	28.18	6.07	34.50	95.96	95.71	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412MHz
------	----------------	-----------	------------

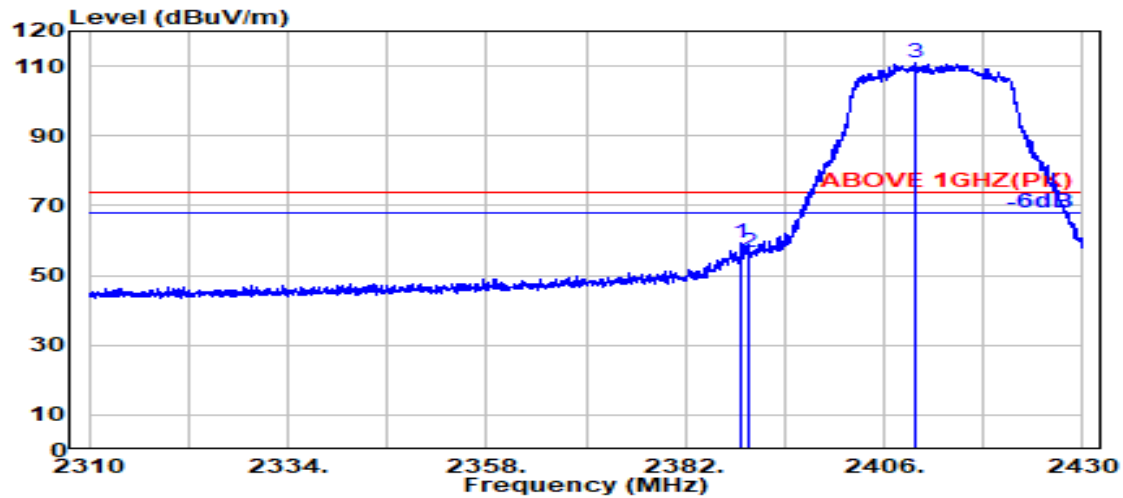

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.700	28.19	6.03	34.50	59.80	59.52	74.00	14.48	Peak
2389.800	28.18	6.03	34.50	56.90	56.62	74.00	17.38	Peak
@ 2409.650	28.16	6.06	34.50	111.17	110.89	---	---	Peak

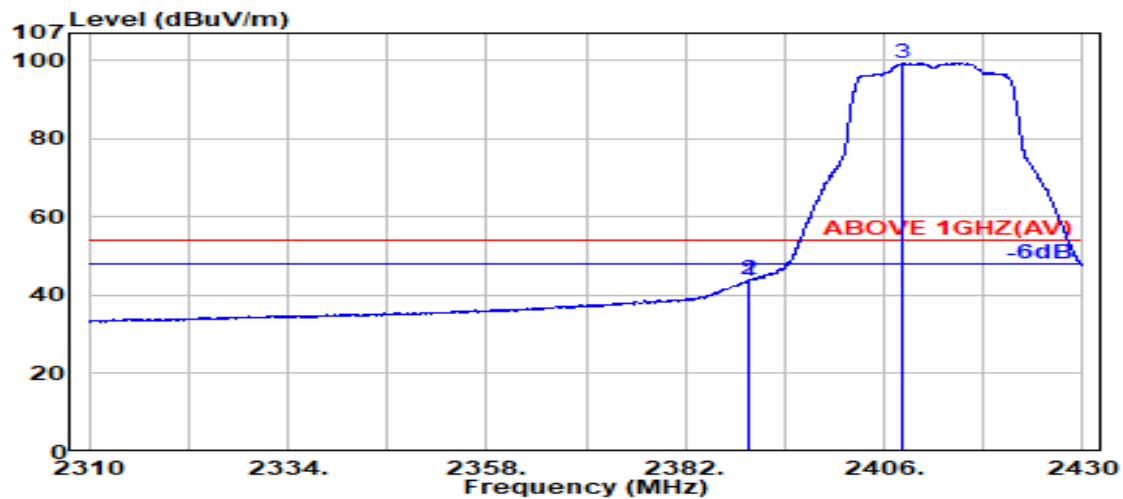

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.650	28.18	6.03	34.50	43.91	43.63	54.00	10.37	Average
2389.800	28.18	6.03	34.50	44.14	43.86	54.00	10.14	Average
@ 2408.250	28.15	6.06	34.50	99.65	99.36	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2462MHz
------	----------------	-----------	------------

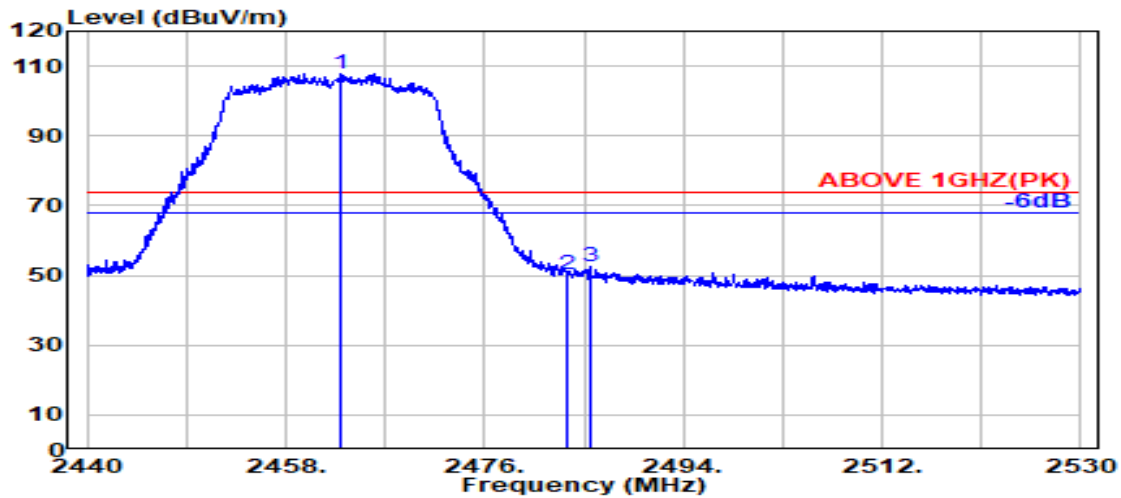

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.950	28.43	6.14	34.51	107.81	107.86	---	---	Peak
2483.500	28.47	6.17	34.52	50.01	50.13	74.00	23.87	Peak
2485.650	28.47	6.17	34.52	52.18	52.30	74.00	21.70	Peak

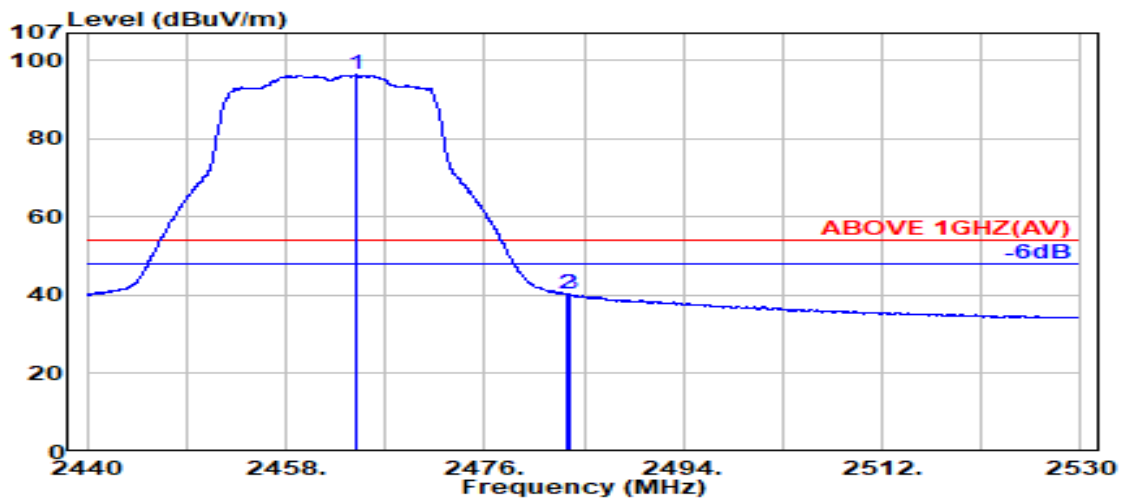

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.450	28.43	6.14	34.51	96.33	96.39	---	---	Average
2483.500	28.47	6.17	34.52	40.15	40.27	54.00	13.73	Average
2483.700	28.47	6.17	34.52	40.08	40.20	54.00	13.80	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2462MHz
------	----------------	-----------	------------

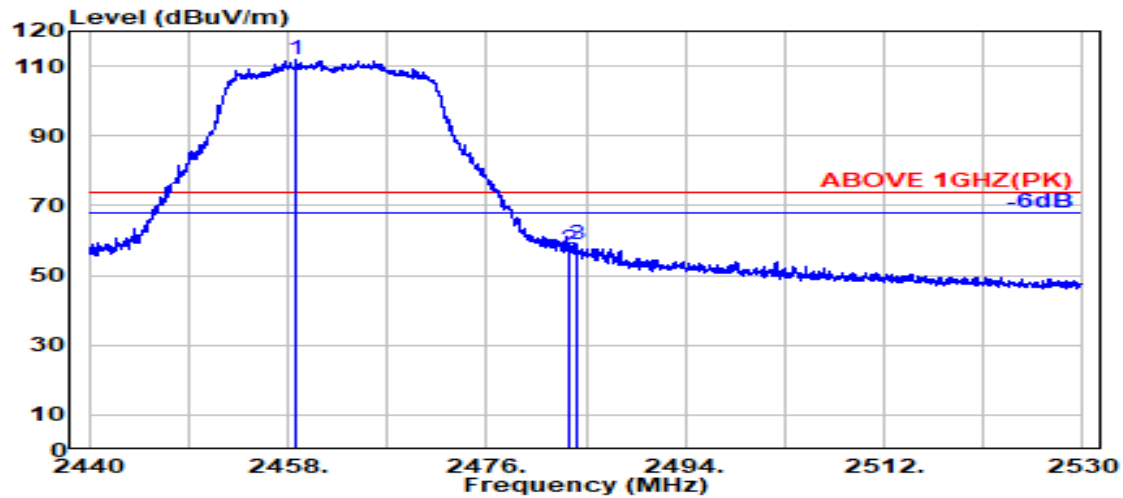

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.750	28.42	6.13	34.51	111.98	112.02	---	---	Peak
2483.500	28.47	6.17	34.52	57.47	57.59	74.00	16.41	Peak
2484.200	28.47	6.17	34.52	58.95	59.07	74.00	14.93	Peak

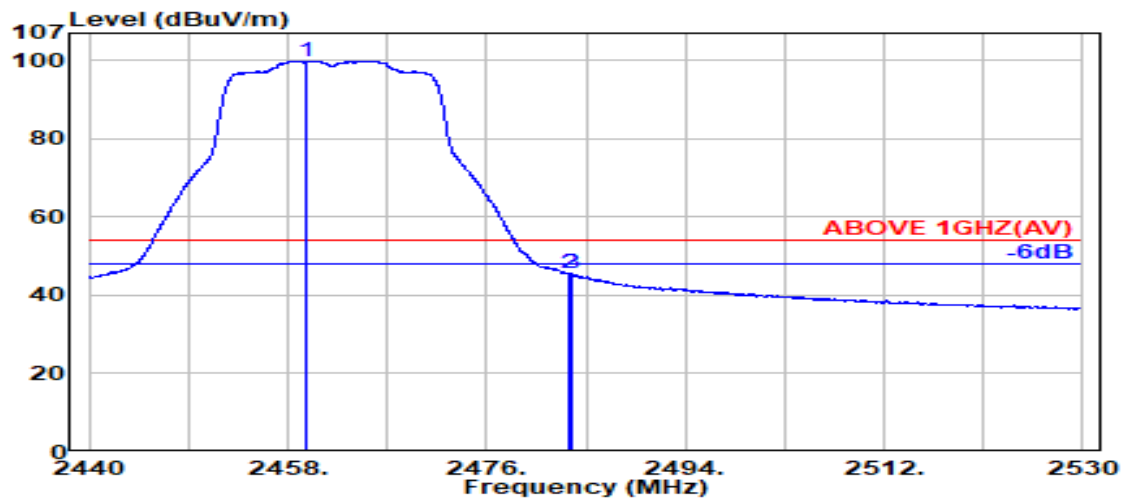

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.650	28.42	6.13	34.51	99.85	99.89	---	---	Average
2483.500	28.47	6.17	34.52	45.53	45.65	54.00	8.35	Average
2483.700	28.47	6.17	34.52	45.42	45.54	54.00	8.46	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2467MHz
------	----------------	-----------	------------

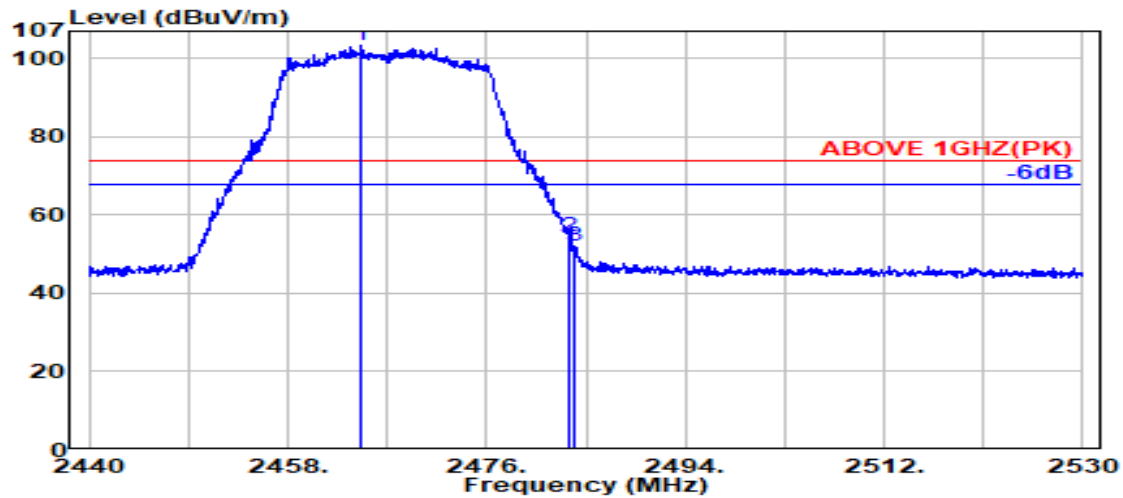

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.650	28.43	6.14	34.51	103.23	103.29	---	---	Peak
2483.500	28.47	6.17	34.52	54.21	54.33	74.00	19.67	Peak
2483.850	28.47	6.17	34.52	51.82	51.94	74.00	22.06	Peak

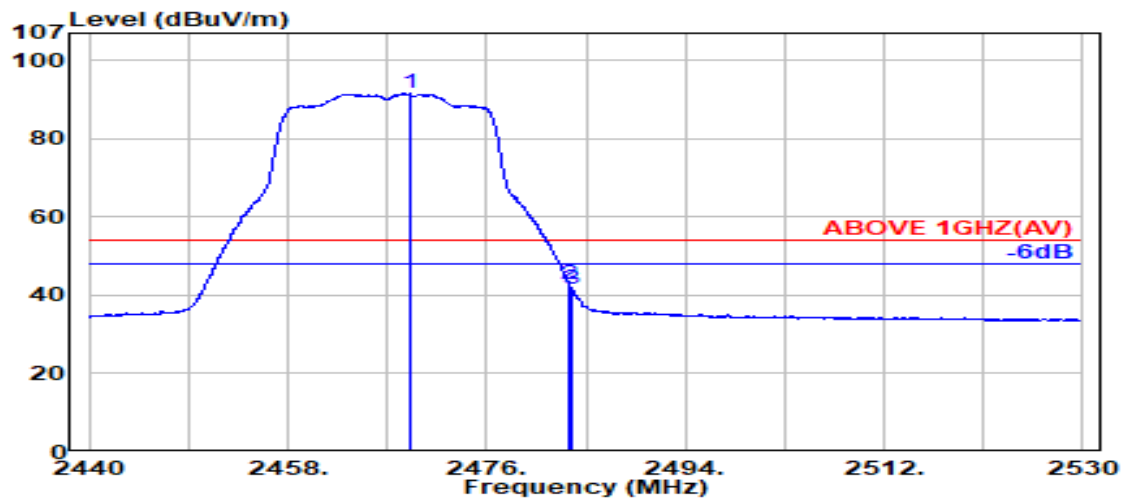

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.200	28.44	6.15	34.51	91.49	91.56	---	---	Average
2483.500	28.47	6.17	34.52	42.74	42.86	54.00	11.14	Average
2483.700	28.47	6.17	34.52	41.55	41.67	54.00	12.33	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2467MHz
------	----------------	-----------	------------

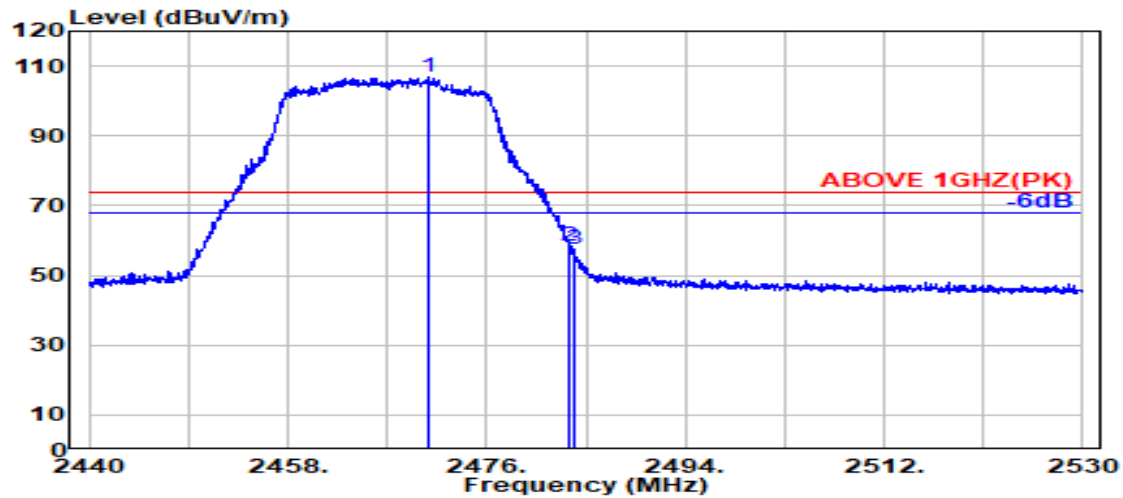

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.800	28.44	6.15	34.51	106.90	106.97	---	---	Peak
2483.500	28.47	6.17	34.52	58.48	58.60	74.00	15.40	Peak
2483.850	28.47	6.17	34.52	57.22	57.34	74.00	16.66	Peak

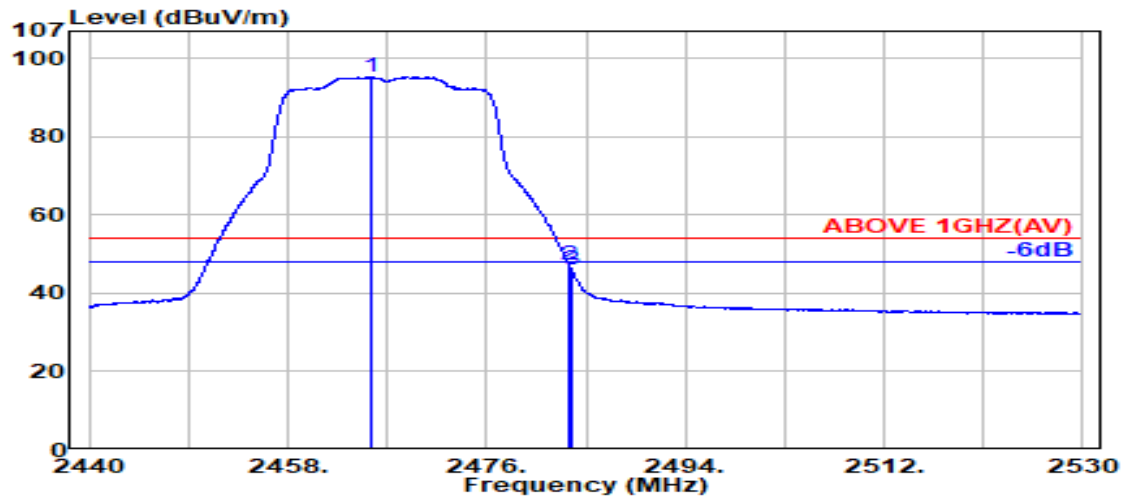

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.550	28.43	6.14	34.51	95.20	95.26	---	---	Average
2483.500	28.47	6.17	34.52	46.98	47.10	54.00	6.90	Average
2483.700	28.47	6.17	34.52	45.81	45.92	54.00	8.08	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
------	----------------	-----------	------------

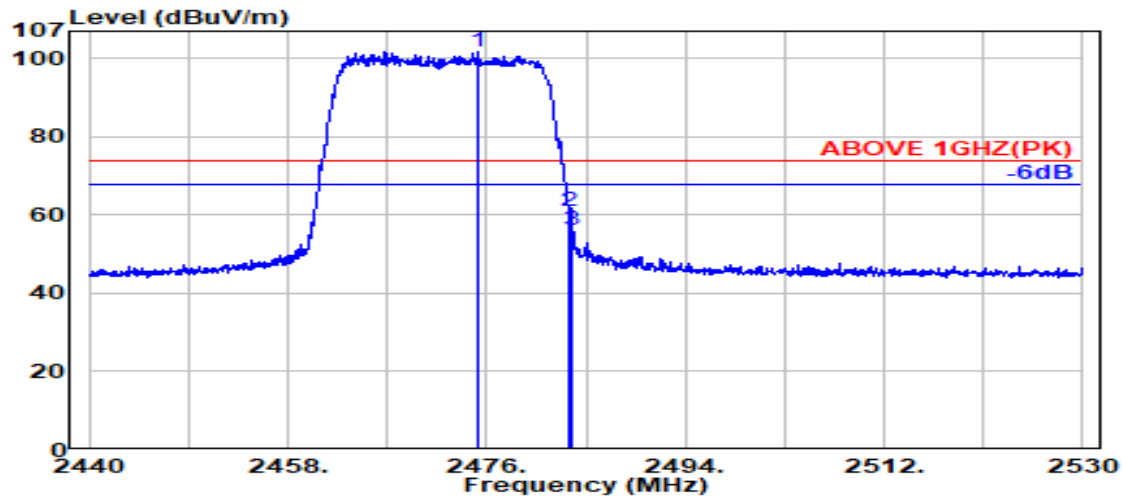

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.300	28.45	6.16	34.52	101.58	101.67	---	---	Peak
2483.500	28.47	6.17	34.52	61.05	61.16	74.00	12.84	Peak
2483.700	28.47	6.17	34.52	55.99	56.11	74.00	17.89	Peak

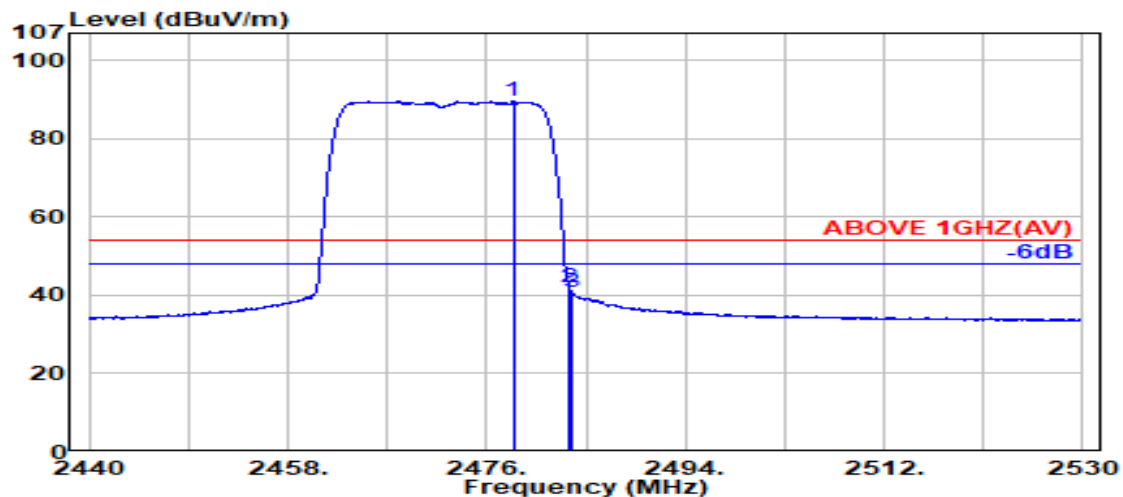

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.400	28.46	6.16	34.52	89.60	89.70	---	---	Average
2483.500	28.47	6.17	34.52	41.78	41.90	54.00	12.10	Average
2483.700	28.47	6.17	34.52	40.61	40.72	54.00	13.28	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
------	----------------	-----------	------------

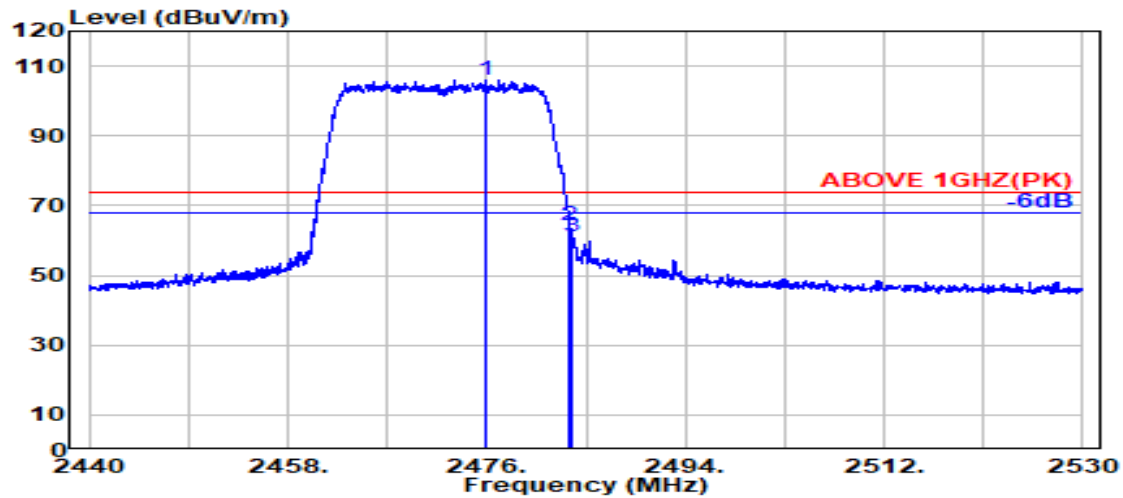

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.000	28.45	6.16	34.52	105.83	105.92	---	---	Peak
2483.500	28.47	6.17	34.52	64.34	64.46	74.00	9.54	Peak
2483.700	28.47	6.17	34.52	61.18	61.30	74.00	12.70	Peak

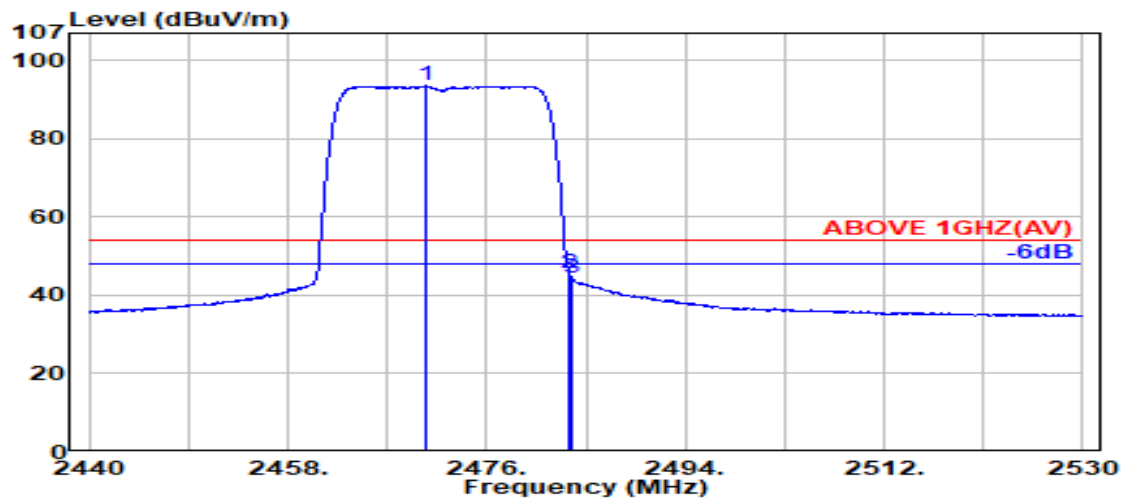

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.450	28.44	6.15	34.51	93.45	93.52	---	---	Average
2483.500	28.47	6.17	34.52	45.49	45.61	54.00	8.39	Average
2483.700	28.47	6.17	34.52	44.47	44.59	54.00	9.41	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2422MHz
------	----------------	-----------	------------

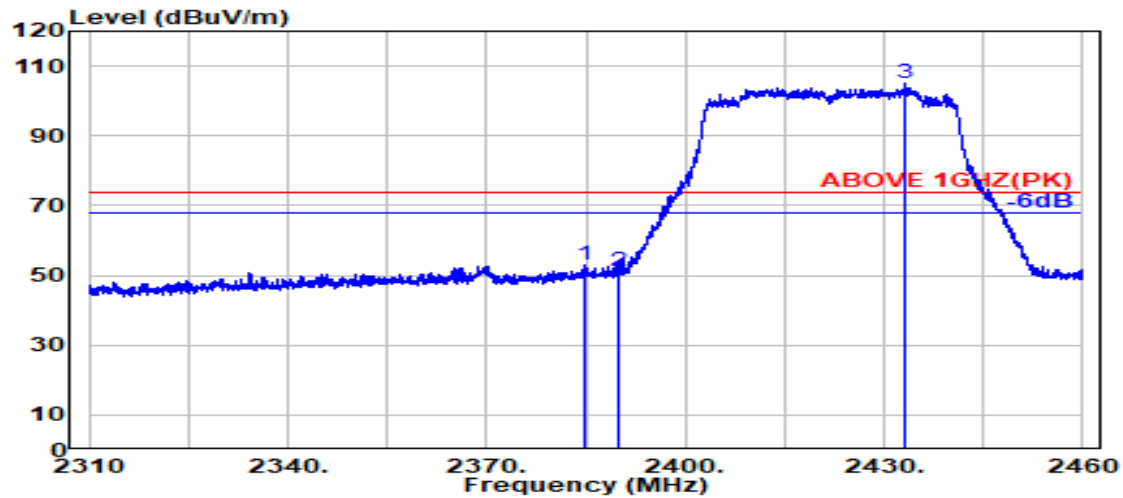

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2384.650	28.22	6.03	34.50	53.44	53.19	74.00	20.81	Peak
2389.800	28.18	6.03	34.50	51.33	51.05	74.00	22.95	Peak
@ 2433.100	28.30	6.10	34.51	105.39	105.27	---	---	Peak

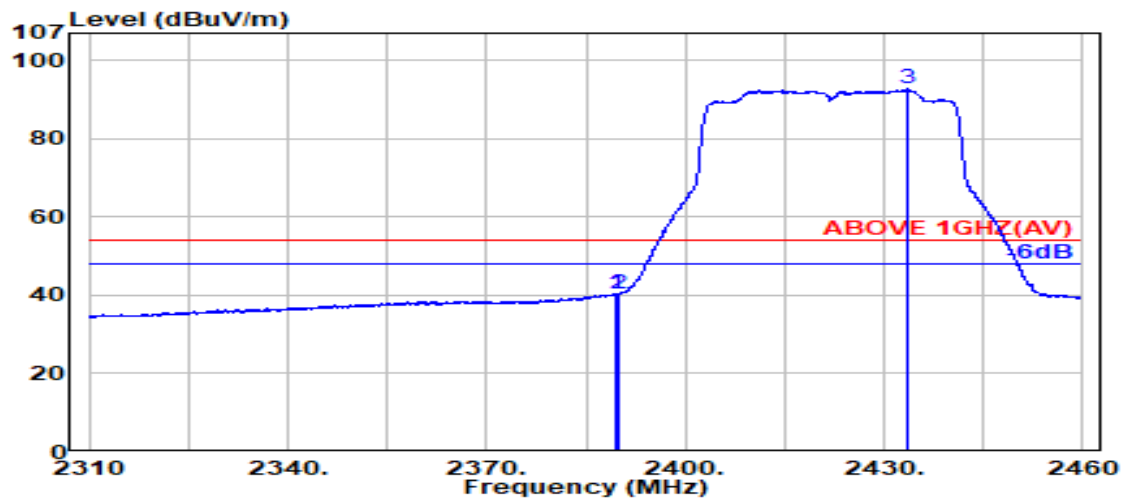

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	28.18	6.03	34.50	40.65	40.37	54.00	13.63	Average
2389.800	28.18	6.03	34.50	40.58	40.29	54.00	13.71	Average
@ 2433.450	28.30	6.10	34.51	92.84	92.73	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2422MHz
------	----------------	-----------	------------

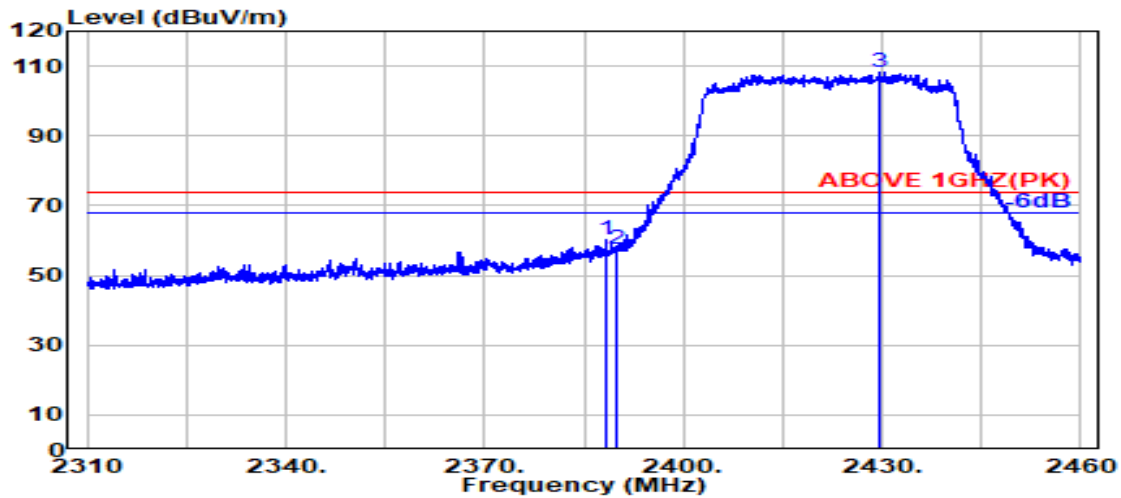

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.300	28.19	6.03	34.50	60.52	60.25	74.00	13.75	Peak
2389.800	28.18	6.03	34.50	57.75	57.47	74.00	16.53	Peak
@ 2429.700	28.28	6.09	34.51	108.31	108.17	---	---	Peak

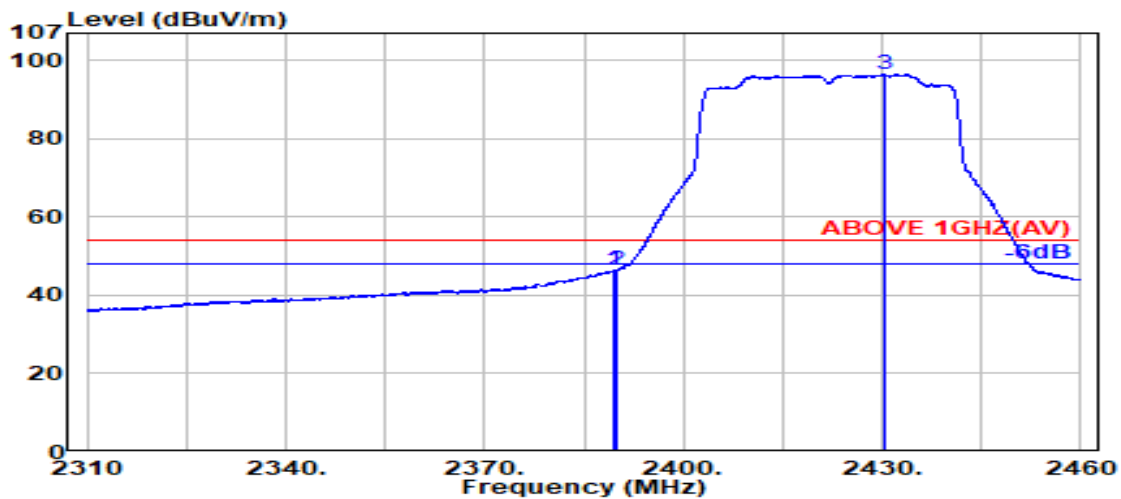

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.50	46.66	46.38	54.00	7.62	Average
2389.800	28.18	6.03	34.50	46.61	46.33	54.00	7.67	Average
@ 2430.250	28.28	6.09	34.51	96.57	96.44	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2452MHz
------	----------------	-----------	------------

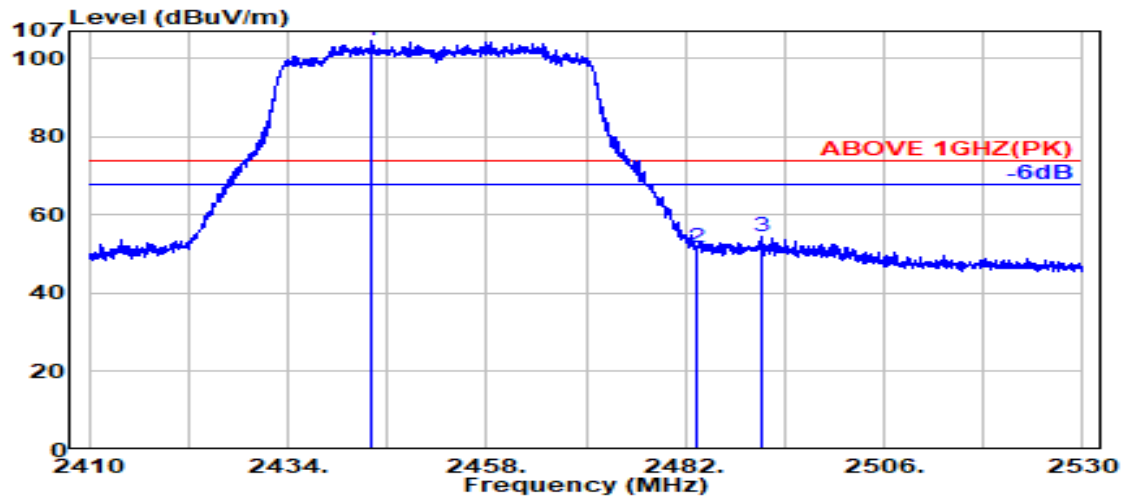

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2444.000	28.36	6.11	34.51	104.61	104.58	---	---	Peak
2483.500	28.47	6.17	34.52	51.37	51.49	74.00	22.51	Peak
2491.250	28.48	6.18	34.52	54.30	54.44	74.00	19.56	Peak

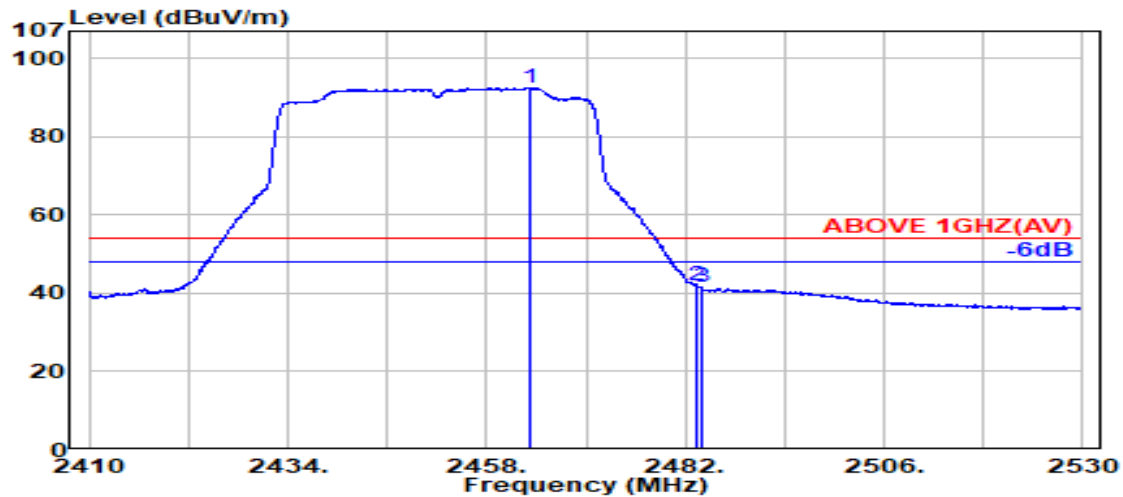

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.350	28.43	6.14	34.51	92.61	92.66	---	---	Average
2483.500	28.47	6.17	34.52	41.88	41.99	54.00	12.01	Average
2483.850	28.47	6.17	34.52	41.65	41.77	54.00	12.23	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2452MHz
------	----------------	-----------	------------

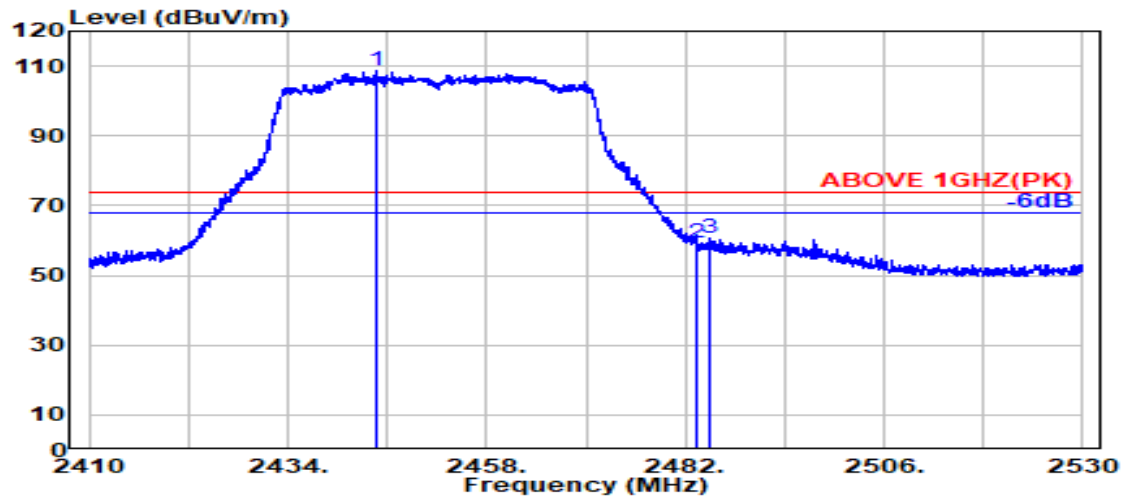

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2444.800	28.37	6.11	34.51	108.89	108.86	---	---	Peak
	2483.500	28.47	6.17	34.52	59.09	59.21	74.00	14.79	Peak
	2484.950	28.47	6.17	34.52	60.53	60.65	74.00	13.35	Peak

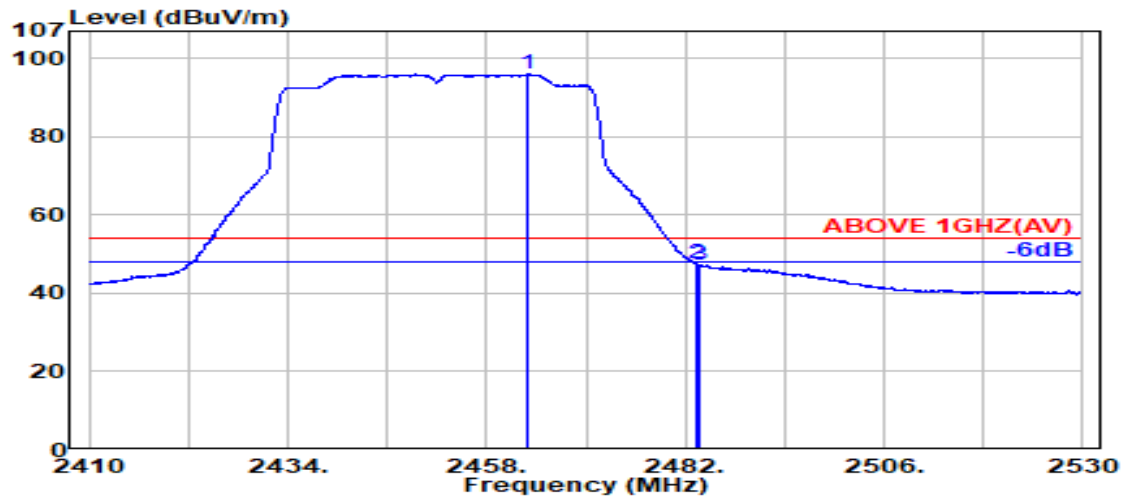

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2462.950	28.43	6.14	34.51	95.92	95.97	---	---	Average
	2483.500	28.47	6.17	34.52	47.40	47.52	54.00	6.48	Average
	2483.700	28.47	6.17	34.52	47.29	47.41	54.00	6.59	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2457MHz
------	----------------	-----------	------------

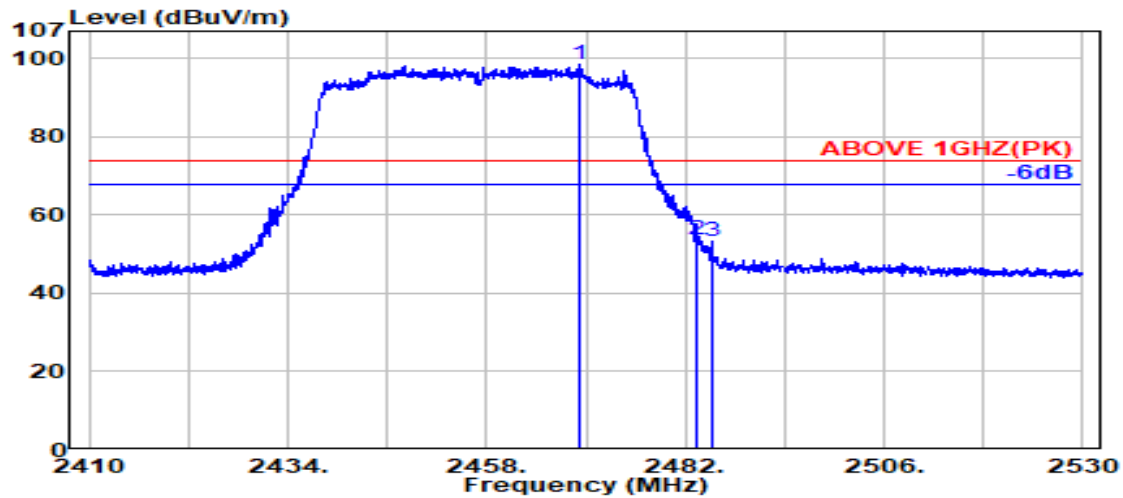

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2469.350	28.44	6.15	34.51	98.29	98.36	---	---	Peak
	2483.500	28.47	6.17	34.52	53.76	53.88	74.00	20.12	Peak
	2485.150	28.47	6.17	34.52	53.31	53.43	74.00	20.57	Peak

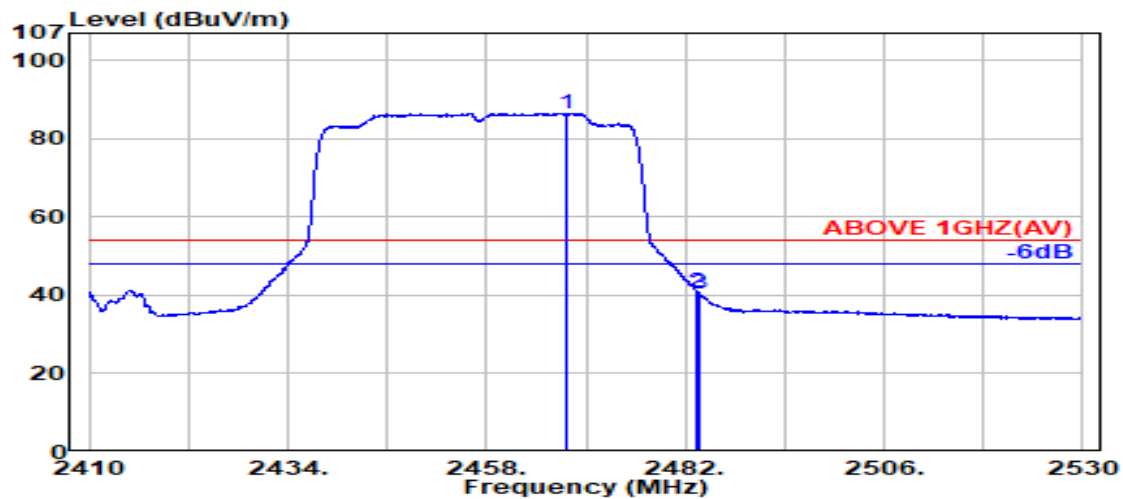

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2467.650	28.44	6.15	34.51	86.47	86.54	---	---	Average
	2483.500	28.47	6.17	34.52	40.57	40.69	54.00	13.31	Average
	2483.700	28.47	6.17	34.52	40.38	40.50	54.00	13.50	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2457MHz
------	----------------	-----------	------------

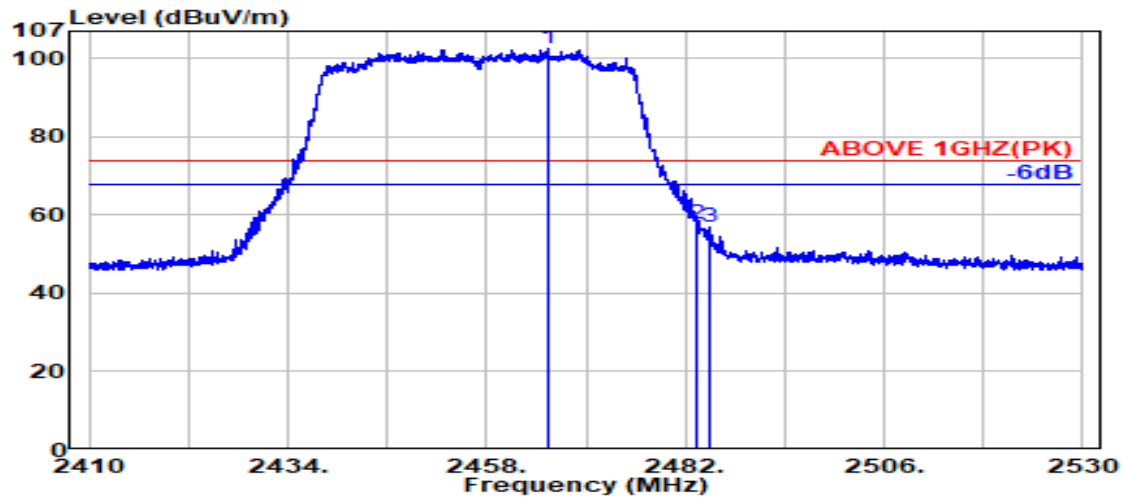

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.400	28.43	6.14	34.51	102.37	102.43	---	---	Peak
2483.500	28.47	6.17	34.52	57.79	57.91	74.00	16.09	Peak
2484.950	28.47	6.17	34.52	56.67	56.80	74.00	17.20	Peak

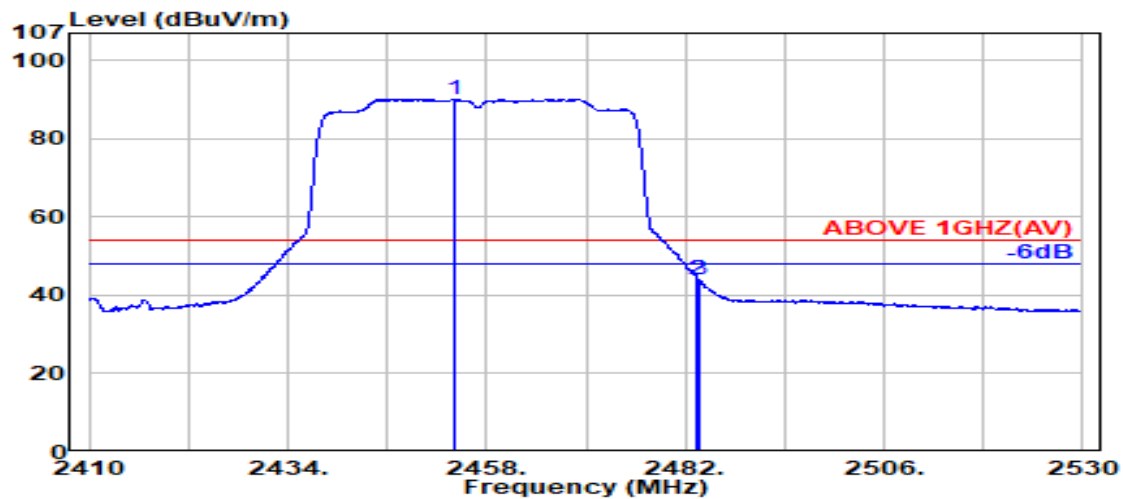

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.100	28.41	6.13	34.51	90.17	90.19	---	---	Average
2483.500	28.47	6.17	34.52	43.99	44.10	54.00	9.90	Average
2483.700	28.47	6.17	34.52	43.83	43.94	54.00	10.06	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2462MHz
------	----------------	-----------	------------

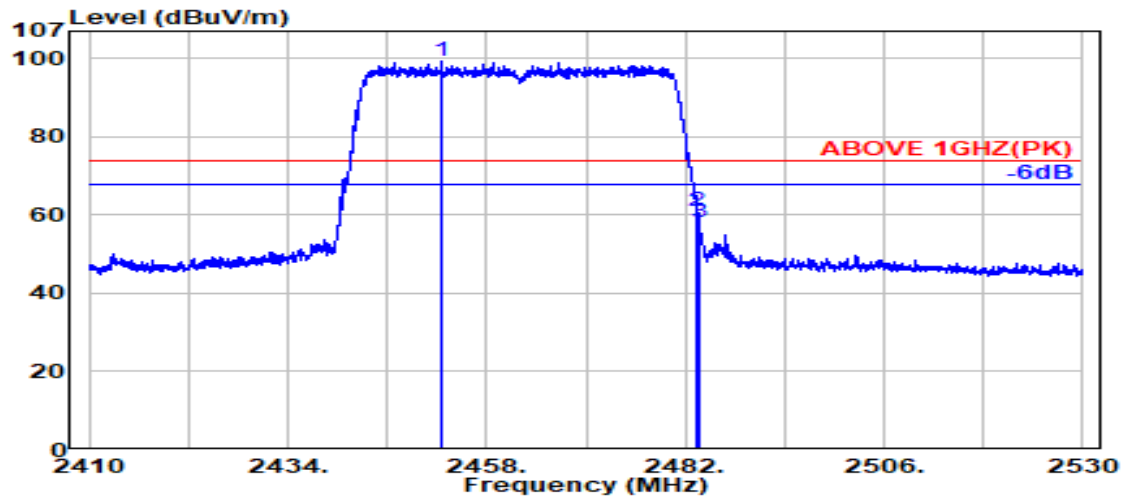

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2452.500	28.41	6.12	34.51	99.28	99.30	---	---	Peak
	2483.500	28.47	6.17	34.52	60.68	60.79	74.00	13.21	Peak
	2483.700	28.47	6.17	34.52	57.92	58.04	74.00	15.96	Peak

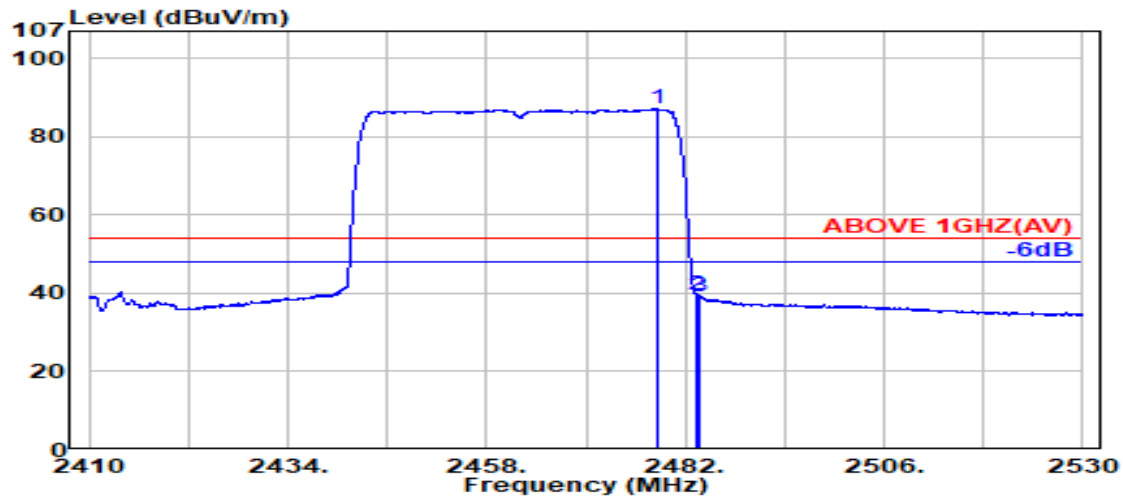

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2478.550	28.46	6.16	34.52	87.16	87.26	---	---	Average
	2483.500	28.47	6.17	34.52	39.48	39.60	54.00	14.40	Average
	2483.700	28.47	6.17	34.52	39.06	39.18	54.00	14.82	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2462MHz
------	----------------	-----------	------------

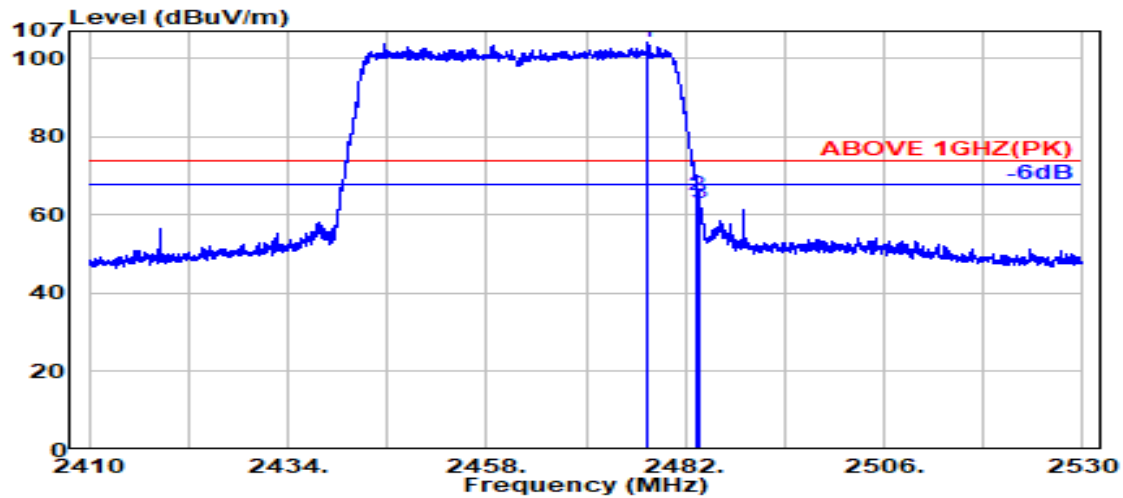

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.500	28.46	6.16	34.52	104.20	104.29	---	---	Peak
2483.500	28.47	6.17	34.52	64.96	65.08	74.00	8.92	Peak
2483.750	28.47	6.17	34.52	62.89	63.01	74.00	10.99	Peak

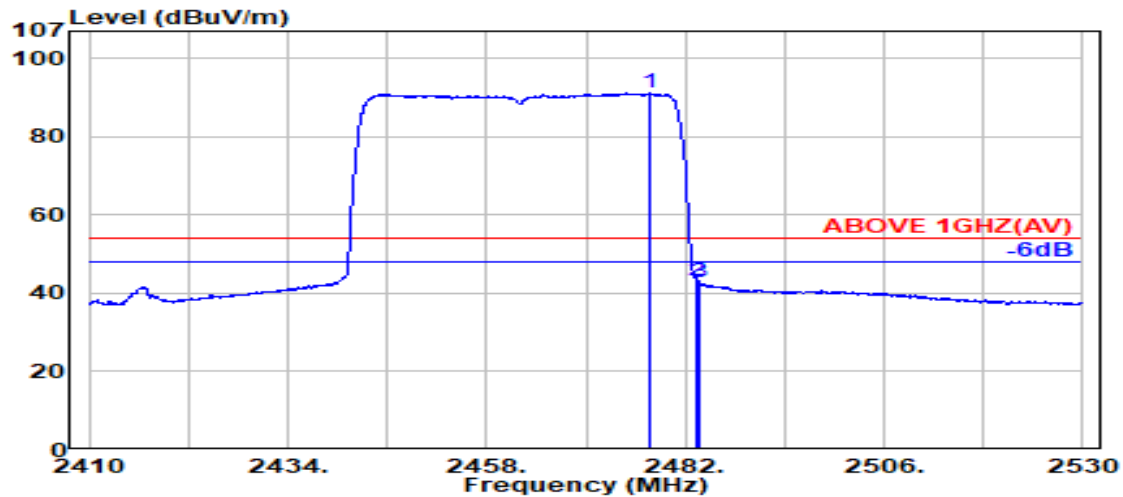

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.700	28.46	6.16	34.52	91.12	91.22	---	---	Average
2483.500	28.47	6.17	34.52	43.14	43.25	54.00	10.75	Average
2483.800	28.47	6.17	34.52	42.56	42.68	54.00	11.32	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	26/0		

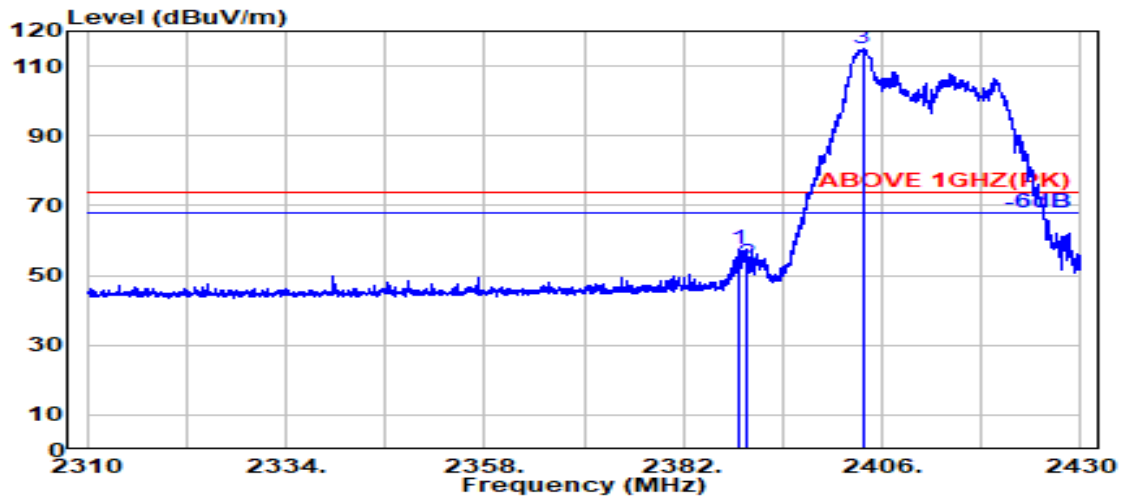

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.650	28.19	6.03	34.50	57.72	57.45	74.00	16.55	Peak
2389.800	28.18	6.03	34.50	53.51	53.22	74.00	20.78	Peak
@ 2403.650	28.12	6.05	34.50	115.14	114.82	---	---	Peak

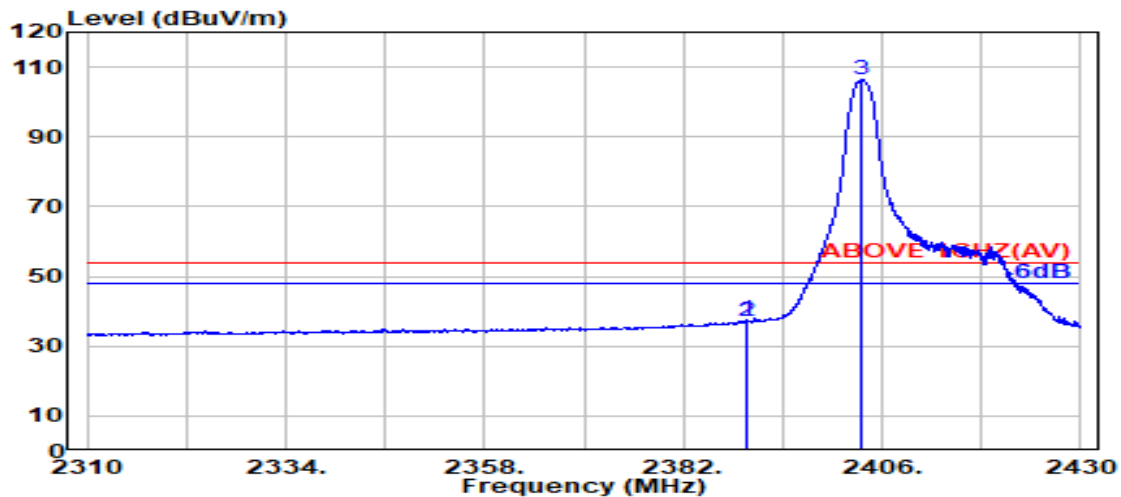

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.50	37.93	37.65	54.00	16.35	Average
2389.800	28.18	6.03	34.50	37.56	37.27	54.00	16.73	Average
@ 2403.450	28.12	6.05	34.50	106.64	106.32	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	26/0		

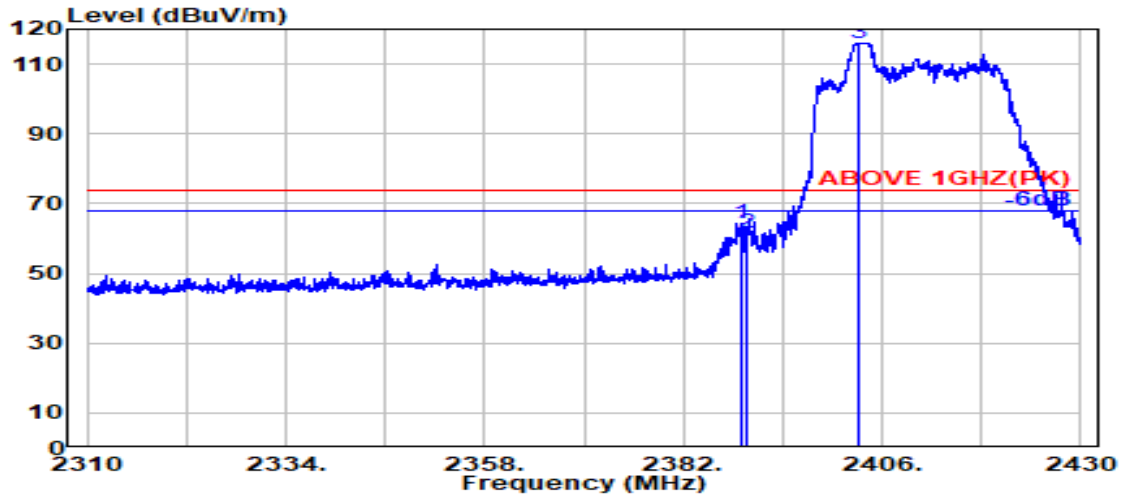

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.000	28.19	6.03	34.50	64.68	64.40	74.00	9.60	Peak
2389.800	28.18	6.03	34.50	61.96	61.67	74.00	12.33	Peak
@ 2403.100	28.12	6.05	34.50	116.27	115.94	---	---	Peak

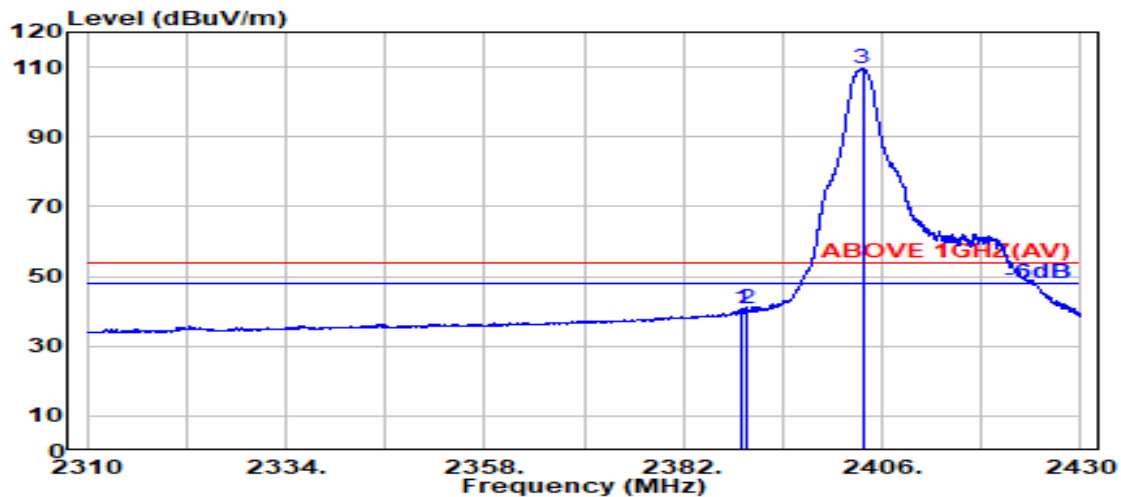

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.950	28.19	6.03	34.50	41.06	40.79	54.00	13.21	Average
2389.800	28.18	6.03	34.50	40.96	40.68	54.00	13.32	Average
@ 2403.650	28.12	6.05	34.50	109.81	109.48	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	52/37		

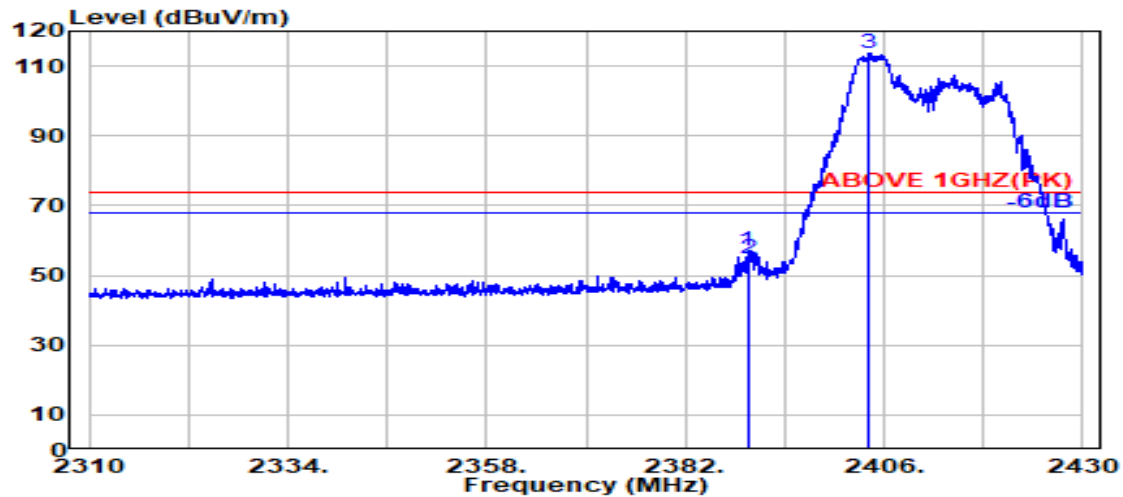

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.18	6.03	34.50	57.25	56.97	74.00	17.03	Peak
2389.800	28.18	6.03	34.50	55.10	54.82	74.00	19.18	Peak
@ 2404.150	28.13	6.06	34.50	114.20	113.88	---	---	Peak

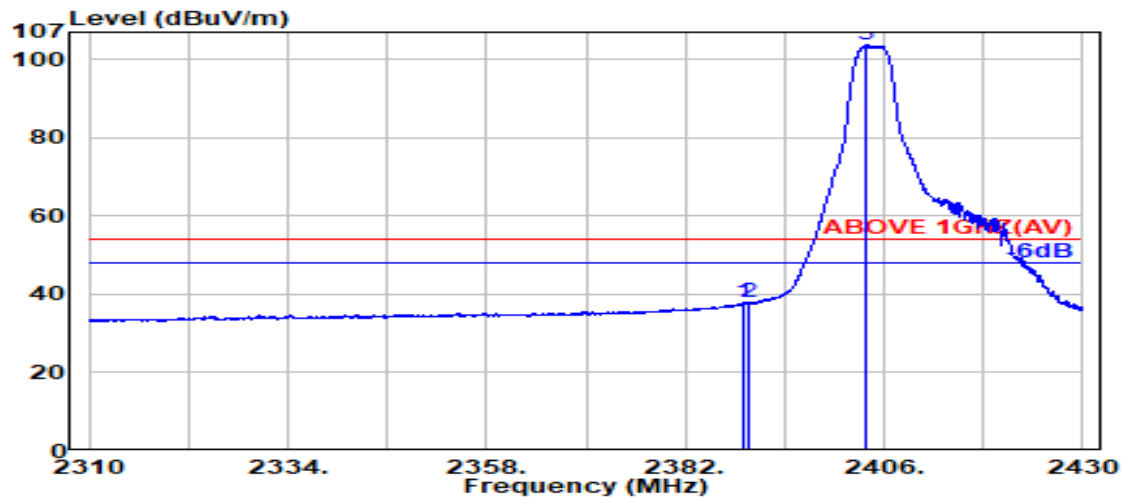

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.100	28.19	6.03	34.50	38.19	37.91	54.00	16.09	Average
2389.800	28.18	6.03	34.50	38.09	37.80	54.00	16.20	Average
@ 2403.950	28.12	6.05	34.50	103.93	103.61	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	52/37		

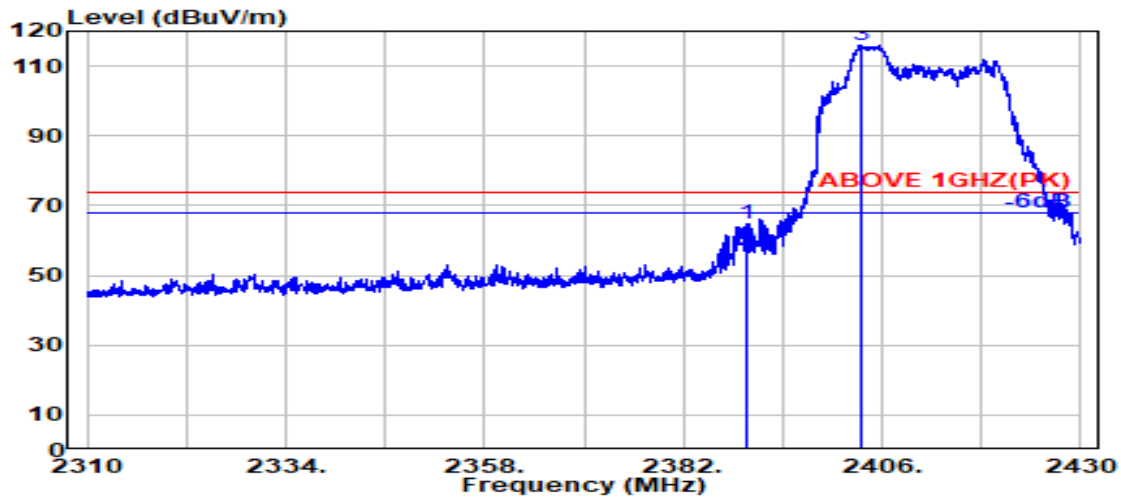

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.550	28.18	6.03	34.50	65.17	64.89	74.00	9.11	Peak
2389.800	28.18	6.03	34.50	57.31	57.02	74.00	16.98	Peak
@ 2403.600	28.12	6.05	34.50	116.26	115.94	---	---	Peak

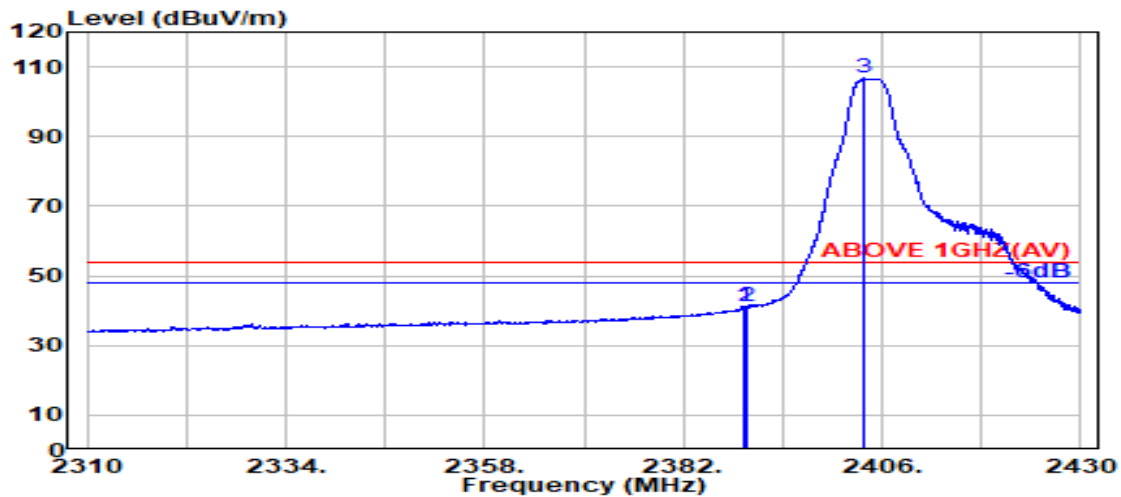

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.400	28.18	6.03	34.50	41.56	41.28	54.00	12.72	Average
2389.800	28.18	6.03	34.50	41.38	41.10	54.00	12.90	Average
@ 2403.900	28.12	6.05	34.50	106.98	106.65	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	106/53		

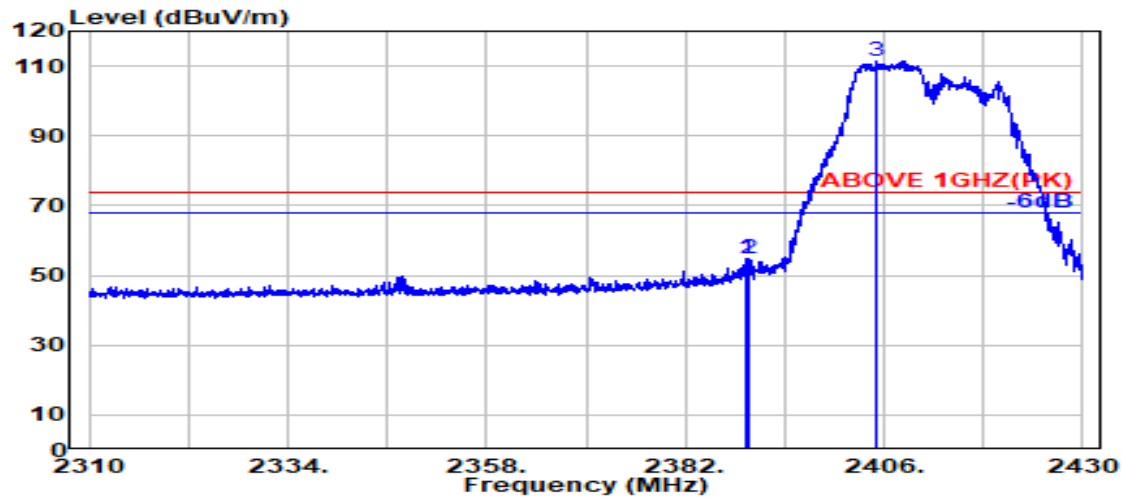

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.250	28.19	6.03	34.50	54.87	54.59	74.00	19.41	Peak
2389.800	28.18	6.03	34.50	55.08	54.79	74.00	19.21	Peak
@ 2405.150	28.13	6.06	34.50	111.93	111.62	---	---	Peak

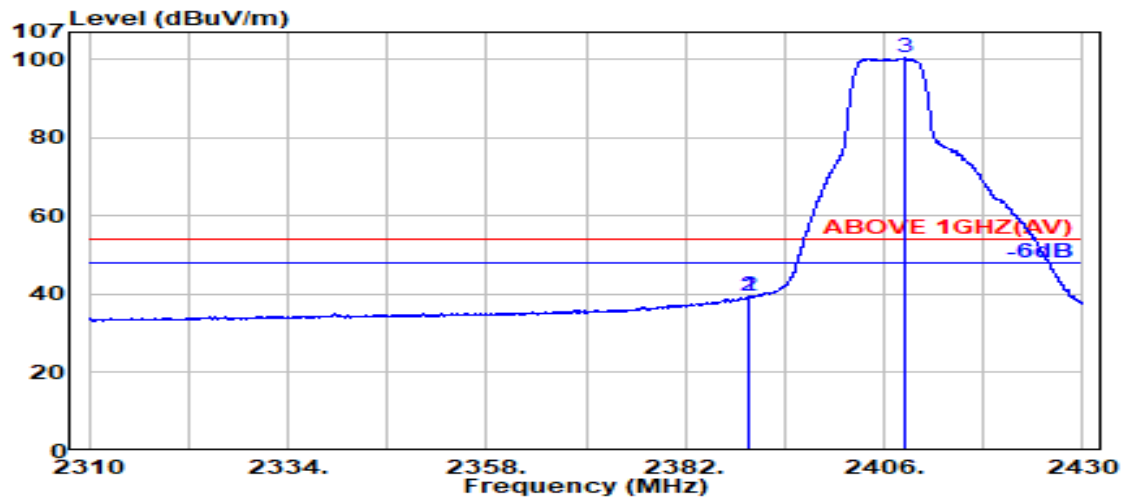

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.50	39.70	39.41	54.00	14.59	Average
2389.800	28.18	6.03	34.50	39.74	39.45	54.00	14.55	Average
@ 2408.500	28.15	6.06	34.50	100.65	100.36	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	106/53		

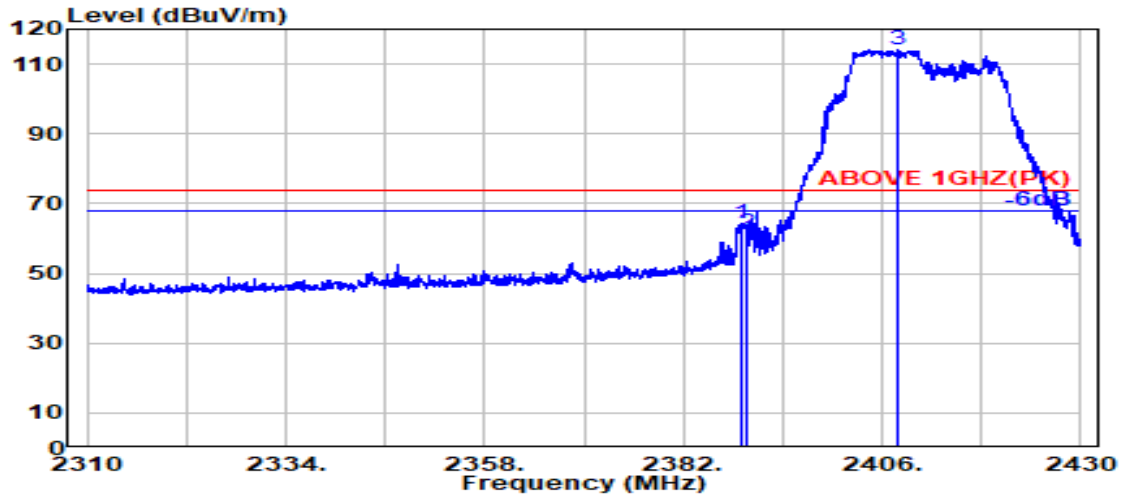

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.100	28.19	6.03	34.50	64.78	64.50	74.00	9.50	Peak
2389.800	28.18	6.03	34.50	62.01	61.73	74.00	12.27	Peak
@ 2407.800	28.15	6.06	34.50	114.21	113.92	---	---	Peak

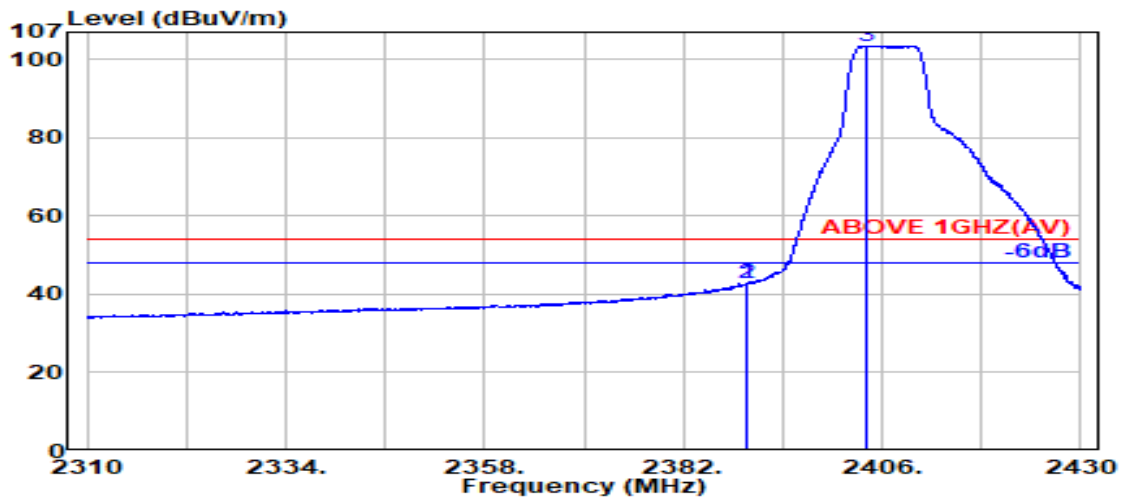

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.550	28.18	6.03	34.50	43.12	42.84	54.00	11.16	Average
2389.800	28.18	6.03	34.50	43.21	42.93	54.00	11.07	Average
@ 2404.250	28.13	6.06	34.50	103.87	103.55	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	26/8		

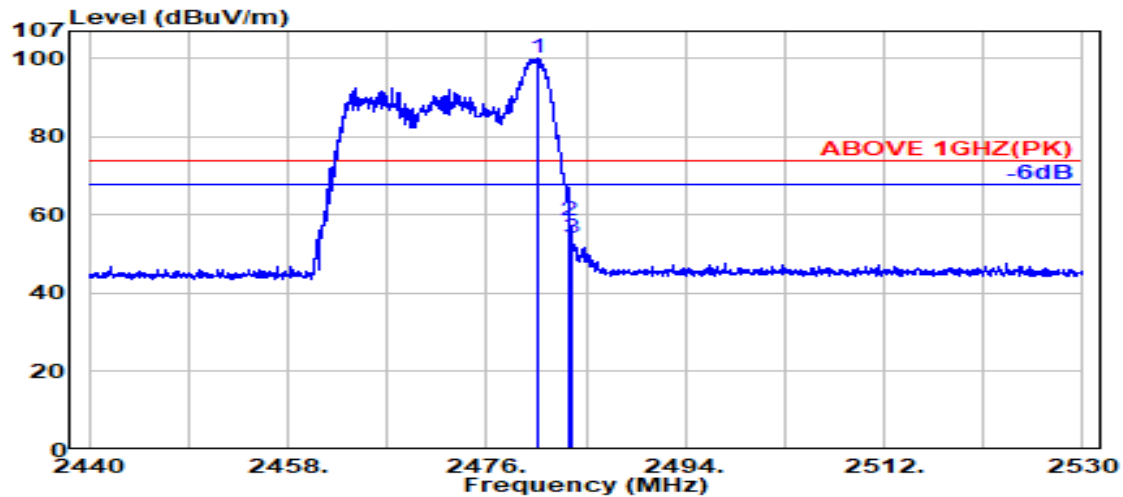

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.550	28.46	6.16	34.52	99.84	99.94	---	---	Peak
	2483.500	28.47	6.17	34.52	58.52	58.63	74.00	15.37	Peak
	2483.700	28.47	6.17	34.52	54.02	54.14	74.00	19.86	Peak

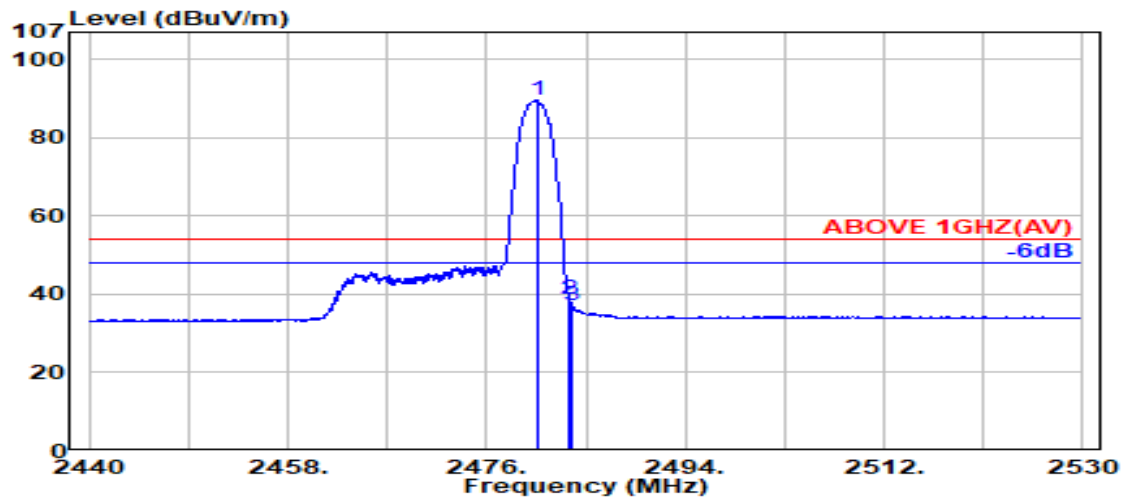

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.600	28.46	6.16	34.52	89.49	89.60	---	---	Average
	2483.500	28.47	6.17	34.52	38.47	38.59	54.00	15.41	Average
	2483.700	28.47	6.17	34.52	37.15	37.27	54.00	16.73	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	26/8		

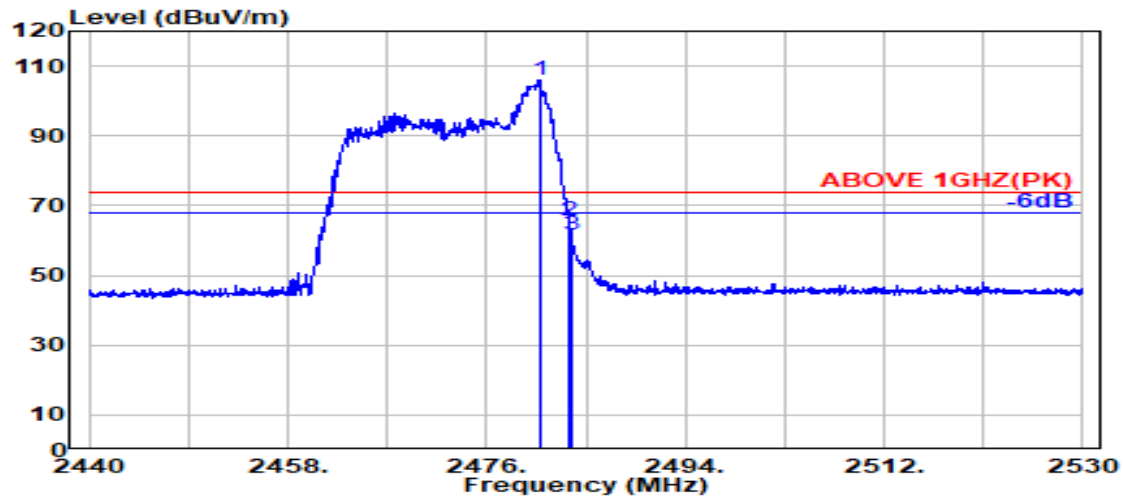

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.800	28.46	6.16	34.52	106.02	106.13	---	---	Peak
2483.500	28.47	6.17	34.52	65.75	65.87	74.00	8.13	Peak
2483.750	28.47	6.17	34.52	61.29	61.41	74.00	12.59	Peak

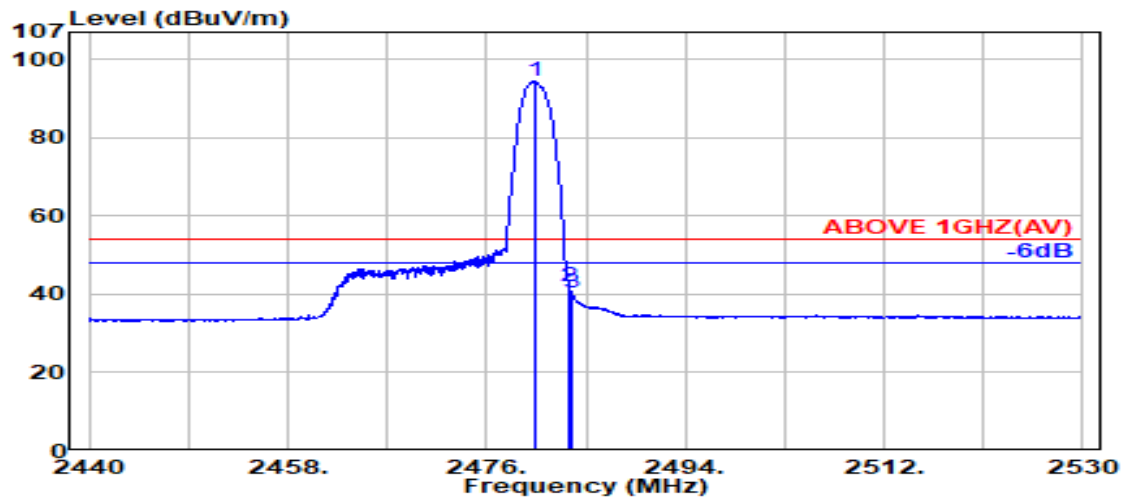

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.400	28.46	6.16	34.52	94.30	94.41	---	---	Average
2483.500	28.47	6.17	34.52	41.85	41.97	54.00	12.03	Average
2483.700	28.47	6.17	34.52	40.20	40.32	54.00	13.68	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	52/40		

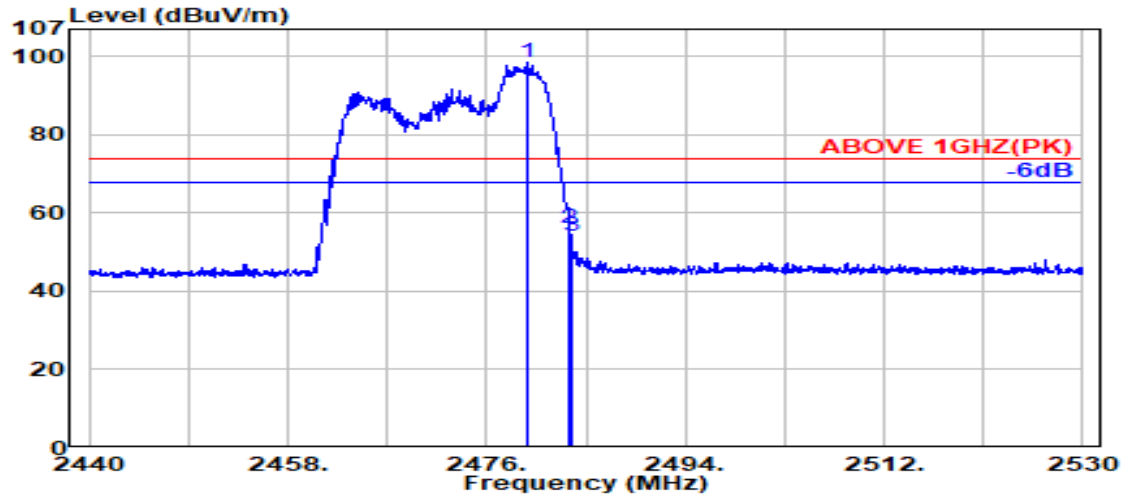

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.600	28.46	6.16	34.52	98.30	98.41	---	---	Peak
2483.500	28.47	6.17	34.52	55.89	56.00	74.00	18.00	Peak
2483.700	28.47	6.17	34.52	54.12	54.23	74.00	19.77	Peak

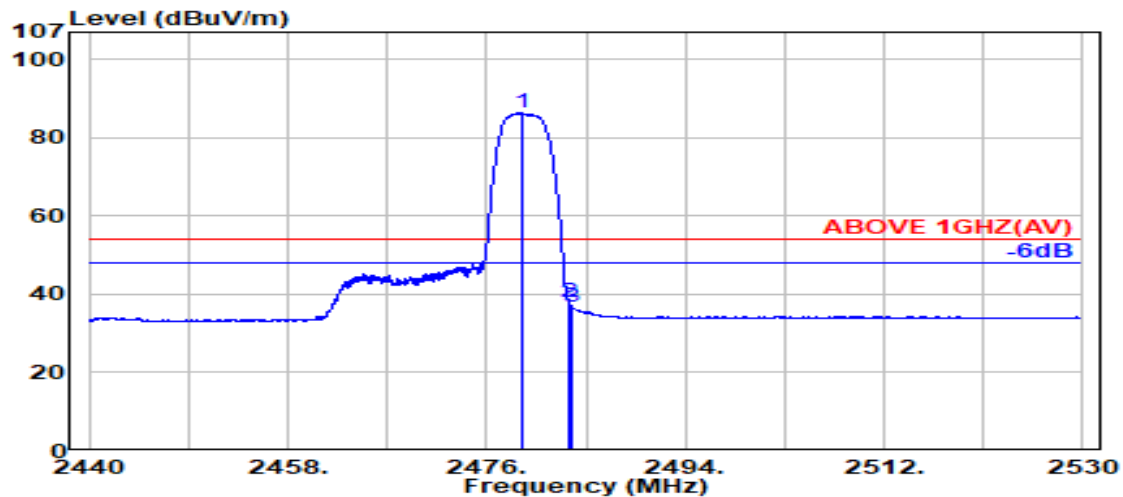

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.150	28.46	6.16	34.52	86.28	86.38	---	---	Average
2483.500	28.47	6.17	34.52	37.85	37.96	54.00	16.04	Average
2483.700	28.47	6.17	34.52	36.82	36.94	54.00	17.06	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	52/40		

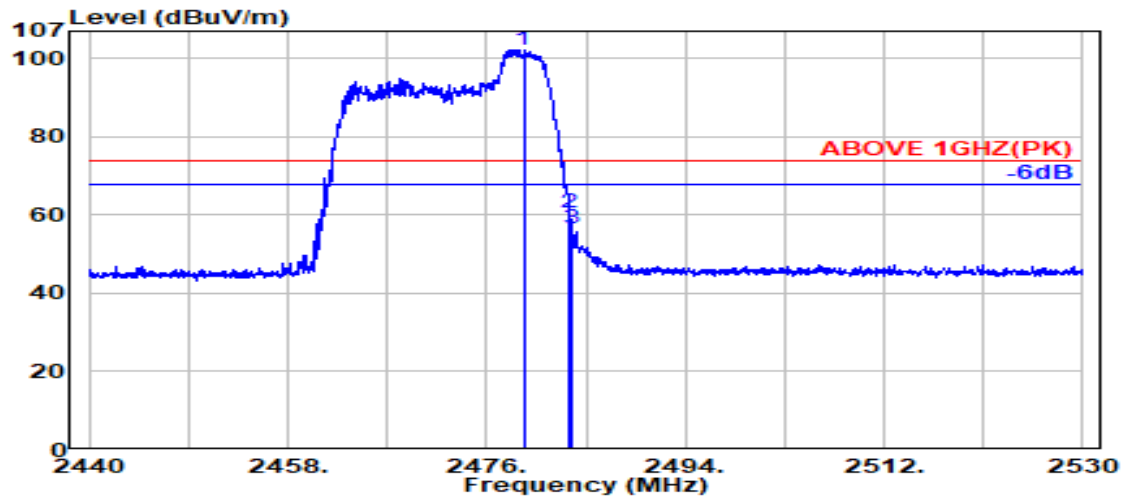

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.350	28.46	6.16	34.52	102.19	102.30	---	---	Peak
2483.500	28.47	6.17	34.52	60.39	60.50	74.00	13.50	Peak
2483.700	28.47	6.17	34.52	56.49	56.61	74.00	17.39	Peak

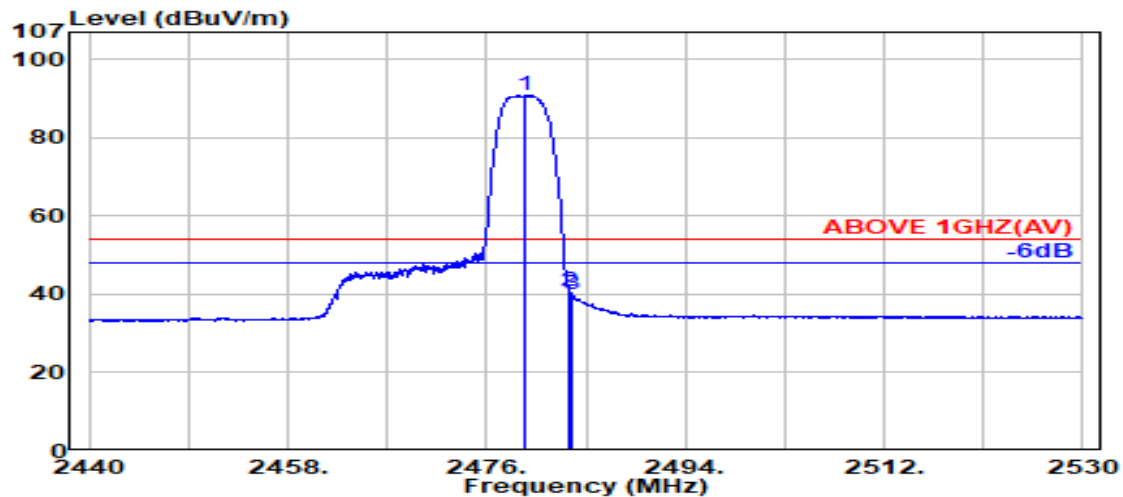

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.550	28.46	6.16	34.52	90.92	91.02	---	---	Average
2483.500	28.47	6.17	34.52	40.72	40.84	54.00	13.16	Average
2483.700	28.47	6.17	34.52	39.78	39.90	54.00	14.10	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	106/54		

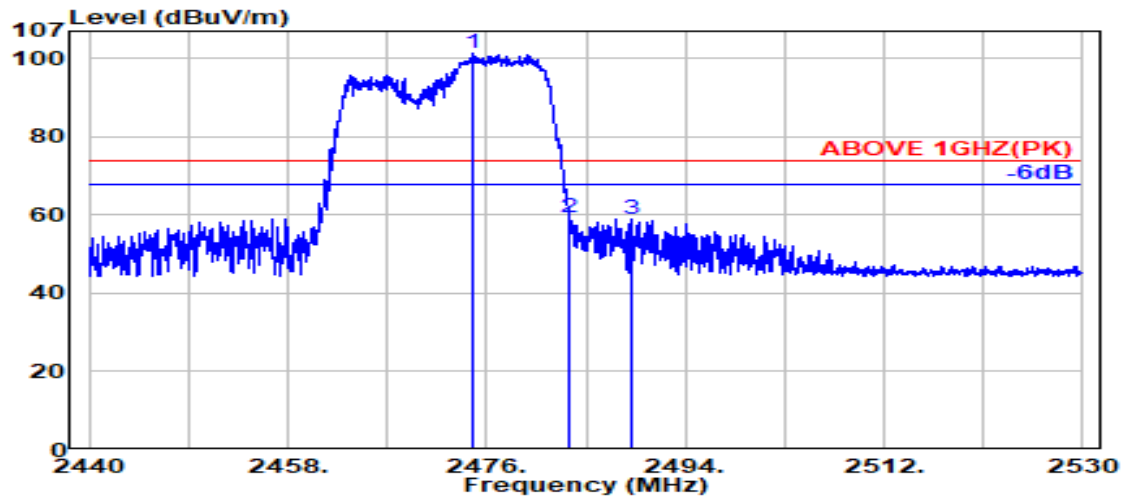

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.750	28.45	6.15	34.52	101.19	101.28	---	---	Peak
2483.500	28.47	6.17	34.52	59.10	59.21	74.00	14.79	Peak
2489.100	28.48	6.17	34.52	58.91	59.05	74.00	14.95	Peak

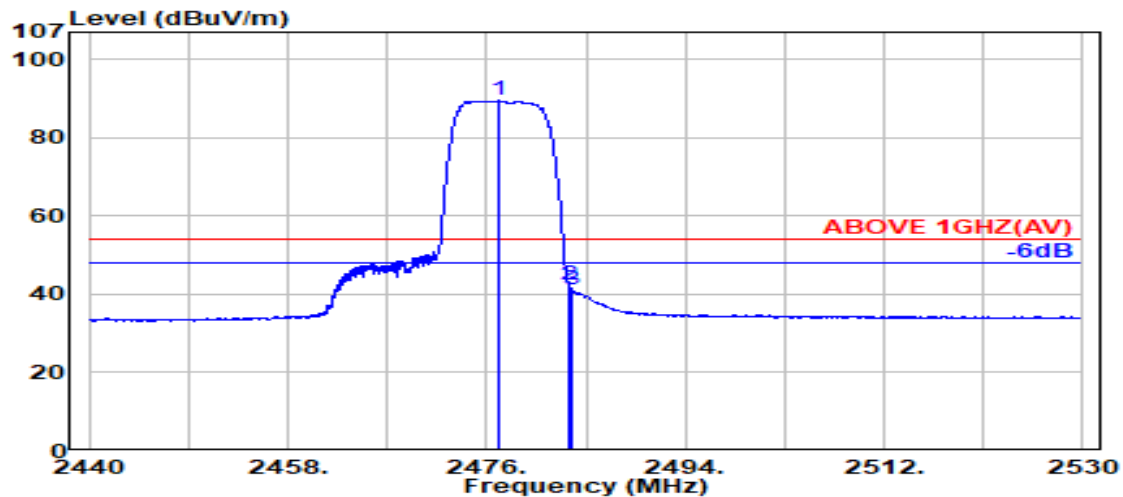

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.000	28.45	6.16	34.52	89.39	89.49	---	---	Average
2483.500	28.47	6.17	34.52	42.13	42.25	54.00	11.75	Average
2483.700	28.47	6.17	34.52	41.08	41.20	54.00	12.80	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	106/54		

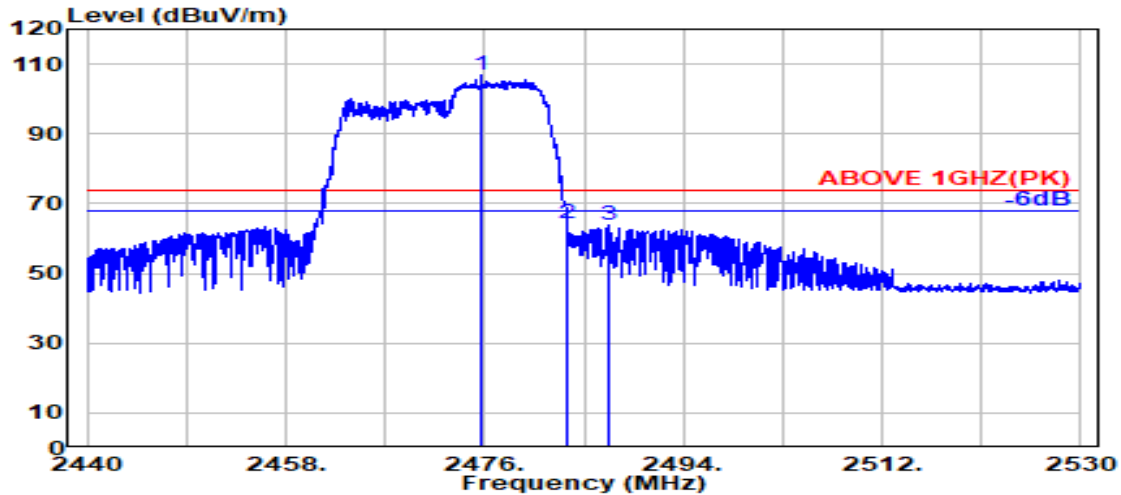

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2475.700	28.45	6.16	34.52	106.64	106.74	---	---	Peak
2483.500	28.47	6.17	34.52	64.00	64.12	74.00	9.88	Peak
2487.250	28.47	6.17	34.52	63.50	63.63	74.00	10.37	Peak

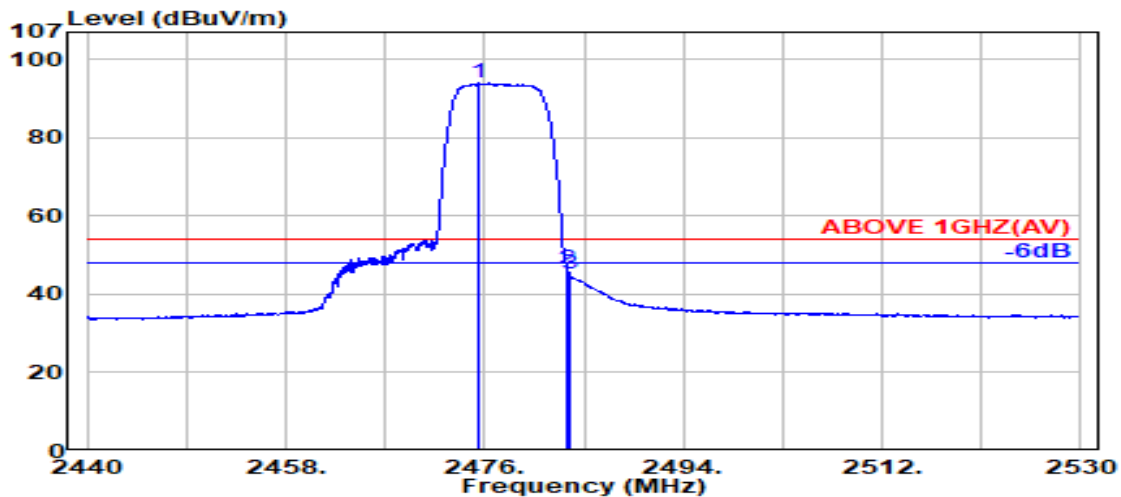

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2475.500	28.45	6.16	34.52	93.79	93.88	---	---	Average
2483.500	28.47	6.17	34.52	46.27	46.39	54.00	7.61	Average
2483.700	28.47	6.17	34.52	45.11	45.23	54.00	8.77	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
RU Configuration	242/61		

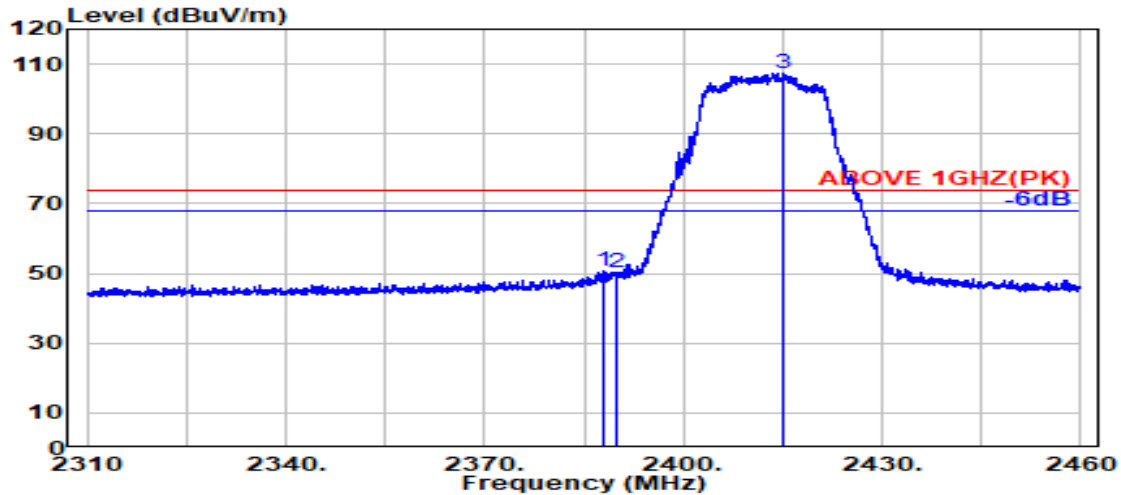

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.050	28.19	6.03	34.50	50.88	50.61	74.00	23.39	Peak
2389.800	28.18	6.03	34.50	50.50	50.22	74.00	23.78	Peak
@ 2414.950	28.19	6.07	34.50	107.67	107.43	---	---	Peak

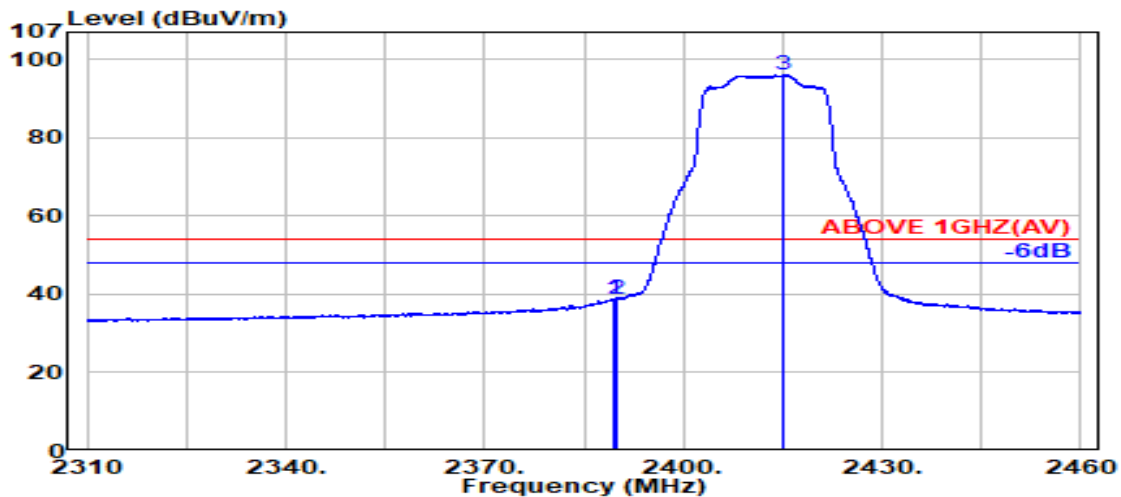

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.50	39.11	38.82	54.00	15.18	Average
2389.800	28.18	6.03	34.50	38.98	38.70	54.00	15.30	Average
@ 2415.000	28.19	6.07	34.50	96.33	96.09	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
RU Configuration	242/61		

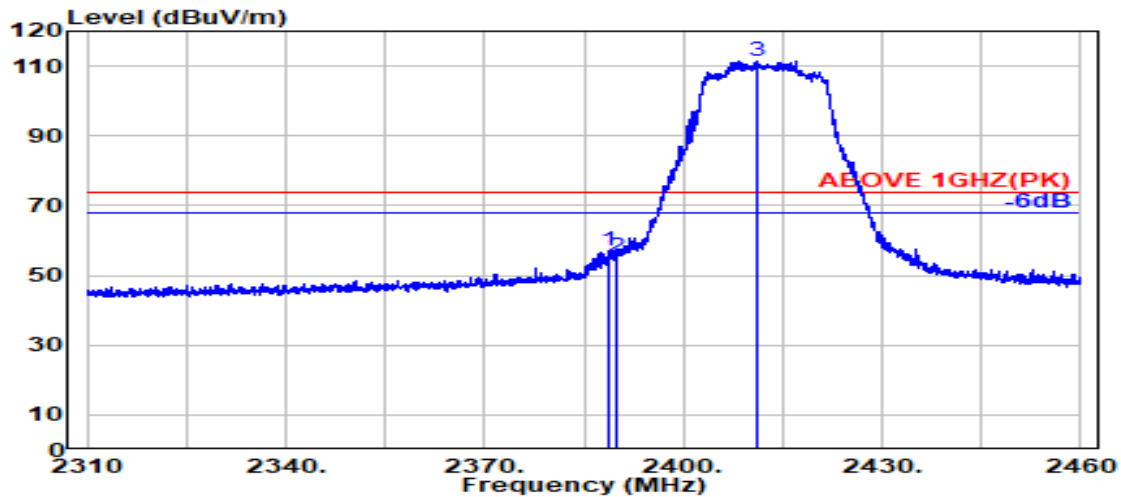

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.700	28.19	6.03	34.50	57.33	57.06	74.00	16.94	Peak
2389.800	28.18	6.03	34.50	55.38	55.10	74.00	18.90	Peak
@ 2411.300	28.17	6.07	34.50	111.86	111.59	---	---	Peak

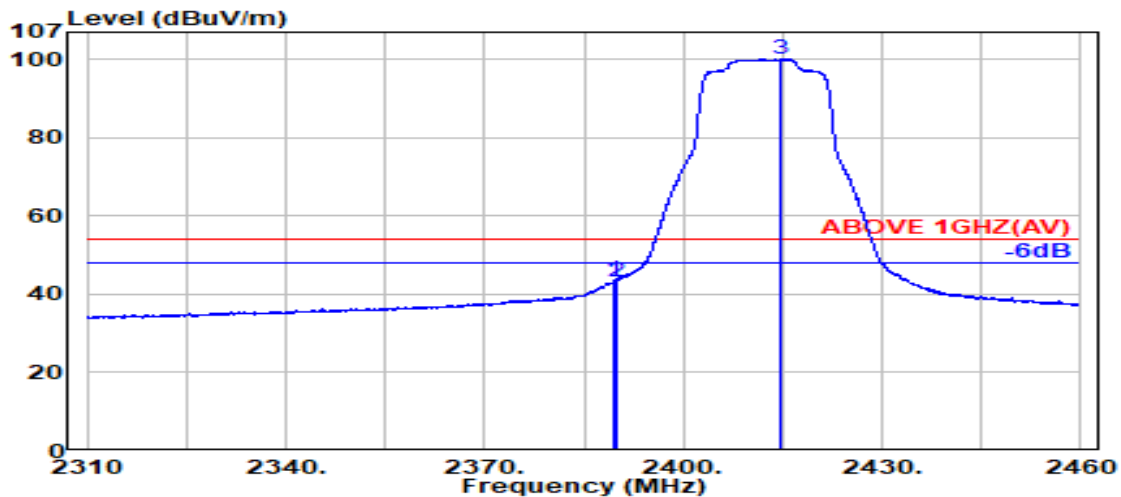

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.550	28.18	6.03	34.50	43.74	43.46	54.00	10.54	Average
2389.800	28.18	6.03	34.50	43.57	43.28	54.00	10.72	Average
@ 2414.750	28.19	6.07	34.50	100.56	100.32	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
RU Configuration	242/62		

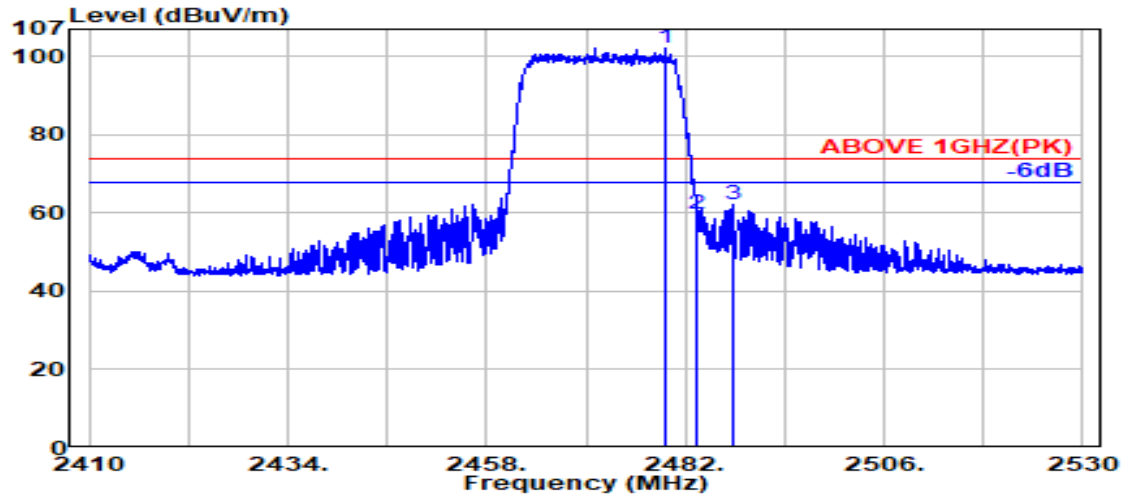

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.450	28.46	6.16	34.52	102.24	102.34	---	---	Peak
2483.500	28.47	6.17	34.52	59.46	59.58	74.00	14.42	Peak
2487.800	28.48	6.17	34.52	61.98	62.11	74.00	11.89	Peak

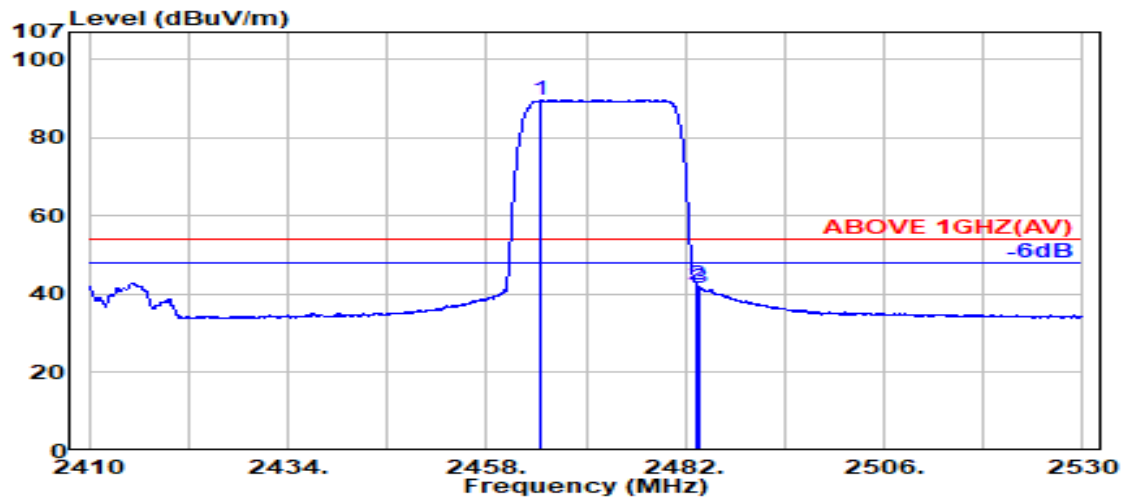

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.550	28.43	6.14	34.51	89.60	89.65	---	---	Average
2483.500	28.47	6.17	34.52	42.08	42.19	54.00	11.81	Average
2483.800	28.47	6.17	34.52	41.53	41.65	54.00	12.35	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
RU Configuration	242/62		

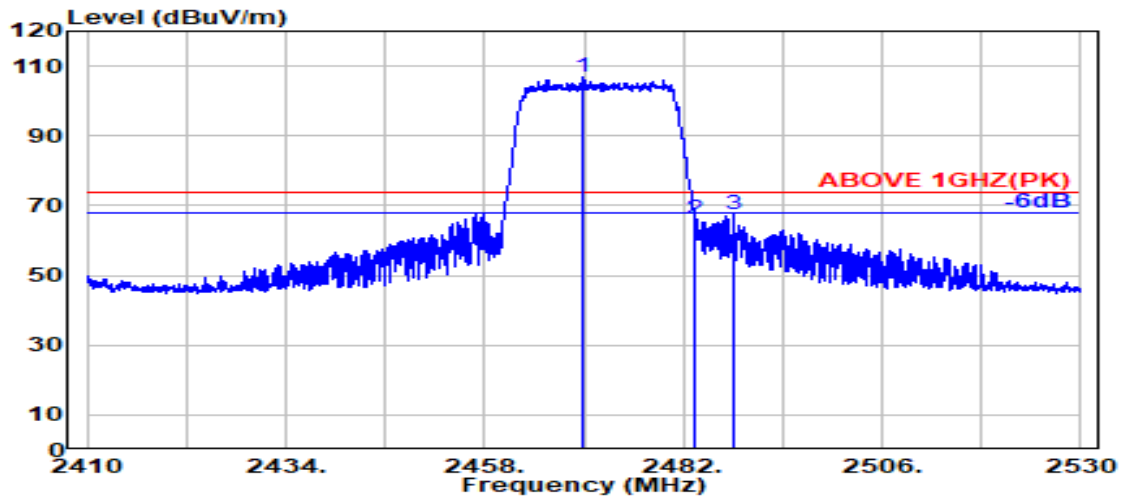

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2469.950	28.44	6.15	34.51	106.74	106.82	---	---	Peak
	2483.500	28.47	6.17	34.52	65.93	66.05	74.00	7.95	Peak
	2488.050	28.48	6.17	34.52	67.20	67.33	74.00	6.67	Peak

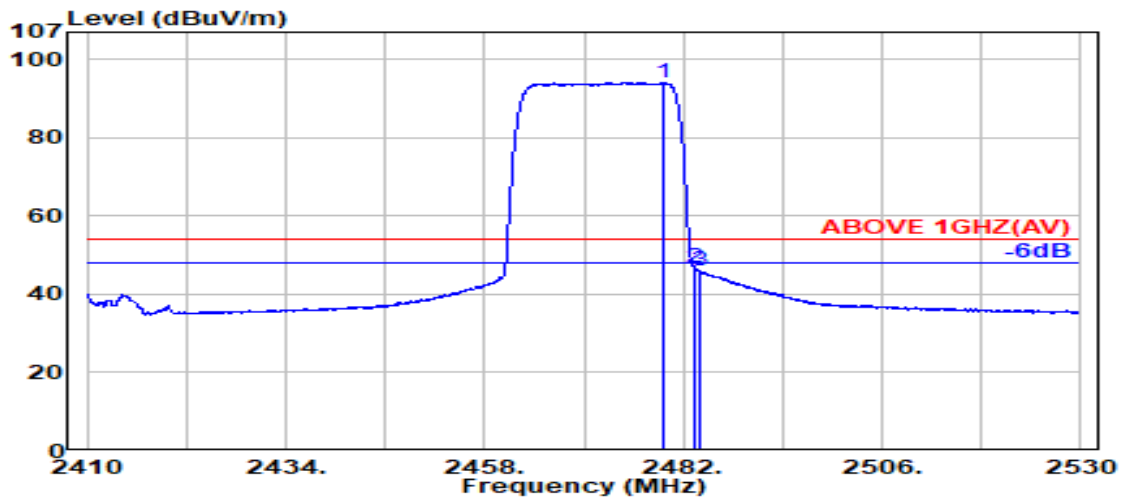

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2479.650	28.46	6.16	34.52	94.02	94.12	---	---	Average
	2483.500	28.47	6.17	34.52	46.58	46.70	54.00	7.30	Average
	2483.900	28.47	6.17	34.52	45.92	46.04	54.00	7.96	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	26/0		

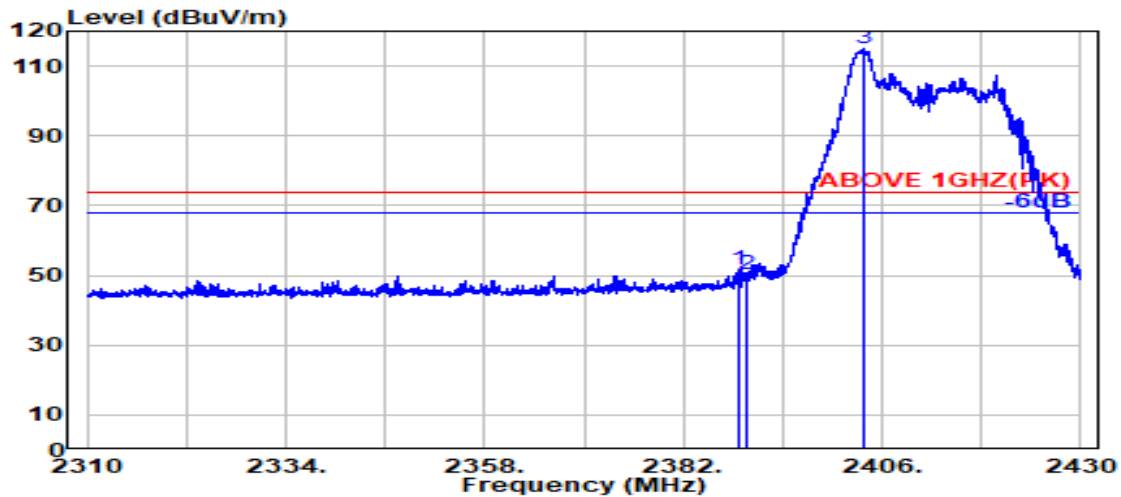

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.600	28.19	6.03	34.50	52.10	51.82	74.00	22.18	Peak
2389.800	28.18	6.03	34.50	50.46	50.17	74.00	23.83	Peak
@ 2403.750	28.12	6.05	34.50	115.18	114.85	---	---	Peak

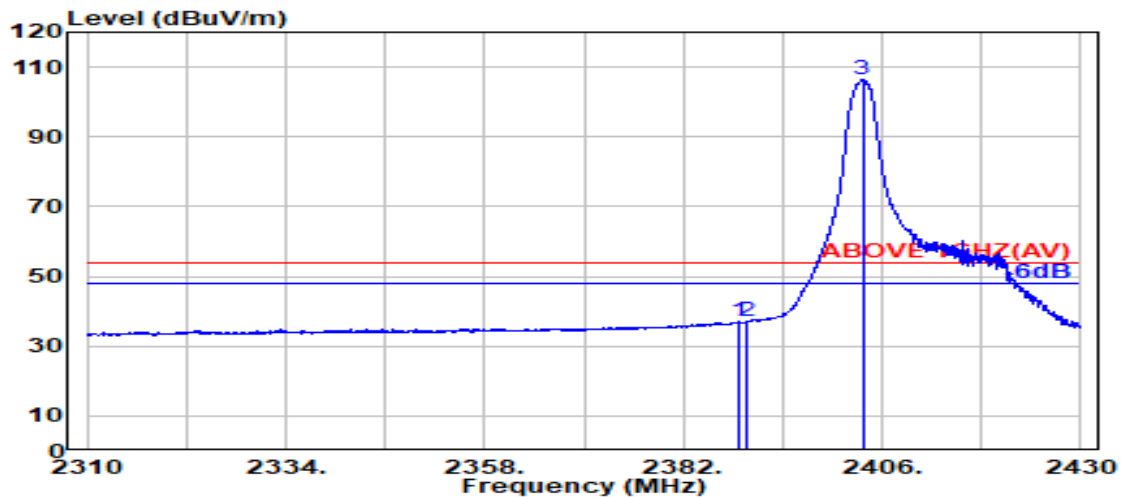

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.800	28.19	6.03	34.50	37.29	37.02	54.00	16.98	Average
2389.800	28.18	6.03	34.50	37.36	37.08	54.00	16.92	Average
@ 2403.650	28.12	6.05	34.50	106.77	106.45	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	26/0		

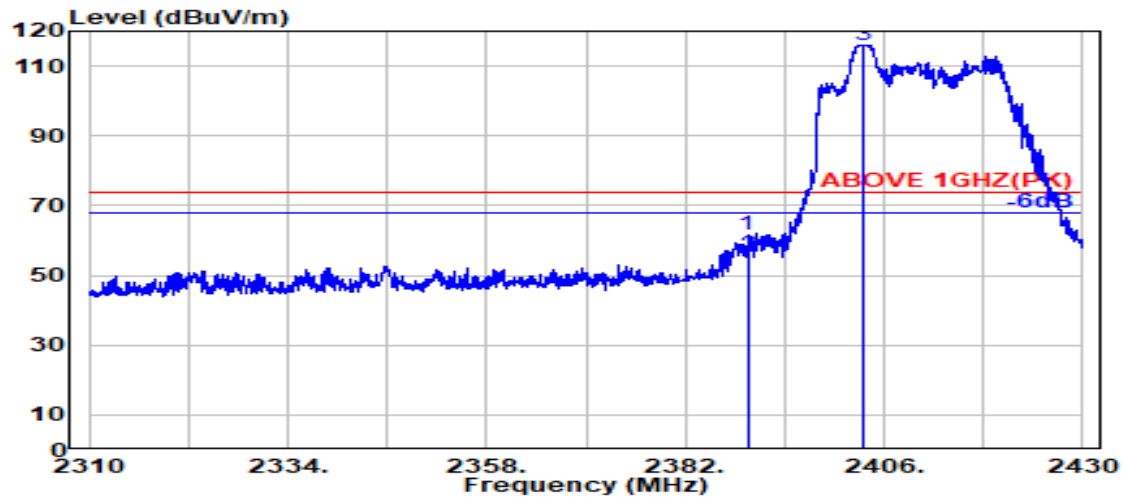

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.18	6.03	34.50	61.67	61.39	74.00	12.61	Peak
2389.800	28.18	6.03	34.50	56.04	55.76	74.00	18.24	Peak
@ 2403.350	28.12	6.05	34.50	116.28	115.95	---	---	Peak

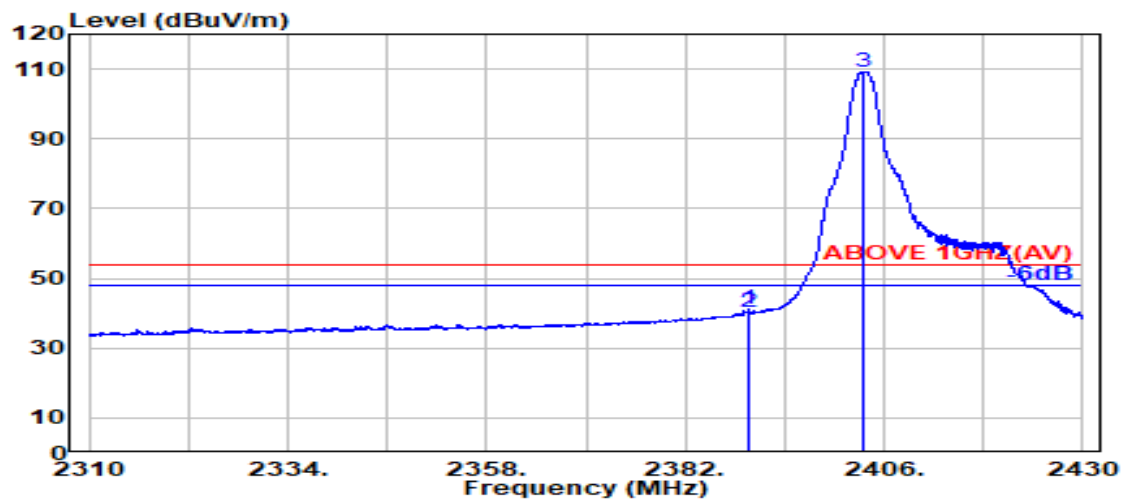

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.550	28.18	6.03	34.50	41.42	41.14	54.00	12.86	Average
2389.800	28.18	6.03	34.50	40.60	40.31	54.00	13.69	Average
@ 2403.500	28.12	6.05	34.50	109.61	109.29	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	52/37		

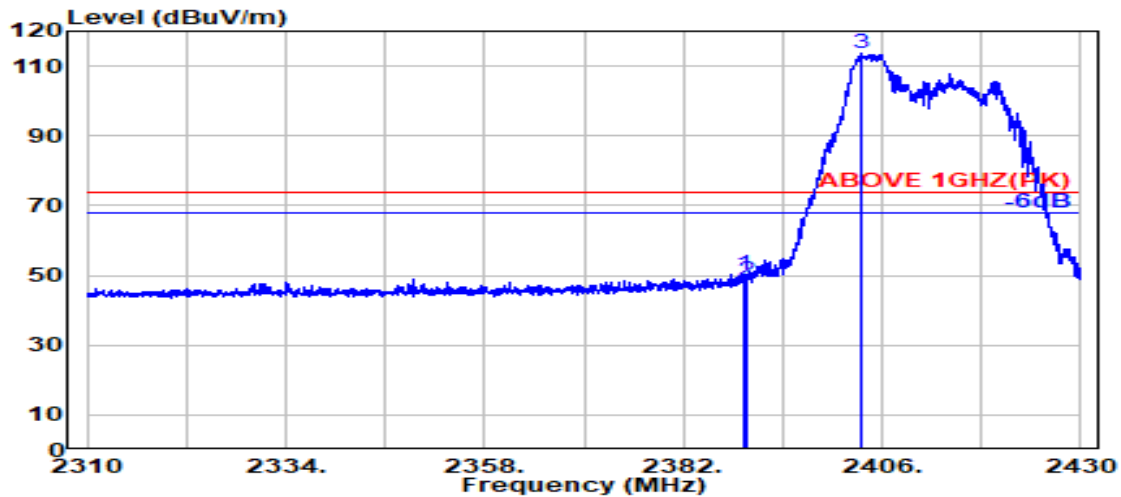

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	28.19	6.03	34.50	50.77	50.49	74.00	23.51	Peak
2389.800	28.18	6.03	34.50	48.88	48.60	74.00	25.40	Peak
@ 2403.550	28.12	6.05	34.50	113.88	113.55	---	---	Peak

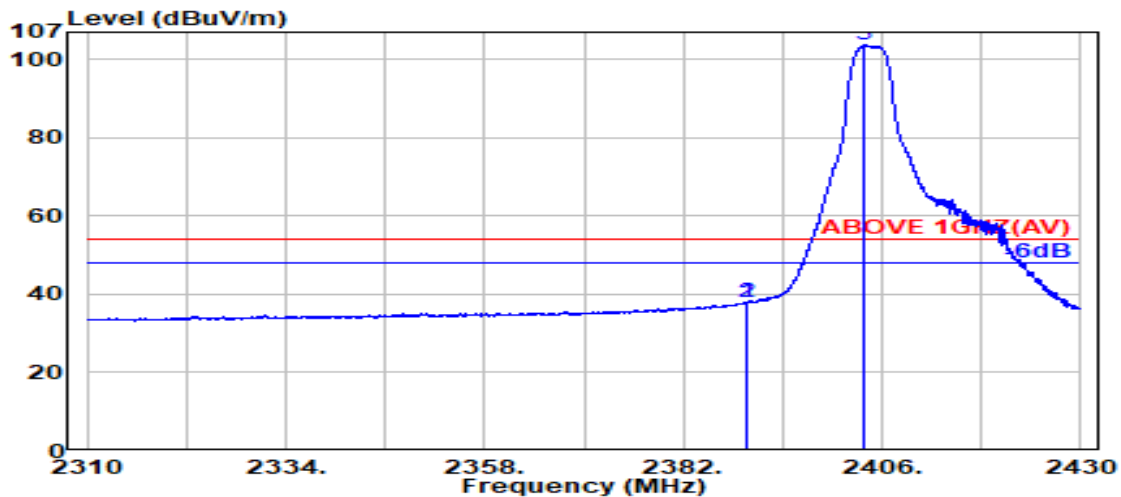

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.50	38.19	37.91	54.00	16.09	Average
2389.800	28.18	6.03	34.50	38.29	38.00	54.00	16.00	Average
@ 2403.950	28.12	6.05	34.50	103.95	103.63	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	52/37		

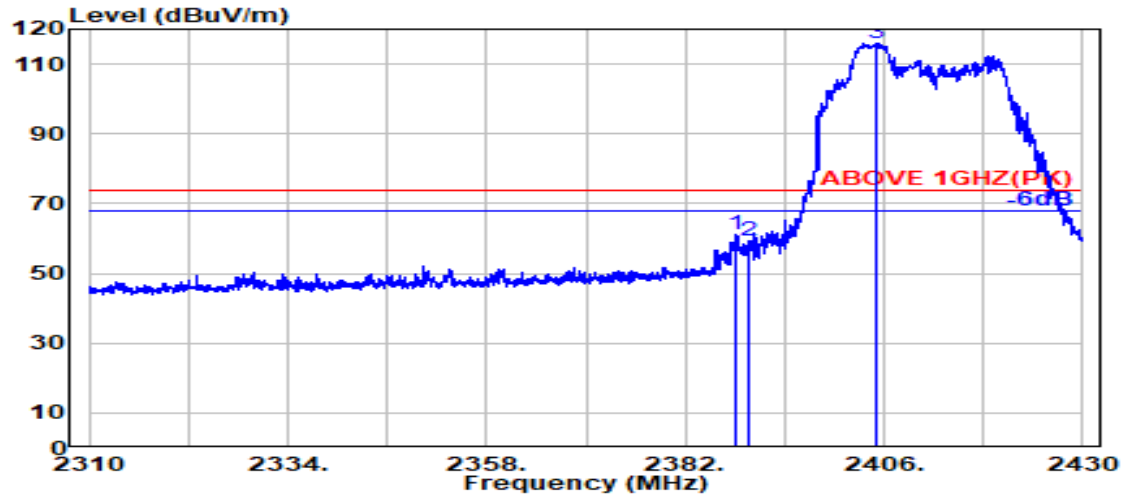

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.950	28.20	6.03	34.50	61.41	61.14	74.00	12.86	Peak
2389.800	28.18	6.03	34.50	59.41	59.12	74.00	14.88	Peak
@ 2404.950	28.13	6.06	34.50	116.18	115.87	---	---	Peak

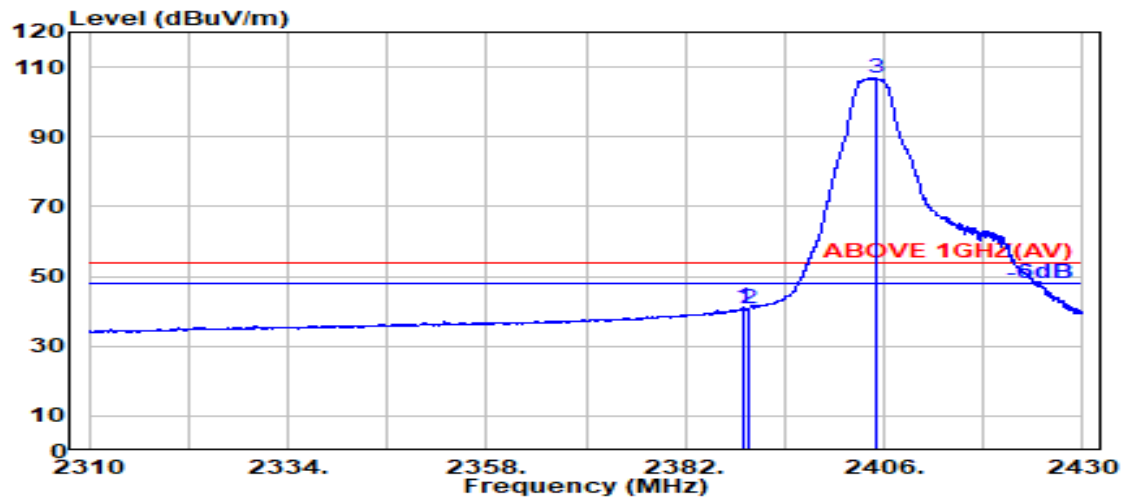

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.900	28.19	6.03	34.50	41.51	41.24	54.00	12.76	Average
2389.800	28.18	6.03	34.50	41.10	40.81	54.00	13.19	Average
@ 2405.050	28.13	6.06	34.50	107.16	106.84	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	106/53		

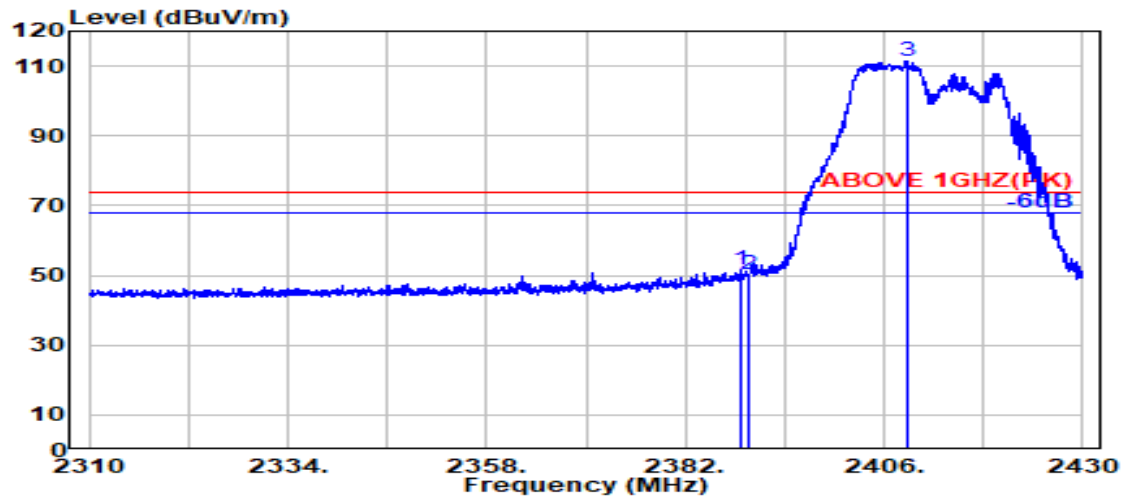

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.700	28.19	6.03	34.50	52.07	51.79	74.00	22.21	Peak
2389.800	28.18	6.03	34.50	50.45	50.17	74.00	23.83	Peak
@ 2408.700	28.15	6.06	34.50	111.61	111.32	---	---	Peak

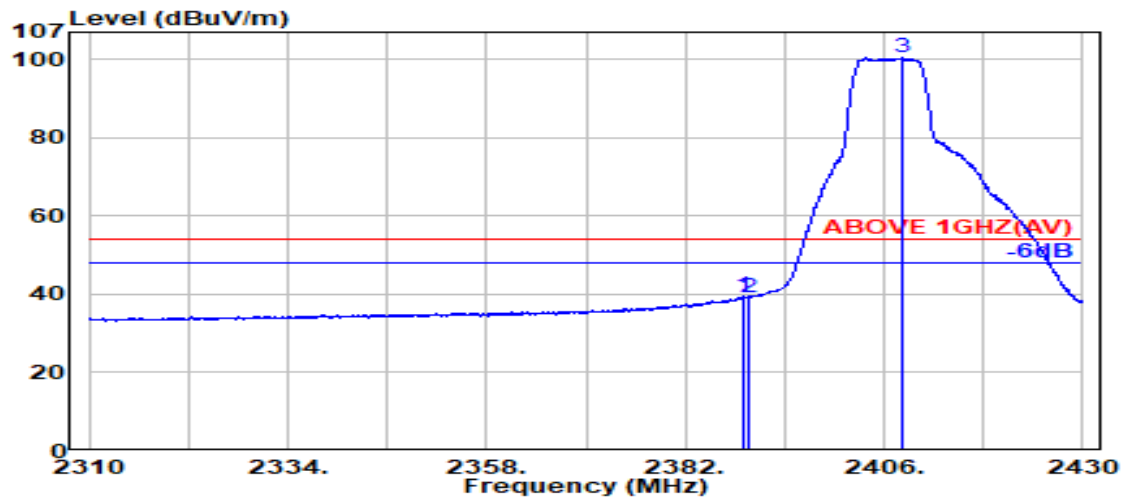

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.150	28.19	6.03	34.50	39.75	39.47	54.00	14.53	Average
2389.800	28.18	6.03	34.50	39.39	39.11	54.00	14.89	Average
@ 2408.300	28.15	6.06	34.50	100.74	100.45	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2412 MHz
RU Configuration	106/53		

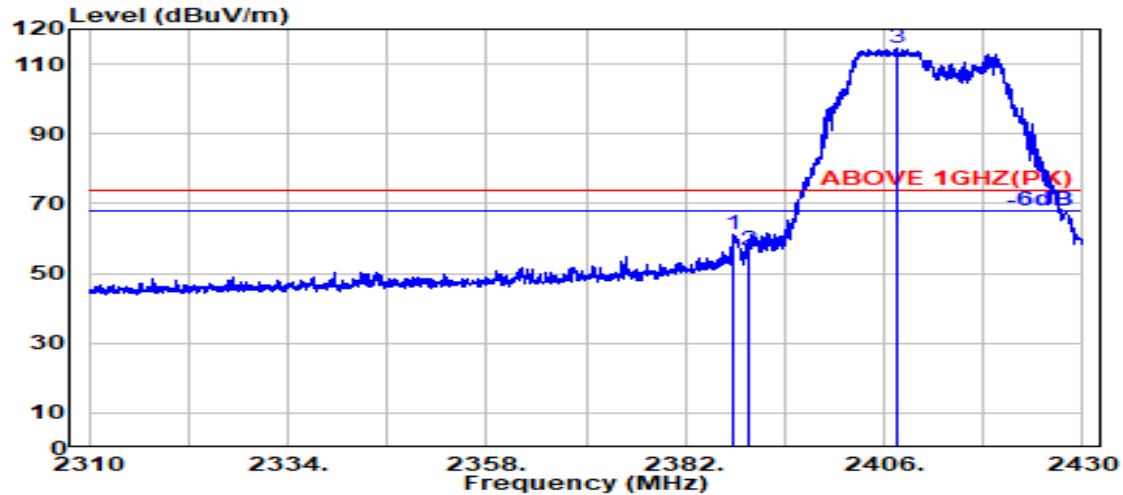

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.750	28.20	6.03	34.50	61.19	60.92	74.00	13.08	Peak
2389.800	28.18	6.03	34.50	56.80	56.52	74.00	17.48	Peak
@ 2407.450	28.15	6.06	34.50	114.76	114.47	---	---	Peak

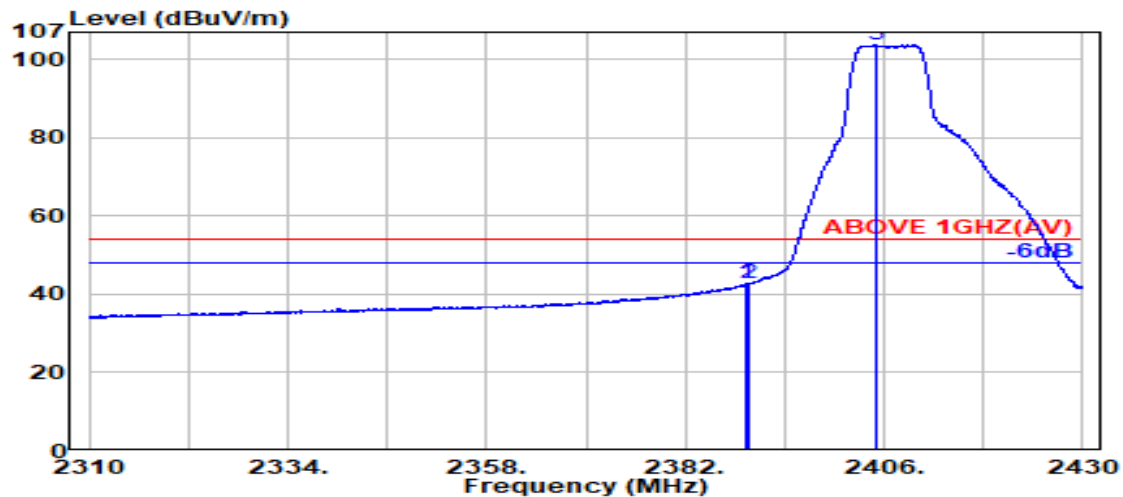

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.250	28.19	6.03	34.50	42.91	42.63	54.00	11.37	Average
2389.800	28.18	6.03	34.50	42.90	42.62	54.00	11.38	Average
@ 2405.100	28.13	6.06	34.50	104.05	103.73	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	26/8		

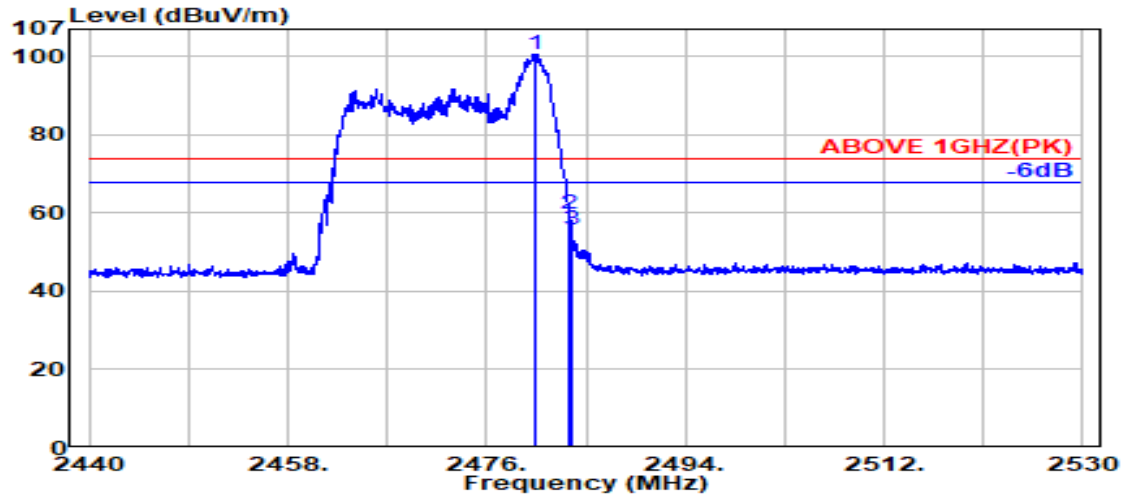

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.300	28.46	6.16	34.52	100.60	100.71	---	---	Peak
	2483.500	28.47	6.17	34.52	59.46	59.57	74.00	14.43	Peak
	2483.750	28.47	6.17	34.52	55.78	55.90	74.00	18.10	Peak

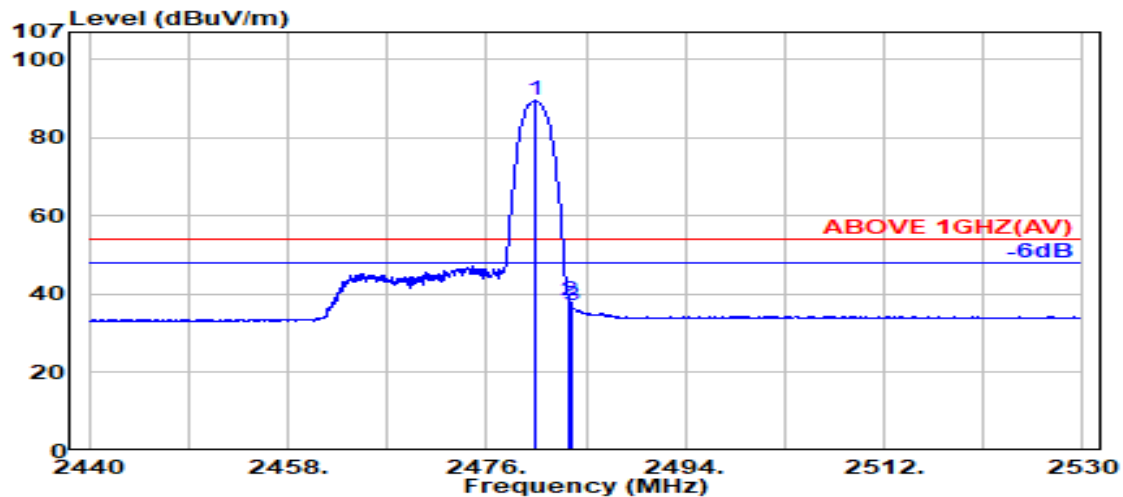

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.400	28.46	6.16	34.52	89.39	89.50	---	---	Average
	2483.500	28.47	6.17	34.52	38.15	38.27	54.00	15.73	Average
	2483.700	28.47	6.17	34.52	36.85	36.97	54.00	17.03	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	26/8		

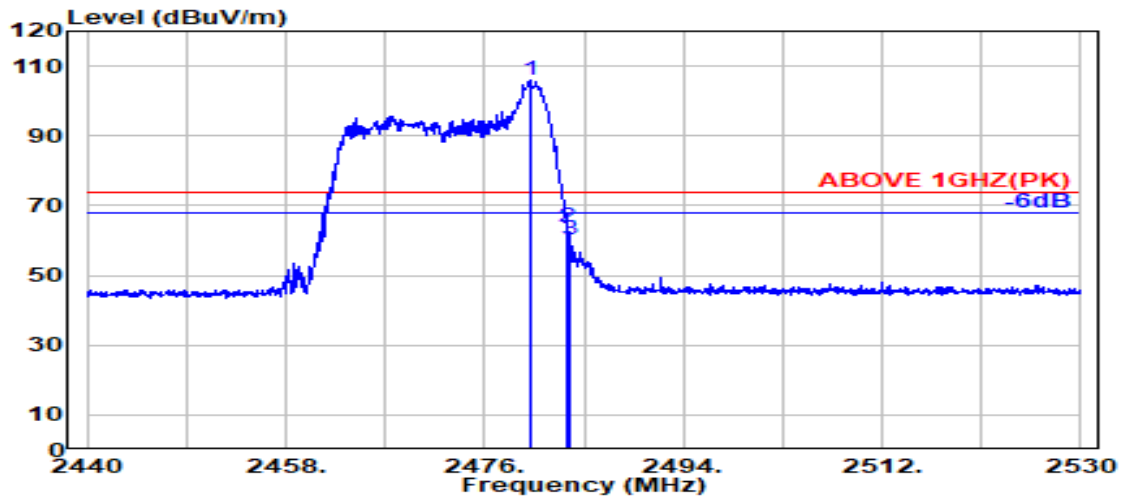

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.100	28.46	6.16	34.52	105.75	105.86	---	---	Peak
2483.500	28.47	6.17	34.52	63.92	64.04	74.00	9.96	Peak
2483.700	28.47	6.17	34.52	60.03	60.15	74.00	13.85	Peak

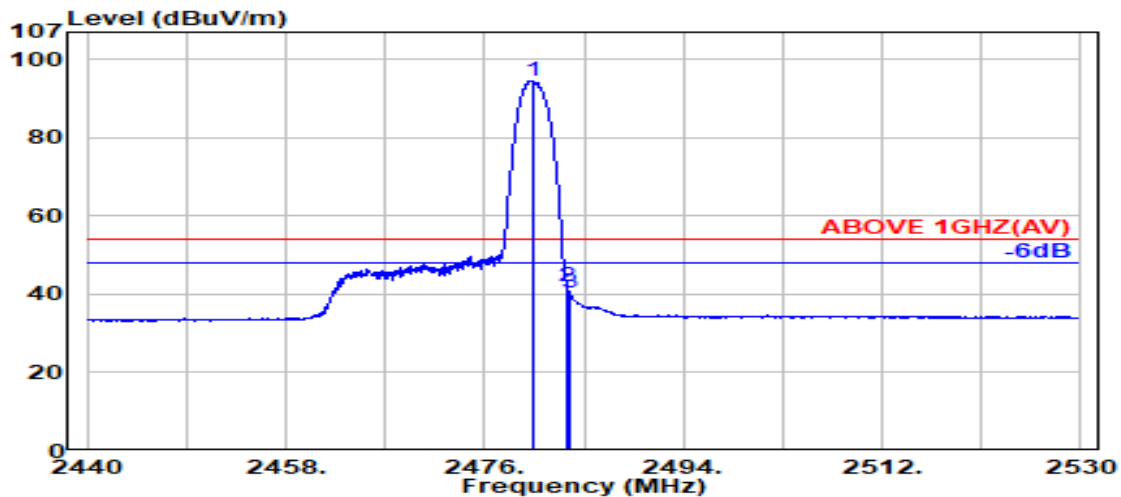

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.300	28.46	6.16	34.52	94.41	94.51	---	---	Average
2483.500	28.47	6.17	34.52	41.78	41.90	54.00	12.10	Average
2483.700	28.47	6.17	34.52	40.09	40.21	54.00	13.79	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	52/40		

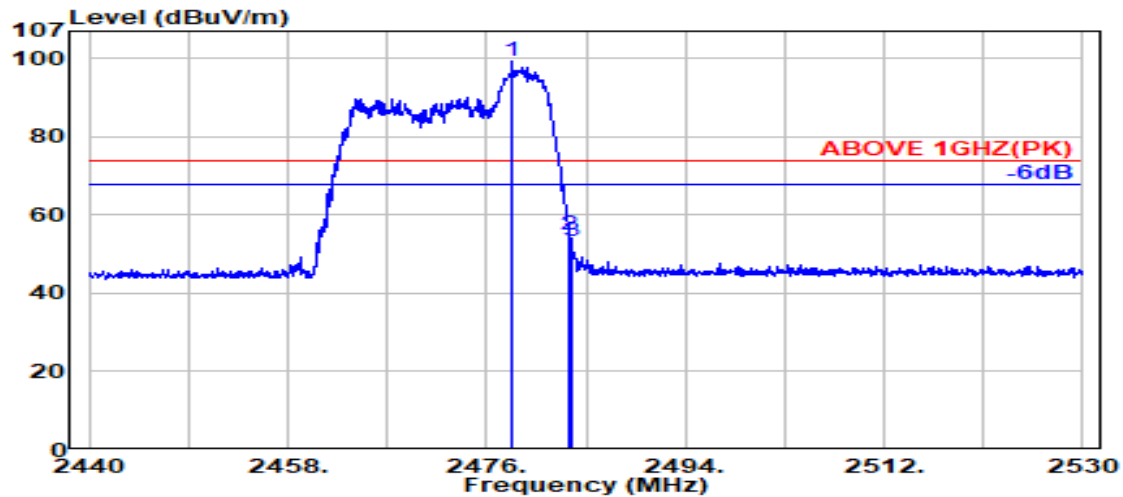

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.350	28.46	6.16	34.52	99.10	99.20	---	---	Peak
2483.500	28.47	6.17	34.52	54.84	54.96	74.00	19.04	Peak
2483.750	28.47	6.17	34.52	53.02	53.14	74.00	20.86	Peak

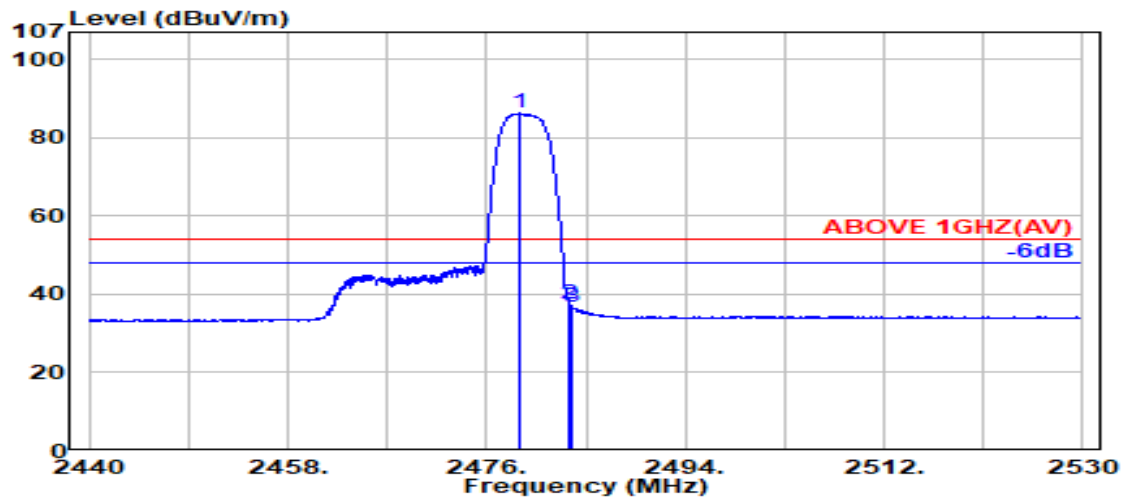

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.900	28.46	6.16	34.52	86.20	86.30	---	---	Average
2483.500	28.47	6.17	34.52	37.33	37.44	54.00	16.56	Average
2483.750	28.47	6.17	34.52	36.50	36.62	54.00	17.38	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	52/40		

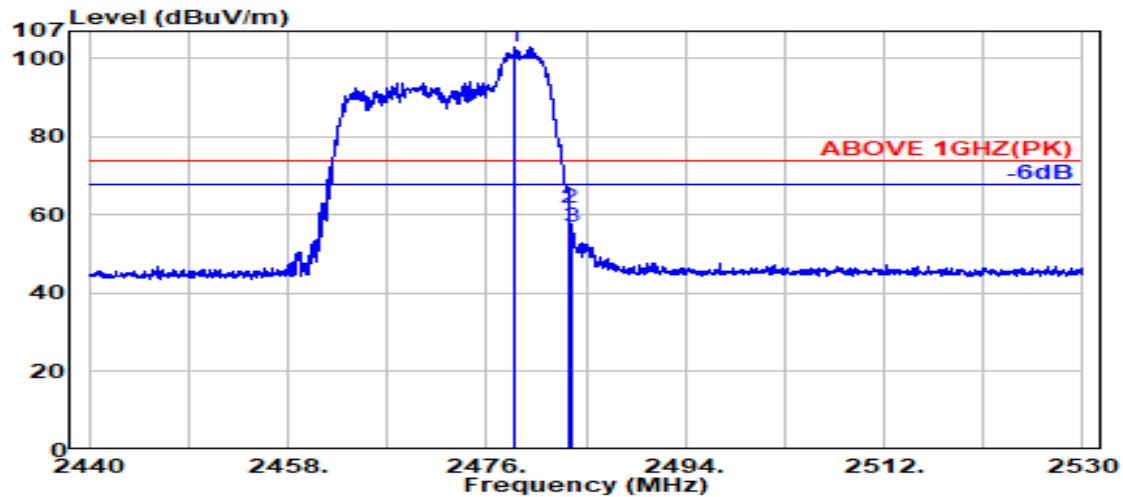

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.600	28.46	6.16	34.52	103.00	103.10	---	---	Peak
2483.500	28.47	6.17	34.52	61.70	61.82	74.00	12.18	Peak
2483.700	28.47	6.17	34.52	56.69	56.81	74.00	17.19	Peak

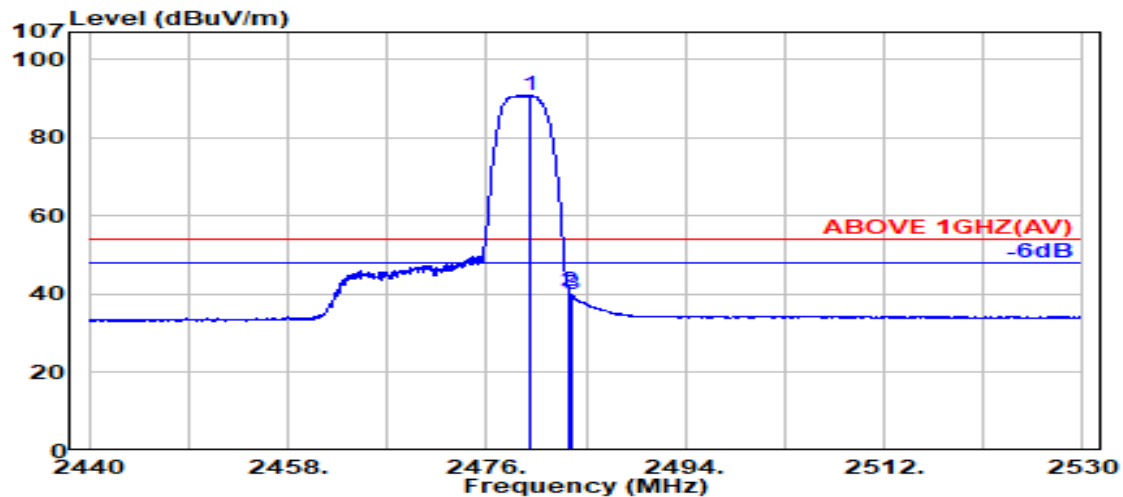

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.850	28.46	6.16	34.52	90.72	90.82	---	---	Average
2483.500	28.47	6.17	34.52	40.84	40.95	54.00	13.05	Average
2483.700	28.47	6.17	34.52	39.73	39.85	54.00	14.15	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	106/54		

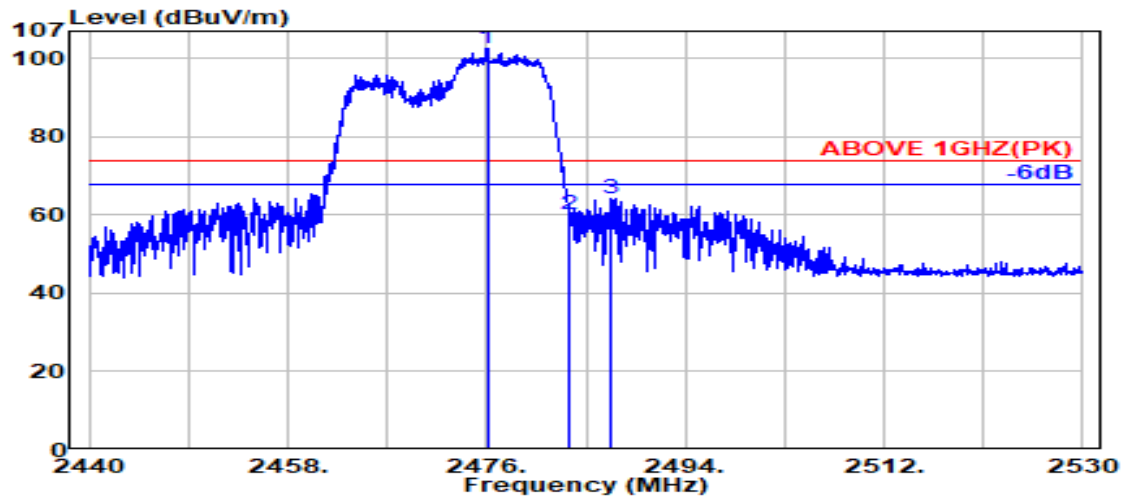

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.050	28.45	6.16	34.52	102.32	102.41	---	---	Peak
2483.500	28.47	6.17	34.52	60.18	60.30	74.00	13.70	Peak
2487.350	28.47	6.17	34.52	64.19	64.32	74.00	9.68	Peak

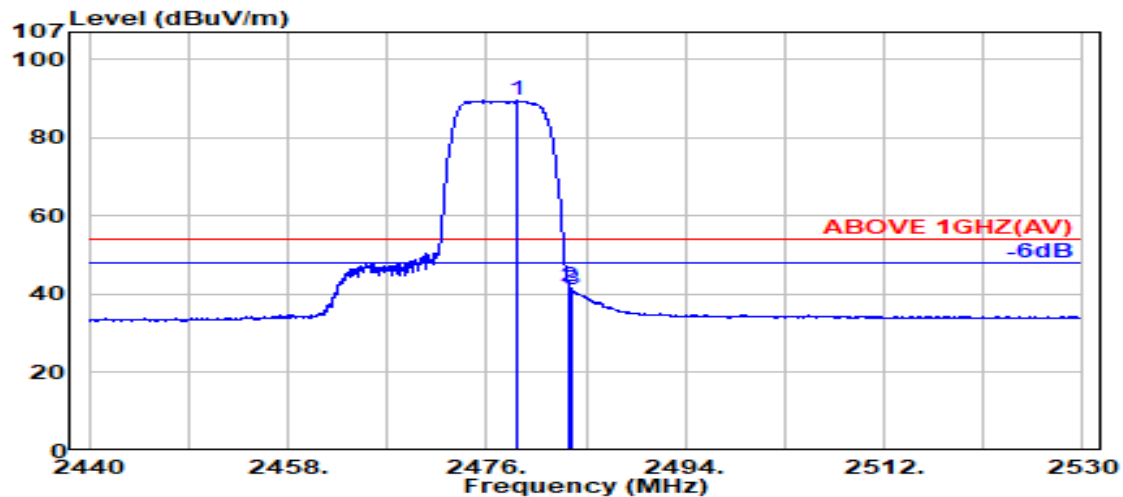

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.850	28.46	6.16	34.52	89.37	89.47	---	---	Average
2483.500	28.47	6.17	34.52	41.93	42.05	54.00	11.95	Average
2483.700	28.47	6.17	34.52	41.07	41.19	54.00	12.81	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	Frequency	TX 2472MHz
RU Configuration	106/54		

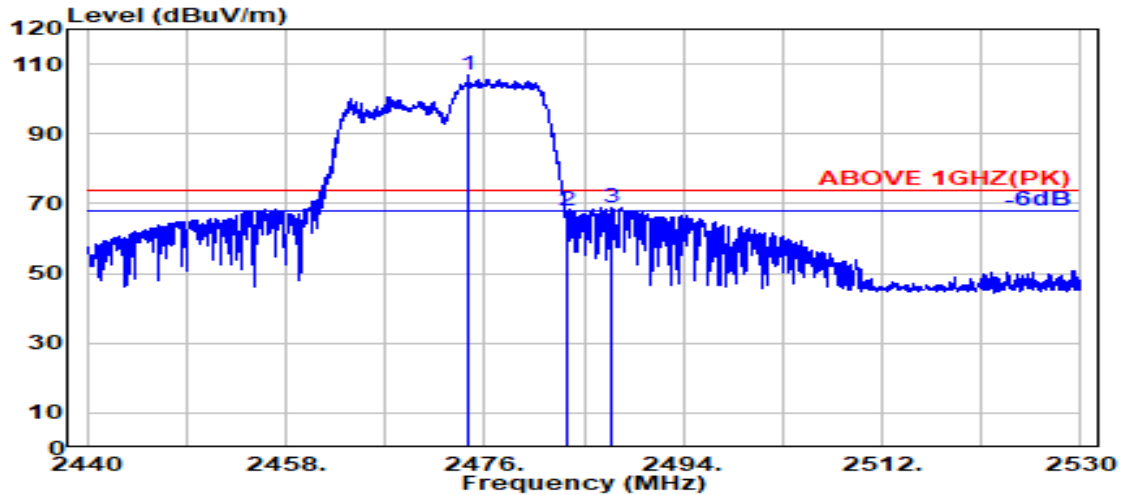

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.600	28.45	6.15	34.51	106.57	106.66	---	---	Peak
2483.500	28.47	6.17	34.52	67.83	67.95	74.00	6.05	Peak
2487.550	28.48	6.17	34.52	68.88	69.01	74.00	4.99	Peak

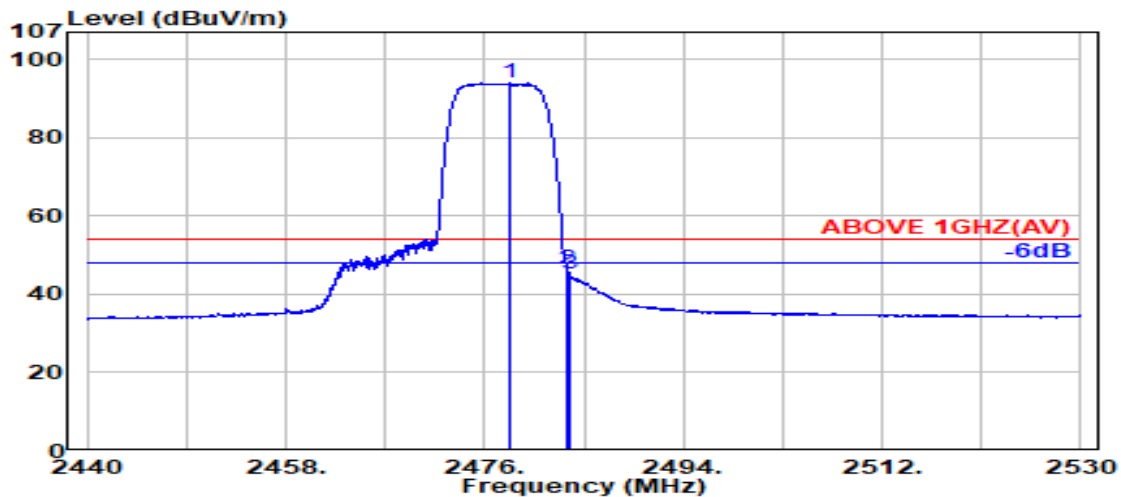

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.250	28.46	6.16	34.52	93.90	94.00	---	---	Average
2483.500	28.47	6.17	34.52	46.12	46.24	54.00	7.76	Average
2483.700	28.47	6.17	34.52	44.95	45.07	54.00	8.93	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2422MHz
RU Configuration	242/61		

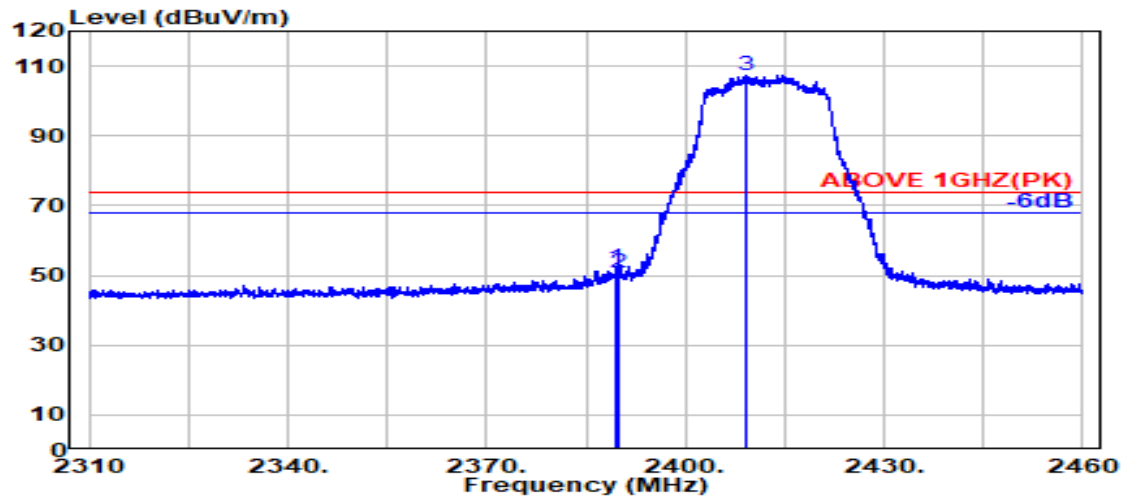

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	28.18	6.03	34.50	52.34	52.06	74.00	21.94	Peak
2389.800	28.18	6.03	34.50	50.99	50.71	74.00	23.29	Peak
@ 2409.250	28.16	6.06	34.50	107.78	107.49	---	---	Peak

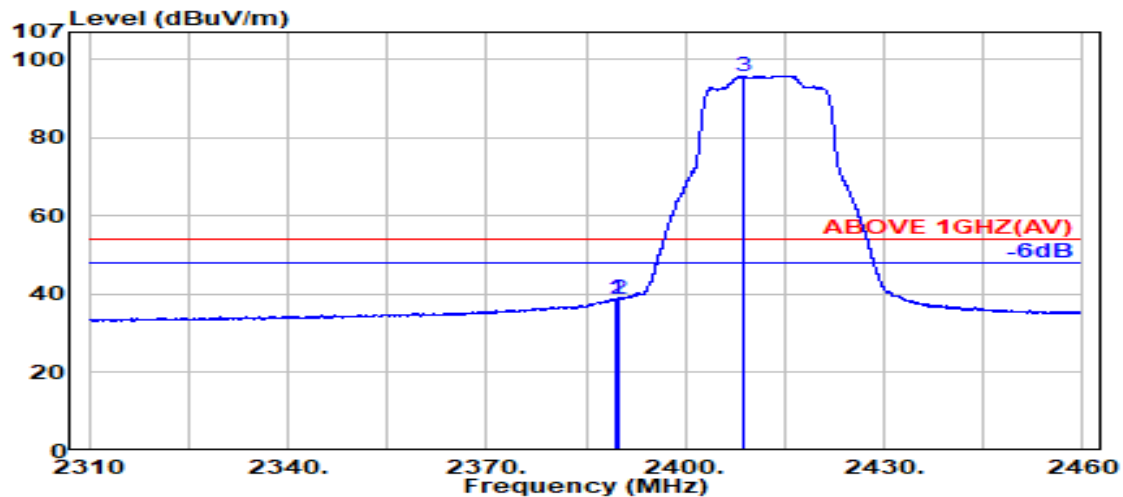

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.18	6.03	34.50	39.05	38.77	54.00	15.23	Average
2389.800	28.18	6.03	34.50	39.03	38.75	54.00	15.25	Average
@ 2408.700	28.15	6.06	34.50	96.18	95.90	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2422MHz
RU Configuration	242/61		

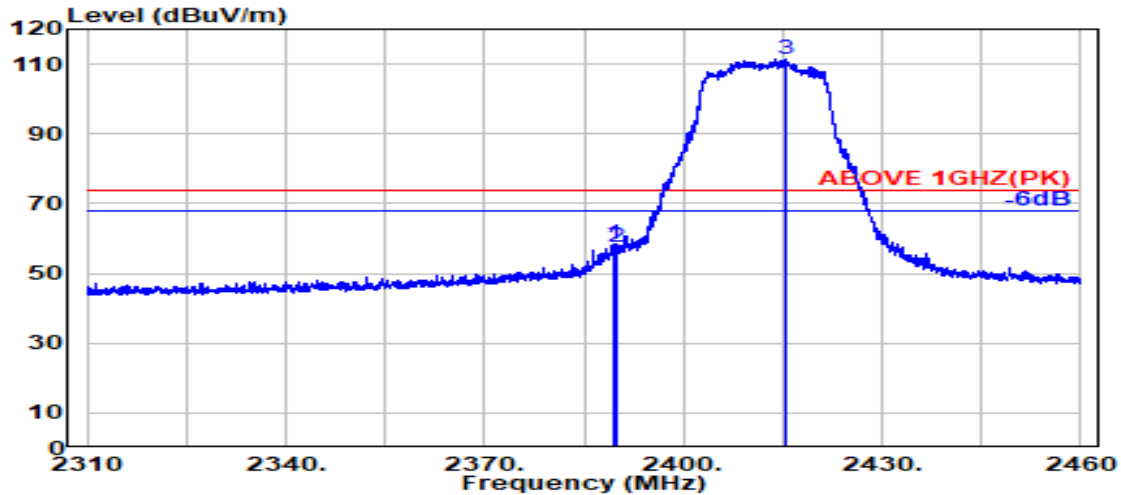

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.350	28.18	6.03	34.50	58.57	58.29	74.00	15.71	Peak
2389.800	28.18	6.03	34.50	57.79	57.50	74.00	16.50	Peak
@ 2415.600	28.19	6.07	34.50	111.80	111.56	---	---	Peak

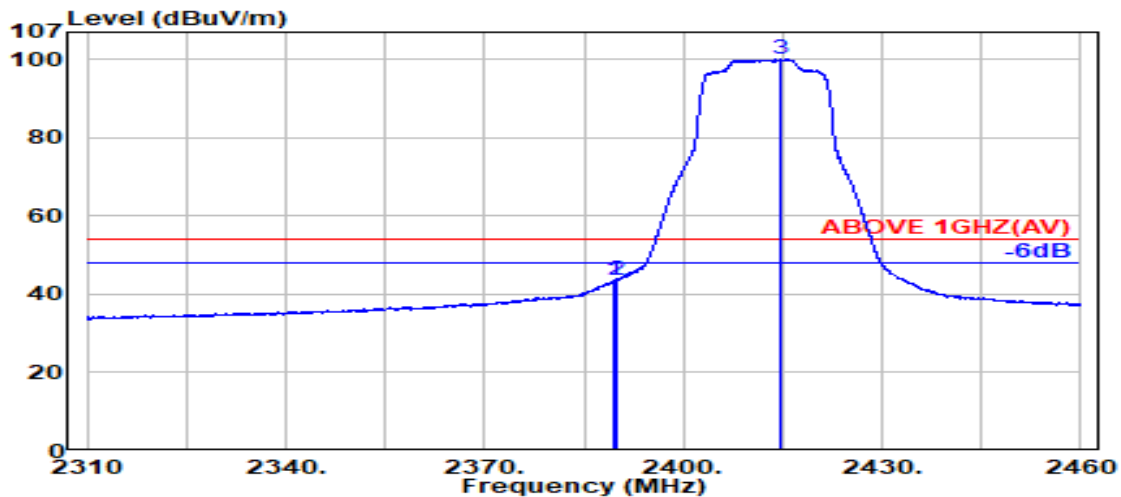

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.18	6.03	34.50	43.71	43.43	54.00	10.57	Average
2389.800	28.18	6.03	34.50	44.09	43.80	54.00	10.20	Average
@ 2414.750	28.19	6.07	34.50	100.29	100.04	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2462MHz
RU Configuration	242/62		

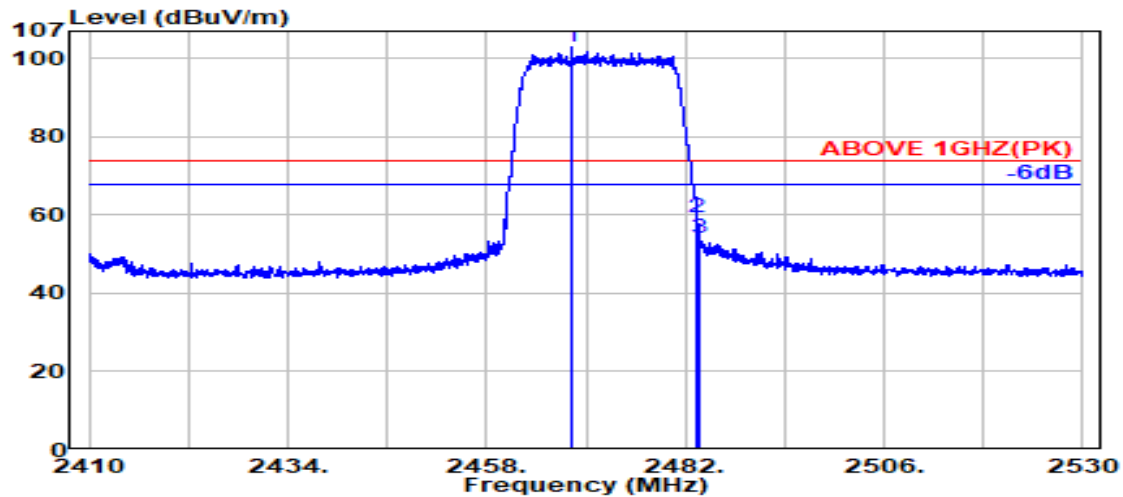

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.200	28.44	6.15	34.51	102.78	102.84	---	---	Peak
2483.500	28.47	6.17	34.52	59.04	59.16	74.00	14.84	Peak
2483.700	28.47	6.17	34.52	54.08	54.20	74.00	19.80	Peak

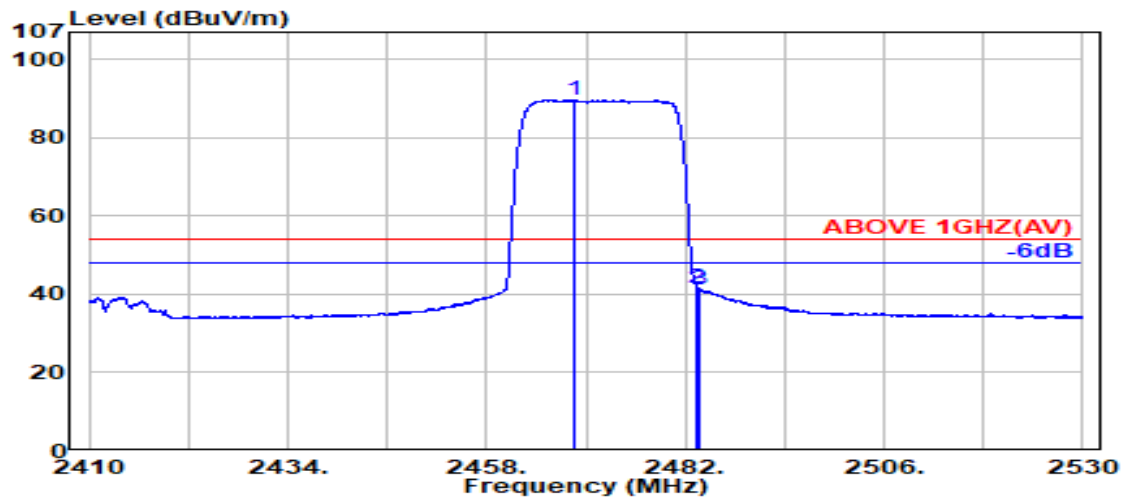

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.450	28.44	6.15	34.51	89.62	89.69	---	---	Average
2483.500	28.47	6.17	34.52	41.61	41.73	54.00	12.27	Average
2483.700	28.47	6.17	34.52	41.25	41.37	54.00	12.63	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	Frequency	TX 2462MHz
RU Configuration	242/62		

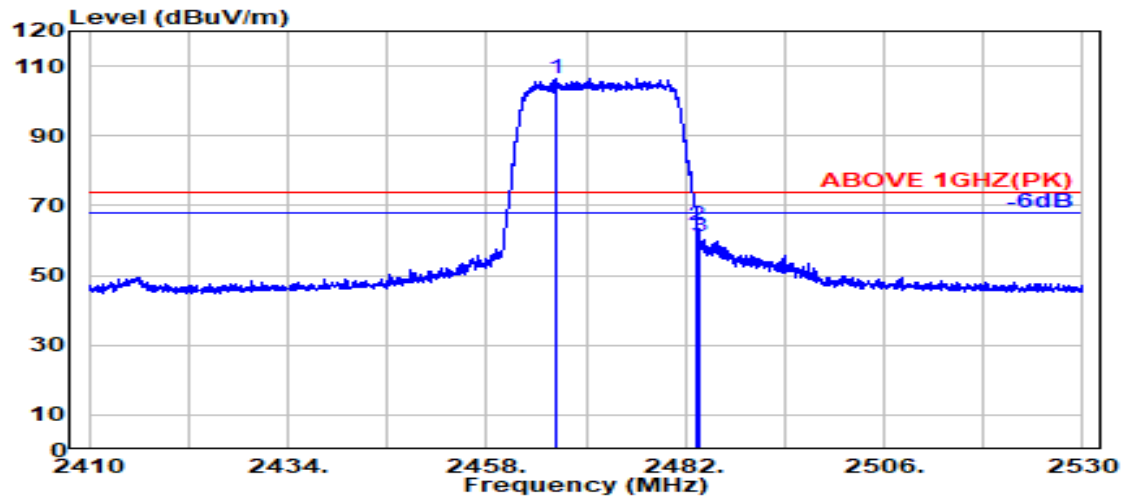

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.250	28.43	6.14	34.51	106.54	106.60	---	---	Peak
2483.500	28.47	6.17	34.52	64.14	64.26	74.00	9.74	Peak
2483.700	28.47	6.17	34.52	60.83	60.95	74.00	13.05	Peak

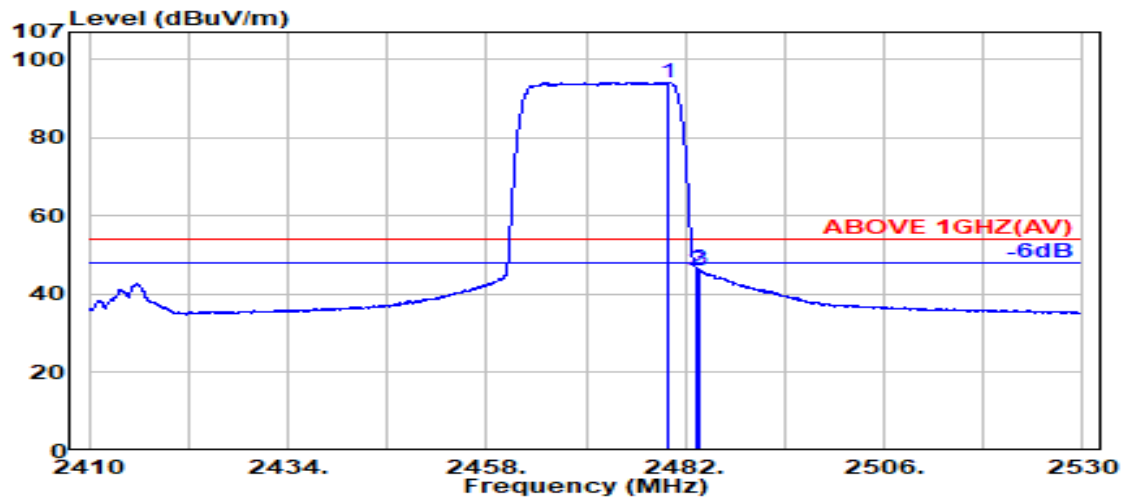

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.050	28.46	6.16	34.52	94.09	94.20	---	---	Average
2483.500	28.47	6.17	34.52	45.98	46.10	54.00	7.90	Average
2483.700	28.47	6.17	34.52	46.14	46.25	54.00	7.75	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

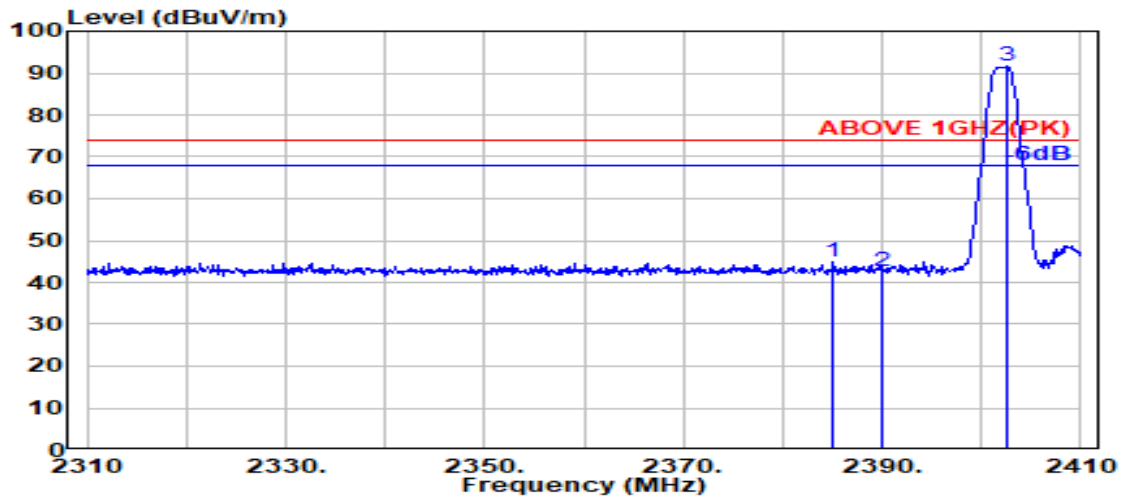

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.100	28.22	6.03	34.50	45.06	44.81	74.00	29.19	Peak
2390.000	28.18	6.03	34.50	42.89	42.61	74.00	31.39	Peak
@ 2402.600	28.12	6.05	34.50	91.87	91.53	---	---	Peak

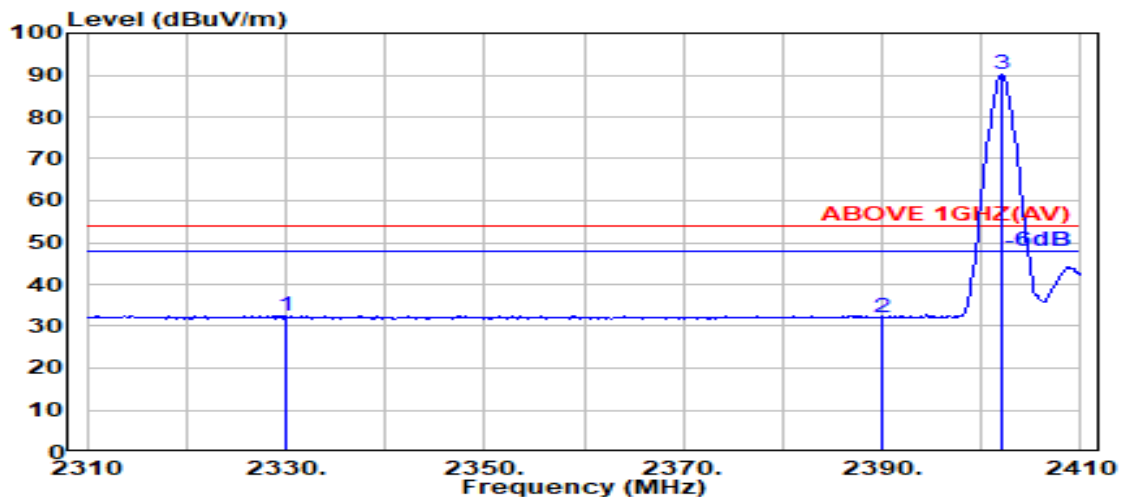

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2329.900	28.34	5.95	34.49	32.83	32.63	54.00	21.37	Average
2390.000	28.18	6.03	34.50	32.52	32.24	54.00	21.76	Average
@ 2402.100	28.11	6.05	34.50	90.41	90.08	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

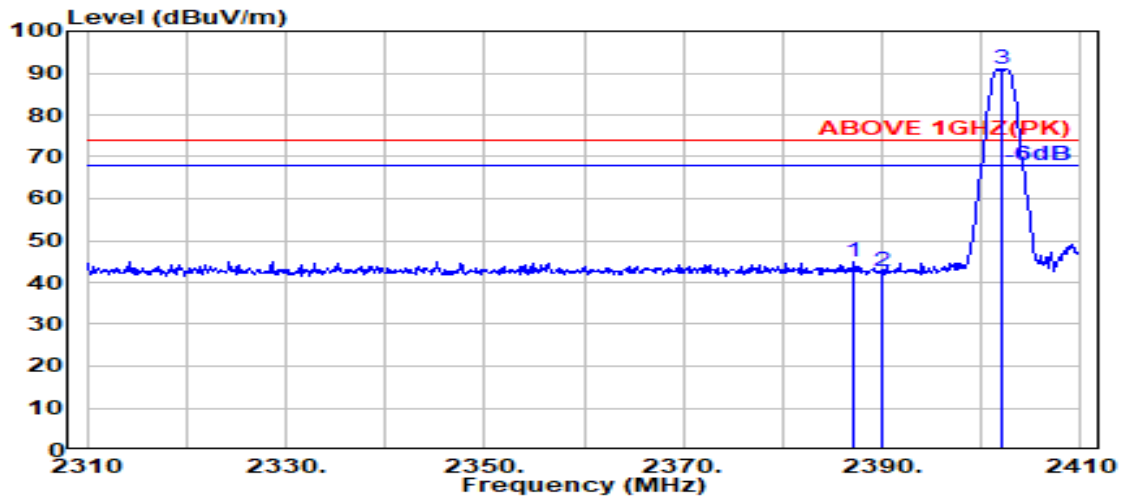

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.100	28.20	6.03	34.50	45.26	44.99	74.00	29.01	Peak
2390.000	28.18	6.03	34.50	43.11	42.83	74.00	31.17	Peak
@ 2402.100	28.11	6.05	34.50	91.20	90.86	---	---	Peak

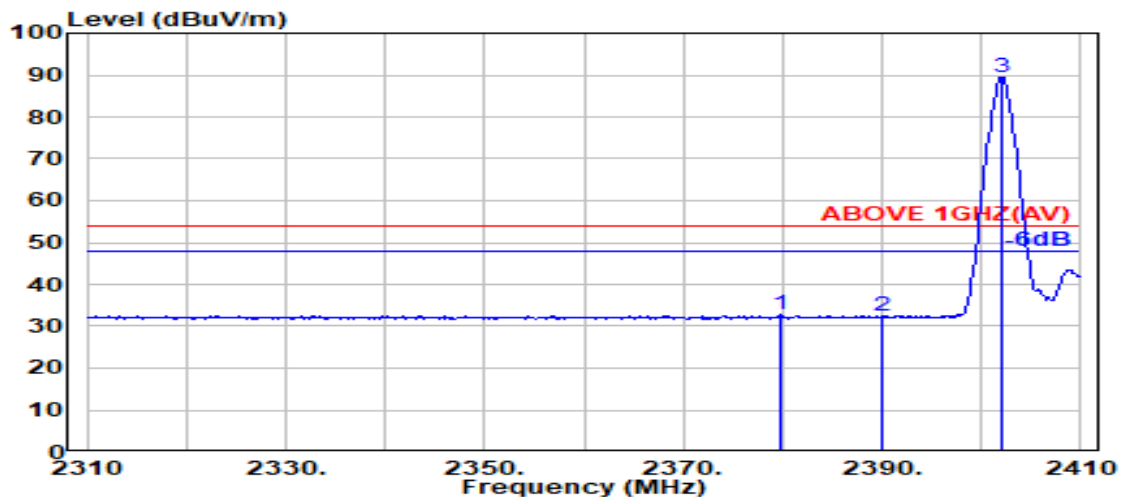

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2379.800	28.26	6.02	34.50	32.93	32.71	54.00	21.29	Average
2390.000	28.18	6.03	34.50	32.60	32.32	54.00	21.68	Average
@ 2402.100	28.11	6.05	34.50	89.82	89.49	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2Mbps)	Frequency	TX 2480 MHz
------	-------------	-----------	-------------

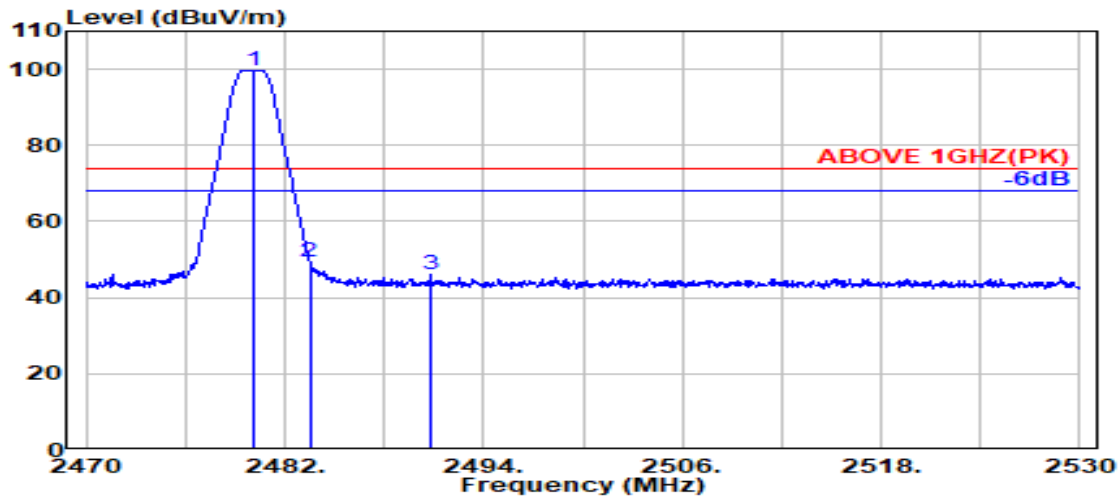

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.050	28.46	6.16	34.52	99.69	99.79	---	---	Peak
2483.500	28.47	6.17	34.52	49.23	49.34	74.00	24.66	Peak
2490.750	28.48	6.18	34.52	46.00	46.14	74.00	27.86	Peak

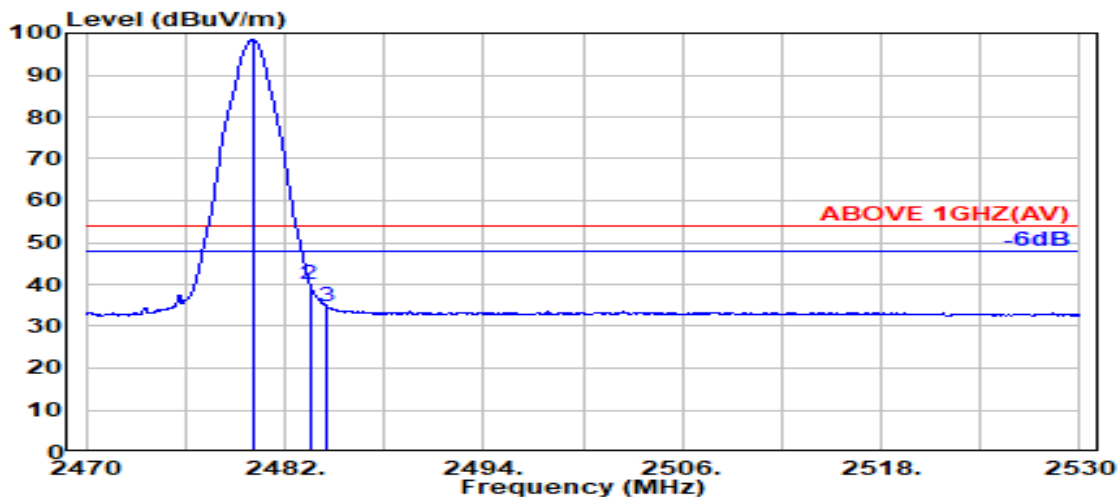

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.100	28.46	6.16	34.52	98.28	98.39	---	---	Average
2483.500	28.47	6.17	34.52	39.89	40.01	54.00	13.99	Average
2484.500	28.47	6.17	34.52	34.77	34.89	54.00	19.11	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2Mbps)	Frequency	TX 2480 MHz
------	-------------	-----------	-------------

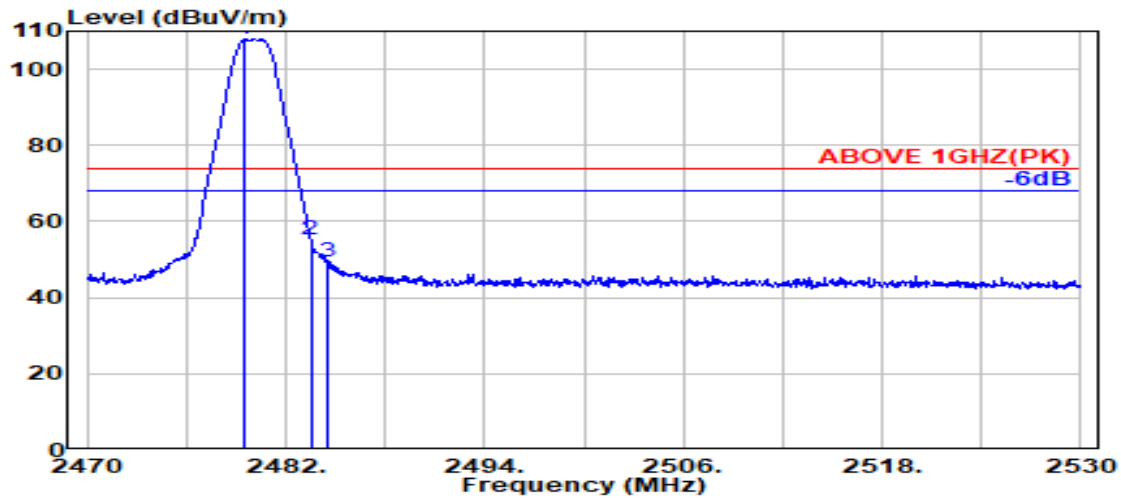

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.550	28.46	6.16	34.52	107.70	107.80	---	---	Peak
2483.500	28.47	6.17	34.52	55.16	55.27	74.00	18.73	Peak
2484.550	28.47	6.17	34.52	49.18	49.30	74.00	24.70	Peak

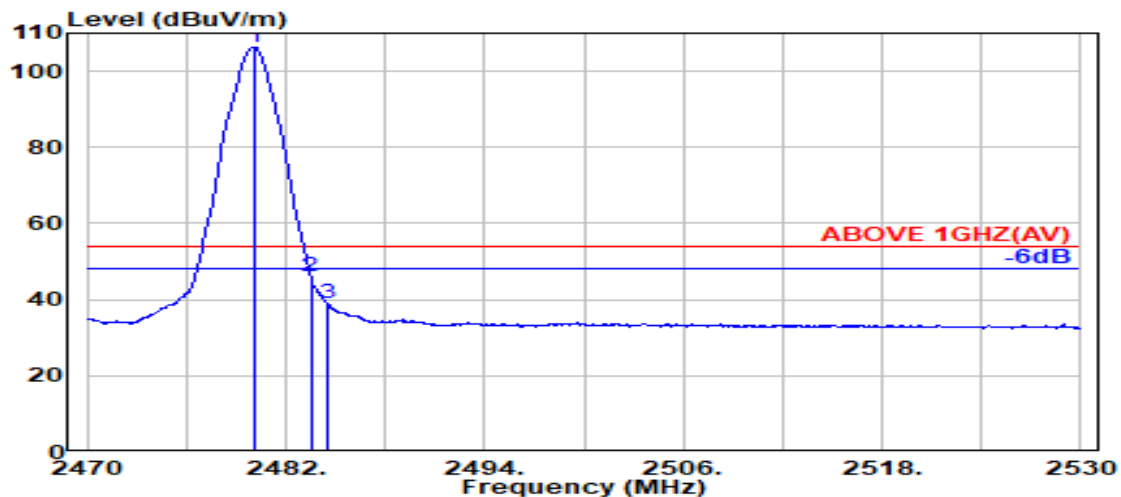

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.050	28.46	6.16	34.52	106.26	106.36	---	---	Average
2483.500	28.47	6.17	34.52	46.12	46.24	54.00	7.76	Average
2484.500	28.47	6.17	34.52	38.99	39.11	54.00	14.89	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

A.2.2 Emissions outside the frequency band:

The emissions (up to 25GHz) not reported for there is no emission be found.

Antenna: INPAQ

● Wireless LAN Mode

Mode	802.11b	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.24	8.38	34.36	35.63	42.88	54.00	11.12	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.24	8.38	34.36	35.44	42.69	54.00	11.31	Peak

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.39	8.41	34.34	35.66	43.12	54.00	10.88	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.39	8.41	34.34	36.86	44.32	54.00	9.68	Peak

Mode	802.11n-HT20	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.24	8.38	34.36	35.82	43.08	54.00	10.92	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.24	8.38	34.36	35.88	43.14	54.00	10.86	Peak

Mode	802.11n-HT40	Frequency	TX 2442 MHz
------	--------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.24	8.38	34.36	36.28	43.53	54.00	10.47	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.24	8.38	34.36	35.64	42.89	54.00	11.11	Peak

Mode	802.11ax-HE20	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.24	8.38	34.36	35.31	42.56	54.00	11.44	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.24	8.38	34.36	34.98	42.24	54.00	11.76	Peak

Mode	802.11ax-HE40	Frequency	TX 2432MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4864.000	33.20	8.37	34.36	34.59	41.79	54.00	12.21	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4864.000	33.20	8.37	34.36	35.22	42.42	54.00	11.58	Peak

Mode	802.11be-EHT20	Frequency	TX 2442 MHz
------	----------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.24	8.38	34.36	35.28	42.54	54.00	11.46	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.24	8.38	34.36	35.94	43.19	54.00	10.81	Peak

Mode	802.11be-EHT40	Frequency	TX 2437 MHz
------	----------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874.000	33.20	8.37	34.36	35.61	42.81	54.00	11.19	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874.000	33.20	8.37	34.36	35.37	42.57	54.00	11.43	Peak

● BLE Mode

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.01	8.32	34.38	35.16	42.12	54.00	11.88	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.01	8.32	34.38	35.36	42.32	54.00	11.68	Peak

Mode	BLE (2Mbps)	Frequency	TX 2440MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.22	8.37	34.36	35.66	42.89	54.00	11.11	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.22	8.37	34.36	34.57	41.81	54.00	12.19	Peak

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.40	8.42	34.34	35.41	42.90	54.00	11.10	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.40	8.42	34.34	35.38	42.87	54.00	11.13	Peak

Antenna: LUXSHARE-ICT

● Wireless LAN Mode

Mode	802.11b	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.24	8.38	34.36	34.18	41.44	54.00	12.56	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.24	8.38	34.36	35.54	42.80	54.00	11.20	Peak

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.39	8.41	34.34	34.19	41.65	54.00	12.35	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.39	8.41	34.34	35.19	42.65	54.00	11.35	Peak

Mode	802.11n-HT20	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.24	8.38	34.36	35.72	42.97	54.00	11.03	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.24	8.38	34.36	35.04	42.30	54.00	11.70	Peak

Mode	802.11n-HT40	Frequency	TX 2442 MHz
------	--------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.24	8.38	34.36	35.57	42.83	54.00	11.17	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.24	8.38	34.36	35.20	42.46	54.00	11.54	Peak

Mode	802.11ax-HE20	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.24	8.38	34.36	35.24	42.49	54.00	11.51	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.24	8.38	34.36	34.25	41.50	54.00	12.50	Peak

Mode	802.11ax-HE40	Frequency	TX 2432 MHz
------	---------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4864.000	33.16	8.36	34.36	35.76	42.92	54.00	11.08	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4864.000	33.16	8.36	34.36	34.70	41.86	54.00	12.14	Peak

Mode	802.11be-EHT20	Frequency	TX 2442 MHz
------	----------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.24	8.38	34.36	34.57	41.83	54.00	12.17	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.24	8.38	34.36	35.45	42.70	54.00	11.30	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11be-EHT40	Frequency	TX 2437 MHz
------	----------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874.000	33.20	8.37	34.36	35.16	42.37	54.00	11.63	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874.000	33.20	8.37	34.36	35.39	42.60	54.00	11.40	Peak

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

● BLE Mode

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.01	8.32	34.38	35.66	42.62	54.00	11.38	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.01	8.32	34.38	36.25	43.21	54.00	10.79	Peak

Mode	BLE (2Mbps)	Frequency	TX 2440MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.22	8.37	34.36	34.98	42.22	54.00	11.78	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.22	8.37	34.36	35.63	42.87	54.00	11.13	Peak

Mode	BLE (2Mbps)	Frequency	TX 2480MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.40	8.42	34.34	34.20	41.69	54.00	12.31	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.40	8.42	34.34	35.76	43.24	54.00	10.76	Peak

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.2.3 Emissions in Non-restricted Frequency Bands:

Pursuant to ANSI C63.10:2013 that emission levels below the FCC 15.209(a)/RSS-Gen Section 8.9 table 4 general radiated emissions limits is not required.