

## 2.4G WiFi 11b 2462MHz Top edge ant1 5mm

Measurement Report for Device, TOP, WLAN 2.4GHz, UID 10315 AAB, Channel 11 (2462.0MHz)

### Device under Test Properties

| Model, Manufacturer | Dimensions [mm]     | IMEI | DUT Type |
|---------------------|---------------------|------|----------|
| Device,             | 240.0 x 70.0 x 10.0 |      | Phone    |

### Exposure Conditions

| Phantom   | Section, TSL | Position, Distance [mm] | Test | Band        | Group, UID      | Frequency [MHz], Channel Number | Conversion Factor | TSL  | Conductivity [S/m] | TSL Permittivity |
|-----------|--------------|-------------------------|------|-------------|-----------------|---------------------------------|-------------------|------|--------------------|------------------|
| Flat, HSL |              | TOP, 5.00               |      | WLAN 2.4GHz | WLAN, 10315-AAB | 2462.0, 11                      | 8.18              | 1.85 |                    | 39.3             |

### Hardware Setup

| Phantom                            | TSL, Measured Date                     | Probe, Calibration Date     | DAE, Calibration Date   |
|------------------------------------|----------------------------------------|-----------------------------|-------------------------|
| ELI V8.0 (20deg probe tilt) - 2178 | HSL600-10000 Charge: xxxx, 2022-Aug-31 | EX3DV4 - SN7733, 2022-08-02 | DAE4 Sn1739, 2022-07-29 |

### Scan Setup


|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 100.0 x 280.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 10.0 x 10.0   | 5.0 x 5.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| Grading Ratio       | 1.5           | 1.5                |
| MAIA                | Y             | N/A                |
| Surface Detection   | VMS + 6p      | VMS + 6p           |
| Scan Method         | Measured      | Measured           |

### Measurement Results

|                     | Area Scan         | Zoom Scan         |
|---------------------|-------------------|-------------------|
| Date                | 2022-08-31, 10:43 | 2022-08-31, 10:50 |
| psSAR1g [W/kg]      | 0.308             | 0.310             |
| psSAR10g [W/kg]     | 0.154             | 0.153             |
| Power Drift [dB]    | -0.02             | -0.03             |
| Power Scaling       | Disabled          | Disabled          |
| Scaling Factor [dB] |                   |                   |
| TSL Correction      | No correction     | No correction     |
| M2/M1 [%]           |                   | 79.9              |
| Dist 3dB Peak [mm]  |                   | 13.3              |

### Warning(s) / Error(s)

| Details    | Area Scan | Zoom Scan |
|------------|-----------|-----------|
| Warning(s) |           |           |
| Error(s)   |           |           |

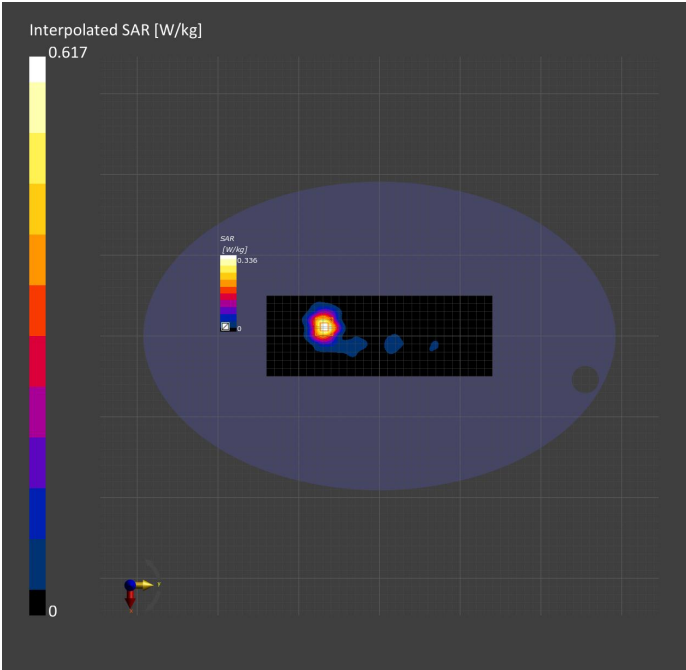

2.4G WiFi 11b 2437MHz Back Surface ant2 5mm

Measurement Report for Device, BACK, WLAN 2.4GHz, UID 10315 AAB, Channel 6 (2437.0MHz)

Device under Test Properties

| Model, Manufacturer | Dimensions [mm]     | IMEI | DUT Type |
|---------------------|---------------------|------|----------|
| Device,             | 240.0 x 70.0 x 10.0 |      | Phone    |

Exposure Conditions

| Phantom   | Section, TSL | Position, Distance [mm] | Test | Band        | Group, UID      | Frequency [MHz], Channel Number | Conversion Factor | TSL  | Conductivity [S/m] | TSL Permittivity |
|-----------|--------------|-------------------------|------|-------------|-----------------|---------------------------------|-------------------|------|--------------------|------------------|
| Flat, HSL |              | BACK, 5.00              |      | WLAN 2.4GHz | WLAN, 10315-AAB | 2437.0, 6                       | 8.18              | 1.83 |                    | 39.6             |

Hardware Setup

| Phantom                            | TSL, Measured Date                     | Probe, Calibration Date     | DAE, Calibration Date   |
|------------------------------------|----------------------------------------|-----------------------------|-------------------------|
| ELI V8.0 (20deg probe tilt) - 2178 | HSL600-10000 Charge: xxxx, 2022-Aug-31 | EX3DV4 - SN7733, 2022-08-02 | DAE4 Sn1739, 2022-07-29 |

Scan Setup


|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 100.0 x 280.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 10.0 x 10.0   | 5.0 x 5.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| Grading Ratio       | 1.5           | 1.5                |
| MAIA                | Y             | N/A                |
| Surface Detection   | VMS + 6p      | VMS + 6p           |
| Scan Method         | Measured      | Measured           |

Measurement Results

|                     | Area Scan         | Zoom Scan         |
|---------------------|-------------------|-------------------|
| Date                | 2022-09-02, 14:28 | 2022-09-02, 14:36 |
| psSAR1g [W/kg]      | 0.254             | 0.260             |
| psSAR10g [W/kg]     | 0.130             | 0.130             |
| Power Drift [dB]    | 0.05              | -0.03             |
| Power Scaling       | Disabled          | Disabled          |
| Scaling Factor [dB] |                   |                   |
| TSL Correction      | No correction     | No correction     |
| M2/M1 [%]           |                   | 78.3              |
| Dist 3dB Peak [mm]  |                   | 13.6              |

Warning(s) / Error(s)

| Details    | Area Scan | Zoom Scan |
|------------|-----------|-----------|
| Warning(s) |           |           |
| Error(s)   |           |           |

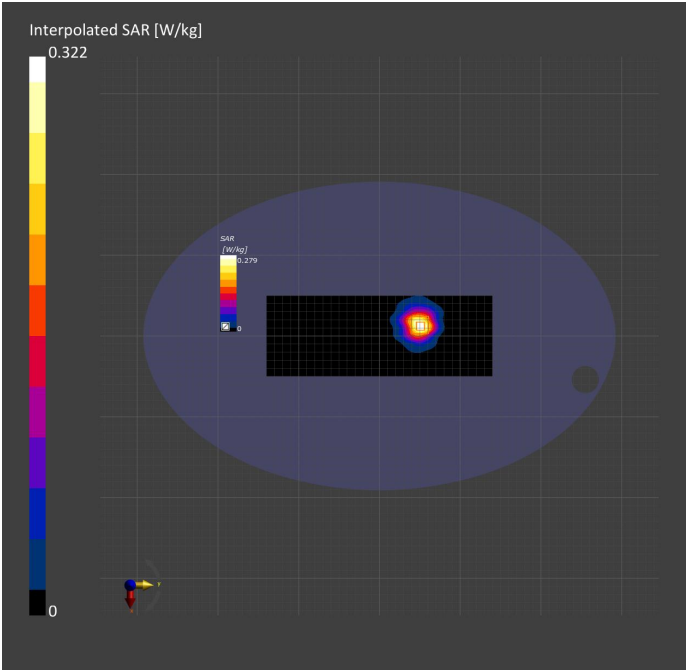

5G WiFi 11A 5200MHz Top edge ant1 5mm

Measurement Report for Device, TOP-NII-1, U-NII-2A, UID 10317 AAD, Channel 40 (5200.0MHz)

Device under Test Properties

| Model, Manufacturer | Dimensions [mm]     | IMEI | DUT Type |
|---------------------|---------------------|------|----------|
| Device,             | 240.0 x 70.0 x 10.0 |      | Phone    |

Exposure Conditions

| Phantom   | Section, TSL | Position, Distance [mm] | Test | Band              | Group, UID      | Frequency [MHz], Channel Number | Conversion Factor | TSL  | Conductivity [S/m] | TSL Permittivity |
|-----------|--------------|-------------------------|------|-------------------|-----------------|---------------------------------|-------------------|------|--------------------|------------------|
| Flat, HSL |              | TOP, 5.00               |      | U-NII-1, U-NII-2A | WLAN, 10317-AAD | 5200.0, 40                      | 5.92              | 4.73 |                    | 36.1             |

Hardware Setup

| Phantom                            | TSL, Measured Date                     | Probe, Calibration Date     | DAE, Calibration Date   |
|------------------------------------|----------------------------------------|-----------------------------|-------------------------|
| ELI V8.0 (20deg probe tilt) - 2178 | HSL600-10000 Charge: xxxx, 2022-Aug-31 | EX3DV4 - SN7733, 2022-08-02 | DAE4 Sn1739, 2022-07-29 |

Scan Setup


|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 100.0 x 280.0 | 22.0 x 22.0 x 22.0 |
| Grid Steps [mm]     | 10.0 x 10.0   | 4.0 x 4.0 x 1.4    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| Grading Ratio       | 1.5           | 1.4                |
| MAIA                | Y             | Y                  |
| Surface Detection   | VMS + 6p      | VMS + 6p           |
| Scan Method         | Measured      | Measured           |

Measurement Results

|                     | Area Scan         | Zoom Scan         |
|---------------------|-------------------|-------------------|
| Date                | 2022-08-31, 11:02 | 2022-08-31, 11:10 |
| psSAR1g [W/kg]      | 0.212             | 0.218             |
| psSAR10g [W/kg]     | 0.092             | 0.089             |
| Power Drift [dB]    | -0.02             | -0.04             |
| Power Scaling       | Disabled          | Disabled          |
| Scaling Factor [dB] |                   |                   |
| TSL Correction      | No correction     | No correction     |
| M2/M1 [%]           |                   | 63.2              |
| Dist 3dB Peak [mm]  |                   | 16.0              |

Warning(s) / Error(s)

| Details    | Area Scan | Zoom Scan |
|------------|-----------|-----------|
| Warning(s) |           |           |
| Error(s)   |           |           |

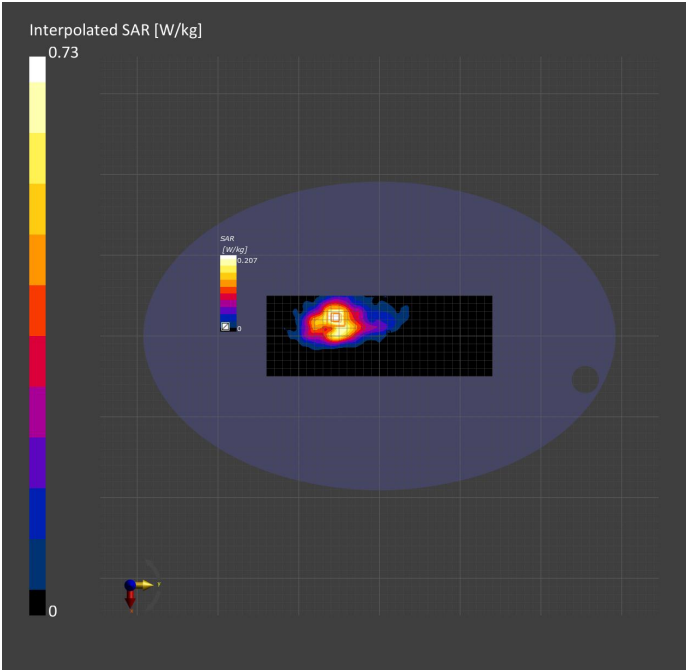

5G WiFi 11A 5500MHz Top edge ant1 5mm

Measurement Report for Device, TOP-NII-2C < 5.65 GHz, UID 10317 AAD, Channel 100 (5500.0MHz)

Device under Test Properties

| Model, Manufacturer | Dimensions [mm]     | IMEI | DUT Type |
|---------------------|---------------------|------|----------|
| Device,             | 240.0 x 70.0 x 10.0 |      | Phone    |

Exposure Conditions

| Phantom   | Section, TSL | Position, Distance [mm] | Test | Band                | Group, UID      | Frequency [MHz], Channel Number | Conversion Factor | TSL  | Conductivity [S/m] | TSL Permittivity |
|-----------|--------------|-------------------------|------|---------------------|-----------------|---------------------------------|-------------------|------|--------------------|------------------|
| Flat, HSL |              | TOP, 5.00               |      | U-NII-2C < 5.65 GHz | WLAN, 10317-AAD | 5500.0, 100                     | 5.24              | 4.95 |                    | 36.1             |

Hardware Setup

| Phantom                            | TSL, Measured Date          | Probe, Calibration Date                   | DAE, Calibration Date   |
|------------------------------------|-----------------------------|-------------------------------------------|-------------------------|
| ELI V8.0 (20deg probe tilt) - 2178 | HSL600-10000<br>2022-Aug-31 | Charge: xxxx, EX3DV4 - SN7733, 2022-08-02 | DAE4 Sn1739, 2022-07-29 |

Scan Setup


|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 100.0 x 280.0 | 22.0 x 22.0 x 22.0 |
| Grid Steps [mm]     | 10.0 x 10.0   | 4.0 x 4.0 x 1.4    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| Grading Ratio       | 1.5           | 1.4                |
| MAIA                | Y             | Y                  |
| Surface Detection   | VMS + 6p      | VMS + 6p           |
| Scan Method         | Measured      | Measured           |

Measurement Results

|                     | Area Scan         | Zoom Scan         |
|---------------------|-------------------|-------------------|
| Date                | 2022-08-31, 11:30 | 2022-08-31, 11:38 |
| psSAR1g [W/kg]      | 0.362             | 0.377             |
| psSAR10g [W/kg]     | 0.151             | 0.150             |
| Power Drift [dB]    | 0.01              | -0.04             |
| Power Scaling       | Disabled          | Disabled          |
| Scaling Factor [dB] |                   |                   |
| TSL Correction      | No correction     | No correction     |
| M2/M1 [%]           |                   | 61.0              |
| Dist 3dB Peak [mm]  |                   | 14.3              |

Warning(s) / Error(s)

| Details    | Area Scan | Zoom Scan |
|------------|-----------|-----------|
| Warning(s) |           |           |
| Error(s)   |           |           |

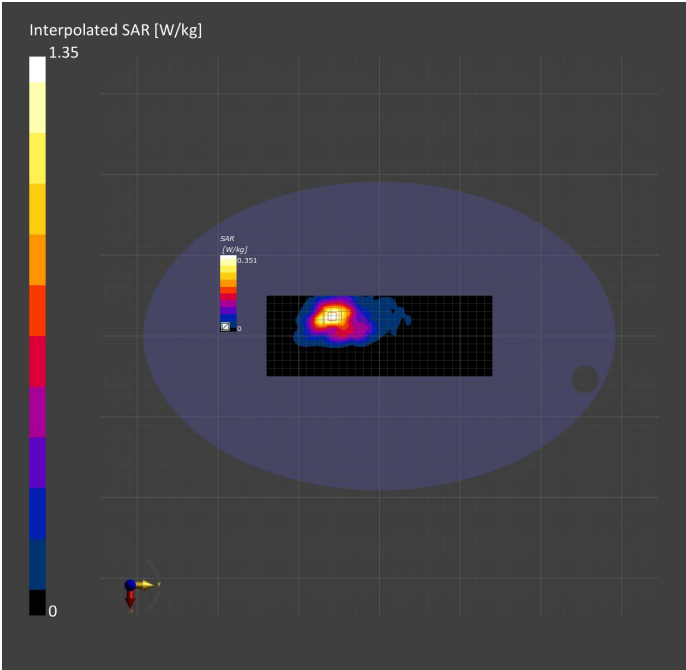

5G WiFi 11N40 5755MHz Top edge ant1 5mm

Measurement Report for Device, TOP, U-NII-2C, U-NII-3, UID 10425 AAC, Channel 151 (5755.0MHz)

Device under Test Properties

| Model, Manufacturer | Dimensions [mm]     | IMEI | DUT Type |
|---------------------|---------------------|------|----------|
| Device,             | 240.0 x 70.0 x 10.0 |      | Phone    |

Exposure Conditions

| Phantom   | Section, TSL | Position, Distance [mm] | Test | Band              | Group, UID      | Frequency [MHz], Channel Number | Conversion Factor | TSL  | Conductivity [S/m] | TSL Permittivity |
|-----------|--------------|-------------------------|------|-------------------|-----------------|---------------------------------|-------------------|------|--------------------|------------------|
| Flat, HSL |              | TOP, 5.00               |      | U-NII-2C, U-NII-3 | WLAN, 10425-AAC | 5755.0, 151                     | 5.15              | 5.16 |                    | 36.1             |

Hardware Setup

| Phantom                            | TSL, Measured Date                     | Probe, Calibration Date     | DAE, Calibration Date   |
|------------------------------------|----------------------------------------|-----------------------------|-------------------------|
| ELI V8.0 (20deg probe tilt) - 2178 | HSL600-10000 Charge: xxxx, 2022-Aug-31 | EX3DV4 - SN7733, 2022-08-02 | DAE4 Sn1739, 2022-07-29 |

Scan Setup


|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 100.0 x 280.0 | 22.0 x 22.0 x 22.0 |
| Grid Steps [mm]     | 10.0 x 10.0   | 4.0 x 4.0 x 1.4    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| Grading Ratio       | 1.5           | 1.4                |
| MAIA                | Y             | Y                  |
| Surface Detection   | VMS + 6p      | VMS + 6p           |
| Scan Method         | Measured      | Measured           |

Measurement Results

|                     | Area Scan         | Zoom Scan         |
|---------------------|-------------------|-------------------|
| Date                | 2022-09-07, 10:19 | 2022-09-07, 10:27 |
| psSAR1g [W/kg]      | 0.265             | 0.288             |
| psSAR10g [W/kg]     | 0.096             | 0.096             |
| Power Drift [dB]    | -0.07             | -0.12             |
| Power Scaling       | Disabled          | Disabled          |
| Scaling Factor [dB] |                   |                   |
| TSL Correction      | No correction     | No correction     |
| M2/M1 [%]           |                   | 57.5              |
| Dist 3dB Peak [mm]  |                   | 8.9               |

Warning(s) / Error(s)

| Details    | Area Scan | Zoom Scan |
|------------|-----------|-----------|
| Warning(s) |           |           |
| Error(s)   |           |           |

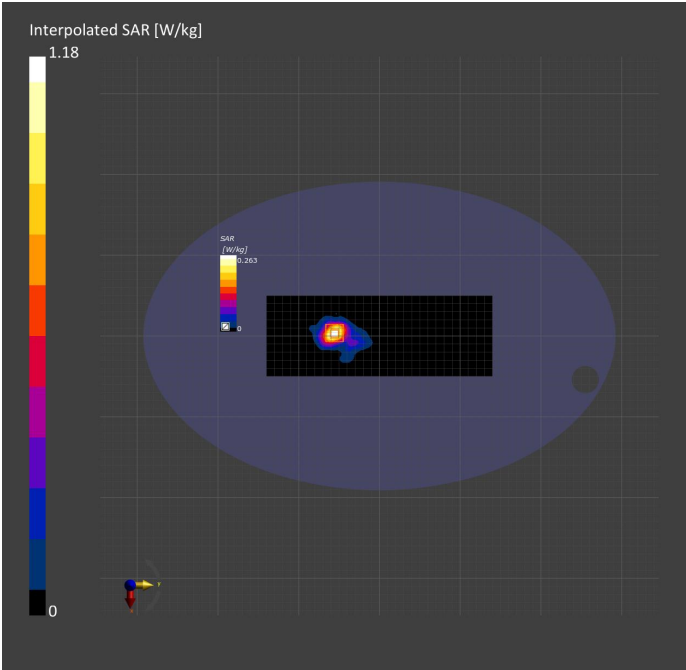

5G WiFi 11A 5180MHz Back Surface ant2 5mm

Measurement Report for Device, BACK, U-NII-1, U-NII-2A, UID 10317 AAD, Channel 36 (5180.0MHz)

Device under Test Properties

| Model, Manufacturer | Dimensions [mm]     | IMEI | DUT Type |
|---------------------|---------------------|------|----------|
| Device,             | 240.0 x 70.0 x 10.0 |      | Phone    |

Exposure Conditions

| Phantom   | Section, TSL | Position, Distance [mm] | Test Band         | Group, UID      | Frequency [MHz], Channel Number | Conversion Factor | TSL Conductivity [S/m] | TSL Permittivity |
|-----------|--------------|-------------------------|-------------------|-----------------|---------------------------------|-------------------|------------------------|------------------|
| Flat, HSL |              | BACK, 5.00              | U-NII-1, U-NII-2A | WLAN, 10317-AAD | 5180.0, 36                      | 5.92              | 4.72                   | 36.5             |

Hardware Setup

| Phantom                            | TSL, Measured Date                     | Probe, Calibration Date     | DAE, Calibration Date   |
|------------------------------------|----------------------------------------|-----------------------------|-------------------------|
| ELI V8.0 (20deg probe tilt) - 2178 | HSL600-10000 Charge: xxxx, 2022-Aug-31 | EX3DV4 - SN7733, 2022-08-02 | DAE4 Sn1739, 2022-07-29 |

Scan Setup


|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 100.0 x 280.0 | 22.0 x 22.0 x 22.0 |
| Grid Steps [mm]     | 10.0 x 10.0   | 4.0 x 4.0 x 1.4    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| Grading Ratio       | 1.5           | 1.4                |
| MAIA                | Y             | N/A                |
| Surface Detection   | VMS + 6p      | VMS + 6p           |
| Scan Method         | Measured      | Measured           |

Measurement Results

|                     | Area Scan         | Zoom Scan         |
|---------------------|-------------------|-------------------|
| Date                | 2022-09-02, 15:18 | 2022-09-02, 15:27 |
| psSAR1g [W/kg]      | 0.625             | 0.648             |
| psSAR10g [W/kg]     | 0.246             | 0.248             |
| Power Drift [dB]    | 0.07              | -0.01             |
| Power Scaling       | Disabled          | Disabled          |
| Scaling Factor [dB] |                   |                   |
| TSL Correction      | No correction     | No correction     |
| M2/M1 [%]           |                   | 62.6              |
| Dist 3dB Peak [mm]  |                   | 11.5              |

Warning(s) / Error(s)

| Details    | Area Scan | Zoom Scan |
|------------|-----------|-----------|
| Warning(s) |           |           |
| Error(s)   |           |           |

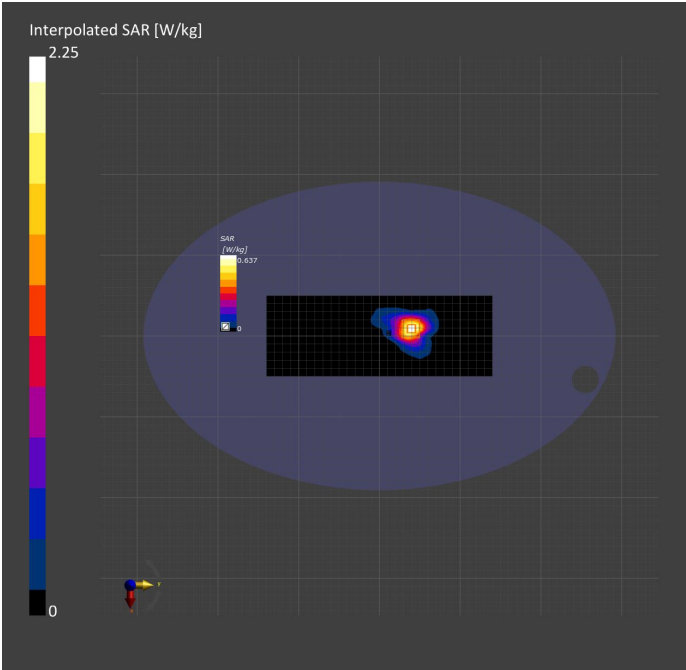

5G WiFi 11A 5580MHz Back Surface ant2 5mm

Measurement Report for Device, BACK, U-NII-2C < 5.65 GHz, UID 10317 AAD, Channel 116 (5580.0MHz)

Device under Test Properties

| Model, Manufacturer | Dimensions [mm]     | IMEI | DUT Type |
|---------------------|---------------------|------|----------|
| Device,             | 240.0 x 70.0 x 10.0 |      | Phone    |

Exposure Conditions

| Phantom   | Section, TSL | Position, Distance [mm] | Test Band           | Group, UID      | Frequency [MHz], Channel Number | Conversion Factor | TSL Conductivity [S/m] | TSL Permittivity |
|-----------|--------------|-------------------------|---------------------|-----------------|---------------------------------|-------------------|------------------------|------------------|
| Flat, HSL |              | BACK, 5.00              | U-NII-2C < 5.65 GHz | WLAN, 10317-AAD | 5580.0, 116                     | 5.08              | 4.95                   | 36.0             |

Hardware Setup

| Phantom                            | TSL, Measured Date               | Probe, Calibration Date           | DAE, Calibration Date   |
|------------------------------------|----------------------------------|-----------------------------------|-------------------------|
| ELI V8.0 (20deg probe tilt) - 2178 | HSL600-10000 Charge: 2022-Aug-31 | xxxx, EX3DV4 - SN7733, 2022-08-02 | DAE4 Sn1739, 2022-07-29 |

Scan Setup


|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 100.0 x 280.0 | 22.0 x 22.0 x 22.0 |
| Grid Steps [mm]     | 10.0 x 10.0   | 4.0 x 4.0 x 1.4    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| Grading Ratio       | 1.5           | 1.4                |
| MAIA                | Y             | Y                  |
| Surface Detection   | VMS + 6p      | VMS + 6p           |
| Scan Method         | Measured      | Measured           |

Measurement Results

|                     | Area Scan         | Zoom Scan         |
|---------------------|-------------------|-------------------|
| Date                | 2022-09-02, 15:41 | 2022-09-02, 15:49 |
| psSAR1g [W/kg]      | 0.615             | 0.623             |
| psSAR10g [W/kg]     | 0.232             | 0.230             |
| Power Drift [dB]    | -0.01             | -0.00             |
| Power Scaling       | Disabled          | Disabled          |
| Scaling Factor [dB] |                   |                   |
| TSL Correction      | No correction     | No correction     |
| M2/M1 [%]           |                   | 59.8              |
| Dist 3dB Peak [mm]  |                   | 11.3              |

Warning(s) / Error(s)

| Details    | Area Scan | Zoom Scan |
|------------|-----------|-----------|
| Warning(s) |           |           |
| Error(s)   |           |           |

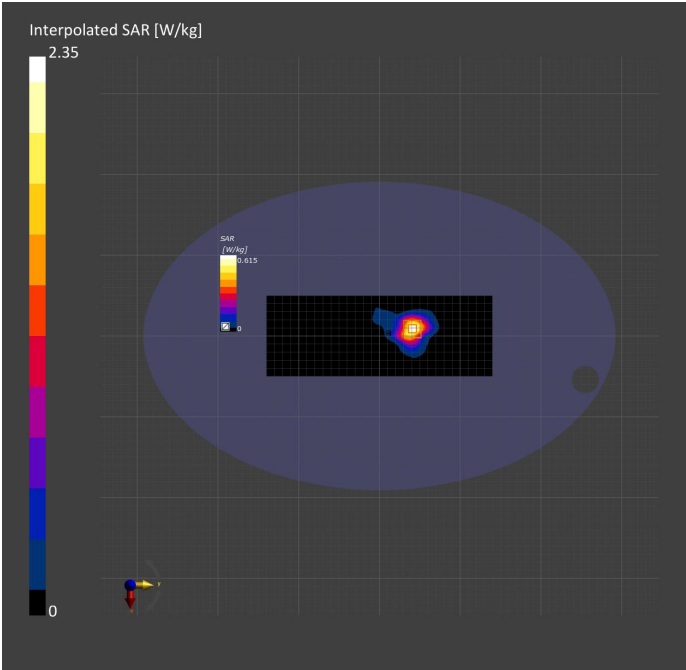

5G WiFi 11N40 5755MHz Back Surface ant2 5mm

Measurement Report for Device, BACK, U-NII-2C, U-NII-3, UID 10425 AAC, Channel 151 (5755.0MHz)

Device under Test Properties

| Model, Manufacturer | Dimensions [mm]     | IMEI | DUT Type |
|---------------------|---------------------|------|----------|
| Device,             | 240.0 x 70.0 x 10.0 |      | Phone    |

Exposure Conditions

| Phantom   | Section, TSL | Position, Distance [mm] | Test Band         | Group, UID      | Frequency [MHz], Channel Number | Conversion Factor | TSL Conductivity [S/m] | TSL Permittivity |
|-----------|--------------|-------------------------|-------------------|-----------------|---------------------------------|-------------------|------------------------|------------------|
| Flat, HSL |              | BACK, 5.00              | U-NII-2C, U-NII-3 | WLAN, 10425-AAC | 5755.0, 151                     | 5.16              | 5.16                   | 36.1             |

Hardware Setup

| Phantom                            | TSL, Measured Date          | Probe, Calibration Date                   | DAE, Calibration Date   |
|------------------------------------|-----------------------------|-------------------------------------------|-------------------------|
| ELI V8.0 (20deg probe tilt) - 2178 | HSL600-10000<br>2022-Aug-31 | Charge: xxxx, EX3DV4 - SN7733, 2022-08-02 | DAE4 Sn1739, 2022-07-29 |

Scan Setup


|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 100.0 x 280.0 | 22.0 x 22.0 x 22.0 |
| Grid Steps [mm]     | 10.0 x 10.0   | 4.0 x 4.0 x 1.4    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| Grading Ratio       | 1.5           | 1.4                |
| MAIA                | Y             | Y                  |
| Surface Detection   | VMS + 6p      | VMS + 6p           |
| Scan Method         | Measured      | Measured           |

Measurement Results

|                     | Area Scan         | Zoom Scan         |
|---------------------|-------------------|-------------------|
| Date                | 2022-09-07, 10:52 | 2022-09-07, 11:00 |
| psSAR1g [W/kg]      | 0.224             | 0.230             |
| psSAR10g [W/kg]     | 0.083             | 0.080             |
| Power Drift [dB]    | 0.07              | -0.04             |
| Power Scaling       | Disabled          | Disabled          |
| Scaling Factor [dB] |                   |                   |
| TSL Correction      | No correction     | No correction     |
| M2/M1 [%]           |                   | 56.6              |
| Dist 3dB Peak [mm]  |                   | 10.2              |

Warning(s) / Error(s)

| Details    | Area Scan | Zoom Scan |
|------------|-----------|-----------|
| Warning(s) |           |           |
| Error(s)   |           |           |

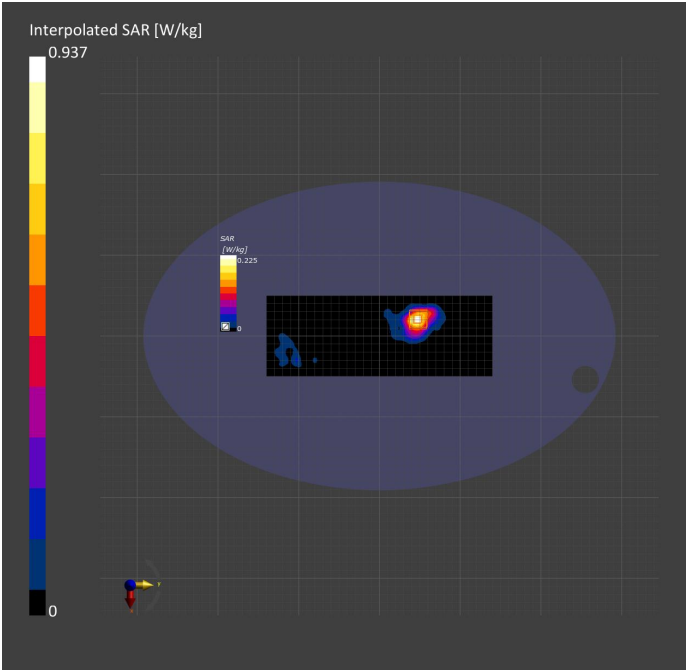

BT 3DH5 2480MHz Front Surface ant2 5mm

Measurement Report for Device, FRONT, ISM 2.4 GHz Band, UID 10038 CAA, Channel 78 (2480.0MHz)

Device under Test Properties

| Model, Manufacturer | Dimensions [mm]     | IMEI | DUT Type |
|---------------------|---------------------|------|----------|
| Device,             | 240.0 x 70.0 x 10.0 |      | Phone    |

Exposure Conditions

| Phantom   | Section, TSL | Position, Distance [mm] | Test | Band             | Group, UID           | Frequency [MHz], Channel Number | Conversion Factor | TSL  | Conductivity [S/m] | TSL Permittivity |
|-----------|--------------|-------------------------|------|------------------|----------------------|---------------------------------|-------------------|------|--------------------|------------------|
| Flat, HSL |              | FRONT, 5.00             |      | ISM 2.4 GHz Band | Bluetooth, 10038-CAA | 2480.0, 78                      | 8.18              | 1.87 |                    | 39.4             |

Hardware Setup

| Phantom                            | TSL, Measured Date                     | Probe, Calibration Date     | DAE, Calibration Date   |
|------------------------------------|----------------------------------------|-----------------------------|-------------------------|
| ELI V8.0 (20deg probe tilt) - 2178 | HSL600-10000 Charge: xxxx, 2022-Aug-31 | EX3DV4 - SN7733, 2022-08-02 | DAE4 Sn1739, 2022-07-29 |

Scan Setup

|                     | Area Scan     | Zoom Scan          |
|---------------------|---------------|--------------------|
| Grid Extents [mm]   | 100.0 x 280.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 10.0 x 10.0   | 5.0 x 5.0 x 1.5    |
| Sensor Surface [mm] | 3.0           | 1.4                |
| Graded Grid         | Yes           | Yes                |
| Grading Ratio       | 1.5           | 1.5                |
| MAIA                | Y             | Y                  |
| Surface Detection   | VMS + 6p      | VMS + 6p           |
| Scan Method         | Measured      | Measured           |

Measurement Results

|                     | Area Scan         | Zoom Scan         |
|---------------------|-------------------|-------------------|
| Date                | 2022-09-02, 17:25 | 2022-09-02, 17:33 |
| psSAR1g [W/kg]      | 0.011             | 0.011             |
| psSAR10g [W/kg]     | 0.004             | 0.003             |
| Power Drift [dB]    | 0.11              | 0.01              |
| Power Scaling       | Disabled          | Disabled          |
| Scaling Factor [dB] |                   |                   |
| TSL Correction      | No correction     | No correction     |
| M2/M1 [%]           |                   | 89.2              |
| Dist 3dB Peak [mm]  |                   | > 15.0            |

Warning(s) / Error(s)

| Details    | Area Scan | Zoom Scan                              |
|------------|-----------|----------------------------------------|
| Warning(s) |           | Power drift exceeds warning threshold. |
| Error(s)   |           |                                        |

