

BT1016项目天线调试报告

BT1016 Antenna test report

Antenna Type: **PCB Antenna**

Antenna model: **BT1016**

PCB manufacturer: Meizhou Shengfei Electronic Co.,LTD

Address:No. 2-2 plant in Meizhou Qingtai Stationery Co., Ltd., AD13 District, Dongsheng Industrial Park, Meijiang District, Meizhou City, Guangdong Province.

Released Date	Version	Record	Tester
December.18th, 2024	V1		Yu Zhou
January.20th, 2025	V2		Yu Zhou

Contents

Revised History	Page3
Requirement of Antenna Design and Measurement	Page4
Test Setup for Radiation Pattern Measurement	Page5
Antenna Placement & Solution.....	Page6
Antenna size	Page7
Microphone antenna matching circuit	Page8
VSWR Results/Smith chart	Page9
3D Radiation Pattern Results	Page10
2D Radiation Pattern Results	Page11
Results Summary (peak gain , efficiency)	Page12

Requirements of Antenna Design and Measuremen


Requirements of Antenna Design(From Customer Demand)

RF Function	Number of ANT	Frequency Band	Remark
ANT	1	Bluetooth	2400-2485MHz

Requirements of Measurement

Test Item	Specification (Free Space)	Remark
VSWR	VSWR<2.0	
Directional patten	/	
Antenna efficiency	efficiency>40% (PCB Antenna)	
Antenna Isolation	/	
OTA Performance	/	


Test Setup for Radiation Pattern Measurement

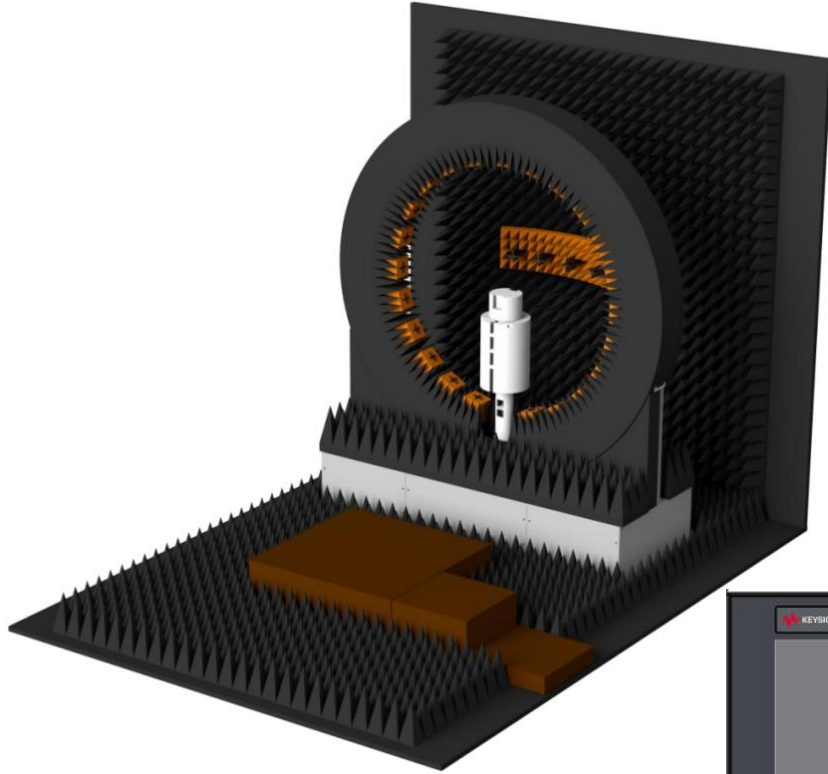

QUIPMENT	BRAND	MODULE TYPE
Network Analyzer	KEYSIGHT	E5071C 9k~8.5G
Signal Generator	R&S	CMW 500
Microwave anechoic chamber	XH-IOE	ATS-300




Antenna Placement & Solution (天线位置&接地处理)

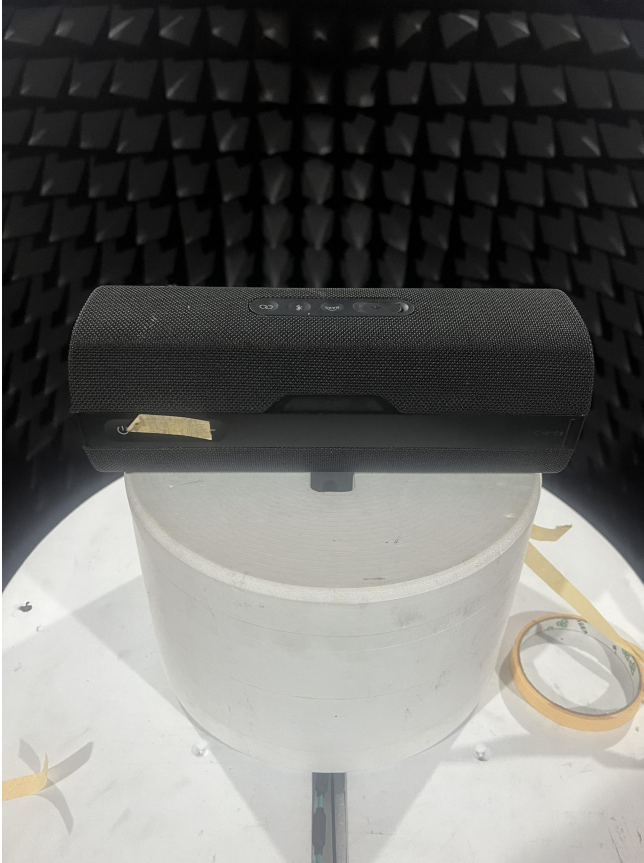

Product picture




Product internal picture

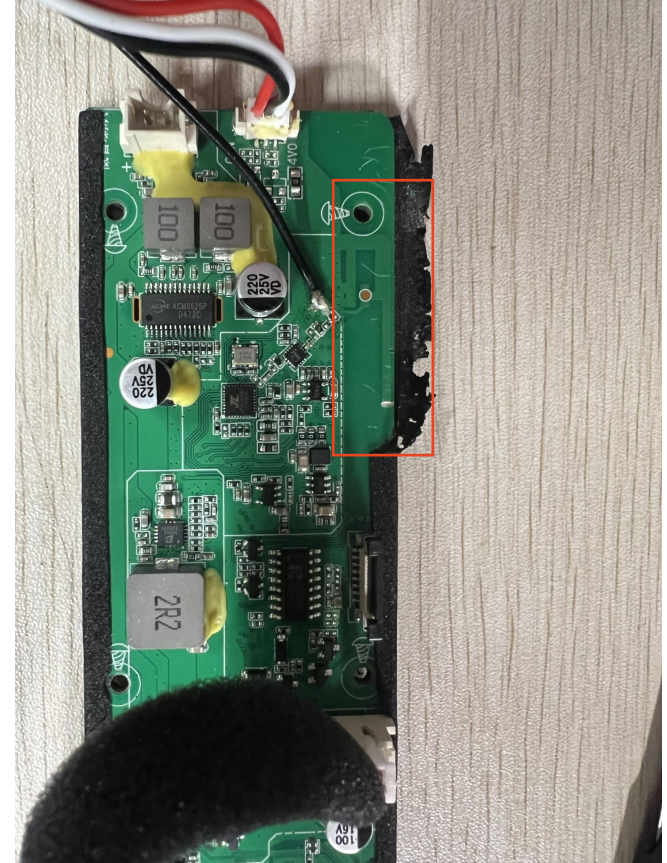


Antenna close-up

Antenna size (Outline drawing)

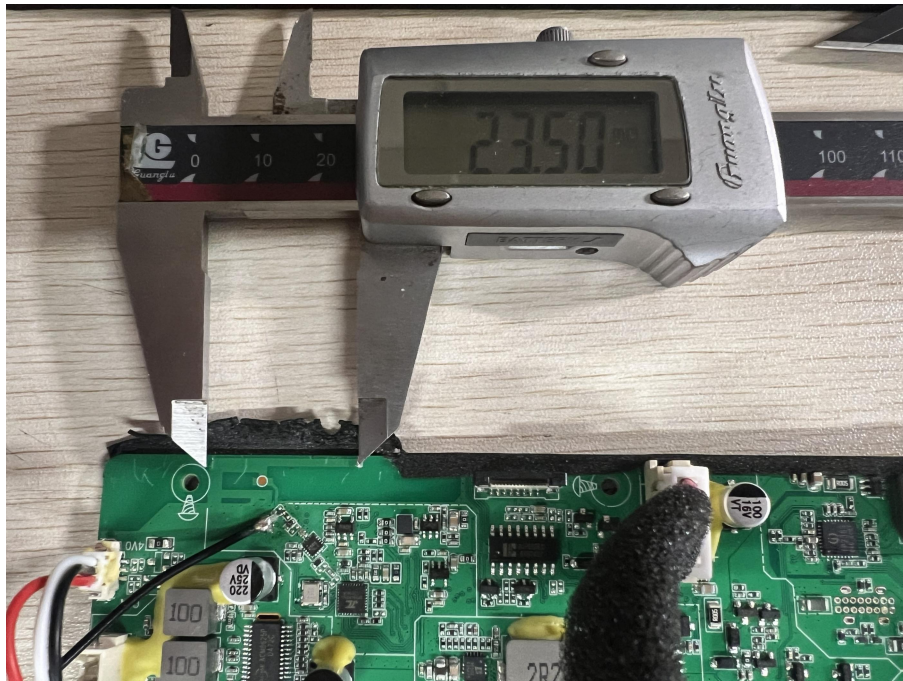

Size=23.5mm*7.1mm

antenna matching circuit

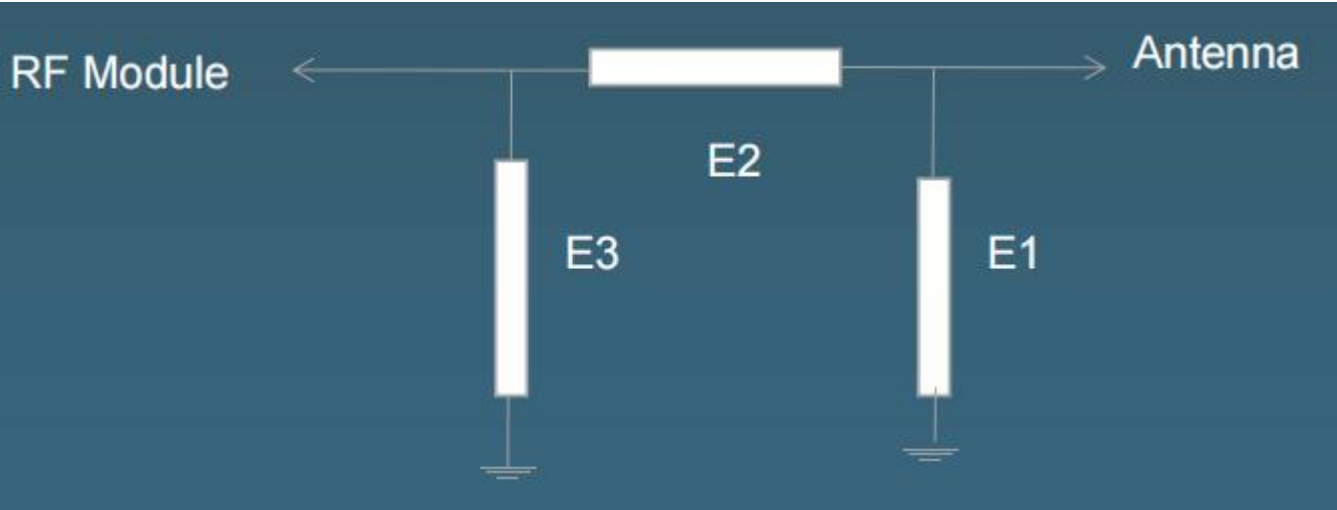

Any changes:


No change

Modified




√

Element	Value
E1(0402)	
E2(0402)	
E3(0402)	




VSWR Results/Smith chart

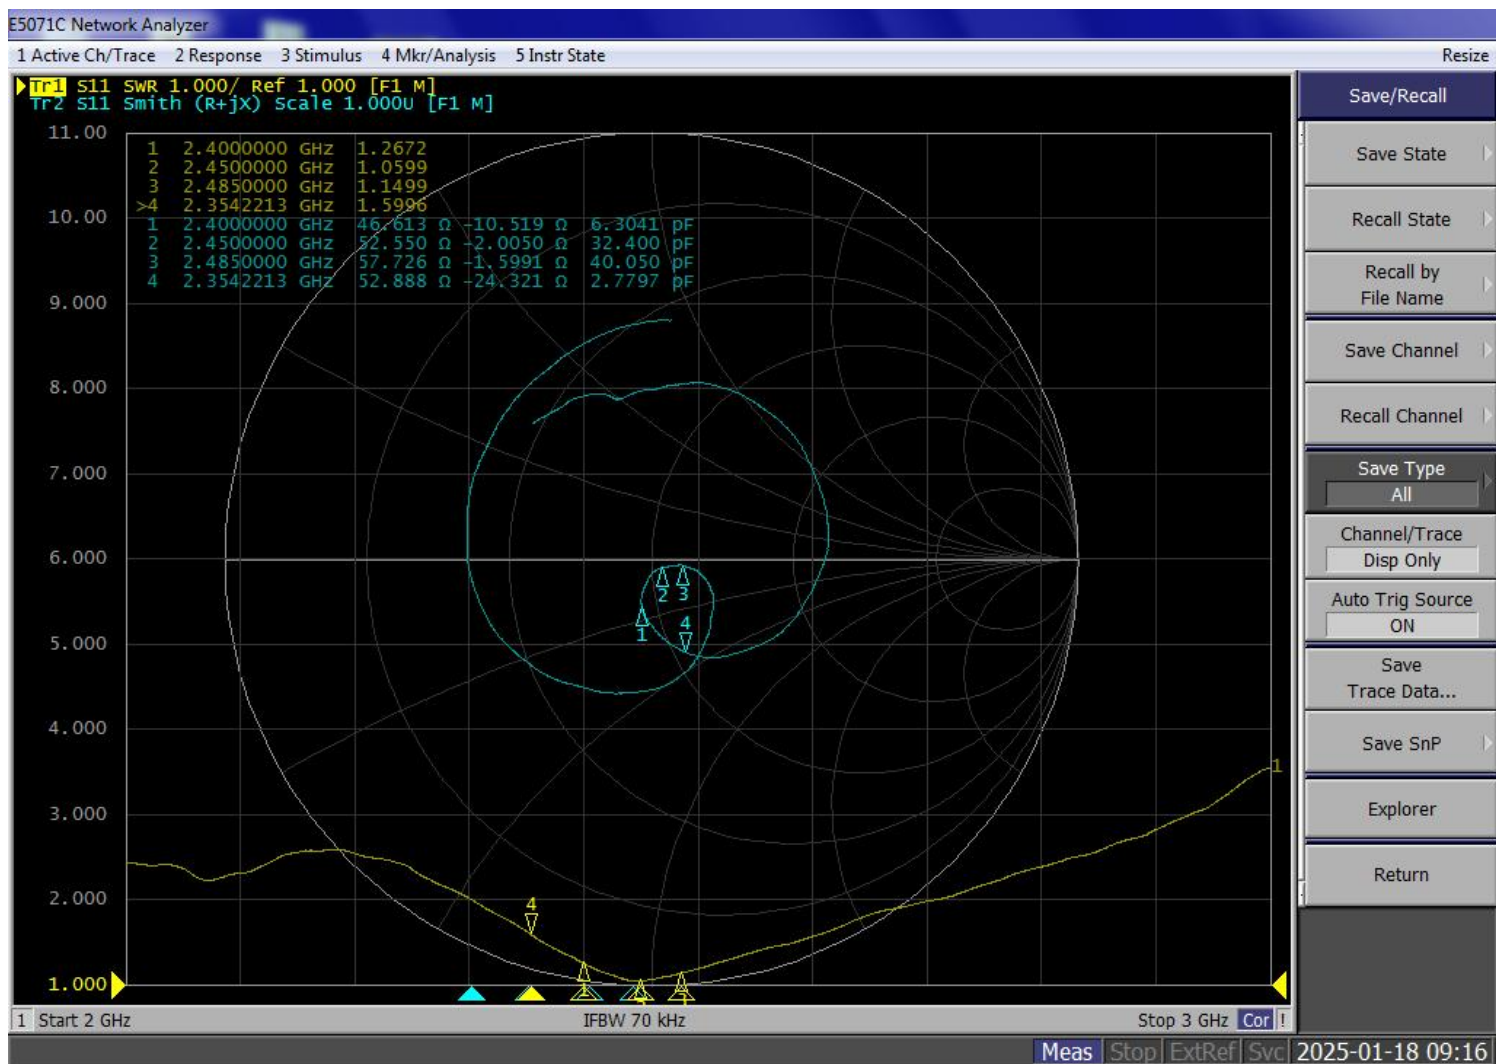

3D Radiation Pattern Results (unit: dBi)

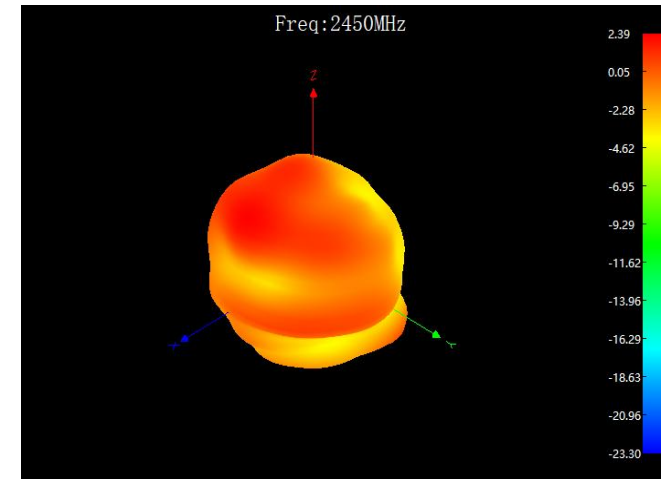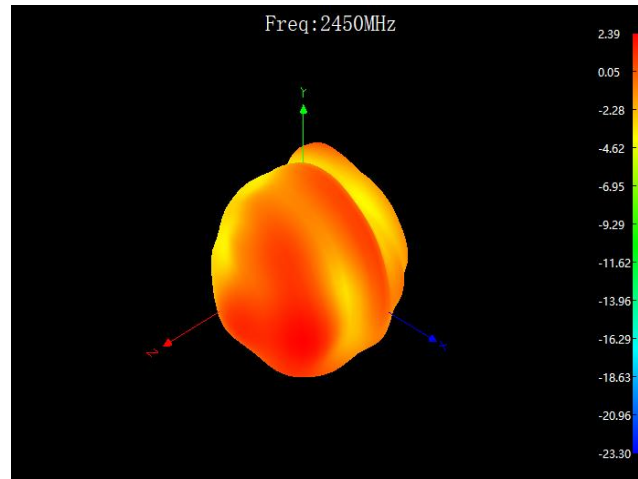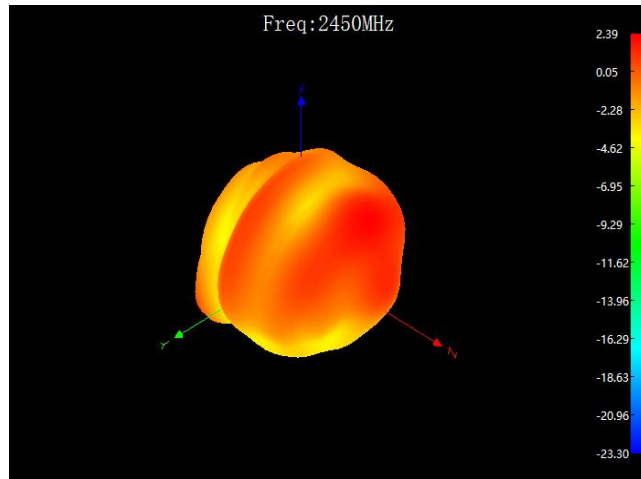

2D Radiation Pattern Results (unit: dB)

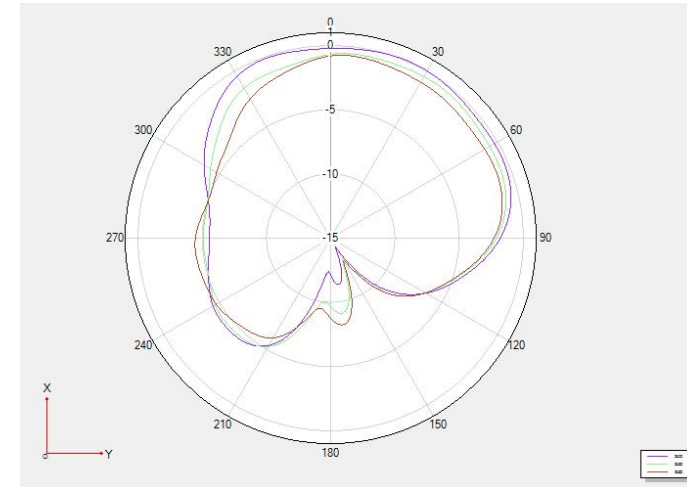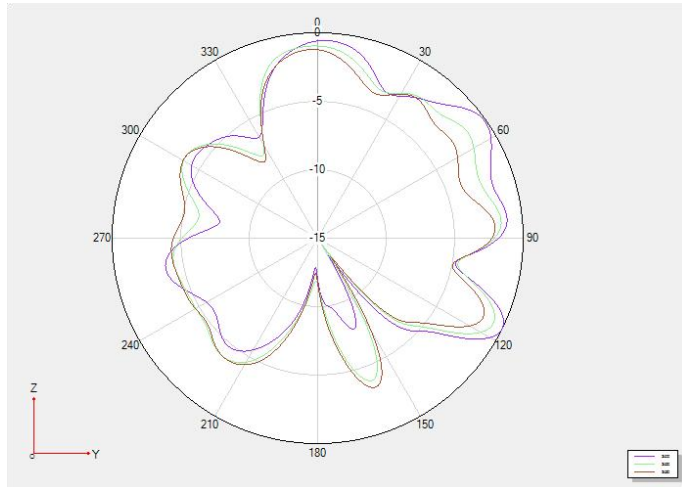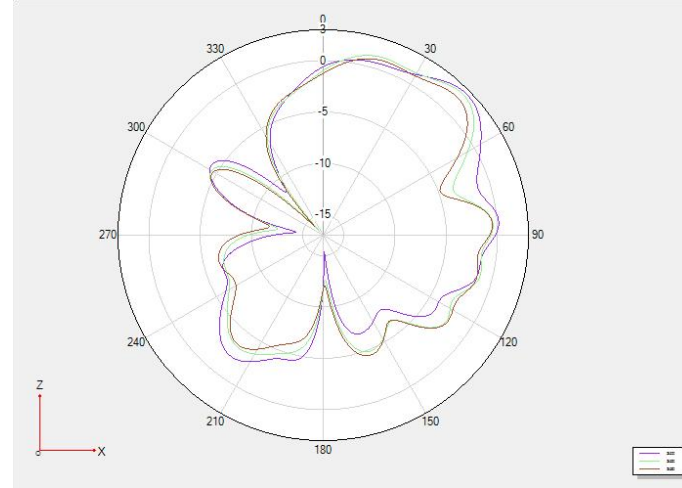

Results Summary-Peak Gain &Efficiency

Frequency/Mhz	Efficiency / dB	Efficiency / %	MaxGain/dBi
2400	-3.17	48.19	2.69
2410	-3.14	48.53	2.73
2420	-2.82	52.24	2.64
2430	-2.86	51.76	2.58
2440	-2.94	50.82	2.13
2450	-2.86	51.76	2.39
2460	-2.89	51.4	2.08
2470	-3.05	49.55	2.1
2480	-3.1	48.98	1.74
2490	-3	50.12	1.99
2500	-3.09	49.09	1.72

Conclusion (结论)

- Average efficiency 50.2%, Meet preset standards.

ANT Specification:

Item		
Max gain	2.73dBi	
Polarization	Linear—Polarized Antenna	
Impedance	50 Ω	
Antenna Size	23.5mm*7.1mm	
Antenna Type	PCB Antenna	

重要说明 NOTICE



1

请贵司注意报告中的匹配是否更改、环境处理是否可行；这直接影响天线性能，若有异议请及时与本司联系；

Please pay attention to whether the matching in the report has changed and whether the environmental treatment is feasible; This will directly affect the antenna performance, if you have any objections, please contact us in time;

2

若贵司机器有更换物料、更新软件、环处理变更等，须及时提供最新状态机器来我司验证；

If your driver has replacement materials, updated software, environmental processing changes, etc., you must provide the latest status machine to our company for verification in time

3

若贵公司机器需送第三方验证或送检，请最好提供送测机器来我司测试验证OK后方可送测（因为主板、环境处理、天线组装等一致性会影响天线性偏差）

If your company's machine needs to be sent to a third party for verification or inspection, it is best to provide the test machine to our company to test and verify OK before sending it for testing (because the consistency of the motherboard, environmental treatment, antenna assembly and so on will affect the antenna deviation)