

FCC Test Report

(PART 90S)

Report No.: RF181126C15-3

FCC ID: N7NHL78

Test Model: HL7800

Received Date: Nov. 26, 2018

Test Date: Jul. 03 ~ Jul. 06, 2018 (Cat-M1)
Dec. 06, 2018 ~ May 17, 2019 (NB-IoT)

Issued Date: May 30, 2019

Applicant: Sierra Wireless Inc.

Address: 13811 Wireless Way, Richmond, BC, Canada V6V3A4

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan
(R.O.C)

Test Location: No. 19, Hwa Ya 2nd Rd, Wen Hwa Vil, Kwei Shan Dist., Taoyuan City
33383, Taiwan (R.O.C)

FCC Registration /
Designation Number: 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	7
2.2 Test Site and Instruments	8
3 General Information	10
3.1 General Description of EUT	10
3.2 Configuration of System under Test	12
3.2.1 Description of Support Units	12
3.3 Test Mode Applicability and Tested Channel Detail	13
3.4 EUT Operating Conditions	17
3.5 General Description of Applied Standards	17
4 Test Types and Results	18
4.1 Output Power Measurement	18
4.1.1 Limits of Output Power Measurement	18
4.1.2 Test Procedures	18
4.1.3 Test Setup	19
4.1.4 Test Results	20
4.2 Modulation Characteristics Measurement	34
4.2.1 Limits of Modulation Characteristics	34
4.2.2 Test Setup	34
4.2.3 Test Procedure	34
4.2.4 Test Results	35
4.3 Frequency Stability Measurement	37
4.3.1 Limits of Frequency Stability Measurement	37
4.3.2 Test Procedure	37
4.3.3 Test Setup	37
4.3.4 Test Results	38
4.4 Occupied Bandwidth Measurement	46
4.4.1 Limits of Occupied Bandwidth Measurement	46
4.4.2 Test Procedure	46
4.4.3 Test Setup	46
4.4.4 Test Results	47
4.5 Emission Mask Measurement	52
4.5.1 Limits of Emission Mask Measurement	52
4.5.2 Test Setup	52
4.5.3 Test Procedures	52
4.5.4 Test Results	53
4.6 Band Edge Measurement	61
4.6.1 Limits of Band Edge Measurement	61
4.6.2 Test Setup	61
4.6.3 Test Procedures	61
4.6.4 Test Results	62
4.7 Conducted Spurious Emissions	68
4.7.1 Limits of Conducted Spurious Emissions Measurement	68
4.7.2 Test Setup	68
4.7.3 Test Procedure	68
4.7.4 Test Results	69
4.8 Radiated Emission Measurement	77
4.8.1 Limits of Radiated Emission Measurement	77
4.8.2 Test Procedure	77
4.8.3 Deviation from Test Standard	77
4.8.4 Test Setup	78

4.8.5 Test Results	79
5 Pictures of Test Arrangements.....	121
Appendix – Information of the Testing Laboratories	122

Release Control Record

Issue No.	Description	Date Issued
RF181126C15-3	Original Release	May 30, 2019

1 Certificate of Conformity

Product: Embedded Module

Brand: AirPrime

Test Model: HL7800

Sample Status: Engineering Sample

Applicant: Sierra Wireless Inc.

Test Date: Jul. 03 ~ Jul. 06, 2018 (Cat-M1)
Dec. 06, 2018 ~ May 17, 2019 (NB-IoT)

Standards: FCC Part 90, Subpart I, S, R
FCC Part 2

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Ivonne Wu, **Date:** May 30, 2019
Ivonne Wu / Supervisor

Approved by : Dylan Chiou, **Date:** May 30, 2019
Dylan Chiou / Project Engineer

2 Summary of Test Results

Applied Standard: FCC Part 90 & Part 2 (LTE 14)			
FCC Clause	Test Item	Result	Remarks
2.1046 90.542 (a)(7)	Effective Radiated Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	Pass	Meet the requirement.
2.1055 90.539 (e)	Frequency Stability	Pass	Meet the requirement of limit.
2.1049	Occupied Bandwidth	Pass	Meet the requirement of limit.
90.210 (n)	Emission Masks	Pass	Meet the requirement of limit.
2.1051 90.543 (e)(2)(3)	Band Edge Measurements	Pass	Meet the requirement of limit.
2.1051 90.543 (e)(3)	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 90.543 (e)(f)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -12.69 dB at 1586.00 MHz.

Applied Standard: FCC Part 90 & Part 2 (LTE 26)			
FCC Clause	Test Item	Result	Remarks
2.1046 90.635 (b)	Effective Radiated Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	Pass	Meet the requirement.
2.1055 90.213	Frequency Stability	Pass	Meet the requirement of limit.
2.1049 90.209	Occupied Bandwidth	Pass	Meet the requirement of limit.
2.1051 90.210	Emission Masks	Pass	Meet the requirement of limit.
2.1051 90.691	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 90.691	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -35.72 dB at 2457.00 MHz.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ($\pm$)
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	3.04 dB
	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

2.2 Test Site and Instruments

Test Date: Jul. 03 ~ Jul. 06, 2018

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent	N9038A	MY51210203	Mar. 16, 2018	Mar. 15, 2019
Spectrum Analyzer Agilent	N9010A	MY52220314	Nov. 24, 2017	Nov. 23, 2018
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Jan. 11, 2018	Jan. 10, 2019
Double Ridge Guide Horn Antenna EMCO	3115	5619	Nov. 30, 2017	Nov. 29, 2018
BILOG Antenna SCHWARZBECK	VULB 9168	9168-153	Dec. 06, 2017	Dec. 05, 2018
Radio Communication Analyzer Anritsu	MT8820C	6201300640	Aug. 16, 2017	Aug. 15, 2019
Preamplifier EMCI	EMC 012645	980115	Oct. 20, 2017	Oct. 19, 2018
Preamplifier EMCI	EMC 184045	980116	Oct. 20, 2017	Oct. 19, 2018
Preamplifier EMCI	EMC 330H	980112	Oct. 13, 2017	Oct. 12, 2018
Power Meter Anritsu	ML2495A	1012010	Aug. 15, 2017	Aug. 14, 2018
Power Sensor Anritsu	MA2411B	1315050	Aug. 15, 2017	Aug. 14, 2018
RF Coaxial Cable HUBER+SUHNNER	EMC104-SM-SM-800 0&3000	140811+170717	Oct. 20, 2017	Oct. 19, 2018
RF Coaxial Cable HUBER+SUHNNER	SUCOFLEX 104	EMC104-SM-SM- 1000(140807)	Oct. 20, 2017	Oct. 19, 2018
RF Coaxial Cable Worken	8D-FB	Cable-Ch10-01	Oct. 20, 2017	Oct. 19, 2018
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
DC Power Supply Topward	33010D	807748	Oct. 25, 2016	Oct. 24, 2018
STANDARD TEMPERATURE & HUMIDITY CHAMBER TERCHY	MHU-225AU	920842	Jun. 01, 2018	May 30, 2019

- Note: 1. The calibration interval of the above test instruments is 12 / 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 10.

Test Date: Dec. 06, 2018 ~ May 17, 2019

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent	N9038A	MY52260177	Aug. 20, 2018	Aug. 19, 2019
Spectrum Analyzer Keysight	N9010A	MY56070348	Sep. 06, 2018	Sep. 05, 2019
Spectrum Analyzer ROHDE & SCHWARZ	FSW26	102023	Oct. 11, 2018	Oct. 10, 2019
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-969	Nov. 25, 2018	Nov. 24, 2019
BILOG Antenna SCHWARZBECK	VULB9168	9168-472	Nov. 23, 2018	Nov. 22, 2019
Double Ridge Guide Horn Antenna EMCO	3115	5619	Nov. 25, 2018	Nov. 24, 2019
BILOG Antenna SCHWARZBECK	VULB 9168	9168-153	Nov. 23, 2018	Nov. 22, 2019
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 16, 2018	Apr. 15, 2019
			Apr. 15, 2019	Apr. 14, 2020
MXG Vector signal generator Agilent	N5182B	MY53050430	Nov. 19, 2018	Nov. 18, 2019
Preamplifier EMCI	EMC 012645	980115	Oct. 12, 2018	Oct. 11, 2019
Preamplifier EMCI	EMC 330H	980112	Oct. 12, 2018	Oct. 11, 2019
RF Coaxial Cable HUBER+SUHNNER	EMC104-SM-SM-800 0&3000	140811+170717	Oct. 12, 2018	Oct. 11, 2019
RF Coaxial Cable HUBER+SUHNNER	SUCOFLEX 104	EMC104-SM-SM-1 000(140807)	Oct. 12, 2018	Oct. 11, 2019
RF Coaxial Cable WOKEN	8D-FB	Cable-Ch10-01	Oct. 12, 2018	Oct. 11, 2019
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Radio Communication Analyzer ANRITSU	MT8821C	6201664741	Jul. 04, 2018	Jul. 03, 2019
Temperature & Humidity Chamber	GTH-120-40-CP-AR	MAA1306-019	Sep. 05, 2018	Sep. 04, 2019
DC Power Supply Topward	33010D	807748	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 / 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 10.

3 General Information

3.1 General Description of EUT

Product	Embedded Module		
Brand	AirPrime		
Test Model	HL7800		
Status of EUT	Engineering Sample		
Power Supply Rating	5.0 Vdc (host equipment)		
Modulation Type	Cat-M1	QPSK, 16QAM	
	NB-IoT	BPSK, QPSK	
Frequency Range	Cat-M1	LTE Band 14 (Channel Bandwidth: 5 MHz)	790.5 ~ 795.5 MHz
		LTE Band 14 (Channel Bandwidth: 10 MHz)	793 MHz
		LTE Band 26 (Channel Bandwidth: 1.4 MHz)	814.7 ~ 823.3 MHz
		LTE Band 26 (Channel Bandwidth: 3 MHz)	815.5 ~ 822.5 MHz
		LTE Band 26 (Channel Bandwidth: 5 MHz)	816.5 ~ 821.5 MHz
		LTE Band 26 (Channel Bandwidth: 10 MHz)	819 MHz
	NB-IoT	LTE Band 14	790.1 ~ 795.9 MHz
		LTE Band 26	814.1 ~ 823.9 MHz
Emission Designator	Cat-M1	LTE Band 14 (Channel Bandwidth: 5 MHz)	1M08G7D
		LTE Band 14 (Channel Bandwidth: 10 MHz)	1M09G7D
		LTE Band 26 (Channel Bandwidth: 1.4 MHz)	1M09G7D
		LTE Band 26 (Channel Bandwidth: 3 MHz)	1M08G7D
		LTE Band 26 (Channel Bandwidth: 5 MHz)	1M08G7D
		LTE Band 26 (Channel Bandwidth: 10 MHz)	1M09G7D
	NB-IoT	LTE Band 14	1K92G7D
		LTE Band 26	1K96G7D
Max. ERP Power	Cat-M1	LTE Band 14 (Channel Bandwidth: 5 MHz)	262.42 mW
		LTE Band 14 (Channel Bandwidth: 10 MHz)	229.09 mW
		LTE Band 26 (Channel Bandwidth: 1.4 MHz)	254.68 mW
		LTE Band 26 (Channel Bandwidth: 3 MHz)	240.44 mW
		LTE Band 26 (Channel Bandwidth: 5 MHz)	228.03 mW
		LTE Band 26 (Channel Bandwidth: 10 MHz)	199.53 mW
	NB-IoT	LTE Band 14	146.89 mW (BPSK) 177.83 mW (QPSK)
		LTE Band 26	139.96 mW (BPSK) 169.82 mW (QPSK)
Antenna Type	Dipole Antenna with 2 dBi gain		
Accessory Device	Refer to Note as below		
Data Cable Supplied	Refer to Note as below		


Note:

1. This report is issued as a supplementary report to BV CPS report no.: RF180425C07A-3. The difference compared with original report is enabled NB-IoT function via software (as listed below). All the test items for NB-IoT were tested. For Cat-M1, only the worst case of radiated spurious emissions for LTE B4/B14 and effective radiated power for LTE B12/B25 in the original report were verified, and the other test data from the original report are kept in this report.

Report No.	FCC ID	Model	Difference
RF180425C07A-3	N7NHL78M	HL7800-M	Support Cat-M1
RF181126C15-3	N7NHL78	HL7800	Support Cat-M1 and NB-IoT

2. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Configuration of System under Test

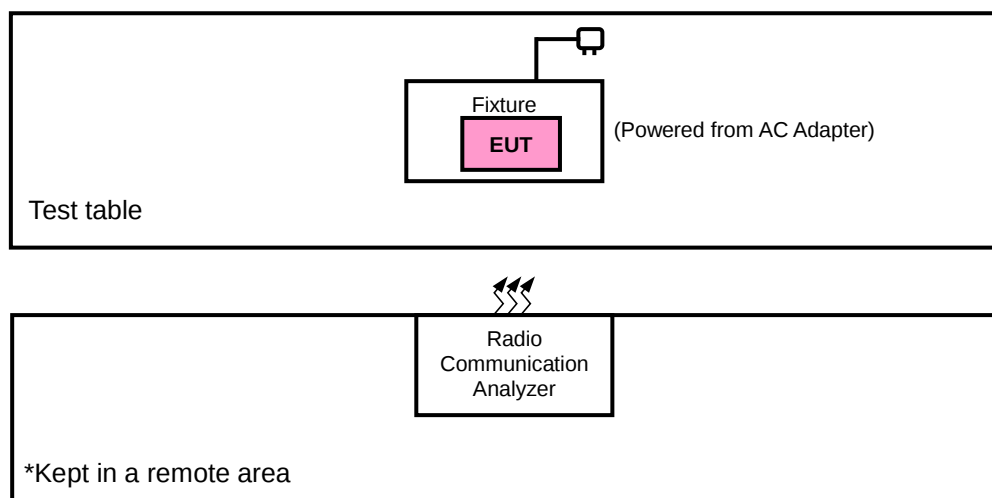

3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1.	Adapter	N/A	N/A	N/A	N/A

No.	Signal Cable Description Of The Above Support Units
1.	N/A

Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item 1 was provided by client.

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, and antenna ports

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	ERP	Radiated Emission
LTE Band 14	X-plane	Z-axis (Cat-M1) X-axis (NB-IoT)
LTE Band 26	X-plane (Cat-M1) Z-plane (NB-IoT)	Z-axis (Cat-M1) X-axis (NB-IoT)

Cat-M1

LTE Band 14

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	ERP	23305 to 23355	23305, 23330, 23355	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23330	23330	10 MHz	QPSK, 16QAM	1 RB / 24 RB Offset
-	Modulation characteristics	23305 to 23355	23330	5 MHz	QPSK, 16QAM	5 RB / 0 RB Offset
-	Frequency Stability	23305 to 23355	23305, 23330, 23355	5 MHz	QPSK	1 RB / 0 RB Offset
		23330	23330	10 MHz	QPSK	1 RB / 24 RB Offset
-	Occupied Bandwidth	23305 to 23355	23305, 23330, 23355	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		23330	23330	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
-	Peak to Average Ratio	23305 to 23355	23305, 23330, 23355	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23330	23330	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	Band Edge	23305 to 23355	23305	5 MHz	QPSK	1 RB / 0 RB Offset
						25 RB / 0 RB Offset
			23355	5 MHz	QPSK	1 RB / 24 RB Offset
						25 RB / 0 RB Offset
		23330	23330	10 MHz	QPSK	1 RB / 0 RB Offset
						50 RB / 0 RB Offset
-	Conducted Emission	23305 to 23355	23305, 23330, 23355	5 MHz	QPSK	1 RB / 0 RB Offset
		23330	23330	10 MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission	23330	23330	10 MHz	QPSK	1 RB / 24 RB Offset
						1 RB / 50 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

LTE Band 26

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	ERP	26697 to 26783	26697, 26740, 26783	1.4 MHz	QPSK, 16QAM	1 RB / 2 RB Offset
		26705 to 26775	26705, 26740, 26775	3 MHz	QPSK, 16QAM	1 RB / 7 RB Offset
		26715 to 26765	26715, 26740, 26765	5 MHz	QPSK, 16QAM	1 RB / 12 RB Offset
		26740	26740	10 MHz	QPSK, 16QAM	1 RB / 49 RB Offset
-	Modulation characteristics	26715 to 26765	26740	5 MHz	QPSK, 16QAM	5 RB / 0 RB Offset
-	Frequency Stability	26697 to 26783	26697, 26783	1.4 MHz	QPSK	1 RB / 2 RB Offset
		26705 to 26775	26705, 26775	3 MHz	QPSK	1 RB / 7 RB Offset
		26715 to 26765	26715, 26765	5 MHz	QPSK	1 RB / 12 RB Offset
		26740	26740	10 MHz	QPSK	1 RB / 49 RB Offset
-	Occupied Bandwidth	26697 to 26783	26697, 26740, 26783	1.4 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		26705 to 26775	26705, 26740, 26775	3 MHz	QPSK, 16QAM	15 RB / 0 RB Offset
		26715 to 26765	26715, 26740, 26765	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		26740	26740	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
-	Emission Mask	26697 to 26783	26697, 26740, 26783	1.4 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		26705 to 26775	26705, 26740, 26775	3 MHz	QPSK, 16QAM	15 RB / 0 RB Offset
		26715 to 26765	26715, 26740, 26765	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		26740	26740	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
-	Conducted Emission	26697 to 26783	26697, 26740, 26783	1.4 MHz	QPSK	1 RB / 0 RB Offset
		26705 to 26775	26705, 26740, 26775	3 MHz	QPSK	1 RB / 0 RB Offset
		26715 to 26765	26715, 26740, 26765	5 MHz	QPSK	1 RB / 0 RB Offset
		26740	26740	10 MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission	26740	26740	10 MHz	QPSK	1 RB / 49 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

NB-IoT

LTE Band 14

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Sub-carrier Bandwidth	Modulation	N _{tones}
-	ERP	23301 to 23359	23301, 23330, 23359	3.75 kHz	BPSK	1@0
				15 kHz	QPSK	3@3
-	Modulation Characteristics	20401 to 20649	23330	3.75 kHz	BPSK	1@0
				15 kHz	QPSK	1@0
-	Frequency Stability	23301 to 23359	23301, 23359	15 kHz	QPSK	3@3
-	Occupied Bandwidth	23301 to 23359	23301	3.75 kHz	BPSK	1@0
				15 kHz	QPSK	1@0
						3@3
						12@0
			23330	3.75 kHz	BPSK	1@0
				15 kHz	QPSK	1@0
						3@3
						12@0
			23359	3.75 kHz	BPSK	1@47
				15 kHz	QPSK	1@11
						3@3
						12@0
-	Band Edge	23301 to 23359	23301	3.75 kHz	BPSK	1@0
				15 kHz	QPSK	1@0
						3@3
						12@0
			23359	3.75 kHz	BPSK	1@47
				15 kHz	QPSK	1@11
						3@3
						12@0
-	Peak to Average Ratio	23301 to 23359	23330	3.75 kHz	BPSK	1@0
				15 kHz	QPSK	1@0
						3@3
-	Conducted Emission	23301 to 23359	23301, 23330, 23359	15 kHz	QPSK	3@3
-	Radiated Emission	23301 to 23359	23301, 23330, 23359	15 kHz	QPSK	3@3

Note:

1. Selection is tested with Stand-alone, In-band and Guard-band, the worst case was found in Stand-alone.
2. For radiated emission and conducted emission test, pre-tested BPSK, QPSK modulation type and found QPSK was the worst, therefore chosen for the final test.
3. The emission measurement was based on the worst maximum conducted power.

LTE Band 26

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Sub-carrier Bandwidth	Modulation	N _{tones}
-	ERP	26691 to 26789	26691, 26740, 26789	3.75 kHz	BPSK	1@0
				15 kHz	QPSK	3@3
-	Modulation Characteristics	26691 to 26789	26740	3.75 kHz	BPSK	1@0
				15 kHz	QPSK	1@0
-	Frequency Stability	26691 to 26789	26691, 26789	15 kHz	QPSK	3@3
-	Occupied Bandwidth	26691 to 26789	26691	3.75 kHz	BPSK	1@0
				15 kHz	QPSK	1@0
						3@3
						12@0
			26740	3.75 kHz	BPSK	1@0
				15 kHz	QPSK	1@0
						3@3
						12@0
			26789	3.75 kHz	BPSK	1@47
				15 kHz	QPSK	1@11
						3@3
						12@0
-	Band Edge	26691 to 26789	26691	3.75 kHz	BPSK	1@0
				15 kHz	QPSK	1@0
						3@3
						12@0
			26789	3.75 kHz	BPSK	1@47
				15 kHz	QPSK	1@11
						3@3
						12@0
-	Peak to Average Ratio	26691 to 26789	26740	3.75 kHz	BPSK	1@0
				15 kHz	QPSK	1@0
-	Conducted Emission	26691 to 26789	26691, 26740, 26789	15 kHz	QPSK	3@3
-	Radiated Emission	26691 to 26789	26691, 26740, 26789	15 kHz	QPSK	3@3

Note:

1. Selection is tested with Stand-alone, In-band and Guard-band, the worst case was found in Stand-alone.
2. For radiated emission and conducted emission test, pre-tested BPSK, QPSK modulation type and found QPSK was the worst, therefore chosen for the final test.
3. The emission measurement was based on the worst maximum conducted power.

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
ERP	25 deg. C, 65 % RH	12 Vdc	Jisyong Wang / Thomas Wei
Frequency Stability	25 deg. C, 65 % RH	12 Vdc	Getaz Yang
Occupied Bandwidth	25 deg. C, 65 % RH	12 Vdc	Getaz Yang
Peak to Average Ratio	25 deg. C, 65 % RH	12 Vdc	Getaz Yang
Emission Mask	25 deg. C, 65 % RH	12 Vdc	Getaz Yang
Band Edge	25 deg. C, 65 % RH	12 Vdc	Getaz Yang
Conducted Emission	25 deg. C, 65 % RH	12 Vdc	Getaz Yang
Radiated Emission	25 deg. C, 65 % RH	12 Vdc	Jisyong Wang / Thomas Wei

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 90

KDB 971168 D01 Power Meas License Digital Systems v03r01

KDB 971168 D02 Misc Rev Approv License Devices v02r01

ANSI/TIA/EIA-603-E 2016

ANSI 63.26-2015

Note: All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

LTE Band 14

Portable stations (hand-held devices) transmitting in the 758-768 MHz band and the 788-798 MHz band are limited to 3 watts ERP.

LTE Band 26

The maximum output power of the transmitter for mobile stations is 100 watts (20 dBw) ERP.

4.1.2 Test Procedures

EIRP / ERP Measurement:

- All measurements were done at low, middle and high operational frequency range. RBW and VBW is 10 MHz for LTE mode.
- Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step b. Record the power level of S.G.
- $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$. E.R.P power can be calculated from E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.P.R \text{ power} - 2.15 \text{ dB}$.


Conducted Power Measurement:

- The EUT was set up for the maximum power with LTE link data modulation and link up with simulator.
- Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.


4.1.3 Test Setup

EIRP / ERP Measurement:

<Radiated Emission below or equal 1 GHz>

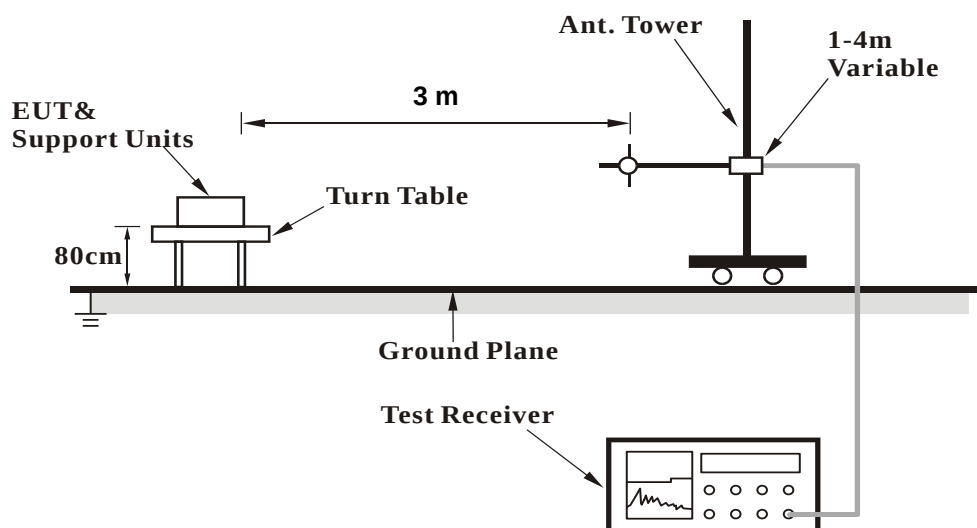


<Radiated Emission above 1 GHz>

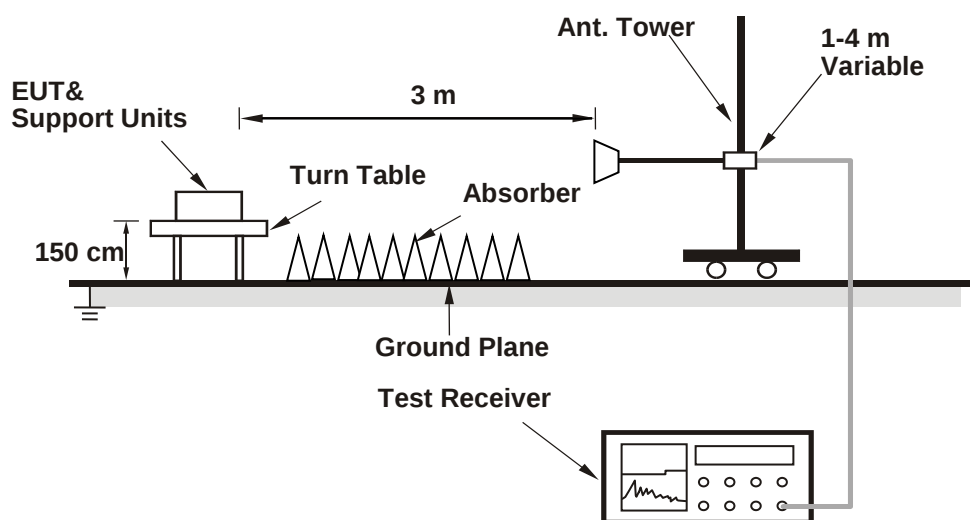

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Conducted Power Measurement:



4.1.4 Test Results

Conducted Output Power (dBm)

Cat-M1

LTE Band 14								
BW (MHz): 5		Frequency of Uplink (MHz)	Test Configuration Initial of Power				EUT	
Test Frequency ID	N _{UL}		Modulation	RB Size	RB Offset	Narrowband Index	Cell Power (dBm/15 kHz)	Power (dBm)
Low Range	23305	790.5	QPSK	1	0	0	-85	23.55
			QPSK	1	5	0	-85	23.54
			QPSK	1	0	1	-85	23.51
			QPSK	1	5	1	-85	23.48
			QPSK	1	0	3	-85	23.47
			QPSK	1	5	3	-85	23.46
			QPSK	3	0	0	-85	22.83
			QPSK	3	3	3	-85	22.59
			QPSK	6	0	0	-85	22.82
			QPSK	6	0	1	-85	22.84
			QPSK	6	0	3	-85	22.79
			16QAM	1	0	0	-85	22.83
			16QAM	1	5	0	-85	22.85
			16QAM	1	0	1	-85	22.91
			16QAM	1	5	1	-85	22.87
			16QAM	1	0	3	-85	22.84
			16QAM	1	5	3	-85	22.81
			16QAM	3	0	0	-85	22.45
			16QAM	3	3	3	-85	22.45
			16QAM	5	0	0	-85	21.36
			16QAM	5	0	1	-85	21.29
			16QAM	5	0	3	-85	21.17
Mid. Range	23330	793	QPSK	1	0	0	-85	23.48
			QPSK	1	5	0	-85	23.44
			QPSK	1	0	1	-85	23.45
			QPSK	1	5	1	-85	23.41
			QPSK	1	0	3	-85	23.43
			QPSK	1	5	3	-85	23.39
			QPSK	3	0	0	-85	22.76
			QPSK	3	3	3	-85	22.73
			QPSK	6	0	0	-85	22.79
			QPSK	6	0	1	-85	22.77
			QPSK	6	0	3	-85	22.69
			16QAM	1	0	0	-85	22.81
			16QAM	1	5	0	-85	22.78
			16QAM	1	0	1	-85	22.66
			16QAM	1	5	1	-85	22.68
			16QAM	1	0	3	-85	22.81
			16QAM	1	5	3	-85	22.77
			16QAM	3	0	0	-85	22.48
			16QAM	3	3	3	-85	22.33
			16QAM	5	0	0	-85	21.22
			16QAM	5	0	1	-85	21.24
			16QAM	5	0	3	-85	21.19

LTE Band 14								
BW (MHz): 5								
Test Frequency ID	N _{UL}	Frequency of Uplink (MHz)	Test Configuration Initial of Power				EUT	
			Modulation	RB Size	RB Offset	Narrowband Index	Cell Power (dBm/15 kHz)	Power (dBm)
High Range	23355	795.5	QPSK	1	0	0	-85	23.46
			QPSK	1	5	0	-85	23.48
			QPSK	1	0	1	-85	23.41
			QPSK	1	5	1	-85	23.44
			QPSK	1	0	3	-85	23.41
			QPSK	1	5	3	-85	23.39
			QPSK	3	0	0	-85	22.79
			QPSK	3	3	3	-85	22.75
			QPSK	6	0	0	-85	22.77
			QPSK	6	0	1	-85	22.79
			QPSK	6	0	3	-85	22.76
			16QAM	1	0	0	-85	22.82
			16QAM	1	5	0	-85	22.78
			16QAM	1	0	1	-85	22.87
			16QAM	1	5	1	-85	22.83
			16QAM	1	0	3	-85	22.69
			16QAM	1	5	3	-85	22.41
			16QAM	3	0	0	-85	22.39
			16QAM	3	3	3	-85	22.34
			16QAM	5	0	0	-85	21.36
			16QAM	5	0	1	-85	21.21
			16QAM	5	0	3	-85	21.22

LTE Band 14								
BW (MHz): 10								
Test Frequency ID	N _{UL}	Frequency of Uplink (MHz)	Test Configuration Initial of Power				EUT	
			Modulation	RB Size	RB Offset	Narrowband Index	Cell Power (dBm/15 kHz)	Power (dBm)
Mid. Range	23330	793	QPSK	1	0	0	-85	23.51
			QPSK	1	5	0	-85	23.38
			QPSK	1	0	3	-85	23.12
			QPSK	1	5	3	-85	23.39
			QPSK	1	0	7	-85	23.34
			QPSK	1	5	7	-85	23.45
			QPSK	4	0	0	-85	23.47
			QPSK	4	2	7	-85	23.33
			QPSK	6	0	0	-85	22.89
			QPSK	6	0	7	-85	22.61
			16QAM	1	0	0	-85	23.14
			16QAM	1	5	0	-85	23.25
			16QAM	1	0	3	-85	23.06
			16QAM	1	5	3	-85	23.22
			16QAM	1	0	7	-85	23.14
			16QAM	1	5	7	-85	23.33
			16QAM	4	2	0	-85	23.03
			16QAM	4	2	7	-85	23.27
			16QAM	6	0	0	-85	22.77
			16QAM	6	0	7	-85	22.56

LTE Band 26								
BW (MHz): 1.4								
Test Frequency ID	N _{UL}	Frequency of Uplink (MHz)	Test Configuration Initial of Power				EUT	
			Modulation	RB Size	RB Offset	Narrowband Index	Cell Power (dBm/15 kHz)	Power (dBm)
Low Range	26697	814.7	QPSK	1	0	0	-85	23.67
			QPSK	1	5	0	-85	23.62
			QPSK	3	3	0	-85	22.06
			QPSK	6	0	0	-85	21.45
			16QAM	1	0	0	-85	23.28
			16QAM	1	5	0	-85	23.18
			16QAM	3	0	0	-85	22.27
Mid. Range	26740	819	16QAM	5	0	0	-85	22.29
			QPSK	1	0	0	-85	23.55
			QPSK	1	5	0	-85	23.54
			QPSK	3	3	0	-85	21.97
			QPSK	6	0	0	-85	21.37
			16QAM	1	0	0	-85	23.13
			16QAM	1	5	0	-85	23.18
			16QAM	3	0	0	-85	22.27
High Range	26783	823.3	16QAM	5	0	0	-85	22.18
			QPSK	1	0	0	-85	23.61
			QPSK	1	5	0	-85	23.51
			QPSK	3	3	0	-85	22.18
			QPSK	6	0	0	-85	21.39
			16QAM	1	0	0	-85	23.14
			16QAM	1	5	0	-85	23.12
			16QAM	3	0	0	-85	22.27
			16QAM	5	0	0	-85	22.11

LTE Band 26								
BW (MHz): 3								
Test Frequency ID	N _{UL}	Frequency of Uplink (MHz)	Test Configuration Initial of Power				EUT	
			Modulation	RB Size	RB Offset	Narrowband Index	Cell Power (dBm/15 kHz)	Power (dBm)
Low Range	26705	815.5	QPSK	1	0	0	-85	23.16
			QPSK	1	5	0	-85	23.18
			QPSK	1	0	1	-85	23.39
			QPSK	1	5	1	-85	23.28
			QPSK	3	3	0	-85	22.9
			QPSK	3	3	1	-85	22.15
			QPSK	6	0	0	-85	21.47
			QPSK	6	0	1	-85	20.97
			16QAM	1	0	0	-85	23.34
			16QAM	1	5	0	-85	23.01
			16QAM	1	0	1	-85	23.13
			16QAM	1	5	1	-85	23.13
			16QAM	3	0	0	-85	22.37
			16QAM	3	3	1	-85	22.21
			16QAM	5	0	0	-85	22.01
			16QAM	5	0	1	-85	22.14
Mid. Range	26740	819	QPSK	1	0	0	-85	23.42
			QPSK	1	5	0	-85	23.46
			QPSK	1	0	1	-85	23.52
			QPSK	1	5	1	-85	23.33
			QPSK	3	3	0	-85	22.14
			QPSK	3	3	1	-85	22.17
			QPSK	6	0	0	-85	21.15
			QPSK	6	0	1	-85	20.87
			16QAM	1	0	0	-85	23.19
			16QAM	1	5	0	-85	23.16
			16QAM	1	0	1	-85	23.21
			16QAM	1	5	1	-85	23.05
			16QAM	3	0	0	-85	22.52
			16QAM	3	3	1	-85	22.16
			16QAM	5	0	0	-85	22.29
			16QAM	5	0	1	-85	22.03
High Range	26775	822.5	QPSK	1	0	0	-85	23.36
			QPSK	1	5	0	-85	23.45
			QPSK	1	0	1	-85	23.49
			QPSK	1	5	1	-85	23.36
			QPSK	3	3	0	-85	22.09
			QPSK	3	3	1	-85	22.11
			QPSK	6	0	0	-85	21.17
			QPSK	6	0	1	-85	20.91
			16QAM	1	0	0	-85	23.12
			16QAM	1	5	0	-85	23.09
			16QAM	1	0	1	-85	23.19
			16QAM	1	5	1	-85	23.07
			16QAM	3	0	0	-85	22.29
			16QAM	3	3	1	-85	22.13
			16QAM	5	0	0	-85	22.26
			16QAM	5	0	1	-85	21.93

LTE Band 26								
BW (MHz): 5								
Test Frequency ID	N _{UL}	Frequency of Uplink (MHz)	Test Configuration Initial of Power				EUT	
			Modulation	RB Size	RB Offset	Narrowband Index	Cell Power (dBm/15 kHz)	Power (dBm)
Low Range	26715	819	QPSK	1	0	0	-85	23.27
			QPSK	1	5	0	-85	23.37
			QPSK	1	0	1	-85	23.29
			QPSK	1	5	1	-85	23.24
			QPSK	1	0	3	-85	23.12
			QPSK	1	5	3	-85	23.16
			QPSK	3	0	0	-85	22.44
			QPSK	3	3	3	-85	22.21
			QPSK	6	0	0	-85	22.13
			QPSK	6	0	1	-85	22.34
			QPSK	6	0	3	-85	22.17
			16QAM	1	0	0	-85	23.28
			16QAM	1	5	0	-85	23.41
			16QAM	1	0	1	-85	23.31
			16QAM	1	5	1	-85	23.35
			16QAM	1	0	3	-85	23.26
			16QAM	1	5	3	-85	23.21
			16QAM	3	0	0	-85	22.37
			16QAM	3	3	3	-85	22.18
			16QAM	5	0	0	-85	22.29
			16QAM	5	0	1	-85	22.34
			16QAM	5	0	3	-85	22.24
Mid. Range	26740	819	QPSK	1	0	0	-85	23.57
			QPSK	1	5	0	-85	23.48
			QPSK	1	0	1	-85	23.33
			QPSK	1	5	1	-85	23.31
			QPSK	1	0	3	-85	23.25
			QPSK	1	5	3	-85	23.27
			QPSK	3	0	0	-85	22.87
			QPSK	3	3	3	-85	22.99
			QPSK	6	0	0	-85	22.58
			QPSK	6	0	1	-85	22.65
			QPSK	6	0	3	-85	22.33
			16QAM	1	0	0	-85	23.43
			16QAM	1	5	0	-85	23.42
			16QAM	1	0	1	-85	23.33
			16QAM	1	5	1	-85	23.42
			16QAM	1	0	3	-85	23.22
			16QAM	1	5	3	-85	23.19
			16QAM	3	0	0	-85	22.57
			16QAM	3	3	3	-85	22.46
			16QAM	5	0	0	-85	22.64
			16QAM	5	0	1	-85	22.67
			16QAM	5	0	3	-85	22.31

LTE Band 26								
BW (MHz): 5								
Test Frequency ID	N _{UL}	Frequency of Uplink (MHz)	Test Configuration Initial of Power				EUT	
			Modulation	RB Size	RB Offset	Narrowband Index	Cell Power (dBm/15 kHz)	Power (dBm)
High Range	26765	821.5	QPSK	1	0	0	-85	23.13
			QPSK	1	5	0	-85	23.01
			QPSK	1	0	1	-85	23.04
			QPSK	1	5	1	-85	23.11
			QPSK	1	0	3	-85	23.21
			QPSK	1	5	3	-85	23.18
			QPSK	3	0	0	-85	22.44
			QPSK	3	3	3	-85	22.39
			QPSK	6	0	0	-85	22.47
			QPSK	6	0	1	-85	22.45
			QPSK	6	0	3	-85	22.37
			16QAM	1	0	0	-85	23.53
			16QAM	1	5	0	-85	23.33
			16QAM	1	0	1	-85	23.34
			16QAM	1	5	1	-85	23.24
			16QAM	1	0	3	-85	23.16
			16QAM	1	5	3	-85	23.18
			16QAM	3	0	0	-85	22.25
			16QAM	3	3	3	-85	22.19
			16QAM	5	0	0	-85	22.31
			16QAM	5	0	1	-85	23.32
			16QAM	5	0	3	-85	23.25

LTE Band 26								
BW (MHz): 10								
Test Frequency ID	N _{UL}	Frequency of Uplink (MHz)	Test Configuration Initial of Power				EUT	
			Modulation	RB Size	RB Offset	Narrowband Index	Cell Power (dBm/15 kHz)	Power (dBm)
Mid. Range	819	8740	QPSK	1	0	0	-85	23.07
			QPSK	1	5	0	-85	23.13
			QPSK	1	0	3	-85	23.02
			QPSK	1	5	3	-85	23.27
			QPSK	1	0	7	-85	23.22
			QPSK	1	5	7	-85	23.24
			QPSK	4	0	0	-85	23.19
			QPSK	4	2	7	-85	23.64
			QPSK	6	0	0	-85	22.37
			QPSK	6	0	7	-85	22.72
			16QAM	1	0	0	-85	23.24
			16QAM	1	5	0	-85	23.12
			16QAM	1	0	3	-85	23.31
			16QAM	1	5	3	-85	23.14
			16QAM	1	0	7	-85	23.41
			16QAM	1	5	7	-85	23.55
			16QAM	4	2	0	-85	23.24
			16QAM	4	2	7	-85	23.41
			16QAM	5	0	0	-85	22.17
			16QAM	5	0	7	-85	22.61

NB-IoT

LTE Band 14							
Stand-alone							
N _{UL}	M _{UL}	Frequency of Uplink (MHz)	Test Configuration Initial of Power			EUT	
			Modulation	N _{tones}	Sub-carrier Spacing (kHz)	Cell Power (dBm/15 kHz)	Power (dBm)
23301	0	790.1	BPSK	1@0	3.75	-110	23.72
			QPSK	1@0	15	-110	23.65
			QPSK	3@3	15	-110	23.83
			QPSK	12@0	15	-110	21.26
23330	0	793	BPSK	1@0	3.75	-110	23.64
			BPSK	1@47	3.75	-110	23.58
			QPSK	1@0	15	-110	23.59
			QPSK	1@11	15	-110	23.74
			QPSK	3@3	15	-110	23.64
23359	0	795.9	QPSK	12@0	15	-110	23.52
			BPSK	1@47	3.75	-110	23.42
			QPSK	1@11	15	-110	23.57
			QPSK	3@3	15	-110	23.6
			QPSK	12@0	15	-110	23.61

LTE Band 14							
In-Band	BW (MHz): 5						
N _{UL}	M _{UL}	Frequency of Uplink (MHz)	Test Configuration Initial of Power			EUT	
			Modulation	N _{tones}	Sub-carrier Spacing (kHz)	Cell Power (dBm/15 kHz)	Power (dBm)
23307	0	790.7	BPSK	1@0	3.75	-110	23.76
			QPSK	1@0	15	-110	23.62
			QPSK	3@3	15	-110	23.58
			QPSK	12@0	15	-110	23.75
23321	0	792.1	BPSK	1@0	3.75	-110	23.7
			BPSK	1@47	3.75	-110	23.6
			QPSK	1@0	15	-110	23.56
			QPSK	1@11	15	-110	23.67
			QPSK	3@3	15	-110	23.42
23353	0	795.3	QPSK	12@0	15	-110	23.58
			BPSK	1@47	3.75	-110	23.56
			QPSK	1@11	15	-110	23.47
			QPSK	3@3	15	-110	23.53
			QPSK	12@0	15	-110	23.59

LTE Band 14							
In-Band	BW (MHz): 10	NB-IoT PRB: 30					
N _{UL}	M _{UL}	Frequency of Uplink (MHz)	Test Configuration Initial of Power			EUT	
			Modulation	N _{tones}	Sub-carrier Spacing (kHz)	Cell Power (dBm/15 kHz)	Power (dBm)
23360	-2	795.99	BPSK	1@0	3.75	-110	23.52
			BPSK	1@47	3.75	-110	23.48
			QPSK	1@0	15	-110	23.62
			QPSK	1@11	15	-110	23.54
			QPSK	3@3	15	-110	23.57
			QPSK	12@0	15	-110	23.61

LTE Band 14							
In-Band	BW (MHz): 10	NB-IoT PRB: 35	Test Configuration Initial of Power			EUT	
N _{UL}	M _{UL}	Frequency of Uplink (MHz)	Modulation	N _{tones}	Sub-carrier Spacing (kHz)	Cell Power (dBm/15 kHz)	Power (dBm)
23369	-2	796.89	BPSK	1@0	3.75	-110	23.62
			BPSK	1@47	3.75	-110	23.65
			QPSK	1@0	15	-110	23.52
			QPSK	1@11	15	-110	23.53
			QPSK	3@3	15	-110	23.47
			QPSK	12@0	15	-110	23.62

LTE Band 14							
Guard-Band	BW (MHz): 5						
N _{UL}	M _{UL}	Frequency of Uplink (MHz)	Test Configuration Initial of Power			EUT	
			Modulation	N _{tones}	Sub-carrier Spacing (kHz)	Cell Power (dBm/15 kHz)	Power (dBm)
23301	0	790.1	BPSK	1@0	3.75	-110	23.73
			QPSK	1@0	15	-110	23.64
			QPSK	3@3	15	-110	23.67
			QPSK	12@0	15	-110	23.81
23306	0	790.6	BPSK	1@0	3.75	-110	23.66
			BPSK	1@47	3.75	-110	23.72
			QPSK	1@0	15	-110	23.62
			QPSK	1@11	15	-110	23.57
			QPSK	3@3	15	-110	23.67
			QPSK	12@0	15	-110	23.8
23359	0	795.9	BPSK	1@47	3.75	-110	23.36
			QPSK	1@11	15	-110	23.23
			QPSK	3@3	15	-110	23.52
			QPSK	12@0	15	-110	23.43

LTE Band 26							
Stand-alone							
N _{UL}	M _{UL}	Frequency of Uplink (MHz)	Test Configuration Initial of Power			EUT	
			Modulation	N _{tones}	Sub-carrier Spacing (kHz)	Cell Power (dBm/15 kHz)	Power (dBm)
26691	0	814.1	BPSK	1@0	3.75	-110	16.15
			QPSK	1@0	15	-110	14.41
			QPSK	3@3	15	-110	23.15
			QPSK	12@0	15	-110	16.6
26740	0	819	BPSK	1@0	3.75	-110	23.02
			BPSK	1@47	3.75	-110	23.04
			QPSK	1@0	15	-110	23.1
			QPSK	1@11	15	-110	23.15
			QPSK	3@3	15	-110	23.28
26789	0	823.9	QPSK	12@0	15	-110	23.17
			BPSK	1@47	3.75	-110	16.47
			QPSK	1@11	15	-110	14.79
			QPSK	3@3	15	-110	23.21
			QPSK	12@0	15	-110	16.54

LTE Band 26							
In-Band	BW (MHz): 3						
N _{UL}	M _{UL}	Frequency of Uplink (MHz)	Test Configuration Initial of Power			EUT	
			Modulation	N _{tones}	Sub-carrier Spacing (kHz)	Cell Power (dBm/15 kHz)	Power (dBm)
26696	0	814.6	BPSK	1@0	3.75	-110	22.97
			QPSK	1@0	15	-110	22.98
			QPSK	3@3	15	-110	23.01
			QPSK	12@0	15	-110	22.93
26731	0	818.1	BPSK	1@0	3.75	-110	23.01
			BPSK	1@47	3.75	-110	23.02
			QPSK	1@0	15	-110	23.01
			QPSK	1@11	15	-110	23.01
			QPSK	3@3	15	-110	23.02
26784	0	823.4	QPSK	12@0	15	-110	22.98
			BPSK	1@47	3.75	-110	23.09
			QPSK	1@11	15	-110	23.02
			QPSK	3@3	15	-110	23.05
			QPSK	12@0	15	-110	23.01

LTE Band 26							
In-Band	BW (MHz): 10	NB-IoT PRB: 30					
N _{UL}	M _{UL}	Frequency of Uplink (MHz)	Test Configuration Initial of Power			EUT	
			Modulation	N _{tones}	Sub-carrier Spacing (kHz)	Cell Power (dBm/15 kHz)	Power (dBm)
26750	-2	819.99	BPSK	1@0	3.75	-110	23
			BPSK	1@47	3.75	-110	22.93
			QPSK	1@0	15	-110	22.91
			QPSK	1@11	15	-110	22.95
			QPSK	3@3	15	-110	23.02
			QPSK	12@0	15	-110	23.01

LTE Band 26							
In-Band	BW (MHz): 10	NB-IoT PRB: 35	Test Configuration Initial of Power			EUT	
N _{UL}	M _{UL}	Frequency of Uplink (MHz)	Modulation	N _{tones}	Sub-carrier Spacing (kHz)	Cell Power (dBm/15 kHz)	Power (dBm)
26759	-2	820.89	BPSK	1@0	3.75	-110	22.98
			BPSK	1@47	3.75	-110	23.01
			QPSK	1@0	15	-110	23.03
			QPSK	1@11	15	-110	23.01
			QPSK	3@3	15	-110	23.12
			QPSK	12@0	15	-110	23.05

LTE Band 26							
Guard-Band	BW (MHz): 5						
N _{UL}	M _{UL}	Frequency of Uplink (MHz)	Test Configuration Initial of Power			EUT	
			Modulation	N _{tones}	Sub-carrier Spacing (kHz)	Cell Power (dBm/15 kHz)	Power (dBm)
26691	0	814.1	BPSK	1@0	3.75	-110	23.02
			QPSK	1@0	15	-110	23.01
			QPSK	3@3	15	-110	23.07
			QPSK	12@0	15	-110	23.02
26716	0	816.6	BPSK	1@0	3.75	-110	23.01
			BPSK	1@47	3.75	-110	23.11
			QPSK	1@0	15	-110	23.11
			QPSK	1@11	15	-110	23.12
			QPSK	3@3	15	-110	23.21
			QPSK	12@0	15	-110	22.96
26789	0	823.9	BPSK	1@47	3.75	-110	23.09
			QPSK	1@11	15	-110	23.05
			QPSK	3@3	15	-110	23.17
			QPSK	12@0	15	-110	23.05

ERP Power (dBm)

Cat-M1

LTE Band 14							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	23305	790.5	-5.90	32.24	24.19	262.42	H
	23330	793.0	-6.17	32.17	23.85	242.66	
	23355	795.5	-5.93	32.11	24.03	252.93	
	23305	790.5	-10.43	32.43	19.85	96.61	V
	23330	793.0	-10.85	32.42	19.42	87.50	
	23355	795.5	-10.64	32.46	19.67	92.68	
Channel Bandwidth: 5 MHz / 16QAM							
X	23305	790.5	-6.92	32.24	23.17	207.49	H
	23330	793.0	-7.19	32.17	22.83	191.87	
	23355	795.5	-6.95	32.11	23.01	199.99	
	23305	790.5	-11.45	32.43	18.83	76.38	V
	23330	793.0	-11.87	32.42	18.40	69.18	
	23355	795.5	-11.66	32.46	18.65	73.28	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 14							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	23330	793.0	-6.42	32.17	23.60	229.09	H
	23330	793.0	-10.85	32.42	19.42	87.50	V
Channel Bandwidth: 10 MHz / 16QAM							
X	23330	793.0	-7.44	32.17	22.58	181.13	H
	23330	793.0	-11.87	32.42	18.40	69.18	V

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 26							
Channel Bandwidth: 1.4 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Z	26697	814.7	-5.80	32.01	24.06	254.68	H
	26740	819.0	-6.17	32.11	23.79	239.33	
	26783	823.3	-6.25	32.32	23.92	246.60	
	26697	814.7	-12.14	32.54	18.25	66.83	V
	26740	819.0	-12.50	32.51	17.86	61.09	
	26783	823.3	-12.35	32.51	18.01	63.24	
Channel Bandwidth: 1.4 MHz / 16QAM							
Z	26697	814.7	-6.82	32.01	23.04	201.37	H
	26740	819.0	-7.19	32.11	22.77	189.23	
	26783	823.3	-7.27	32.32	22.90	194.98	
	26697	814.7	-13.16	32.54	17.23	52.84	V
	26740	819.0	-13.52	32.51	16.84	48.31	
	26783	823.3	-13.37	32.51	16.99	50.00	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 26							
Channel Bandwidth: 3 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Z	26705	815.5	-6.06	32.02	23.81	240.44	H
	26740	819.0	-6.42	32.11	23.54	225.94	
	26775	822.5	-6.36	32.18	23.67	232.81	
	26705	815.5	-12.35	32.5	18.00	63.10	V
	26740	819.0	-12.75	32.51	17.61	57.68	
	26775	822.5	-12.56	32.47	17.76	59.70	
Channel Bandwidth: 3 MHz / 16QAM							
Z	26705	815.5	-7.05	32.02	22.82	191.43	H
	26740	819.0	-7.41	32.11	22.55	179.89	
	26775	822.5	-7.35	32.18	22.68	185.35	
	26705	815.5	-13.34	32.5	17.01	50.23	V
	26740	819.0	-13.74	32.51	16.62	45.92	
	26775	822.5	-13.55	32.47	16.77	47.53	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 26							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Z	26715	816.5	-6.31	32.04	23.58	228.03	H
	26740	819.0	-6.65	32.11	23.31	214.29	
	26765	821.5	-6.20	31.79	23.44	220.80	
	26715	816.5	-12.60	32.52	17.77	59.84	V
	26740	819.0	-12.98	32.51	17.38	54.70	
	26765	821.5	-12.49	32.17	17.53	56.62	
Channel Bandwidth: 5 MHz / 16QAM							
Z	26715	816.5	-7.32	32.04	22.57	180.72	H
	26740	819.0	-7.66	32.11	22.30	169.82	
	26765	821.5	-7.21	31.79	22.43	174.98	
	26715	816.5	-13.61	32.52	16.76	47.42	V
	26740	819.0	-13.99	32.51	16.37	43.35	
	26765	821.5	-13.50	32.17	16.52	44.87	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 26							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Z	26740	819.0	-6.96	32.11	23.00	199.53	H
	26740	819.0	-13.29	32.51	17.07	50.93	V
Channel Bandwidth: 10 MHz / 16QAM							
Z	26740	819.0	-7.97	32.11	21.99	158.12	H
	26740	819.0	-14.30	32.51	16.06	40.36	V

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

NB-IoT

LTE Band 14							
BPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	23301	790.1	-8.42	32.24	21.67	146.89	H
	23330	793.0	-8.46	32.17	21.56	143.22	
	23359	795.9	-8.36	32.11	21.60	144.54	
	23301	790.1	-14.33	32.43	15.95	39.36	V
	23330	793.0	-14.53	32.42	15.74	37.50	
	23359	795.9	-14.48	32.46	15.83	38.28	
QPSK							
X	23301	790.1	-7.59	32.24	22.50	177.83	H
	23330	793.0	-7.68	32.17	22.34	171.40	
	23359	795.9	-7.57	32.11	22.39	173.38	
	23301	790.1	-13.54	32.43	16.74	47.21	V
	23330	793.0	-13.87	32.42	16.40	43.65	
	23359	795.9	-13.74	32.46	16.57	45.39	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 26							
BPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Z	26691	814.1	-14.54	32.01	15.32	34.04	H
	26740	819	-14.57	32.11	15.39	34.59	
	26789	823.9	-14.91	32.32	15.26	33.57	
	26691	814.1	-9.02	32.54	21.37	137.09	V
	26740	819	-8.90	32.51	21.46	139.96	
	26789	823.9	-9.03	32.51	21.33	135.83	
QPSK							
Z	26691	814.1	-13.74	32.01	16.12	40.93	H
	26740	819	-13.78	32.11	16.18	41.50	
	26789	823.9	-14.14	32.32	16.03	40.09	
	26691	814.1	-8.21	32.54	22.18	165.20	V
	26740	819	-8.06	32.51	22.30	169.82	
	26789	823.9	-8.25	32.51	22.11	162.55	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

4.2 Modulation Characteristics Measurement

4.2.1 Limits of Modulation Characteristics

N/A

4.2.2 Test Setup





4.2.3 Test Procedure



Connect the EUT to Communication Simulator via the antenna connector. The frequency band is set as EUT supported Modulation and Channels, the EUT output is matched with 50 ohm load, the waveform quality and constellation of the EUT was tested.

4.2.4 Test Results

Cat-M1

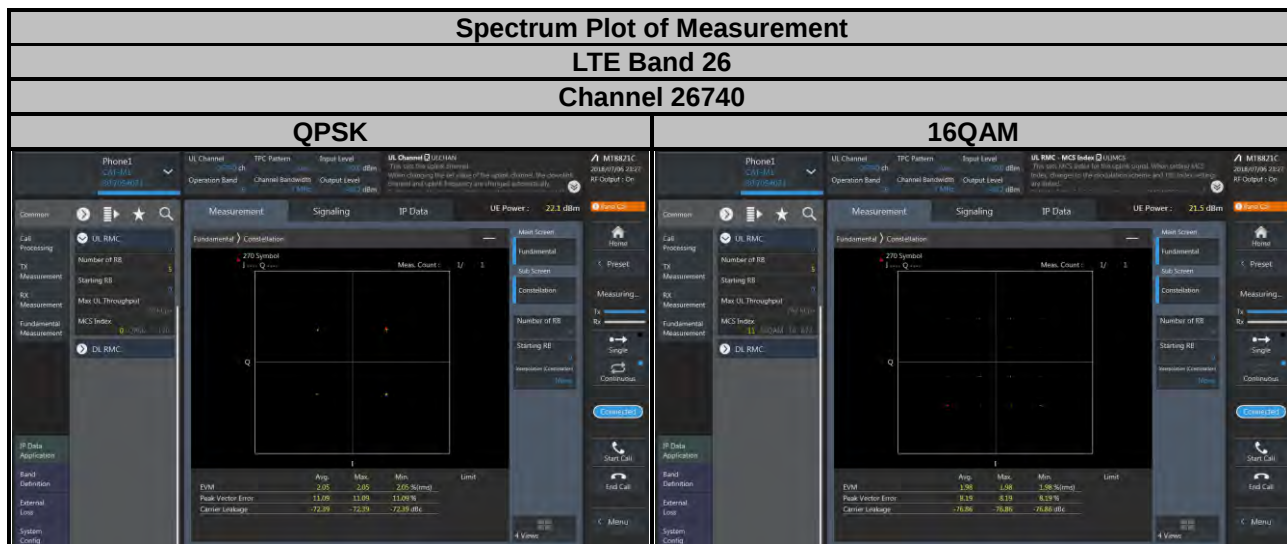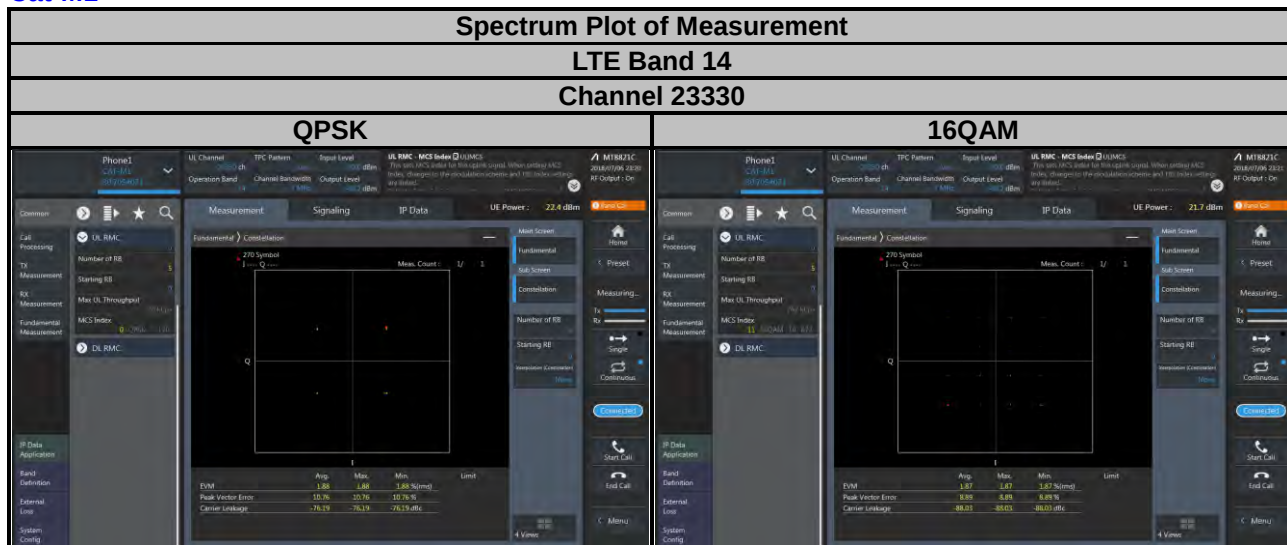

NB-IoT

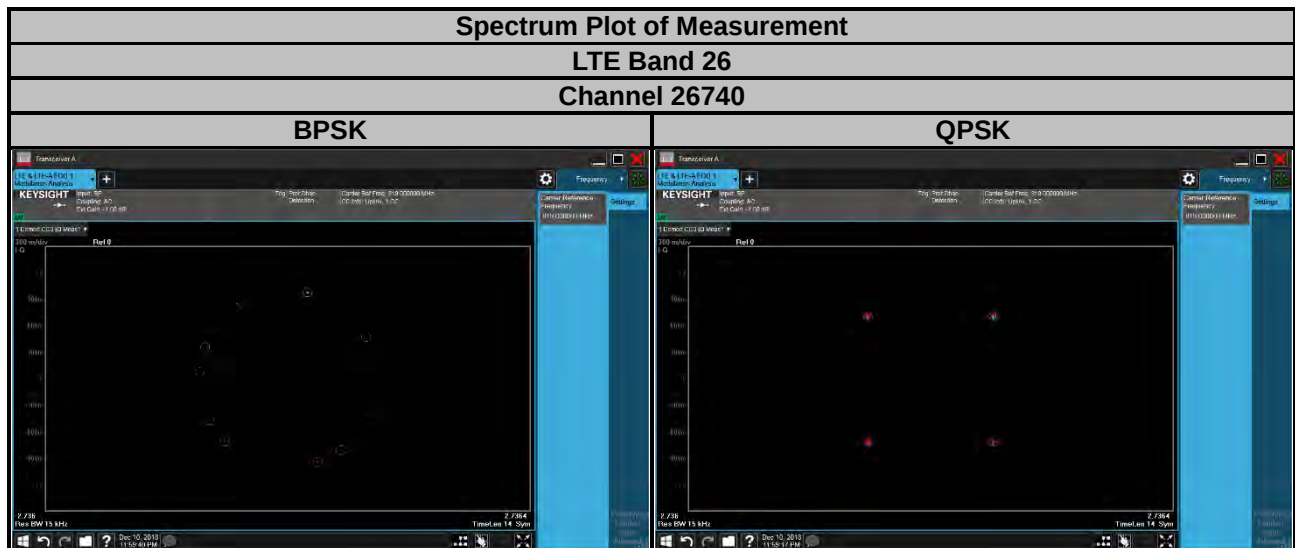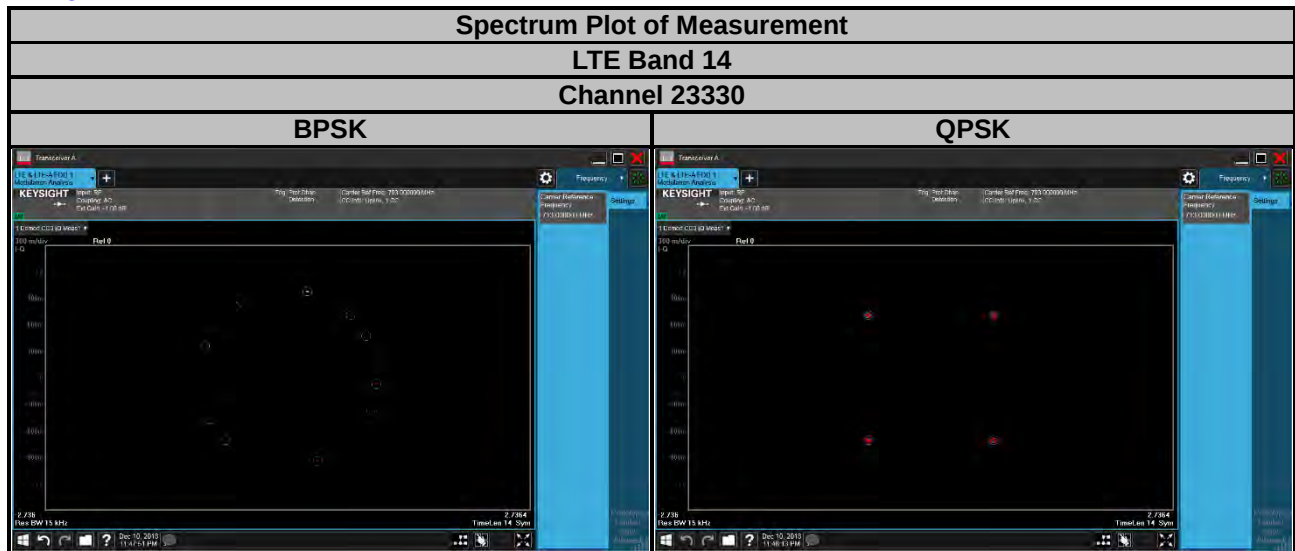

4.3 Frequency Stability Measurement

4.3.1 Limits of Frequency Stability Measurement

LTE Band 14

The frequency stability of mobile, portable and control transmitters operating in the wideband segment must be 1.25 parts per million or better when AFC is locked to a base station, and 5 parts per million or better when AFC is not locked.

LTE Band 26


1.5 ppm is for base and fixed station. 2.5 ppm is for mobile station.

4.3.2 Test Procedure

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the ± 0.5 °C during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.3.3 Test Setup

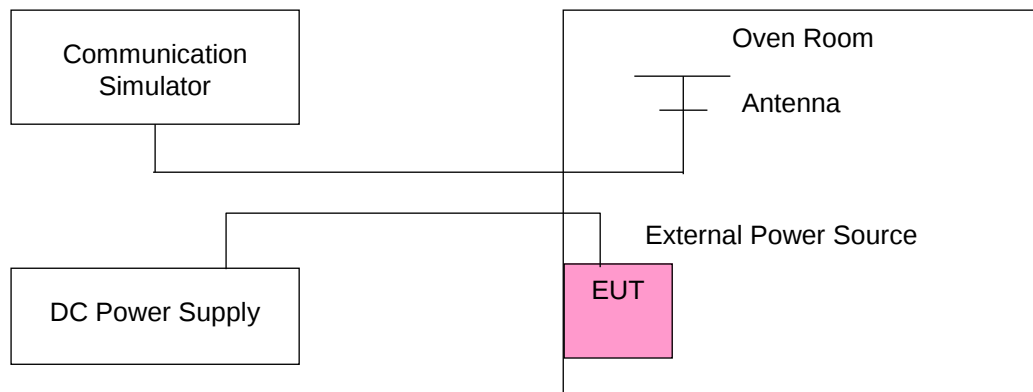

4.3.4 Test Results

Cat-M1

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 14				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
12	790.500002	0.002	795.500003	0.004	1.25
10.2	790.500002	0.003	795.500003	0.004	1.25
13.8	790.500003	0.004	795.500004	0.005	1.25

Note: The fixture defined the normal working voltage of the adapter is from 10.2 Vdc to 13.8 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 14				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	790.500003	0.003	795.500002	0.003	1.25
-20	790.500004	0.004	795.500004	0.005	1.25
-10	790.500002	0.002	795.500003	0.004	1.25
0	790.500003	0.004	795.500002	0.002	1.25
10	790.500003	0.004	795.500003	0.004	1.25
20	790.500002	0.002	795.500003	0.004	1.25
30	790.499998	-0.003	795.499996	-0.005	1.25
40	790.499998	-0.002	795.499998	-0.002	1.25
50	790.499997	-0.004	795.499999	-0.002	1.25
60	790.499996	-0.005	795.499998	-0.002	1.25
70	790.499997	-0.004	795.499999	-0.002	1.25
80	790.499997	-0.004	795.499999	-0.002	1.25
85	790.499998	-0.003	795.499997	-0.004	1.25

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 14		Limit (ppm)
	Channel Bandwidth: 10 MHz		
	Frequency (MHz)	Frequency Error (ppm)	
12	793.000002	0.002	1.25
10.2	793.000002	0.003	1.25
13.8	793.000004	0.005	1.25

Note: The fixture defined the normal working voltage of the adapter is from 10.2 Vdc to 13.8 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 14		Limit (ppm)
	Channel Bandwidth: 10 MHz		
	Frequency (MHz)	Frequency Error (ppm)	
-30	793.000002	0.003	1.25
-20	793.000003	0.004	1.25
-10	793.000004	0.005	1.25
0	793.000003	0.004	1.25
10	793.000001	0.002	1.25
20	793.000002	0.003	1.25
30	792.999999	-0.002	1.25
40	792.999997	-0.003	1.25
50	792.999997	-0.004	1.25
60	792.999996	-0.005	1.25
70	792.999999	-0.001	1.25
50	792.999998	-0.002	1.25
85	792.999997	-0.004	1.25

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 1.4 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
12	814.700001	0.002	823.300004	0.005	2.5
10.2	814.700004	0.005	823.300002	0.003	2.5
13.8	814.700001	0.002	823.300003	0.004	2.5

Note: The fixture defined the normal working voltage of the adapter is from 10.2 Vdc to 13.8 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 1.4 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	814.700002	0.003	823.300004	0.005	2.5
-20	814.700001	0.001	823.300004	0.004	2.5
-10	814.700003	0.004	823.300003	0.003	2.5
0	814.700002	0.003	823.300002	0.003	2.5
10	814.700004	0.004	823.300003	0.004	2.5
20	814.700004	0.004	823.300003	0.004	2.5
30	814.699999	-0.002	823.299996	-0.004	2.5
40	814.699998	-0.002	823.299997	-0.004	2.5
50	814.699997	-0.004	823.299999	-0.002	2.5
60	814.699997	-0.004	823.299996	-0.004	2.5
70	814.699998	-0.002	823.299997	-0.003	2.5
80	814.699997	-0.003	823.299999	-0.001	2.5
85	814.699996	-0.005	823.299998	-0.003	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 3 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
12	815.500004	0.005	822.500002	0.002	2.5
10.2	815.500002	0.002	822.500001	0.002	2.5
13.8	815.500003	0.004	822.500002	0.002	2.5

Note: The fixture defined the normal working voltage of the adapter is from 10.2 Vdc to 13.8 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 3 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	815.500002	0.003	822.500003	0.004	2.5
-20	815.500002	0.002	822.500003	0.004	2.5
-10	815.500001	0.001	822.500002	0.003	2.5
0	815.500003	0.003	822.500001	0.001	2.5
10	815.500004	0.005	822.500001	0.001	2.5
20	815.500003	0.004	822.500003	0.004	2.5
30	815.499999	-0.001	822.499999	-0.002	2.5
40	815.499996	-0.005	822.499998	-0.002	2.5
50	815.499998	-0.003	822.499996	-0.005	2.5
60	815.499997	-0.003	822.499998	-0.002	2.5
70	815.499996	-0.005	822.499996	-0.005	2.5
80	815.499997	-0.003	822.499999	-0.002	2.5
85	815.499997	-0.004	822.499997	-0.004	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
12	816.500001	0.001	821.500002	0.003	2.5
10.2	816.500001	0.001	821.500002	0.003	2.5
13.8	816.500002	0.002	821.500001	0.002	2.5

Note: The fixture defined the normal working voltage of the adapter is from 10.2 Vdc to 13.8 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	816.500003	0.004	821.500002	0.003	2.5
-20	816.500003	0.004	821.500002	0.003	2.5
-10	816.500003	0.004	821.500001	0.002	2.5
0	816.500004	0.005	821.500001	0.002	2.5
10	816.500002	0.003	821.500001	0.001	2.5
20	816.500001	0.001	821.500003	0.003	2.5
30	816.499998	-0.002	821.499998	-0.003	2.5
40	816.499998	-0.003	821.499997	-0.003	2.5
50	816.499998	-0.002	821.499996	-0.004	2.5
60	816.499998	-0.002	821.499998	-0.002	2.5
70	816.499997	-0.004	821.499998	-0.003	2.5
80	816.499997	-0.004	821.499999	-0.001	2.5
85	816.499998	-0.003	821.499999	-0.002	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 26		Limit (ppm)
	Channel Bandwidth: 10 MHz		
	Frequency (MHz)	Frequency Error (ppm)	
12	819.000003	0.003	2.5
10.2	819.000002	0.003	2.5
13.8	819.000002	0.002	2.5

Note: The fixture defined the normal working voltage of the adapter is from 10.2 Vdc to 13.8 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 26		Limit (ppm)
	Channel Bandwidth: 10 MHz		
	Frequency (MHz)	Frequency Error (ppm)	
-30	819.000001	0.001	2.5
-20	819.000003	0.004	2.5
-10	819.000003	0.003	2.5
0	819.000003	0.003	2.5
10	819.000004	0.005	2.5
20	819.000004	0.004	2.5
30	818.999997	-0.004	2.5
40	818.999999	-0.001	2.5
50	818.999997	-0.004	2.5
60	818.999997	-0.004	2.5
70	818.999997	-0.004	2.5
80	818.999997	-0.003	2.5
85	818.999999	-0.001	2.5

NB-IoT

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 14				Limit (ppm)
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
12	790.100002	0.003	795.900002	0.003	1.25
10.2	790.100001	0.001	795.900003	0.003	1.25
13.8	790.100002	0.003	795.900002	0.003	1.25

Note: The fixture defined the normal working voltage of the adapter is from 10.2 Vdc to 13.8 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 14				Limit (ppm)
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	790.100003	0.003	795.900003	0.003	1.25
-20	790.100002	0.003	795.900002	0.002	1.25
-10	790.100004	0.005	795.900001	0.001	1.25
0	790.100002	0.003	795.900003	0.004	1.25
10	790.100001	0.001	795.900003	0.004	1.25
20	790.099997	-0.004	795.899996	-0.005	1.25
30	790.099998	-0.002	795.899996	-0.005	1.25
40	790.099999	-0.002	795.899997	-0.004	1.25
50	790.099999	-0.002	795.899996	-0.005	1.25
60	790.099998	-0.003	795.899998	-0.003	1.25
70	790.099998	-0.003	795.899998	-0.002	1.25
80	790.099998	-0.002	795.899997	-0.004	1.25
85	790.099999	-0.002	795.899999	-0.001	1.25

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 26				Limit (ppm)
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
12	814.100003	0.003	823.900002	0.002	2.5
10.2	814.100002	0.002	823.900004	0.005	2.5
13.8	814.100001	0.002	823.900004	0.004	2.5

Note: The fixture defined the normal working voltage of the adapter is from 10.2 Vdc to 13.8 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 26				Limit (ppm)
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	814.100002	0.002	823.900003	0.004	2.5
-20	814.100003	0.004	823.900004	0.004	2.5
-10	814.100004	0.005	823.900003	0.004	2.5
0	814.100003	0.003	823.900003	0.004	2.5
10	814.100002	0.003	823.900002	0.002	2.5
20	814.099997	-0.004	823.899998	-0.002	2.5
30	814.099997	-0.004	823.899998	-0.002	2.5
40	814.099997	-0.003	823.899998	-0.002	2.5
50	814.099997	-0.004	823.899996	-0.004	2.5
60	814.099997	-0.003	823.899996	-0.005	2.5
70	814.099999	-0.001	823.899999	-0.001	2.5
80	814.099998	-0.003	823.899997	-0.004	2.5
85	814.099998	-0.002	823.899998	-0.002	2.5

4.4 Occupied Bandwidth Measurement


4.4.1 Limits of Occupied Bandwidth Measurement

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

4.4.2 Test Procedure

The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.


4.4.3 Test Setup

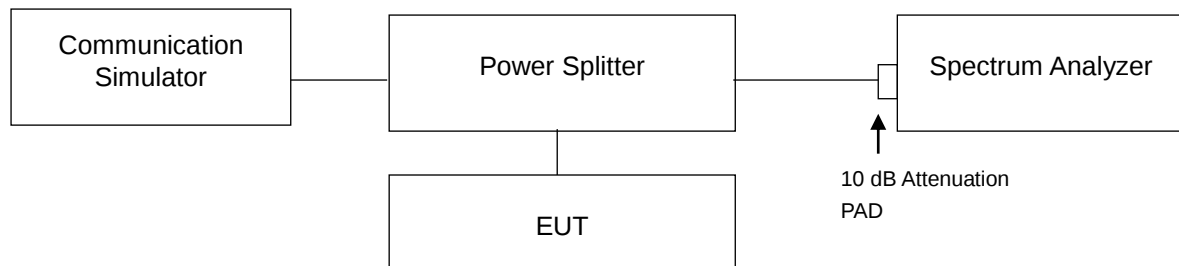

4.4.4 Test Results


Cat-M1

LTE Band 14					
Channel Bandwidth: 5 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
23305	790.5	1.0776	0.8899	1.273	1.183
23330	793.0	1.0806	0.9120	1.269	1.245
23355	795.5	1.0789	0.9127	1.281	1.220
Channel Bandwidth: 10 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
23330	793.0	1.0878	0.9120	1.279	1.206

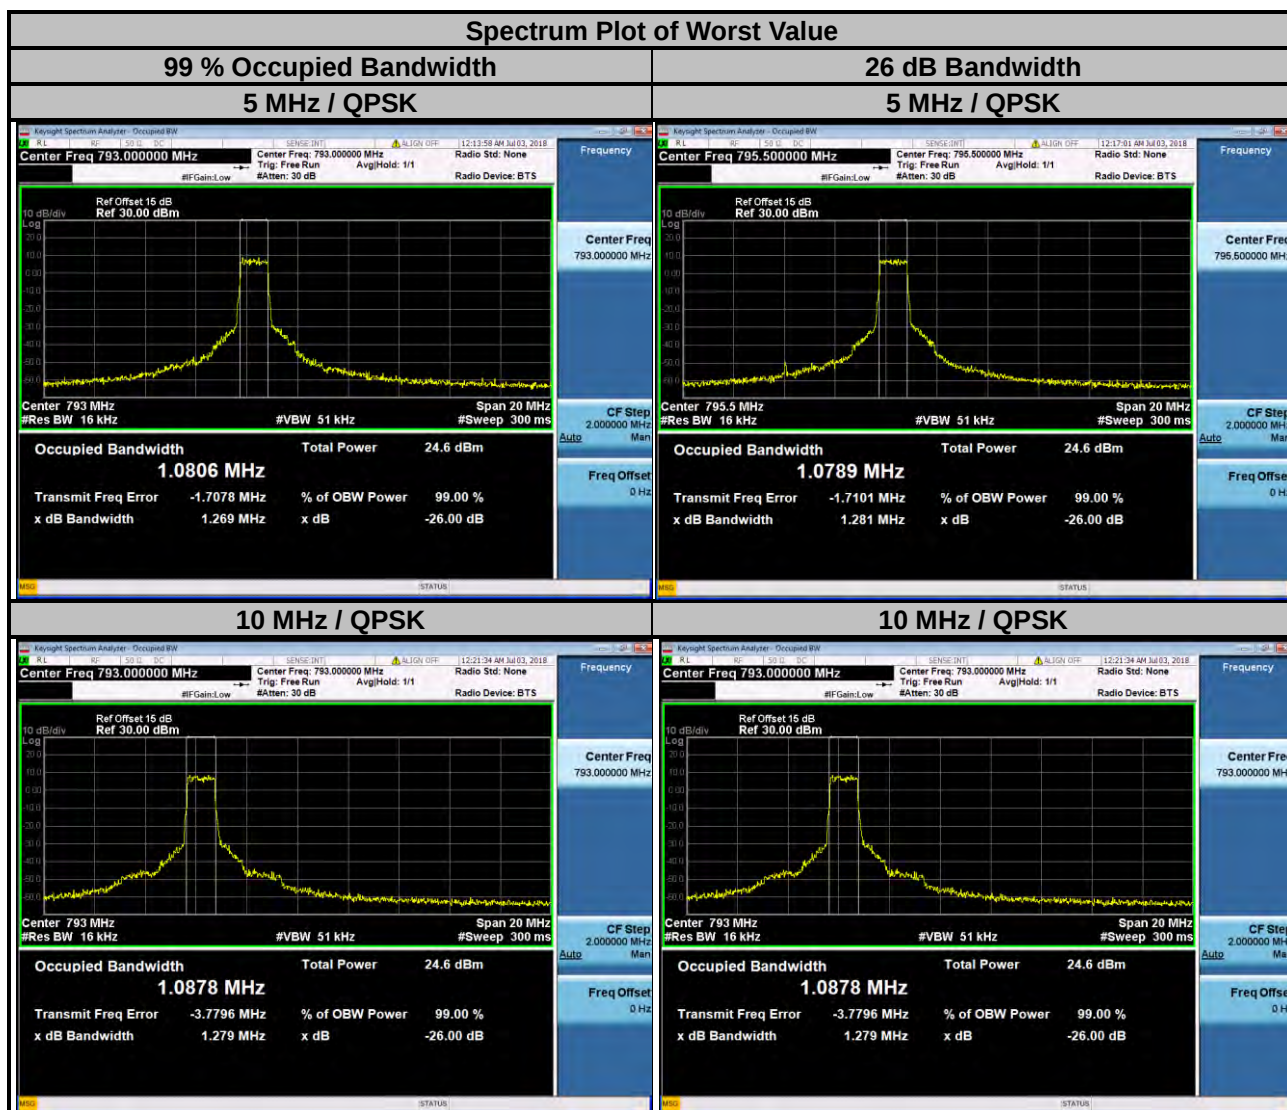


LTE Band 26					
Channel Bandwidth: 1.4 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
26697	814.7	1.0886	0.9107	1.281	1.210
26740	819.0	1.0866	0.9121	1.276	1.215
26783	823.3	1.0877	0.9137	1.279	1.230

Channel Bandwidth: 3 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
26705	815.5	1.0836	0.9052	1.279	1.231
26740	819.0	1.0793	0.9164	1.261	1.202
26775	822.5	1.0837	0.9147	1.295	1.228

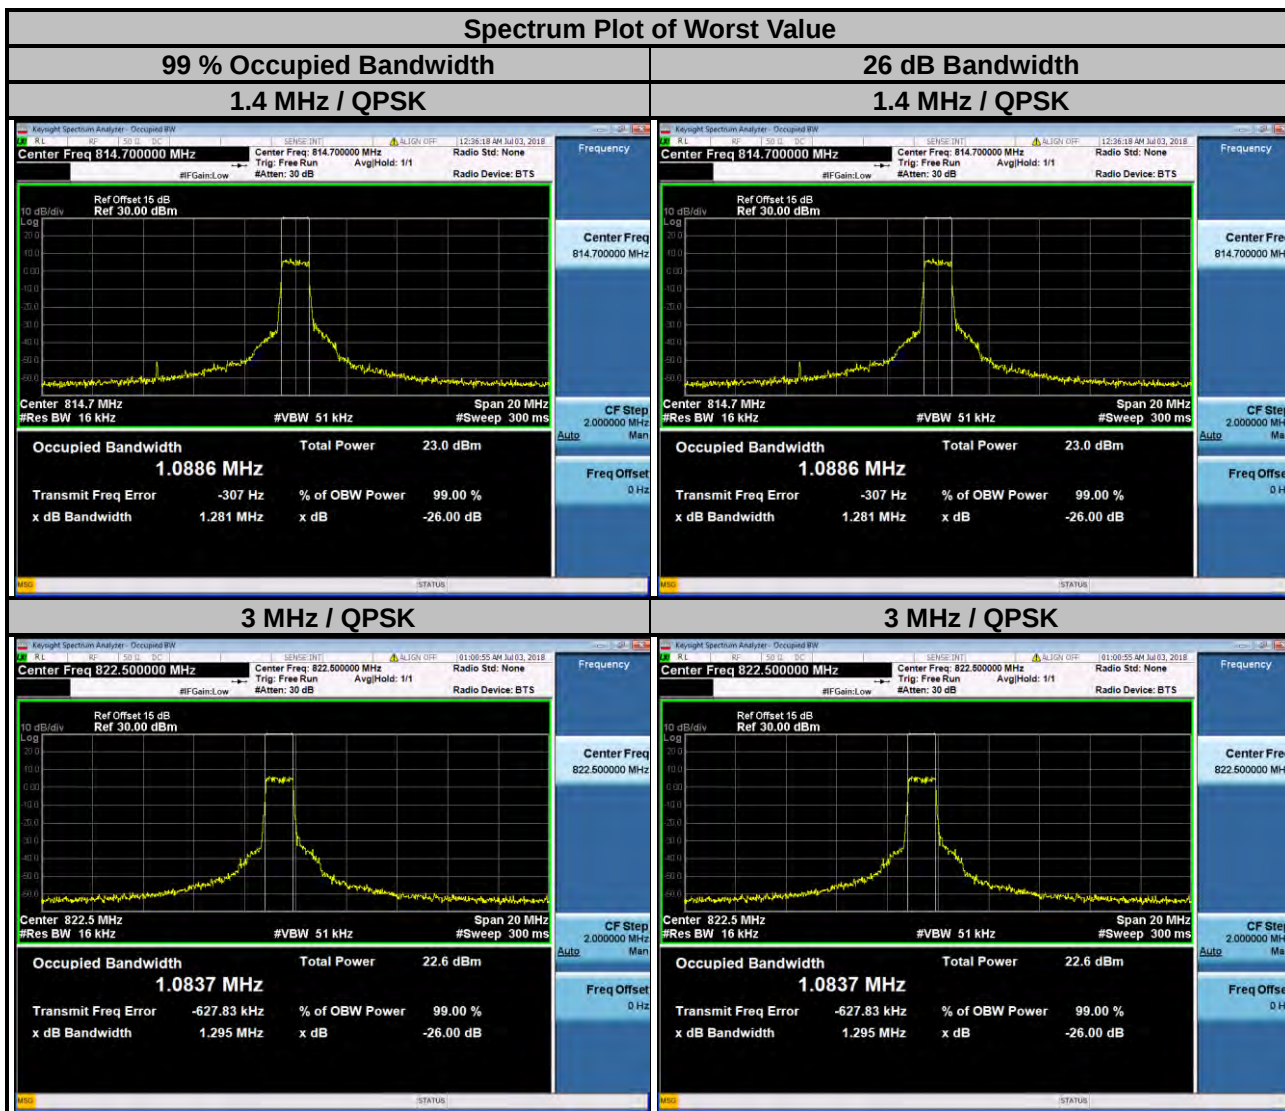


LTE Band 26					
Channel Bandwidth: 5 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
26715	816.5	1.0818	0.9183	1.265	1.217
26740	819.0	1.0774	0.9171	1.275	1.182
26765	821.5	1.0825	0.9043	1.262	1.205
Channel Bandwidth: 10 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
26740	819.0	1.0895	0.9102	1.272	1.181

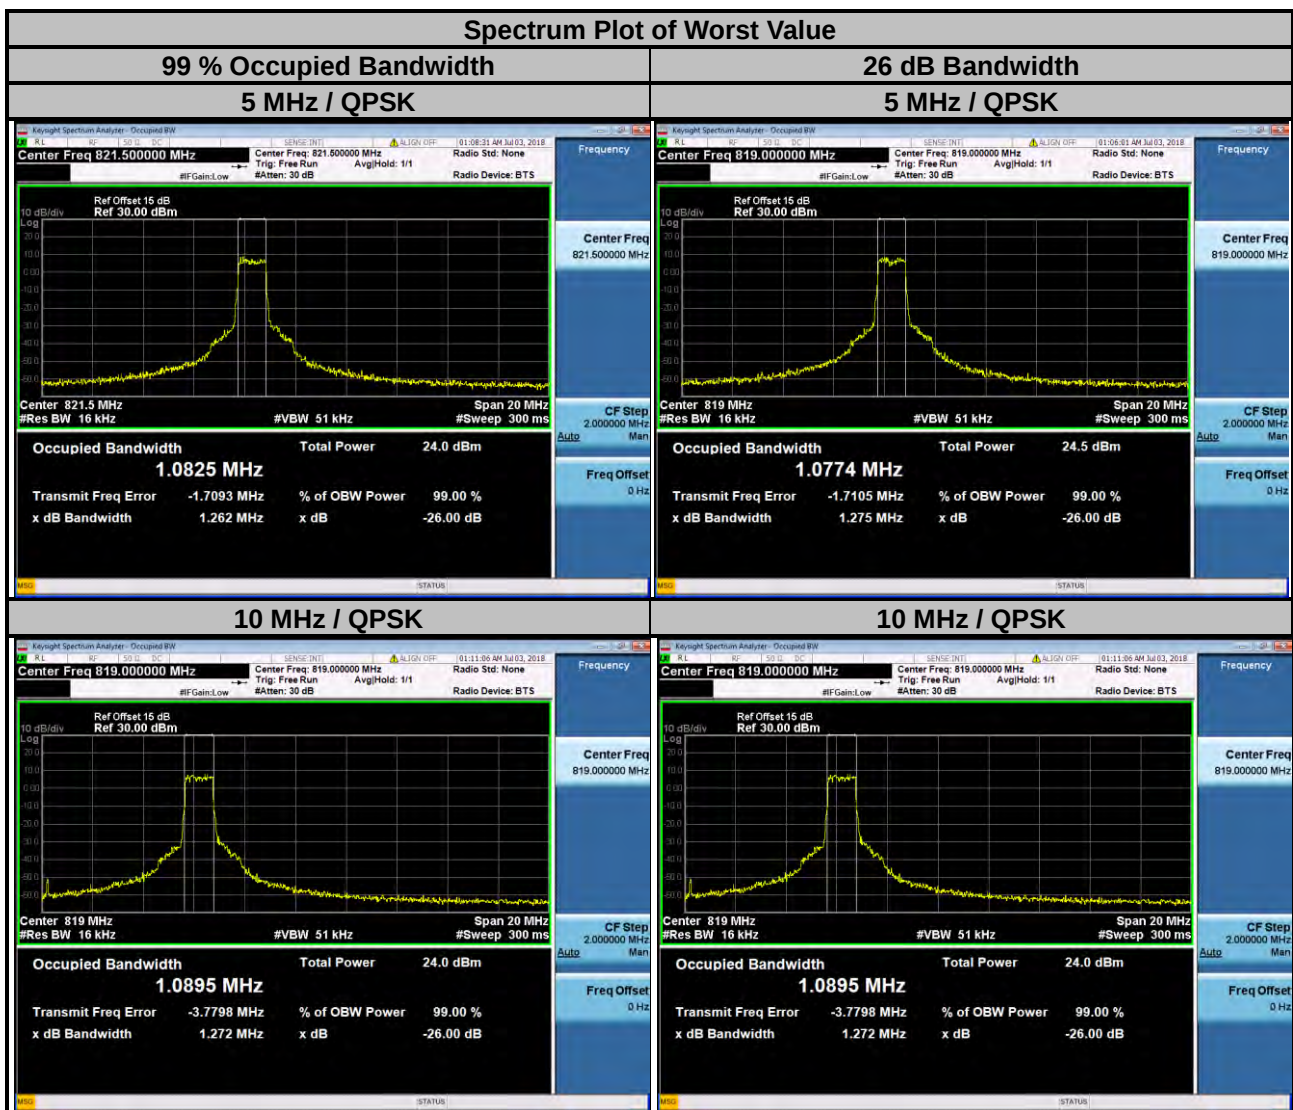


NB-IoT

LTE Band 14						
Channel	Frequency (MHz)	Modulation	N _{tones}	Sub-carrier Spacing (kHz)	99 % Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
23301	790.1	BPSK	1@0	3.75	52.47	37.30
		QPSK	1@0	15	98.14	124.20
		QPSK	3@3	15	102.82	168.90
		QPSK	12@0	15	185.64	261.20
23330	793	BPSK	1@0	3.75	52.19	37.94
		QPSK	1@0	15	95.10	114.60
		QPSK	3@3	15	100.37	153.20
		QPSK	12@0	15	181.60	264.70
23359	795.9	BPSK	1@47	3.75	51.57	36.93
		QPSK	1@11	15	93.92	112.90
		QPSK	3@3	15	104.23	167.50
		QPSK	12@0	15	192.20	276.70

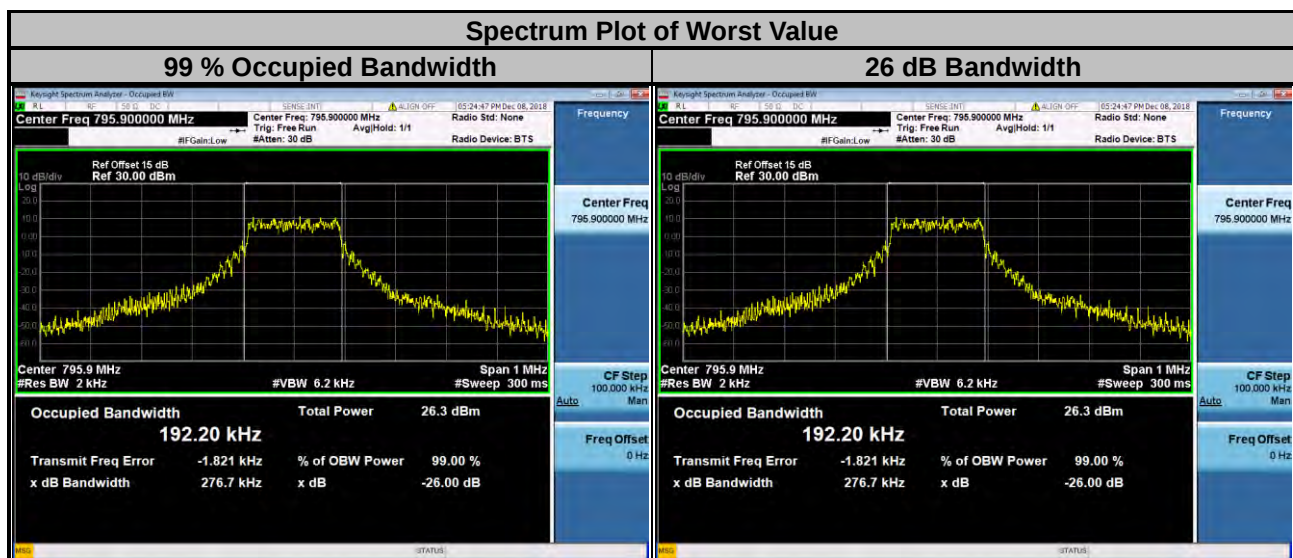

LTE Band 26						
Channel	Frequency (MHz)	Modulation	N _{tones}	Sub-carrier Spacing (kHz)	99 % Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
26691	814.1	BPSK	1@0	3.75	52.99	37.61
		QPSK	1@0	15	93.39	111.80
		QPSK	3@3	15	114.33	194.40
		QPSK	12@0	15	189.82	264.30
26740	819	BPSK	1@0	3.75	52.59	37.47
		QPSK	1@0	15	97.94	114.60
		QPSK	3@3	15	100.40	141.70
		QPSK	12@0	15	196.42	270.50
26789	823.9	BPSK	1@47	3.75	51.18	37.22
		QPSK	1@11	15	96.38	112.00
		QPSK	3@3	15	103.93	169.60
		QPSK	12@0	15	188.24	260.70

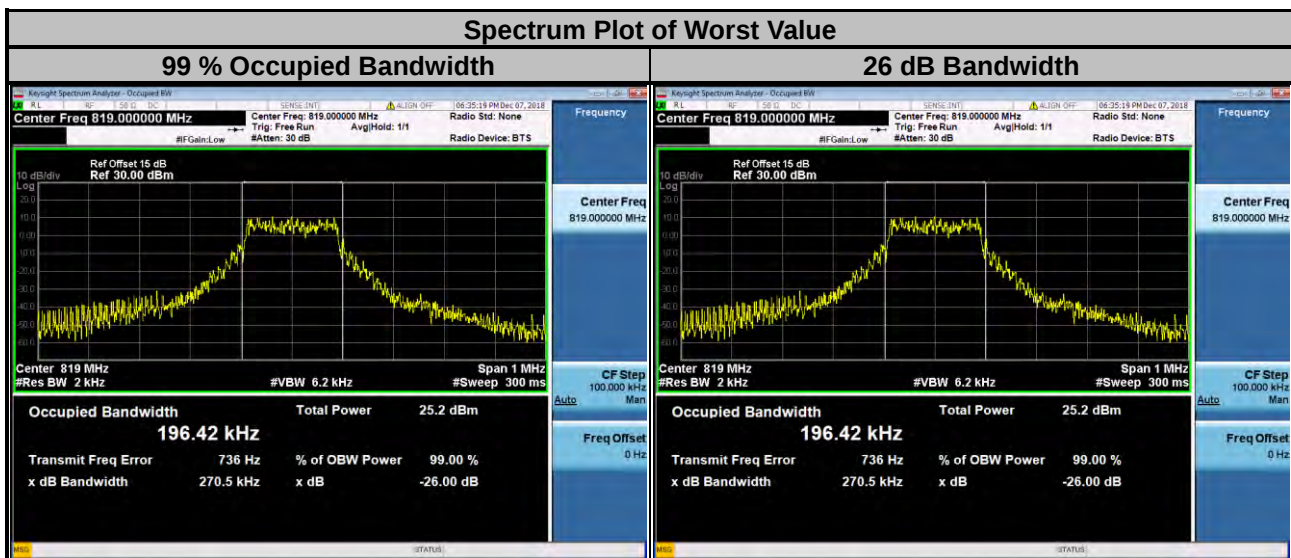

4.5 Emission Mask Measurement

4.5.1 Limits of Emission Mask Measurement

LTE Band 14

1. On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.
2. On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB.
3. On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least $43 + 10 \log (P)$ dB.


LTE Band 26

According to FCC part 90.691 shall be tested the emission mask. For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

For §90.691(a), RBW=300 Hz for offset less than 37.5 kHz from channel edge and RBW=100 kHz for offsets greater than 37.5 kHz is allowed.

4.5.2 Test Setup

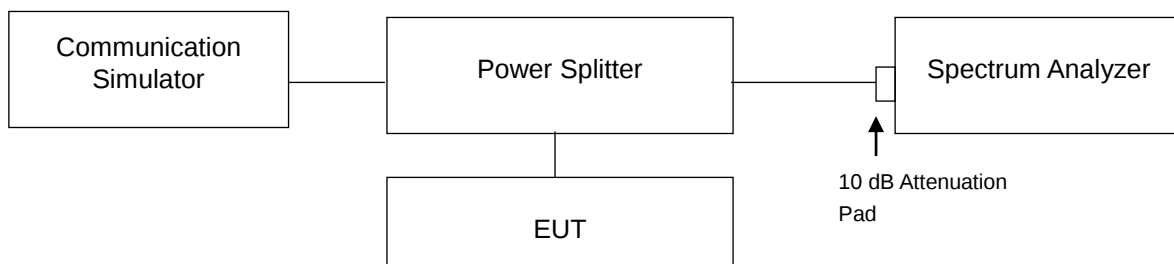



4.5.3 Test Procedures


- a. The measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- b. Record the test plot.


4.5.4 Test Results


Cat-M1

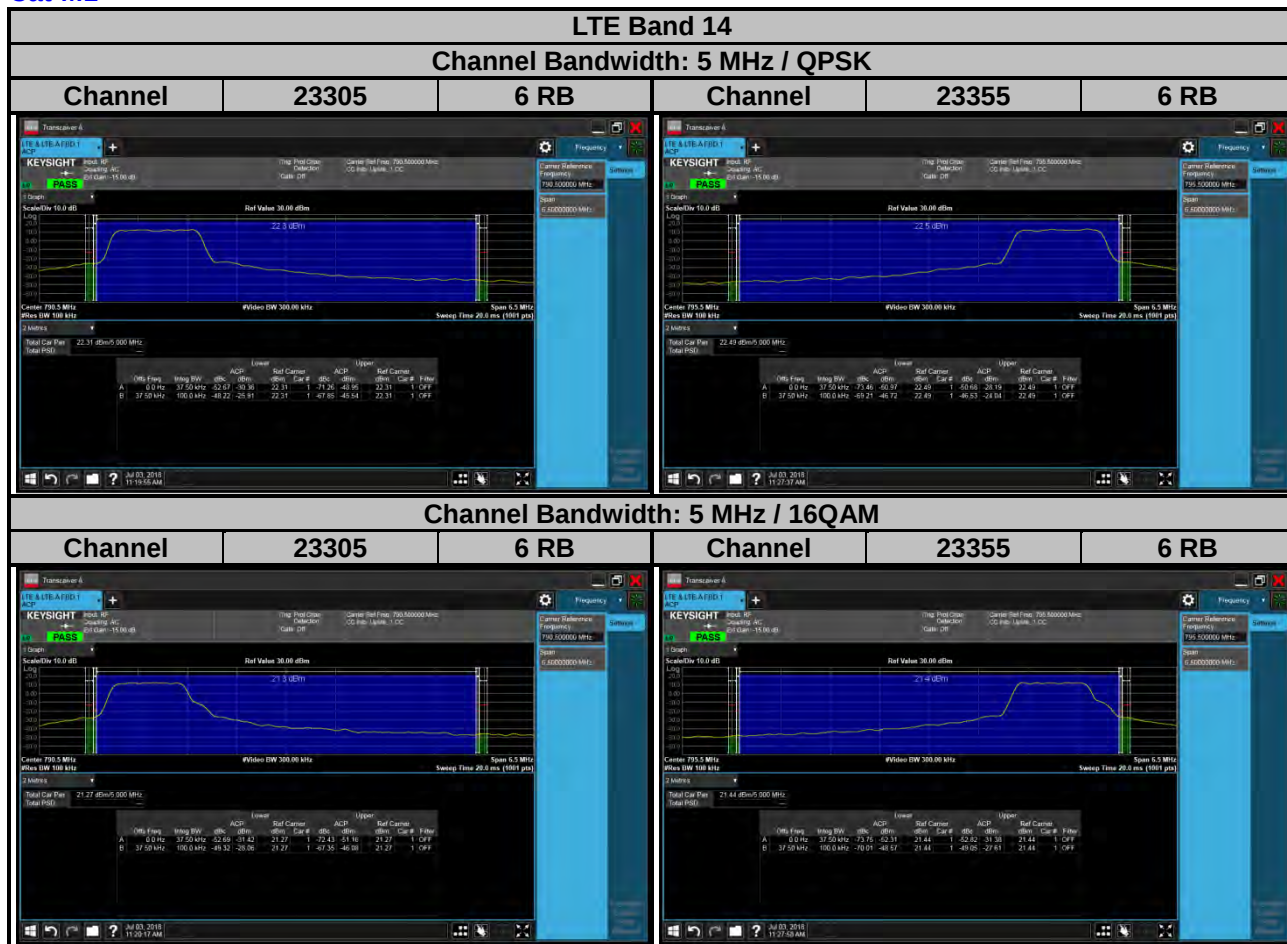


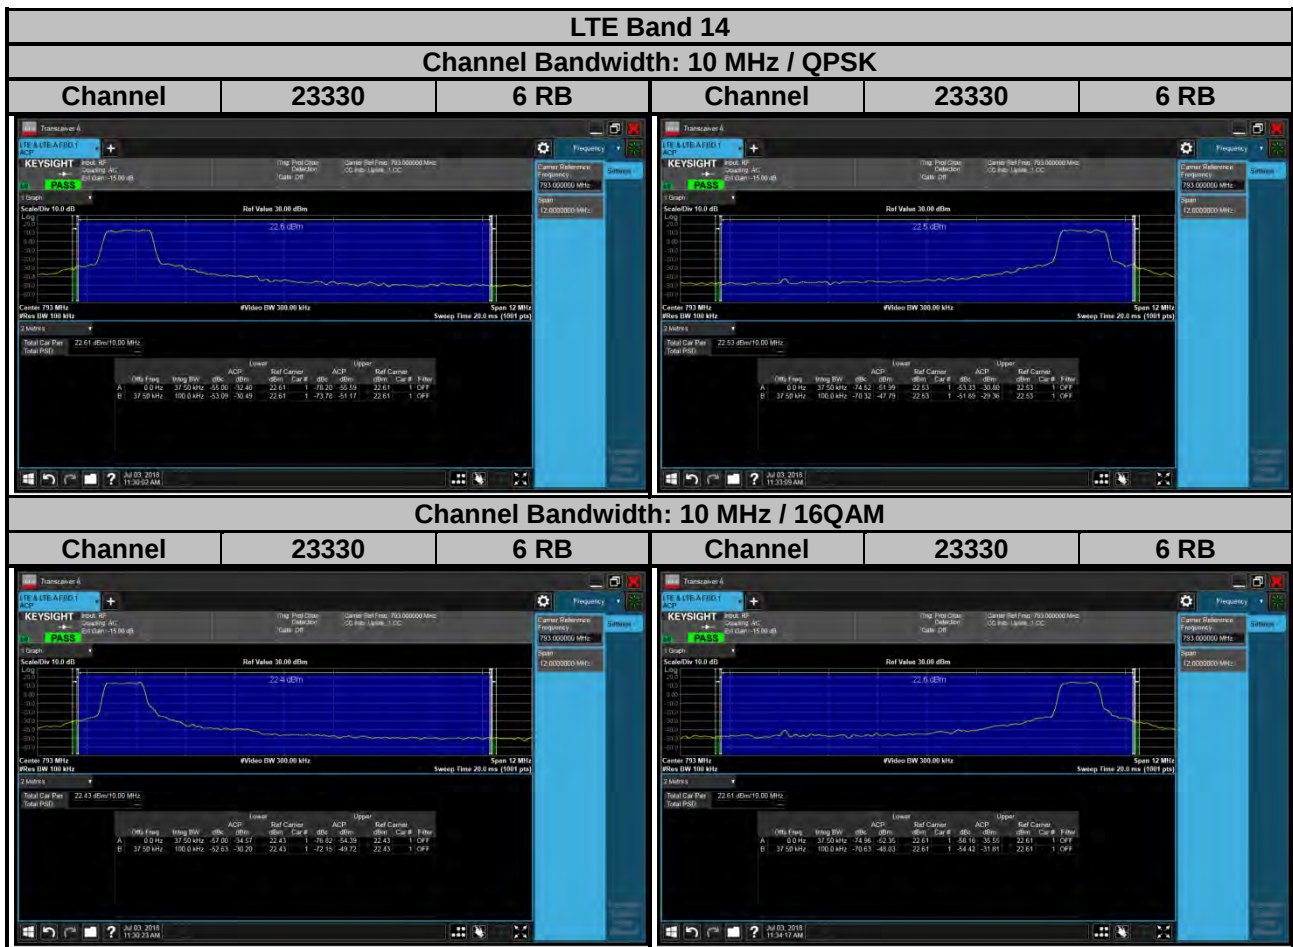

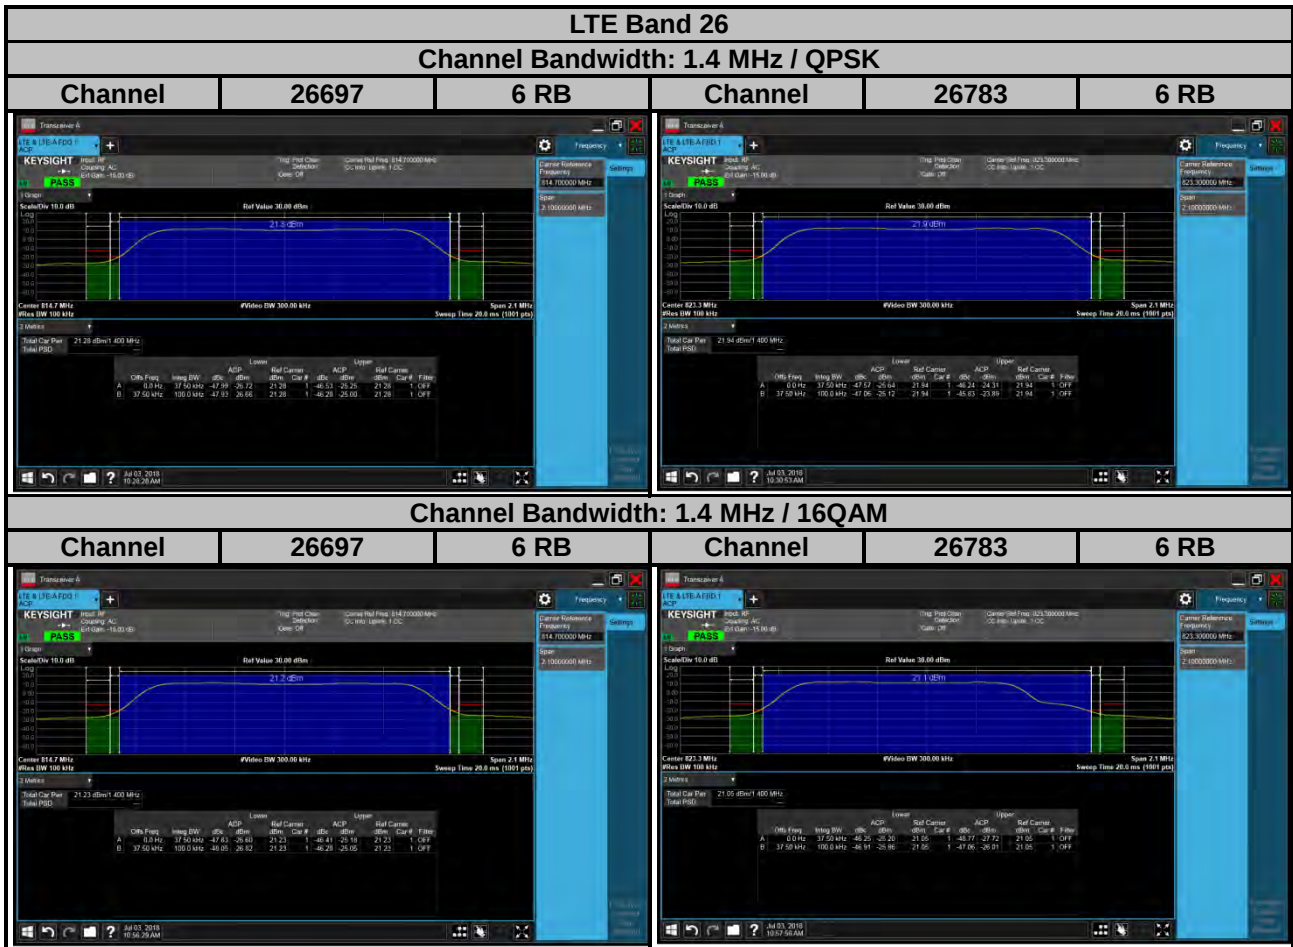


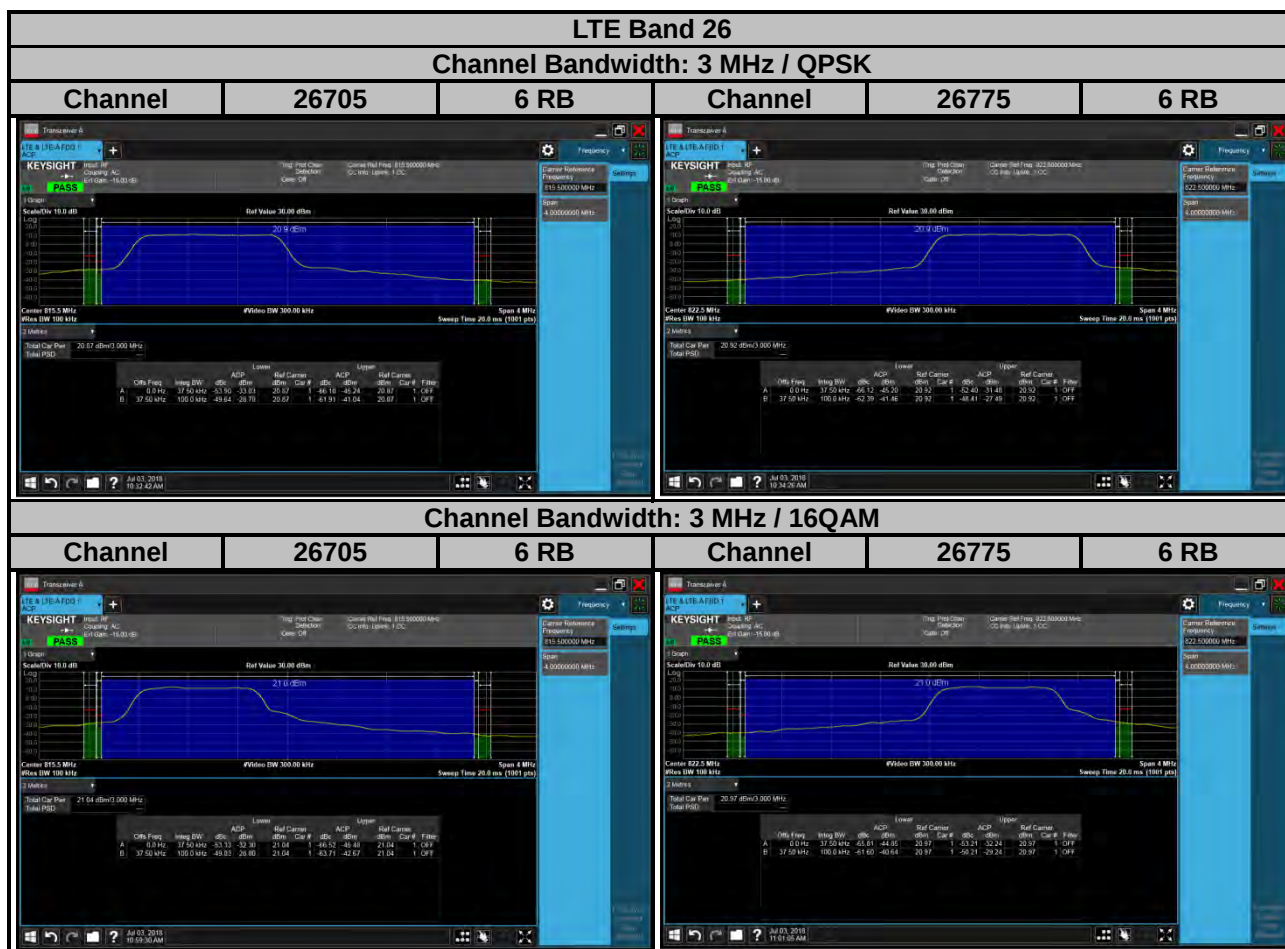

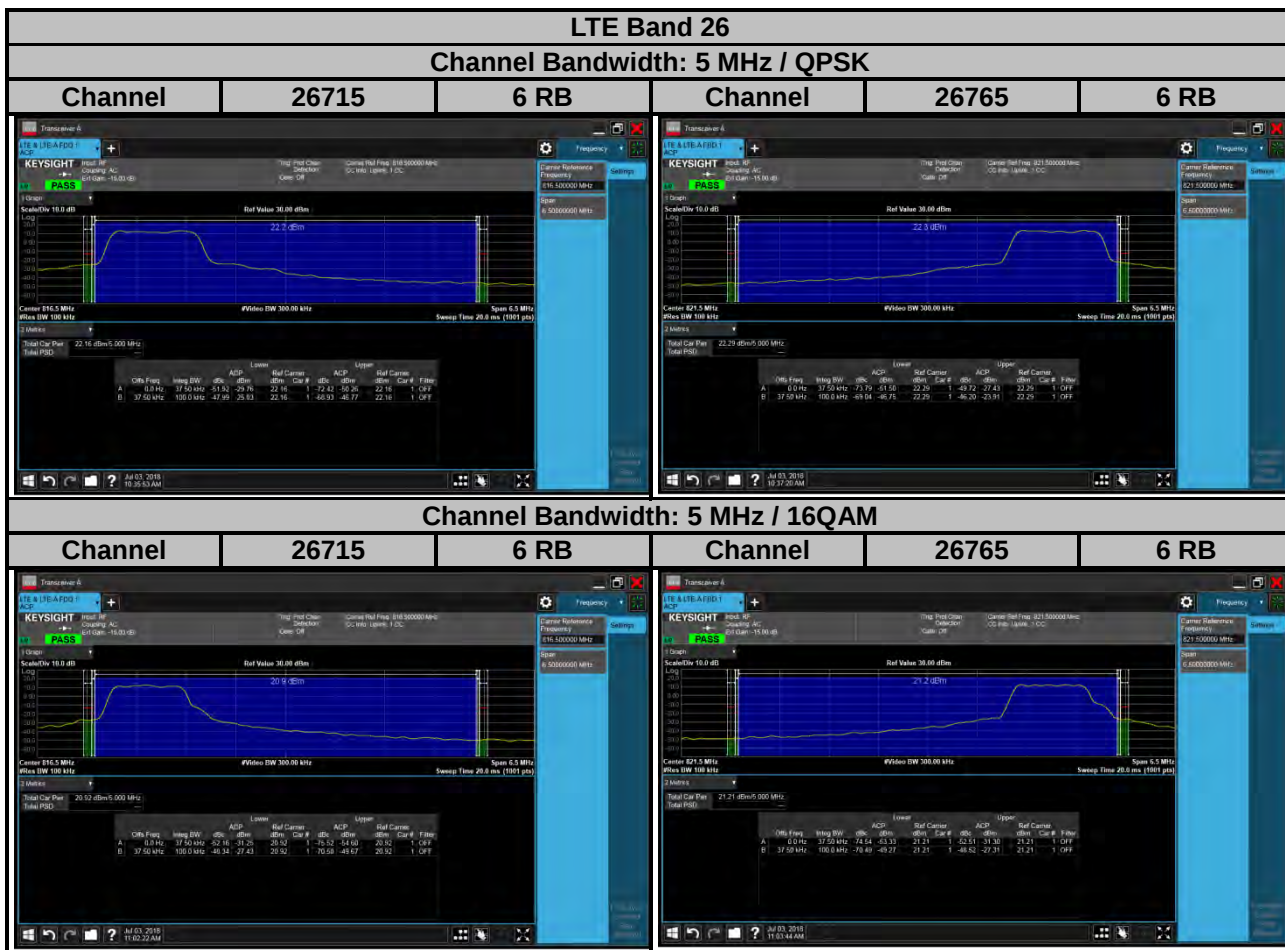


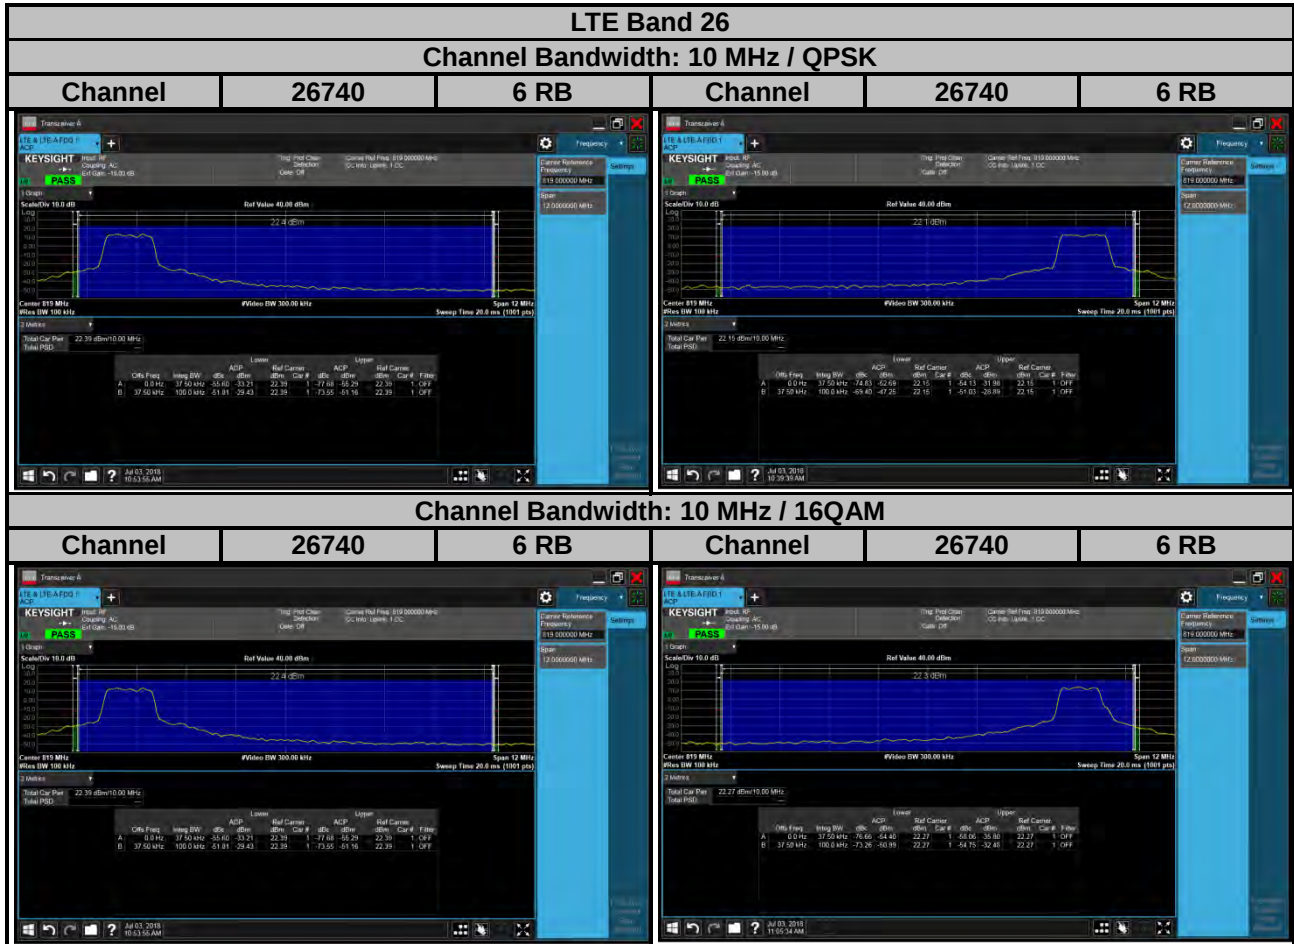

NB-IoT

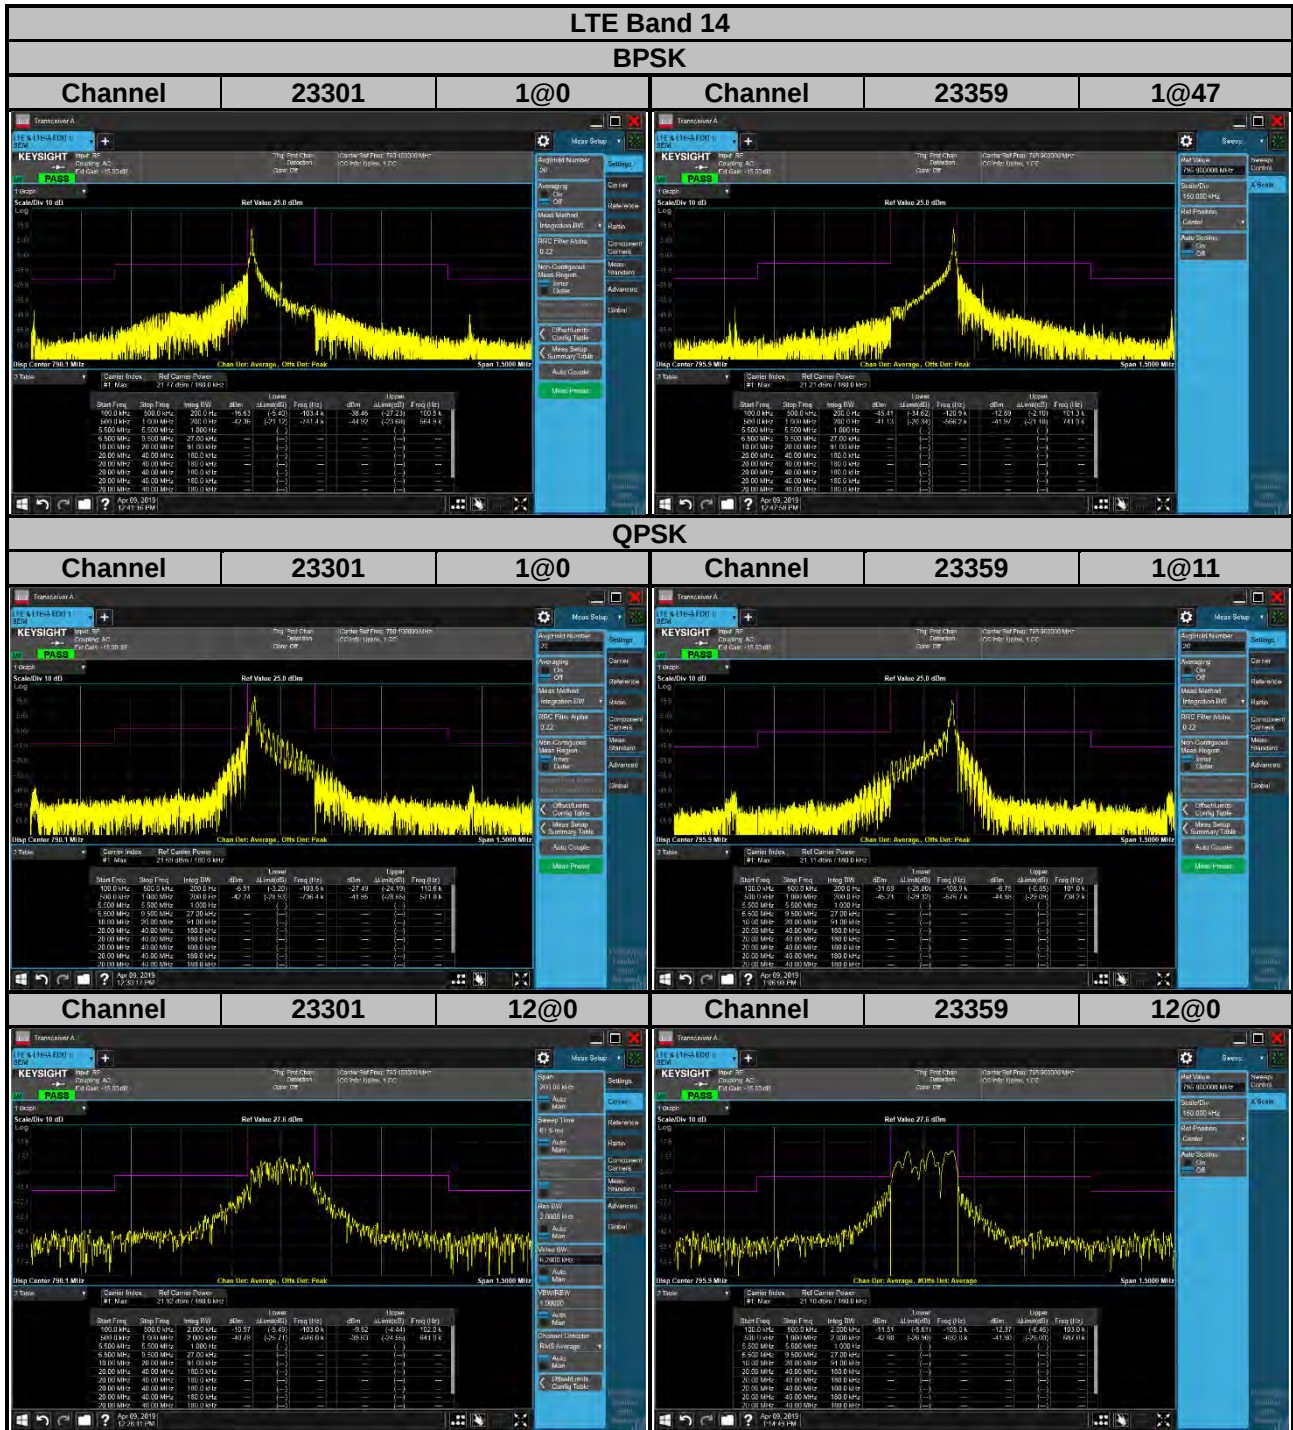

LTE Band 26 BPSK

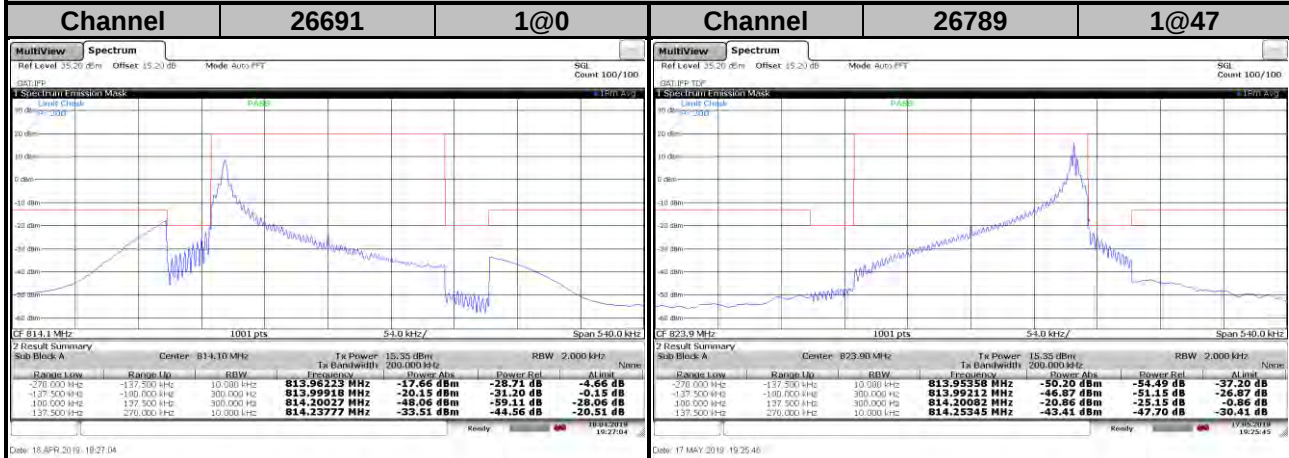

QPSK




4.6 Band Edge Measurement

4.6.1 Limits of Band Edge Measurement

- (1) On all frequencies between 769 - 775 MHz and 799 - 805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations.
- (2) On all frequencies between 769 - 775 MHz and 799 - 805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations.
- (3) On any frequency between 775 - 788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10 \log (P)$.

4.6.2 Test Setup

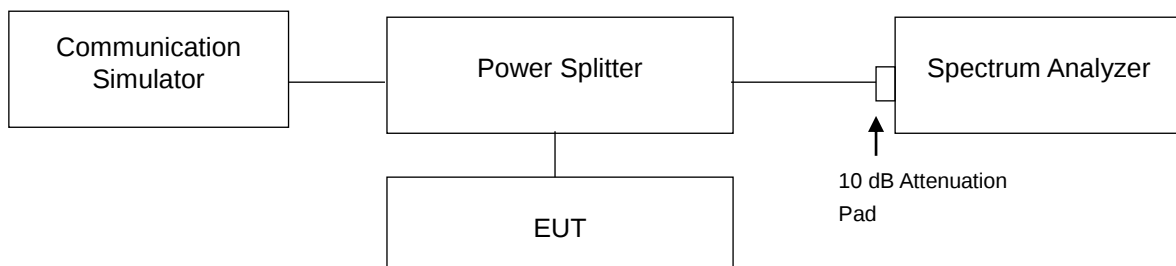



4.6.3 Test Procedures


- a. All measurements were done at low and high operational frequency range.
- b. The band edge measurement used the power splitter via EUT RF power connector between signal generator and spectrum analyzer. This splitter loss, attenuator loss and cable loss are the worst loss 15 dB in the transmitted path track.
- c. Record the max. trace plot into the test report.


4.6.4 Test Results

Cat-M1

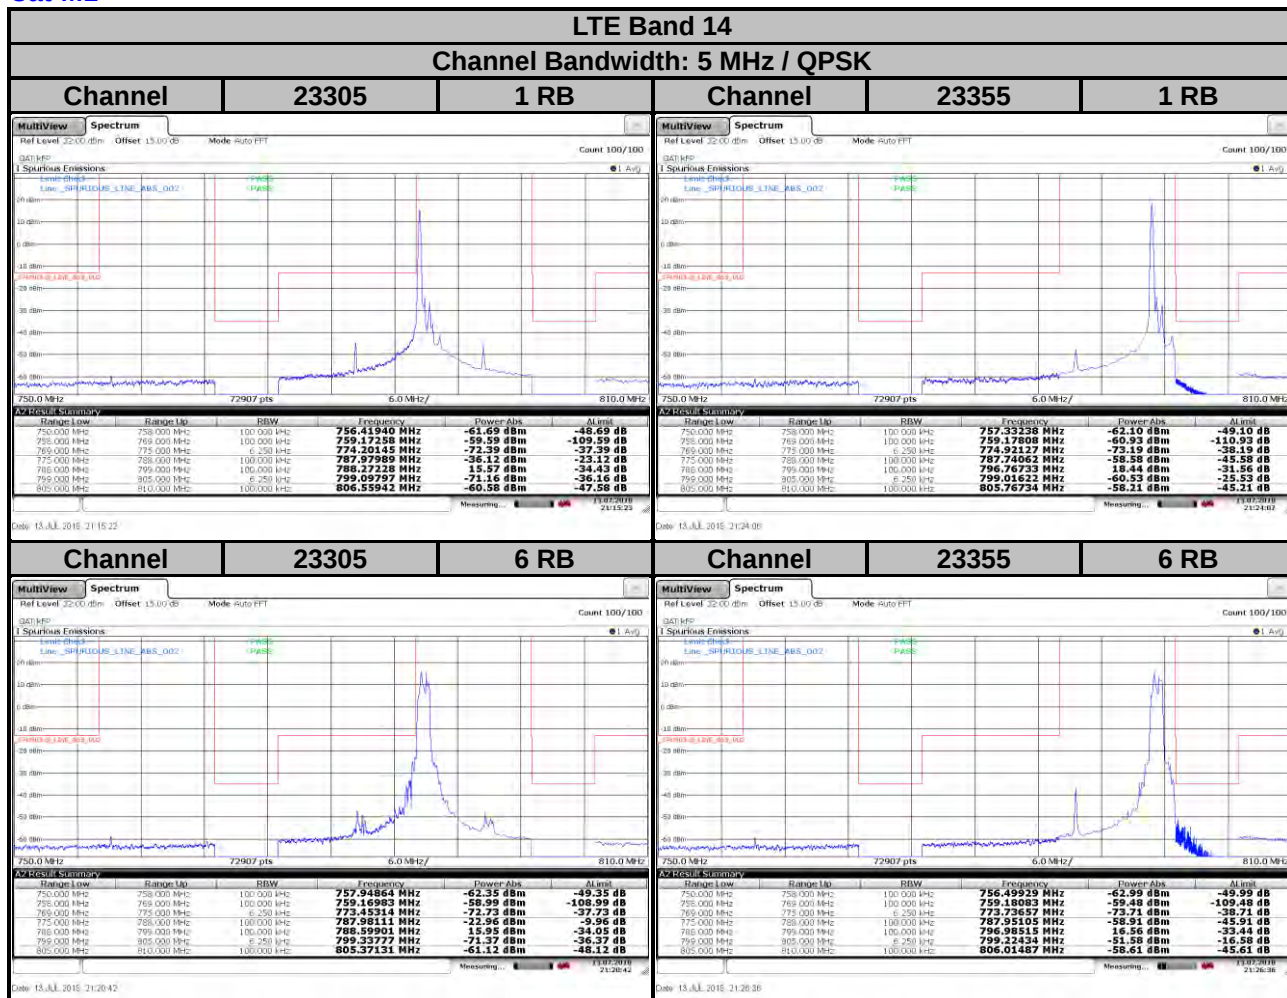


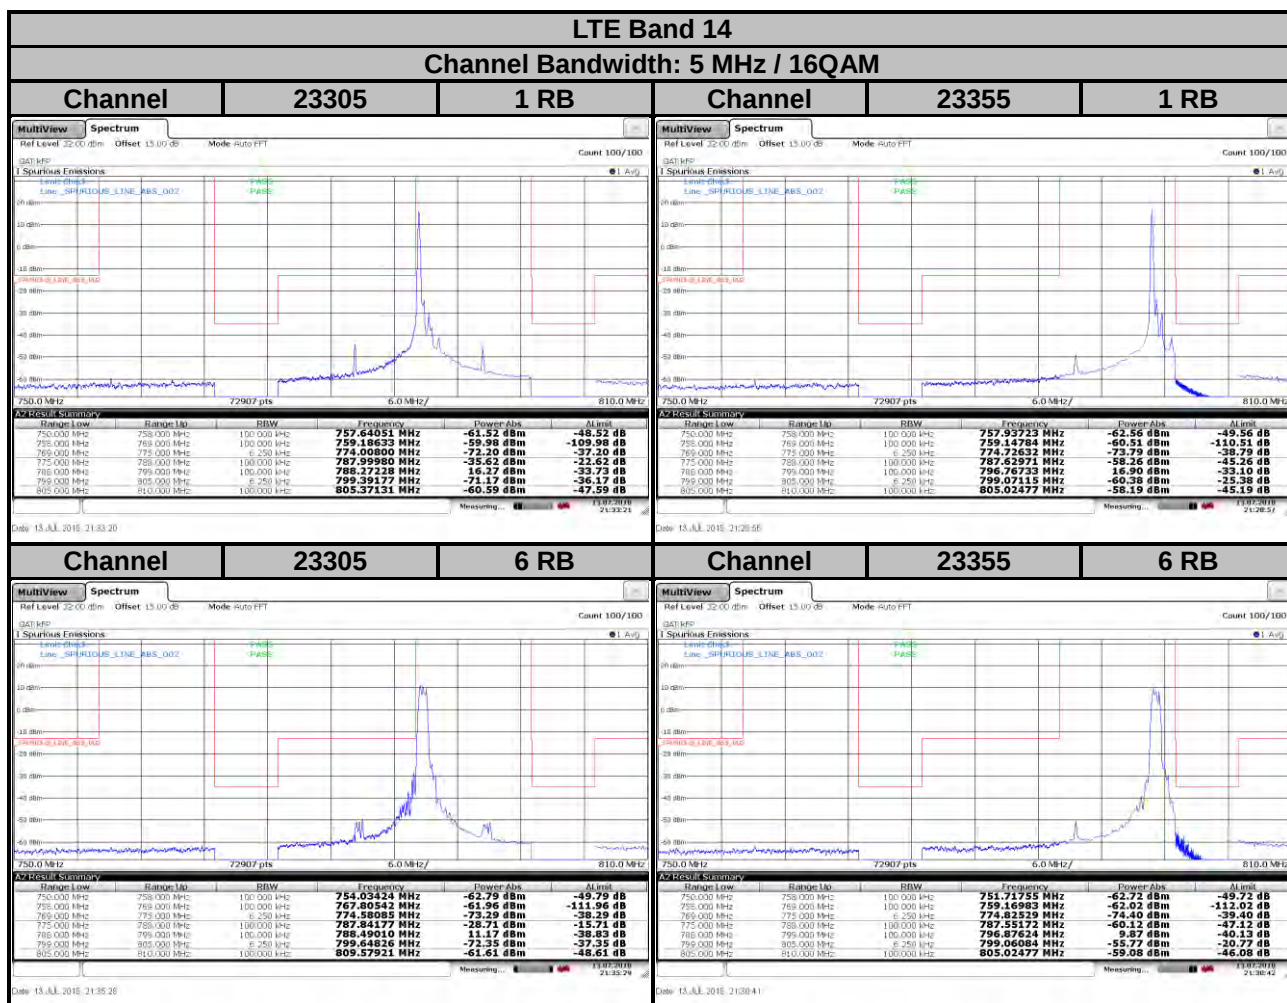


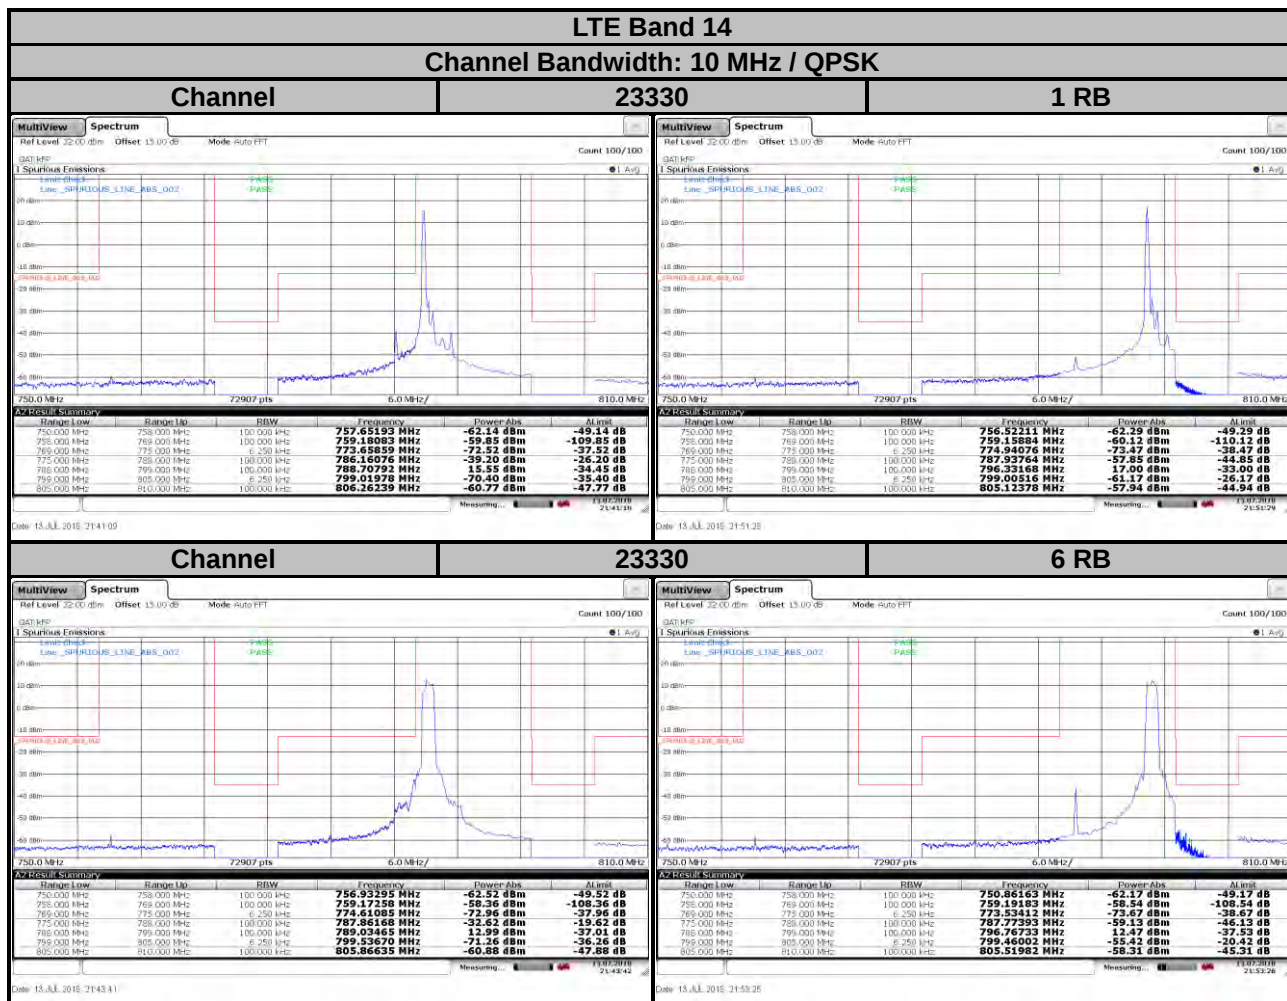



NB-IoT

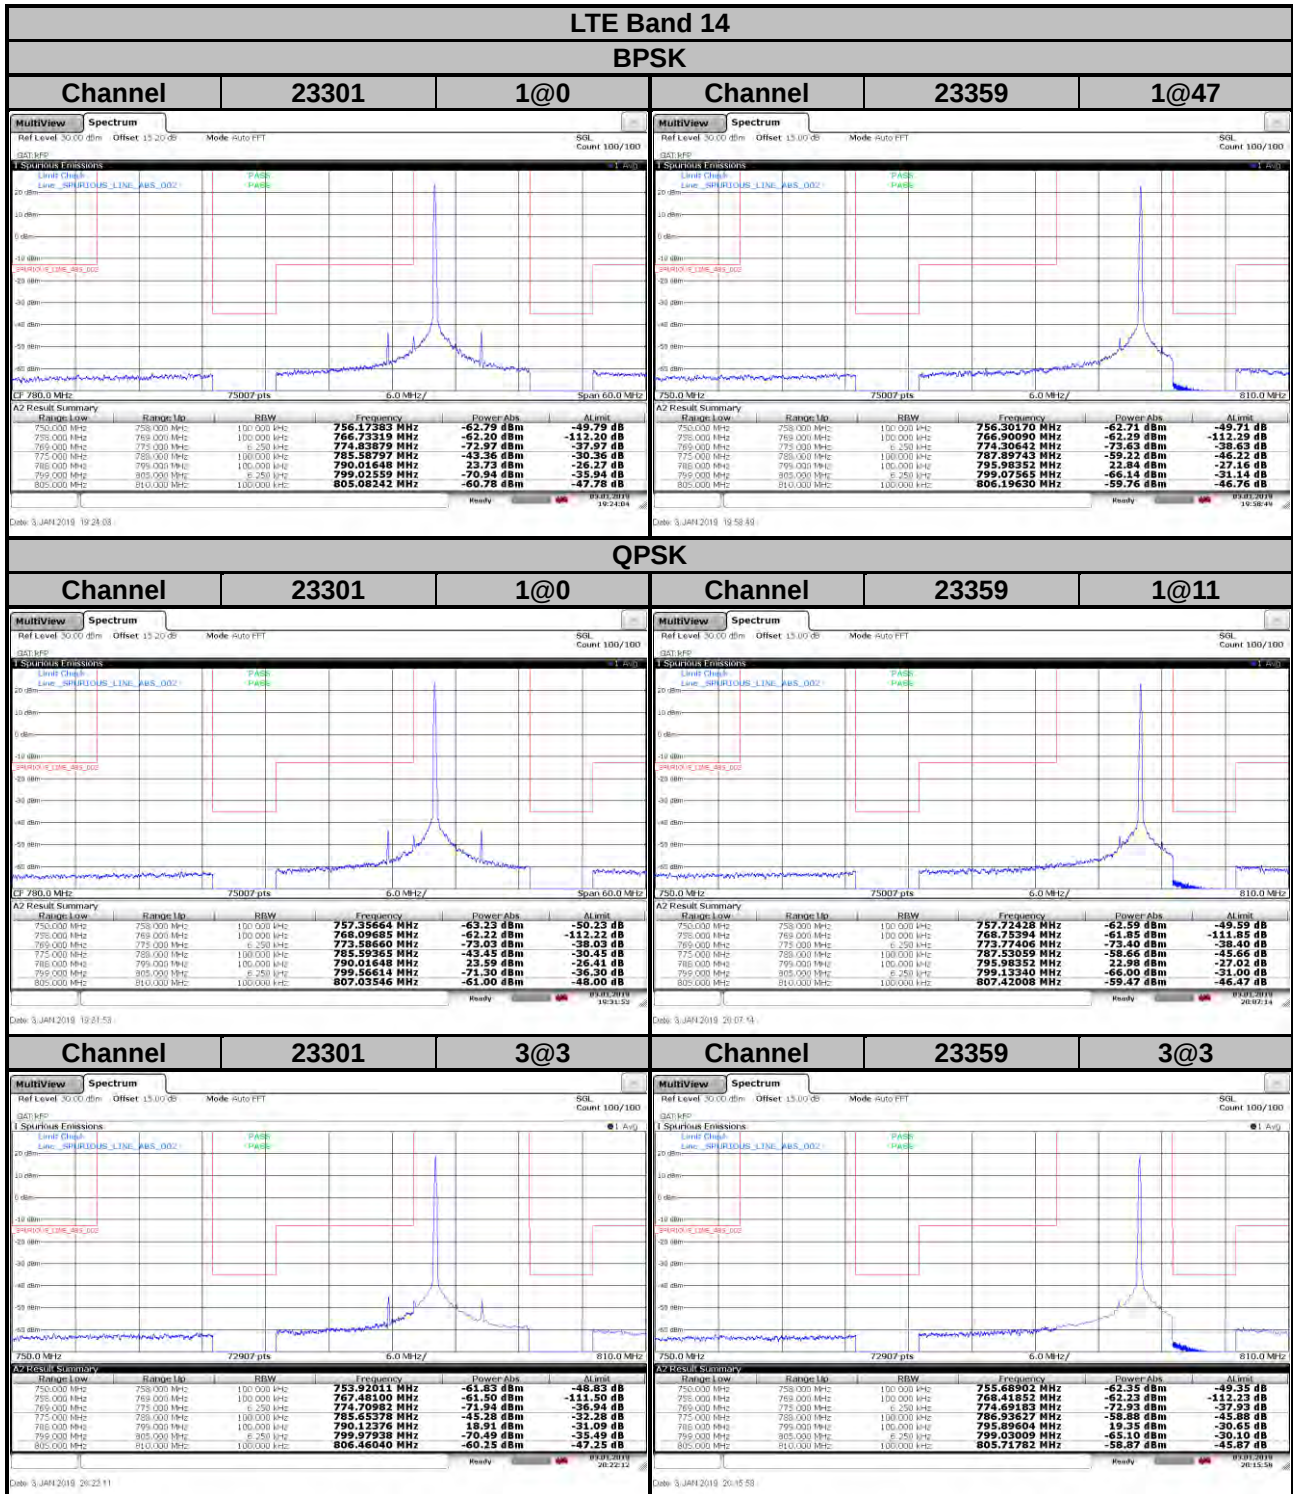

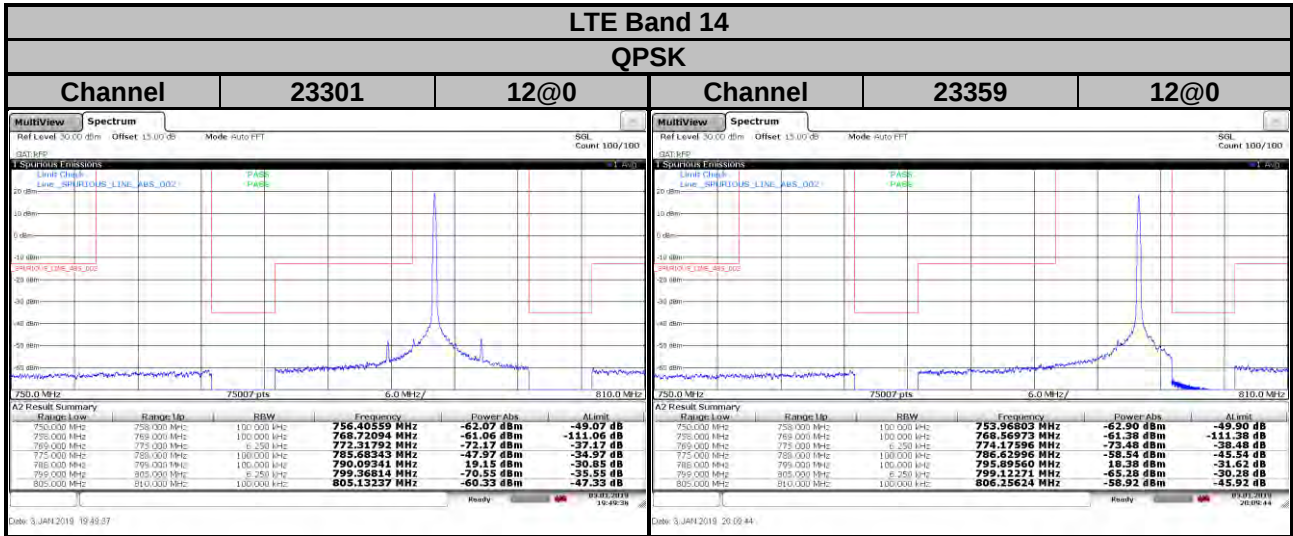


4.7 Conducted Spurious Emissions

4.7.1 Limits of Conducted Spurious Emissions Measurement

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB. The limit of emission is equal to -13 dBm.

On all frequencies between 769 – 775 MHz and 799 – 805 MHz, by a factor not less than $65 + 10 \log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations.

4.7.2 Test Setup

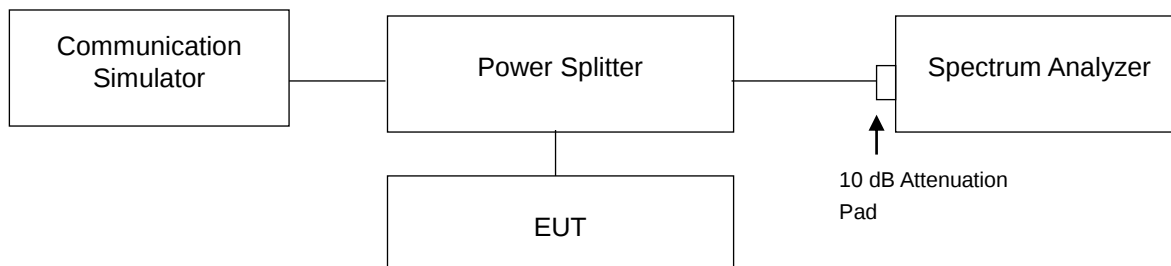


4.7.3 Test Procedure


- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 9 kHz to 1 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 100 kHz and VBW = 300 kHz are used for conducted emission measurement.
- Measuring frequency range is from 1 GHz to 9 / 10 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 1 MHz and VBW = 3 MHz are used for conducted emission measurement.

4.7.4 Test Results

Cat-M1

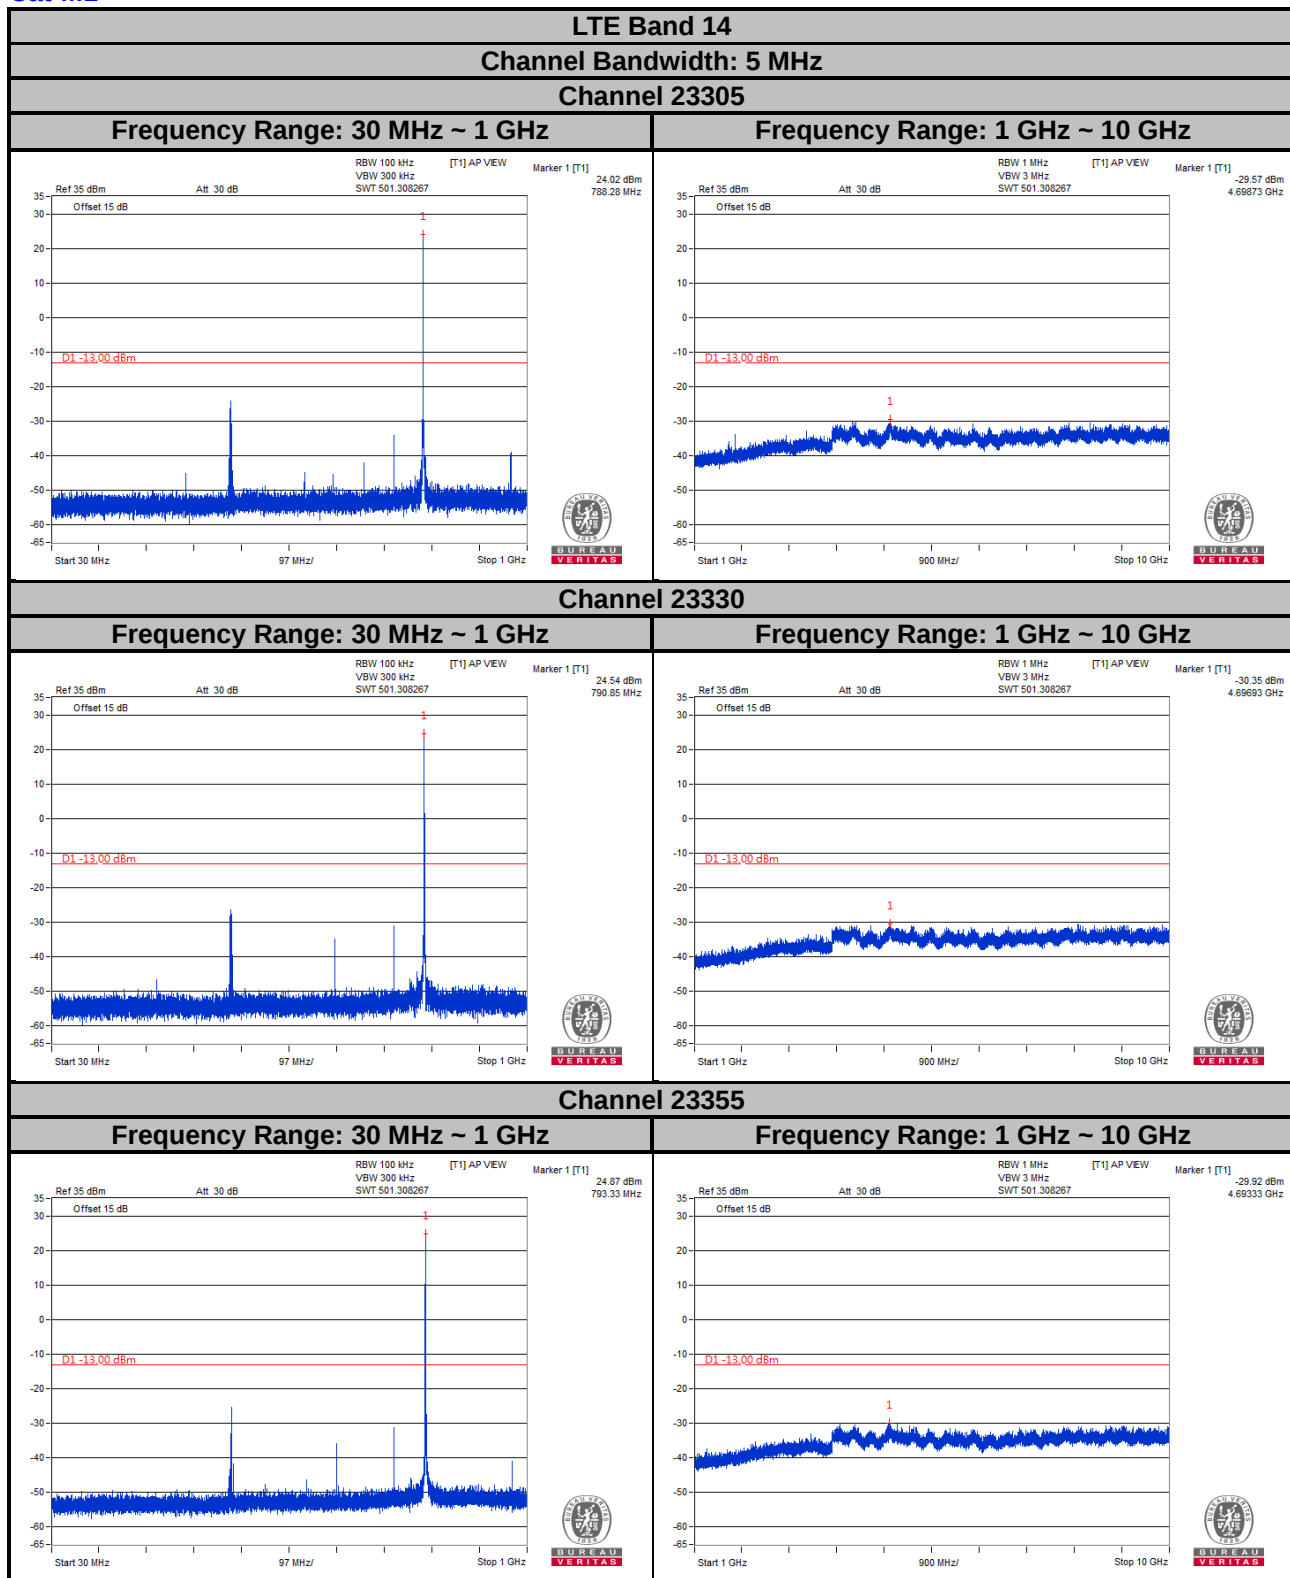

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

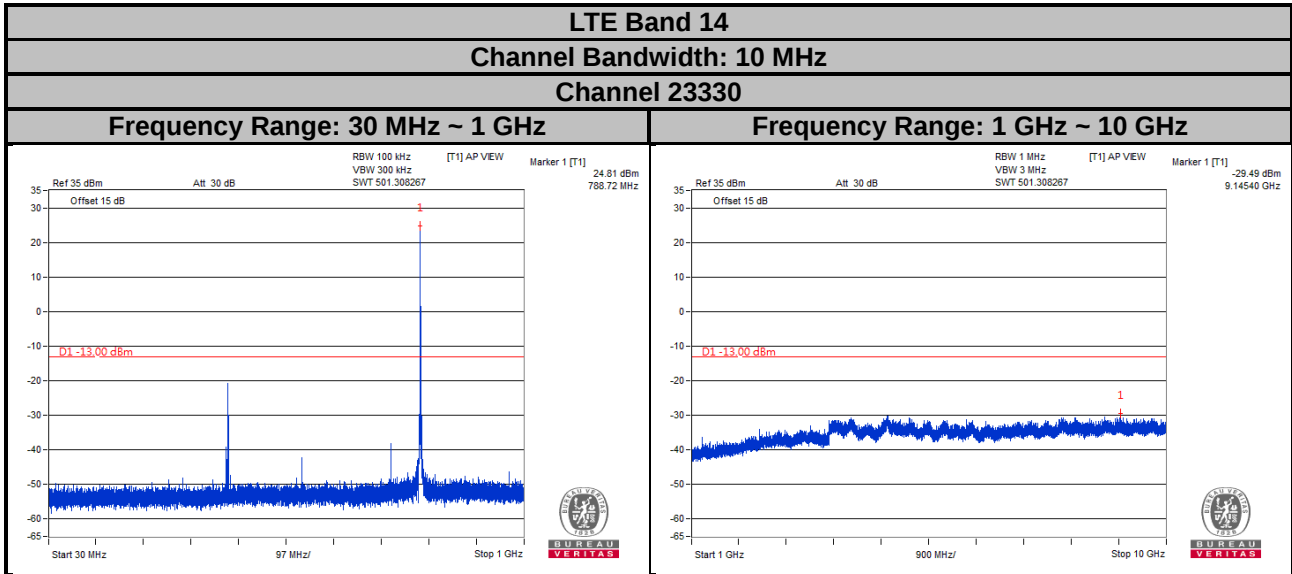


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

LTE Band 26


Channel Bandwidth: 1.4 MHz

Channel 26697

Frequency Range: 30 MHz ~ 1 GHz

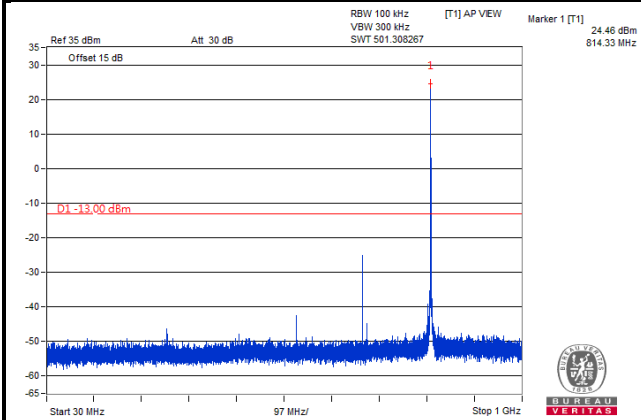


Frequency Range: 1 GHz ~ 10 GHz

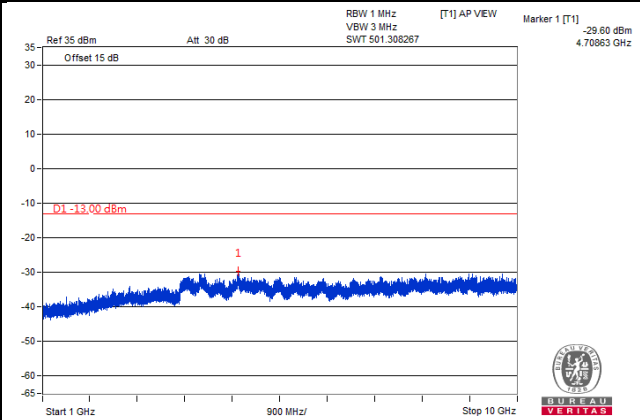


Channel 26740

Frequency Range: 30 MHz ~ 1 GHz

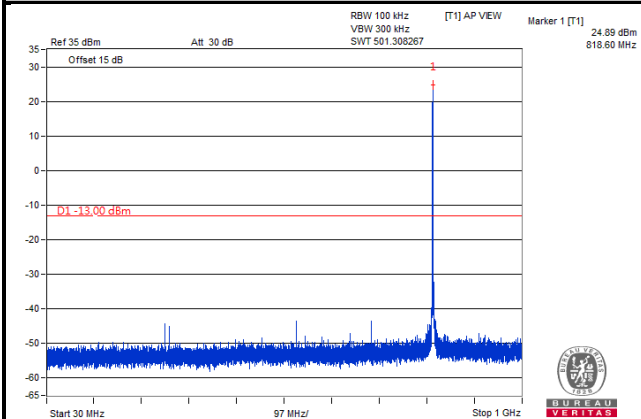


Frequency Range: 1 GHz ~ 10 GHz

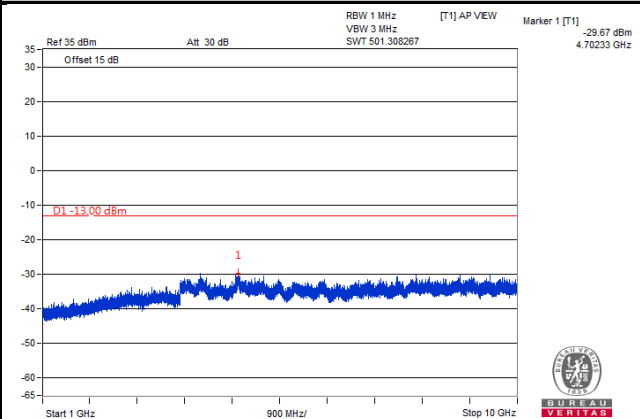


Channel 26783


Frequency Range: 30 MHz ~ 1 GHz

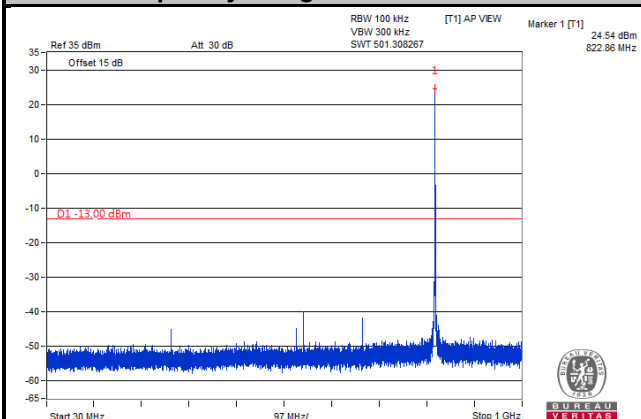

Frequency Range: 1 GHz ~ 10 GHz

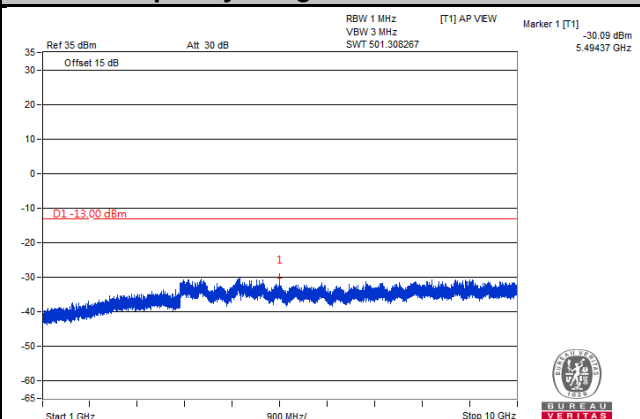

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

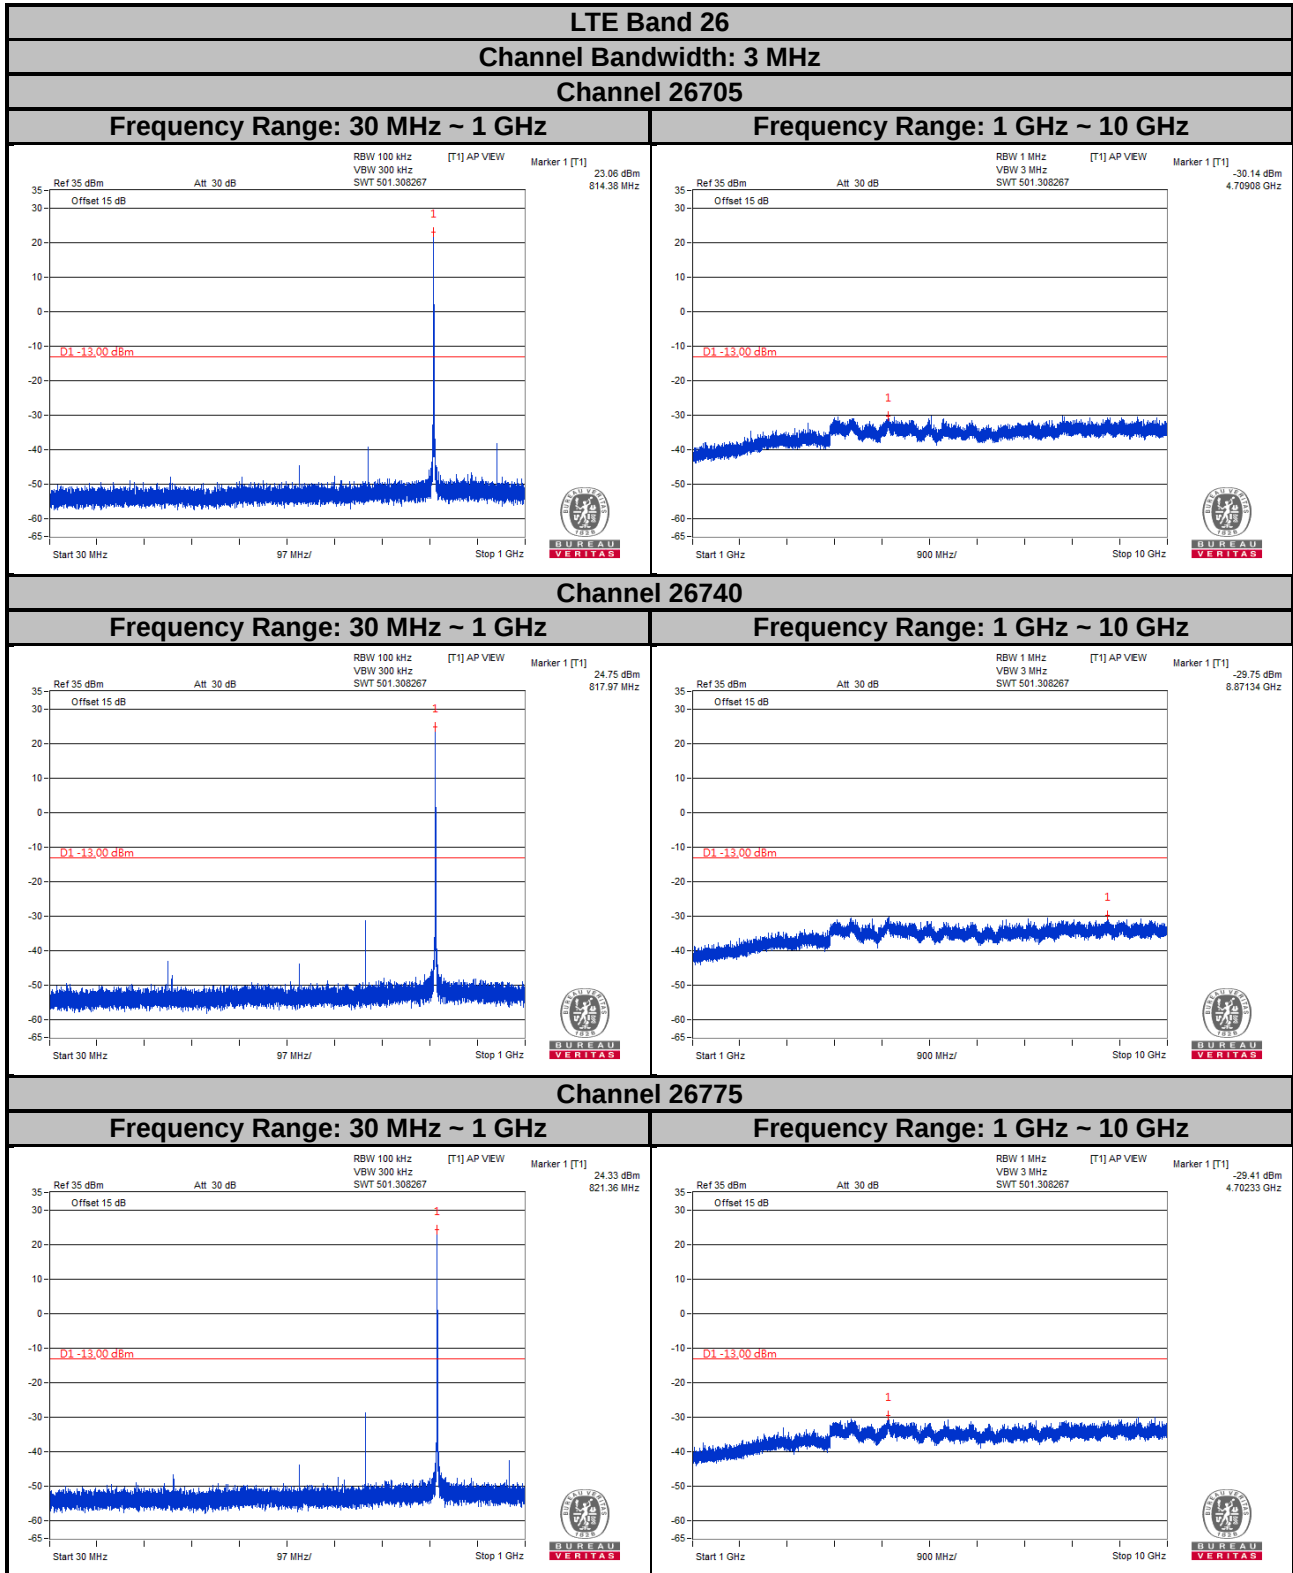


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

LTE Band 26


Channel Bandwidth: 5 MHz

Channel 26715

Frequency Range: 30 MHz ~ 1 GHz

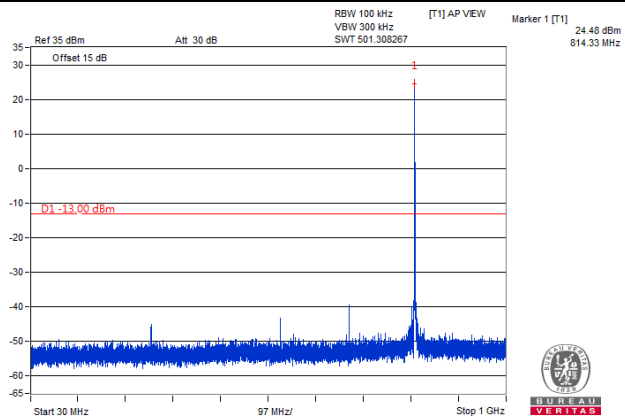


Frequency Range: 1 GHz ~ 10 GHz

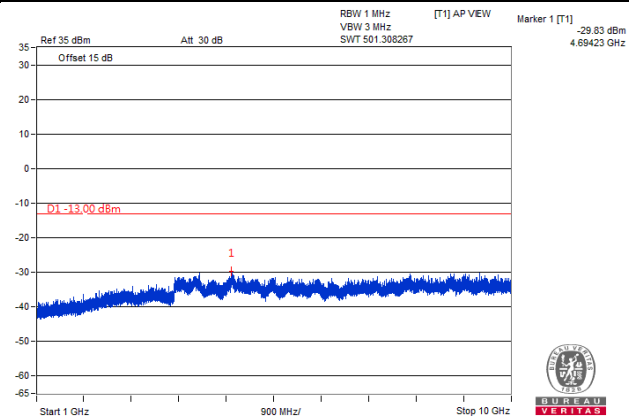


Channel 26740

Frequency Range: 30 MHz ~ 1 GHz

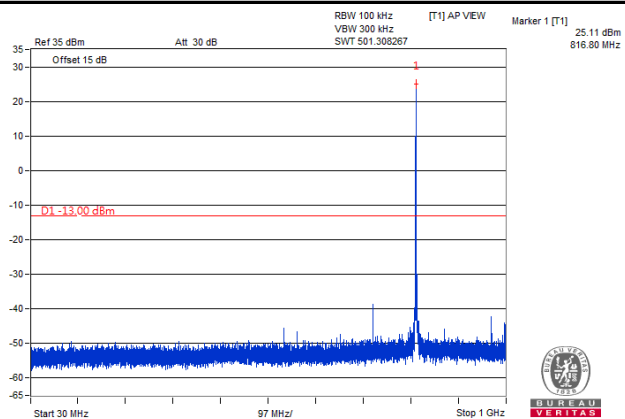


Frequency Range: 1 GHz ~ 10 GHz

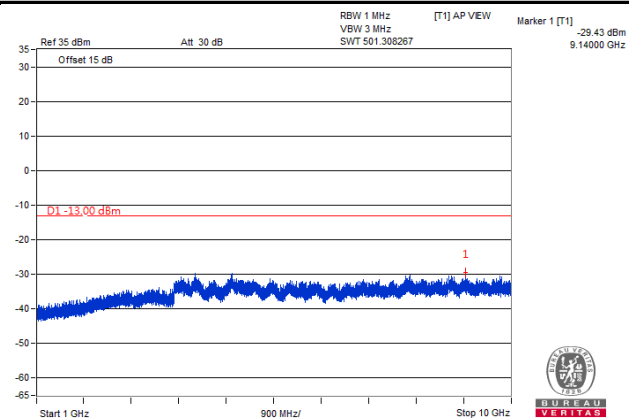


Channel 26765


Frequency Range: 30 MHz ~ 1 GHz

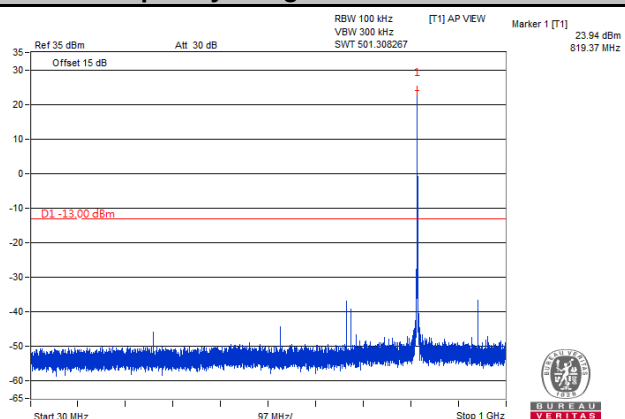

Frequency Range: 1 GHz ~ 10 GHz

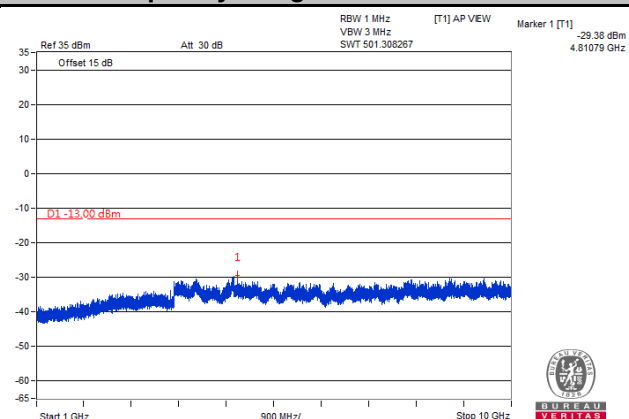


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

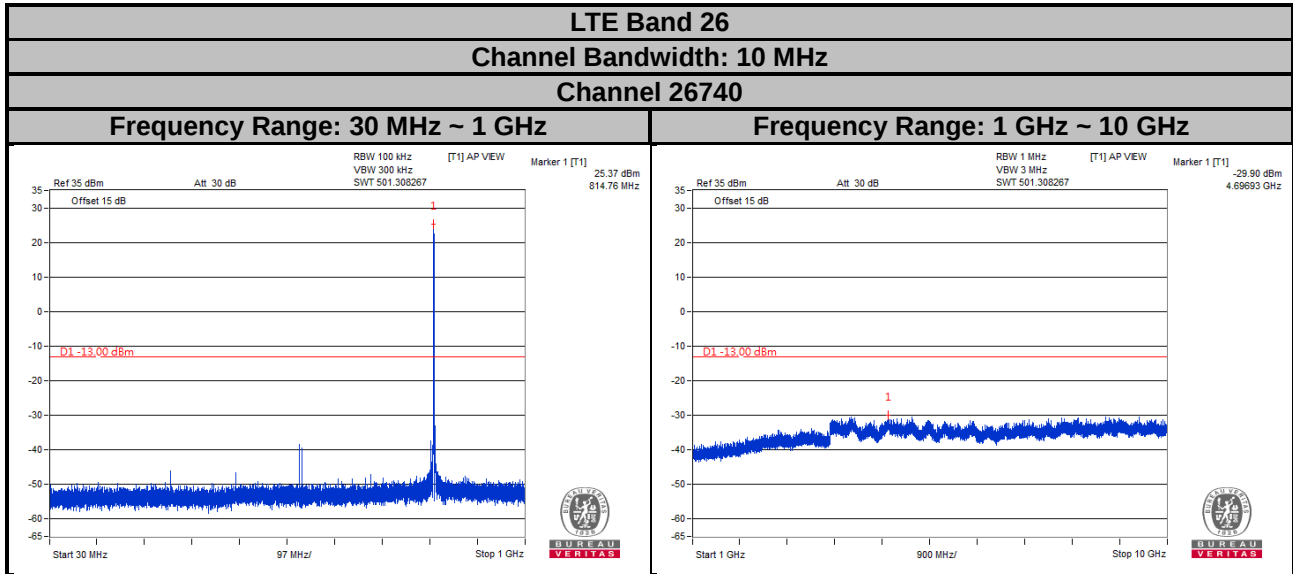

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

NB-IoT

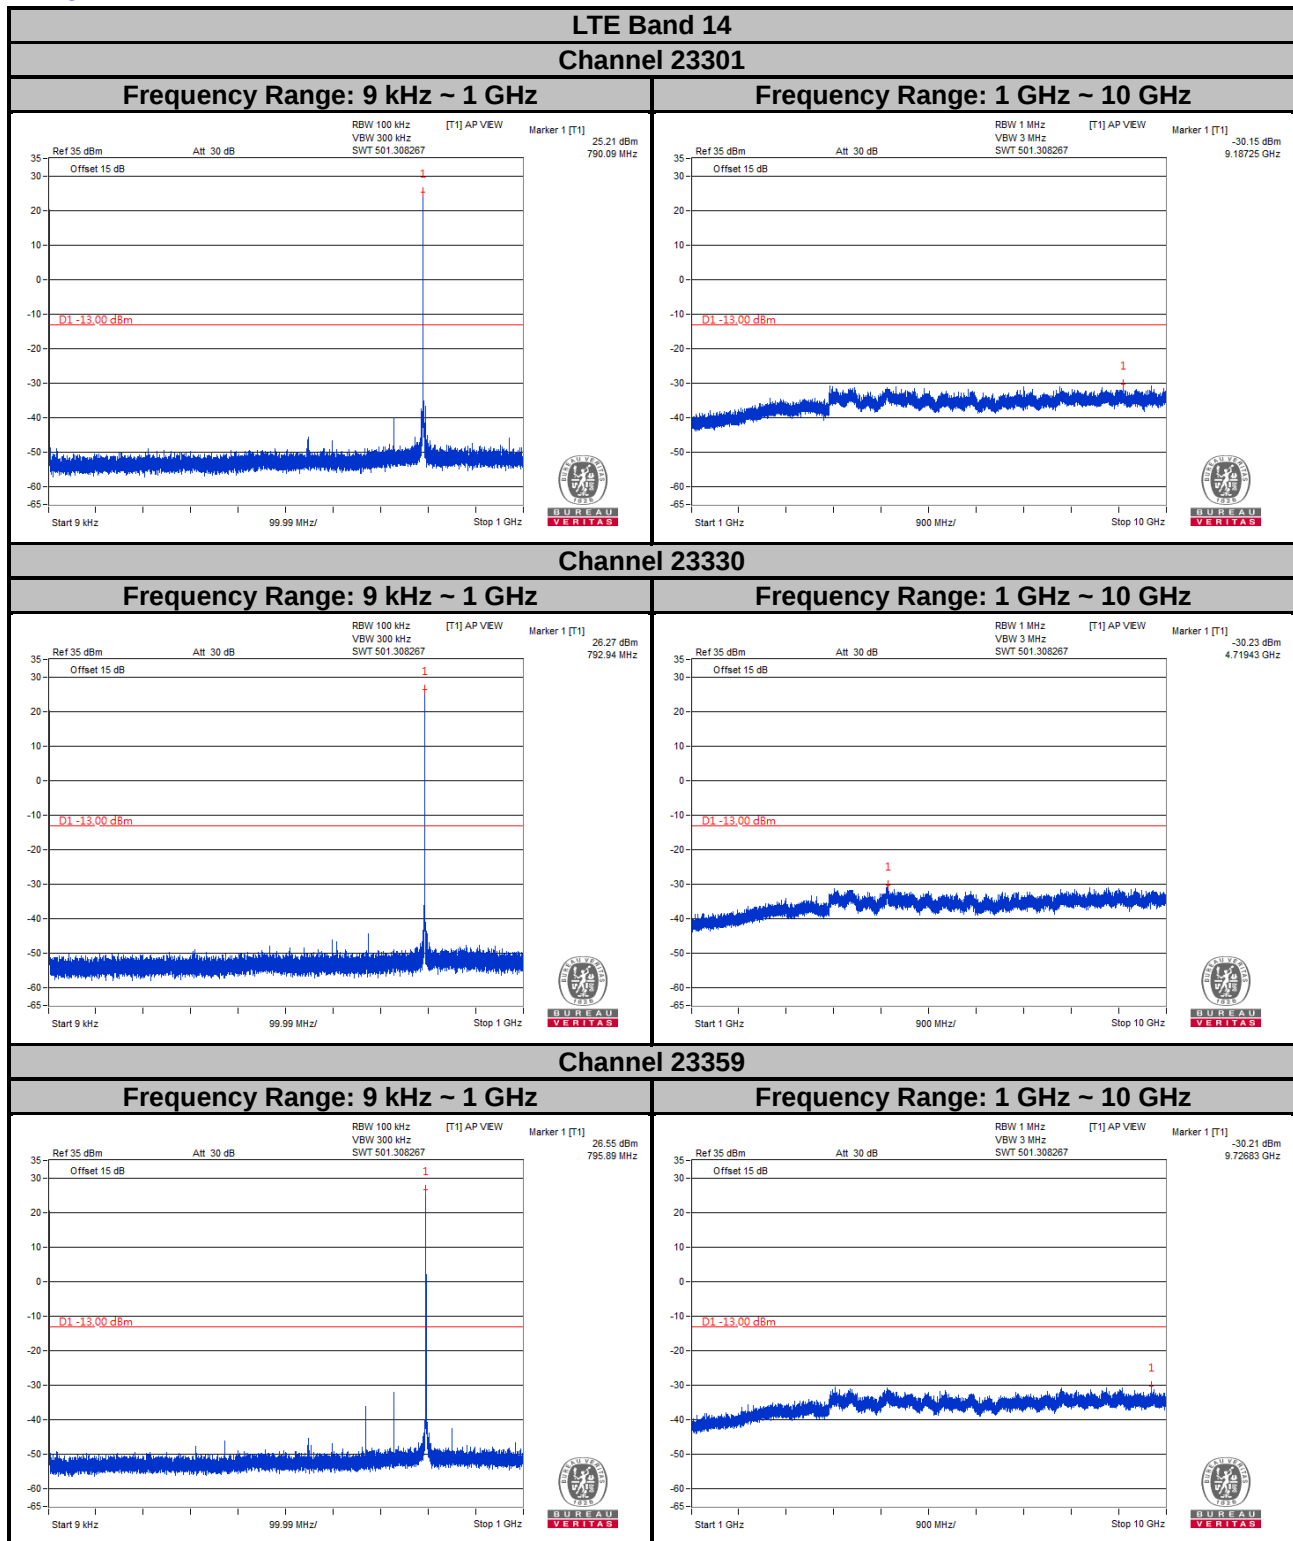


Note: The signal over the limit in 9 kHz is from spectrum analyzer.


LTE Band 26

Channel 26691

Frequency Range: 9 kHz ~ 1 GHz

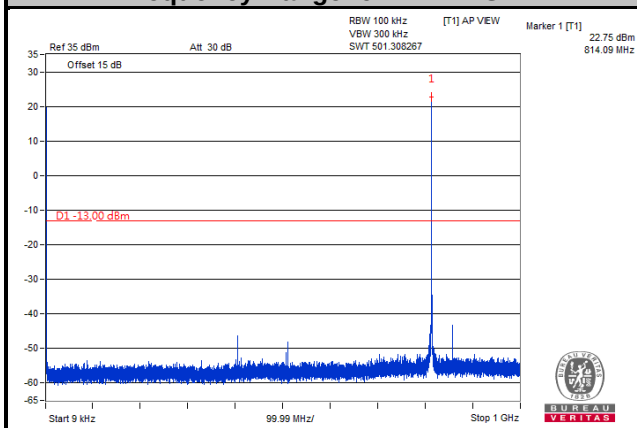


Frequency Range: 1 GHz ~ 9 GHz

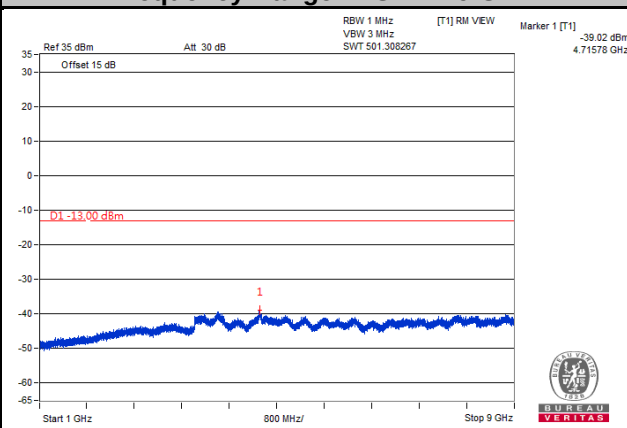


Channel 26740

Frequency Range: 9 kHz ~ 1 GHz

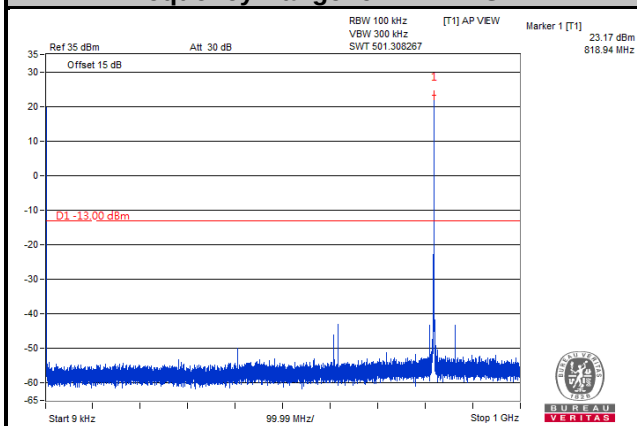


Frequency Range: 1 GHz ~ 9 GHz

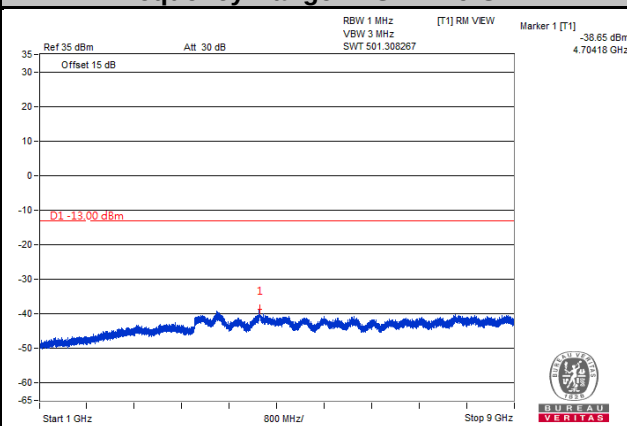


Channel 26789

Frequency Range: 9 kHz ~ 1 GHz

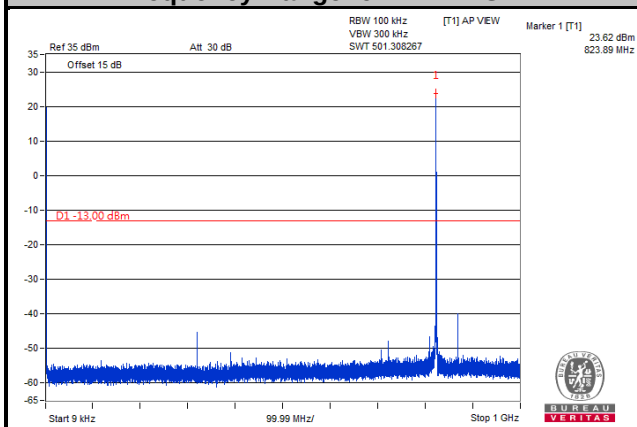

Frequency Range: 1 GHz ~ 9 GHz

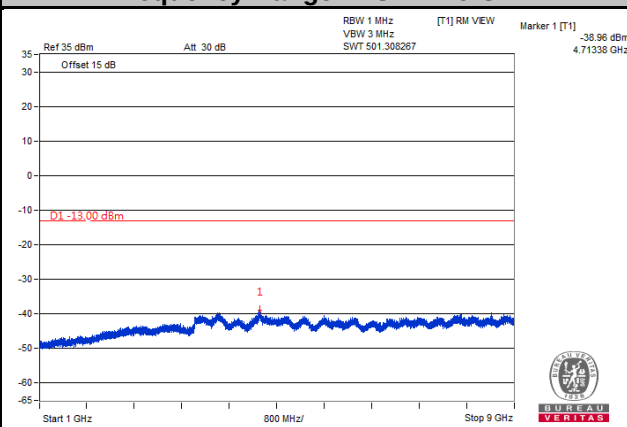

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

4.8 Radiated Emission Measurement

4.8.1 Limits of Radiated Emission Measurement

- (1) The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. The limit of emission is equal to -13 dBm.
- (2) For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.

4.8.2 Test Procedure

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G.
- c. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$.
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.P.R \text{ power} - 2.15 \text{ dB}$.


Note: The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

4.8.3 Deviation from Test Standard


No deviation.

4.8.4 Test Setup

<Radiated Emission below or equal 1 GHz>

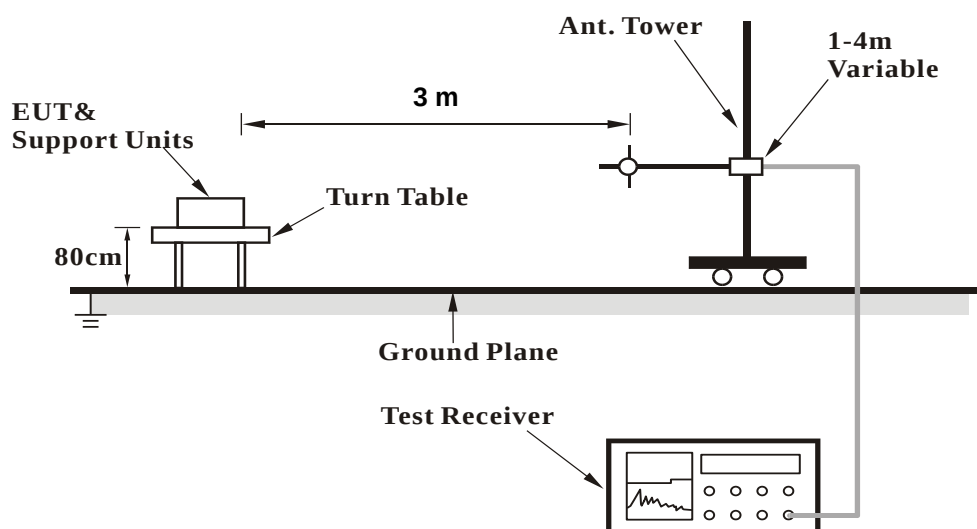

<Radiated Emission above 1 GHz>

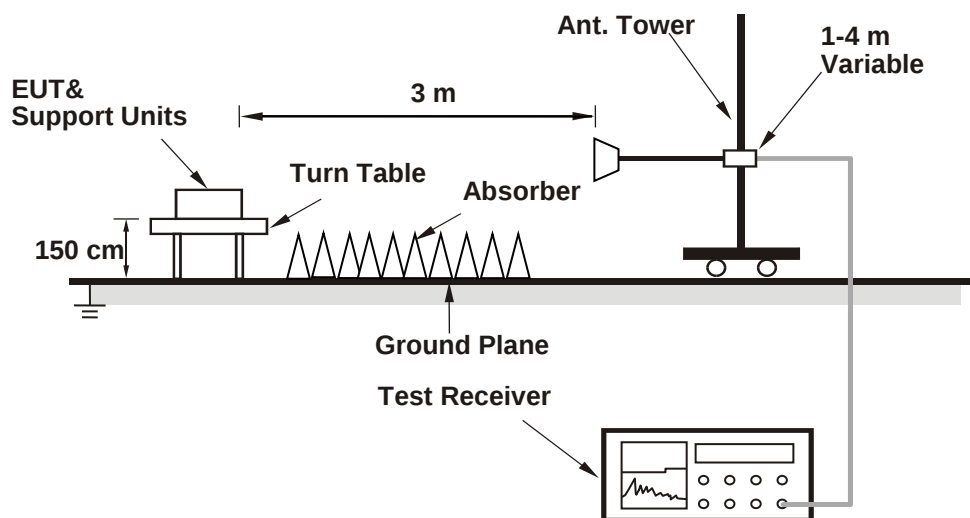

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.8.5 Test Results

Cat-M1

LTE Band 14_1 RB

Channel Bandwidth: 5 MHz / QPSK


Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 1

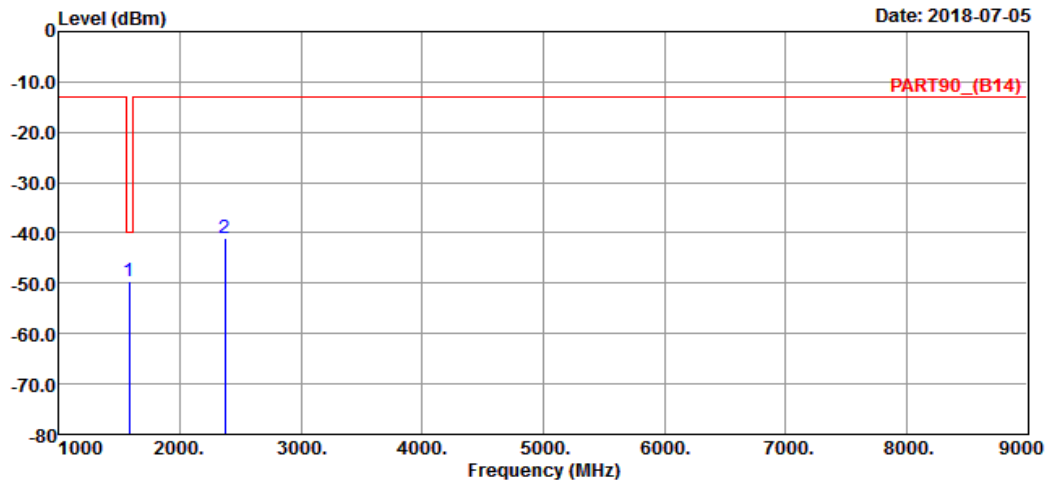

Site : 966 Chamber 5

Condition: PART90_(B14) HORIZONTAL

Remak : Cat-M1 Band 14 QPSK_5M Link_L-CH

Tested by: Thomas Wei


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	1581.00	-49.55	-36.17	-40.00	-9.55	-13.38	Peak
2	2371.50	-40.89	-31.26	-13.00	-27.89	-9.63	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 2

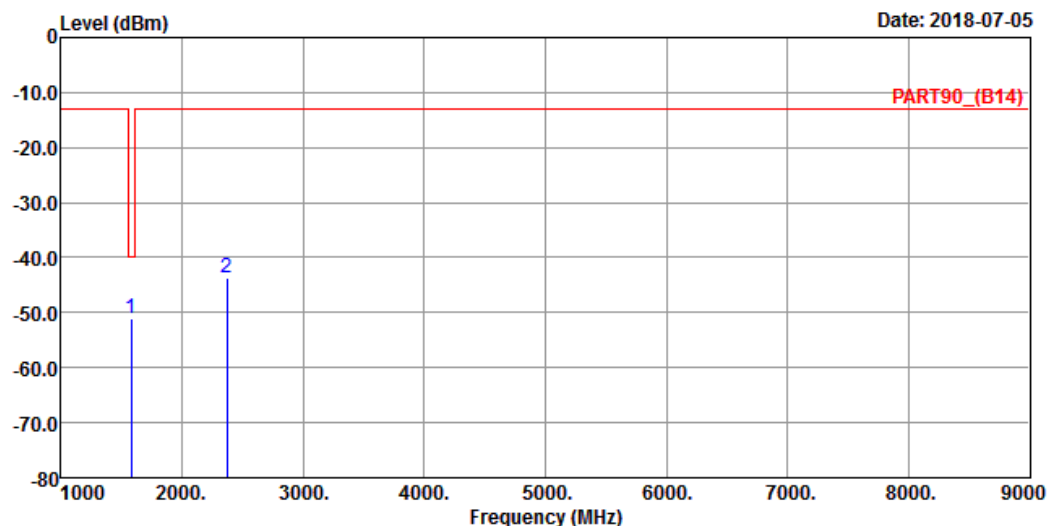

Site : 966 Chamber 5

Condition: PART90_(B14) VERTICAL

Remak : Cat-M1 Band 14 QPSK_5M Link_L-CH

Tested by: Thomas Wei

			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	1581.00	-51.18	-37.80	-40.00	-11.18	-13.38	Peak
2	2371.50	-43.60	-33.97	-13.00	-30.60	-9.63	Peak

Middle Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 05-08-2019

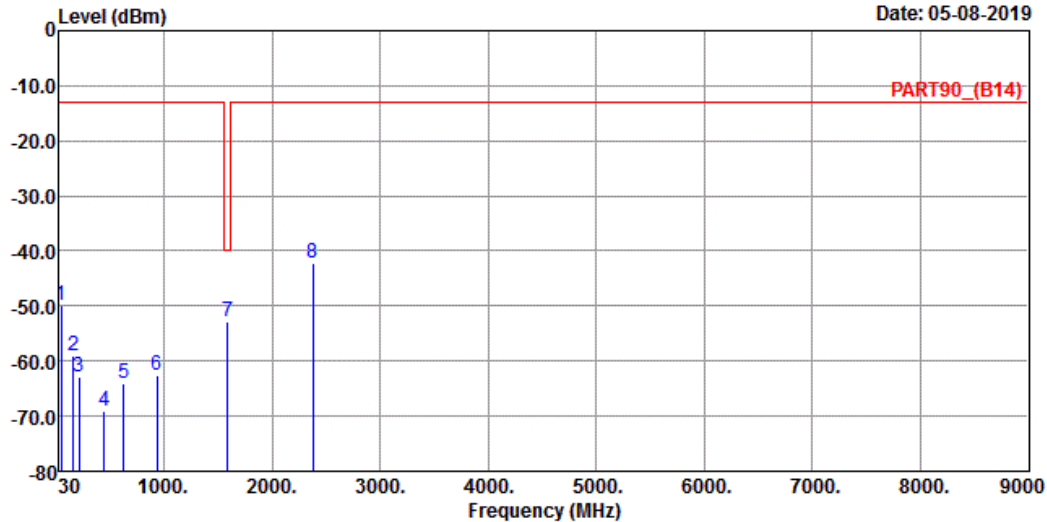

Site : 966 Chamber 5

Condition: PART90_(B14) HORIZONTAL

Remak : Cat-M1 Band 14 QPSK_5M Link_M-CH

Tested by: Getaz Yang

	Freq	Level	Read	Limit	Over	
	MHz	dBm	Level	Line	Factor	Limit Remark
	MHz	dBm	dBm	dBm	dB	dB
1	44.55	-49.96	-47.97	-13.00	-1.99	-36.96 Peak
2	160.95	-58.95	-54.04	-13.00	-4.91	-45.95 Peak
3	210.42	-62.74	-55.15	-13.00	-7.59	-49.74 Peak
4	442.25	-69.16	-63.55	-13.00	-5.61	-56.16 Peak
5	624.61	-63.93	-63.11	-13.00	-0.82	-50.93 Peak
6	933.07	-62.47	-63.86	-13.00	1.39	-49.47 Peak
7 pp	1586.00	-52.85	-39.46	-40.00	-13.39	-12.85 Peak
8	2379.00	-42.36	-32.67	-13.00	-9.69	-29.36 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

Date: 05-08-2019

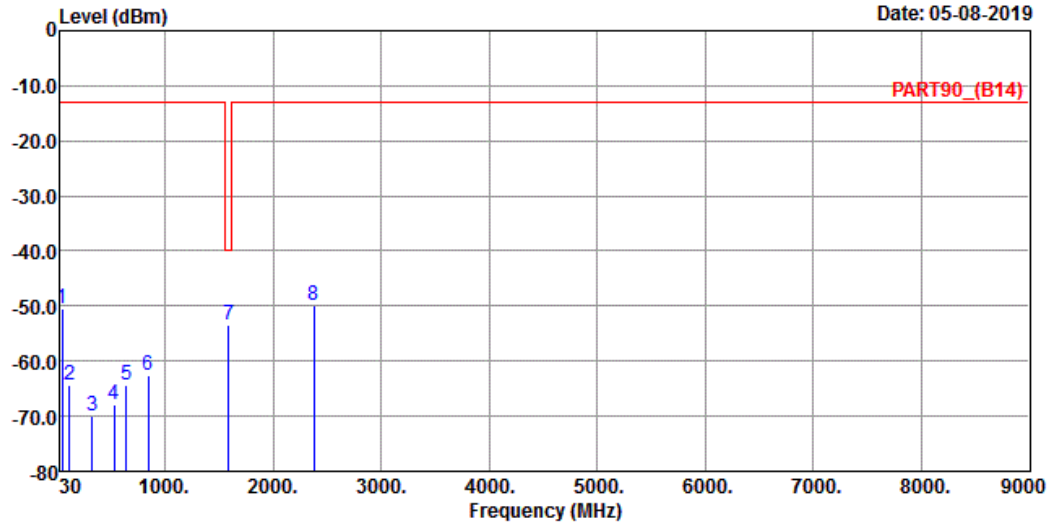

Site : 966 Chamber 5

Condition: PART90_(B14) VERTICAL

Remak : Cat-M1 Band 14 QPSK_5M Link_M-CH

Tested by: Getaz Yang

	Freq	Level	Read Level	Limit	Over	
	MHz	dBm	dBm	dBm	Factor	Limit Remark
1	44.55	-50.46	-48.47	-13.00	-1.99	-37.46 Peak
2	112.45	-64.28	-54.08	-13.00	-10.20	-51.28 Peak
3	321.97	-70.00	-63.33	-13.00	-6.67	-57.00 Peak
4	526.64	-67.76	-64.08	-13.00	-3.68	-54.76 Peak
5	644.01	-64.49	-63.62	-13.00	-0.87	-51.49 Peak
6	841.89	-62.48	-62.84	-13.00	0.36	-49.48 Peak
7 pp	1586.00	-53.36	-39.97	-40.00	-13.39	-13.36 Peak
8	2379.00	-49.81	-40.12	-13.00	-9.69	-36.81 Peak


High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 1

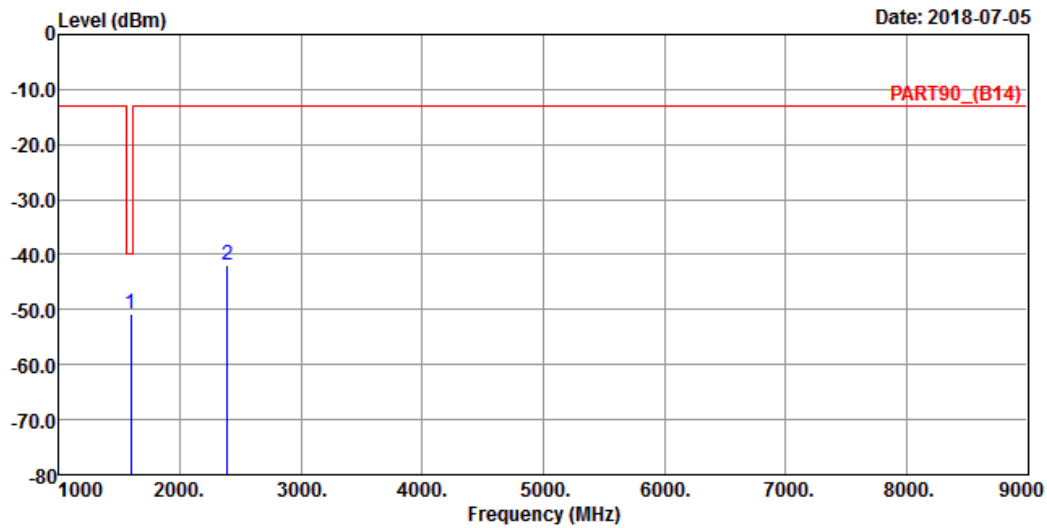

Site : 966 Chamber 5
Condition: PART90_(B14) HORIZONTAL
Remak : Cat-M1 Band 14 QPSK_5M Link_H-CH
Tested by: Thomas Wei

			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	1591.00	-50.78	-37.37	-40.00	-10.78	-13.41	Peak
2	2386.50	-42.01	-32.26	-13.00	-29.01	-9.75	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 2

Date: 2018-07-05

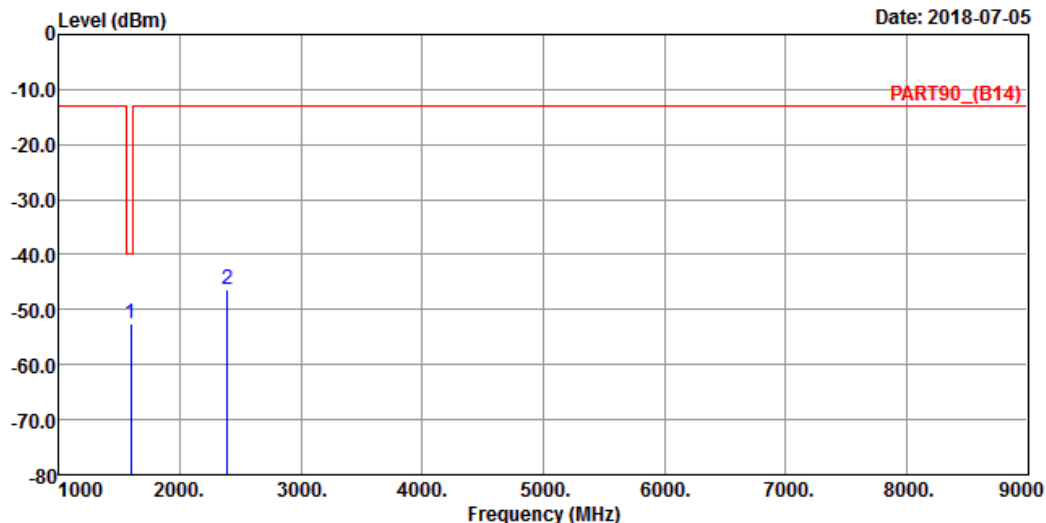

Site : 966 Chamber 5

Condition: PART90_(B14) VERTICAL

Remak : Cat-M1 Band 14 QPSK_5M Link_H-CH

Tested by: Thomas Wei

			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	1591.00	-52.44	-39.03	-40.00	-12.44	-13.41	Peak
2	2386.50	-46.26	-36.51	-13.00	-33.26	-9.75	Peak


Channel Bandwidth: 10 MHz / QPSK
Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 1

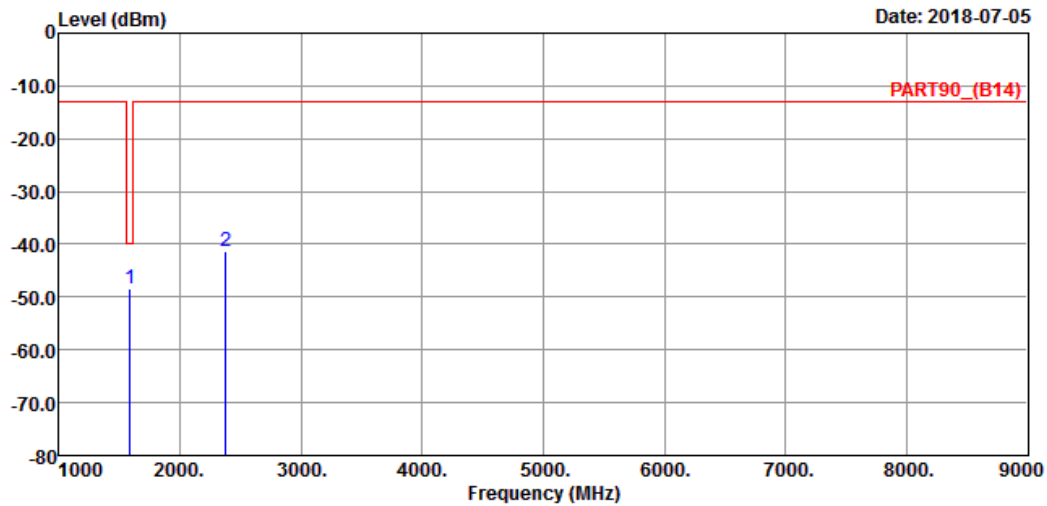

Site : 966 Chamber 5
Condition: PART90_(B14) HORIZONTAL
Remak : Cat-M1 Band 14 QPSK_10M Link_M-CH
Tested by: Thomas Wei


		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1586.00	-48.32	-34.93	-40.00	-8.32	-13.39	Peak
2 2379.00	-41.27	-31.58	-13.00	-28.27	-9.69	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 2

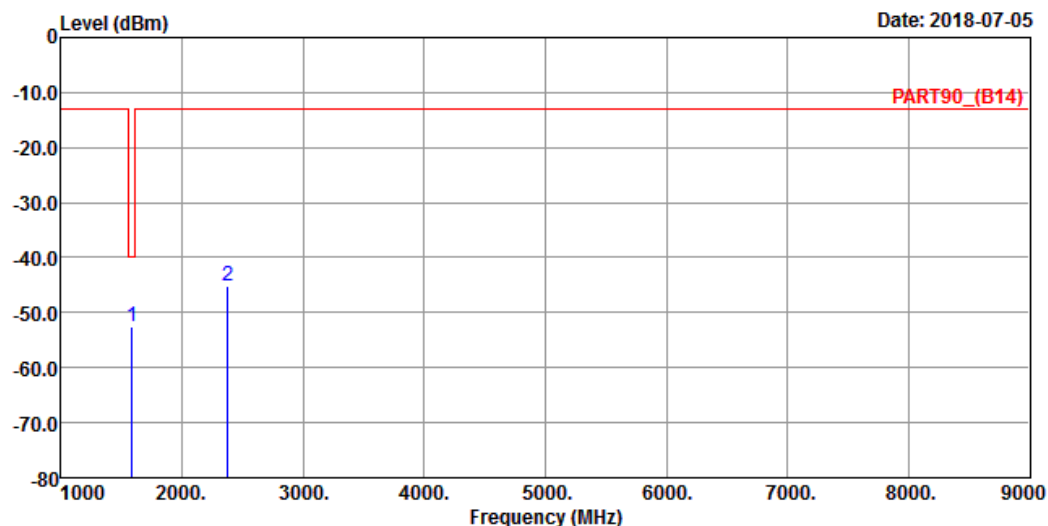

Site : 966 Chamber 5

Condition: PART90_(B14) VERTICAL

Remak : Cat-M1 Band 14 QPSK_10M Link_M-CH

Tested by: Thomas Wei

			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	1586.00	-52.64	-39.25	-40.00	-12.64	-13.39	Peak
2	2379.00	-45.29	-35.60	-13.00	-32.29	-9.69	Peak


LTE Band 14_Full RB
Channel Bandwidth: 5 MHz / QPSK
Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 1

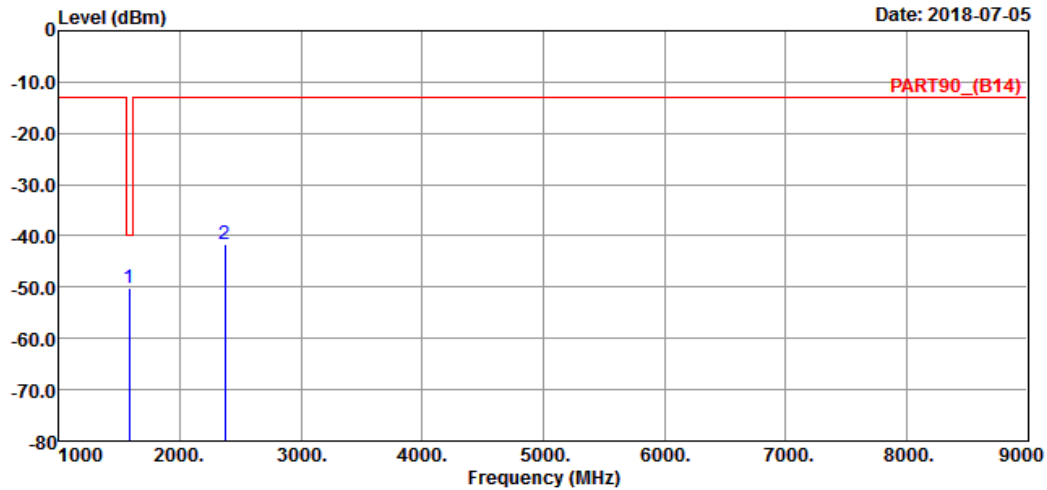

Site : 966 Chamber 5
Condition: PART90_(B14) HORIZONTAL
Remak : Cat-M1 Band 14 QPSK_5M Link_L-CH
Tested by: Thomas Wei


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	1581.00	-50.11	-36.73	-40.00	-10.11	-13.38	Peak
2	2371.50	-41.58	-31.95	-13.00	-28.58	-9.63	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 2

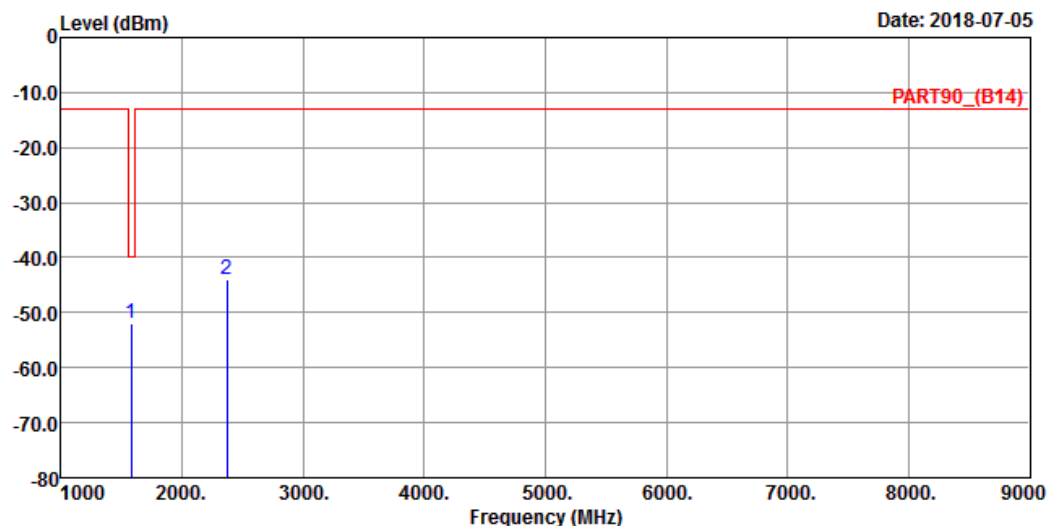

Site : 966 Chamber 5

Condition: PART90_(B14) VERTICAL

Remak : Cat-M1 Band 14 QPSK_5M Link_L-CH

Tested by: Thomas Wei

			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	1581.00	-51.87	-38.49	-40.00	-11.87	-13.38	Peak
2	2371.50	-44.06	-34.43	-13.00	-31.06	-9.63	Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 1

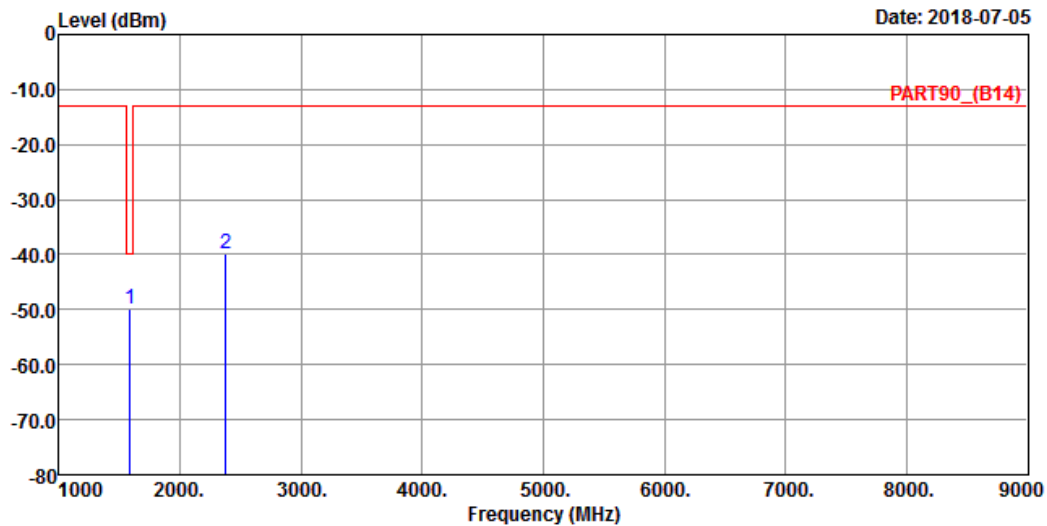

Site : 966 Chamber 5
 Condition: PART90_(B14) HORIZONTAL
 Remak : Cat-M1 Band 14 QPSK_5M Link_M-CH
 Tested by: Thomas Wei


			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	1586.00	-49.83	-36.44	-40.00	-9.83	-13.39	Peak
2	2379.00	-39.91	-30.22	-13.00	-26.91	-9.69	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 2

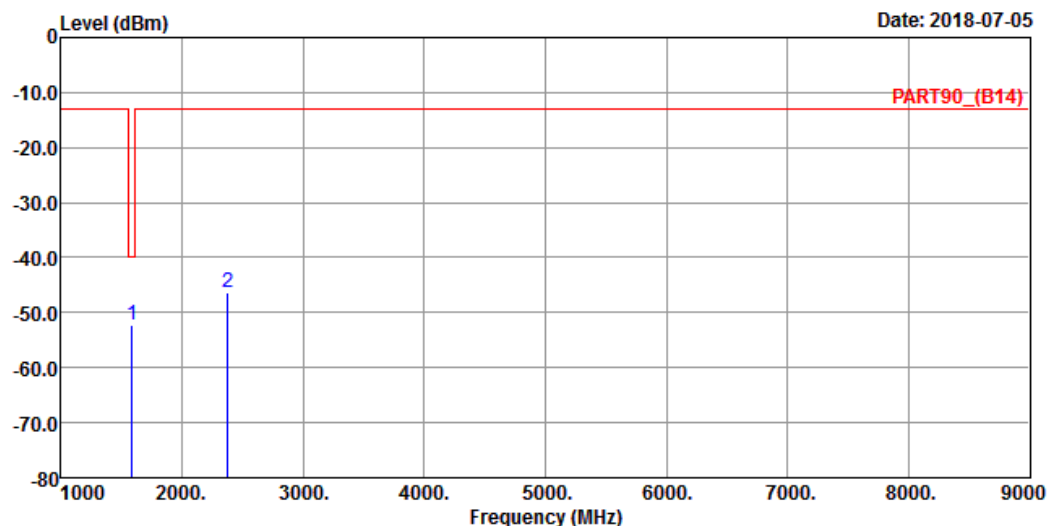

Site : 966 Chamber 5

Condition: PART90_(B14) VERTICAL

Remak : Cat-M1 Band 14 QPSK_5M Link_M-CH

Tested by: Thomas Wei

			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	1586.00	-52.29	-38.90	-40.00	-12.29	-13.39	Peak
2	2379.00	-46.48	-36.79	-13.00	-33.48	-9.69	Peak


High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 1

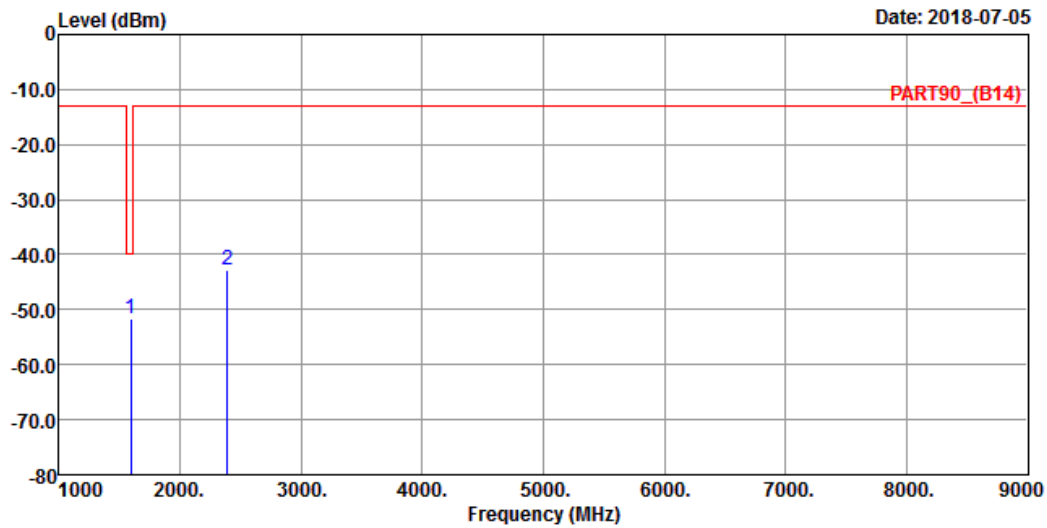

Site : 966 Chamber 5
Condition: PART90_(B14) HORIZONTAL
Remak : Cat-M1 Band 14 QPSK_5M Link_H-CH
Tested by: Thomas Wei

			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	1591.00	-51.55	-38.14	-40.00	-11.55	-13.41	Peak
2	2386.50	-42.79	-33.04	-13.00	-29.79	-9.75	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 2

Date: 2018-07-05

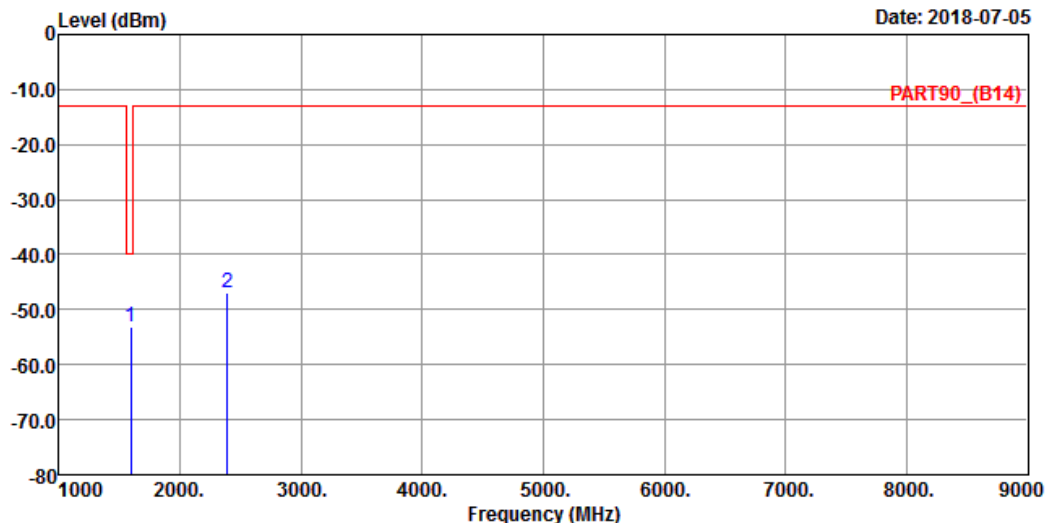

Site : 966 Chamber 5

Condition: PART90_(B14) VERTICAL

Remak : Cat-M1 Band 14 QPSK_5M Link_H-CH

Tested by: Thomas Wei

			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	1591.00	-53.06	-39.65	-40.00	-13.06	-13.41	Peak
2	2386.50	-46.92	-37.17	-13.00	-33.92	-9.75	Peak


Channel Bandwidth: 10 MHz / QPSK
Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 1

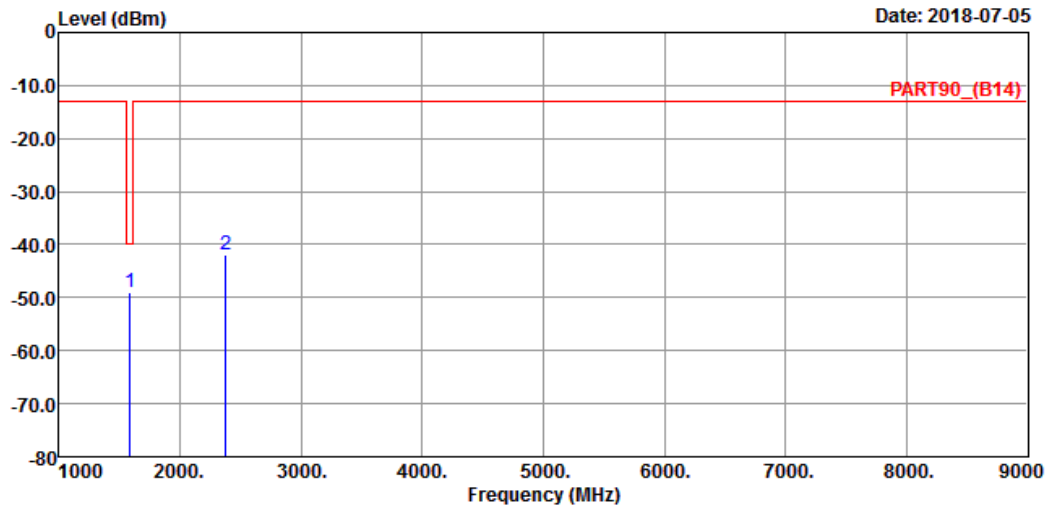

Site : 966 Chamber 5
Condition: PART90_(B14) HORIZONTAL
Remak : Cat-M1 Band 14 QPSK_10M Link_M-CH
Tested by: Thomas Wei


			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	pp 1586.00	-48.97	-35.58	-40.00	-8.97	-13.39	Peak
2	2379.00	-41.88	-32.19	-13.00	-28.88	-9.69	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 2

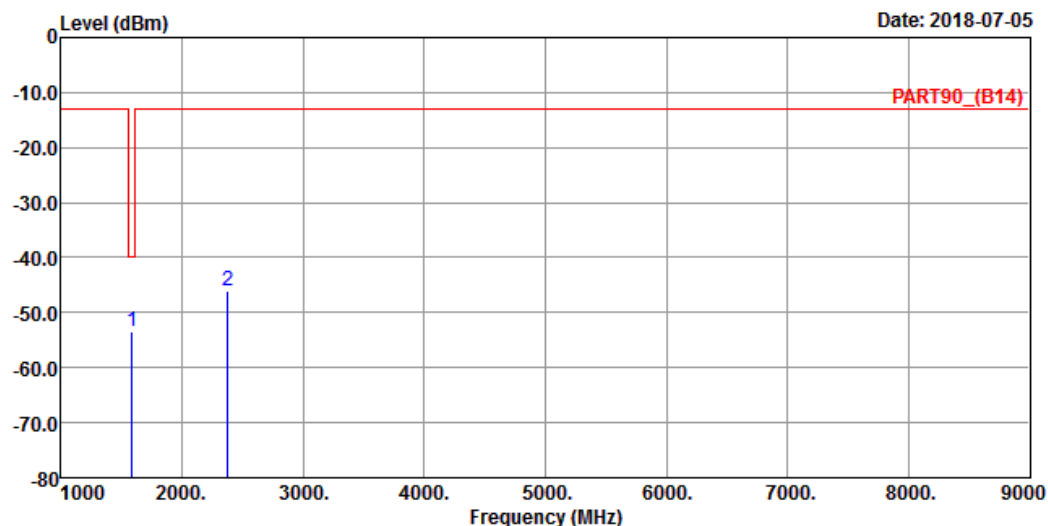

Site : 966 Chamber 5

Condition: PART90_(B14) VERTICAL

Remak : Cat-M1 Band 14 QPSK_10M Link_M-CH

Tested by: Thomas Wei

			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	1586.00	-53.29	-39.90	-40.00	-13.29	-13.39	Peak
2	2379.00	-46.00	-36.31	-13.00	-33.00	-9.69	Peak


LTE Band 26
Channel Bandwidth: 1.4 MHz / QPSK
Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 1

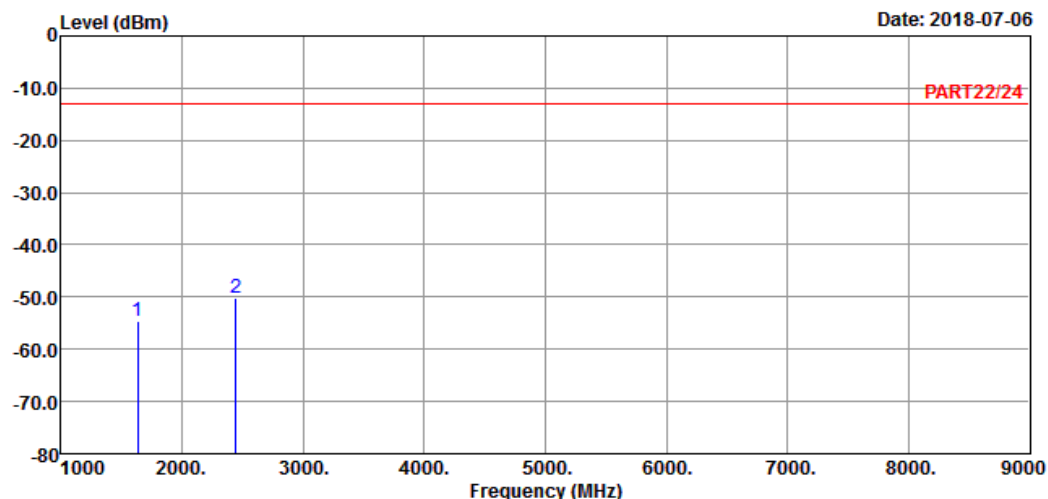

Site : 966 Chamber 5
Condition: PART22/24 HORIZONTAL
Remak : Cat-M1 Band 26 QPSK_1.4M Link_L-CH
Tested by: Thomas Wei

			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1629.40	-54.67	-41.05	-13.00	-41.67	-13.62	Peak
2 pp	2444.10	-50.22	-40.26	-13.00	-37.22	-9.96	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 2

Date: 2018-07-06

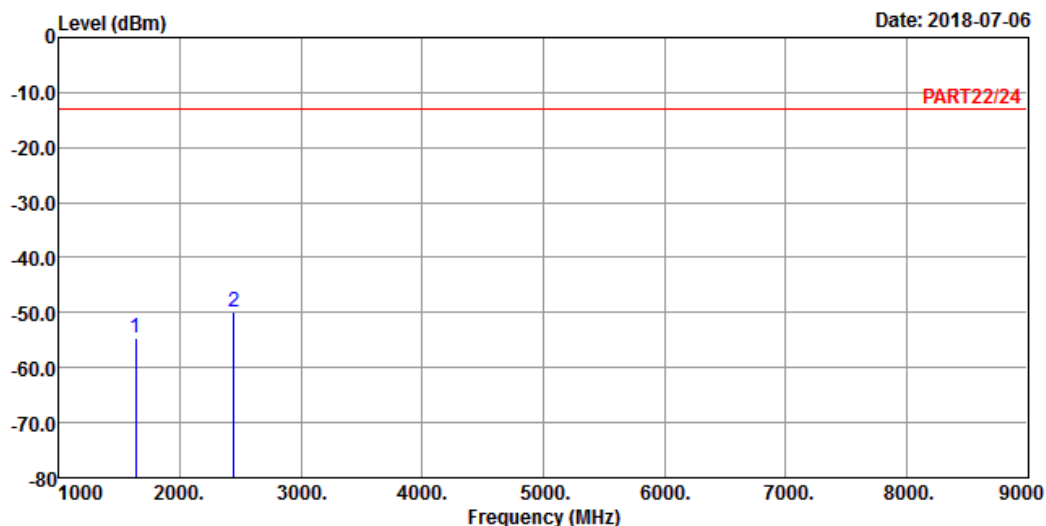

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : Cat-M1 Band 26 QPSK_1.4M Link_L-CH

Tested by: Thomas Wei

			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1629.40	-54.60	-40.98	-13.00	-41.60	-13.62	Peak
2 pp	2444.10	-49.75	-39.79	-13.00	-36.75	-9.96	Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

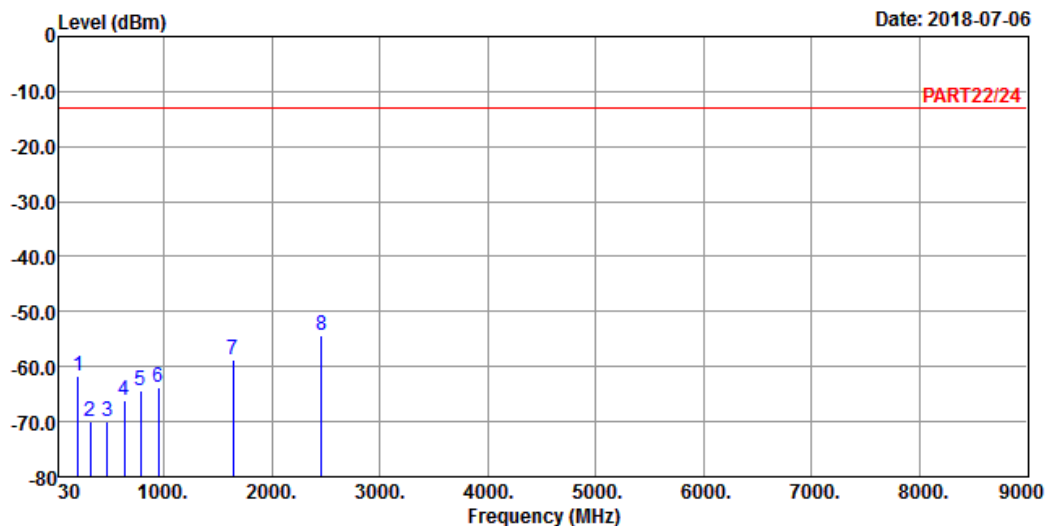

Site : 966 Chamber 5
 Condition: PART22/24 HORIZONTAL
 Remak : Cat-M1 Band 26 QPSK_1.4M Link_M-CH
 Tested by: Thomas Wei


			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	202.66	-61.81	-53.91	-13.00	-48.81	-7.90	Peak
2	316.15	-69.83	-63.07	-13.00	-56.83	-6.76	Peak
3	479.11	-70.00	-64.99	-13.00	-57.00	-5.01	Peak
4	630.43	-66.06	-65.23	-13.00	-53.06	-0.83	Peak
5	780.78	-64.28	-65.07	-13.00	-51.28	0.79	Peak
6	952.47	-63.67	-65.57	-13.00	-50.67	1.90	Peak
7	1638.00	-58.78	-45.10	-13.00	-45.78	-13.68	Peak
8 pp	2457.00	-54.21	-44.22	-13.00	-41.21	-9.99	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

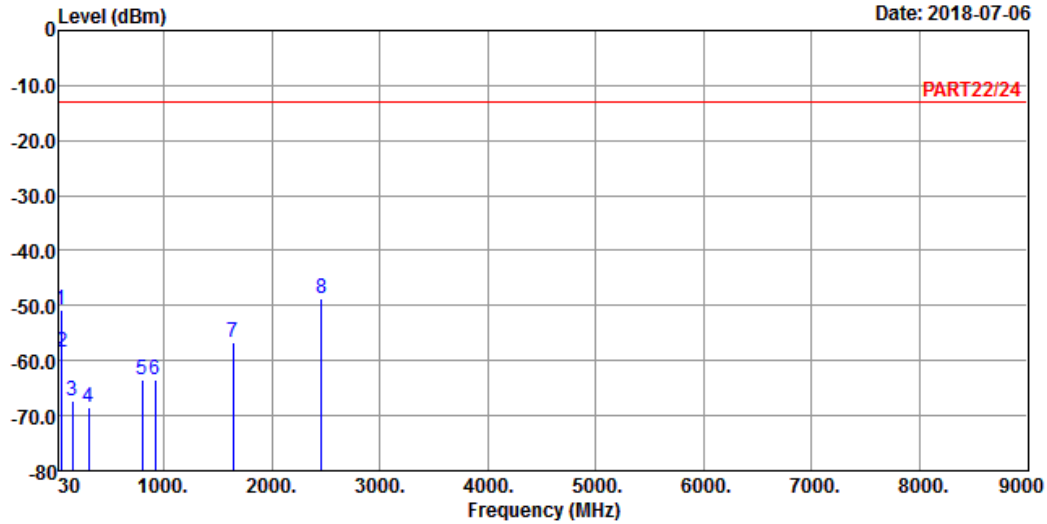

Site : 966 Chamber 5
Condition: PART22/24 VERTICAL
Remak : Cat-M1 Band 26 QPSK_1.4M Link_M-CH
Tested by: Thomas Wei

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	44.55	-50.64	-48.65	-13.00	-37.64	-1.99	Peak
2	54.25	-58.57	-52.50	-13.00	-45.57	-6.07	Peak
3	155.13	-67.24	-61.03	-13.00	-54.24	-6.21	Peak
4	299.66	-68.58	-61.57	-13.00	-55.58	-7.01	Peak
5	795.33	-63.41	-64.16	-13.00	-50.41	0.75	Peak
6	915.61	-63.34	-64.30	-13.00	-50.34	0.96	Peak
7	1638.00	-56.72	-43.04	-13.00	-43.72	-13.68	Peak
8 pp	2457.00	-48.72	-38.73	-13.00	-35.72	-9.99	Peak


High Channel



Bureau Veritas Consumer Products Services Ltd.,Taoyuan Branch

A D T

Data: 1

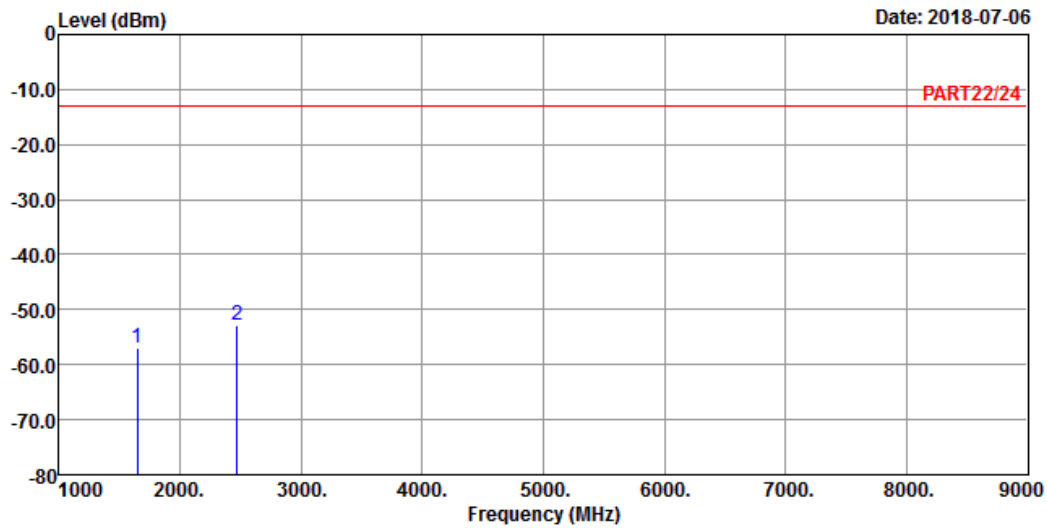

Site : 966 Chamber 5
Condition: PART22/24 HORIZONTAL
Remak : Cat-M1 Band 26 QPSK_1.4M Link_H-CH
Tested by: Thomas Wei


			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1646.60	-57.06	-43.35	-13.00	-44.06	-13.71	Peak
2 pp	2469.90	-52.73	-42.71	-13.00	-39.73	-10.02	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 2

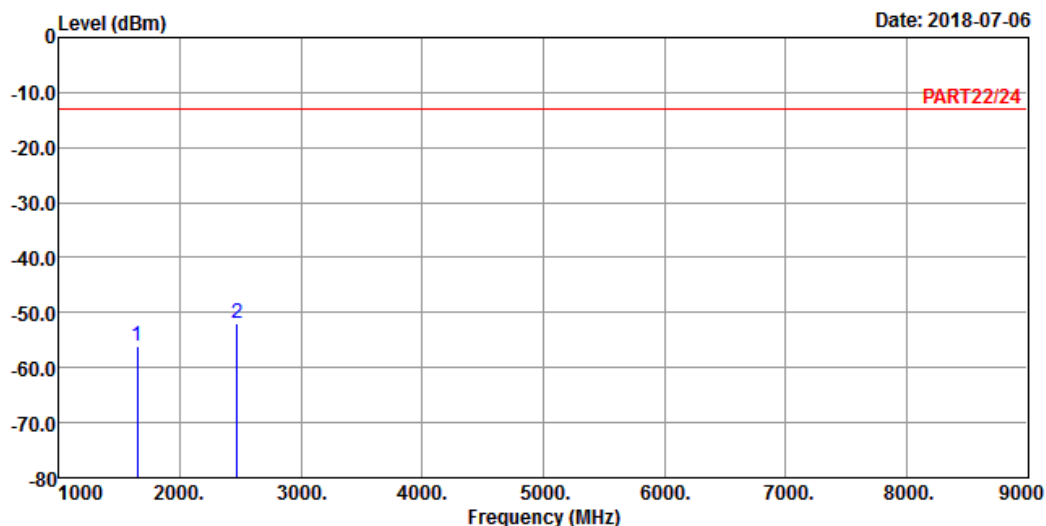

Site : 966 Chamber 5
 Condition: PART22/24 VERTICAL
 Remak : Cat-M1 Band 26 QPSK_1.4M Link_H-CH
 Tested by: Thomas Wei

			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1646.60	-56.20	-42.49	-13.00	-43.20	-13.71	Peak
2 pp	2469.90	-52.05	-42.03	-13.00	-39.05	-10.02	Peak


Channel Bandwidth: 5 MHz / QPSK
Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 1

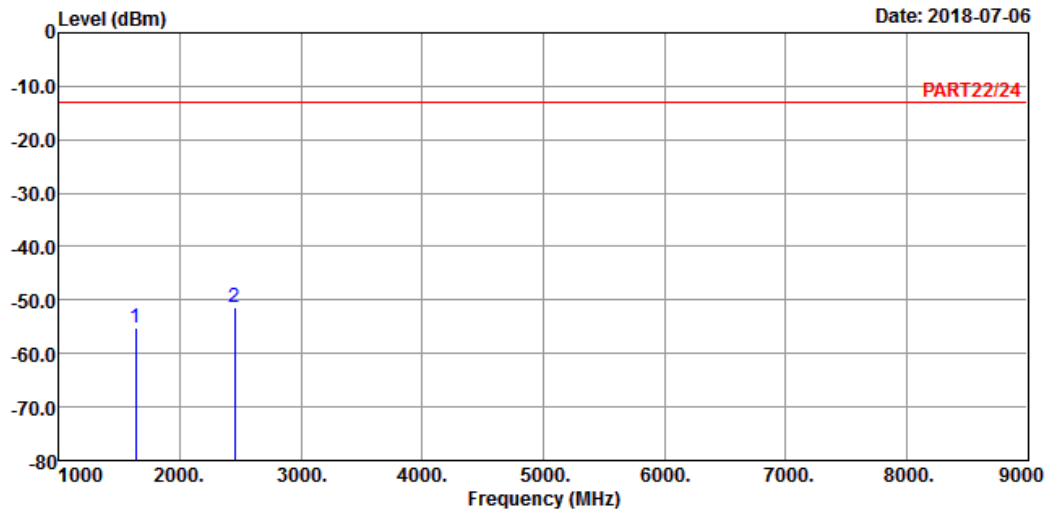

Site : 966 Chamber 5
Condition: PART22/24 HORIZONTAL
Remak : Cat-M1 Band 26 QPSK_5M Link_L-CH
Tested by: Thomas Wei

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1633.00	-55.23	-41.61	-13.00	-42.23	-13.62	Peak
2 pp	2449.50	-51.33	-41.37	-13.00	-38.33	-9.96	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 2

Date: 2018-07-06

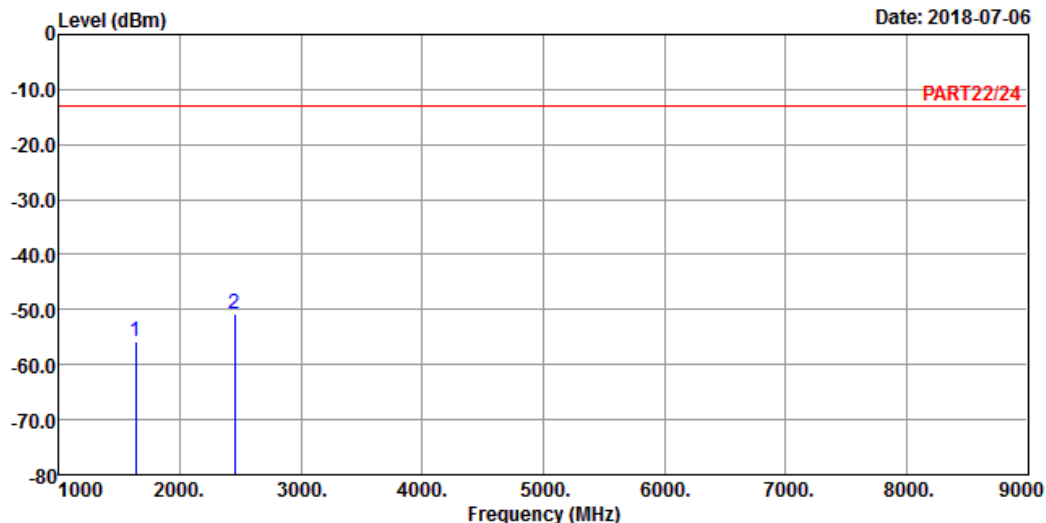

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : Cat-M1 Band 26 QPSK_5M Link_L-CH

Tested by: Thomas Wei

			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1633.00	-55.89	-42.27	-13.00	-42.89	-13.62	Peak
2 pp	2449.50	-50.66	-40.70	-13.00	-37.66	-9.96	Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 1

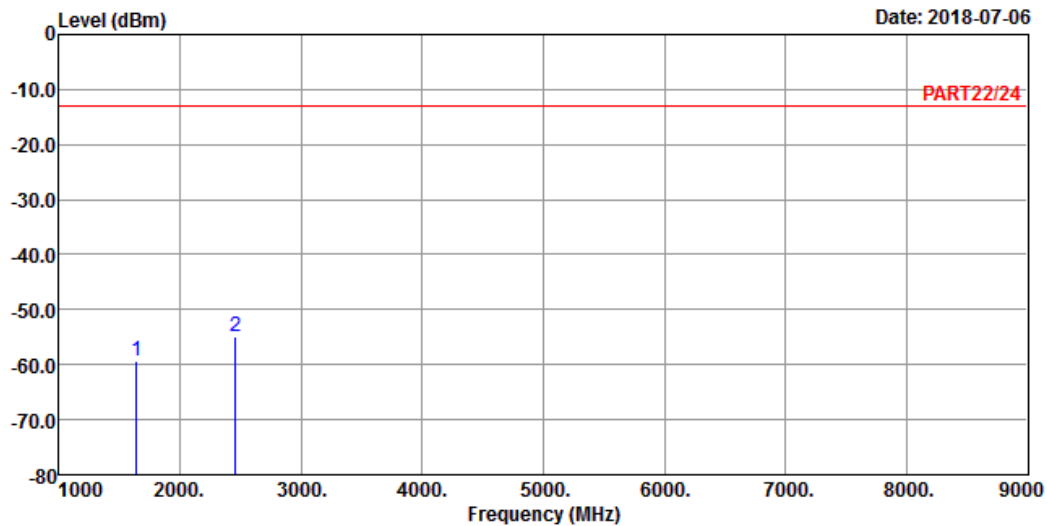

Site : 966 Chamber 5
Condition: PART22/24 HORIZONTAL
Remak : Cat-M1 Band 26 QPSK_5M Link_M-CH
Tested by: Thomas Wei


			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1638.00	-59.33	-45.65	-13.00	-46.33	-13.68	Peak
2 pp	2457.00	-54.79	-44.80	-13.00	-41.79	-9.99	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 2

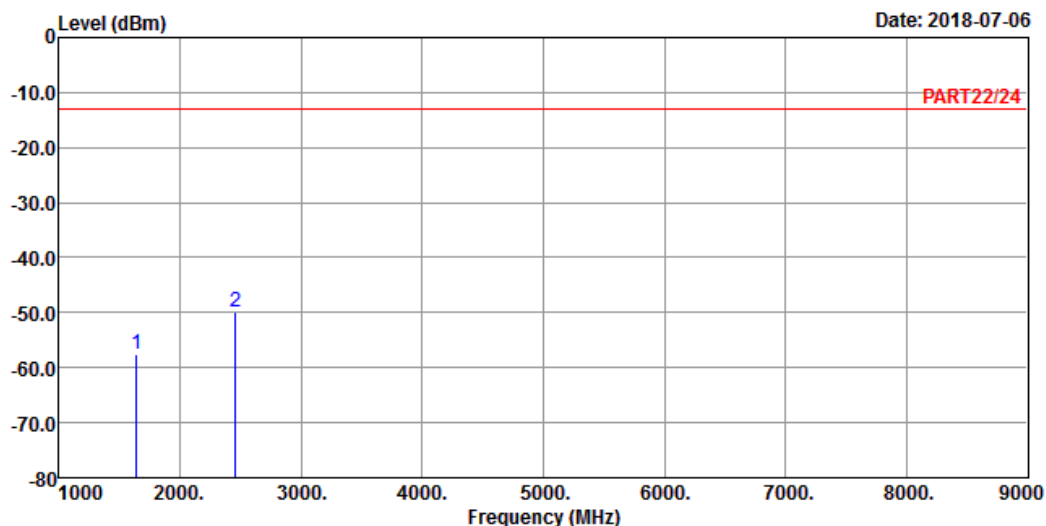

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : Cat-M1 Band 26 QPSK_5M Link_M-CH

Tested by: Thomas Wei

			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1638.00	-57.49	-43.81	-13.00	-44.49	-13.68	Peak
2 pp	2457.00	-49.88	-39.89	-13.00	-36.88	-9.99	Peak


High Channel



Bureau Veritas Consumer Products Services Ltd.,Taoyuan Branch

A D T

Data: 1

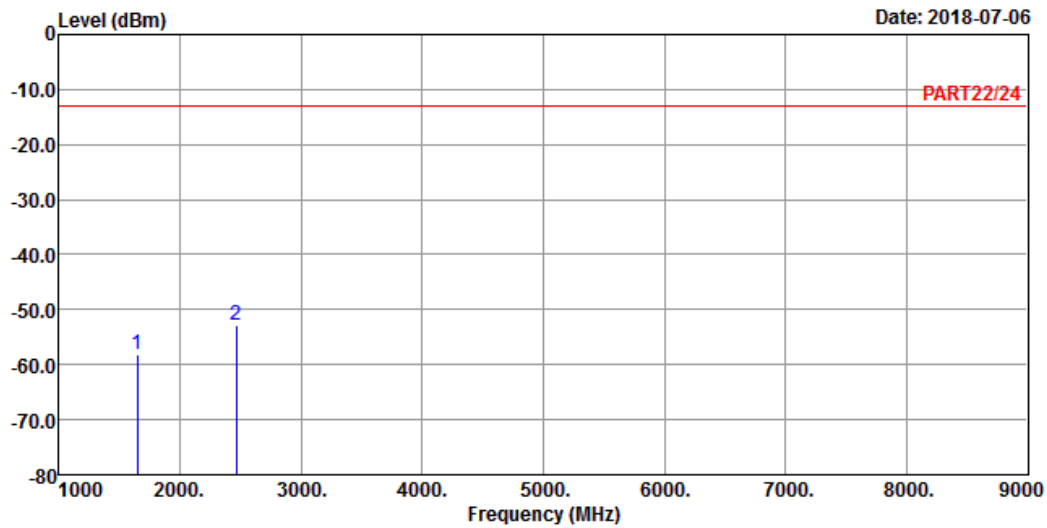

Site : 966 Chamber 5
Condition: PART22/24 VERTICAL
Remak : Cat-M1 Band 26 QPSK_5M Link_H-CH
Tested by: Thomas Wei

			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1643.00	-58.07	-44.36	-13.00	-45.07	-13.71	Peak
2 pp	2464.50	-52.93	-42.91	-13.00	-39.93	-10.02	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 2

Date: 2018-07-06

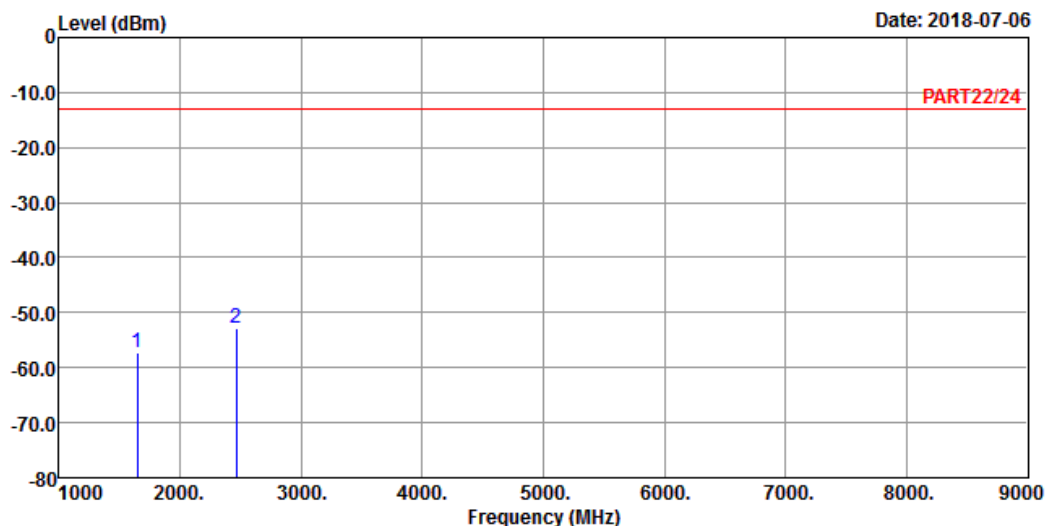

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : Cat-M1 Band 26 QPSK_5M Link_H-CH

Tested by: Thomas Wei

			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1643.00	-57.14	-43.43	-13.00	-44.14	-13.71	Peak
2 pp	2464.50	-52.98	-42.96	-13.00	-39.98	-10.02	Peak


Channel Bandwidth: 10 MHz / QPSK
Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 1

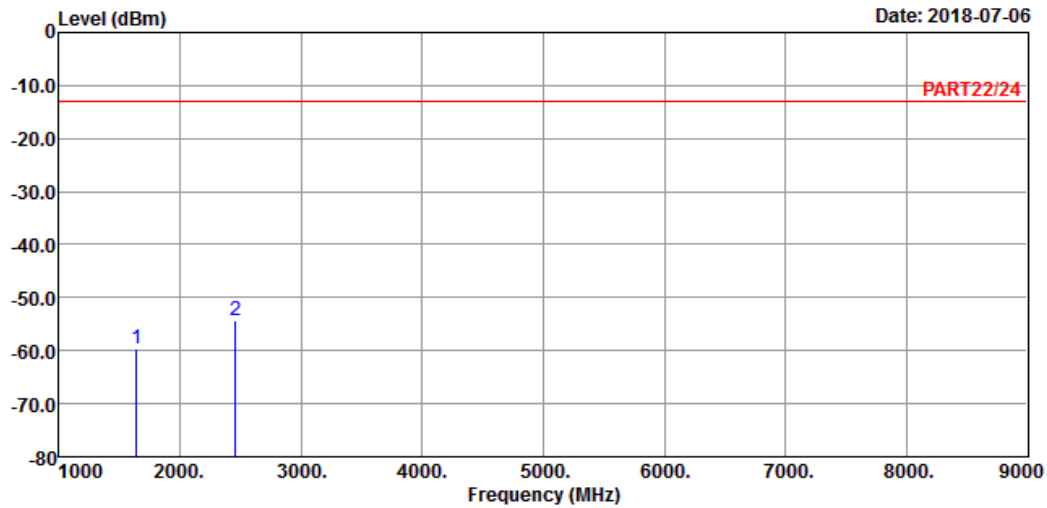

Site : 966 Chamber 5
Condition: PART22/24 HORIZONTAL
Remak : Cat-M1 Band 26 QPSK_10M Link_M-CH
Tested by: Thomas Wei

			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1638.00	-59.68	-46.00	-13.00	-46.68	-13.68	Peak
2 pp	2457.00	-54.19	-44.20	-13.00	-41.19	-9.99	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 2

Date: 2018-07-06

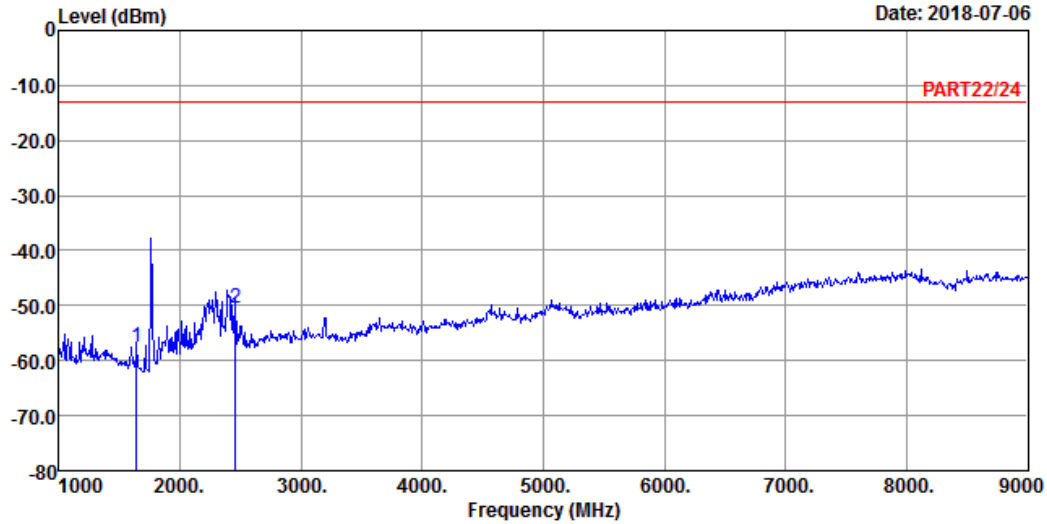

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : Cat-M1 Band 26 QPSK_10M Link_M-CH

Tested by: Thomas Wei

			Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark	
MHz	dBm	dBm	dBm	dB	dB		
1	1638.00	-57.66	-43.98	-13.00	-44.66	-13.68	Peak
2 pp	2457.00	-50.41	-40.42	-13.00	-37.41	-9.99	Peak


NB-IoT
LTE Band 14
Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

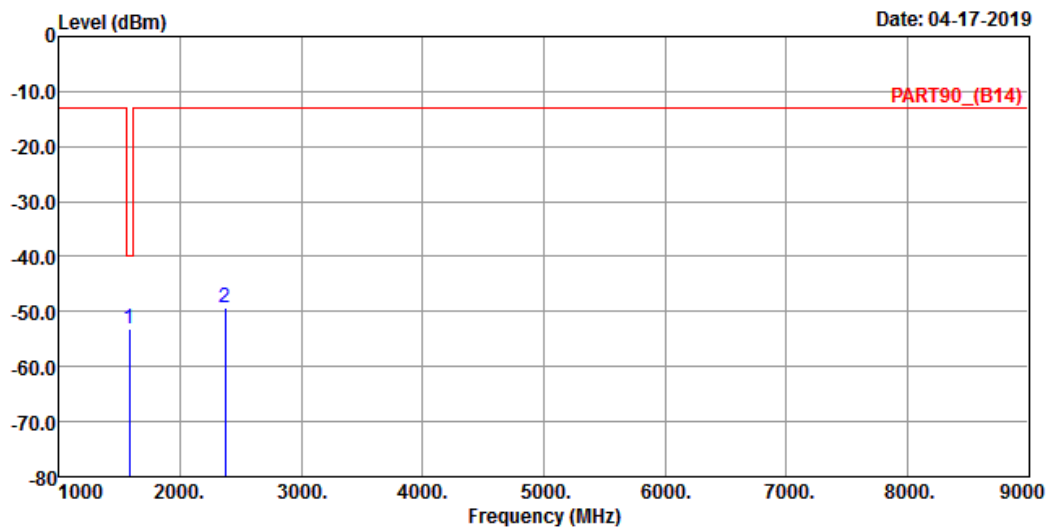

Site : 966 Chamber 5
Condition: PART90_(B14) HORIZONTAL
Remak : NB-IOT Band 14 Stand-alone_Link_L-Ch
Tested by: Thomas Wei

	Freq	Level	Read Level	Limit	Over	
	MHz	dBm	dBm	dBm	dB	Limit Remark
1 pp	1580.20	-53.15	-39.77	-40.00	-13.38	-13.15 Peak
2	2370.30	-49.31	-39.68	-13.00	-9.63	-36.31 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 04-17-2019

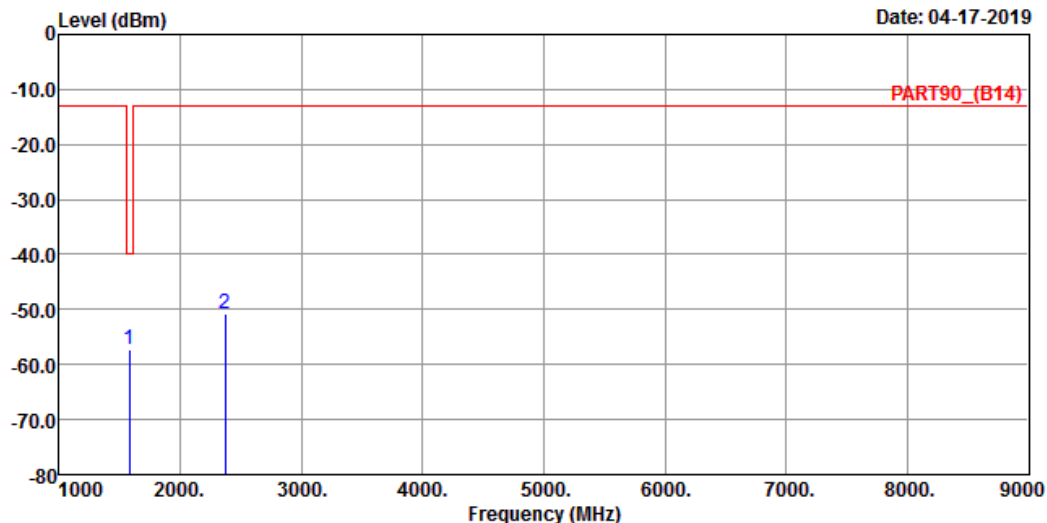

Site : 966 Chamber 5

Condition: PART90_(B14) VERTICAL

Remak : NB-IOT Band 14 Stand-alone_Link_L-Ch

Tested by: Thomas Wei

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	1580.20	-57.41	-44.03	-40.00	-13.38	-17.41	Peak
2	2370.30	-50.78	-41.15	-13.00	-9.63	-37.78	Peak

Middle Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 7

Date: 04-18-2019

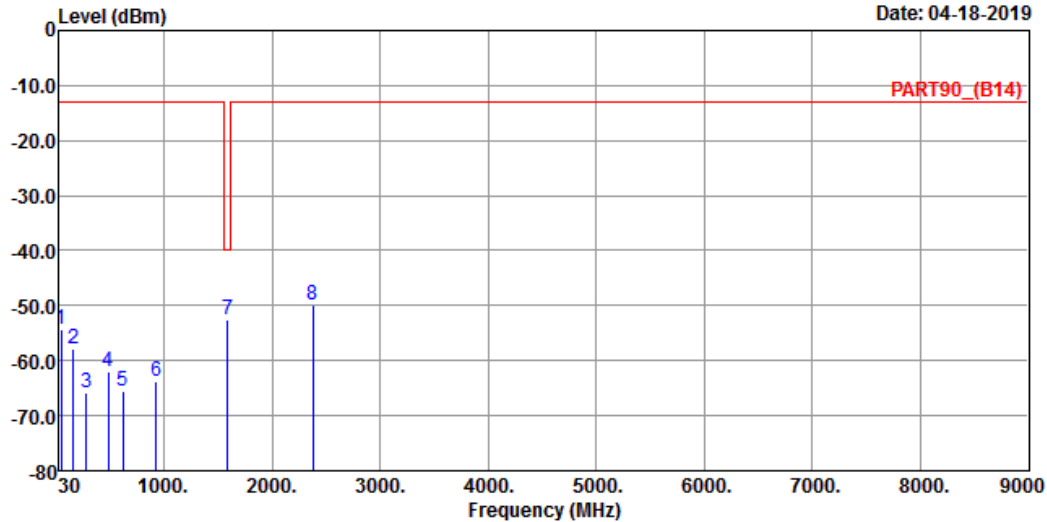

Site : 966 Chamber 5

Condition: PART90_(B14) HORIZONTAL

Remak : NB-IOT Band 14 Stand-alone_Link_M-Ch

Tested by: Thomas Wei

	Freq	Level	Read	Limit	Over	
	MHz	dBm	Level	Line	Factor	Limit Remark
	MHz	dBm	dBm	dBm	dB	dB
1	43.58	-54.23	-52.76	-13.00	-1.47	-41.23 Peak
2	160.95	-57.90	-52.99	-13.00	-4.91	-44.90 Peak
3	278.32	-65.76	-59.19	-13.00	-6.57	-52.76 Peak
4	481.05	-62.06	-57.09	-13.00	-4.97	-49.06 Peak
5	617.82	-65.44	-64.64	-13.00	-0.80	-52.44 Peak
6	928.22	-63.62	-64.89	-13.00	1.27	-50.62 Peak
7 pp	1586.00	-52.69	-39.30	-40.00	-13.39	-12.69 Peak
8	2379.00	-49.85	-40.16	-13.00	-9.69	-36.85 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 8

Date: 04-18-2019

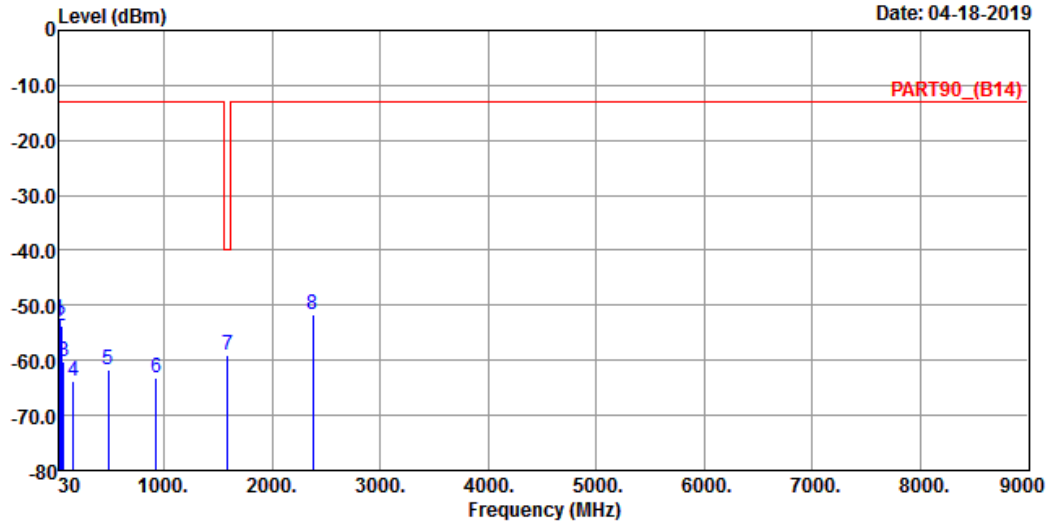

Site : 966 Chamber 5

Condition: PART90_(B14) VERTICAL

Remak : NB-IOT Band 14 Stand-alone_Link_M-Ch

Tested by: Thomas Wei

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	30.00	-52.54	-52.92	-13.00	0.38	-39.54	Peak
2	43.58	-53.75	-52.28	-13.00	-1.47	-40.75	Peak
3	68.80	-60.25	-51.93	-13.00	-8.32	-47.25	Peak
4	158.04	-63.85	-58.46	-13.00	-5.39	-50.85	Peak
5	481.05	-61.59	-56.62	-13.00	-4.97	-48.59	Peak
6	930.16	-63.16	-64.48	-13.00	1.32	-50.16	Peak
7 pp	1586.00	-58.97	-45.58	-40.00	-13.39	-18.97	Peak
8	2379.00	-51.56	-41.87	-13.00	-9.69	-38.56	Peak

High Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 04-17-2019

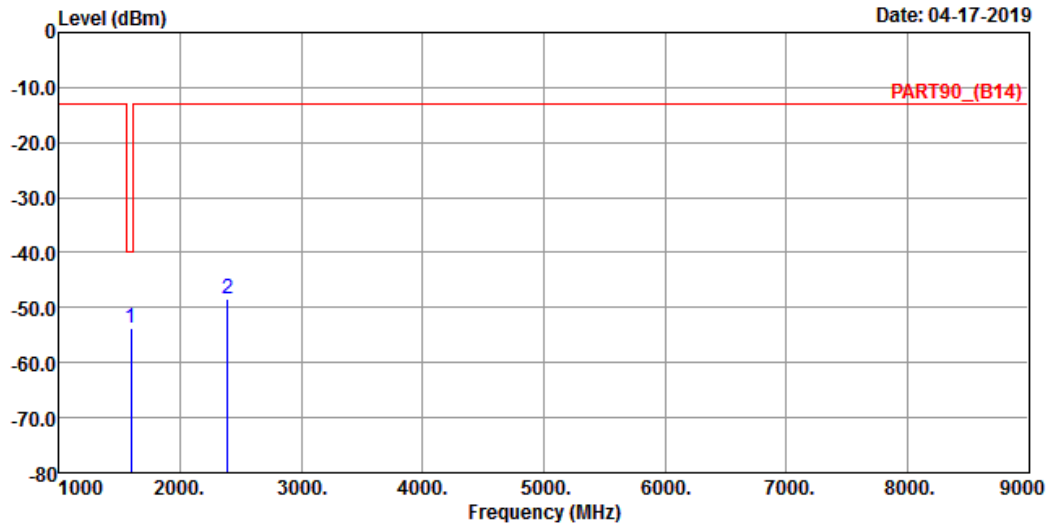

Site : 966 Chamber 5

Condition: PART90_(B14) HORIZONTAL

Remak : NB-IOT Band 14 Stand-alone_Link_H-Ch

Tested by: Thomas Wei

	Freq	Level	Read Level	Limit	Over	
	MHz	dBm	dBm	dBm	Factor	Limit Remark
1 pp	1591.80	-53.75	-40.34	-40.00	-13.41	-13.75 Peak
2	2387.70	-48.44	-38.63	-13.00	-9.81	-35.44 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 04-17-2019

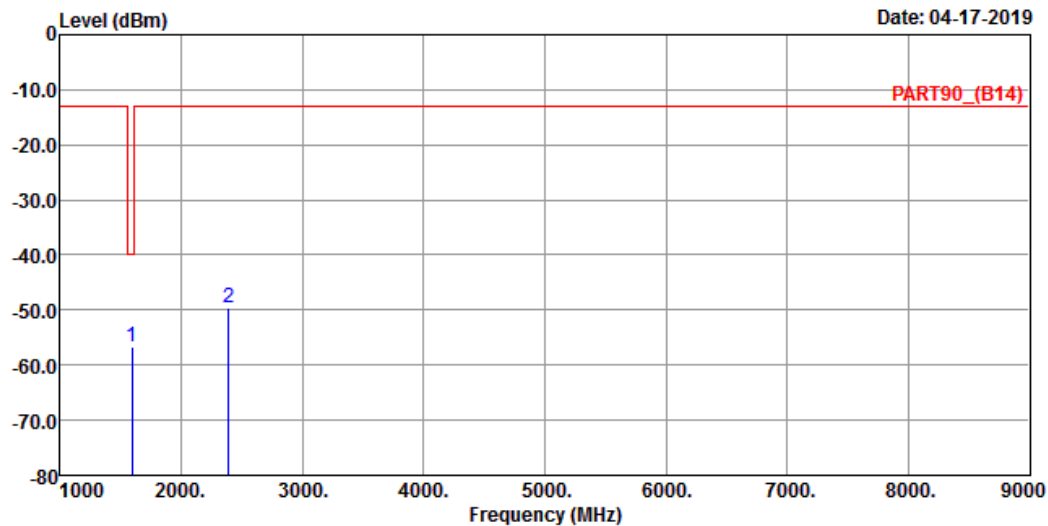

Site : 966 Chamber 5

Condition: PART90_(B14) VERTICAL

Remak : NB-IOT Band 14 Stand-alone_Link_H-Ch

Tested by: Thomas Wei

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	1591.80	-56.70	-43.29	-40.00	-13.41	-16.70	Peak
2	2387.70	-49.52	-39.71	-13.00	-9.81	-36.52	Peak


LTE Band 26
Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

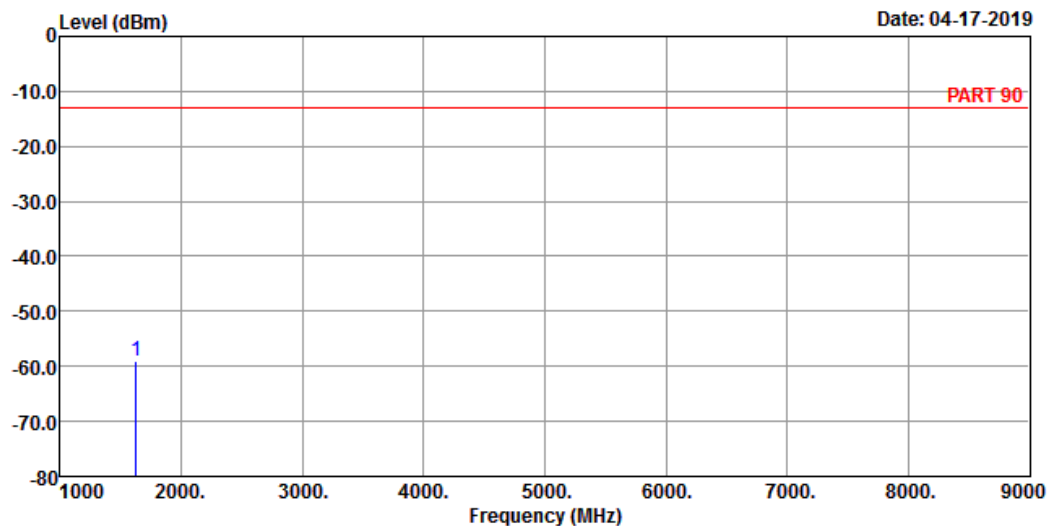

Site : 966 Chamber 5
Condition: PART 90 HORIZONTAL
Remak : NB-IOT Band 26 Stand-alone_Link_L-Ch
Tested by: Thomas Wei

Freq	Level	Read	Limit	Over	
MHz	dBm	Level	Line	Limit	Remark
		dBm	dBm	dB	

1 pp 1628.20 -59.16 -44.37 -13.00 -14.79 -46.16 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 04-17-2019

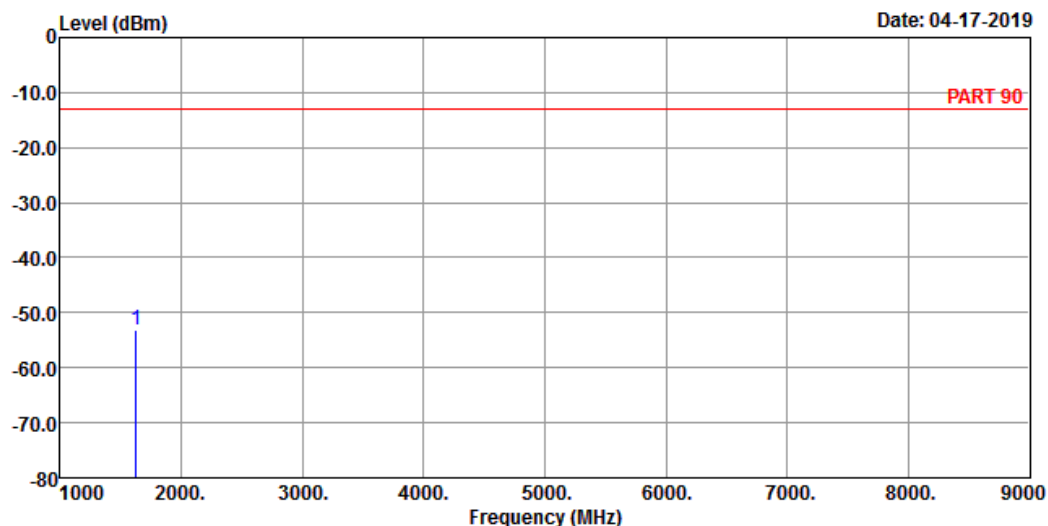

Site : 966 Chamber 5

Condition: PART 90 VERTICAL

Remak : NB-IOT Band 26 Stand-alone_Link_L-Ch

Tested by: Thomas Wei

Freq	Level	Read Level	Limit	Over	Remark
MHz	dBm	dBm	dBm	dB	dB

1 pp 1628.20 -53.08 -38.29 -13.00 -14.79 -40.08 Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd.,Taoyuan Branch

A D T

Data: 1

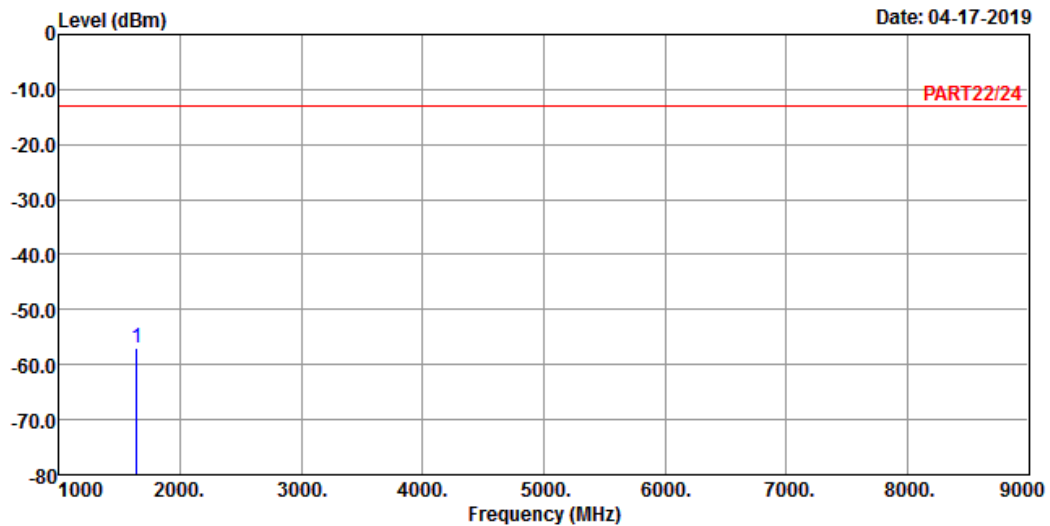

Site : 966 Chamber 5
 Condition: PART22/24 HORIZONTAL
 Remak : NB-IOT Band 26 Stand-alone_Link_M-Ch
 Tested by: Thomas Wei

Freq	Level	Read Level	Limit	Over	
MHz	dBm	dBm	Line	Factor	Limit Remark
			dBm	dB	dB

1 pp 1638.00 -57.05 -43.37 -13.00 -13.68 -44.05 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 2

Date: 04-17-2019

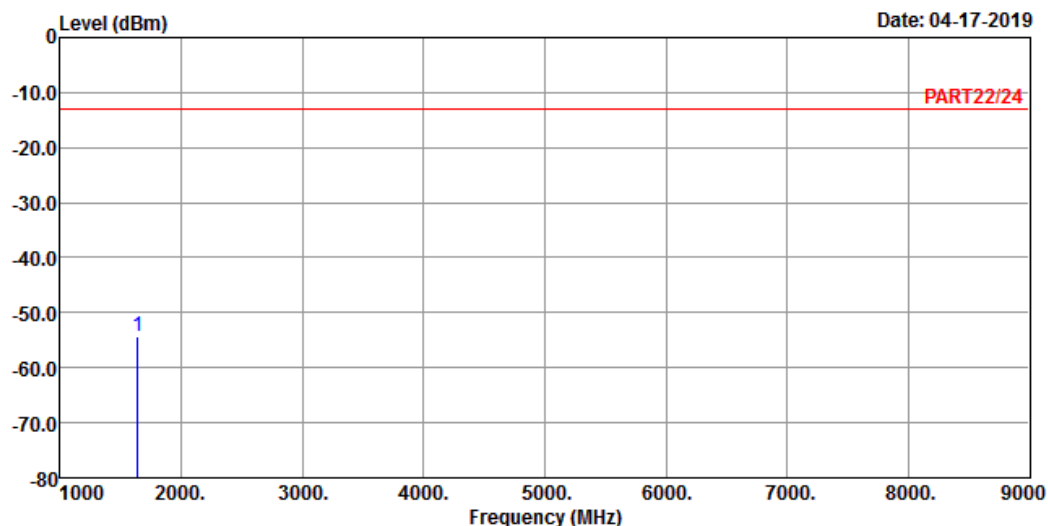

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : NB-IOT Band 26 Stand-alone_Link_M-Ch

Tested by: Thomas Wei

Freq	Level	Read Level	Limit Line	Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1638.00 -54.34 -40.66 -13.00 -13.68 -41.34 Peak

High Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 04-17-2019

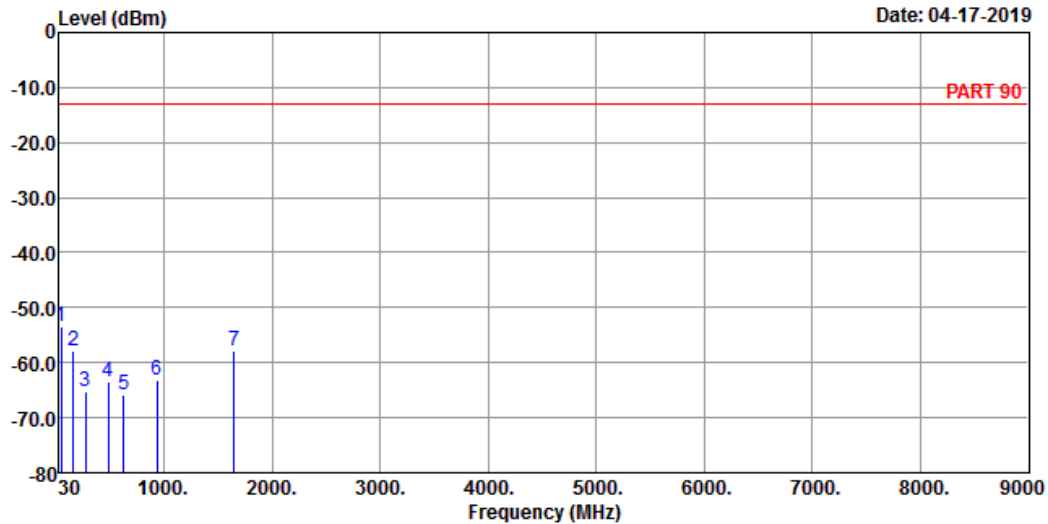

Site : 966 Chamber 5

Condition: PART 90 HORIZONTAL

Remak : NB-IOT Band 26 Stand-alone_Link_H-Ch

Tested by: Thomas Wei

	Freq	Level	Read Level	Limit	Over	
	MHz	dBm	dBm	dBm	dB	Limit Remark
1 pp	43.58	-53.33	-51.86	-13.00	-1.47	-40.33 Peak
2	162.89	-57.82	-52.77	-13.00	-5.05	-44.82 Peak
3	275.41	-65.23	-58.72	-13.00	-6.51	-52.23 Peak
4	481.05	-63.57	-58.60	-13.00	-4.97	-50.57 Peak
5	629.46	-65.81	-64.98	-13.00	-0.83	-52.81 Peak
6	931.13	-63.19	-64.53	-13.00	1.34	-50.19 Peak
7	1647.80	-57.95	-43.22	-13.00	-14.73	-44.95 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

Date: 04-17-2019

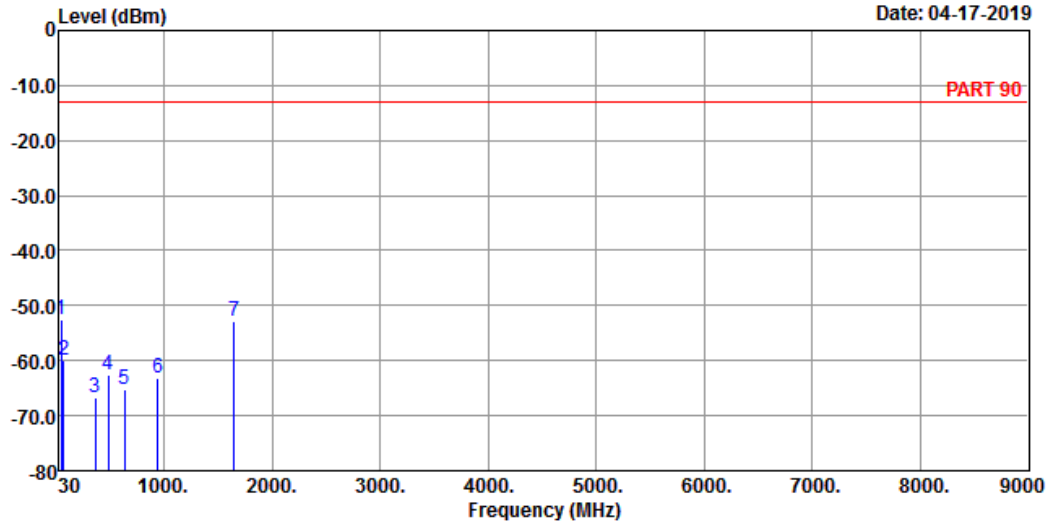

Site : 966 Chamber 5

Condition: PART 90 VERTICAL

Remak : NB-IOT Band 26 Stand-alone_Link_H-Ch

Tested by: Thomas Wei

	Freq	Level	Read Level	Limit Line	Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	43.58	-52.61	-51.14	-13.00	-1.47	-39.61	Peak
2	68.80	-59.98	-51.66	-13.00	-8.32	-46.98	Peak
3	361.74	-66.58	-60.41	-13.00	-6.17	-53.58	Peak
4	481.05	-62.61	-57.64	-13.00	-4.97	-49.61	Peak
5	635.28	-65.11	-64.26	-13.00	-0.85	-52.11	Peak
6	940.83	-63.21	-64.79	-13.00	1.58	-50.21	Peak
7	1647.80	-52.82	-38.09	-13.00	-14.73	-39.82	Peak

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---