

FCC Test Report (Co-Located)

Report No.: RF191021C06-5

FCC ID: I4L-LAVIELVAX200

Test Model: LN20006A

Received Date: Oct. 21, 2019

Test Date: Dec. 19, 2019

Issued Date: Dec. 20, 2019

Applicant: Micro-Star International Co., Ltd.

Address: No. 69, Lide St., Zhonghe Dist., 235 New Taipei City Taiwan

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: B2F, No.215, Sec. 3, Beixin Rd., Xindian Dist., New Taipei City 231, Taiwan

**FCC Registration /
Designation Number:** 427177 / TW0011



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	3
1 Certificate of Conformity.....	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty	5
2.2 Modification Record	5
3 General Information.....	6
3.1 General Description of EUT	6
3.2 Description of Test Modes	8
3.2.1 Test Mode Applicability and Tested Channel Detail.....	12
3.3 Description of Support Units	13
3.3.1 Configuration of System under Test	13
3.4 General Description of Applied Standards and references	13
4 Test Types and Results	14
4.1 Radiated Emission and Bandedge Measurement.....	14
4.1.1 Limits of Radiated Emission and Bandedge Measurement	14
4.1.2 Test Instruments	16
4.1.3 Test Procedures.....	17
4.1.4 Deviation from Test Standard	17
4.1.5 Test Setup.....	18
4.1.6 EUT Operating Conditions.....	19
4.1.7 Test Results	20
5 Pictures of Test Arrangements.....	26
Appendix – Information on the Testing Laboratories	27

Release Control Record

Issue No.	Description	Date Issued
RF191021C06-5	Original Release	Dec. 20, 2019

1 Certificate of Conformity

Product: Notebook PC

Brand: NEC

Model Name: LN20006A

Sample Status: Mass product

Applicant: Micro-Star International Co., Ltd.

Test Date: Dec. 19, 2019

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
47 CFR FCC Part 15, Subpart E (Section 15.407)
ANSI C63.10-2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Gina Liu, **Date:** Dec. 20, 2019
Gina Liu / Specialist

Approved by : Dylan Chiou, **Date:** Dec. 20, 2019
Dylan Chiou / Project Engineer

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247) 47 CFR FCC Part 15, Subpart E (Section 15.407)			
FCC Clause	Test Item	Result	Remarks
15.205 / 15.209 / 15.247(d) / 15.407(b) (1/2/3/4(i/ii)/6)	Radiated Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -6.98 dB at 5146.82 MHz.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	3.04 dB
	30 MHz ~ 200 MHz	2.0153 dB
	200 MHz ~ 1000 MHz	2.0224 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	1.0121 dB
	18 GHz ~ 40 GHz	1.1508 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Notebook PC
Test Model	LN20006A
Status of EUT	Mass product
Power Supply Rating	20.0 / 15.0 / 9.0 / 5.0 Vdc (adapter) 15.36 Vdc (Li-ion battery)
Modulation Type	BT: GFSK, $\pi/4$ -DQPSK, 8DPSK WLAN: CCK, DQPSK, DBPSK for DSSS 256QAM, 64QAM, 16QAM, QPSK, BPSK for OFDM 1024QAM for OFDMA
Modulation Technology	DSSS, OFDM, OFDMA
Transfer Rate	BT: 1/2/3 Mbps WLAN: 802.11b: 11.0 / 5.5 / 2.0 / 1.0 Mbps 802.11g: 54.0 / 48.0 / 36.0 / 24.0 / 18.0 / 12.0 / 9.0 / 6.0 Mbps 802.11a: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0 Mbps 802.11n: up to 400.0 Mbps 802.11ac: up to 1733.3 Mbps 802.11ax: up to 2402 Mbps
Operating Frequency	BT: 2402 ~ 2480 MHz 2.4 GHz: 2412 ~ 2472 MHz 5 GHz: 5180 ~ 5240 MHz, 5260 ~ 5320 MHz, 5500 ~ 5720 MHz, 5745 ~ 5825 MHz
Number of Channel	BT: 79 2.4 GHz: 13 for 802.11b, 802.11g, 802.11n (HT20), 802.11ax (HE20) 9 for 802.11n (HT40), 802.11ax (HE40) 5 GHz: 5180 ~ 5240 MHz: 4 for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20) 2 for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40) 1 for 802.11ac (VHT80), 802.11ax (HE80) 5250 ~ 5320 MHz: 4 for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20) 2 for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40) 1 for 802.11ac (VHT80), 802.11ax (HE80) 1 for 802.11ac (VHT160), 802.11ax (HE160) 5500 ~ 5720 MHz: 12 for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20) 6 for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40) 3 for 802.11ac (VHT80), 802.11ax (HE80)

	1 for 802.11ac (VHT160), 802.11ax (HE160) 5745 ~ 5825 MHz: 5 for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20) 2 for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40) 1 for 802.11ac (VHT80), 802.11ax (HE80)
Output Power	BT: 11.092 mW 2.4 GHz: 184.312 mW 5 GHz: 44.211 mW for 5180 ~ 5240 MHz 43.909 mW for 5250 ~ 5320 MHz 44.263 mW for 5500 ~ 5720 MHz 43.159 mW for 5745 ~ 5825 MHz
Antenna Type	2402 ~ 2480 MHz: PIFA antenna with -0.15 dBi gain 2412 ~ 2462 MHz: PIFA antenna with -0.15 dBi gain 5180 ~ 5240 MHz: PIFA antenna with -1.67 dBi gain 5250 ~ 5320 MHz: PIFA antenna with -1.67 dBi gain 5500 ~ 5720 MHz: PIFA antenna with -1.01 dBi gain 5745 ~ 5825 MHz: PIFA antenna with -1.04 dBi gain
Antenna Connector	i-pex(MHF)
Accessory Device	Refer to Note as below
Cable Supplied	Refer to Note as below

Note:

1. The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and two receivers.

Modulation Mode	Tx Function
802.11a	1TX
802.11b	1TX
802.11g	1TX
802.11n (HT20) / 802.11ac (VHT20) / 802.11ax (HE20)	2TX
802.11n (HT40) / 802.11ac (VHT40) / 802.11ax (HE40)	2TX
802.11ac (VHT80) / 802.11ax (HE80)	2TX
802.11ac (VHT160) / 802.11ax (HE160)	2TX

* The modulation and bandwidth are similar for 802.11n mode for HT20 / HT40 and 802.11ac mode for VHT20 / VHT40 / VHT80 / VHT160 and 802.11ax mode for HE20 / HE40 / HE80 / HE160, therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)

2. The EUT contains following accessory devices.

Product	Brand	Model	Description
Adapter	NEC	A19-095P1A	I/P: 100-240 Vac, 50-60 Hz, 1.6 A O/P: 20 Vdc, 4.75 A / 15 Vdc, 3 A / 9 Vdc, 3 A / 5 Vdc, 3 A
Battery	NEC	PC-VP-WP151	15.36 Vdc, 5235 mAh, Min.4711 mAh (72Wh)
WLAN Module	Intel	AX200NGW	--

3. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

BT:

79 channels are provided to this EUT:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

WLAN 2.4GHz:

13 channels are provided for 802.11b, 802.11g, 802.11n (HT20) and 802.11ax (HE20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	12	2467
6	2437	13	2472
7	2442		

9 channels are provided for 802.11n (HT40) and 802.11ax (HE40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	8	2447
4	2427	9	2452
5	2432	10	2457
6	2437	11	2462
7	2442		

WLAN 5GHz:

For 5180 ~ 5240 MHz

4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
40	5200	48	5240

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	46	5230

1 channel is provided for 802.11ac (VHT80), 802.11ax (HE80):

Channel	Frequency (MHz)
42	5210

For 5250 ~ 5320 MHz

4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	60	5300
56	5280	64	5320

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
54	5270	62	5310

1 channel is provided for 802.11ac (VHT80), 802.11ax (HE80):

Channel	Frequency (MHz)
58	5290

1 channel is provided for 802.11ac (VHT160), 802.11ax (HE160):

Channel	Frequency (MHz)
50	5250

For 5500 ~ 5720 MHz

12 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	124	5620
104	5520	128	5640
108	5540	132	5660
112	5560	136	5680
116	5580	140	5700
120	5600	144	5720

6 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
102	5510	126	5630
110	5550	134	5670
118	5590	142	5710

3 channels are provided for 802.11ac (VHT80), 802.11ax (HE80):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
106	5530	138	5690
122	5610		

1 channel is provided for 802.11ac (VHT160), 802.11ax (HE160):

Channel	Frequency (MHz)
114	5570

For 5745 ~ 5825 MHz:

5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	161	5805
153	5765	165	5825
157	5785		

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755	159	5795

1 channel is provided for 802.11ac (VHT80), 802.11ax (HE80):

Channel	Frequency (MHz)
155	5775

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable To		Description
	RE $\geq$ 1G	RE<1G	
-	√	√	2TX

Where RE $\geq$ 1G: Radiated Emission above 1 GHz RE<1G: Radiated Emission below 1 GHz

Radiated Emission Test (Above 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Freq. Range (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	WLAN 2.4G 802.11n (HT20) + BT	2412 ~ 2472	1 to 13	6 + 78	OFDM	BPSK	6.5
		2402 ~ 2480	0 to 78		FHSS	8DPSK	1.0
-	WLAN 5G 802.11ac (VHT80) + BT	5180 ~ 5240	42	42 + 78	OFDM	BPSK	29.3
		2402 ~ 2480	0 to 78		FHSS	8DPSK	1.0

Radiated Emission Test (Below 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Freq. Range (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	WLAN 2.4G 802.11n (HT20) + BT	2412 ~ 2472	1 to 13	6 + 78	OFDM	BPSK	6.5
		2402 ~ 2480	0 to 78		FHSS	8DPSK	1.0
-	WLAN 5G 802.11ac (VHT80) + BT	5180 ~ 5240	42	42 + 78	OFDM	BPSK	29.3
		2402 ~ 2480	0 to 78		FHSS	8DPSK	1.0


Test Condition:

Applicable To	Environmental Conditions	Input Power	Tested by
RE $\geq$ 1G	25 deg. C, 65 % RH	120 Vac, 60 Hz	Harry Hsueh, Charles Hsiao
RE<1G	25 deg. C, 65 % RH	120 Vac, 60 Hz	Karl Lee

3.3 Description of Support Units

The EUT has been tested as an independent unit.

3.3.1 Configuration of System under Test

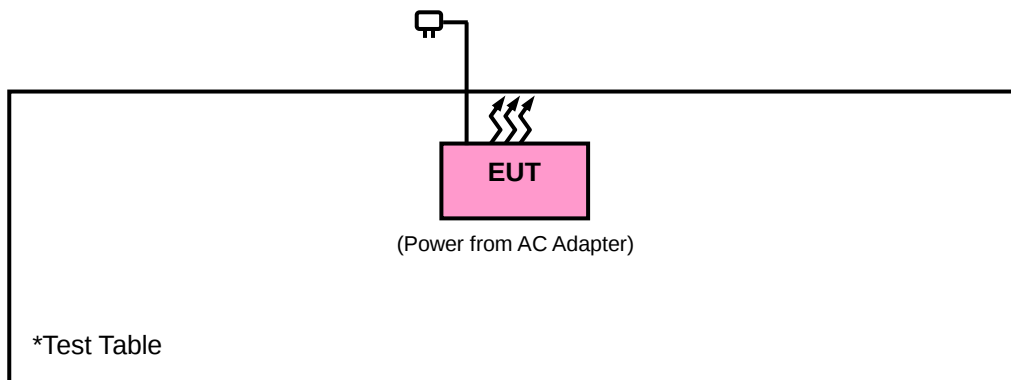

3.4 General Description of Applied Standards and references

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test standard :

FCC Part 15, Subpart E (15.407)

FCC Part 15, Subpart C (15.247)

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 558074 D01 Meas Guidance v05r02

KDB 789033 D02 General UNII Test Procedures New Rules v02r01

KDB 662911 D01 Multiple Transmitter Output v02r01

All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

Applicable To		Limit	
789033 D02 General UNII Test Procedures New Rules v02r01		Field Strength at 3 m	
		PK: 74 (dBμV/m)	AV: 54 (dBμV/m)
Frequency Band	Applicable To	EIRP Limit	Equivalent Field Strength at 3 m
5150~5250 MHz	15.407(b)(1)	PK: -27 (dBm/MHz)	PK: 68.2 (dBμV/m)
5250~5350 MHz	15.407(b)(2)		
5470~5725 MHz	15.407(b)(3)		
5725~5850 MHz	15.407(b)(4)(i)	PK:-27 (dBm/MHz) ^{*1} PK:10 (dBm/MHz) ^{*2} PK:15.6 (dBm/MHz) ^{*3} PK:27 (dBm/MHz) ^{*4}	PK: 68.2 (dBμV/m) ^{*1} PK:105.2 (dBμV/m) ^{*2} PK: 110.8 (dBμV/m) ^{*3} PK:122.2 (dBμV/m) ^{*4}

^{*1} beyond 75 MHz or more above of the band edge.

^{*2} below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.

^{*3} below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.

^{*4} from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Note:

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where } P \text{ is the eirp (Watts).}$$

4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent Technologies	N9038A	MY52260177	Aug. 26, 2019	Aug. 25, 2020
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Apr. 15, 2019	Apr. 14, 2020
Spectrum Analyzer ROHDE & SCHWARZ	FSW26	102023	Oct. 08, 2019	Oct. 07, 2020
BILOG Antenna SCHWARZBECK	VULB 9168	9168-616	Nov. 12, 2019	Nov. 11, 2020
HORN Antenna ETS-Lindgren	3117	00143293	Nov. 24, 2019	Nov. 23, 2020
HORN Antenna SCHWARZBECK	BBHA 9170	9170-480	Nov. 24, 2019	Nov. 23, 2020
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 15, 2019	Apr. 14, 2020
Loop Antenna	EM-6879	269	Sep. 16, 2019	Sep. 15, 2020
Preamplifier Agilent	310N	187226	Jun. 18, 2019	Jun. 17, 2020
Preamplifier Agilent	83017A	MY39501357	Jun. 18, 2019	Jun. 17, 2020
Power Meter Anritsu	ML2495A	1012010	Sep. 04, 2019	Sep. 03, 2020
Power Sensor Anritsu	MA2411B	1315050	Sep. 04, 2019	Sep. 03, 2020
RF signal cable ETS-LINDGREN	5D-FB	Cable-CH1-01(RFC-SMS-100-SMS-120+RFC-SMS-100-SMS-400)	Jun. 18, 2019	Jun. 17, 2020
RF signal cable ETS-LINDGREN	8D-FB	Cable-CH1-02(RFC-SMS-100-SMS-24)	Jun. 18, 2019	Jun. 17, 2020
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Software BV ADT	E3 8.130425b	NA	NA	NA
Antenna Tower MF	NA	NA	NA	NA
Turn Table MF	NA	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HsinTien Chamber 1.

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

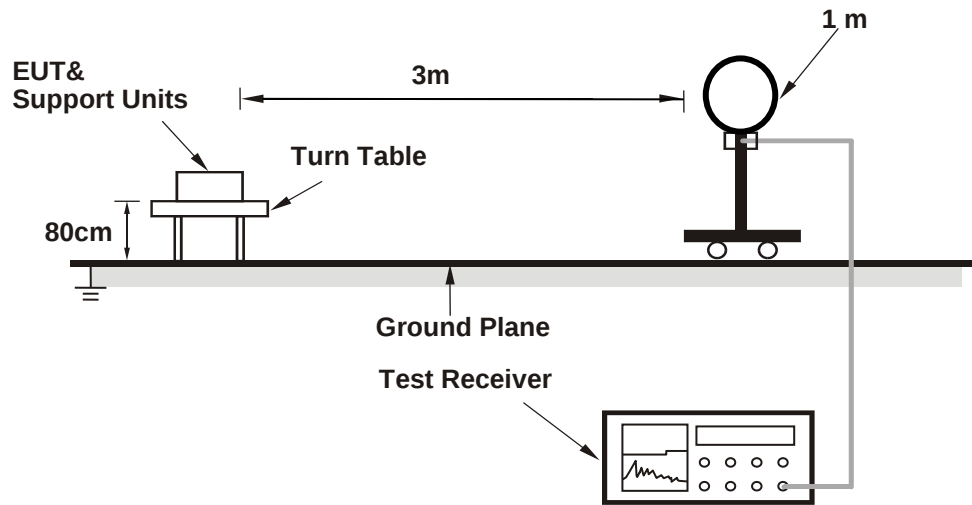

For Radiated emission 30MHz to 1GHz

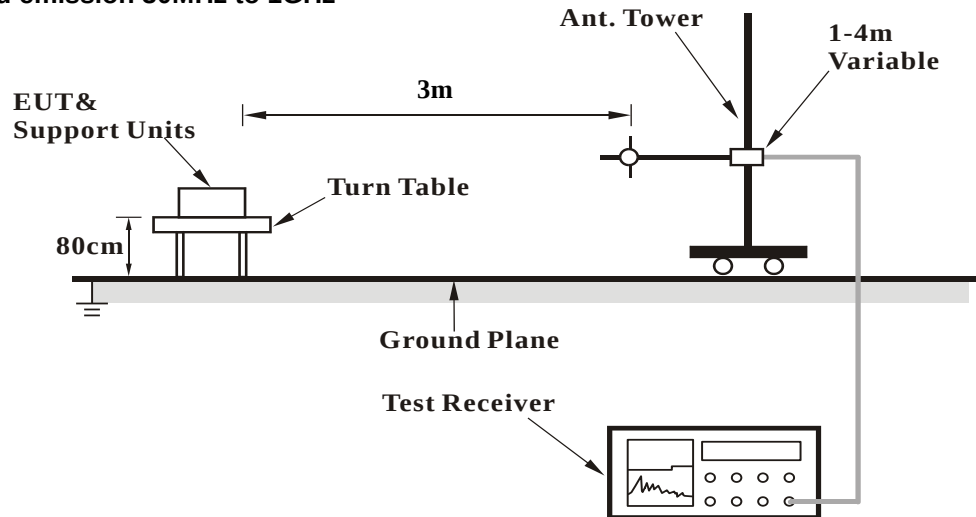

For Radiated emission above 1GHz

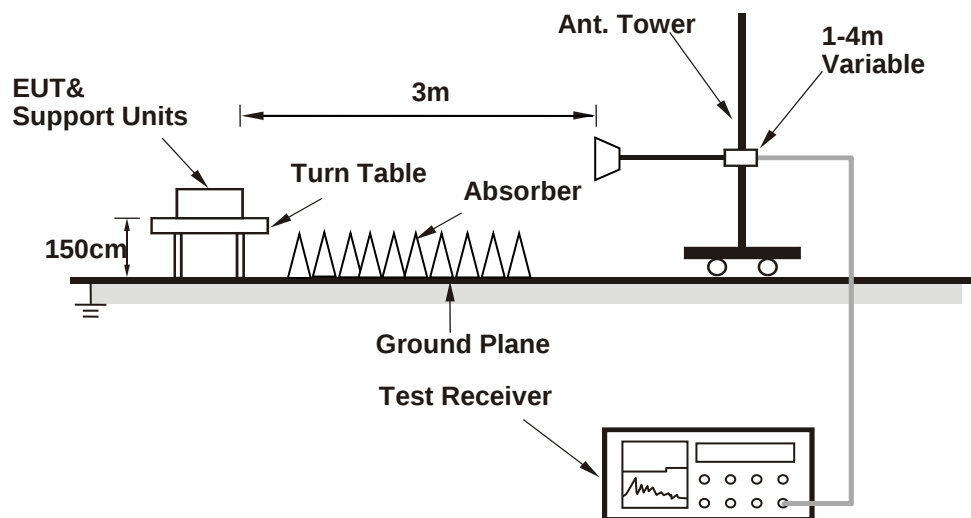

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- a. Set the EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results

Above 1 GHz Data :
802.11n (HT20) + BT

EUT Test Condition		Measurement Detail	
Channel	CH 6 + CH 78	Frequency Range	1 GHz ~ 25 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Harry Hsueh

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Antenna Height (cm)	Table Angle (Degree)	Remark
2388.57	40.75	36.26	54	-13.25	4.49	286	64	Average
2388.57	51.63	47.14	74	-22.37	4.49	286	64	Peak
2437	98.84	94.25			4.59	286	64	Average
2437	106.94	102.35			4.59	286	64	Peak
2480	104.56	99.92			4.64	284	290	Average
2480	105.03	100.39			4.64	284	290	Peak
2483.52	43.62	38.96	54	-10.38	4.66	284	290	Average
2483.52	54.71	50.05	74	-19.29	4.66	284	290	Peak
2485.02	41.08	36.42	54	-12.92	4.66	286	64	Average
2485.02	52.19	47.53	74	-21.81	4.66	286	64	Peak
4874	41.76	31.55	54	-12.24	10.21	156	147	Average
4874	49.35	39.14	74	-24.65	10.21	156	147	Peak
4960	42.52	32.16	54	-11.48	10.36	106	88	Average
4960	48.66	38.3	74	-25.34	10.36	106	88	Peak
Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Antenna Height (cm)	Table Angle (Degree)	Remark
2389.38	42.59	38.1	54	-11.41	4.49	265	347	Average
2389.38	54.75	50.26	74	-19.25	4.49	265	347	Peak
2437	103.3	98.71			4.59	265	347	Average
2437	111.16	106.57			4.59	265	347	Peak
2480	106.13	101.49			4.64	282	26	Average
2480	106.64	102			4.64	282	26	Peak
2483.56	44.51	39.85	54	-9.49	4.66	282	26	Average
2483.56	56.37	51.71	74	-17.63	4.66	282	26	Peak
2483.57	41.77	37.11	54	-12.23	4.66	265	347	Average
2483.57	53.36	48.7	74	-20.64	4.66	265	347	Peak
4874	41.68	31.47	54	-12.32	10.21	149	204	Average
4874	48.39	38.18	74	-25.61	10.21	149	204	Peak
4960	42.06	31.7	54	-11.94	10.36	129	217	Average
4960	48.24	37.88	74	-25.76	10.36	129	217	Peak

Remarks:

1. Emission Level = Read Level + Factor
Margin value = Emission level – Limit value
2. 2437 MHz & 2480 MHz: Fundamental Frequency
3. *: Out of Restricted Band
4. The emission levels of other frequencies were very low against the limit

802.11ac (VHT80) + BT

EUT Test Condition		Measurement Detail	
Channel	CH 42 + CH 78	Frequency Range	1 GHz ~ 25 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Charles Hsiao

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Antenna Height (cm)	Table Angle (Degree)	Remark
2480	104.52	99.88			4.64	282	301	Average
2480	105.06	100.42			4.64	282	301	Peak
2483.556	43.57	38.91	54	-10.43	4.66	282	301	Average
2483.56	54.57	49.91	74	-19.43	4.66	282	301	Peak
4960	42.21	31.85	54	-11.79	10.36	132	25	Average
4960	48.19	37.83	74	-25.81	10.36	132	25	Peak
5146.82	47.02	36.97	54	-6.98	10.05	104	213	Average
5146.82	55.67	45.62	74	-18.33	10.05	104	213	Peak
5210	90.27	80.1			10.17	104	213	Average
5210	97.1	86.93			10.17	104	213	Peak
5352.27	42.16	31.93	54	-11.84	10.23	104	213	Average
5352.27	52.99	42.76	74	-21.01	10.23	104	213	Peak
*10420	54.98	38.82	68.2	-13.22	16.16	113	286	Peak
Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Antenna Height (cm)	Table Angle (Degree)	Remark
2480	106.09	101.45			4.64	286	19	Average
2480	106.57	101.93			4.64	286	19	Peak
2483.59	44.52	39.86	54	-9.48	4.66	286	19	Average
2483.59	56.28	51.62	74	-17.72	4.66	286	19	Peak
4960	41.53	31.17	54	-12.47	10.36	153	226	Average
4960	47.59	37.23	74	-26.41	10.36	153	226	Peak
5148.26	46.83	36.78	54	-7.17	10.05	126	117	Average
5148.26	56.16	46.11	74	-17.84	10.05	126	117	Peak
5210	91.37	81.2			10.17	126	117	Average
5210	98.02	87.85			10.17	126	117	Peak
5368.21	42.13	31.87	54	-11.87	10.26	126	117	Average
5368.21	52.92	42.66	74	-21.08	10.26	126	117	Peak
*10420	54.85	38.69	68.2	-13.35	16.16	129	134	Peak

Remarks:

- Emission Level = Read Level + Factor
Margin value = Emission level – Limit value
- 2480 MHz & 5210 MHz: Fundamental Frequency
- *: Out of Restricted Band
- The emission levels of other frequencies were very low against the limit

9 kHz ~ 30 MHz Data:


The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

30 MHz ~ 1 GHz Worst-Case Data:


802.11n (HT20) + BT

EUT Test Condition		Measurement Detail	
Channel	CH 6 + CH 78	Frequency Range	30 MHz ~ 1 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Quasi-peak (QP)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Karl Lee

Horizontal

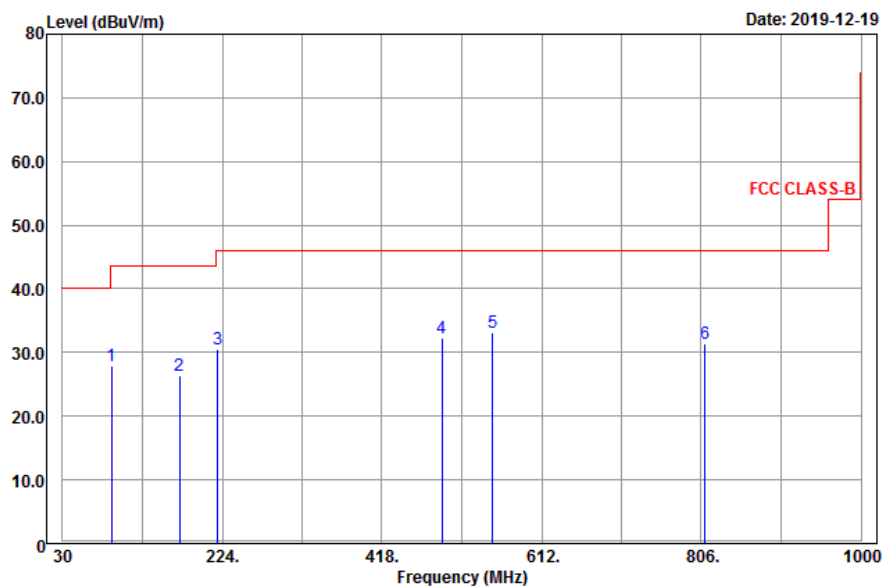

Vertical

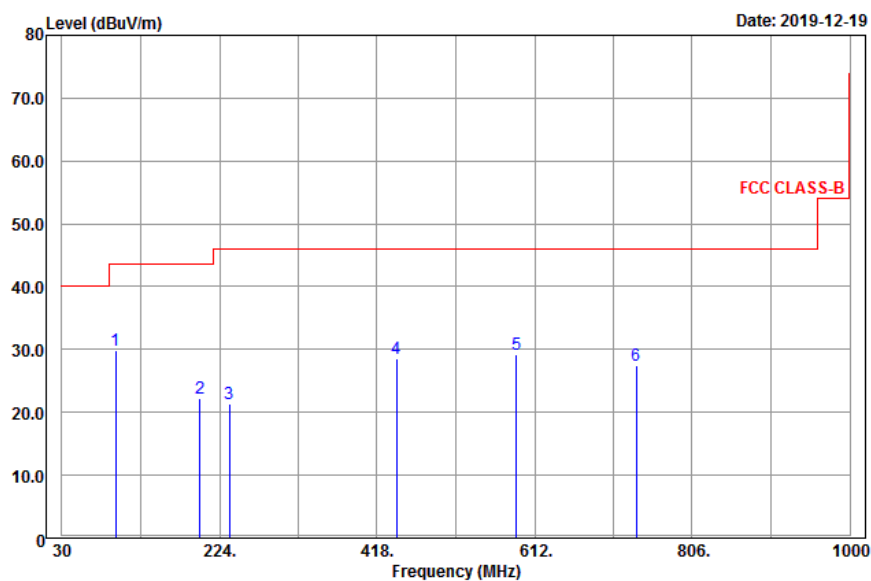

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
89.13	28.01	47.3	-19.29	43.5	-15.49	105	117	Peak
171.75	26.34	46.55	-20.21	43.5	-17.16	156	26	Peak
218.19	30.53	48.43	-17.9	46	-15.47	118	214	Peak
491.1	32.3	44.79	-12.49	46	-13.7	162	221	Peak
552.7	33.13	44.65	-11.52	46	-12.87	134	256	Peak
811	31.43	38.89	-7.46	46	-14.57	105	25	Peak
Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
96.42	29.87	47.59	-17.72	43.5	-13.63	124	175	Peak
199.83	22.19	40.44	-18.25	43.5	-21.31	183	189	Peak
236.55	21.34	38.55	-17.21	46	-24.66	105	2	Peak
442.1	28.59	41.97	-13.38	46	-17.41	145	174	Peak
589.8	29.17	40.06	-10.89	46	-16.83	189	88	Peak
737.5	27.53	36.14	-8.61	46	-18.47	143	265	Peak


Remarks:

1. Emission Level = Read Level + Factor
Margin value = Emission level – Limit value
2. The emission levels of other frequencies were very low against the limit


802.11ac (VHT80) + BT

EUT Test Condition		Measurement Detail	
Channel	CH 42 + CH 78	Frequency Range	30 MHz ~ 1 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Quasi-peak (QP)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Karl Lee

Horizontal

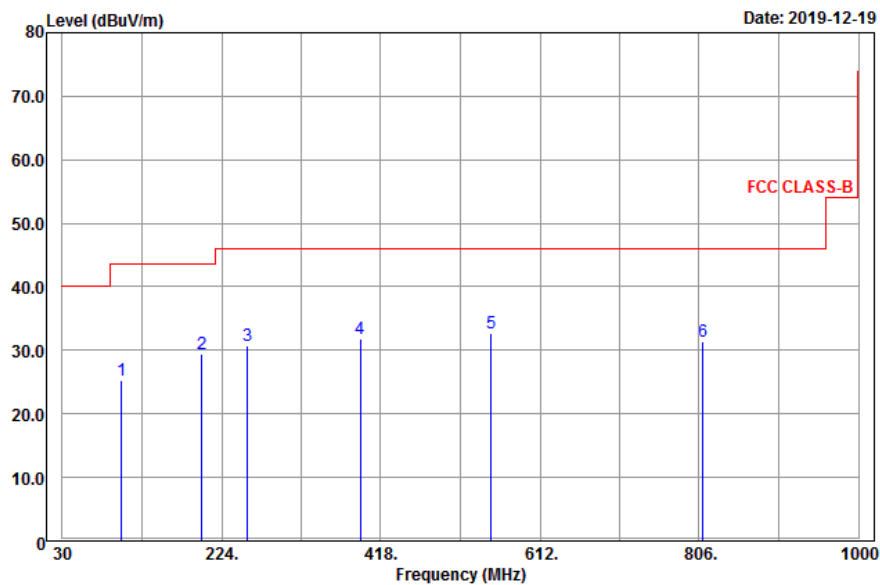

Vertical

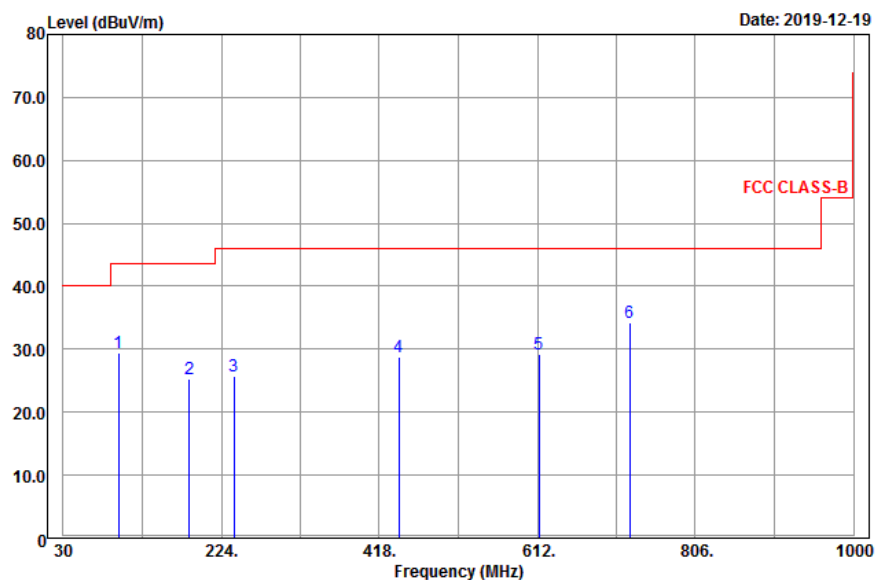

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
101.82	25.32	42.48	-17.16	43.5	-18.18	101	284	Peak
199.83	29.35	47.6	-18.25	43.5	-14.15	150	354	Peak
255.72	30.82	47.55	-16.73	46	-15.18	158	88	Peak
393.1	31.84	45.9	-14.06	46	-14.16	135	285	Peak
552.7	32.7	44.22	-11.52	46	-13.3	124	114	Peak
811	31.33	38.79	-7.46	46	-14.67	108	296	Peak
Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
97.5	29.51	46.97	-17.46	43.5	-13.99	195	24	Peak
184.44	25.31	44.55	-19.24	43.5	-18.19	184	233	Peak
239.79	25.71	42.76	-17.05	46	-20.29	120	208	Peak
442.1	28.87	42.25	-13.38	46	-17.13	168	288	Peak
614.3	29.24	39.6	-10.36	46	-16.76	180	314	Peak
725.6	34.14	42.85	-8.71	46	-11.86	187	8	Peak

Remarks:

1. Emission Level = Read Level + Factor
Margin value = Emission level – Limit value
2. The emission levels of other frequencies were very low against the limit

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---