

TEST REPORT

Applicant: Tianjin keepsens Information Technology Co., Ltd
Address: Building 9, Xin'an Chuangye Plaza, No. 399,
Huixiang Road, Binhai high tech Zone, Tianjin
Equipment Type: Wide area locator
Model Name: KP-CCXG700
Brand Name: KEEPESENS
FCC ID: 2A64JCCXG700
Test Standard: 47 CFR Part 15 Subpart B
Test Date: May 30, 2022 - Jun. 01, 2022
Date of Issue: Jul. 07, 2022

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

Tested by: Xiong Chong

Checked by: Xia Long

Approved by: Liao Jianming
(Technical Director)

Xiong Chong

Xia Long

Jim Liao

Revision History

Version	Issue Date	Revisions
<u>Rev. 01</u>	<u>Jul. 07, 2022</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION.....	4
1.1	Identification of the Testing Laboratory	4
1.2	Identification of the Responsible Testing Location	4
2	PRODUCT INFORMATION	5
2.1	Applicant Information	5
2.2	Manufacturer Information.....	5
2.3	Factory Information.....	5
2.4	General Description for Equipment under Test (EUT).....	5
2.5	Ancillary Equipment.....	6
2.6	Technical Information	6
3	SUMMARY OF TEST RESULTS	7
3.1	Test Standards	7
3.2	Verdict	7
3.3	Test Uncertainty	7
4	GENERAL TEST CONFIGURATIONS	8
4.1	Test Environments, Test Date and Test Engineer.....	8
4.2	Test Equipment List.....	9
4.3	Test Enclosure list	10
4.4	Test Configurations	10
4.5	Test Setups	11
4.6	Test Conditions.....	13
5	TEST ITEMS	14
5.1	Emission Tests	14
ANNEX A	TEST RESULTS.....	18

A.1	Radiated Emission.....	18
A.2	Conducted Emission.....	22
ANNEX B	TEST SETUP PHOTOS	23
ANNEX C	EUT EXTERNAL PHOTOS.....	23
ANNEX D	EUT INTERNAL PHOTOS.....	23



1 GENERAL INFORMATION

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe West Road, Nanshan District, ShenZhen, GuangDong Province, China
Phone Number	+86 755 6685 0100

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe West Road, Nanshan District, ShenZhen, GuangDong Province, China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.
Description	All measurement facilities used to collect the measurement data are located at Block B, 1/F, Baisha Science and Technology Park, Shahe West Road, Nanshan District, ShenZhen, GuangDong Province, China



2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Tianjin keepsens Information Technology Co., Ltd
Address	Building 9, Xin'an Chuangye Plaza, No. 399, Huixiang Road, Binhai high tech Zone, Tianjin

2.2 Manufacturer Information

Manufacturer	Tianjin keepsens Information Technology Co., Ltd
Address	Building 9, Xin'an Chuangye Plaza, No. 399, Huixiang Road, Binhai high tech Zone, Tianjin

2.3 Factory Information

Factory	N/A
Address	N/A

2.4 General Description for Equipment under Test (EUT)

EUT Name	Wide area locator
Model Name Under Test	KP-CCXG700
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	V1.1
Software Version	N/A
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.5 Ancillary Equipment

Ancillary Equipment 1	Battery	
	Brand Name	LONGSING
	Model No.	HPC1550
	Serial No.	N/A
	Capacity	400mAh
	Rated Voltage	4V
	Limit Charge Voltage	N/A
	Length (Approx.)	N/A

2.6 Technical Information

Network and Wireless connectivity	2G Network GSM/GPRS/EDGE 850/1900 MHz 3G Network WCDMA Band 2/4/5 4G Network FDD LTE Band 2/4/5/7/12/13/25/26 TDD LTE Band 38/41 Bluetooth BLE, GPS, GLONASS, BDS, Galileo
-----------------------------------	--

The requirement for the following technical information of the EUT was tested in this report:

The Highest Speed of Processor	N/A
--------------------------------	-----

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15 Subpart B	Unintentional Radiators
2	ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

3.2 Verdict

No.	Description	FCC Rule	Test Verdict	Result
1	Radiated Emission	15.109	Pass	Annex A .1
2	Conducted Emission, AC Ports	15.107	N/A	Annex A .2
Note: The EUT is powered only by battery. So the Conducted Emission, AC Ports test is not applicable.				

3.3 Test Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions (9 kHz-30 MHz)	3.22 dB
Radiated emissions (30 MHz-1 GHz)-10m	4.80 dB
Radiated emissions (30 MHz-1 GHz)-3m	4.76 dB
Radiated emissions (1 GHz-18 GHz)-3m	4.88 dB

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments, Test Date and Test Engineer

Test items	Voltage	Temperature	Relative Humidity	Ambient Pressure	Test Date	Test Engineer
Radiated Emission	From battery	26.3℃ 23.8℃	58% 48%	101kPa	May 30, 2022 Jun. 01, 2022	Tian Shuo Huang Zehuai



4.2 Test Equipment List

Radiated Emission Test For Frequency Below 1 GHz (10 m)						
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	ROHDE&SCHWA RZ	ESRP	101036	2021.10.10	2022.10.09	☒
Amplifier (30-1GHz)	COM-MV	ZT30-1000M	B2018054558	2021.10.10	2022.10.09	☒
Test Antenna- Bi-Log	SCHWARZBECK	VULB 9163	9163-624	2021.08.20	2024.08.19	☒
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60* 7.35m	N/A	2021.08.15	2024.08.14	☒
Description	Manufacturer	Name		Version		Use
Test Software	BALUN	BL410-E		V19.91		☒

Radiated Emission Test For Frequency Above 1 GHz (3m)						
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	Agilent	N9038A	MY55330120	2021.10.20	2022.10.19	☒
Spectrum Analyzer	ROHDE & SCHWARZ	FSV40	101544	2022.01.04	2023.01.03	☐
Amplifier (1-12GHz)	Advanced Microwave	WLA652A	1740103	2021.10.20	2022.10.19	☒
Amplifier (0.8- 21GHz)	Mini-Circuits	ZVA-213-S+	225321316	2021.10.20	2022.10.19	☒
Amplifier (18-40GHz)	COM-MV	KA_LNA18- 40G-01	18050001	2021.10.20	2022.10.19	☐
Test Antenna- Horn	SCHWARZBECK	BBHA 9120D	1917	2019.07.02	2022.07.01	☒
Test Antenna- Horn	A-INFOMW	LB- 180400KF	J211060273	2021.07.02	2024.07.01	☐
Anechoic Chamber	YIHENG	9m*6m*6m	N/A	2021.09.04	2024.09.03	☒
Description	Manufacturer	Name		Version		Use
Test Software	BALUN	BL410-E		V19.918		☒

4.3 Test Enclosure list


Note: Not applicable.

4.4 Test Configurations

Test Configurations (TC) No.	Description
TC01	<u>The GSM 850 RX Test Mode</u> EUT + Battery + GSM 850 RX
TC02	<u>The WCDMA Band 5 RX Test Mode</u> EUT + Battery + WCDMA Band 5 RX
TC03	<u>The LTE Band 5 RX Test Mode</u> EUT + Battery + LTE Band 5 RX
TC04	<u>The LTE Band 12 RX Test Mode</u> EUT + Battery + LTE Band 12 RX
TC05	<u>The LTE Band 13 RX Test Mode</u> EUT + Battery + LTE Band 13 RX
TC06	<u>The LTE Band 26 RX Test Mode</u> EUT + Battery + LTE Band 26 RX


4.5 Test Setups

Test Setup 1

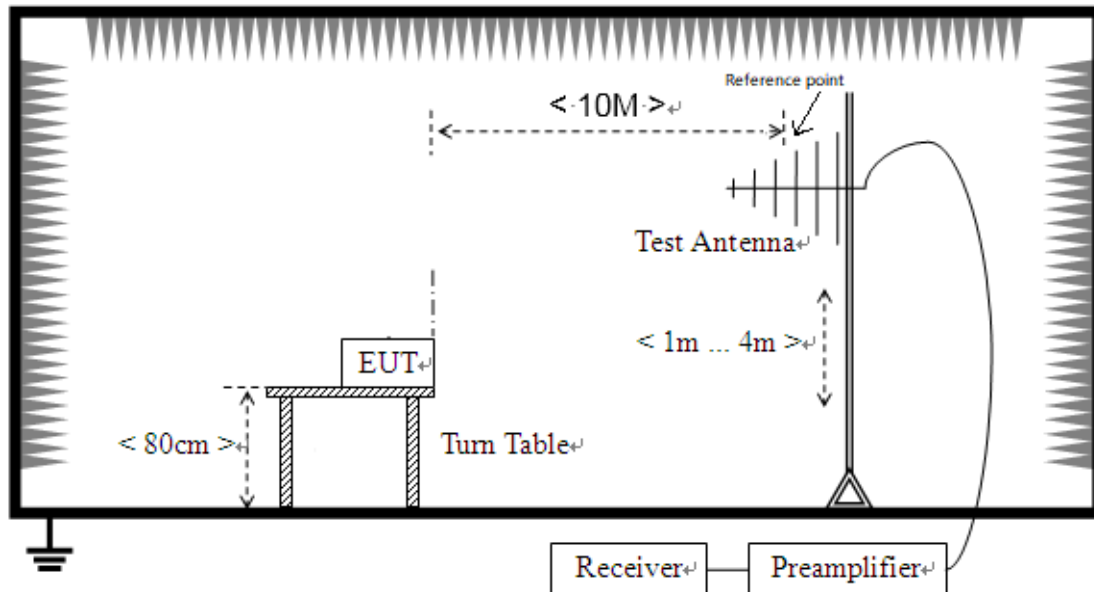


(For Radiated Emission Test (30 MHz-1 GHz))

Test Setup 2

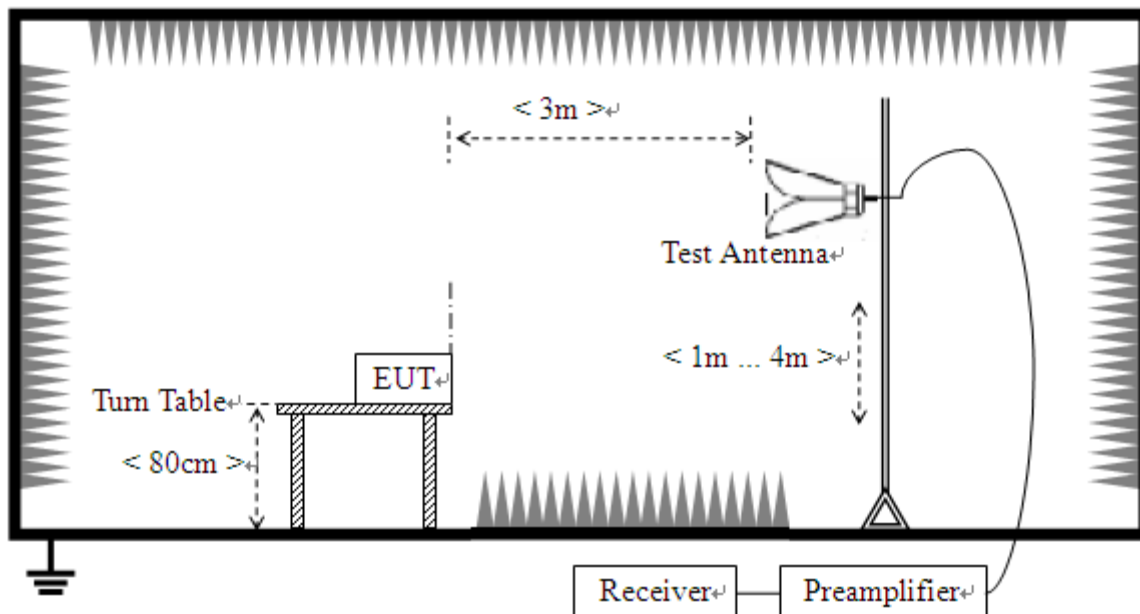

(For Radiated Emission Test (above 1 GHz))

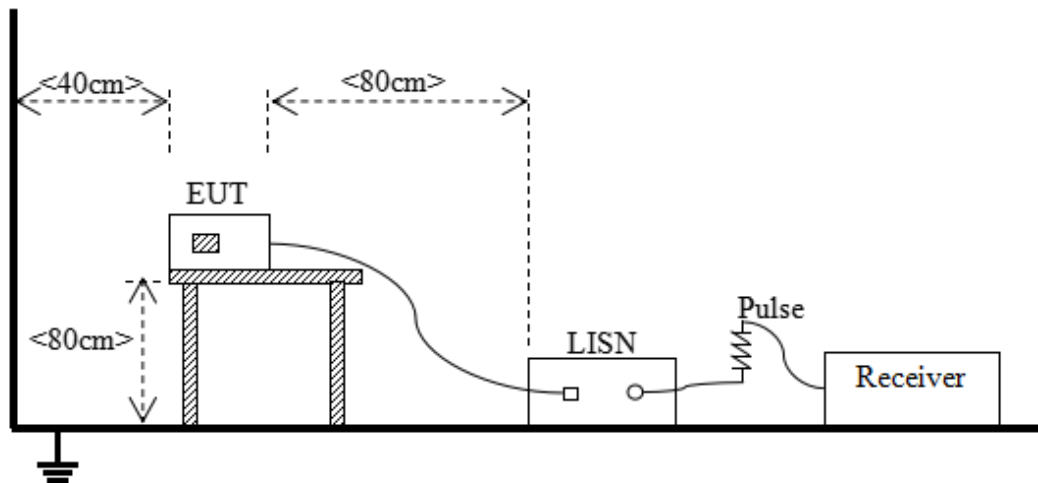Test Setup 3

(For Conducted Emission, AC Ports Test)



4.6 Test Conditions

Test Case	Test Conditions	
Radiated Emission	Test Setup	Test Setup 1&2
	Test Configuration	TC01~TC06 ^{Note}
Note: Based on client request, all normal using modes of the normal function were tested but only the worst test data of the worst mode is reported by this report. The GSM 850 RX Test Mode is the worst mode in this report.		



5 TEST ITEMS

5.1 Emission Tests

5.1.1 Radiated Emission

5.1.1.1 Limit

Frequency range (MHz)	Class B (at 3 m)		Class B (at 10 m)	Class A (at 10 m)	
	Field Strength ($\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)	Field Strength ($\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)
30 - 88	100	40	30	90	39
88 - 216	150	43.5	33.5	150	43.5
216 - 960	200	46	36	210	46.4
Above 960	500	54	44	300	49.5

NOTE:

- 1) Field Strength (dB $\mu\text{V/m}$) = $20 \cdot \log [\text{Field Strength } (\mu\text{V/m})]$.
- 2) In the emission tables above, the tighter limit applies at the band edges.

5.1.1.2 Test Setup

Refer to 4.5 section (test setup 1 to test setup 2) for radiated emission test, the photo of test setup please refer to ANNEX B.

5.1.1.3 Test Procedure

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

An initial pre-scan was performed in the chamber using the EMI Receiver in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by Bi-Log antenna with 2 orthogonal polarities.

The measurement frequency range is from 30 MHz to the 5th harmonic of the maximum frequency of the EUT internal source. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1 \text{ GHz}$, 100 kHz for $f < 1 \text{ GHz}$

VBW $\geq$ RBW

Sweep = auto

Detector function = peak for $f < 1 \text{ GHz}$, peak & RMS Average for $f \geq 1 \text{ GHz}$

Trace = max hold

5.1.1.4 Test Result

Please refer to ANNEX A.1.

NOTE:

1. Results (dBuV/m) = Reading (dBuV/m) + Factor (dB/m)

The reading level is calculated by software which is not shown in the sheet

2. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain (dB)

3. Over limit = Results – Limit.



5.1.2 Conducted Emission

5.1.2.1 Test Limit

Frequency range (MHz)	Class A	
	Quasi-peak (dB μ V)	Average (dB μ V)
0.15 - 0.50	79	66
0.50 - 30	73	60

Frequency range (MHz)	Class B	
	Quasi-peak (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- 1) The lower limit shall apply at the band edges.
- 2) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50 MHz.

5.1.2.2 Test Setup

Refer to 4.5 section test (test setup 3) for conducted emission, the photo of test setup please refer to ANNEX B.

5.1.2.3 Test Procedure

The EUT is connected to the power mains through a LISN which provides 50 Ω /50 μ H of coupling impedance for the measuring instrument. The test frequency range is from 150 kHz to 30 MHz. The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels that are more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

Use the following spectrum analyzer settings:

RBW = 9 KHz

VBW $\geq$ RBW

Sweep = 10ms

Detector function = peak & Average

Trace = max hold

5.1.2.4 Test Result

Please refer to ANNEX A.2.

NOTE:

1. Results (dBuV) = Reading (dBuV) + Factor (dB)

The reading level is calculated by software which is not shown in the sheet

2. Factor = Insertion loss + Cable loss

3. Over limit = Results – Limit.



ANNEX A TEST RESULTS

A.1 Radiated Emission

Note 1: The symbol of "--" in the table which means not application.

Note 2: For the test data above 1 GHz, according the ANSI C63.4-2014, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.


Note 3: All the configurations were pre tested, only the worst configuration has been reported in this report.

Note 4: This the marked spikes near 2400 MHz with circle should be ignored because they are Bluetooth carrier frequencies.

Test Data and Plots


The GSM 850 RX Test Mode

A.1.1 Test Antenna Vertical, 30 MHz – 1 GHz

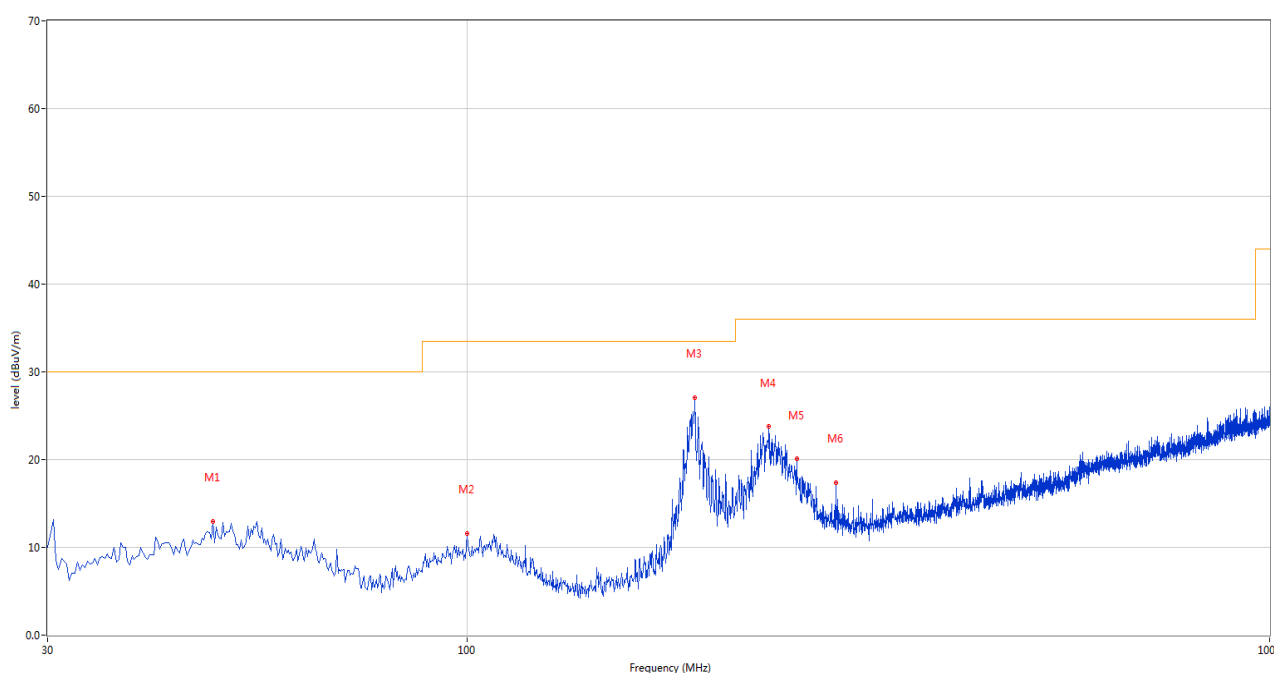


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	48.183	12.96	-26.18	30.0	-17.04	Peak	176.00	200	Vertical	Pass
2	100.065	11.59	-27.99	33.5	-21.91	Peak	201.00	200	Vertical	Pass
3	192.192	27.08	-28.35	33.5	-6.42	Peak	68.00	100	Vertical	Pass
4	237.528	23.76	-26.62	36.0	-12.24	Peak	125.00	200	Vertical	Pass
5	257.408	20.10	-26.16	36.0	-15.90	Peak	105.00	200	Vertical	Pass
6	287.956	17.37	-25.38	36.0	-18.63	Peak	28.00	100	Vertical	Pass

A.1.2 Test Antenna Horizontal, 30 MHz – 1 GHz

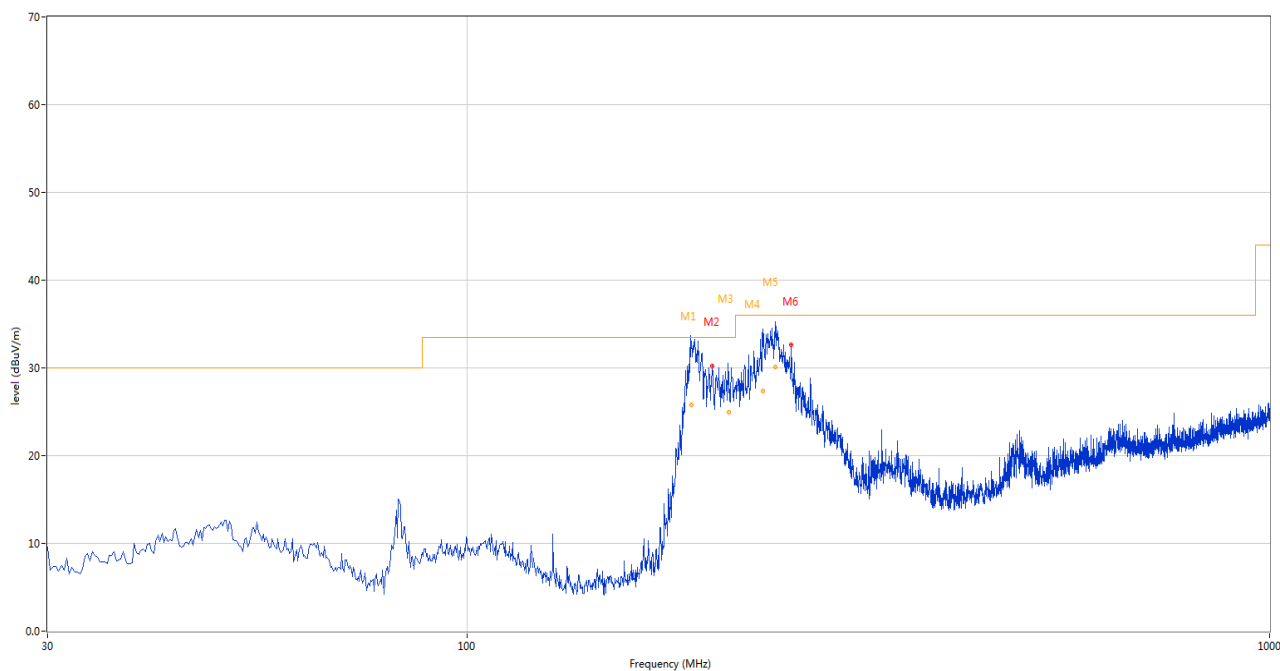


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	190.314	31.73	-28.62	33.5	-1.77	Peak	357.00	174	Horizontal	N/A
1*	190.314	25.84	-28.62	33.5	-7.66	QP	357.00	174	Horizontal	Pass
2	201.890	30.22	-27.79	33.5	-3.28	Peak	171.00	200	Horizontal	Pass
3	211.962	30.98	-27.87	33.5	-2.52	Peak	181.00	200	Horizontal	N/A
3*	211.962	24.97	-27.87	33.5	-8.53	QP	181.00	200	Horizontal	Pass
4	233.599	32.79	-26.90	36.0	-3.21	Peak	0.00	200	Horizontal	N/A
4*	233.599	27.36	-26.90	36.0	-8.64	QP	0.00	200	Horizontal	Pass
5	242.055	37.05	-26.55	36.0	1.05	Peak	0.00	194	Horizontal	N/A
5*	242.055	30.11	-26.55	36.0	-5.89	QP	0.00	194	Horizontal	Pass
6	253.529	32.59	-26.25	36.0	-3.41	Peak	14.00	200	Horizontal	Pass

A.1.3 Test Antenna Vertical, 1 GHz – 12.75 GHz

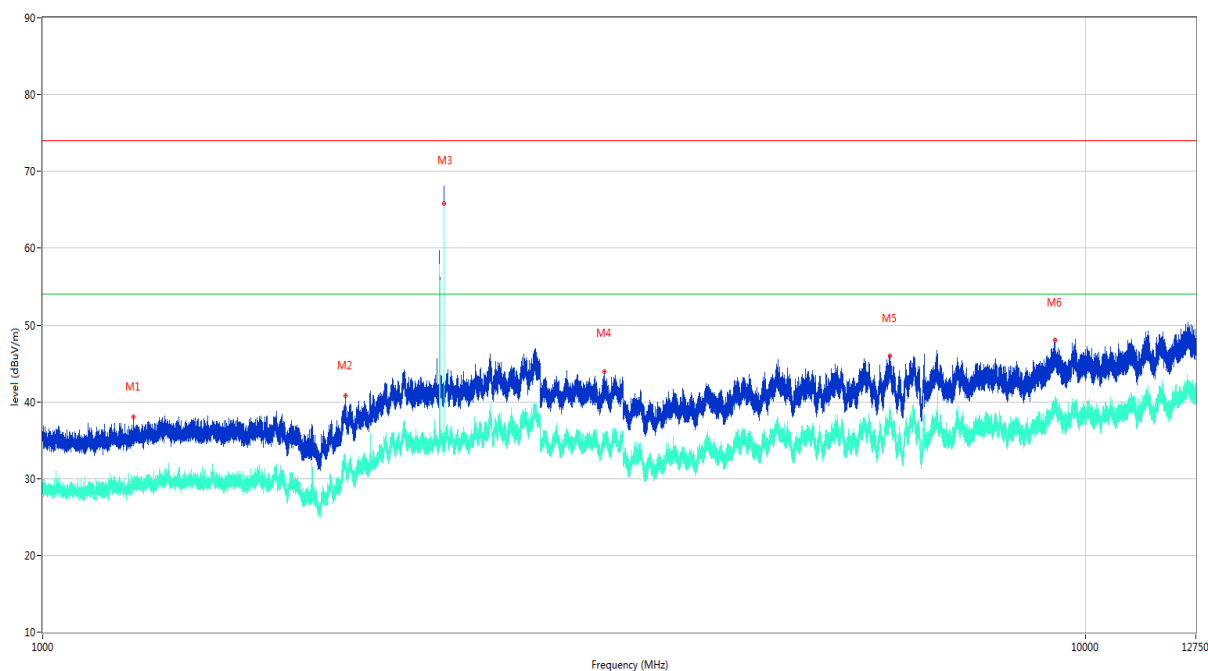

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1221.400	37.99	-15.79	74.0	-36.01	Peak	56.70	200	Vertical	Pass
1**	1221.400	29.70	-15.79	54.0	-24.30	AV	56.70	200	Vertical	Pass
2	1952.000	40.84	-12.20	74.0	-33.16	Peak	305.80	100	Vertical	Pass
2**	1952.000	31.07	-12.20	54.0	-22.93	AV	305.80	100	Vertical	Pass
3	2425.500	65.86	-9.64	74.0	-8.14	Peak	40.60	200	Vertical	N/A
3**	2425.500	65.82	-9.64	54.0	11.82	AV	40.60	200	Vertical	N/A
4	3454.200	43.89	-7.43	74.0	-30.11	Peak	0.60	100	Vertical	Pass
4**	3454.200	35.28	-7.43	54.0	-18.72	AV	0.60	100	Vertical	Pass
5	6492.200	45.96	-2.47	74.0	-28.04	Peak	314.60	100	Vertical	Pass
5**	6492.200	36.82	-2.47	54.0	-17.18	AV	314.60	100	Vertical	Pass
6	9338.237	48.00	20.43	74.0	-26.00	Peak	148.30	200	Vertical	Pass
6**	9338.237	39.29	20.43	54.0	-14.71	AV	148.30	200	Vertical	Pass

A.1.4 Test Antenna Horizontal, 1 GHz – 12.75 GHz

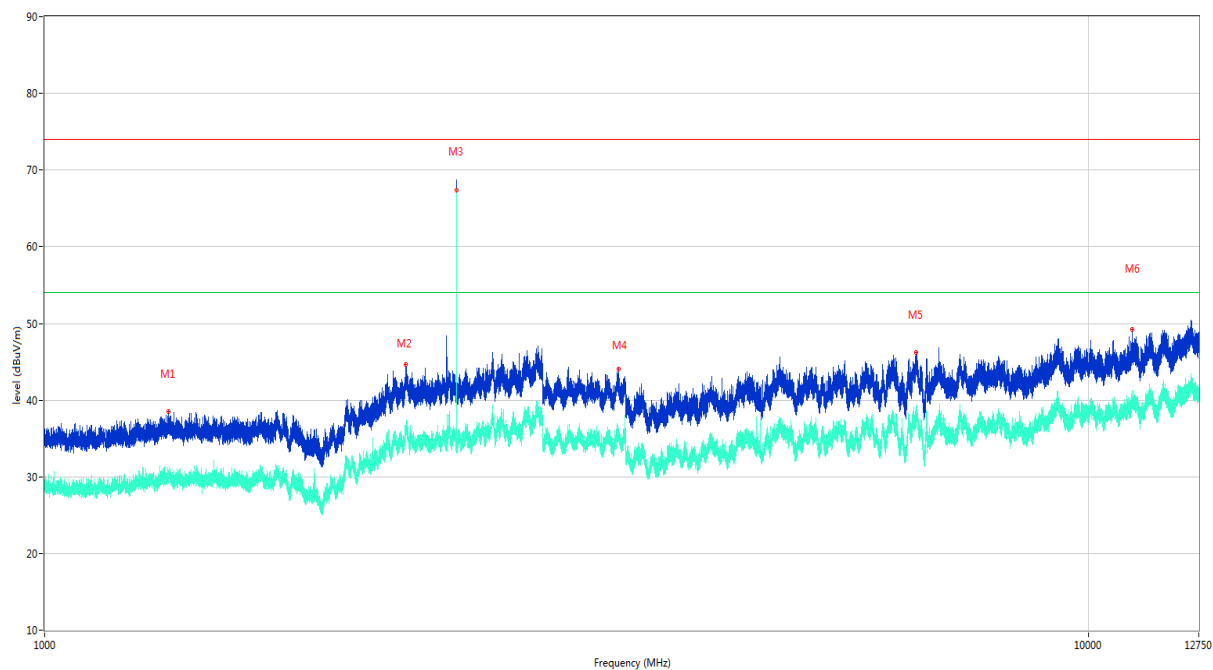

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1314.600	38.54	-15.00	74.0	-35.46	Peak	344.00	200	Horizontal	Pass
1**	1314.600	29.81	-15.00	54.0	-24.19	AV	344.00	200	Horizontal	Pass
2	2217.000	44.61	-8.55	74.0	-29.39	Peak	117.30	100	Horizontal	Pass
2**	2217.000	35.70	-8.55	54.0	-18.30	AV	117.30	100	Horizontal	Pass
3	2480.100	68.56	-9.75	74.0	-5.44	Peak	46.10	100	Horizontal	N/A
3**	2480.100	67.37	-9.75	54.0	13.37	AV	46.10	100	Horizontal	N/A
4	3547.000	44.10	-6.81	74.0	-29.90	Peak	329.50	100	Horizontal	Pass
4**	3547.000	35.11	-6.81	54.0	-18.89	AV	329.50	100	Horizontal	Pass
5	6834.800	46.24	-1.91	74.0	-27.76	Peak	321.20	200	Horizontal	Pass
5**	6834.800	37.72	-1.91	54.0	-16.28	AV	321.20	200	Horizontal	Pass
6	11003.725	49.27	21.08	74.0	-24.73	Peak	150.80	100	Horizontal	Pass
6**	11003.725	39.05	21.08	54.0	-14.95	AV	150.80	100	Horizontal	Pass

A.2 Conducted Emission

Note: Not applicable.



ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-EC2250422-AE.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-EC2250422-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-EC2250422-AI.PDF”.



Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--

