
TCT通测检测 TESTING CENTRE TECHNOLOGY							
	TEST REPOR	RT					
FCC ID :	2BEQO-J50						
Test Report No:	TCT240822E035						
Date of issue:	Aug. 28, 2024						
Testing laboratory: :	SHENZHEN TONGCE TESTIN	IG LAB					
Testing location/ address:	2101 & 2201, Zhenchang Facto Subdistrict, Bao'an District, She People's Republic of China	ory Renshan Industrial Zone, Fuhai enzhen, Guangdong, 518103,					
Applicant's name::	SHENZHEN HAOCHENG TEC	HNOLOGY CO., LTD					
Address:	501, Main Building, Qiaocheng No.1 Plaza, No.2 shenyun Road, Gaofa Community, Shahe Street, Nanshan District, Shenzhen city, 518000 China						
Manufacturer's name :	SHENZHEN HAOCHENG TECHNOLOGY CO., LTD						
Address:	501, Main Building, Qiaocheng No.1 Plaza, No.2 shenyun Road, Gaofa Community, Shahe Street, Nanshan District, Shenzhen city, 518000 China						
Standard(s):	KDB 447498 D01 General RF E	Exposure Guidance v06					
Product Name::	SmartWatch						
Trade Mark:	N/A (C)						
Model/Type reference :	J50						
Rating(s):	Rechargeable Li-ion Battery DC	C 3.7V					
Date of receipt of test item	Aug. 22, 2024						
Date (s) of performance of test:	Aug. 22, 2024 ~ Aug. 28, 2024						
Tested by (+signature) :	Yannie ZHONG	Yannie Zhunginger					
Check by (+signature) :	Beryl ZHAO	Boy 12 TCT					
Approved by (+signature):	Tomsin	Tomsm 40 2					
TONGCE TESTING LAB. TH	nis document may be altered or	he written approval of SHENZHEN revised by SHENZHEN TONGCE					

TONGCE TESTING LAB. This document may be altered or revised by SHENZHEN TONGCE TESTING LAB, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

Report No.: TCT240822E035

Table of Contents

1.	General Product Information			3
	1.1. EUT description		<u> </u>	
	1.2. Model(s) list			3
2.	General Information			4
	2.1. Test environment and mode	\sim		4
	2.2. Description of Support Units			
3.	Facilities and Accreditations			5
	3.1. Facilities			5
	3.2. Location			5
4.	Test Results and Measurement Data	<u>(6)</u>	<u>(((((((((((((((((((</u>	6

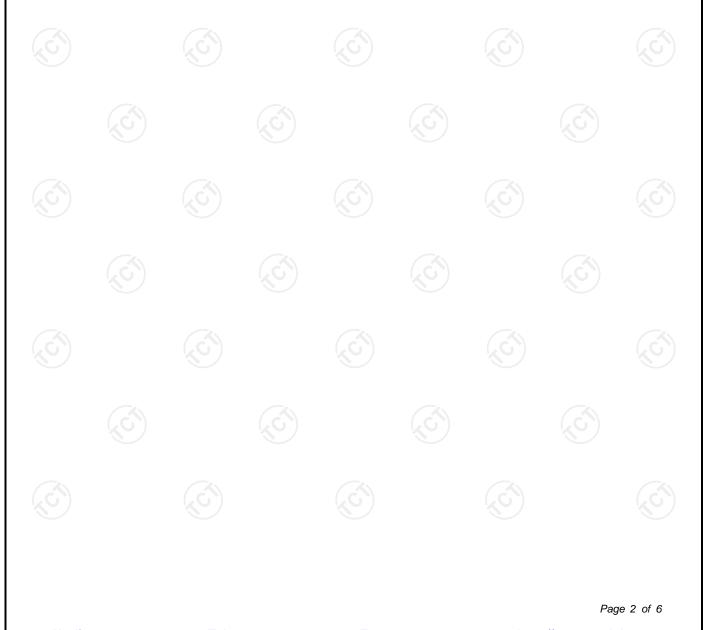



1. General Product Information

1.1. EUT description

Product Name:	SmartWatch			
Model/Type reference:	J50			
Sample Number:	TCT240822E012-0101			
Operation Frequency:	2402MHz~2480MHz		S S	
Modulation Type:	For BT: GFSK, π/4-DQPSK For BLE: GFSK			
Antenna Type:	Internal Antenna			
Antenna Gain:	-2.42dBi			
Rating(s):	Rechargeable Li-ion Battery DC	3.7V	$\langle c \rangle$	

Report No.: TCT240822E035

Note: The antenna gain listed in this report is provided by applicant, and the test laboratory is not responsible for this parameter.



2. General Information

2.1. Test environment and mode

ltem		Normal conditio	n	
Temperature		+25ºC		
Voltage	(\mathcal{G})	DC 3.7V	$\left(\mathcal{C}^{\prime}\right)$	
Humidity		56%		
Atmospheric Pressure:		1008 mbar		ć
Test Mode:				
Engineering mode:	Keep the EU	T in continuous transmi	tting by select chan	nel

2.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
/		L	1	1
Mater				

Note:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
- 3. For conducted measurements (Output Power, 20dB Occupied Bandwidth, Carrier Frequencies Separation, Hopping Channel Number, Dwell Time, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.

Report No.: TCT240822E035



3. Facilities and Accreditations

3.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

• FCC - Registration No.: 645098

SHENZHEN TONGCE TESTING LAB

Designation Number: CN1205

The testing lab has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- IC Registration No.: 10668A
- SHENZHEN TONGCE TESTING LAB
- CAB identifier: CN0031

The testing lab has been registered by Innovation, Science and Economic Development Canada for radio equipment testing.

3.2. Location

SHENZHEN TONGCE TESTING LAB

Address: 2101 & 2201, Zhenchang Factory, Renshan Industrial Zone, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, 518103, People's Republic of China TEL: +86-755-27673339



4. Test Results and Measurement Data

CT 通测检测 TESTING CENTRE TECHNOLOGY

According to KDB 447498 D01 General RF Exposure Guidance v06, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the commission's guidance.

The 1-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances \leq 50 mm are determined by:

[(max. power of channel, including tune-up tolerance, mW) / (min. test separation distance, mm)] $\cdot [\sqrt{f}(GHz)] \le 3.0$ for 1-g SAR, where

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation. When the minimum test separation distance is < 5 mm, a distance of 5 mm
 - according is applied to determine SAR test exclusion.
- The result is rounded to one decimal place for comparison
- BDR+EDR:

Channel	Frequency (GHz)	Max. Power (dBm)	Tune up Power (dBm)	Max. Tune up Power (dBm)	Max. Tune up Power (mW)	Test distance (mm)	Result	exclusion thresholds for 1-g SAR
CH 39	2.441	5.29	4.5±1	5.5	3.55	5	1.11	3.0

For BLE(1M):

S)	Channel	Frequency (GHz)	Max. Power (dBm)	Tune up Power (dBm)	Max. Tune up Power (dBm)	Max. Tune up Power (mW)	Test distance (mm)	Result	exclusion thresholds for 1-g SAR	
	CH 00	2.402	4.43	3.5±1	4.5	2.82	5	0.87	3.0	

For BLE(2M):

Channel	Frequency (GHz)	Max. Power (dBm)	Tune up Power (dBm)	Max. Tune up Power (dBm)	Max. Tune up Power (mW)	Test distance (mm)	Result	exclusion thresholds for 1-g SAR
CH 19	2.440	4.51	4±1	5	3.16	5	0.99	3.0

Result: Base on the calculation value, No SAR measurement is required.

*****END OF REPORT*****