



FCC ID: Y4O- FORCE
Report No.: T190401N03-RP1

Page: 1 / 128
Rev.: 02

FCC 47 CFR PART 15 SUBPART C AND ANSI C63.10: 2013

TEST REPORT

For

Standalone Cliplauncher W/7inch Touchdisplay

Model: FORCE, Force, ADA2, AdA2

Data Applies to: N/A

Brand: AKAI PROFESSIONAL

Issued for

inMusic Brands, Inc.

200 Scenic View Drive, Cumberland, RI 02864, U.S.A.

Issued by

Compliance Certification Services Inc.

Tainan Lab.

No.8, Jiucengling, Xinhua Dist., Tainan City 712, Taiwan (R.O.C.)

TEL: 886-6-580-2201

FAX: 886-6-580-2202

Date of Issue: August 08, 2019

Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. Ltd. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部分複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: T190401N03-RP1

Page: 2 / 128
Rev.: 02

REVISION HISTORY

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	May 23, 2019	Initial Issue	ALL	Gina Lin
01	July 22, 2019	See the following note rev.01	Page9 Page33 Page122	Gina Lin
02	August 08, 2019	See the following note rev.02	ALL	Gina Lin

Note:

- ※ Rev.00 Issue Date : May 23, 2019
Original Report
- ※ Rev.01 Issue Date : July 22, 2019
Add company number on page9, update average power on page33, update standard applicable on page122.
- ※ Rev.02 Issue Date : August 08, 2019
Modify product name.



TABLE OF CONTENTS

1. TEST REPORT CERTIFICATION	4
2. EUT DESCRIPTION	5
3. DESCRIPTION OF TEST MODES	7
4. TEST METHODOLOGY	8
5. FACILITIES AND ACCREDITATIONS.....	8
5.1 FACILITIES	8
5.2 EQUIPMENT	8
5.3 LABORATORY ACCREDITATIONS LISTINGS	8
5.4 TABLE OF ACCREDITATIONS AND LISTINGS.....	9
6. CALIBRATION AND UNCERTAINTY	10
6.1 MEASURING INSTRUMENT CALIBRATION	10
6.2 MEASUREMENT UNCERTAINTY	10
7. SETUP OF EQUIPMENT UNDER TEST	11
7.1 SETUP CONFIGURATION OF EUT	11
7.2 SUPPORT EQUIPMENT	13
7.3 EUT OPERATING CONDITION	15
8. APPLICABLE LIMITS AND TEST RESULTS.....	18
8.1 6DB BANDWIDTH.....	18
8.2 MAXIMUM PEAK OUTPUT POWER	29
8.3 DUTY CYCLE.....	42
8.4 POWER SPECTRAL DENSITY	53
8.5 CONDUCTED SPURIOUS EMISSION	64
8.6 RADIATED EMISSIONS	81
8.6.1 TRANSMITTER RADIATED SUPURIOUS EMSSIONS.....	81
8.6.2 WORST-CASE RADIATED EMISSION BELOW 1 GHZ	86
8.6.3 TRANSMITTER RADIATED EMISSION ABOVE 1 GHZ.....	88
8.6.4 RESTRICTED BAND EDGES.....	100
8.7 POWERLINE CONDUCTED EMISSIONS	116
9. ANTENNA REQUIREMENT	122
9.1 STANDARD APPLICABLE	122
9.2 ANTENNA CONNECTED CONSTRUCTION.....	122
APPENDIX I SETUP PHOTOS.....	123

1. TEST REPORT CERTIFICATION

Applicant : inMusic Brands, Inc.
 200 Scenic View Drive, Cumberland, RI 02864, U.S.A.
Manufacturer : inMusic Brands, Inc.
 200 Scenic View Drive, Cumberland, RI 02864, U.S.A.
Equipment Under Test : Standalone Cliplauncher W/7inch Touchdisplay
Model : FORCE, Force, ADA2, AdA2
Data Applies To : N/A
Brand : 
Date of Test : April 08, 2019 ~ April 18, 2019

APPLICABLE STANDARD


STANDARD	TEST RESULT
FCC Part 15 Subpart C AND ANSI C63.10: 2013	No non-compliance noted

Statements of Conformity


Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

FCC Standard Section	Report Section	Test Item	Result
15.247(a)	8.1	6dB BANDWIDTH	Pass
15.247(b)	8.2	MAXIMUM PEAK OUTPUT POWER	Pass
-	8.3	DUTY CYCLE	-
15.247(e)	8.4	POWER SPECTRAL DENSITY	Pass
15.247(d)	8.5	CONDUCTED SPURIOUS EMISSION	Pass
15.205(a)	8.6	RADIATED EMISSIONS	Pass
15.207(a)	8.7	POWERLINE CONDUCTED EMISSIONS	Pass

Approved by:

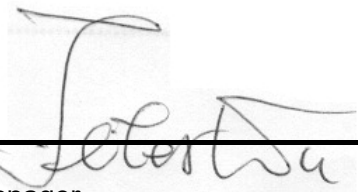
Jeter Wu
 Assistant Manager

Reviewed by:

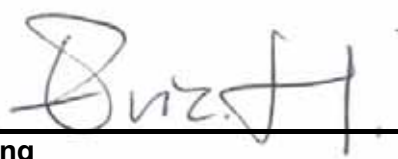
Eric Huang
 Section Manager

2. EUT DESCRIPTION

Product Name	Standalone Cliplauncher W/7inch Touchdisplay
Model	FORCE, Force, ADA2, AdA2
Data Applies To	N/A
Brand	
Received Date	March 22, 2019
Frequency Range	IEEE 802.11b/g, 802.11n HT20: 2412MHz~2462MHz Bluetooth 4.0: 2402MHz~2480MHz
Transmit Power	IEEE 802.11b Mode: 15.41dBm (34.7536mW) IEEE 802.11g Mode: 19.76dBm (94.6237mW) IEEE 802.11n HT20 Mode: 20.06dBm (101.391mW) Bluetooth 4.0 Mode: 5.63dBm (3.65595mW)
Channel Spacing	IEEE 802.11b/g, 802.11n HT20: 5MHz Bluetooth 4.0: 2MHz
Channel Number	IEEE 802.11b/g, 802.11n HT20: 11 Channels Bluetooth 4.0 : 40 Channels
Transmit Data Rate	IEEE 802.11b : 11, 5.5, 2, 1 Mbps IEEE 802.11g : 54, 48, 36, 24, 18, 12, 9, 6 Mbps IEEE 802.11n HT20 : 130, 117, 104, 78, 65, 58.5, 52, 39, 26, 19.5, 13, 6.5 Mbps Bluetooth 4.0: 1 Mbps
Type of Modulation	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK, BPSK) Bluetooth 4.0: GFSK
Antenna Type	Type: PCB Antenna Model: WLA-EM-1508-0008-B Manufacturer: BRITO Gain: 4.6 dBi
Power Rating	19Vdc, 3.42A (Powered by adapter)
Hardware Version	AZ01: AZ01CRE01B E
Software Version	N/A
Temperature Range	0°C ~ +40°C
Reported Date	May 23, 2019



Report No.: T190401N03-RP1

Page: 6 / 128
Rev.: 02

Power Adapter :

No.	Manufacturer	Model No.	Power Input	Power Output
1	Sunny	SYS1548-6519-T3	100-240Vac, 50-60Hz, 1.5A	19Vdc, 3.42A

REMARK:

1. The sample (**Force**) selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: **Y40- FORCE** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.
3. The listed series model (**FORCE, ADA2, AdA2**) are all the same of the original design, except for different model name and is just for the marketing purpose.
4. For more details, please refer to the User's manual of the EUT.

3. DESCRIPTION OF TEST MODES

The EUT is a Standalone Cliplauncher W/7inch Touchdisplay. It has one transmitter chains and one receive chains (1x1 configurations) and BT4.0. The 1x1 configuration is implemented with one outside chains (Chain 0).

The RF chipset is manufactured by SMSC.

The antenna peak gain 4.6dBi (highest gain) were chosen for full testing.

IEEE 802.11 b ,802.11g ,802.11n HT20 mode (DTS Band)

The EUT had been tested under operating condition.

There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2412
Middle	2437
High	2462

IEEE 802.11b mode: 1Mbps long data rate (worst case) were chosen for full testing.

IEEE 802.11g mode: 6Mbps data rate (worst case) were chosen for full testing.

IEEE 802.11n HT20 mode: 6.5Mbps data rate (worst case) were chosen for full testing.

GFSK mode

The EUT had been tested under operating condition.

There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2402
Middle	2442
High	2480

Bluetooth 4.0 (GFSK) mode: 1Mbps data rate (worst case) were chosen for full testing.



4. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10 and FCC CFR 47 15.207, 15.209 and 15.247.

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at No.8, Jiucengling, Xinhua Dist., Tainan City 712, Taiwan (R.O.C.)

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 LABORATORY ACCREDITATIONS LISTINGS

The test facilities used to perform radiated and conducted emissions tests are accredited by Taiwan Accreditation Foundation for the specific scope of accreditation under Lab Code: 1109 to perform Electromagnetic Interference tests according to FCC PART 15 AND CISPR 22 requirements. No part of this report may be used to claim or imply product endorsement by TAF or any agency of the Government. In addition, the test facilities are listed with Federal Communications Commission (registration no: TW1109).



Report No.: T190401N03-RP1

Page: 9 / 128
Rev.: 02

5.4 TABLE OF ACCREDITATIONS AND LISTINGS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

Taiwan	TAF
---------------	-----

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

Canada	Industry Canada (ISED#: 2324H)
Germany	TUV NORD
Taiwan	BSMI
USA	FCC
Japan	VCCI

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsrf.com>

6. CALIBRATION AND UNCERTAINTY

6.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

6.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:


PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz Test Site : CB966	$\pm 3.1\text{dB}$
Radiated Emission, 200 to 1000 MHz Test Site : CB966	$\pm 2.7\text{dB}$
Radiated Emission, 1 to 6 GHz	$\pm 2.7\text{dB}$
Radiated Emission, 6 to 18 GHz	$\pm 2.7\text{dB}$
Radiated Emission, 18 to 26.5 GHz	$\pm 2.7\text{dB}$
Radiated Emission, 26 to 40 GHz	$\pm 3.7\text{dB}$
Power Line Conducted Emission	$\pm 2.0\text{dB}$

Uncertainty figures are valid to a confidence level of 95%, K=2


7. SETUP OF EQUIPMENT UNDER TEST


7.1 SETUP CONFIGURATION OF EUT

**FOR RF TEST
WIFI:**

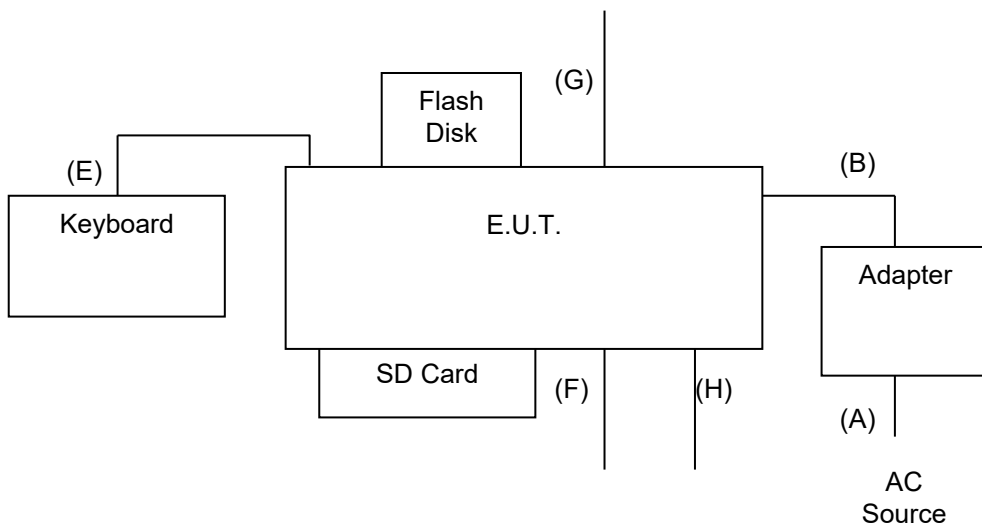

BLUETOOTH:

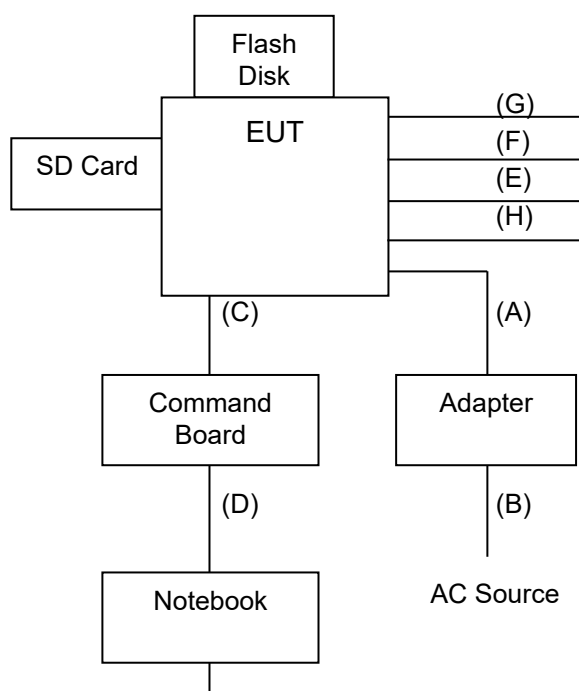

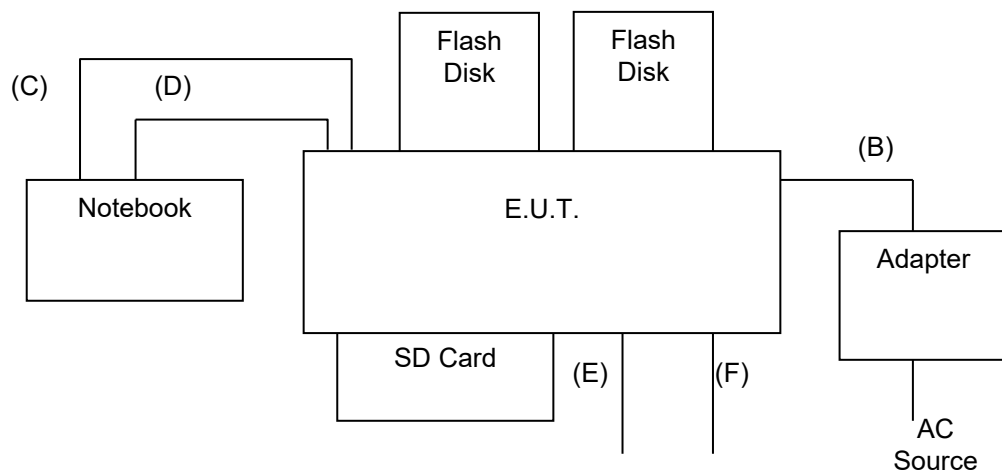FOR EMI TEST

7.2 SUPPORT EQUIPMENT

RF test

No.	Product	Manufacturer	Model No.	Certify No.	Signal cable
1	Notebook	Acer	AS 3830TG	DOC	Power cable, unshd, 1.6m
2	Flash Disk	Transcend	Jet Flash790	DOC	N/A
3	SD CARD	TOSHIBA	2GB	DOC	N/A
4	Keyboard	Lenovo	KU-0225	DOC	N/A

No.	Signal cable description	
A	DC Power	Unshielded, 1.4m, 1pcs
B	AC Power	Unshielded, 1.5m, 1pcs.
C	Command	Unshielded, 0.4m, 1pcs.
D	USB	Shielded, 1.7m, 1pcs. With one core
E	USB	Shielded, 1.8m, 1pcs. With one core
F	RJ45	Unshielded, 0.5m, 1pcs.
G	Audio	Shielded, 1.0m, 13pcs.
H	Audio	Shielded, 1.0m, 1pcs.

EMI test

No.	Product	Manufacturer	Model No.	Certify No.	Signal cable
1	Notebook	TOSHIBA	Satellite L730	DOC	Power cable, unshd, 1.6m
2	Flash Disk	Transcend	Jet Flash790	DOC	N/A
3	SD CARD	TOSHIBA	2GB	DOC	N/A

No.	Signal cable description	
A	AC Power	Unshielded, 1.4m, 1pcs.
B	DC Power	Unshielded, 1.5m, 1pcs.
C	USB	Shielded, 1.8m, 1pcs. With one core
D	RJ45	Unshielded, 0.5m, 1pcs.
E	Audio	Shielded, 1.0m, 13pcs.
F	Audio	Shielded, 1.0m, 1pcs.

REMARK:

1. All the above equipment/cables were placed in worse case positions to maximize emission signals during emission test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



7.3 EUT OPERATING CONDITION

RF Setup

WIFI:

1. Set up a whole system as the setup diagram.
2. The "Tera Term" software was used for testing
3. Key in "root" , "connmanctl enable wifi".

TX Mode Key in:

B Mode : wl down
wl mpc 0
wl country ALL
wl band b
wl up
wl 2g_rate -r 01 -b 20
wl channel 01(01,06,11)
wl phy_watchdog 0
wl scansuppress 1
wl phy_forcecal 1
wl phy_txpwrctrl 1
wl txpwr1 -1
wl pkteng_start 00:90:4c:14:43:19 tx 100 1000 0

G Mode : wl down
wl mpc 0
wl country ALL
wl band b
wl up
wl 2g_rate -r 06 -b 20
wl channel 01 (01,06,11)
wl phy_watchdog 0
wl scansuppress 1
wl phy_forcecal 1
wl phy_txpwrctrl 1
wl txpwr1 -o -d 13(12)



Report No.: T190401N03-RP1

Page: 16 / 128
Rev.: 02

wl pkteng_start 00:90:4c:14:43:19 tx 100 1000 0

HT20 Mode : wl down
wl mpc 0
wl country ALL
wl band b
wl up
wl 2g_rate -h 0 -b 20
wl channel 01/20 (01,06,11)
wl phy_watchdog 0
wl scansuppress 1
wl phy_forcecal 1
wl phy_txpwrctrl 1
wl txpwr1 -o -d 11(13)
wl pkteng_start 00:90:4c:14:43:19 tx 100 1000 0

RX Mode Key in:

wl down
wl band auto
wl mpc 0
wl country ALL
wl channel 01 (01,06,11)
wl bi 65535
wl up
wl phy_watchdog 0
wl scansuppress 1
wl phy_forcecal 1

4. All of the function are under run.

5. Start test.



Report No.: T190401N03-RP1

Page: 17 / 128
Rev.: 02

Bluetooth:

1. Set up a whole system as the setup diagram.
2. The "Tera Term" software was used for testing
3. Key in "root".

TX Mode Key in:

```
hciconfig hci0 up  
hcidtool cmd 0x03 0x0003  
hcidtool cmd 0x08 0x0001e 00(00,14,27) 25 00
```

RX Mode Key in:

```
hciconfig hci0 up  
hcidtool cmd 0x03 0x0003  
hcidtool cmd 0x3f 0x0052 EE FF C0 88 00 00 E8 03 00(00,27,4E) 04 00 01 FF FF
```

4. All of the function are under run.
5. Start test.

8. APPLICABLE LIMITS AND TEST RESULTS

8.1 6DB BANDWIDTH


LIMIT

§ 15.247(a) (2) For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz

TEST EQUIPMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY54430216	07/05/2018	07/04/2019
SMA Cable + 10dB Attenuator	CCS	SMA+10dB ATT	SMA/10dB	01/25/2019	01/24/2020
Software	Excel(ccs-o6-2019 v1.2)				

TEST SETUP



TEST PROCEDURE

1. Set resolution bandwidth (RBW) = 1-5 % of the emission bandwidth (EBW).
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. Compare the resultant bandwidth with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is 1-5 %.

TEST RESULTS

No non-compliance noted.

Model Name	Force	Test By	Ted Huang
Temp & Humidity	26.5 , 54%	Test Date	2019/04/17

IEEE 802.11b mode

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (kHz)	Pass / Fail
Low	2412	9.05	500	PASS
Middle	2437	8.59	500	PASS
High	2462	8.57	500	PASS

NOTE :

1. At final test to get the worst-case emission at 1Mbps long.
2. The cable assembly insertion loss of 11.1dB (including 10 dB pad and 1.1 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11g mode

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (kHz)	Pass / Fail
Low	2412	16.38	500	PASS
Middle	2437	16.39	500	PASS
High	2462	16.38	500	PASS

NOTE :

1. At final test to get the worst-case emission at 6Mbps.
2. The cable assembly insertion loss of 11.1dB (including 10 dB pad and 1.1 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11n HT20 mode

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (kHz)	Pass / Fail
Low	2412	17.65	500	PASS
Middle	2437	17.63	500	PASS
High	2462	17.62	500	PASS

NOTE :

1. At final test to get the worst-case emission at 6.5Mbps.
2. The cable assembly insertion loss of 11.1dB (including 10 dB pad and 1.1 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.



Model Name	Force	Test By	Ted Huang
Temp & Humidity	26.5 , 54%	Test Date	2019/04/17


Bluetooth 4.0 (GFSK) mode



Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass / Fail
Low	2402	718	500	PASS
Middle	2442	716	500	PASS
High	2480	715	500	PASS


NOTE :



1. At final test to get the worst-case emission at 1Mbps.
2. The cable assembly insertion loss of 11.1dB (including 10 dB pad and 1.1 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

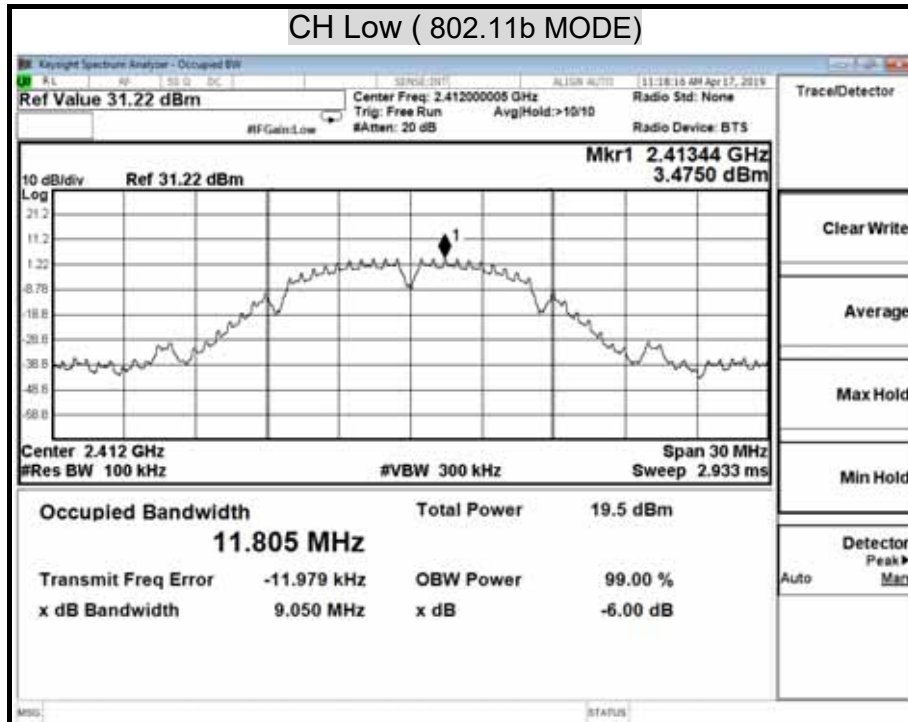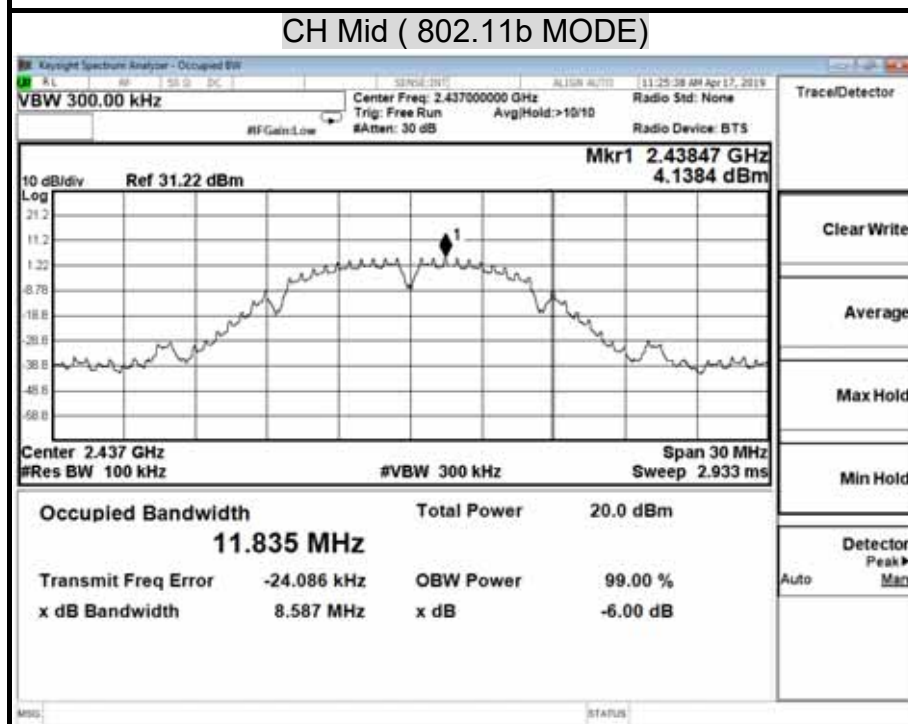
6dB BANDWIDTH (802.11b MODE)**CH Low (802.11b MODE)****CH Mid (802.11b MODE)**

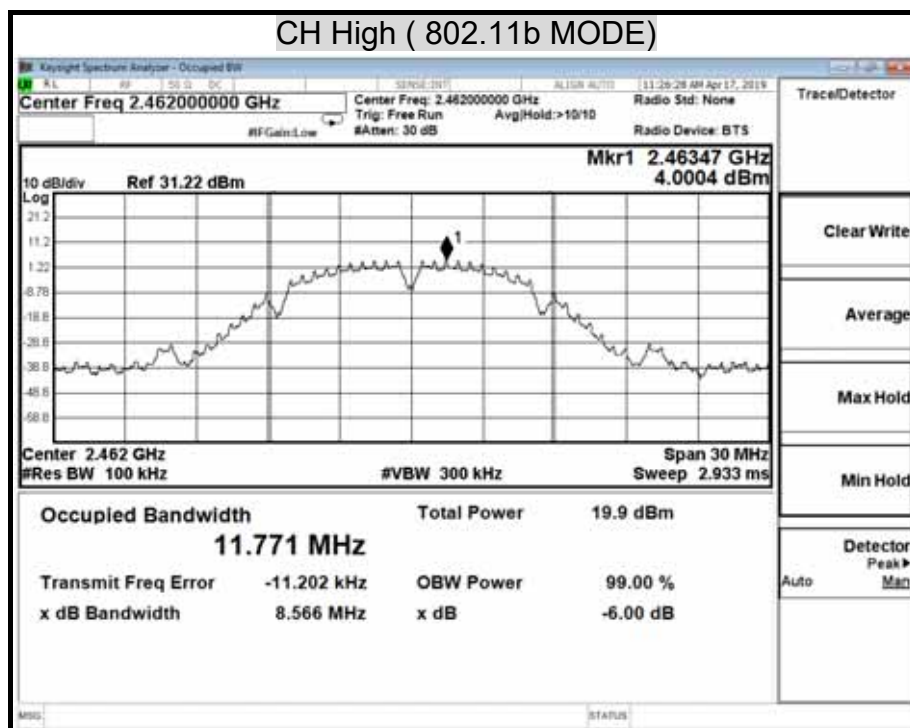

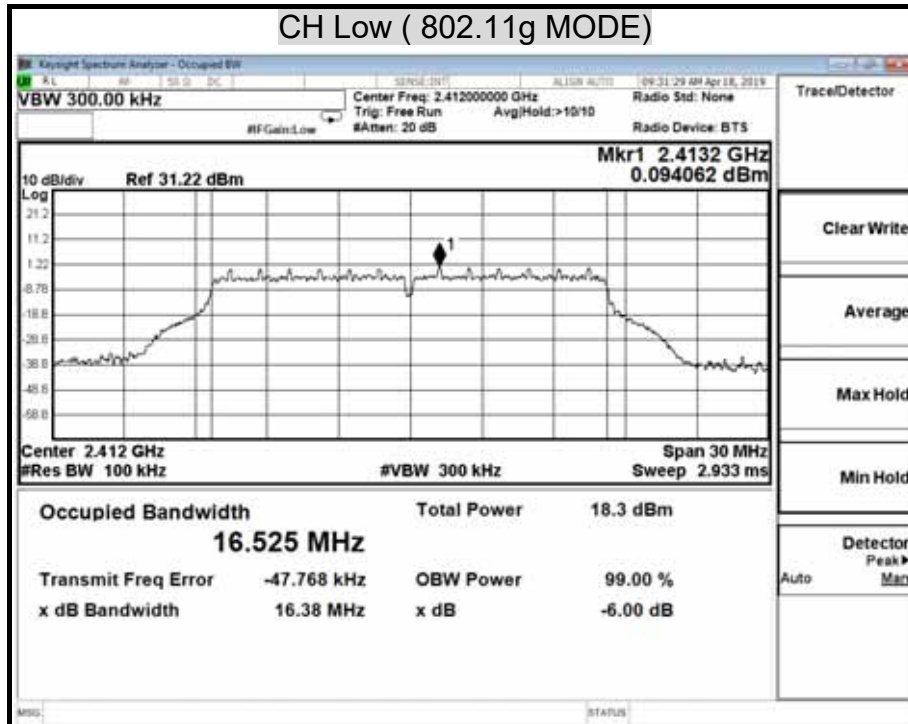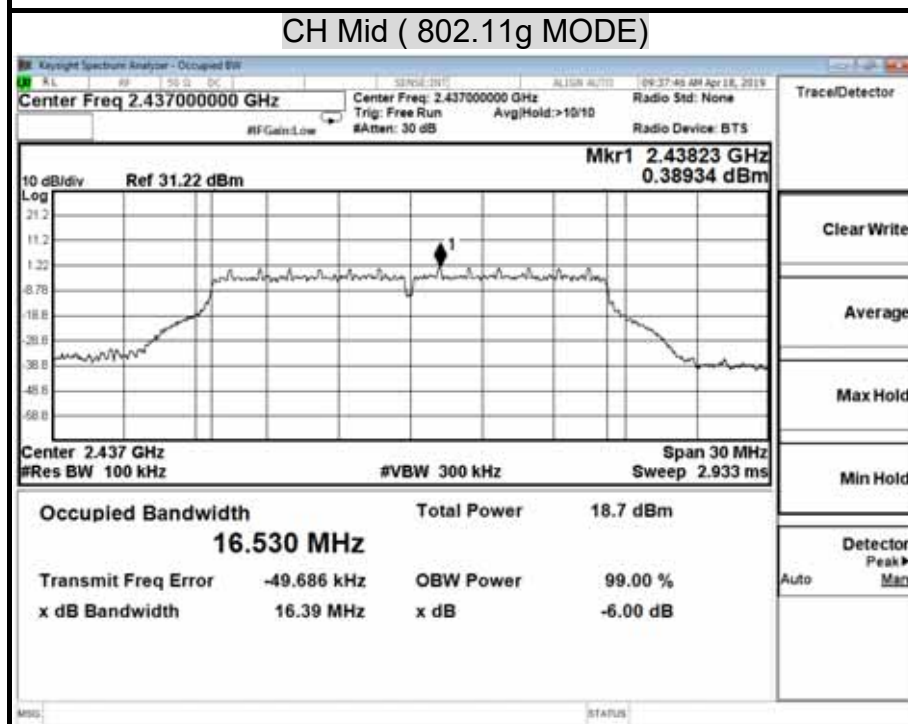
6dB BANDWIDTH (802.11g MODE)**CH Low (802.11g MODE)****CH Mid (802.11g MODE)**

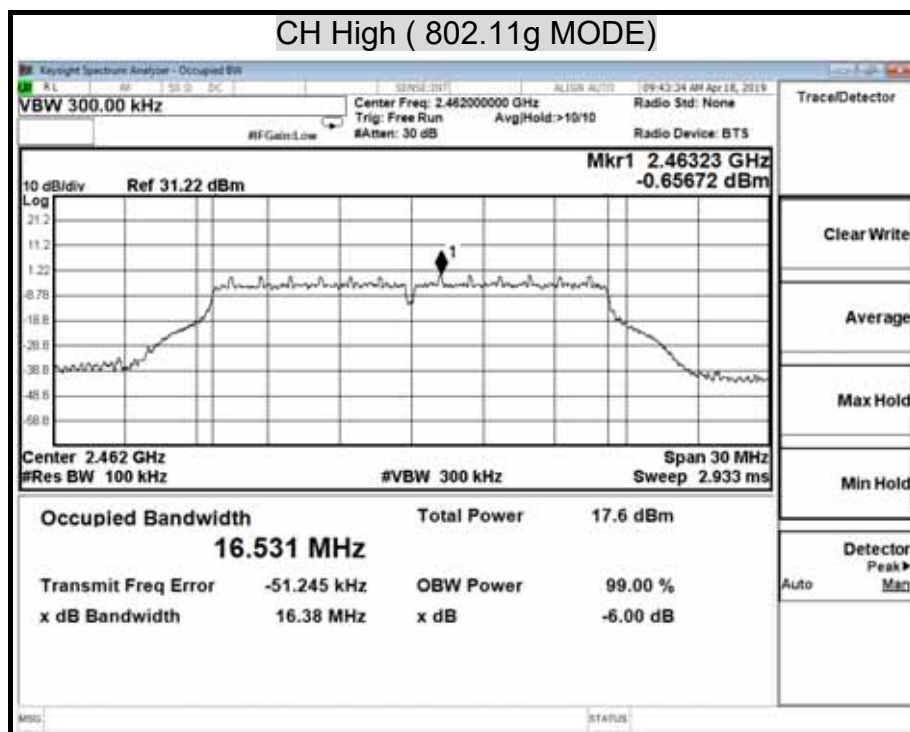


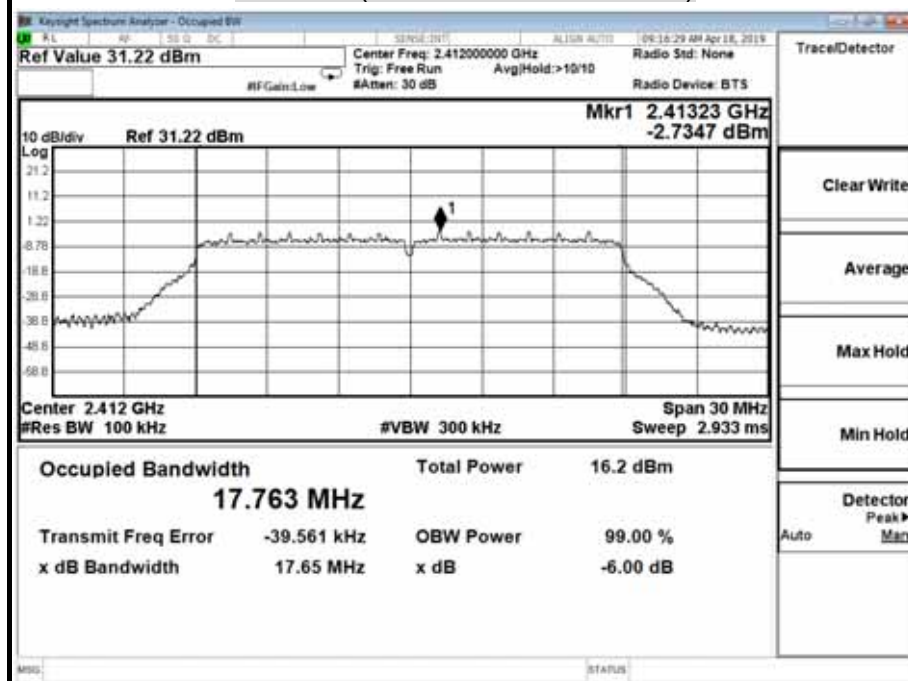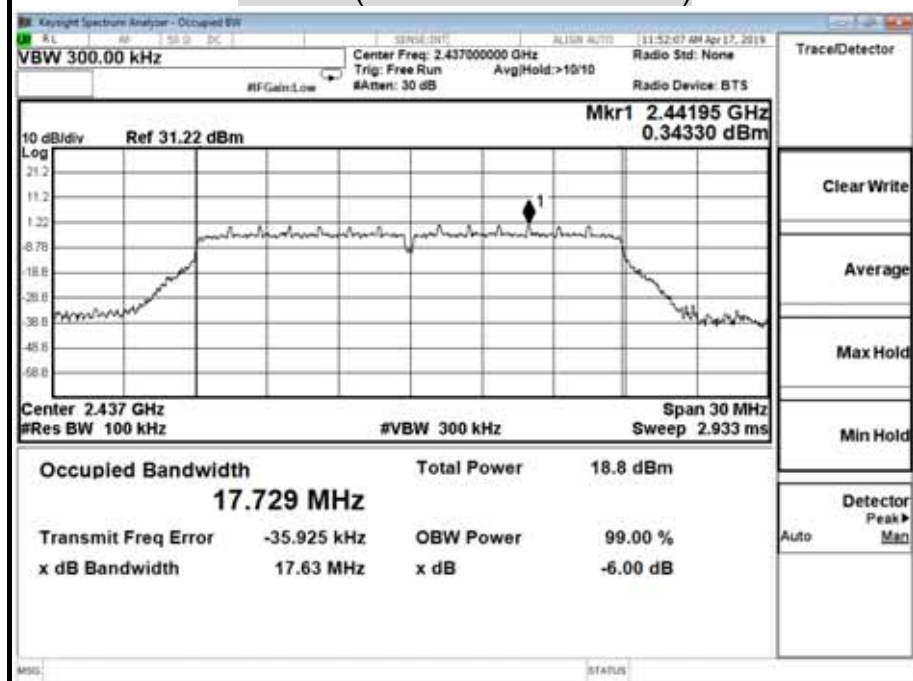6dB BANDWIDTH (802.11n HT20 MODE)**CH Low (802.11n HT20 MODE)****CH Mid (802.11n HT20 MODE)**

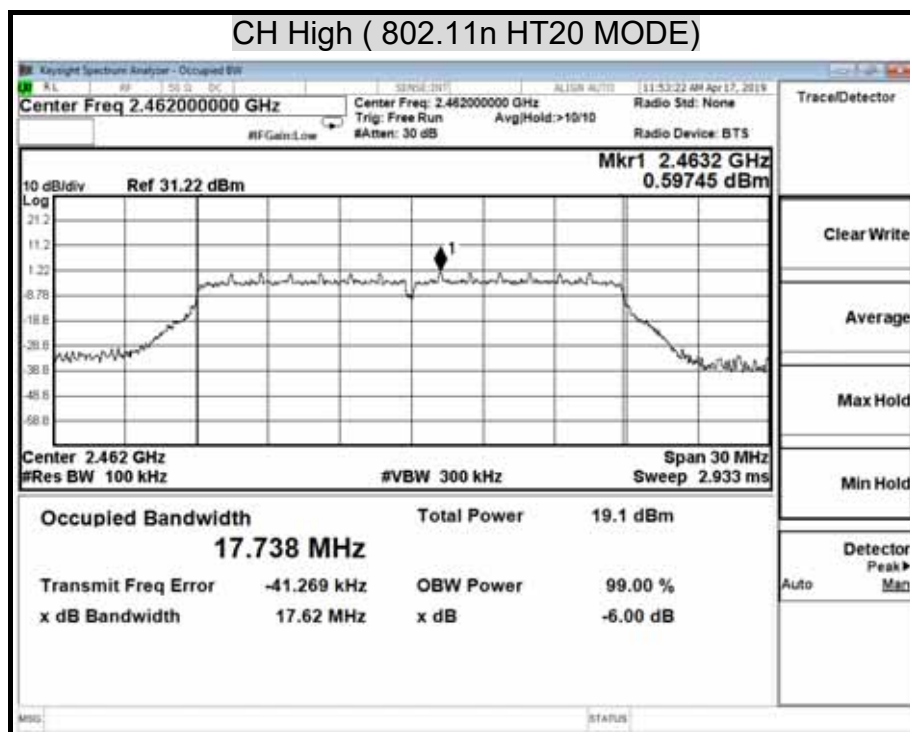

6dB BANDWIDTH (GFSK MODE)

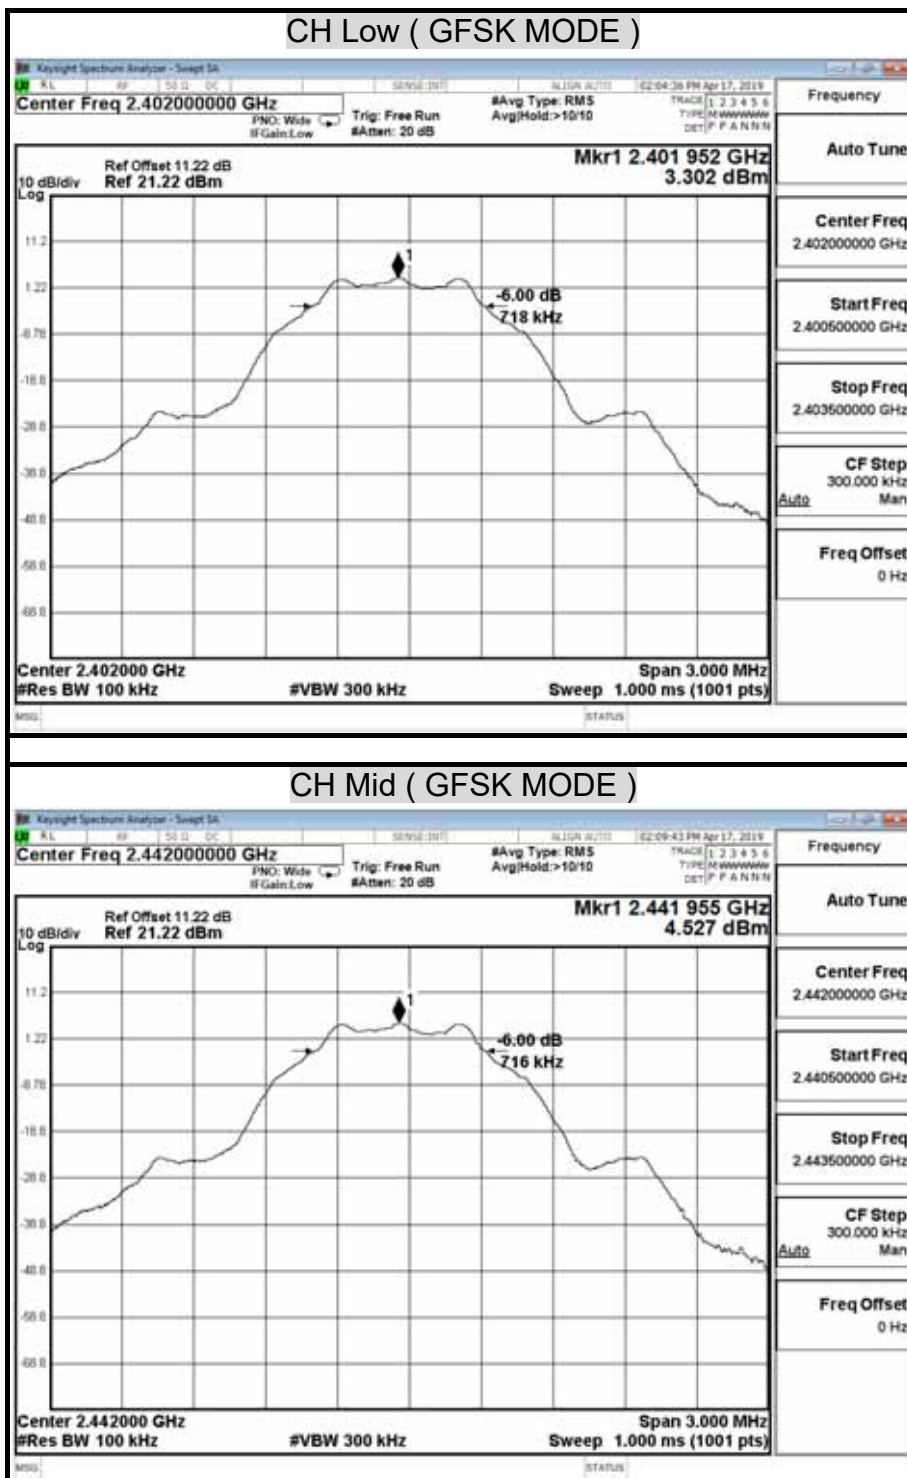

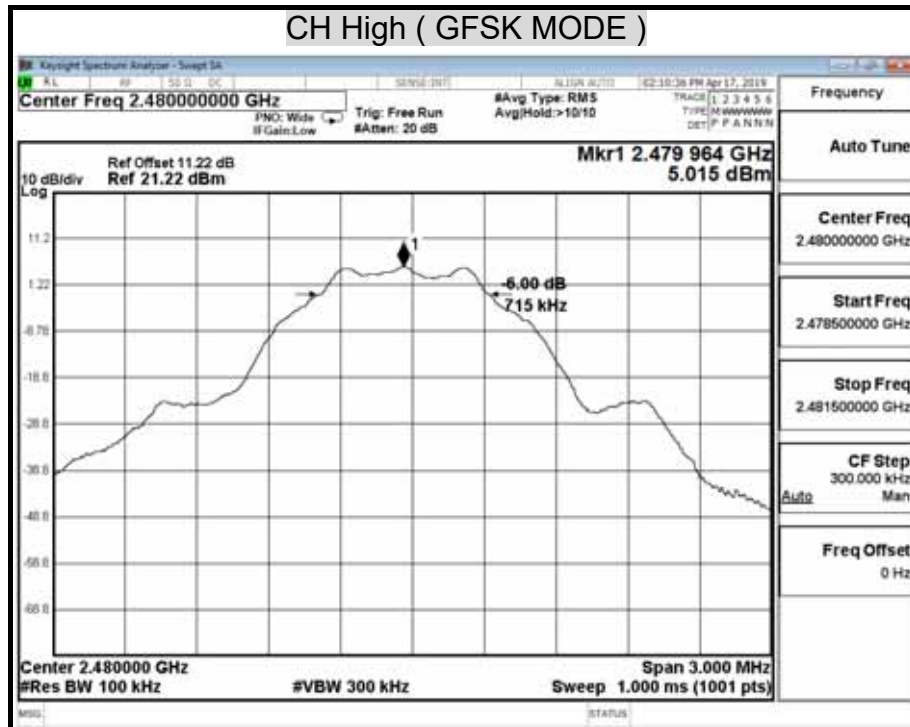

8.2 MAXIMUM PEAK OUTPUT POWER

LIMIT

§ 15.247(b) The maximum peak output power of the intentional radiator shall not exceed the following :

§ 15.247(b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands : 1 watt.

§ 15.247(b) (4) Except as shown in paragraphs (c) of this section , if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2), and (b)(3) of this section , as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST EQUIPMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY54430216	07/05/2018	07/04/2019
SMA Cable + 10dB Attenuator	CCS	SMA+10dB ATT	SMA/10dB	01/25/2019	01/24/2020
Software	Excel(ccs-o6-2019 v1.2)				

TEST SETUP





Report No.: T190401N03-RP1

Page: 30 / 128
Rev.: 02

TEST PROCEDURE

The tests were performed in accordance with KDB 558074 5.2.1.2 and 5.2.2.1.

5.2.1.2 Measurement Procedure PK2:

1. Set the RBW = 1 MHz.
2. Set the VBW $\geq$ 3 RBW
3. Set the span $\geq$ 1.5 x DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select peak detector). If the instrument does not have a band power function,
9. Sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS bandwidth.

TEST RESULTS

No non-compliance noted

Model Name	Force	Test By	Ted Huang
Temp & Humidity	26.5 , 54%	Test Date	2019/04/17

IEEE 802.11b mode

Channel	Channel Frequency (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Pass / Fail
Low	2412	15.01	30.00	PASS
Middle	2437	15.41	30.00	PASS
High	2462	15.39	30.00	PASS

NOTE : 1. At final test to get the worst-case emission at 1Mbps long.
2. The cable assembly insertion loss of 11.1dB (including 10 dB pad and 1.1 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11g mode

Channel	Channel Frequency (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Pass / Fail
Low	2412	19.30	30.00	PASS
Middle	2437	19.76	30.00	PASS
High	2462	18.49	30.00	PASS

NOTE : 1. At final test to get the worst-case emission at 6Mbps.
2. The cable assembly insertion loss of 11.1dB (including 10 dB pad and 1.1 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11n HT20 mode

Channel	Channel Frequency (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Pass / Fail
Low	2412	17.09	30.00	PASS
Middle	2437	19.83	30.00	PASS
High	2462	20.06	30.00	PASS

NOTE : 1. At final test to get the worst-case emission at 6.5Mbps.
2. The cable assembly insertion loss of 11.1dB (including 10 dB pad and 1.1 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

Model Name	Force	Test By	Ted Huang
Temp & Humidity	26.5 , 54%	Test Date	2019/04/17

Bluetooth 4.0 (GFSK) mode

Channel	Channel Frequency (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Pass / Fail
Low	2402	3.98	30.00	PASS
Middle	2442	5.17	30.00	PASS
High	2480	5.63	30.00	PASS

NOTE : 1. At final test to get the worst-case emission at 1Mbps.
2. The cable assembly insertion loss of 11.1dB (including 10 dB pad and 1.1 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

Average Power Data**IEEE 802.11b mode**

Channel	Channel Frequency (MHz)	Average Power (dBm)
Low	2412	11.92
Middle	2437	12.29
High	2462	12.38

IEEE 802.11g mode

Channel	Channel Frequency (MHz)	Average Power (dBm)
Low	2412	10.93
Middle	2437	11.26
High	2462	10.14



IEEE 802.11n HT20 mode


Channel	Channel Frequency (MHz)	Average Power (dBm)
		Chain 0
Low	2412	8.58
Middle	2437	11.16
High	2462	11.42

Bluetooth 4.0 (GFSK) mode

Channel	Channel Frequency (MHz)	Average Power (dBm)
Low	2402	3.55
Middle	2442	4.75
High	2480	5.20


MAXIMUM PEAK OUTPUT POWER (802.11b MODE)

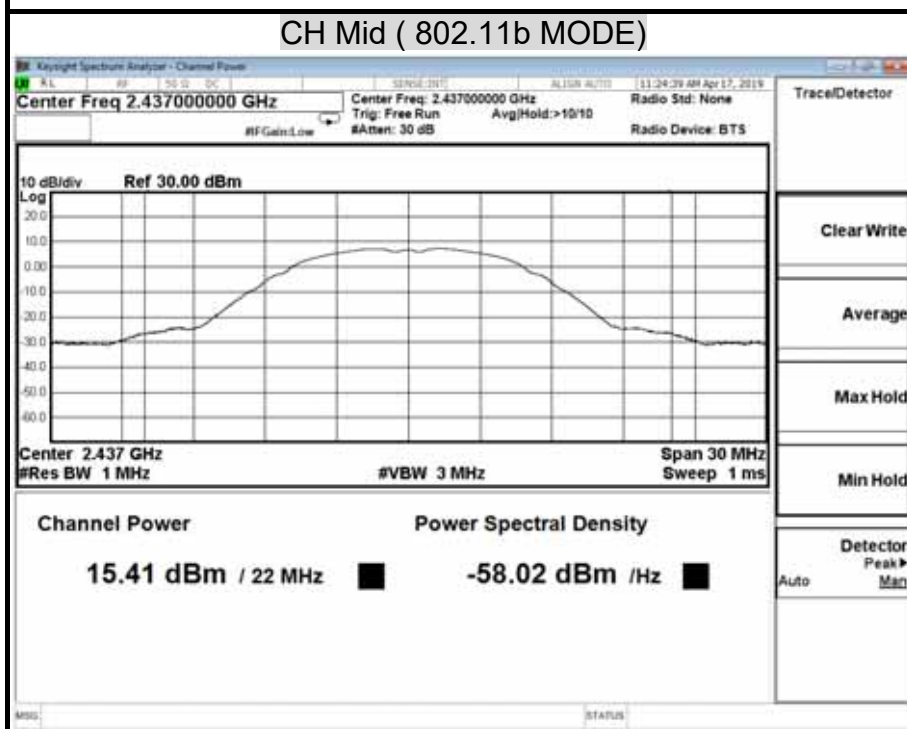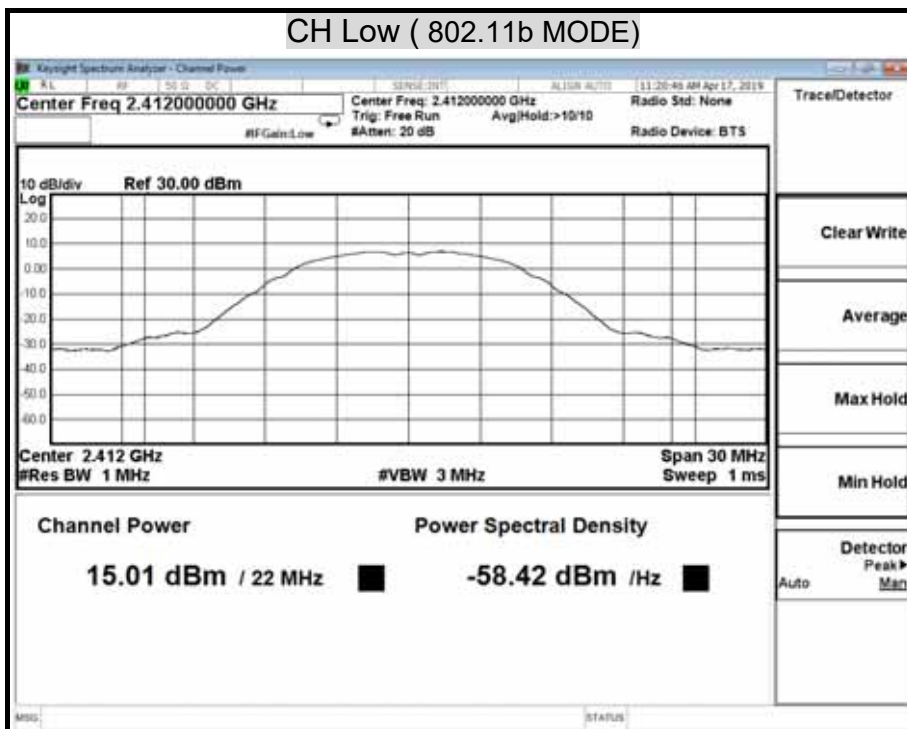

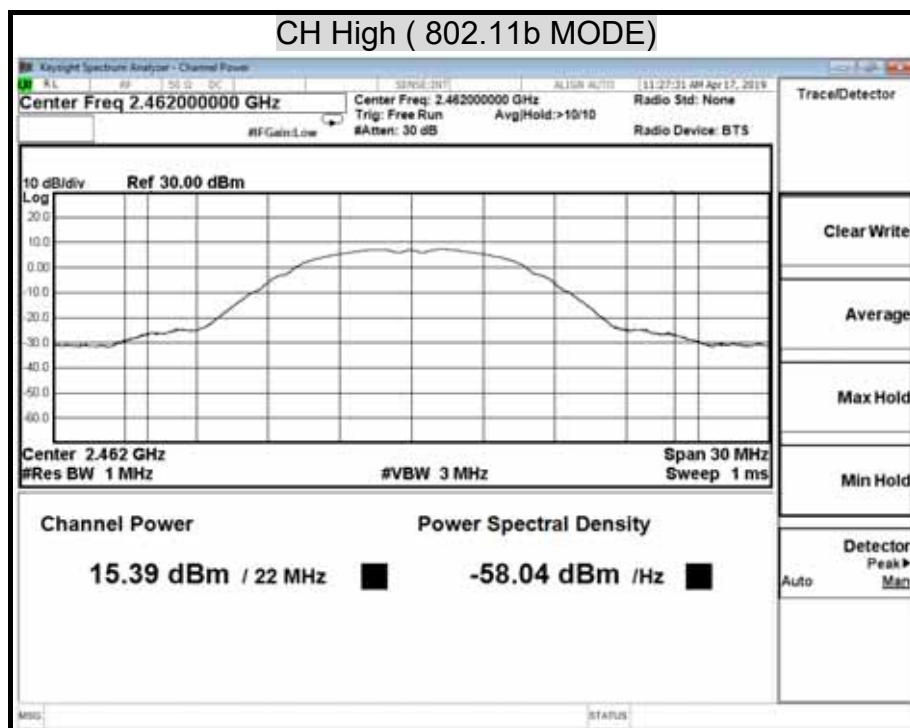



MAXIMUM PEAK OUTPUT POWER (802.11g MODE)

CH Low (802.11g MODE)

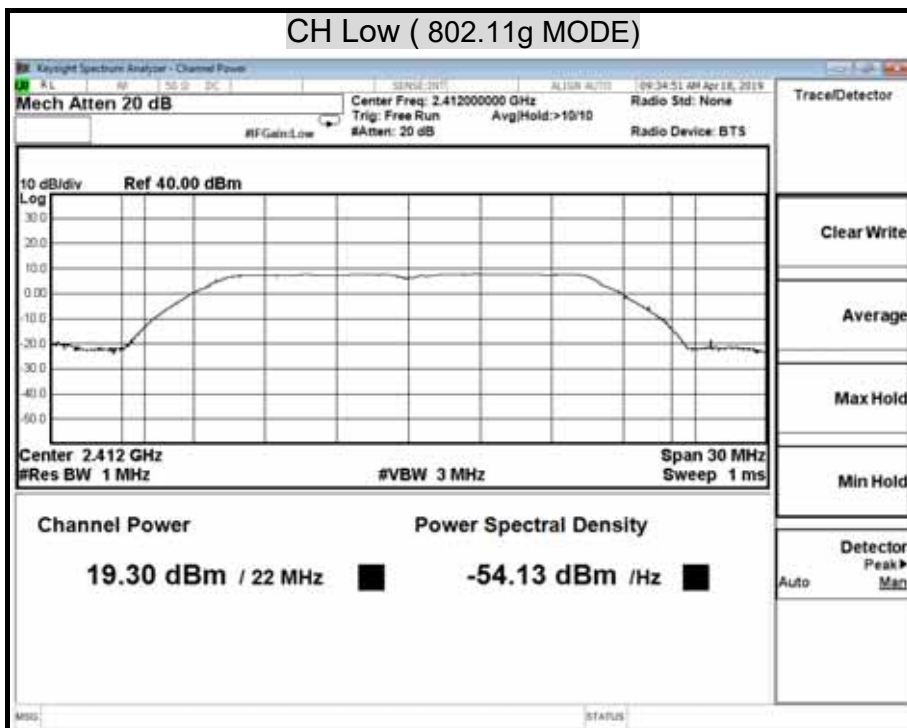


CH Mid (802.11g MODE)

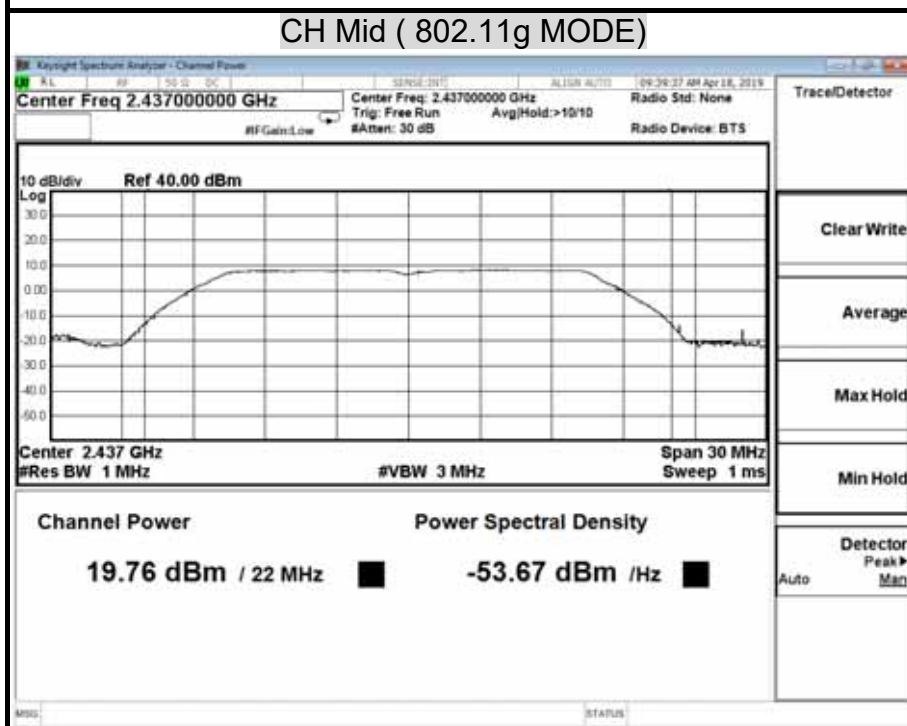

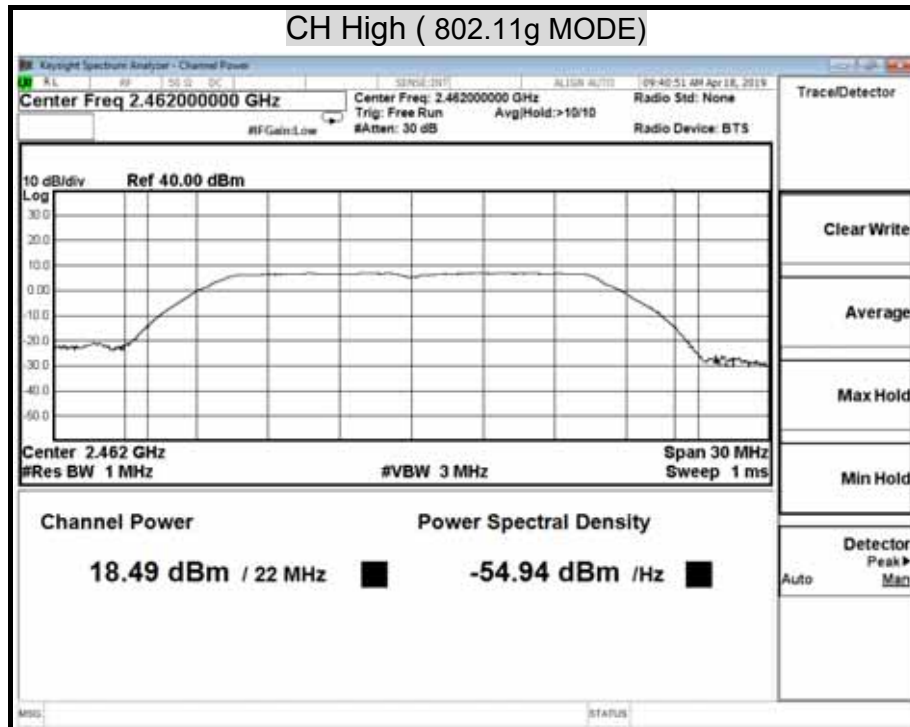



MAXIMUM PEAK OUTPUT POWER (802.11n HT20 MODE)

CH Low (802.11n HT20 MODE)

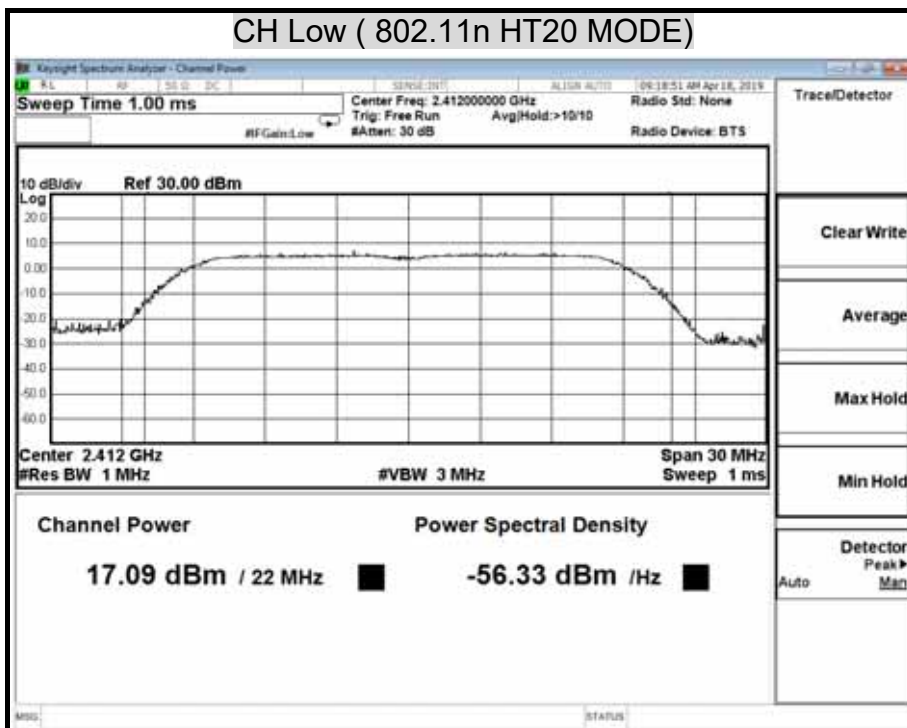



CH Mid (802.11n HT20 MODE)

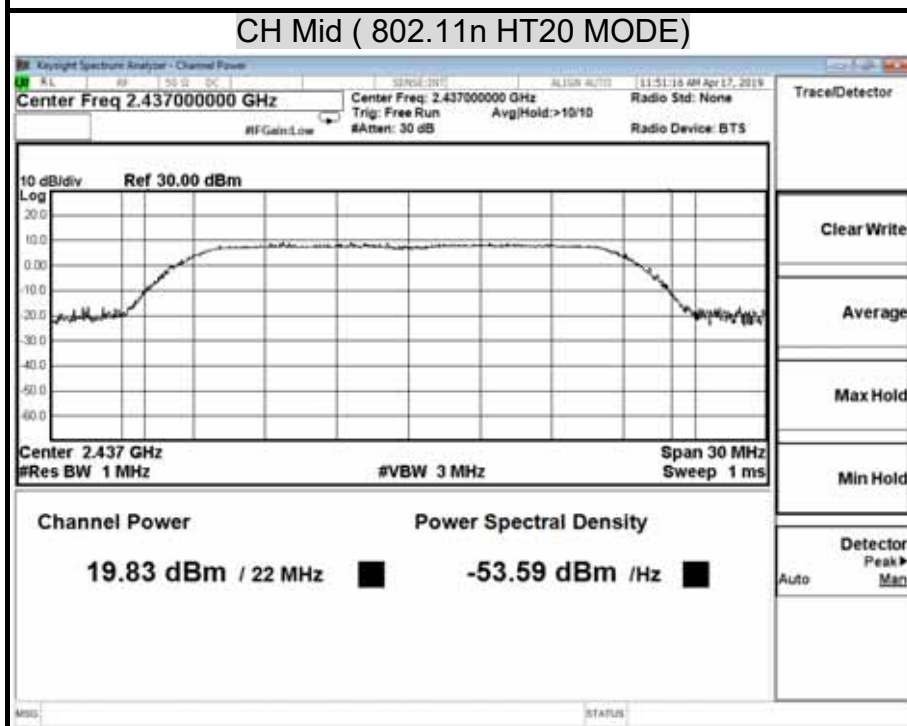

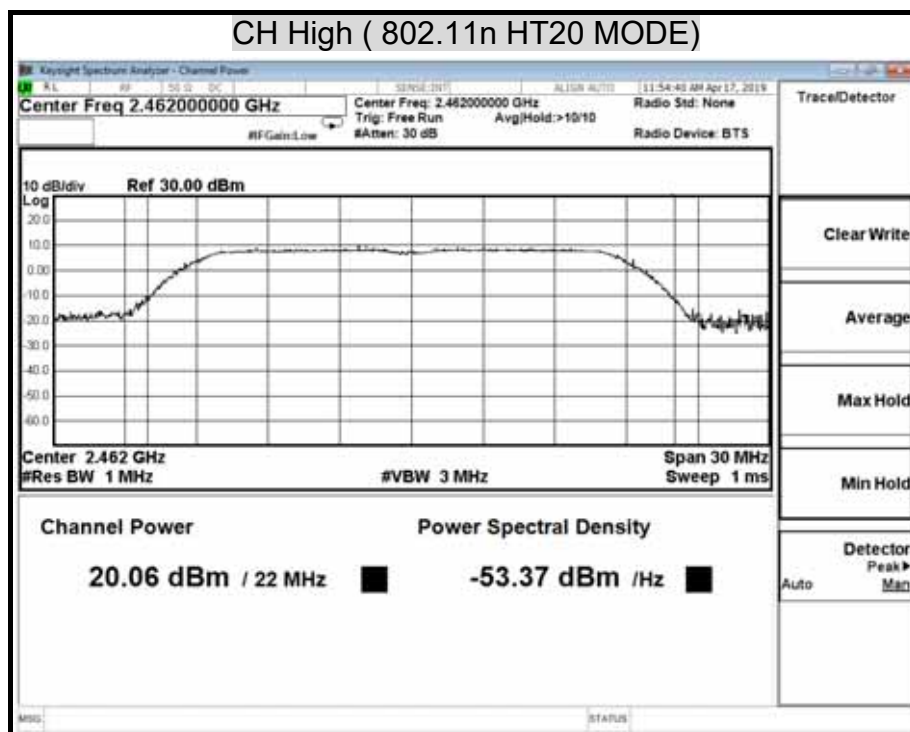

MAXIMUM PEAK OUTPUT POWER (GFSK MODE)

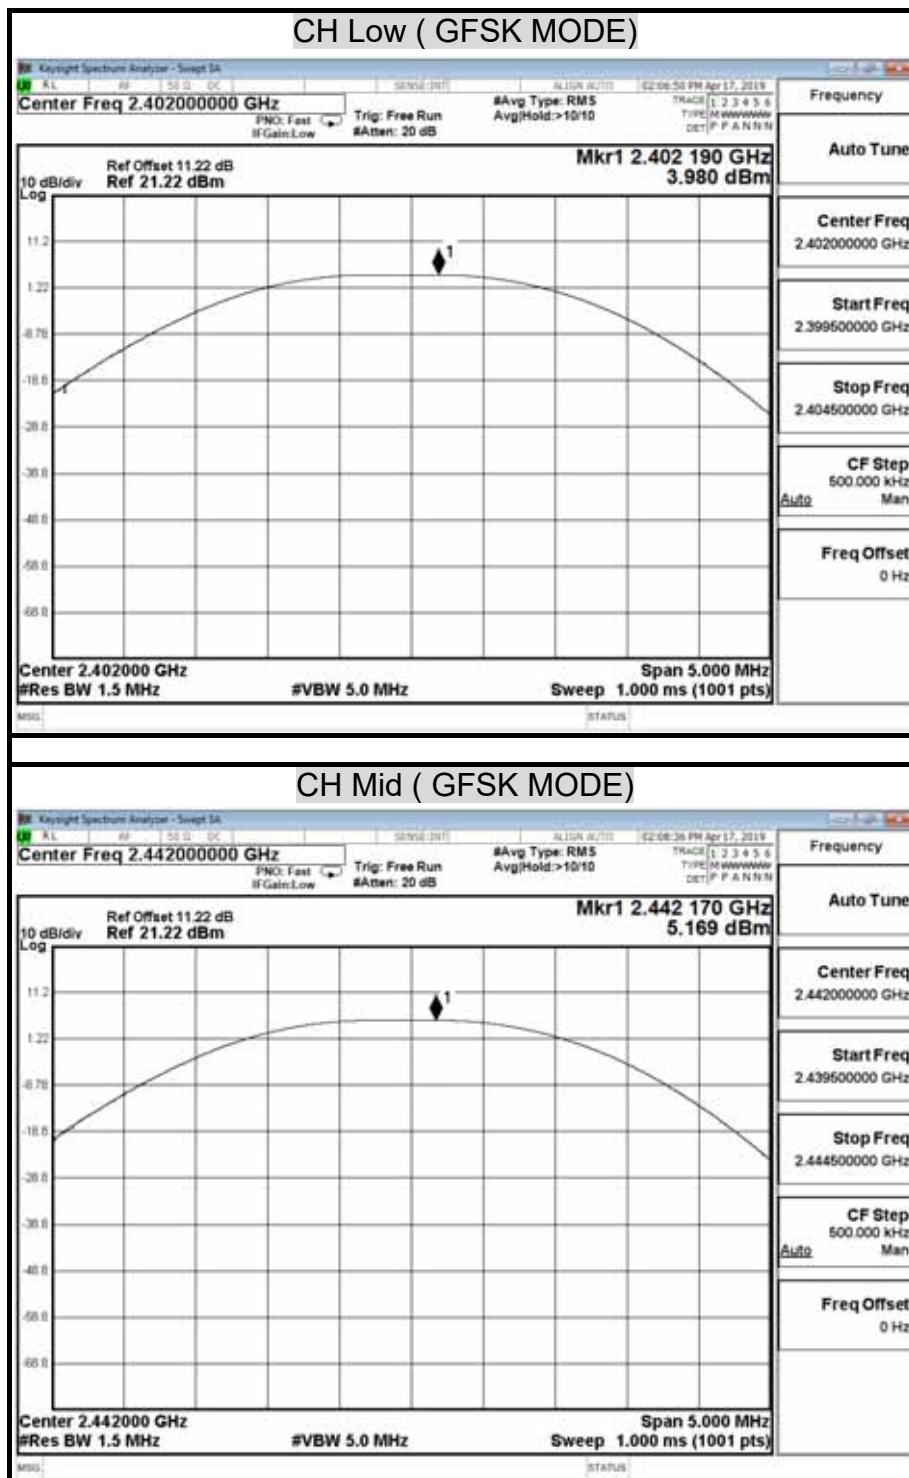

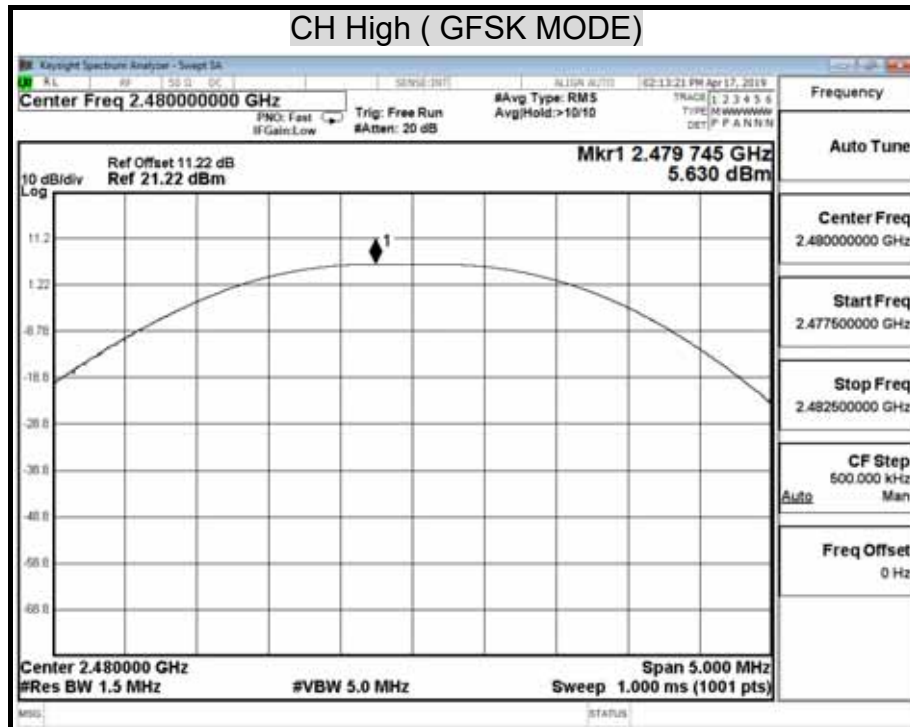

8.3 DUTY CYCLE

LIMIT


Nil (No dedicated limit specified in the Rules)

TEST EQUIPMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY54430216	07/05/2018	07/04/2019
SMA Cable + 10dB Attenuator	CCS	SMA+10dB ATT	SMA/10dB	01/25/2019	01/24/2020
Software	Excel(ccs-o6-2019 v1.2)				

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP

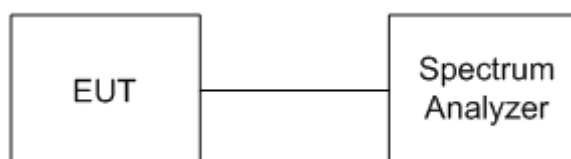

TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set RBW $\geq$ OBW if possible; otherwise, set RBW to the largest available value. Set VBW $\geq$ RBW. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)



Report No.: T190401N03-RP1

Page: 43 / 128
Rev.: 02

TEST RESULTS

No non-compliance noted.

TEST DATA

WIFI



Model Name	Force	Test By	Ted Huang
Temp & Humidity	26.5 , 54%	Test Date	2019/04/17


	us	Times	Ton	Total Ton time(ms)
Ton1	100000.000	1	100000	
Ton2		0	0	
Ton3			0	100
Tp				100



Ton	100
Tp(Ton+Toff)	100
Duty Cycle	1
$10 * \log (1/x) =$	0


TEST PLOT



Plot

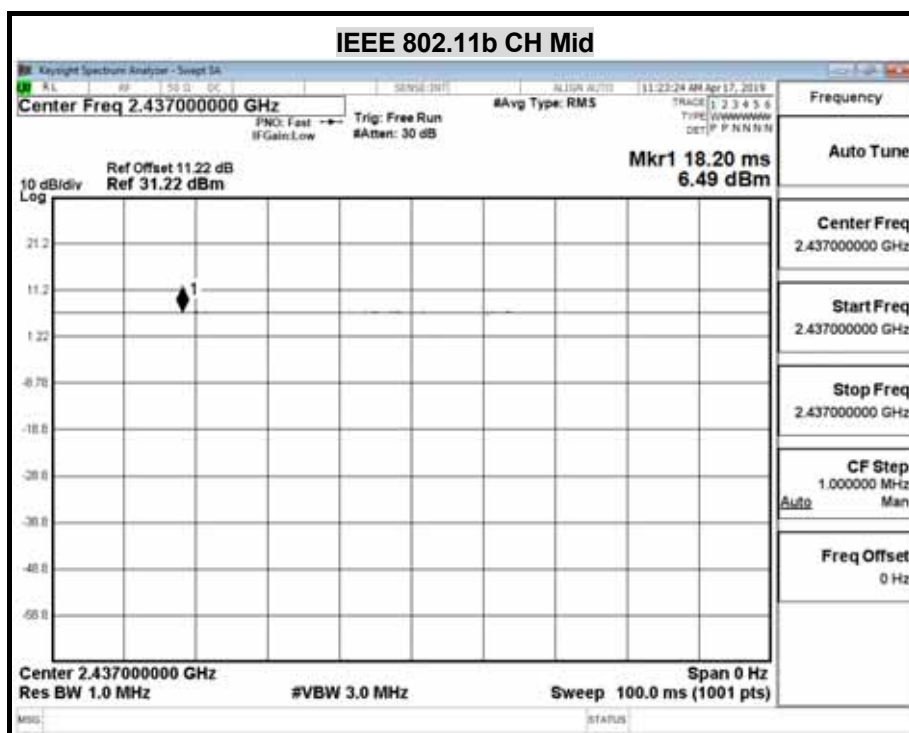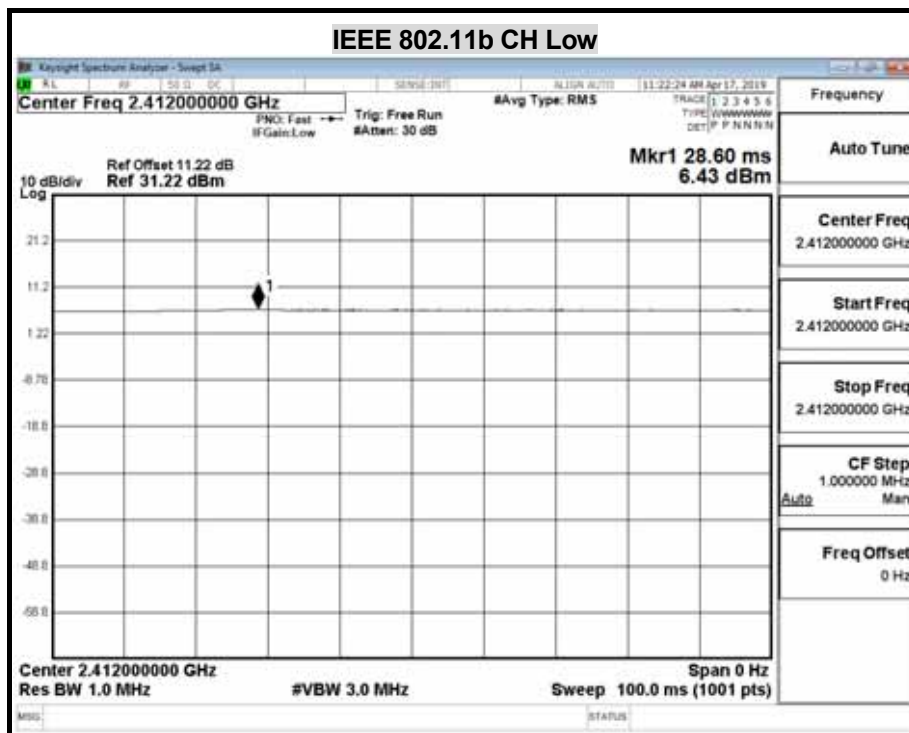


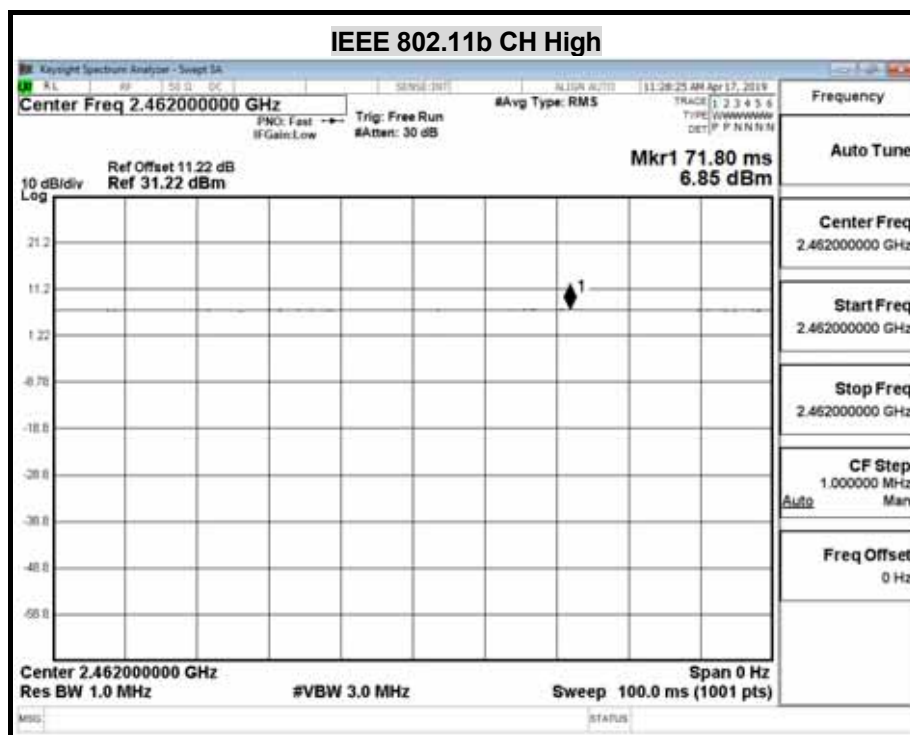

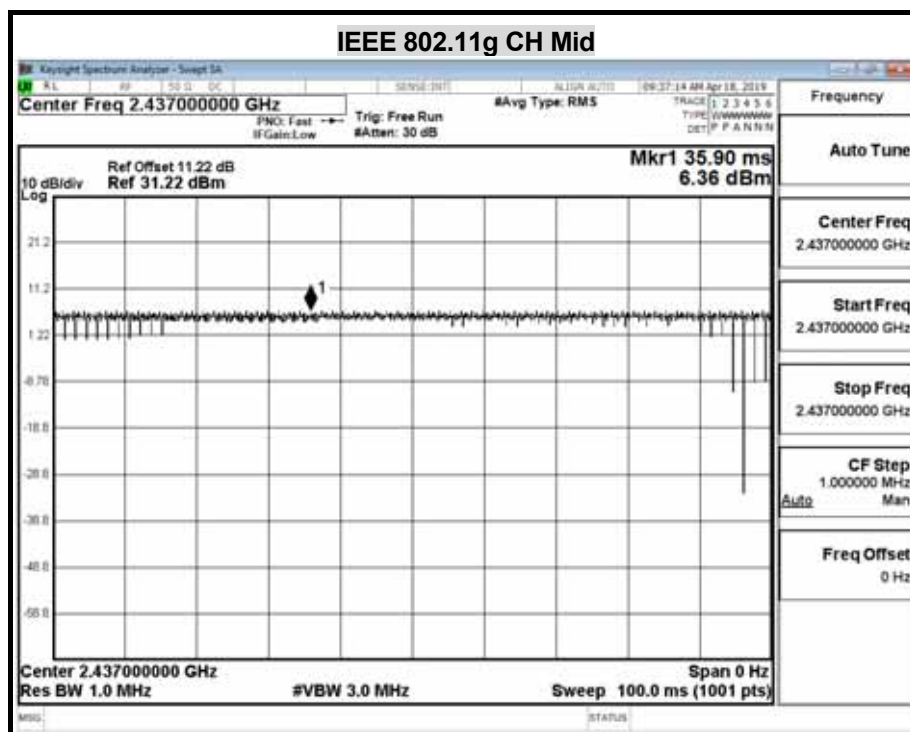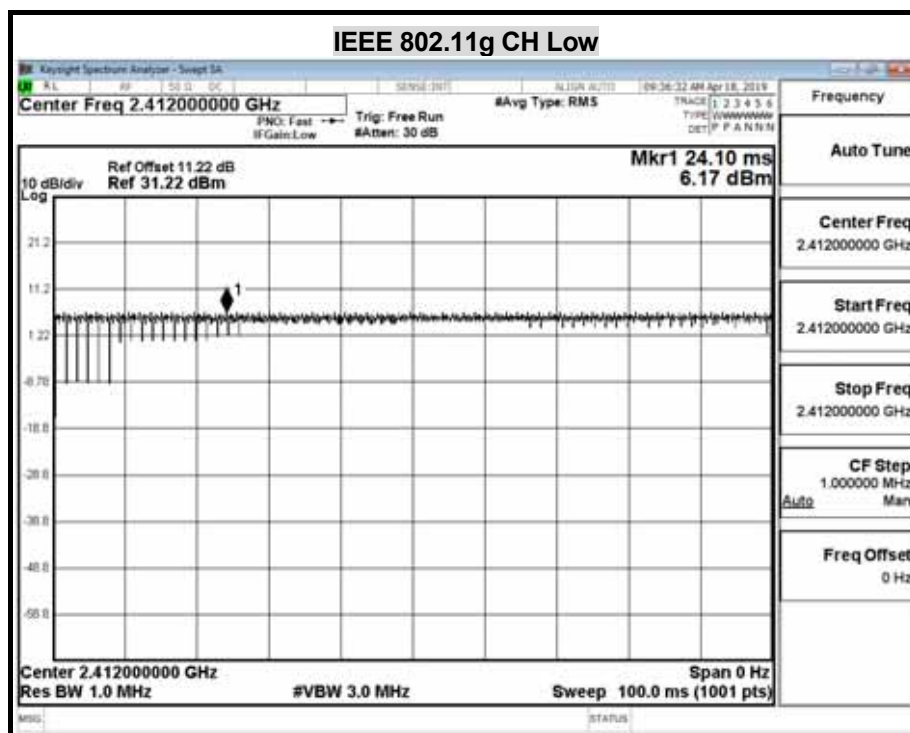

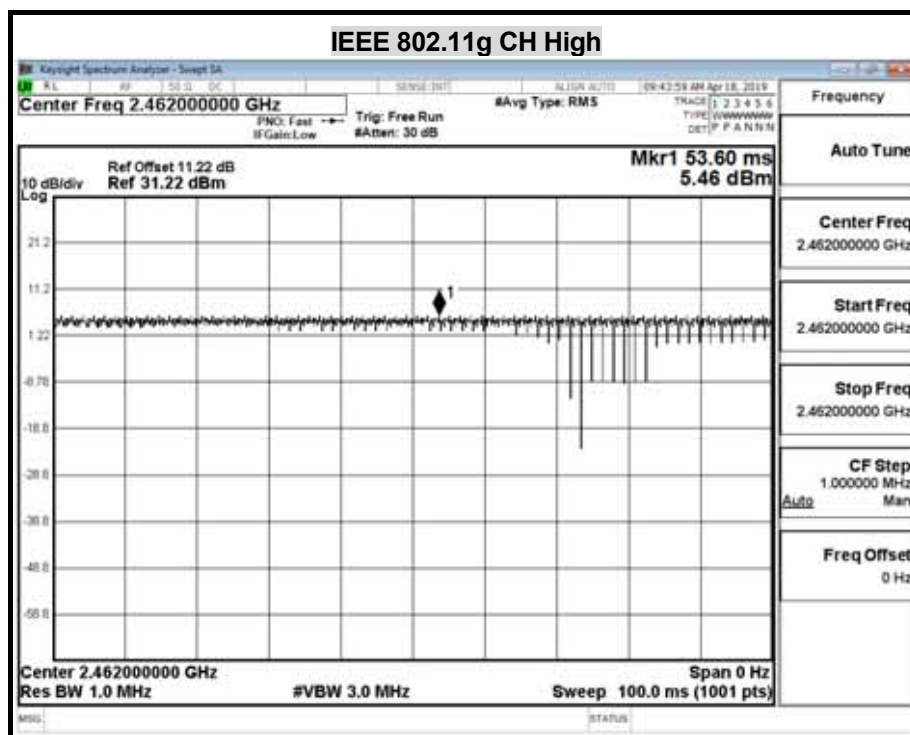

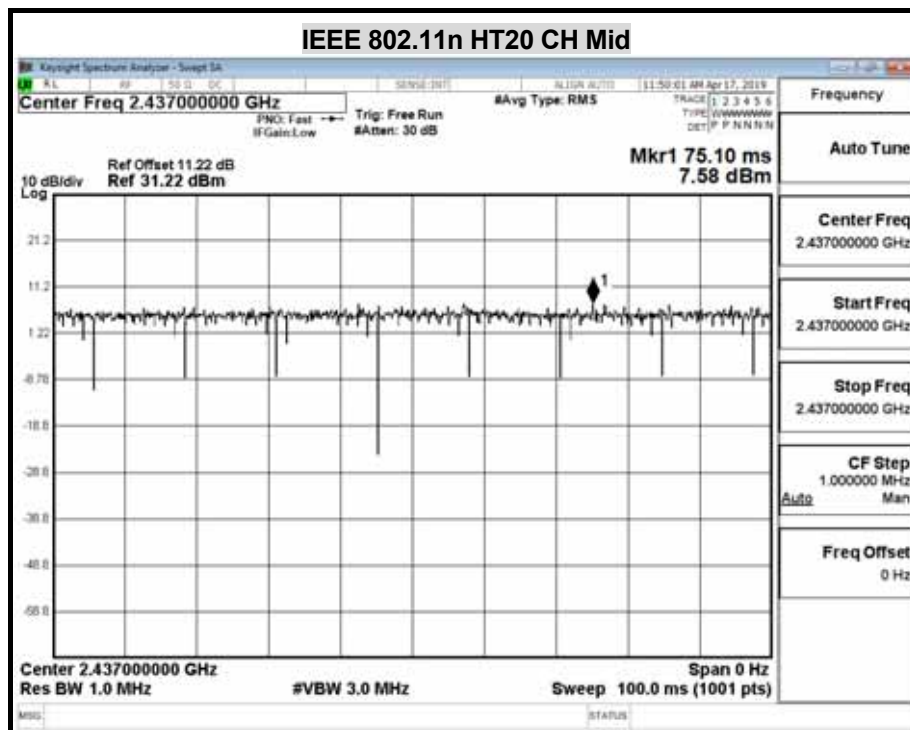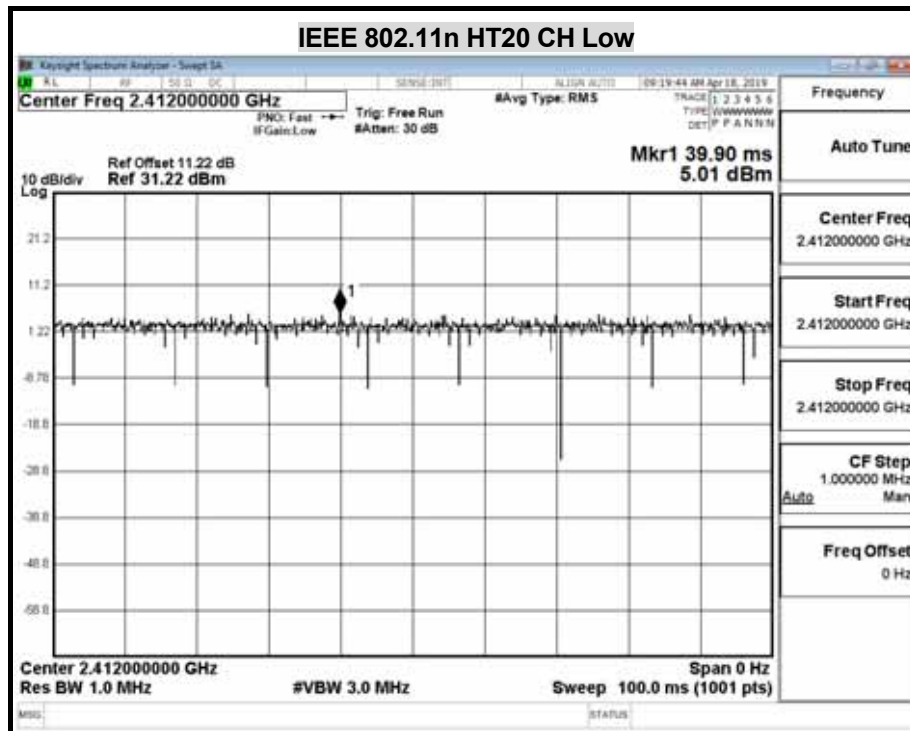

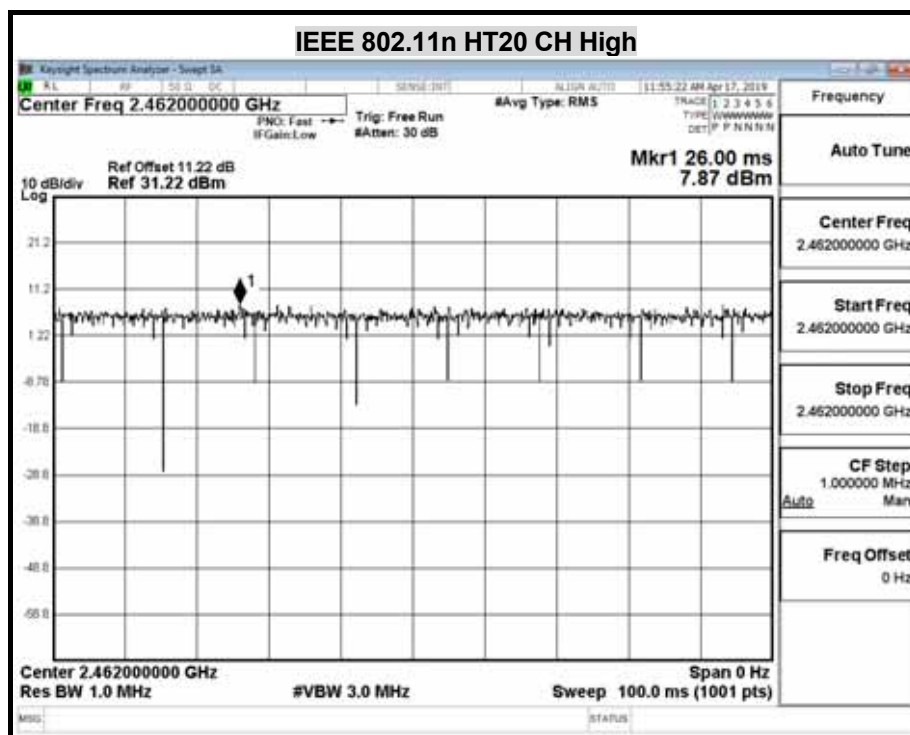



Report No.: T190401N03-RP1

Page: 50 / 128
Rev.: 02



Bluetooth 4.0:


Model Name	Force	Test By	Ted Huang
Temp & Humidity	26.5 , 54%	Test Date	2019/04/17

	us	Times	Ton	Total Ton time(ms)
Ton1	400.000	1	400	
Ton2		0	0	
Ton3			0	0.4
Tp				0.625

Ton	0.4
Tp(Ton+Toff)	0.625
Duty Cycle	0.64
$10 * \log (1/x) =$	1.93820026

Plot

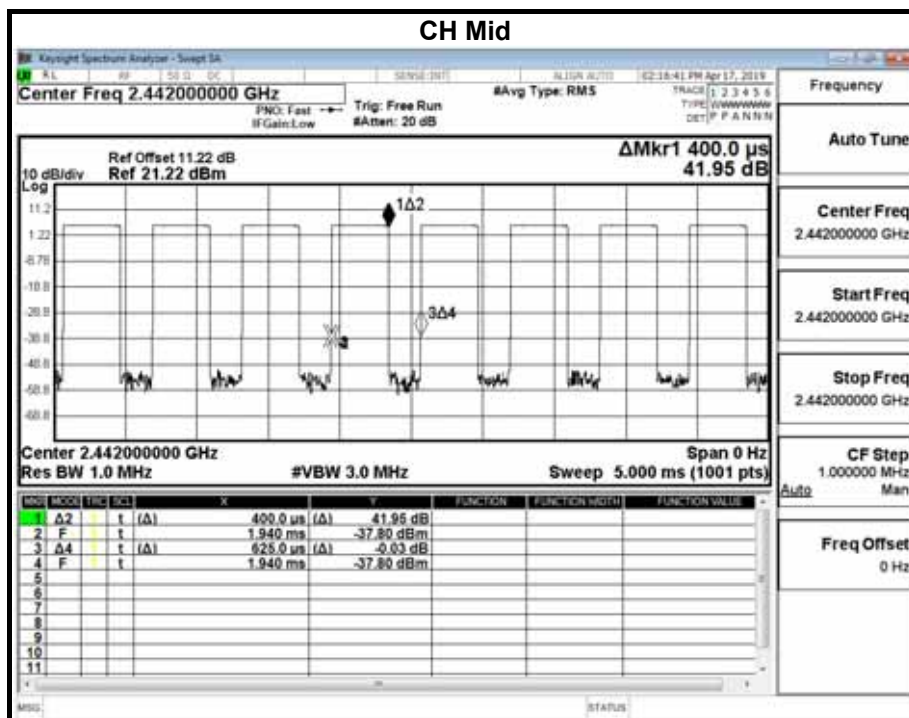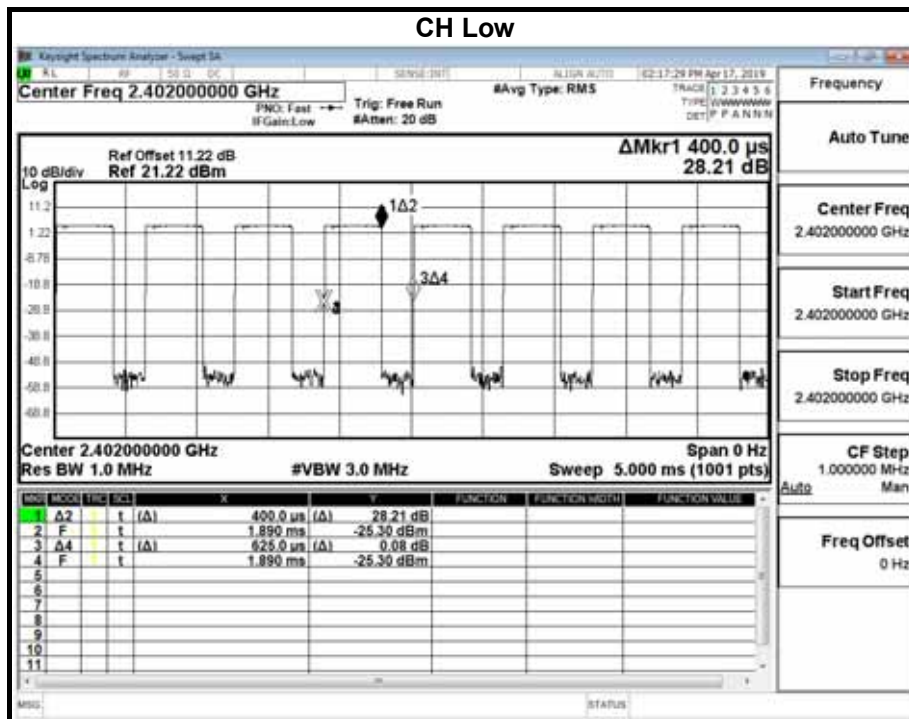

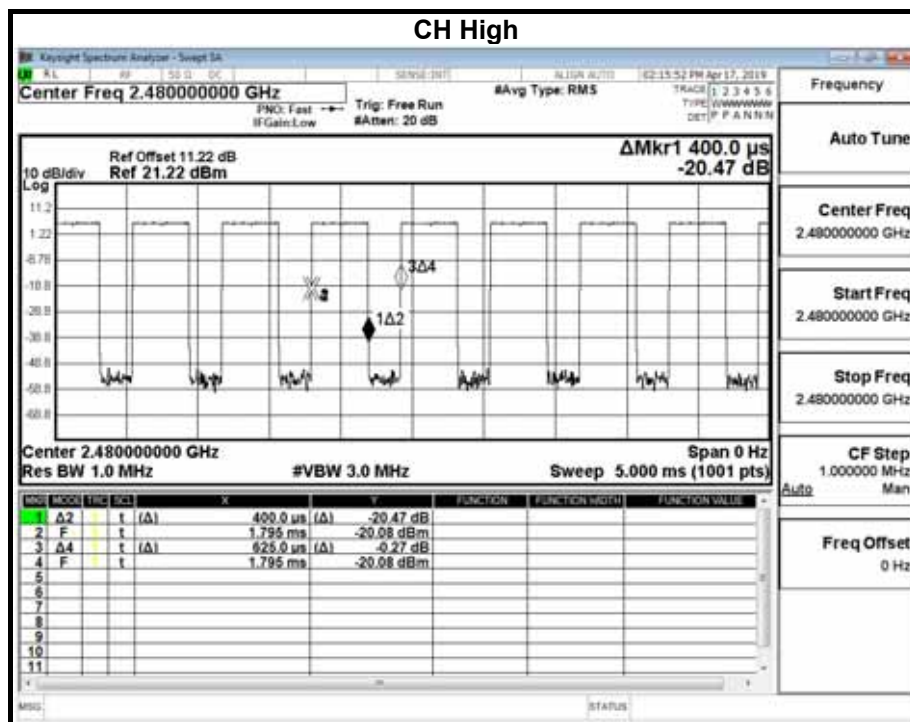

8.4 POWER SPECTRAL DENSITY


LIMIT

§ 15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST EQUIPMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY54430216	07/05/2018	07/04/2019
SMA Cable + 10dB Attenuator	CCS	SMA+10dB ATT	SMA/10dB	01/25/2019	01/24/2020
Software	Excel(ccs-o6-2019 v1.2)				

TEST SETUP



TEST PROCEDURE

The tests were performed in accordance with KDB 558074 5.3.1.

5.3.1 Measurement Procedure PKPSD:

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the *DTS bandwidth*.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \text{ RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST RESULTS

Model Name	Force	Test By	Ted Huang
Temp & Humidity	26.5 , 54%	Test Date	2019/04/17

IEEE 802.11b mode

Channel	Frequency (MHz)	PPSD/100kHz (dBm)	PPSD/3kHz (dBm)	Limit (dBm)	Margin (dB)	Pass / Fail
Low	2412	3.48	-11.75	8.00	-19.75	PASS
Middle	2437	4.14	-11.09	8.00	-19.09	PASS
High	2462	4.00	-11.23	8.00	-19.23	PASS

NOTE : 1. At final test to get the worst-case emission at 1long Mbps long.
2. The cable assembly insertion loss of 11.1dB (including 10 dB pad and 1.1 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11g mode

Channel	Frequency (MHz)	PPSD/100kHz (dBm)	PPSD/3kHz (dBm)	Limit (dBm)	Margin (dB)	Pass / Fail
Low	2412	0.09	-15.13	8.00	-23.13	PASS
Middle	2437	0.39	-14.84	8.00	-22.84	PASS
High	2462	-0.66	-15.89	8.00	-23.89	PASS

NOTE : 1. At final test to get the worst-case emission at 6long Mbps long.
2. The cable assembly insertion loss of 11.1dB (including 10 dB pad and 1.1 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11n HT20 mode

Channel	Frequency (MHz)	PPSD/100kHz (dBm)	PPSD/3kHz (dBm)	Limit (dBm)	Margin (dB)	Pass / Fail
Low	2412	-2.73	-17.96	8.00	-25.96	PASS
Middle	2437	0.34	-14.89	8.00	-22.89	PASS
High	2462	0.60	-14.63	8.00	-22.63	PASS

NOTE : 1. At final test to get the worst-case emission at 6.5long Mbps long.
2. The cable assembly insertion loss of 11.1dB (including 10 dB pad and 1.1 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.



Model Name	Force	Test By	Ted Huang
Temp & Humidity	26.5 , 54%	Test Date	2019/04/17


Bluetooth 4.0 (GFSK) mode


Channel	Frequency (MHz)	PPSD/100kHz (dBm)	PPSD/3kHz (dBm)	Limit (dBm)	Margin (dB)	Pass / Fail
Low	2402	3.30	-11.93	8.00	-19.93	PASS
Middle	2442	4.53	-10.70	8.00	-18.70	PASS
High	2480	5.02	-10.21	8.00	-18.21	PASS


NOTE :

1. At final test to get the worst-case emission at 1long Mbps long.
2. The cable assembly insertion loss of 11.1dB (including 10 dB pad and 1.1 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

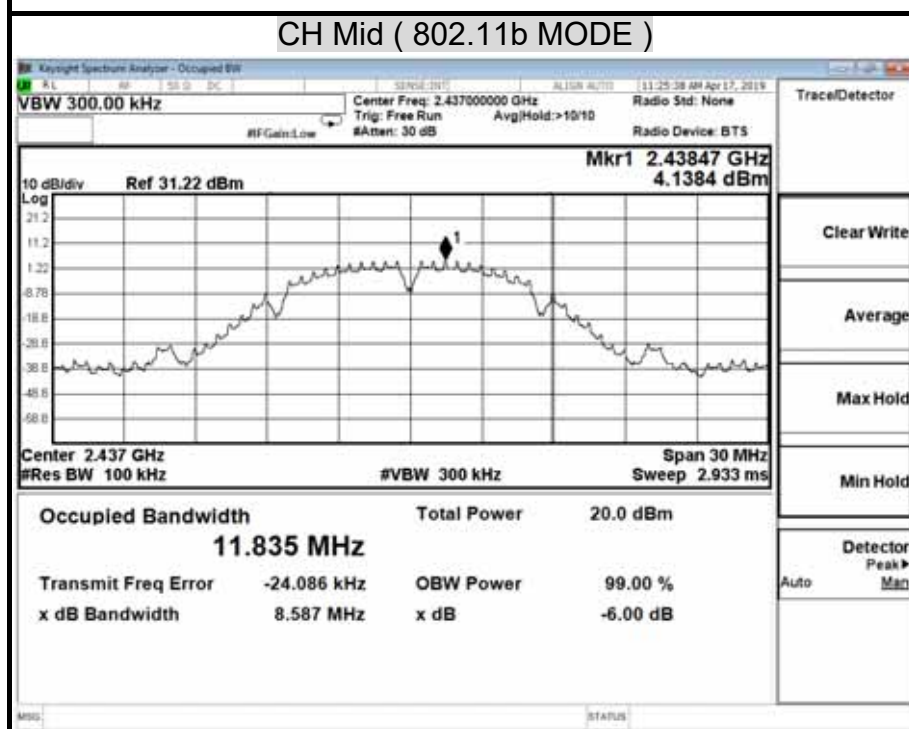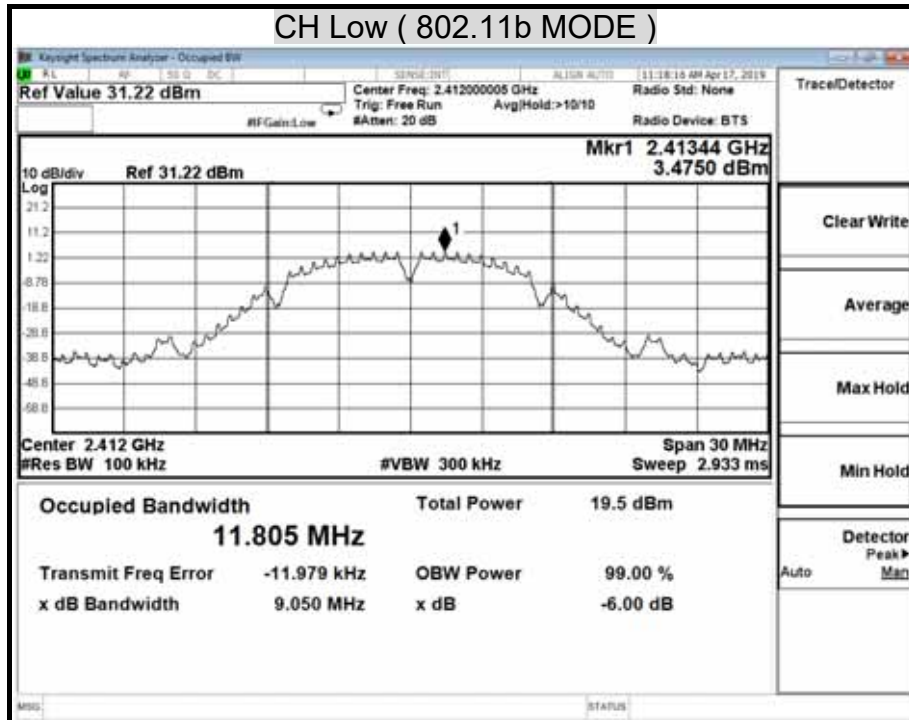
POWER SPECTRAL DENSITY (IEEE 802.11b MODE)

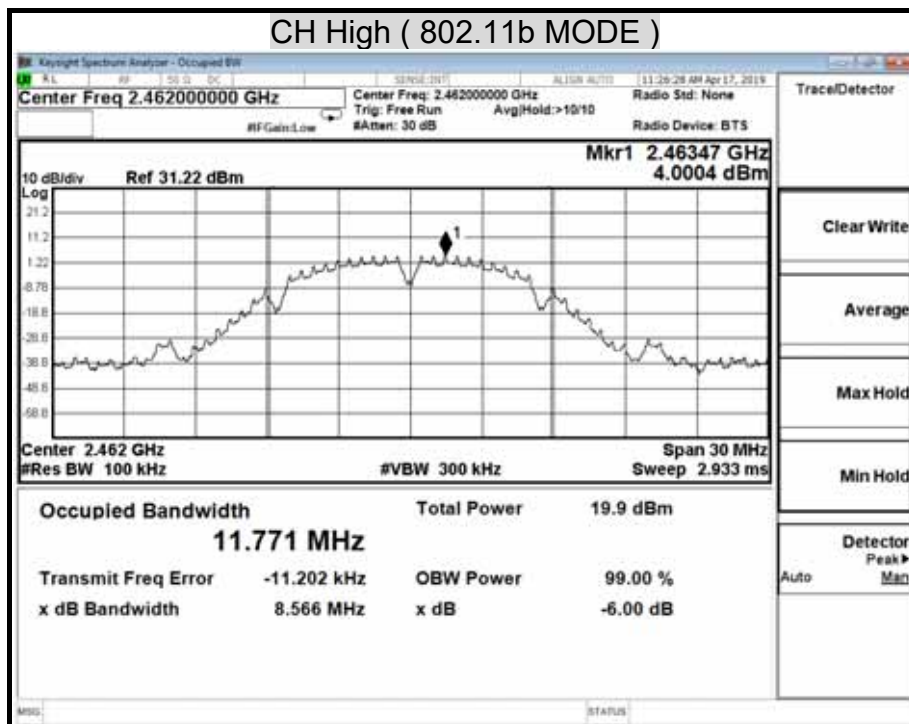


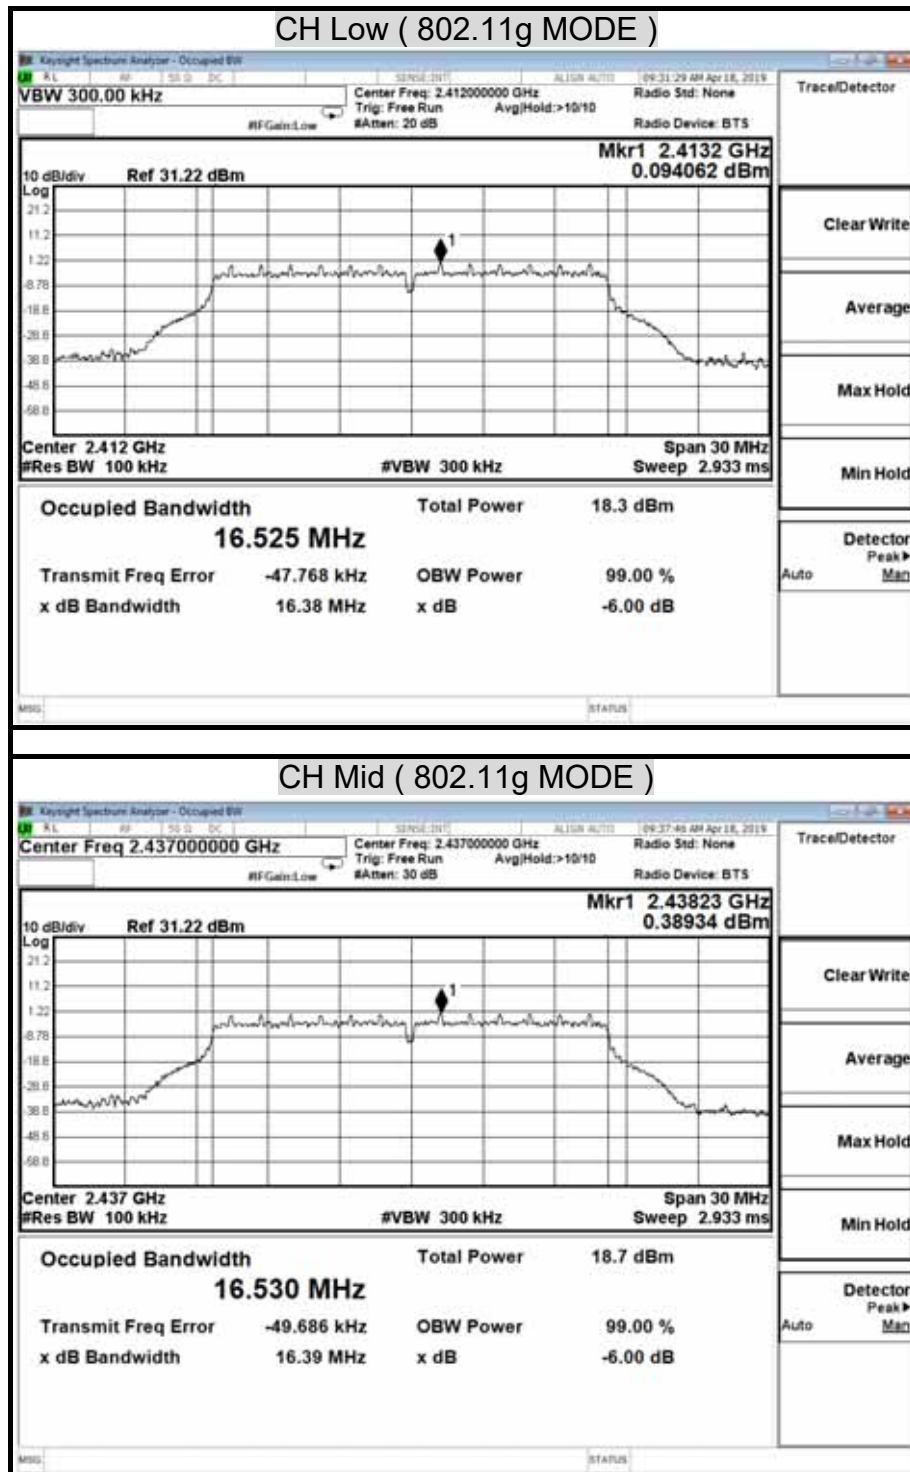POWER SPECTRAL DENSITY (IEEE 802.11g MODE)

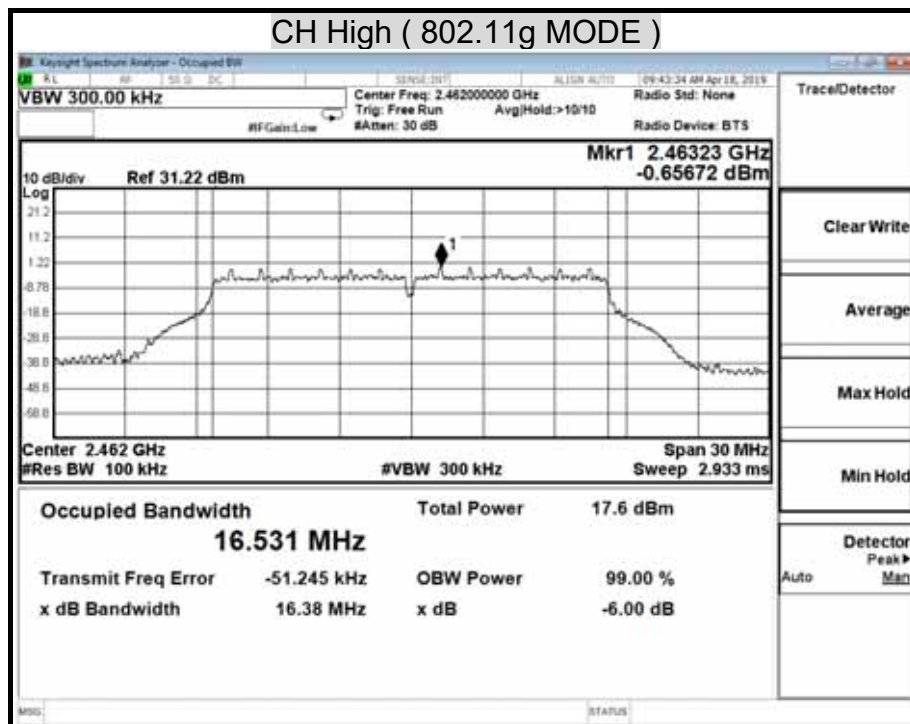



POWER SPECTRAL DENSITY (802.11n HT20 MODE)

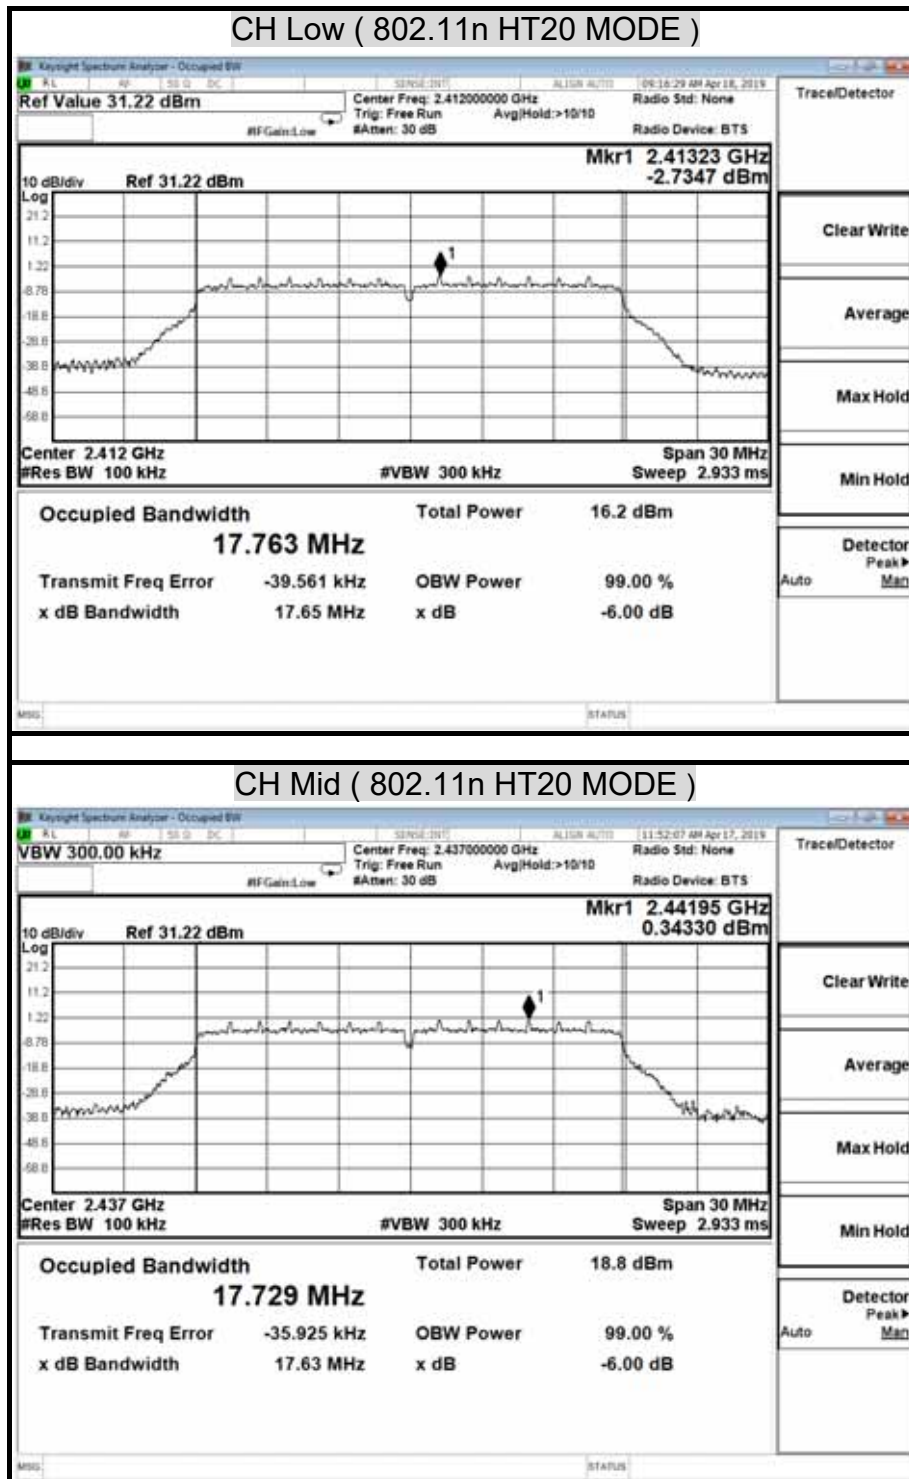

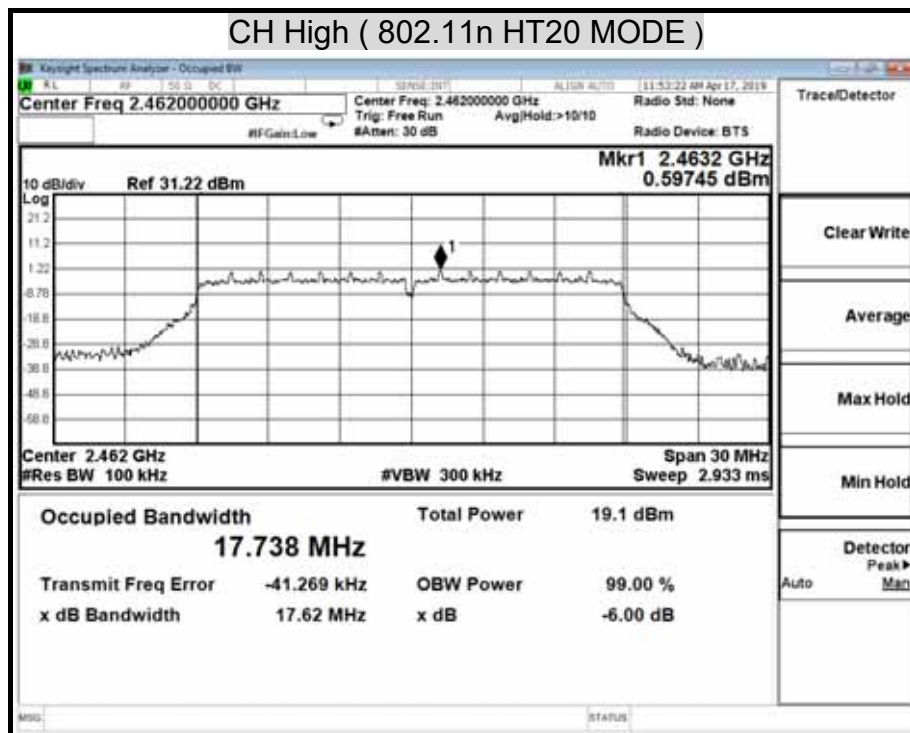

POWER SPECTRAL DENSITY (Bluetooth 4.0 (GFSK) MODE)

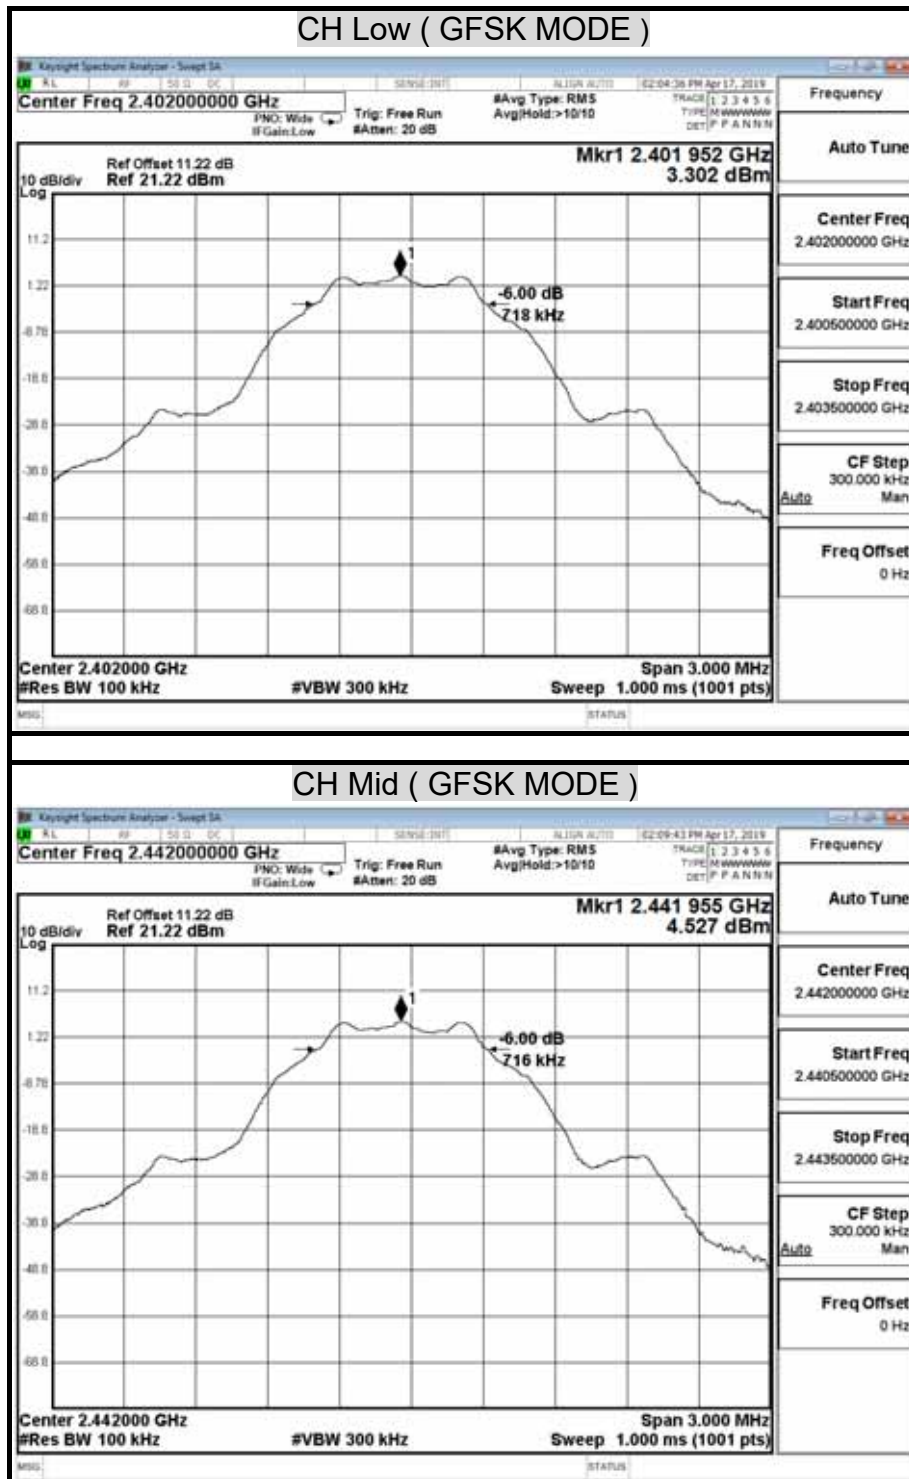

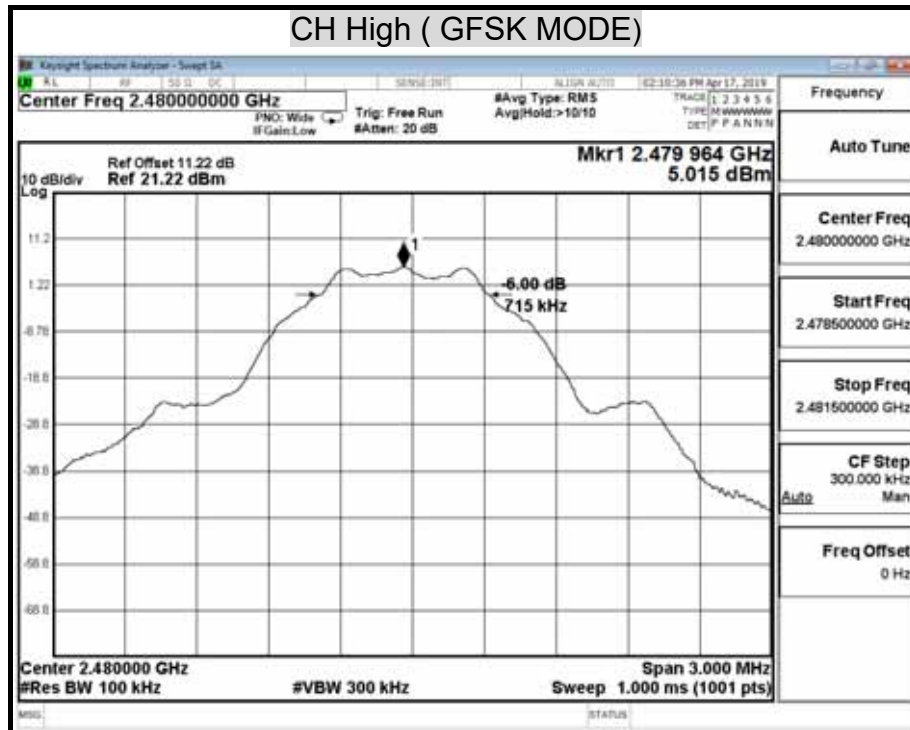

8.5 CONDUCTED SPURIOUS EMISSION

LIMITS

§ 15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

TEST EQUIPMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY54430216	07/05/2018	07/04/2019
SMA Cable + 10dB Attenuator	CCS	SMA+10dB ATT	SMA/10dB	01/25/2019	01/24/2020
Software	Excel(ccs-o6-2019 v1.2)				

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP



TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


TEST RESULTS


OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT


Model Name	Force	Test By	Ted Huang
Temp & Humidity	26.5 , 54%	Test Date	2019/04/17

(IEEE 802.11b MODE)

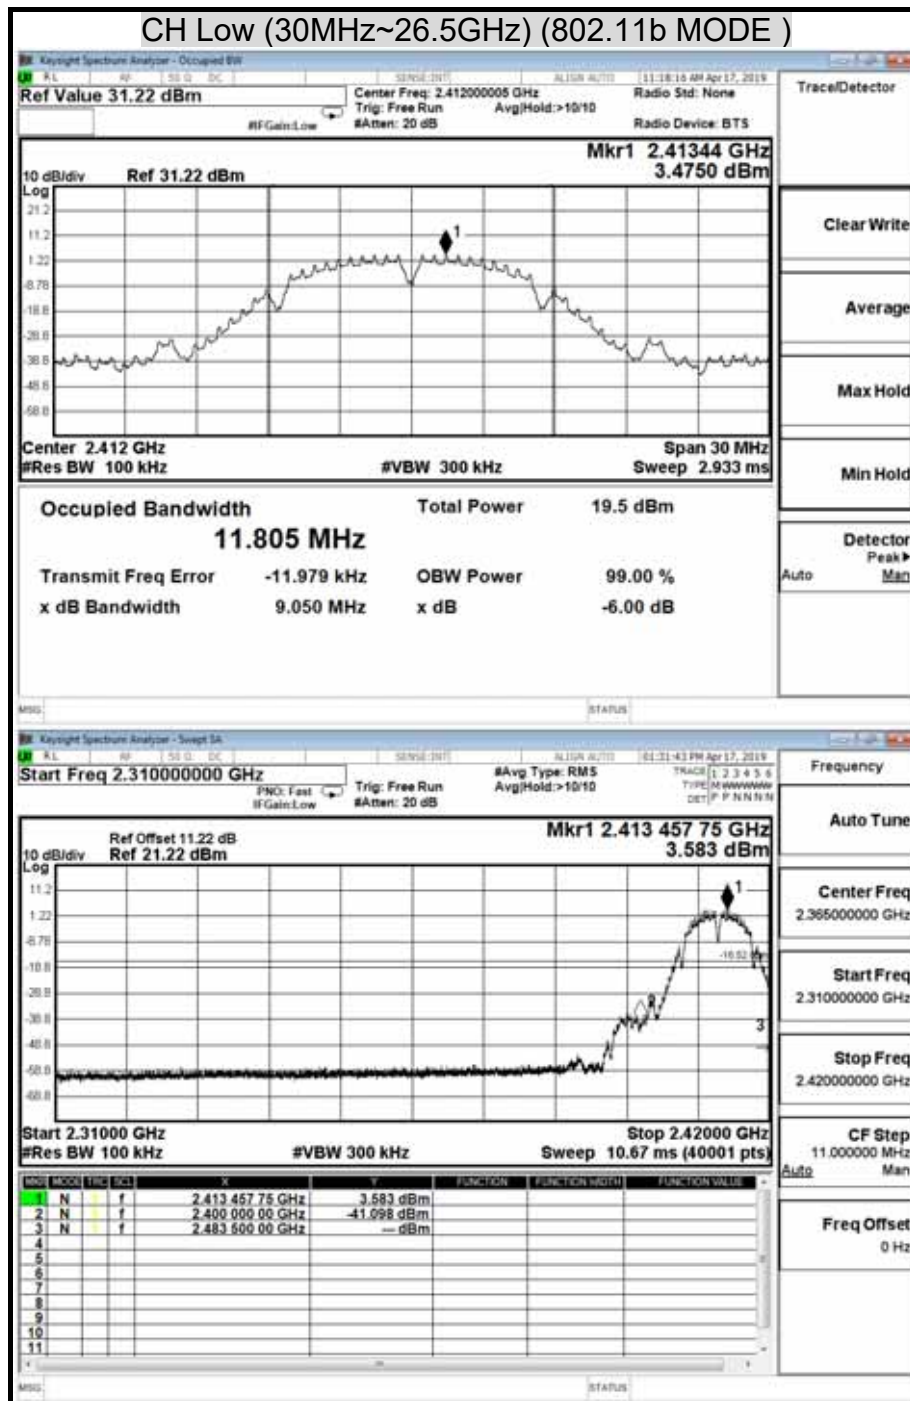

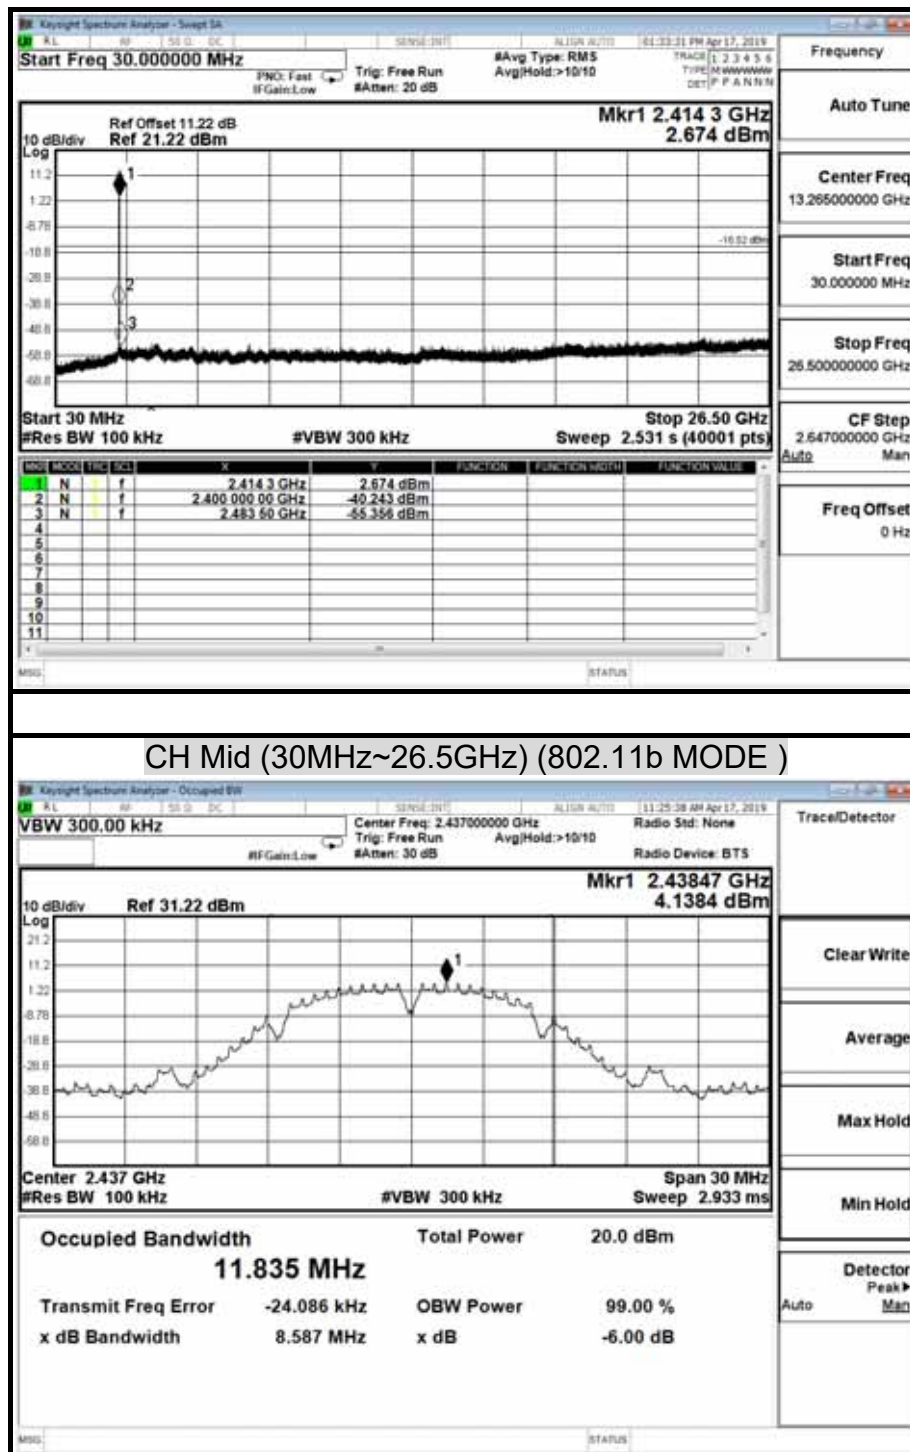


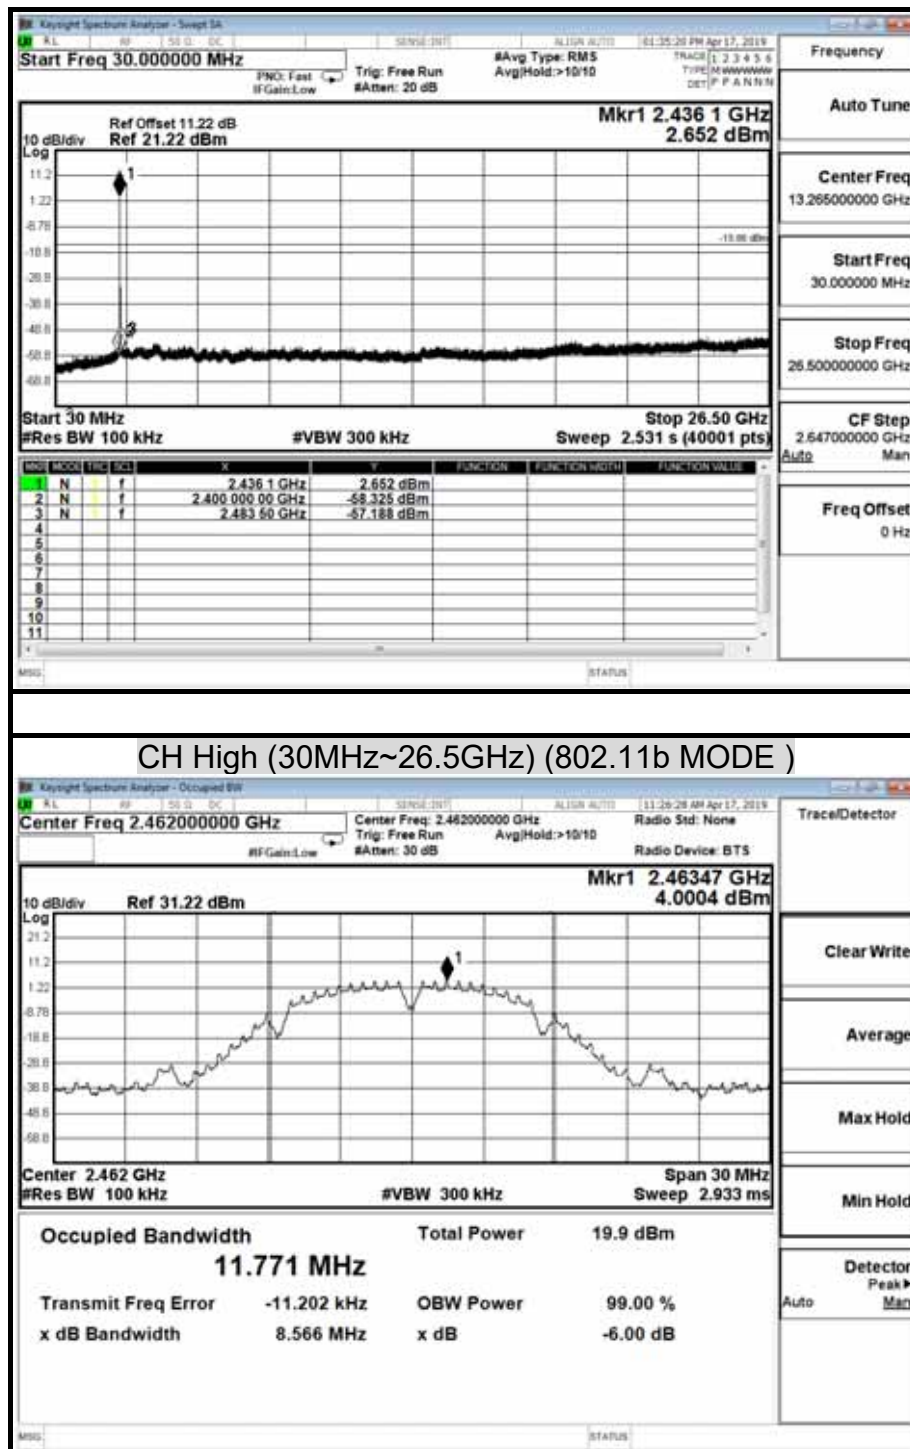


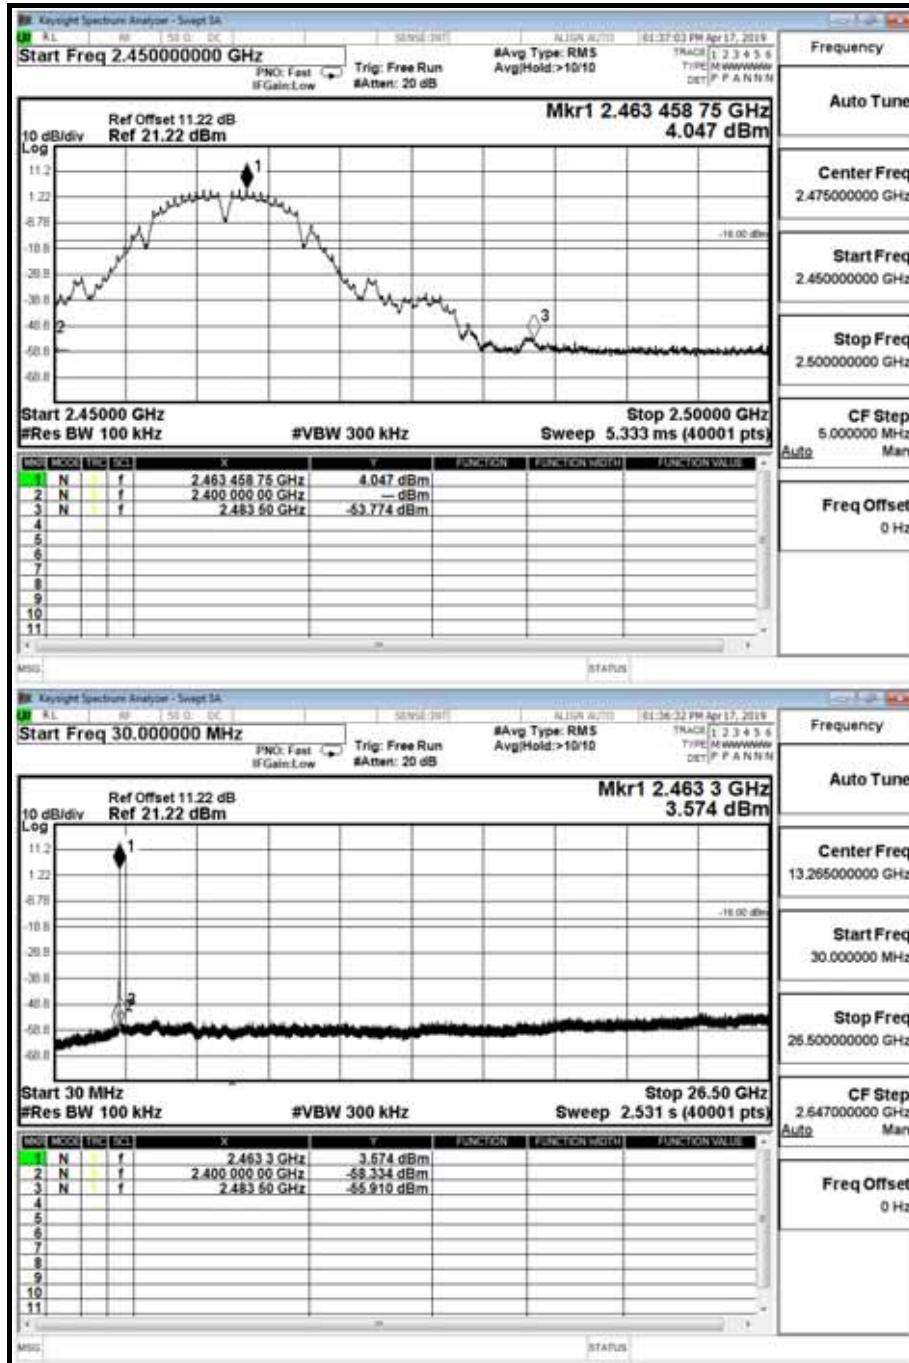



OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT

(802.11g MODE)

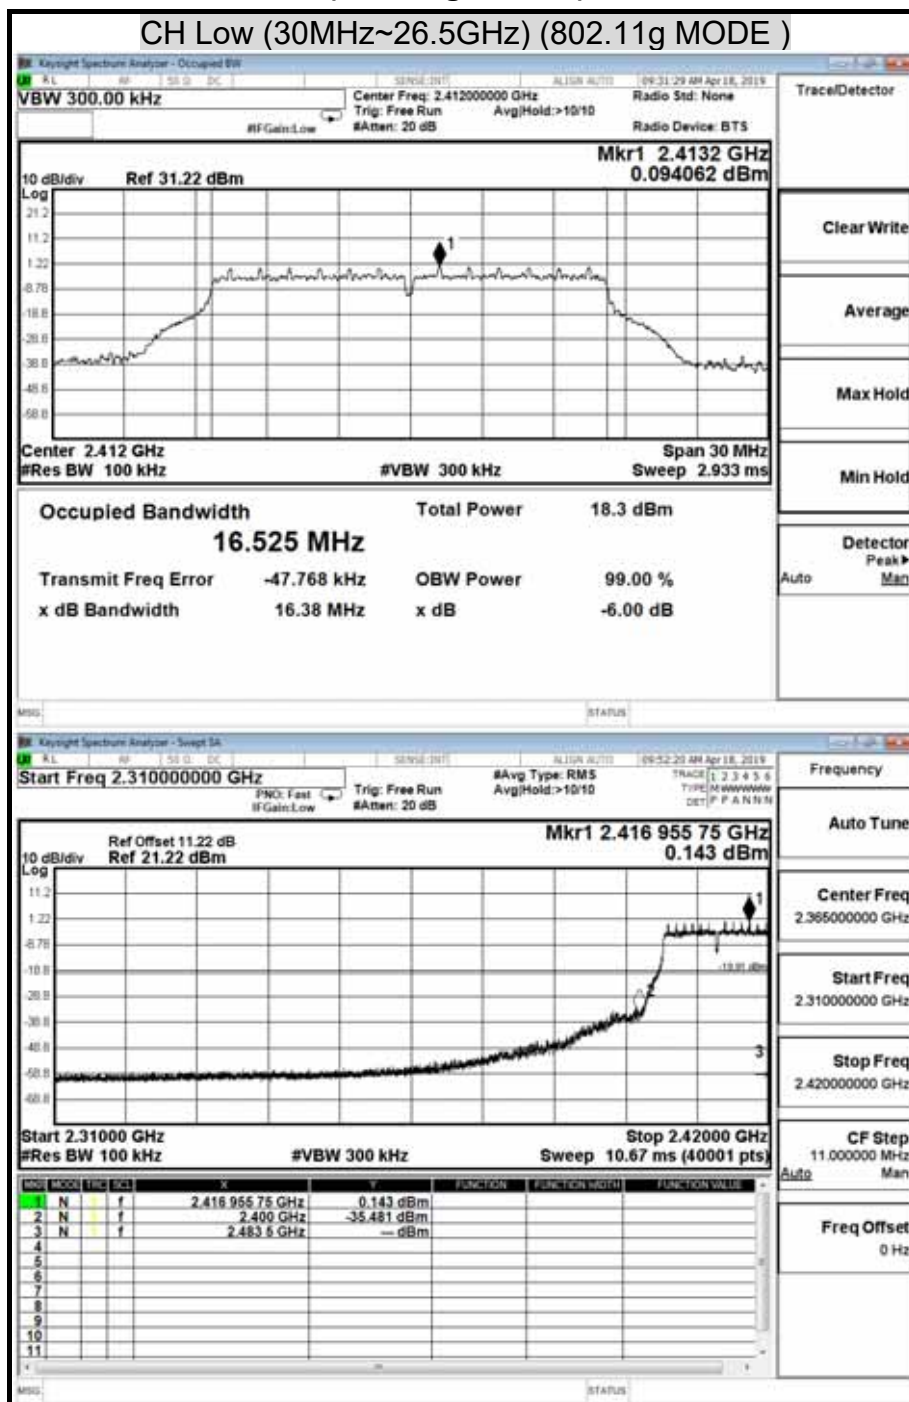

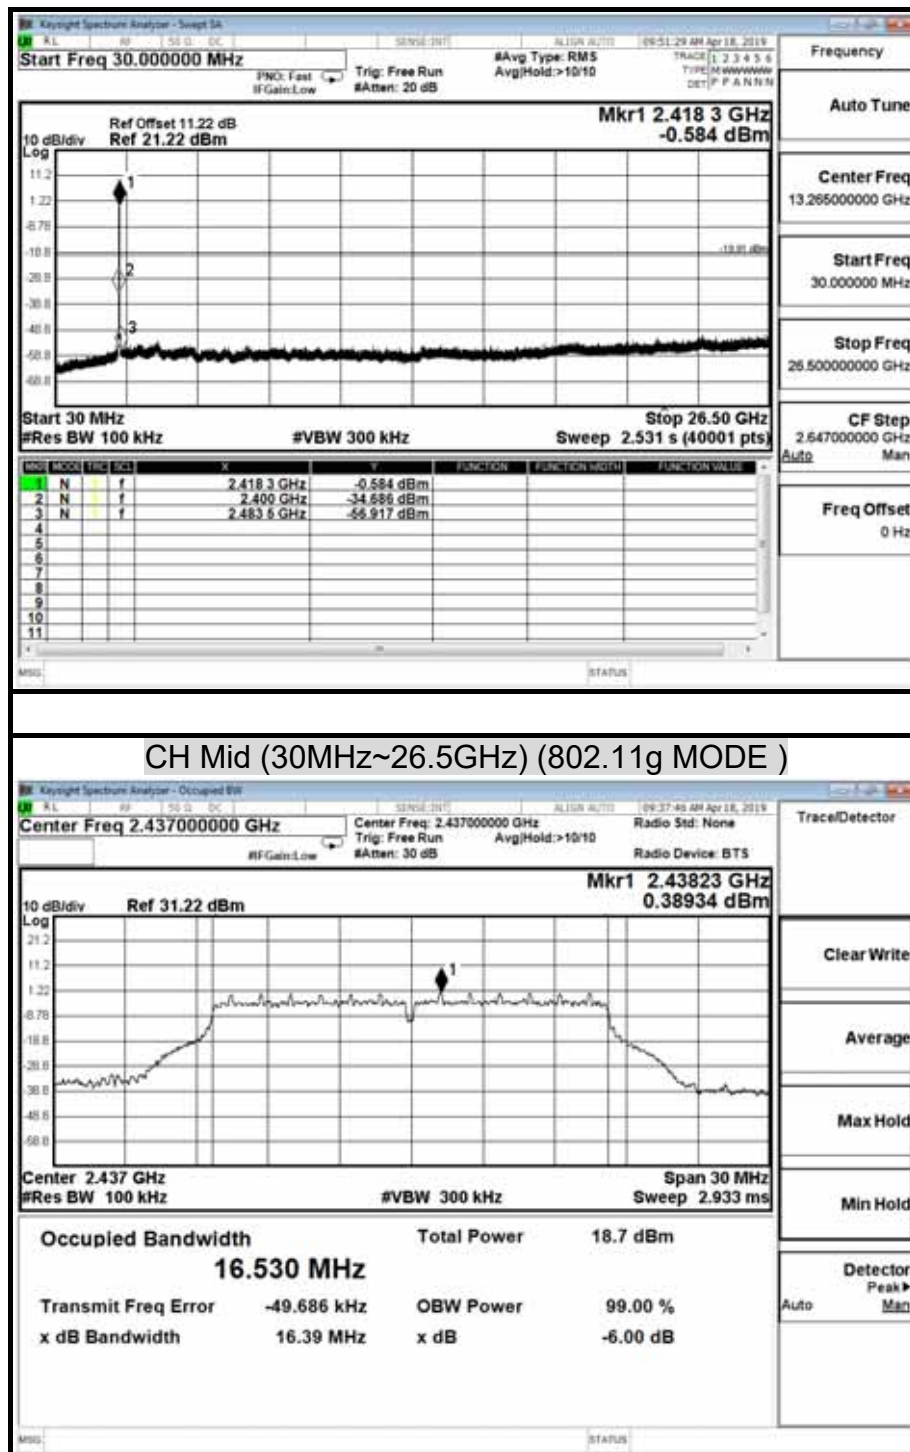


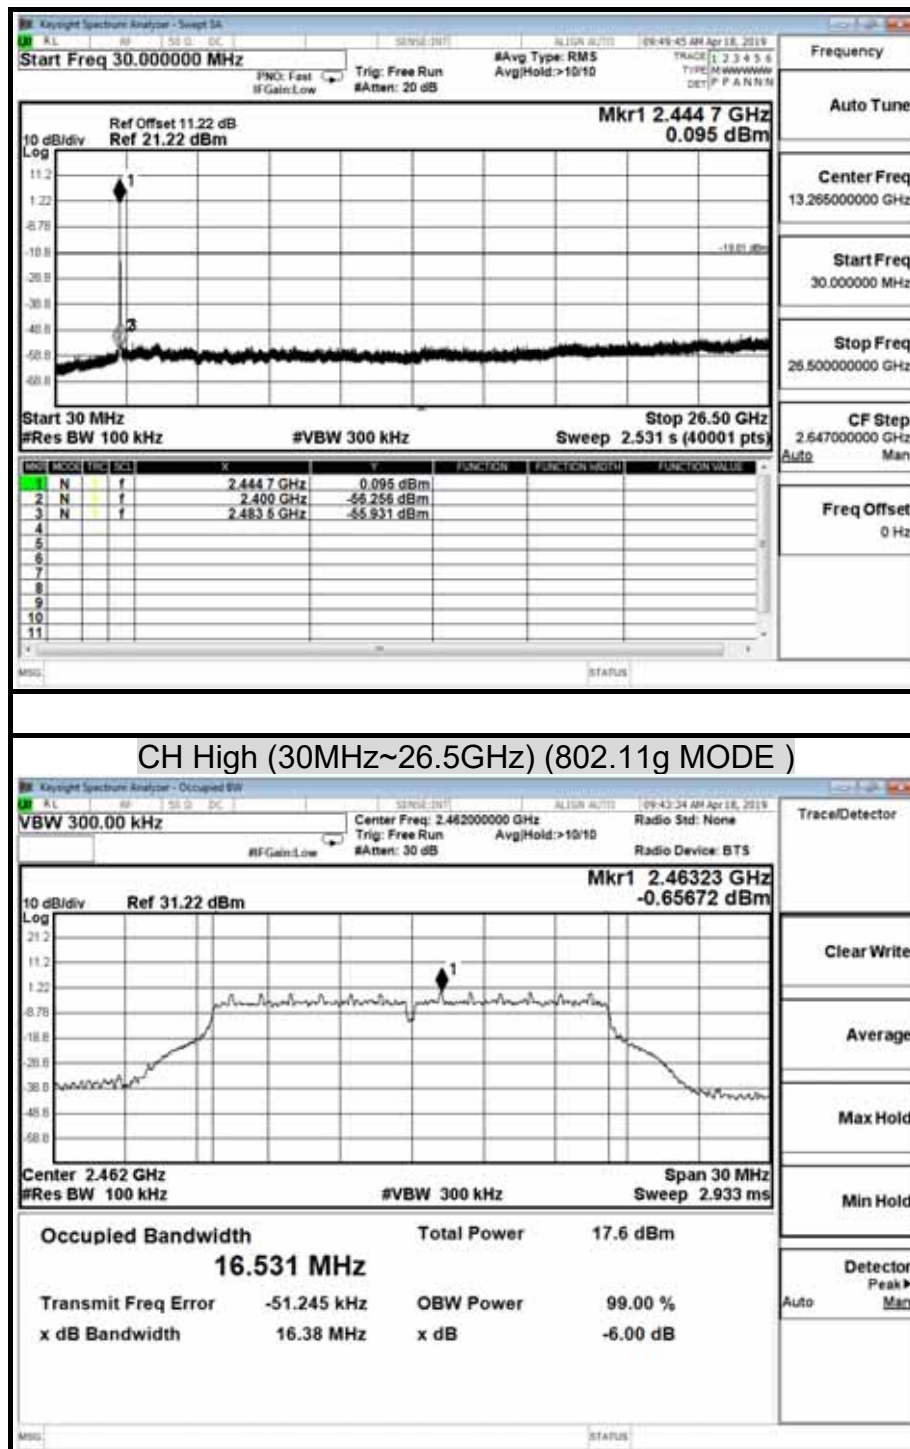


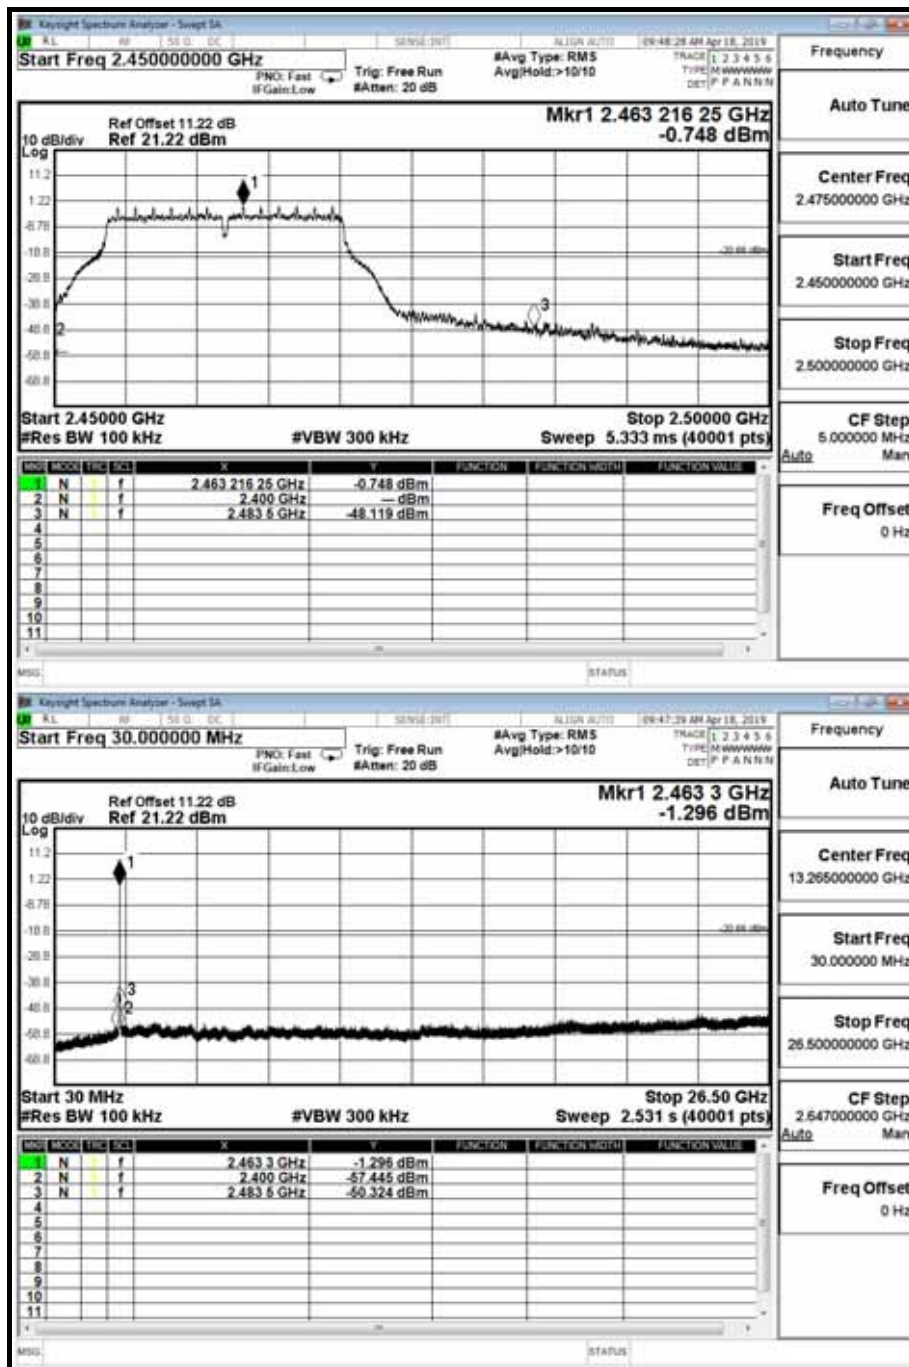


OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT


(802.11n HT20 MODE)

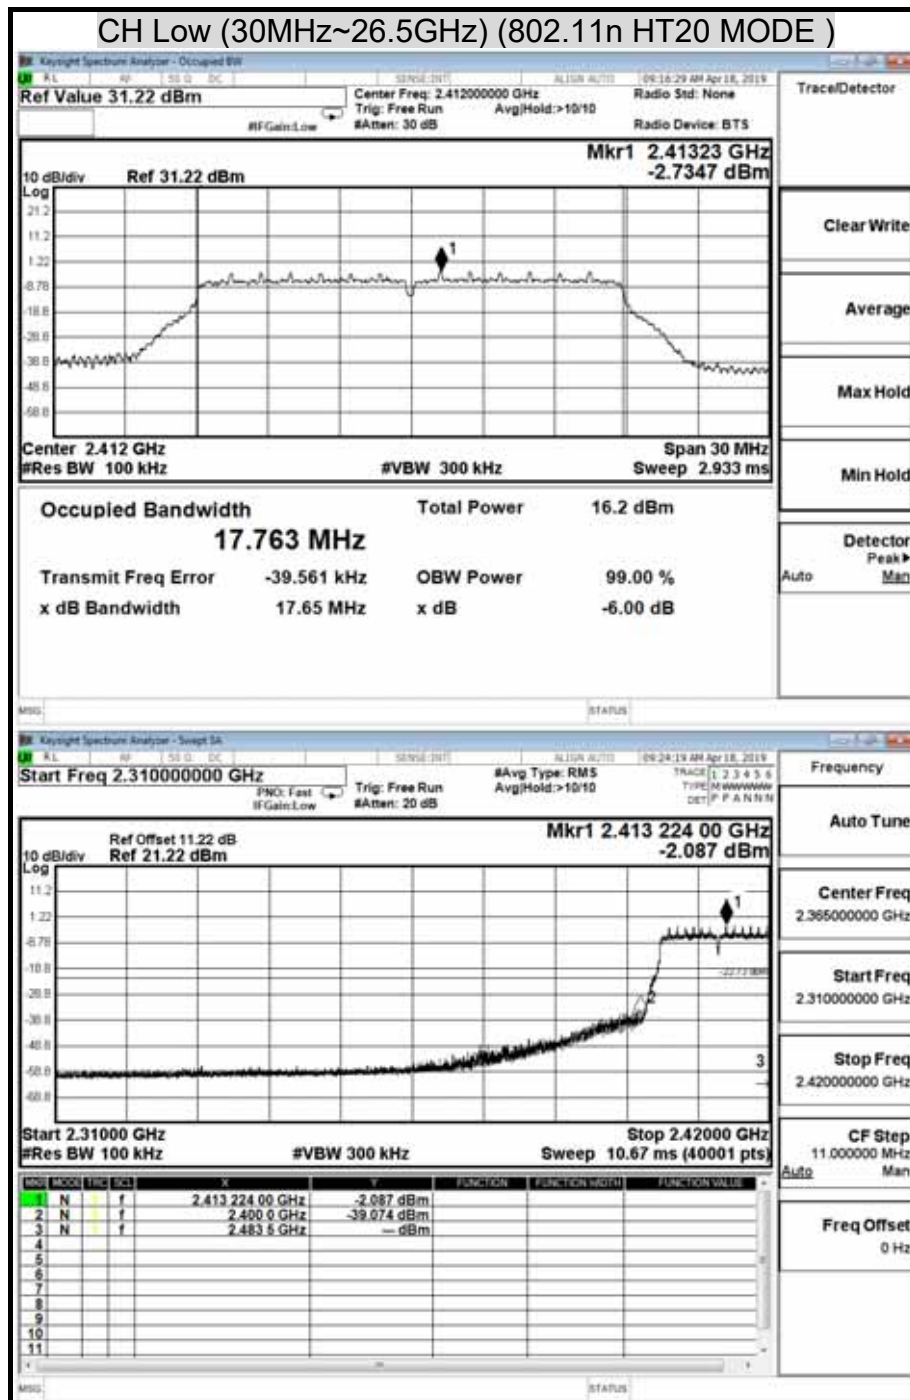


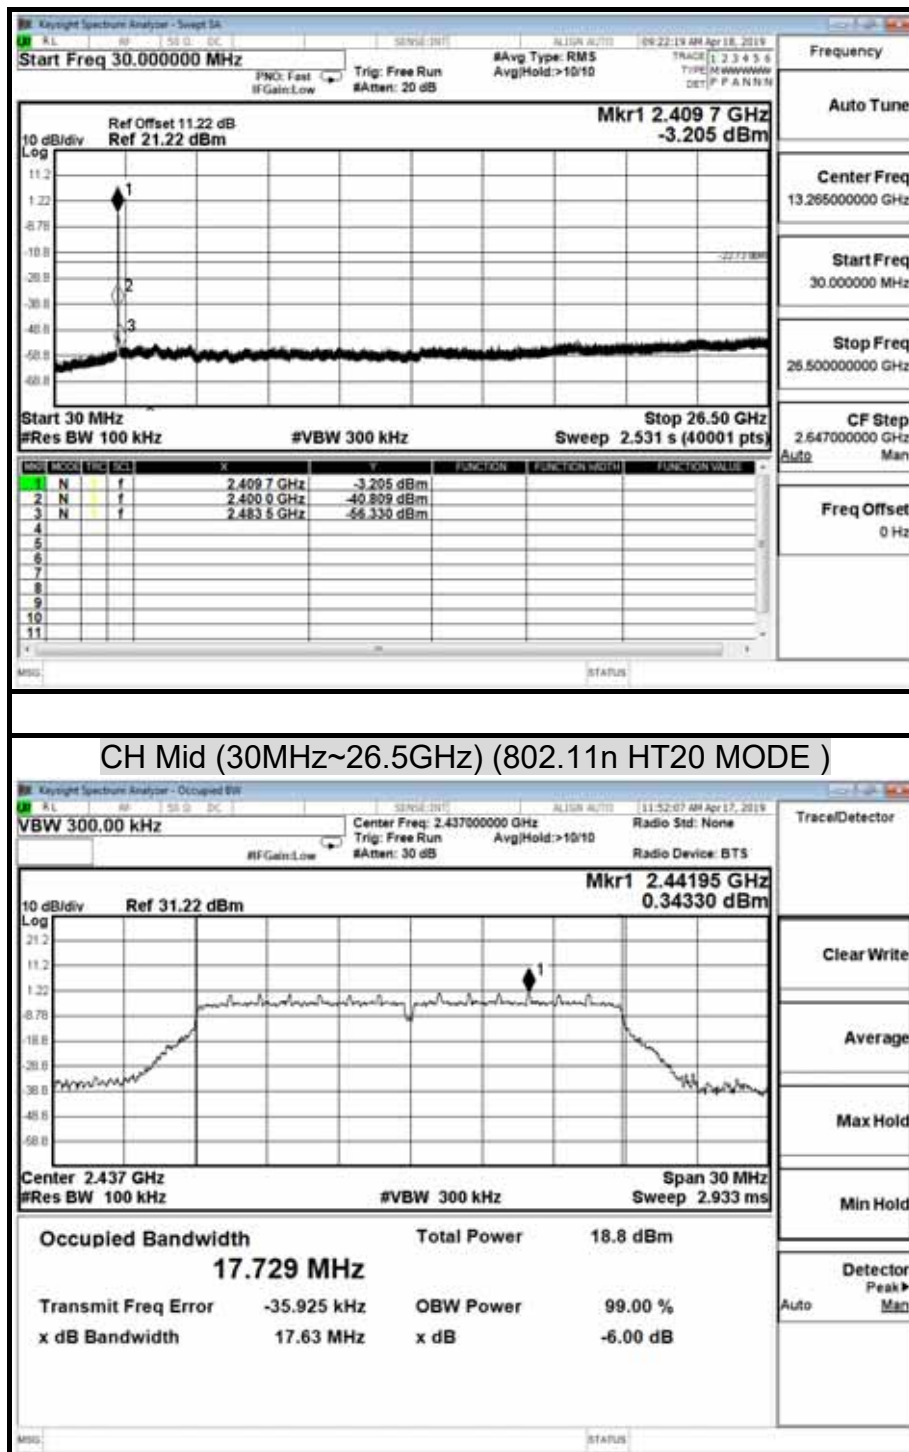

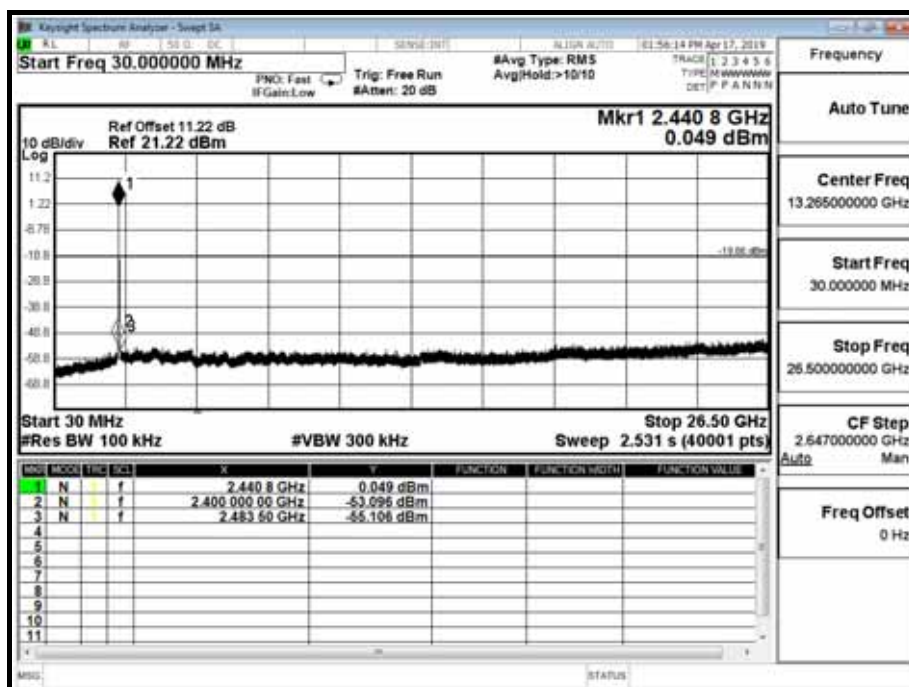

CH High (30MHz~26.5GHz) (802.11n HT20 MODE)

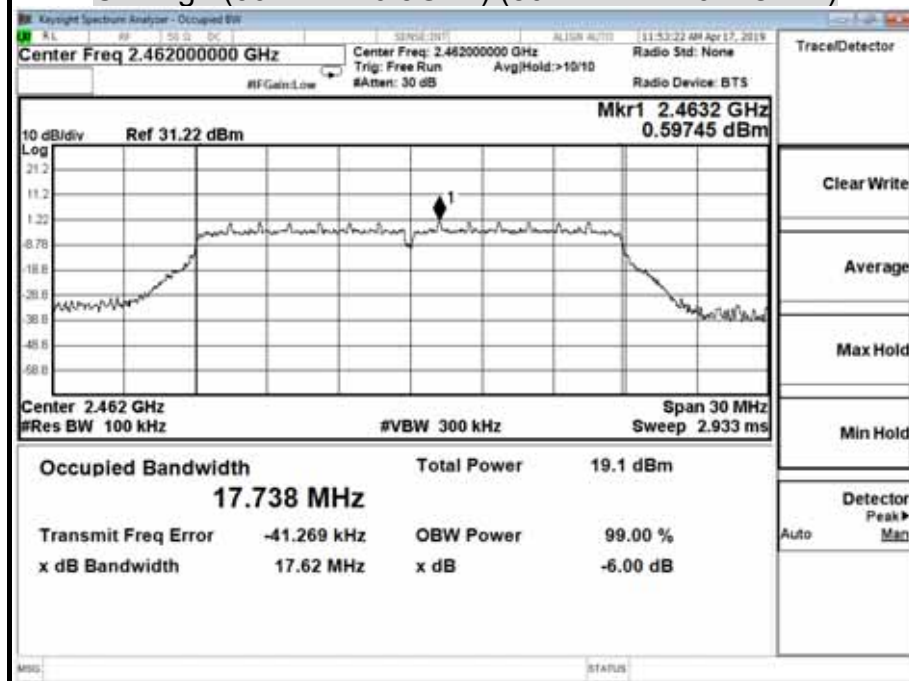

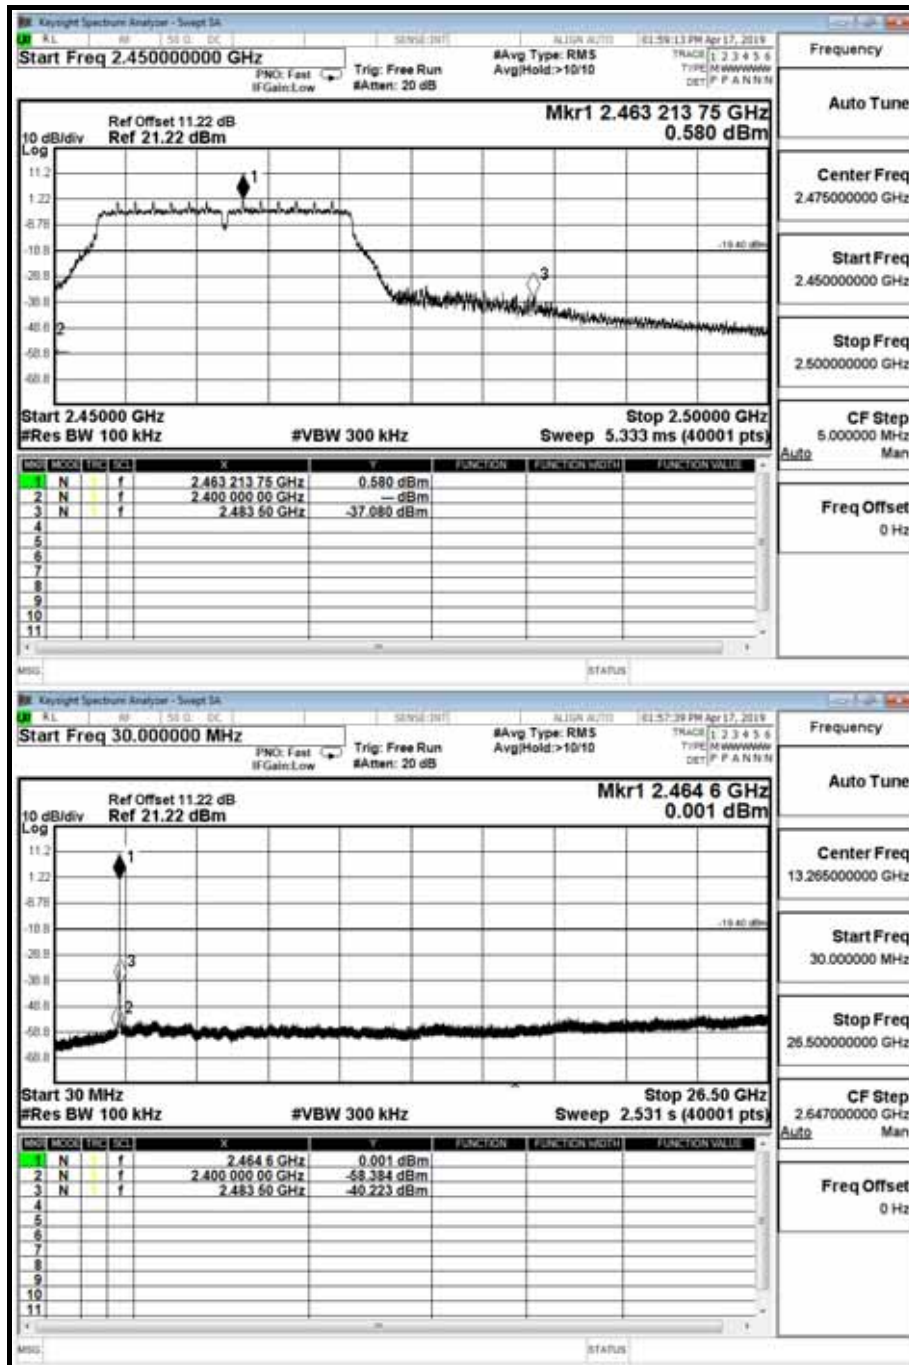



OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT

Model Name	Force	Test By	Ted Huang
Temp & Humidity	26.5 , 54%	Test Date	2019/04/17


(Bluetooth 4.0 (GFSK) MODE)


CH Low (30MHz~26.5GHz) (GFSK MODE)

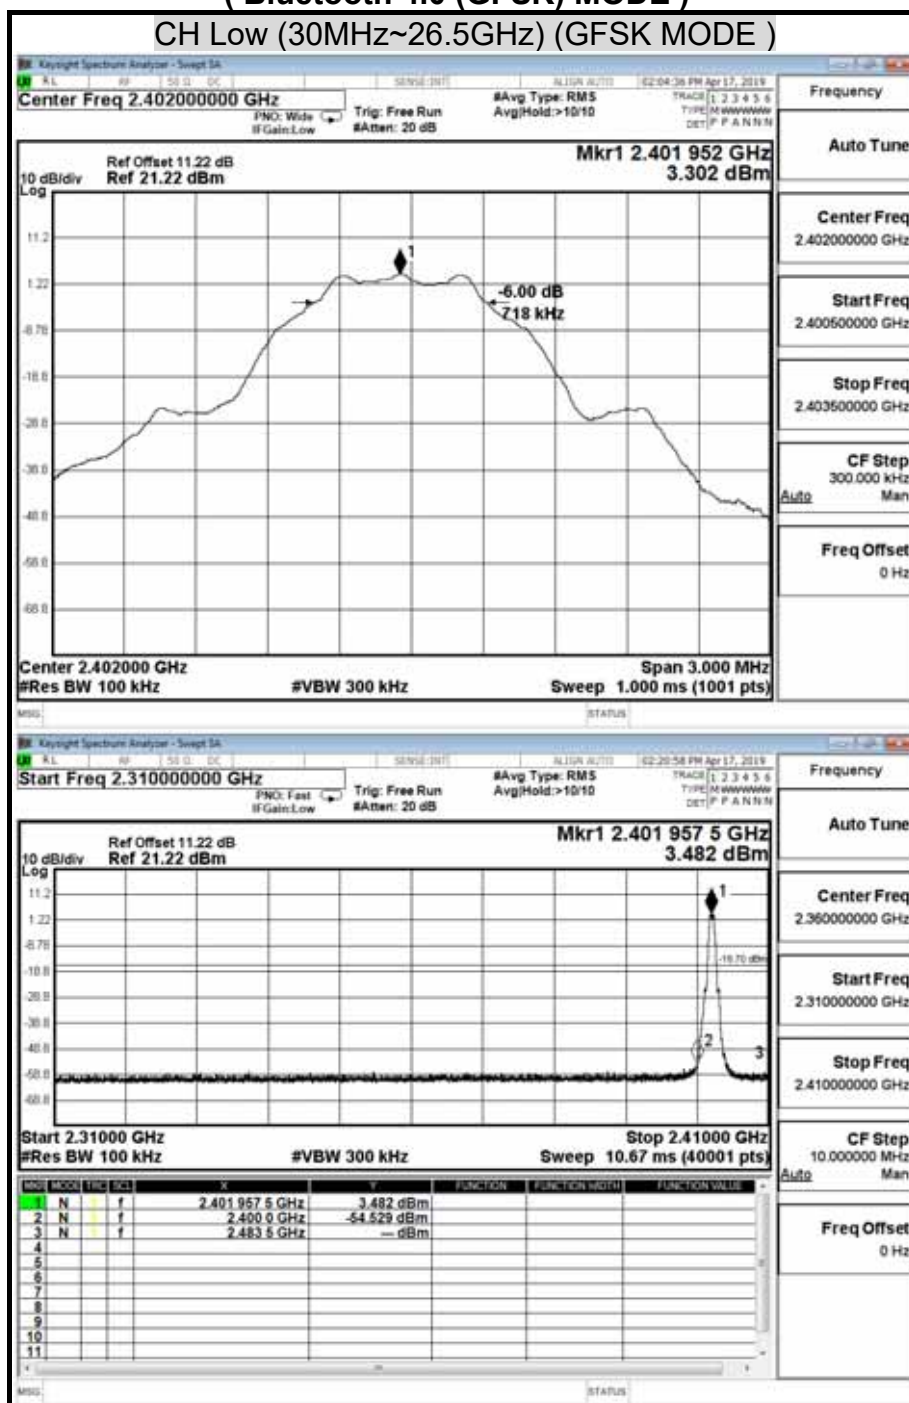


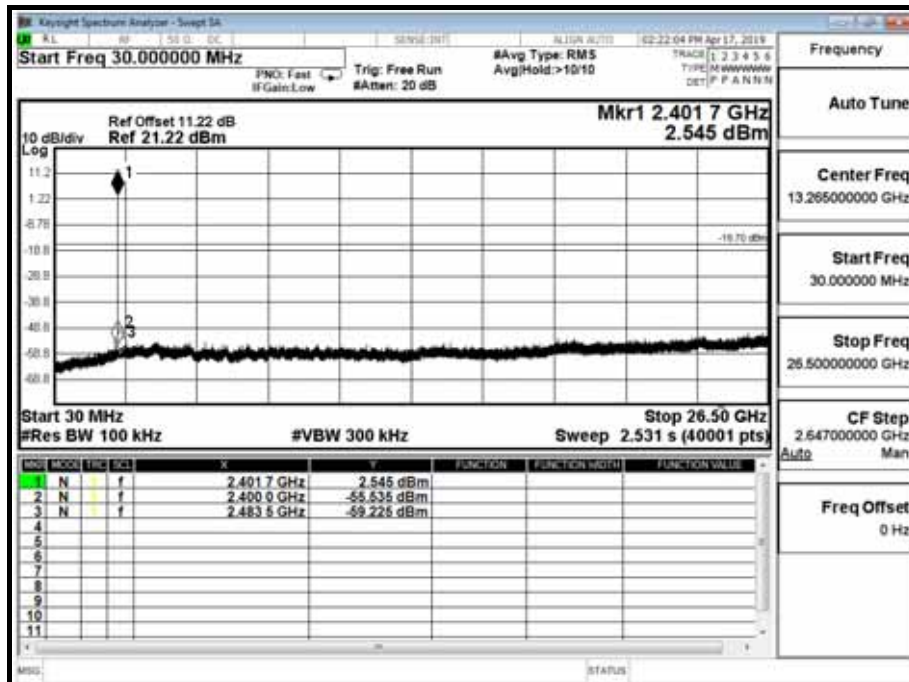

CH Mid (30MHz~26.5GHz) (GFSK MODE)

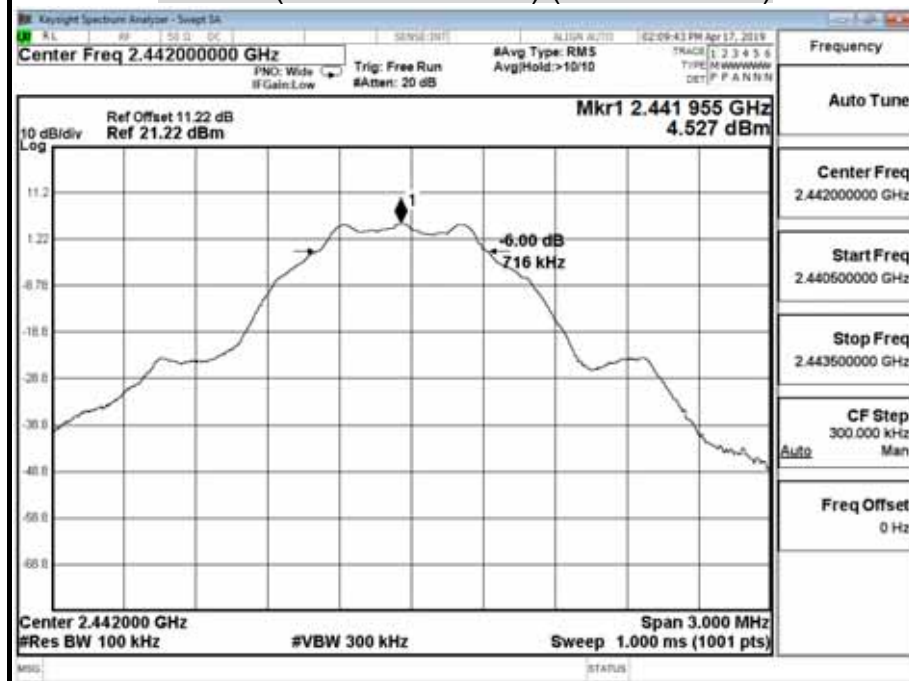

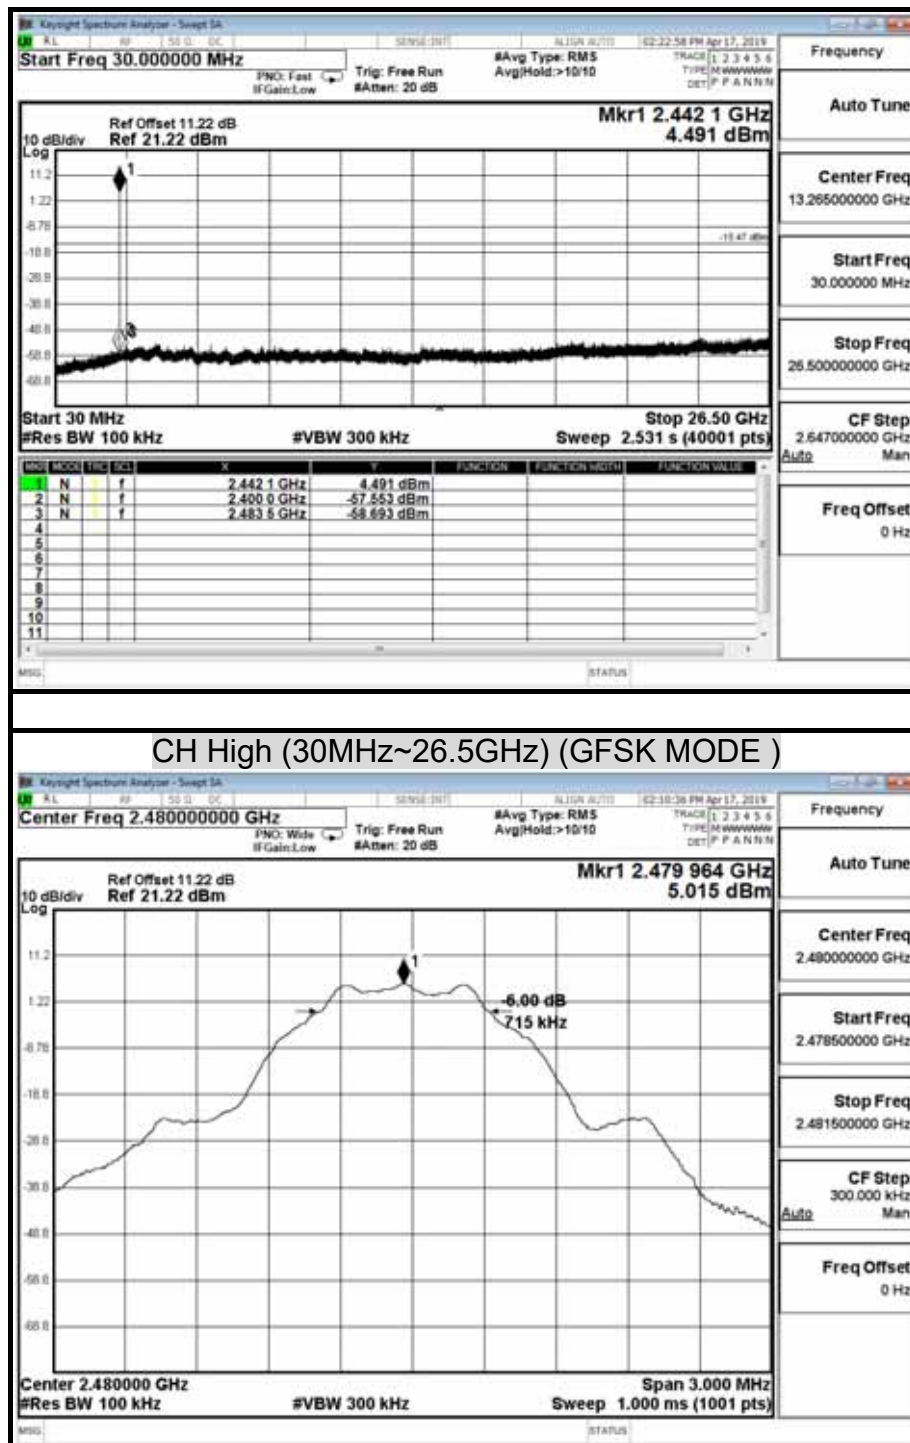

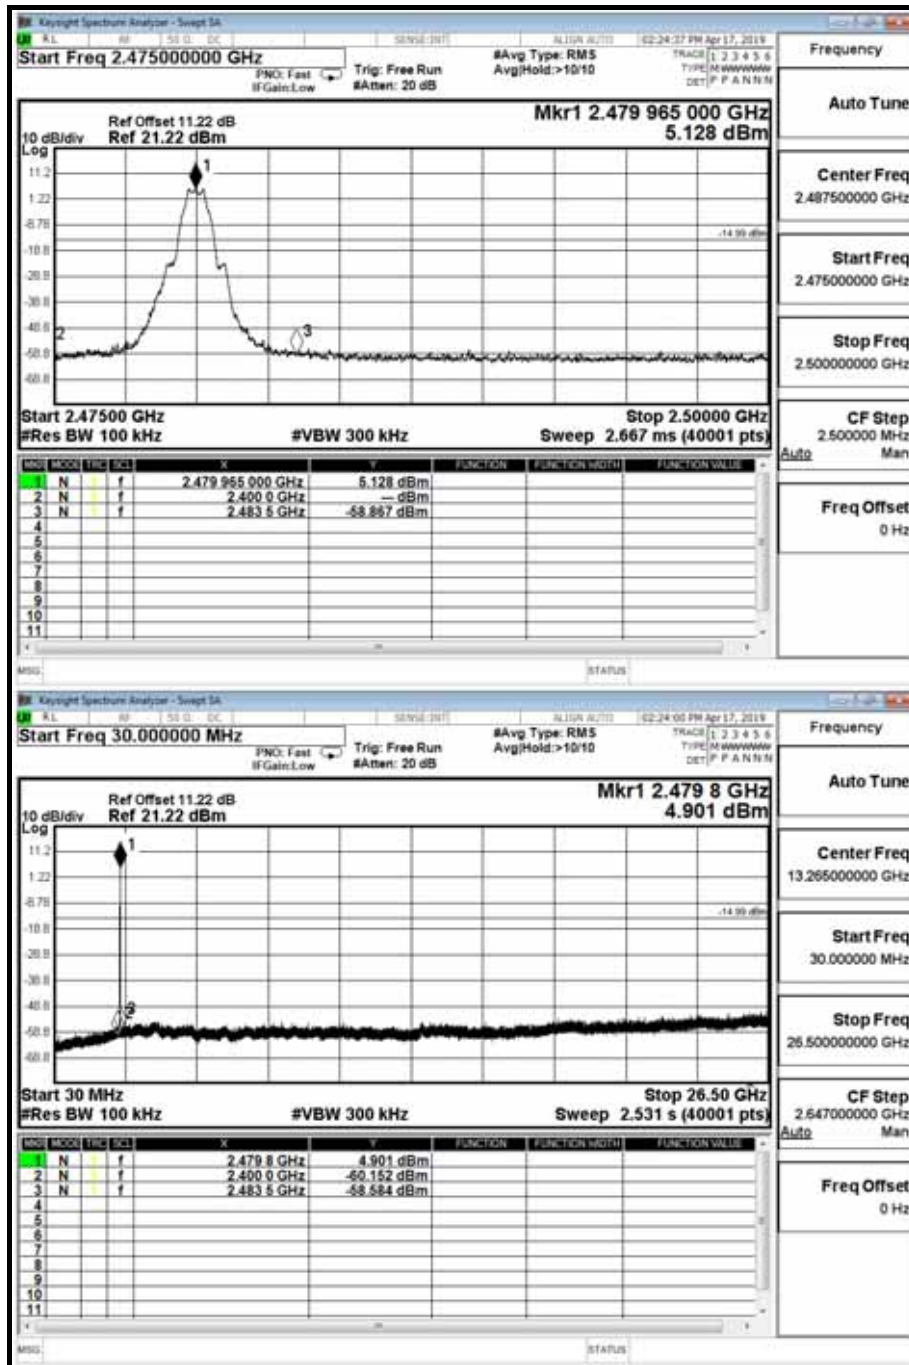

8.6 RADIATED EMISSIONS

8.6.1 TRANSMITTER RADIATED SUPURIOUS EMSSIONS

LIMITS

§ 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 -1710	10.6 -12.7
6.26775 - 6.26825	108 -121.94	1718.8 - 1722.2	13.25 -13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 – 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 -16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3338	36.43 - 36.5
12.57675 - 12.57725	322 -335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§ 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§ 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz, However, operation within these frequency bands is permitted under other sections of this Part, e-g, Sections 15.231 and 15.241.

§ 15.209 (b) In the emission table above, the tighter limit applies at the band edges.


TEST EQUIPMENTS

The following test equipments are utilized in making the measurements contained in this report.


Chamber Room #966					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Active Loop Antenna	ETS-LINDREN	6502	8905-2356	07/20/2017	07/19/2019
Amplifier	HP	8447F	2443A01671	01/25/2019	01/24/2020
Bi-Log Antenna	Sunol	JB1	A070506-2	02/09/2019	02/08/2020
Cable	Rosnol+Suhner	SUCOFLEX 104PEA	SN25737 /4PEA	01/27/2019	01/26/2020
Double Ridged Guide Horn Antenna	ETS-LINDGREN	3116	00078900	03/29/2019	03/28/2021
EMI Test Receiver	R&S	ESCI	100960	11/07/2018	11/06/2019
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY54430216	07/05/2018	07/04/2019
Horn Antenna	Com-Power	AH-118	071032	04/30/2019	04/29/2020
Pre-Amplifier	EMCI	EMC012645	980098	01/25/2019	01/24/2020
Pre-Amplifier	MITEQ	AMF-6F-260400-40-8P	985646	06/21/2018	06/20/2019
Hi-Pass Filter	MICRO-TRONICS	BRM50702-01	018	N.C.R	N.C.R
Software	Excel(ccs-o6-2019 v1.2)				

TEST SETUP

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 to 1GHz.

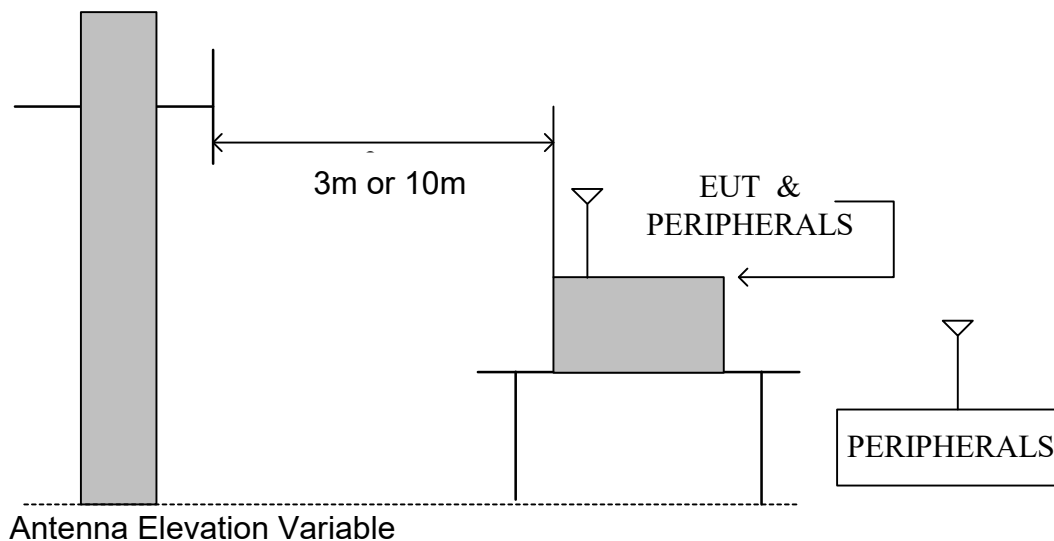

The diagram below shows the test setup that is utilized to make the measurements for emission above 1GHz.

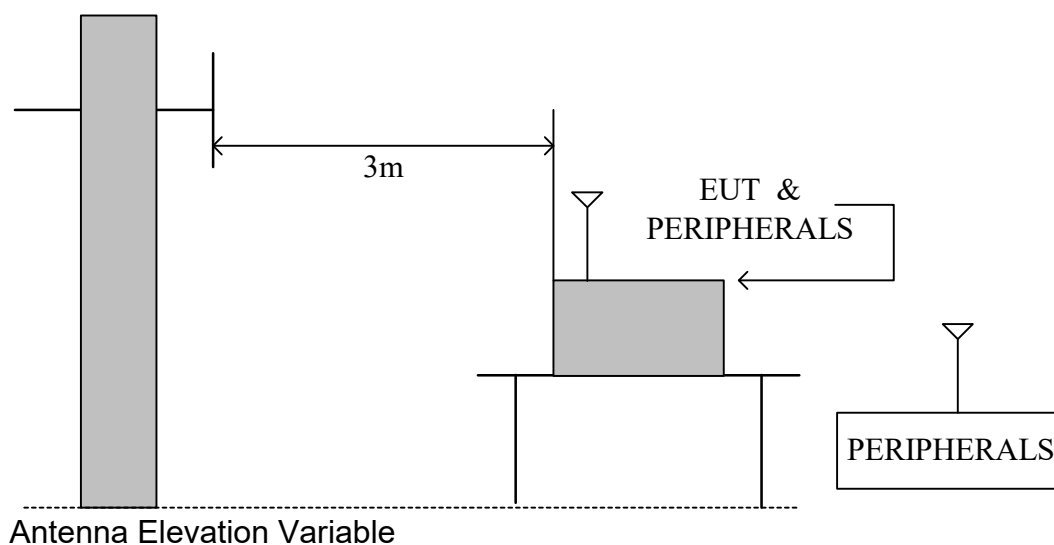

TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8/1.5 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. While measuring the radiated emission below 1GHz, the EUT was set 3/10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. While measuring the radiated emission above 1GHz, the EUT was set 3 meters away from the interference-receiving antenna
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. The tests were performed in accordance with 558074 D01 DTS Meas Guidance v03r03.

NOTE :

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.
4. No emission is found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz)

TEST RESULTS


No non-compliance noted.

8.6.2 WORST-CASE RADIATED EMISSION BELOW 1 GHz

Product Name	Standalone Cliplauncher W/7inch Touchdisplay	Test Date	2019/04/18
Model	Force	Test By	Ted Huang
Test Mode	TX	TEMP& Humidity	26.5 /54%

Horizontal

(The chart below shows the highest readings taken from the final data.)

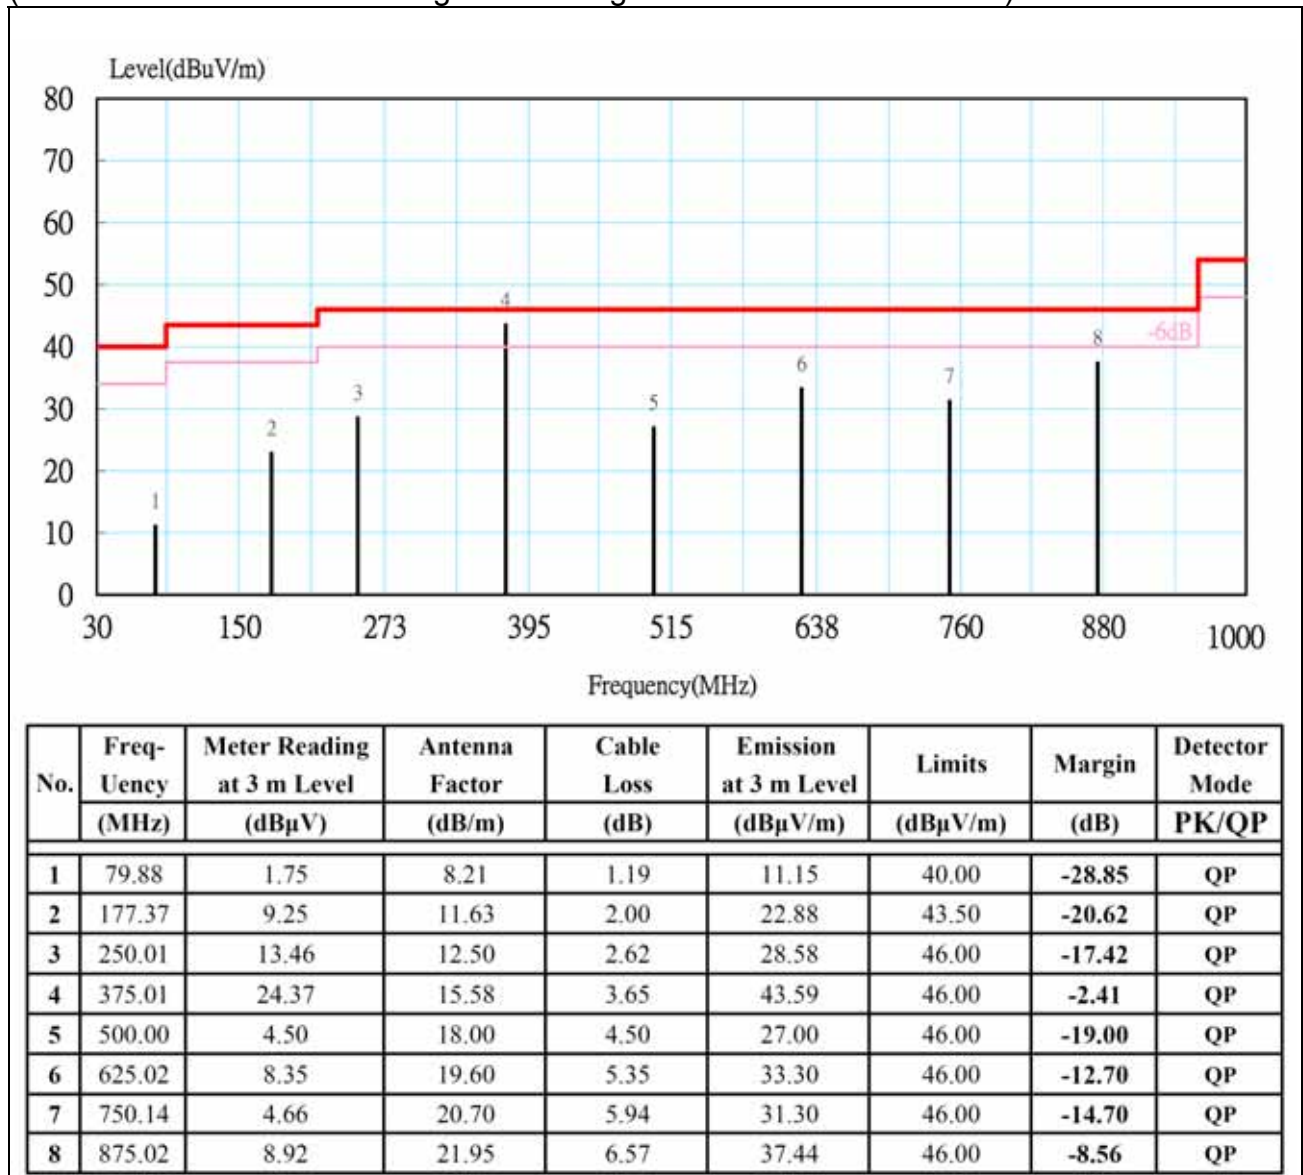


- Note: 1. QP= Quasi-peak Reading.
2. The other emission levels were very low against the limit

Product Name	Standalone Cliplauncher W/7inch Touchdisplay	Test Date	2019/04/18
Model	Force	Test By	Ted Huang
Test Mode	Normal Operation	TEMP& Humidity	26.5 /54%

Vertical

(The chart below shows the highest readings taken from the final data.)

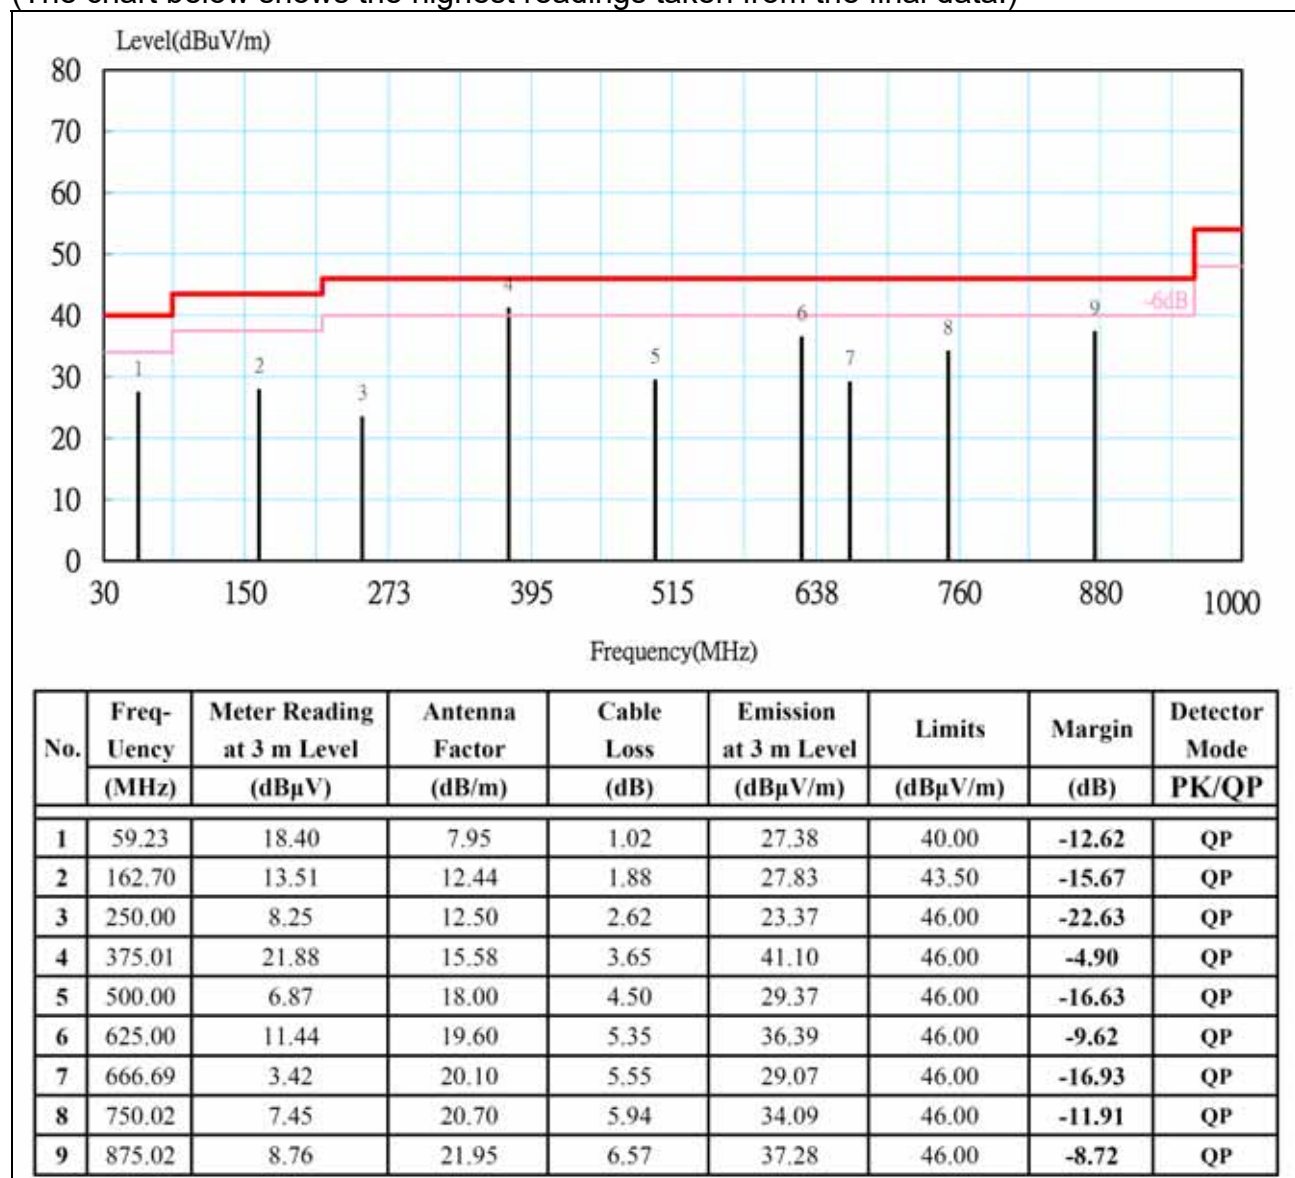

Note: 1. QP= Quasi-peak Reading.

2. The other emission levels were very low against the limit

8.6.3 TRANSMITTER RADIATED EMISSION ABOVE 1 GHz

Product Name	Standalone Cliplauncher W/7inch Touchdisplay	Test Date	2019/04/17
Model	Force	Test By	Ted Huang
Test Mode	IEEE 802.11b TX (CH Low)	TEMP& Humidity	26.5 , 54%

TX / IEEE 802.11b mode / CH Low				Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 1374.88	61.46	25.97	2.20	45.12	0.44	44.96	74.00	-29.04	P
* 1374.88	54.62	25.97	2.20	45.12	0.44	38.12	54.00	-15.88	A
* 4825.42	56.70	32.98	4.39	44.32	0.22	49.96	74.00	-24.04	P
* 4825.42	46.52	32.98	4.39	44.32	0.22	39.78	54.00	-14.22	A
7235.18	55.76	38.80	5.51	44.01	0.27	56.33	74.00	-17.67	P
7235.18	44.92	38.80	5.51	44.01	0.27	45.49	54.00	-8.51	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

TX / IEEE 802.11b mode / CH Low				Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 1375.14	62.42	25.98	2.21	45.12	0.44	45.92	74.00	-28.08	P
* 1375.14	58.23	25.98	2.21	45.12	0.44	41.73	54.00	-12.27	A
* 4822.86	56.46	32.97	4.38	44.32	0.22	49.72	74.00	-24.28	P
* 4822.86	46.33	32.97	4.38	44.32	0.22	39.59	54.00	-14.41	A
7236.37	55.28	38.80	5.51	44.01	0.27	55.85	74.00	-18.15	P
7236.37	45.32	38.80	5.51	44.01	0.27	45.89	54.00	-8.11	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter , Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.
6. *=Restricted bands of operation

Product Name	Standalone Cliplauncher W/7inch Touchdisplay	Test Date	2019/04/17
Model	Force	Test By	Ted Huang
Test Mode	IEEE 802.11b TX (CH Middle)	TEMP& Humidity	26.5 , 54%

TX / IEEE 802.11b mode / CH Middle				Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 1374.59	61.25	25.97	2.20	45.12	0.44	44.75	74.00	-29.25	P
* 1374.59	54.65	25.97	2.20	45.12	0.44	38.15	54.00	-15.85	A
* 4874.18	57.14	33.12	4.41	44.33	0.23	50.57	74.00	-23.43	P
* 4874.18	46.68	33.12	4.41	44.33	0.23	40.11	54.00	-13.89	A
* 7312.36	55.62	39.06	5.53	43.95	0.27	56.54	74.00	-17.46	P
* 7312.36	45.78	39.06	5.53	43.95	0.27	46.70	54.00	-7.30	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

TX / IEEE 802.11b mode / CH Middle				Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 1375.08	62.56	25.98	2.21	45.12	0.44	46.06	74.00	-27.94	P
* 1375.08	58.43	25.98	2.21	45.12	0.44	41.93	54.00	-12.07	A
* 4822.64	56.52	32.97	4.38	44.32	0.22	49.77	74.00	-24.23	P
* 4822.64	46.46	32.97	4.38	44.32	0.22	39.71	54.00	-14.29	A
* 7311.35	55.78	39.06	5.53	43.95	0.27	56.69	74.00	-17.31	P
* 7311.35	45.16	39.06	5.53	43.95	0.27	46.07	54.00	-7.93	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter , Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.
6. *=Restricted bands of operation

Product Name	Standalone Cliplauncher W/7inch Touchdisplay	Test Date	2019/04/17
Model	Force	Test By	Ted Huang
Test Mode	IEEE 802.11b TX (CH High)	TEMP& Humidity	26.5 , 54%

TX / IEEE 802.11b mode / CH High				Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 1375.27	61.23	25.98	2.21	45.12	0.44	44.73	74.00	-29.27	P
* 1375.27	54.37	25.98	2.21	45.12	0.44	37.87	54.00	-16.13	A
* 4925.22	56.64	33.28	4.44	44.35	0.23	50.24	74.00	-23.76	P
* 4925.22	46.48	33.28	4.44	44.35	0.23	40.08	54.00	-13.92	A
* 7383.64	56.14	39.30	5.55	43.88	0.27	57.38	74.00	-16.62	P
* 7383.64	46.63	39.30	5.55	43.88	0.27	47.87	54.00	-6.13	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

TX / IEEE 802.11b mode / CH High				Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 1375.28	62.56	25.98	2.21	45.12	0.44	46.06	74.00	-27.94	P
* 1375.28	58.22	25.98	2.21	45.12	0.44	41.72	54.00	-12.28	A
* 4924.64	55.78	33.27	4.44	44.35	0.23	49.38	74.00	-24.62	P
* 4924.64	46.36	33.27	4.44	44.35	0.23	39.96	54.00	-14.04	A
* 7386.28	55.27	39.31	5.55	43.88	0.27	56.52	74.00	-17.48	P
* 7386.28	44.85	39.31	5.55	43.88	0.27	46.10	54.00	-7.90	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter , Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.
6. *=Restricted bands of operation

Product Name	Standalone Cliplauncher W/7inch Touchdisplay	Test Date	2019/04/17
Model	Force	Test By	Ted Huang
Test Mode	IEEE 802.11g TX (CH Low)	TEMP& Humidity	26.5 , 54%

TX / IEEE 802.11g mode / CH Low				Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 1375.16	61.42	25.98	2.21	45.12	0.44	44.92	74.00	-29.08	P
* 1375.16	54.28	25.98	2.21	45.12	0.44	37.78	54.00	-16.22	A
* 4829.23	56.67	32.99	4.39	44.32	0.22	49.95	74.00	-24.05	P
* 4829.23	46.24	32.99	4.39	44.32	0.22	39.52	54.00	-14.48	A
7237.28	55.65	38.81	5.51	44.01	0.27	56.23	74.00	-17.77	P
7237.28	45.26	38.81	5.51	44.01	0.27	45.84	54.00	-8.16	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

TX / IEEE 802.11g mode / CH Low				Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 1375.35	62.78	25.98	2.21	45.12	0.44	46.28	74.00	-27.72	P
* 1375.35	58.46	25.98	2.21	45.12	0.44	41.96	54.00	-12.04	A
* 4818.67	56.86	32.96	4.38	44.32	0.22	50.10	74.00	-23.90	P
* 4818.67	45.56	32.96	4.38	44.32	0.22	38.80	54.00	-15.20	A
7230.64	55.68	38.78	5.51	44.02	0.27	56.23	74.00	-17.77	P
7230.64	45.52	38.78	5.51	44.02	0.27	46.07	54.00	-7.93	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter , Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.
6. *=Restricted bands of operation

Product Name	Standalone Cliplauncher W/7inch Touchdisplay	Test Date	2019/04/17
Model	Force	Test By	Ted Huang
Test Mode	IEEE 802.11g TX (CH Middle)	TEMP& Humidity	26.5 , 54%

TX / IEEE 802.11g		mode / CH Middle		Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 1374.96	61.58	25.97	2.20	45.12	0.44	45.08	74.00	-28.92	P
* 1374.96	54.72	25.97	2.20	45.12	0.44	38.22	54.00	-15.78	A
* 4880.48	56.23	33.14	4.42	44.34	0.23	49.68	74.00	-24.32	P
* 4880.48	46.48	33.14	4.42	44.34	0.23	39.93	54.00	-14.07	A
* 7308.67	55.86	39.05	5.53	43.95	0.27	56.76	74.00	-17.24	P
* 7308.67	45.23	39.05	5.53	43.95	0.27	46.13	54.00	-7.87	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

TX / IEEE 802.11g		mode / CH Middle		Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 1375.28	62.63	25.98	2.21	45.12	0.44	46.13	74.00	-27.87	P
* 1375.28	58.48	25.98	2.21	45.12	0.44	41.98	54.00	-12.02	A
* 4864.72	56.46	33.09	4.41	44.33	0.23	49.86	74.00	-24.14	P
* 4864.72	45.52	33.09	4.41	44.33	0.23	38.92	54.00	-15.08	A
* 7315.42	55.36	39.07	5.53	43.94	0.27	56.29	74.00	-17.71	P
* 7315.42	45.22	39.07	5.53	43.94	0.27	46.15	54.00	-7.85	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter , Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.
6. *=Restricted bands of operation

Product Name	Standalone Cliplauncher W/7inch Touchdisplay	Test Date	2019/04/17
Model	Force	Test By	Ted Huang
Test Mode	IEEE 802.11g TX (CH High)	TEMP& Humidity	26.5 , 54%

TX / IEEE 802.11g mode / CH High				Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 1374.62	61.36	25.97	2.20	45.12	0.44	44.86	74.00	-29.14	P
* 1374.62	54.42	25.97	2.20	45.12	0.44	37.92	54.00	-16.08	A
* 4929.56	56.48	33.29	4.44	44.35	0.23	50.09	74.00	-23.91	P
* 4929.56	46.62	33.29	4.44	44.35	0.23	40.23	54.00	-13.77	A
* 7392.43	55.56	39.33	5.55	43.87	0.27	56.84	74.00	-17.16	P
* 7392.43	45.18	39.33	5.55	43.87	0.27	46.46	54.00	-7.54	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

TX / IEEE 802.11g mode / CH High				Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 1375.20	62.67	25.98	2.21	45.12	0.44	46.17	74.00	-27.83	P
* 1375.20	58.52	25.98	2.21	45.12	0.44	42.02	54.00	-11.98	A
* 4914.53	55.86	33.24	4.43	44.35	0.23	49.42	74.00	-24.58	P
* 4914.53	46.45	33.24	4.43	44.35	0.23	40.01	54.00	-13.99	A
* 7385.68	55.68	39.31	5.55	43.88	0.27	56.93	74.00	-17.07	P
* 7385.68	44.82	39.31	5.55	43.88	0.27	46.07	54.00	-7.93	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter , Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.
6. *=Restricted bands of operation

Product Name	Standalone Cliplauncher W/7inch Touchdisplay	Test Date	2019/04/17
Model	Force	Test By	Ted Huang
Test Mode	IEEE 802.11n HT20 TX (CH Low)	TEMP& Humidity	26.5 , 54%

TX / IEEE 802.11n HT20 mode / CH Low					Measurement Distance at 3m			Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 1374.67	61.45	25.97	2.20	45.12	0.44	44.95	74.00	-29.05	P
* 1374.67	54.68	25.97	2.20	45.12	0.44	38.18	54.00	-15.82	A
* 4828.24	56.68	32.98	4.39	44.32	0.22	49.95	74.00	-24.05	P
* 4828.24	46.62	32.98	4.39	44.32	0.22	39.89	54.00	-14.11	A
7242.53	56.27	38.82	5.51	44.01	0.27	56.87	74.00	-17.13	P
7242.53	45.42	38.82	5.51	44.01	0.27	46.02	54.00	-7.98	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

TX / IEEE 802.11n HT20 mode / CH Low					Measurement Distance at 3m			Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 1375.23	62.75	25.98	2.21	45.12	0.44	46.25	74.00	-27.75	P
* 1375.23	58.52	25.98	2.21	45.12	0.44	42.02	54.00	-11.98	A
* 4821.23	56.86	32.96	4.38	44.32	0.22	50.11	74.00	-23.89	P
* 4821.23	45.63	32.96	4.38	44.32	0.22	38.88	54.00	-15.12	A
7233.56	55.75	38.79	5.51	44.01	0.27	56.31	74.00	-17.69	P
7233.56	45.65	38.79	5.51	44.01	0.27	46.21	54.00	-7.79	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter , Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.
6. *=Restricted bands of operation

Product Name	Standalone Cliplauncher W/7inch Touchdisplay	Test Date	2019/04/17
Model	Force	Test By	Ted Huang
Test Mode	IEEE 802.11n HT20 TX (CH Middle)	TEMP& Humidity	26.5 , 54%

TX / IEEE 802.11n HT20 mode / CH Middle					Measurement Distance at 3m			Horizontal polarity		
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)	
* 1375.65	61.46	25.98	2.21	45.12	0.44	44.97	74.00	-29.03	P	
* 1375.65	54.58	25.98	2.21	45.12	0.44	38.09	54.00	-15.91	A	
* 4882.68	56.63	33.15	4.42	44.34	0.23	50.09	74.00	-23.91	P	
* 4882.68	46.80	33.15	4.42	44.34	0.23	40.26	54.00	-13.74	A	
* 7320.35	56.55	39.09	5.53	43.94	0.27	57.50	74.00	-16.50	P	
* 7320.35	45.68	39.09	5.53	43.94	0.27	46.63	54.00	-7.37	A	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A	

TX / IEEE 802.11n HT20 mode / CH Middle					Measurement Distance at 3m			Vertical polarity		
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)	
* 1375.36	62.75	25.98	2.21	45.12	0.44	46.25	74.00	-27.75	P	
* 1375.36	58.36	25.98	2.21	45.12	0.44	41.86	54.00	-12.14	A	
* 4870.28	57.22	33.11	4.41	44.33	0.23	50.63	74.00	-23.37	P	
* 4870.28	46.48	33.11	4.41	44.33	0.23	39.89	54.00	-14.11	A	
* 7313.42	55.58	39.07	5.53	43.94	0.27	56.50	74.00	-17.50	P	
* 7313.42	45.37	39.07	5.53	43.94	0.27	46.29	54.00	-7.71	A	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A	

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter , Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.
6. *=Restricted bands of operation

Product Name	Standalone Cliplauncher W/7inch Touchdisplay	Test Date	2019/04/17
Model	Force	Test By	Ted Huang
Test Mode	IEEE 802.11n HT20 TX (CH High)	TEMP& Humidity	26.5 , 54%

TX / IEEE 802.11n HT20 mode / CH High					Measurement Distance at 3m			Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 1374.58	61.52	25.97	2.20	45.12	0.44	45.02	74.00	-28.98	P
* 1374.58	54.65	25.97	2.20	45.12	0.44	38.15	54.00	-15.85	A
* 4932.36	56.58	33.30	4.44	44.35	0.23	50.20	74.00	-23.80	P
* 4932.36	46.46	33.30	4.44	44.35	0.23	40.08	54.00	-13.92	A
* 7390.43	55.58	39.33	5.55	43.88	0.27	56.85	74.00	-17.15	P
* 7390.43	45.48	39.33	5.55	43.88	0.27	46.75	54.00	-7.25	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

TX / IEEE 802.11n HT20 mode / CH High					Measurement Distance at 3m			Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 1375.26	62.64	25.98	2.21	45.12	0.44	46.14	74.00	-27.86	P
* 1375.26	58.45	25.98	2.21	45.12	0.44	41.95	54.00	-12.05	A
* 4924.67	55.76	33.27	4.44	44.35	0.23	49.36	74.00	-24.64	P
* 4924.67	46.65	33.27	4.44	44.35	0.23	40.25	54.00	-13.75	A
* 7380.28	55.85	39.29	5.55	43.89	0.27	57.07	74.00	-16.93	P
* 7380.28	44.68	39.29	5.55	43.89	0.27	45.90	54.00	-8.10	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter , Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.
6. *=Restricted bands of operation

Product Name	Standalone Cliplauncher W/7inch Touchdisplay	Test Date	2019/04/17
Model	Force	Test By	Ted Huang
Test Mode	Bluetooth 4.0 TX (CH Low)	TEMP& Humidity	26.5 , 54%

TX / Bluetooth 4.0 (GFSK) mode / CH Low					Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)	
* 1375.16	61.25	25.98	2.21	45.12	0.44	44.75	74.00	-29.25	P	
* 1375.16	54.48	25.98	2.21	45.12	0.44	37.98	54.00	-16.02	A	
1999.22	62.62	30.39	2.68	44.71	0.98	51.96	74.00	-22.04	P	
1999.22	47.58	30.39	2.68	44.71	0.98	36.92	54.00	-17.08	A	
* 4804.15	56.85	32.91	4.37	44.32	0.22	50.04	74.00	-23.96	P	
* 4804.15	46.23	32.91	4.37	44.32	0.22	39.42	54.00	-14.58	A	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A	

TX / Bluetooth 4.0 (GFSK) mode / CH Low					Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)	
* 1374.86	62.85	25.97	2.20	45.12	0.44	46.35	74.00	-27.65	P	
* 1374.86	58.56	25.97	2.20	45.12	0.44	42.06	54.00	-11.94	A	
2002.12	65.48	30.40	2.68	44.71	0.98	54.83	74.00	-19.17	P	
2002.12	49.06	30.40	2.68	44.71	0.98	38.41	54.00	-15.59	A	
* 4804.05	55.52	32.91	4.37	44.32	0.22	48.71	74.00	-25.29	P	
* 4804.05	45.56	32.91	4.37	44.32	0.22	38.75	54.00	-15.25	A	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A	

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter , Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.
6. *=Restricted bands of operation

Product Name	Standalone Cliplauncher W/7inch Touchdisplay	Test Date	2019/04/17
Model	Force	Test By	Ted Huang
Test Mode	Bluetooth 4.0 TX (CH Middle)	TEMP& Humidity	26.5 , 54%

TX / Bluetooth 4.0 (GFSK) mode / CH Middle					Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)	
* 1375.12	61.28	25.98	2.21	45.12	0.44	44.78	74.00	-29.22	P	
* 1375.04	54.22	25.98	2.21	45.12	0.44	37.72	54.00	-16.28	A	
2000.56	62.68	30.40	2.68	44.71	0.98	52.03	74.00	-21.97	P	
2000.20	47.85	30.40	2.68	44.71	0.98	37.20	54.00	-16.80	A	
* 4884.04	55.21	33.15	4.42	44.34	0.23	48.67	74.00	-25.33	P	
* 4884.04	44.76	33.15	4.42	44.34	0.23	38.22	54.00	-15.78	A	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A	

TX / Bluetooth 4.0 (GFSK) mode / CH Middle					Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)	
* 1375.23	62.60	25.98	2.21	45.12	0.44	46.10	74.00	-27.90	P	
* 1375.10	58.24	25.98	2.21	45.12	0.44	41.74	54.00	-12.26	A	
2002.45	65.45	30.40	2.68	44.71	0.98	54.80	74.00	-19.20	P	
2002.25	48.86	30.40	2.68	44.71	0.98	38.21	54.00	-15.79	A	
* 4884.12	55.46	33.15	4.42	44.34	0.23	48.92	74.00	-25.08	P	
* 4884.12	44.78	33.15	4.42	44.34	0.23	38.24	54.00	-15.76	A	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A	

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter , Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.
6. *=Restricted bands of operation

Product Name	Standalone Cliplauncher W/7inch Touchdisplay	Test Date	2019/04/17
Model	Force	Test By	Ted Huang
Test Mode	Bluetooth 4.0 TX (CH High)	TEMP& Humidity	26.5 , 54%

TX / Bluetooth 4.0 (GFSK) mode / CH High					Measurement Distance at 3m			Horizontal polarity		
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)	
* 1374.82	61.28	25.97	2.20	45.12	0.44	44.78	74.00	-29.22	P	
* 1374.86	54.43	25.97	2.20	45.12	0.44	37.93	54.00	-16.07	A	
2003.28	62.85	30.40	2.68	44.71	0.98	52.20	74.00	-21.80	P	
2003.42	48.05	30.40	2.68	44.71	0.98	37.40	54.00	-16.60	A	
* 4959.94	56.22	33.38	4.46	44.36	0.24	49.93	74.00	-24.07	P	
* 4959.94	45.57	33.38	4.46	44.36	0.24	39.28	54.00	-14.72	A	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A	

TX / Bluetooth 4.0 (GFSK) mode / CH High					Measurement Distance at 3m			Vertical polarity		
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)	
* 1375.16	62.45	25.98	2.21	45.12	0.44	45.95	74.00	-28.05	P	
* 1375.16	58.08	25.98	2.21	45.12	0.44	41.58	54.00	-12.42	A	
2001.86	65.85	30.40	2.68	44.71	0.98	55.20	74.00	-18.80	P	
2001.66	48.56	30.40	2.68	44.71	0.98	37.91	54.00	-16.09	A	
* 4960.14	57.24	33.38	4.46	44.36	0.24	50.96	74.00	-23.04	P	
* 4960.14	46.43	33.38	4.46	44.36	0.24	40.15	54.00	-13.85	A	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A	

REMARK:


1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter , Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.
6. *=Restricted bands of operation

8.6.4 RESTRICTED BAND EDGES

Model Name	Force	Test By	Ted Huang
Temp & Humidity	26.5 , 54%	Test Date	2019/04/17


Detector mode : Peak

Polarity : Horizontal

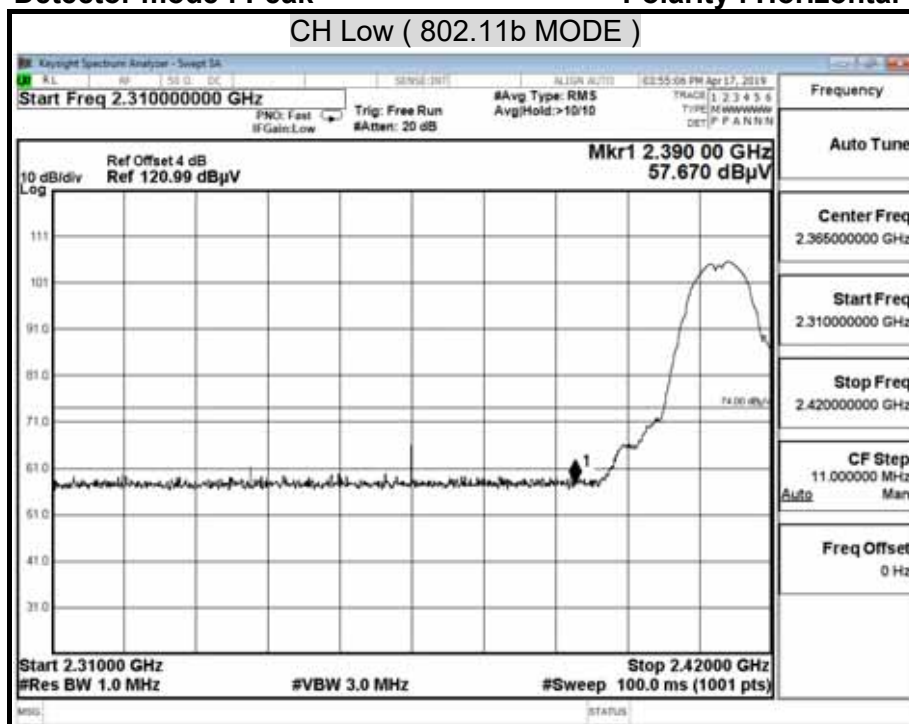


Detector mode : Average

Polarity : Horizontal

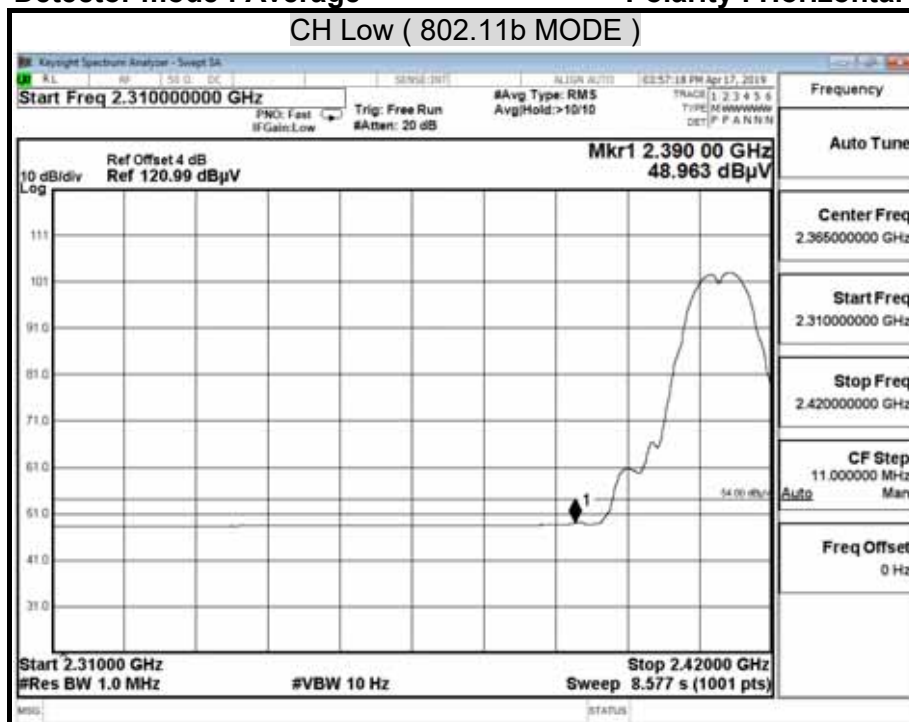


Detector mode : Peak

Polarity : Vertical

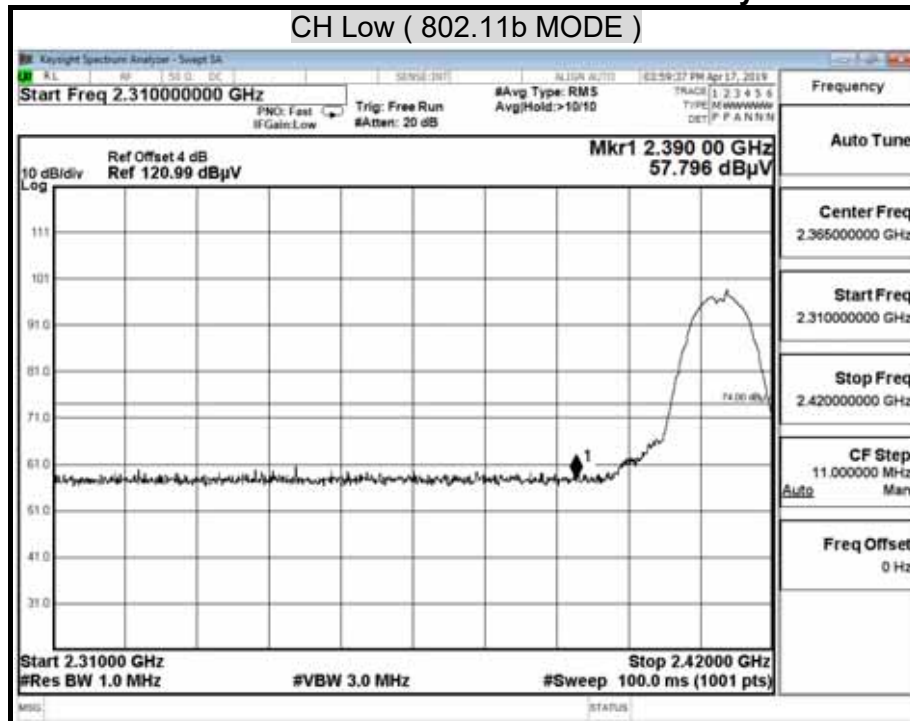


Detector mode : Average

Polarity : Vertical

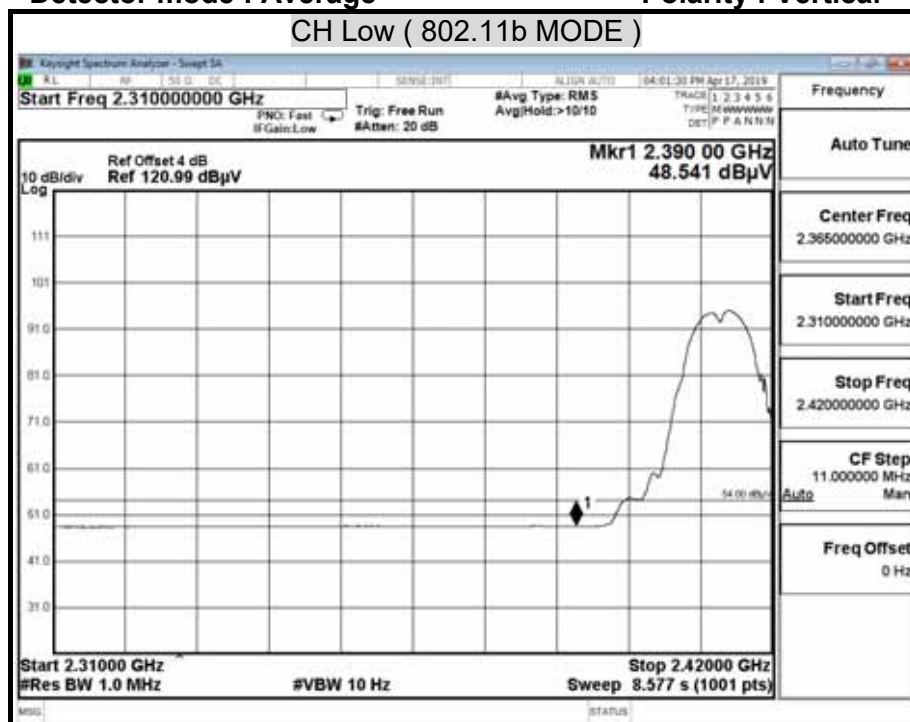


Detector mode : Peak

Polarity : Horizontal

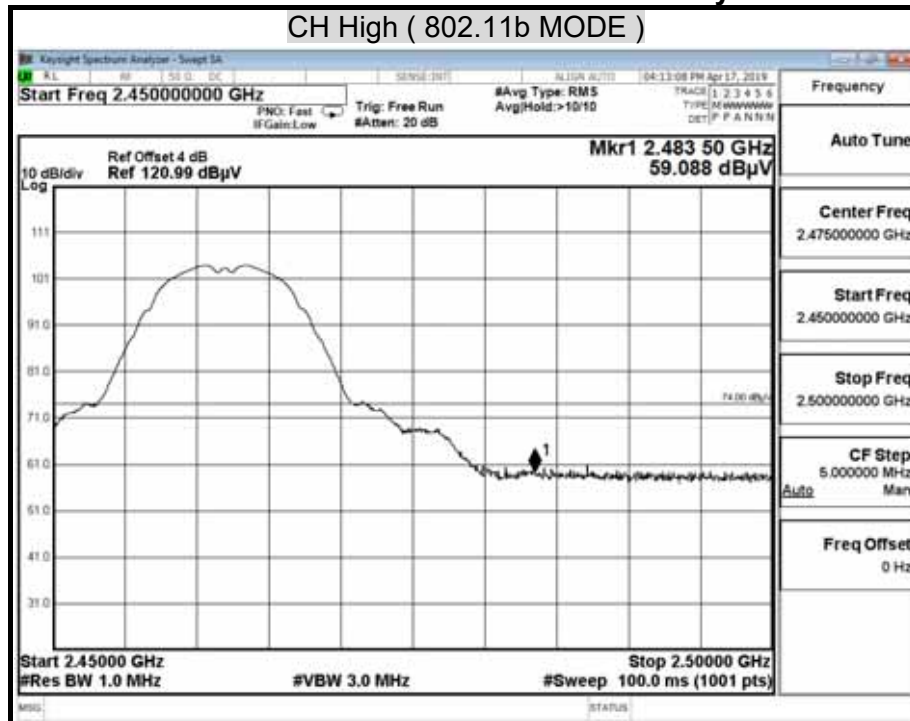


Detector mode : Average

Polarity : Horizontal

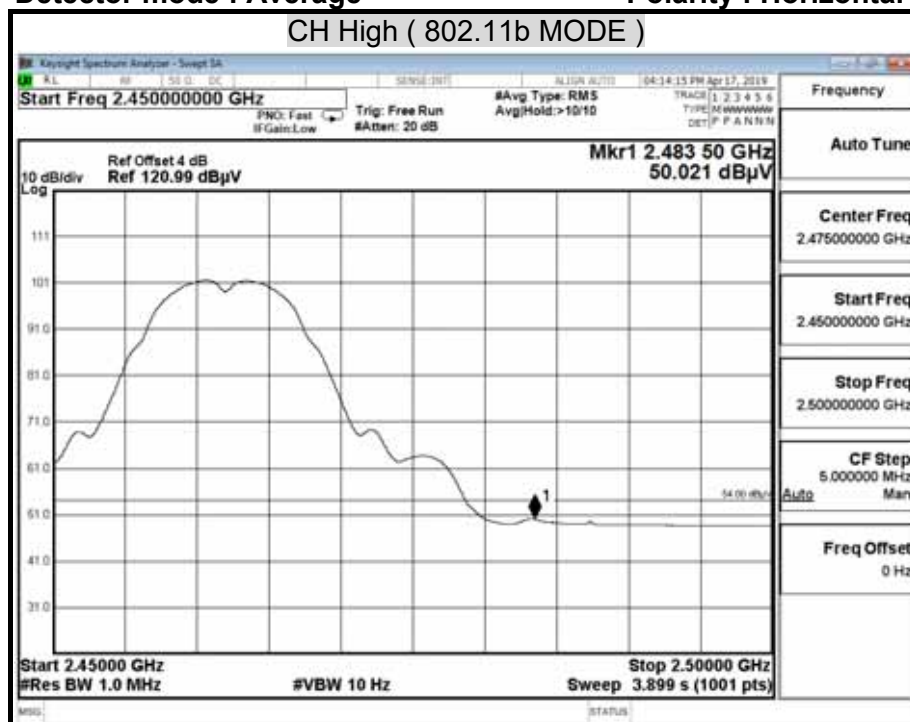


Detector mode : Peak

Polarity : Vertical

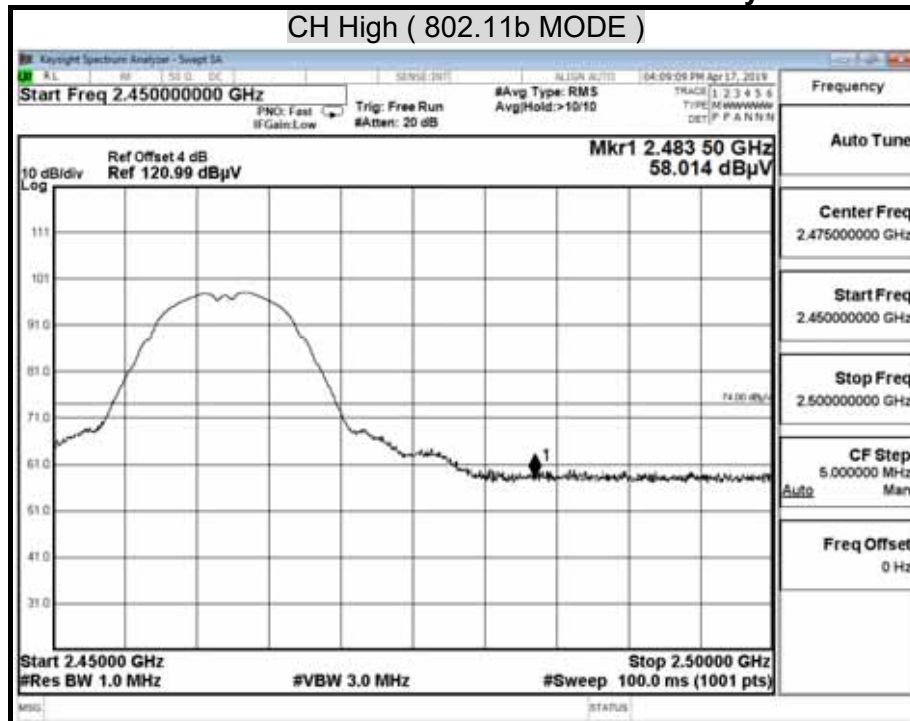


Detector mode : Average

Polarity : Vertical

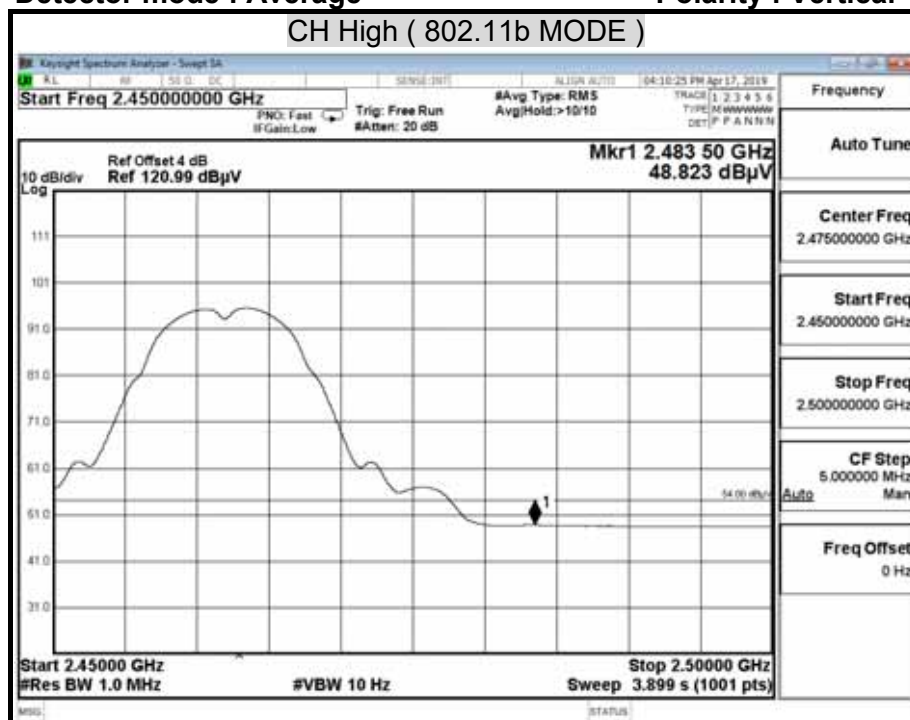


Detector mode : Peak

Polarity : Horizontal

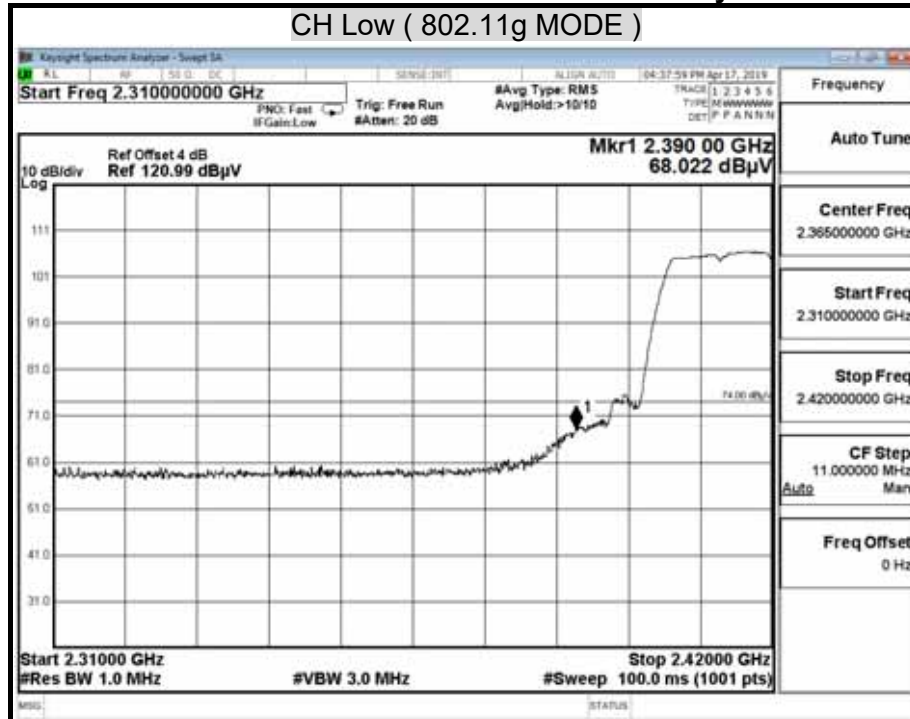


Detector mode : Average

Polarity : Horizontal

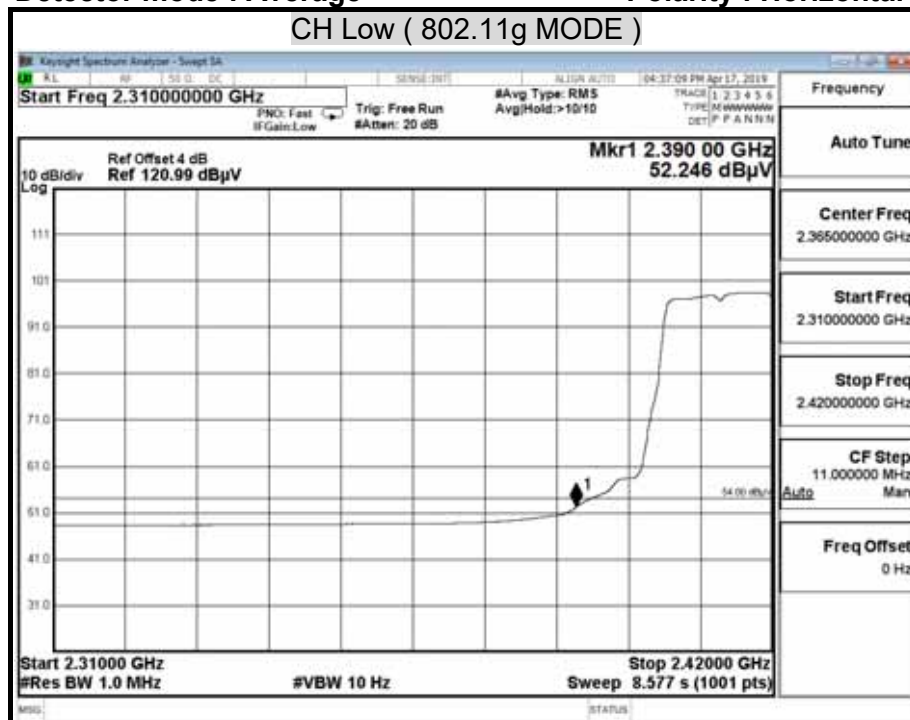


Detector mode : Peak

Polarity : Vertical

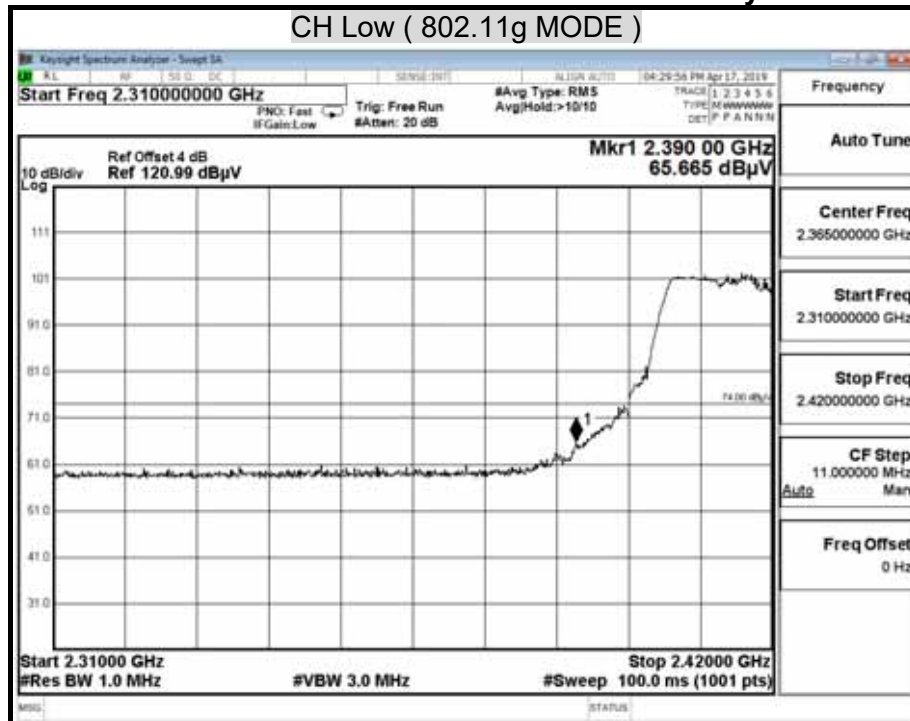


Detector mode : Average

Polarity : Vertical

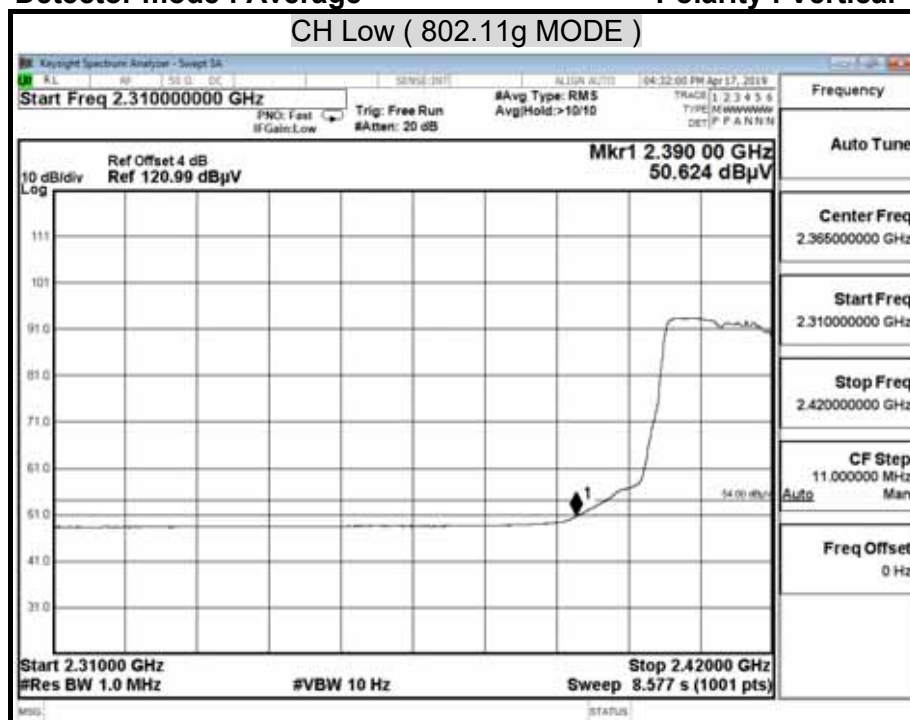


Detector mode : Peak

Polarity : Horizontal

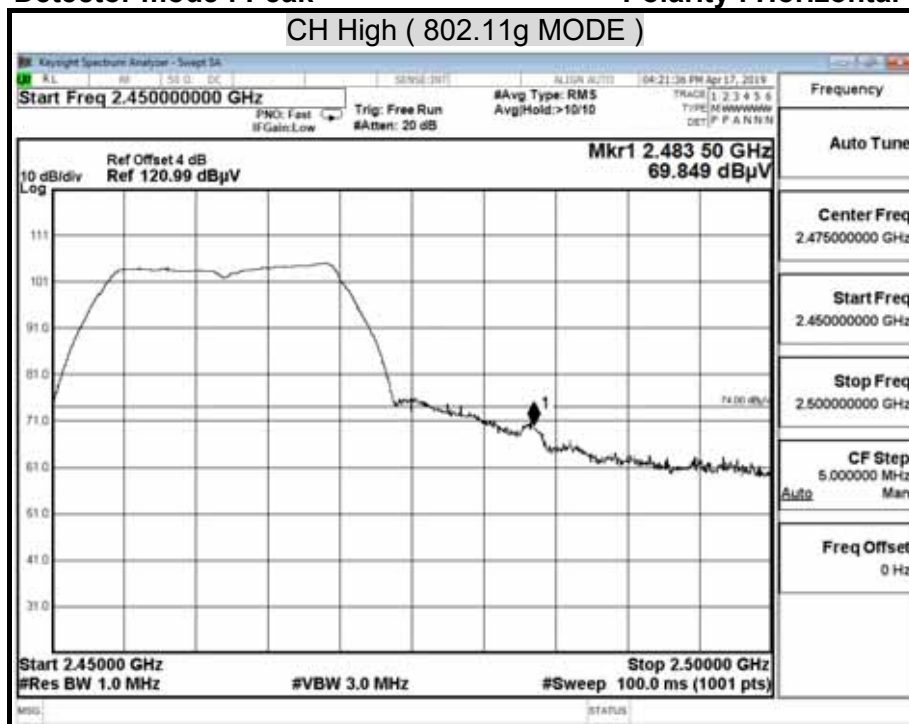


Detector mode : Average

Polarity : Horizontal

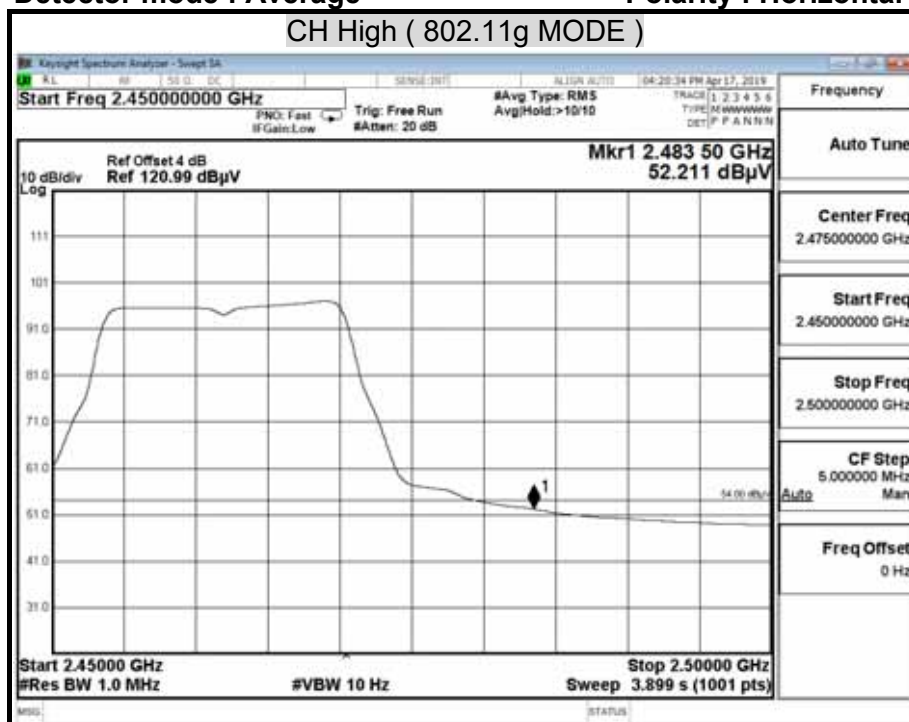


Detector mode : Peak

Polarity : Vertical

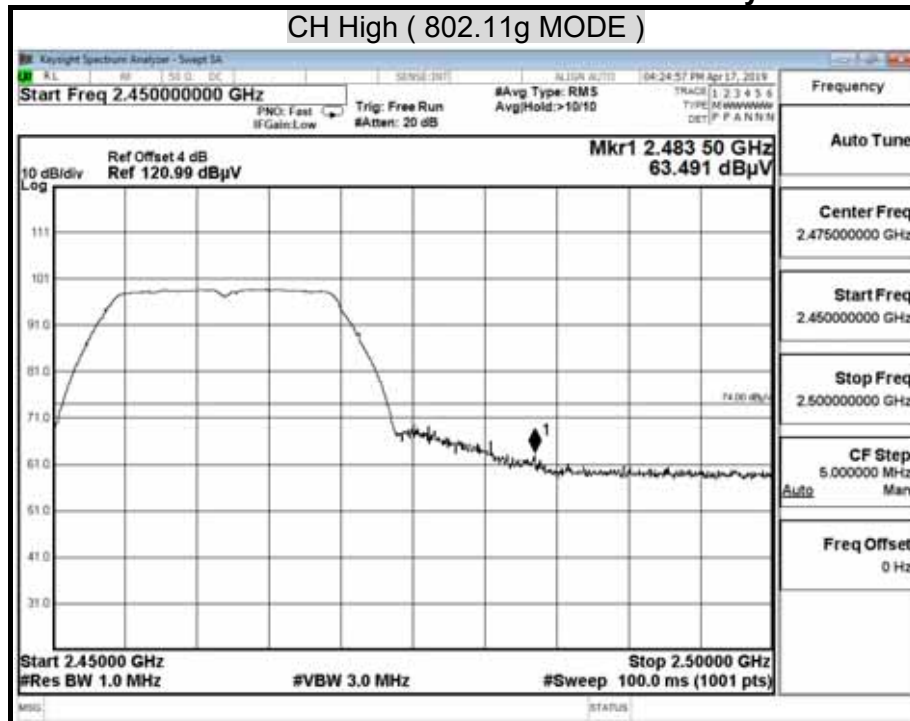

Detector mode : Average


Polarity : Vertical

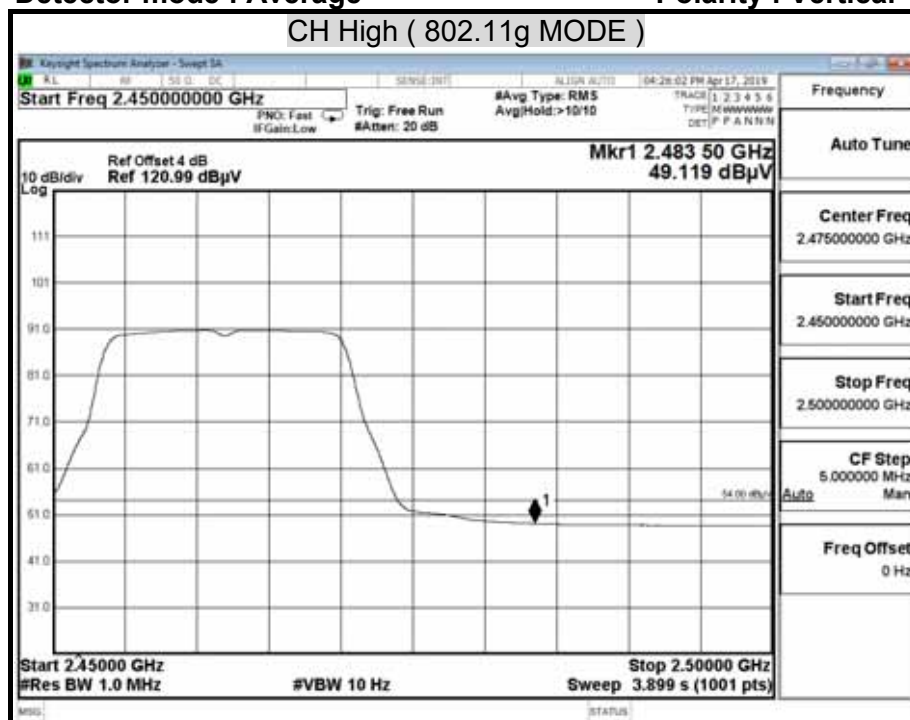

Detector mode : Peak

Polarity : Horizontal


CH Low (802.11n HT20 MODE)

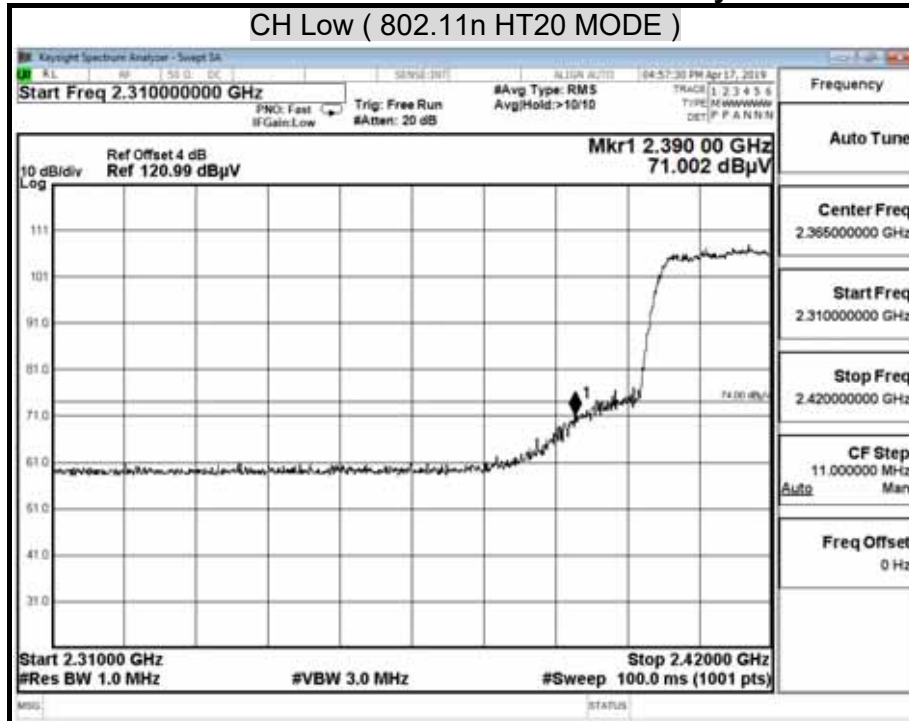

Detector mode : Average


Polarity : Horizontal

CH Low (802.11n HT20 MODE)

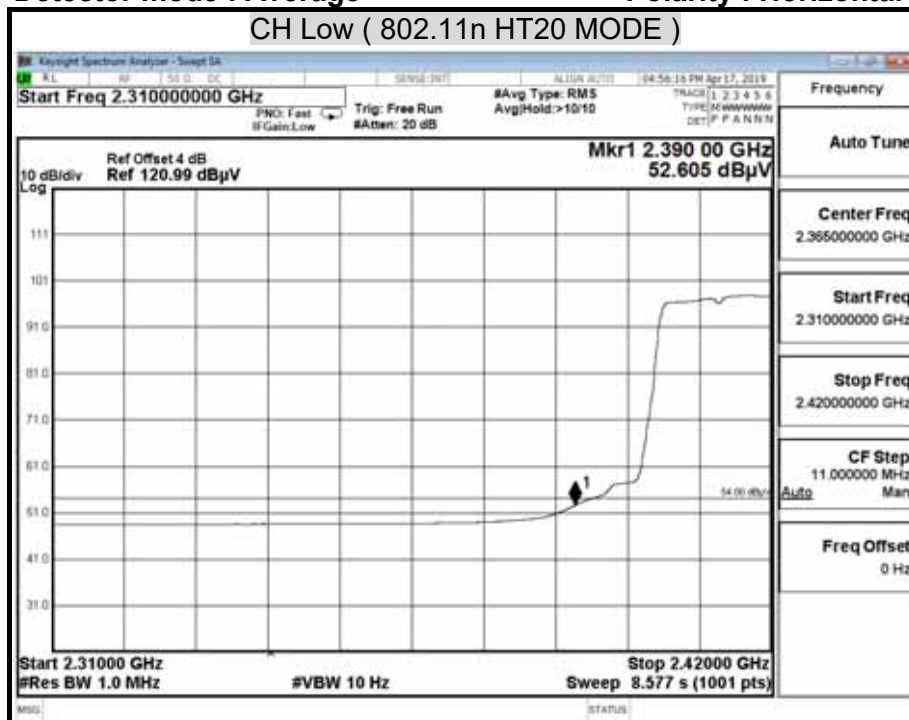


Detector mode : Peak

Polarity : Vertical

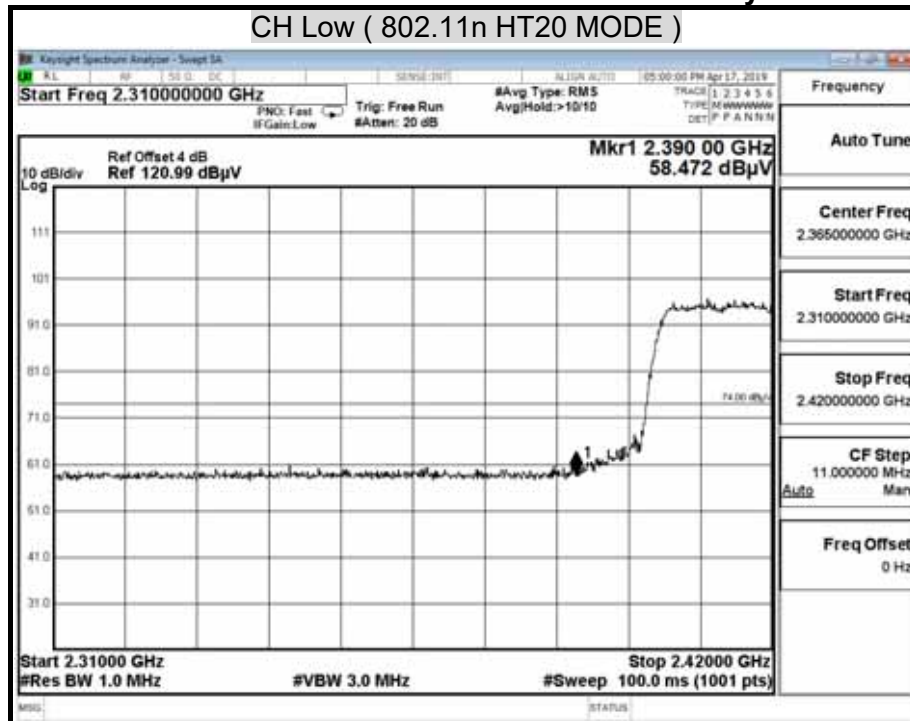

Detector mode : Average


Polarity : Vertical

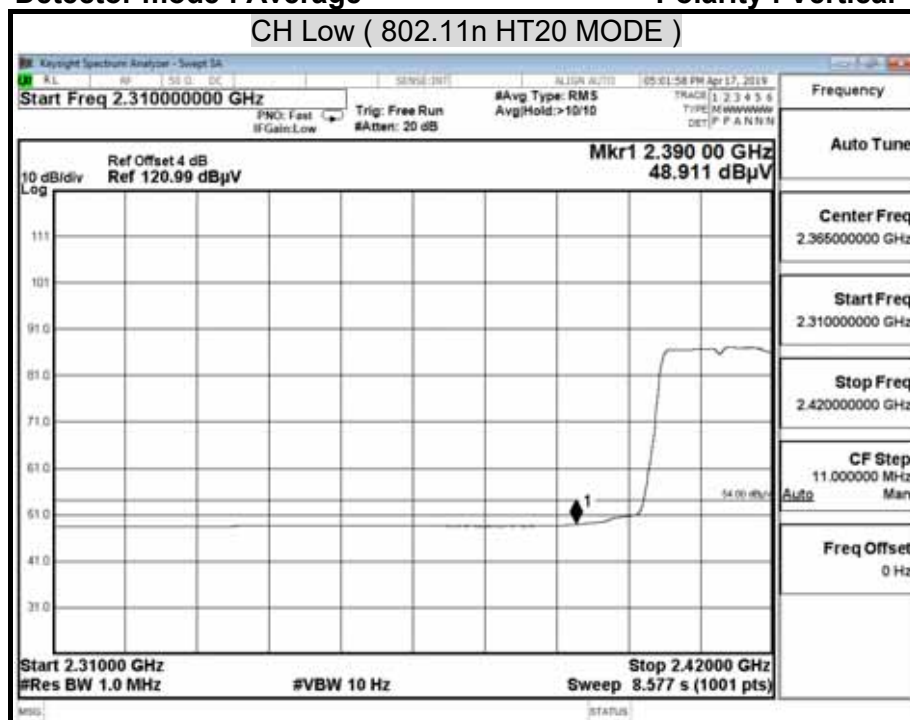

Detector mode : Peak

Polarity : Horizontal


CH High (802.11n HT20 MODE)

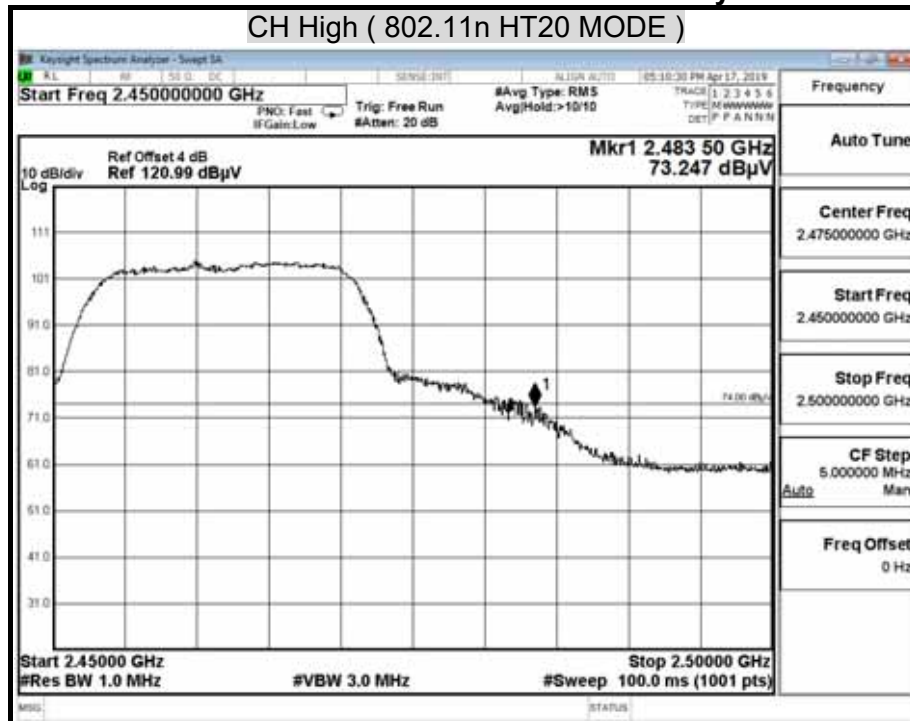

Detector mode : Average

Polarity : Horizontal


CH High (802.11n HT20 MODE)

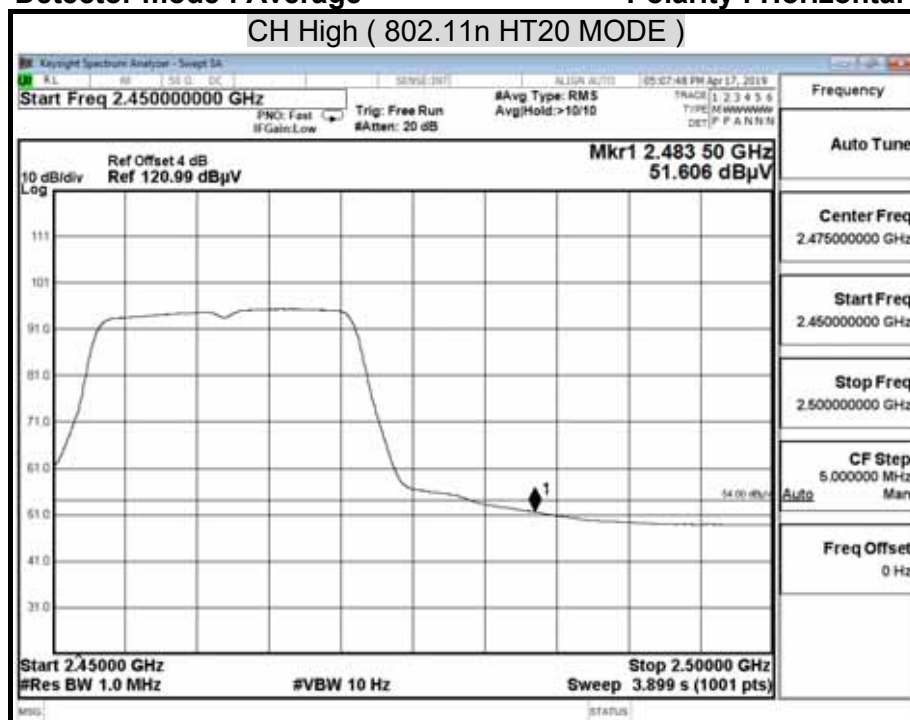

Detector mode : Peak

Polarity : Vertical


CH High (802.11n HT20 MODE)

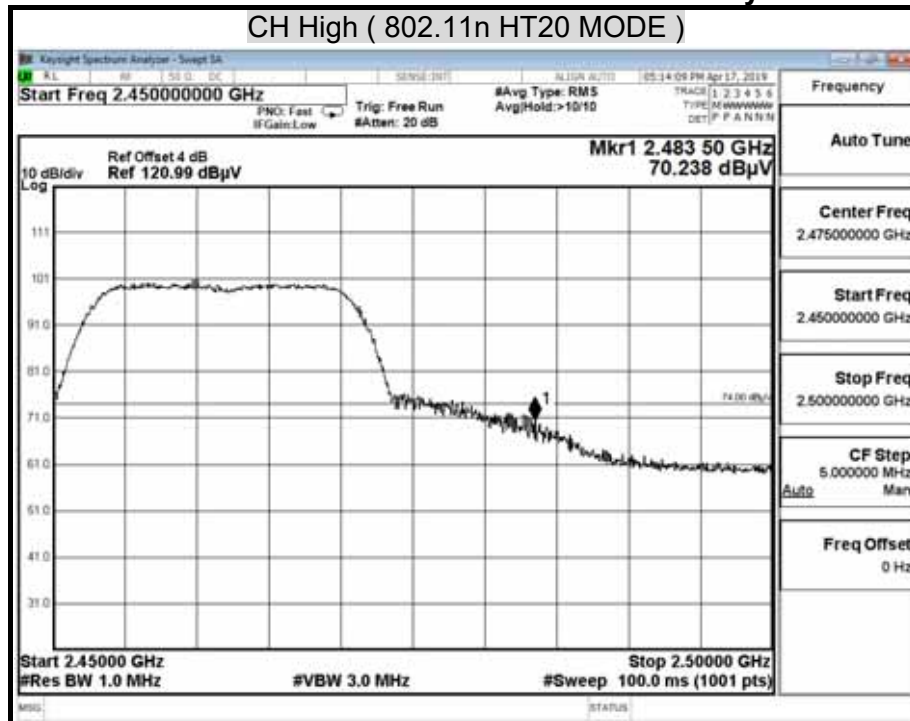

Detector mode : Average

Polarity : Vertical


CH High (802.11n HT20 MODE)

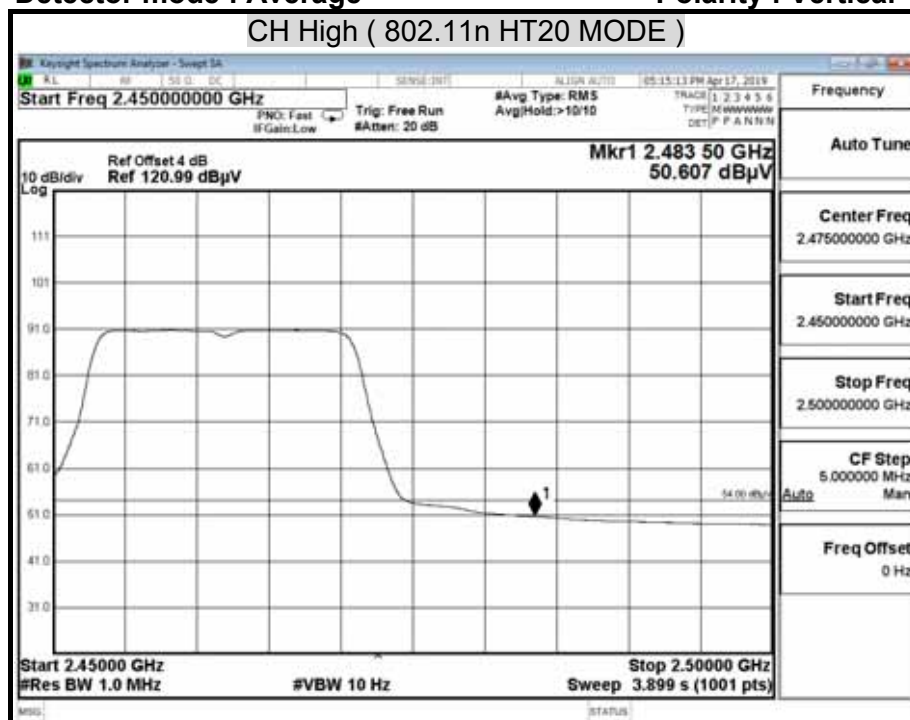


Bluetooth 4.0

Model Name	Force	Test By	Ted Huang
Temp & Humidity	26.5 , 54%	Test Date	2019/04/17

Detector mode : Peak Polarity : Horizontal

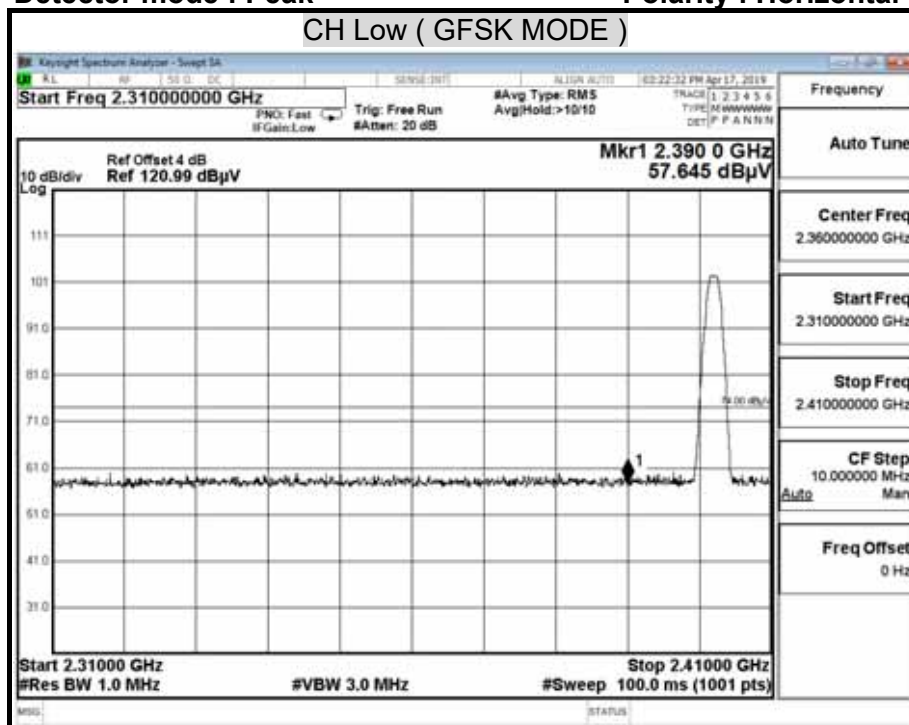


Detector mode : Average Polarity : Horizontal

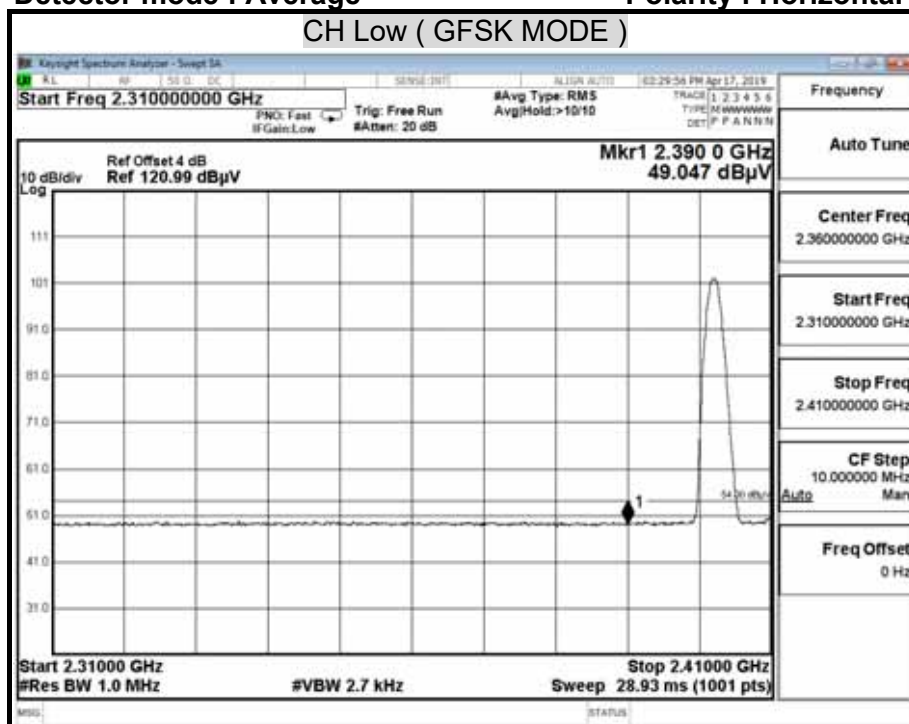


Detector mode : Peak

Polarity : Vertical

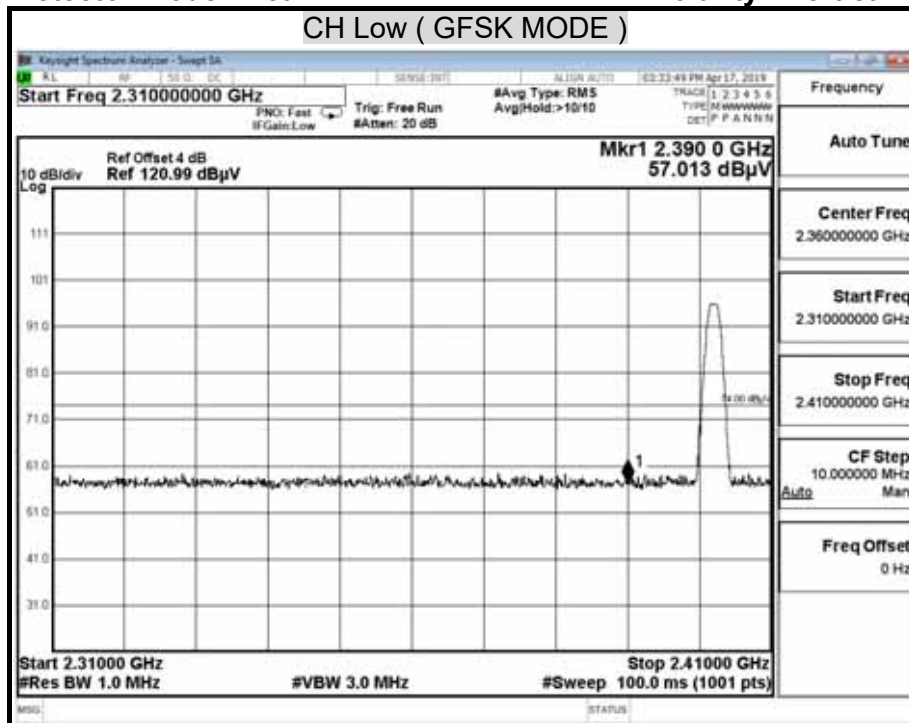


Detector mode : Average

Polarity : Vertical

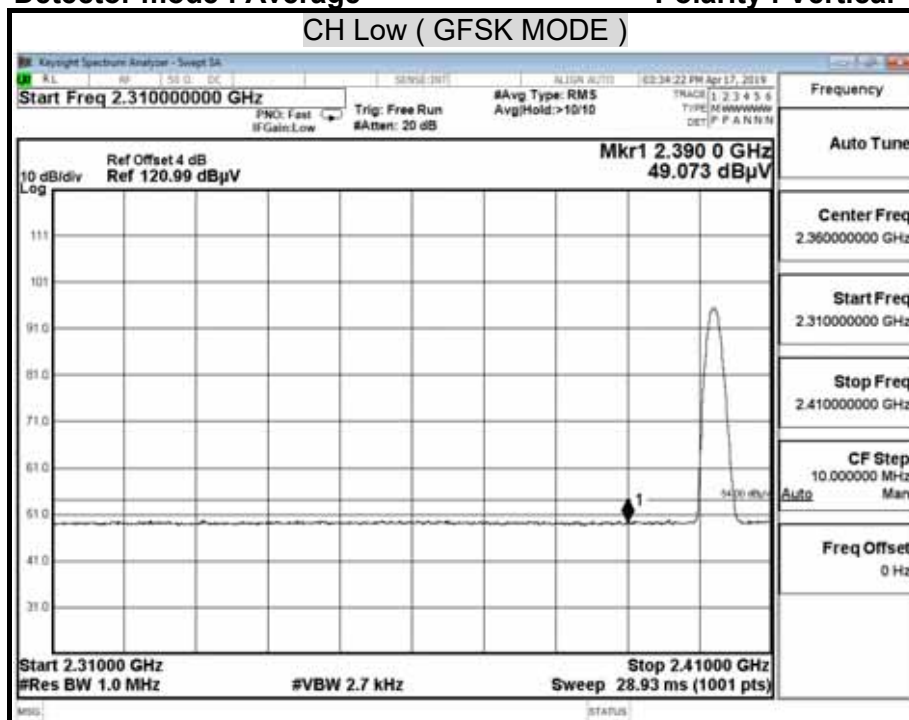


Detector mode : Peak

Polarity : Horizontal

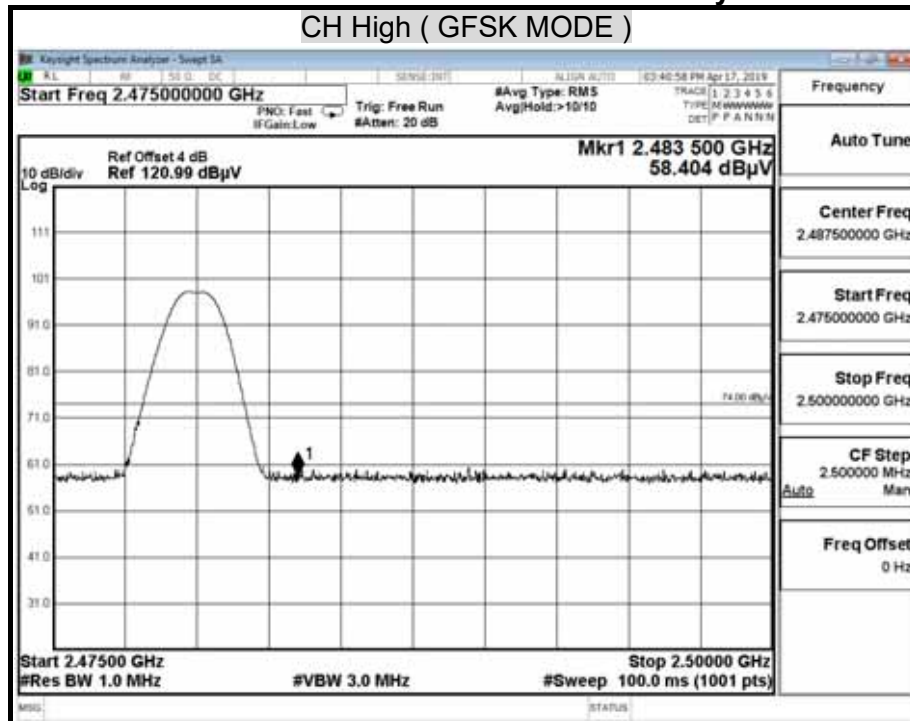


Detector mode : Average

Polarity : Horizontal

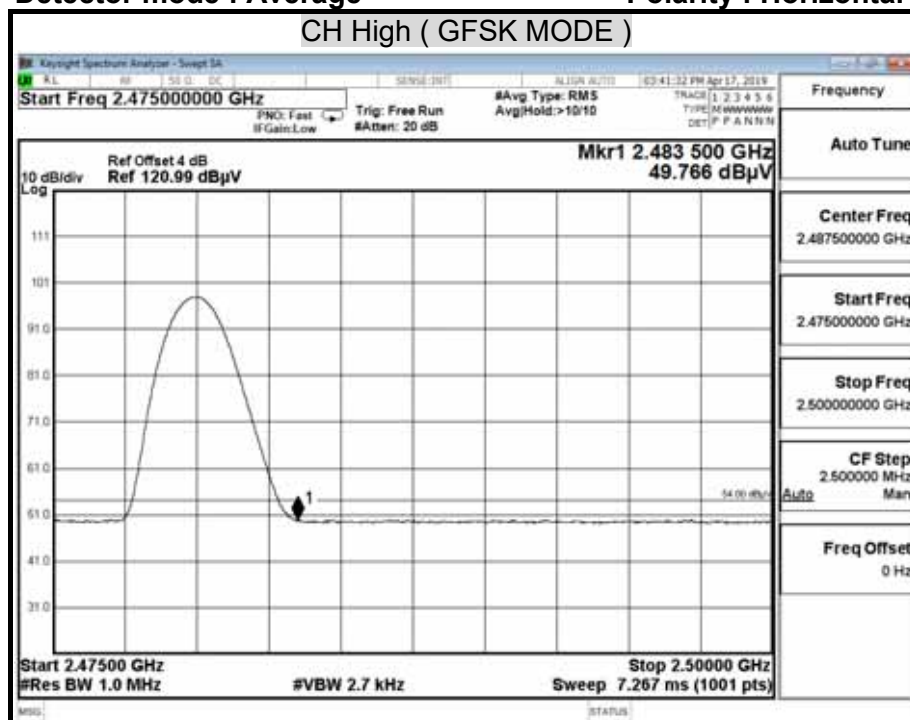


Detector mode : Peak

Polarity : Vertical

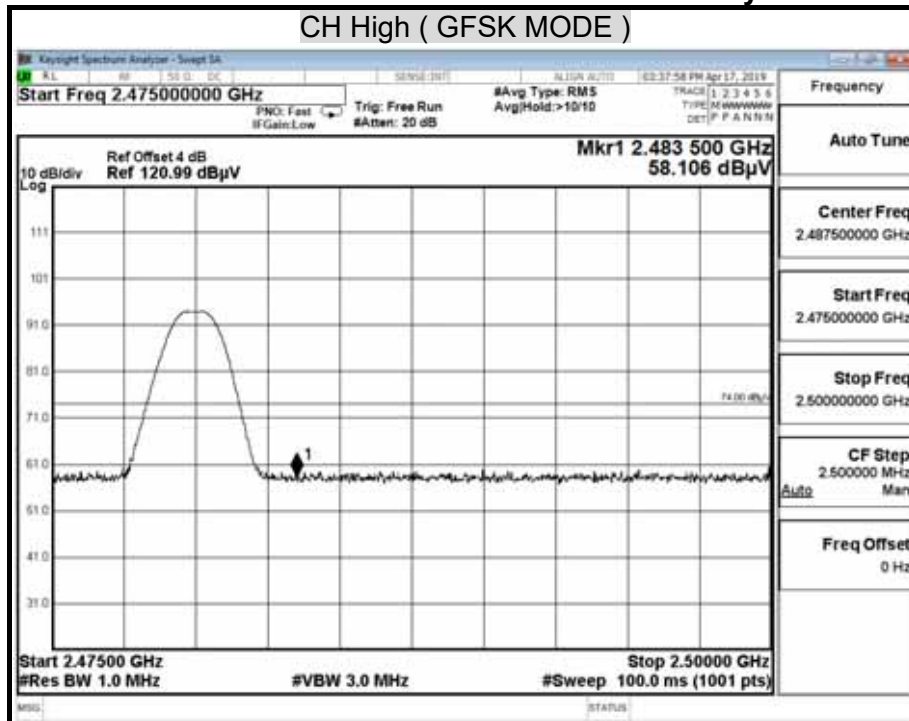

Detector mode : Average

Polarity : Vertical

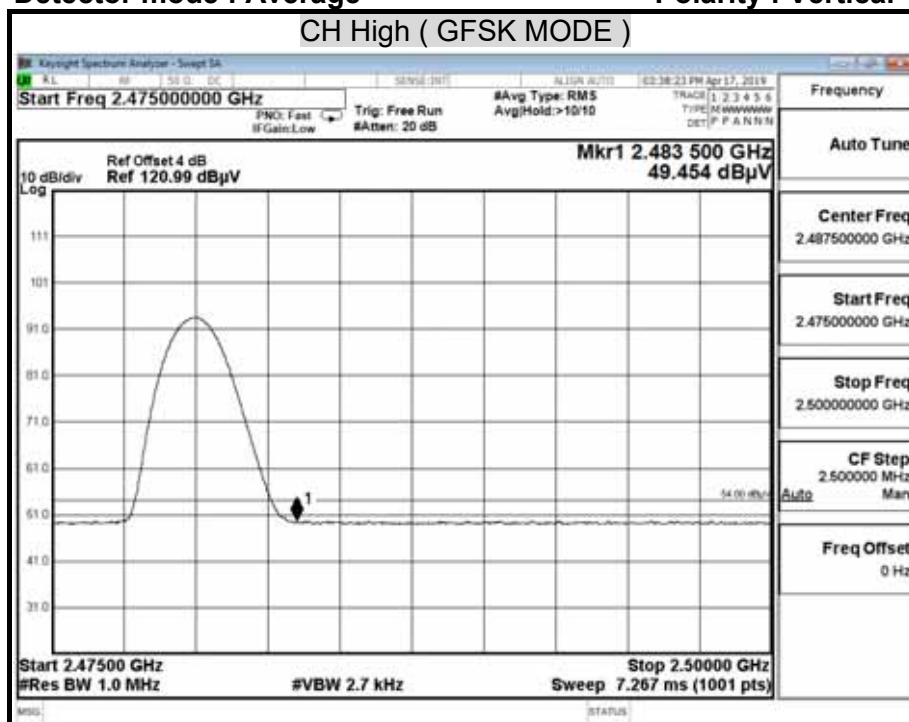

8.7 POWERLINE CONDUCTED EMISSIONS

LIMITS

§ 15.207 (a) Except as shown in paragraph (b) and (c) this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.


The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted limit (dB μ v)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.5 - 5	56	46
5 - 30	60	50

TEST EQUIPMENTS

The following test equipments are used during the conducted power line tests :

Conducted Emission room #1					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
BNC Coaxial Cable	CCS	BNC50	11	02/25/2019	02/24/2020
EMI Test Receiver	R&S	ESCS 30	100348	02/19/2019	02/18/2020
LISN	SCHWARZBECK	NNLK8130	8130124	01/02/2019	01/01/2020
LISN	FCC	FCC-LISN-50-32-2	08009	05/24/2019	05/23/2020
Pulse Limiter	R&S	ESH3-Z2	100116	02/25/2019	02/24/2020
Software	e3(6.101222)				

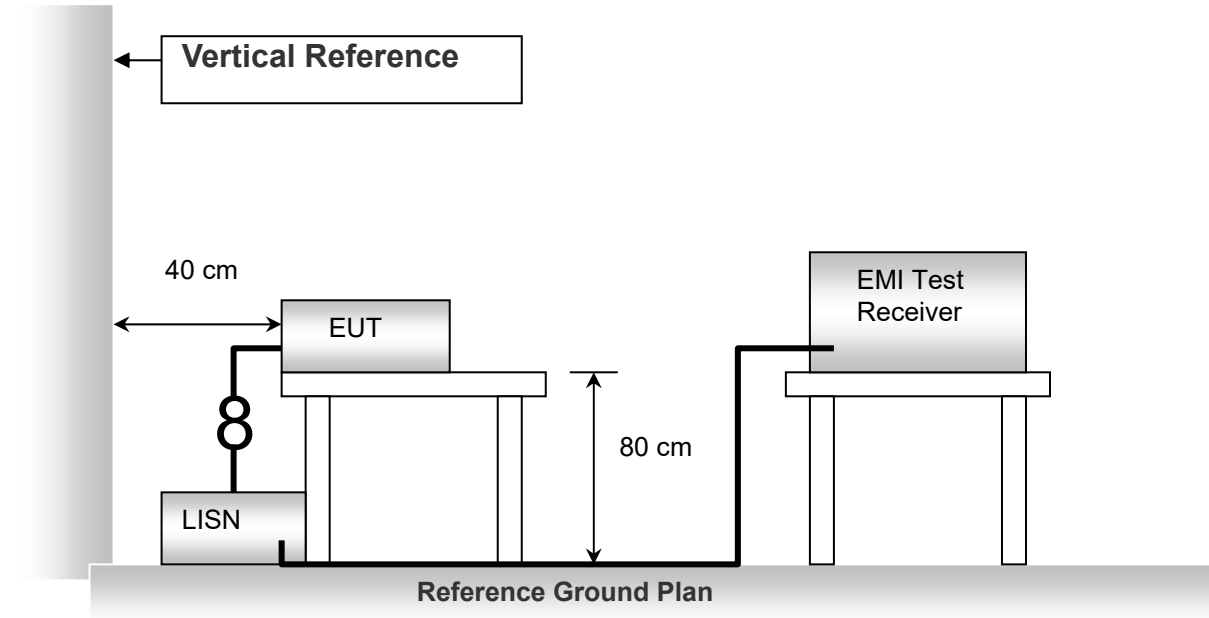TEST SETUP**TEST PROCEDURE**

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80cm above the horizontal ground plane. The EUT IS CONFIGURED IN ACCORDANCE WITH ANSI C63.10.

The resolution bandwidth is set to 9 kHz for both quasi-peak detection and average detection measurements.

Line conducted data is recorded for both NEUTRAL and LINE.

TEST RESULTS


No non-compliance noted.

Test Voltage: 110Vac, 60Hz

Model No.	Force	Test Mode	Normal Operation
Environmental Conditions	25 , 59% RH	Resolution Bandwidth	9 kHz
Tested by	Event Cheng		

Line

(The chart below shows the highest readings taken from the final data.)

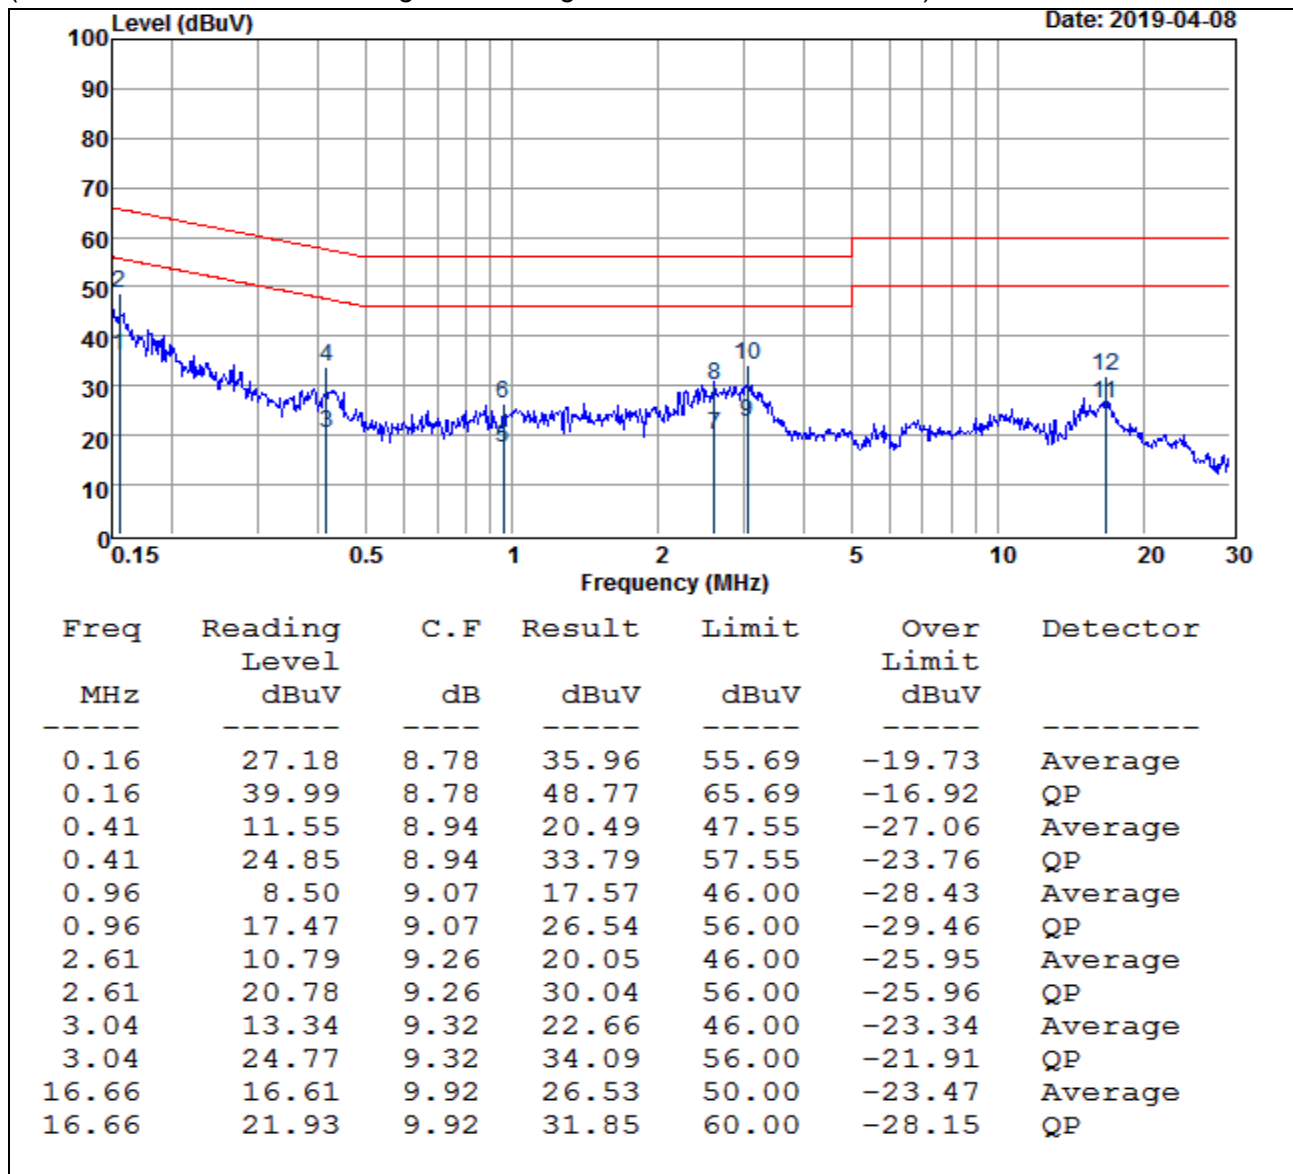
**NOTE:**

1. Measured Level (dBuV) = LISN Factor (dB) + Cable Loss (dB)+ Meter Reading (dBuV)
2. Over Limit (dBuV) = Measured Level (dBuV) – Limits (dBuV)

Model No.	Force	Test Mode	Normal Operation
Environmental Conditions	25 , 59% RH	Resolution Bandwidth	9 kHz
Tested by	Event Cheng		

Neutral

(The chart below shows the highest readings taken from the final data.)

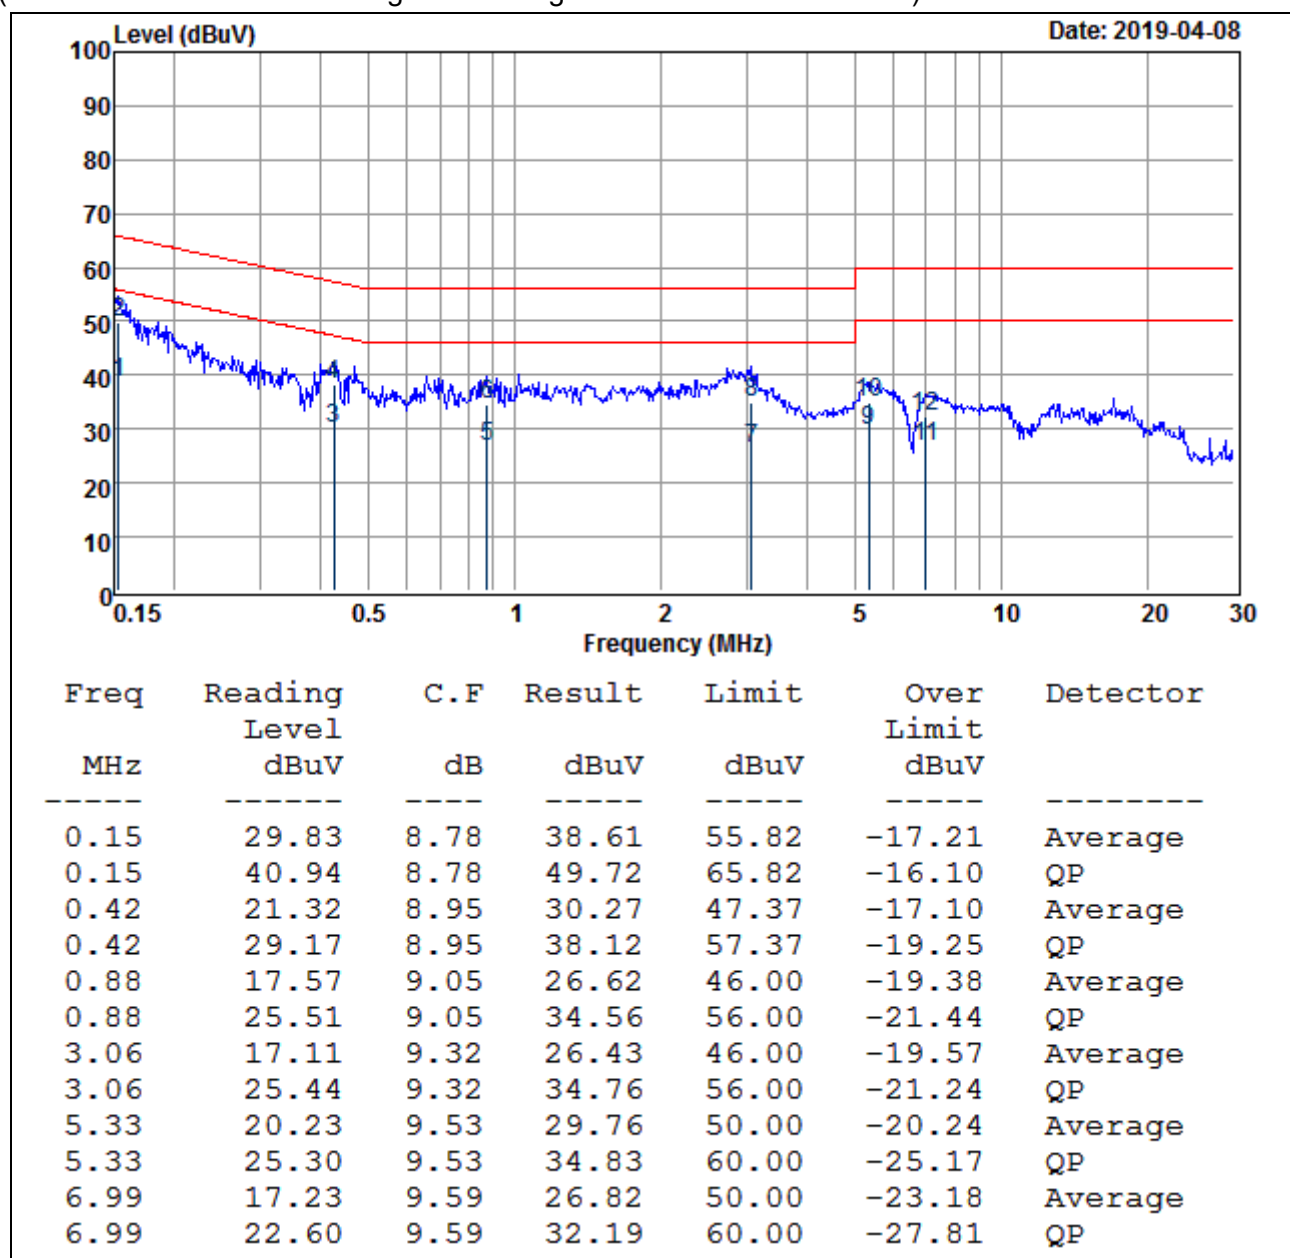**NOTE:**


1. Measured Level (dBuV) = LISN Factor (dB) + Cable Loss (dB)+ Meter Reading (dBuV)
2. Over Limit (dBuV) = Measured Level (dBuV) – Limits (dBuV)

Test Voltage: 230Vac, 50Hz

Model No.	Force	Test Mode	Normal Operation
Environmental Conditions	25 , 59% RH	Resolution Bandwidth	9 kHz
Tested by	Event Cheng		

Line

(The chart below shows the highest readings taken from the final data.)

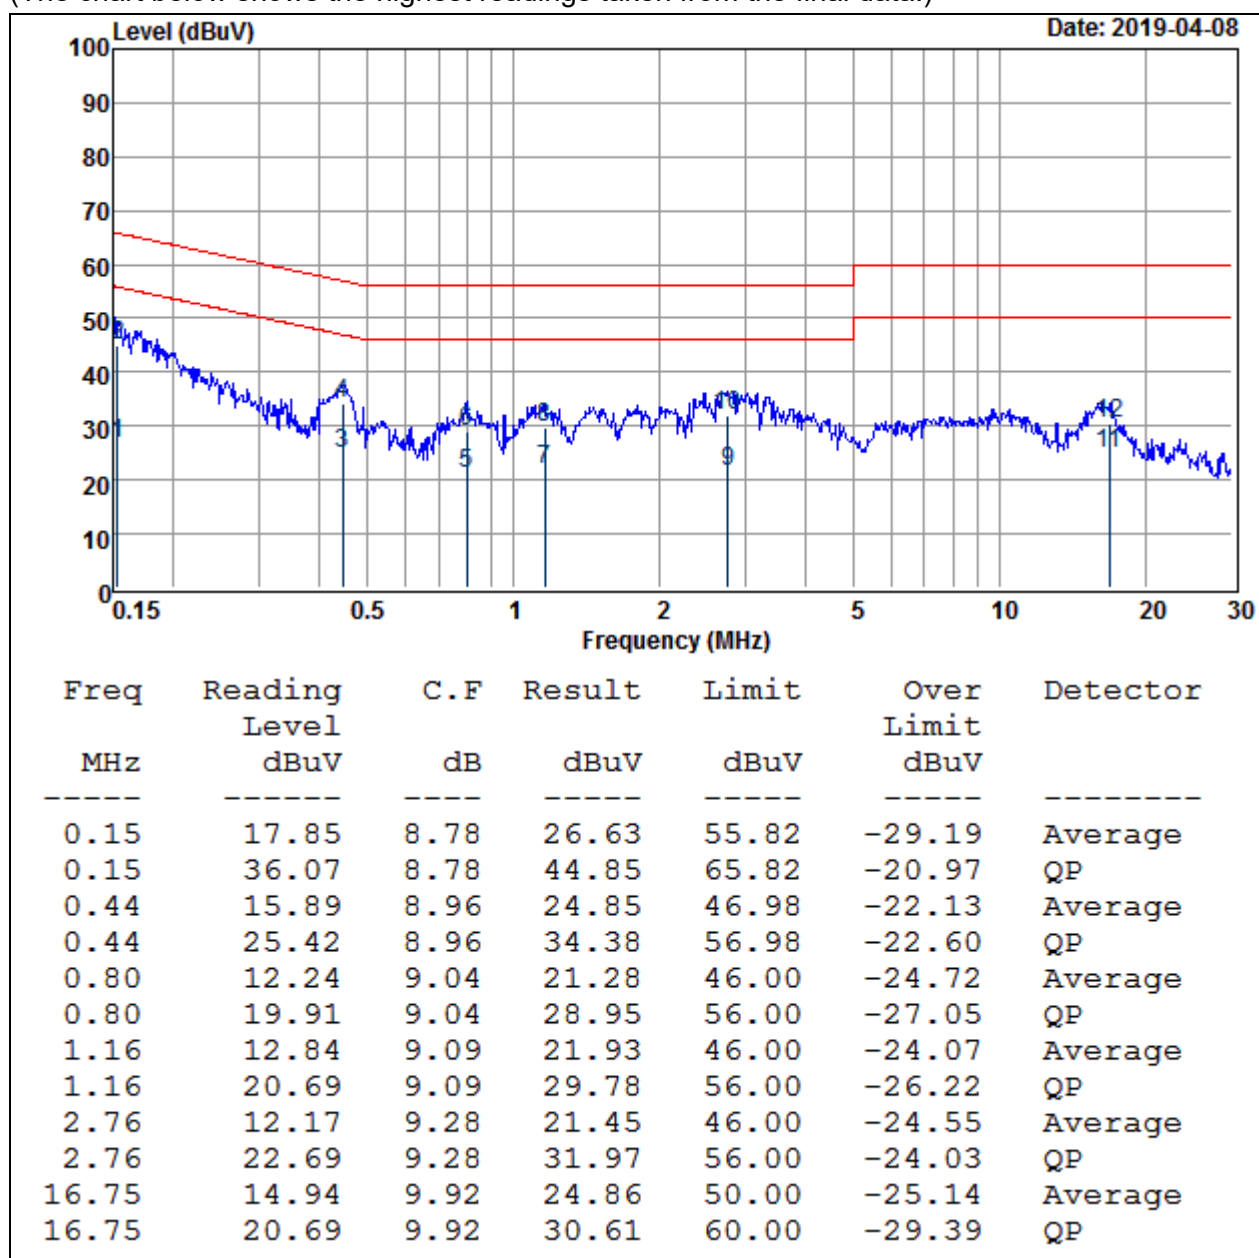
**NOTE:**

1. Measured Level (dBuV) = LISN Factor (dB) + Cable Loss (dB)+ Meter Reading (dBuV)
2. Over Limit (dBuV) = Measured Level (dBuV) – Limits (dBuV)

Model No.	Force	Test Mode	Normal Operation
Environmental Conditions	25 , 59% RH	Resolution Bandwidth	9 kHz
Tested by	Event Cheng		

Neutral

(The chart below shows the highest readings taken from the final data.)

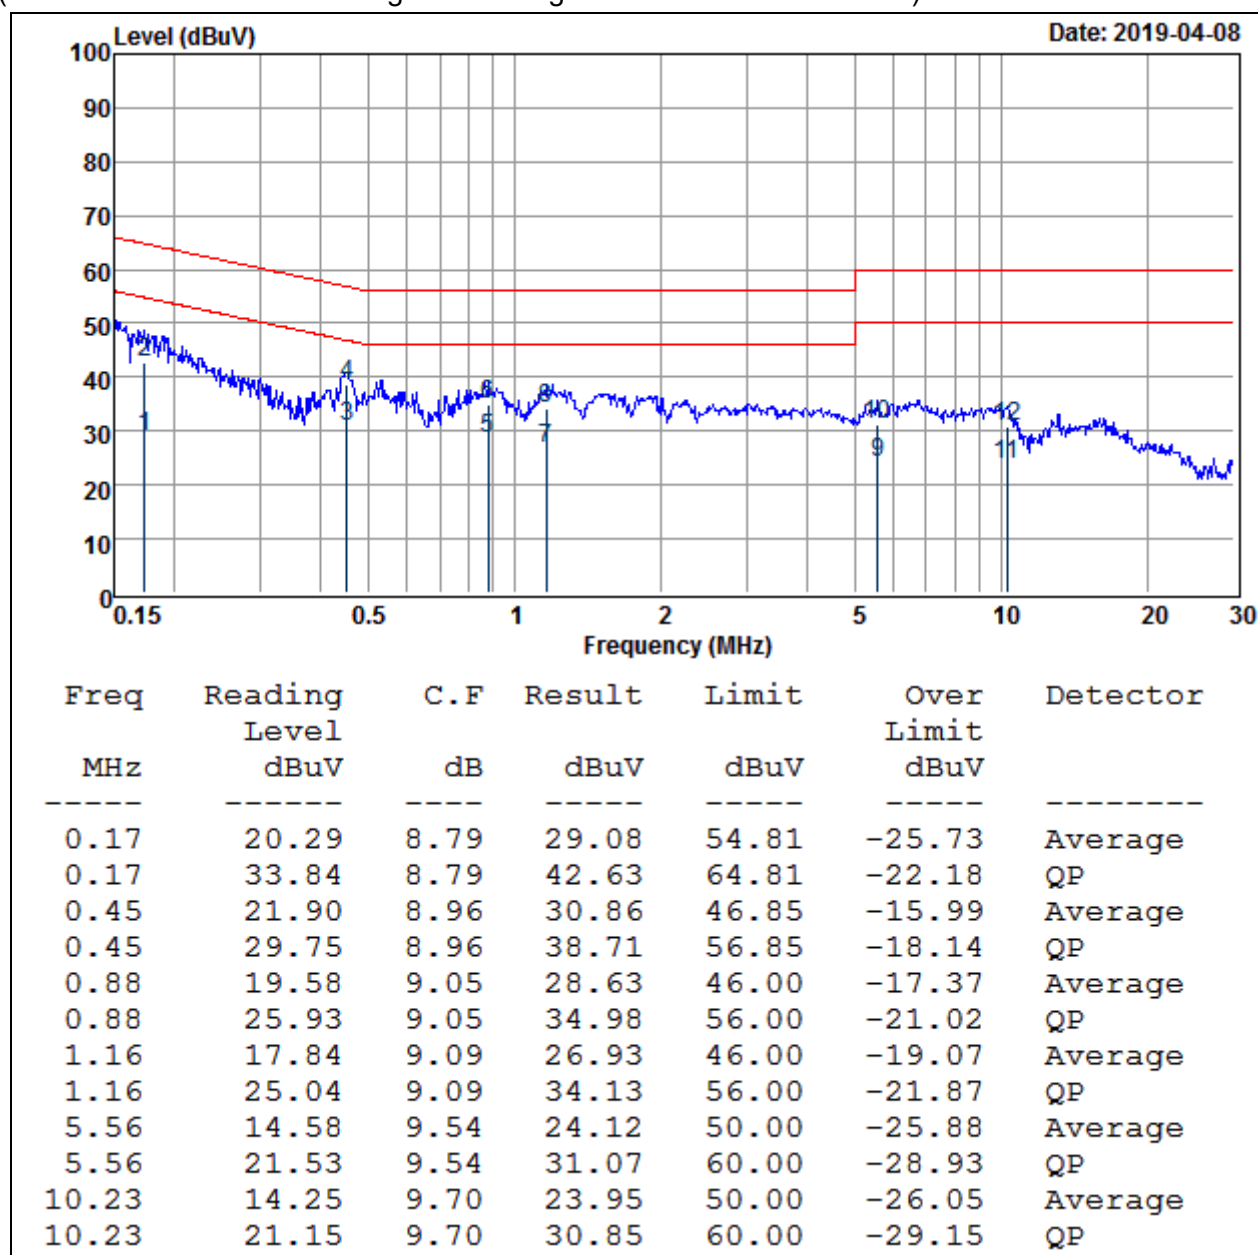**NOTE:**

1. Measured Level (dBuV) = LISN Factor (dB) + Cable Loss (dB)+ Meter Reading (dBuV)
2. Over Limit (dBuV) = Measured Level (dBuV) – Limits (dBuV)



Report No.: T190401N03-RP1

Page: 122 / 128
Rev.: 02

9. ANTENNA REQUIREMENT

9.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device, no capability to be accessible by the user.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

9.2 ANTENNA CONNECTED CONSTRUCTION

Type: PCB Antenna
Model: WLA-EM-1508-0008-B
Manufacturer: BRITO
Gain: 4.6 dBi

=== END of Report ===