

HEARING AID COMPATIBILITY Volume Control Evaluation Report

FCC ID : 2ACCJH183
Equipment : GSM/UMTS/LTE/NR Mobile phone
Model Name : T803E
Brand Name : TCL
Receive Volume Control Results : PASS
Lowest Conversational Gain : 2N: 8.51 dB
8N: 12.82 dB
Applicant : TCL Communication Ltd.
5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong
Manufacturer : TCL Communication Ltd.
5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong
FCC 47 CFR §20.19
Standard : ANSI C63.19-2019
ANSI/TIA-5050-2018
Date Tested : Mar. 18, 2024 ~ Mar. 28, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in ANSI C63.19-2019 / 47 CFR Part 20.19 / ANSI/TIA-5050-2018 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.



Approved by: Si Zhang

Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



Table of Contents

1. General Information	4
2. Testing Location.....	5
3. Applied Standards	5
4. Air Interface and Operating Mode.....	6
5. Volume Control Requirements	7
6. System Description.....	8
7. Volume Control Test Procedure	9
8. Test Equipment List	10
9. Device Support Codec.....	11
10. Volume Control Evaluation Results.....	12
11. Uncertainty Assessment	25
12. References.....	26

Appendix A. Volume Control Evaluation Results

Appendix B. Calibration Certificate

Appendix C. Test Setup Photos



History of this test report

Report No.	Version	Description	Issued Date
HA422702C	Rev. 01	Initial issue of report	Apr. 07, 2024



1. General Information

Product Feature & Specification	
Applicant Name	TCL Communication Ltd.
Equipment Name	GSM/UMTS/LTE/NR Mobile phone
Brand Name	TCL
Model Name	T803E
IMEI Code	IMEI1: 353318350001839 IMEI2: 353318350001862
FCC ID	2ACCJH183
HW	05
SW	AGS7
EUT Stage	Identical Prototype
Frequency Band	GSM850: 824 MHz ~ 849 MHz GSM1900: 1850 MHz ~ 1910 MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 42: 3450 MHz ~ 3550 MHz, 3550 MHz ~ 3600 MHz LTE Band 48: 3550 MHz ~ 3700 MHz LTE Band 66: 1710 MHz ~ 1780 MHz 5G NR n2: 1850 MHz ~ 1910 MHz 5G NR n5: 824 MHz ~ 849 MHz 5G NR n7: 2500 MHz ~ 2570 MHz 5G NR n66: 1710 MHz ~ 1780 MHz 5G NR n77: 3450 MHz ~ 3550 MHz, 3550 MHz ~ 3700 MHz, 3700 MHz ~ 3980 MHz 5G NR n78: 3450 MHz ~ 3550 MHz, 3550 MHz ~ 3700 MHz, 3700 MHz ~ 3800 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5720 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC: 13.56 MHz
Mode	GSM/GPRS/EGPRS AMR / RMC 12.2Kbps HSDPA HSUPA DC-HSDPA HSPA+ (16QAM uplink is supported) LTE: QPSK, 16QAM, 64QAM, 256QAM 5G NR : CP-OFDM / DFT-s-OFDM, PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM WLAN 2.4GHz : 802.11b/g/n HT20/ HT40 WLAN 5GHz : 802.11a/n/ac HT20/HT40/VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE NFC: ASK



2. Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Testing Laboratory			
Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	AC01-KS	CN1257	314309

3. Applied Standards

- FCC CFR47 Part 20.19
- ANSI C63.19-2019
- FCC KDB 285076 D01 HAC Guidance v06r04
- FCC KDB 285076 D04 Volume Control v02
- FCC KDB 285076 D05 CG Interim Waiver DA 23-914 v01
- ANSI/TIA-5050-2018

4. Air Interface and Operating Mode

Air Interface	Band MHz	Type	C63.19 Volume Control Tested	Simultaneous Transmitter	Name of Voice Service	Power Reduction
GSM	GSM850	VO	Yes	WLAN, BT	CMRS Voice	No
	GSM1900			WLAN, BT		No
	EDGE850	VD	No	WLAN, BT	Google Meet ⁽¹⁾ Google Fi	No
	EDGE1900					No
UMTS	Band 2	VO	Yes	WLAN, BT	CMRS Voice	No
	Band 4			WLAN, BT		No
	Band 5			WLAN, BT		No
	HSPA	VD	No	WLAN, BT	Google Meet ⁽¹⁾ Google Fi	No
LTE (FDD)	Band 2	VD	Yes	5G NR, WLAN, BT	VoLTE / Google Meet ⁽¹⁾ Google Fi	No
	Band 4			5G NR, WLAN, BT		No
	Band 5			5G NR, WLAN, BT		No
	Band 7			5G NR, WLAN, BT		No
	Band 12			5G NR, WLAN, BT		No
	Band 13			5G NR, WLAN, BT		No
	Band 17			5G NR, WLAN, BT		No
	Band 25			5G NR, WLAN, BT		No
	Band 26			5G NR, WLAN, BT		No
LTE (TDD)	Band 38	VD	Yes	5G NR, WLAN, BT	VoLTE / Google Meet ⁽¹⁾ Google Fi	No
	Band 41			5G NR, WLAN, BT		No
	Band 42			5G NR, WLAN, BT		No
	Band 48			5G NR, WLAN, BT		No
5G NR	n2	VD	Yes	LTE, WLAN, BT	VoNR / Google Meet ⁽¹⁾ Google Fi	No
	n5			LTE, WLAN, BT		No
	n7			LTE, WLAN, BT		No
	n66			LTE, WLAN, BT		No
	n71			LTE, WLAN, BT		No
	n77			LTE, WLAN, BT		No
	n78			LTE, WLAN, BT		No
Wi-Fi	2450	VD	Yes	GSM, WCDMA, LTE, 5G NR	VoWiFi / Google Meet ⁽¹⁾ Google Fi	No
	5200			GSM, WCDMA, LTE, 5G NR, BT		No
	5300			GSM, WCDMA, LTE, 5G NR, BT		No
	5500			GSM, WCDMA, LTE, 5G NR, BT		No
	5800			GSM, WCDMA, LTE, 5G NR, BT		No
BT	2450	DT	No	GSM, WCDMA, LTE, 5G NR, 5G WLAN	NA	No

Type Transport:

VO= Voice only

DT= Digital Transport only (no voice)

VD= CMRS and IP Voice Service over Digital Transport

Remark

- Per KDB 285076 D05, Waiver DA 23-914 only requires conversational gain compliance for CMRS narrowband and CMRS wideband voice codecs as stated below. All other codecs either part of 3GPP set such as full-band and super-wideband codecs or OTT codecs are to be documented in the test report but not required to comply with the TIA 5050 Volume Control Standard.
- The device have similar frequency in some LTE bands: LTE B12/17, 5/26, 4/66, 2/25, 38/41, since the supported frequency spans for the smaller LTE bands are completely cover by the larger LTE bands, therefore, only larger LTE bands were required to be tested for hearing-aid compliance.
- The device have similar frequency in some LTE and NR bands: LTE B2/B25, B4/B66, B5/B26, B12/B17, B38/41, 5G NR n77/78, since the supported frequency spans for the smaller LTE and NR bands are completely cover by the larger LTE and NR bands, therefore, only larger LTE and NR bands were required to be tested for hearing-aid compliance.
- The device has two batteries. For battery 1/2 only suppliers are different, so only battery 1 was chosen to perform full testing and battery 2 verified the worst case of battery 1.

5. Volume Control Requirements

<Conversational Gain>

- Per KDB 285076 D05, With a mounting force of 8N, the DUT shall have at least one volume control setting that will produce a conversational gain of ≥ 6 dB
- Per KDB 285076 D05, With a mounting force of 2N, the DUT shall have at least one volume control setting that will produce a conversational gain of ≥ 6 dB.
- Calculate the Conversational Gain by subtracting 70 dB from the measured dBSPL.
[Conversational Gain = (Measured dBSPL Level – 70 dBSPL) dB]

<Receive Distortion And Noise Performance>

With a mounting force of 8N and 2N, the ratio of the stimulus signal power to the 100 Hz to 8000 Hz total A-weighted distortion and noise power shall be ≥ 20 dB when tested over the range of 1/3 octave band center frequencies:

- Narrowband transmission mode: Each 1/3 octave band center frequency from 400 Hz to 3150 Hz
- Wideband transmission mode: Each 1/3 octave band center frequency from 250 Hz to 5000 Hz
- Per KDB 285076 D05, choose one narrowband and one wideband for all voice services, bands of operation and air interfaces over which it operates using one codec bit rate of the applicant's choosing to meet Receive Distortion And Noise Performance requirement.

<Receive Acoustic Frequency Response Performance>

For the volume control settings determined in ANSI/TIA-5050-2018 section 5.1.1 with a mounting force of 8N and 2N, the receive frequency response shall be measured at the DRP in 1/12 octave bands. After translation to the FF, it shall fall between the applicable upper and lower limits. The exact limit values at any 1/12 octave band center frequency falling between two consecutive points specified in the table may be calculated using the formula given in Eq 2 below:

$$X_f = X_1 + (X_2 - X_1) * \left(\frac{\log_{10} f - \log_{10} f_1}{\log_{10} f_2 - \log_{10} f_1} \right) \quad \text{Eq 2}$$

Where

X_f = limit value at frequency f

X_1 = limit value at frequency f_1 as given in table

X_2 = limit value at frequency f_2 as given in table

For Narrowband: The 1/12 octave band frequency response after translation to the FF shall fall between the upper and lower limits given in Table 1.

For Wideband: The 1/12 octave band frequency response after translation to the FF shall fall between the upper and lower limits given in Table 2.

Table 1 – Narrowband Receive Frequency Response Limits

Lower Limit Frequency (Hz)	Lower Limit (dB)	Upper Limit Frequency (Hz)	Upper Limit (dB)
300	-6	100	+6
3400	-6	4000	+6



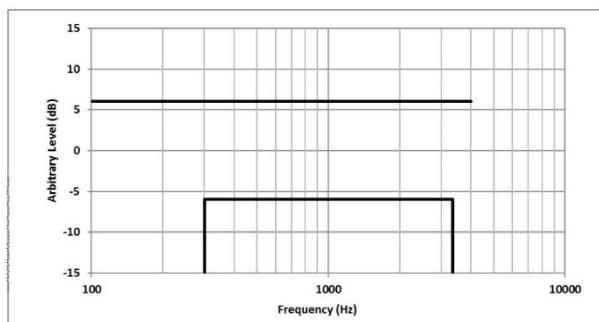


Table 2 – Wideband Receive Frequency Response Limits

Lower Limit Frequency (Hz)	Lower Limit (dB)	Upper Limit Frequency (Hz)	Upper Limit (dB)
200	-10	100	+6
300	-6	1000	+6
5000	-6	2000	+8
6300	-12	8000	+8

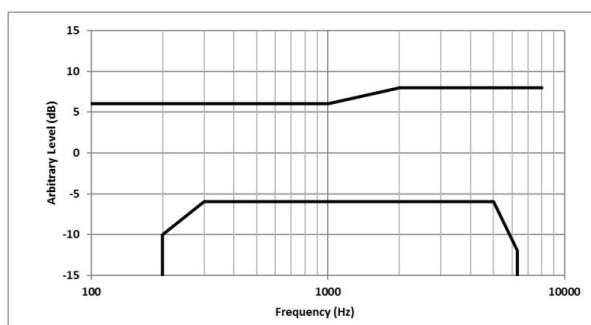

6. System Description

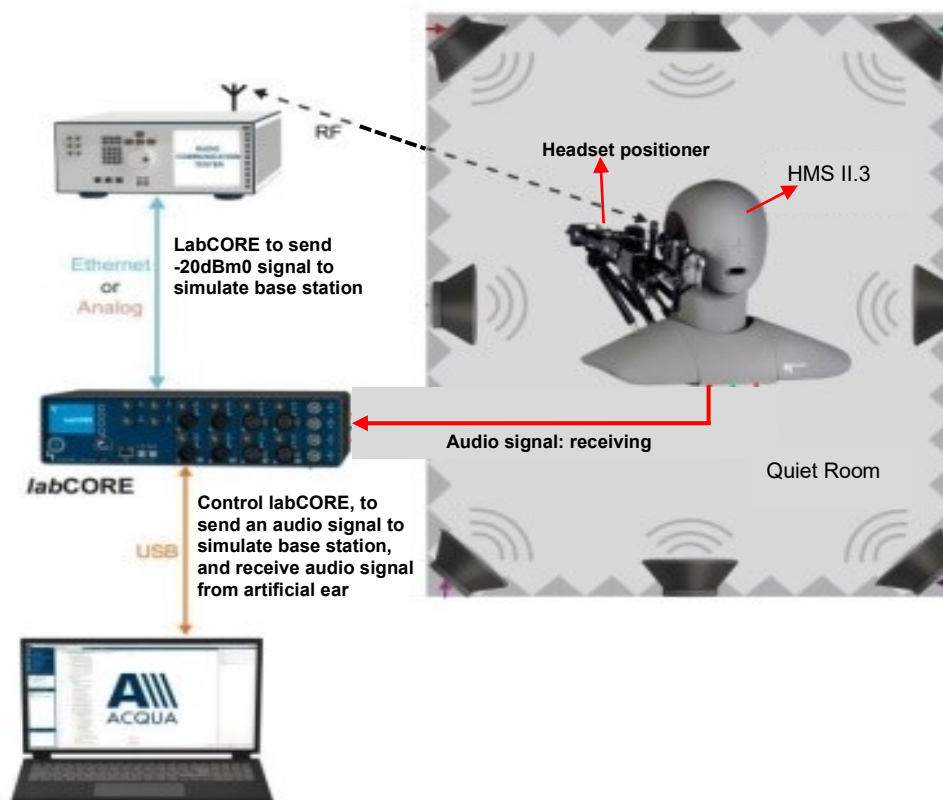

System Components:

Name of Equipment	Equipment Description
labCORE Audio Analyzer	labCORE is a high-precision measurement hardware platform. It provides multiple channels, a wide variety of analog and digital inputs and outputs, high processing power and high-performance interfaces. labCORE is an all-in-one solution for measuring the voice and audio quality of a wide range of devices. labCORE is used in conjunction with the communication quality analysis system ACQUA. Connected to a computer via USB (Plug & Play), it is configured and controlled by ACQUA. Combinations with other HEAD acoustics hardware platforms and software applications are possible. labCORE settings are controlled via the intuitive ACQUA settings. They can be stored and assigned to selectable measurement sequences.
HMS II.3, artificial head	HMS II.3 supports measurements in sending and receiving direction. For this purpose, the artificial head is equipped with an impedance simulator in the right ear and a two-way mouth loudspeaker – both meeting the requirements in the recommendations ITU-T P.57 and P.58
Handset positioner	Control the Newton's force(2N/8N) of the mobile phone on the artificial head
ACQUA, TIA-5050 Test Software	The SW version5.1.200 can be evaluated TIA-5050 section5.1, 5.2, 5.3
R&S base station simulator	RF connect with the mobile phone

7. Volume Control Test Procedure

<Conversational Gain>

1. Configure the DUT with a mounting force of 8N and test equipment as shown in section 5 in an active call state with the applicable codec for the transmission mode under test.
2. Set the DUT volume control to the maximum setting.
3. If the DUT has an adjustable tone control feature, a tone control setting that meets the frequency response requirements in ANSI/TIA-5050 section 5.3.1 shall be used.
4. The ACQUA system is applied the real speech test signal at a level of -20 dBm₀ at the RETP and measure the acoustic output at the Drum Reference Point (DRP) over one complete sequence of the test signal.
5. Translate the measurement made at the DRP to the Free Field (FF) using the translation data in ANSI/TIA-5050 Annex B.
6. Over the applicable frequency band, determine the ASL in dBSPL for the resulting sound pressure level in accordance with Method B of ITU-T Recommendation P.56:
 - a. Narrowband 100 Hz through 4000 Hz.
 - b. Wideband 100 Hz through 7720 Hz.Calculate the Conversational Gain by subtracting 70 dB from the measured dBSPL.
[Conversational Gain = (Measured dBSPL Level – 70 dBSPL) dB]
7. Measure the output distortion per ANSI/TIA-5050 clause 5.2. If a distortion failure occurs at the maximum volume control setting, reduce the volume control setting and repeat the measurement to determine if a setting can be found for which the conversational gain requirement is met without a distortion failure.
8. Repeat steps 2-8 with a mounting force of 2N.

<Receive Distortion And Noise Performance>

1. Configure the DUT with a mounting force of 8N and test equipment as shown in section in an active call state with the applicable codec for the transmission mode under test.
2. Receive distortion and noise is measured using the PN-SDNR procedure as described in ANSI/TIA-5050 Annex A.
3. To ensure DUT activation, the ACQUA system is applied the real speech test signal at a level of -20 dBm₀ followed immediately by the initial 1/3 octave center frequency PN test signal in ANSI/TIA-5050 Table A.1 based on the narrowband or wideband operating mode. Measure the acoustic output at the DRP over the complete sequence of the PN test signal.
4. Translate the measurement made at the DRP to the FF using the translation data in ANSI/TIA-5050 Annex B.
5. Calculate the acoustic output unweighted total signal power of the stimulus measurement band as described in ANSI/TIA-5050 A.2.
6. Calculate the notched A-weighting distortion and noise components as described in ANSI/TIA-5050 A.3.
7. Calculate the ratio of the signal power to the total A-weighted distortion and noise power using ANSI/TIA-5050 Eq A-1.
8. Repeat for each of the remaining 1/3 octave center frequencies in Table A.1 based on the narrowband or wideband operating mode.
9. Repeat steps 2-8 with a mounting force of 2N.
10. The measured value that the system equipment will automatically calculate or convert to define whether it meets the requirements of ANSI/TIA-5050 annex A and annex B.

<Receive Acoustic Frequency Response Performance>

1. Configure the DUT with a mounting force of 8N and test equipment as shown in Figure 1 in an active call state with the applicable codec for the transmission mode under test.
2. If the DUT has an adjustable tone control feature the initial measurement is to be performed with the default tone control setting.
3. The ACQUA system is apply the real speech test signal with a level of -20 dBm0 at the RETP.
4. Capture the frequency spectrum at the DRP of the HATS using real-time analysis with 1/12 octave bands over the frequency range from 100 Hz to 4000 Hz for narrowband measurements, or over the frequency range from 100 Hz to 8000 Hz for wideband measurements, averaged over the entire duration of the test signal.
5. Transform the DRP frequency spectrum measurement to the FF (include ANSI/TIA-5050 Annex B).
6. Divide the 1/12 octave measurement data by the 1/12 octave frequency spectrum of the test signal at the RETP and present the measurement in terms of dB(Pa/V).
7. Apply the applicable frequency response limits to determine compliance.
8. If the default tone control setting does not meet the requirement, repeat the above steps for other tone control settings to determine a tone control setting that meets the requirements.
9. Repeat with a mounting force of 2N.
10. The receive acoustic frequency response performance was perform at max tone control setting.

8. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
HEAD acoustic GmbH	Fullband artificial head	HMS II.3	12306242	2023/11/2	2024/11/1
HEAD acoustic GmbH	Audio Analyzer	labCORE	77000544	2023/10/27	2024/10/26
G.R.A.S	Sound Calibrator	42AB	31744	2023/10/27	2024/10/26
R&S	Base Station	CMW500	143030	2023/7/5	2024/7/4
R&S	Base Station	CMX500	100303	2023/7/6	2024/7/5
Testo	Thermo-Hygrometer	608-H1	1241332126	2023/7/10	2024/7/9

9. Device Support Codec

General Note:

1. Per KDB 285076 D04, it is expected to investigate and document only the worst-case test conditions and results. Each submitted test report shall document the codec type (i.e., NB, WB, EVS, etc.), every air interface (i.e., LTE, 5G NR, WI-FI) and band supported for the worst-case codec bit rate, band channel, bandwidth, air interface bit rate, subcarrier spacings, and resource blocks
2. Through Internal codec and air interface configuration investigation (e.g. (i.e., NB, WB, EVS codec, bandwidth, modulation data rate, subcarrier spacing, and resource blocks) that the worst investigate results of codec, air interface configuration etc. were include in section10
3. Per KDB 285076 D05, Waiver DA 23-914 only requires conversational gain compliance for CMRS narrowband and CMRS wideband voice codecs as stated below. All other codecs either part of 3GPP set such as full-band and super-wideband codecs or OTT codecs are to be documented in the test report but not required to comply with the TIA 5050 Volume Control Standard
4. If a handset does not have a wideband codec or the handset only has an AMR wideband codec, then the test report must document this fact and the passing requirement under these circumstances for the wideband codec test is waived. The passing results for the distortion/noise and frequency response tests must be reported in the handset's test report

GSM Codec/bitrate		
Codec	AMR NB	EFR NB
Bitrate	4.75kbps	12.2kbps
	5.15kbps	
	5.9kbps	
	6.7kbps	
	7.4kbps	
	7.95kbps	
	10.2kbps	
	12.2kbps	

WCDMA Codec/bitrate		
Codec	AMR NB	AMR WB
Bitrate	4.75kbps	6.60kbps
	5.15kbps	8.85kbps
	5.9kbps	12.65kbps
	6.7kbps	14.25kbps
	7.4kbps	15.85kbps
	7.95kbps	18.25kbps
	10.2kbps	19.85kbps
	12.2kbps	23.05kbps
		23.85kbps

VoLTE/VoNR/VoWiFi Codec/bitrate					
Codec	AMR NB	AMR WB	EVS NB	EVS WB	EVS SWB
Bitrate	4.75kbps	6.60kbps	5.9kbps	5.9kbps	9.6kbps
	5.15kbps	8.85kbps	7.2kbps	7.2kbps	13.2kbps
	5.9kbps	12.65kbps	8kbps	8kbps	
	6.7kbps	14.25kbps	9.6kbps	9.6kbps	
	7.4kbps	15.85kbps	13.2kbps	13.2kbps	
	7.95kbps	18.25kbps	16.4kbps		
	10.2kbps	19.85kbps	24.4kbps		
	12.2kbps	23.05kbps			
		23.85kbps			

Google meet Codec/bitrate investigation	
Codec	Opus (Full Band)
Bitrate	6Kbps~75Kbps

10. Volume Control Evaluation Results

General Note:

1. All the test result was done at quiet room and ambient noise is less than 40dBA.
2. Per KDB 285076 D05, in section2 addresses the technical testing requirements for the conversational gain, distortion, and frequency response tests that amends KDB 285076 D04 Volume Control under the conditions of the limited-term waiver DA 23-914, as follows:
 - a. Under the waiver, only CMRS narrowband and CMRS wideband voice codecs are required to comply with the volume control requirements of the TIA 5050-2018 Volume Control Standard as amended as follows:
 1. For the 2N mounting force test, one narrowband and one wideband voice codec embedded with the handset must pass with at least one volume control setting with a conversational gain of ≥ 6 dB for all voice services, bands of operation and air interfaces over which it operates using one codec bit rate of the applicant's choosing
 2. For the 8N mounting force test, one narrowband and one wideband voice codec embedded with the handset must pass with at least one volume control setting with a conversational gain of ≥ 6 dB 8 for all voice services, bands of operation and air interfaces over which they operate but is not required to meet or exceed the full 18 dB of conversational gain specified in section 5.1.1 of the TIA 5050 Volume Control Standard using one codec bit rate of the applicant's choosing
 - b. For all other narrowband and wideband codecs not evaluated in 2.a. above, TIA 5050-2018 Receive Distortion and Noise Performance and Receive Acoustic Frequency Response Performance evaluations are not required; however, these codecs shall be assessed for conversational gain and documented in the test report at the 2N and 8N levels with a gain of ≥ 6 dB for all voice services, bands of operation and air interfaces over which they operate. The handset volume setting used to comply with 2.a. shall be used for these other CMRS codec evaluations.
 - c. Any other codec for voice services embedded in the handset, not identified in 2.a. and 2.b. above, is not required to comply or demonstrate in the test reports for conversational gain.
3. All the test results were set the DUT volume control to the maximum setting.
4. Conversational Gain = (measured dBSPL Level – 70 dBSPL) dB
5. Through Internal radio configuration investigation (e.g. bandwidth, modulation data rate, subcarrier spacing, and resource blocks) that the worst radio configuration was document as below table.
6. Per KDB 285076 D05 and document of DA 23-914 item 30, the manufacturer only perform EVS codec to meet distortion/noise and frequency response tests at the 2N and 8N force levels.
7. The device have similar frequency in some LTE and NR bands: LTE B12/17, 5/26, 4/66, 2/25, 38/41, 5G NR n77/78 since the supported frequency spans for the smaller LTE and NR bands are completely cover by the larger LTE and NR bands, therefore, only larger LTE and NR bands were required to be tested for hearing-aid compliance.
8. The worst case results of each air interface include in appendix A.

The 2N mounting force lowest conversational gain is 8.51 dB with a hearing aid.

The 8N mounting force lowest conversational gain is 12.82 dB without a hearing aid.



<Evaluation results for KDB 285076 D05 2.a>

<LTE>

HAC (Volume control) Test Record										Receive Volume Control Performance					Receive Distortion and Noise Performance				Receive Acoustic Frequency Response Performance
Plot No.	Air Interface	BW (MHz)	Modulation / Mode	RB Size	RB offset	Channel	Battery	Audio Codec	Mounting Force (N)	Measured dB SPL Level	Conversational Gain (Measured dB SPL Level - 70 dB SPL) (dB)	Limit (dB)	Margin to Limit (dB)	PASS/FAIL	Minimum PN-SDNR (dB) Doc. Section	Limit (dB)	Margin to Limit (dB)	PASS/FAIL	Free Field (FF)
	LTE Band 7	20M	QPSK	1	0	21100	1	EVS NB 24.4kbps	2N	79.47	9.47	≥6	3.47	PASS	29.42	≥20	9.42	PASS	1.6
	LTE Band 7	20M	QPSK	1	0	21100	1	EVS NB 24.4kbps	8N	84.27	14.27	≥6	8.27	PASS	26.95	≥20	6.95	PASS	1.92
	LTE Band 7	20M	QPSK	1	0	21100	1	EVS WB 13.2kbps	2N	78.7	8.7	≥6	2.7	PASS	27.94	≥20	7.94	PASS	0.25
	LTE Band 7	20M	QPSK	1	0	21100	1	EVS WB 13.2kbps	8N	82.82	12.82	≥6	6.82	PASS	27.21	≥20	7.21	PASS	1.57
	LTE Band 12	10M	QPSK	1	0	23095	1	EVS NB 24.4kbps	2N	79.44	9.44	≥6	3.44	PASS	26.55	≥20	6.55	PASS	1.95
	LTE Band 12	10M	QPSK	1	0	23095	1	EVS NB 24.4kbps	8N	84.15	14.15	≥6	8.15	PASS	29.13	≥20	9.13	PASS	1.84
	LTE Band 12	10M	QPSK	1	0	23095	1	EVS WB 13.2kbps	2N	78.95	8.95	≥6	2.95	PASS	27.52	≥20	7.52	PASS	0.39
1	LTE Band 12	10M	QPSK	1	0	23095	1	EVS WB 13.2kbps	8N	82.99	12.99	≥6	6.99	PASS	23.93	≥20	3.93	PASS	1.65
	LTE Band 12	10M	QPSK	1	0	23095	2	EVS WB 13.2kbps	2N	83.06	13.06	≥6	7.06	PASS	23.98	≥20	3.98	PASS	1.69
	LTE Band 13	10M	QPSK	1	0	23230	1	EVS NB 24.4kbps	2N	79.46	9.46	≥6	3.46	PASS	31.67	≥20	11.67	PASS	2.03
	LTE Band 13	10M	QPSK	1	0	23230	1	EVS NB 24.4kbps	8N	84.06	14.06	≥6	8.06	PASS	27.33	≥20	7.33	PASS	2.02
	LTE Band 13	10M	QPSK	1	0	23230	1	EVS WB 13.2kbps	2N	78.53	8.53	≥6	2.53	PASS	24.75	≥20	4.75	PASS	0.22
	LTE Band 13	10M	QPSK	1	0	23230	1	EVS WB 13.2kbps	8N	82.98	12.98	≥6	6.98	PASS	25.8	≥20	5.8	PASS	1.56
	LTE Band 25	20M	QPSK	1	0	26340	1	EVS NB 24.4kbps	2N	79.33	9.33	≥6	3.33	PASS	26.71	≥20	6.71	PASS	1.94
	LTE Band 25	20M	QPSK	1	0	26340	1	EVS NB 24.4kbps	8N	84.09	14.09	≥6	8.09	PASS	28.67	≥20	8.67	PASS	1.98
	LTE Band 25	20M	QPSK	1	0	26340	1	EVS WB 13.2kbps	2N	78.68	8.68	≥6	2.68	PASS	27.22	≥20	7.22	PASS	0.1
	LTE Band 25	20M	QPSK	1	0	26340	1	EVS WB 13.2kbps	8N	82.97	12.97	≥6	6.97	PASS	27.21	≥20	7.21	PASS	1.2
	LTE Band 26	15M	QPSK	1	0	26865	1	EVS NB 24.4kbps	2N	79.45	9.45	≥6	3.45	PASS	28.29	≥20	8.29	PASS	2.25
	LTE Band 26	15M	QPSK	1	0	26865	1	EVS NB 24.4kbps	8N	84.03	14.03	≥6	8.03	PASS	28.23	≥20	8.23	PASS	1.91
	LTE Band 26	15M	QPSK	1	0	26865	1	EVS WB 13.2kbps	2N	78.62	8.62	≥6	2.62	PASS	25.63	≥20	5.63	PASS	0.22
	LTE Band 26	15M	QPSK	1	0	26865	1	EVS WB 13.2kbps	8N	82.94	12.94	≥6	6.94	PASS	28.32	≥20	8.32	PASS	1.77
	LTE Band 66	20M	QPSK	1	0	132322	1	EVS NB 24.4kbps	2N	79.33	9.33	≥6	3.33	PASS	28.3	≥20	8.3	PASS	2.08
	LTE Band 66	20M	QPSK	1	0	132322	1	EVS NB 24.4kbps	8N	84.13	14.13	≥6	8.13	PASS	32.07	≥20	12.07	PASS	2.04
	LTE Band 66	20M	QPSK	1	0	132322	1	EVS WB 13.2kbps	2N	78.62	8.62	≥6	2.62	PASS	27.78	≥20	7.78	PASS	0.09
	LTE Band 66	20M	QPSK	1	0	132322	1	EVS WB 13.2kbps	8N	82.96	12.96	≥6	6.96	PASS	28.93	≥20	8.93	PASS	1.44
	LTE Band 41	20M	QPSK	1	0	40620	1	EVS NB 24.4kbps	2N	79.84	9.84	≥6	3.84	PASS	28.33	≥20	8.33	PASS	1.6
	LTE Band 41	20M	QPSK	1	0	40620	1	EVS NB 24.4kbps	8N	84.28	14.28	≥6	8.28	PASS	32.5	≥20	12.5	PASS	1.87
	LTE Band 41	20M	QPSK	1	0	40620	1	EVS WB 13.2kbps	2N	78.69	8.69	≥6	2.69	PASS	27.44	≥20	7.44	PASS	0.11
	LTE Band 41	20M	QPSK	1	0	40620	1	EVS WB 13.2kbps	8N	83.07	13.07	≥6	7.07	PASS	26.85	≥20	6.85	PASS	1.37
	LTE Band 42	20M	QPSK	1	0	42590	1	EVS NB 24.4kbps	2N	79.47	9.47	≥6	3.47	PASS	31.41	≥20	11.41	PASS	1.72
	LTE Band 42	20M	QPSK	1	0	42590	1	EVS NB 24.4kbps	8N	84.14	14.14	≥6	8.14	PASS	32.74	≥20	12.74	PASS	1.59



Volume Control Evaluation Report

Report No. : HA422702C

LTE Band 42	20M	QPSK	1	0	42590	1	EVS WB 13.2kbps	2N	78.66	8.66	≥6	2.66	PASS	26.98	≥20	6.98	PASS	0.05
LTE Band 42	20M	QPSK	1	0	42590	1	EVS WB 13.2kbps	8N	83.12	13.12	≥6	7.12	PASS	27.46	≥20	7.46	PASS	0.82
LTE Band 48	20M	QPSK	1	0	55830	1	EVS NB 24.4kbps	2N	79.41	9.41	≥6	3.41	PASS	29.36	≥20	9.36	PASS	1.65
LTE Band 48	20M	QPSK	1	0	55830	1	EVS NB 24.4kbps	8N	84.12	14.12	≥6	8.12	PASS	32.59	≥20	12.59	PASS	1.56
LTE Band 48	20M	QPSK	1	0	55830	1	EVS WB 13.2kbps	2N	78.89	8.89	≥6	2.89	PASS	27.61	≥20	7.61	PASS	0.11
LTE Band 48	20M	QPSK	1	0	55830	1	EVS WB 13.2kbps	8N	83.08	13.08	≥6	7.08	PASS	27.46	≥20	7.46	PASS	0.68

<NR>

HAC (Volume control) Test Record										Receive Volume Control Performance					Receive Distortion and Noise Performance				Receive Acoustic Frequency Response Performance
Plot No.	Air Interface	BW (MHz)	Modulation / Mode	RB Size	RB offset	Channel	Battery	Audio Codec	Mounting Force (N)	Measured dB SPL Level	Conversational Gain (Measured dB SPL Level - 70 dB SPL) (dB)	Limit (dB)	Margin to Limit (dB)	PASS/FAIL	Minimum PN-SDNR (dB) Doc. Section	Limit (dB)	Margin to Limit (dB)	PASS/FAIL	Free Field (FF)
	FR1 n2	40M	QPSK	1	1	376000	1	EVS NB 24.4kbps	2N	79.68	9.68	≥6	3.68	PASS	32.96	≥20	12.96	PASS	2.11
	FR1 n2	40M	QPSK	1	1	376000	1	EVS NB 24.4kbps	8N	84.37	14.37	≥6	8.37	PASS	33.63	≥20	13.63	PASS	2.01
2	FR1 n2	40M	QPSK	1	1	376000	1	EVS WB 13.2kbps	2N	78.93	8.93	≥6	2.93	PASS	25.37	≥20	5.37	PASS	0.32
	FR1 n2	40M	QPSK	1	1	376000	2	EVS WB 13.2kbps	2N	79.12	9.12	≥6	3.12	PASS	25.46	≥20	5.46	PASS	0.41
	FR1 n2	40M	QPSK	1	1	376000	1	EVS WB 13.2kbps	8N	83.57	13.57	≥6	7.57	PASS	28.09	≥20	8.09	PASS	1.62
	FR1 n5	25M	QPSK	1	1	167300	1	EVS NB 24.4kbps	2N	79.32	9.32	≥6	3.32	PASS	33.15	≥20	13.15	PASS	2.15
	FR1 n5	25M	QPSK	1	1	167300	1	EVS NB 24.4kbps	8N	84.05	14.05	≥6	8.05	PASS	33.86	≥20	13.86	PASS	2.11
	FR1 n5	25M	QPSK	1	1	167300	1	EVS WB 13.2kbps	2N	79.85	9.85	≥6	3.85	PASS	25.56	≥20	5.56	PASS	0.45
	FR1 n5	25M	QPSK	1	1	167300	1	EVS WB 13.2kbps	8N	84.12	14.12	≥6	8.12	PASS	28.19	≥20	8.19	PASS	1.76
	FR1 n7	50M	QPSK	1	1	507000	1	EVS NB 24.4kbps	2N	79.57	9.57	≥6	3.57	PASS	31.75	≥20	11.75	PASS	2.43
	FR1 n7	50M	QPSK	1	1	507000	1	EVS NB 24.4kbps	8N	84.25	14.25	≥6	8.25	PASS	32.36	≥20	12.36	PASS	2.05
	FR1 n7	50M	QPSK	1	1	507000	1	EVS WB 13.2kbps	2N	78.84	8.84	≥6	2.84	PASS	26.13	≥20	6.13	PASS	0.8
	FR1 n7	50M	QPSK	1	1	507000	1	EVS WB 13.2kbps	8N	83.38	13.38	≥6	7.38	PASS	26.8	≥20	6.8	PASS	1.93
	FR1 n66	45M	QPSK	1	1	349000	1	EVS NB 24.4kbps	2N	79.61	9.61	≥6	3.61	PASS	28.65	≥20	8.65	PASS	2.5
	FR1 n66	45M	QPSK	1	1	349000	1	EVS NB 24.4kbps	8N	84.28	14.28	≥6	8.28	PASS	27.97	≥20	7.97	PASS	2.13
	FR1 n66	45M	QPSK	1	1	349000	1	EVS WB 13.2kbps	2N	78.86	8.86	≥6	2.86	PASS	27.19	≥20	7.19	PASS	0.54
	FR1 n66	45M	QPSK	1	1	349000	1	EVS WB 13.2kbps	8N	83.46	13.46	≥6	7.46	PASS	26.92	≥20	6.92	PASS	1.75
	FR1 n77 27O	100M	QPSK	1	1	656000	1	EVS NB 24.4kbps	2N	79.91	9.91	≥6	3.91	PASS	27.27	≥20	7.27	PASS	1.68
	FR1 n77 27O	100M	QPSK	1	1	656000	1	EVS NB 24.4kbps	8N	84.2	14.2	≥6	8.2	PASS	29.21	≥20	9.21	PASS	1.88
	FR1 n77 27O	100M	QPSK	1	1	656000	1	EVS WB 13.2kbps	2N	79.18	9.18	≥6	3.18	PASS	26.88	≥20	6.88	PASS	0.1
	FR1 n77 27O	100M	QPSK	1	1	656000	1	EVS WB 13.2kbps	8N	83.37	13.37	≥6	7.37	PASS	26.26	≥20	6.26	PASS	1.1
	FR1 n77 27Q	100M	QPSK	1	1	633332	1	EVS NB 24.4kbps	2N	79.63	9.63	≥6	3.63	PASS	26.96	≥20	6.96	PASS	0.36
	FR1 n77 27Q	100M	QPSK	1	1	633332	1	EVS NB 24.4kbps	8N	84.14	14.14	≥6	8.14	PASS	28.65	≥20	8.65	PASS	2.01
	FR1 n77 27Q	100M	QPSK	1	1	633332	1	EVS WB 13.2kbps	2N	79.16	9.16	≥6	3.16	PASS	25.68	≥20	5.68	PASS	0.01
	FR1 n77 27Q	100M	QPSK	1	1	633332	1	EVS WB 13.2kbps	8N	83.29	13.29	≥6	7.29	PASS	26.16	≥20	6.16	PASS	1.08



<WLAN>

HAC (Volume control) Test Record							Receive Volume Control Performance					Receive Distortion and Noise Performance				Receive Acoustic Frequency Response Performance
Plot No.	Air Interface	Modulation / Mode	Channel	Battery	Audio Codec	Mounting Force (N)	Measured dB SPL Level	Conversational Gain (Measured dB SPL Level – 70 dB SPL) (dB)	Limit (dB)	Margin to Limit (dB)	PASS/FAIL	Minimum PN-SDNR (dB) Doc. Section	Limit (dB)	Margin to Limit (dB)	PASS/FAIL	Free Field (FF)
	WLAN2.4GHz	802.11b 1Mbps	6	1	EVS NB 24.4kbps	2N	79.48	9.48	≥6	3.48	PASS	22.23	≥20	2.23	PASS	1.44
	WLAN2.4GHz	802.11b 1Mbps	6	1	EVS NB 24.4kbps	8N	84.09	14.09	≥6	8.09	PASS	31.66	≥20	11.66	PASS	1.42
	WLAN2.4GHz	802.11b 1Mbps	6	1	EVS WB 13.2kbps	2N	79.06	9.06	≥6	3.06	PASS	21.65	≥20	1.65	PASS	0.37
	WLAN2.4GHz	802.11b 1Mbps	6	1	EVS WB 13.2kbps	8N	82.88	12.88	≥6	6.88	PASS	21.9	≥20	1.9	PASS	0.73
	WLAN5.2GHz	802.11a 6Mbps	40	1	EVS NB 24.4kbps	2N	79.71	9.71	≥6	3.71	PASS	24.05	≥20	4.05	PASS	1.24
	WLAN5.2GHz	802.11a 6Mbps	40	1	EVS NB 24.4kbps	8N	84.45	14.45	≥6	8.45	PASS	23.87	≥20	3.87	PASS	1.32
	WLAN5.2GHz	802.11a 6Mbps	40	1	EVS WB 13.2kbps	2N	79.05	9.05	≥6	3.05	PASS	21.88	≥20	1.88	PASS	0.54
	WLAN5.2GHz	802.11a 6Mbps	40	2	EVS WB 13.2kbps	2N	79.11	9.11	≥6	3.11	PASS	21.95	≥20	1.95	PASS	0.59
4	WLAN5.2GHz	802.11a 6Mbps	40	1	EVS WB 13.2kbps	8N	83.3	13.3	≥6	7.3	PASS	20.46	≥20	0.46	PASS	1.03
	WLAN5.2GHz	802.11a 6Mbps	40	2	EVS WB 13.2kbps	8N	83.36	13.36	≥6	7.36	PASS	20.52	≥20	0.52	PASS	1.08
	WLAN5.3GHz	802.11a 6Mbps	60	1	EVS NB 24.4kbps	2N	79.69	9.69	≥6	3.69	PASS	21	≥20	1	PASS	1.28
	WLAN5.3GHz	802.11a 6Mbps	60	1	EVS NB 24.4kbps	8N	84.27	14.27	≥6	8.27	PASS	25.13	≥20	5.13	PASS	1.3
3	WLAN5.3GHz	802.11a 6Mbps	60	1	EVS WB 13.2kbps	2N	78.85	8.85	≥6	2.85	PASS	20.88	≥20	0.88	PASS	0.61
	WLAN5.3GHz	802.11a 6Mbps	60	1	EVS WB 13.2kbps	8N	83.03	13.03	≥6	7.03	PASS	22.87	≥20	2.87	PASS	1.12
	WLAN5.5GHz	802.11a 6Mbps	116	1	EVS NB 24.4kbps	2N	79.59	9.59	≥6	3.59	PASS	21.14	≥20	1.14	PASS	1.22
	WLAN5.5GHz	802.11a 6Mbps	116	1	EVS NB 24.4kbps	8N	84.07	14.07	≥6	8.07	PASS	23.48	≥20	3.48	PASS	1.39
	WLAN5.5GHz	802.11a 6Mbps	116	1	EVS WB 13.2kbps	2N	78.88	8.88	≥6	2.88	PASS	23.35	≥20	3.35	PASS	0.44
	WLAN5.5GHz	802.11a 6Mbps	116	1	EVS WB 13.2kbps	8N	83.45	13.45	≥6	7.45	PASS	23.97	≥20	3.97	PASS	0.95
	WLAN5.8GHz	802.11a 6Mbps	157	1	EVS NB 24.4kbps	2N	79.41	9.41	≥6	3.41	PASS	21.88	≥20	1.88	PASS	1.25
	WLAN5.8GHz	802.11a 6Mbps	157	1	EVS NB 24.4kbps	8N	84.04	14.04	≥6	8.04	PASS	24.82	≥20	4.82	PASS	1.23
	WLAN5.8GHz	802.11a 6Mbps	157	1	EVS WB 13.2kbps	2N	79	9	≥6	3	PASS	23.76	≥20	3.76	PASS	0.34
	WLAN5.8GHz	802.11a 6Mbps	157	1	EVS WB 13.2kbps	8N	83.39	13.39	≥6	7.39	PASS	26.93	≥20	6.93	PASS	0.87

<Codec Investigation and Evaluation results for KDB 285076 D05 2.b>

<GSM>

HAC (Volume control) Test Record							Receive Volume Control Performance				
Plot No.	Air Interface	Modulation / Mode	Channel	Battery	Audio Codec	Mounting Force (N)	Measured dBSPL Level	Conversational Gain (Measured dBSPL Level – 70 dBSPL) (dB)	Limit (dB)	Margin to Limit (dB)	PASS/FAIL
	GSM850	GSM Voice	189	1	EFR NB 12.2Kbps	2N	79.75	9.75	≥6	3.75	PASS
	GSM850	GSM Voice	189	1	EFR NB 12.2Kbps	8N	84.4	14.4	≥6	8.4	PASS
	GSM850	GSM Voice	189	1	AMR NB 4.75kbps	2N	78.77	8.77	≥6	2.77	PASS
	GSM850	GSM Voice	189	1	AMR NB 4.75kbps	8N	83.5	13.5	≥6	7.5	PASS
	GSM850	GSM Voice	189	1	AMR NB 12.2kbps	2N	79.69	9.69	≥6	3.69	PASS
	GSM850	GSM Voice	189	1	AMR NB 12.2kbps	8N	84.33	14.33	≥6	8.33	PASS
	GSM1900	GSM Voice	661	1	EFR NB 12.2Kbps	2N	79.67	9.67	≥6	3.67	PASS
	GSM1900	GSM Voice	661	1	EFR NB 12.2Kbps	8N	84.41	14.41	≥6	8.41	PASS
5	GSM1900	GSM Voice	661	1	AMR NB 4.75kbps	2N	78.69	8.69	≥6	2.69	PASS
	GSM1900	GSM Voice	661	2	AMR NB 4.75kbps	2N	78.77	8.77	≥6	2.77	PASS
	GSM1900	GSM Voice	661	1	AMR NB 4.75kbps	8N	83.42	13.42	≥6	7.42	PASS
	GSM1900	GSM Voice	661	1	AMR NB 12.2kbps	2N	79.7	9.7	≥6	3.7	PASS
	GSM1900	GSM Voice	661	1	AMR NB 12.2kbps	8N	84.28	14.28	≥6	8.28	PASS

<UMTS>

HAC (Volume control) Test Record							Receive Volume Control Performance				
Plot No.	Air Interface	Modulation / Mode	Channel	Battery	Audio Codec	Mounting Force (N)	Measured dBSPL Level	Conversational Gain (Measured dBSPL Level – 70 dBSPL) (dB)	Limit (dB)	Margin to Limit (dB)	PASS/FAIL
	WCDMA II	Voice	9400	1	AMR NB 4.75kbps	2N	78.94	8.94	≥6	2.94	PASS
	WCDMA II	Voice	9400	1	AMR NB 4.75kbps	8N	83.59	13.59	≥6	7.59	PASS
	WCDMA II	Voice	9400	1	AMR NB 12.2kbps	2N	79.62	9.62	≥6	3.62	PASS
	WCDMA II	Voice	9400	1	AMR NB 12.2kbps	8N	84.23	14.23	≥6	8.23	PASS
6	WCDMA II	Voice	9400	1	AMR WB 6.60kbps	2N	78.51	8.51	≥6	2.51	PASS
	WCDMA II	Voice	9400	2	AMR WB 6.60kbps	2N	78.66	8.66	≥6	2.66	PASS
	WCDMA II	Voice	9400	1	AMR WB 6.60kbps	8N	83.24	13.24	≥6	7.24	PASS
	WCDMA II	Voice	9400	1	AMR WB 23.85kbps	2N	79.33	9.33	≥6	3.33	PASS
	WCDMA II	Voice	9400	1	AMR WB 23.85kbps	8N	83.81	13.81	≥6	7.81	PASS
	WCDMA IV	Voice	1413	1	AMR NB 4.75kbps	2N	78.85	8.85	≥6	2.85	PASS
	WCDMA IV	Voice	1413	1	AMR NB 4.75kbps	8N	83.6	13.6	≥6	7.6	PASS
	WCDMA IV	Voice	1413	1	AMR NB 12.2kbps	2N	79.55	9.55	≥6	3.55	PASS
	WCDMA IV	Voice	1413	1	AMR NB 12.2kbps	8N	84.32	14.32	≥6	8.32	PASS
	WCDMA IV	Voice	1413	1	AMR WB 6.60kbps	2N	78.87	8.87	≥6	2.87	PASS
	WCDMA IV	Voice	1413	1	AMR WB 6.60kbps	8N	84.12	14.12	≥6	8.12	PASS
	WCDMA IV	Voice	1413	1	AMR WB 23.85kbps	2N	78.95	8.95	≥6	2.95	PASS
	WCDMA IV	Voice	1413	1	AMR WB 23.85kbps	8N	84.26	14.26	≥6	8.26	PASS
	WCDMA V	Voice	4182	1	AMR NB 4.75kbps	2N	78.96	8.96	≥6	2.96	PASS
	WCDMA V	Voice	4182	1	AMR NB 4.75kbps	8N	83.85	13.85	≥6	7.85	PASS
	WCDMA V	Voice	4182	1	AMR NB 12.2kbps	2N	79.12	9.12	≥6	3.12	PASS
	WCDMA V	Voice	4182	1	AMR NB 12.2kbps	8N	84.22	14.22	≥6	8.22	PASS
	WCDMA V	Voice	4182	1	AMR WB 6.60kbps	2N	79.25	9.25	≥6	3.25	PASS
	WCDMA V	Voice	4182	1	AMR WB 6.60kbps	8N	84.56	14.56	≥6	8.56	PASS
	WCDMA V	Voice	4182	1	AMR WB 23.85kbps	2N	79.15	9.15	≥6	3.15	PASS
	WCDMA V	Voice	4182	1	AMR WB 23.85kbps	8N	84.63	14.63	≥6	8.63	PASS



<LTE>

HAC (Volume control) Test Record										Receive Volume Control Performance				
Plot No.	Air Interface	BW (MHz)	Modulation / Mode	RB Size	RB offset	Channel	Battery	Audio Codec	Mounting Force (N)	Measured dB SPL Level	Conversational Gain (Measured dB SPL Level - 70 dB SPL) (dB)	Limit (dB)	Margin to Limit (dB)	PASS/FAIL
	LTE Band 7	20M	QPSK	1	0	21100	1	AMR NB 4.75kbps	2N	79.52	9.52	≥6	3.52	PASS
	LTE Band 7	20M	QPSK	1	0	21100	1	AMR NB 4.75kbps	8N	84.33	14.33	≥6	8.33	PASS
	LTE Band 7	20M	QPSK	1	0	21100	1	AMR NB 12.2kbps	2N	79.63	9.63	≥6	3.63	PASS
	LTE Band 7	20M	QPSK	1	0	21100	1	AMR NB 12.2kbps	8N	84.39	14.39	≥6	8.39	PASS
	LTE Band 7	20M	QPSK	1	0	21100	1	AMR WB 6.60kbps	2N	78.79	8.79	≥6	2.79	PASS
	LTE Band 7	20M	QPSK	1	0	21100	1	AMR WB 6.60kbps	8N	82.95	12.95	≥6	6.95	PASS
	LTE Band 7	20M	QPSK	1	0	21100	1	AMR WB 23.85kbps	2N	79.81	9.81	≥6	3.81	PASS
	LTE Band 7	20M	QPSK	1	0	21100	1	AMR WB 23.85kbps	8N	82.99	12.99	≥6	6.99	PASS
	LTE Band 7	20M	QPSK	1	0	21100	1	EVS NB 5.9kbps	2N	79.57	9.57	≥6	3.57	PASS
	LTE Band 7	20M	QPSK	1	0	21100	1	EVS NB 5.9kbps	8N	84.41	14.41	≥6	8.41	PASS
	LTE Band 7	20M	QPSK	1	0	21100	1	EVS NB 24.4kbps	2N	79.47	9.47	≥6	3.47	PASS
	LTE Band 7	20M	QPSK	1	0	21100	1	EVS NB 24.4kbps	8N	84.27	14.27	≥6	8.27	PASS
	LTE Band 7	20M	QPSK	1	0	21100	1	EVS WB 5.9kbps	2N	78.95	8.95	≥6	2.95	PASS
	LTE Band 7	20M	QPSK	1	0	21100	1	EVS WB 5.9kbps	8N	82.97	12.97	≥6	6.97	PASS
	LTE Band 7	20M	QPSK	1	0	21100	1	EVS WB 13.2kbps	2N	78.7	8.7	≥6	2.7	PASS
7	LTE Band 7	20M	QPSK	1	0	21100	1	EVS WB 13.2kbps	8N	82.82	12.82	≥6	6.82	PASS
	LTE Band 7	20M	QPSK	1	0	21100	1	EVS WB 13.2kbps	8N	82.93	12.93	≥6	6.93	PASS
	LTE Band 7	20M	QPSK	1	0	21100	1	EVS SWB 9.6kbps	2N	78.99	8.99	≥6	2.99	PASS
	LTE Band 7	20M	QPSK	1	0	21100	1	EVS SWB 9.6kbps	8N	83.02	13.02	≥6	7.02	PASS
	LTE Band 7	20M	QPSK	1	0	21100	1	EVS SWB 13.2kbps	2N	78.96	8.96	≥6	2.96	PASS
	LTE Band 7	20M	QPSK	1	0	21100	1	EVS SWB 13.2kbps	8N	83.05	13.05	≥6	7.05	PASS
	LTE Band 12	10M	QPSK	1	0	23095	1	AMR NB 4.75kbps	2N	79.05	9.05	≥6	3.05	PASS
	LTE Band 12	10M	QPSK	1	0	23095	1	AMR NB 4.75kbps	8N	84.22	14.22	≥6	8.22	PASS
	LTE Band 12	10M	QPSK	1	0	23095	1	AMR NB 12.2kbps	2N	79.12	9.12	≥6	3.12	PASS
	LTE Band 12	10M	QPSK	1	0	23095	1	AMR NB 12.2kbps	8N	84.26	14.26	≥6	8.26	PASS
	LTE Band 12	10M	QPSK	1	0	23095	1	AMR WB 6.60kbps	2N	79.06	9.06	≥6	3.06	PASS
	LTE Band 12	10M	QPSK	1	0	23095	1	AMR WB 6.60kbps	8N	83.13	13.13	≥6	7.13	PASS
	LTE Band 12	10M	QPSK	1	0	23095	1	AMR WB 23.85kbps	2N	79.11	9.11	≥6	3.11	PASS
	LTE Band 12	10M	QPSK	1	0	23095	1	AMR WB 23.85kbps	8N	83.15	13.15	≥6	7.15	PASS
	LTE Band 12	10M	QPSK	1	0	23095	1	EVS NB 5.9kbps	2N	79.06	9.06	≥6	3.06	PASS
	LTE Band 12	10M	QPSK	1	0	23095	1	EVS NB 5.9kbps	8N	84.33	14.33	≥6	8.33	PASS
	LTE Band 12	10M	QPSK	1	0	23095	1	EVS NB 24.4kbps	2N	79.44	9.44	≥6	3.44	PASS
	LTE Band 12	10M	QPSK	1	0	23095	1	EVS NB 24.4kbps	8N	84.15	14.15	≥6	8.15	PASS
	LTE Band 12	10M	QPSK	1	0	23095	1	EVS WB 5.9kbps	2N	79.03	9.03	≥6	3.03	PASS
	LTE Band 12	10M	QPSK	1	0	23095	1	EVS WB 5.9kbps	8N	83.11	13.11	≥6	7.11	PASS
	LTE Band 12	10M	QPSK	1	0	23095	1	EVS WB 13.2kbps	2N	78.95	8.95	≥6	2.95	PASS
	LTE Band 12	10M	QPSK	1	0	23095	1	EVS WB 13.2kbps	8N	82.99	12.99	≥6	6.99	PASS
	LTE Band 12	10M	QPSK	1	0	23095	1	EVS SWB 9.6kbps	2N	79.15	9.15	≥6	3.15	PASS
	LTE Band 12	10M	QPSK	1	0	23095	1	EVS SWB 9.6kbps	8N	83.06	13.06	≥6	7.06	PASS
	LTE Band 12	10M	QPSK	1	0	23095	1	EVS SWB 13.2kbps	2N	79.23	9.23	≥6	3.23	PASS
	LTE Band 12	10M	QPSK	1	0	23095	1	EVS SWB 13.2kbps	8N	83.08	13.08	≥6	7.08	PASS
	LTE Band 13	10M	QPSK	1	0	23230	1	AMR NB 4.75kbps	2N	79.56	9.56	≥6	3.56	PASS
	LTE Band 13	10M	QPSK	1	0	23230	1	AMR NB 4.75kbps	8N	84.15	14.15	≥6	8.15	PASS
	LTE Band 13	10M	QPSK	1	0	23230	1	AMR NB 12.2kbps	2N	79.52	9.52	≥6	3.52	PASS
	LTE Band 13	10M	QPSK	1	0	23230	1	AMR NB 12.2kbps	8N	84.11	14.11	≥6	8.11	PASS
	LTE Band 13	10M	QPSK	1	0	23230	1	AMR WB 6.60kbps	2N	78.71	8.71	≥6	2.71	PASS
	LTE Band 13	10M	QPSK	1	0	23230	1	AMR WB 6.60kbps	8N	83.06	13.06	≥6	7.06	PASS
	LTE Band 13	10M	QPSK	1	0	23230	1	AMR WB 23.85kbps	2N	78.68	8.68	≥6	2.68	PASS
	LTE Band 13	10M	QPSK	1	0	23230	1	AMR WB 23.85kbps	8N	83.08	13.08	≥6	7.08	PASS



Volume Control Evaluation Report

Report No. : HA422702C

	LTE Band 13	10M	QPSK	1	0	23230	1	EVS NB 5.9kbps	2N	79.61	9.61	≥6	3.61	PASS
	LTE Band 13	10M	QPSK	1	0	23230	1	EVS NB 5.9kbps	8N	84.17	14.17	≥6	8.17	PASS
	LTE Band 13	10M	QPSK	1	0	23230	1	EVS NB 24.4kbps	2N	79.46	9.46	≥6	3.46	PASS
	LTE Band 13	10M	QPSK	1	0	23230	1	EVS NB 24.4kbps	8N	84.06	14.06	≥6	8.06	PASS
	LTE Band 13	10M	QPSK	1	0	23230	1	EVS WB 5.9kbps	2N	78.69	8.69	≥6	2.69	PASS
	LTE Band 13	10M	QPSK	1	0	23230	1	EVS WB 5.9kbps	8N	83.15	13.15	≥6	7.15	PASS
8	LTE Band 13	10M	QPSK	1	0	23230	1	EVS WB 13.2kbps	2N	78.53	8.53	≥6	2.53	PASS
	LTE Band 13	10M	QPSK	1	0	23230	1	EVS WB 13.2kbps	2N	78.63	8.63	≥6	2.63	PASS
	LTE Band 13	10M	QPSK	1	0	23230	1	EVS WB 13.2kbps	8N	82.98	12.98	≥6	6.98	PASS
	LTE Band 13	10M	QPSK	1	0	23230	1	EVS SWB 9.6kbps	2N	78.74	8.74	≥6	2.74	PASS
	LTE Band 13	10M	QPSK	1	0	23230	1	EVS SWB 9.6kbps	8N	83.05	13.05	≥6	7.05	PASS
	LTE Band 13	10M	QPSK	1	0	23230	1	EVS SWB 13.2kbps	2N	78.63	8.63	≥6	2.63	PASS
	LTE Band 13	10M	QPSK	1	0	23230	1	EVS SWB 13.2kbps	8N	83.12	13.12	≥6	7.12	PASS
	LTE Band 25	20M	QPSK	1	0	26340	1	AMR NB 4.75kbps	2N	79.44	9.44	≥6	3.44	PASS
	LTE Band 25	20M	QPSK	1	0	26340	1	AMR NB 4.75kbps	8N	84.15	14.15	≥6	8.15	PASS
	LTE Band 25	20M	QPSK	1	0	26340	1	AMR NB 12.2kbps	2N	79.52	9.52	≥6	3.52	PASS
	LTE Band 25	20M	QPSK	1	0	26340	1	AMR NB 12.2kbps	8N	84.22	14.22	≥6	8.22	PASS
	LTE Band 25	20M	QPSK	1	0	26340	1	AMR WB 6.60kbps	2N	78.74	8.74	≥6	2.74	PASS
	LTE Band 25	20M	QPSK	1	0	26340	1	AMR WB 6.60kbps	8N	83.06	13.06	≥6	7.06	PASS
	LTE Band 25	20M	QPSK	1	0	26340	1	AMR WB 23.85kbps	2N	78.71	8.71	≥6	2.71	PASS
	LTE Band 25	20M	QPSK	1	0	26340	1	AMR WB 23.85kbps	8N	83.11	13.11	≥6	7.11	PASS
	LTE Band 25	20M	QPSK	1	0	26340	1	EVS NB 5.9kbps	2N	79.41	9.41	≥6	3.41	PASS
	LTE Band 25	20M	QPSK	1	0	26340	1	EVS NB 5.9kbps	8N	84.16	14.16	≥6	8.16	PASS
	LTE Band 25	20M	QPSK	1	0	26340	1	EVS NB 24.4kbps	2N	79.33	9.33	≥6	3.33	PASS
	LTE Band 25	20M	QPSK	1	0	26340	1	EVS NB 24.4kbps	8N	84.09	14.09	≥6	8.09	PASS
	LTE Band 25	20M	QPSK	1	0	26340	1	EVS WB 5.9kbps	2N	78.82	8.82	≥6	2.82	PASS
	LTE Band 25	20M	QPSK	1	0	26340	1	EVS WB 5.9kbps	8N	83.15	13.15	≥6	7.15	PASS
	LTE Band 25	20M	QPSK	1	0	26340	1	EVS WB 13.2kbps	2N	78.68	8.68	≥6	2.68	PASS
	LTE Band 25	20M	QPSK	1	0	26340	1	EVS WB 13.2kbps	8N	82.97	12.97	≥6	6.97	PASS
	LTE Band 25	20M	QPSK	1	0	26340	1	EVS SWB 9.6kbps	2N	78.86	8.86	≥6	2.86	PASS
	LTE Band 25	20M	QPSK	1	0	26340	1	EVS SWB 9.6kbps	8N	83.22	13.22	≥6	7.22	PASS
	LTE Band 25	20M	QPSK	1	0	26340	1	EVS SWB 13.2kbps	2N	78.88	8.88	≥6	2.88	PASS
	LTE Band 25	20M	QPSK	1	0	26340	1	EVS SWB 13.2kbps	8N	83.16	13.16	≥6	7.16	PASS
	LTE Band 26	15M	QPSK	1	0	26865	1	AMR NB 4.75kbps	2N	79.41	9.41	≥6	3.41	PASS
	LTE Band 26	15M	QPSK	1	0	26865	1	AMR NB 4.75kbps	8N	84.11	14.11	≥6	8.11	PASS
	LTE Band 26	15M	QPSK	1	0	26865	1	AMR NB 12.2kbps	2N	79.51	9.51	≥6	3.51	PASS
	LTE Band 26	15M	QPSK	1	0	26865	1	AMR NB 12.2kbps	8N	84.16	14.16	≥6	8.16	PASS
	LTE Band 26	15M	QPSK	1	0	26865	1	AMR WB 6.60kbps	2N	78.75	8.75	≥6	2.75	PASS
	LTE Band 26	15M	QPSK	1	0	26865	1	AMR WB 6.60kbps	8N	83.06	13.06	≥6	7.06	PASS
	LTE Band 26	15M	QPSK	1	0	26865	1	AMR WB 23.85kbps	2N	78.82	8.82	≥6	2.82	PASS
	LTE Band 26	15M	QPSK	1	0	26865	1	AMR WB 23.85kbps	8N	83.08	13.08	≥6	7.08	PASS
	LTE Band 26	15M	QPSK	1	0	26865	1	EVS NB 5.9kbps	2N	79.52	9.52	≥6	3.52	PASS
	LTE Band 26	15M	QPSK	1	0	26865	1	EVS NB 5.9kbps	8N	84.19	14.19	≥6	8.19	PASS
	LTE Band 26	15M	QPSK	1	0	26865	1	EVS NB 24.4kbps	2N	79.45	9.45	≥6	3.45	PASS
	LTE Band 26	15M	QPSK	1	0	26865	1	EVS NB 24.4kbps	8N	84.03	14.03	≥6	8.03	PASS
	LTE Band 26	15M	QPSK	1	0	26865	1	EVS WB 5.9kbps	2N	78.81	8.81	≥6	2.81	PASS
	LTE Band 26	15M	QPSK	1	0	26865	1	EVS WB 5.9kbps	8N	83.11	13.11	≥6	7.11	PASS
	LTE Band 26	15M	QPSK	1	0	26865	1	EVS WB 13.2kbps	2N	78.62	8.62	≥6	2.62	PASS
	LTE Band 26	15M	QPSK	1	0	26865	1	EVS WB 13.2kbps	8N	82.94	12.94	≥6	6.94	PASS
	LTE Band 26	15M	QPSK	1	0	26865	1	EVS SWB 9.6kbps	2N	78.92	8.92	≥6	2.92	PASS
	LTE Band 26	15M	QPSK	1	0	26865	1	EVS SWB 9.6kbps	8N	83.21	13.21	≥6	7.21	PASS
	LTE Band 26	15M	QPSK	1	0	26865	1	EVS SWB 13.2kbps	2N	78.86	8.86	≥6	2.86	PASS
	LTE Band 26	15M	QPSK	1	0	26865	1	EVS SWB 13.2kbps	8N	83.23	13.23	≥6	7.23	PASS
	LTE Band 66	20M	QPSK	1	0	132322	1	AMR NB 4.75kbps	2N	79.45	9.45	≥6	3.45	PASS
	LTE Band 66	20M	QPSK	1	0	132322	1	AMR NB 4.75kbps	8N	84.39	14.39	≥6	8.39	PASS
	LTE Band 66	20M	QPSK	1	0	132322	1	AMR NB 12.2kbps	2N	79.51	9.51	≥6	3.51	PASS



Volume Control Evaluation Report

Report No. : HA422702C

LTE Band 66	20M	QPSK	1	0	132322	1	AMR NB 12.2kbps	8N	84.33	14.33	≥6	8.33	PASS
LTE Band 66	20M	QPSK	1	0	132322	1	AMR WB 6.60kbps	2N	78.71	8.71	≥6	2.71	PASS
LTE Band 66	20M	QPSK	1	0	132322	1	AMR WB 6.60kbps	8N	83.16	13.16	≥6	7.16	PASS
LTE Band 66	20M	QPSK	1	0	132322	1	AMR WB 23.85kbps	2N	78.82	8.82	≥6	2.82	PASS
LTE Band 66	20M	QPSK	1	0	132322	1	AMR WB 23.85kbps	8N	83.12	13.12	≥6	7.12	PASS
LTE Band 66	20M	QPSK	1	0	132322	1	EVS NB 5.9kbps	2N	79.33	9.33	≥6	3.33	PASS
LTE Band 66	20M	QPSK	1	0	132322	1	EVS NB 5.9kbps	8N	84.26	14.26	≥6	8.26	PASS
LTE Band 66	20M	QPSK	1	0	132322	1	EVS NB 24.4kbps	2N	79.33	9.33	≥6	3.33	PASS
LTE Band 66	20M	QPSK	1	0	132322	1	EVS NB 24.4kbps	8N	84.13	14.13	≥6	8.13	PASS
LTE Band 66	20M	QPSK	1	0	132322	1	EVS WB 5.9kbps	2N	78.85	8.85	≥6	2.85	PASS
LTE Band 66	20M	QPSK	1	0	132322	1	EVS WB 5.9kbps	8N	83.15	13.15	≥6	7.15	PASS
LTE Band 66	20M	QPSK	1	0	132322	1	EVS WB 13.2kbps	2N	78.62	8.62	≥6	2.62	PASS
LTE Band 66	20M	QPSK	1	0	132322	1	EVS WB 13.2kbps	8N	82.96	12.96	≥6	6.96	PASS
LTE Band 66	20M	QPSK	1	0	132322	1	EVS SWB 9.6kbps	2N	78.81	8.81	≥6	2.81	PASS
LTE Band 66	20M	QPSK	1	0	132322	1	EVS SWB 9.6kbps	8N	83.11	13.11	≥6	7.11	PASS
LTE Band 66	20M	QPSK	1	0	132322	1	EVS SWB 13.2kbps	2N	78.79	8.79	≥6	2.79	PASS
LTE Band 66	20M	QPSK	1	0	132322	1	EVS SWB 13.2kbps	8N	83.06	13.06	≥6	7.06	PASS
LTE Band 41	20M	QPSK	1	0	40620	1	AMR NB 4.75kbps	2N	79.95	9.95	≥6	3.95	PASS
LTE Band 41	20M	QPSK	1	0	40620	1	AMR NB 4.75kbps	8N	84.35	14.35	≥6	8.35	PASS
LTE Band 41	20M	QPSK	1	0	40620	1	AMR NB 12.2kbps	2N	79.86	9.86	≥6	3.86	PASS
LTE Band 41	20M	QPSK	1	0	40620	1	AMR NB 12.2kbps	8N	84.36	14.36	≥6	8.36	PASS
LTE Band 41	20M	QPSK	1	0	40620	1	AMR WB 6.60kbps	2N	78.77	8.77	≥6	2.77	PASS
LTE Band 41	20M	QPSK	1	0	40620	1	AMR WB 6.60kbps	8N	83.31	13.31	≥6	7.31	PASS
LTE Band 41	20M	QPSK	1	0	40620	1	AMR WB 23.85kbps	2N	78.86	8.86	≥6	2.86	PASS
LTE Band 41	20M	QPSK	1	0	40620	1	AMR WB 23.85kbps	8N	83.29	13.29	≥6	7.29	PASS
LTE Band 41	20M	QPSK	1	0	40620	1	EVS NB 5.9kbps	2N	80.06	10.06	≥6	4.06	PASS
LTE Band 41	20M	QPSK	1	0	40620	1	EVS NB 5.9kbps	8N	84.33	14.33	≥6	8.33	PASS
LTE Band 41	20M	QPSK	1	0	40620	1	EVS NB 24.4kbps	2N	79.84	9.84	≥6	3.84	PASS
LTE Band 41	20M	QPSK	1	0	40620	1	EVS NB 24.4kbps	8N	84.28	14.28	≥6	8.28	PASS
LTE Band 41	20M	QPSK	1	0	40620	1	EVS WB 5.9kbps	2N	78.91	8.91	≥6	2.91	PASS
LTE Band 41	20M	QPSK	1	0	40620	1	EVS WB 5.9kbps	8N	83.22	13.22	≥6	7.22	PASS
LTE Band 41	20M	QPSK	1	0	40620	1	EVS WB 13.2kbps	2N	78.69	8.69	≥6	2.69	PASS
LTE Band 41	20M	QPSK	1	0	40620	1	EVS WB 13.2kbps	8N	83.07	13.07	≥6	7.07	PASS
LTE Band 41	20M	QPSK	1	0	40620	1	EVS SWB 9.6kbps	2N	78.96	8.96	≥6	2.96	PASS
LTE Band 41	20M	QPSK	1	0	40620	1	EVS SWB 9.6kbps	8N	83.16	13.16	≥6	7.16	PASS
LTE Band 41	20M	QPSK	1	0	40620	1	EVS SWB 13.2kbps	2N	78.92	8.92	≥6	2.92	PASS
LTE Band 41	20M	QPSK	1	0	40620	1	EVS SWB 13.2kbps	8N	83.18	13.18	≥6	7.18	PASS
LTE Band 42	20M	QPSK	1	0	42590	1	AMR NB 4.75kbps	2N	79.52	9.52	≥6	3.52	PASS
LTE Band 42	20M	QPSK	1	0	42590	1	AMR NB 4.75kbps	8N	84.31	14.31	≥6	8.31	PASS
LTE Band 42	20M	QPSK	1	0	42590	1	AMR NB 12.2kbps	2N	79.58	9.58	≥6	3.58	PASS
LTE Band 42	20M	QPSK	1	0	42590	1	AMR NB 12.2kbps	8N	84.22	14.22	≥6	8.22	PASS
LTE Band 42	20M	QPSK	1	0	42590	1	AMR WB 6.60kbps	2N	78.76	8.76	≥6	2.76	PASS
LTE Band 42	20M	QPSK	1	0	42590	1	AMR WB 6.60kbps	8N	83.41	13.41	≥6	7.41	PASS
LTE Band 42	20M	QPSK	1	0	42590	1	AMR WB 23.85kbps	2N	78.79	8.79	≥6	2.79	PASS
LTE Band 42	20M	QPSK	1	0	42590	1	AMR WB 23.85kbps	8N	83.39	13.39	≥6	7.39	PASS
LTE Band 42	20M	QPSK	1	0	42590	1	EVS NB 5.9kbps	2N	79.63	9.63	≥6	3.63	PASS
LTE Band 42	20M	QPSK	1	0	42590	1	EVS NB 5.9kbps	8N	84.29	14.29	≥6	8.29	PASS
LTE Band 42	20M	QPSK	1	0	42590	1	EVS NB 24.4kbps	2N	79.47	9.47	≥6	3.47	PASS
LTE Band 42	20M	QPSK	1	0	42590	1	EVS NB 24.4kbps	8N	84.14	14.14	≥6	8.14	PASS
LTE Band 42	20M	QPSK	1	0	42590	1	EVS WB 5.9kbps	2N	79.56	9.56	≥6	3.56	PASS
LTE Band 42	20M	QPSK	1	0	42590	1	EVS WB 5.9kbps	8N	84.02	14.02	≥6	8.02	PASS
LTE Band 42	20M	QPSK	1	0	42590	1	EVS WB 13.2kbps	2N	78.66	8.66	≥6	2.66	PASS
LTE Band 42	20M	QPSK	1	0	42590	1	EVS WB 13.2kbps	8N	83.12	13.12	≥6	7.12	PASS
LTE Band 42	20M	QPSK	1	0	42590	1	EVS SWB 9.6kbps	2N	79.15	9.15	≥6	3.15	PASS
LTE Band 42	20M	QPSK	1	0	42590	1	EVS SWB 9.6kbps	8N	83.26	13.26	≥6	7.26	PASS
LTE Band 42	20M	QPSK	1	0	42590	1	EVS SWB 13.2kbps	2N	79.06	9.06	≥6	3.06	PASS



Volume Control Evaluation Report

Report No. : HA422702C

	LTE Band 42	20M	QPSK	1	0	42590	1	EVS SWB 13.2kbps	8N	83.37	13.37	≥6	7.37	PASS
	LTE Band 48	20M	QPSK	1	0	55830	1	AMR NB 4.75kbps	2N	78.95	8.95	≥6	2.95	PASS
	LTE Band 48	20M	QPSK	1	0	55830	1	AMR NB 4.75kbps	8N	84.42	14.42	≥6	8.42	PASS
	LTE Band 48	20M	QPSK	1	0	55830	1	AMR NB 12.2kbps	2N	78.98	8.98	≥6	2.98	PASS
	LTE Band 48	20M	QPSK	1	0	55830	1	AMR NB 12.2kbps	8N	84.39	14.39	≥6	8.39	PASS
	LTE Band 48	20M	QPSK	1	0	55830	1	AMR WB 6.60kbps	2N	79.12	9.12	≥6	3.12	PASS
	LTE Band 48	20M	QPSK	1	0	55830	1	AMR WB 6.60kbps	8N	83.29	13.29	≥6	7.29	PASS
	LTE Band 48	20M	QPSK	1	0	55830	1	AMR WB 23.85kbps	2N	79.03	9.03	≥6	3.03	PASS
	LTE Band 48	20M	QPSK	1	0	55830	1	AMR WB 23.85kbps	8N	83.25	13.25	≥6	7.25	PASS
	LTE Band 48	20M	QPSK	1	0	55830	1	EVS NB 5.9kbps	2N	79.06	9.06	≥6	3.06	PASS
	LTE Band 48	20M	QPSK	1	0	55830	1	EVS NB 5.9kbps	8N	84.33	14.33	≥6	8.33	PASS
	LTE Band 48	20M	QPSK	1	0	55830	1	EVS NB 24.4kbps	2N	79.41	9.41	≥6	3.41	PASS
	LTE Band 48	20M	QPSK	1	0	55830	1	EVS NB 24.4kbps	8N	84.12	14.12	≥6	8.12	PASS
	LTE Band 48	20M	QPSK	1	0	55830	1	EVS WB 5.9kbps	2N	79.33	9.33	≥6	3.33	PASS
	LTE Band 48	20M	QPSK	1	0	55830	1	EVS WB 5.9kbps	8N	83.17	13.17	≥6	7.17	PASS
	LTE Band 48	20M	QPSK	1	0	55830	1	EVS WB 13.2kbps	2N	78.89	8.89	≥6	2.89	PASS
	LTE Band 48	20M	QPSK	1	0	55830	1	EVS WB 13.2kbps	8N	83.08	13.08	≥6	7.08	PASS
	LTE Band 48	20M	QPSK	1	0	55830	1	EVS SWB 9.6kbps	2N	79.25	9.25	≥6	3.25	PASS
	LTE Band 48	20M	QPSK	1	0	55830	1	EVS SWB 9.6kbps	8N	83.26	13.26	≥6	7.26	PASS
	LTE Band 48	20M	QPSK	1	0	55830	1	EVS SWB 13.2kbps	2N	79.18	9.18	≥6	3.18	PASS
	LTE Band 48	20M	QPSK	1	0	55830	1	EVS SWB 13.2kbps	8N	83.11	13.11	≥6	7.11	PASS

<NR>

HAC (Volume control) Test Record										Receive Volume Control Performance				
Plot No.	Air Interface	BW (MHz)	Modulation / Mode	RB Size	RB offset	Channel	Battery	Audio Codec	Mounting Force (N)	Measured dB SPL Level	Conversational Gain (Measured dB SPL Level - 70 dB SPL) (dB)	Limit (dB)	Margin to Limit (dB)	PASS/FAIL
	FR1 n2	40M	QPSK	1	1	376000	1	AMR NB 4.75kbps	2N	79.06	9.06	≥6	3.06	PASS
	FR1 n2	40M	QPSK	1	1	376000	1	AMR NB 4.75kbps	8N	84.58	14.58	≥6	8.58	PASS
	FR1 n2	40M	QPSK	1	1	376000	1	AMR NB 12.2kbps	2N	79.26	9.26	≥6	3.26	PASS
	FR1 n2	40M	QPSK	1	1	376000	1	AMR NB 12.2kbps	8N	84.52	14.52	≥6	8.52	PASS
	FR1 n2	40M	QPSK	1	1	376000	1	AMR WB 6.60kbps	2N	79.15	9.15	≥6	3.15	PASS
	FR1 n2	40M	QPSK	1	1	376000	1	AMR WB 6.60kbps	8N	83.81	13.81	≥6	7.81	PASS
	FR1 n2	40M	QPSK	1	1	376000	1	AMR WB 23.85kbps	2N	79.25	9.25	≥6	3.25	PASS
	FR1 n2	40M	QPSK	1	1	376000	1	AMR WB 23.85kbps	8N	83.82	13.82	≥6	7.82	PASS
	FR1 n2	40M	QPSK	1	1	376000	1	EVS NB 5.9kbps	2N	79.19	9.19	≥6	3.19	PASS
	FR1 n2	40M	QPSK	1	1	376000	1	EVS NB 5.9kbps	8N	84.49	14.49	≥6	8.49	PASS
	FR1 n2	40M	QPSK	1	1	376000	1	EVS NB 24.4kbps	2N	79.68	9.68	≥6	3.68	PASS
	FR1 n2	40M	QPSK	1	1	376000	1	EVS NB 24.4kbps	8N	84.37	14.37	≥6	8.37	PASS
	FR1 n2	40M	QPSK	1	1	376000	1	EVS WB 5.9kbps	2N	79.34	9.34	≥6	3.34	PASS
	FR1 n2	40M	QPSK	1	1	376000	1	EVS WB 5.9kbps	8N	83.71	13.71	≥6	7.71	PASS
	FR1 n2	40M	QPSK	1	1	376000	1	EVS WB 13.2kbps	2N	78.93	8.93	≥6	2.93	PASS
	FR1 n2	40M	QPSK	1	1	376000	1	EVS WB 13.2kbps	8N	83.57	13.57	≥6	7.57	PASS
	FR1 n2	40M	QPSK	1	1	376000	1	EVS SWB 9.6kbps	2N	79.28	9.28	≥6	3.28	PASS
	FR1 n2	40M	QPSK	1	1	376000	1	EVS SWB 9.6kbps	8N	83.69	13.69	≥6	7.69	PASS
	FR1 n2	40M	QPSK	1	1	376000	1	EVS SWB 13.2kbps	2N	79.25	9.25	≥6	3.25	PASS
	FR1 n2	40M	QPSK	1	1	376000	1	EVS SWB 13.2kbps	8N	83.78	13.78	≥6	7.78	PASS
	FR1 n5	25M	QPSK	1	1	167300	1	AMR NB 4.75kbps	2N	79.48	9.48	≥6	3.48	PASS
	FR1 n5	25M	QPSK	1	1	167300	1	AMR NB 4.75kbps	8N	84.19	14.19	≥6	8.19	PASS
	FR1 n5	25M	QPSK	1	1	167300	1	AMR NB 12.2kbps	2N	79.52	9.52	≥6	3.52	PASS
	FR1 n5	25M	QPSK	1	1	167300	1	AMR NB 12.2kbps	8N	84.28	14.28	≥6	8.28	PASS
	FR1 n5	25M	QPSK	1	1	167300	1	AMR WB 6.60kbps	2N	79.62	9.62	≥6	3.62	PASS
	FR1 n5	25M	QPSK	1	1	167300	1	AMR WB 6.60kbps	8N	84.36	14.36	≥6	8.36	PASS
	FR1 n5	25M	QPSK	1	1	167300	1	AMR WB 23.85kbps	2N	79.61	9.61	≥6	3.61	PASS



Volume Control Evaluation Report

Report No. : HA422702C

	FR1 n5	25M	QPSK	1	1	167300	1	AMR WB 23.85kbps	8N	84.28	14.28	≥6	8.28	PASS
	FR1 n5	25M	QPSK	1	1	167300	1	EVS NB 5.9kbps	2N	79.56	9.56	≥6	3.56	PASS
	FR1 n5	25M	QPSK	1	1	167300	1	EVS NB 5.9kbps	8N	84.33	14.33	≥6	8.33	PASS
	FR1 n5	25M	QPSK	1	1	167300	1	EVS NB 24.4kbps	2N	79.32	9.32	≥6	3.32	PASS
	FR1 n5	25M	QPSK	1	1	167300	1	EVS NB 24.4kbps	8N	84.05	14.05	≥6	8.05	PASS
	FR1 n5	25M	QPSK	1	1	167300	1	EVS WB 5.9kbps	2N	79.71	9.71	≥6	3.71	PASS
	FR1 n5	25M	QPSK	1	1	167300	1	EVS WB 5.9kbps	8N	84.35	14.35	≥6	8.35	PASS
	FR1 n5	25M	QPSK	1	1	167300	1	EVS WB 13.2kbps	2N	79.85	9.85	≥6	3.85	PASS
	FR1 n5	25M	QPSK	1	1	167300	1	EVS WB 13.2kbps	8N	84.12	14.12	≥6	8.12	PASS
	FR1 n5	25M	QPSK	1	1	167300	1	EVS SWB 9.6kbps	2N	79.86	9.86	≥6	3.86	PASS
	FR1 n5	25M	QPSK	1	1	167300	1	EVS SWB 9.6kbps	8N	84.36	14.36	≥6	8.36	PASS
	FR1 n5	25M	QPSK	1	1	167300	1	EVS SWB 13.2kbps	2N	79.92	9.92	≥6	3.92	PASS
	FR1 n5	25M	QPSK	1	1	167300	1	EVS SWB 13.2kbps	8N	84.41	14.41	≥6	8.41	PASS
	FR1 n7	50M	QPSK	1	1	507000	1	AMR NB 4.75kbps	2N	79.65	9.65	≥6	3.65	PASS
	FR1 n7	50M	QPSK	1	1	507000	1	AMR NB 4.75kbps	8N	84.33	14.33	≥6	8.33	PASS
	FR1 n7	50M	QPSK	1	1	507000	1	AMR NB 12.2kbps	2N	79.69	9.69	≥6	3.69	PASS
	FR1 n7	50M	QPSK	1	1	507000	1	AMR NB 12.2kbps	8N	84.45	14.45	≥6	8.45	PASS
	FR1 n7	50M	QPSK	1	1	507000	1	AMR WB 6.60kbps	2N	79.12	9.12	≥6	3.12	PASS
	FR1 n7	50M	QPSK	1	1	507000	1	AMR WB 6.60kbps	8N	83.52	13.52	≥6	7.52	PASS
	FR1 n7	50M	QPSK	1	1	507000	1	AMR WB 23.85kbps	2N	79.15	9.15	≥6	3.15	PASS
	FR1 n7	50M	QPSK	1	1	507000	1	AMR WB 23.85kbps	8N	83.56	13.56	≥6	7.56	PASS
	FR1 n7	50M	QPSK	1	1	507000	1	EVS NB 5.9kbps	2N	79.71	9.71	≥6	3.71	PASS
	FR1 n7	50M	QPSK	1	1	507000	1	EVS NB 5.9kbps	8N	84.49	14.49	≥6	8.49	PASS
	FR1 n7	50M	QPSK	1	1	507000	1	EVS NB 24.4kbps	2N	79.57	9.57	≥6	3.57	PASS
	FR1 n7	50M	QPSK	1	1	507000	1	EVS NB 24.4kbps	8N	84.25	14.25	≥6	8.25	PASS
	FR1 n7	50M	QPSK	1	1	507000	1	EVS WB 5.9kbps	2N	79.03	9.03	≥6	3.03	PASS
	FR1 n7	50M	QPSK	1	1	507000	1	EVS WB 5.9kbps	8N	83.47	13.47	≥6	7.47	PASS
9	FR1 n7	50M	QPSK	1	1	507000	1	EVS WB 13.2kbps	2N	78.84	8.84	≥6	2.84	PASS
	FR1 n7	50M	QPSK	1	1	507000	2	EVS WB 13.2kbps	2N	78.92	8.92	≥6	2.92	PASS
	FR1 n7	50M	QPSK	1	1	507000	1	EVS WB 13.2kbps	8N	83.38	13.38	≥6	7.38	PASS
	FR1 n7	50M	QPSK	1	1	507000	1	EVS SWB 9.6kbps	2N	78.96	8.96	≥6	2.96	PASS
	FR1 n7	50M	QPSK	1	1	507000	1	EVS SWB 9.6kbps	8N	83.48	13.48	≥6	7.48	PASS
	FR1 n7	50M	QPSK	1	1	507000	1	EVS SWB 13.2kbps	2N	78.91	8.91	≥6	2.91	PASS
	FR1 n7	50M	QPSK	1	1	507000	1	EVS SWB 13.2kbps	8N	83.45	13.45	≥6	7.45	PASS
	FR1 n66	45M	QPSK	1	1	349000	1	AMR NB 4.75kbps	2N	79.74	9.74	≥6	3.74	PASS
	FR1 n66	45M	QPSK	1	1	349000	1	AMR NB 4.75kbps	8N	84.36	14.36	≥6	8.36	PASS
	FR1 n66	45M	QPSK	1	1	349000	1	AMR NB 12.2kbps	2N	79.76	9.76	≥6	3.76	PASS
	FR1 n66	45M	QPSK	1	1	349000	1	AMR NB 12.2kbps	8N	84.41	14.41	≥6	8.41	PASS
	FR1 n66	45M	QPSK	1	1	349000	1	AMR WB 6.60kbps	2N	79.01	9.01	≥6	3.01	PASS
	FR1 n66	45M	QPSK	1	1	349000	1	AMR WB 6.60kbps	8N	83.64	13.64	≥6	7.64	PASS
	FR1 n66	45M	QPSK	1	1	349000	1	AMR WB 23.85kbps	2N	79.03	9.03	≥6	3.03	PASS
	FR1 n66	45M	QPSK	1	1	349000	1	AMR WB 23.85kbps	8N	83.65	13.65	≥6	7.65	PASS
	FR1 n66	45M	QPSK	1	1	349000	1	EVS NB 5.9kbps	2N	79.8	9.8	≥6	3.8	PASS
	FR1 n66	45M	QPSK	1	1	349000	1	EVS NB 5.9kbps	8N	84.33	14.33	≥6	8.33	PASS
	FR1 n66	45M	QPSK	1	1	349000	1	EVS NB 24.4kbps	2N	79.61	9.61	≥6	3.61	PASS
	FR1 n66	45M	QPSK	1	1	349000	1	EVS NB 24.4kbps	8N	84.28	14.28	≥6	8.28	PASS
	FR1 n66	45M	QPSK	1	1	349000	1	EVS WB 5.9kbps	2N	78.93	8.93	≥6	2.93	PASS
	FR1 n66	45M	QPSK	1	1	349000	1	EVS WB 5.9kbps	8N	83.74	13.74	≥6	7.74	PASS
	FR1 n66	45M	QPSK	1	1	349000	1	EVS WB 13.2kbps	2N	78.86	8.86	≥6	2.86	PASS
	FR1 n66	45M	QPSK	1	1	349000	1	EVS WB 13.2kbps	8N	83.46	13.46	≥6	7.46	PASS
	FR1 n66	45M	QPSK	1	1	349000	1	EVS SWB 9.6kbps	2N	78.95	8.95	≥6	2.95	PASS
	FR1 n66	45M	QPSK	1	1	349000	1	EVS SWB 9.6kbps	8N	83.59	13.59	≥6	7.59	PASS
	FR1 n66	45M	QPSK	1	1	349000	1	EVS SWB 13.2kbps	2N	78.92	8.92	≥6	2.92	PASS
	FR1 n66	45M	QPSK	1	1	349000	1	EVS SWB 13.2kbps	8N	83.61	13.61	≥6	7.61	PASS
	FR1 n77 270	100M	QPSK	1	1	656000	1	AMR NB 4.75kbps	2N	79.95	9.95	≥6	3.95	PASS
	FR1 n77 270	100M	QPSK	1	1	656000	1	AMR NB 4.75kbps	8N	84.25	14.25	≥6	8.25	PASS



Volume Control Evaluation Report

Report No. : HA422702C

FR1 n77 27Q	100M	QPSK	1	1	656000	1	AMR NB 12.2kbps	2N	80.06	10.06	≥6	4.06	PASS
FR1 n77 27Q	100M	QPSK	1	1	656000	1	AMR NB 12.2kbps	8N	84.33	14.33	≥6	8.33	PASS
FR1 n77 27Q	100M	QPSK	1	1	656000	1	AMR WB 6.60kbps	2N	79.26	9.26	≥6	3.26	PASS
FR1 n77 27Q	100M	QPSK	1	1	656000	1	AMR WB 6.60kbps	8N	83.59	13.59	≥6	7.59	PASS
FR1 n77 27Q	100M	QPSK	1	1	656000	1	AMR WB 23.85kbps	2N	79.28	9.28	≥6	3.28	PASS
FR1 n77 27Q	100M	QPSK	1	1	656000	1	AMR WB 23.85kbps	8N	83.64	13.64	≥6	7.64	PASS
FR1 n77 27Q	100M	QPSK	1	1	656000	1	EVS NB 5.9kbps	2N	80.11	10.11	≥6	4.11	PASS
FR1 n77 27Q	100M	QPSK	1	1	656000	1	EVS NB 5.9kbps	8N	84.29	14.29	≥6	8.29	PASS
FR1 n77 27Q	100M	QPSK	1	1	656000	1	EVS NB 24.4kbps	2N	79.91	9.91	≥6	3.91	PASS
FR1 n77 27Q	100M	QPSK	1	1	656000	1	EVS NB 24.4kbps	8N	84.2	14.2	≥6	8.2	PASS
FR1 n77 27Q	100M	QPSK	1	1	656000	1	EVS WB 5.9kbps	2N	79.36	9.36	≥6	3.36	PASS
FR1 n77 27Q	100M	QPSK	1	1	656000	1	EVS WB 5.9kbps	8N	83.52	13.52	≥6	7.52	PASS
FR1 n77 27Q	100M	QPSK	1	1	656000	1	EVS WB 13.2kbps	2N	79.18	9.18	≥6	3.18	PASS
FR1 n77 27Q	100M	QPSK	1	1	656000	1	EVS WB 13.2kbps	8N	83.37	13.37	≥6	7.37	PASS
FR1 n77 27Q	100M	QPSK	1	1	656000	1	EVS SWB 9.6kbps	2N	79.33	9.33	≥6	3.33	PASS
FR1 n77 27Q	100M	QPSK	1	1	656000	1	EVS SWB 9.6kbps	8N	83.45	13.45	≥6	7.45	PASS
FR1 n77 27Q	100M	QPSK	1	1	656000	1	EVS SWB 13.2kbps	2N	79.31	9.31	≥6	3.31	PASS
FR1 n77 27Q	100M	QPSK	1	1	656000	1	EVS SWB 13.2kbps	8N	83.47	13.47	≥6	7.47	PASS
FR1 n77 27Q	100M	QPSK	1	1	633332	1	AMR NB 4.75kbps	2N	79.36	9.36	≥6	3.36	PASS
FR1 n77 27Q	100M	QPSK	1	1	633332	1	AMR NB 4.75kbps	8N	84.09	14.09	≥6	8.09	PASS
FR1 n77 27Q	100M	QPSK	1	1	633332	1	AMR NB 12.2kbps	2N	79.45	9.45	≥6	3.45	PASS
FR1 n77 27Q	100M	QPSK	1	1	633332	1	AMR NB 12.2kbps	8N	84.05	14.05	≥6	8.05	PASS
FR1 n77 27Q	100M	QPSK	1	1	633332	1	AMR WB 6.60kbps	2N	79.38	9.38	≥6	3.38	PASS
FR1 n77 27Q	100M	QPSK	1	1	633332	1	AMR WB 6.60kbps	8N	83.62	13.62	≥6	7.62	PASS
FR1 n77 27Q	100M	QPSK	1	1	633332	1	AMR WB 23.85kbps	2N	79.42	9.42	≥6	3.42	PASS
FR1 n77 27Q	100M	QPSK	1	1	633332	1	AMR WB 23.85kbps	8N	83.59	13.59	≥6	7.59	PASS
FR1 n77 27Q	100M	QPSK	1	1	633332	1	EVS NB 5.9kbps	2N	79.51	9.51	≥6	3.51	PASS
FR1 n77 27Q	100M	QPSK	1	1	633332	1	EVS NB 5.9kbps	8N	84.11	14.11	≥6	8.11	PASS
FR1 n77 27Q	100M	QPSK	1	1	633332	1	EVS NB 24.4kbps	2N	79.63	9.63	≥6	3.63	PASS
FR1 n77 27Q	100M	QPSK	1	1	633332	1	EVS NB 24.4kbps	8N	84.14	14.14	≥6	8.14	PASS
FR1 n77 27Q	100M	QPSK	1	1	633332	1	EVS WB 5.9kbps	2N	79.62	9.62	≥6	3.62	PASS
FR1 n77 27Q	100M	QPSK	1	1	633332	1	EVS WB 5.9kbps	8N	83.5	13.5	≥6	7.5	PASS
FR1 n77 27Q	100M	QPSK	1	1	633332	1	EVS WB 13.2kbps	2N	79.16	9.16	≥6	3.16	PASS
FR1 n77 27Q	100M	QPSK	1	1	633332	1	EVS WB 13.2kbps	8N	83.29	13.29	≥6	7.29	PASS
FR1 n77 27Q	100M	QPSK	1	1	633332	1	EVS SWB 9.6kbps	2N	79.52	9.52	≥6	3.52	PASS
FR1 n77 27Q	100M	QPSK	1	1	633332	1	EVS SWB 9.6kbps	8N	83.48	13.48	≥6	7.48	PASS
FR1 n77 27Q	100M	QPSK	1	1	633332	1	EVS SWB 13.2kbps	2N	79.46	9.46	≥6	3.46	PASS
FR1 n77 27Q	100M	QPSK	1	1	633332	1	EVS SWB 13.2kbps	8N	83.33	13.33	≥6	7.33	PASS



<WLAN>

HAC (Volume control) Test Record							Receive Volume Control Performance				
Plot No.	Air Interface	Modulation / Mode	Channel	Battery	Audio Codec	Mounting Force (N)	Measured dBSPL Level	Conversational Gain (Measured dBSPL Level - 70 dBSPL) (dB)	Limit (dB)	Margin to Limit (dB)	PASS/FAIL
	WLAN2.4GHz	802.11b 1Mbps	6	1	AMR NB 4.75kbps	2N	79.22	9.22	≥6	3.22	PASS
	WLAN2.4GHz	802.11b 1Mbps	6	1	AMR NB 4.75kbps	8N	84.11	14.11	≥6	8.11	PASS
	WLAN2.4GHz	802.11b 1Mbps	6	1	AMR NB 12.2kbps	2N	79.18	9.18	≥6	3.18	PASS
	WLAN2.4GHz	802.11b 1Mbps	6	1	AMR NB 12.2kbps	8N	84.26	14.26	≥6	8.26	PASS
	WLAN2.4GHz	802.11b 1Mbps	6	1	AMR WB 6.60kbps	2N	79.29	9.29	≥6	3.29	PASS
	WLAN2.4GHz	802.11b 1Mbps	6	1	AMR WB 6.60kbps	8N	82.95	12.95	≥6	6.95	PASS
	WLAN2.4GHz	802.11b 1Mbps	6	1	AMR WB 23.85kbps	2N	79.35	9.35	≥6	3.35	PASS
	WLAN2.4GHz	802.11b 1Mbps	6	1	AMR WB 23.85kbps	8N	82.98	12.98	≥6	6.98	PASS
	WLAN2.4GHz	802.11b 1Mbps	6	1	EVS NB 5.9kbps	2N	79.33	9.33	≥6	3.33	PASS
	WLAN2.4GHz	802.11b 1Mbps	6	1	EVS NB 5.9kbps	8N	84.06	14.06	≥6	8.06	PASS
	WLAN2.4GHz	802.11b 1Mbps	6	1	EVS NB 24.4kbps	2N	79.48	9.48	≥6	3.48	PASS
	WLAN2.4GHz	802.11b 1Mbps	6	1	EVS NB 24.4kbps	8N	84.09	14.09	≥6	8.09	PASS
	WLAN2.4GHz	802.11b 1Mbps	6	1	EVS WB 5.9kbps	2N	79.31	9.31	≥6	3.31	PASS
	WLAN2.4GHz	802.11b 1Mbps	6	1	EVS WB 5.9kbps	8N	83.05	13.05	≥6	7.05	PASS
	WLAN2.4GHz	802.11b 1Mbps	6	1	EVS WB 13.2kbps	2N	79.06	9.06	≥6	3.06	PASS
	WLAN2.4GHz	802.11b 1Mbps	6	1	EVS WB 13.2kbps	8N	82.88	12.88	≥6	6.88	PASS
	WLAN2.4GHz	802.11b 1Mbps	6	1	EVS SWB 9.6kbps	2N	79.25	9.25	≥6	3.25	PASS
	WLAN2.4GHz	802.11b 1Mbps	6	1	EVS SWB 9.6kbps	8N	83.15	13.15	≥6	7.15	PASS
	WLAN2.4GHz	802.11b 1Mbps	6	1	EVS SWB 13.2kbps	2N	79.21	9.21	≥6	3.21	PASS
	WLAN2.4GHz	802.11b 1Mbps	6	1	EVS SWB 13.2kbps	8N	83.12	13.12	≥6	7.12	PASS
	WLAN5.2GHz	802.11a 6Mbps	40	1	AMR NB 4.75kbps	2N	79.74	9.74	≥6	3.74	PASS
	WLAN5.2GHz	802.11a 6Mbps	40	1	AMR NB 4.75kbps	8N	84.59	14.59	≥6	8.59	PASS
	WLAN5.2GHz	802.11a 6Mbps	40	1	AMR NB 12.2kbps	2N	79.66	9.66	≥6	3.66	PASS
	WLAN5.2GHz	802.11a 6Mbps	40	1	AMR NB 12.2kbps	8N	84.51	14.51	≥6	8.51	PASS
	WLAN5.2GHz	802.11a 6Mbps	40	1	AMR WB 6.60kbps	2N	79.15	9.15	≥6	3.15	PASS
	WLAN5.2GHz	802.11a 6Mbps	40	1	AMR WB 6.60kbps	8N	83.51	13.51	≥6	7.51	PASS
	WLAN5.2GHz	802.11a 6Mbps	40	1	AMR WB 23.85kbps	2N	79.26	9.26	≥6	3.26	PASS
	WLAN5.2GHz	802.11a 6Mbps	40	1	AMR WB 23.85kbps	8N	83.56	13.56	≥6	7.56	PASS
	WLAN5.2GHz	802.11a 6Mbps	40	1	EVS NB 5.9kbps	2N	79.58	9.58	≥6	3.58	PASS
	WLAN5.2GHz	802.11a 6Mbps	40	1	EVS NB 5.9kbps	8N	84.49	14.49	≥6	8.49	PASS
	WLAN5.2GHz	802.11a 6Mbps	40	1	EVS NB 24.4kbps	2N	79.71	9.71	≥6	3.71	PASS
	WLAN5.2GHz	802.11a 6Mbps	40	1	EVS NB 24.4kbps	8N	84.45	14.45	≥6	8.45	PASS
	WLAN5.2GHz	802.11a 6Mbps	40	1	EVS WB 5.9kbps	2N	79.33	9.33	≥6	3.33	PASS
	WLAN5.2GHz	802.11a 6Mbps	40	1	EVS WB 5.9kbps	8N	83.48	13.48	≥6	7.48	PASS
	WLAN5.2GHz	802.11a 6Mbps	40	1	EVS WB 13.2kbps	2N	79.05	9.05	≥6	3.05	PASS
	WLAN5.2GHz	802.11a 6Mbps	40	1	EVS WB 13.2kbps	8N	83.3	13.3	≥6	7.3	PASS
	WLAN5.2GHz	802.11a 6Mbps	40	1	EVS SWB 9.6kbps	2N	79.28	9.28	≥6	3.28	PASS
	WLAN5.2GHz	802.11a 6Mbps	40	1	EVS SWB 9.6kbps	8N	83.39	13.39	≥6	7.39	PASS
	WLAN5.2GHz	802.11a 6Mbps	40	1	EVS SWB 13.2kbps	2N	79.31	9.31	≥6	3.31	PASS
	WLAN5.2GHz	802.11a 6Mbps	40	1	EVS SWB 13.2kbps	8N	83.41	13.41	≥6	7.41	PASS
	WLAN5.3GHz	802.11a 6Mbps	60	1	AMR NB 4.75kbps	2N	79.75	9.75	≥6	3.75	PASS
	WLAN5.3GHz	802.11a 6Mbps	60	1	AMR NB 4.75kbps	8N	84.39	14.39	≥6	8.39	PASS
	WLAN5.3GHz	802.11a 6Mbps	60	1	AMR NB 12.2kbps	2N	79.82	9.82	≥6	3.82	PASS
	WLAN5.3GHz	802.11a 6Mbps	60	1	AMR NB 12.2kbps	8N	84.33	14.33	≥6	8.33	PASS
	WLAN5.3GHz	802.11a 6Mbps	60	1	AMR WB 6.60kbps	2N	78.92	8.92	≥6	2.92	PASS
	WLAN5.3GHz	802.11a 6Mbps	60	1	AMR WB 6.60kbps	8N	83.21	13.21	≥6	7.21	PASS
	WLAN5.3GHz	802.11a 6Mbps	60	1	AMR WB 23.85kbps	2N	78.94	8.94	≥6	2.94	PASS
	WLAN5.3GHz	802.11a 6Mbps	60	1	AMR WB 23.85kbps	8N	83.26	13.26	≥6	7.26	PASS
	WLAN5.3GHz	802.11a 6Mbps	60	1	EVS NB 5.9kbps	2N	79.71	9.71	≥6	3.71	PASS



Volume Control Evaluation Report

Report No. : HA422702C

	WLAN5.3GHz	802.11a 6Mbps	60	1	EVS NB 5.9kbps	8N	84.36	14.36	≥6	8.36	PASS
	WLAN5.3GHz	802.11a 6Mbps	60	1	EVS NB 24.4kbps	2N	79.69	9.69	≥6	3.69	PASS
	WLAN5.3GHz	802.11a 6Mbps	60	1	EVS NB 24.4kbps	8N	84.27	14.27	≥6	8.27	PASS
	WLAN5.3GHz	802.11a 6Mbps	60	1	EVS WB 5.9kbps	2N	79.02	9.02	≥6	3.02	PASS
	WLAN5.3GHz	802.11a 6Mbps	60	1	EVS WB 5.9kbps	8N	83.2	13.2	≥6	7.2	PASS
10	WLAN5.3GHz	802.11a 6Mbps	60	1	EVS WB 13.2kbps	2N	78.85	8.85	≥6	2.85	PASS
	WLAN5.3GHz	802.11a 6Mbps	60	2	EVS WB 13.2kbps	2N	78.92	8.92	≥6	2.92	PASS
	WLAN5.3GHz	802.11a 6Mbps	60	1	EVS WB 13.2kbps	8N	83.03	13.03	≥6	7.03	PASS
	WLAN5.3GHz	802.11a 6Mbps	60	1	EVS SWB 9.6kbps	2N	79.12	9.12	≥6	3.12	PASS
	WLAN5.3GHz	802.11a 6Mbps	60	1	EVS SWB 9.6kbps	8N	83.13	13.13	≥6	7.13	PASS
	WLAN5.3GHz	802.11a 6Mbps	60	1	EVS SWB 13.2kbps	2N	79.14	9.14	≥6	3.14	PASS
	WLAN5.3GHz	802.11a 6Mbps	60	1	EVS SWB 13.2kbps	8N	83.11	13.11	≥6	7.11	PASS
	WLAN5.5GHz	802.11a 6Mbps	116	1	AMR NB 4.75kbps	2N	79.62	9.62	≥6	3.62	PASS
	WLAN5.5GHz	802.11a 6Mbps	116	1	AMR NB 4.75kbps	8N	84.06	14.06	≥6	8.06	PASS
	WLAN5.5GHz	802.11a 6Mbps	116	1	AMR NB 12.2kbps	2N	79.65	9.65	≥6	3.65	PASS
	WLAN5.5GHz	802.11a 6Mbps	116	1	AMR NB 12.2kbps	8N	84.11	14.11	≥6	8.11	PASS
	WLAN5.5GHz	802.11a 6Mbps	116	1	AMR WB 6.60kbps	2N	78.94	8.94	≥6	2.94	PASS
	WLAN5.5GHz	802.11a 6Mbps	116	1	AMR WB 6.60kbps	8N	83.62	13.62	≥6	7.62	PASS
	WLAN5.5GHz	802.11a 6Mbps	116	1	AMR WB 23.85kbps	2N	78.99	8.99	≥6	2.99	PASS
	WLAN5.5GHz	802.11a 6Mbps	116	1	AMR WB 23.85kbps	8N	83.6	13.6	≥6	7.6	PASS
	WLAN5.5GHz	802.11a 6Mbps	116	1	EVS NB 5.9kbps	2N	79.6	9.6	≥6	3.6	PASS
	WLAN5.5GHz	802.11a 6Mbps	116	1	EVS NB 5.9kbps	8N	84.15	14.15	≥6	8.15	PASS
	WLAN5.5GHz	802.11a 6Mbps	116	1	EVS NB 24.4kbps	2N	79.59	9.59	≥6	3.59	PASS
	WLAN5.5GHz	802.11a 6Mbps	116	1	EVS NB 24.4kbps	8N	84.07	14.07	≥6	8.07	PASS
	WLAN5.5GHz	802.11a 6Mbps	116	1	EVS WB 5.9kbps	2N	79.05	9.05	≥6	3.05	PASS
	WLAN5.5GHz	802.11a 6Mbps	116	1	EVS WB 5.9kbps	8N	83.59	13.59	≥6	7.59	PASS
	WLAN5.5GHz	802.11a 6Mbps	116	1	EVS WB 13.2kbps	2N	78.88	8.88	≥6	2.88	PASS
	WLAN5.5GHz	802.11a 6Mbps	116	1	EVS WB 13.2kbps	8N	83.45	13.45	≥6	7.45	PASS
	WLAN5.5GHz	802.11a 6Mbps	116	1	EVS SWB 9.6kbps	2N	79.12	9.12	≥6	3.12	PASS
	WLAN5.5GHz	802.11a 6Mbps	116	1	EVS SWB 9.6kbps	8N	83.55	13.55	≥6	7.55	PASS
	WLAN5.5GHz	802.11a 6Mbps	116	1	EVS SWB 13.2kbps	2N	79.06	9.06	≥6	3.06	PASS
	WLAN5.5GHz	802.11a 6Mbps	116	1	EVS SWB 13.2kbps	8N	83.52	13.52	≥6	7.52	PASS
	WLAN5.8GHz	802.11a 6Mbps	157	1	AMR NB 4.75kbps	2N	79.15	9.15	≥6	3.15	PASS
	WLAN5.8GHz	802.11a 6Mbps	157	1	AMR NB 4.75kbps	8N	84.15	14.15	≥6	8.15	PASS
	WLAN5.8GHz	802.11a 6Mbps	157	1	AMR NB 12.2kbps	2N	79.12	9.12	≥6	3.12	PASS
	WLAN5.8GHz	802.11a 6Mbps	157	1	AMR NB 12.2kbps	8N	84.12	14.12	≥6	8.12	PASS
	WLAN5.8GHz	802.11a 6Mbps	157	1	AMR WB 6.60kbps	2N	79.08	9.08	≥6	3.08	PASS
	WLAN5.8GHz	802.11a 6Mbps	157	1	AMR WB 6.60kbps	8N	83.51	13.51	≥6	7.51	PASS
	WLAN5.8GHz	802.11a 6Mbps	157	1	AMR WB 23.85kbps	2N	79.16	9.16	≥6	3.16	PASS
	WLAN5.8GHz	802.11a 6Mbps	157	1	AMR WB 23.85kbps	8N	83.54	13.54	≥6	7.54	PASS
	WLAN5.8GHz	802.11a 6Mbps	157	1	EVS NB 5.9kbps	2N	79.06	9.06	≥6	3.06	PASS
	WLAN5.8GHz	802.11a 6Mbps	157	1	EVS NB 5.9kbps	8N	84.11	14.11	≥6	8.11	PASS
	WLAN5.8GHz	802.11a 6Mbps	157	1	EVS NB 24.4kbps	2N	79.41	9.41	≥6	3.41	PASS
	WLAN5.8GHz	802.11a 6Mbps	157	1	EVS NB 24.4kbps	8N	84.04	14.04	≥6	8.04	PASS
	WLAN5.8GHz	802.11a 6Mbps	157	1	EVS WB 5.9kbps	2N	79.13	9.13	≥6	3.13	PASS
	WLAN5.8GHz	802.11a 6Mbps	157	1	EVS WB 5.9kbps	8N	83.49	13.49	≥6	7.49	PASS
	WLAN5.8GHz	802.11a 6Mbps	157	1	EVS WB 13.2kbps	2N	79	9	≥6	3	PASS
	WLAN5.8GHz	802.11a 6Mbps	157	1	EVS WB 13.2kbps	8N	83.39	13.39	≥6	7.39	PASS
	WLAN5.8GHz	802.11a 6Mbps	157	1	EVS SWB 9.6kbps	2N	79.08	9.08	≥6	3.08	PASS
	WLAN5.8GHz	802.11a 6Mbps	157	1	EVS SWB 9.6kbps	8N	83.45	13.45	≥6	7.45	PASS
	WLAN5.8GHz	802.11a 6Mbps	157	1	EVS SWB 13.2kbps	2N	79.05	9.05	≥6	3.05	PASS
	WLAN5.8GHz	802.11a 6Mbps	157	1	EVS SWB 13.2kbps	8N	83.42	13.42	≥6	7.42	PASS

Test Engineer : Martin Li, Varus Wang, Light Wang, Ricky Gu

11. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances. Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %.

The judgment of conformity in the report is based on the measurement results excluding the measurement uncertainty.

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Component	Standard uncertainty (dB)	U^2 (%)
Generator Accuracy To enable harmonic distortion measurements to 0.1%, the generator distortion must be <0.05%. This is equivalent to a standard uncertainty of 0.043 dB.	0.043	0.25
Ear Simulator Pressure Sensitivity (incl. Measurement Mic.) The uncertainty of the ear simulator as per the standards and quoted on its calibration certificate is 0.3 dB with a coverage factor of $k = 2$. This is equivalent to a standard uncertainty of $0.3/2 = 0.15$ dB.	0.15	3.03
Microphone Preamplifier The manufacturer quotes the preamp to be within ± 0.02 dB with a 95% probability or 2σ . This is equivalent to a standard uncertainty of $0.02/2 = 0.01$ dB.	0.01	0.01
Analysis System / RMS Detector Typical measurement system detector accuracy is 0.1 dB with a coverage factor of $k = 2$. This is equivalent to a standard uncertainty of $0.1/2 = 0.05$ dB.	0.05	0.33
Effect of Positioning on Mid-Band Sensitivity For a handset, with the HATS positioning jig, the typical standard deviation estimated from a statistically significant number of measurements is ± 2 dB. This is equivalent to a standard uncertainty of 2 dB.	2	670.42
Time Varying Effects of the Mouth Simulator for Send & Sidetone For a receive measurement on a handset, the mouth simulator is not used (its uncertainty is zero), The standard uncertainty of 0 dB	0	0.00
Total Standard Uncertainty (%)	25.96	
UMAX ($k = 2$) (%)	51.9	
UMAX ($k = 2$) (dB)	3.6	

Uncertainty Budget of Volume Control assessment

12. References

- [1] ANSI C63.19:2019, "American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids", Aug. 2019.
- [2] FCC KDB 285076 D01v06r04, "Equipment Authorization Guidance for Hearing Aid Compatibility", Sep. 2023.
- [3] FCC KDB 285076 D04 Volume Control v02, "GUIDANCE FOR PERFORMING VOLUME CONTROL MEASUREMENTS ON MOBILE HANDSETS", Sep. 2023
- [4] FCC KDB 285076 D05 HAC Waiver DA 23-914 v01, "HAC COMPLIANCE UNDER WAIVER DA 23-914", Sep. 2023
- [5] ANSI/TIA-5050-2018, "Receive Volume Control Requirements for Wireless (Mobile) Devices", Jan. 2018
- [6] Head Acoustic System Handbook