

# **FCC Test Report**

Report No.: AGC02762220706FE05

**FCC ID** : 2AKC6-AX1808

**APPLICATION PURPOSE** : Original Equipment

**PRODUCT DESIGNATION**: Wireless USB Adapter

**BRAND NAME** : N/A

**MODEL NAME** : AX1808, AX1806, AX1803

**APPLICANT**: SHEN ZHEN XIN HUA TIAN TECHNOLOGY CO., LTD

**DATE OF ISSUE** : Sep. 19, 2022

STANDARD(S)

TEST PROCEDURE(S)

: FCC Part 15.247

**REPORT VERSION**: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd





Page 2 of 131


#### REPORT REVISE RECORD

Report Versio	n Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Sep. 19, 2022	Valid	Initial Release




## **TABLE OF CONTENTS**

1. VERIFICATION OF CONFORMITY	5
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION	6
2.2. TABLE OF CARRIER FREQUENCYS	7
2.3. IEEE 802.11N MODULATION SCHEME	8
2.4. RELATED SUBMITTAL(S) / GRANT (S)	8
2.5. TEST METHODOLOGY	8
2.6. SPECIAL ACCESSORIES	8
2.7. EQUIPMENT MODIFICATIONS	8
2.8. ANTENNA REQUIREMENT	9
2.9. DESCRIPTION OF AVAILABLE ANTENNAS	10
3. MEASUREMENT UNCERTAINTY	11
4. DESCRIPTION OF TEST MODES	12
5. SYSTEM TEST CONFIGURATION	13
5.1. CONFIGURATION OF EUT SYSTEM	13
5.2. EQUIPMENT USED IN EUT SYSTEM	13
5.3. SUMMARY OF TEST RESULTS	13
6. TEST FACILITY	14
7. OUTPUT POWER	15
7.1. MEASUREMENT PROCEDURE	15
7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	15
7.3. LIMITS AND MEASUREMENT RESULT	16
8. BANDWIDTH	18
8.1. MEASUREMENT PROCEDURE	18
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	18
8.3. LIMITS AND MEASUREMENT RESULTS	19
9. CONDUCTED SPURIOUS EMISSION	44
9.1. MEASUREMENT PROCEDURE	44
9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	44
9.3. MEASUREMENT EQUIPMENT USEDJN	44





9.4. LIMITS AND MEASUREMENT RESULT	44
10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY	73
10.1 MEASUREMENT PROCEDURE	73
10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	73
10.3 MEASUREMENT EQUIPMENT USED	73
10.4 LIMITS AND MEASUREMENT RESULT	73
11. RADIATED EMISSION	87
11.1. MEASUREMENT PROCEDURE	87
11.2. TEST SETUP	88
11.3. LIMITS AND MEASUREMENT RESULT	
11.4. TEST RESULT	89
12. LINE CONDUCTED EMISSION TEST	127
12.1. LIMITS OF LINE CONDUCTED EMISSION TEST	127
12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	127
12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	128
12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	128
12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	129
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	131
APPENDIX B: PHOTOGRAPHS OF EUT	131






## 1. VERIFICATION OF CONFORMITY

Applicant	SHEN ZHEN XIN HUA TIAN TECHNOLOGY CO., LTD
Address 3Foor, B Buliding, DaHong Industrial Park, GuangMin District, Sher China	
manufacturer	SHEN ZHEN XIN HUA TIAN TECHNOLOGY CO., LTD
Address 3Foor, B Buliding, DaHong Industrial Park, GuangMin District, Sher China	
Factory	SHEN ZHEN XIN HUA TIAN TECHNOLOGY CO., LTD
Address	3Foor, B Buliding, DaHong Industrial Park, GuangMin District, Shenzhen City, China
Product Designation	Wireless USB Adapter
Brand Name	N/A
Test Model	AX1808
Series Model	AX1806, AX1803
Declaration of Difference	All the same except model name and shell.
Date of test	Sep. 08, 2022 to Sep. 19, 2022
Deviation	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Report Template	AGCRT-US-BGN/RF

### We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.247.

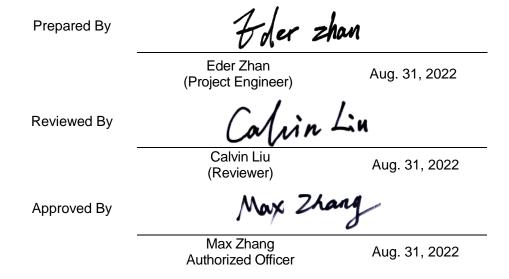



Page 6 of 131

## 2. GENERAL INFORMATION

### 2.1. PRODUCT DESCRIPTION

The EUT is designed as "Wireless USB Adapter". It is designed by way of utilizing the DSSS and OFDM technology to achieve the system operation.

A major technical description of EUT is described as following

A major technical description of EOT is described as following					
Equipment Type WLAN 2.4G					
Frequency Band	2400MHz ~ 2483.5MHz				
Operation Frequency	2412MHz ~ 2462MHz				
Output Power (Average)	IEEE 802.11b:7.57dBm; IEEE 802.11g:6.39dBm;				
Output Power (Average)	IEEE 802.11n(HT20):6.53dBm; IEEE 802.11n(HT40):5.94dBm				
Output Power (Peak)	IEEE 802.11b:9.97dBm; IEEE 802.11g:9.54dBm;				
Output Power (Peak)	IEEE 802.11n(HT20):8.42dBm; IEEE 802.11n(HT40):8.21dBm				
Output Power (MIMO-	IEEE 802.11b:10.44dBm; IEEE 802.11g:9.23dBm;				
Average)	IEEE 802.11n(20):9.15dBm; IEEE 802.11n(40):8.90dBm				
Output Power (MIMO-	IEEE 802.11b:12.97dBm; IEEE 802.11g:12.52dBm;				
Peak)	IEEE 802.11n(20):11.32dBm; IEEE 802.11n(40):11.19dBm				
Modulation	802.11b:DQPSK, DBPSK, CCK				
Wioddiation	802.11g/n: 64-QAM, 16-QAM, QPSK, BPSK				
	802.11b: 1/2/5.5/11Mbps				
Data Rate	802.11g: 6/9/12/18/24/36/48/54Mbps				
	802.11n: up to 300Mbps				
Number of channels	802.11b/g/n-HT20:11channels				
Number of charmers	802.11n-HT40:7channels				
Hardware Version	V1.0				
Software Version	V2.1				
Antenna Designation	Dipole antenna (Comply with requirements of the FCC part 15.203)				
Antenna Gain	2.21dBi				
Number of transmit chain	2(802.11b/g/n all used two antennas,802.11b/g/n support MIMO)				
Power Supply	DC 5V by PC				



Page 7 of 131

### 2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
	1	2412 MHZ
	2	2417 MHZ
	3	2422 MHZ
	4	2427 MHZ
	5	2432 MHZ
2400~2483.5MHZ	6	2437 MHZ
	7	2442 MHZ
	8	2447 MHZ
	9	2452 MHZ
	10	2457 MHZ
	11	2462 MHZ

Note: For 20MHZ bandwidth system use Channel 1 to Channel 11. For 40MHZ bandwidth system use Channel 3 to Channel 9



Page 8 of 131

### 2.3. IEEE 802.11N MODULATION SCHEME

MCS Index	Nss	Modulation	R	NBPSC	NBPSC NCBPS		NDBPS		Data rate(Mbps) 800nsGl	
					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0
6	1	64-QAM	3/4	6	312	648	234	489	58.5	121.5
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0

Symbol	Explanation	
NSS	Number of spatial streams	
R	Code rate	
NBPSC	Number of coded bits per single carrier	
NCBPS	Number of coded bits per symbol	
NDBPS	Number of data bits per symbol	
GI	Guard interval	

## 2.4. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID**: **2AKC6-AX1808** filing to comply with the FCC Part 15 requirements.

## 2.5. TEST METHODOLOGY

KDB 558074 D01 15.247 Meas Guidance v05: Guidance for compliance measurements on Digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules

ANSI C63.10:2013: American National Standard for Testing Unlicensed Wireless Devices

## 2.6. SPECIAL ACCESSORIES

Refer to section 5.2.

# 2.7. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.



Page 9 of 131

#### 2.8. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device. For more information of the antenna, please refer to the APPENDIX B: PHOTOGRAPHS OF EUT.



Page 10 of 131

#### 2.9. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency	TX	TX Bandwidth Max Pe	Max Peak (	Gain (dBi)	Max Directional Gain
Type	Band (MHz)	Paths (MHz) Ant 1		Ant 1	Ant 2	(dBi)
		2.4G WIFI	Dipole Antenna	List (2.4GHz 2*	2 MIMO)	
Dipole Antenna	2412 ~ 2462	2	20,40	2.21	2.21	5.22

Note 1: The EUT supports Cyclic Delay Diversity (CDD) technology for 802.11b/g/n mode.

Note 2: The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.

If all antennas have the same gain, Gant, Directional gain = Gant + Array Gain, where Array Gain is as follows.

• For power spectral density (PSD) measurements on devices:

Array Gain = 10 log (Nant/ Nss) dB = 3.01;

For power measurements on IEEE 802.1devices:

Array Gain = 0 dB for  $N_{ANT} \le 4$ ;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥40 MHz for any NANT;

Array Gain = 5 log(Nant/Nss) dB or 3 dB, whichever is less, for 20 MHz channel widths with Nant ≥ 5.

If antenna gains are not equal, Directional gain may be calculated by using the formulas applicable to equal gain antennas with G<sub>ANT</sub> set equal to the gain of the antenna having the highest gain.




Page 11 of 131

## 3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 3.1 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 4.0 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.8 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	$U_c = \pm 2 \%$
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$





### 4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION			
1	Low channel transmitting (TX)			
2	Middle channel transmitting (TX)			
3	High channel transmitting (TX)			

#### Note:

Transmit by 802.11b with Date rate (1/2/5.5/11)

Transmit by 802.11g with Date rate (6/9/12/18/24/36/48/54)

Transmit by 802.11n (20MHz) with Date rate (6.5/13/19.5/26/39/52/58.5/65)


Transmit by 802.11n (40MHz) with Date rate (13.5/27/40.5/54/81/108/121.5/135)

The test channel for 20MHZ bandwidth system is channel 1, 6 and 11.

The test channel for 40MHZ bandwidth system is channel 3, 6 and 9.

#### Note:

- 1. The EUT has been set to operate continuously on the lowest, middle and highest operation frequency Individually, and the EUT is operating at its maximum duty cycle>or equal 98%
- 2. All modes under which configure applicable have been tested and the worst mode test data recording in the test report, if no other mode data.

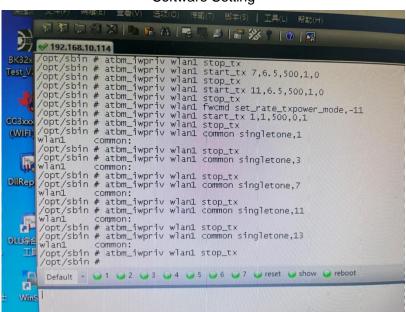

# Software Setting



Page 13 of 131

## 5. SYSTEM TEST CONFIGURATION

## **5.1. CONFIGURATION OF EUT SYSTEM**

Radiated Emission Configure:



Conducted Emission Configure:

EUT	AE

## **5.2. EQUIPMENT USED IN EUT SYSTEM**

Item	Equipment	Equipment Model No. ID or Specification		Remark
1	Wireless USB Adapter	AX1808	2AKC6-AX1808	EUT
2	PC	PC NbI-WAQ9R DC 5V		AE
3	PC adapter	HW-200200CP1	DC 5V	AE

### 5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.247	Output Power	Compliant
§15.247	6 dB Bandwidth	Compliant
§15.247	Conducted Spurious Emission	Compliant
§15.247	Maximum Conducted Output Power Spectral Density	Compliant
§15.209	Radiated Emission	Compliant
§15.247	Band Edges	Compliant
§15.207	Line Conduction Emission	Compliant



Page 14 of 131

## 6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Designation Number	CN1259
FCC Test Firm Registration Number	975832
A2LA Cert. No.	5054.02
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA

# TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Mar. 28, 2022	Mar. 27, 2023
LISN	R&S	ESH2-Z5	100086	Jun. 09, 2022	Jun. 08, 2023
Test software	R&S	ES-K1(Ver.V1.71)	N/A	N/A	N/A

### **TEST EQUIPMENT OF RADIATED EMISSION TEST**

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Mar. 28, 2022	Mar. 27, 2023
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Nov. 17, 2021	Nov. 16, 2022
2.4GHz Filter	EM Electronics	2400-2500MHz	N/A	Mar. 23, 2022	Mar. 22, 2024
Attenuator	ZHINAN	E-002	N/A	Sep. 02, 2022	Sep. 01, 2024
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Oct. 31, 2021	Oct. 30, 2023
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2024
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Apr. 23, 2021	Apr. 22, 2023
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Sep. 02, 2022	Sep. 01, 2024
ANTENNA	SCHWARZBECK	VULB9168	494	Jan. 08, 2021	Jan. 07, 2023
Test software	Tonscend	JS32-RE (Ver.2.5)	N/A	N/A	N/A



Page 15 of 131

## 7. OUTPUT POWER


## 7.1. MEASUREMENT PROCEDURE

For average power test:

- 1. Connect EUT RF output port to power sensor through an RF attenuator.
- 2. Connect the power sensor to the PC.
- 3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 4. Record the maximum power from the software.

**Note**: The EUT was tested according to ANSI C63.10 (2013) for compliance to FCC 47CFR 15.247 requirements.

# 7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)





Page 16 of 131

### 7.3. LIMITS AND MEASUREMENT RESULT

Test Data of Conducted Output Power-ANT 1						
Test Mode	Test Channel (MHz)	Average Power (dBm)	Peak Power (dBm)	Limits (dBm)	Pass or Fail	
	2412	7.57	9.95	<b>≪3</b> 0	Pass	
802.11b	2437	7.22	9.70	<b>≪3</b> 0	Pass	
	2462	7.54	9.88	<b>≪3</b> 0	Pass	
	2412	6.39	9.47	<b>⊴</b> 30	Pass	
802.11g	2437	6.30	9.42	<b>⊴</b> 30	Pass	
	2462	6.27	9.40	<b>≪3</b> 0	Pass	
	2412	5.70	8.19	<b>≪3</b> 0	Pass	
802.11n20	2437	5.85	8.30	<b>≪3</b> 0	Pass	
	2462	5.18	8.26	<b>≪3</b> 0	Pass	
	2422	5.86	8.17	<b>≪3</b> 0	Pass	
802.11n40	2437	5.43	8.12	<b>≪3</b> 0	Pass	
	2452	5.14	8.09	<b>≪3</b> 0	Pass	

Test Data of Conducted Output Power-ANT 2						
Test Mode	Test Channel (MHz)	Average Power (dBm)	Peak Power (dBm)	Limits (dBm)	Pass or Fail	
	2412	7.29	9.97	<b>\$</b> 0	Pass	
802.11b	2437	7.24	9.82	<b>≪3</b> 0	Pass	
	2462	7.14	9.91	<b>≼3</b> 0	Pass	
	2412	6.04	9.54	<b>⊴</b> 30	Pass	
802.11g	2437	5.88	9.48	<b>⊴</b> 30	Pass	
	2462	5.72	9.43	<b>≼3</b> 0	Pass	
	2412	6.53	8.42	<b>⊴</b> 30	Pass	
802.11n20	2437	6.25	8.22	≪30	Pass	
	2462	5.76	8.36	<b>⊴</b> 30	Pass	
	2422	5.92	8.19	<b>≼3</b> 0	Pass	
802.11n40	2437	5.94	8.21	≪30	Pass	
	2452	5.75	8.15	<b>⊴</b> 30	Pass	



Page 17 of 131

Test Data of Conducted Output Power-MIMO						
Test Mode	Test Channel (MHz)	Average Power (dBm)	Peak Power (dBm)	Limits (dBm)	Pass or Fail	
	2412	10.44	12.97	≤30	Pass	
802.11b	2437	10.24	12.77	≤30	Pass	
	2462	10.35	12.91	≤30	Pass	
	2412	9.23	12.52	≤30	Pass	
802.11g	2437	9.11	12.46	≤30	Pass	
	2462	9.01	12.43	≤30	Pass	
	2412	9.15	11.32	≤30	Pass	
802.11n20	2437	9.06	11.27	≤30	Pass	
	2462	8.49	11.32	≤30	Pass	
	2422	8.90	11.19	≤30	Pass	
802.11n40	2437	8.70	11.18	≤30	Pass	
	2452	8.47	11.13	≤30	Pass	



Page 18 of 131

#### 8. BANDWIDTH

#### **8.1. MEASUREMENT PROCEDURE**

#### 6dB bandwidth:


- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 kHz, VBW≥3×RBW.
- 4. Set SPA Trace 1 Max hold, then View.

## Occupied bandwidth:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hoping channel
  The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video
  bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.

# 8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

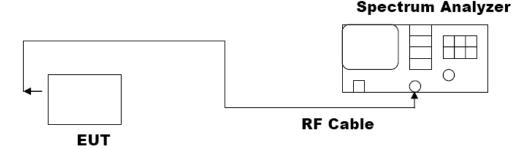




Page 19 of 131

### 8.3. LIMITS AND MEASUREMENT RESULTS

Test Data of Occupied Bandwidth and DTS Bandwidth-ANT1						
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	-6dB Bandwidth (MHz)	Limits (MHz)	Pass or Fail	
	2412	12.963	8.532	∌.5	Pass	
802.11b	2437	13.601	8.570	<b>≥</b> 0.5	Pass	
	2462	12.999	8.089	∌.5	Pass	
	2412	16.416	15.101	<b>∌</b> .5	Pass	
802.11g	2437	16.591	15.135	<b>∌</b> .5	Pass	
	2462	16.424	15.104	<b>≥0.5</b>	Pass	
	2412	17.463	15.102	∌.5	Pass	
802.11n20	2437	17.622	15.429	<b>≥</b> 0.5	Pass	
	2462	17.471	15.099	<b>≥0.5</b>	Pass	
	2422	35.724	31.312	∌.5	Pass	
802.11n40	2437	36.249	35.717	<b>≥</b> 0.5	Pass	
	2452	35.875	35.044	∌.5	Pass	


Test Data of Occupied Bandwidth and DTS Bandwidth-ANT2						
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	-6dB Bandwidth (MHz)	Limits (MHz)	Pass or Fail	
	2412	12.998	8.555	≥0.5	Pass	
802.11b	2437	13.629	9.038	≥0.5	Pass	
	2462	12.961	8.085	≥0.5	Pass	
	2412	16.425	15.108	≥0.5	Pass	
802.11g	2437	16.593	15.142	≥0.5	Pass	
	2462	16.405	15.100	≥0.5	Pass	
	2412	17.477	15.099	≥0.5	Pass	
802.11n20	2437	17.637	15.445	≥0.5	Pass	
	2462	17.448	15.101	≥0.5	Pass	
	2422	35.669	31.278	≥0.5	Pass	
802.11n40	2437	36.271	35.442	≥0.5	Pass	
	2452	35.948	35.059	≥0.5	Pass	

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.






## **Test Graphs of Occupied Bandwidth-ANT1**

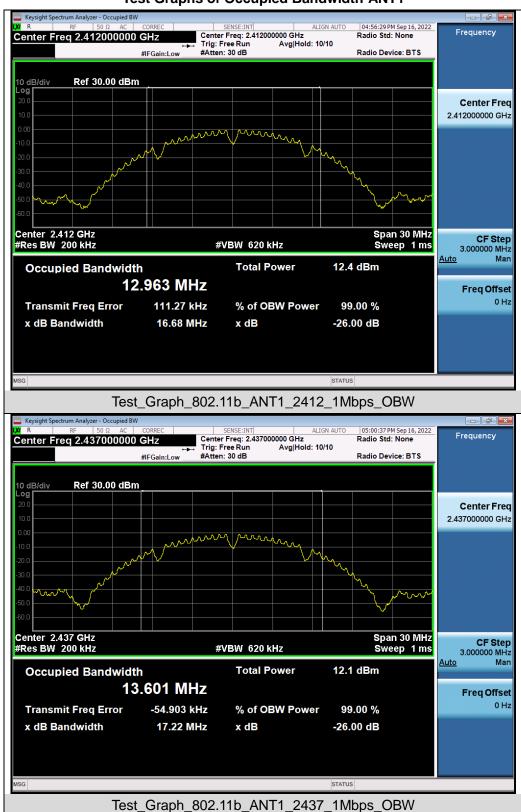


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.









Test\_Graph\_802.11g\_ANT1\_2412\_6Mbps\_OBW






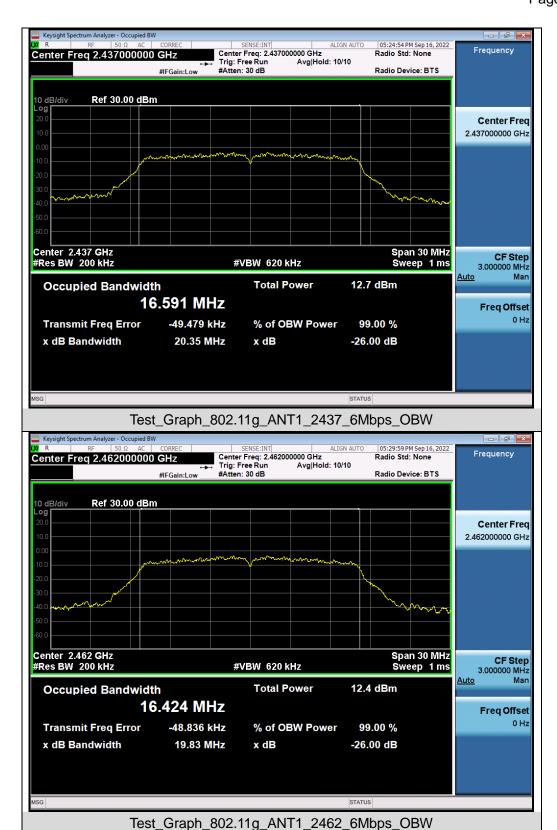





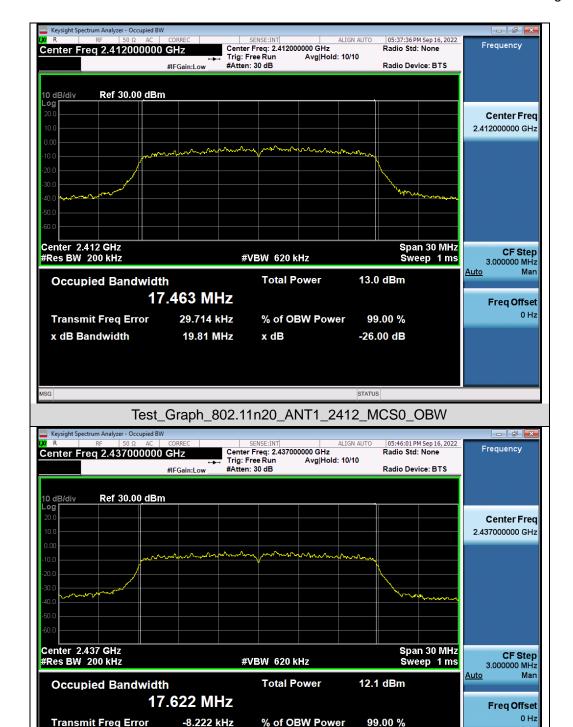


x dB

Test\_Graph\_802.11n20\_ANT1\_2437\_MCS0\_OBW


-26.00 dB


20.19 MHz

x dB Bandwidth






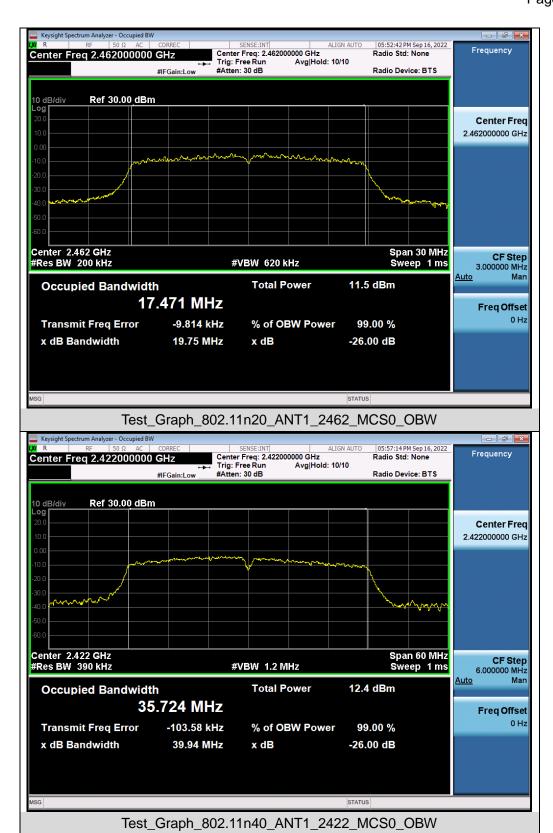






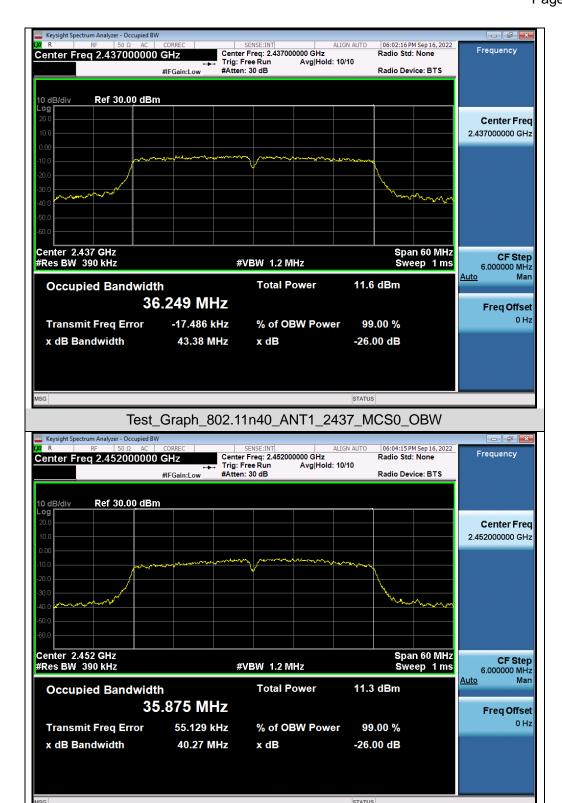

Test Graph 802.11n40 ANT1 2452 MCS0 OBW







### **Test Graphs of DTS Bandwidth**




Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.






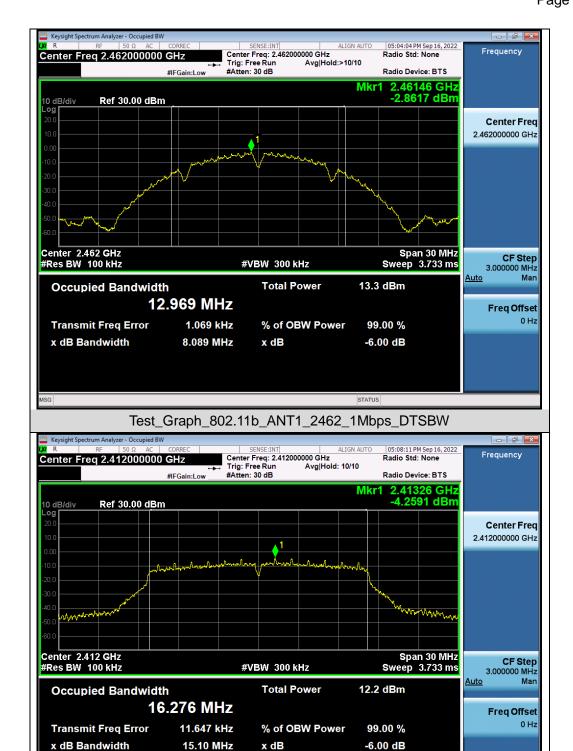


Test\_Graph\_802.11g\_ANT1\_2412\_6Mbps\_DTSBW






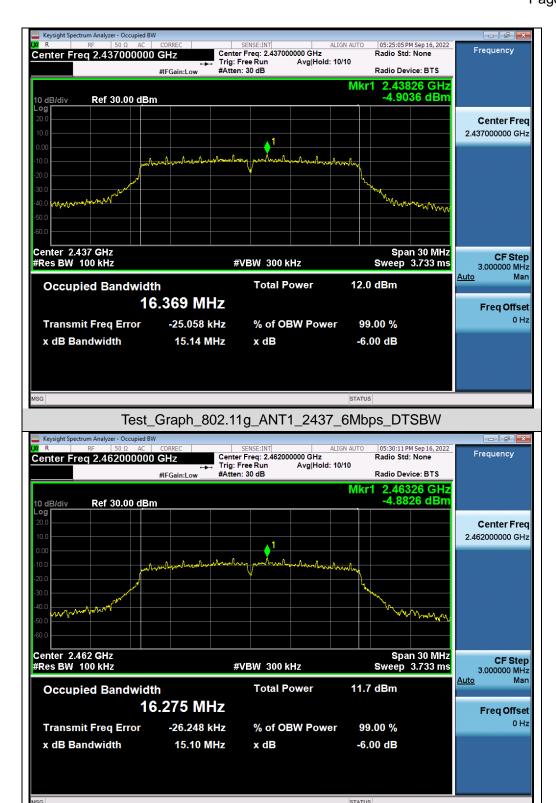


Test\_Graph\_802.11g\_ANT1\_2462\_6Mbps\_DTSBW






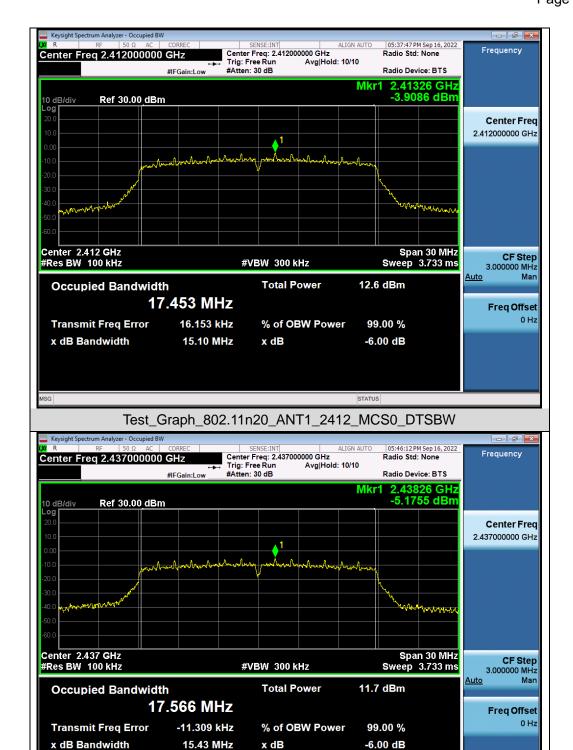


Test Graph 802.11n20 ANT1 2437 MCS0 DTSBW






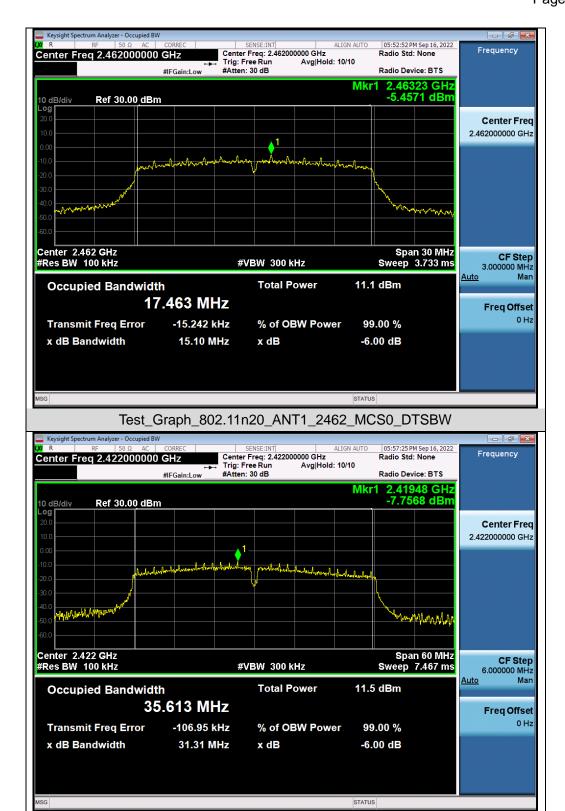


Test Graph 802.11n40 ANT1 2422 MCS0 DTSBW





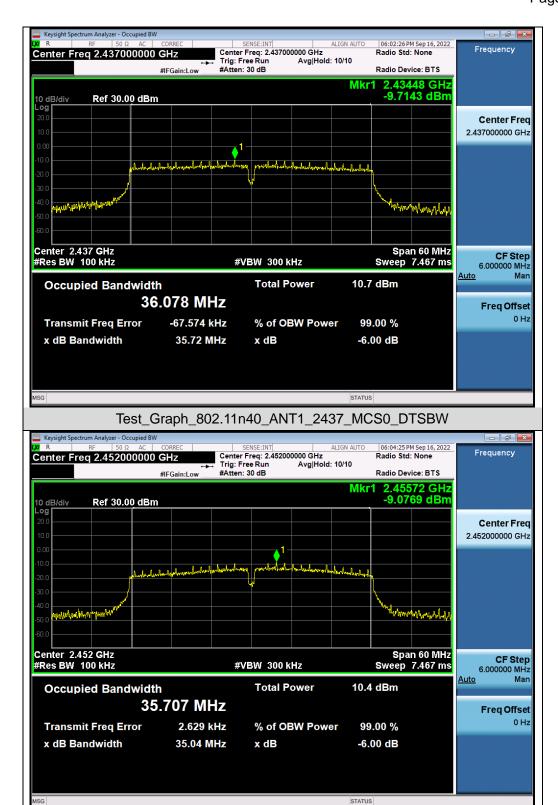



Test Graph 802.11n40 ANT1 2452 MCS0 DTSBW






# **Test Graphs of Occupied Bandwidth-ANT2**

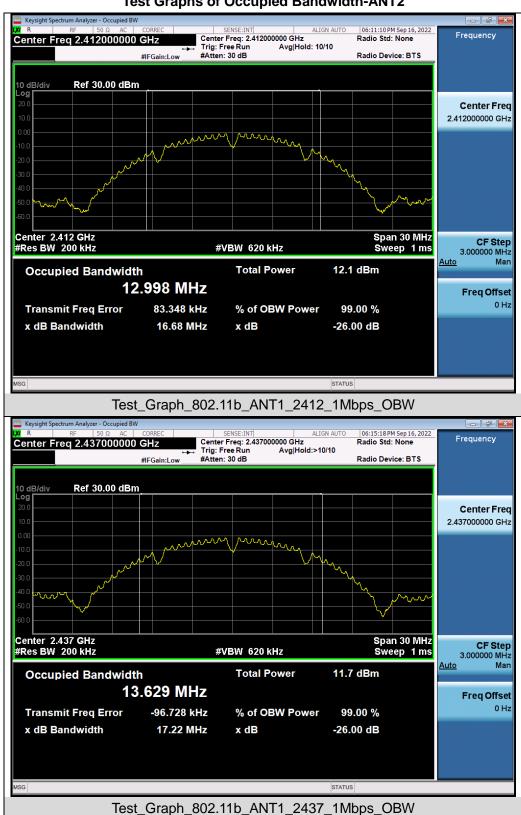







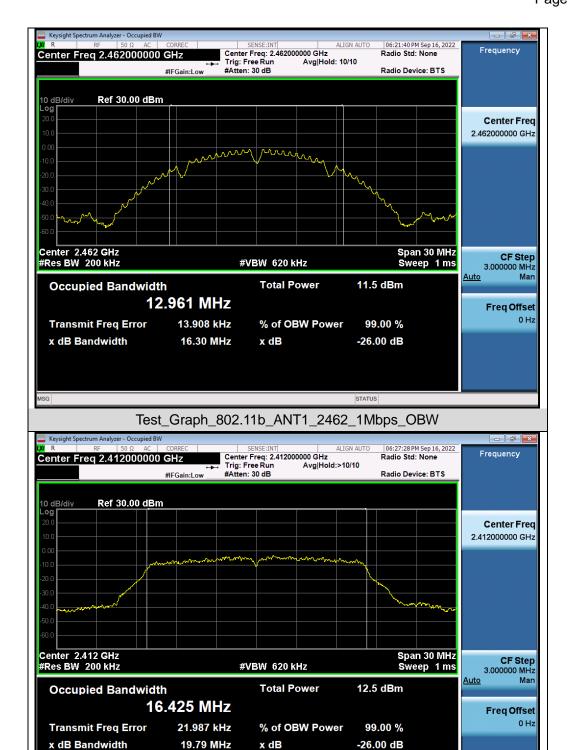


Test\_Graph\_802.11g\_ANT1\_2412\_6Mbps\_OBW






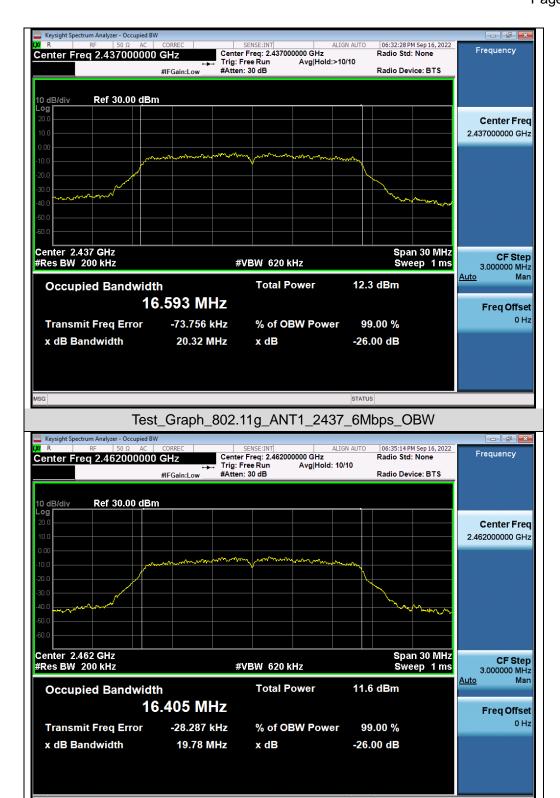


Test\_Graph\_802.11g\_ANT1\_2462\_6Mbps\_OBW







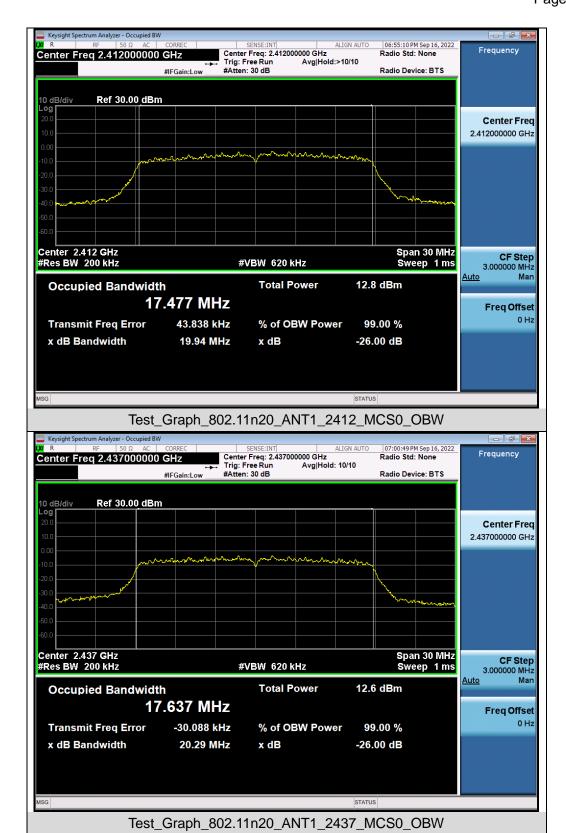







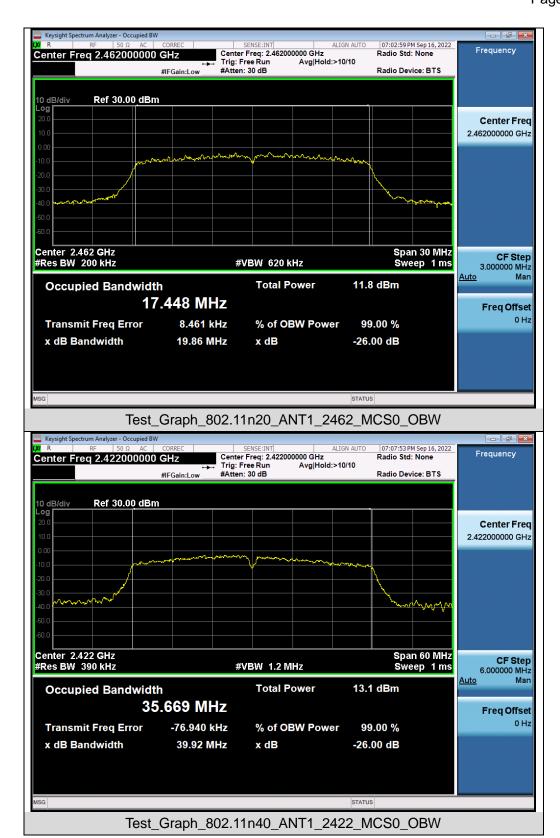





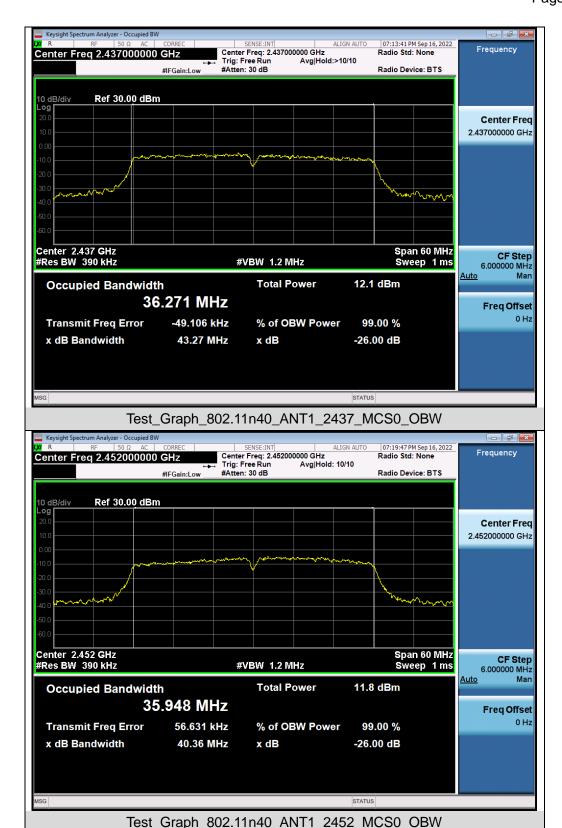







# Test Graphs of DTS Bandwidth



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.





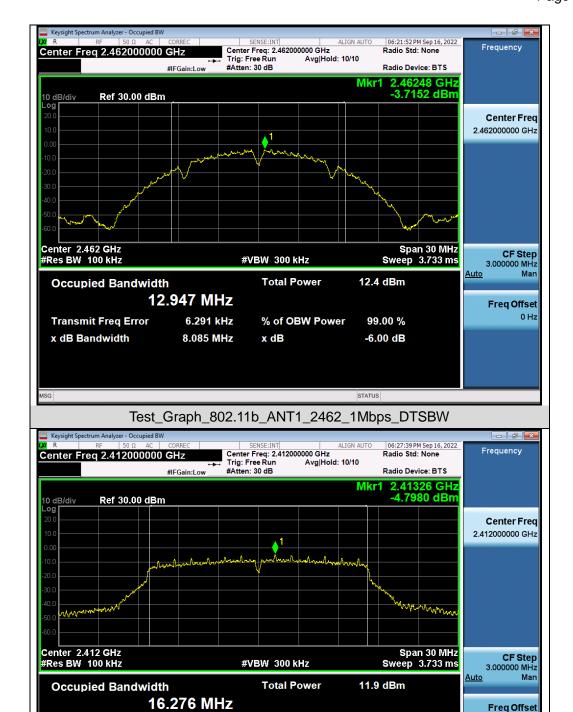

% of OBW Power

x dB

Test\_Graph\_802.11g\_ANT1\_2412\_6Mbps\_DTSBW

99.00 %

-6.00 dB


12.345 kHz

15.11 MHz


Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

**Transmit Freq Error** 


x dB Bandwidth






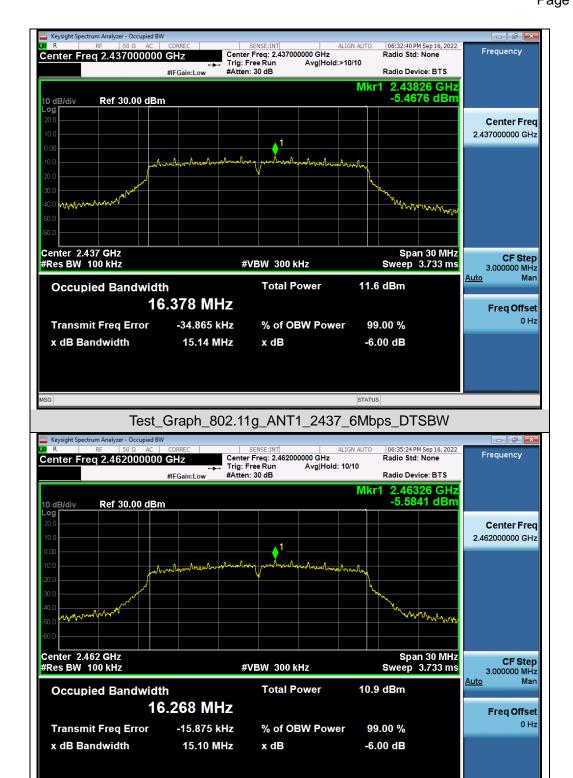

Test\_Graph\_802.11g\_ANT1\_2462\_6Mbps\_DTSBW





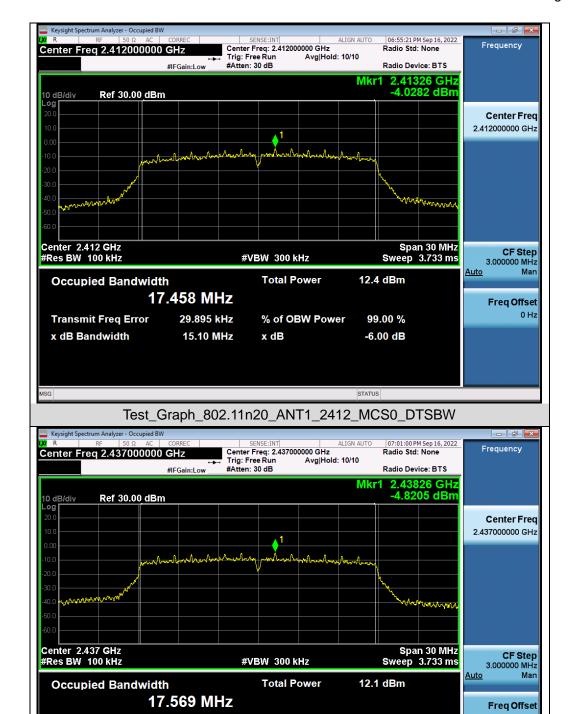

% of OBW Power

x dB

Test Graph 802.11n20 ANT1 2437 MCS0 DTSBW

99.00 %

-6.00 dB


-22.436 kHz

15.45 MHz

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

**Transmit Freq Error** 


x dB Bandwidth








Test Graph 802.11n40 ANT1 2422 MCS0 DTSBW





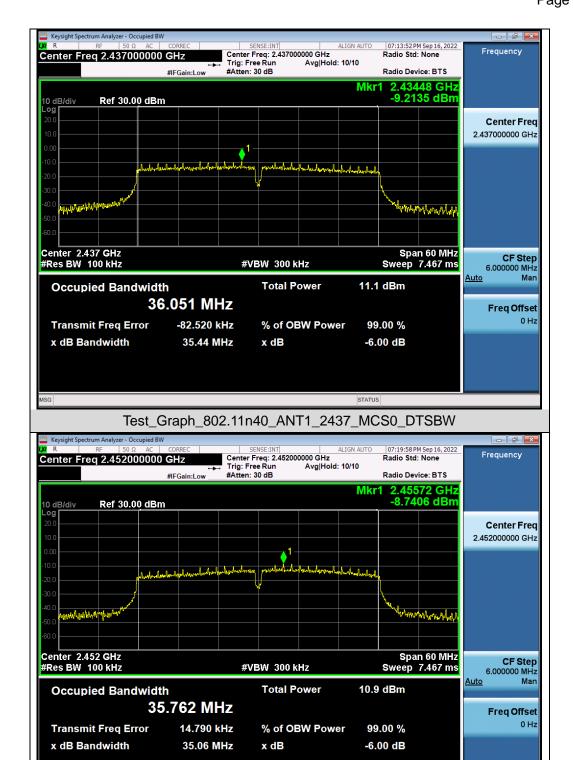

Test Graph 802.11n40 ANT1 2452 MCS0 DTSBW



Report No.: AGC02762220706FE05

Page 44 of 131

### 9. CONDUCTED SPURIOUS EMISSION

### 9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Trace 1 Max hold, then View.

**Note:** The EUT was tested according to ANSI C63.10 (2013) for compliance to FCC 47CFR 15.247 requirements. Owing to satisfy the requirements of the number of measurement points, we set the RBW=1MHz, VBW>RBW, scan up through 10th harmonic, and consider the tested results as the worst case, if the tested results conform to the requirement, we can deem that the real tested results(set the RBW=100KHz, VBW>RBW) are conform to the requirement.

## 9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 8.2.

#### 9.3. MEASUREMENT EQUIPMENT USEDJN


The same as described in section 6.

#### 9.4. LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT		
Applicable Limits	Measurement Result	
	Test Data	Criteria
In any 100 KHz Bandwidth Outside the	At least -20dBc than the limit	
frequency band in which the spread spectrum	Specified on the BOTTOM	PASS
intentional radiator is operating, the radio frequency	Channel	
power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power.  In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a))	At least -20dBc than the limit Specified on the TOP Channel	PASS


Note: The limits reference level is according to the test plot of -6dB bandwidth.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.






# Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands-ANT1

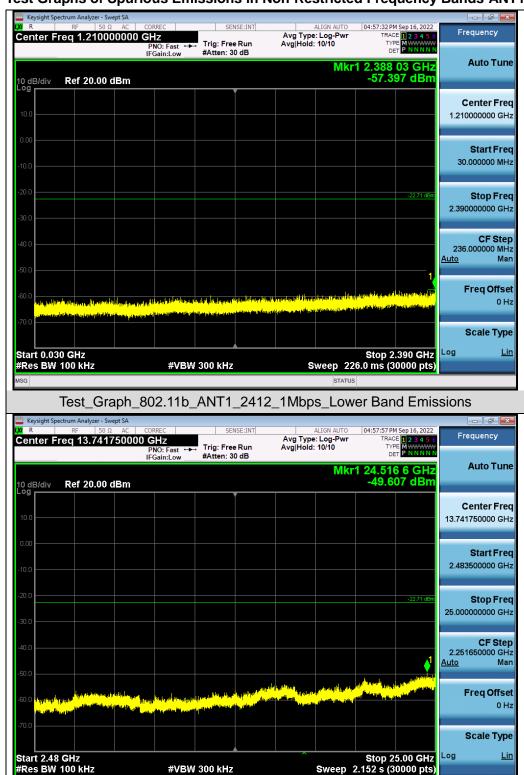


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Test\_Graph\_802.11b\_ANT1\_2412\_1Mbps\_Higher Band Emissions





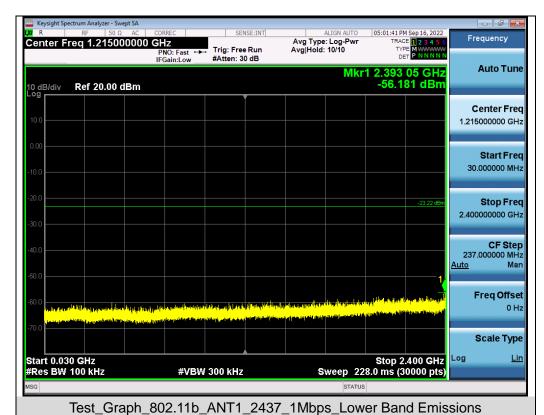


















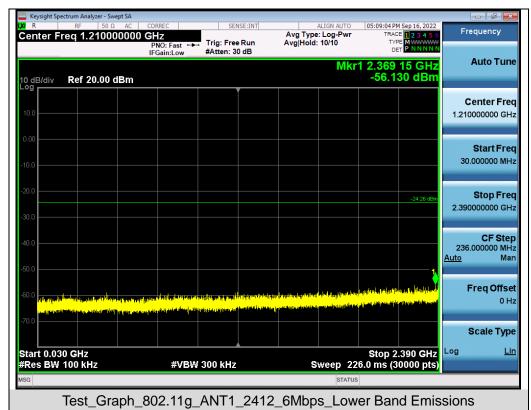





















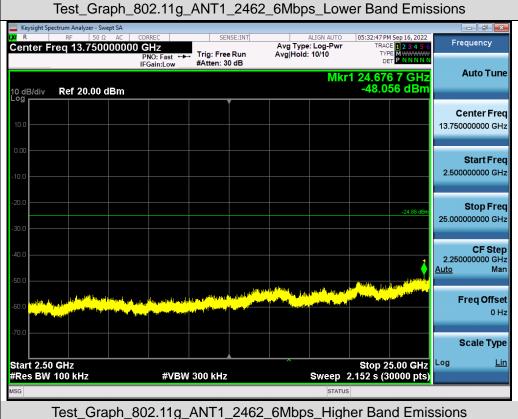







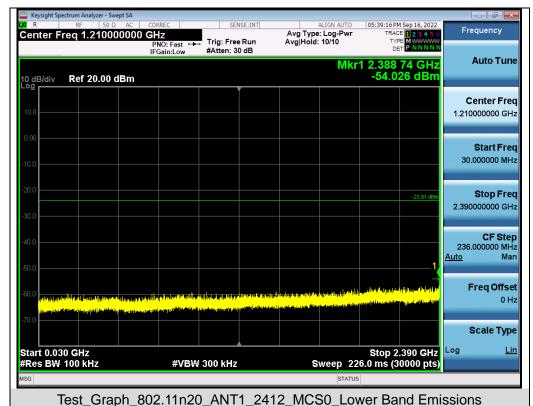









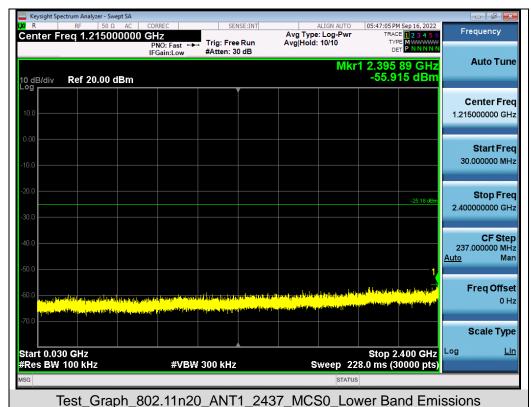










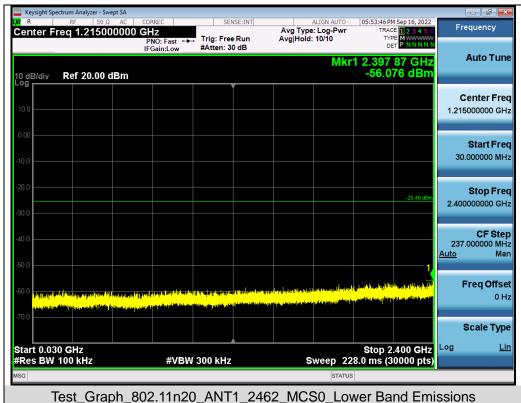

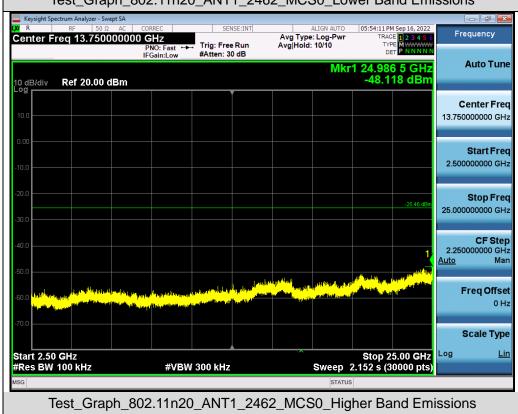






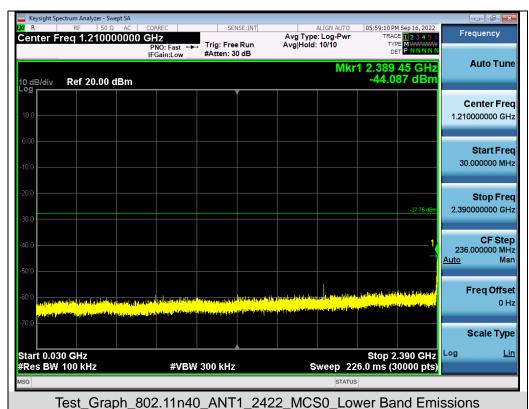


























### Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands-ANT1



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test\_Graph\_802.11g\_ANT1\_2412\_6Mbps\_Lower Band Edge Emissions

Web: http://www.agccert.com/



**Scale Type** 

Log





Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test\_Graph\_802.11n40\_ANT1\_2422\_MCS0\_Lower Band Edge Emissions