

FCC NFC REPORT

Certification

Applicant Name:
SAMSUNG Electronics Co., Ltd.

Address:
129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do,
16677, Rep. of Korea

Date of Issue:
October 17, 2023

Test Site/Location:
74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-
si, Gyeonggi-do, 17383 KOREA

Report No.: HCT-RF-2309-FC014

FCC ID: A3LSMS926B

APPLICANT: SAMSUNG Electronics Co., Ltd.

Model: SM-S926B/DS

Additional Model: SM-S926B

EUT Type: Mobile Phone

RF Output Field Strength: 21.88 dB μ V/m @30 m

Frequency of Operation: 13.56 MHz

Modulation type: ASK

FCC Classification: Low Power Communication Device Transmitter (DXX)

FCC Rule Part(s): FCC Part 15.225 Subpart C

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

Report No.: HCT-RF-2309-FC014

REVIEWED BY



Report prepared by : Kyung Jun Woo
Engineer of Telecommunication Testing Center



Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.
This test results were applied only to the test methods required by the standard.

Test Report Statement:

The above Test Report is not related to the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA.

The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2309-FC014	October 17, 2023	- First Approval Report

Table of Contents

REVIEWED BY	2
1. EUT DESCRIPTION	5
2. TEST METHODOLOGY	6
EUT CONFIGURATION	6
EUT EXERCISE	6
GENERAL TEST PROCEDURES	6
DESCRIPTION OF TEST MODES	6
3. INSTRUMENT CALIBRATION.....	7
4. FACILITIES AND ACCREDITATIONS	7
FACILITIES	7
EQUIPMENT	7
5. ANTENNA REQUIREMENTS	7
6. MEASUREMENT UNCERTAINTY	8
7. DESCRIPTION OF TESTS.....	9
8. TEST SUMMARY	17
9. TEST RESULT	18
9.1. Operation within the band 13.110 MHz – 14.010 MHz.....	18
9.2. Radiated Emission 9kHz – 30 MHz	20
9.3. Radiated Emission 30MHz – 1000 MHz	21
9.4. 20 dB Bandwidth	22
9.5. Frequency Stability	23
9.6. POWERLINE CONDUCTED EMISSIONS	27
10. LIST OF TEST EQUIPMENT	31
11. ANNEX A_ TEST SETUP PHOTO	33

1. EUT DESCRIPTION

Model	SM-S926B/DS
Additional Model	SM-S926B
EUT Type	Mobile Phone
Power Supply	DC 3.88 V
Frequency of Operation	13.56 MHz
Transmit Power	21.88 dBμV/m @30 m
Modulation Type	ASK
Date(s) of Tests	August 30, 2023 ~ October 13, 2023
Serial number	Radiated : R3CW70NE10P

2. TEST METHODOLOGY

The measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) is used in the measurement of the test device.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.225 under the FCC Rules Part 15 Subpart C.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013).

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

4. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated March 31, 2022 (Registration Number: KR0032).

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

(1) The antennas of this E.U.T are permanently attached.

(2)The E.U.T Complies with the requirement of §15.203

6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.

The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.90 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.14 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.82 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.74 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.76 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.52 (Confidence level about 95 %, $k=2$)

7. DESCRIPTION OF TESTS

7.1. Radiated Test

Limit (Operation within the band 13.110 MHz – 14.010 MHz)

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
13.553 – 13.567	15,848	30
13.410 $\leq f \leq$ 13.553 13.567 $\leq f \leq$ 13.710	334	30
13.110 $\leq f \leq$ 13.410 13.710 $\leq f \leq$ 14.010	106	30

Note:

1. 15,848 $\mu\text{V/m}$ = 84.0dB $\mu\text{V/m}$
2. 334 $\mu\text{V/m}$ = 50.47 dB $\mu\text{V/m}$
3. 106 $\mu\text{V/m}$ = 40.51dB $\mu\text{V/m}$

Limit(Radiated Spurious Emissions)


Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	*100	3
88-216	*150	3
216-960	*200	3
Above 960	500	3

※.


Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

Test Configuration

Below 30 MHz

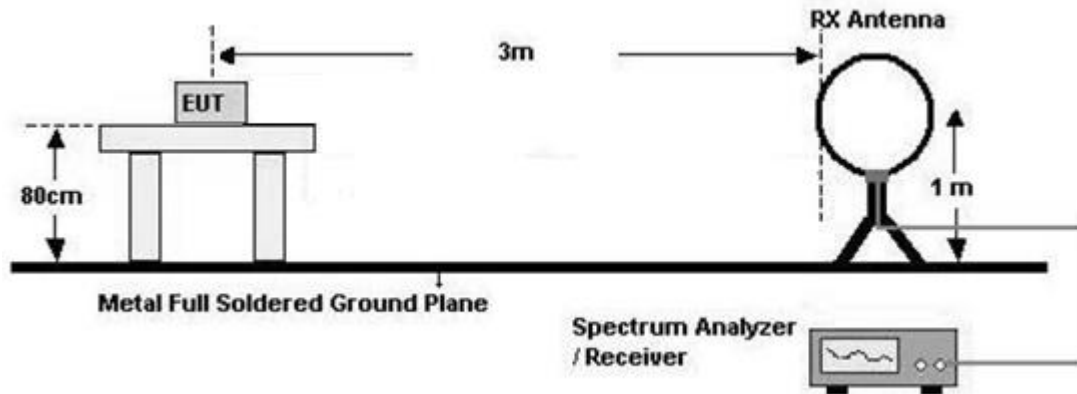

30 MHz - 1 GHz

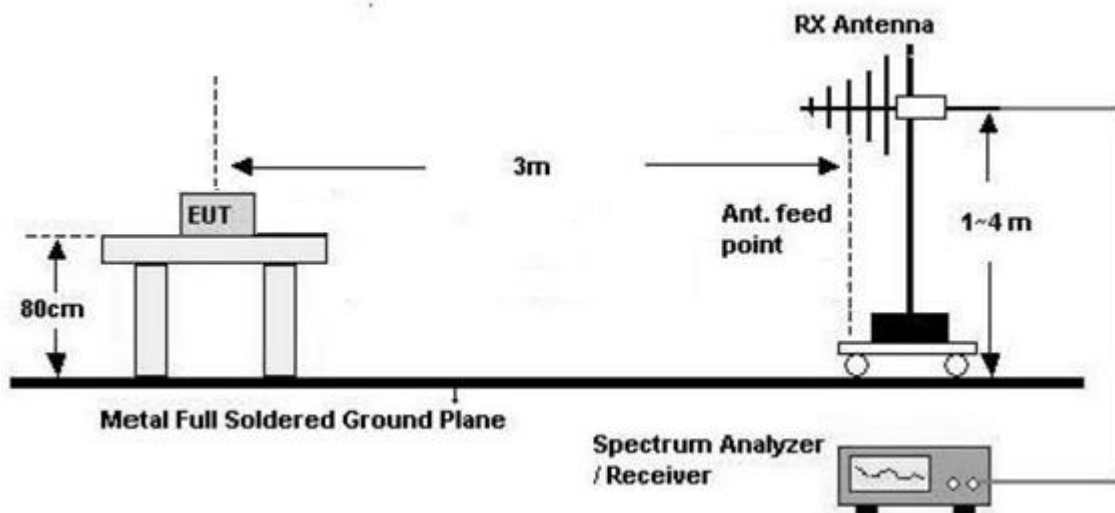

Test Procedure of in-band

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor = $40\log(3\text{ m}/30\text{ m}) = -40\text{ dB}$
Measurement Distance : 3 m(Below30 MHz)
7. Spectrum Setting

1) Frequency Range = 9 kHz ~ 150 kHz

- Detector = Peak
- Trace = Maxhold
- RBW = 300 Hz
- VBW $\geq 3 \times$ RBW

2) Frequency Range = 150 kHz ~ 30 MHz

- Detector = Peak
- Trace = Maxhold
- RBW = 10 kHz
- VBW $\geq 3 \times$ RBW

8.Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

Test Procedure of Radiated spurious emissions(Below30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40\log(3 \text{ m}/300 \text{ m}) = - 80 \text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40\log(3 \text{ m}/30 \text{ m}) = - 40 \text{ dB}$
Measurement Distance : 3 m

8. Spectrum Setting

1) Frequency Range = 9 kHz ~ 150 kHz

- Detector = Peak
- Trace = Maxhold
- RBW = 300 Hz
- VBW $\geq 3 \times$ RBW

2) Frequency Range = 150 kHz ~ 30 MHz

- Detector = Peak
- Trace = Maxhold
- RBW = 10 kHz
- VBW $\geq 3 \times$ RBW

9. Total(Measurement Type : Peak)

= Peak Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.


OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions(Above30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
 - Frequency Range = 30 MHz ~ 1 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 100 kHz
 - VBW $\geq 3 \times$ RBW
- 7.Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

7.2. 20 dB Bandwidth

Test Configuration

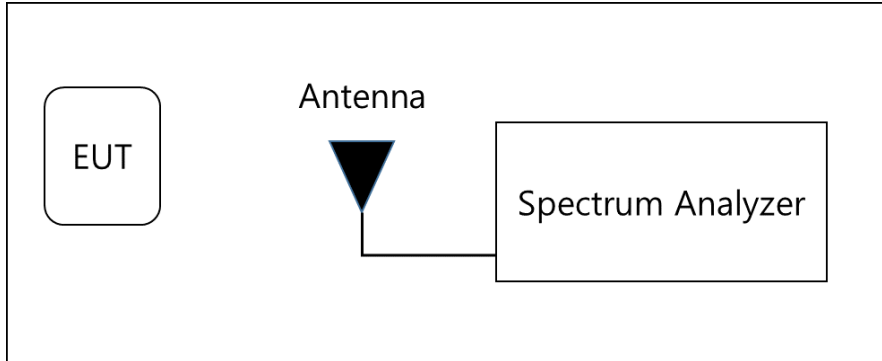

Test Procedure

The 20 dB bandwidth was measured by using a spectrum analyzer.

(Procedure 6.9.2 in ANSI 63.10-2013)

- 1) RBW = 1 %~5 % of the OBW
- 2) VBW = approximately three times RBW
- 3) Span = between two times and five times the OBW
- 4) Detector = Peak
- 5) Trace mode = Max hold
- 6) Allow the trace to stabilize

Note :


We tested Occupied Bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer.

7.3. Frequency Stability

Limit

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency.

Test Configuration

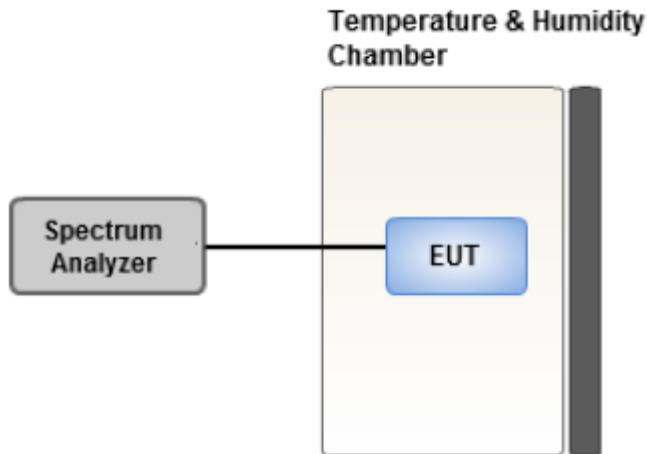

Test Procedure.

For battery operated equipment, the equipment tests shall be performed using a new battery.

- 1) Turn the EUT OFF and place it inside the environmental temperature chamber.
For devices that have oscillator heaters, energize only the heater circuit.
- 2) Set the temperature control on the chamber to the highest specified in the regulatory requirements for the type of device and allow the oscillator heater and the chamber temperature to stabilize.
- 3) While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.
- 4) The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency.

Note:

- 1) Temperature:
The temperature is varied from $-20\text{ }^{\circ}\text{C}$ to $+50\text{ }^{\circ}\text{C}$ using an environmental chamber.
- 2) Primary Supply Voltage :
The primary supply voltage is varied from 85 % to 115 % of the nominal value for non hand-carried battery and AC powered equipment.
For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

7.4. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 ^(a)	56 to 46 ^(a)
0.50 to 5	56	46
5 to 30	60	50

^(a)Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.
5. The EUT is the device operating below 30 MHz.
 - For unterminated the Antenna, the AC line conducted tests are performed with the antenna connected
 - For terminated the Antenna, the AC line conducted tests are performed with a dummy load connected to the EUT antenna output terminal.

Sample Calculation

Quasi-peak(Final Result) = Measured Value + Correction Factor

7.5. Worst case configuration and mode

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone, Stand alone + external accessories(Earphone, etc)
 - Worst case : Stand alone
2. EUT Axis : X
3. All type and bitrate were investigated and the worst case results are reported.
 - Worst case : Type A, 106 kbps
4. All mode of without tag and with tag were investigated and the worst case configuration results are reported.
 - Worst case : Without Tag
5. All position of loop antenna were investigated and the worst case configuration results are reported.
 - Position : Horizontal, Vertical, Parallel to the ground plane
 - Worst case : Horizontal
6. SM-S926B/DS, SM-S926B were tested and the worst case results are reported.
(Worst case: SM-S926B/DS)

AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone + Earphone + Travel Adapter, Stand alone + Travel Adapter
 - Worst case : Stand alone + Travel Adapter
2. SM-S926B/DS, SM-S926B were tested and the worst case results are reported.
(Worst case: SM-S926B/DS)

20 dB Bandwidth & Frequency Stability

1. All type and bitrate were investigated and the worst case results are reported.
 - Worst case : Type A, 106 kbps
2. SM-S926B/DS, SM-S926B were tested and the worst case results are reported.
(Worst case: SM-S926B/DS)

8. TEST SUMMARY

Regulation	Requirement	Result
Part 15.225 (a)	Radiated Electric Field Emissions (13.553 MHz to 13.567 MHz)	Pass
Part 15.225 (b)	Radiated Electric Field Emissions ($13.410 \leq f \leq 13.553$, $13.567 \leq f \leq 13.710$)	Pass
Part 15.225 (c)	Radiated Electric Field Emissions ($13.110 \leq f \leq 13.410$, $13.710 \leq f \leq 14.010$)	Pass
Part 15.209	Radiated Electric Field Emissions (9 kHz to 30 MHz)	Pass
Part 15.209	Radiated Electric Field Emissions (30 MHz to 1 GHz)	Pass
Part 15.225 (e)	Frequency Stability	Pass
Part 15.207	AC power conducted emissions (150 kHz to 30 MHz)	Pass
Part 15.215 (c)	20 dB Bandwidth	Pass

9. TEST RESULT

9.1. Operation within the band 13.110 MHz – 14.010 MHz


Measured Frequency Range : 13.553 MHz-13.567 MHz							
Frequency (MHz)	Measured Value (dBμV/m) @3 m	Ant. Factor +Cable Loss (dB/m)	Distance Correction (dB)	Ant. POL (H/V)	Total (dBμV/m) @30 m	Limit (dBμV/m) @30 m	Margin (dB)
13.5599	41.72	20.16	-40.00	H	21.88	84.00	62.12
13.5601	40.85	20.16	-40.00	V	21.01	84.00	62.99

Measured Frequency Range : 13.410 MHz-13.553 MHz and 13.567 MHz-13.710 MHz							
Frequency (MHz)	Measured Value (dBμV/m) @3 m	Ant. Factor +Cable Loss (dB/m)	Distance Correction (dB)	Ant. POL (H/V)	Total (dBμV/m) @30 m	Limit (dBμV/m) @30 m	Margin (dB)
13.5528	35.67	20.16	-40.00	H	15.83	50.47	34.64
13.5672	35.56	20.16	-40.00	H	15.72	50.47	34.75

Measured Frequency Range : 13.110 MHz – 13.410 MHz and 13.710 MHz-14.010 MHz							
Frequency (MHz)	Measured Value (dBμV/m) @3 m	Ant. Factor +Cable Loss (dB/m)	Distance Correction (dB)	Ant. POL (H/V)	Total (dBμV/m) @30 m	Limit (dBμV/m) @30 m	Margin (dB)
13.3473	23.73	20.16	-40.00	H	3.89	40.51	36.62
13.7691	25.08	20.16	-40.00	H	5.24	40.51	35.27


Test Plot

13.553 MHz ~ 13.567 MHz

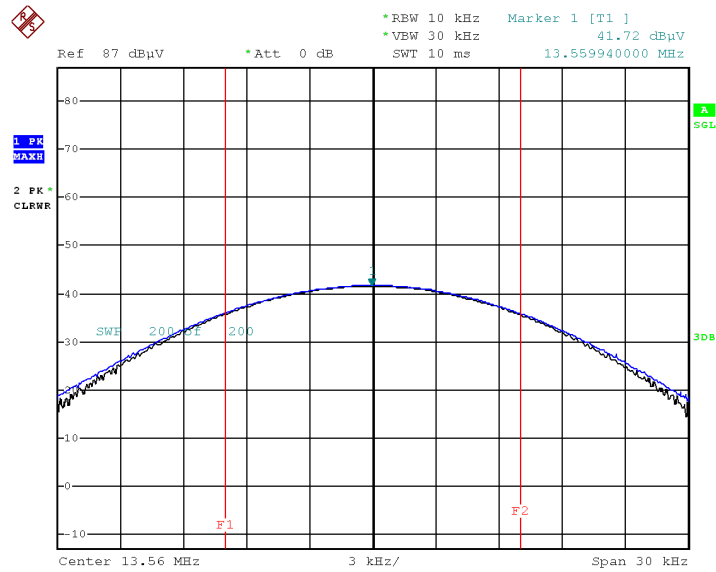

Date: 13.JAN.2003 04:08:22

Worst Case (13.410 MHz - 13.553 MHz)

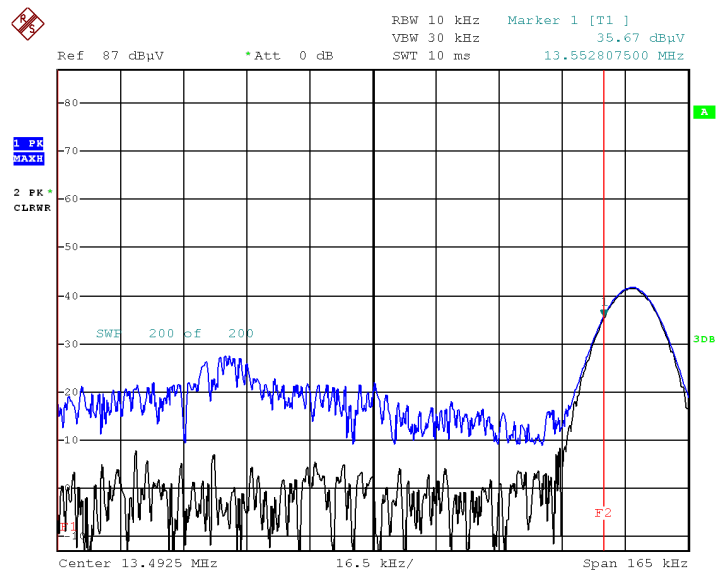

Date: 13.JAN.2003 04:27:48

Note:

Plot of worst case are only reported.

9.2. Radiated Emission 9kHz – 30 MHz

Measured Frequency Range : 9 kHz - 490 kHz							
Frequency (kHz)	Measured Value (dBμV/m) @3 m	Ant. Factor +Cable Loss (dB/m)	Distance Correction (dB)	Ant. POL (H/V)	Total (dBμV/m) @300 m	Limit (dBμV/m) @300 m	Margin (dB)
0.010	49.23	19.33	-80.00	H	-11.44	47.45	58.89
0.165	43.63	19.73	-80.00	H	-16.63	23.25	39.89
Measured Frequency Range : 490 kHz - 30 MHz							
Frequency (MHz)	Measured Value (dBμV/m) @3 m	Ant. Factor +Cable Loss (dB/m)	Distance Correction (dB)	Ant. POL (H/V)	Total (dBμV/m) @30 m	Limit (dBμV/m) @30 m	Margin (dB)
0.513	29.67	19.63	-40.00	H	9.30	33.40	24.10
1.785	21.06	19.63	-40.00	H	0.69	29.54	28.85
18.370	7.91	20.20	-40.00	H	-11.89	29.54	41.43


9.3. Radiated Emission 30MHz – 1000 MHz

Measured Frequency Range : 30 MHz - 1000 MHz							
Frequency (MHz)	Measured Value (dBμV/m)@ 3 m	A.F [dB/m]	C.L [dB]	Ant. Pol (H/V)	Total (dBμV/m)	Limit (dBμV/m)	Margin (dB)
#124.0000	10.520	17.38	0.95	H	28.86	43.52	14.66
212.1550	11.050	15.57	1.19	H	27.81	43.52	15.71
#241.2510	11.320	17.27	1.31	V	29.90	46.02	16.12
297.1025	11.110	19.03	1.43	H	31.57	46.02	14.45
312.8610	11.080	19.47	1.47	H	32.02	46.02	14.00
#331.3600	12.468	19.97	1.55	V	33.98	46.02	12.04

Note:

1. # is the result for restricted band.


Test Plot

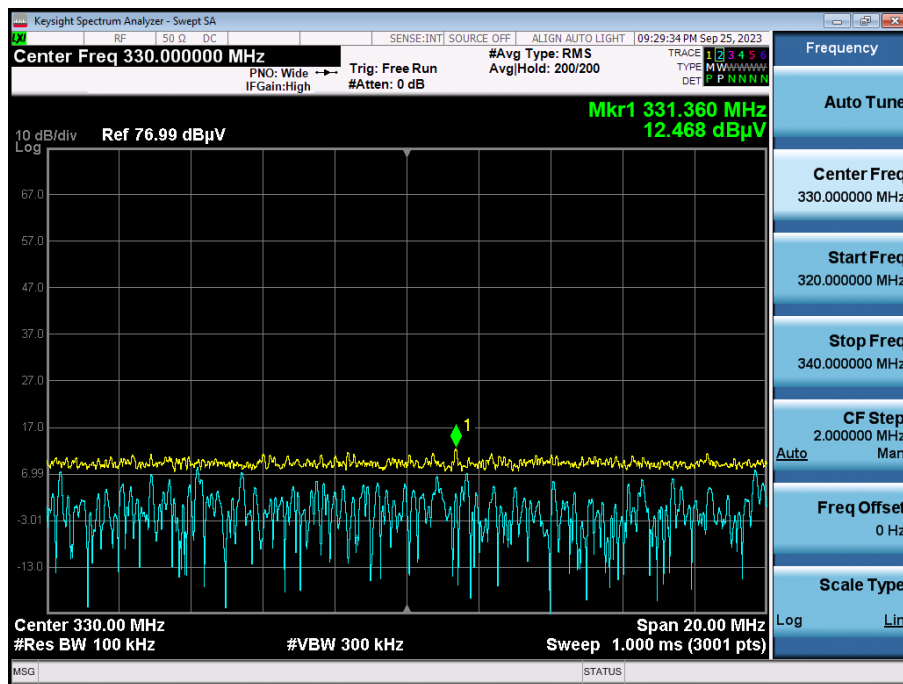

Note:

Plot of worst case are only reported

9.4. 20 dB Bandwidth

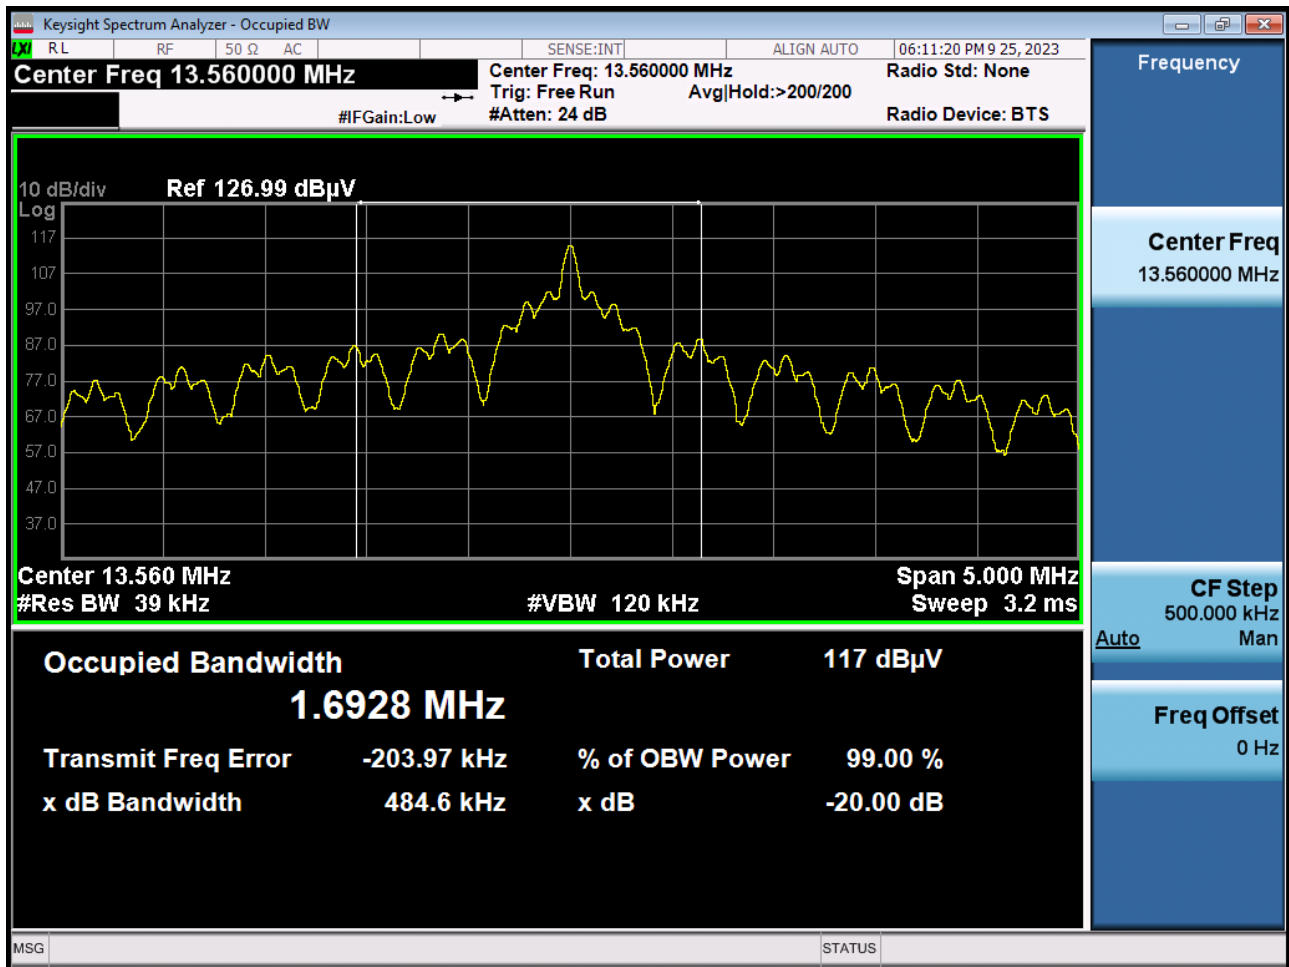

9.5. Frequency Stability

Startup

OPERATING FREQUENCY: 13.56 MHz

REFERENCE VOLTAGE: 3.88 VDC

DEVIATION LIMIT: $\pm 0.01 \% = \pm 1356 \text{ Hz}$

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (MHz)	Frequency Dev. (Hz)	Frequency Dev (%)
100%	3.88	-20	13.560040	40	0.0002950
100%		-10	13.560069	69	0.0005088
100%		0	13.560043	43	0.0003171
100%		+10	13.560084	84	0.0006195
100%		+20(Ref.)	13.560097	97	0.0007153
100%		+30	13.560057	57	0.0004204
100%		+40	13.560052	52	0.0003835
100%		+50	13.560070	70	0.0005162
LOW	3.65	+20	13.560006	6	0.0000442
HIGH	4.42	+20	13.560008	8	0.0000590

2 minutes

PERATING FREQUENCY: 13.56 MHz

REFERENCE VOLTAGE: 3.88 VDC

DEVIATION LIMIT: $\pm 0.01 \% = \pm 1356 \text{ Hz}$

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (MHz)	Frequency Dev. (Hz)	Frequency Dev (%)
100%	3.88	-20	13.560071	71	0.0005236
100%		-10	13.560066	66	0.0004867
100%		0	13.560003	3	0.0000221
100%		+10	13.560072	72	0.0005310
100%		+20(Ref.)	13.560052	52	0.0003835
100%		+30	13.560031	31	0.0002286
100%		+40	13.560027	27	0.0001991
100%		+50	13.560082	82	0.0006047
LOW	3.65	+20	13.560012	12	0.0000885
HIGH	4.42	+20	13.560040	40	0.0002950

5 minutes

OPERATING FREQUENCY: 13.56 MHz

REFERENCE VOLTAGE: 3.88 VDC

DEVIATION LIMIT: $\pm 0.01 \% = \pm 1356 \text{ Hz}$

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (MHz)	Frequency Dev. (Hz)	Frequency Dev (%)
100%	3.88	-20	13.560090	90	0.0006637
100%		-10	13.560088	88	0.0006490
100%		0	13.560086	86	0.0006342
100%		+10	13.560085	85	0.0006268
100%		+20(Ref.)	13.560061	61	0.0004499
100%		+30	13.560069	69	0.0005088
100%		+40	13.560041	41	0.0003024
100%		+50	13.560034	34	0.0002507
LOW	3.65	+20	13.560034	34	0.0002507
HIGH	4.42	+20	13.560071	71	0.0005236

10 minutes

OPERATING FREQUENCY: 13.56 MHz

REFERENCE VOLTAGE: 3.88 VDC

DEVIATION LIMIT: $\pm 0.01 \% = \pm 1356 \text{ Hz}$

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (MHz)	Frequency Dev. (Hz)	Frequency Dev (%)
100%	3.88	-20	13.560030	30	0.0002212
100%		-10	13.560008	8	0.0000590
100%		0	13.560010	10	0.0000737
100%		+10	13.560051	51	0.0003761
100%		+20(Ref.)	13.560074	74	0.0005457
100%		+30	13.560035	35	0.0002581
100%		+40	13.560035	35	0.0002581
100%		+50	13.560100	100	0.0007375
LOW	3.65	+20	13.560052	52	0.0003835
HIGH	4.42	+20	13.560096	96	0.0007080

9.6. POWERLINE CONDUCTED EMISSIONS

Conducted Emissions

Test


1 / 2

Test Report

Common Information

EUT : SM-S926B/DS
Operating Conditions : NFC Term Mode
Comment :

Full Spectrum

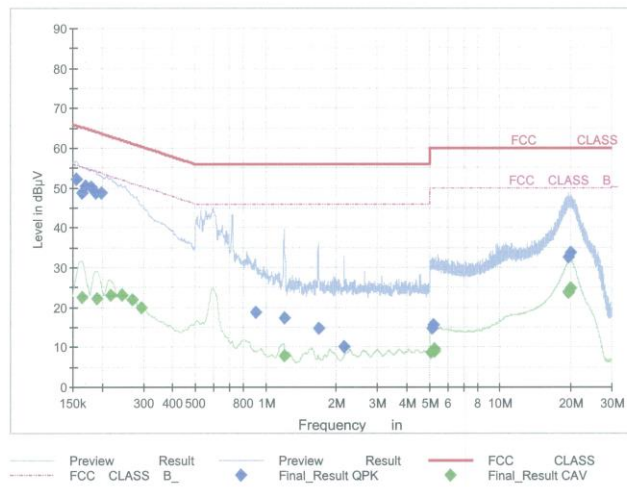

Final Result QPK

Frequency (MHz)	QuasiPeak (dBμV)	Limit (dBμV)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.1545	52.28	65.75	13.47	9.000	N	9.6
0.1635	48.83	65.28	16.46	9.000	N	9.6
0.1703	50.52	64.95	14.43	9.000	N	9.6
0.1793	50.29	64.52	14.23	9.000	N	9.6
0.1883	48.64	64.11	15.48	9.000	N	9.6
0.1995	48.85	63.63	14.78	9.000	N	9.6
0.9095	18.88	56.00	37.12	9.000	L1	9.6
1.1998	17.42	56.00	38.58	9.000	L1	9.7
1.6790	14.72	56.00	41.28	9.000	L1	9.7
2.1583	10.14	56.00	45.86	9.000	L1	9.7
5.1238	14.67	60.00	45.33	9.000	L1	9.8
5.1800	15.48	60.00	44.52	9.000	L1	9.8
19.5463	32.70	60.00	27.30	9.000	L1	10.3
19.5643	32.54	60.00	27.46	9.000	L1	10.3
19.6183	32.58	60.00	27.42	9.000	L1	10.3
19.6318	32.72	60.00	27.28	9.000	L1	10.3
20.0075	33.61	60.00	26.39	9.000	L1	10.3
20.0750	33.72	60.00	26.28	9.000	L1	10.3

2023-10-10

오전 10:14:58

Test

2 / 2

Final Result CAV

Frequency (MHz)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.1635	22.58	55.28	32.70	9.000	N	9.6
0.1905	22.21	54.02	31.81	9.000	N	9.6
0.2175	23.22	52.91	29.69	9.000	L1	9.6
0.2445	23.12	51.94	28.82	9.000	L1	9.6
0.2693	21.78	51.14	29.36	9.000	L1	9.6
0.2963	19.90	50.35	30.45	9.000	L1	9.6
1.1975	7.80	46.00	38.20	9.000	L1	9.7
5.0698	8.55	50.00	41.45	9.000	L1	9.8
5.2318	9.39	50.00	40.61	9.000	L1	9.8
5.2363	9.08	50.00	40.92	9.000	L1	9.8
5.2633	9.27	50.00	40.73	9.000	L1	9.8
19.4968	23.58	50.00	26.42	9.000	L1	10.3
19.5463	23.89	50.00	26.11	9.000	L1	10.3
19.5620	23.68	50.00	26.32	9.000	L1	10.3
19.9378	24.81	50.00	25.19	9.000	L1	10.3
19.9738	24.90	50.00	25.10	9.000	L1	10.3
20.0773	24.81	50.00	25.19	9.000	L1	10.3
20.1088	24.87	50.00	25.13	9.000	L1	10.3

2023-10-10

오전 10:14:58

Test

1 / 2

Test Report

Common Information

EUT :


SM-S926B/DS

Operating Conditions :

NFC Unterm Mode

Comment :

Full Spectrum

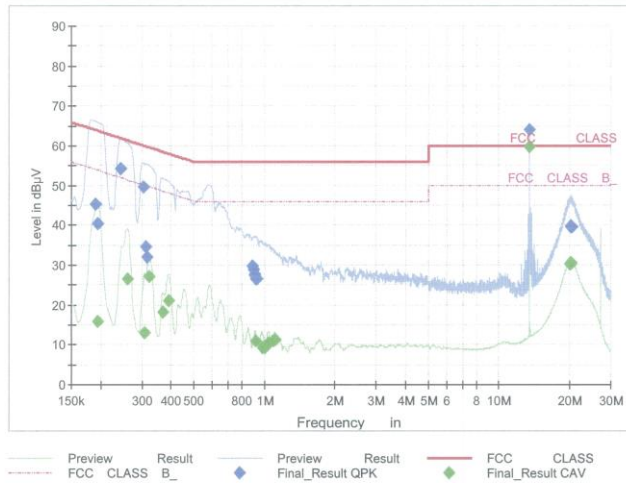

Final Result QPK

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.1905	45.22	64.02	18.79	9.000	N	9.6
0.1950	40.31	63.82	23.51	9.000	N	9.6
0.2445	54.12	61.94	7.82	9.000	N	9.6
0.3053	49.59	60.10	10.51	9.000	N	9.6
0.3120	34.60	59.92	25.32	9.000	N	9.6
0.3165	31.89	59.80	27.91	9.000	N	9.6
0.8893	29.72	56.00	26.28	9.000	N	9.7
0.8960	28.72	56.00	27.28	9.000	N	9.7
0.9028	27.77	56.00	28.23	9.000	N	9.7
0.9073	27.36	56.00	28.64	9.000	N	9.7
0.9185	26.60	56.00	29.40	9.000	N	9.7
0.9230	26.47	56.00	29.53	9.000	N	9.7
13.5590	63.98	60.00	-3.98	9.000	L1	10.1
20.1875	39.54	60.00	20.46	9.000	L1	10.3
20.2055	39.79	60.00	20.21	9.000	L1	10.3
20.2505	39.47	60.00	20.53	9.000	L1	10.3
20.4418	39.48	60.00	20.52	9.000	L1	10.3
20.5048	39.56	60.00	20.44	9.000	L1	10.3

2023-10-10

오전 9:59:10

Test

2 / 2

Final Result CAV

Frequency (MHz)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.1950	15.90	53.82	37.92	9.000	N	9.6
0.2603	26.46	51.42	24.97	9.000	N	9.6
0.3075	12.97	50.04	37.06	9.000	L1	9.6
0.3233	27.02	49.62	22.60	9.000	N	9.6
0.3683	18.26	48.54	30.28	9.000	L1	9.6
0.3885	20.93	48.10	27.17	9.000	N	9.6
0.9140	10.94	46.00	35.06	9.000	L1	9.6
0.9770	9.29	46.00	36.71	9.000	L1	9.6
0.9995	9.12	46.00	36.88	9.000	L1	9.6
1.0400	10.46	46.00	35.54	9.000	L1	9.7
1.0805	10.98	46.00	35.02	9.000	L1	9.7
1.1098	11.39	46.00	34.61	9.000	L1	9.7
13.5590	59.79	50.00	-9.79	9.000	L1	10.1
19.9963	30.36	50.00	19.64	9.000	L1	10.3
20.0143	30.21	50.00	19.79	9.000	L1	10.3
20.1425	30.42	50.00	19.58	9.000	L1	10.3
20.1875	30.44	50.00	19.56	9.000	L1	10.3
20.2505	30.44	50.00	19.56	9.000	L1	10.3

2023-10-10

오전 9:59:10

10. LIST OF TEST EQUIPMENT

Conducted Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
LISN	ENV216	Rohde & Schwarz	102245	08/02/2024	Annual
EMI Test Receiver	ESR	Rohde & Schwarz	101910	05/26/2024	Annual
Temperature Chamber	SU-642	ESPEC	93008124	02/22/2024	Annual
DC Power Supply	E3632A	Agilent	KR75305528	01/03/2024	Annual
Attenuator(10 dB)(DC-26.5 GHz)	8493C-010	Agilent	08285	06/02/2024	Annual
Software	EMC32	Rohde & Schwarz	N/A	N/A	N/A

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
Controller(Antenna mast)	CO3000	Innco system	CO3000-4p	N/A	N/A
Antenna Position Tower	MA4640/800-XP-EP	Innco system	S3AM	08/03/2025	Biennial
Controller	EM2090	Emco	060520	N/A	N/A
Turn Table	N/A	Ets	N/A	N/A	N/A
Loop Antenna	FMZB 1513	Rohde & Schwarz	1513-333	03/17/2024	Biennial
Hybrid Antenna	VULB 9168	Schwarzbeck	9168-0895	08/16/2024	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	9120D-1191	11/18/2023	Biennial
Spectrum Analyzer	FSVA40 (10 Hz ~ 40 GHz)	Rohde & Schwarz	101502	03/17/2024	Annual
Spectrum Analyzer	FSP40	Rohde & Schwarz	100843	11/08/2024	Annual
Signal Analyzer	N9030A	Keysight	MY52350879	01/02/2024	Annual
RF Switching System	FBSR-03A (3dB ATT+LNA)	T&M SYSTEM	S3L4	12/05/2023	Annual
RF Switching System	FBSR-03A (10dB ATT+LNA)	T&M SYSTEM	S3L2	12/05/2023	Annual
Power Amplifier	310N	SONOMA INSTRUMENT	186169	02/15/2024	Annual
Power Amplifier	CBL18265035	CERNEX	22966	12/01/2023	Annual
Power Amplifier	CBL26405040	CERNEX	25956	03/02/2024	Annual

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

11. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2309-FC014-P