





11.3 Measurement Setup (Block Diagram of Configuration)


Radiated Emission Test Setup 9kHz-30MHz

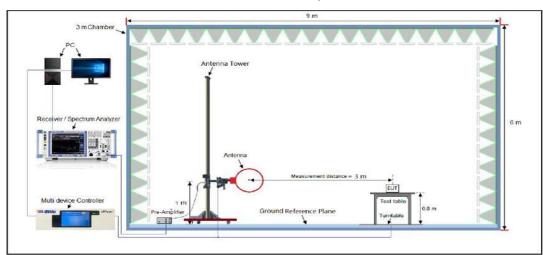

Radiated Emission Test Setup 30MHz-1000MHz

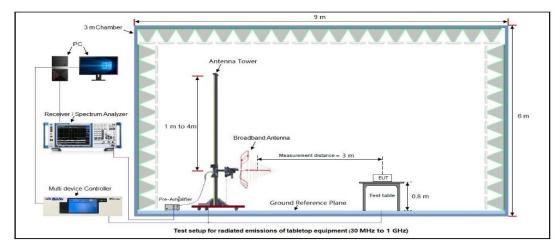

Radiated Emission Test Setup Above 1000MHz

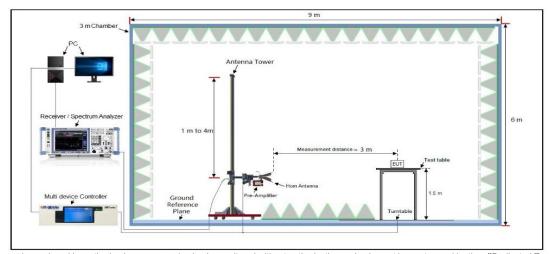

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.




11.4 Measurement Result


Radiated Emission at 9kHz-30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

Radiated Emission Test Results at 30MHz-1GHz									
EUT Name	IMILAB EC6 Dual Outdoor Security	Madal Nama	CMSXJ68A						
EUT Name	T Name Camera Model Name	Woder Name	CIVISAJUOA						
Temperature	23.5°C	Relative Humidity	58.4%						
Pressure	960hPa	Test Voltage	Normal Voltage						
Test Mode	Mode 2	Antenna Polarity	Horizontal						

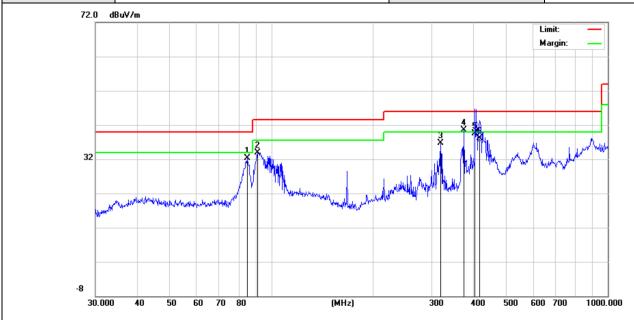


Final D	ata List							
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	84.7019	32.35	13.83	40.00	7.65	100	180	Horizontal
2	90.8554	33.99	14.78	43.50	9.51	100	102	Horizontal
3	318.8170	36.73	16.50	46.00	9.27	100	90	Horizontal
4	373.3112	40.57	18.00	46.00	5.43	100	211	Horizontal
5	403.2500	39.52	20.46	46.00	6.48	100	170	Horizontal
6	416.1791	38.15	20.72	46.00	7.85	100	130	Horizontal





	Radiated Emission Test Results at 30MHz-1GHz								
EUT Name	IMILAB EC6 Dual Outdoor Security	Madal Nama	CMS / ISOA						
EUT Name	Camera	Model Name	CMSXJ68A						
Temperature	23.5°C	Relative Humidity	58.4%						
Pressure	960hPa	Test Voltage	Normal Voltage						
Test Mode	Mode 2	Antenna Polarity	Vertical						

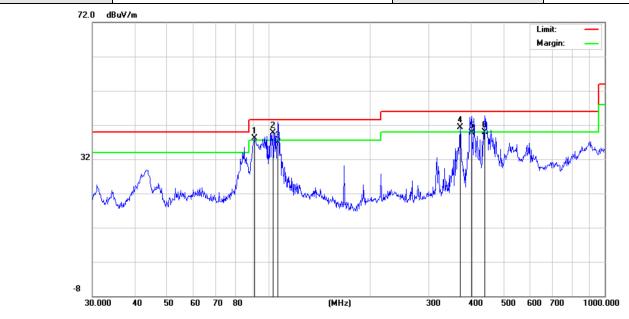

Final D	ata List							
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	90.8554	38.13	14.78	43.50	5.37	100	180	Vertical
2	103.0800	39.75	16.23	43.50	3.75	100	102	Vertical
3	106.7587	36.88	16.27	43.50	6.62	100	90	Vertical
4	372.0045	41.37	17.96	46.00	4.63	100	211	Vertical
5	401.8385	39.61	20.44	46.00	6.39	100	170	Vertical
6	440.1963	39.92	25.09	46.00	6.08	100	130	Vertical

RESULT: Pass

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Limit-Level.

2. All test modes had been pre-tested. The mode 2 is the worst case and recorded in the report.



Page 69 of 101

Radiated Emissions Test Results above 1 GHz

EUT Name	IMILAB EC6 Dual Outdoor Security Camera	Model Name	CMSXJ68A
Temperature	23.5°C	Relative Humidity	58.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.000	46.39	0.08	46.47	74	-27.53	peak
4824.000	37.47	0.08	37.55	54	-16.45	AVG
7236.000	41.31	2.21	43.52	74	-30.48	peak
7236.000	32.46	2.21	34.67	54	-19.33	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	IMILAB EC6 Dual Outdoor Security Camera	Model Name	CMSXJ68A
Temperature	23.5°C	Relative Humidity	58.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.000	46.35	0.08	46.43	74	-27.57	peak
4824.000	37.43	80.0	37.51	54	-16.49	AVG
7236.000	41.37	2.21	43.58	74	-30.42	peak
7236.000	32.48	2.21	34.69	54	-19.31	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

RESULT: Pass



Page 70 of 101

Radiated Emissions Test Results above 1GHz

EUT Name	IMILAB EC6 Dual Outdoor Security Camera	Model Name	CMSXJ68A
Temperature	23.5°C	Relative Humidity	58.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4874.000	45.75	0.14	45.89	74	-28.11	peak
4874.000	38.18	0.14	38.32	54	-15.68	AVG
7311.000	41.63	2.36	43.99	74	-30.01	peak
7311.000	34.24	2.36	36.6	54	-17.4	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	IMILAB EC6 Dual Outdoor Security Camera	Model Name	CMSXJ68A
Temperature	23.5°C	Relative Humidity	58.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4874.000	45.26	0.14	45.4	74	-28.6	peak
4874.000	37.64	0.14	37.78	54	-16.22	AVG
7311.000	40.92	2.36	43.28	74	-30.72	peak
7311.000	33.78	2.36	36.14	54	-17.86	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

RESULT: Pass



Page 71 of 101

Radiated Emissions Test Results above 1GHz

EUT Name	IMILAB EC6 Dual Outdoor Security Camera	Model Name	CMSXJ68A
Temperature	23.5°C	Relative Humidity	58.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.000	46.58	0.22	46.8	74	-27.2	peak
4924.000	38.43	0.22	38.65	54	-15.35	AVG
7386.000	41.26	2.64	43.9	74	-30.1	peak
7386.000	32.87	2.64	35.51	54	-18.49	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	IMILAB EC6 Dual Outdoor Security Camera	Model Name	CMSXJ68A
Temperature	23.5°C	Relative Humidity	58.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.000	46.12	0.22	46.34	74	-27.66	peak
4924.000	38.51	0.22	38.73	54	-15.27	AVG
7386.000	40.76	2.64	43.4	74	-30.6	peak
7386.000	31.93	2.64	34.57	54	-19.43	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

RESULT: Pass



Page 72 of 101

Radiated Emissions Test Results above 1GHz

EUT Name	IMILAB EC6 Dual Outdoor Security Camera	Model Name	CMSXJ68A
Temperature	23.5°C	Relative Humidity	58.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.000	46.32	0.08	46.4	74	-27.6	peak
4824.000	37.37	0.08	37.45	54	-16.55	AVG
7236.000	41.35	2.21	43.56	74	-30.44	peak
7236.000	32.44	2.21	34.65	54	-19.35	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	IMILAB EC6 Dual Outdoor Security Camera	Model Name	CMSXJ68A
Temperature	23.5°C	Relative Humidity	58.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.000	46.32	0.08	46.4	74	-27.6	peak
4824.000	37.45	0.08	37.53	54	-16.47	AVG
7236.000	41.37	2.21	43.58	74	-30.42	peak
7236.000	32.48	2.21	34.69	54	-19.31	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

RESULT: Pass



Page 73 of 101

Radiated Emissions Test Results above 1GHz

EUT Name	IMILAB EC6 Dual Outdoor Security Camera	Model Name	CMSXJ68A
Temperature	23.5°C	Relative Humidity	58.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 5	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4874.000	45.76	0.14	45.9	74	-28.1	peak
4874.000	38.19	0.14	38.33	54	-15.67	AVG
7311.000	41.62	2.36	43.98	74	-30.02	peak
7311.000	34.25	2.36	36.61	54	-17.39	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	IMILAB EC6 Dual Outdoor Security Camera	Model Name	CMSXJ68A
Temperature	23.5°C	Relative Humidity	58.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 5	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4874.000	45.27	0.14	45.41	74	-28.59	peak
4874.000	37.66	0.14	37.8	54	-16.2	AVG
7311.000	40.98	2.36	43.34	74	-30.66	peak
7311.000	33.79	2.36	36.15	54	-17.85	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

RESULT: Pass



Page 74 of 101

Radiated Emissions Test Results above 1GHz

EUT Name	IMILAB EC6 Dual Outdoor Security Camera	Model Name	CMSXJ68A
Temperature	23.5°C	Relative Humidity	58.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.000	46.59	0.22	46.81	74	-27.19	peak
4924.000	38.43	0.22	38.65	54	-15.35	AVG
7386.000	41.27	2.64	43.91	74	-30.09	peak
7386.000	32.86	2.64	35.5	54	-18.5	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	IMILAB EC6 Dual Outdoor Security Camera	Model Name	CMSXJ68A
Temperature	23.5°C	Relative Humidity	58.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.000	46.12	0.22	46.34	74	-27.66	peak
4924.000	38.57	0.22	38.79	54	-15.21	AVG
7386.000	40.78	2.64	43.42	74	-30.58	peak
7386.000	31.93	2.64	34.57	54	-19.43	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

RESULT: Pass



Page 75 of 101

Radiated Emissions Test Results above 1GHz

EUT Name	IMILAB EC6 Dual Outdoor Security Camera	Model Name	CMSXJ68A
Temperature	23.5°C	Relative Humidity	58.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 7	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.000	46.38	0.08	46.46	74	-27.54	peak
4824.000	37.43	0.08	37.51	54	-16.49	AVG
7236.000	41.31	2.21	43.52	74	-30.48	peak
7236.000	32.45	2.21	34.66	54	-19.34	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	IMILAB EC6 Dual Outdoor Security Camera	Model Name	CMSXJ68A
Temperature	23.5°C	Relative Humidity	58.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 7	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.000	46.34	0.08	46.42	74	-27.58	peak
4824.000	37.45	80.0	37.53	54	-16.47	AVG
7236.000	41.37	2.21	43.58	74	-30.42	peak
7236.000	32.48	2.21	34.69	54	-19.31	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

RESULT: Pass



Page 76 of 101

Radiated Emissions Test Results above 1GHz

EUT Name	IMILAB EC6 Dual Outdoor Security Camera	Model Name	CMSXJ68A
Temperature	23.5°C	Relative Humidity	58.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 8	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4874.000	45.78	0.14	45.92	74	-28.08	peak
4874.000	38.13	0.14	38.27	54	-15.73	AVG
7311.000	41.62	2.36	43.98	74	-30.02	peak
7311.000	34.27	2.36	36.63	54	-17.37	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	IMILAB EC6 Dual Outdoor Security Camera	Model Name	CMSXJ68A
Temperature	23.5°C	Relative Humidity	58.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 8	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4874.000	45.28	0.14	45.42	74	-28.58	peak
4874.000	37.64	0.14	37.78	54	-16.22	AVG
7311.000	40.97	2.36	43.33	74	-30.67	peak
7311.000	33.79	2.36	36.15	54	-17.85	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

RESULT: Pass



Page 77 of 101

Radiated Emissions Test Results above 1GHz

EUT Name	IMILAB EC6 Dual Outdoor Security Camera	Model Name	CMSXJ68A
Temperature	23.5°C	Relative Humidity	58.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 9	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	$(dB\mu V/m)$	(dB)	value Type
4924.000	46.55	0.22	46.77	74	-27.23	peak
4924.000	38.46	0.22	38.68	54	-15.32	AVG
7386.000	41.27	2.64	43.91	74	-30.09	peak
7386.000	32.88	2.64	35.52	54	-18.48	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	IMILAB EC6 Dual Outdoor Security Camera	Model Name	CMSXJ68A
Temperature	23.5°C	Relative Humidity	58.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 9	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.000	46.14	0.22	46.36	74	-27.64	peak
4924.000	38.57	0.22	38.79	54	-15.21	AVG
7386.000	40.76	2.64	43.4	74	-30.6	peak
7386.000	31.93	2.64	34.57	54	-19.43	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

RESULT: Pass



Page 78 of 101

Radiated Emissions Test Results above 1GHz

EUT Name	IMILAB EC6 Dual Outdoor Security Camera	Model Name	CMSXJ68A
Temperature	23.5°C	Relative Humidity	58.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 10	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.000	46.36	0.08	46.44	74	-27.56	peak
4824.000	37.42	0.08	37.5	54	-16.5	AVG
7236.000	41.34	2.21	43.55	74	-30.45	peak
7236.000	32.48	2.21	34.69	54	-19.31	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	IMILAB EC6 Dual Outdoor Security Camera	Model Name	CMSXJ68A
Temperature	23.5°C	Relative Humidity	58.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 10	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.000	46.37	0.08	46.45	74	-27.55	peak
4824.000	37.46	0.08	37.54	54	-16.46	AVG
7236.000	41.38	2.21	43.59	74	-30.41	peak
7236.000	32.41	2.21	34.62	54	-19.38	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

RESULT: Pass



Page 79 of 101

Radiated Emissions Test Results above 1GHz

EUT Name	IMILAB EC6 Dual Outdoor Security Camera	Model Name	CMSXJ68A
Temperature	23.5°C	Relative Humidity	58.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 11	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4874.000	45.77	0.14	45.91	74	-28.09	peak
4874.000	38.14	0.14	38.28	54	-15.72	AVG
7311.000	41.62	2.36	43.98	74	-30.02	peak
7311.000	34.25	2.36	36.61	54	-17.39	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	IMILAB EC6 Dual Outdoor Security Camera	Model Name	CMSXJ68A
Temperature	23.5°C	Relative Humidity	58.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 11	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4874.000	45.29	0.14	45.43	74	-28.57	peak
4874.000	37.61	0.14	37.75	54	-16.25	AVG
7311.000	40.92	2.36	43.28	74	-30.72	peak
7311.000	33.75	2.36	36.11	54	-17.89	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: Pass



Page 80 of 101

Radiated Emissions Test Results above 1GHz

EUT Name	IMILAB EC6 Dual Outdoor Security Camera	Model Name	CMSXJ68A
Temperature	23.5°C	Relative Humidity	58.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 12	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.000	46.58	0.22	46.8	74	-27.2	peak
4924.000	38.45	0.22	38.67	54	-15.33	AVG
7386.000	41.27	2.64	43.91	74	-30.09	peak
7386.000	32.83	2.64	35.47	54	-18.53	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT Name	IMILAB EC6 Dual Outdoor	MILAB EC6 Dual Outdoor Security Camera Model Name	CMSXJ68A
	Security Camera		
Temperature	23.5°C	Relative Humidity	58.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 12	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.000	46.11	0.22	46.33	74	-27.67	peak
4924.000	38.57	0.22	38.79	54	-15.21	AVG
7386.000	40.79	2.64	43.43	74	-30.57	peak
7386.000	31.95	2.64	34.59	54	-19.41	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

RESULT: Pass

Note:

- The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit.
- 3. The "Factor" value can be calculated automatically by software of measurement system.

 Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



EUT Name	IMILAB EC6 Dual Outdoor	Madal Nama	CMSXJ68A
EUT Name	Security Camera	Model Name	CIVISAJOOA
Temperature	23.5°C	Relative Humidity	58.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement



RESULT: Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



EUT Name	IMILAB EC6 Dual Outdoor Security Camera	Model Name	CMSXJ68A
Temperature	23.5°C	Relative Humidity	58.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement



RESULT: Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



EUT Name	IMILAB EC6 Dual Outdoor	Model Name	CMSXJ68A
EOT Name	Security Camera	CIVISAJOOA	
Temperature	23.5°C	Relative Humidity	58.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement



RESULT: Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



EUT Name	IMILAB EC6 Dual Outdoor	Model Name	CMSXJ68A
EUT Name	Security Camera	Model Name	CIVISAJOOA
Temperature	23.5°C	Relative Humidity	58.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement



RESULT: Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.




EUT Name	IMILAB EC6 Dual Outdoor	Model Name	CMSXJ68A
EUT Name	Security Camera	wodei name	CIVISAJOOA
Temperature	23.5°C	Relative Humidity	58.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna Polarity	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

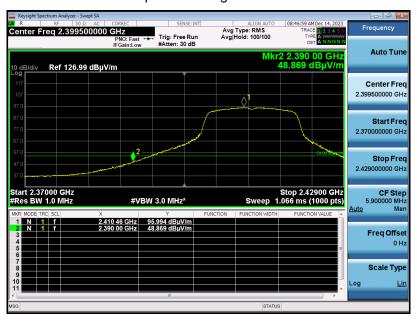

RESULT: Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.




EUT Name	IMILAB EC6 Dual Outdoor	Model Name	CMSXJ68A
EO1 Name	Security Camera	Model Name	CIVISAJOOA
Temperature	23.5°C	Relative Humidity	58.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna Polarity	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

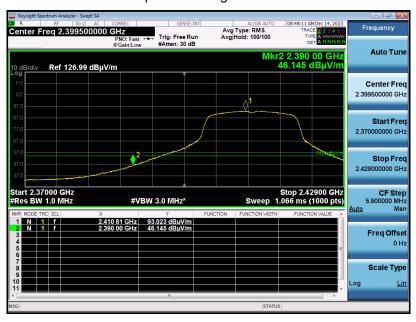

RESULT: Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



EUT Name	IMILAB EC6 Dual Outdoor	Model Name	CMSXJ68A
LOT Name	Security Camera	CIVISAUUA	
Temperature	23.5°C	Relative Humidity	58.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna Polarity	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement



RESULT: Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.




EUT Name	IMILAB EC6 Dual Outdoor	Model Name	CMSXJ68A
LOT Name	Security Camera	Model Name	CIVIOAJOOA
Temperature	23.5°C	Relative Humidity	58.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna Polarity	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

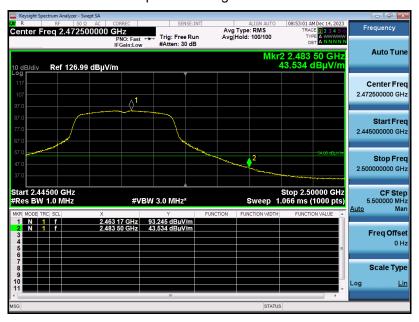

RESULT: Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



EUT Name	IMILAB EC6 Dual Outdoor		CMSXJ68A
EUT Name	Security Camera	Model Name	CIVISAJOOA
Temperature	23.5°C	Relative Humidity	58.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 7	Antenna Polarity	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement



RESULT: Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.




EUT Name	IMILAB EC6 Dual Outdoor	Model Name	CMSXJ68A	
EUT Name	Security Camera	Woder Name	CIVISAJOOA	
Temperature	23.5°C	Relative Humidity	58.4%	
Pressure	960hPa	Test Voltage	Normal Voltage	
Test Mode	Mode 7	Antenna Polarity	Vertical	

Test Graph for Peak Measurement




Test Graph for Average Measurement

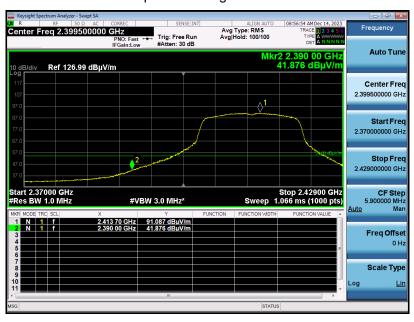

RESULT: Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.





EUT Name	IMILAB EC6 Dual Outdoor	Model Name	CMSXJ68A
EO1 Name	Security Camera	Wiodel Name	CIVISAJOOA
Temperature	23.5°C	Relative Humidity	58.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 9	Antenna Polarity	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement



RESULT: Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.




EUT Name	IMILAB EC6 Dual Outdoor	Model Name	CMSXJ68A
EUT Name	Security Camera	Wioder Name	CIVISAJOOA
Temperature	23.5°C	Relative Humidity	58.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 9	Antenna Polarity	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

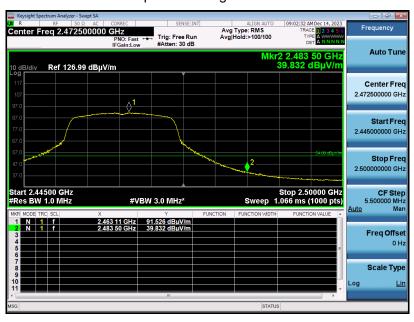

RESULT: Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.




EUT Name	IMILAB EC6 Dual Outdoor	Model Name	CMSXJ68A
LOT Name	Security Camera	Model Name	OWO/WOO/
Temperature	23.5°C	Relative Humidity	58.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 10	Antenna Polarity	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

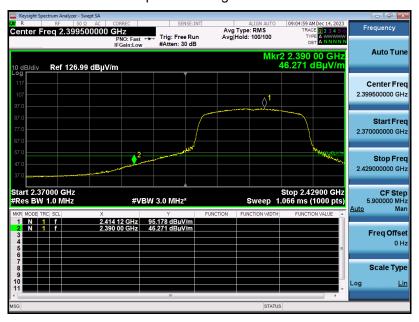

RESULT: Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.




EUT Name IMILAB EC6 Dual Outdoor Model		Model Name	CMSXJ68A
LOT Name	Security Camera	Wiodel Name	CIVIOAJOOA
Temperature	23.5°C	Relative Humidity	58.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 10	Antenna Polarity	Vertical

Test Graph for Peak Measurement




Test Graph for Average Measurement

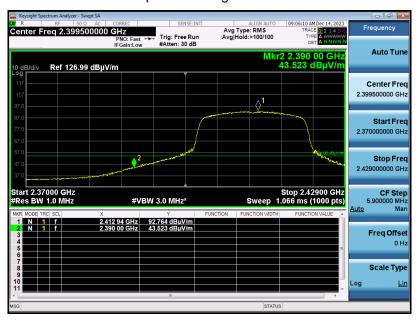

RESULT: Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.





EUT Name	IMILAB EC6 Dual Outdoor	Model Name	CMSXJ68A
EO1 Name	Security Camera	Wiodel Name	CIVISAJOOA
Temperature	23.5°C	Relative Humidity	58.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 12	Antenna Polarity	Horizontal

Test Graph for Peak Measurement




Test Graph for Average Measurement



RESULT: Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.






EUT Name	IMILAB EC6 Dual Outdoor Security Camera	Model Name	CMSXJ68A
Temperature	23.5°C	Relative Humidity	58.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 12	Antenna Polarity	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

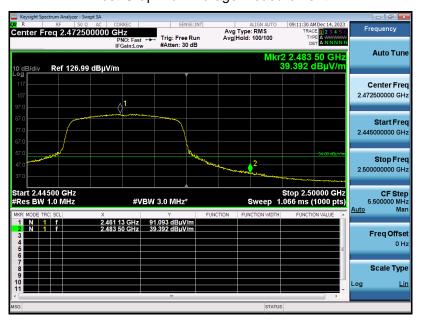

RESULT: Pass

Note: The factor had been edited in the "Input Correction" of the Spectry method by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



12. AC Power Line Conducted Emission


12.1 Measurement Limits

Francis	Maximum RF Line Voltage				
Frequency	Q.P (dBµV)	Average (dBμV)			
150kHz~500kHz	66-56	56-46			
500kHz~5MHz	56	46			
5MHz~30MHz	60	50			

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

12.2 Block Diagram of Line Conducted Emission Test

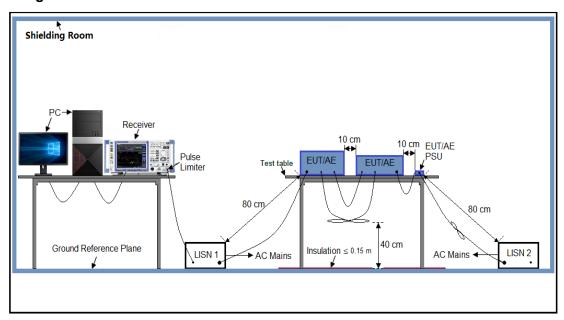



Page 98 of 101

12.3 Preliminary Procedure of Line Conducted Emission Test

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 12V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 Ohm load; the second scan had Line 1 connected to a 50 Ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4 Final Procedure of Line Conducted Emission Test

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case was reported on the Summary Data page.



12.5 Test Result of Line Conducted Emission Test

	AC Power Line Conducted Emission Test						
est Mode	Mode 2			LIS	N Line	Hot S	Side
				•		'	
- 1	vel [dBμV]						
08							
70			; !	j		· i - i - i ·	
60						111	1 1
50 40	4 ra	<u> </u>	<u> </u>		7		
30	The sound		L	 	and the same of the same	K X	X X
20	the state of the s	how hall hall have	Alternative of the second		A PART OF THE PART		
10			And the state of the state of	-			
0			 	 			
-10	<u> </u>	<u> </u>	: !	<u> </u>	<u>i i i i</u>	<u> </u>	<u> </u>
	150k 300k 400k	600k 800k 1		M 3M ency [Hz]	4M 5M 6M	8M 10M	20M 30M
xxx	MES agc_fin						
	Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
	0.158000	41.30	6.1	66	24.3	OP	L1
	0.158000 0.174000	41.30 39.60	6.1 6.1	66 65	24.3 25.2	QP QP	L1 L1
	0.174000 8.114000		6.1 6.6		25.2 26.0		
	0.174000 8.114000 8.894000	39.60 34.00 33.20	6.1 6.6 6.6	65 60 60	25.2 26.0 26.8	QP QP QP	L1 L1 L1
	0.174000 8.114000 8.894000 20.458000	39.60 34.00 33.20 34.90	6.1 6.6 6.6 7.2	65 60 60	25.2 26.0 26.8 25.1	QP QP QP QP	L1 L1 L1 L1
	0.174000 8.114000 8.894000	39.60 34.00 33.20	6.1 6.6 6.6	65 60 60	25.2 26.0 26.8	QP QP QP	L1 L1 L1
3.	0.174000 8.114000 8.894000 20.458000	39.60 34.00 33.20 34.90 37.70	6.1 6.6 6.6 7.2 7.8	65 60 60	25.2 26.0 26.8 25.1	QP QP QP QP	L1 L1 L1 L1
	0.174000 8.114000 8.894000 20.458000 24.002000 TEASUREMENT 023/12/14 10	39.60 34.00 33.20 34.90 37.70 RESULT :01	6.1 6.6 6.6 7.2 7.8	65 60 60 60 60	25.2 26.0 26.8 25.1 22.3	QP QP QP QP QP	L1 L1 L1 L1 L1
	0.174000 8.114000 8.894000 20.458000 24.002000 TEASUREMENT 023/12/14 10 Frequency	39.60 34.00 33.20 34.90 37.70 RESULT :01 Level	6.1 6.6 6.6 7.2 7.8 : "agc_	65 60 60 60 60 fin2" Limit	25.2 26.0 26.8 25.1 22.3	QP QP QP QP QP	L1 L1 L1 L1 L1
	0.174000 8.114000 8.894000 20.458000 24.002000 TEASUREMENT 023/12/14 10	39.60 34.00 33.20 34.90 37.70 RESULT :01 Level	6.1 6.6 6.6 7.2 7.8	65 60 60 60 60 fin2" Limit	25.2 26.0 26.8 25.1 22.3	QP QP QP QP QP	L1 L1 L1 L1 L1
	0.174000 8.114000 8.894000 20.458000 24.002000 EASUREMENT 023/12/14 10 Frequency MHz	39.60 34.00 33.20 34.90 37.70 RESULT :01 Level dBµV	6.1 6.6 6.6 7.2 7.8 : "agc_ Transd dB	65 60 60 60 60 fin2" Limit dBµV	25.2 26.0 26.8 25.1 22.3 Margin dB	QP QP QP QP QP	L1 L1 L1 L1 L1
	0.174000 8.114000 8.894000 20.458000 24.002000 EASUREMENT 023/12/14 10 Frequency MHz 0.174000	39.60 34.00 33.20 34.90 37.70 RESULT :01 Level dBµV 25.40	6.1 6.6 7.2 7.8 : "agc_ Transd dB 6.1 6.1	65 60 60 60 60 fin2" Limit dBµV 55 48	25.2 26.0 26.8 25.1 22.3 Margin dB 29.4 25.2	QP QP QP QP QP Detector	L1 L1 L1 L1 L1
	0.174000 8.114000 8.894000 20.458000 24.002000 EASUREMENT 023/12/14 10 Frequency MHz 0.174000 0.378000 4.514000	39.60 34.00 33.20 34.90 37.70 RESULT :01 Level dBµV 25.40 23.10 19.10	6.1 6.6 7.2 7.8 : "agc_ Transd dB 6.1 6.1 6.3	65 60 60 60 60 fin2" Limit dBµV 55 48 46	25.2 26.0 26.8 25.1 22.3 Margin dB 29.4 25.2 26.9	QP QP QP QP QP Detector AV AV	Line Line L1 L1 L1 L1 L1 L1 L1 L1
	0.174000 8.114000 8.894000 20.458000 24.002000 EASUREMENT 023/12/14 10 Frequency MHz 0.174000 0.378000 4.514000	39.60 34.00 33.20 34.90 37.70 RESULT :01 Level dBµV 25.40 23.10 19.10	6.1 6.6 7.2 7.8 : "agc_ Transd dB 6.1 6.1 6.3	65 60 60 60 60 fin2" Limit dBµV 55 48 46 50	25.2 26.0 26.8 25.1 22.3 Margin dB 29.4 25.2 26.9 23.2	QP QP QP QP QP Detector AV AV AV	L1 L1 L1 L1 L1 L1 L1 L1 L1
	0.174000 8.114000 8.894000 20.458000 24.002000 EASUREMENT 023/12/14 10 Frequency MHz 0.174000 0.378000	39.60 34.00 33.20 34.90 37.70 RESULT :01 Level dBµV 25.40 23.10 19.10	6.1 6.6 7.2 7.8 : "agc_ Transd dB 6.1 6.1 6.3	65 60 60 60 60 fin2" Limit dBµV 55 48 46 50	25.2 26.0 26.8 25.1 22.3 Margin dB 29.4 25.2 26.9 23.2	QP QP QP QP QP Detector AV AV AV	L1 L1 L1 L1 L1 L1 L1 L1

RESULT: Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

7.8

50

15.4


ь1


24.002000

Web: http://www.agccert.com/

34.60





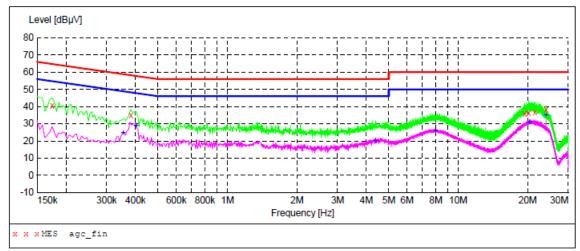

MEASUREMENT RESULT: "agc_fin"

2023/12/14 9:58

2023/12/14 9:	58					
Frequency MHz	Level dBµV		Limit dBµV	Margin dB	Detector	Line
0.174000	40.30	6.1	65	24.5	QP	N
0.382000	35.10	6.1		23.1	QP	N
19.406000	35.60	7.1	60	24.4	QP	N
20.194000	36.30	7.1	60	23.7	QP	N
21.498000	36.60	7.4	60	23.4	QP	N
24 002000	38 20	7.8	60	21.8	OP	N

MEASUREMENT RESULT: "agc_fin2"

2023/12/14 9:58

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.354000	24.60	6.1	49	24.3		N
0.402000 4.382000	29.00	6.1	48 46	18.8	AV	N N
20.342000	30.70	7.1	50	19.3	AV	N N
7.962000 20.342000 24.002000	26.00 30.70 35.10	6.6 7.1 7.8	50 50 50	24.0 19.3 14.9	AV AV AV	

RESULT: Pass



Page 101 of 101

Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC05877231206AP02

Appendix II: Photographs of EUT

Refer to the Report No.: AGC05877231206AP03

----End of Report----



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.