




Plots of Injected signal (AWGN) level

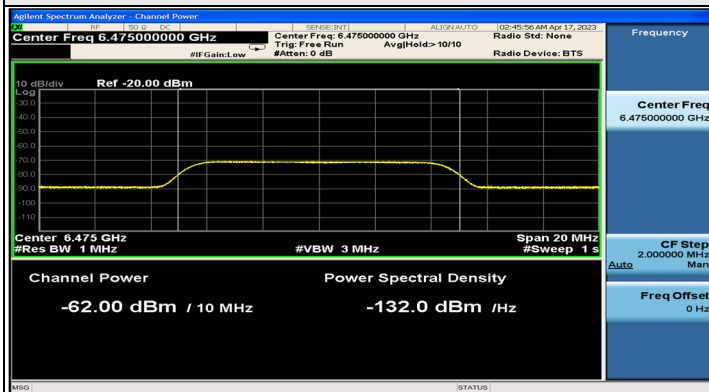


802.11be (EHT20) / CH105

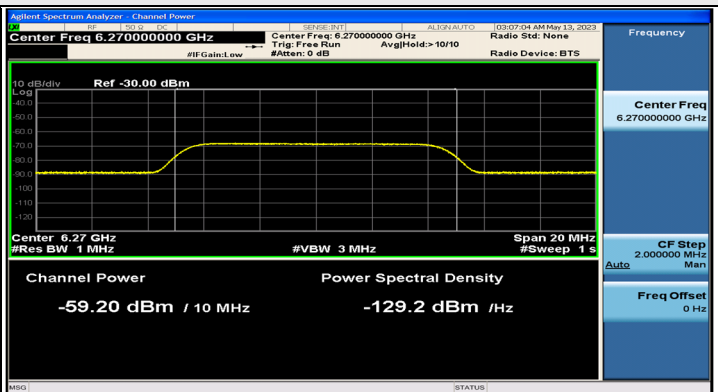

802.11be (EHT320) / CH95(Low Edge)

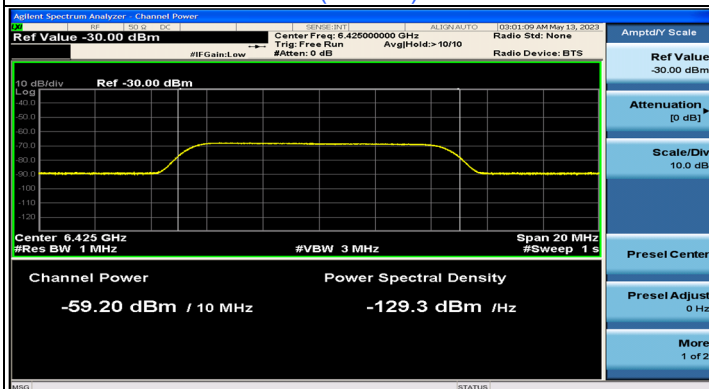


802.11be (EHT320) / CH95(Middle)

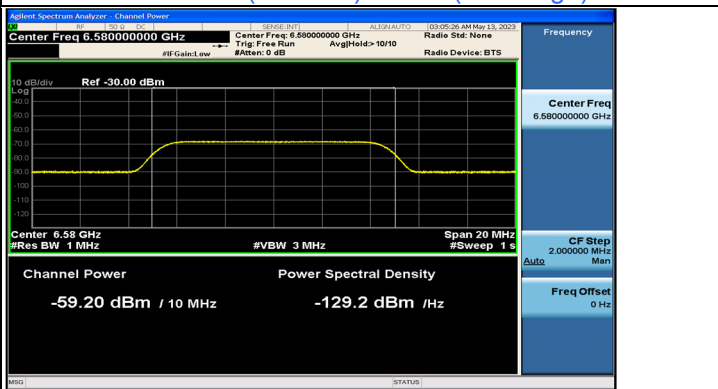


802.11be (EHT320) / CH95(High Edge)


Plots of EUT ceased transmission in the time domain

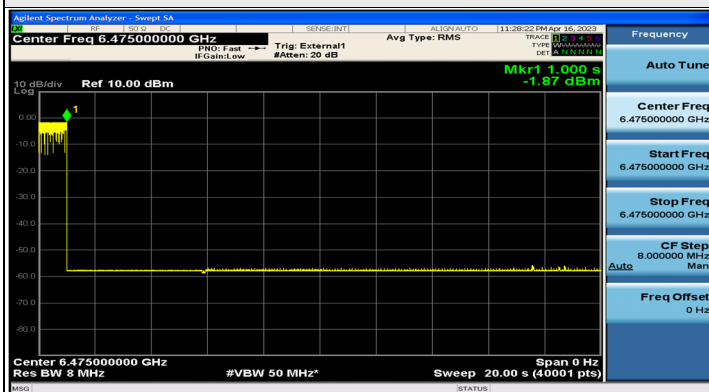


802.11be (EHT20) / CH105

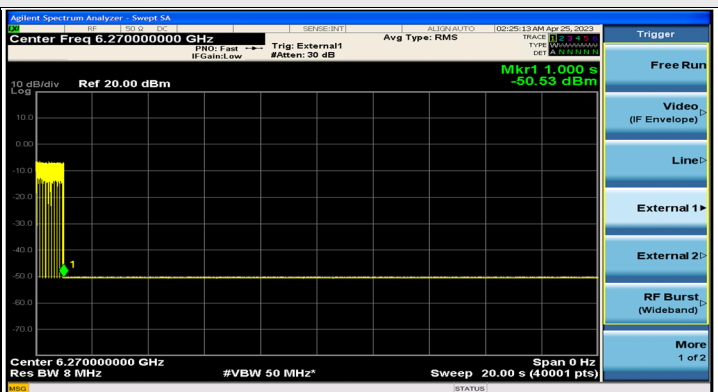

802.11be (EHT320) / CH95(Low Edge)

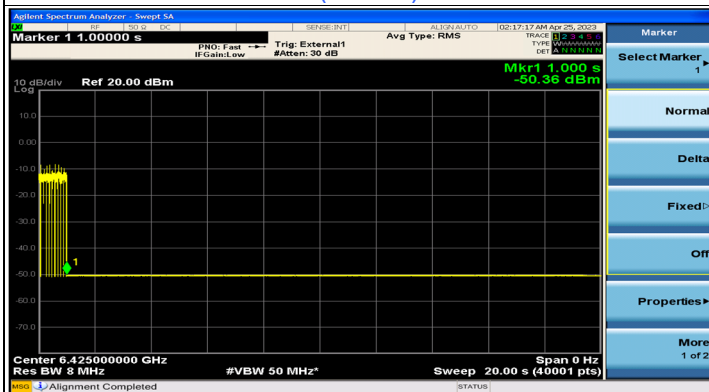

802.11be (EHT320) / CH95(Middle)

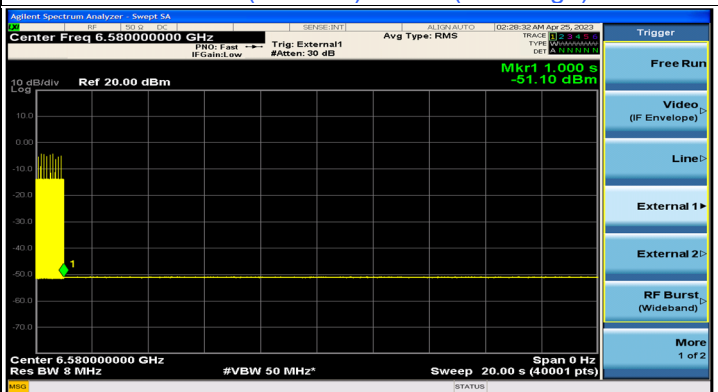

802.11be (EHT320) / CH95(High Edge)


Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	149	6695	6695	-61	2.3	0	-63.3	-62	OFF
					-65	2.3	0	-67.3	-62	Minimal
					-79.7	2.3	0	-82	-62	ON
	320	127	6430	6430	-62	2.3	0	-64.3	-62	OFF
					-64	2.3	0	-66.3	-62	Minimal
					-79.7	2.3	0	-82	-62	ON
			6585	6585	-59.7	2.3	0	-62	-62	OFF
					-63	2.3	0	-65.3	-62	Minimal
					-79.7	2.3	0	-82	-62	ON
			6740	6740	-60	2.3	0	-62.3	-62	OFF
					-64	2.3	0	-66.3	-62	Minimal
					-79.7	2.3	0	-82	-62	ON

Notes:


1. After investigation (consider antenna gain and path loss), the one representative port (Chain 2) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.

Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6695	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
	320	6430	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6585	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6740	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass


Plots of EUT Tx waveform

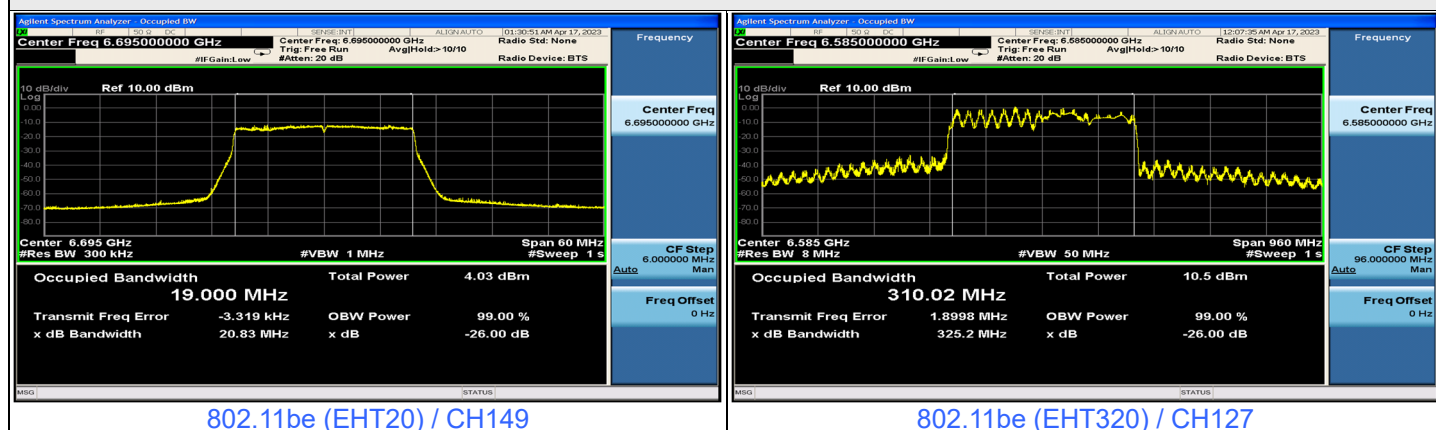


Plots of Injected signal (AWGN) level

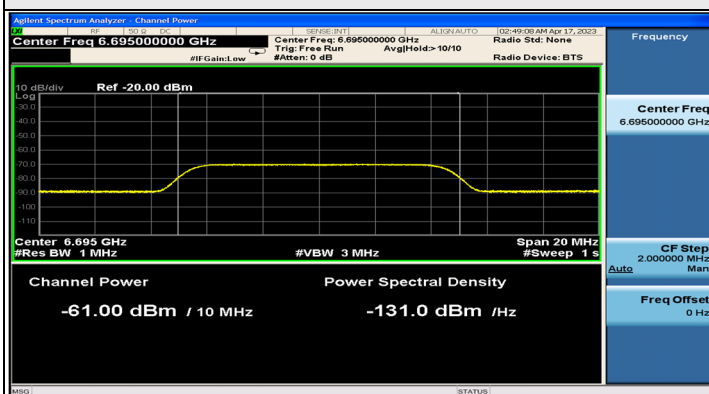


802.11be (EHT20) / CH149

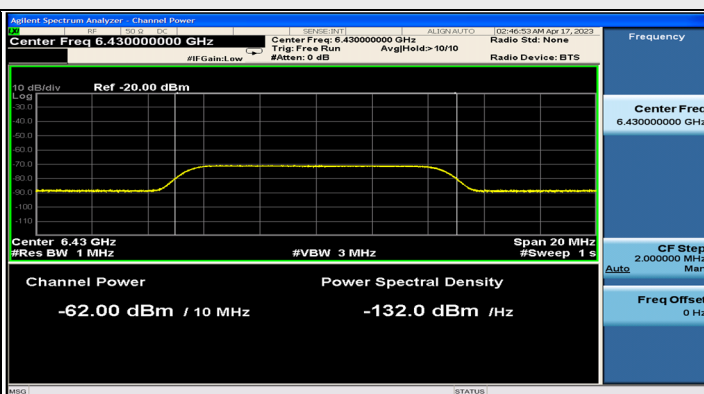

802.11be (EHT320) / CH127(Low Edge)

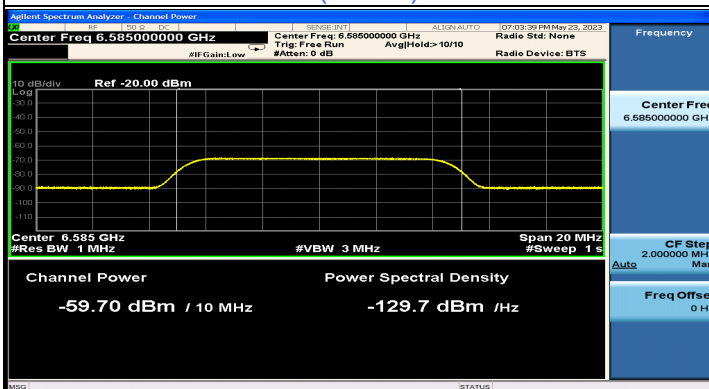


802.11be (EHT320) / CH127(Middle)

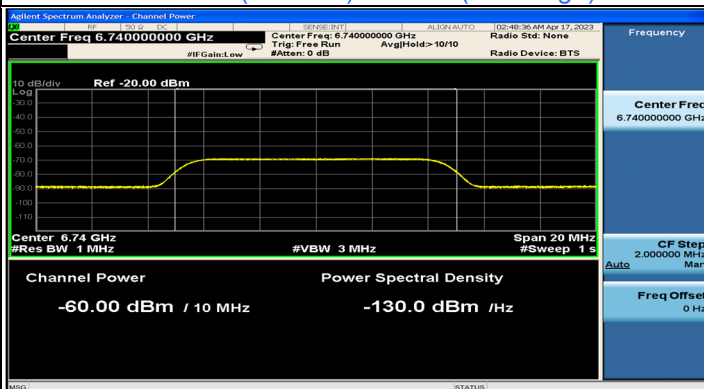


802.11be (EHT320) / CH127(High Edge)


Plots of EUT ceased transmission in the time domain

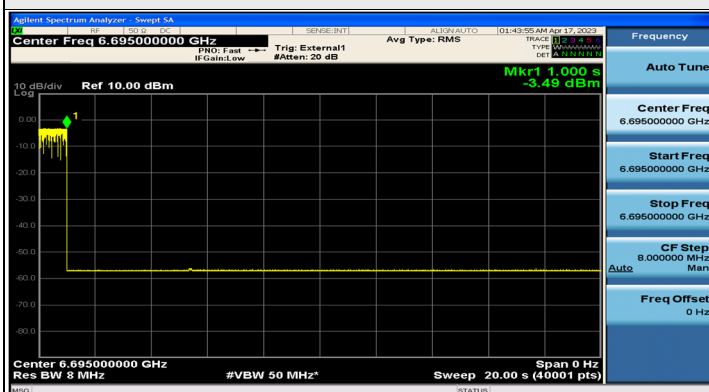


802.11be (EHT20) / CH149

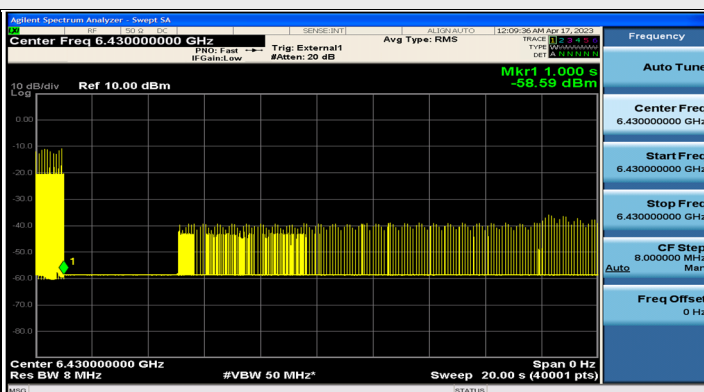

802.11be (EHT320) / CH127(Low Edge)

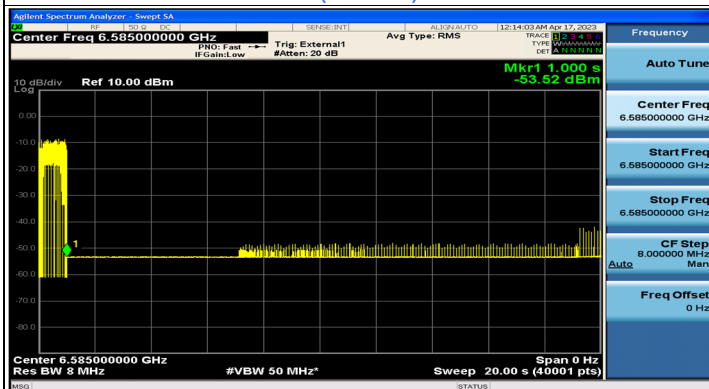

802.11be (EHT320) / CH127(Middle)

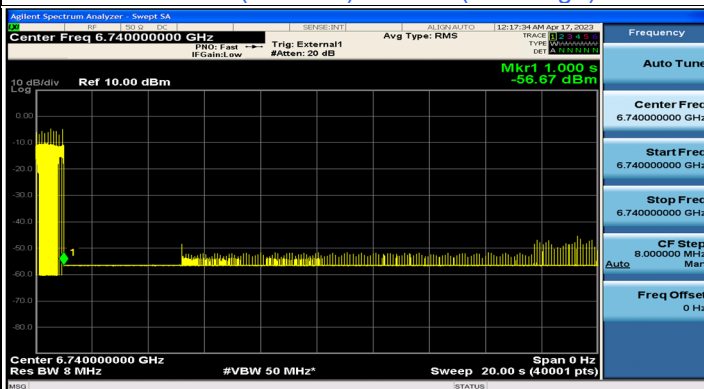

802.11be (EHT320) / CH127(High Edge)


Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	209	6995	6995	-60	2.7	0	-62.7	-62	OFF
					-64	2.7	0	-66.7	-62	Minimal
					-79.3	2.7	0	-82	-62	ON
	320	191	6905	6750	-60	2.7	0	-62.7	-62	OFF
					-62	2.7	0	-64.7	-62	Minimal
					-79.3	2.7	0	-82	-62	ON
				6905	-59.5	2.7	0	-62.2	-62	OFF
					-63	2.7	0	-65.7	-62	Minimal
					-79.3	2.7	0	-82	-62	ON
				7060	-62	2.7	0	-64.7	-62	OFF
					-66	2.7	0	-68.7	-62	Minimal
					-79.3	2.7	0	-82	-62	ON

Notes:


1. After investigation (consider antenna gain and path loss), the one representative port (Chain 2) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.

Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6995	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
	320	6750	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6905	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		7060	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass


Plots of EUT Tx waveform

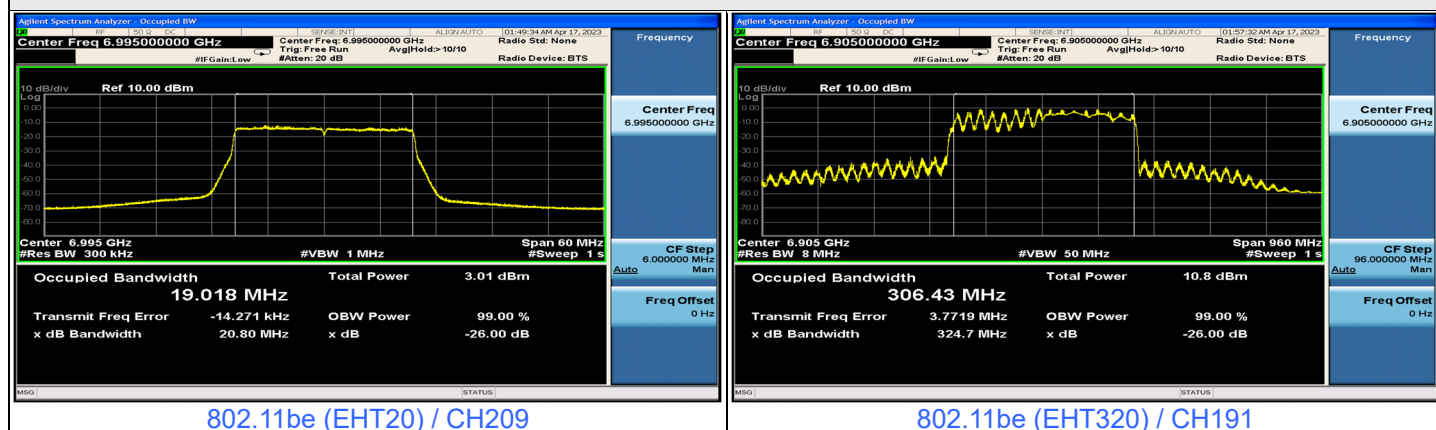


Plots of Injected signal (AWGN) level

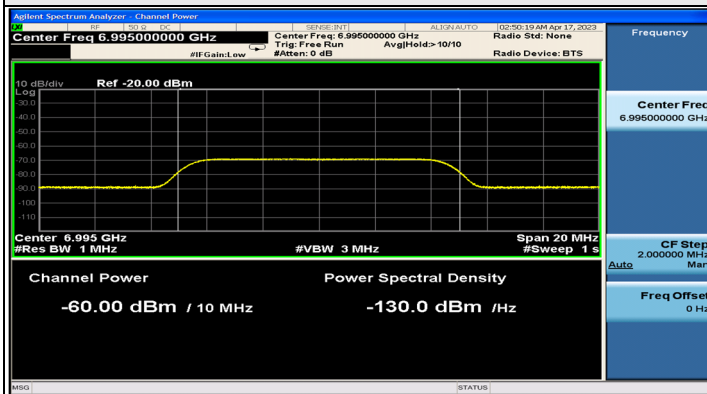


802.11be (EHT20) / CH209

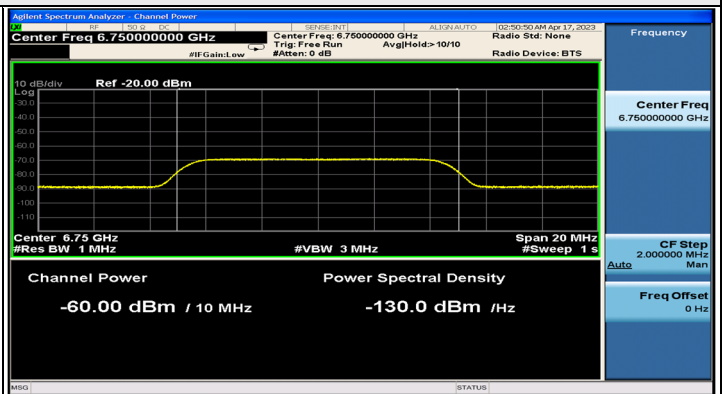

802.11be (EHT320) / CH191(Low Edge)

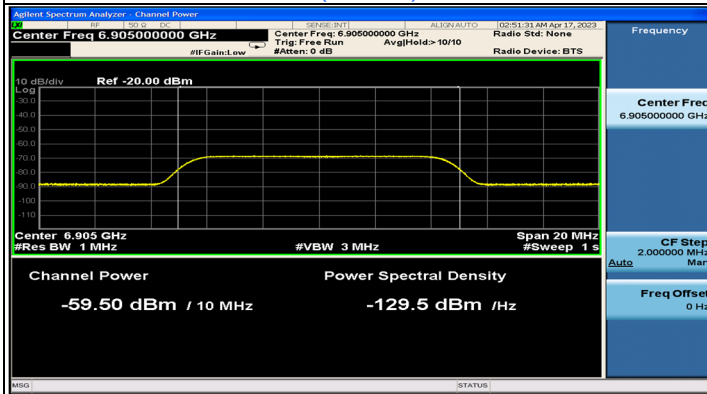


802.11be (EHT320) / CH191(Middle)

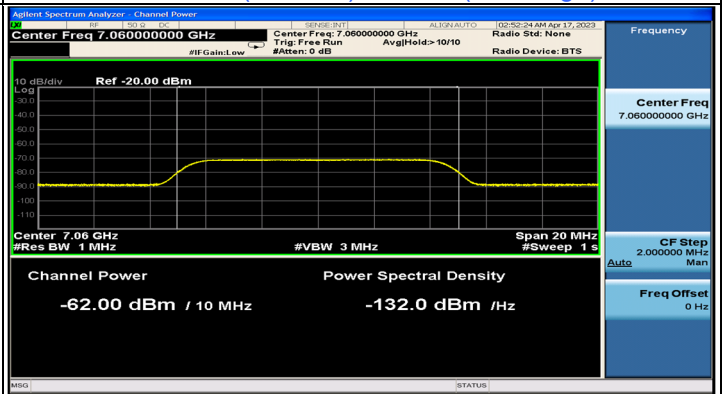


802.11be (EHT320) / CH191(High Edge)


Plots of EUT ceased transmission in the time domain

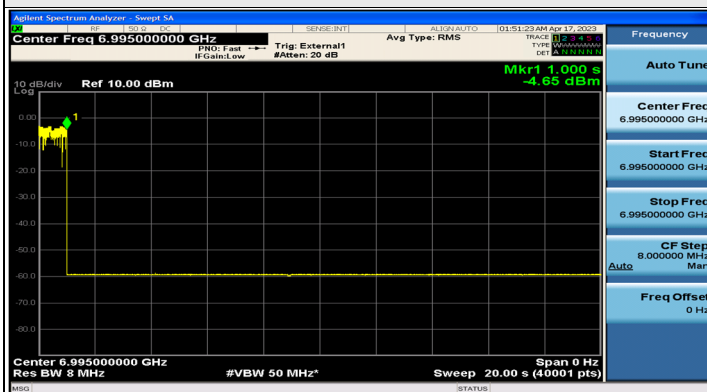


802.11be (EHT20) / CH209

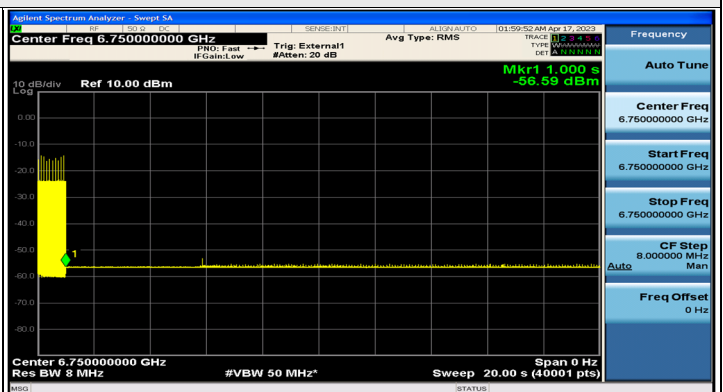

802.11be (EHT320) / CH191(Low Edge)

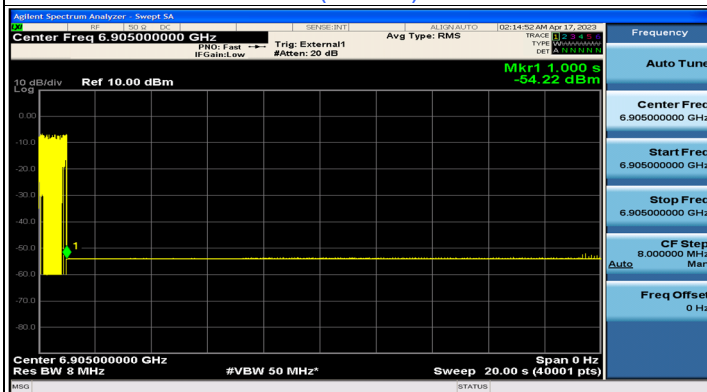

802.11be (EHT320) / CH191(Middle)

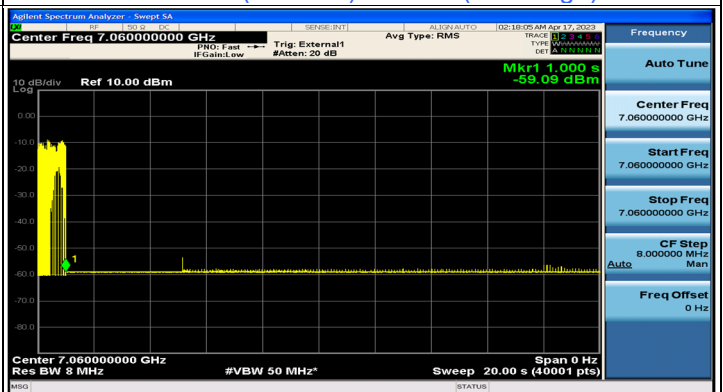

802.11be (EHT320) / CH191(High Edge)

7.8 AC Power Conducted Emissions


Test Mode A

RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 71% RH
Tested By	Luis Lee		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17000	9.68	32.62	13.71	42.30	23.39	64.96	54.96	-22.66	-31.57
2	0.19400	9.70	29.49	11.49	39.19	21.19	63.86	53.86	-24.67	-32.67
3	0.21800	9.71	27.66	9.74	37.37	19.45	62.89	52.89	-25.52	-33.44
4	0.24200	9.72	24.94	10.30	34.66	20.02	62.03	52.03	-27.37	-32.01
5	0.26569	9.73	23.42	11.02	33.15	20.75	61.25	51.25	-28.10	-30.50
6	0.28600	9.74	21.59	8.80	31.33	18.54	60.64	50.64	-29.31	-32.10

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

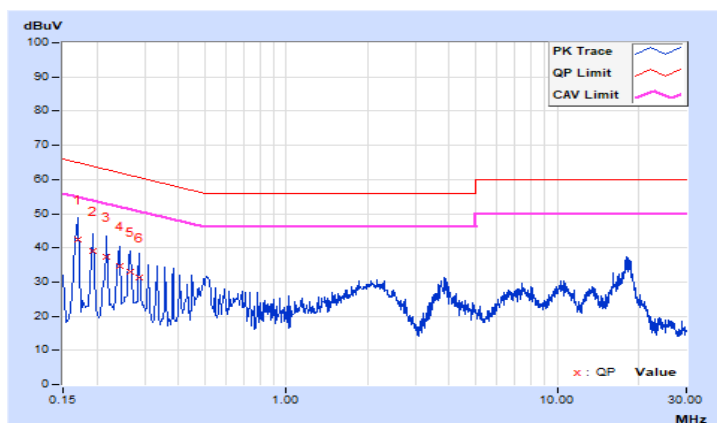


RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 71% RH
Tested By	Luis Lee		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16200	9.67	33.62	16.46	43.29	26.13	65.36	55.36	-22.07	-29.23
2	0.18600	9.69	30.81	14.05	40.50	23.74	64.21	54.21	-23.71	-30.47
3	0.21000	9.70	27.81	10.33	37.51	20.03	63.21	53.21	-25.70	-33.18
4	0.23400	9.71	25.56	11.74	35.27	21.45	62.31	52.31	-27.04	-30.86
5	0.49347	9.78	18.30	11.87	28.08	21.65	56.11	46.11	-28.03	-24.46
6	18.83400	10.14	20.02	15.00	30.16	25.14	60.00	50.00	-29.84	-24.86

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

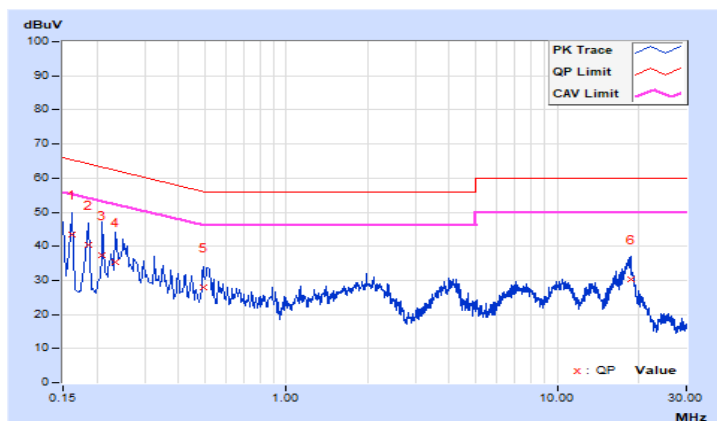


Test Mode B

RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 70% RH
Tested By	Luis Lee		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15400	9.66	37.57	22.04	47.23	31.70	65.78	55.78	-18.55	-24.08
2	0.17800	9.68	32.61	20.25	42.29	29.93	64.58	54.58	-22.29	-24.65
3	0.21000	9.70	28.74	19.94	38.44	29.64	63.21	53.21	-24.77	-23.57
4	0.29400	9.74	28.77	20.70	38.51	30.44	60.41	50.41	-21.90	-19.97
5	0.35000	9.77	28.42	19.99	38.19	29.76	58.96	48.96	-20.77	-19.20
6	0.47000	9.80	35.41	28.84	45.21	38.64	56.51	46.51	-11.30	-7.87

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

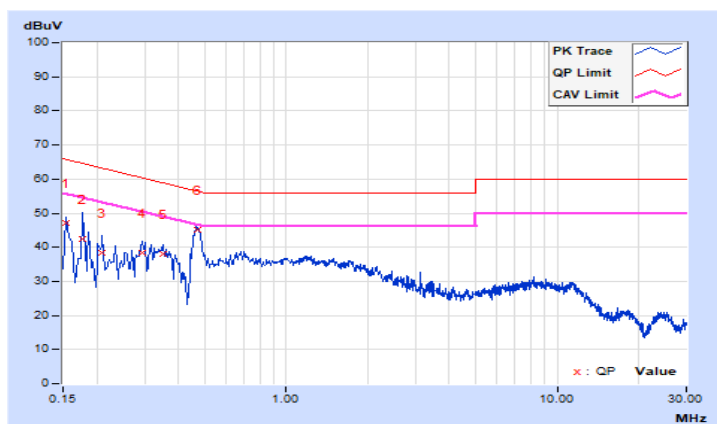


RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 70% RH
Tested By	Luis Lee		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15400	9.66	38.53	27.75	48.19	37.41	65.78	55.78	-17.59	-18.37
2	0.17400	9.68	34.64	24.48	44.32	34.16	64.77	54.77	-20.45	-20.61
3	0.22200	9.71	29.69	19.66	39.40	29.37	62.74	52.74	-23.34	-23.37
4	0.25000	9.72	29.36	18.86	39.08	28.58	61.76	51.76	-22.68	-23.18
5	0.44529	9.78	33.65	26.67	43.43	36.45	56.96	46.96	-13.53	-10.51
6	0.60200	9.79	28.80	22.17	38.59	31.96	56.00	46.00	-17.41	-14.04

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

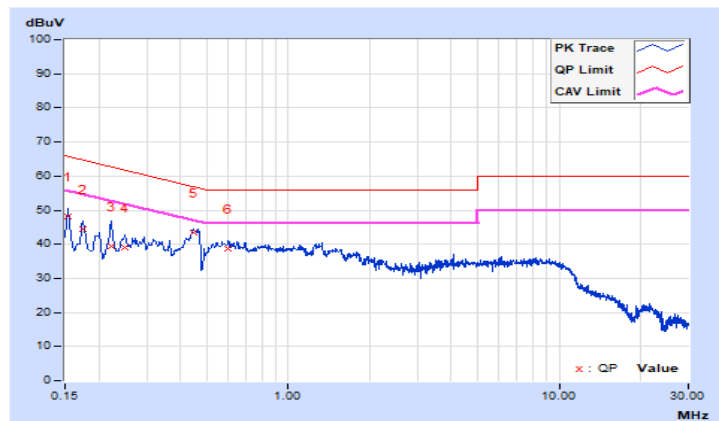

7.9 Unwanted Emissions below 1 GHz


Test Mode A

RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	(QP) RB = 120kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	91.86	25.8 QP	43.5	-17.7	1.00 H	84	40.0	-14.2
2	138.25	26.2 QP	43.5	-17.3	1.00 H	201	35.4	-9.2
3	284.45	34.9 QP	46.0	-11.1	1.49 H	119	42.6	-7.7
4	422.22	25.0 QP	46.0	-21.0	1.00 H	276	30.5	-5.5
5	465.80	27.8 QP	46.0	-18.2	1.00 H	259	32.3	-4.5
6	707.59	29.6 QP	46.0	-16.4	1.00 H	308	29.5	0.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

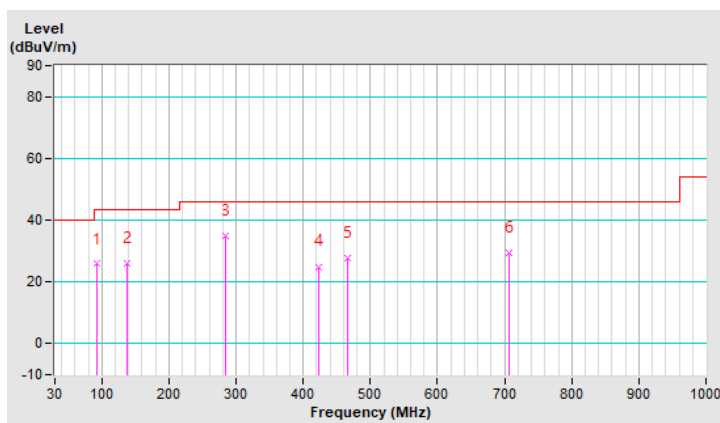


RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	(QP) RB = 120kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	38.43	31.1 QP	40.0	-8.9	1.00 V	216	40.7	-9.6
2	138.25	27.0 QP	43.5	-16.5	1.00 V	159	36.2	-9.2
3	259.14	35.5 QP	46.0	-10.5	1.50 V	333	44.4	-8.9
4	285.86	34.6 QP	46.0	-11.4	1.50 V	242	42.3	-7.7
5	495.32	29.1 QP	46.0	-16.9	1.00 V	256	33.5	-4.4
6	775.07	38.4 QP	46.0	-7.6	1.50 V	263	35.9	2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

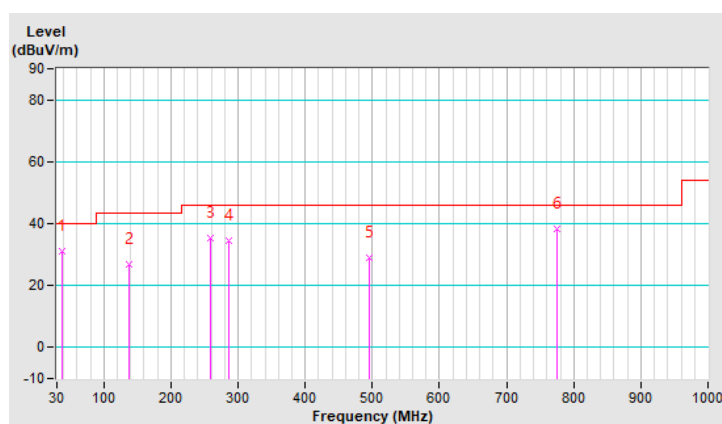


Test Mode B

RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	(QP) RB = 120kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	52.49	34.1 QP	40.0	-5.9	1.49 H	6	42.9	-8.8
2	73.58	27.8 QP	40.0	-12.2	1.00 H	301	39.2	-11.4
3	166.36	23.4 QP	43.5	-20.1	1.00 H	261	32.1	-8.7
4	257.74	37.1 QP	46.0	-8.9	1.49 H	334	46.0	-8.9
5	304.13	33.6 QP	46.0	-12.4	1.49 H	159	40.9	-7.3
6	505.16	29.3 QP	46.0	-16.7	1.00 H	271	33.3	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

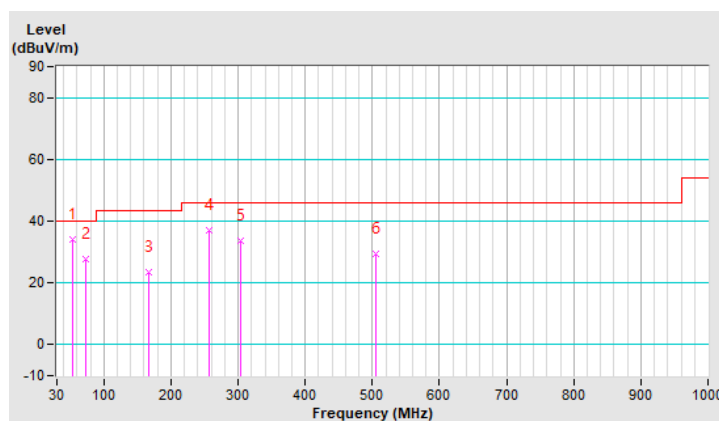


RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	(QP) RB = 120kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	52.49	33.9 QP	40.0	-6.1	1.00 V	332	42.7	-8.8
2	257.74	36.2 QP	46.0	-9.8	1.50 V	5	45.1	-8.9
3	284.45	36.4 QP	46.0	-9.6	1.50 V	138	44.1	-7.7
4	465.80	28.5 QP	46.0	-17.5	1.00 V	261	33.0	-4.5
5	512.19	26.8 QP	46.0	-19.2	1.00 V	256	30.7	-3.9
6	613.41	27.3 QP	46.0	-18.7	1.50 V	302	28.6	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

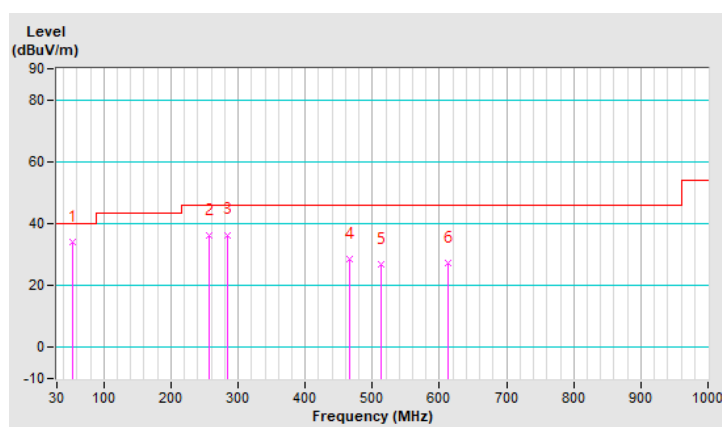

7.10 Unwanted Emissions above 1 GHz

RF Mode	802.11a	Channel	CH 33 : 6115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	61.1 PK	88.2	-27.1	1.70 H	21	47.5	13.6
2	#5925.00	48.2 AV	68.2	-20.0	1.70 H	21	34.6	13.6
3	*6115.00	105.3 PK			1.70 H	21	61.0	44.3
4	*6115.00	94.7 AV			1.70 H	21	50.4	44.3
5	12230.00	61.6 PK	74.0	-12.4	1.62 H	184	39.8	21.8
6	12230.00	48.5 AV	54.0	-5.5	1.62 H	184	26.7	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	61.6 PK	88.2	-26.6	1.52 V	323	48.0	13.6
2	#5925.00	48.6 AV	68.2	-19.6	1.52 V	323	35.0	13.6
3	*6115.00	108.8 PK			1.52 V	323	64.5	44.3
4	*6115.00	99.3 AV			1.52 V	323	55.0	44.3
5	12230.00	62.0 PK	74.0	-12.0	1.95 V	311	40.2	21.8
6	12230.00	49.0 AV	54.0	-5.0	1.95 V	311	27.2	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 61 : 6255 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	103.9 PK			1.76 H	28	59.2	44.7
2	*6255.00	94.1 AV			1.76 H	28	49.4	44.7
3	12510.00	61.0 PK	74.0	-13.0	1.69 H	188	39.5	21.5
4	12510.00	48.0 AV	54.0	-6.0	1.69 H	188	26.5	21.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	108.3 PK			1.77 V	148	63.6	44.7
2	*6255.00	98.4 AV			1.77 V	148	53.7	44.7
3	12510.00	61.6 PK	74.0	-12.4	1.89 V	315	40.1	21.5
4	12510.00	48.5 AV	54.0	-5.5	1.89 V	315	27.0	21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	104.8 PK			1.69 H	34	59.3	45.5
2	*6415.00	95.0 AV			1.69 H	34	49.5	45.5
3	#12830.00	62.6 PK	88.2	-25.6	1.58 H	188	39.8	22.8
4	#12830.00	49.6 AV	68.2	-18.6	1.58 H	188	26.8	22.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	108.5 PK			1.59 V	151	63.0	45.5
2	*6415.00	98.7 AV			1.59 V	151	53.2	45.5
3	#12830.00	62.8 PK	88.2	-25.4	1.89 V	316	40.0	22.8
4	#12830.00	49.8 AV	68.2	-18.4	1.89 V	316	27.0	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	104.5 PK			1.65 H	28	58.9	45.6
2	*6435.00	94.1 AV			1.65 H	28	48.5	45.6
3	#12870.00	63.0 PK	88.2	-25.2	1.69 H	176	39.9	23.1
4	#12870.00	49.7 AV	68.2	-18.5	1.69 H	176	26.6	23.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	108.1 PK			1.56 V	149	62.5	45.6
2	*6435.00	98.3 AV			1.56 V	149	52.7	45.6
3	#12870.00	63.1 PK	88.2	-25.1	1.59 V	312	40.0	23.1
4	#12870.00	50.0 AV	68.2	-18.2	1.59 V	312	26.9	23.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	104.0 PK			1.77 H	45	58.2	45.8
2	*6475.00	94.1 AV			1.77 H	45	48.3	45.8
3	#12950.00	62.7 PK	88.2	-25.5	1.59 H	194	39.7	23.0
4	#12950.00	49.3 AV	68.2	-18.9	1.59 H	194	26.3	23.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	108.3 PK			1.59 V	149	62.5	45.8
2	*6475.00	98.6 AV			1.59 V	149	52.8	45.8
3	#12950.00	63.1 PK	88.2	-25.1	1.52 V	306	40.1	23.0
4	#12950.00	50.0 AV	68.2	-18.2	1.52 V	306	27.0	23.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	104.4 PK			1.75 H	265	58.3	46.1
2	*6515.00	94.3 AV			1.75 H	265	48.2	46.1
3	#13030.00	62.5 PK	88.2	-25.7	1.66 H	189	39.7	22.8
4	#13030.00	49.3 AV	68.2	-18.9	1.66 H	189	26.5	22.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	108.0 PK			1.62 V	270	61.9	46.1
2	*6515.00	98.5 AV			1.62 V	270	52.4	46.1
3	#13030.00	62.8 PK	88.2	-25.4	1.47 V	319	40.0	22.8
4	#13030.00	49.8 AV	68.2	-18.4	1.47 V	319	27.0	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	104.8 PK			1.77 H	263	58.6	46.2
2	*6535.00	94.6 AV			1.77 H	263	48.4	46.2
3	#13070.00	62.3 PK	88.2	-25.9	1.62 H	189	39.5	22.8
4	#13070.00	49.2 AV	68.2	-19.0	1.62 H	189	26.4	22.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	108.6 PK			1.45 V	274	62.4	46.2
2	*6535.00	98.7 AV			1.45 V	274	52.5	46.2
3	#13070.00	62.6 PK	88.2	-25.6	1.58 V	312	39.8	22.8
4	#13070.00	49.6 AV	68.2	-18.6	1.58 V	312	26.8	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	104.0 PK			1.69 H	277	58.1	45.9
2	*6695.00	94.2 AV			1.69 H	277	48.3	45.9
3	13390.00	63.7 PK	74.0	-10.3	1.69 H	184	39.5	24.2
4	13390.00	50.9 AV	54.0	-3.1	1.69 H	184	26.7	24.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	107.9 PK			1.32 V	274	62.0	45.9
2	*6695.00	98.1 AV			1.32 V	274	52.2	45.9
3	13390.00	64.2 PK	74.0	-9.8	1.62 V	303	40.0	24.2
4	13390.00	51.1 AV	54.0	-2.9	1.62 V	303	26.9	24.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	105.0 PK			1.74 H	300	58.8	46.2
2	*6855.00	94.8 AV			1.74 H	300	48.6	46.2
3	#13710.00	64.4 PK	88.2	-23.8	1.70 H	182	39.8	24.6
4	#13710.00	51.3 AV	68.2	-16.9	1.70 H	182	26.7	24.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	108.1 PK			1.51 V	137	61.9	46.2
2	*6855.00	97.9 AV			1.51 V	137	51.7	46.2
3	#13710.00	64.6 PK	88.2	-23.6	1.62 V	312	40.0	24.6
4	#13710.00	51.4 AV	68.2	-16.8	1.62 V	312	26.8	24.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	104.7 PK			1.77 H	310	58.3	46.4
2	*6875.00	94.6 AV			1.77 H	310	48.2	46.4
3	#13750.00	64.2 PK	88.2	-24.0	1.63 H	192	39.5	24.7
4	#13750.00	51.3 AV	68.2	-16.9	1.63 H	192	26.6	24.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	108.0 PK			1.48 V	136	61.6	46.4
2	*6875.00	97.5 AV			1.48 V	136	51.1	46.4
3	#13750.00	64.9 PK	88.2	-23.3	1.55 V	311	40.2	24.7
4	#13750.00	51.6 AV	68.2	-16.6	1.55 V	311	26.9	24.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	106.0 PK			1.79 H	296	58.6	47.4
2	*6995.00	95.6 AV			1.79 H	296	48.2	47.4
3	#13990.00	65.2 PK	88.2	-23.0	1.70 H	188	39.7	25.5
4	#13990.00	52.0 AV	68.2	-16.2	1.70 H	188	26.5	25.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	108.9 PK			1.48 V	137	61.5	47.4
2	*6995.00	98.3 AV			1.48 V	137	50.9	47.4
3	#13990.00	65.5 PK	88.2	-22.7	1.56 V	316	40.0	25.5
4	#13990.00	52.3 AV	68.2	-15.9	1.56 V	316	26.8	25.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 229 : 7095 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	106.1 PK			1.74 H	302	58.4	47.7
2	*7095.00	96.3 AV			1.74 H	302	48.6	47.7
3	#14190.00	65.5 PK	88.2	-22.7	1.78 H	183	39.6	25.9
4	#14190.00	52.5 AV	68.2	-15.7	1.78 H	183	26.6	25.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	109.1 PK			1.41 V	137	61.4	47.7
2	*7095.00	98.8 AV			1.41 V	137	51.1	47.7
3	#14190.00	65.9 PK	88.2	-22.3	1.49 V	312	40.0	25.9
4	#14190.00	52.8 AV	68.2	-15.4	1.49 V	312	26.9	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	105.3 PK			1.74 H	61	57.4	47.9
2	*7115.00	96.0 AV			1.74 H	61	48.1	47.9
3	#7125.00	84.7 PK	88.2	-3.5	1.74 H	61	68.5	16.2
4	#7125.00	57.0 AV	68.2	-11.2	1.74 H	61	40.8	16.2
5	#14230.00	65.8 PK	88.2	-22.4	1.69 H	182	39.8	26.0
6	#14230.00	52.8 AV	68.2	-15.4	1.69 H	182	26.8	26.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	110.1 PK			1.59 V	137	62.2	47.9
2	*7115.00	99.7 AV			1.59 V	137	51.8	47.9
3	#7125.00	86.0 PK	88.2	-2.2	1.59 V	137	69.8	16.2
4	#7125.00	56.2 AV	68.2	-12.0	1.59 V	137	40.0	16.2
5	#14230.00	66.0 PK	88.2	-22.2	1.45 V	312	40.0	26.0
6	#14230.00	52.9 AV	68.2	-15.3	1.45 V	312	26.9	26.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

Beamforming (4T1S)

RF Mode	802.11be (EHT20)	Channel	CH 33 : 6115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	61.0 PK	88.2	-27.2	1.60 H	25	47.4	13.6
2	#5925.00	48.1 AV	68.2	-20.1	1.60 H	25	34.5	13.6
3	*6115.00	105.2 PK			1.60 H	25	60.9	44.3
4	*6115.00	93.2 AV			1.60 H	25	48.9	44.3
5	12230.00	61.3 PK	74.0	-12.7	1.63 H	184	39.5	21.8
6	12230.00	48.4 AV	54.0	-5.6	1.63 H	184	26.6	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	61.6 PK	88.2	-26.6	1.71 V	152	48.0	13.6
2	#5925.00	48.4 AV	68.2	-19.8	1.71 V	152	34.8	13.6
3	*6115.00	110.8 PK			1.71 V	152	66.5	44.3
4	*6115.00	98.6 AV			1.71 V	152	54.3	44.3
5	12230.00	61.6 PK	74.0	-12.4	1.55 V	316	39.8	21.8
6	12230.00	48.6 AV	54.0	-5.4	1.55 V	316	26.8	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 61 : 6255 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	106.7 PK			1.60 H	27	62.0	44.7
2	*6255.00	94.4 AV			1.60 H	27	49.7	44.7
3	12510.00	61.3 PK	74.0	-12.7	1.72 H	196	39.8	21.5
4	12510.00	48.1 AV	54.0	-5.9	1.72 H	196	26.6	21.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	111.5 PK			1.73 V	149	66.8	44.7
2	*6255.00	99.2 AV			1.73 V	149	54.5	44.7
3	12510.00	61.5 PK	74.0	-12.5	1.49 V	316	40.0	21.5
4	12510.00	48.3 AV	54.0	-5.7	1.49 V	316	26.8	21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	105.7 PK			1.62 H	34	60.2	45.5
2	*6415.00	94.9 AV			1.62 H	34	49.4	45.5
3	#12830.00	62.7 PK	88.2	-25.5	1.63 H	189	39.9	22.8
4	#12830.00	49.3 AV	68.2	-18.9	1.63 H	189	26.5	22.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	111.0 PK			1.64 V	150	65.5	45.5
2	*6415.00	99.6 AV			1.64 V	150	54.1	45.5
3	#12830.00	62.8 PK	88.2	-25.4	1.45 V	311	40.0	22.8
4	#12830.00	49.5 AV	68.2	-18.7	1.45 V	311	26.7	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	105.8 PK			1.69 H	24	60.2	45.6
2	*6435.00	94.9 AV			1.69 H	24	49.3	45.6
3	#12870.00	63.0 PK	88.2	-25.2	1.66 H	187	39.9	23.1
4	#12870.00	49.6 AV	68.2	-18.6	1.66 H	187	26.5	23.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	111.4 PK			1.66 V	149	65.8	45.6
2	*6435.00	99.1 AV			1.66 V	149	53.5	45.6
3	#12870.00	63.1 PK	88.2	-25.1	1.44 V	315	40.0	23.1
4	#12870.00	49.8 AV	68.2	-18.4	1.44 V	315	26.7	23.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	105.6 PK			1.65 H	39	59.8	45.8
2	*6475.00	94.4 AV			1.65 H	39	48.6	45.8
3	#12950.00	62.7 PK	88.2	-25.5	1.75 H	187	39.7	23.0
4	#12950.00	49.3 AV	68.2	-18.9	1.75 H	187	26.3	23.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	110.3 PK			1.59 V	149	64.5	45.8
2	*6475.00	98.5 AV			1.59 V	149	52.7	45.8
3	#12950.00	62.8 PK	88.2	-25.4	1.46 V	313	39.8	23.0
4	#12950.00	49.8 AV	68.2	-18.4	1.46 V	313	26.8	23.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	106.1 PK			1.69 H	45	60.0	46.1
2	*6515.00	94.9 AV			1.69 H	45	48.8	46.1
3	#13030.00	62.3 PK	88.2	-25.9	1.82 H	199	39.5	22.8
4	#13030.00	49.2 AV	68.2	-19.0	1.82 H	199	26.4	22.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	111.1 PK			1.51 V	270	65.0	46.1
2	*6515.00	98.5 AV			1.51 V	270	52.4	46.1
3	#13030.00	62.8 PK	88.2	-25.4	1.45 V	315	40.0	22.8
4	#13030.00	49.5 AV	68.2	-18.7	1.45 V	315	26.7	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	106.2 PK			1.60 H	266	60.0	46.2
2	*6535.00	94.6 AV			1.60 H	266	48.4	46.2
3	#13070.00	62.5 PK	88.2	-25.7	1.74 H	185	39.7	22.8
4	#13070.00	49.5 AV	68.2	-18.7	1.74 H	185	26.7	22.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	110.7 PK			1.53 V	271	64.5	46.2
2	*6535.00	98.8 AV			1.53 V	271	52.6	46.2
3	#13070.00	62.8 PK	88.2	-25.4	1.56 V	311	40.0	22.8
4	#13070.00	49.7 AV	68.2	-18.5	1.56 V	311	26.9	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	106.1 PK			1.62 H	278	60.2	45.9
2	*6695.00	94.2 AV			1.62 H	278	48.3	45.9
3	13390.00	63.8 PK	74.0	-10.2	1.69 H	190	39.6	24.2
4	13390.00	50.9 AV	54.0	-3.1	1.69 H	190	26.7	24.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	110.8 PK			1.37 V	272	64.9	45.9
2	*6695.00	98.5 AV			1.37 V	272	52.6	45.9
3	13390.00	64.2 PK	74.0	-9.8	1.45 V	312	40.0	24.2
4	13390.00	51.2 AV	54.0	-2.8	1.45 V	312	27.0	24.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	105.6 PK			1.74 H	303	59.4	46.2
2	*6855.00	94.9 AV			1.74 H	303	48.7	46.2
3	#13710.00	64.1 PK	88.2	-24.1	1.78 H	189	39.5	24.6
4	#13710.00	51.2 AV	68.2	-17.0	1.78 H	189	26.6	24.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	109.1 PK			1.52 V	134	62.9	46.2
2	*6855.00	97.4 AV			1.52 V	134	51.2	46.2
3	#13710.00	64.4 PK	88.2	-23.8	1.42 V	313	39.8	24.6
4	#13710.00	51.4 AV	68.2	-16.8	1.42 V	313	26.8	24.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	105.7 PK			1.73 H	302	59.3	46.4
2	*6875.00	94.4 AV			1.73 H	302	48.0	46.4
3	#13750.00	64.4 PK	88.2	-23.8	1.78 H	190	39.7	24.7
4	#13750.00	51.2 AV	68.2	-17.0	1.78 H	190	26.5	24.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	109.2 PK			1.49 V	257	62.8	46.4
2	*6875.00	97.2 AV			1.49 V	257	50.8	46.4
3	#13750.00	64.6 PK	88.2	-23.6	1.54 V	311	39.9	24.7
4	#13750.00	51.4 AV	68.2	-16.8	1.54 V	311	26.7	24.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	107.1 PK			1.77 H	305	59.7	47.4
2	*6995.00	95.3 AV			1.77 H	305	47.9	47.4
3	#13990.00	65.1 PK	88.2	-23.1	1.64 H	185	39.6	25.5
4	#13990.00	52.0 AV	68.2	-16.2	1.64 H	185	26.5	25.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	109.6 PK			1.47 V	134	62.2	47.4
2	*6995.00	98.1 AV			1.47 V	134	50.7	47.4
3	#13990.00	65.5 PK	88.2	-22.7	1.51 V	302	40.0	25.5
4	#13990.00	52.3 AV	68.2	-15.9	1.51 V	302	26.8	25.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 229 : 7095 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	107.1 PK			1.69 H	311	59.4	47.7
2	*7095.00	95.9 AV			1.69 H	311	48.2	47.7
3	#14190.00	65.6 PK	88.2	-22.6	1.68 H	185	39.7	25.9
4	#14190.00	52.7 AV	68.2	-15.5	1.68 H	185	26.8	25.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	111.0 PK			1.77 V	192	63.3	47.7
2	*7095.00	98.8 AV			1.77 V	192	51.1	47.7
3	#14190.00	65.9 PK	88.2	-22.3	1.59 V	305	40.0	25.9
4	#14190.00	52.8 AV	68.2	-15.4	1.59 V	305	26.9	25.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	98.8 PK			1.76 H	63	50.9	47.9
2	*7115.00	86.2 AV			1.76 H	63	38.3	47.9
3	#7125.00	79.0 PK	88.2	-9.2	1.76 H	63	62.8	16.2
4	#7125.00	66.4 AV	68.2	-1.8	1.76 H	63	50.2	16.2
5	#14230.00	65.4 PK	88.2	-22.8	1.70 H	196	39.4	26.0
6	#14230.00	52.3 AV	68.2	-15.9	1.70 H	196	26.3	26.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	100.2 PK			1.83 V	193	52.3	47.9
2	*7115.00	89.1 AV			1.83 V	193	41.2	47.9
3	#7125.00	80.3 PK	88.2	-7.9	1.83 V	193	64.1	16.2
4	#7125.00	67.8 AV	68.2	-0.4	1.83 V	193	51.6	16.2
5	#14230.00	65.5 PK	88.2	-22.7	1.55 V	312	39.5	26.0
6	#14230.00	52.5 AV	68.2	-15.7	1.55 V	312	26.5	26.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 35 : 6125 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	60.8 PK	88.2	-27.4	1.72 H	24	47.2	13.6
2	#5925.00	48.4 AV	68.2	-19.8	1.72 H	24	34.8	13.6
3	*6125.00	106.2 PK			1.72 H	24	61.9	44.3
4	*6125.00	93.4 AV			1.72 H	24	49.1	44.3
5	12250.00	61.0 PK	74.0	-13.0	1.64 H	182	39.3	21.7
6	12250.00	48.1 AV	54.0	-5.9	1.64 H	182	26.4	21.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	61.5 PK	88.2	-26.7	1.72 V	150	47.9	13.6
2	#5925.00	48.7 AV	68.2	-19.5	1.72 V	150	35.1	13.6
3	*6125.00	110.3 PK			1.72 V	150	66.0	44.3
4	*6125.00	98.4 AV			1.72 V	150	54.1	44.3
5	12250.00	61.2 PK	74.0	-12.8	1.47 V	311	39.5	21.7
6	12250.00	48.2 AV	54.0	-5.8	1.47 V	311	26.5	21.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 59 : 6245 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6245.00	106.9 PK			1.77 H	23	62.3	44.6
2	*6245.00	94.3 AV			1.77 H	23	49.7	44.6
3	12490.00	61.0 PK	74.0	-13.0	1.69 H	180	39.5	21.5
4	12490.00	47.9 AV	54.0	-6.1	1.69 H	180	26.4	21.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6245.00	111.9 PK			1.72 V	149	67.3	44.6
2	*6245.00	99.2 AV			1.72 V	149	54.6	44.6
3	12490.00	61.1 PK	74.0	-12.9	1.44 V	318	39.6	21.5
4	12490.00	48.1 AV	54.0	-5.9	1.44 V	318	26.6	21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	106.6 PK			1.79 H	25	61.2	45.4
2	*6405.00	94.4 AV			1.79 H	25	49.0	45.4
3	#12810.00	62.2 PK	88.2	-26.0	1.80 H	189	39.5	22.7
4	#12810.00	49.0 AV	68.2	-19.2	1.80 H	189	26.3	22.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	111.7 PK			1.64 V	149	66.3	45.4
2	*6405.00	100.1 AV			1.64 V	149	54.7	45.4
3	#12810.00	62.3 PK	88.2	-25.9	1.49 V	312	39.6	22.7
4	#12810.00	49.1 AV	68.2	-19.1	1.49 V	312	26.4	22.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	106.7 PK			1.79 H	30	61.0	45.7
2	*6445.00	94.8 AV			1.79 H	30	49.1	45.7
3	#12890.00	62.7 PK	88.2	-25.5	1.63 H	190	39.6	23.1
4	#12890.00	49.5 AV	68.2	-18.7	1.63 H	190	26.4	23.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	111.7 PK			1.60 V	151	66.0	45.7
2	*6445.00	99.2 AV			1.60 V	151	53.5	45.7
3	#12890.00	62.8 PK	88.2	-25.4	1.52 V	309	39.7	23.1
4	#12890.00	49.7 AV	68.2	-18.5	1.52 V	309	26.6	23.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	106.2 PK			1.70 H	28	60.3	45.9
2	*6485.00	94.8 AV			1.70 H	28	48.9	45.9
3	#12970.00	62.4 PK	88.2	-25.8	1.71 H	188	39.5	22.9
4	#12970.00	49.2 AV	68.2	-19.0	1.71 H	188	26.3	22.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	111.7 PK			1.60 V	149	65.8	45.9
2	*6485.00	99.3 AV			1.60 V	149	53.4	45.9
3	#12970.00	62.5 PK	88.2	-25.7	1.59 V	311	39.6	22.9
4	#12970.00	49.4 AV	68.2	-18.8	1.59 V	311	26.5	22.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	106.3 PK			1.77 H	28	60.2	46.1
2	*6525.00	94.7 AV			1.77 H	28	48.6	46.1
3	#13050.00	62.3 PK	88.2	-25.9	1.78 H	196	39.5	22.8
4	#13050.00	49.2 AV	68.2	-19.0	1.78 H	196	26.4	22.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	111.7 PK			1.52 V	272	65.6	46.1
2	*6525.00	99.3 AV			1.52 V	272	53.2	46.1
3	#13050.00	62.4 PK	88.2	-25.8	1.48 V	312	39.6	22.8
4	#13050.00	49.4 AV	68.2	-18.8	1.48 V	312	26.6	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	106.4 PK			1.79 H	30	60.1	46.3
2	*6565.00	94.6 AV			1.79 H	30	48.3	46.3
3	#13130.00	62.3 PK	88.2	-25.9	1.79 H	185	39.3	23.0
4	#13130.00	49.2 AV	68.2	-19.0	1.79 H	185	26.2	23.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	111.7 PK			1.50 V	272	65.4	46.3
2	*6565.00	99.5 AV			1.50 V	272	53.2	46.3
3	#13130.00	62.5 PK	88.2	-25.7	1.59 V	311	39.5	23.0
4	#13130.00	49.5 AV	68.2	-18.7	1.59 V	311	26.5	23.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	105.6 PK			1.71 H	28	59.7	45.9
2	*6725.00	93.8 AV			1.71 H	28	47.9	45.9
3	#13450.00	63.8 PK	88.2	-24.4	1.79 H	181	39.5	24.3
4	#13450.00	50.7 AV	68.2	-17.5	1.79 H	181	26.4	24.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	110.5 PK			1.52 V	256	64.6	45.9
2	*6725.00	98.0 AV			1.52 V	256	52.1	45.9
3	#13450.00	64.0 PK	88.2	-24.2	1.57 V	313	39.7	24.3
4	#13450.00	50.8 AV	68.2	-17.4	1.57 V	313	26.5	24.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	106.2 PK			1.62 H	48	60.0	46.2
2	*6845.00	93.7 AV			1.62 H	48	47.5	46.2
3	#13690.00	64.0 PK	88.2	-24.2	1.80 H	190	39.6	24.4
4	#13690.00	50.9 AV	68.2	-17.3	1.80 H	190	26.5	24.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	111.3 PK			1.28 V	274	65.1	46.2
2	*6845.00	99.0 AV			1.28 V	274	52.8	46.2
3	#13690.00	64.1 PK	88.2	-24.1	1.45 V	309	39.7	24.4
4	#13690.00	51.0 AV	68.2	-17.2	1.45 V	309	26.6	24.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	105.9 PK			1.81 H	45	59.4	46.5
2	*6885.00	94.1 AV			1.81 H	45	47.6	46.5
3	#13770.00	64.3 PK	88.2	-23.9	1.86 H	193	39.5	24.8
4	#13770.00	51.2 AV	68.2	-17.0	1.86 H	193	26.4	24.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	111.0 PK			1.29 V	276	64.5	46.5
2	*6885.00	98.6 AV			1.29 V	276	52.1	46.5
3	#13770.00	64.4 PK	88.2	-23.8	1.52 V	305	39.6	24.8
4	#13770.00	51.3 AV	68.2	-16.9	1.52 V	305	26.5	24.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	107.7 PK			1.79 H	48	60.2	47.5
2	*7005.00	96.1 AV			1.79 H	48	48.6	47.5
3	#14010.00	65.0 PK	88.2	-23.2	1.65 H	190	39.4	25.6
4	#14010.00	51.9 AV	68.2	-16.3	1.65 H	190	26.3	25.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	112.7 PK			1.28 V	262	65.2	47.5
2	*7005.00	100.8 AV			1.28 V	262	53.3	47.5
3	#14010.00	65.2 PK	88.2	-23.0	1.45 V	317	39.6	25.6
4	#14010.00	52.0 AV	68.2	-16.2	1.45 V	317	26.4	25.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	108.2 PK			1.78 H	63	60.6	47.6
2	*7085.00	96.2 AV			1.78 H	63	48.6	47.6
3	#7125.00	56.4 PK	88.2	-31.8	1.78 H	63	40.2	16.2
4	#7125.00	44.3 AV	68.2	-23.9	1.78 H	63	28.1	16.2
5	#14170.00	65.2 PK	88.2	-23.0	1.77 H	183	39.5	25.7
6	#14170.00	52.0 AV	68.2	-16.2	1.77 H	183	26.3	25.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	111.3 PK			1.83 V	136	63.7	47.6
2	*7085.00	98.5 AV			1.83 V	136	50.9	47.6
3	#7125.00	56.7 PK	88.2	-31.5	1.83 V	136	40.5	16.2
4	#7125.00	44.4 AV	68.2	-23.8	1.83 V	136	28.2	16.2
5	#14170.00	65.3 PK	88.2	-22.9	1.52 V	312	39.6	25.7
6	#14170.00	52.1 AV	68.2	-16.1	1.52 V	312	26.4	25.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	60.8 PK	88.2	-27.4	1.72 H	21	47.2	13.6
2	#5925.00	47.8 AV	68.2	-20.4	1.72 H	21	34.2	13.6
3	*6145.00	105.0 PK			1.72 H	21	60.8	44.2
4	*6145.00	92.3 AV			1.72 H	21	48.1	44.2
5	12290.00	61.1 PK	74.0	-12.9	1.78 H	195	39.4	21.7
6	12290.00	48.0 AV	54.0	-6.0	1.78 H	195	26.3	21.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	61.1 PK	88.2	-27.1	1.74 V	150	47.5	13.6
2	#5925.00	48.1 AV	68.2	-20.1	1.74 V	150	34.5	13.6
3	*6145.00	110.5 PK			1.74 V	150	66.3	44.2
4	*6145.00	97.5 AV			1.74 V	150	53.3	44.2
5	12290.00	61.2 PK	74.0	-12.8	1.55 V	322	39.5	21.7
6	12290.00	48.2 AV	54.0	-5.8	1.55 V	322	26.5	21.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 55 : 6225 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	104.7 PK			1.78 H	27	60.2	44.5
2	*6225.00	92.6 AV			1.78 H	27	48.1	44.5
3	12450.00	60.8 PK	74.0	-13.2	1.64 H	195	39.4	21.4
4	12450.00	47.6 AV	54.0	-6.4	1.64 H	195	26.2	21.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	109.8 PK			1.66 V	150	65.3	44.5
2	*6225.00	97.8 AV			1.66 V	150	53.3	44.5
3	12450.00	60.9 PK	74.0	-13.1	1.49 V	311	39.5	21.4
4	12450.00	47.7 AV	54.0	-6.3	1.49 V	311	26.3	21.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	104.7 PK			1.70 H	26	59.4	45.3
2	*6385.00	93.2 AV			1.70 H	26	47.9	45.3
3	#12770.00	62.0 PK	88.2	-26.2	1.69 H	188	39.4	22.6
4	#12770.00	48.9 AV	68.2	-19.3	1.69 H	188	26.3	22.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	109.7 PK			1.65 V	151	64.4	45.3
2	*6385.00	98.1 AV			1.65 V	151	52.8	45.3
3	#12770.00	62.1 PK	88.2	-26.1	1.59 V	312	39.5	22.6
4	#12770.00	49.0 AV	68.2	-19.2	1.59 V	312	26.4	22.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	106.1 PK			1.79 H	22	60.3	45.8
2	*6465.00	93.3 AV			1.79 H	22	47.5	45.8
3	#12930.00	62.5 PK	88.2	-25.7	1.78 H	186	39.4	23.1
4	#12930.00	49.3 AV	68.2	-18.9	1.78 H	186	26.2	23.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	111.2 PK			1.56 V	150	65.4	45.8
2	*6465.00	98.4 AV			1.56 V	150	52.6	45.8
3	#12930.00	62.6 PK	88.2	-25.6	1.52 V	306	39.5	23.1
4	#12930.00	49.5 AV	68.2	-18.7	1.52 V	306	26.4	23.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	104.0 PK			1.79 H	20	57.8	46.2
2	*6545.00	93.0 AV			1.79 H	20	46.8	46.2
3	#13090.00	62.1 PK	88.2	-26.1	1.69 H	184	39.3	22.8
4	#13090.00	49.2 AV	68.2	-19.0	1.69 H	184	26.4	22.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	109.1 PK			1.60 V	150	62.9	46.2
2	*6545.00	97.8 AV			1.60 V	150	51.6	46.2
3	#13090.00	62.2 PK	88.2	-26.0	1.52 V	311	39.4	22.8
4	#13090.00	49.2 AV	68.2	-19.0	1.52 V	311	26.4	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	105.7 PK			1.76 H	41	59.5	46.2
2	*6625.00	93.5 AV			1.76 H	41	47.3	46.2
3	13250.00	62.7 PK	74.0	-11.3	1.78 H	199	39.2	23.5
4	13250.00	49.8 AV	54.0	-4.2	1.78 H	199	26.3	23.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	111.1 PK			1.42 V	270	64.9	46.2
2	*6625.00	98.3 AV			1.42 V	270	52.1	46.2
3	13250.00	62.9 PK	74.0	-11.1	1.62 V	316	39.4	23.5
4	13250.00	49.9 AV	54.0	-4.1	1.62 V	316	26.4	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	105.1 PK			1.77 H	26	59.2	45.9
2	*6705.00	93.1 AV			1.77 H	26	47.2	45.9
3	#13410.00	63.8 PK	88.2	-24.4	1.64 H	179	39.4	24.4
4	#13410.00	50.6 AV	68.2	-17.6	1.64 H	179	26.2	24.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	110.0 PK			1.35 V	273	64.1	45.9
2	*6705.00	97.8 AV			1.35 V	273	51.9	45.9
3	#13410.00	63.9 PK	88.2	-24.3	1.62 V	317	39.5	24.4
4	#13410.00	50.7 AV	68.2	-17.5	1.62 V	317	26.3	24.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	105.3 PK			1.79 H	44	59.3	46.0
2	*6785.00	93.0 AV			1.79 H	44	47.0	46.0
3	#13570.00	63.8 PK	88.2	-24.4	1.73 H	194	39.5	24.3
4	#13570.00	50.7 AV	68.2	-17.5	1.73 H	194	26.4	24.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	110.1 PK			1.34 V	275	64.1	46.0
2	*6785.00	97.5 AV			1.34 V	275	51.5	46.0
3	#13570.00	63.9 PK	88.2	-24.3	1.48 V	309	39.6	24.3
4	#13570.00	50.8 AV	68.2	-17.4	1.48 V	309	26.5	24.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	104.9 PK			1.72 H	22	58.6	46.3
2	*6865.00	92.6 AV			1.72 H	22	46.3	46.3
3	#13730.00	63.9 PK	88.2	-24.3	1.86 H	194	39.4	24.5
4	#13730.00	50.7 AV	68.2	-17.5	1.86 H	194	26.2	24.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	109.5 PK			1.33 V	276	63.2	46.3
2	*6865.00	97.1 AV			1.33 V	276	50.8	46.3
3	#13730.00	64.0 PK	88.2	-24.2	1.58 V	302	39.5	24.5
4	#13730.00	50.8 AV	68.2	-17.4	1.58 V	302	26.3	24.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	106.0 PK			1.76 H	26	59.1	46.9
2	*6945.00	94.7 AV			1.76 H	26	47.8	46.9
3	#13890.00	64.9 PK	88.2	-23.3	1.79 H	199	39.4	25.5
4	#13890.00	51.6 AV	68.2	-16.6	1.79 H	199	26.1	25.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	111.1 PK			1.37 V	263	64.2	46.9
2	*6945.00	99.4 AV			1.37 V	263	52.5	46.9
3	#13890.00	65.0 PK	88.2	-23.2	1.55 V	318	39.5	25.5
4	#13890.00	51.7 AV	68.2	-16.5	1.55 V	318	26.2	25.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	108.2 PK			1.88 H	63	60.7	47.5
2	*7025.00	96.6 AV			1.88 H	63	49.1	47.5
3	#7125.00	56.0 PK	88.2	-32.2	1.88 H	63	39.8	16.2
4	#7125.00	42.7 AV	68.2	-25.5	1.88 H	63	26.5	16.2
5	#14050.00	64.7 PK	88.2	-23.5	1.72 H	193	39.4	25.3
6	#14050.00	51.4 AV	68.2	-16.8	1.72 H	193	26.1	25.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	111.0 PK			1.82 V	134	63.5	47.5
2	*7025.00	99.0 AV			1.82 V	134	51.5	47.5
3	#7125.00	56.2 PK	88.2	-32.0	1.82 V	134	40.0	16.2
4	#7125.00	43.0 AV	68.2	-25.2	1.82 V	134	26.8	16.2
5	#14050.00	64.8 PK	88.2	-23.4	1.52 V	313	39.5	25.3
6	#14050.00	51.5 AV	68.2	-16.7	1.52 V	313	26.2	25.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	61.2 PK	88.2	-27.0	1.53 H	28	47.6	13.6
2	#5925.00	48.1 AV	68.2	-20.1	1.53 H	28	34.5	13.6
3	*6185.00	104.5 PK			1.53 H	28	60.2	44.3
4	*6185.00	92.5 AV			1.53 H	28	48.2	44.3
5	12370.00	60.4 PK	74.0	-13.6	1.78 H	194	39.0	21.4
6	12370.00	47.0 AV	54.0	-7.0	1.78 H	194	25.6	21.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	61.5 PK	88.2	-26.7	1.72 V	152	47.9	13.6
2	#5925.00	48.3 AV	68.2	-19.9	1.72 V	152	34.7	13.6
3	*6185.00	109.6 PK			1.72 V	152	65.3	44.3
4	*6185.00	97.5 AV			1.72 V	152	53.2	44.3
5	12370.00	60.6 PK	74.0	-13.4	1.48 V	312	39.2	21.4
6	12370.00	47.3 AV	54.0	-6.7	1.48 V	312	25.9	21.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	105.2 PK			1.59 H	38	60.2	45.0
2	*6345.00	92.6 AV			1.59 H	38	47.6	45.0
3	12690.00	61.6 PK	74.0	-12.4	1.74 H	195	39.2	22.4
4	12690.00	48.1 AV	54.0	-5.9	1.74 H	195	25.7	22.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	110.2 PK			1.72 V	151	65.2	45.0
2	*6345.00	97.9 AV			1.72 V	151	52.9	45.0
3	12690.00	61.7 PK	74.0	-12.3	1.53 V	312	39.3	22.4
4	12690.00	48.2 AV	54.0	-5.8	1.53 V	312	25.8	22.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	105.7 PK			1.56 H	38	59.7	46.0
2	*6505.00	93.6 AV			1.56 H	38	47.6	46.0
3	#13010.00	62.2 PK	88.2	-26.0	1.78 H	193	39.4	22.8
4	#13010.00	48.6 AV	68.2	-19.6	1.78 H	193	25.8	22.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	110.8 PK			1.49 V	272	64.8	46.0
2	*6505.00	98.3 AV			1.49 V	272	52.3	46.0
3	#13010.00	62.3 PK	88.2	-25.9	1.53 V	309	39.5	22.8
4	#13010.00	48.8 AV	68.2	-19.4	1.53 V	309	26.0	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	105.8 PK			1.59 H	22	59.8	46.0
2	*6665.00	93.1 AV			1.59 H	22	47.1	46.0
3	13330.00	63.0 PK	74.0	-11.0	1.81 H	194	39.2	23.8
4	13330.00	49.5 AV	54.0	-4.5	1.81 H	194	25.7	23.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	110.6 PK			1.48 V	272	64.6	46.0
2	*6665.00	98.0 AV			1.48 V	272	52.0	46.0
3	13330.00	63.1 PK	74.0	-10.9	1.46 V	301	39.3	23.8
4	13330.00	49.6 AV	54.0	-4.4	1.46 V	301	25.8	23.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	105.7 PK			1.48 H	55	59.5	46.2
2	*6825.00	93.5 AV			1.48 H	55	47.3	46.2
3	#13650.00	63.8 PK	88.2	-24.4	1.77 H	182	39.4	24.4
4	#13650.00	50.2 AV	68.2	-18.0	1.77 H	182	25.8	24.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	111.0 PK			1.32 V	271	64.8	46.2
2	*6825.00	98.7 AV			1.32 V	271	52.5	46.2
3	#13650.00	63.9 PK	88.2	-24.3	1.47 V	314	39.5	24.4
4	#13650.00	50.4 AV	68.2	-17.8	1.47 V	314	26.0	24.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	108.6 PK			1.71 H	298	61.3	47.3
2	*6985.00	96.2 AV			1.71 H	298	48.9	47.3
3	#7125.00	61.4 PK	88.2	-26.8	1.71 H	298	45.2	16.2
4	#7125.00	44.2 AV	68.2	-24.0	1.71 H	298	28.0	16.2
5	#13970.00	64.5 PK	88.2	-23.7	1.79 H	187	39.0	25.5
6	#13970.00	51.2 AV	68.2	-17.0	1.79 H	187	25.7	25.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	110.8 PK			1.36 V	273	63.5	47.3
2	*6985.00	99.1 AV			1.36 V	273	51.8	47.3
3	#7125.00	61.9 PK	88.2	-26.3	1.36 V	273	45.7	16.2
4	#7125.00	44.6 AV	68.2	-23.6	1.36 V	273	28.4	16.2
5	#13970.00	64.9 PK	88.2	-23.3	1.45 V	322	39.4	25.5
6	#13970.00	51.5 AV	68.2	-16.7	1.45 V	322	26.0	25.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#5925.00	61.1 PK	88.2	-27.1	1.56 H	26	47.5	13.6
2	#5925.00	48.1 AV	68.2	-20.1	1.56 H	26	34.5	13.6
3	*6265.00	105.9 PK			1.56 H	26	61.2	44.7
4	*6265.00	93.7 AV			1.56 H	26	49.0	44.7
5	12530.00	60.3 PK	74.0	-13.7	1.77 H	190	38.6	21.7
6	12530.00	47.1 AV	54.0	-6.9	1.77 H	190	25.4	21.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	#5925.00	61.4 PK	88.2	-26.8	1.76 V	151	47.8	13.6
2	#5925.00	48.3 AV	68.2	-19.9	1.76 V	151	34.7	13.6
3	*6265.00	110.2 PK			1.76 V	151	65.5	44.7
4	*6265.00	98.5 AV			1.76 V	151	53.8	44.7
5	12530.00	60.9 PK	74.0	-13.1	1.42 V	305	39.2	21.7
6	12530.00	47.3 AV	54.0	-6.7	1.42 V	305	25.6	21.7

Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 95 : 6425 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	104.7 PK			1.52 H	24	59.2	45.5
2	*6425.00	93.1 AV			1.52 H	24	47.6	45.5
3	#12850.00	62.1 PK	88.2	-26.1	1.76 H	194	39.1	23.0
4	#12850.00	48.6 AV	68.2	-19.6	1.76 H	194	25.6	23.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	109.8 PK			1.69 V	150	64.3	45.5
2	*6425.00	98.1 AV			1.69 V	150	52.6	45.5
3	#12850.00	62.3 PK	88.2	-25.9	1.53 V	312	39.3	23.0
4	#12850.00	48.7 AV	68.2	-19.5	1.53 V	312	25.7	23.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 127 : 6585 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	107.5 PK			1.66 H	36	61.2	46.3
2	*6585.00	94.5 AV			1.66 H	36	48.2	46.3
3	#13170.00	62.5 PK	88.2	-25.7	1.74 H	189	39.2	23.3
4	#13170.00	49.1 AV	68.2	-19.1	1.74 H	189	25.8	23.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	112.6 PK			1.47 V	272	66.3	46.3
2	*6585.00	99.9 AV			1.47 V	272	53.6	46.3
3	#13170.00	62.7 PK	88.2	-25.5	1.45 V	303	39.4	23.3
4	#13170.00	49.3 AV	68.2	-18.9	1.45 V	303	26.0	23.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 159 : 6745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	105.1 PK			1.55 H	34	59.2	45.9
2	*6745.00	93.2 AV			1.55 H	34	47.3	45.9
3	#13490.00	63.8 PK	88.2	-24.4	1.80 H	184	39.4	24.4
4	#13490.00	50.0 AV	68.2	-18.2	1.80 H	184	25.6	24.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	110.2 PK			1.34 V	273	64.3	45.9
2	*6745.00	98.0 AV			1.34 V	273	52.1	45.9
3	#13490.00	63.9 PK	88.2	-24.3	1.43 V	316	39.5	24.4
4	#13490.00	50.2 AV	68.2	-18.0	1.43 V	316	25.8	24.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 191 : 6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	107.9 PK			1.88 H	302	61.2	46.7
2	*6905.00	96.3 AV			1.88 H	302	49.6	46.7
3	#7125.00	62.9 PK	88.2	-25.3	1.88 H	302	46.7	16.2
4	#7125.00	49.0 AV	68.2	-19.2	1.88 H	302	32.8	16.2
5	#13810.00	63.9 PK	88.2	-24.3	1.78 H	182	39.0	24.9
6	#13810.00	50.5 AV	68.2	-17.7	1.78 H	182	25.6	24.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	111.2 PK			1.42 V	261	64.5	46.7
2	*6905.00	99.1 AV			1.42 V	261	52.4	46.7
3	#7125.00	66.6 PK	88.2	-21.6	1.42 V	261	50.4	16.2
4	#7125.00	51.3 AV	68.2	-16.9	1.42 V	261	35.1	16.2
5	#13810.00	64.2 PK	88.2	-24.0	1.42 V	303	39.3	24.9
6	#13810.00	50.7 AV	68.2	-17.5	1.42 V	303	25.8	24.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

Beamforming (4T4S)

RF Mode	802.11be (EHT20)	Channel	CH 33 : 6115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	62.1 PK	88.2	-26.1	1.36 H	75	48.5	13.6
2	#5925.00	49.0 AV	68.2	-19.2	1.36 H	75	35.4	13.6
3	*6115.00	108.1 PK			1.36 H	75	63.8	44.3
4	*6115.00	95.5 AV			1.36 H	75	51.2	44.3
5	12230.00	61.3 PK	74.0	-12.7	1.72 H	205	39.5	21.8
6	12230.00	48.3 AV	54.0	-5.7	1.72 H	205	26.5	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	62.4 PK	88.2	-25.8	1.73 V	152	48.8	13.6
2	#5925.00	49.2 AV	68.2	-19.0	1.73 V	152	35.6	13.6
3	*6115.00	110.7 PK			1.73 V	152	66.4	44.3
4	*6115.00	98.1 AV			1.73 V	152	53.8	44.3
5	12230.00	61.6 PK	74.0	-12.4	1.57 V	321	39.8	21.8
6	12230.00	48.5 AV	54.0	-5.5	1.57 V	321	26.7	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 61 : 6255 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	108.4 PK			1.28 H	77	63.7	44.7
2	*6255.00	95.8 AV			1.28 H	77	51.1	44.7
3	12510.00	61.2 PK	74.0	-12.8	1.85 H	202	39.7	21.5
4	12510.00	48.2 AV	54.0	-5.8	1.85 H	202	26.7	21.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	111.7 PK			1.76 V	150	67.0	44.7
2	*6255.00	99.2 AV			1.76 V	150	54.5	44.7
3	12510.00	61.5 PK	74.0	-12.5	1.54 V	315	40.0	21.5
4	12510.00	48.4 AV	54.0	-5.6	1.54 V	315	26.9	21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 66% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	110.0 PK			1.65 H	30	64.5	45.5
2	*6415.00	96.7 AV			1.65 H	30	51.2	45.5
3	#12830.00	62.3 PK	88.2	-25.9	1.78 H	206	39.5	22.8
4	#12830.00	49.3 AV	68.2	-18.9	1.78 H	206	26.5	22.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	112.0 PK			1.64 V	151	66.5	45.5
2	*6415.00	100.3 AV			1.64 V	151	54.8	45.5
3	#12830.00	62.6 PK	88.2	-25.6	1.47 V	312	39.8	22.8
4	#12830.00	49.5 AV	68.2	-18.7	1.47 V	312	26.7	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.