

01_WLAN2.4GHz_802.11b 1Mbps_Right Cheek_0mm_Ch1

Communication System: IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)

Frequency: 2412.000 MHz; Duty Cycle: 1:1.01

Medium: HSL Medium parameters used: $f = 2412.000$ MHz; $\sigma = 1.74$ S/m; $\epsilon_r = 39.4$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(8.03, 8.03, 8.03); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10012-CAB

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.772 W/kg; SAR (10g) = 0.393 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.12 dB

SAR (1g) = 0.856 W/kg; SAR (10g) = 0.434 W/kg

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 82.4 %

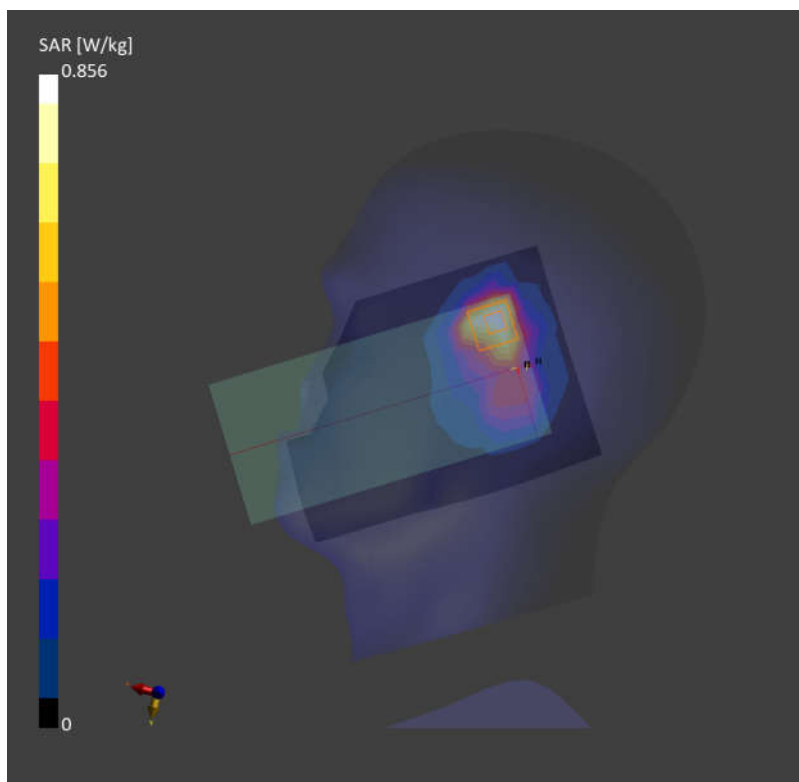

02_Bluetooth_1Mbps_Left Cheek_0mm_Ch39

Communication System: IEEE 802.15.1 Bluetooth (GFSK, DH5)

Frequency: 2441.000 MHz; DutyCycle: 1:1.302

Medium: HSL Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.76$ S/m; $\epsilon_r = 39.4$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(8.03, 8.03, 8.03); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.070 W/kg; SAR (10g) = 0.034 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.08 dB

SAR (1g) = 0.088 W/kg; SAR (10g) = 0.040 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 80.2 %

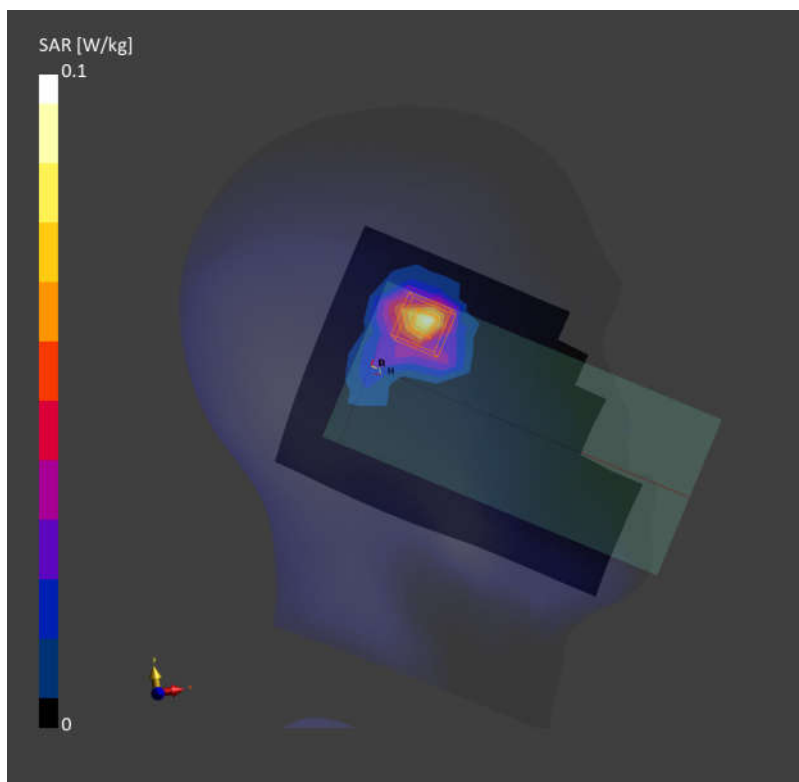

03_WLAN5GHz_802.11n-HT40 MCS0_Right Cheek_0mm_Ch54


Communication System: IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle)
Frequency: 5270.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 5270.000$ MHz; $\sigma = 4.80$ S/m; $\epsilon_r = 35.8$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(5.73, 5.73, 5.73); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10599-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.737 W/kg; SAR (10g) = 0.240 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = 0.08 dB
SAR (1g) = 0.785 W/kg; SAR (10g) = 0.253 W/kg
Smallest distance from peaks to all points 3 dB below = 7.2 mm
Ratio of SAR at M2 to SAR at M1 = 67.3 %

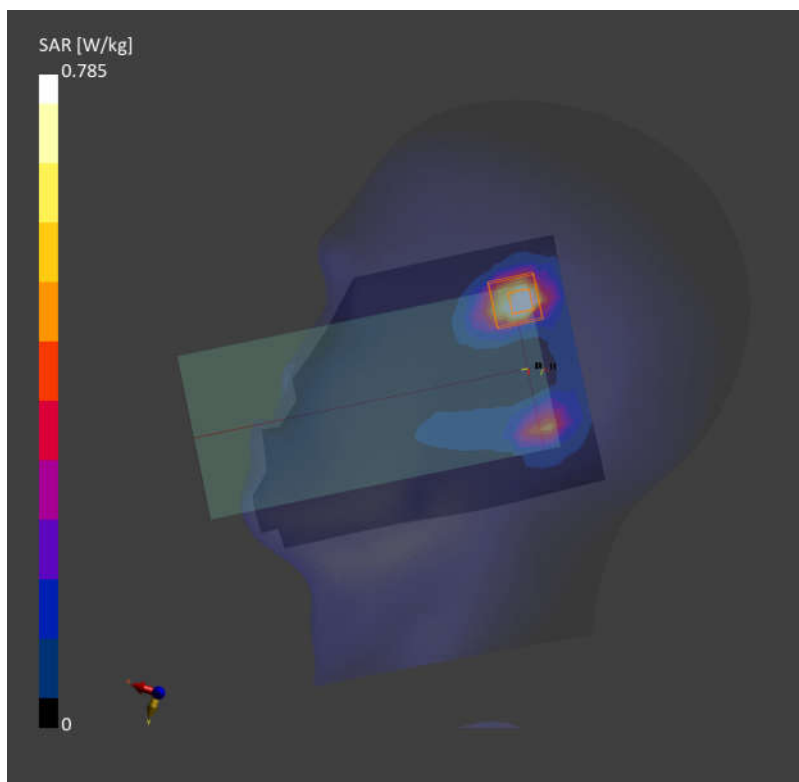

04_WLAN5GHz_802.11ac-VHT80 MCS0_Left Cheek_0mm_Ch122


Communication System: IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle)
Frequency: 5610.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f=5610.000$ MHz; $\sigma=5.18$ S/m; $\epsilon_r=35.2$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(5.1, 5.1, 5.1); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.705 W/kg; SAR (10g) = 0.224 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = -0.05 dB
SAR (1g) = 0.739 W/kg; SAR (10g) = 0.239 W/kg
Smallest distance from peaks to all points 3 dB below = 7.2 mm
Ratio of SAR at M2 to SAR at M1 = 70.4 %

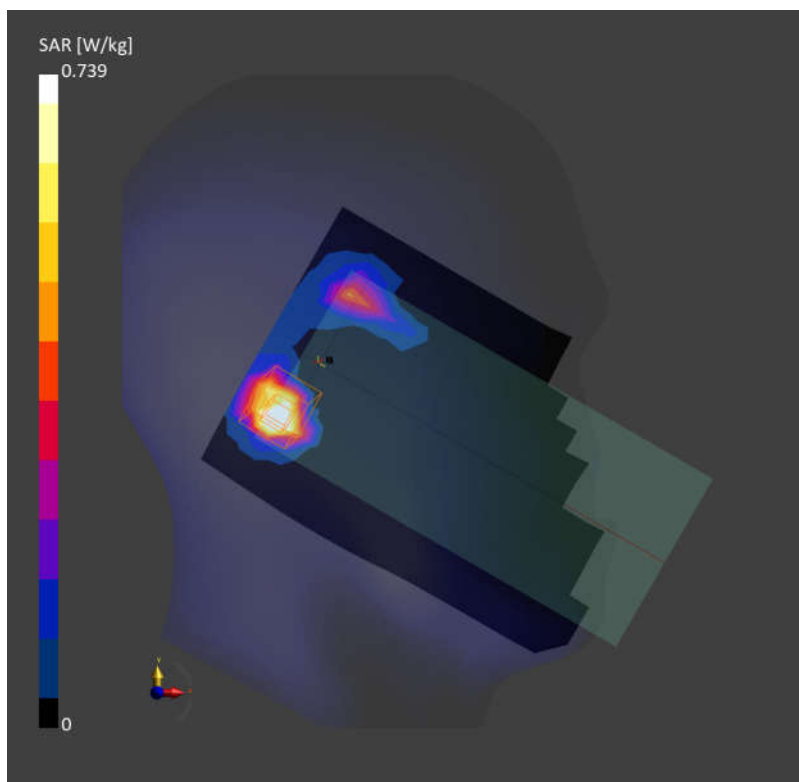

05_WLAN5GHz_802.11ac-VHT80 MCS0_Right Cheek_0mm_Ch155


Communication System: IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle)
Frequency: 5775.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.37$ S/m; $\epsilon_r = 34.9$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(5.32, 5.32, 5.32); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.734 W/kg; SAR (10g) = 0.218 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = 0.02 dB
SAR (1g) = 0.776 W/kg; SAR (10g) = 0.233 W/kg
Smallest distance from peaks to all points 3 dB below = 6.9 mm
Ratio of SAR at M2 to SAR at M1 = 62.5 %

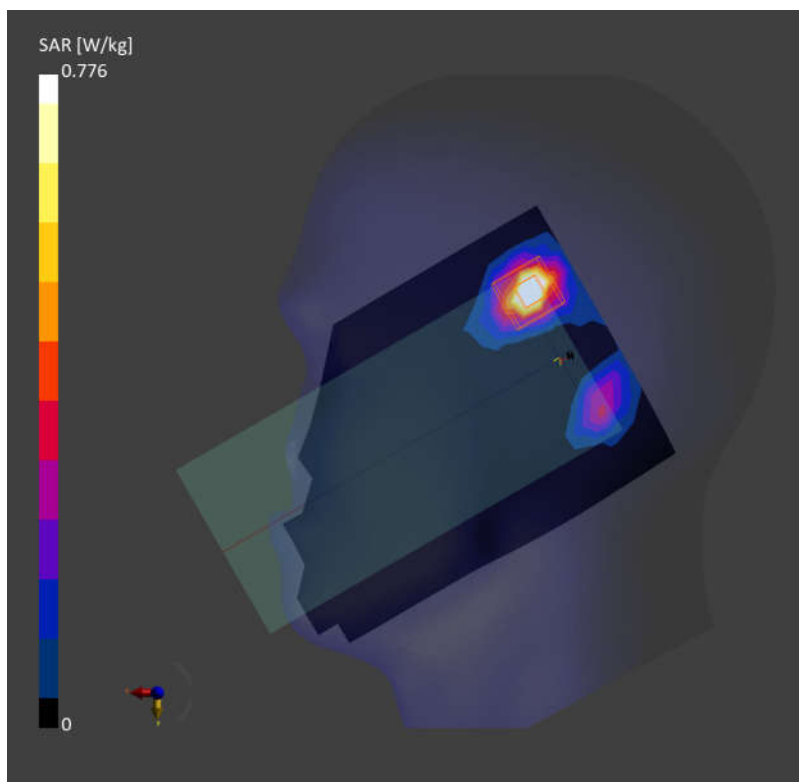

06_WLAN2.4GHz_802.11b 1Mbps_Top Side_10mm_Ch1

Communication System: IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)

Frequency: 2412.000 MHz; Duty Cycle: 1:1.010

Medium: HSL Medium parameters used: $f = 2412.000$ MHz; $\sigma = 1.74$ S/m; $\epsilon_r = 39.4$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(8.03, 8.03, 8.03); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10012-CAB

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.716 W/kg; SAR (10g) = 0.373 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.11 dB

SAR (1g) = 0.717 W/kg; SAR (10g) = 0.395 W/kg

Smallest distance from peaks to all points 3 dB below = 12.0 mm

Ratio of SAR at M2 to SAR at M1 = 84.2 %

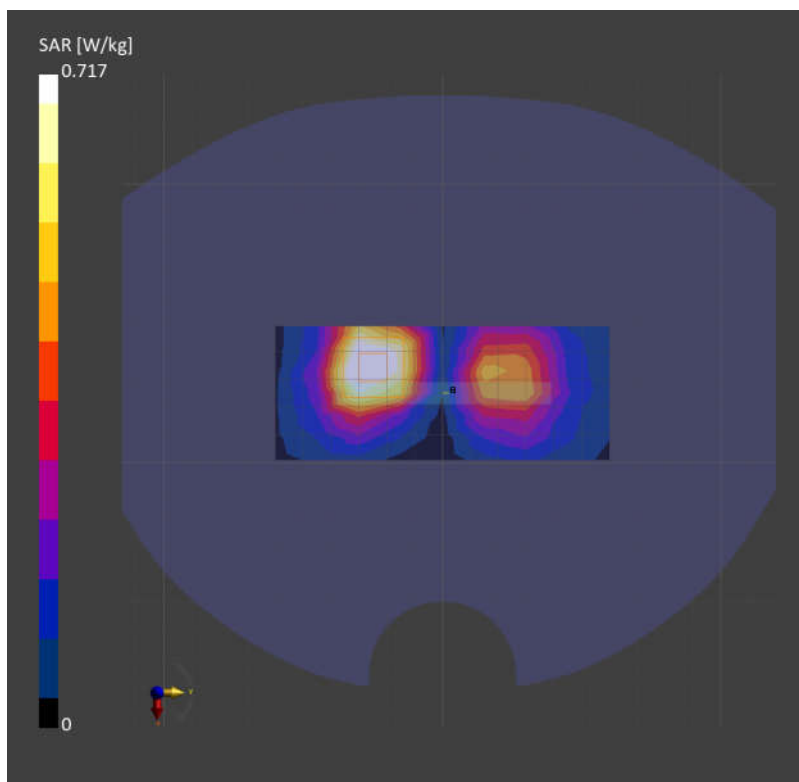

07_Bluetooth_1Mbps_Front_10mm_Ch39

Communication System: IEEE 802.15.1 Bluetooth (GFSK, DH5)

Frequency: 2441.000 MHz; DutyCycle: 1:1.302

Medium: HSL Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.76$ S/m; $\epsilon_r = 39.4$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(8.03, 8.03, 8.03); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.017 W/kg; SAR (10g) = 0.009 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.09 dB

SAR (1g) = 0.018 W/kg; SAR (10g) = 0.009 W/kg

Smallest distance from peaks to all points 3 dB below = 10.3 mm

Ratio of SAR at M2 to SAR at M1 = 84.9 %

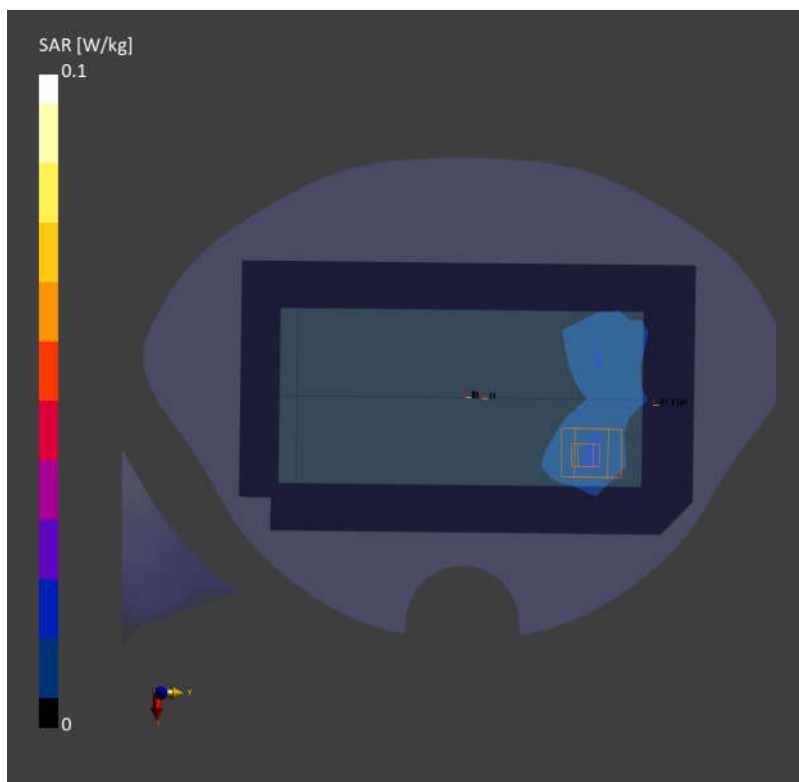

08_WLAN5GHz_802.11n-HT40 MCS0_Right Side_10mm_Ch46

Communication System: IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle)

Frequency: 5230.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 5230.000$ MHz; $\sigma = 4.72$ S/m; $\epsilon_r = 36.0$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(5.73, 5.73, 5.73); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10599-AAD

Area Scan (60.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.224 W/kg; SAR (10g) = 0.088 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.12 dB

SAR (1g) = 0.204 W/kg; SAR (10g) = 0.076 W/kg

Smallest distance from peaks to all points 3 dB below = 9.4 mm

Ratio of SAR at M2 to SAR at M1 = 72.2 %

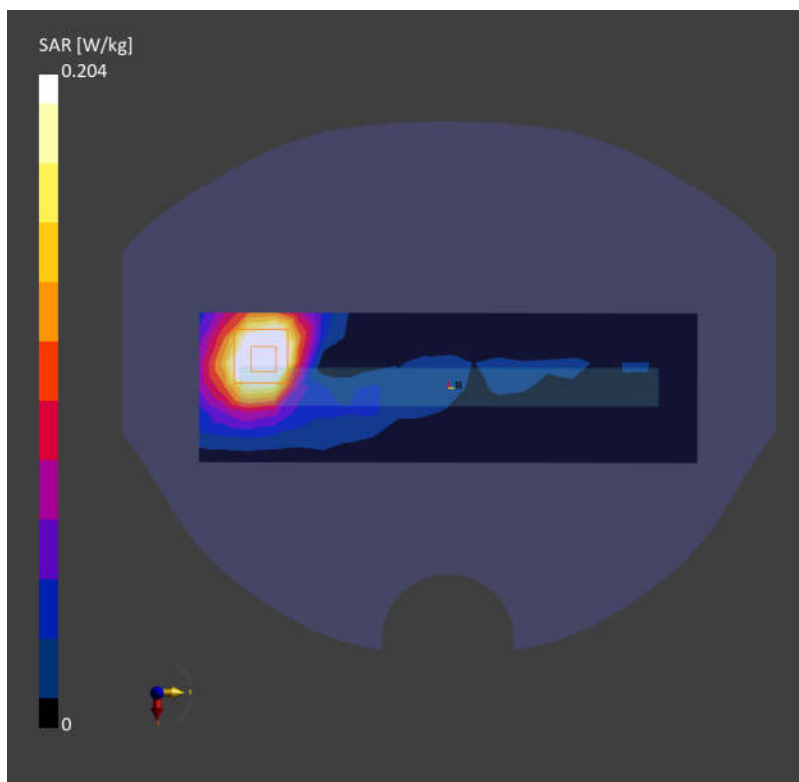

09_WLAN5GHz_802.11ac-VHT80 MCS0_Front_10mm_Ch155


Communication System: IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle)
Frequency: 5775.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.37$ S/m; $\epsilon_r = 34.9$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(5.32, 5.32, 5.32); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.871 W/kg; SAR (10g) = 0.333 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = 0.06 dB
SAR (1g) = 0.822 W/kg; SAR (10g) = 0.311 W/kg
Smallest distance from peaks to all points 3 dB below = 9.4 mm
Ratio of SAR at M2 to SAR at M1 = 67.2 %

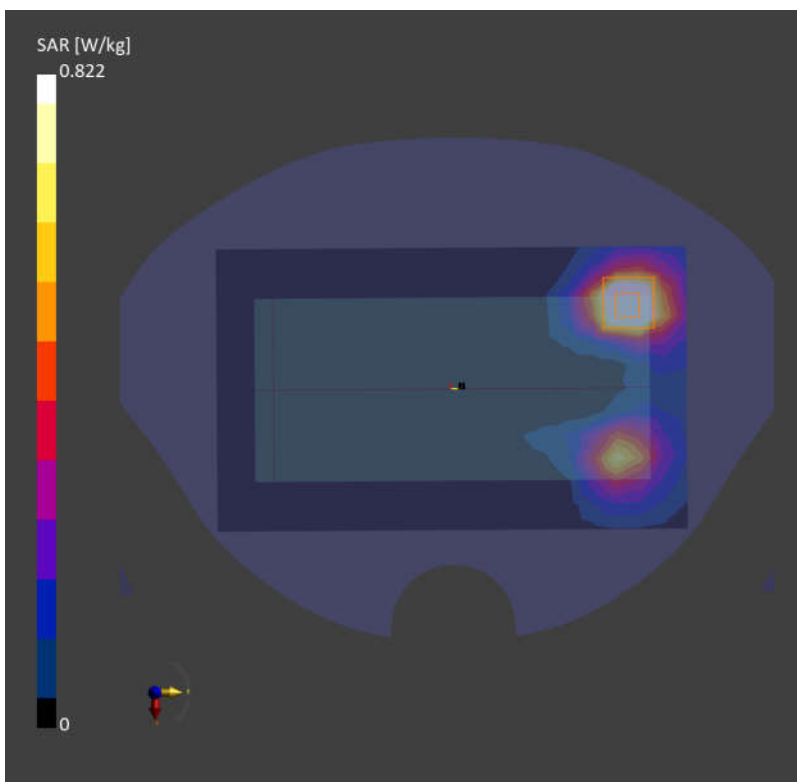

10_WLAN2.4GHz_802.11b 1Mbps_Back_10mm_Ch1

Communication System: IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)

Frequency: 2412.000 MHz; Duty Cycle: 1:1.010

Medium: HSL Medium parameters used: $f = 2412.000$ MHz; $\sigma = 1.74$ S/m; $\epsilon_r = 39.4$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(8.03, 8.03, 8.03); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10012-CAB

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.631 W/kg; SAR (10g) = 0.346 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.18 dB

SAR (1g) = 0.723 W/kg; SAR (10g) = 0.418 W/kg

Smallest distance from peaks to all points 3 dB below = 17.5 mm

Ratio of SAR at M2 to SAR at M1 = 84.5 %

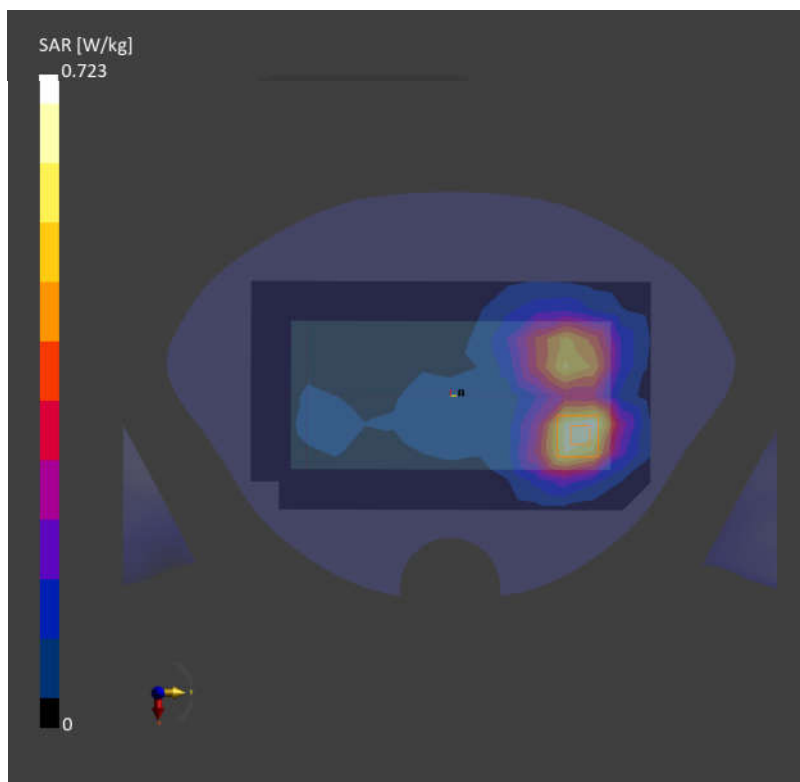

11_Bluetooth_1Mbps_Front_10mm_Ch39

Communication System: IEEE 802.15.1 Bluetooth (GFSK, DH5)

Frequency: 2441.000 MHz; DutyCycle: 1:1.302

Medium: HSL Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.76$ S/m; $\epsilon_r = 39.4$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(8.03, 8.03, 8.03); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.017 W/kg; SAR (10g) = 0.009 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.09 dB

SAR (1g) = 0.018 W/kg; SAR (10g) = 0.009 W/kg

Smallest distance from peaks to all points 3 dB below = 10.3 mm

Ratio of SAR at M2 to SAR at M1 = 84.9 %

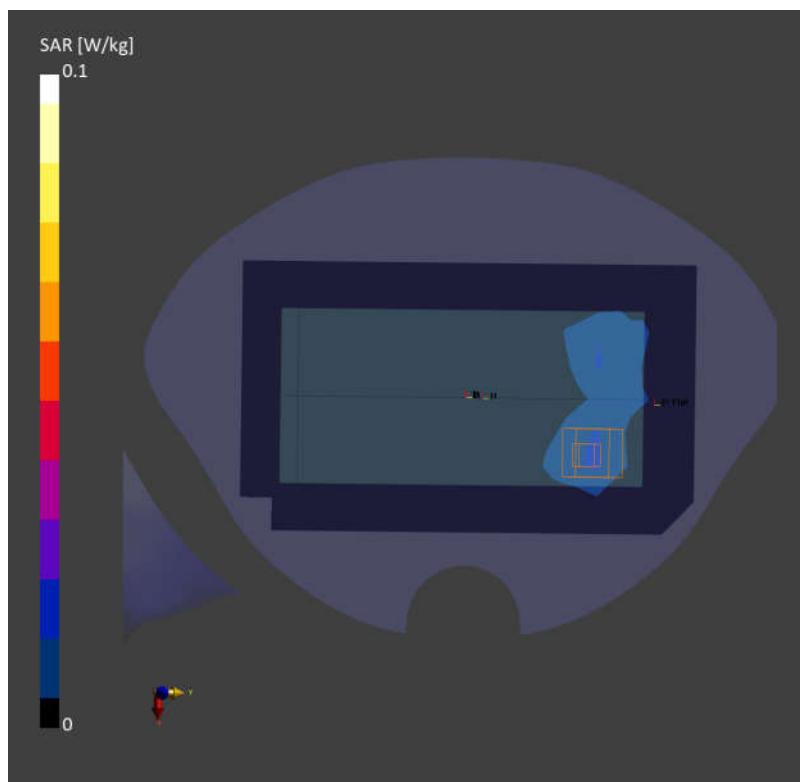

12_WLAN5GHz_802.11n-HT40 MCS0_Front_10mm_Ch54

Communication System: IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle)

Frequency: 5270.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 5270.000$ MHz; $\sigma = 4.8$ S/m; $\epsilon_r = 35.8$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(5.73, 5.73, 5.73); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10599-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.481 W/kg; SAR (10g) = 0.191 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.17 dB

SAR (1g) = 0.476 W/kg; SAR (10g) = 0.188 W/kg

Smallest distance from peaks to all points 3 dB below = 9.0 mm

Ratio of SAR at M2 to SAR at M1 = 72.4 %

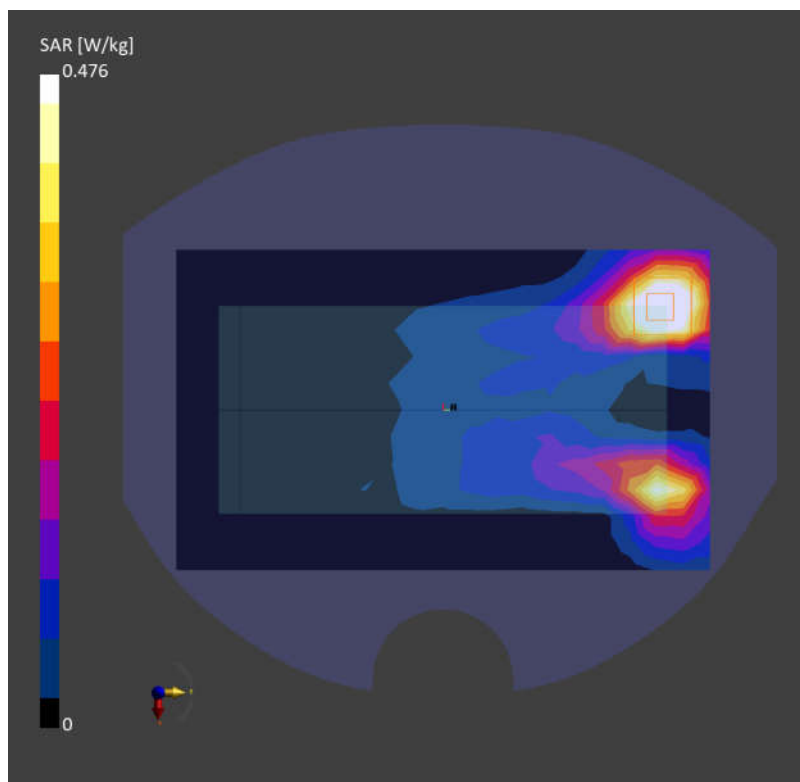

13_WLAN5GHz_802.11ac-VHT80 MCS0_Front_10mm_Ch138


Communication System: IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle)
Frequency: 5690.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 5690.000$ MHz; $\sigma = 5.27$ S/m; $\epsilon_r = 35.1$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(5.32, 5.32, 5.32); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.702 W/kg; SAR (10g) = 0.259 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = 0.03 dB
SAR (1g) = 0.678 W/kg; SAR (10g) = 0.251 W/kg
Smallest distance from peaks to all points 3 dB below = 9.4 mm
Ratio of SAR at M2 to SAR at M1 = 67.8 %

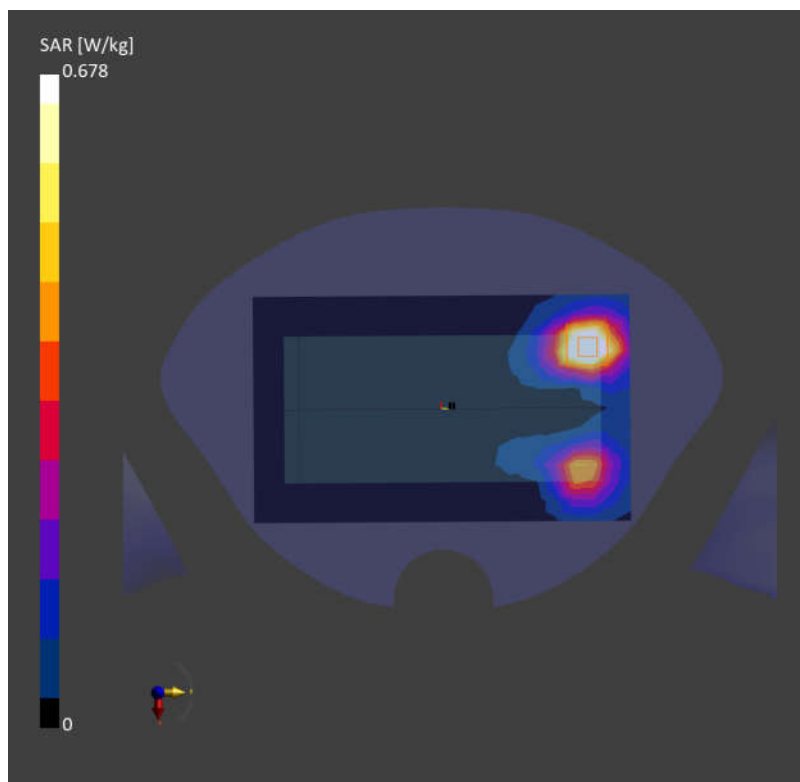

WLAN5GHz_802.11ac-VHT80 MCS0_Front_10mm_Ch155


Communication System: IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle)
Frequency: 5775.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.37$ S/m; $\epsilon_r = 34.9$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(5.32, 5.32, 5.32); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.871 W/kg; SAR (10g) = 0.333 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = 0.06 dB
SAR (1g) = 0.822 W/kg; SAR (10g) = 0.311 W/kg
Smallest distance from peaks to all points 3 dB below = 9.4 mm
Ratio of SAR at M2 to SAR at M1 = 67.2 %

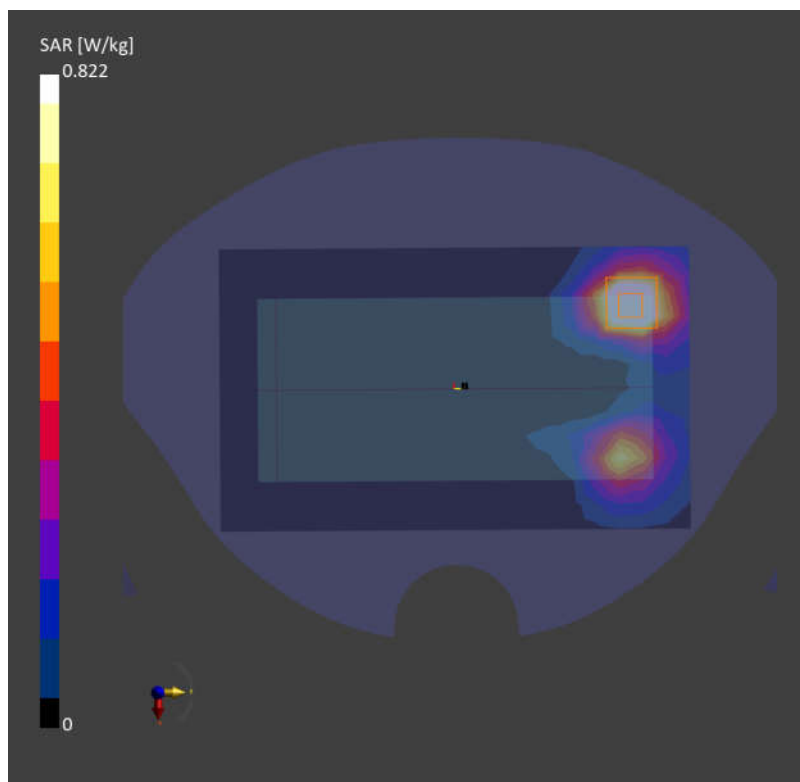

15_WLAN5GHz_802.11n-HT40 MCS0_Right Side_0mm_Ch54

Communication System: IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle)

Frequency: 5270.000 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 5270.000$ MHz; $\sigma = 4.80$ S/m; $\epsilon_r = 35.8$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(5.73, 5.73, 5.73); Calibrated: 2023-10-05

- Sensor-Surface: 1.4 mm

- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20

- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat

- Measurement Software: 16.4.0.5005

- UID: WLAN, 10599-AAD

Area Scan (60.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 3.50 W/kg; SAR (10g) = 0.977 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.09 dB

SAR (1g) = 3.62 W/kg; SAR (10g) = 1.04 W/kg

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 68.2 %

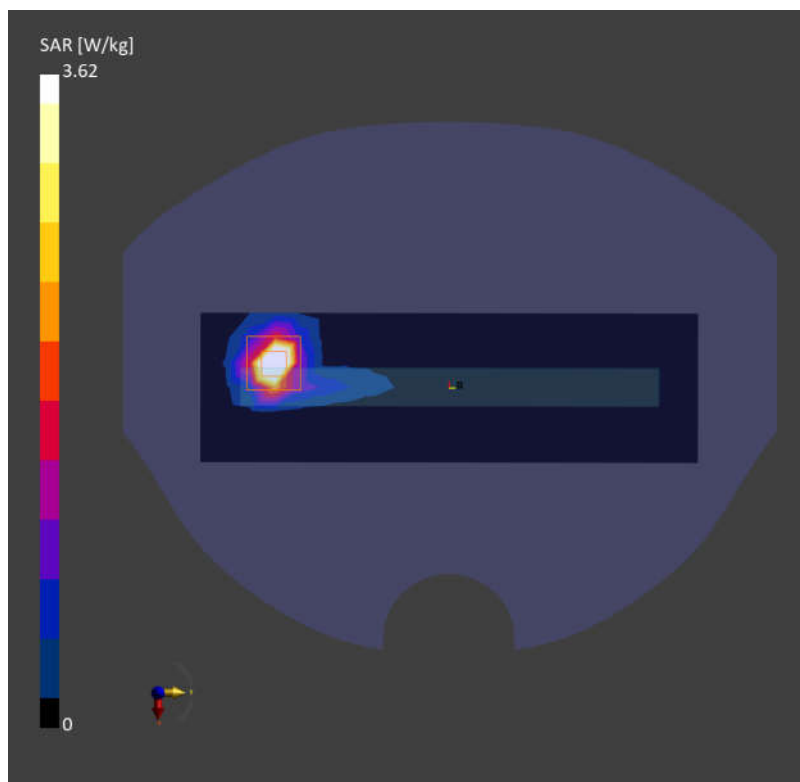

16_WLAN5GHz_802.11ac-VHT80 MCS0_Right Side_0mm_Ch138

Communication System: IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle)
Frequency: 5690.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 5690.000$ MHz; $\sigma = 5.24$ S/m; $\epsilon_r = 35.1$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(5.1, 5.1, 5.1); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (60.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 2.15 W/kg; SAR (10g) = 0.693 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = 0.04 dB
SAR (1g) = 2.63 W/kg; SAR (10g) = 0.774 W/kg
Smallest distance from peaks to all points 3 dB below = 5.8 mm
Ratio of SAR at M2 to SAR at M1 = 65.8 %

