

FCC PART 22 and 90 TEST REPORT

For

Sepura plc

Radio House, St. Andrews Road, Cambridge CB4 1GR UK

FCC ID: XX6SER8040

Report Type: Original Report	Product Type: DMR Repeater
Test Engineer: Leon Chen	leon chen
Report Number: R2DG131115009-00	
Report Date: 2014-06-25	
Reviewed By: Ivan Cao RF Leader	Ivan Cao
Test Laboratory: Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP*, or any agency of the Federal Government.

* This report may contain data that are not covered by the NVLAP accreditation and shall be marked with an asterisk "★" (Rev.2), This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
FCC §1.1310 - MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	8
APPLICABLE STANDARD	8
FCC §2.1046 & § 22.727 & §90.205- RF OUTPUT POWER	9
APPLICABLE STANDARD	9
TEST PROCEDURE	9
TEST EQUIPMENT LIST AND DETAILS.....	9
TEST DATA	9
FCC §2.1047 & §90.207 - MODULATION CHARACTERISTIC.....	11
APPLICABLE STANDARD	11
TEST PROCEDURE	11
TEST EQUIPMENT LIST AND DETAILS.....	11
TEST DATA	11
FCC §2.1049& §22.357 & § 22.731 &§90.209 & §90.210 – OCCUPIED BANDWIDTH & EMISSION MASK	15
APPLICABLE STANDARD	15
TEST EQUIPMENT LIST AND DETAILS.....	16
TEST DATA	16
FCC §2.1051 & §22.861 & §90.210 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS	21
APPLICABLE STANDARD	21
TEST EQUIPMENT LIST AND DETAILS.....	21
TEST PROCEDURE	22
TEST DATA	22
FCC §2.1053 & §22.861 & §90.210 - RADIATED SPURIOUS EMISSIONS	33
APPLICABLE STANDARD	33
TEST EQUIPMENT LIST AND DETAILS.....	33
TEST PROCEDURE	33
TEST DATA	34
FCC §2.1055 & § 22.355 & §90.213- FREQUENCY STABILITY	37
APPLICABLE STANDARD	37
TEST EQUIPMENT LIST AND DETAILS.....	37
TEST PROCEDURE	37
TEST DATA	37

FCC §90.214 - TRANSIENT FREQUENCY BEHAVIOR.....40

 APPLICABLE STANDARD40

 TEST EQUIPMENT LIST AND DETAILS.....40

 TEST PROCEDURE40

 TEST DATA41

DECLARATION LETTER43

GENERAL INFORMATION

Product Description for Equipment Under Test (EUT)

Sepura plc's product, model number: SBR8040 (FCC ID: XX6SER8040) the "EUT" in this report is a *DMR Repeater*, which was measured approximately: 48.5 cm(L) x 33.5 cm(W) x 13.0 cm(H), rated input voltage: 120 VAC or 13.6 VDC.

Note: Models SBR8040, SCR8040, SER8040 are electrically identical, the difference between them is just the model name, we selected SBR8040 for fully testing, and the details were explained in the attached declaration letter.

** All measurement and test data in this report was gathered from production sample serial number: 7PR111403GE0011. The EUT was received on 2014-01-16.*

Objective

This test report is prepared on behalf of *Sepura plc* in accordance with Part 2, and Part 90 of the Federal Communications Commission rules.

Related Submittal(s)/Grant(s)

No related submittal(s).

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of federal Regulations Title 47 Part 2, Sub-part J as well as the following individual parts:

Part 22 – Public Mobile Service
Part 90 – Private Land Mobile Radio Service

Applicable Standards: TIA 603-D and ANSI 63.4-2003.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 02, 2012. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Dongguan) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 500069-0).



The current scope of accreditations can be found at <http://ts.nist.gov/standards/scopes/5000690.htm>

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a test mode.


Specification:

Operating Frequency Band	400-470MHz
Modulation Mode	FM/4FSK
Channnel separation	12.5 kHz
Conducted Output Power	40W

Equipment Modifications

No modifications were made to the unit tested.

Block Diagram of Test Setup

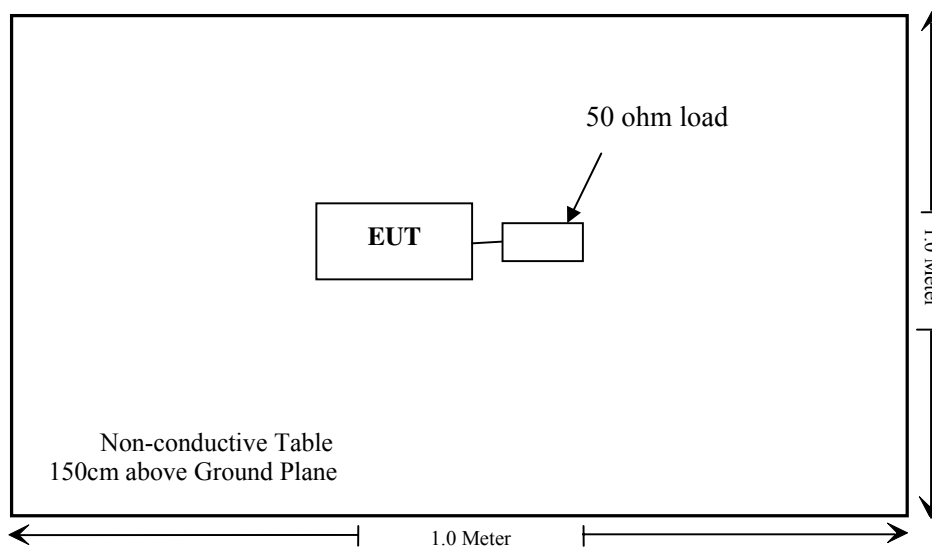

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
FCC §1.1310	Maximum Permissible Exposure(MPE)	Compliance
§2.1046; § 22.727;§90.205	RF Output Power	Compliance
§2.1047;§90.207	Modulation Characteristic	Compliance
§2.1049;§22.357;§ 22.731;§90.209; §90.210	Occupied Bandwidth & Emission Mask	Compliance
§2.1051; §22.861;§90.210	Spurious Emission at Antenna Terminal	Compliance
§2.1053; §22.861;§90.210	Spurious Radiated Emissions	Compliance
§2.1055; § 22.355;§90.213	Frequency Stability	Compliance
§90.214	Transient Frequency Behavior	Compliance

FCC §1.1310 - MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to 1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for Occupational/Controlled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Time E , H or S (minutes)
0.3- 3.0	614	1.63	(100)*	6
3.0 - 30	1842/f	4.89/f	(900/f ²)*	6
30-300	61.4	0.163	1.0	6
300-1500	/	/	f/300	6
1500-100,000	/	/	5	6

f = frequency in MHz

* = Plane-wave equivalent power density

MPE Calculation

Predication of MPE limit at a given distance

$$S = PG/4\pi R^2$$

Where: S = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Frequency	Output Power	Typical Antenna Gain		Distance	Power Density	Limits
MHz	mW	dBi	numeric	cm	mW/cm ²	mW/cm ²
435	43000	0	1	100	0.34	1.45

Result: Pass

FCC §2.1046 & § 22.727 & §90.205- RF OUTPUT POWER**Applicable Standard**

FCC §2.1046, § 22.727 and §90.205.

Test Procedure

Conducted RF Output Power:

TIA-603-D section 2.2.1

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

Spectrum Analyzer setting:

RBW	Video B/W
100kHz	300 kHz

Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
R&S	Spectrum analyzer	FSEM	DE31388	2013-05-07	2014-05-06
R&S	Spectrum Analyzer	FSEM	DE31388	2014-05-09	2015-05-08

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	23.8 °C
Relative Humidity:	40 %
ATM Pressure:	101.2 kPa

The testing was performed by Leon Chen on 2014-01-24 & 2014-05-22.

Test Mode: Transmitting

Test Result: Compliance.

Please refer to following tables.

FCC Part 90:

Modulation Mode	Channel Separation	f _c	Reading		Note
		MHz	dBm	W	
FM	12.5 kHz	400.0125	45.86	38.55	Not for FCC Review
		435	46.06	40.36	/
		469.9875	46.02	39.99	/
4FSK		400.0125	45.80	38.02	Not for FCC Review
		435	46.03	40.09	/
		469.9875	46.03	40.09	/

FCC Part 22:

Modulation Mode	Channel Separation	f _c	Reading		Note
		MHz	dBm	W	
FM	12.5 kHz	454.5	46.04	40.18	/
		458	46.02	39.99	/
4FSK		454.5	46.02	39.99	/
		458	46.01	39.90	/

FCC §2.1047 & §90.207 - MODULATION CHARACTERISTIC**Applicable Standard**

FCC§2.1047 & §90.207:

- (a) Equipment which utilizes voice modulated communication shall show the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz. for equipment which is required to have a low pass filter, the frequency response of the filter, or all of the circuitry installed between the modulation limited and the modulated stage shall be supplied.
- (b) Equipment which employs modulation limiting, a curve showing the percentage of modulation versus the modulation input voltage shall be supplied.

Test Procedure

Test Method: TIA/EIA-603 2.2.3

Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
HP	RF Communications Test Set	8920A	00 235	2014-05-09	2015-05-08

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**


Temperature:	27.9 °C
Relative Humidity:	69 %
ATM Pressure:	99.9 kPa

The testing was performed by Leon Chen on 2014-06-25.

MODULATION LIMITING

Carrier Frequency: 435 MHz, Channel Separation = 12.5 kHz,

Audio Input Level [dB]	Frequency Deviation (kHz)			FCC Limit [kHz]
	@ 300 Hz	@ 1kHz	@ 3 kHz	
20.0	2.185	2.198	2.190	2.5
15.0	2.105	2.188	2.186	2.5
10.0	1.267	2.164	2.172	2.5
5.0	1.003	2.022	2.164	2.5
0.0	0.628	1.320	2.042	2.5
-5.0	0.511	0.820	1.868	2.5
-10.0	0.402	0.734	1.609	2.5
-15.0	0.245	0.477	0.977	2.5
-20.0	0.247	0.358	0.576	2.5

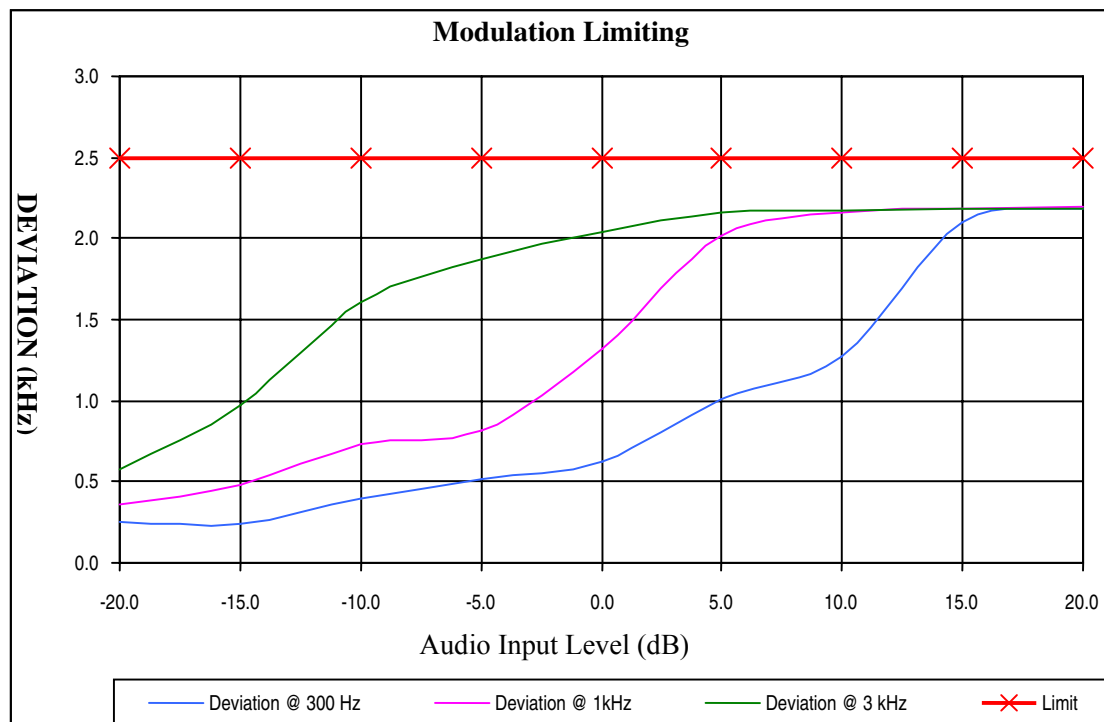


Note: the maximum frequency deviation is 2.2 kHz, which was declared by the manufactory.

Audio Frequency Response


Carrier Frequency: 435 MHz, Channel Separation = 12.5 kHz,

Audio Frequency (Hz)	Response Attenuation (dB)
300	-10.79
400	-7.50
500	-4.62
600	-3.11
700	-2.12
800	-1.04
900	-0.55
1000	0.03
1200	1.02
1400	2.08
1600	2.62
1800	3.09
2000	3.53
2200	4.50
2400	5.22
2600	6.36
2800	7.06
3000	7.12

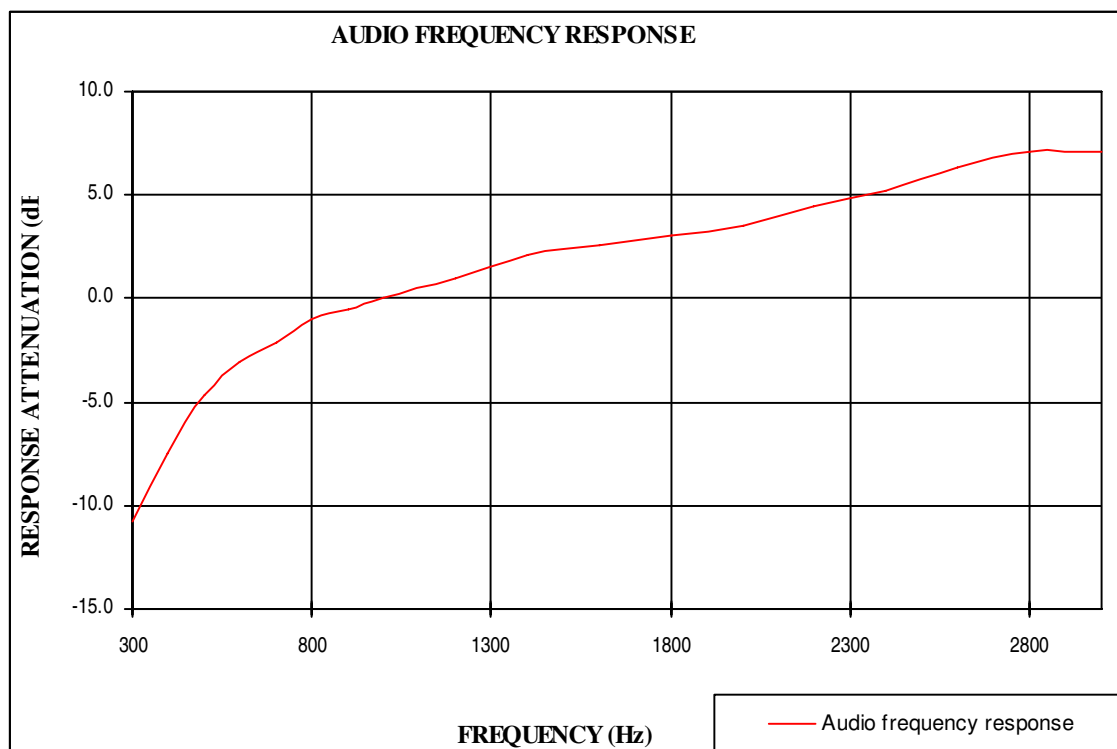

Audio Frequency Low Pass Filter Response

Audio Frequency	Response Attenuation	Limit
kHz	dB	dB
3.0	-0.3	0.0
3.5	-10.8	-6.7
4.0	-22.5	-12.5
5.0	-35.4	-22.2
7.0	-54.6	-36.8
10.0	-68.9	-52.3
15.0	-78.4	-69.9
20.0	-84.5	-82.5
30.0	-84.5	-82.5
50.0	-84.5	-82.5
70.0	-84.5	-82.5

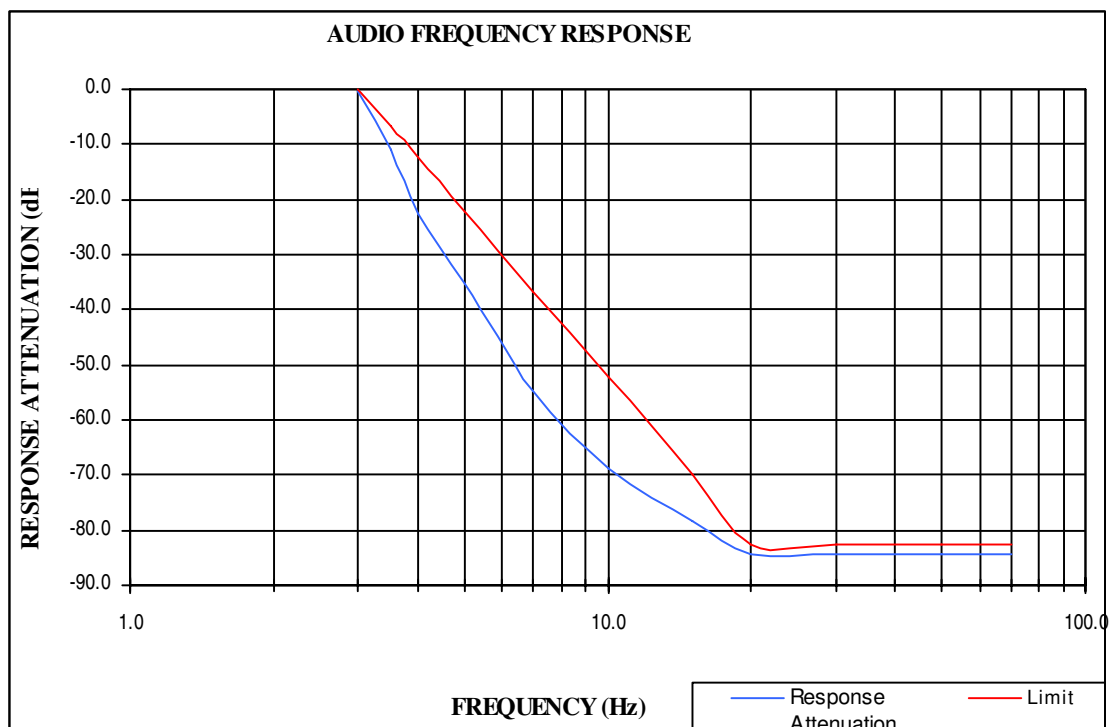

FCC §2.1049 & §22.357 & § 22.731 & §90.209 & §90.210 – OCCUPIED BANDWIDTH & EMISSION MASK

Applicable Standard

FCC §2.1049, §22.357, § 22.731, §90.209 and §90.210

Applicable Emission Masks

Frequency band (MHz)	Mask for equipment with audio low pass filter	Mask for equipment without audio low pass filter
Below 25	A or B	A or C
25-50	B	C
72-76	B	C
150-174	B, D, or E	C, D or E
150 paging only	B	C
220-222	F	F
421-512	B, D, or E	C, D, or E
450 paging only	B	G
806-809/851-854	B	H
809-824/854-869	B	G
896-901/935-940	I	J
902-928	K	K
929-930	B	G
4940-4990 MHz	L or M	L or M
5850-5925		
All other bands	B	C

Emission Mask D—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 : Zero dB.
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least $7.27(f_d - 2.88 \text{ kHz})$ dB.
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least $50 + 10 \log(P)$ dB or 70 dB, whichever is the lesser attenuation.
- (4) The reference level for showing compliance with the emission mask shall be established using a resolution bandwidth sufficiently wide (usually two or three times the channel bandwidth) to capture the true peak emission of the equipment under test. In order to show compliance with the emission mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak hold mode. A sufficient number of sweeps must be measured to insure that the emission profile is developed. If video filtering is used, its bandwidth must not be less than the instrument resolution bandwidth. For emissions beyond 50 kHz from the edge of the authorized bandwidth, see paragraph (o) of this section. If it can be shown that use of the above instrumentation settings do not accurately represent the true interference potential of the equipment under test, an alternate procedure may be used provided prior Commission approval is obtained.

Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2014-05-09	2015-05-08

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	22.1 ~ 24.1°C
Relative Humidity:	31 ~ 44 %
ATM Pressure:	101.2 ~ 102.1 kPa

The testing was performed by Leon Chen on 2014-06-25.

FCC Part 90:


Modulation Mode	Channel Separation	f_c	26 dB Bandwidth
	kHz	MHz	kHz
FM	12.5	435	10.30
4FSK		435	9.40

FCC Part 22:


Modulation Mode	Channel Separation	f _c	26 dB Bandwidth
		MHz	kHz
FM	12.5	454.5	10.30
		458	10.30
4FSK		454.5	9.30
		458	9.50

Please refer to the emission mask hereinafter plots.

Occupied Bandwidth, 435 MHz, FM mode

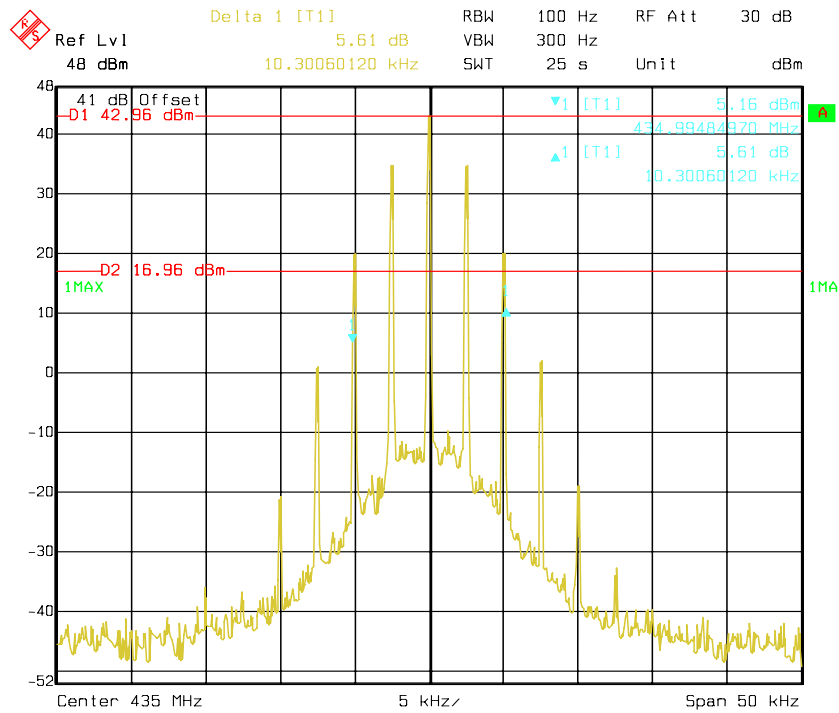

Emission Mask- Channel – Type D

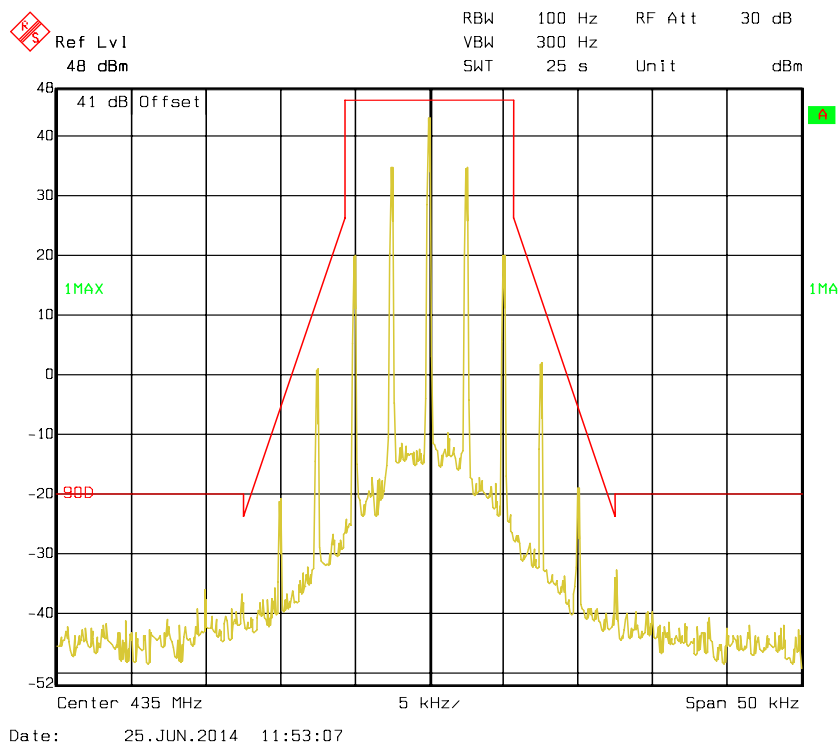

Delta 1 [T1] 1.91 dB RBW 100 Hz RF Att 30 dB
 Ref Lvl 48 dBm Unit dBm
 41 dB Offset
 -D1 38.05 dBm
 1MAX D2 12.05 dBm
 434.99515730 MHz
 1.91 dB
 9.39879760 kHz
 Center 435 MHz 5 kHz/ Span 50 kHz
 Date: 25.JUN.2014 11:59:01

Ref Lvl 48 dBm

RBW 100 Hz

VBW 300 Hz

SWT 25 s

RF Att 30 dB

Unit dBm

41 dB Offset

1MAX


99.9

Center 435 MHz


5 kHz/

Span 50 kHz

Date: 25 JUN 2014 11:59:25

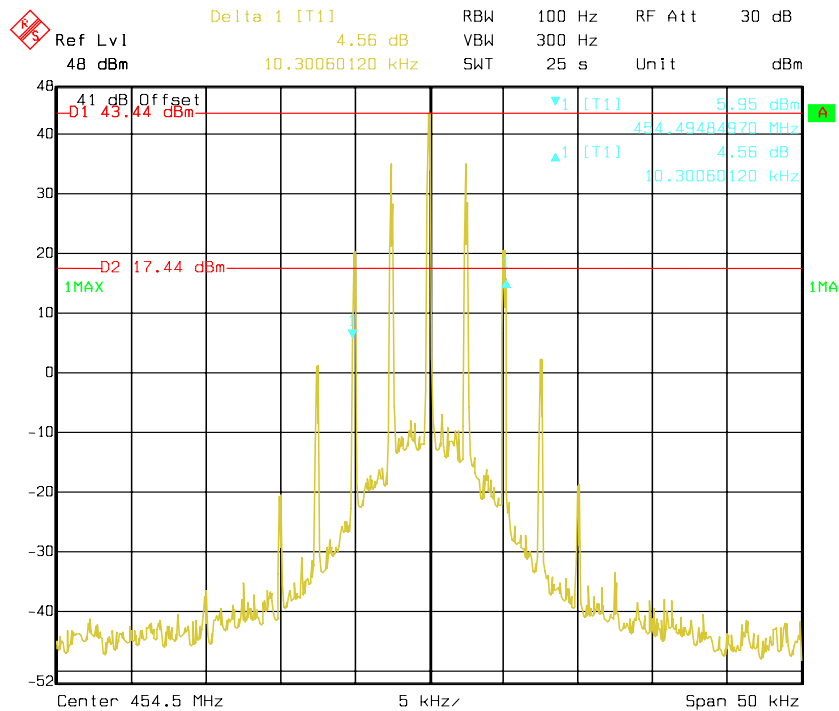
Occupied Bandwidth, 454.5 MHz, FM mode

Date: 25.JUN.2014 11:54:38

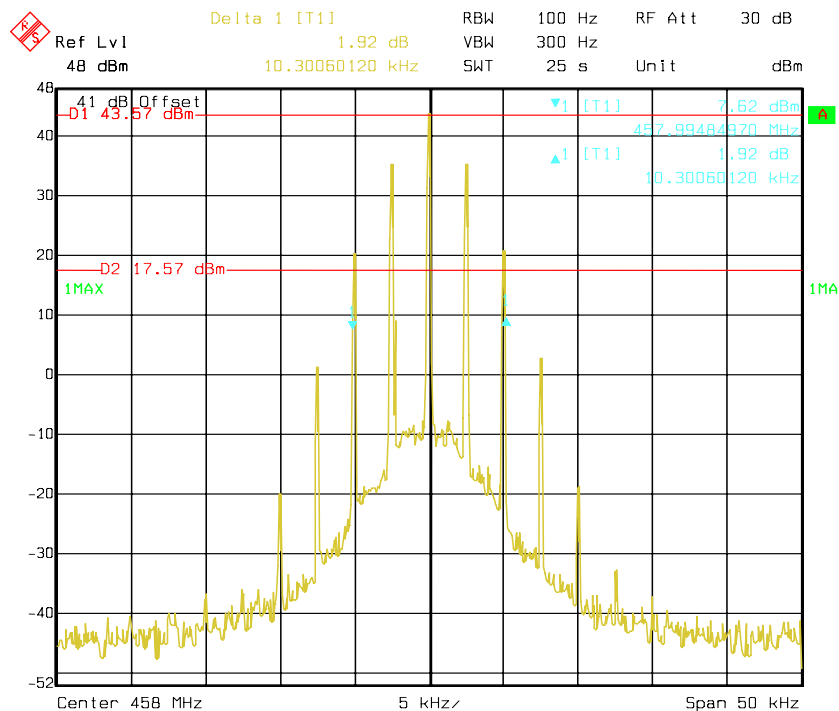Occupied Bandwidth, 458 MHz, FM mode


Date: 25.JUN.2014 11:56:10

Occupied Bandwidth, 454.5 MHz, 4FSK mode

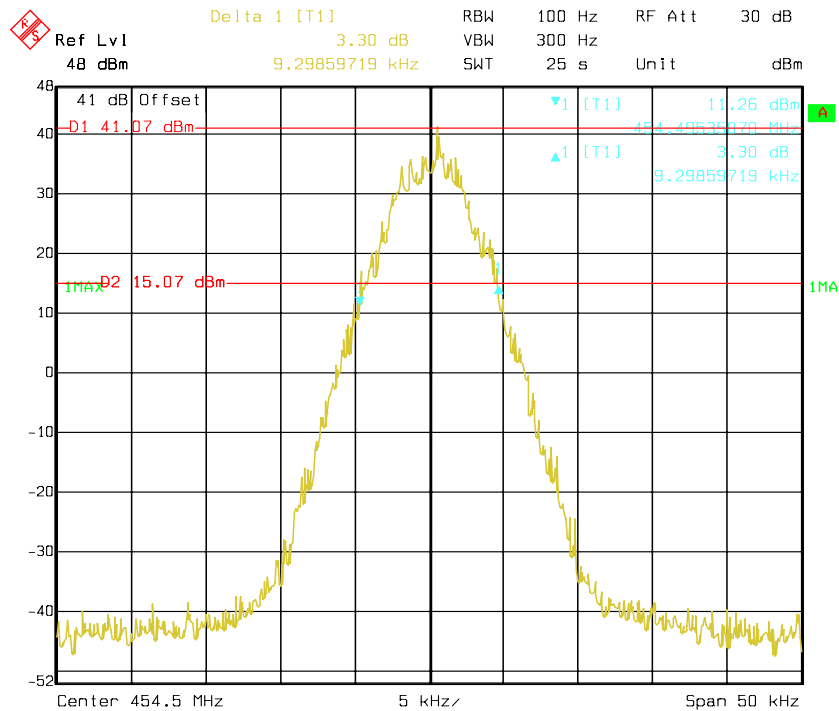

Date: 25.JUN.2014 12:57:05

Occupied Bandwidth, 458 MHz, 4FSK mode

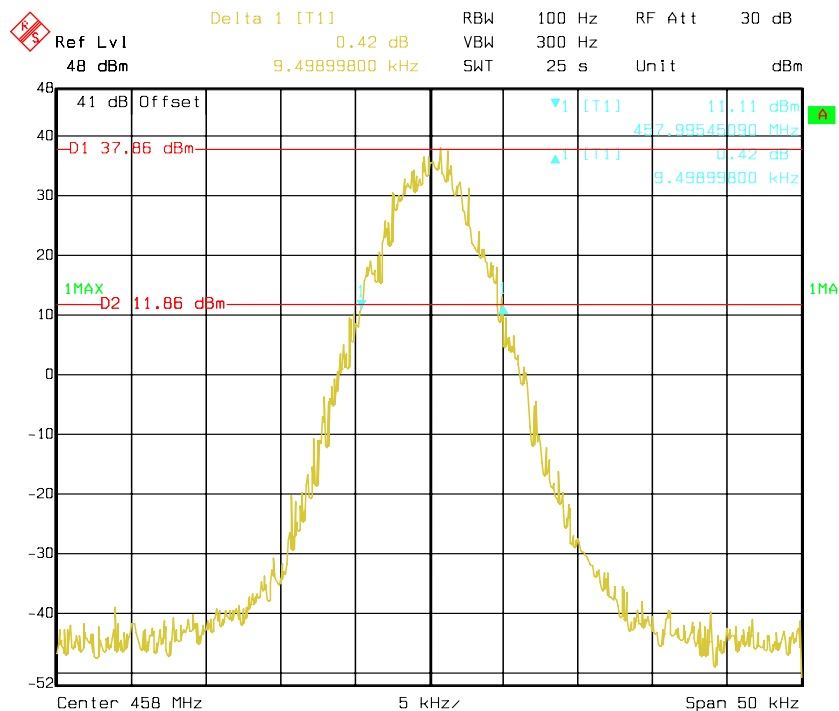

Date: 25.JUN.2014 12:59:19

FCC §2.1051 & §22.861 & §90.210 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Applicable Standard

Emission Mask D—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 : Zero dB.
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least $7.27(f_d - 2.88 \text{ kHz})$ dB.
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least $50 + 10 \log(P)$ dB or 70 dB, whichever is the lesser attenuation.
- (4) The reference level for showing compliance with the emission mask shall be established using a resolution bandwidth sufficiently wide (usually two or three times the channel bandwidth) to capture the true peak emission of the equipment under test. In order to show compliance with the emission mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak hold mode. A sufficient number of sweeps must be measured to insure that the emission profile is developed. If video filtering is used, its bandwidth must not be less than the instrument resolution bandwidth. For emissions beyond 50 kHz from the edge of the authorized bandwidth, see paragraph (o) of this section. If it can be shown that use of the above instrumentation settings do not accurately represent the true interference potential of the equipment under test, an alternate procedure may be used provided prior Commission approval is obtained.

Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
R&S	Spectrum analyzer	FSEM	DE31388	2013-05-07	2014-05-06
R&S	Spectrum Analyzer	FSEM	DE31388	2014-05-09	2015-05-08

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

Spectrum analyzer settings:

- 1) Resolution Bandwidth = 100 kHz for spurious emissions below 1 GHz, and 1 MHz for spurious emissions above 1 GHz.
- 2) Video Bandwidth ≥ 3 times the resolution bandwidth.
- 3) Sweep Speed ≤ 2000 Hz per second.
- 4) Detector Mode = mean or average power.

Test Data

Environmental Conditions



Temperature:	23.8°C
Relative Humidity:	40 %
ATM Pressure:	101.2 kPa

The testing was performed by Leon Chen on 2014-01-24 & 2014-05-22.



Please refer to the following plots.

FCC Part 90:


400.0125 MHz –FM mode (Not for FCC Review)

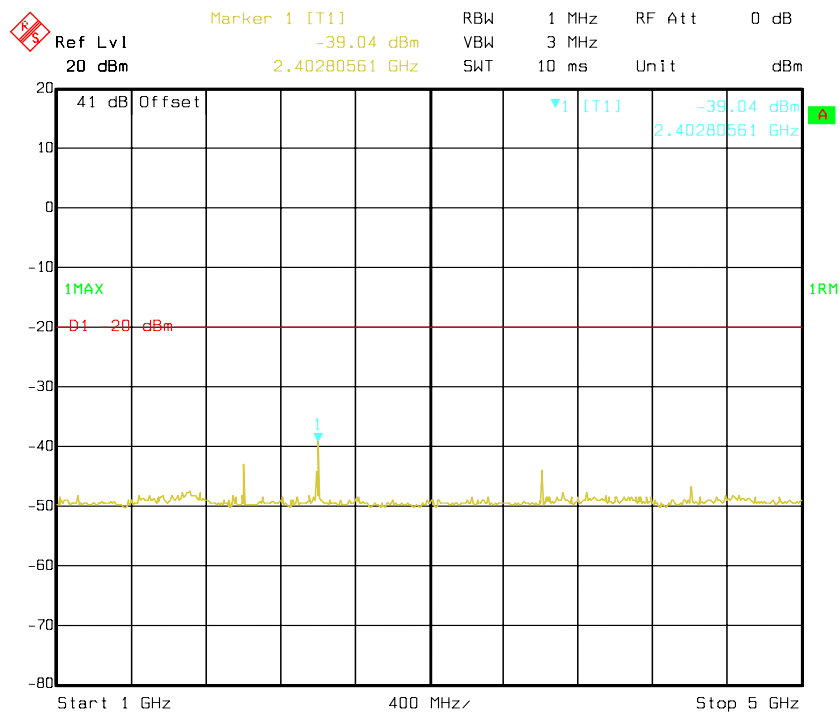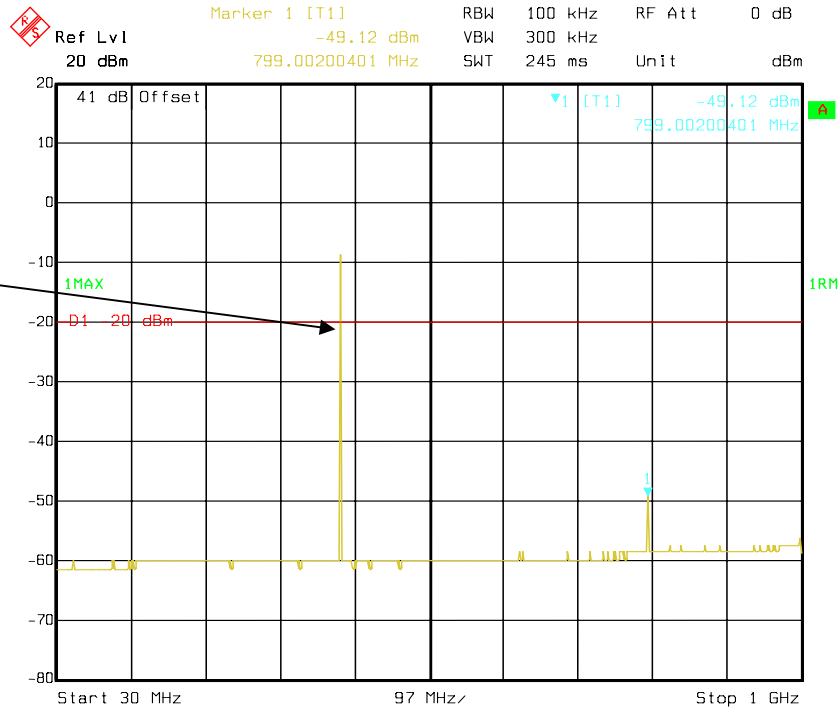



435 MHz – FM mode

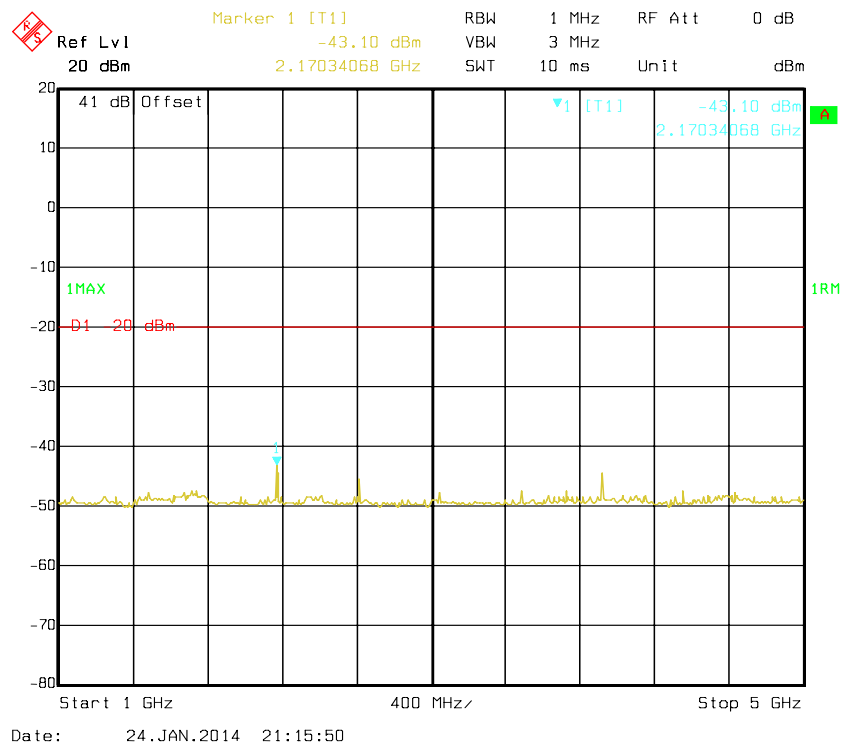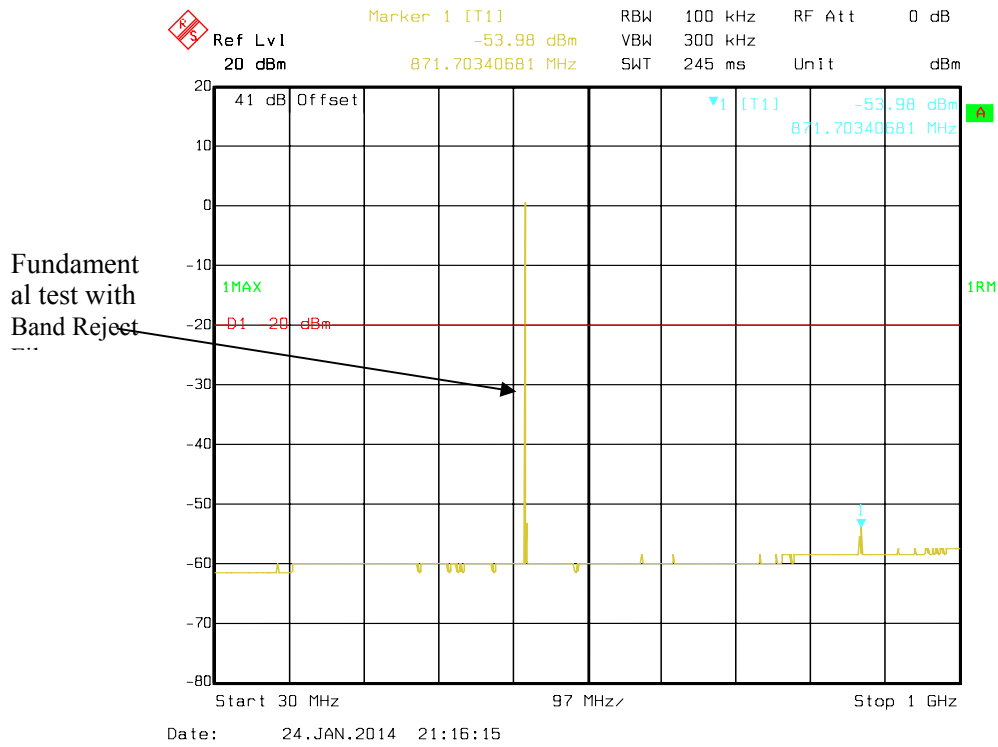


Fundamental test with Band Reject Filter —

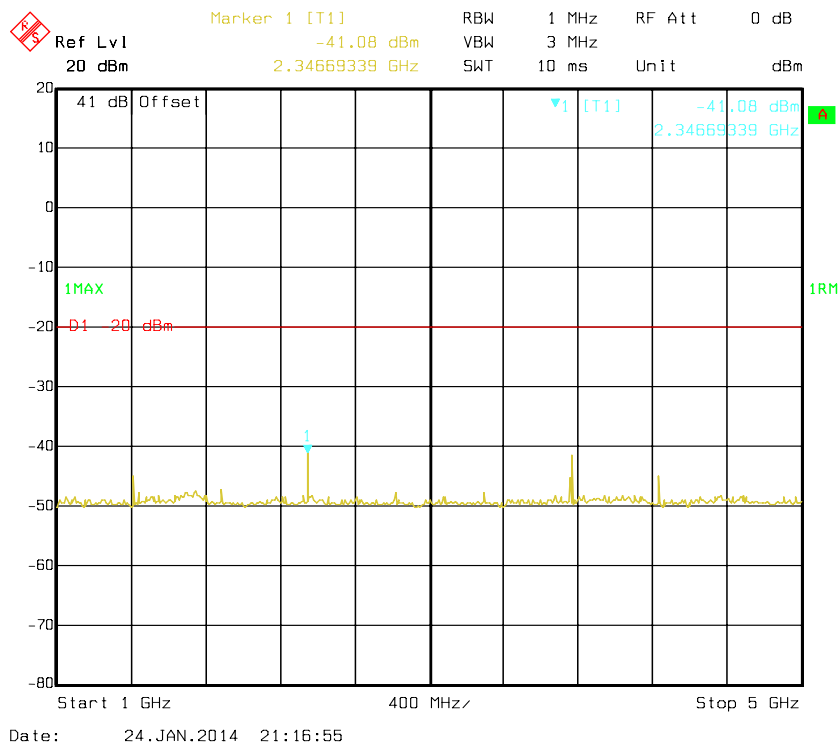


400.0125 MHz – 4FSK mode (Not for FCC Review)

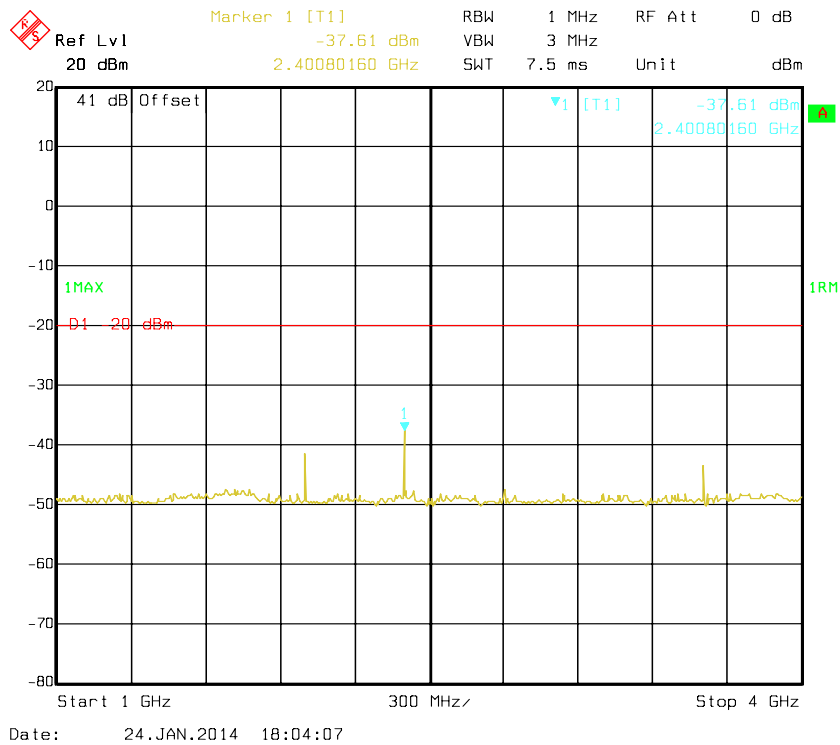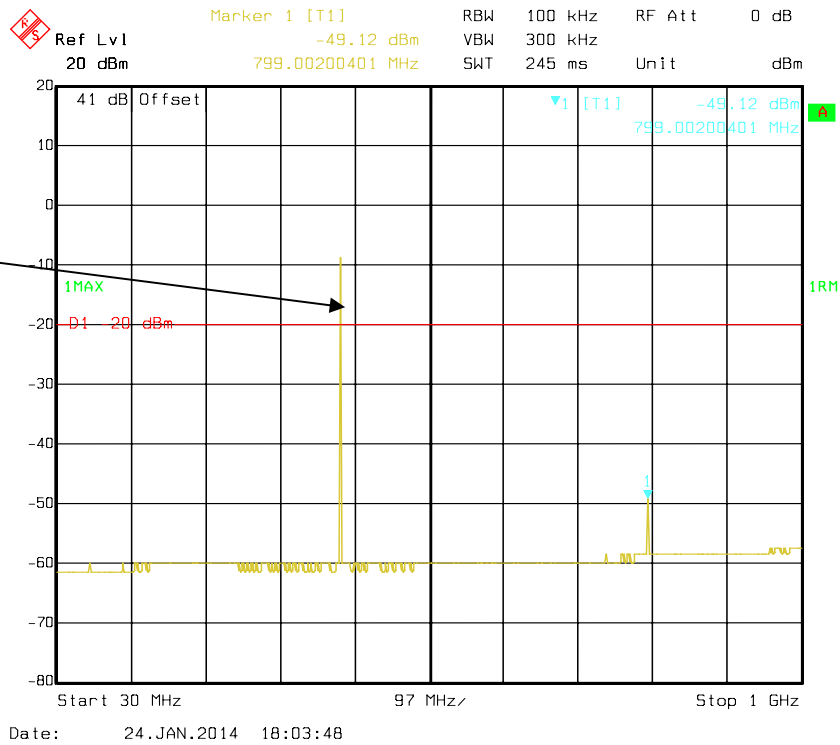



435 MHz – FM mode

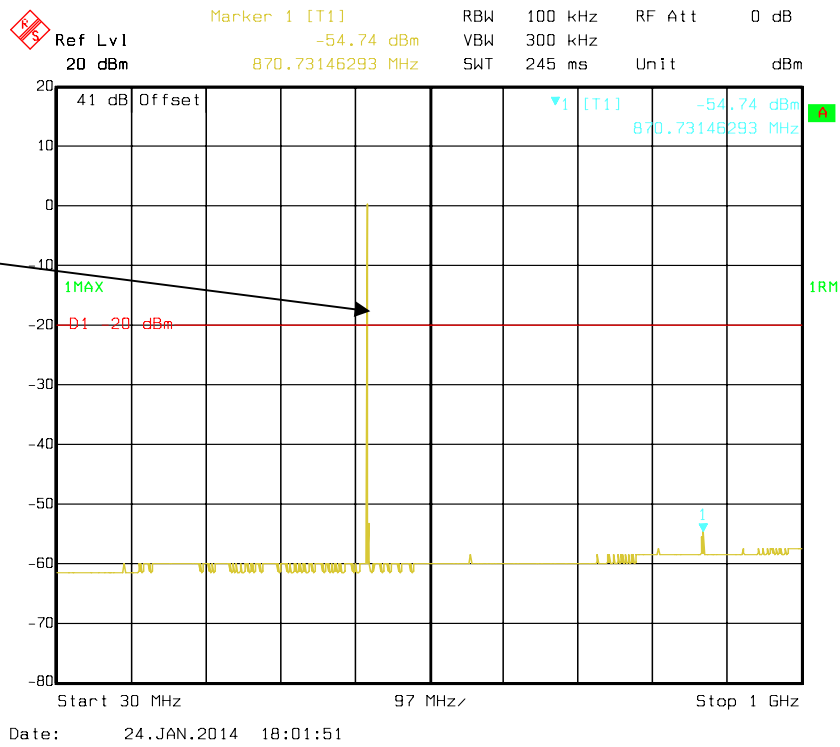

Fundamental test with Band Reject Filter


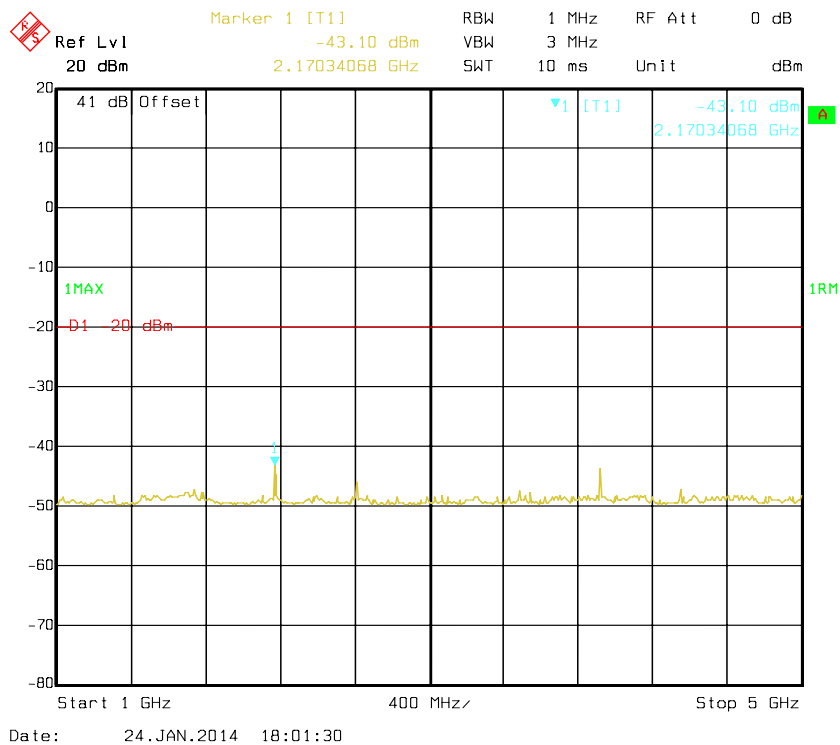


469.9875 MHz – FM mode

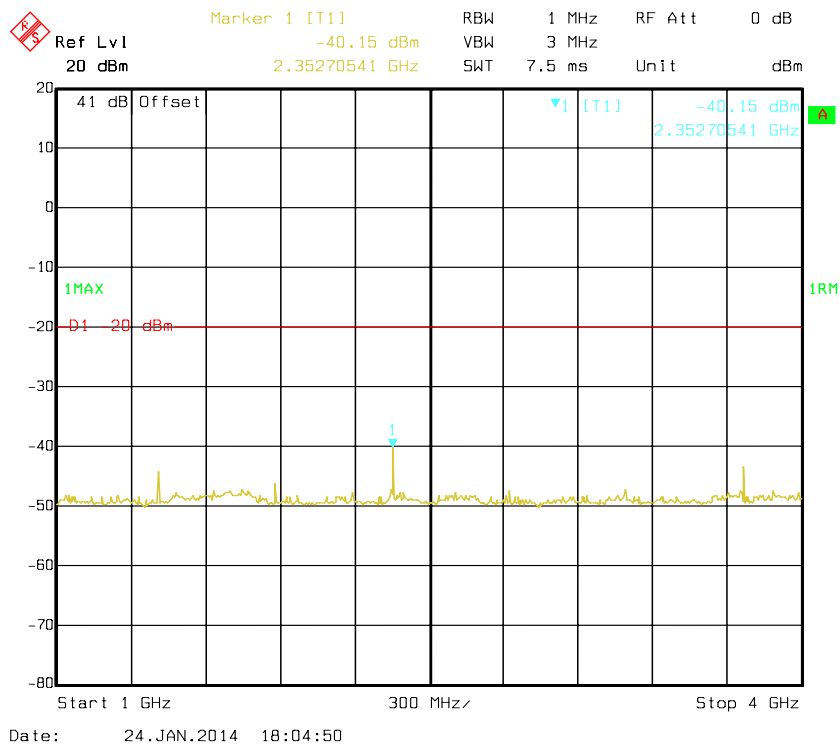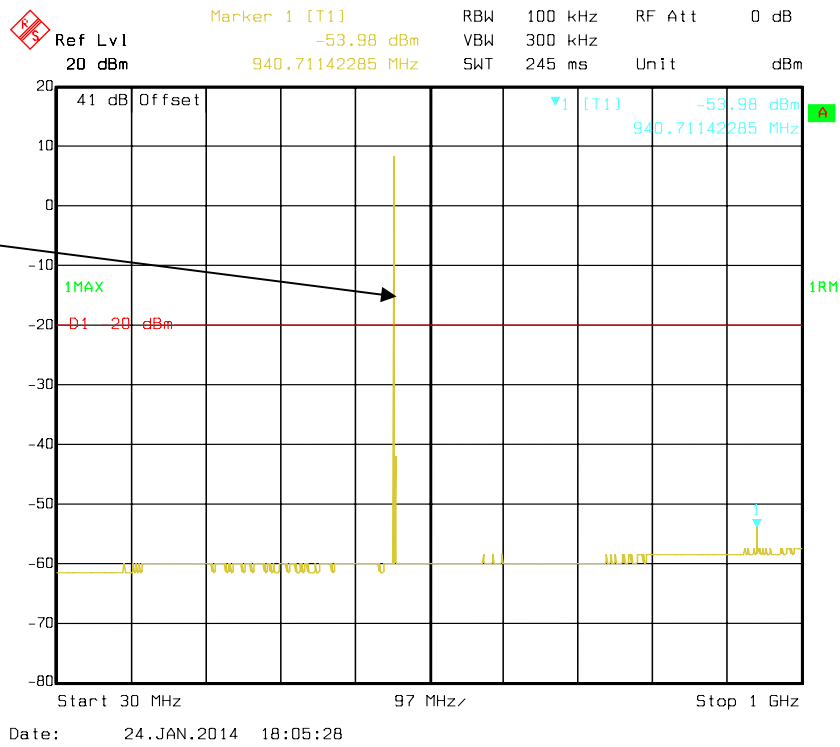


FCC Part 22:


454.5 MHz – FM mode

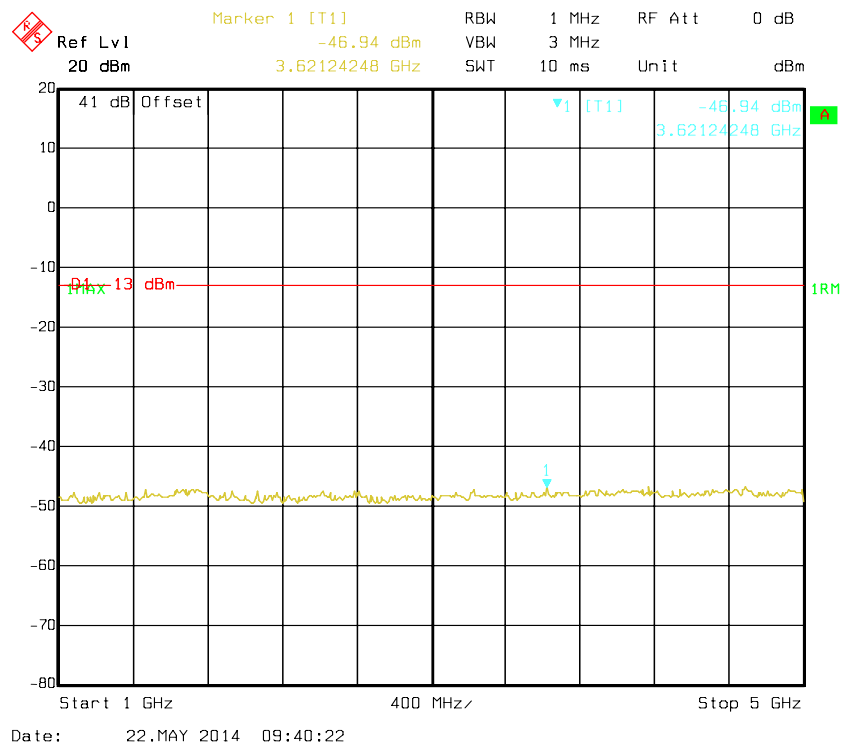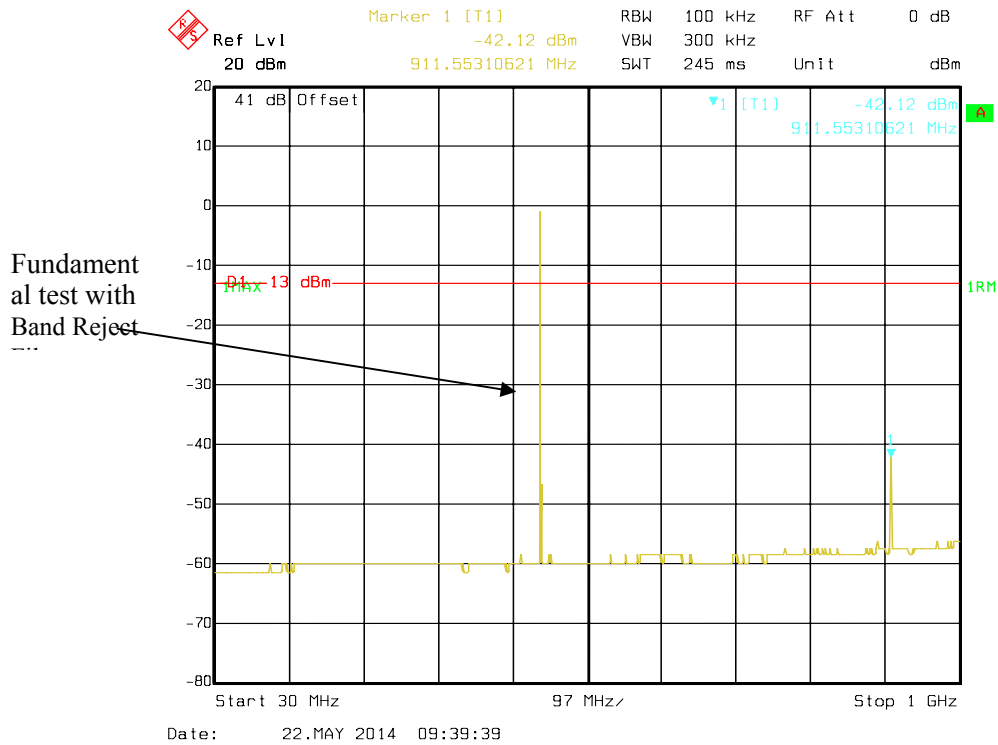



458 MHz – FM mode

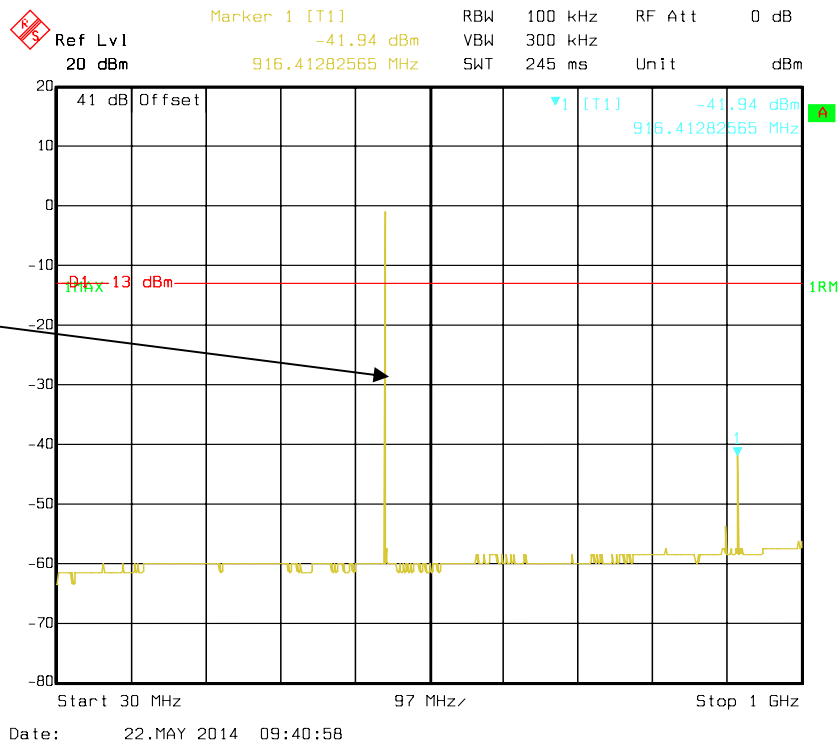

Fundamental test with Band Reject Filter


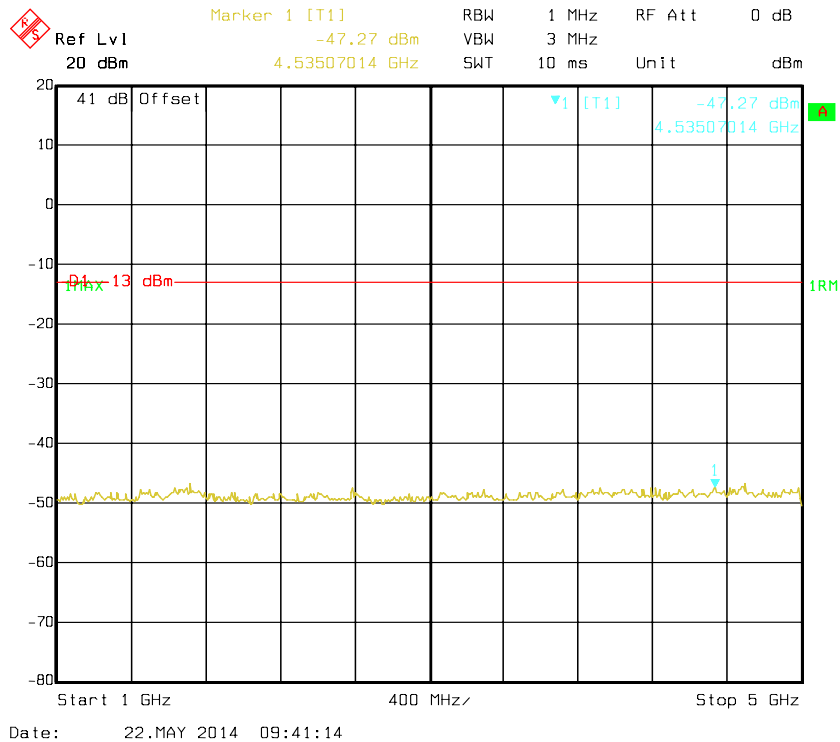


454.05 MHz – 4FSK mode

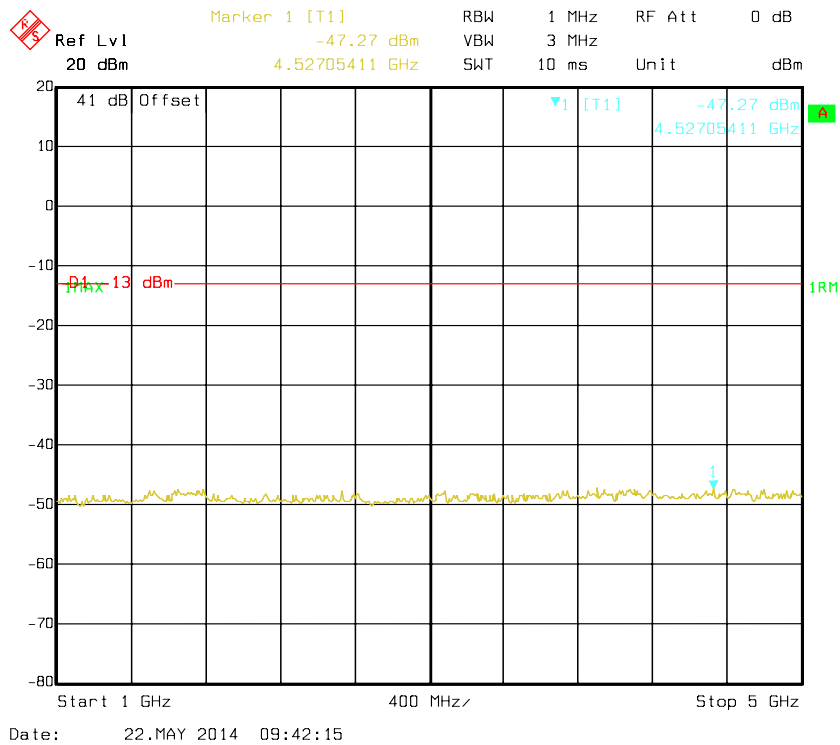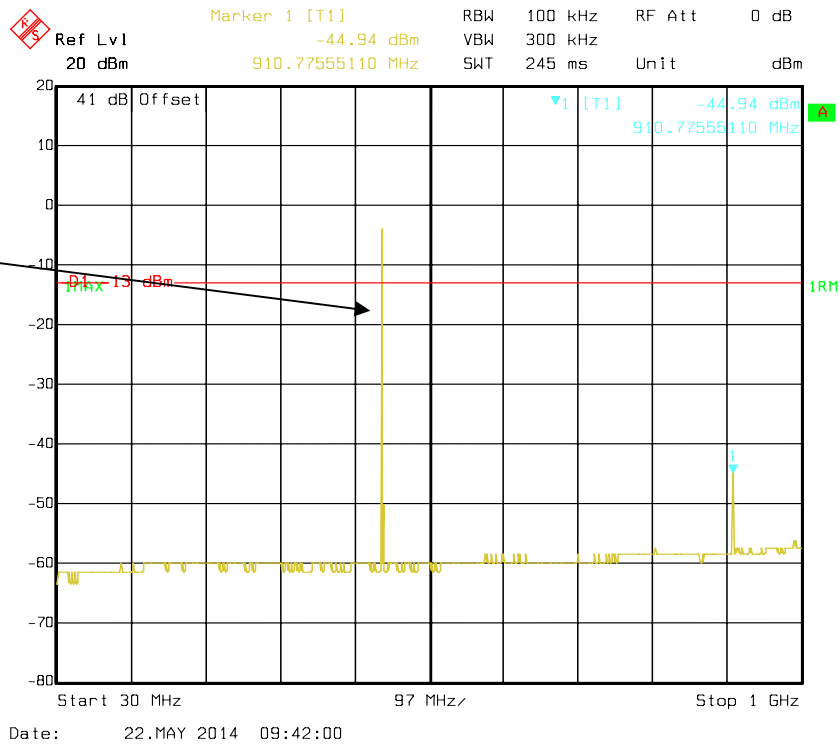

458 MHz – 4FSK mode

Fundamental
test with Band
Reject Filter

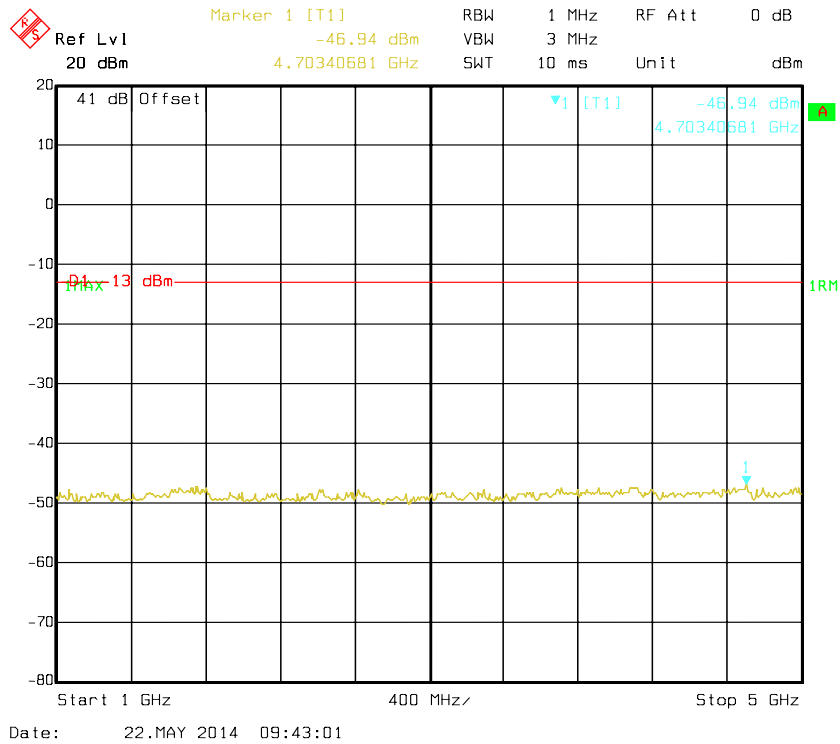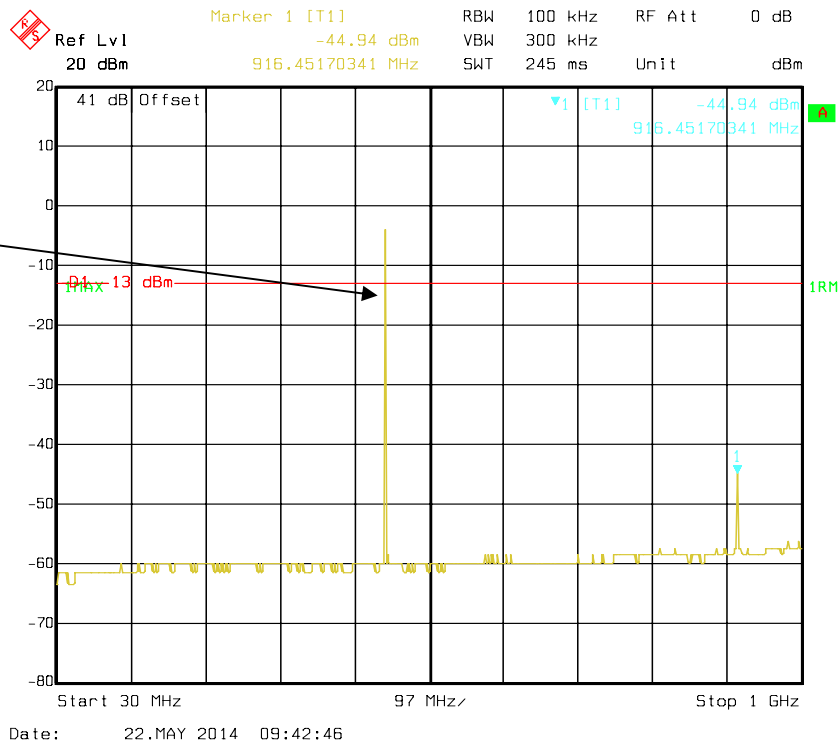

FCC §2.1053 & §22.861 & §90.210 - RADIATED SPURIOUS EMISSIONS

Applicable Standard

FCC §2.1053 and §22.861 and §90.210

Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2013-05-06	2014-05-05
R&S	EMI Test Receiver	ESCI	100224	2014-05-09	2015-05-08
R&S	Spectrum analyzer	FSEM	DE31388	2013-05-07	2014-05-06
R&S	Spectrum Analyzer	FSEM	DE31388	2014-05-09	2015-05-08
Sunol Sciences	Antenna	JB3	A060611-1	2011-09-06	2014-09-05
ETS LINDGREN	horn antenna	3115	000 527 35	2012-09-06	2015-09-05
HP	AMPLIFIER	8447E	2434A02181	N/A	N/A
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	N/A	N/A
Giga	Signal Generator	1026	320408	2013-05-09	2014-05-08
Giga	Signal Generator	1026	320408	2014-05-09	2015-05-08
EMCO	Adjustable dipole antenna	3121C	9109-753	N/A	N/A
TDK RF	horn antenna	HRN-0118	130 084	2012-09-06	2015-09-05

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to teeth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = 10 lg (TXpwr in Watts/0.001)-the absolute level

Spurious attenuation limit in dB = 50 + 10 Log₁₀ (power out in Watts) for EUT with a 12.5 kHz channel bandwidth.

Test Data**Environmental Conditions**

Temperature:	23.8 °C
Relative Humidity:	40 %
ATM Pressure:	101.2 kPa

The testing was performed by Leon Chen on 2014-01-24 & 2014-05-22.

120 VAC input, FM Modulation mode (worst case):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	PART 90	
			S.G. Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)		Limit (dBm)	Margin (dB)
operation frequency: 400.0125 MHz (Not for FCC Review)								
400.540	H	46.40	-48.9	0.0	0.6	-49.5	-20.0	29.5
800.025	H	39.92	-51.9	0.0	0.9	-52.8	-20.0	32.8
2800.088	H	43.98	-54.4	13.1	1.7	-43.0	-20.0	23.0
400.540	V	44.73	-47.9	0.0	0.6	-48.5	-20.0	28.5
800.025	V	37.18	-52.2	0.0	0.9	-53.1	-20.0	33.1
2800.088	V	43.14	-55.2	13.1	1.7	-43.8	-20.0	23.8
operation frequency: 435.0000 MHz								
400.540	H	46.93	-48.4	0.0	0.6	-49.0	-20.0	29.0
870.000	H	40.35	-51.7	0.0	1	-52.7	-20.0	32.7
2175.000	H	45.69	-50.1	10.9	1.5	-40.7	-20.0	20.7
400.540	V	44.66	-48	0.0	0.6	-48.6	-20.0	28.6
870.000	V	41.26	-47.4	0.0	1	-48.4	-20.0	28.4
2175.000	V	43.72	-51.7	10.9	1.5	-42.3	-20.0	22.3
operation frequency: 469.9875 MHz								
400.540	H	47.61	-47.7	0.0	0.6	-48.3	-20.0	28.3
939.975	H	40.56	-47.6	0.0	1	-48.6	-20.0	28.6
2819.925	H	45.66	-52.6	13.3	1.7	-41.0	-20.0	21.0
400.540	V	44.67	-48	0.0	0.6	-48.6	-20.0	28.6
939.975	V	42.57	-42.9	0.0	1	-43.9	-20.0	23.9
2819.925	V	45.49	-52.8	13.3	1.7	-41.2	-20.0	21.2
Frequency:454.5000 MHz								
400.540	H	46.92	-48.4	0.0	0.6	-49.0	-20.0	29.0
909.000	H	40.43	-50.8	0.0	1	-51.8	-20.0	31.8
2727.000	H	38.58	-58.4	13.1	2	-47.3	-20.0	27.3
400.540	V	47.59	-45.1	0.0	0.6	-45.7	-20.0	25.7
909.000	V	36.76	-51	0.0	1	-52.0	-20.0	32.0
2727.000	V	41.16	-57.2	13.1	2	-46.1	-20.0	26.1
Frequency:458.0000 MHz								
400.540	H	47.04	-48.3	0.0	0.6	-48.9	-13.0	35.9
916.000	H	40.80	-49.7	0.0	1	-50.7	-13.0	37.7
2748.000	H	44.51	-52.9	13.1	1.9	-41.7	-13.0	28.7
400.540	V	47.47	-45.2	0.0	0.6	-45.8	-13.0	32.8
916.000	V	38.40	-48.8	0.0	1	-49.8	-13.0	36.8
2748.000	V	39.99	-58.4	13.1	1.9	-47.2	-13.0	34.2

13.6 VDC, input FM modulation mode (worst case):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	PART 90	
			S.G. Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)		Limit (dBm)	Margin (dB)
operation frequency: 400.0125 MHz (Not for FCC Review)								
400.540	H	50.70	-44.6	0.0	0.6	-45.2	-20.0	25.2
800.025	H	49.44	-42.4	0.0	0.9	-43.3	-20.0	23.3
2800.088	H	42.07	-56.3	13.1	1.7	-44.9	-20.0	24.9
400.540	V	46.97	-45.7	0.0	0.6	-46.3	-20.0	26.3
800.025	V	47.26	-42.1	0.0	0.9	-43.0	-20.0	23.0
2800.088	V	43.56	-54.8	13.1	1.7	-43.4	-20.0	23.4
operation frequency: 435.0000 MHz								
400.540	H	49.78	-45.6	0.0	0.6	-46.2	-20.0	26.2
870.000	H	49.14	-42.9	0.0	1	-43.9	-20.0	23.9
2610.000	H	42.34	-52.3	13.2	2.8	-41.9	-20.0	21.9
400.540	V	45.85	-46.8	0.0	0.6	-47.4	-20.0	27.4
870.000	V	48.53	-40.2	0.0	1	-41.2	-20.0	21.2
2610.000	V	43.80	-53.4	13.2	2.8	-43.0	-20.0	23.0
operation frequency: 469.9875 MHz								
400.540	H	49.35	-46	0.0	0.6	-46.6	-20.0	26.6
939.975	H	48.88	-39.3	0.0	1	-40.3	-20.0	20.3
3289.913	H	43.72	-53.6	13.6	1.7	-41.7	-20.0	21.7
400.540	V	47.16	-45.5	0.0	0.6	-46.1	-20.0	26.1
939.975	V	46.45	-39	0.0	1	-40.0	-20.0	20.0
3289.913	V	43.61	-53.3	13.6	1.7	-41.4	-20.0	21.4
Frequency:454.5000 MHz								
400.540	H	50.73	-44.6	0.0	0.6	-45.2	-20.0	25.2
909.000	H	39.95	-51.2	0.0	1	-52.2	-20.0	32.2
3181.500	H	42.72	-54.9	13.5	1.8	-43.2	-20.0	23.2
400.540	V	45.81	-46.9	0.0	0.6	-47.5	-20.0	27.5
909.000	V	37.01	-50.7	0.0	1	-51.7	-20.0	31.7
3181.500	V	43.02	-53.8	13.5	1.8	-42.1	-20.0	22.1
Frequency:458.0000 MHz								
400.54	H	51.53	-43.8	0.0	0.6	-44.4	-13.0	31.4
916.000	H	40.27	-50.2	0.0	1	-51.2	-13.0	38.2
3206.000	H	42.9	-54.7	13.5	1.8	-43.0	-13.0	30.0
400.54	V	46.05	-46.6	0.0	0.6	-47.2	-13.0	34.2
916.000	V	37.75	-49.5	0.0	1	-50.5	-13.0	37.5
3206.000	V	43.09	-53.7	13.5	1.8	-42.0	-13.0	29.0

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = SG Level - Cable loss + Antenna Gain
- 3) Margin = Limit-Absolute Level

FCC §2.1055 & § 22.355 & §90.213- FREQUENCY STABILITY**Applicable Standard**

FCC §2.1055, § 22.355, §90.213

Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
R&S	Spectrum analyzer	FSEM	DE31388	2013-05-07	2014-05-06
R&S	Spectrum Analyzer	FSEM	DE31388	2014-05-09	2015-05-08
Dongzhixu	High Temperature Test Chamber	DP1000	201105083-3	2013-07-03	2014-07-02

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to DC or AC power supply and the RF output were connected to a frequency counter via feed-through attenuators. The EUT was placed inside the temperature chamber. The power leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the counter.

The frequency stability shall be measured with variation of primary supply voltage as follows:

- (1) Vary primary supply voltage from 85 to 115 percent of the nominal value.
- (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

Test Data**Environmental Conditions**

Temperature:	23.8°C
Relative Humidity:	40 %
ATM Pressure:	101.2 kPa

The testing was performed by Leon Chen on 2014-01-24 & 2014-05-22.

Test Mode: Transmitting

FCC Part 90:

Reference Frequency: 435 MHz, Limit: 1.5 ppm			
Temperature	Voltage	Reading	Frequency Error
°C	V _{AC}	MHz	ppm
-30	120	435.000183	0.42
-20	120	435.000197	0.45
-10	120	435.000182	0.42
0	120	435.000186	0.43
10	120	435.000186	0.43
20	120	435.000164	0.38
30	120	435.000165	0.38
40	120	435.000155	0.36
50	120	435.000132	0.30
60	120	435.000138	0.32
25	102	435.000119	0.27
25	138	435.000093	0.21

Reference Frequency: 435 MHz, Limit: 1.5 ppm			
Temperature	Voltage	Reading	Frequency Error
°C	V _{DC}	MHz	ppm
-30	13.6	435.000264	0.61
-20	13.6	435.000244	0.56
-10	13.6	435.000228	0.52
0	13.6	435.000199	0.46
10	13.6	435.000174	0.40
20	13.6	435.000194	0.45
30	13.6	435.000179	0.41
40	13.6	435.000189	0.43
50	13.6	435.000214	0.49
60	13.6	435.000235	0.54
25	10.8	435.000207	0.48
25	15.6	435.000264	0.61

Note: The EUT is a base station

FCC Part 22:

Reference Frequency: 454.5 MHz, Limit: 2.5 ppm			
Temperature	Voltage	Reading	Frequency Error
°C	V _{AC}	MHz	ppm
-30	120	454.500155	0.34
-20	120	454.500166	0.36
-10	120	454.500137	0.30
0	120	454.500120	0.26
10	120	454.500136	0.30
20	120	454.500146	0.32
30	120	454.500143	0.31
40	120	454.500120	0.26
50	120	454.500122	0.27
60	120	454.500138	0.30
25	108	454.500150	0.33
25	132	454.500156	0.34

Reference Frequency: 454.5 MHz, Limit: 2.5 ppm			
Temperature	Voltage	Reading	Frequency Error
°C	V _{DC}	MHz	ppm
-30	13.6	454.500164	0.36
-20	13.6	454.500180	0.39
-10	13.6	454.500153	0.34
0	13.6	454.500149	0.33
10	13.6	454.500123	0.27
20	13.6	454.500111	0.24
30	13.6	454.500106	0.23
40	13.6	454.500134	0.29
50	13.6	454.500153	0.34
60	13.6	454.500127	0.28
25	10.8	454.500123	0.27
25	15.6	454.500142	0.31

Note: The EUT is a base station

FCC §90.214 - TRANSIENT FREQUENCY BEHAVIOR

Applicable Standard

Regulations: FCC §90.214

Test method: ANSI/TIA-603-D 2010, section 2.2.19.3


Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
R&S	Spectrum analyzer	FSEM	DE31388	2013-05-07	2014-05-06
HP	Signal Generator	8648A	3426A00831	2013-11-06	2014-11-05

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

- Connect the EUT and test equipment as shown on the following block diagram.
- Set the Spectrum Analyzer to measure FM deviation, and tune the RF frequency to the transmitter assigned frequency.
- Set the signal generator to the assigned transmitter frequency and modulate it with a 1 kHz tone at ± 12.5 kHz deviation and set its output level to -100dBm.
- Turn on the transmitter.
- Supply sufficient attenuation via the RF attenuator to provide an input level to the Spectrum Analyzer that is 40 dB below the maximum allowed input power when the transmitter is operating at its rated power level. Note this power level on the Spectrum Analyzer as P_0 .
- Turn off the transmitter.
- Adjust the RF level of the signal generator to provide RF power equal to P_0 . This signal generator RF level shall be maintained throughout the rest of the measurement.
- Remove the attenuation 1, so the input power to the Spectrum Analyzer is increased by 30 dB when the transmitter is turned on.
- Adjust the vertical amplitude control of the spectrum analyzer to display the 1000 Hz at ± 4 divisions vertically centered on the display. Set trigger mode of the Spectrum Analyzer to "Video", and tune the "trigger level" on suitable level. Then set the "trigger offset" to -10ms for turn on and -15ms for turn off.
- Turn on the transmitter and the transient wave will be captured on the screen of Spectrum Analyzer. Observe the stored display. The instant when the 1 kHz test signal is completely suppressed is considered to be t_{on} . The trace should be maintained within the allowed divisions during the period t_1 and t_2 .
- Then turn off the transmitter, and another transient wave will be captured on the screen of Spectrum Analyzer. The trace should be maintained within the allowed divisions during the period t_3 .

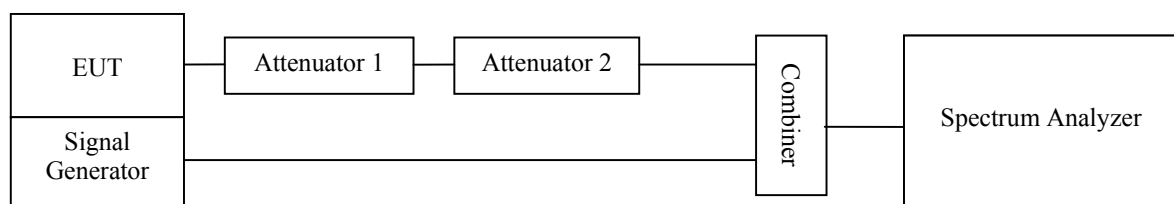

Test Data**Environmental Conditions**


Temperature:	23.9°C
Relative Humidity:	42 %
ATM Pressure:	101.2 kPa

The testing was performed by Leon Chen on 2014-01-24.


Channel Separation (kHz)	Period (ms)	Maximum frequency difference	Result
12.5	<10 (t1)	± 12.5 kHz	Pass
	<25 (t2)	± 6.25 kHz	
	<10 (t3)	± 12.5 kHz	

Please refer to the following plots.

435 MHz – Turn on

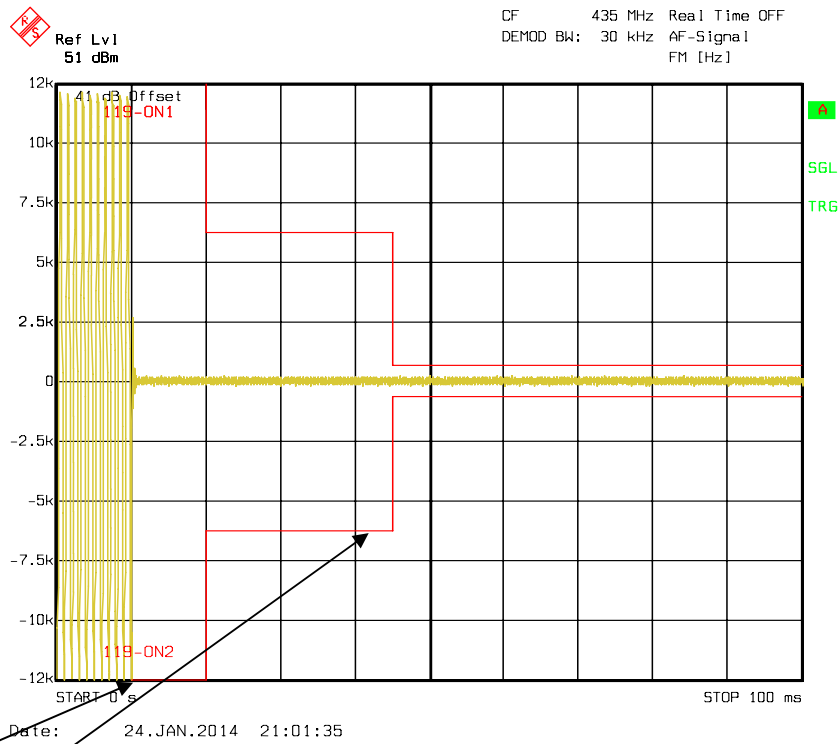

435 MHz – Turn off

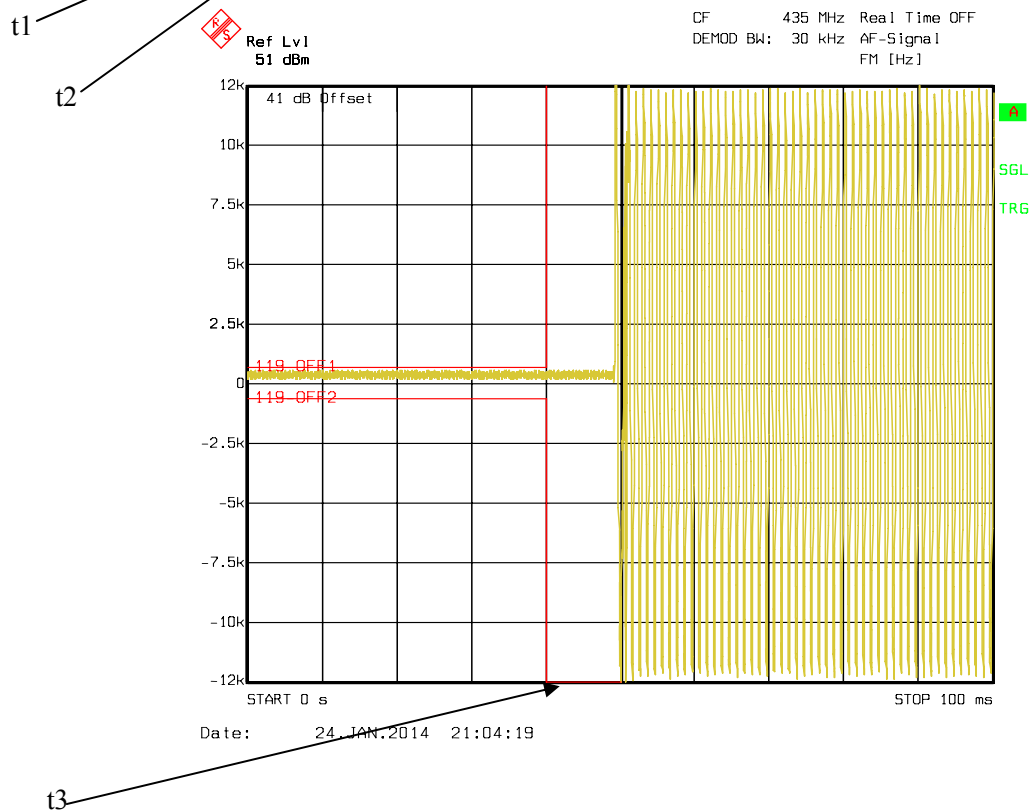

DECLARATION LETTER

sepura

Sepura plc

Radio House, St Andrew's Road,
Cambridge CB4 1GR, England.

Tel: + 44 (0) 1223 876000

Fax: + 44 (0) 1223 879000

sepura.com

Date: 2013-12-26

DECLARATION OF SIMILARITY

Dear Sir or Madam:

We, Sepura plc, hereby declare that our product: DMR Repeater, model: SCR8040 and SER8040 are electrically identical with the same electromagnetic emissions and electromagnetic compatibility characteristics as model SBR8040 which was test by BACL, the results of which are featured in BACL project.

A description of the differences between the tested model and those that are declared similar areas follows:

Models: SBR8040, SCR8040, SER8040. The only difference is the model name.

Please contact me should there be need for any additional clarification or information.

Sincerely,



Company Officer: Steve Wood

Telephone Number: +44 (0)1223) 877354

Email: steve.wood@sepura.com

Position: Verification Engineering Team leader

Going further in critical communications



Sepura plc Registered in England No: 4353801 Registered office:
Radio House, St Andrew's Road, Cambridge CB4 1GR, England.



*****END OF REPORT*****