

TEST REPORT

Reference No. : WTX20X10075770W-3
FCC ID : 2AVFE-WILDFIREE2
Applicant : Fortune Ship International Industrial Limited
Address : UNIT C 24/F GOLDEN BEAR INDUSTRIAL CENTRE 66-82 CHAI WAN
KOK STREET TSUEN WAN NT, HONG KONG
Product Name : 4G Smart Phone
Test Model. : Wildfire E2
Standards : FCC Part 15.407
Date of Receipt sample : Oct.19, 2020
Date of Test : Oct.19, 2020 to Nov.16, 2020
Date of Issue : Nov.16, 2020
Test Result : Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308


Fax.: +86-755-33663309

Tested by:



Jason Su / Project Engineer

Reviewed By:



Lion Cai / RF Manager

Approved & Authorized By:



Silin Chen / Manager

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 TEST STANDARDS.....	5
1.3 TEST METHODOLOGY.....	5
1.4 TABLE FOR PARAMETERS OF TEST SOFTWARE SETTING	5
1.5 EUT OPERATING DURING TEST	6
1.6 TEST FACILITY	6
1.7 EUT SETUP AND TEST MODE.....	7
1.8 MEASUREMENT UNCERTAINTY	8
1.9 TEST EQUIPMENT LIST AND DETAILS	9
2. SUMMARY OF TEST RESULTS	11
3. ANTENNA REQUIREMENT	12
3.1 STANDARD APPLICABLE.....	12
3.2 EVALUATION INFORMATION.....	12
4. AUTOMATICALLY DISCONTINUE TRANSMISSION	13
4.1 STANDARD APPLICABLE.....	13
4.2 SUMMARY OF TEST RESULTS	13
5. POWER SPECTRAL DENSITY	14
5.1 STANDARD APPLICABLE.....	14
5.2 TEST PROCEDURE.....	14
5.3 SUMMARY OF TEST RESULTS/PLOTS	15
6. EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH.....	16
6.1 STANDARD APPLICABLE.....	16
6.2 TEST PROCEDURE.....	16
6.3 SUMMARY OF TEST RESULTS/PLOTS	18
7. MAXIMUM CONDUCTED OUTPUT POWER.....	19
7.1 STANDARD APPLICABLE.....	19
7.2 TEST PROCEDURE.....	19
7.3 SUMMARY OF TEST RESULTS/PLOTS	20
8. RADIATED SPURIOUS EMISSIONS.....	21
8.1 STANDARD APPLICABLE.....	21
8.2 TEST PROCEDURE.....	21
8.3 TEST RECEIVER SETUP	23
8.4 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	23
8.5 SUMMARY OF TEST RESULTS/PLOTS	23
9. FREQUENCY STABILITY	54
9.1 STANDARD APPLICABLE.....	54
9.2 TEST PROCEDURE.....	54
9.3 SUMMARY OF TEST RESULTS/PLOTS	54
10. CONDUCTED EMISSIONS	55
10.1 TEST PROCEDURE.....	55
10.2 BASIC TEST SETUP BLOCK DIAGRAM.....	55
10.3 TEST RECEIVER SETUP	55
10.4 SUMMARY OF TEST RESULTS/PLOTS	55
APPENDIX SUMMARY	58
APPENDIX A.....	59
APPENDIX B	66
APPENDIX C	76
APPENDIX D.....	83

APPENDIX PHOTOGRAPHS.....84**Report version**

Version No.	Date of issue	Description
Rev.00	Nov.16, 2020	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant:	Fortune Ship International Industrial Limited
Address of applicant:	UNIT C 24/F GOLDEN BEAR INDUSTRIAL CENTRE 66-82 CHAI WAN KOK STREET TSUEN WAN NT, HONG KONG
Manufacturer:	Fortune Ship International Industrial Limited
Address of manufacturer:	UNIT C 24/F GOLDEN BEAR INDUSTRIAL CENTRE 66-82 CHAI WAN KOK STREET TSUEN WAN NT, HONG KONG

General Description of EUT	
Product Name:	4G Smart Phone
Trade Name:	HTC
Model No.:	Wildfire E2
Adding Model(s):	/
Rated Voltage:	DC3.85V
Battery Capacity:	/
Power Adapter:	ES568-U050200XYF INPUT: AC100-240V, 50/60Hz, 0.5A; Output: DC5V, 2000mA
Software Version:	HTC_WILDFIRE_E2
Hardware Version:	YK685-MB-V1.1
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11a, 802.11n(HT20) , 802.11n-HT40, 802.11ac-VHT20, 802.11ac-VHT40, 802.11ac-VHT80
Frequency Range:	5150-5250MHz, 5725-5850MHz
RF Output Power:	12.15dBm (Conducted)
Type of Modulation:	BPSK, QPSK, 16QAM, 64QAM, 256QAM
Data Rate:	6-54Mbps, up to 200Mbps
Quantity of Channels:	15
Type of Antenna:	Integral Antenna
Antenna Gain:	1.03dBi

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.407: General technical requirements.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

KDB789033 D02 v02r01: GUIDELINES FOR COMPLIANCE TESTING OF UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE (U-NII) DEVICES PART 15, SUBPARTE.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB789033 D02 v02r01. The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Table for parameters of Test Software setting

Enter “*###3646633#*##” into the phone to enter the engineer mode, you can start to test. During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Mode	Test Frequency (MHz)												
	NCB: 20MHz												
	5180	5200	5240	5260	5300	5320	5500	5580	5700	5720	5745	5785	5825
802.11a 6Mbps	20	20	20	/	/	/	/	/	/	/	22	22	22
802.11n-HT20 MCS0	20	20	20	/	/	/	/	/	/	/	22	22	22
Mode	NCB: 40MHz												
	5190	5230	5270	5310	5510	5550	5670	5710	5755	5795			
802.11n-HT40 MCS0	20	20	/	/	/	/	/	/	/	22	22		
Mode	NCB: 80MHz												
	5210		5290		5530		5610		5690		5775		
802.11ac-VH80 MCS0/Nss2	20		/		/		/		/		22		

1.5 EUT Operating during test

EUT was programmed to be in continuously transmitting mode. During the test, EUT operation to normal function and programs under Android were executed.

1.6 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.7 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11a	5180MHz,5200MHz,5240MHz, ,5745MHz, 5785MHz,5825MHz
TM2	802.11n-HT20	5180MHz,5200MHz,5240MHz, 5745MHz, 5785MHz,5825MHz
TM3	802.11n-HT40	5190MHz,5230MHz, 5755MHz,5795MHz
TM4	802.11ac-VH80	5210MHz, 5775MHz

Note: All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report.

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	45~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB-C Cable	0.99	Unshielded	Without Ferrite
Earphone Cable	1.23	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Notebook	Lenovo	TianYi310-14ISK	/

1.8 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.9 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2020-04-28	2021-04-27
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2020-04-28	2021-04-27
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2020-04-28	2021-04-27
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2020-04-28	2021-04-27
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2020-04-28	2021-04-27
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2019-05-05	2021-05-04
SEMT-1042	Horn Antenna	ETS	3117	00086197	2019-05-05	2021-05-04
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2019-05-05	2021-05-04
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2019-05-05	2021-05-04
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2020-04-28	2021-04-27
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2020-04-28	2021-04-27
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2020-04-28	2021-04-27
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2020-04-28	2021-04-27
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2020-04-28	2021-04-27
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2020-04-28	2021-04-27
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2019-05-05	2021-05-04
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2020-04-28	2021-04-27
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2020-04-28	2021-04-27
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2020-04-28	2021-04-27
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2020-03-17	2021-03-16
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2020-03-17	2021-03-16
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2020-03-17	2021-03-16
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2020-03-17	2021-03-16
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2020-03-17	2021-03-16
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2020-03-17	2021-03-16

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203; §15.405	Antenna Requirement	Compliant
15.407 (c)	Automatically Discontinue Transmission	Compliant
§15.207; §15.407(b)(6)	Conducted Emission	Compliant
§15.407(a)(1),(2)	Power Spectral Density	Compliant
§15.407(e)	Emission Bandwidth and Occupied Bandwidth	Compliant
§15.407(a)(1),(2)	Maximum Conducted Output Power	Compliant
§15.407(b)(1),(2),(3),(4)	Undesirable emission	Compliant
§15.205; §15.407(b)(1),(2),(3)	Radiated Emission	Compliant
§15.407(g)	Frequency Stability	Compliant
§15.407(h)	Dynamic Frequency Selection (DFS)	Compliant

N/A: Not applicable

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Evaluation Information

This product has an integral antenna, fulfill the requirement of this section.

4. Automatically Discontinue Transmission

4.1 Standard Applicable

According to FCC Part 15.407(c), the device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

4.2 Summary of Test Results

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

5. Power Spectral Density

5.1 Standard Applicable

Section 15.407(a) Power limits:

- (1) For the band 5.15-5.25 GHz.
- (iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

5.2 Test Procedure

According to 789033 D02 v02r01 General UNII Test Procedures New Rules v02, the following is the measurement procedure.

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500

kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500kHz bandwidth, the following adjustments to the procedures apply:

- a) Set RBW $\geq 1/T$, where T is defined in section II.B.1.a).
- b) Set VBW ≥ 3 RBW.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result, whereas RBW (< 500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/\text{RBW})$ to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the sections 5.c) and 5.d) above, since RBW=100 kHz is available on nearly all spectrum analyzers.

5.3 Summary of Test Results/Plots

Please refer to Appendix A

6. Emission Bandwidth and Occupied Bandwidth

6.1 Standard Applicable

According to 15.407(a) and (e):

- (1) For the band 5.15-5.25 GHz.
- (iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
- (e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

6.2 Test Procedure

According to 789033 D02 v02r0r section C&D, the following is the measurement procedure.

1. Emission Bandwidth (EBW)
 - a) Set RBW = approximately 1% of the emission bandwidth.
 - b) Set the VBW > RBW.
 - c) Detector = Peak.

- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

D. 99 Percent Occupied Bandwidth

The 99-percent occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99-percent occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in section II.G.3.d). Measurements of 99-percent occupied bandwidth may also optionally be used in lieu of the EBW to 789033 D02 v02r01 General UNII Test Procedures New Rules v01 define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in section II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 *$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

6.3 Summary of Test Results/Plots

Please refer to Appendix B

7. Maximum Conducted Output Power

7.1 Standard Applicable

Section 15.407(a) Power limits:

- (1) For the band 5.15-5.25 GHz.
- (iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

7.2 Test Procedure

According to KDB789033 D02 v02r01 section E, the following is the measurement procedure.

- (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (ii) Set RBW = 1 MHz.
- (iii) Set VBW \geq 3 MHz.
- (iv) Number of points in sweep ≥ 2 Span / RBW. (This ensures that bin-to-bin spacing is \leq RBW/2, so that narrowband signals are not lost between frequency bins.)

Waltek Testing Group (Shenzhen) Co., Ltd.

<http://www.semtest.com.cn>

- (v) Sweep time = auto.
- (vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- (vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle \geq 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run”.
- (viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- (ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument’s band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

7.3 Summary of Test Results/Plots

Please refer to Appendix C

8. Radiated Spurious Emissions

8.1 Standard Applicable

According to §15.407(b), undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

According to §15.407(b)(6), Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

According to §15.407(b)(7), The provisions of §15.205 apply to intentional radiators operating under this section.
789033 D02 v02r01 General UNII Test Procedures New Rules v01

If radiated measurements are performed, field strength is then converted to EIRP as follows:

$$\text{EIRP} = ((E \cdot d)^2) / 30$$

where:

- E is the field strength in V/m;
- d is the measurement distance in meters;
- EIRP is the equivalent isotropically radiated power in watts.


8.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.407(b)(6) and FCC Part 15.209 Limit..


The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.


The test setup for emission measurement below 30MHz..

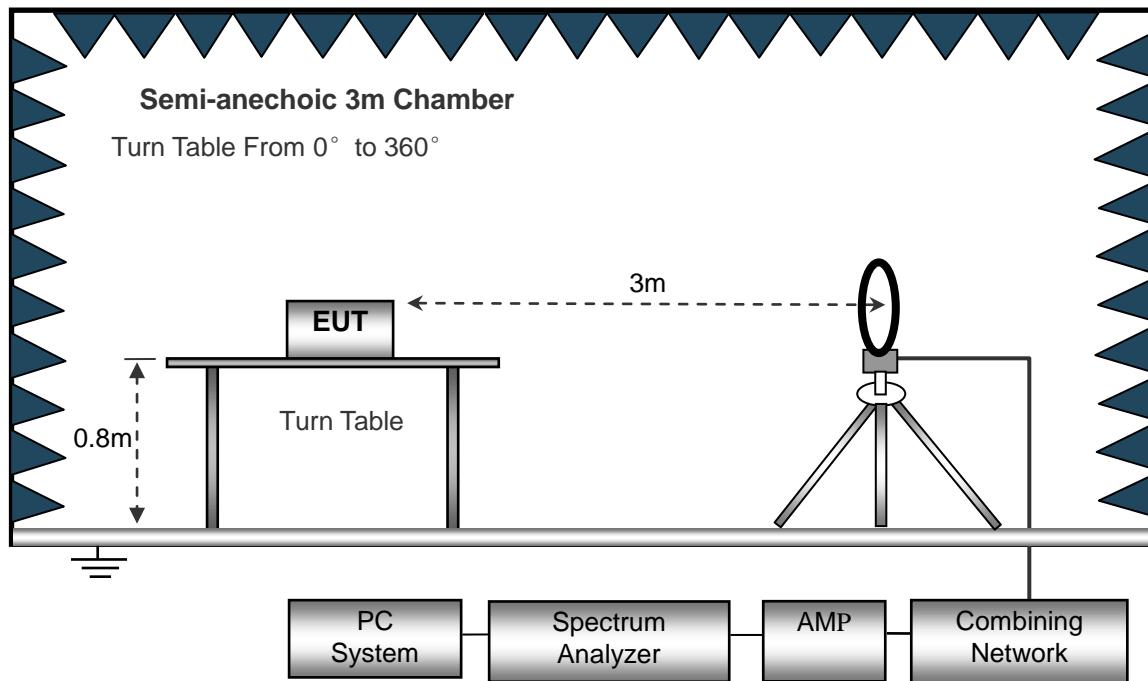

The test setup for emission measurement from 30 MHz to 1 GHz..

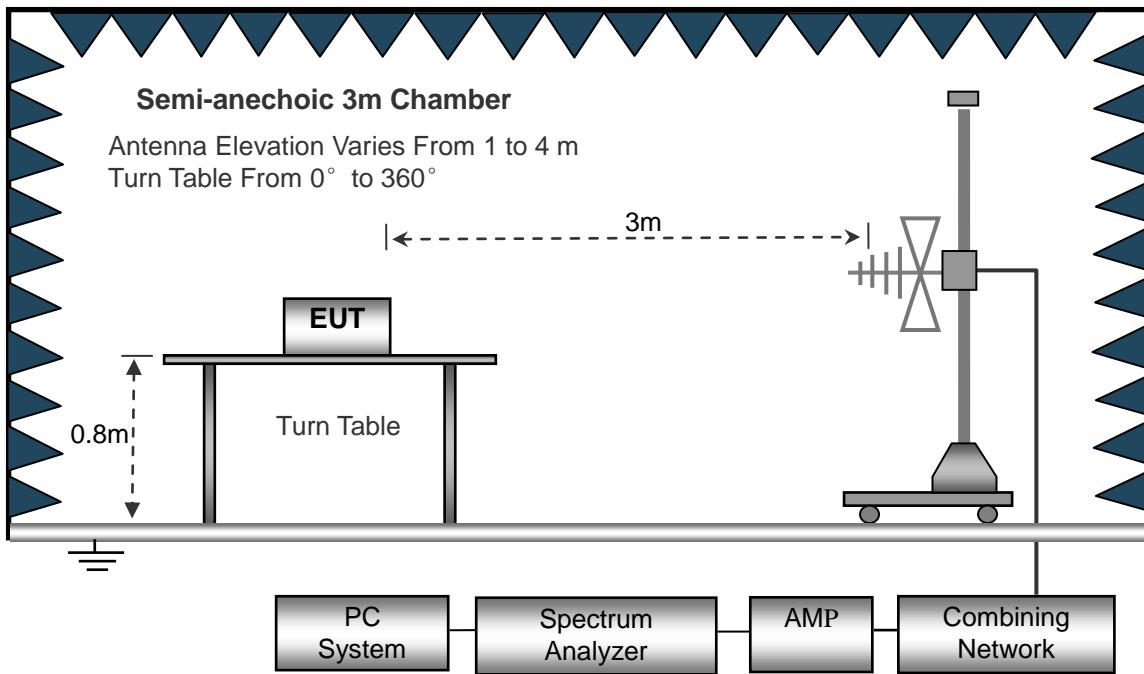

The test setup for emission measurement above 1 GHz..

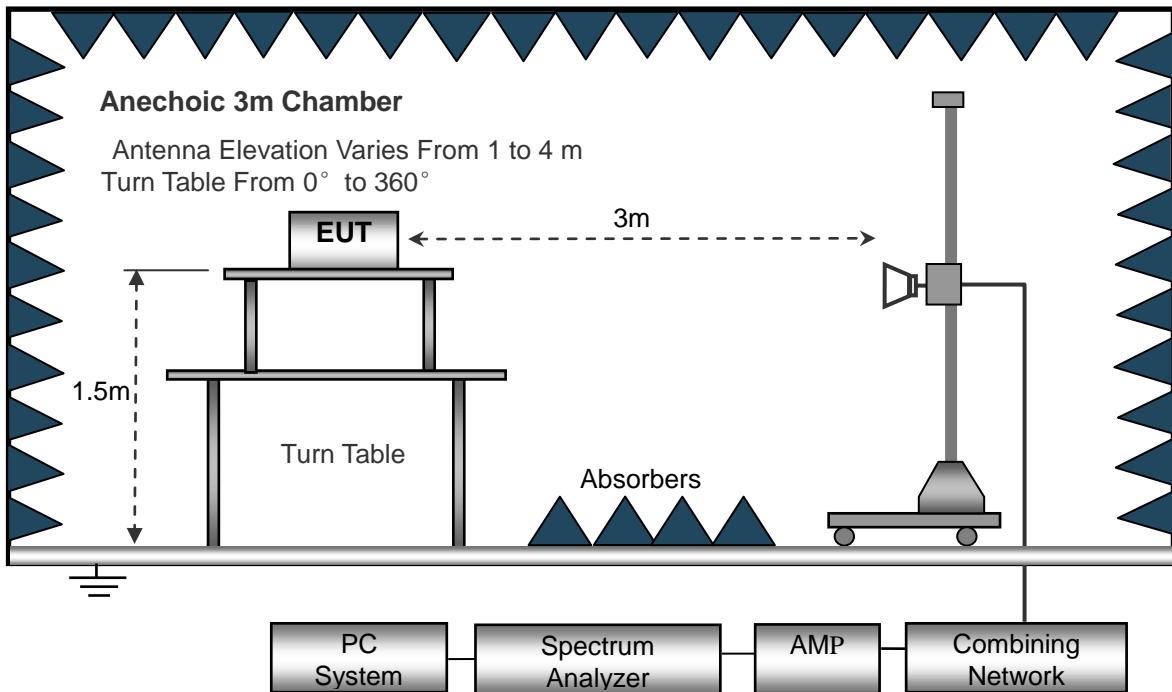

8.3 Test Receiver Setup

During the radiated emission test for above 1GHz, the test receiver was set with the following configurations:

For peak detector:

RBW = 1000kHz, VBW = 3000kHz, Sweep Time = Auto

For average detector:

RBW = 1000kHz, VBW = 10Hz, Sweep Time = Auto

8.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

8.5 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.


Waltek Testing Group (Shenzhen) Co., Ltd.

<http://www.semtest.com.cn>


- Spurious Emission From 30 MHz to 1 GHz
- 5150-5250MHz

802.11a


Test Channel	5180MHz(Worst case)	Polarity:	Horizontal
--------------	---------------------	-----------	------------

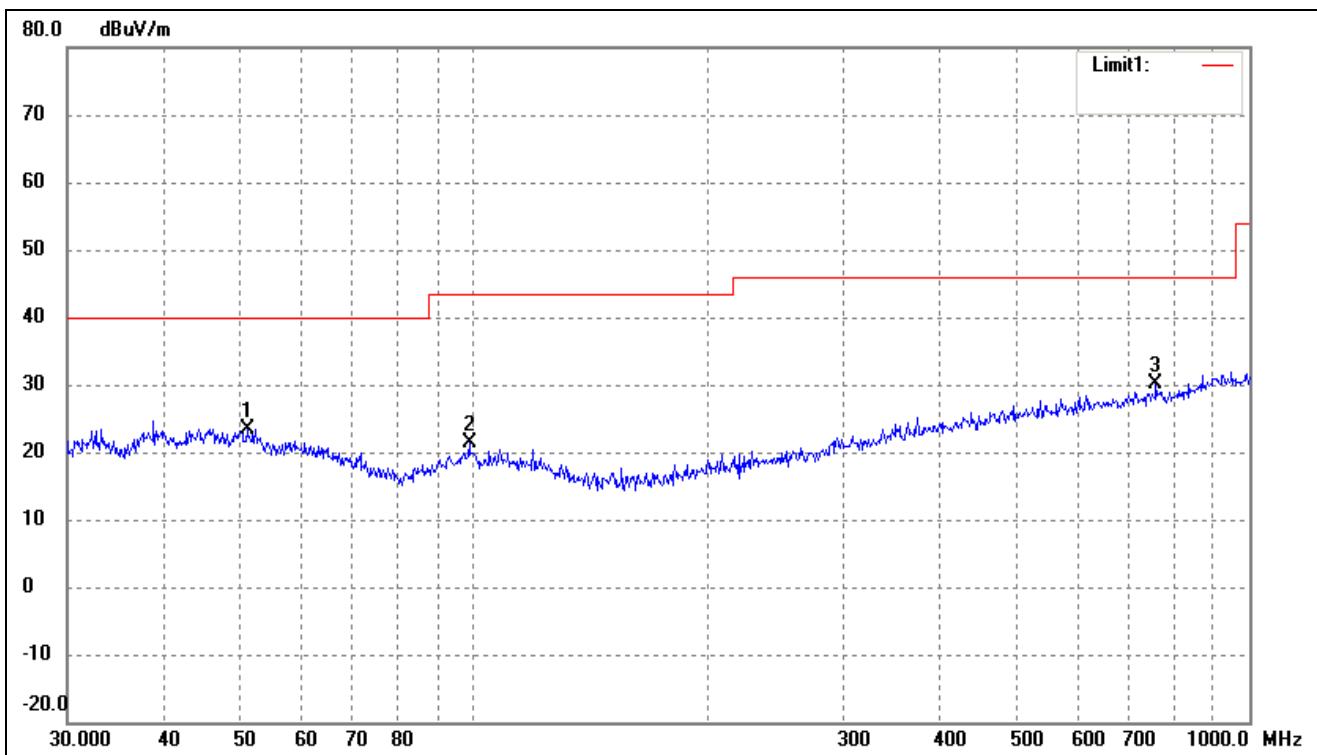


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	51.1209	35.26	-11.85	23.41	40.00	-16.59	-	-	peak
2	98.8326	34.80	-13.52	21.28	43.50	-22.22	-	-	peak
3	758.0408	31.34	-1.24	30.10	46.00	-15.90	-	-	peak

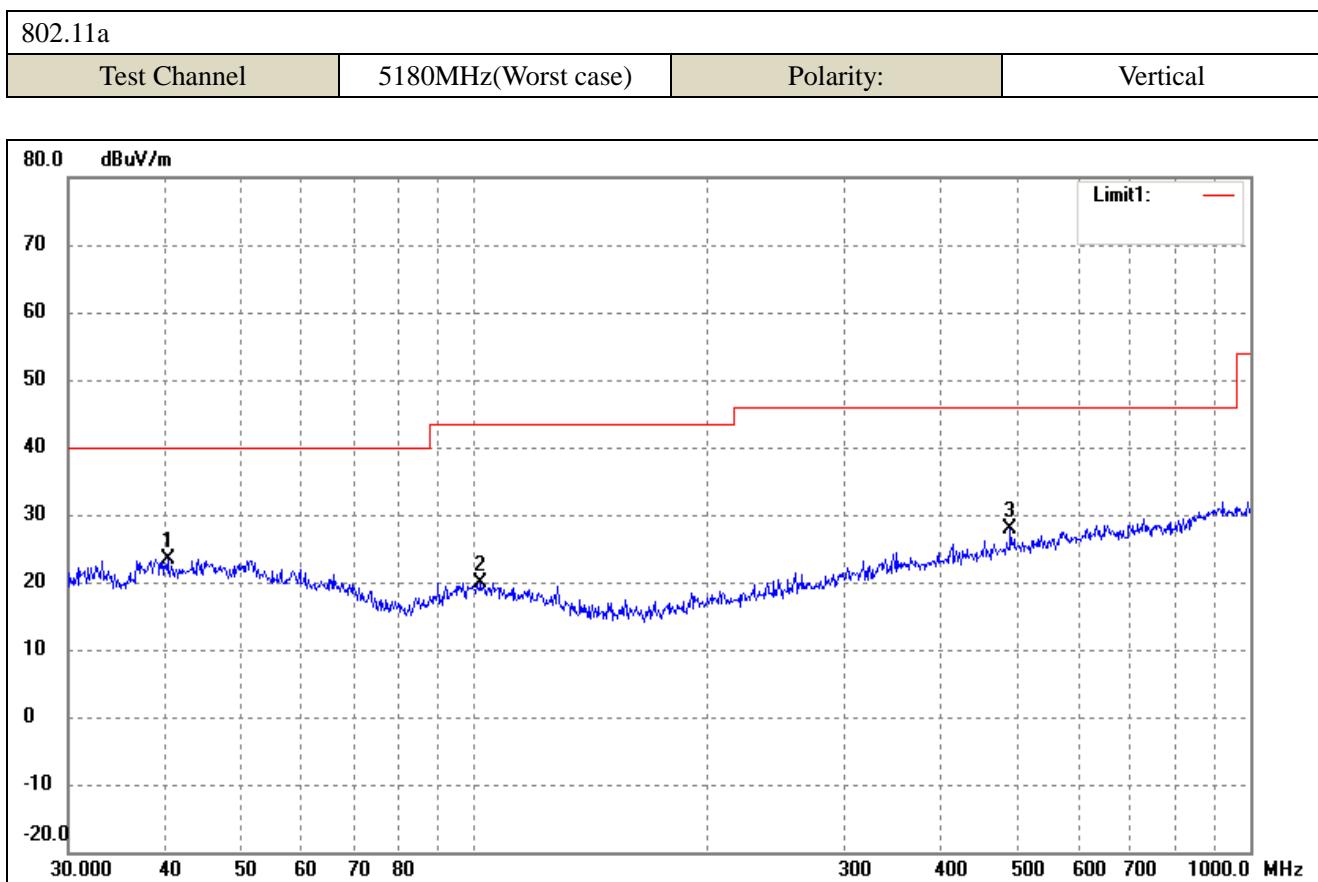


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	40.2757	35.38	-11.98	23.40	40.00	-16.60	-	-	peak
2	102.0014	33.25	-13.32	19.93	43.50	-23.57	-	-	peak
3	490.7447	32.16	-4.33	27.83	46.00	-18.17	-	-	peak

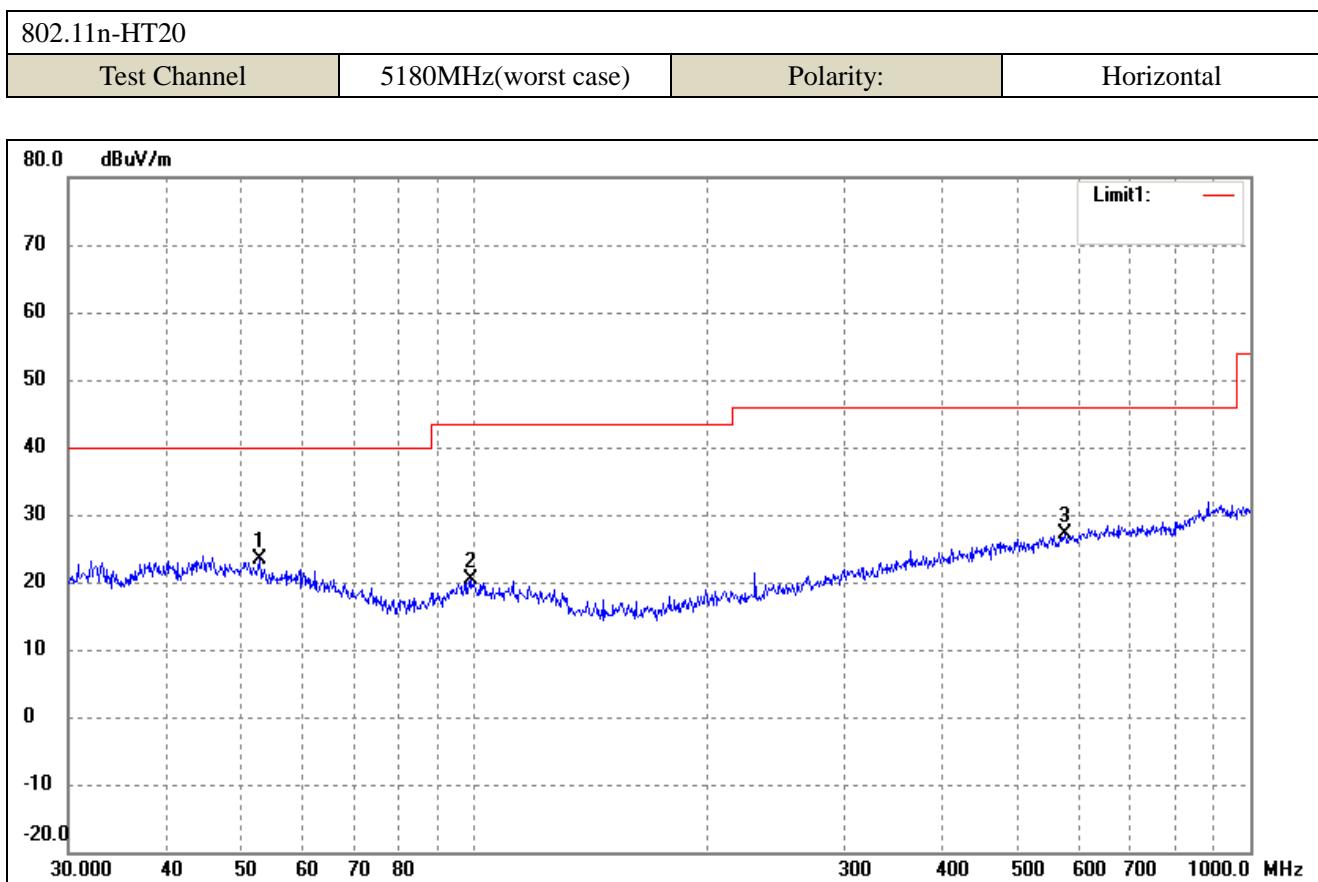


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	52.9453	35.79	-12.36	23.43	40.00	-16.57	-	-	peak
2	99.1797	33.92	-13.45	20.47	43.50	-23.03	-	-	peak
3	576.6443	29.60	-2.52	27.08	46.00	-18.92	-	-	peak

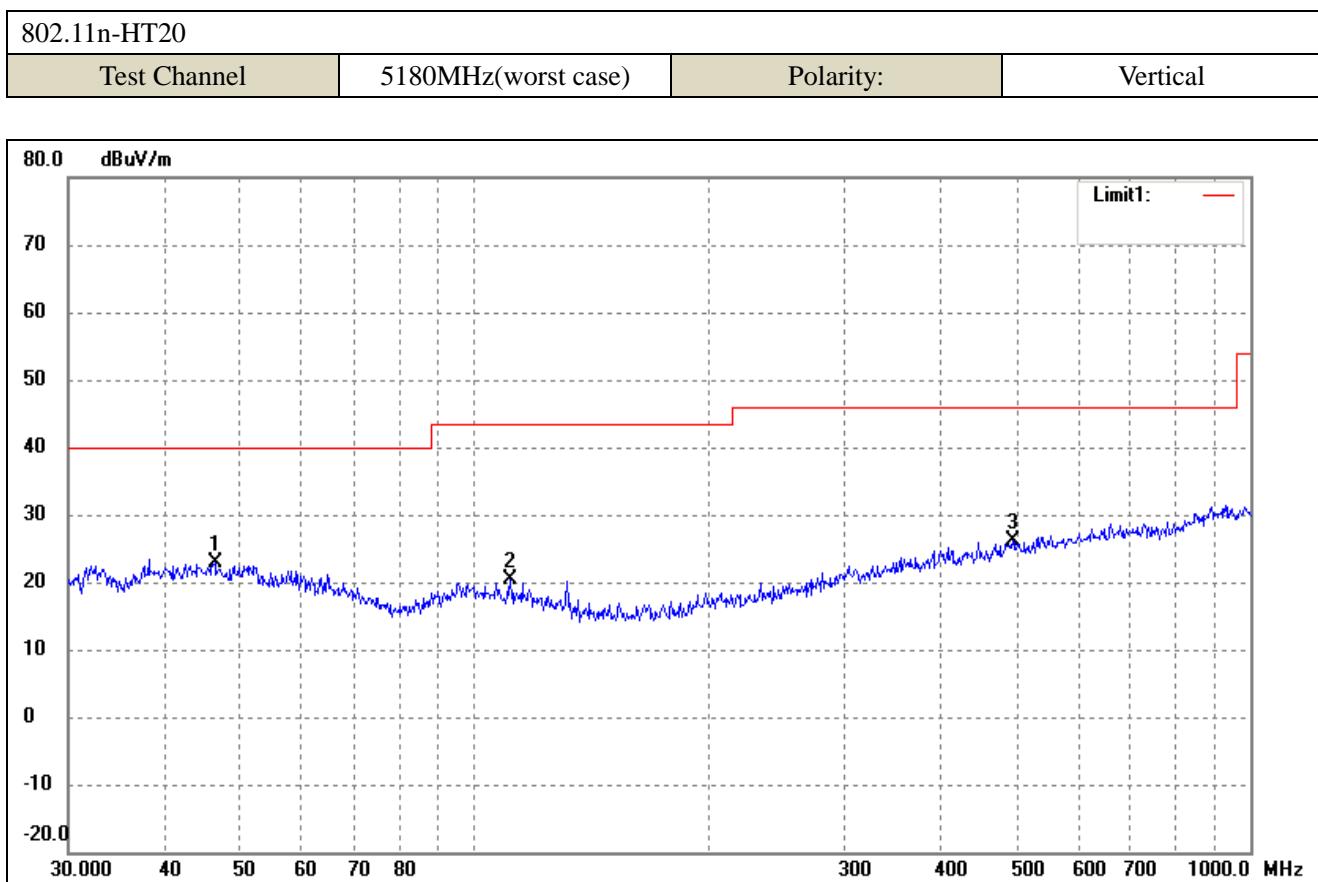


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	46.3402	34.49	-11.73	22.76	40.00	-17.24	-	-	peak
2	111.3468	33.85	-13.45	20.40	43.50	-23.10	-	-	peak
3	494.1984	30.31	-4.22	26.09	46.00	-19.91	-	-	peak

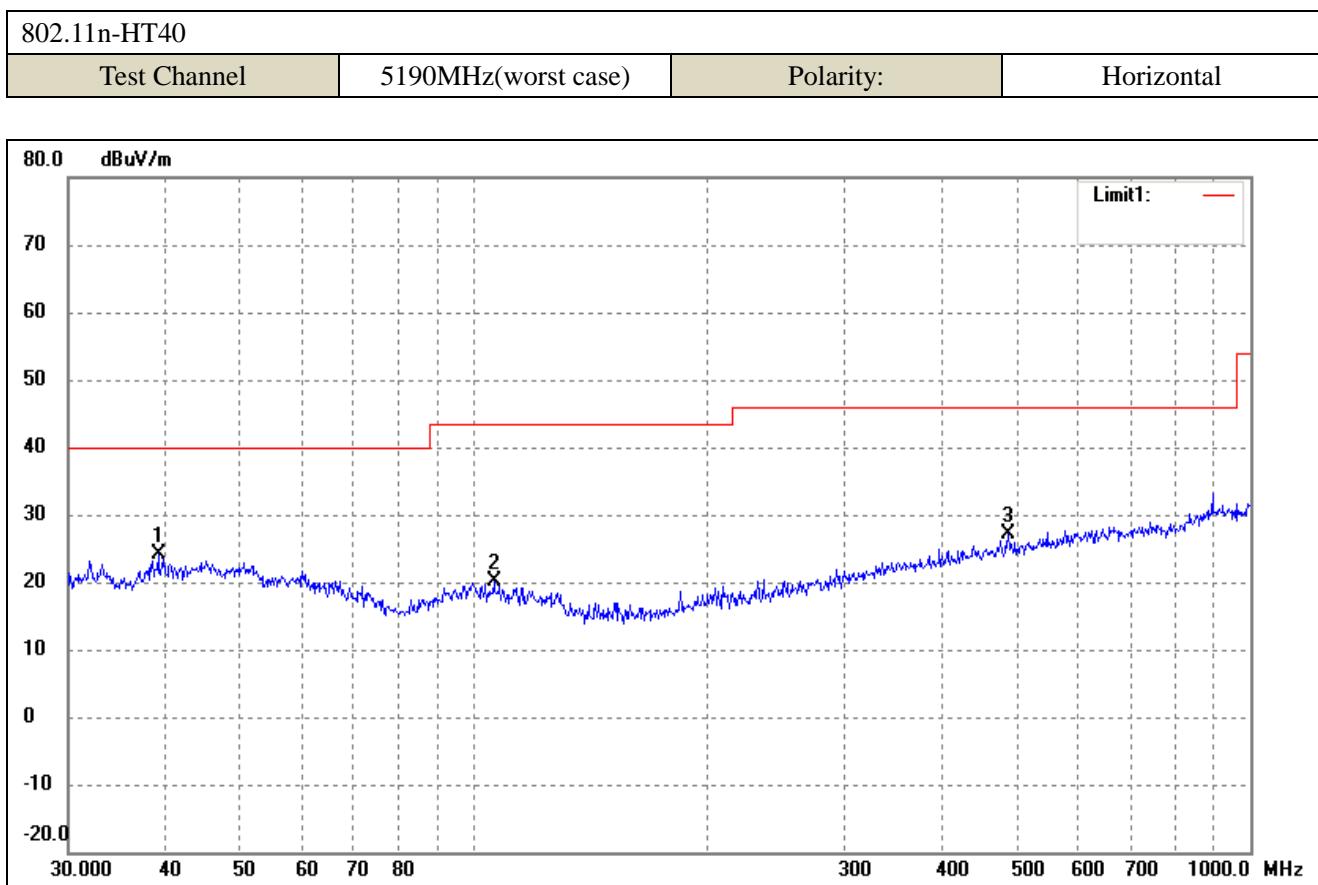


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	39.1616	36.37	-12.30	24.07	40.00	-15.93	-	-	peak
2	106.0126	33.43	-13.31	20.12	43.50	-23.38	-	-	peak
3	487.3151	31.50	-4.44	27.06	46.00	-18.94	-	-	peak

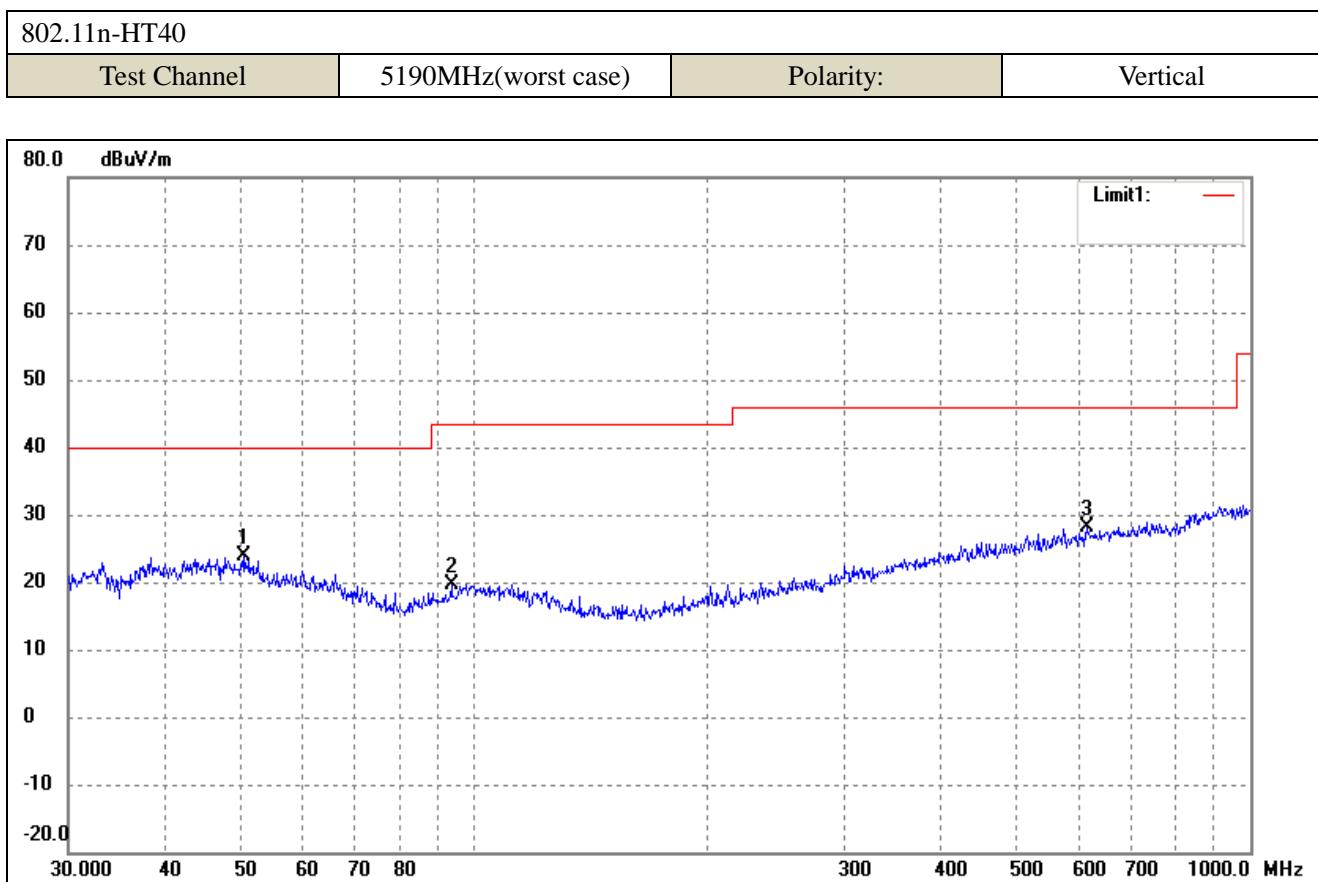

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	50.5860	35.48	-11.69	23.79	40.00	-16.21	-	-	peak
2	93.4402	33.94	-14.40	19.54	43.50	-23.96	-	-	peak
3	616.3718	30.26	-2.07	28.19	46.00	-17.81	-	-	peak

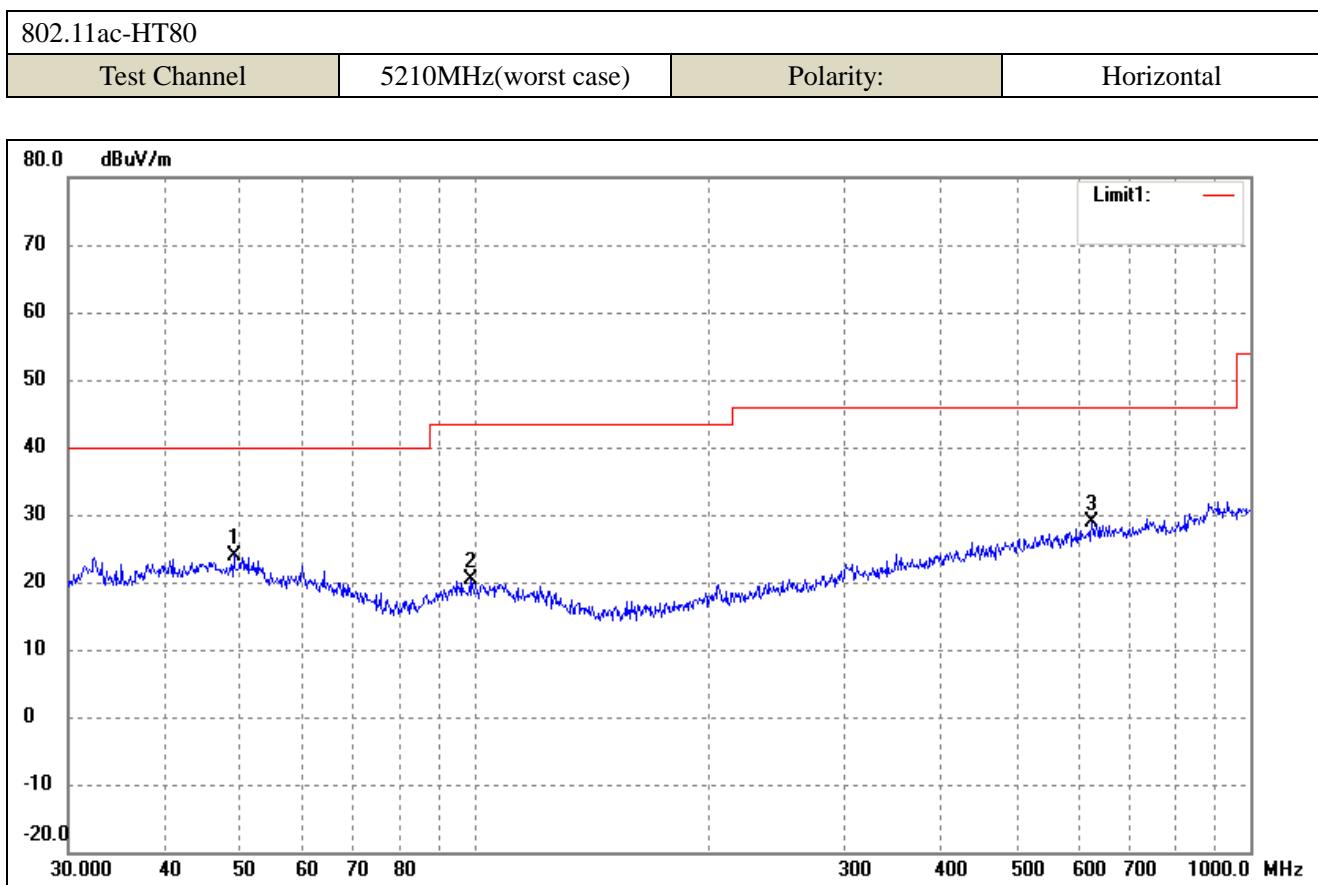

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	49.0145	35.59	-11.59	24.00	40.00	-16.00	-	-	peak
2	98.8326	33.99	-13.52	20.47	43.50	-23.03	-	-	peak
3	625.0780	31.13	-2.15	28.98	46.00	-17.02	-	-	peak

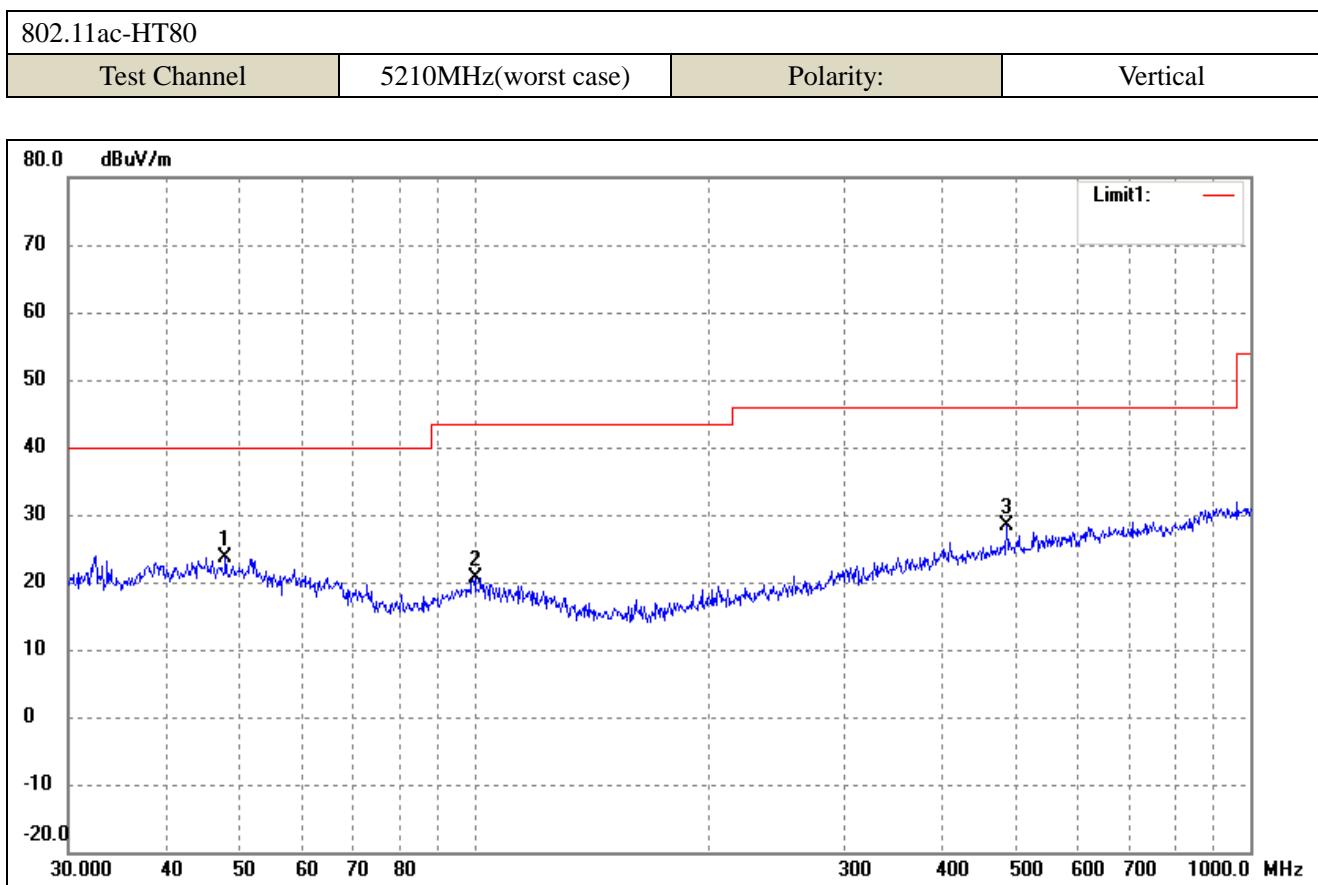


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	47.8260	35.17	-11.64	23.53	40.00	-16.47	-	-	peak
2	100.2286	34.06	-13.32	20.74	43.50	-22.76	-	-	peak
3	485.6093	32.80	-4.49	28.31	46.00	-17.69	-	-	peak


➤ 5725-5850MHz

802.11a


Test Channel	5745MHz(worst case)	Polarity:	Horizontal
--------------	---------------------	-----------	------------

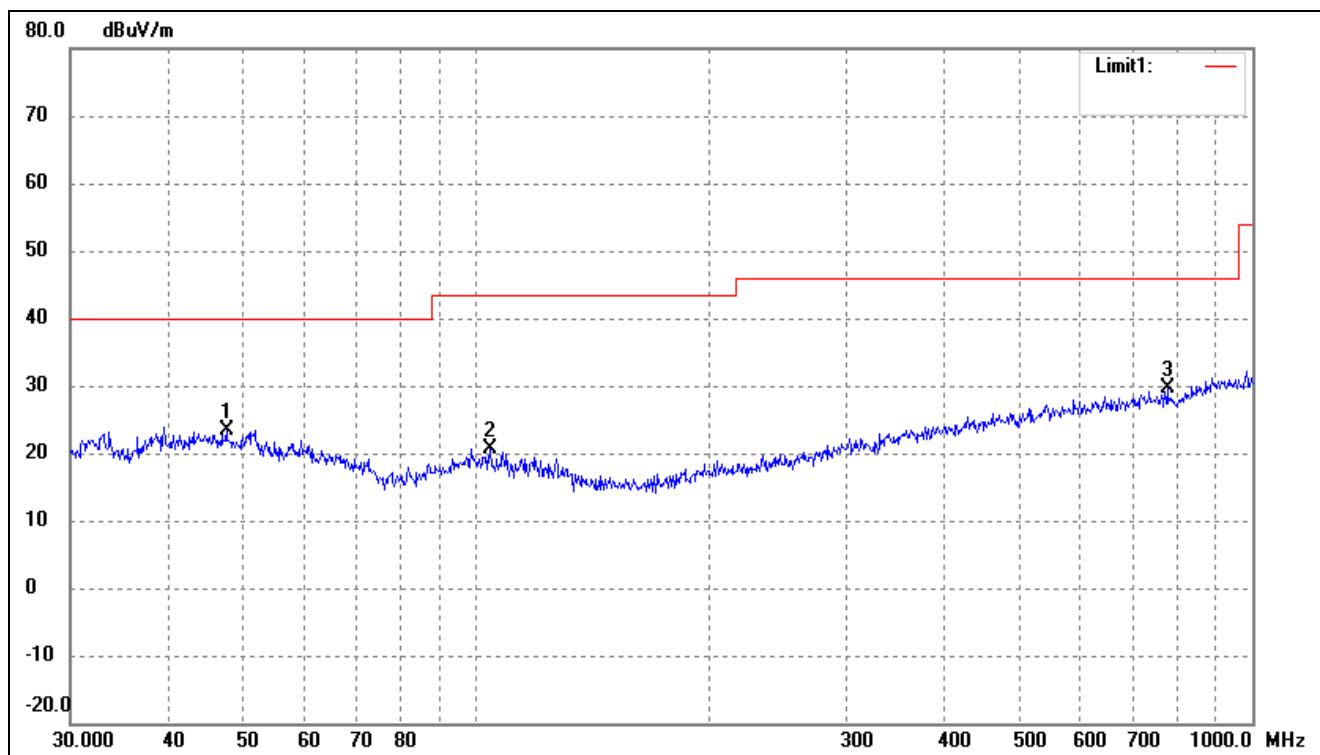


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	47.6586	35.15	-11.65	23.50	40.00	-16.50	-	-	peak
2	104.1701	33.96	-13.31	20.65	43.50	-22.85	-	-	peak
3	776.8778	30.74	-1.11	29.63	46.00	-16.37	-	-	peak

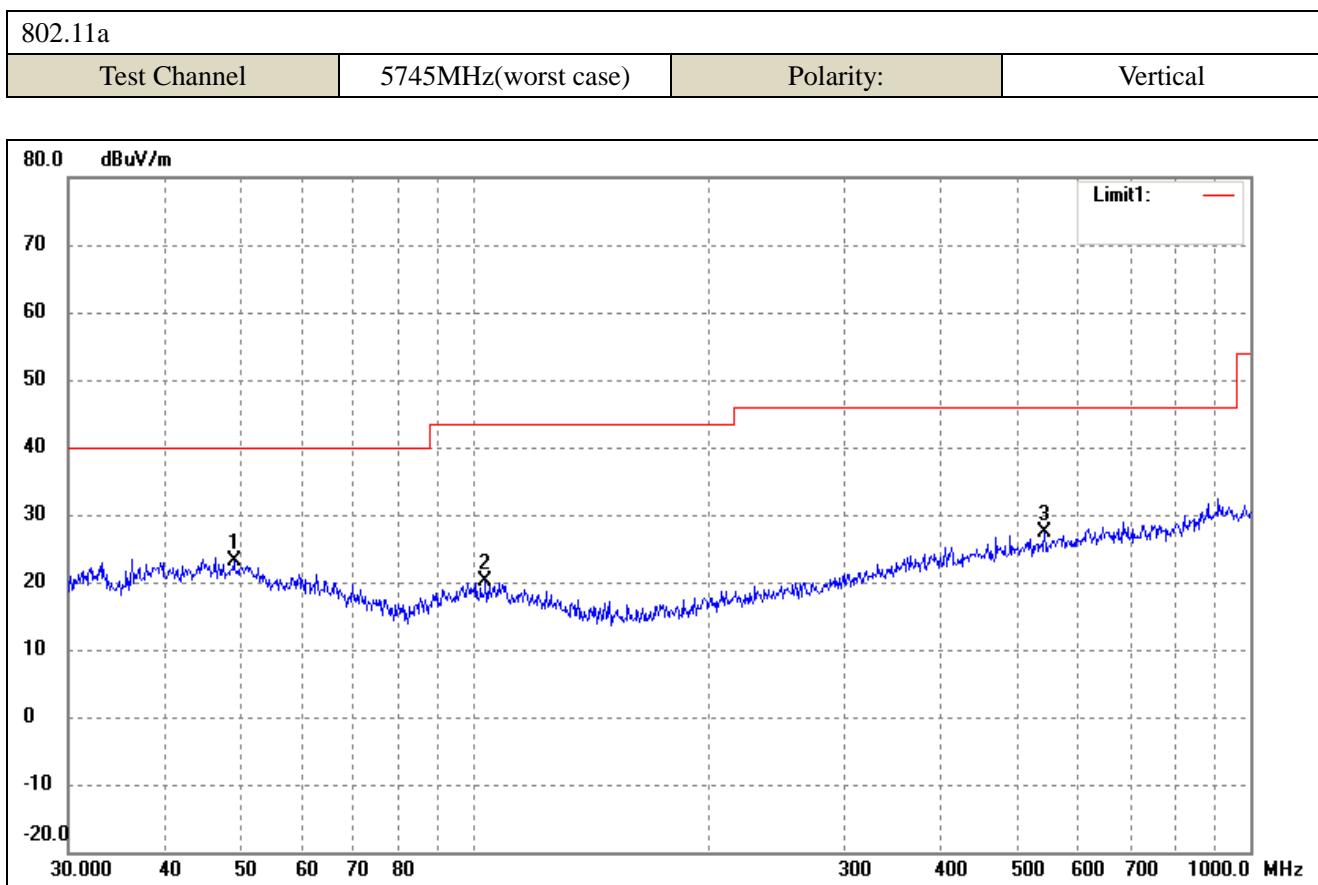


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	49.0145	34.70	-11.59	23.11	40.00	-16.89	-	-	peak
2	103.4421	33.39	-13.31	20.08	43.50	-23.42	-	-	peak
3	543.2742	31.25	-3.90	27.35	46.00	-18.65	-	-	peak

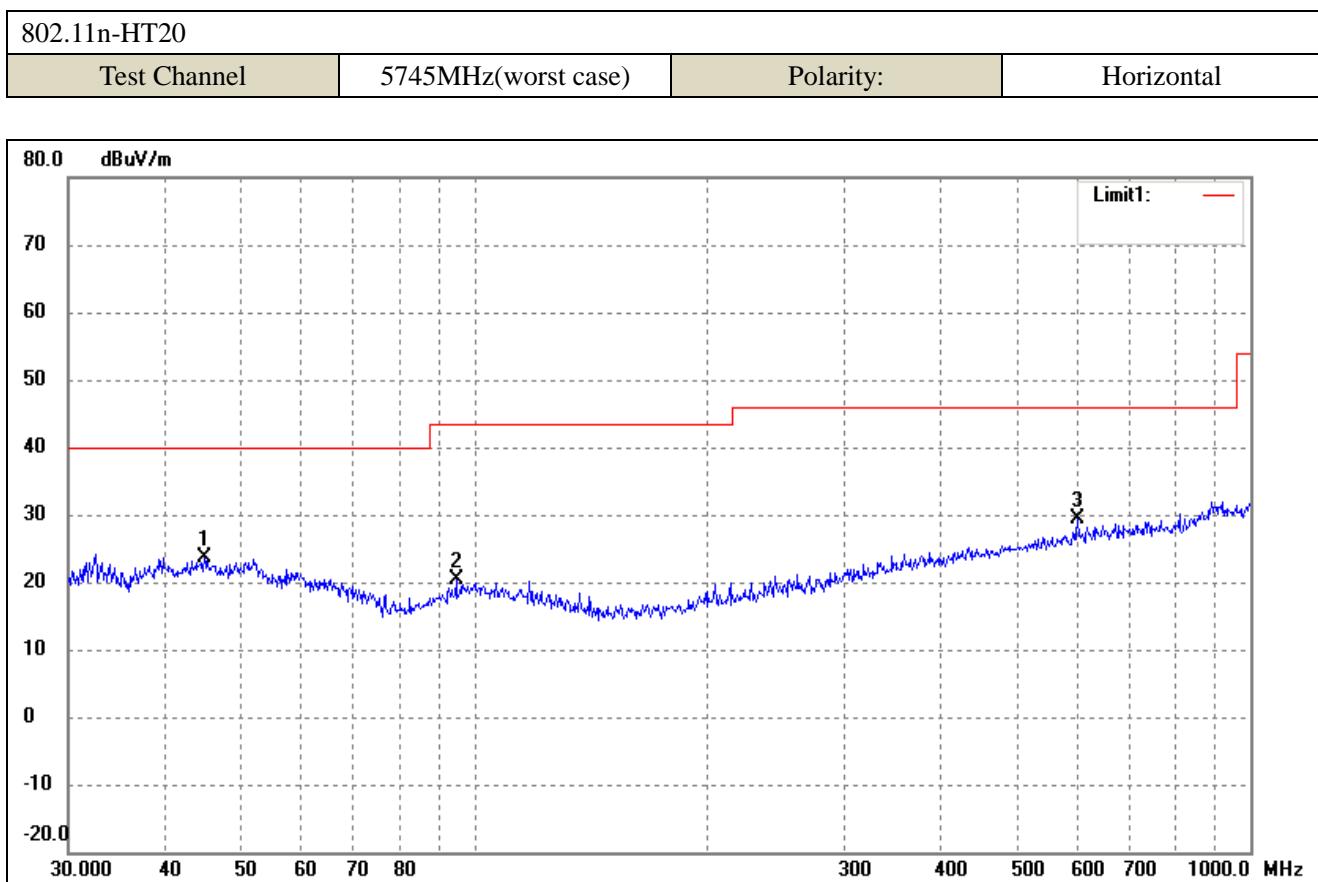


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	44.9006	35.31	-11.80	23.51	40.00	-16.49	-	-	peak
2	94.7601	34.51	-14.19	20.32	43.50	-23.18	-	-	peak
3	599.3213	31.42	-1.95	29.47	46.00	-16.53	-	-	peak

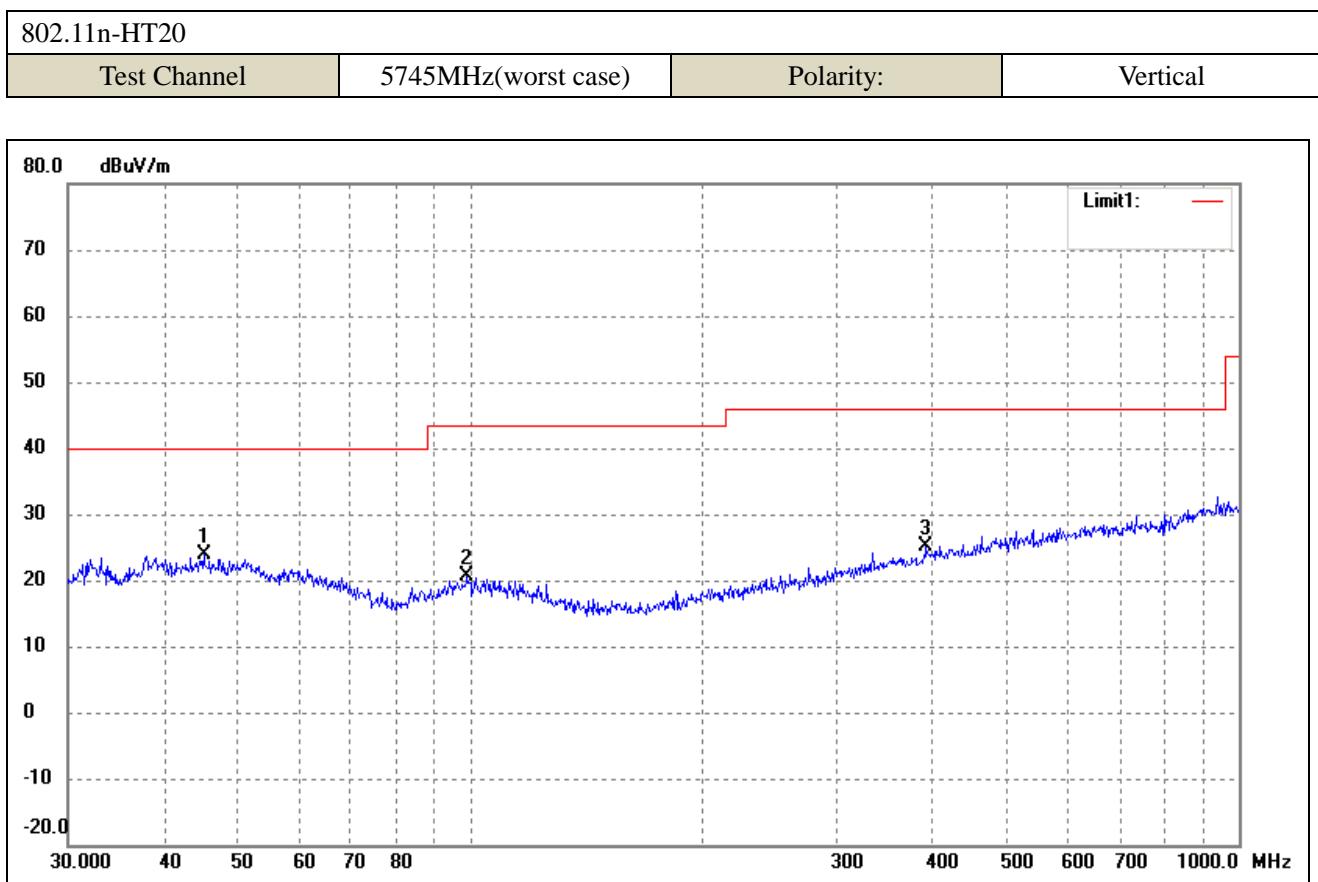


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	45.0583	35.71	-11.80	23.91	40.00	-16.09	-	-	peak
2	99.1797	33.96	-13.45	20.51	43.50	-22.99	-	-	peak
3	392.0951	31.84	-6.69	25.15	46.00	-20.85	-	-	peak

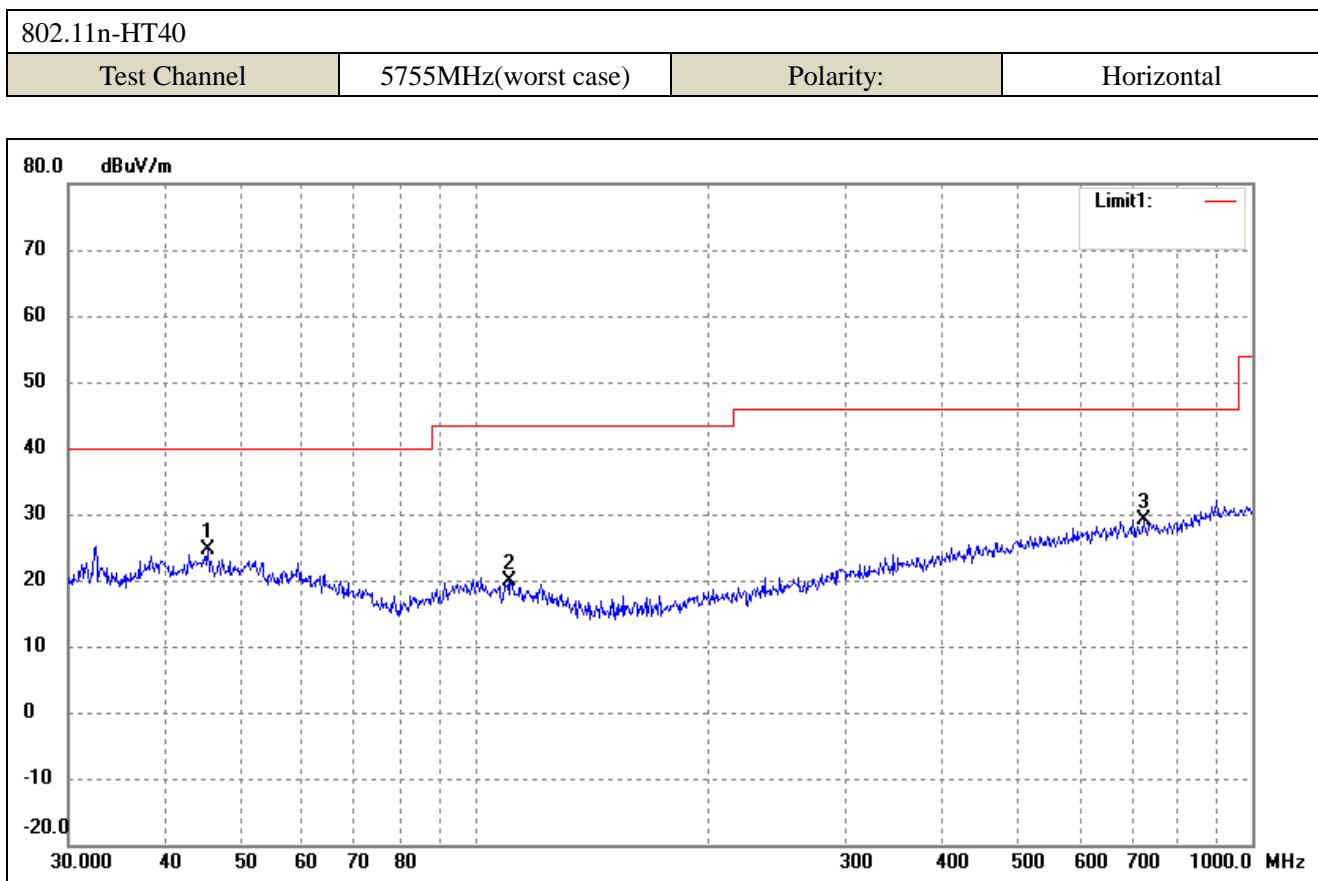


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	45.3755	36.47	-11.78	24.69	40.00	-15.31	-	-	peak
2	110.9571	33.40	-13.41	19.99	43.50	-23.51	-	-	peak
3	724.2611	30.15	-1.01	29.14	46.00	-16.86	-	-	peak

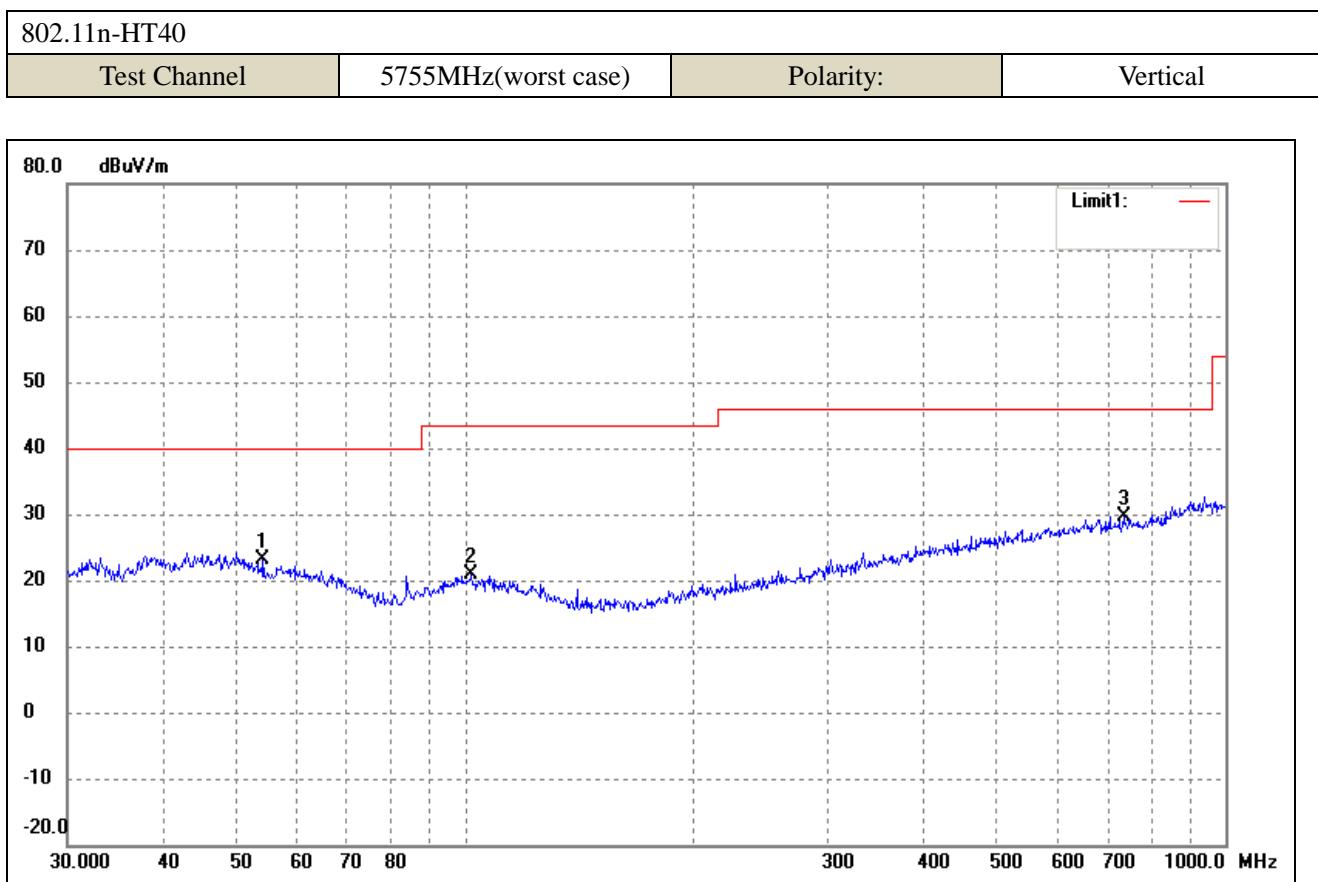

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	54.2610	35.91	-12.74	23.17	40.00	-16.83	-	-	peak
2	102.0014	34.08	-13.32	20.76	43.50	-22.74	-	-	peak
3	734.4913	30.81	-1.10	29.71	46.00	-16.29	-	-	peak

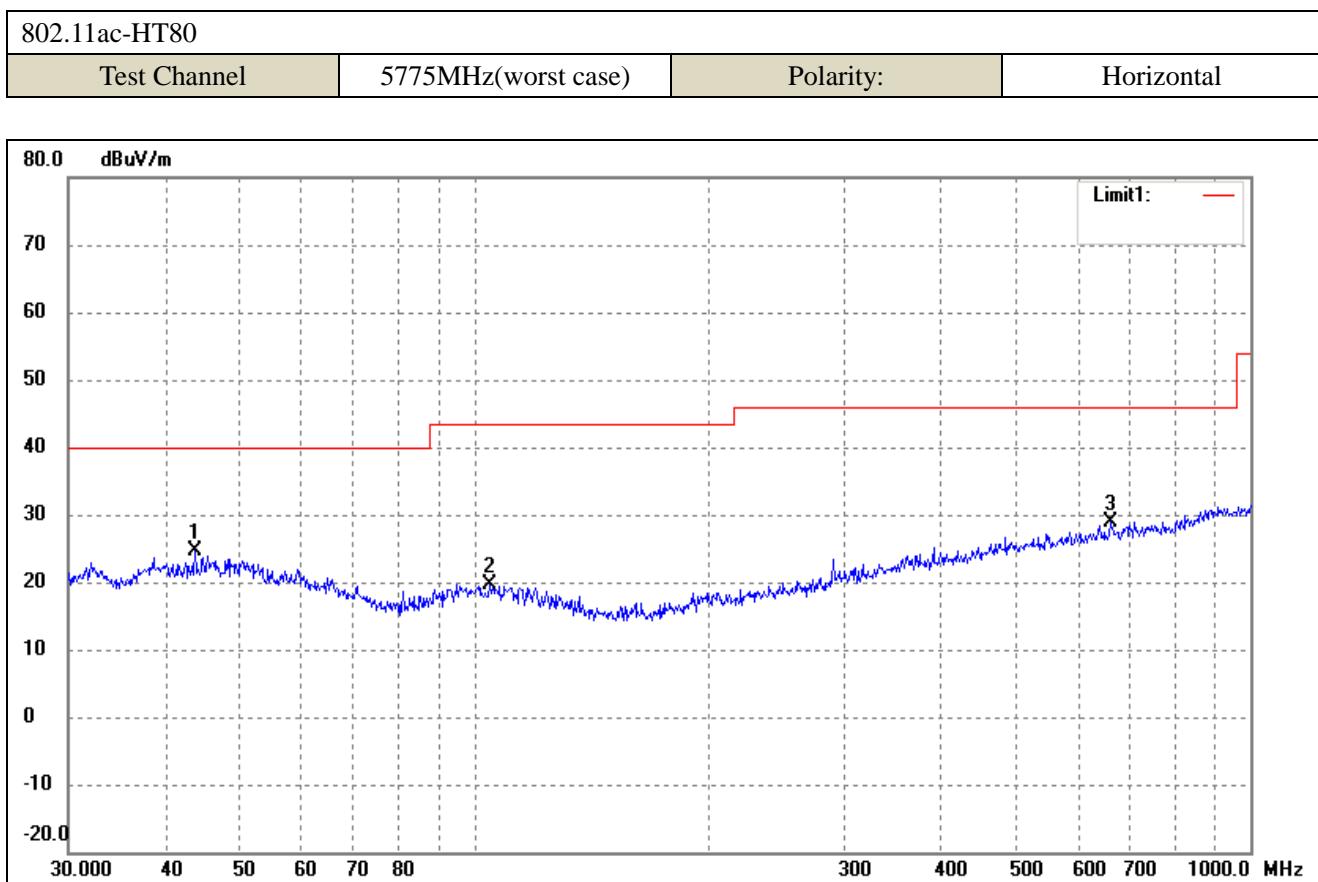

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	43.6585	36.41	-11.84	24.57	40.00	-15.43	-	-	peak
2	104.5361	32.94	-13.32	19.62	43.50	-23.88	-	-	peak
3	661.1505	31.04	-2.15	28.89	46.00	-17.11	-	-	peak

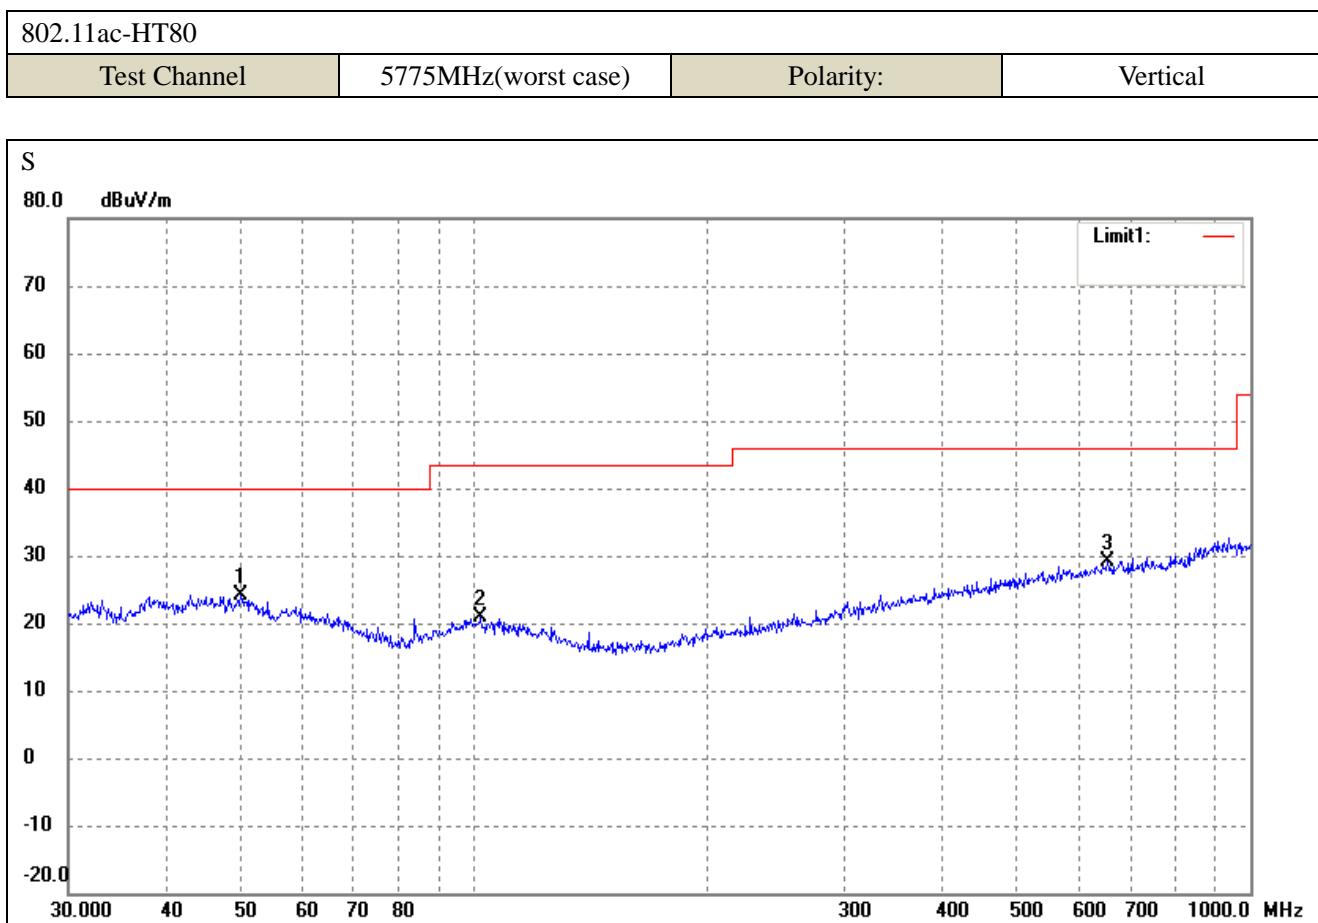


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	50.0566	35.62	-11.55	24.07	40.00	-15.93	-	-	peak
2	102.0014	34.08	-13.32	20.76	43.50	-22.74	-	-	peak
3	654.2318	31.38	-2.29	29.09	46.00	-16.91	-	-	peak


Remark: '-'Means' the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

➤ Spurious Emission above 1GHz


802.11a- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)

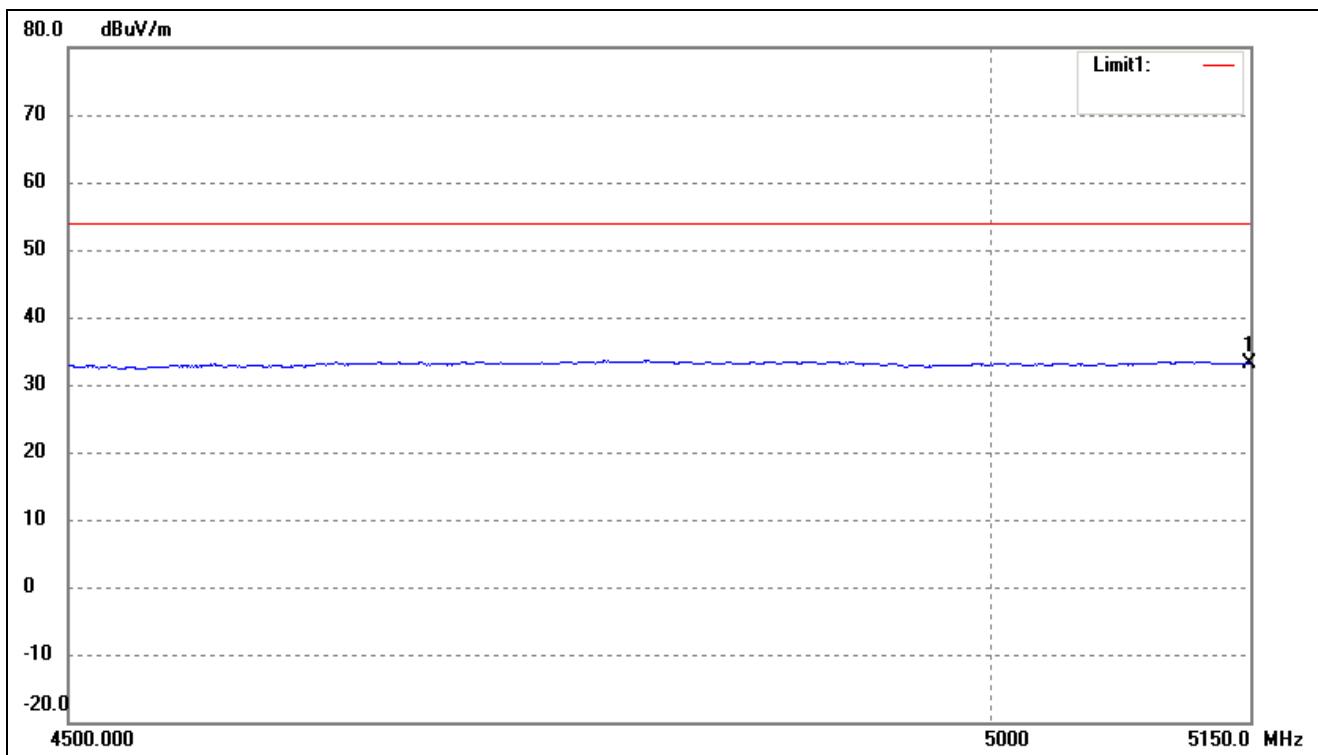


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5149.305	37.55	-4.32	33.23	54.00	-20.77	-	-	AV

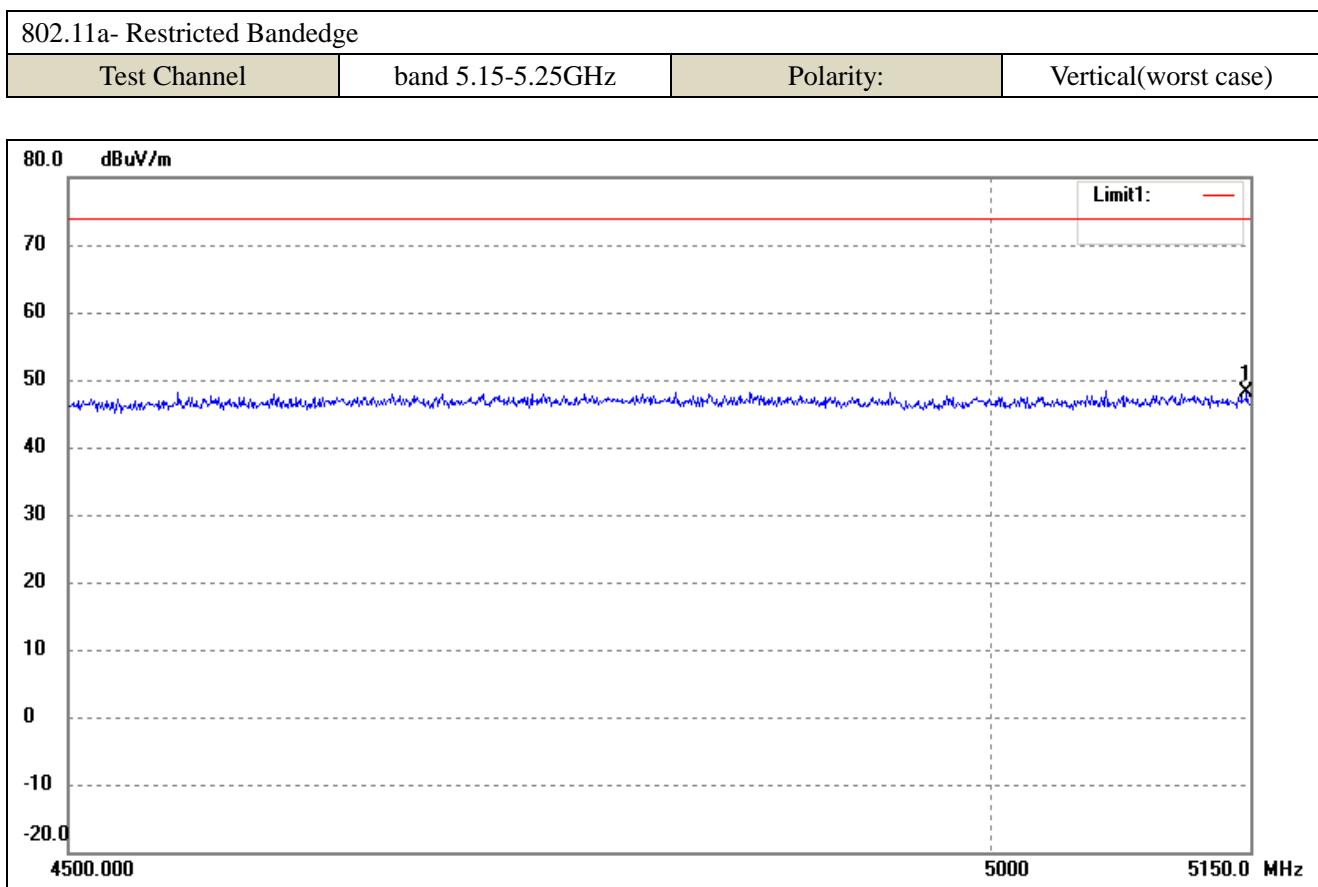


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	5147.916	52.37	-4.32	48.05	74.00	-25.95	-	-	Peak

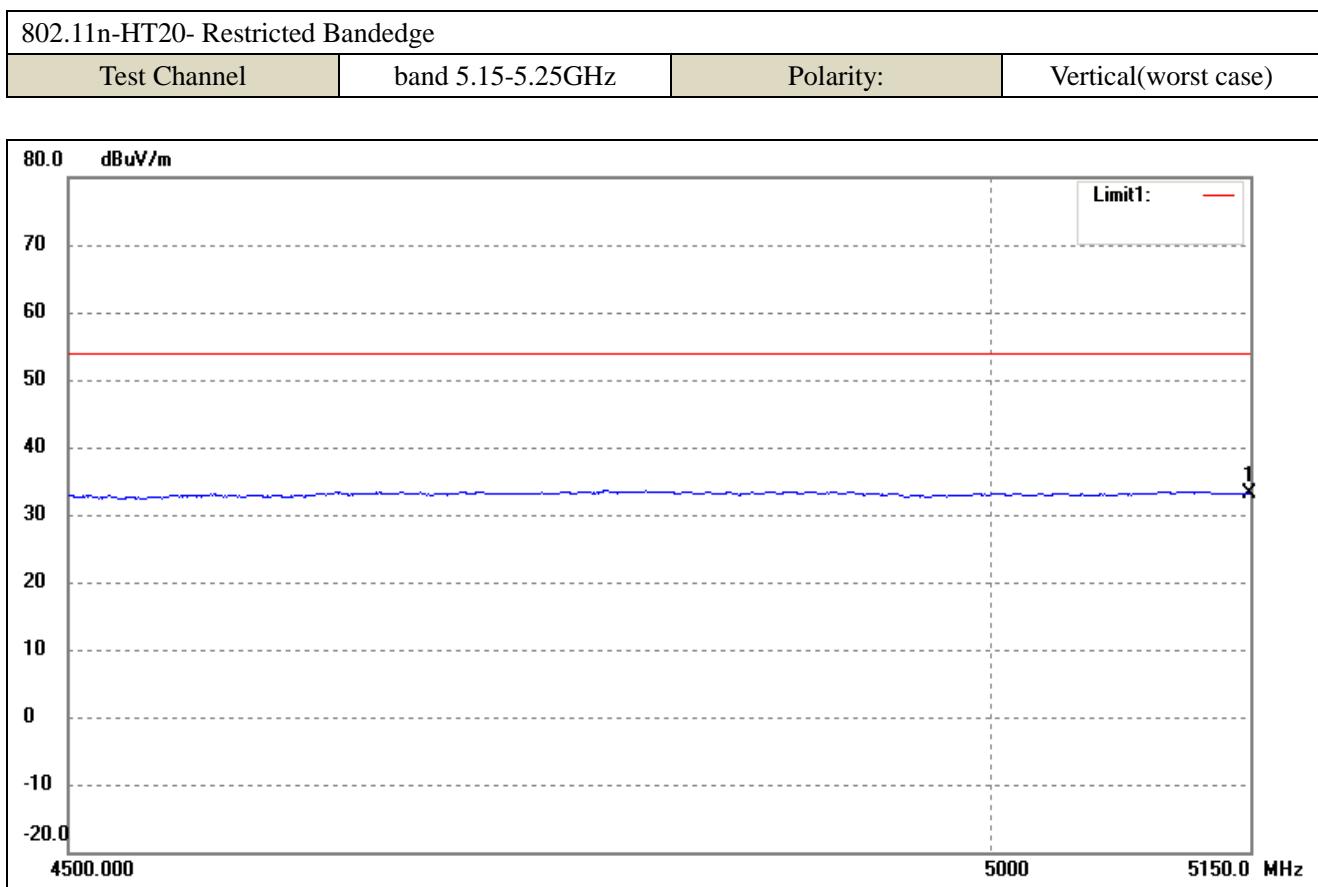


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5149.305	37.55	-4.32	33.23	54.00	-20.77	-	-	AVG

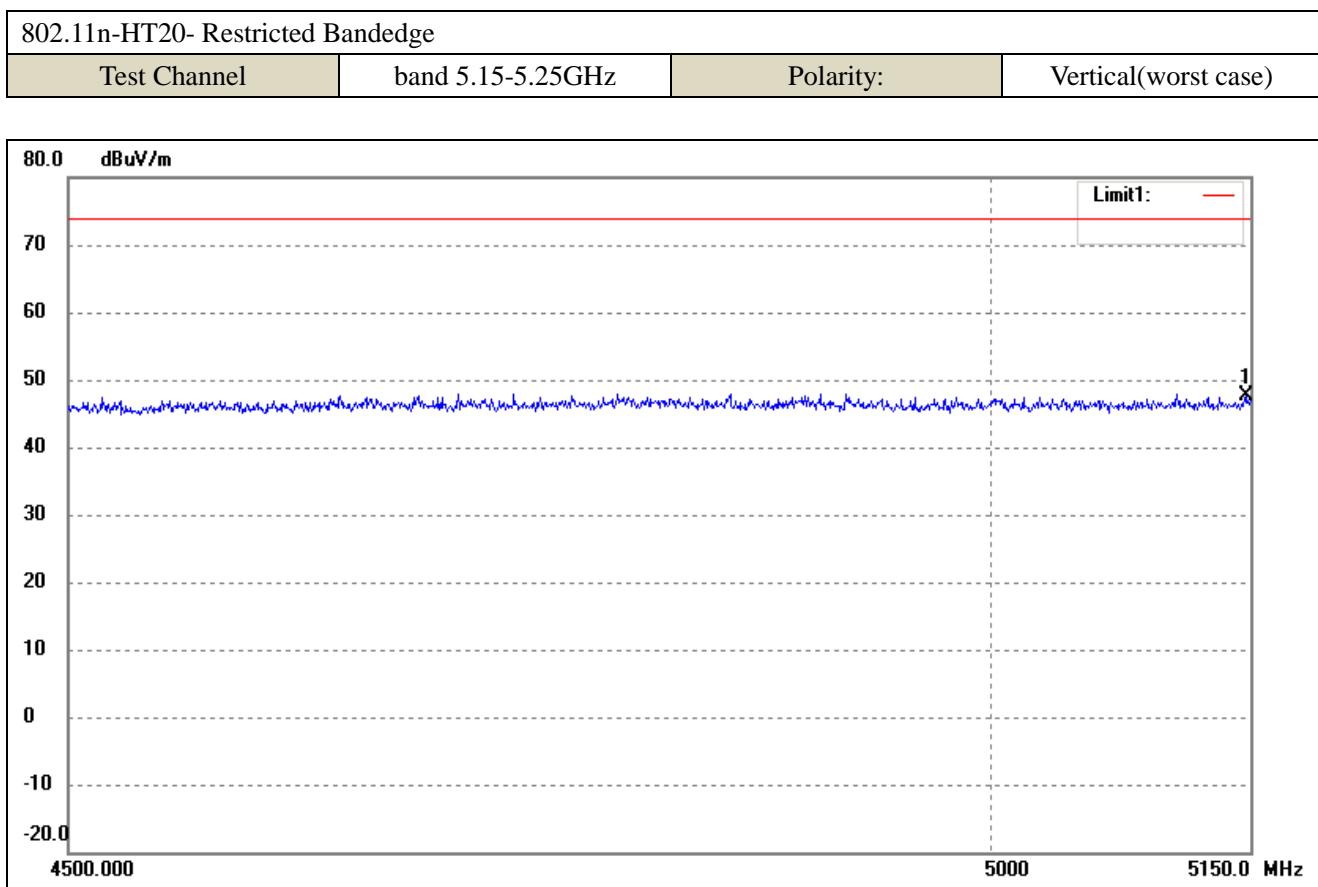


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	5147.221	52.03	-4.32	47.71	74.00	-26.29	-	-	Peak

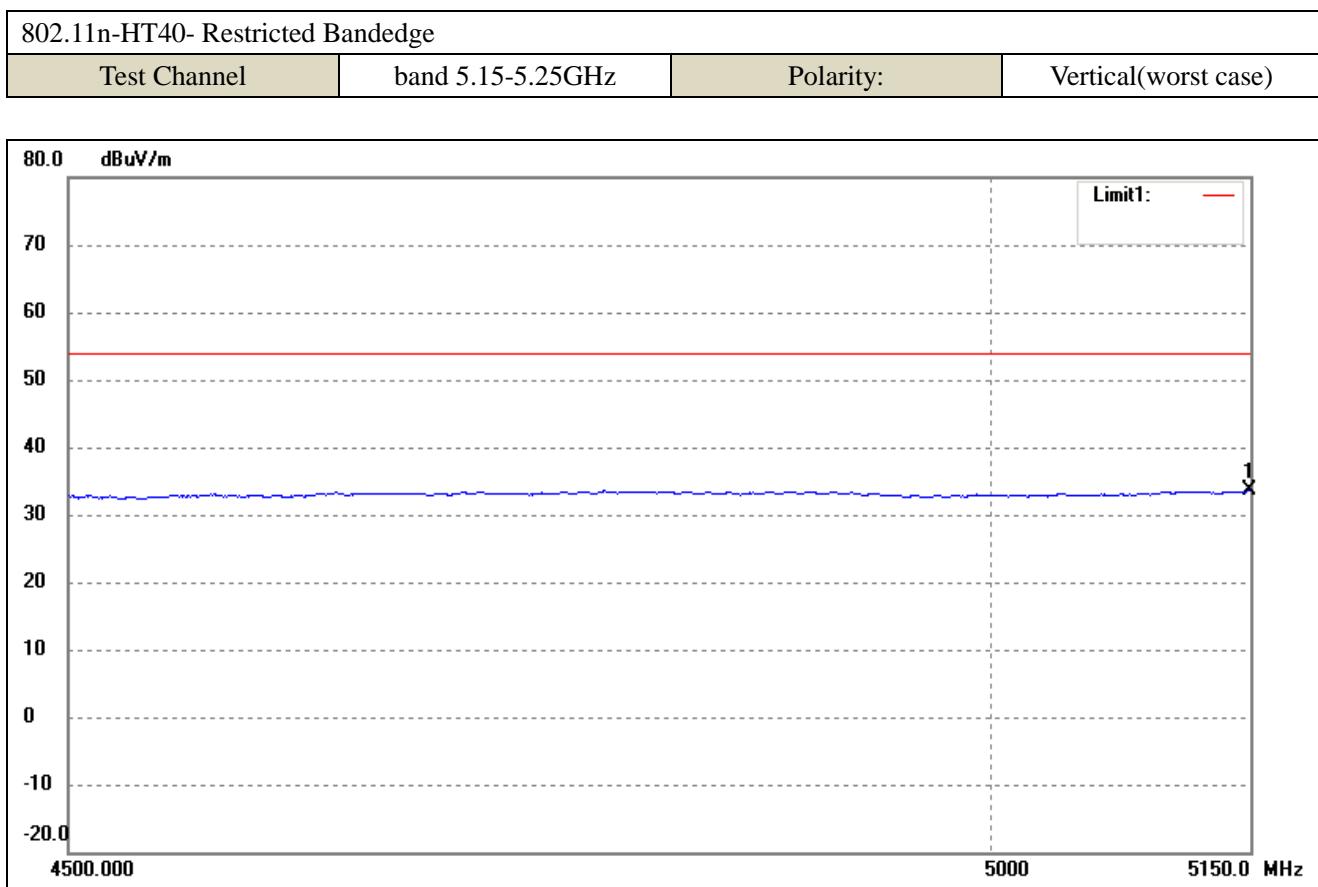


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5149.305	37.89	-4.32	33.57	54.00	-20.43	-	-	AVG

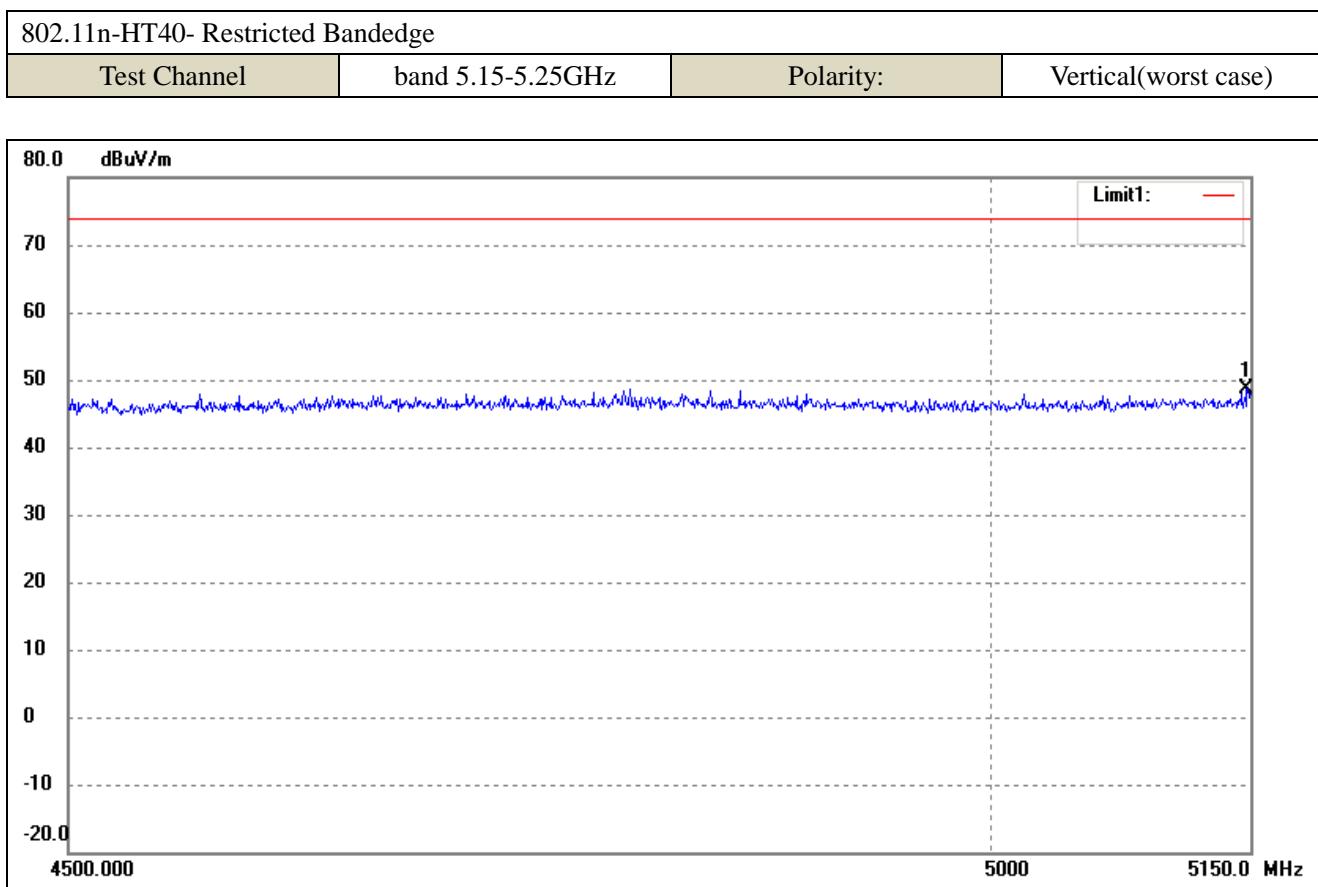

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5147.916	53.04	-4.32	48.72	74.00	-25.28	-	-	Peak

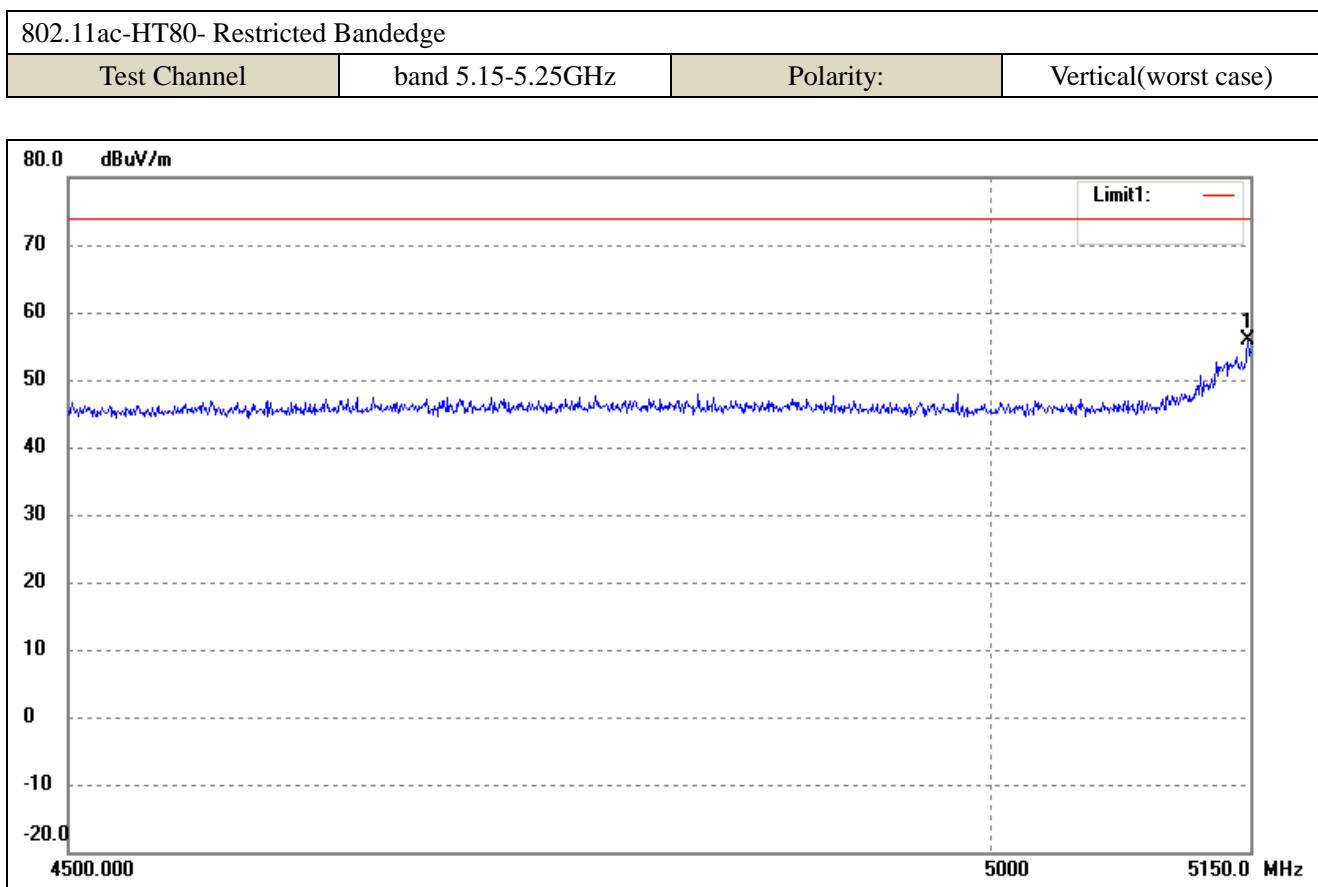

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	5148.610	60.29	-4.32	55.97	74.00	-18.03	-	-	AVG

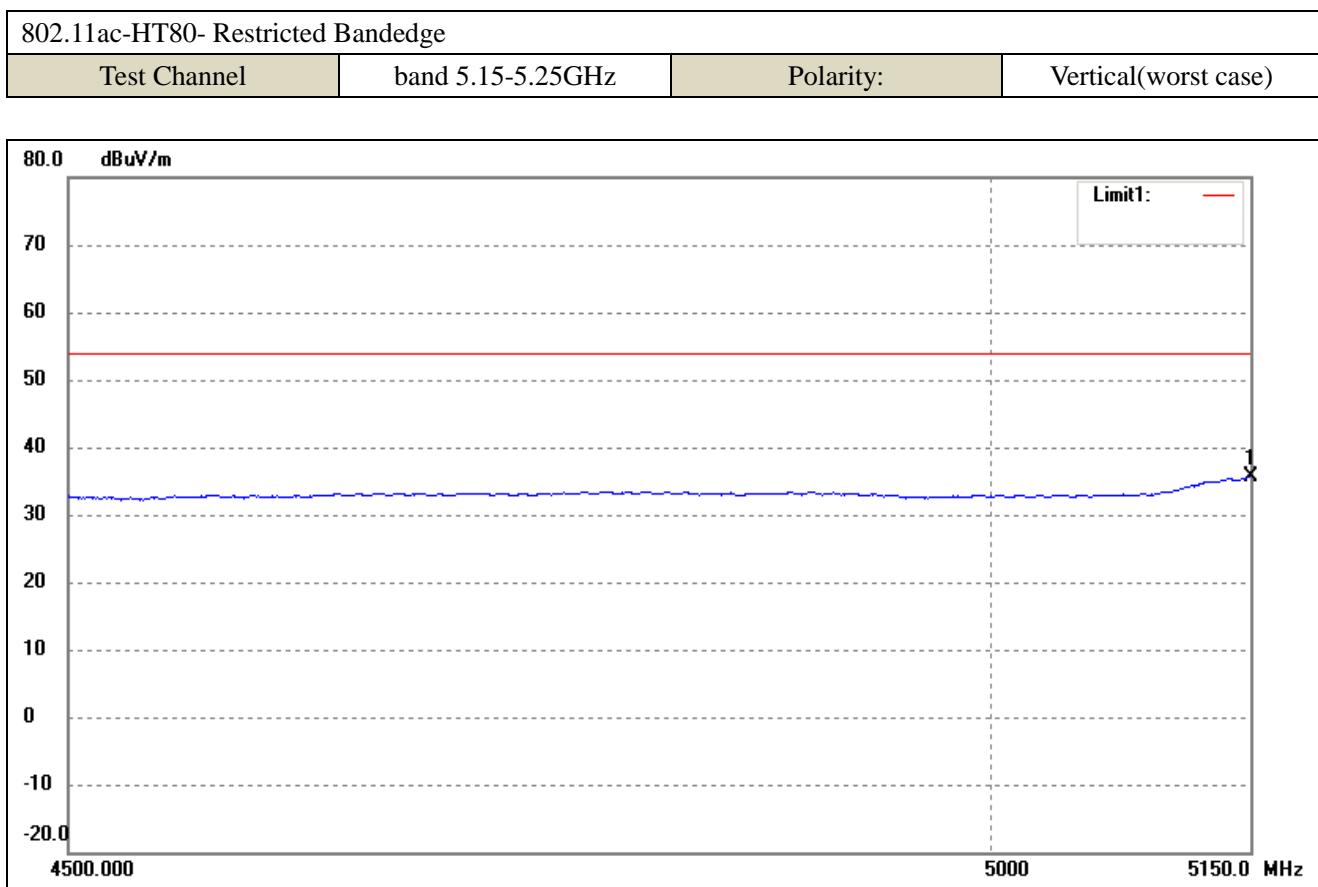

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5150.000	40.07	-4.32	35.75	54.00	-18.25	-	-	Peak

Note: The Restricted Bandedge was tested in Horizontal /Vertical and the worst case position data was reported.

Remark: '-' Means 'the test Degree and Height is not recorded by the test software and only show the worst case in the test report.

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11a)
- Harmonics And Spurious Emissions

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel (5180MHz)							
10360	53.52	7.11	60.63	74	-13.37	H	PK
10360	27.65	7.11	34.76	54	-19.24	H	AV
10360	53.14	7.11	60.25	74	-13.75	V	PK
10360	27.97	7.11	35.08	54	-18.92	V	AV
High Channel (5240MHz)							
10480	52.56	7.10	59.66	74	-14.34	H	PK
10480	26.95	7.10	34.05	54	-19.95	H	AV
10480	52.75	7.10	59.85	74	-14.15	V	PK
10480	25.97	7.10	33.07	54	-20.93	V	AV
Low Channel (5745MHz)							
11490	50.73	9.02	59.75	74	-14.25	H	PK
11490	25.86	9.02	34.88	54	-19.12	H	AV
11490	51.05	9.02	60.07	74	-13.93	V	PK
11490	26.13	9.02	35.15	54	-18.85	V	AV
High Channel (5825MHz)							
11610	52.48	8.94	61.42	74	-12.58	H	PK
11610	25.97	8.94	34.91	54	-19.09	H	AV
11610	50.15	8.94	59.09	74	-14.91	V	PK
11610	27.46	8.94	36.40	54	-17.60	V	AV

- Out of Band edge for 5150-5250MHz

Test CH.	Test Segment		Result dBm/MHz	Limit dBm/MHz
	MHz			
Lowest	Below 5150		-38.46	-27
Highest	Above 5350		-34.37	-27

Note: the data just list the worst cases

- Out of Band edge for 5725-5850MHz

Test CH.	Test Segment		Result dBm/MHz	Limit dBm/MHz
	MHz			
Lowest	Below 5715		-40.39	-27
	5715 to 5725		-28.16	-17
Highest	5850 to 5860		-26.19	-17
	Above 5860		-38.64	-27

Note: the data just list the worst cases

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11n HT20)
- Harmonics And Spurious Emissions

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel (5180MHz)							
10360	53.97	7.11	61.08	74	-12.92	H	PK
10360	27.35	7.11	34.46	54	-19.54	H	AV
10360	52.28	7.11	59.39	74	-14.61	V	PK
10360	25.46	7.11	32.57	54	-21.43	V	AV
High Channel (5240MHz)							
10480	51.42	7.10	58.52	74	-15.48	H	PK
10480	26.59	7.10	33.69	54	-20.31	H	AV
10480	50.34	7.10	57.44	74	-16.56	V	PK
10480	27.12	7.10	34.22	54	-19.78	V	AV
Low Channel (5745MHz)							
11490	52.98	9.02	62	74	-12.00	H	PK
11490	26.46	9.02	35.48	54	-18.52	H	AV
11490	53.12	9.02	62.14	74	-11.86	V	PK
11490	27.59	9.02	36.61	54	-17.39	V	AV
High Channel (5825MHz)							
11610	53.84	8.94	62.78	74	-11.22	H	PK
11610	28.68	8.94	37.62	54	-16.38	H	AV
11610	52.13	8.94	61.07	74	-12.93	V	PK
11610	26.48	8.94	35.42	54	-18.58	V	AV

- Out of Band edge 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-37.41	-27
Highest	Above 5350	-36.31	-27

Note: the data just list the worst cases

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-39.46	-27
	5715 to 5725	-28.11	-17
Highest	5850 to 5860	-37.56	-17
	Above 5860	-36.13	-27

Note: the data just list the worst cases

Note: this EUT was tested in the low, high channel and the worst case position data was reported.

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11n HT40)
- Harmonics And Spurious Emissions

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar	Detector
Low Channel (5190MHz)							
10380	50.98	7.11	58.09	74	-15.91	H	PK
10380	28.35	7.11	35.46	54	-18.54	H	AV
10380	51.16	7.11	58.27	74	-15.73	V	PK
10380	27.69	7.11	34.8	54	-19.20	V	AV
High Channel (5230MHz)							
10460	51.26	7.1	58.36	74	-15.64	H	PK
10460	29.43	7.1	36.53	54	-17.47	H	AV
10460	52.23	7.1	59.33	74	-14.67	V	PK
10460	27.21	7.1	34.31	54	-19.69	V	AV

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar	Detector
Low Channel (5755MHz)							
11510	52.95	9.04	61.99	74	-12.01	H	PK
11510	27.47	9.04	36.51	54	-17.49	H	AV
11510	50.25	9.04	59.29	74	-14.71	V	PK
11510	27.09	9.04	36.13	54	-17.87	V	AV
High Channel (5795MHz)							
11590	53.31	8.96	62.27	74	-11.73	H	PK
11590	26.79	8.96	35.75	54	-18.25	H	AV
11590	52.13	8.96	61.09	74	-12.91	V	PK
11590	27.06	8.96	36.02	54	-17.98	V	AV

- Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-37.56	-27
Highest	Above 5350	-39.42	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-35.69	-27
	5715 to 5725	-29.45	-17
Highest	5850 to 5860	-28.17	-17
	Above 5860	-36.16	-27

Note: the data just list the worst cases

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11ac VH80)
- Harmonics And Spurious Emissions

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
5210MHz							
10420	50.93	7.11	58.04	74	-15.96	H	PK
10420	25.46	7.11	32.57	54	-21.43	H	AV
10420	51.35	7.11	58.46	74	-15.54	V	PK
10420	25.97	7.11	33.08	54	-20.92	V	AV

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
5775MHz							
11550	51.39	9.00	60.39	74	-13.61	H	PK
11550	27.35	9.00	36.35	54	-17.65	H	AV
11550	50.46	9.00	59.46	74	-14.54	V	PK
11550	25.92	9.00	34.92	54	-19.08	V	AV

- Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-39.45	-27
Highest	Above 5350	-35.61	-27

Note: the data just list the worst cases

- Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-40.36	-27
	5715 to 5725	-29.42	-17
Highest	5850 to 5860	-37.53	-17
	Above 5860	-37.17	-27

Note: the data just list the worst cases

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

9. Frequency Stability

9.1 Standard Applicable

According to §15.407(g), manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

9.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode.

9.3 Summary of Test Results/Plots

Please refer to Appendix D


10. Conducted Emissions

10.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

10.2 Basic Test Setup Block Diagram

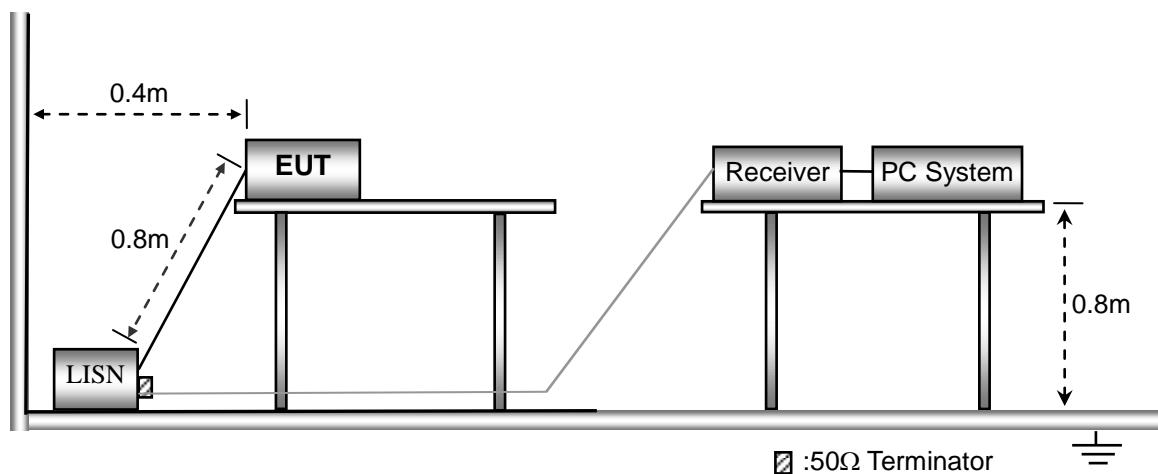


10.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150 kHz
Stop Frequency	30 MHz
Sweep Speed	Auto
IF Bandwidth.....	10 kHz
Quasi-Peak Adapter Bandwidth	9 kHz
Quasi-Peak Adapter Mode	Normal


10.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

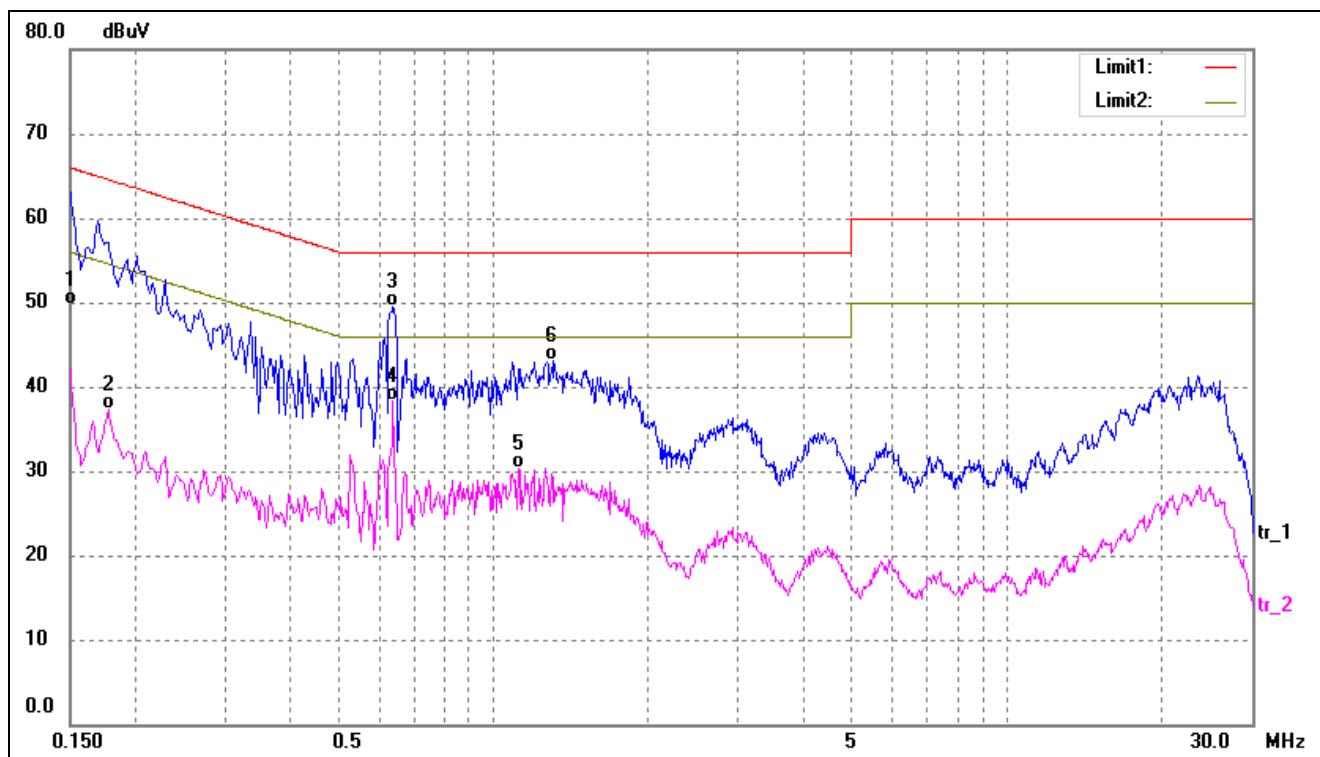

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1500	39.36	10.25	49.61	65.99	-16.38	QP
2	0.1780	26.99	10.26	37.25	54.57	-17.32	AVG
3*	0.6380	39.26	10.19	49.45	56.00	-6.55	QP
4	0.6380	28.05	10.19	38.24	46.00	-7.76	AVG
5	1.1220	20.09	10.21	30.30	46.00	-15.70	AVG
6	1.3099	32.79	10.22	43.01	56.00	-12.99	QP

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

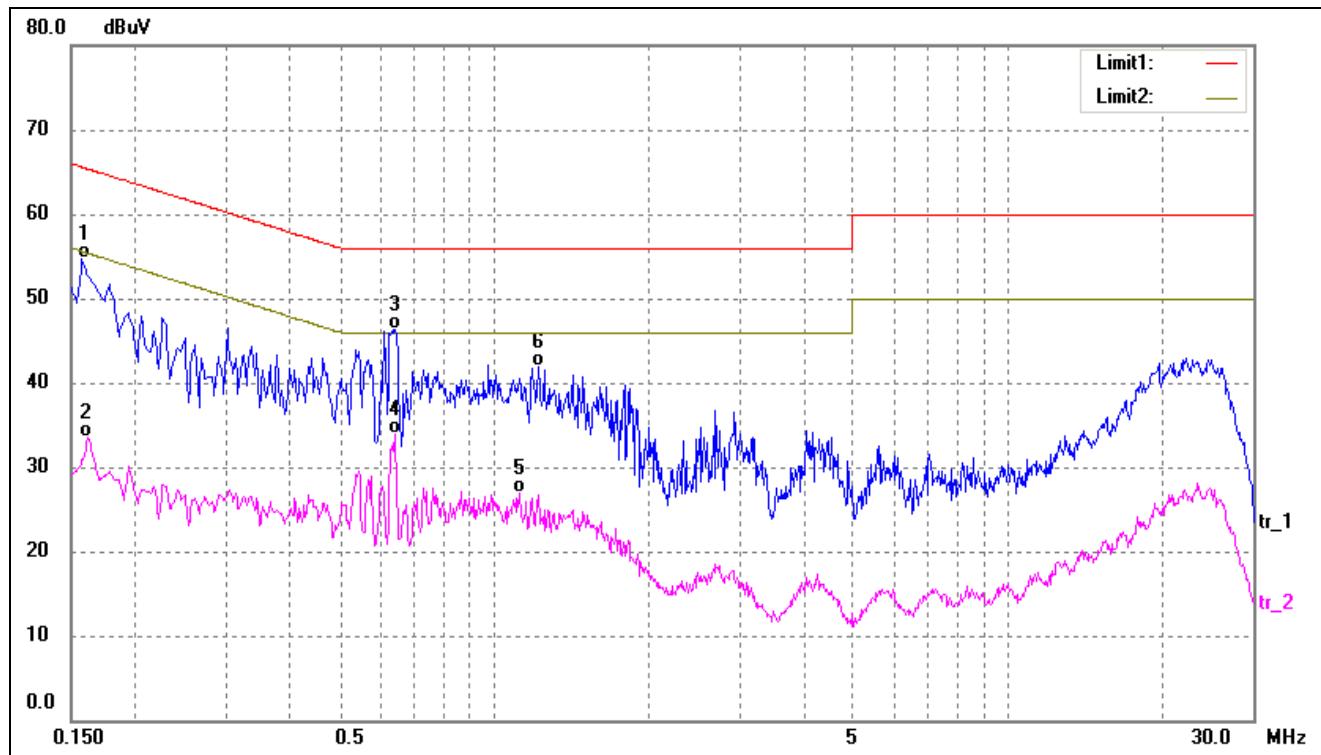

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1580	44.38	10.25	54.63	65.56	-10.93	QP
2	0.1620	23.27	10.26	33.53	55.36	-21.83	AVG
3*	0.6340	36.05	10.19	46.24	56.00	-9.76	QP
4	0.6419	23.67	10.19	33.86	46.00	-12.14	AVG
5	1.1220	16.69	10.21	26.90	46.00	-19.10	AVG
6	1.2180	31.62	10.22	41.84	56.00	-14.16	QP

APPENDIX SUMMARY

Project No.	WTX20X10075770W	Test Engineer	Shaw
Start date	2020/11/11	Finish date	2020/11/11
Temperature	24.1°C	Humidity	45%
RF specifications	U-NII		

APPENDIX	Description of Test Item	Result
A	Power Spectral Density	Compliant
B	Emission Bandwidth and Occupied Bandwidth	Compliant
C	Maximum Conducted Output Power	Compliant
D	Frequency Stability	Compliant


APPENDIX A


Power Spectral Density			
U-NII-1:5150-5250MHz			
Operating mode	Test Channel	Power Spectral Density dBm/MHz	Limit (dBm/MHz)
802.11a	5180	7.345	11
	5200	7.544	11
	5240	7.495	11
802.11n-HT20	5180	6.763	11
	5200	6.830	11
	5240	7.209	11
802.11n-HT40	5190	3.332	11
	5230	3.763	11
802.11ac-HT80	5210	0.539	11


U-NII-3: 5725-5850MHz					
Operating mode	Test Channel	Power Spectral Density dBm/300kHz	Factor	Power Spectral Density* dBm/500kHz	Limit dBm/500kHz
802.11a	5745	1.944	2.22	4.164	30
	5785	2.746	2.22	4.966	30
	5825	2.608	2.22	4.828	30
802.11n-HT20	5745	2.397	2.22	4.617	30
	5785	2.424	2.22	4.644	30
	5825	1.921	2.22	4.141	30
802.11n HT40	5755	0.066	2.22	2.286	30
	5795	-1.171	2.22	1.049	30
802.11ac VH80	5775	-3.688	2.22	-1.468	30

*Note: Maximum PSD=PSD(dBm/300kHz)+10log(500kHz/300kHz)=2.22


5150-5250MHz

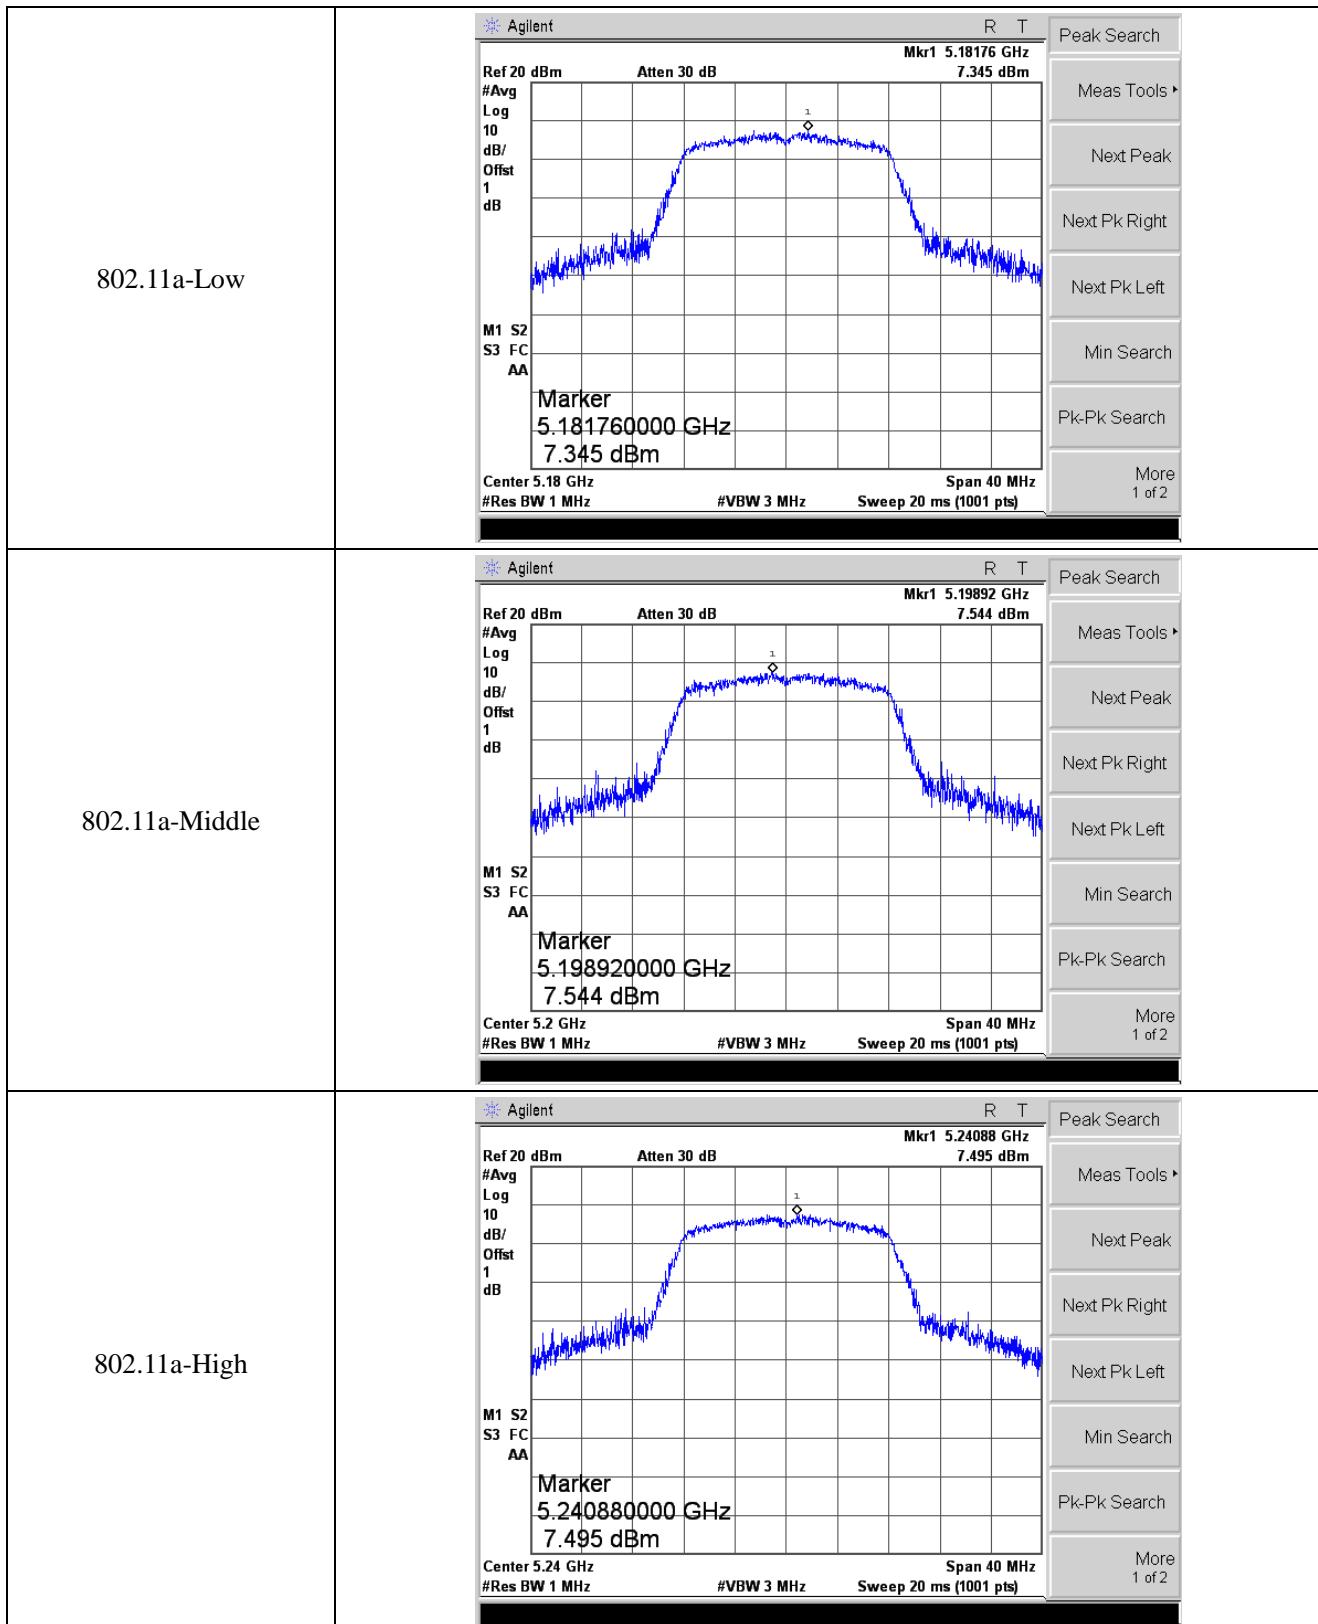


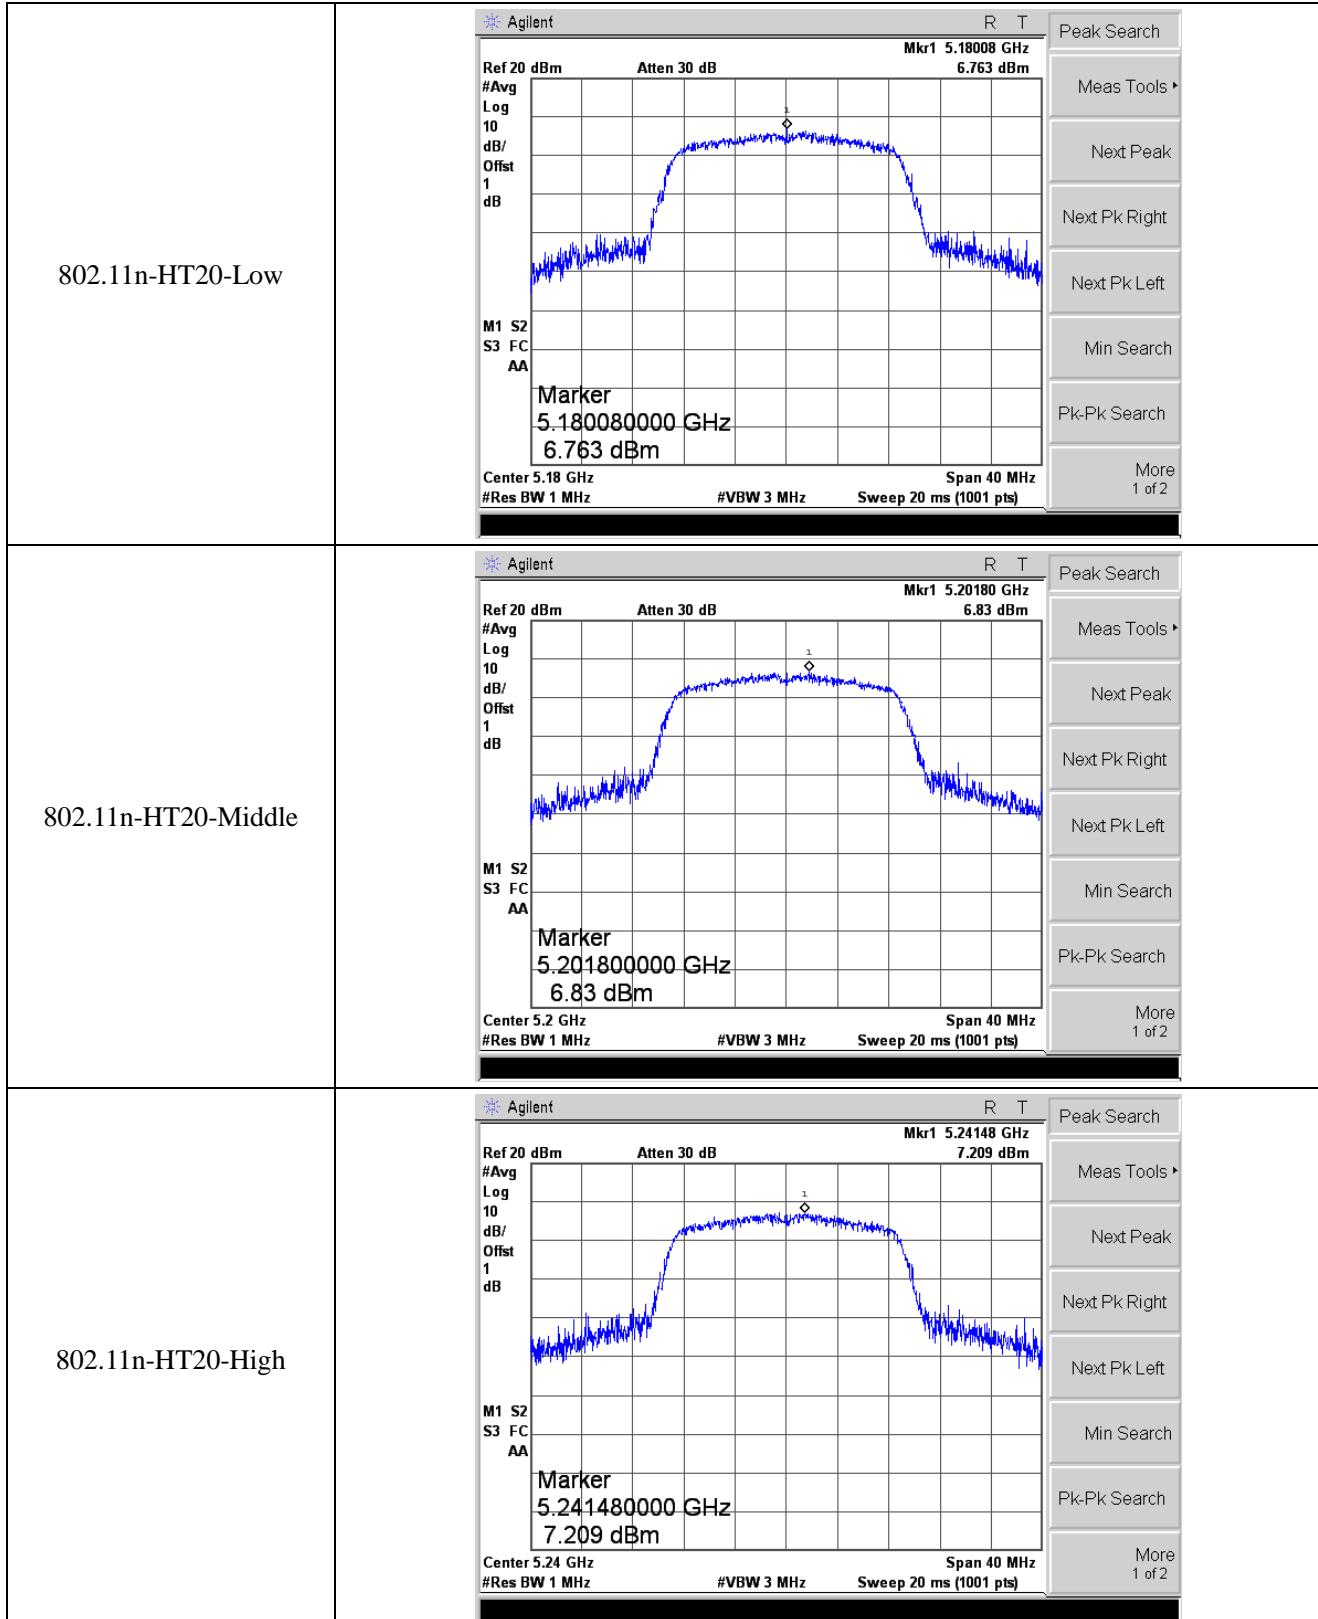


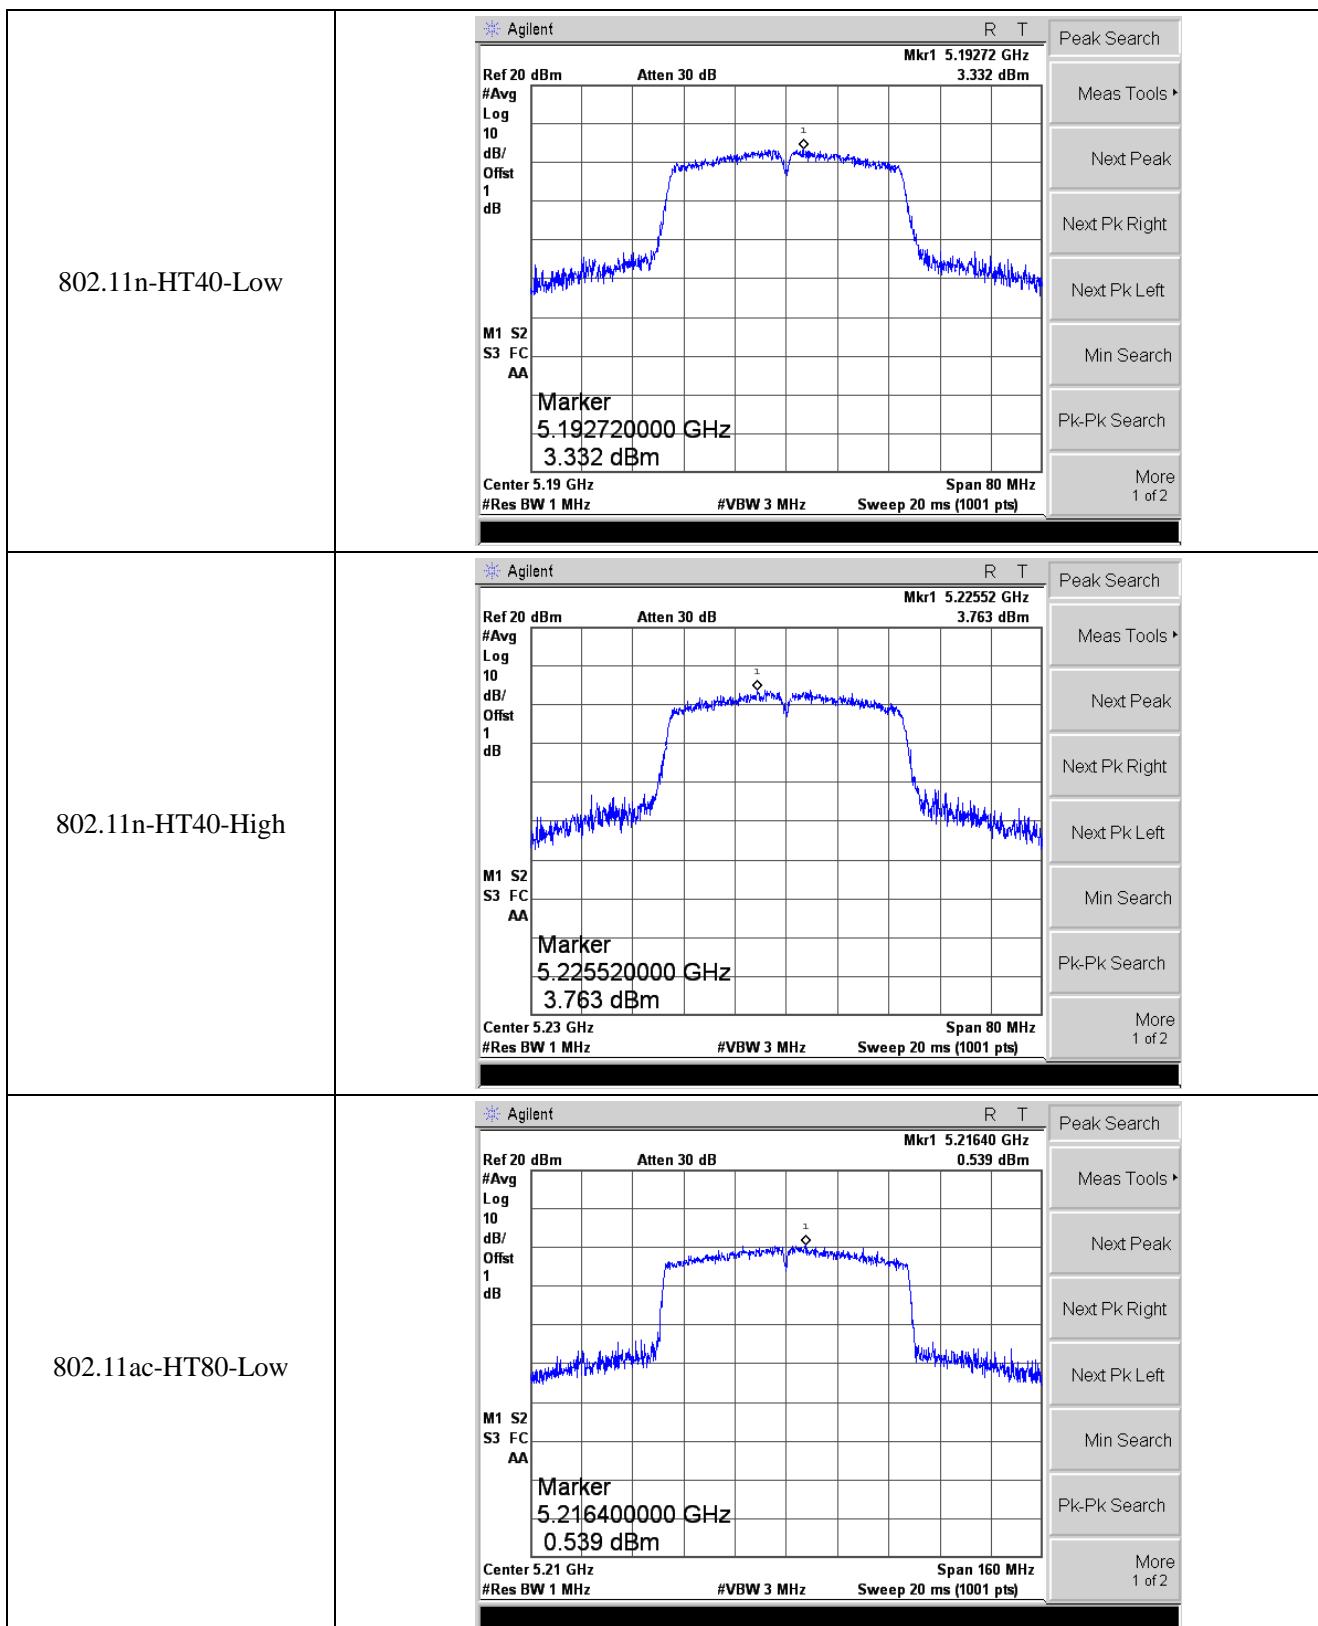

5725-5850MHz

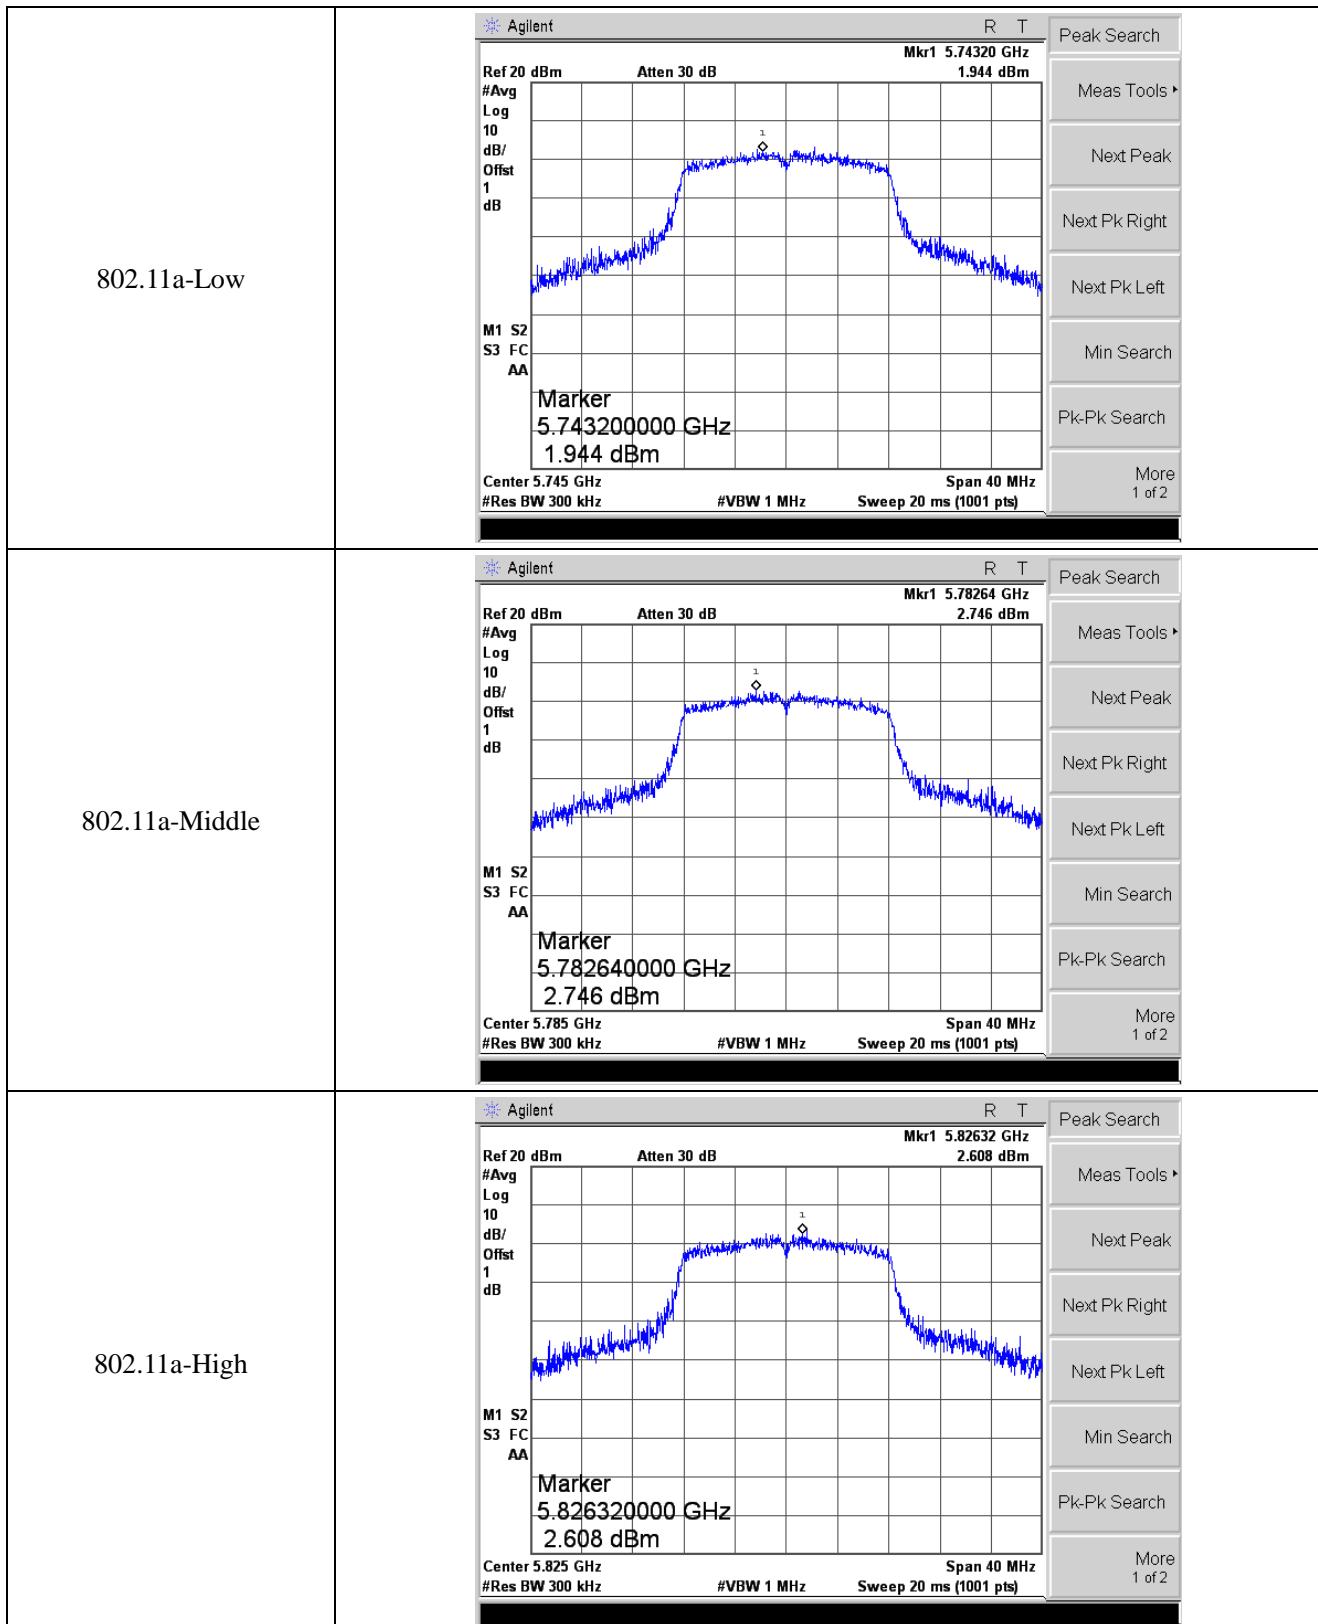

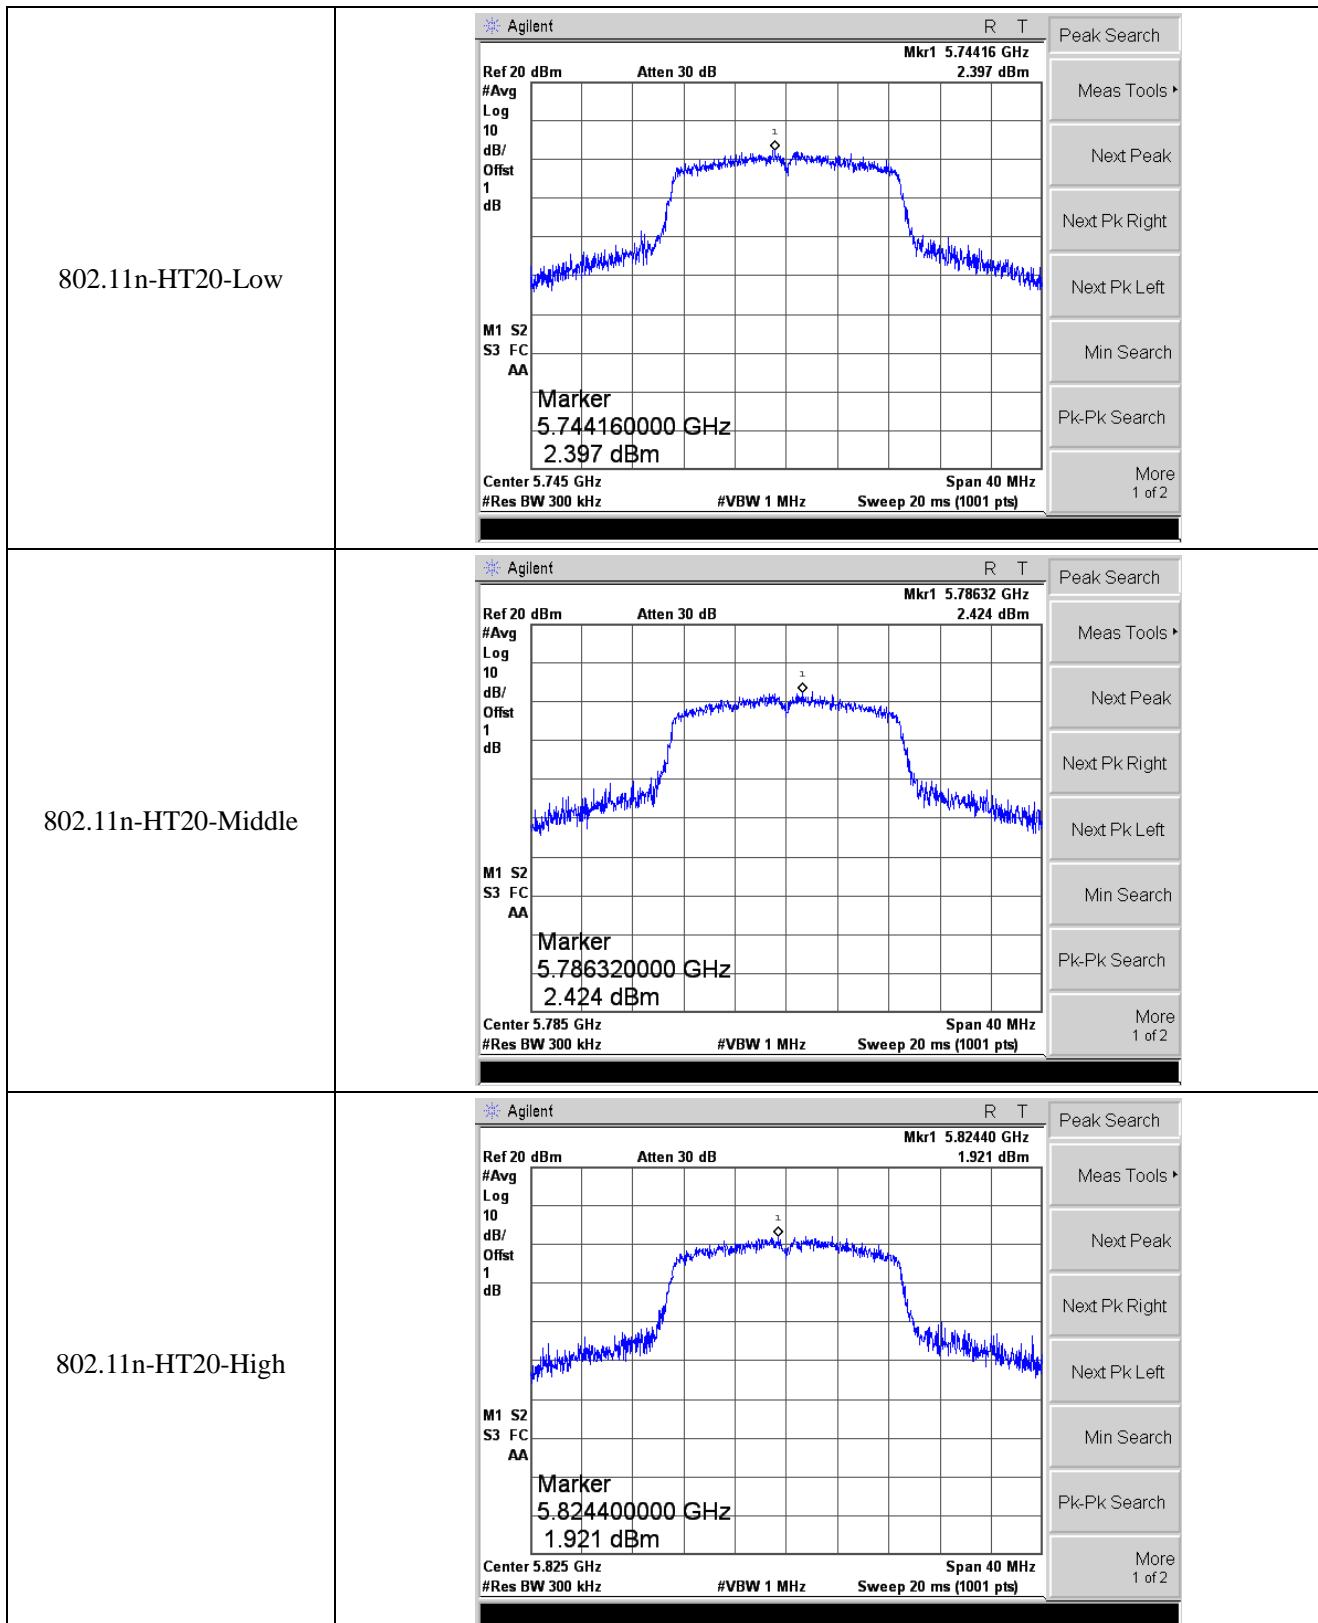

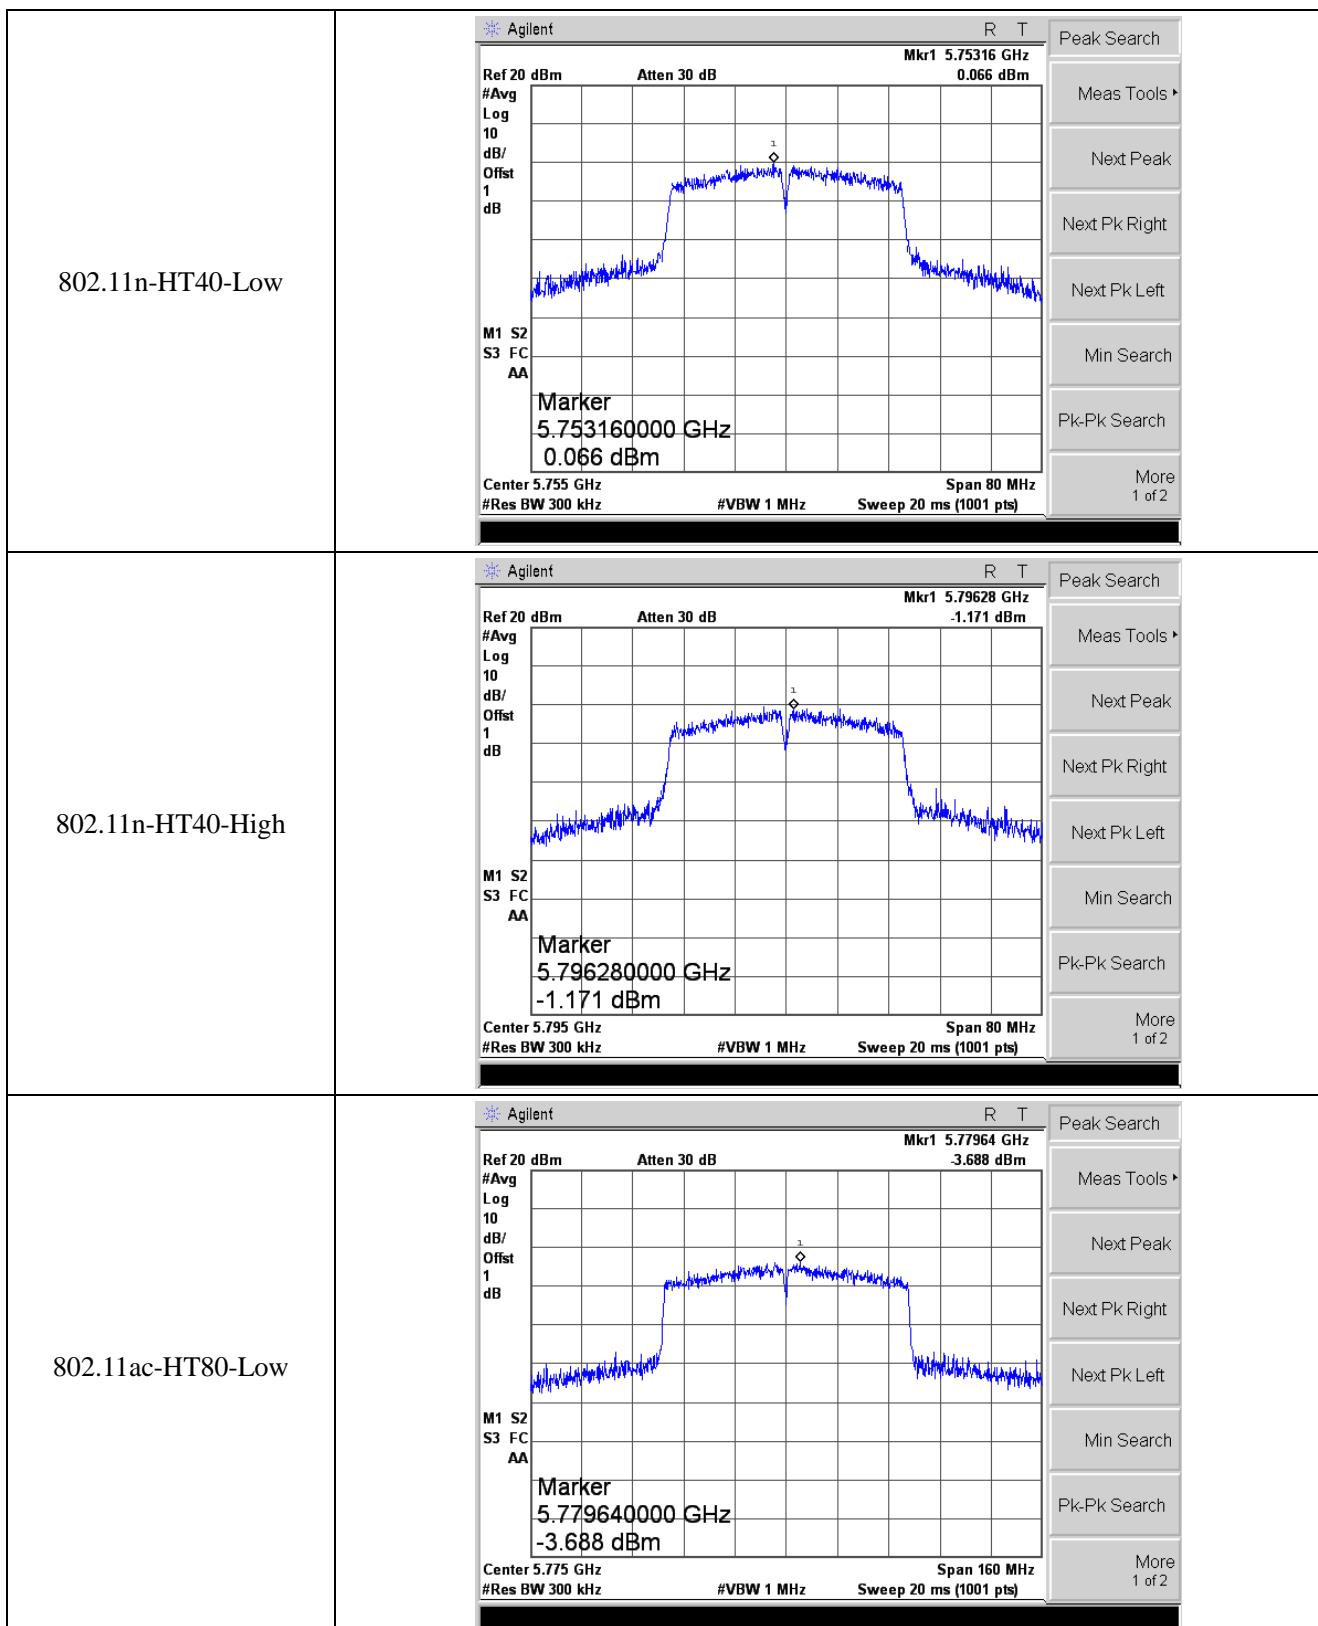


APPENDIX B


Emission Bandwidth and Occupied Bandwidth


U-NII-1:5150-5250MHz				
Test Mode	Test Channel MHz	26 dB Bandwidth MHz	99% Bandwidth MHz	Limit MHz
802.11a	5180	24.846	16.8493	Pass
	5200	25.138	16.8062	Pass
	5240	24.464	16.8388	Pass
802.11n-HT20	5180	26.342	17.8444	Pass
	5200	26.889	17.8670	Pass
	5240	24.993	17.8198	Pass
802.11n-HT40	5190	71.416	36.8605	Pass
	5230	70.786	36.5353	Pass
802.11ac-HT80	5210	120.024	76.0607	Pass


U-NII-3: 5725-5850MHz				
Test Mode	Test Channel MHz	6 dB Bandwidth MHz	99% Bandwidth MHz	Limit MHz
802.11a	5745	16.324	17.7179	≥500
	5785	16.332	17.4108	≥500
	5825	16.328	17.1586	≥500
802.11n-HT20	5745	17.564	18.2106	≥500
	5785	17.545	18.1239	≥500
	5825	17.601	18.0936	≥500
802.11n-HT40	5755	35.748	37.2776	≥500
	5795	36.052	37.1761	≥500
802.11ac VH80	5775	76.138	75.2051	≥500


5150-5250MHz

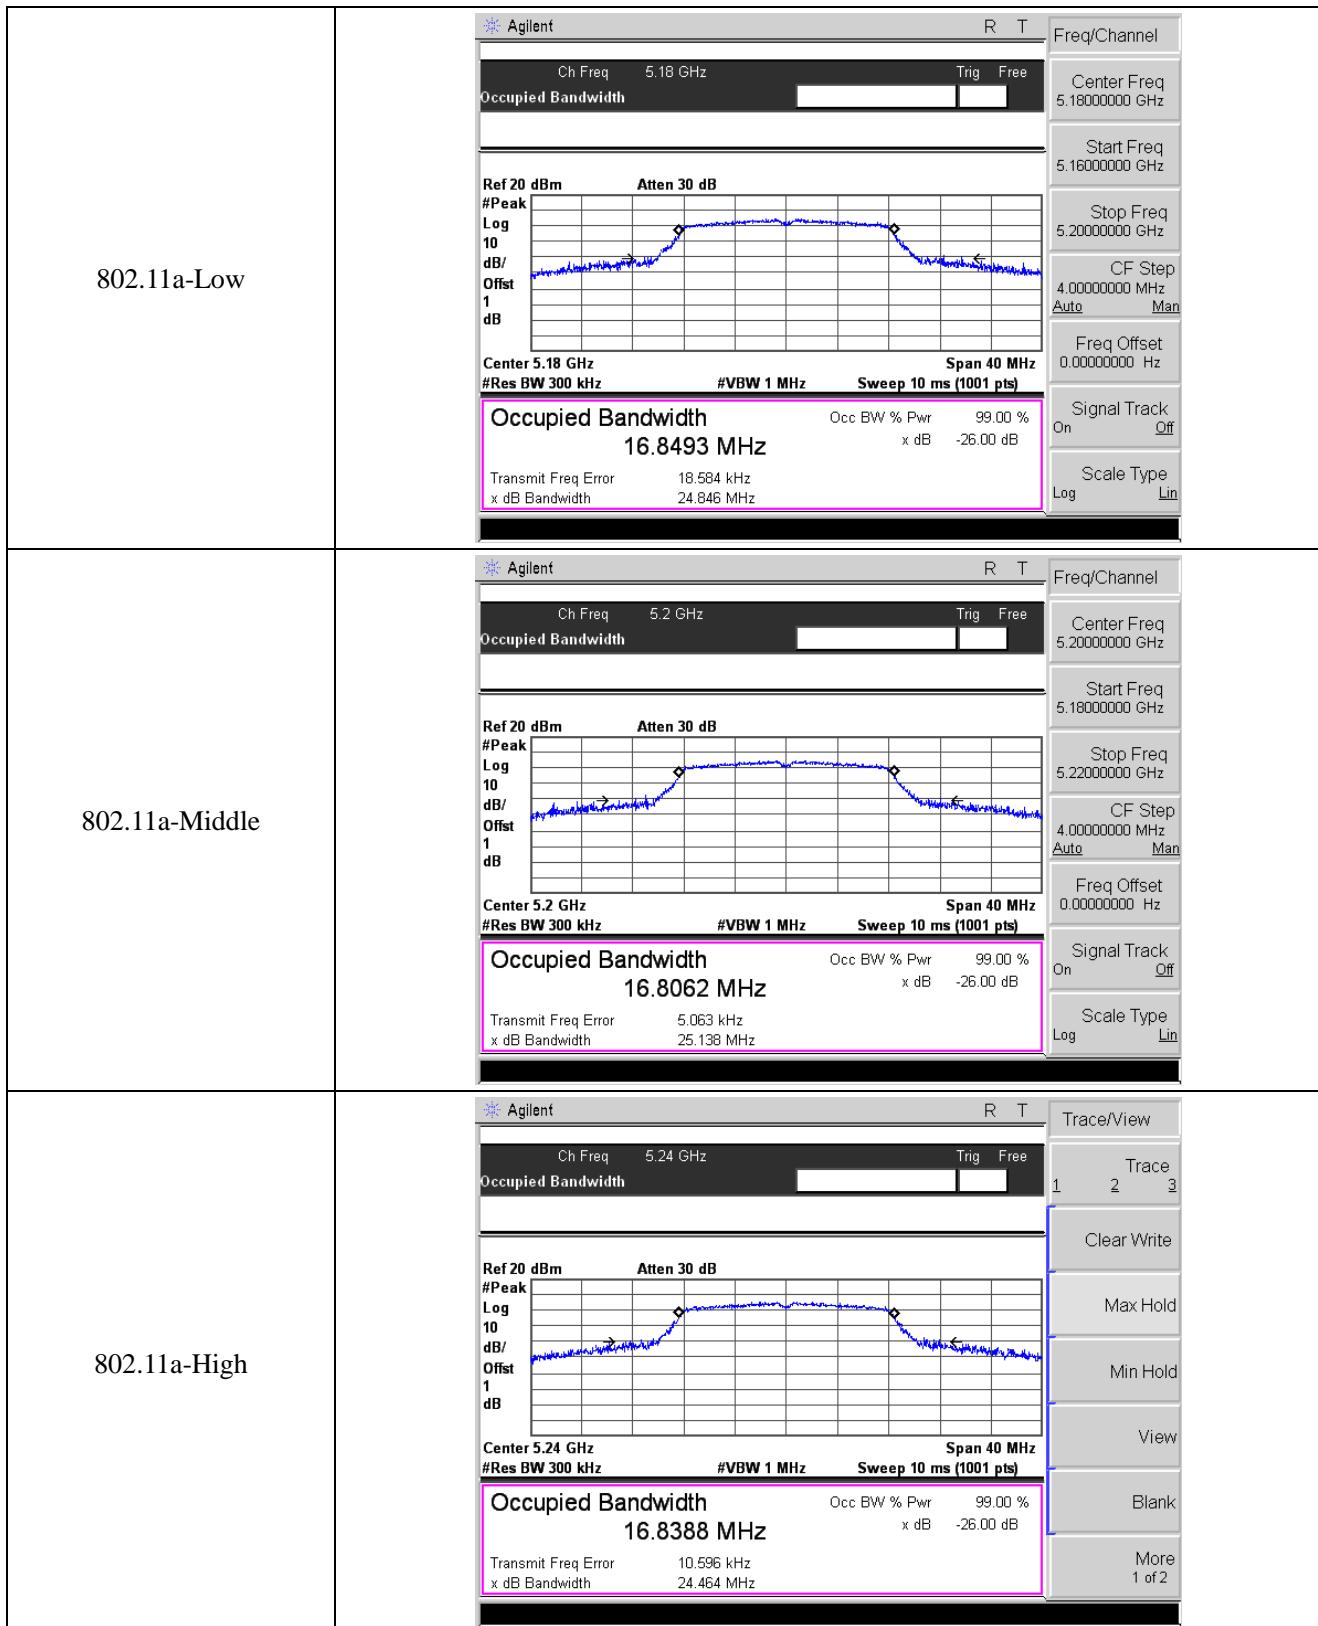


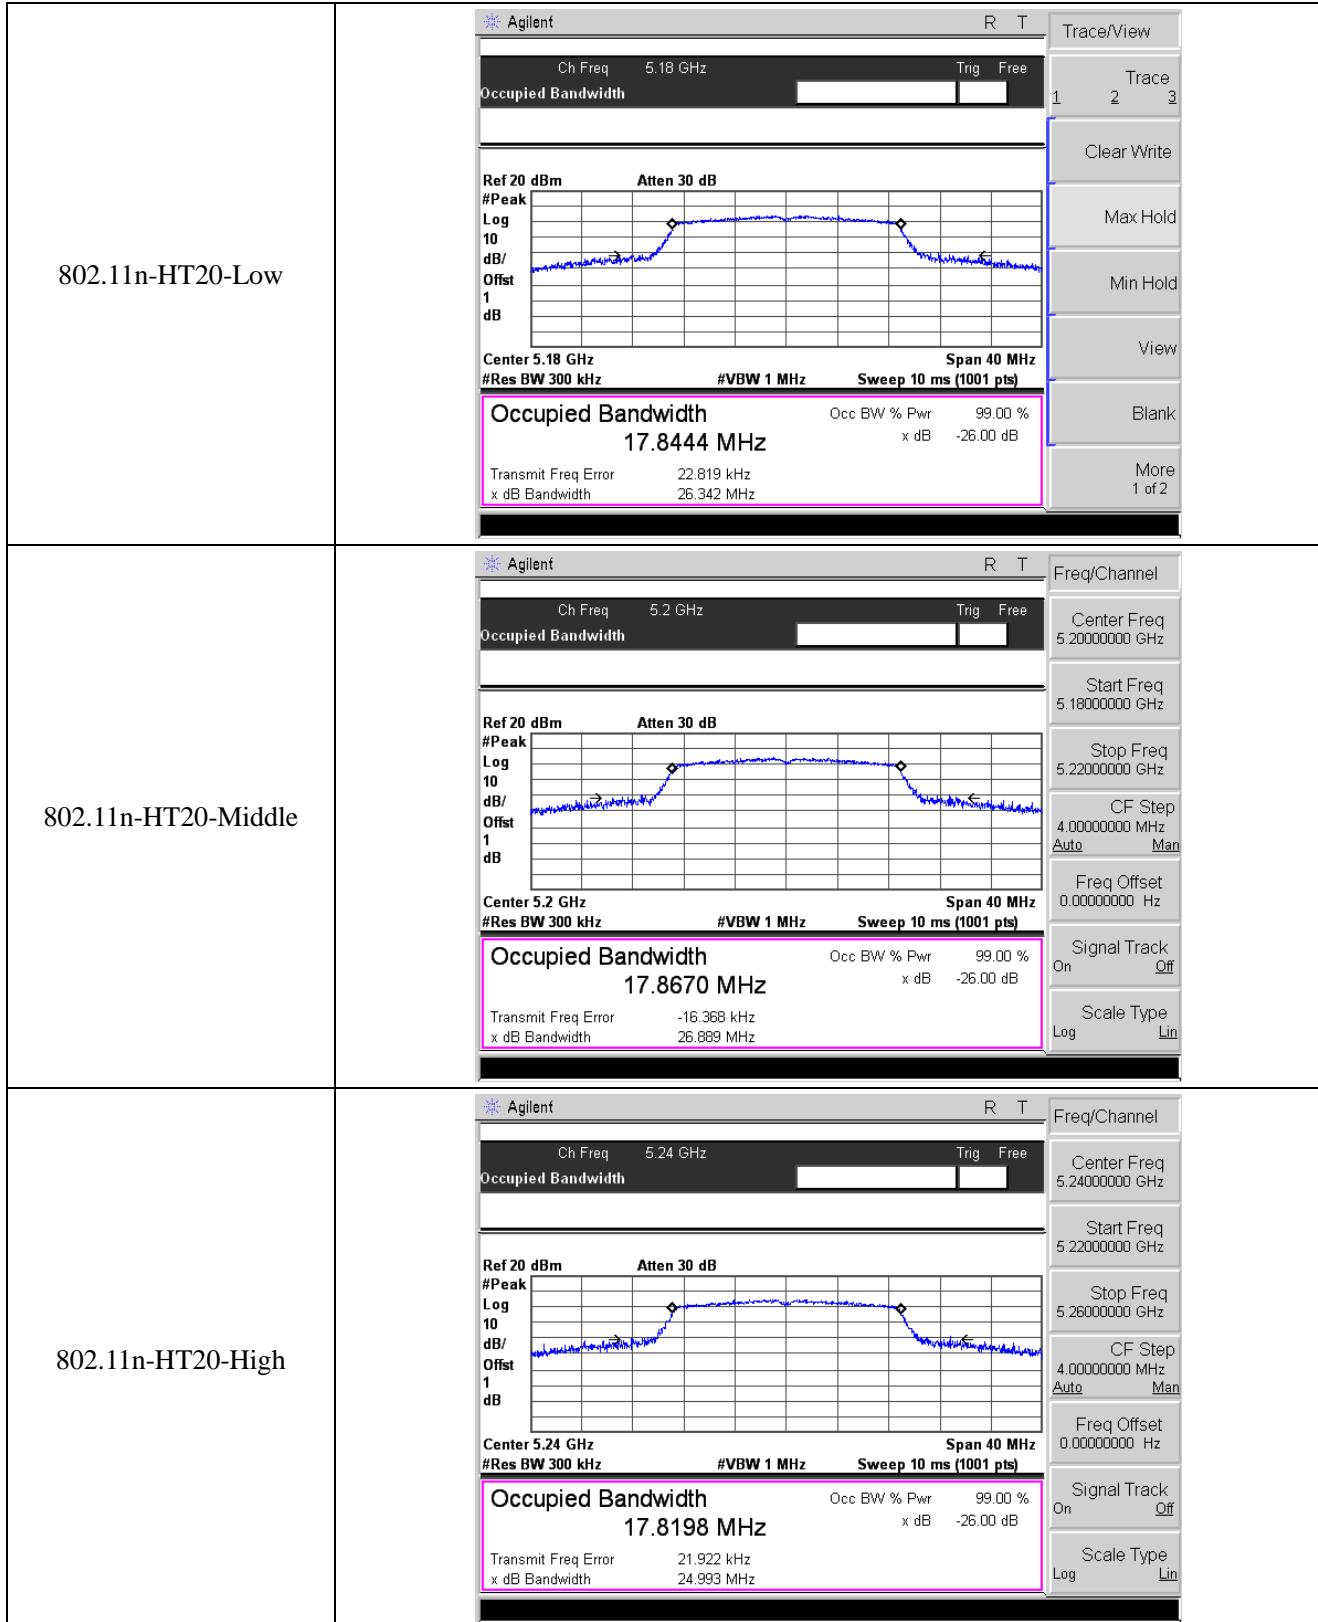






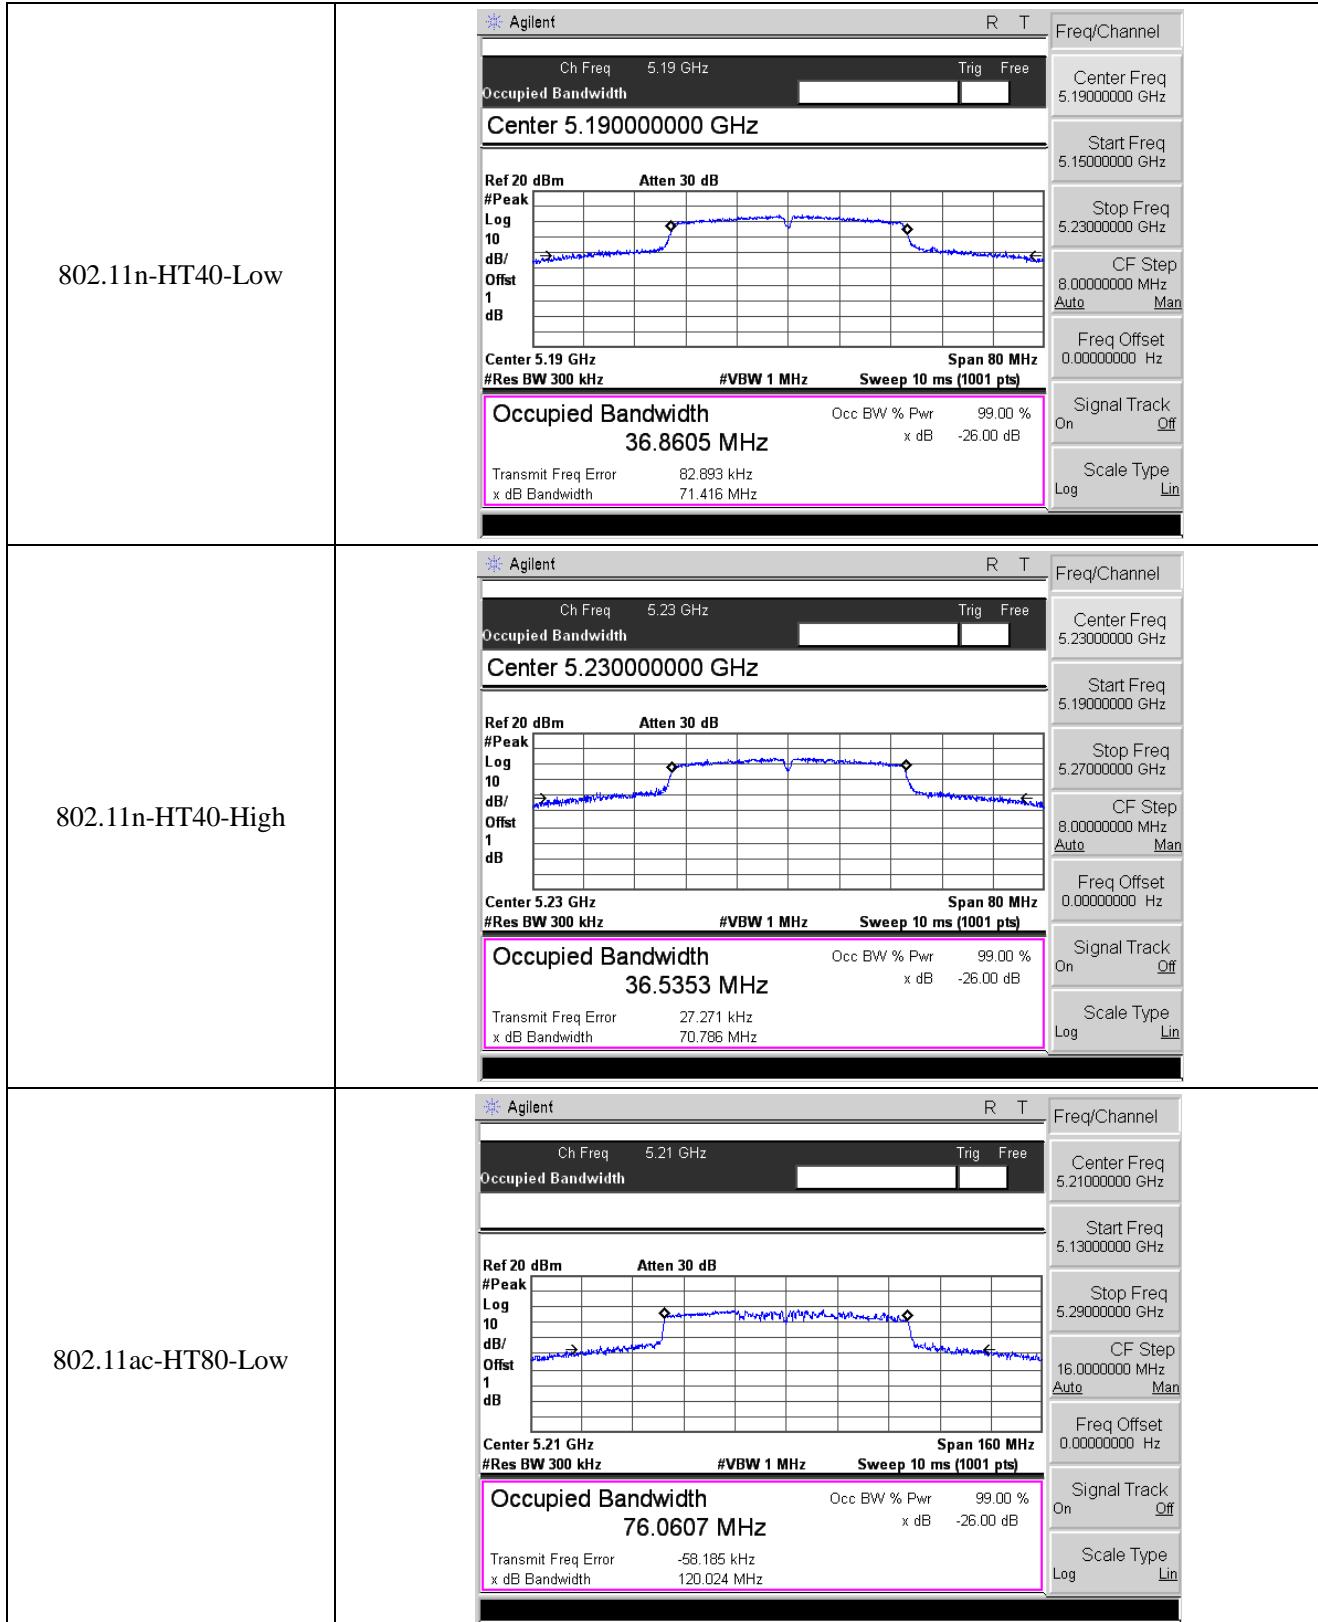


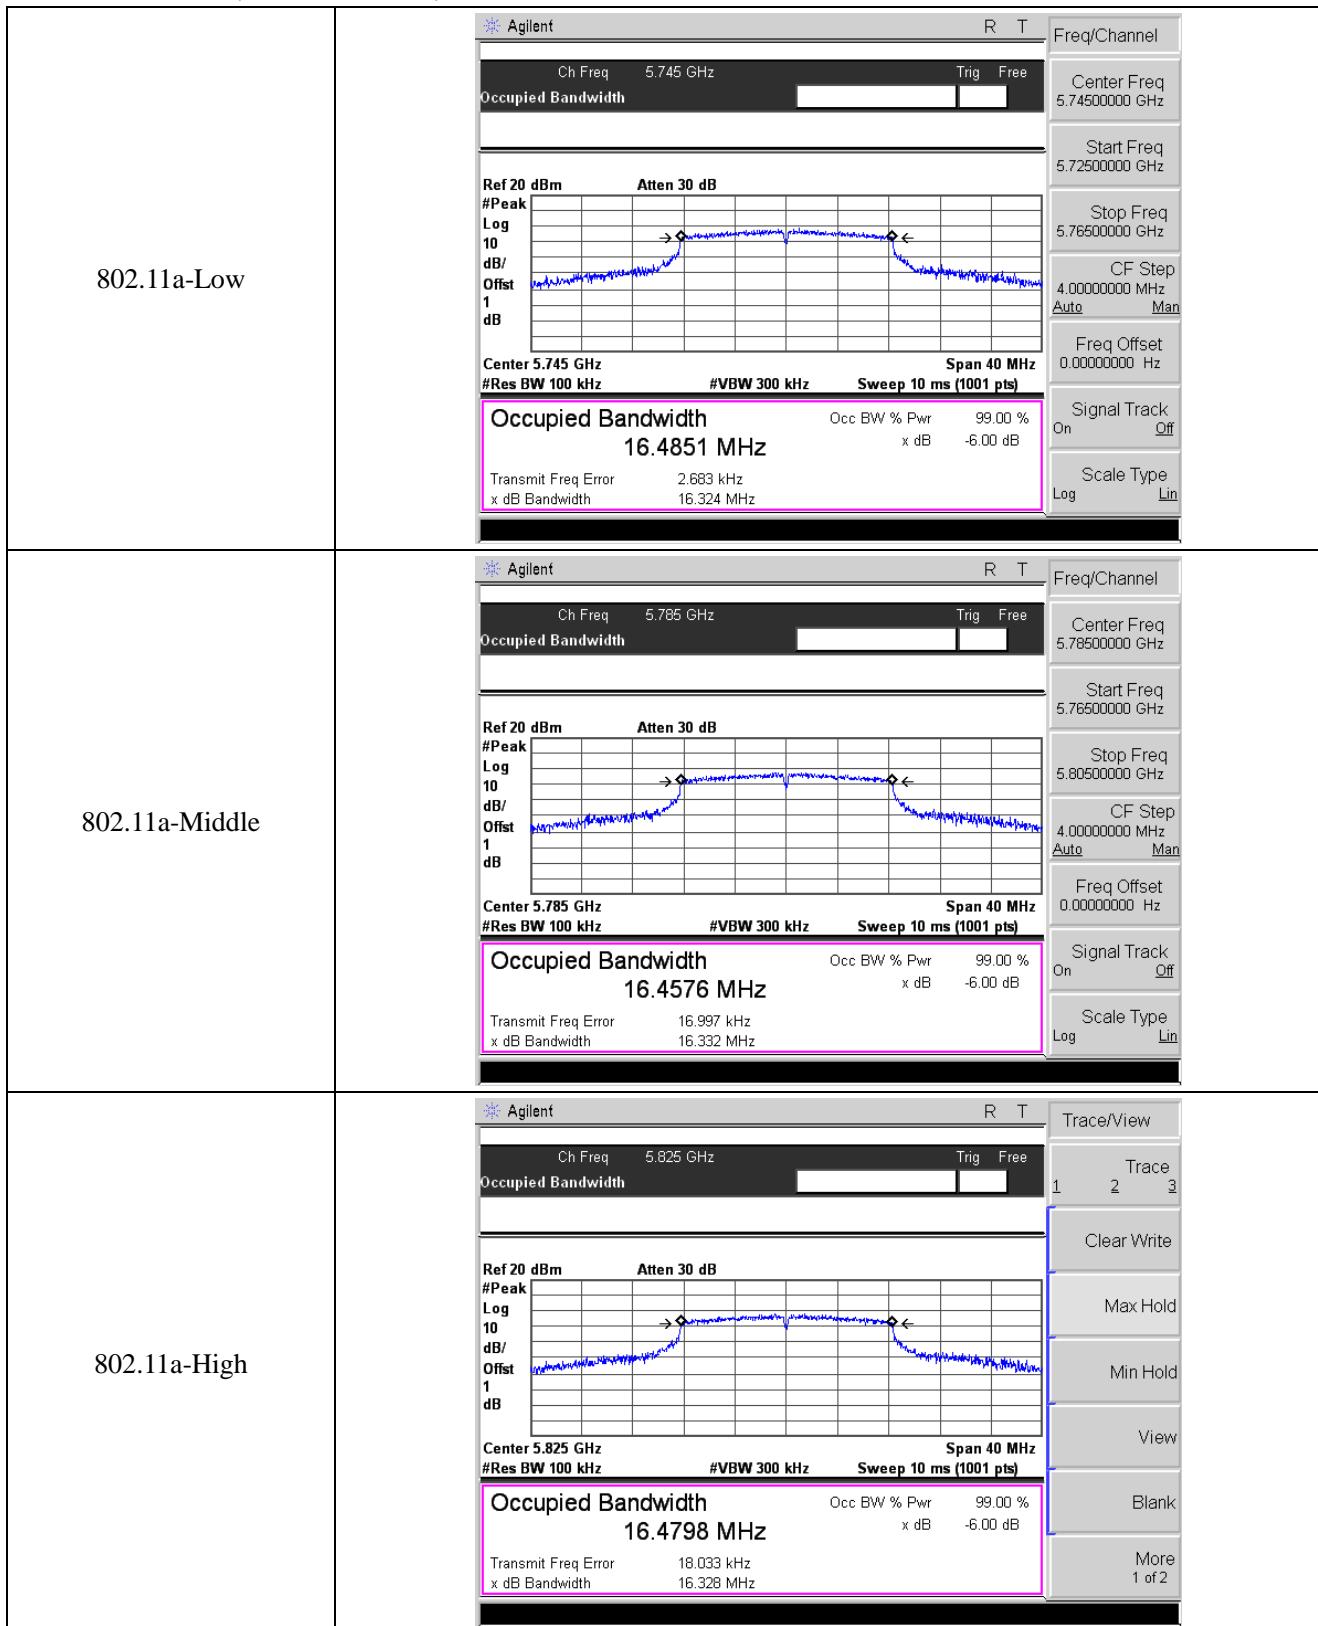
5725-5850MHz (6 dB Bandwidth)

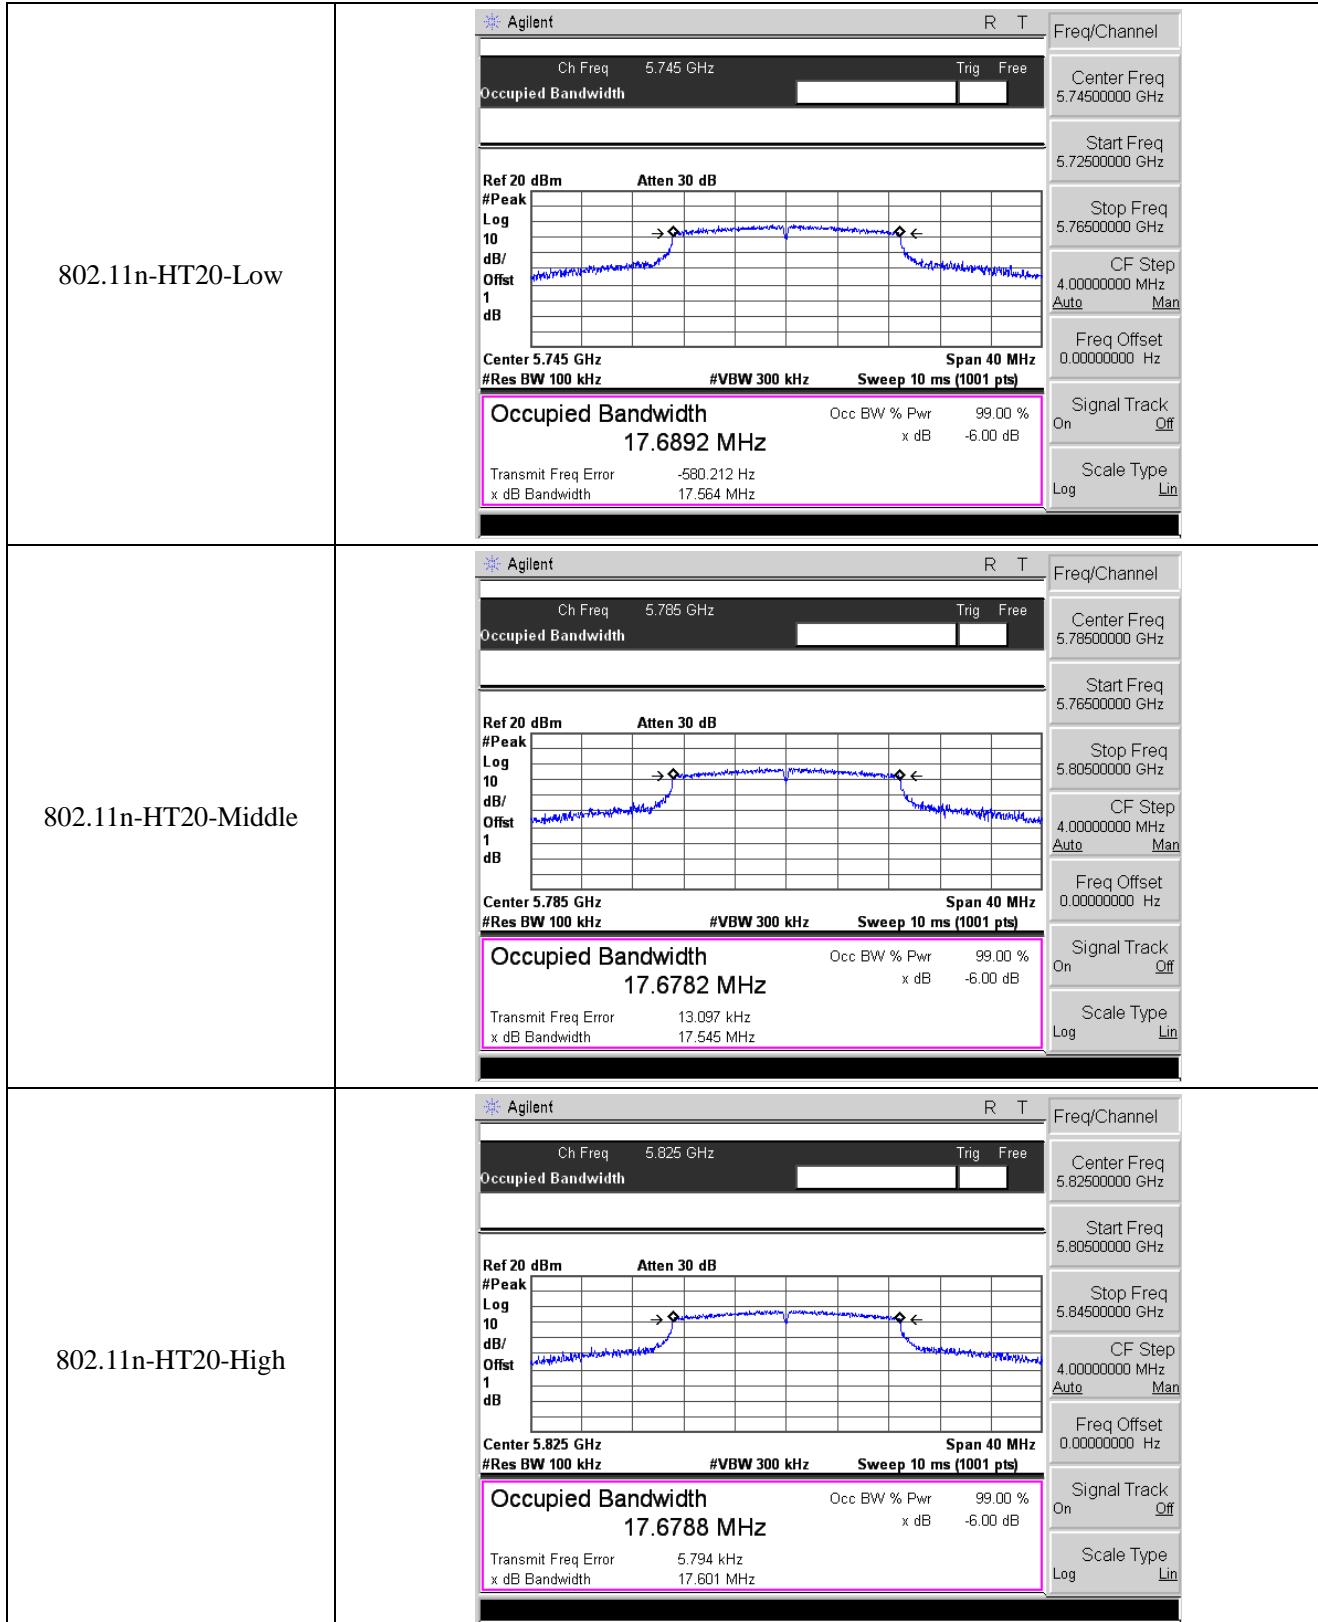


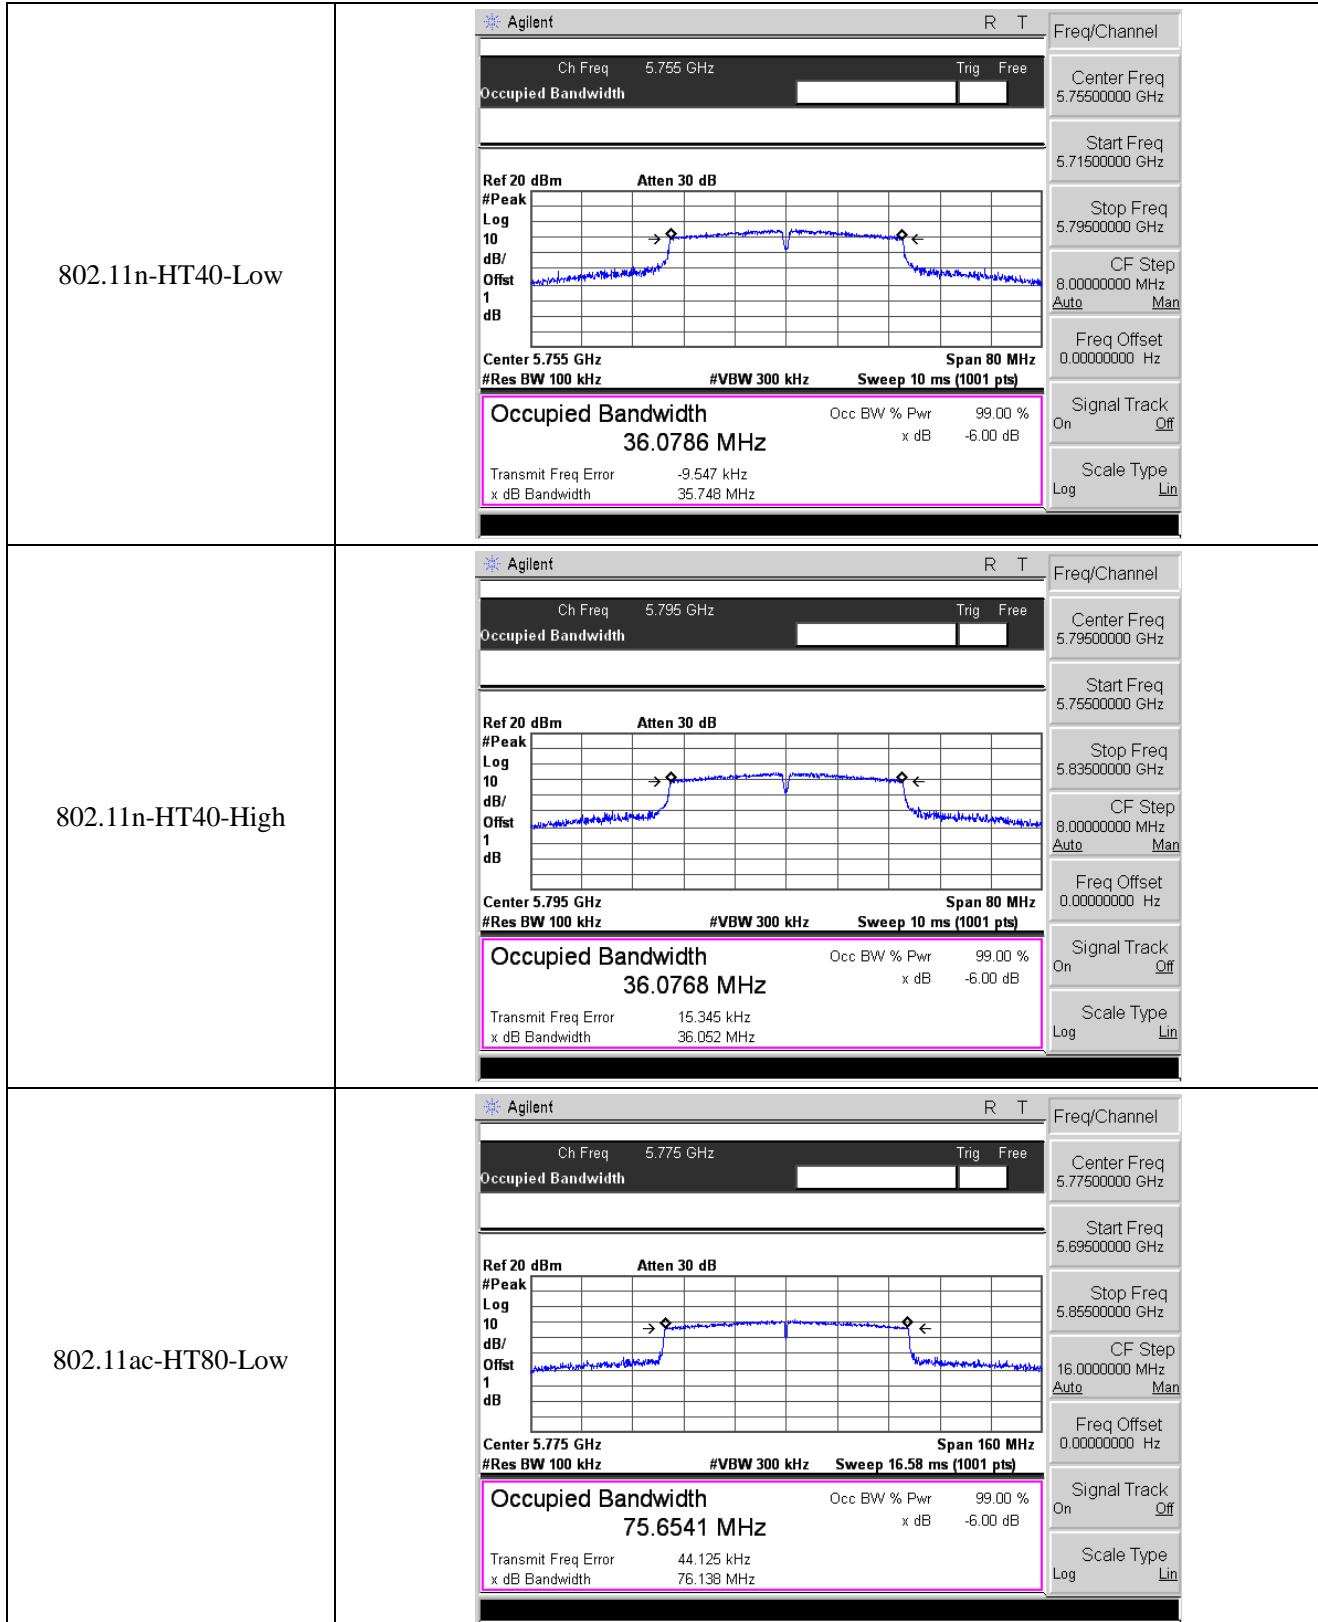

5725-5850MHz (99% Bandwidth)

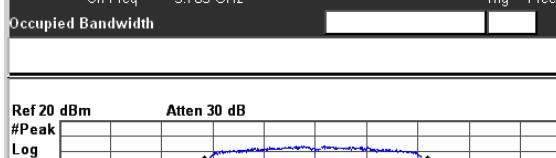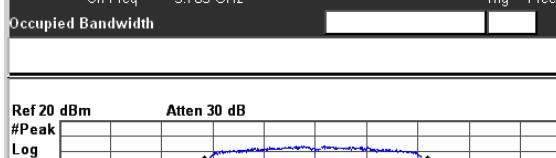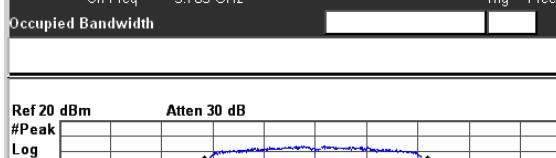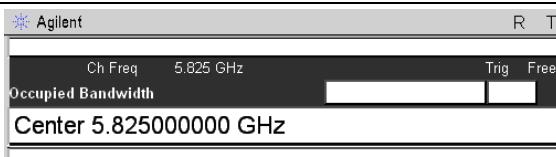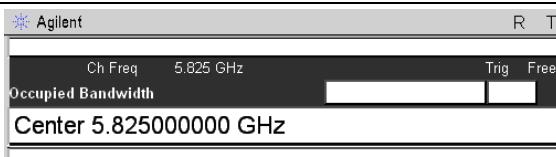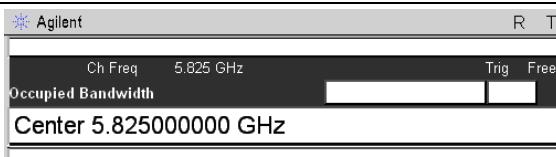802.11a-Middle	<p>Agilent</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%;">Ch Freq</td> <td style="width: 40%;">5.785 GHz</td> <td style="width: 10%;">Trig</td> <td style="width: 40%;">Free</td> </tr> <tr> <td colspan="4">Occupied Bandwidth</td> </tr> <tr> <td colspan="4"> Ref 20 dBm Atten 30 dB  #Peak Log 10 dB/ Offst 1 dB </td> </tr> <tr> <td colspan="4"> Center 5.785 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) </td> </tr> <tr> <td colspan="4" style="background-color: pink; border: 1px solid black; padding: 5px;"> Occupied Bandwidth 17.4108 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 72.393 kHz x dB Bandwidth 36.261 MHz </td> </tr> </table>	Ch Freq	5.785 GHz	Trig	Free	Occupied Bandwidth				Ref 20 dBm Atten 30 dB  #Peak Log 10 dB/ Offst 1 dB				Center 5.785 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)				Occupied Bandwidth 17.4108 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 72.393 kHz x dB Bandwidth 36.261 MHz				<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">Freq/Channel</td> <td style="width: 50%;"></td> </tr> <tr> <td>Center Freq</td> <td>5.7850000 GHz</td> </tr> <tr> <td>Start Freq</td> <td>5.7650000 GHz</td> </tr> <tr> <td>Stop Freq</td> <td>5.8050000 GHz</td> </tr> <tr> <td>CF Step</td> <td>4.0000000 MHz</td> </tr> <tr> <td>Auto</td> <td>Man</td> </tr> <tr> <td>Freq Offset</td> <td>0.0000000 Hz</td> </tr> <tr> <td>Signal Track</td> <td>Off</td> </tr> <tr> <td>Scale Type</td> <td>Log</td> </tr> <tr> <td></td> <td>Lin</td> </tr> </table>	Freq/Channel		Center Freq	5.7850000 GHz	Start Freq	5.7650000 GHz	Stop Freq	5.8050000 GHz	CF Step	4.0000000 MHz	Auto	Man	Freq Offset	0.0000000 Hz	Signal Track	Off	Scale Type	Log		Lin				
Ch Freq	5.785 GHz	Trig	Free																																											
Occupied Bandwidth																																														
Ref 20 dBm Atten 30 dB  #Peak Log 10 dB/ Offst 1 dB																																														
Center 5.785 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)																																														
Occupied Bandwidth 17.4108 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 72.393 kHz x dB Bandwidth 36.261 MHz																																														
Freq/Channel																																														
Center Freq	5.7850000 GHz																																													
Start Freq	5.7650000 GHz																																													
Stop Freq	5.8050000 GHz																																													
CF Step	4.0000000 MHz																																													
Auto	Man																																													
Freq Offset	0.0000000 Hz																																													
Signal Track	Off																																													
Scale Type	Log																																													
	Lin																																													
802.11a-High	<p>Agilent</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%;">Ch Freq</td> <td style="width: 40%;">5.825 GHz</td> <td style="width: 10%;">Trig</td> <td style="width: 40%;">Free</td> </tr> <tr> <td colspan="4">Occupied Bandwidth</td> </tr> <tr> <td colspan="4"> Center 5.825000000 GHz </td> </tr> <tr> <td colspan="4"> Ref 20 dBm Atten 30 dB  #Peak Log 10 dB/ Offst 1 dB </td> </tr> <tr> <td colspan="4"> Center 5.825 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) </td> </tr> <tr> <td colspan="4" style="background-color: pink; border: 1px solid black; padding: 5px;"> Occupied Bandwidth 17.1586 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 49.557 kHz x dB Bandwidth 31.831 MHz </td> </tr> </table>	Ch Freq	5.825 GHz	Trig	Free	Occupied Bandwidth				Center 5.825000000 GHz				Ref 20 dBm Atten 30 dB  #Peak Log 10 dB/ Offst 1 dB				Center 5.825 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)				Occupied Bandwidth 17.1586 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 49.557 kHz x dB Bandwidth 31.831 MHz				<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">Freq/Channel</td> <td style="width: 50%;"></td> </tr> <tr> <td>Center Freq</td> <td>5.8250000 GHz</td> </tr> <tr> <td>Start Freq</td> <td>5.8050000 GHz</td> </tr> <tr> <td>Stop Freq</td> <td>5.8450000 GHz</td> </tr> <tr> <td>CF Step</td> <td>4.0000000 MHz</td> </tr> <tr> <td>Auto</td> <td>Man</td> </tr> <tr> <td>Freq Offset</td> <td>0.0000000 Hz</td> </tr> <tr> <td>Signal Track</td> <td>Off</td> </tr> <tr> <td>Scale Type</td> <td>Log</td> </tr> <tr> <td></td> <td>Lin</td> </tr> </table>	Freq/Channel		Center Freq	5.8250000 GHz	Start Freq	5.8050000 GHz	Stop Freq	5.8450000 GHz	CF Step	4.0000000 MHz	Auto	Man	Freq Offset	0.0000000 Hz	Signal Track	Off	Scale Type	Log		Lin
Ch Freq	5.825 GHz	Trig	Free																																											
Occupied Bandwidth																																														
Center 5.825000000 GHz																																														
Ref 20 dBm Atten 30 dB  #Peak Log 10 dB/ Offst 1 dB																																														
Center 5.825 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)																																														
Occupied Bandwidth 17.1586 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 49.557 kHz x dB Bandwidth 31.831 MHz																																														
Freq/Channel																																														
Center Freq	5.8250000 GHz																																													
Start Freq	5.8050000 GHz																																													
Stop Freq	5.8450000 GHz																																													
CF Step	4.0000000 MHz																																													
Auto	Man																																													
Freq Offset	0.0000000 Hz																																													
Signal Track	Off																																													
Scale Type	Log																																													
	Lin																																													

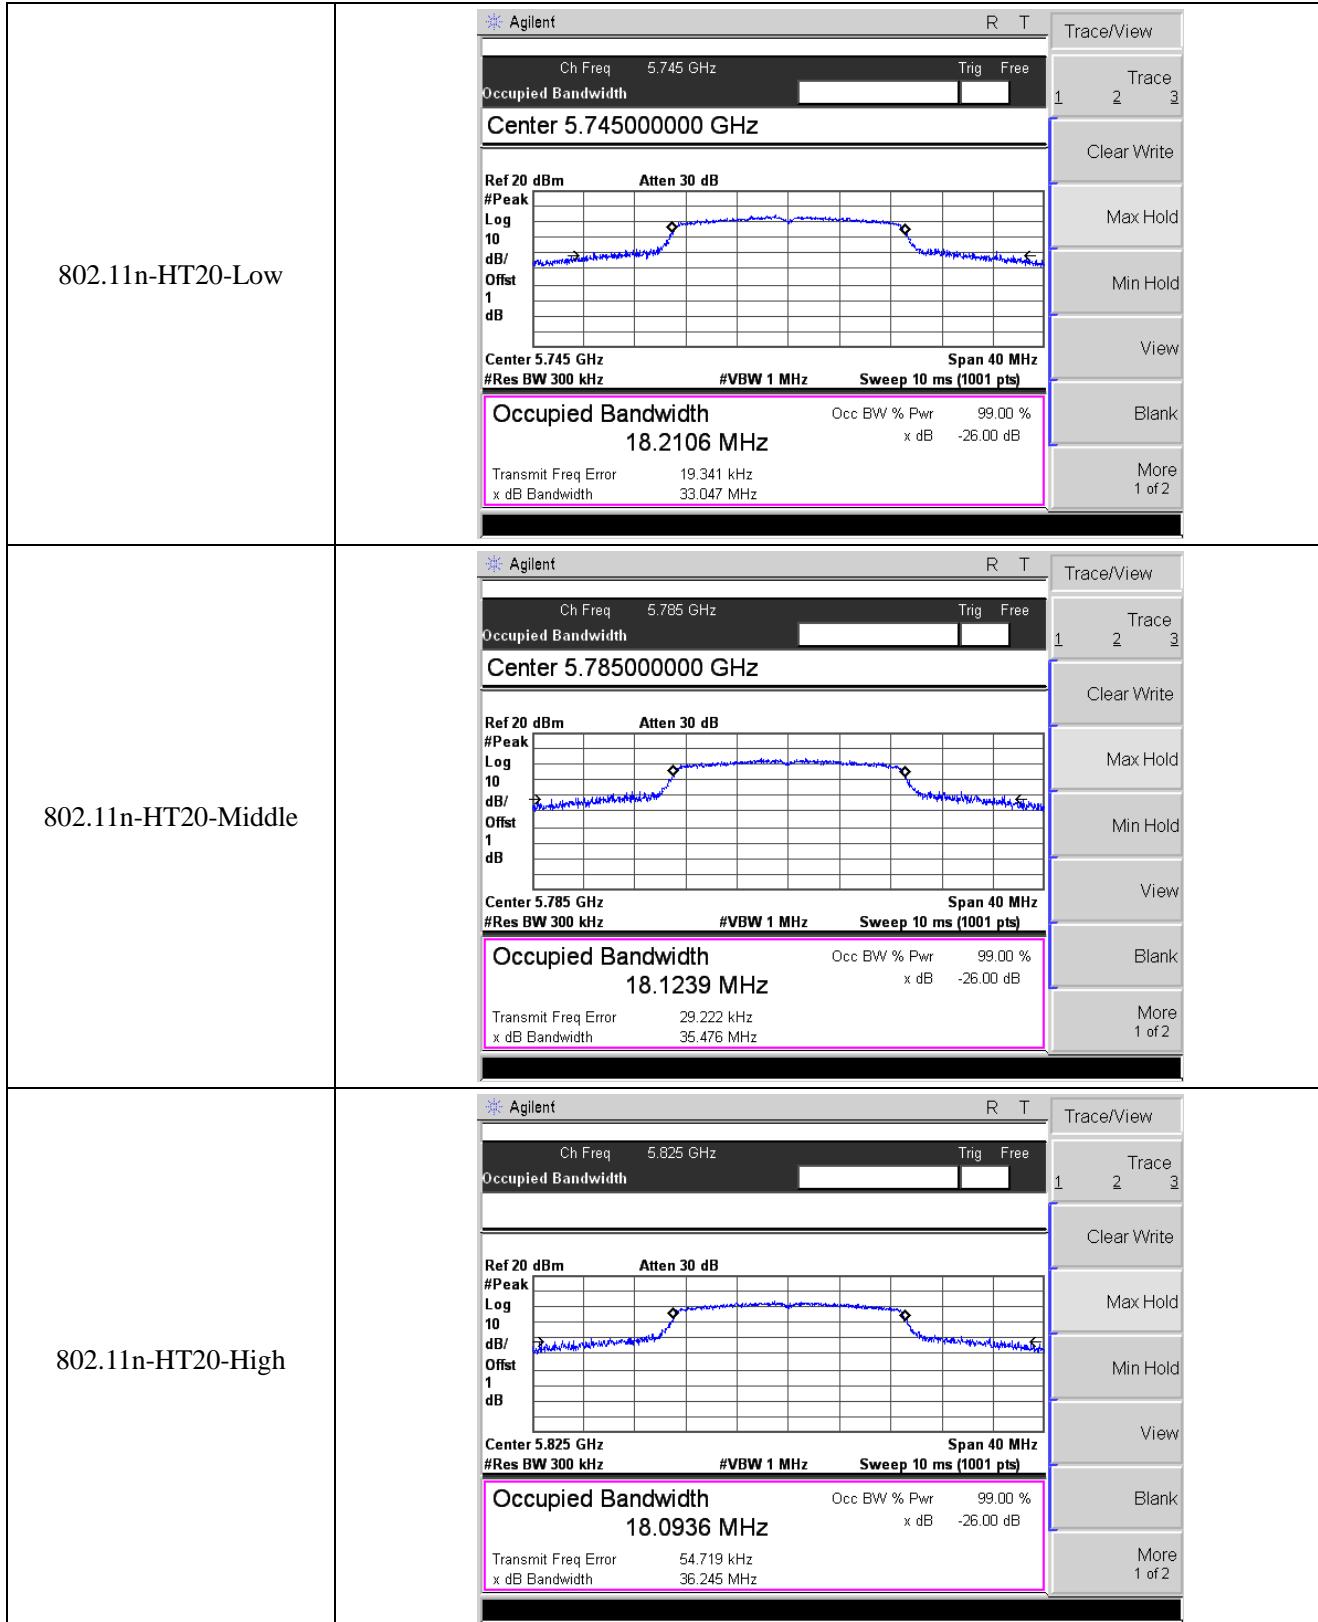

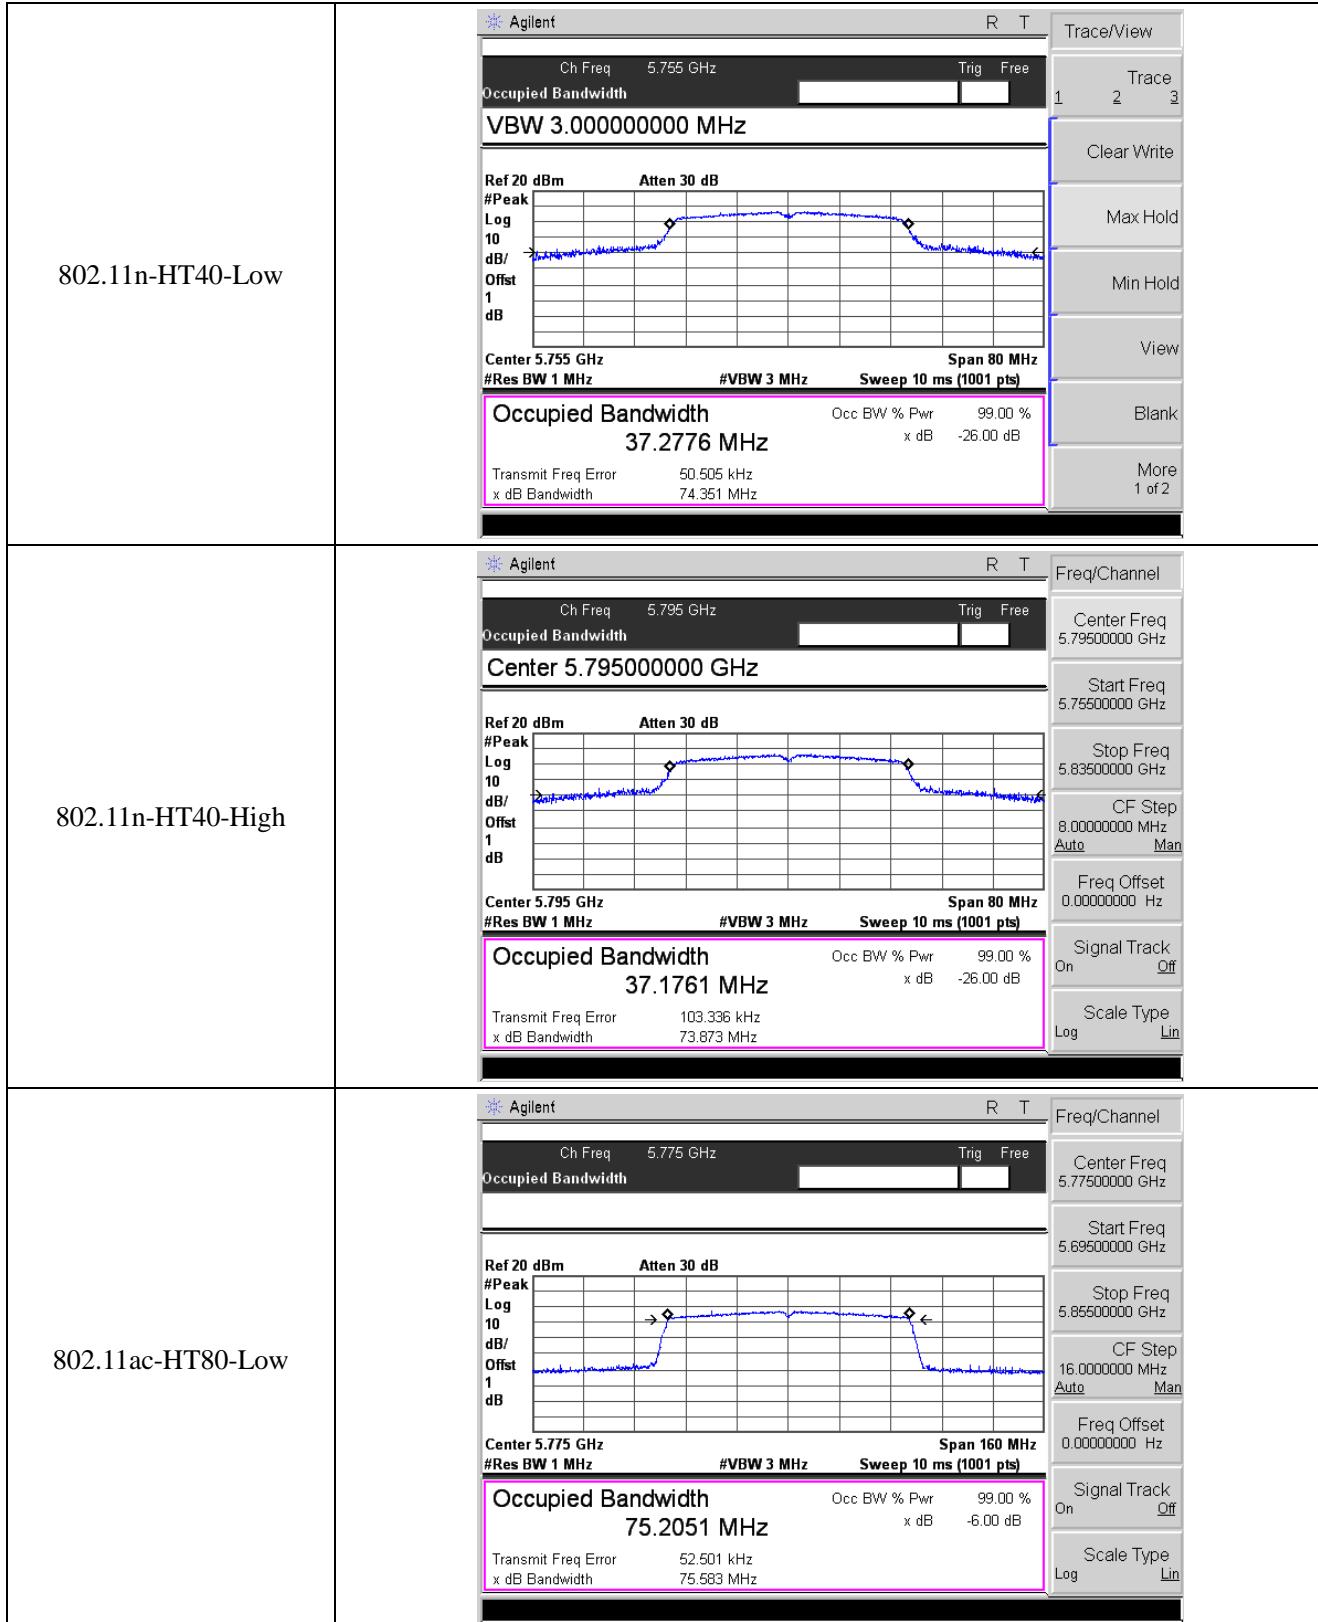


APPENDIX C


Maximum Conducted Output Power


U-NII-1:5150-5250MHz			
Test mode	Frequency MHz	Output Power dBm	Limit dBm
802.11a	5180	11.16	23.98
	5200	10.95	23.98
	5240	12.15	23.98
802.11n-HT20	5180	11.35	23.98
	5200	11.13	23.98
	5240	11.51	23.98
802.11n-HT40	5190	11.23	23.98
	5230	11.48	23.98
802.11ac VH80	5210	11.04	23.98

U-NII-3: 5725-5850MHz			
Test mode	Frequency MHz	Output Power dBm	Limit dBm
802.11a	5745	9.99	30.00
	5785	9.94	30.00
	5825	10.02	30.00
802.11n-HT20	5745	9.92	30.00
	5785	9.82	30.00
	5825	10.02	30.00
802.11n-HT40	5755	10.21	30.00
	5795	9.54	30.00
802.11ac VH80	5775	9.68	30.00


5150-5250MHz

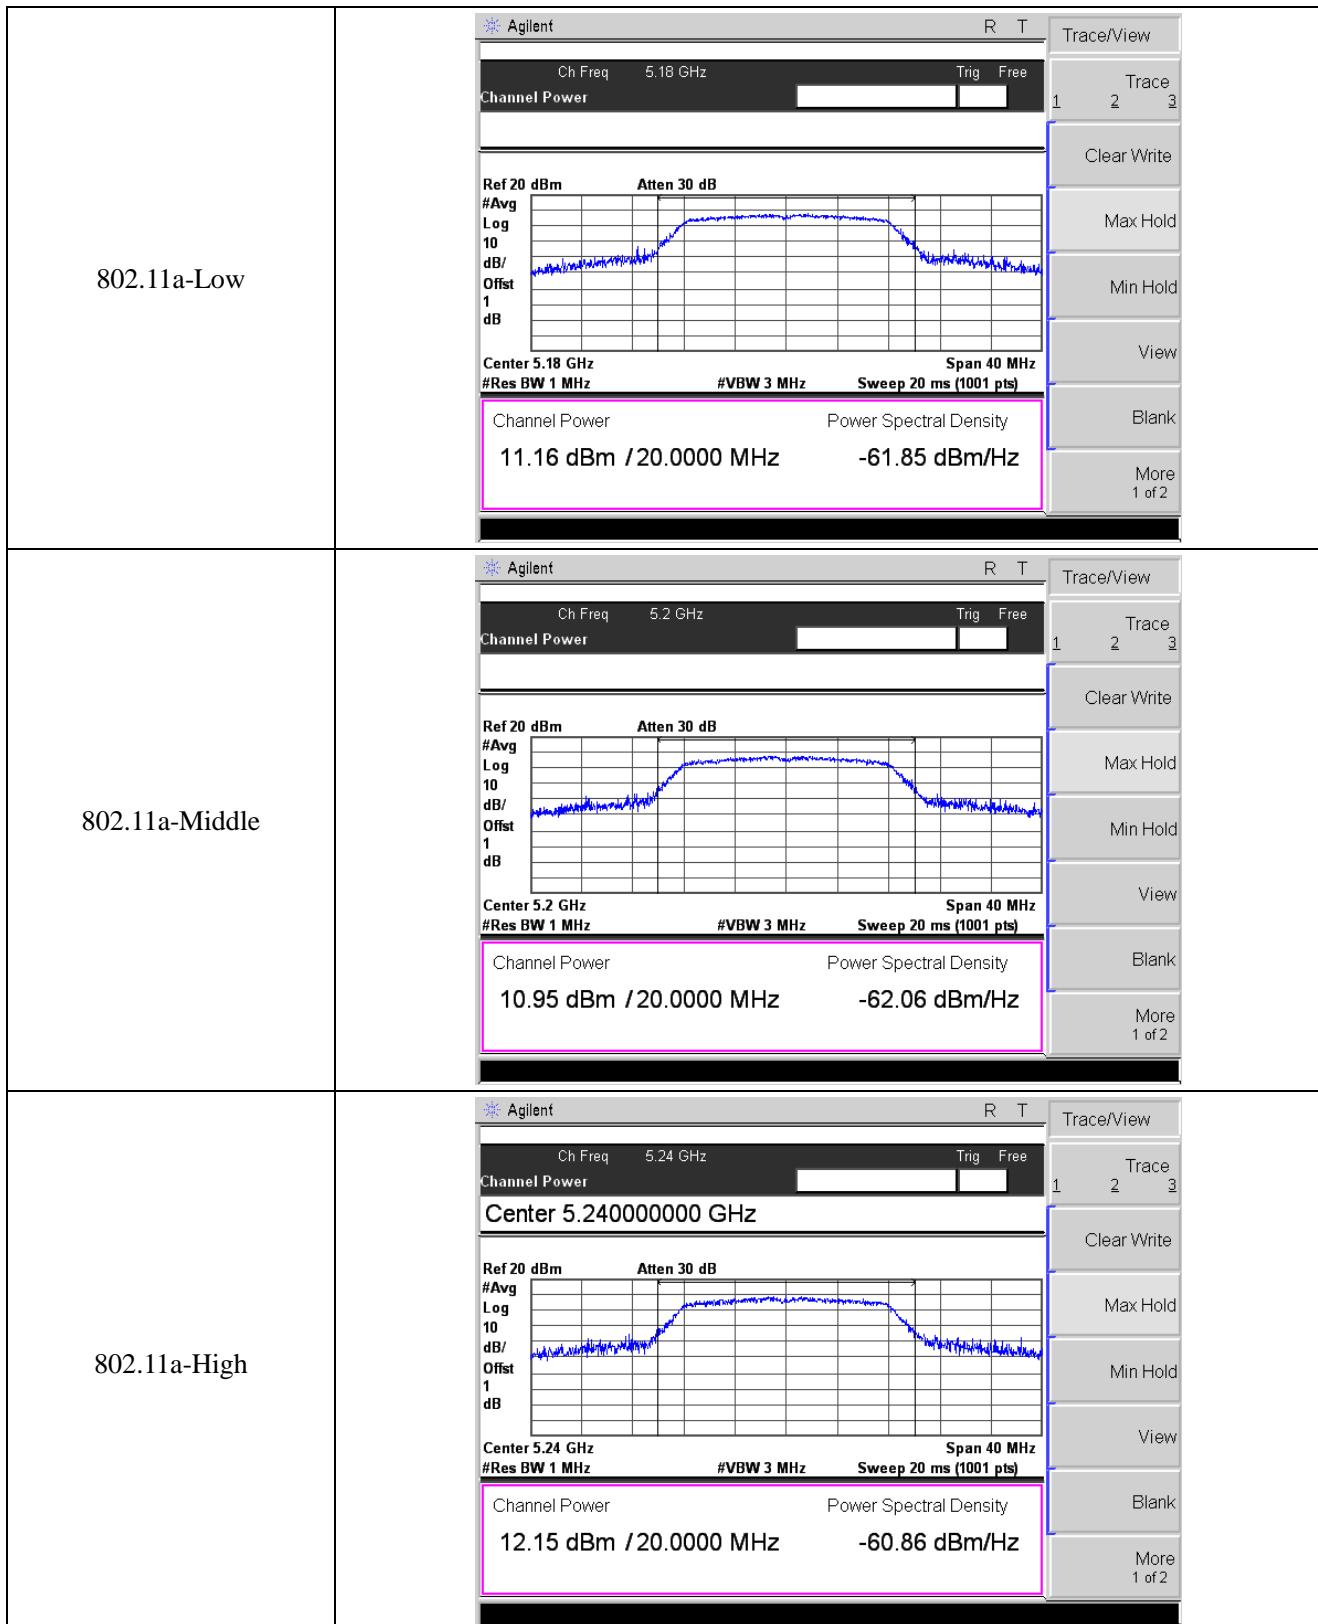


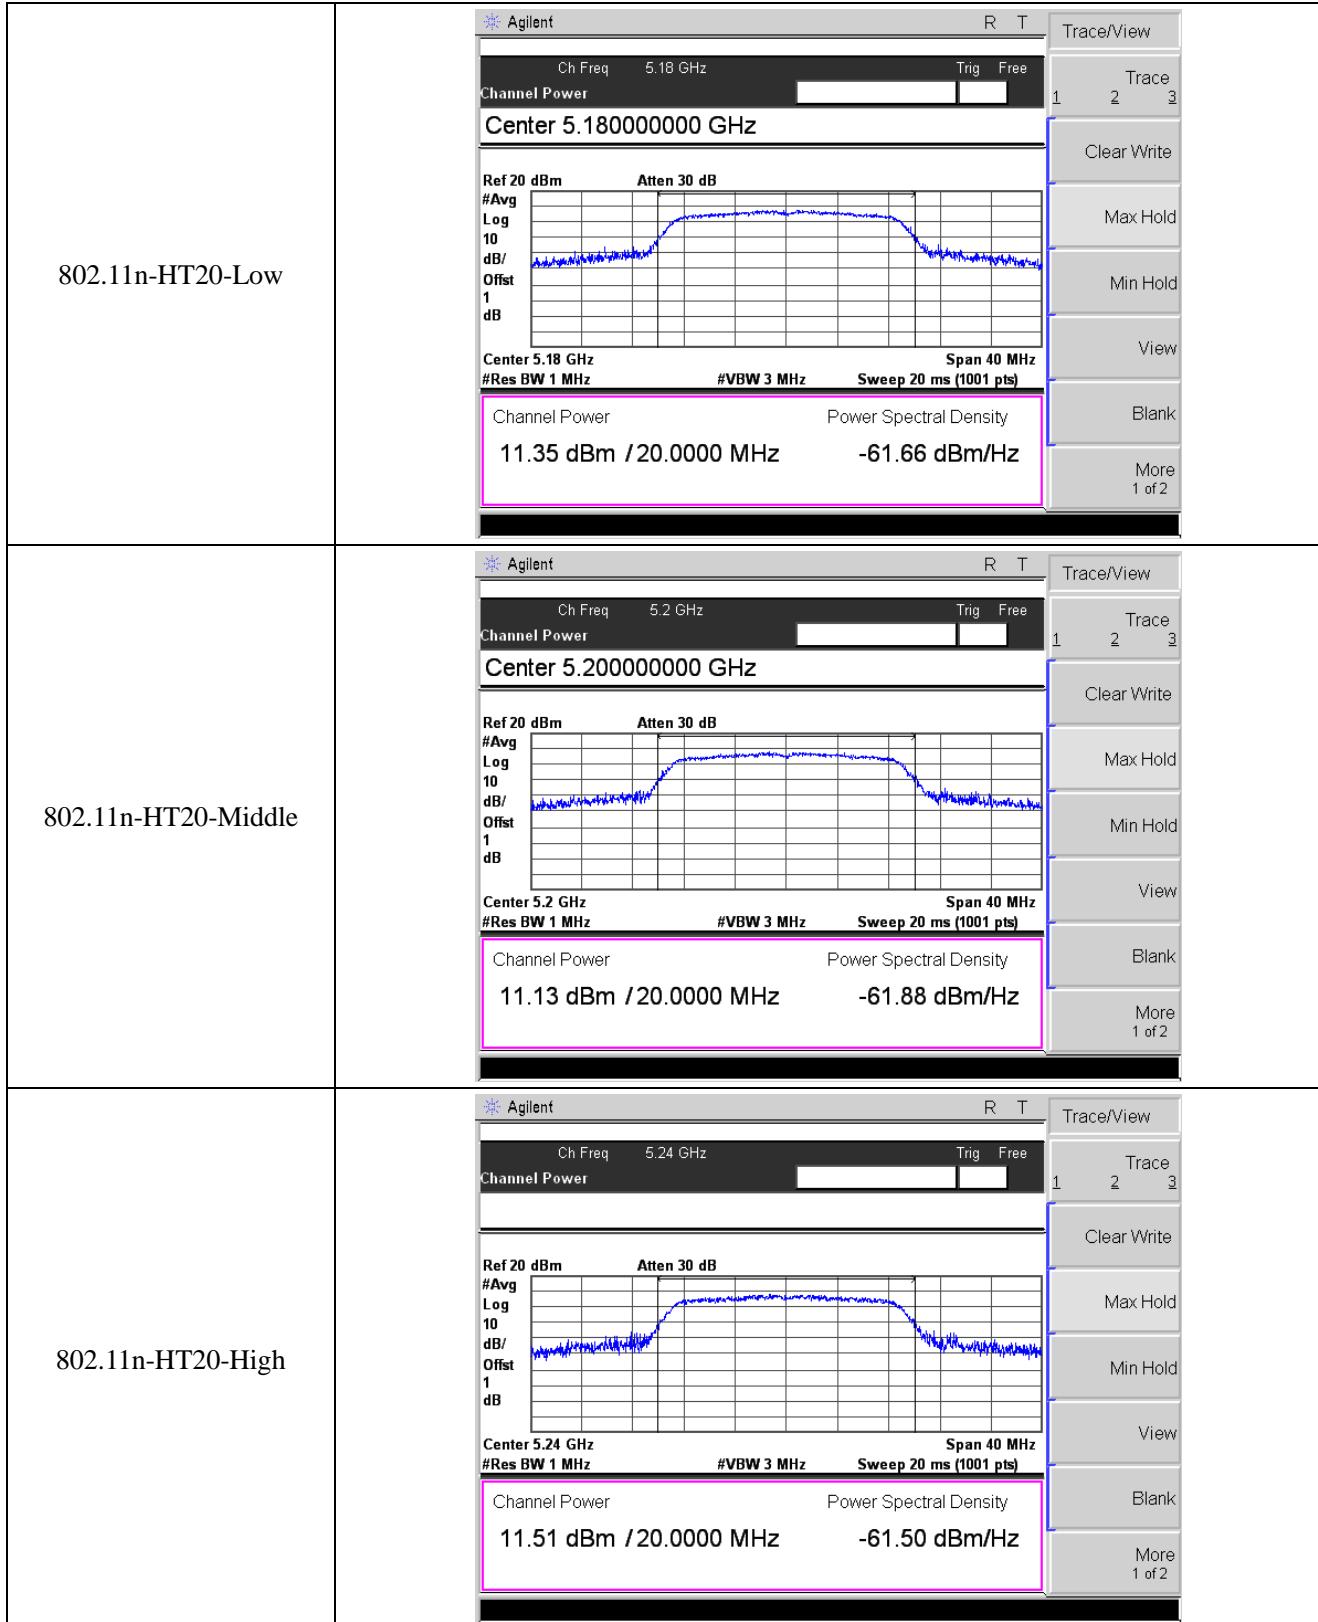


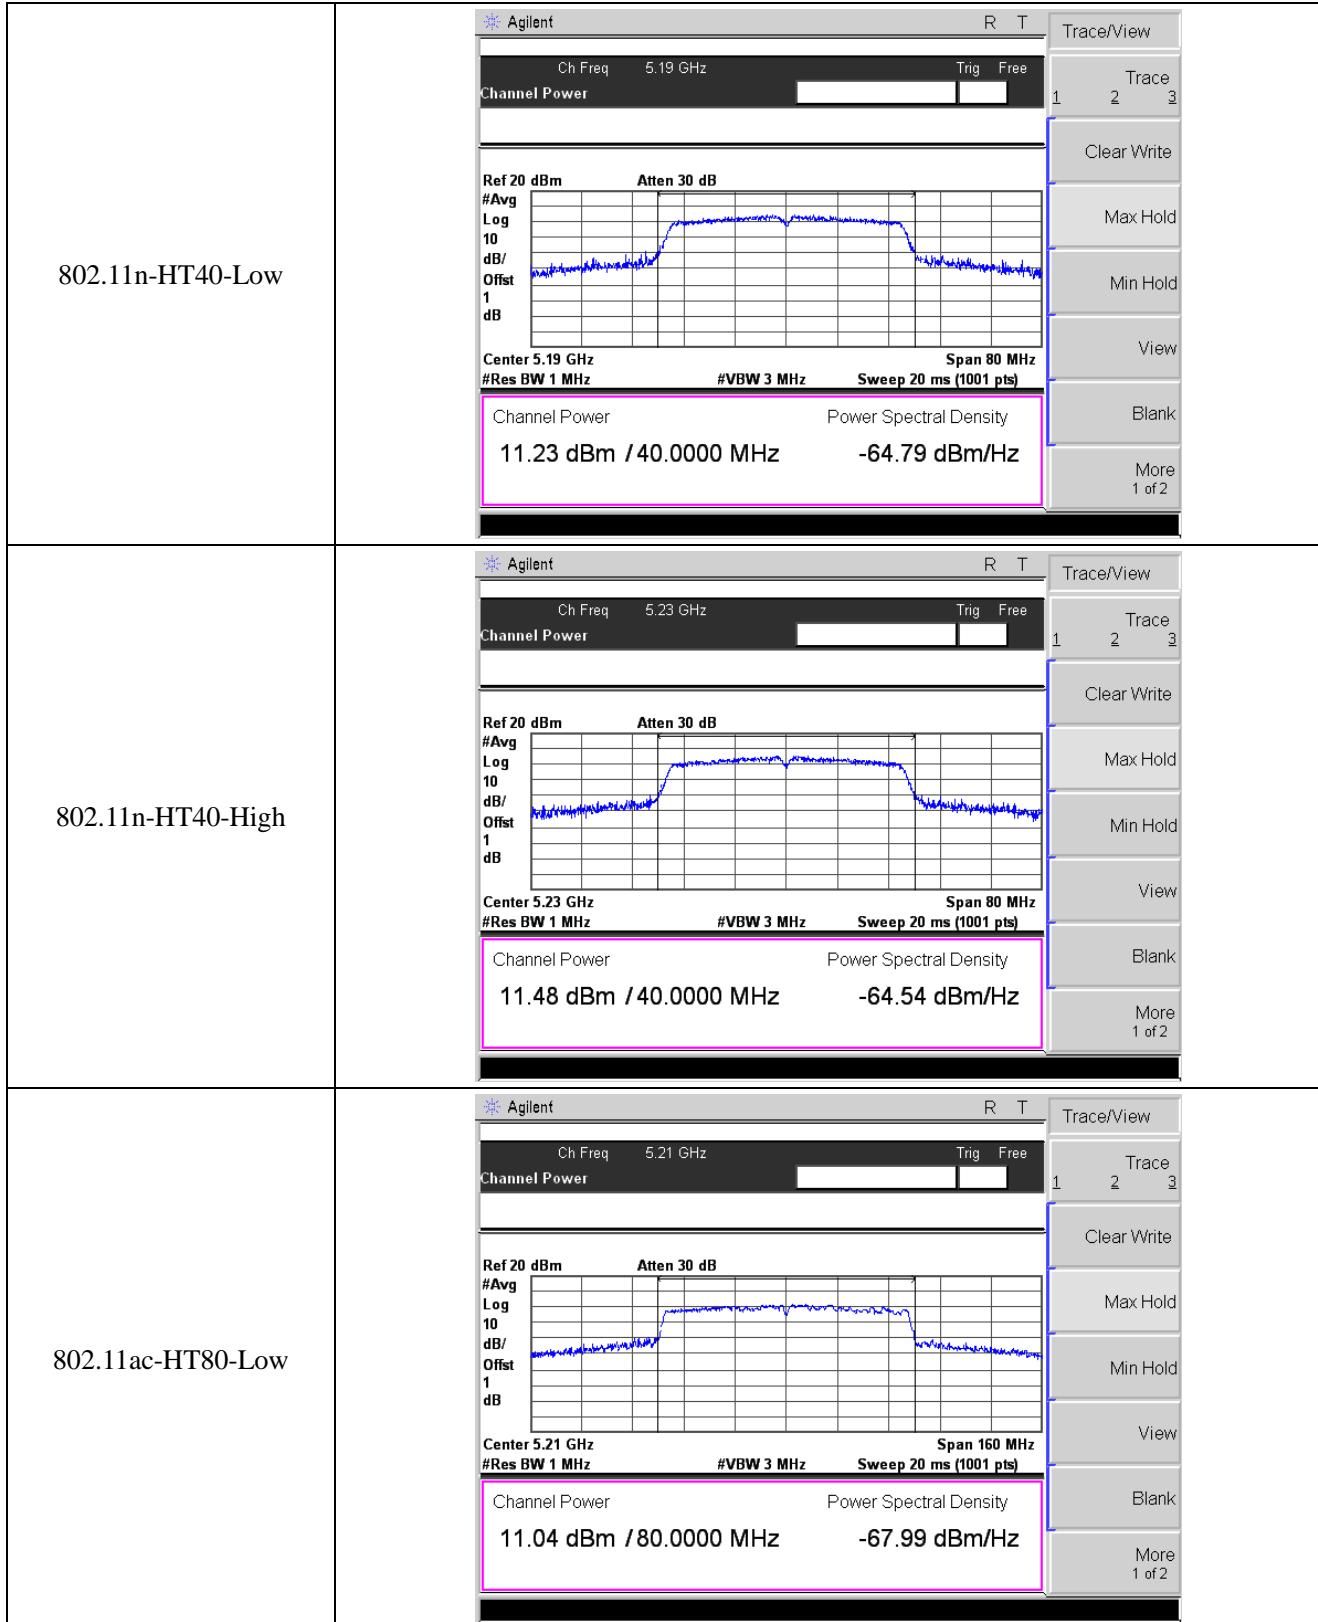

5725-5850MHz

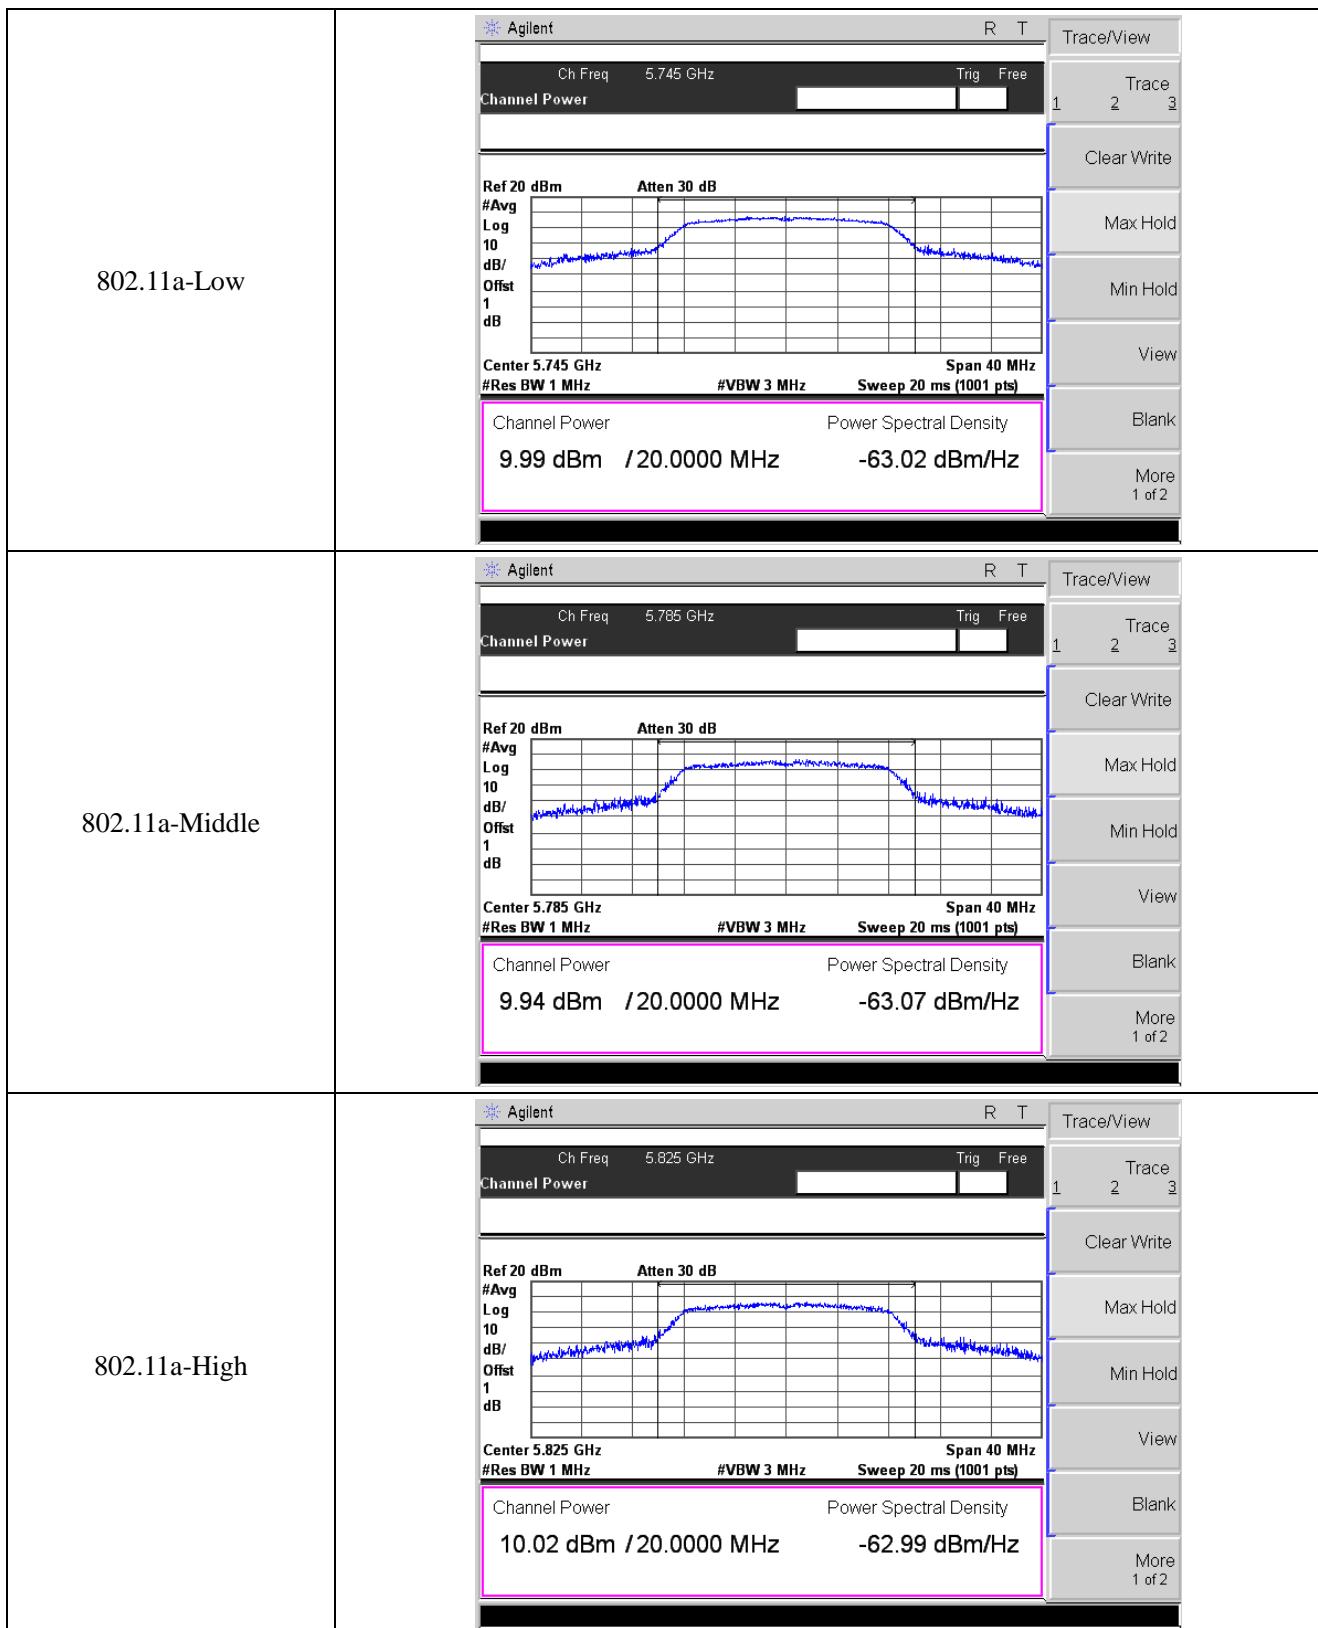

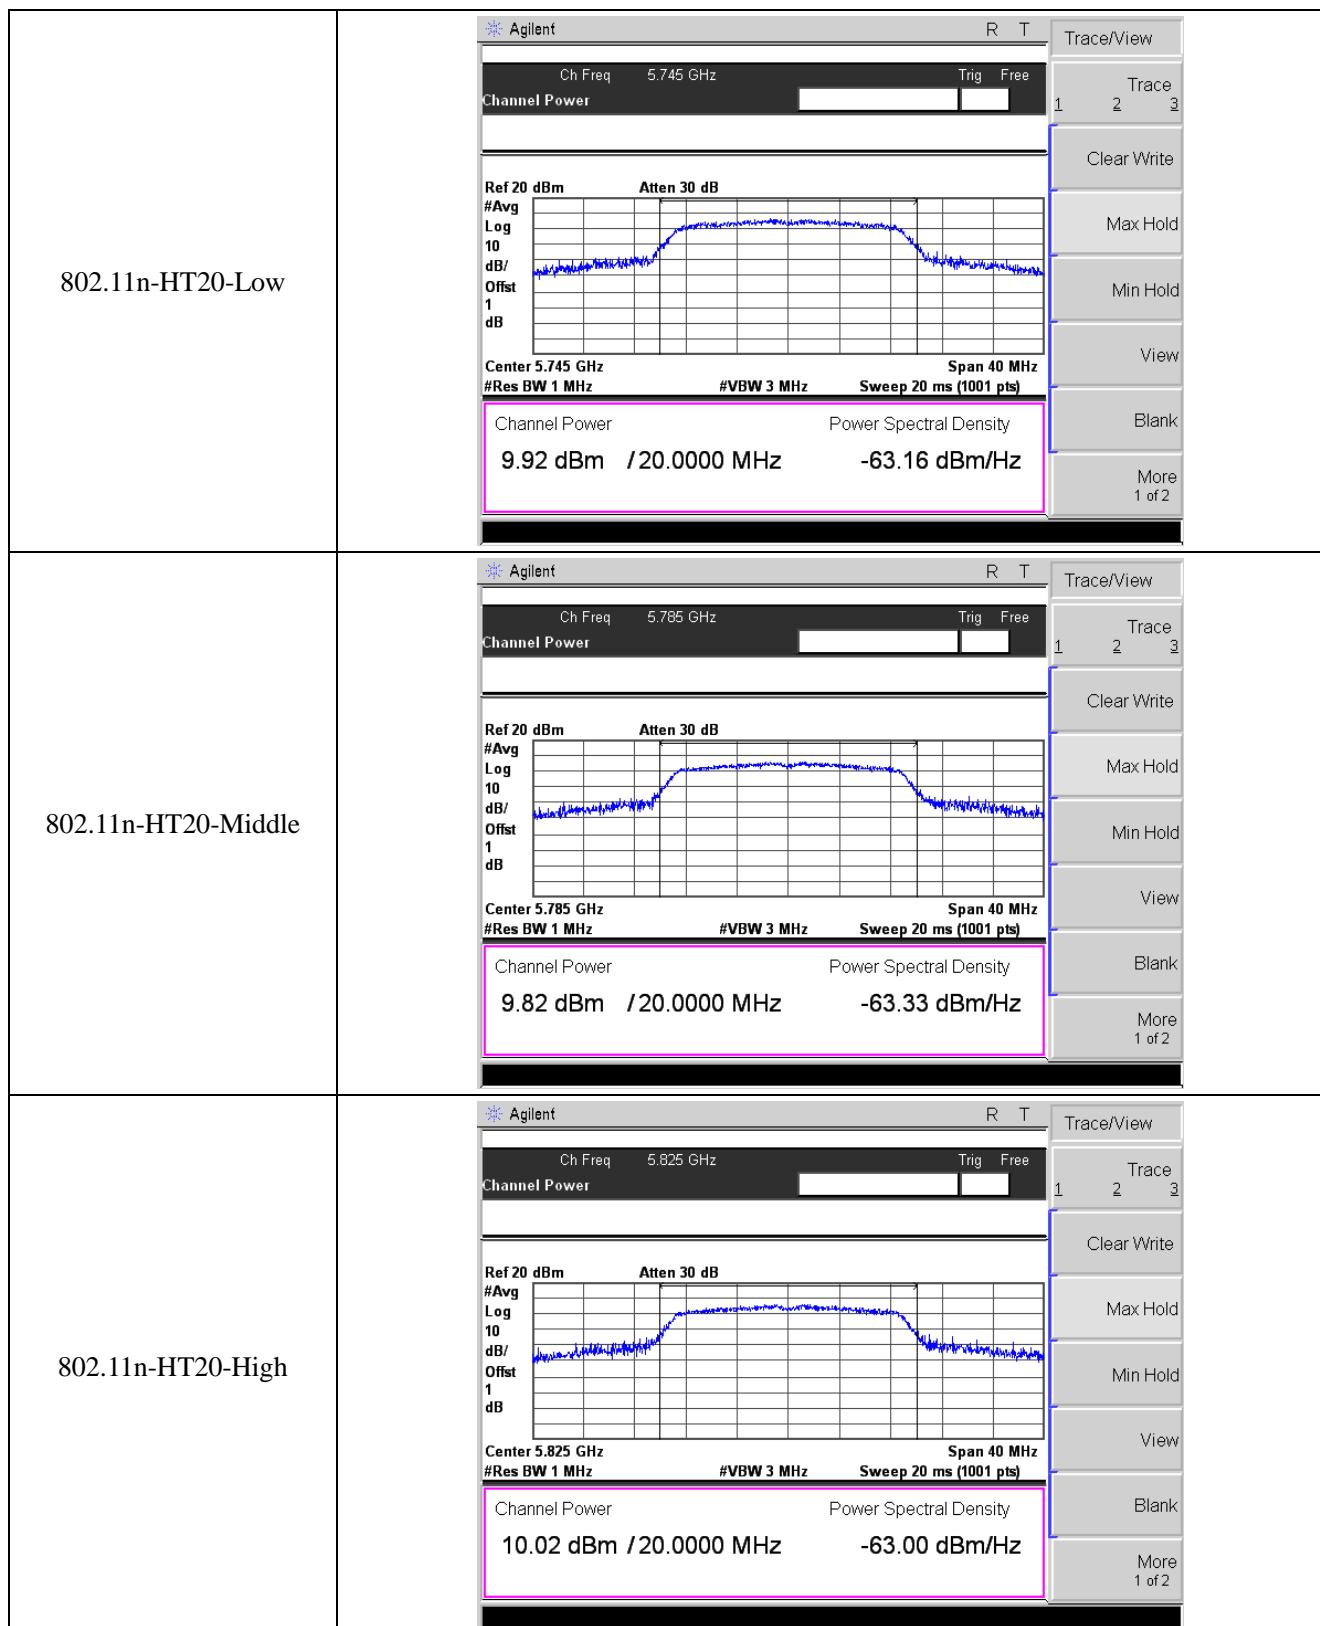

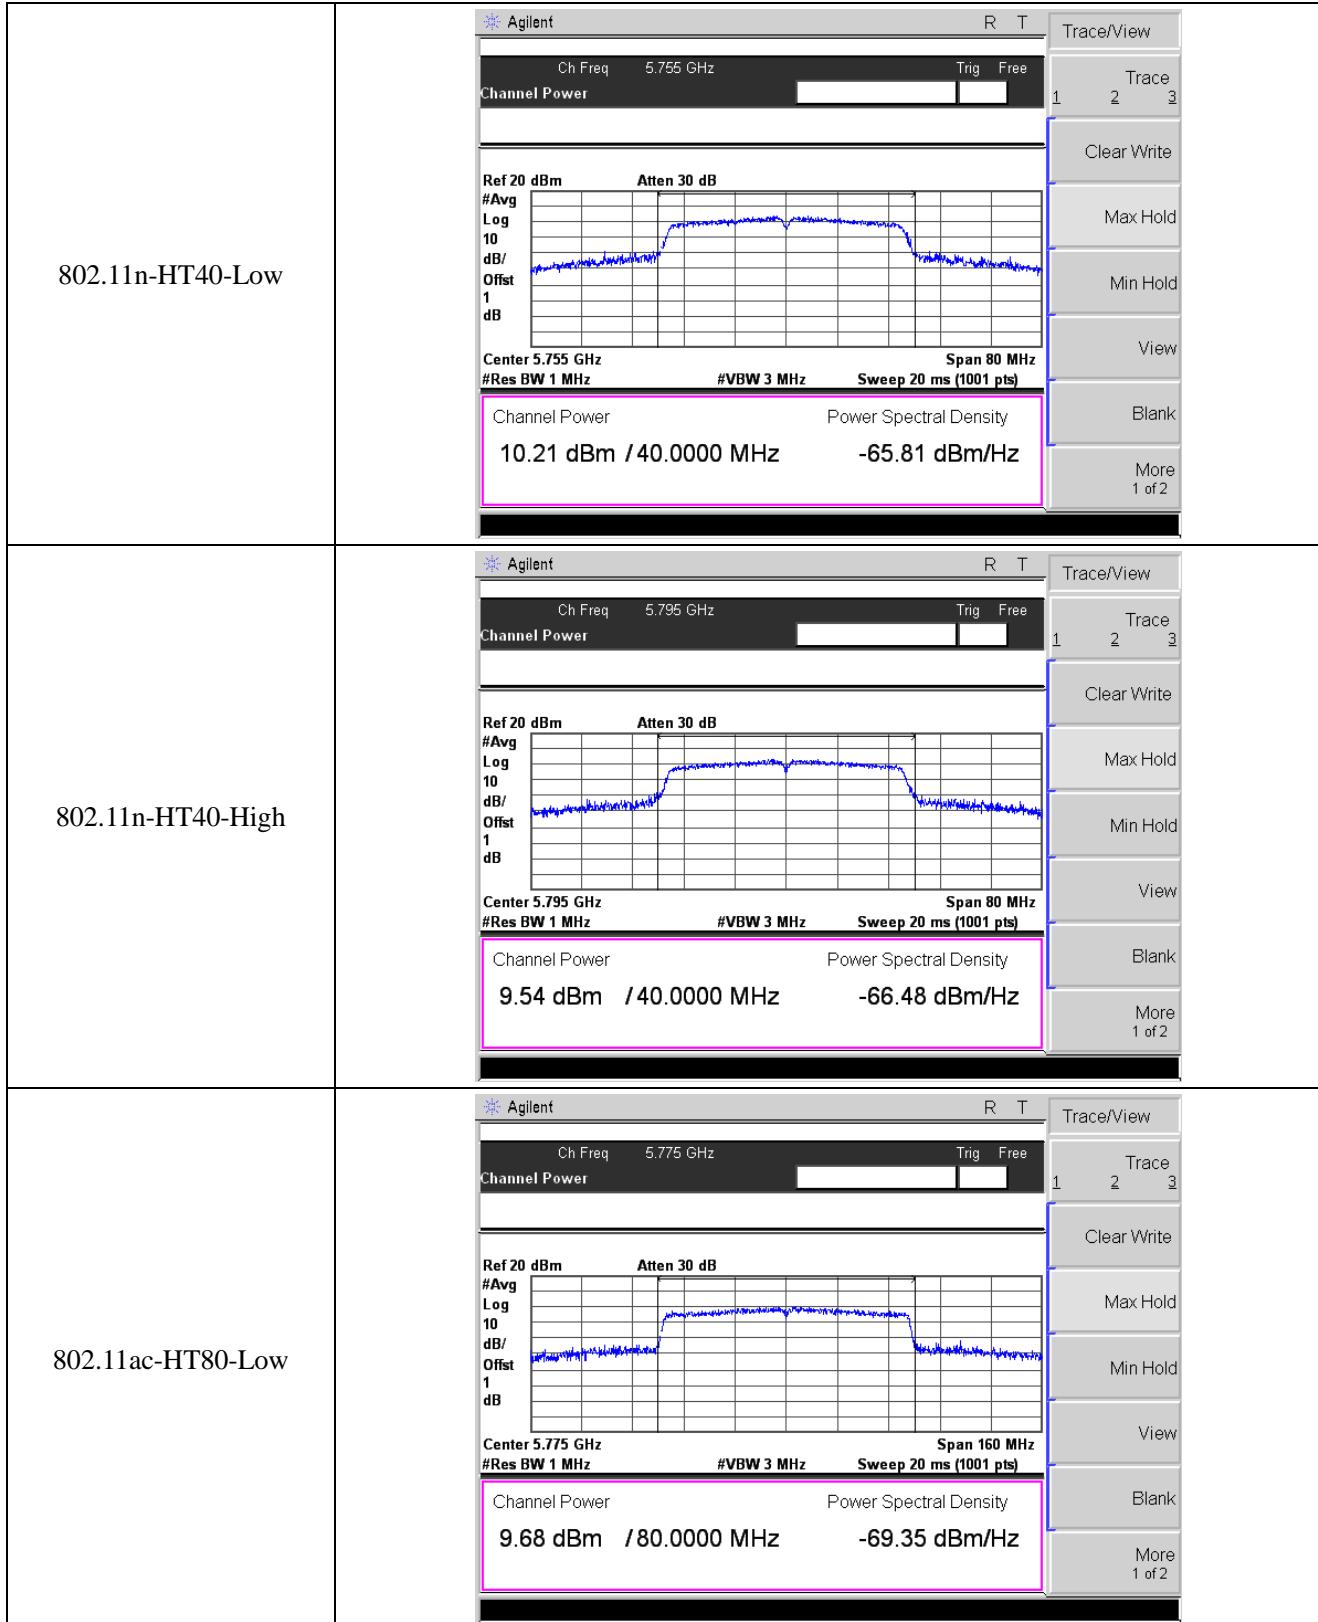

APPENDIX D

Frequency Stability

U-NII-1:5150-5250MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	3.85	-30	167	0.0321
100%		-20	141	0.0271
100%		-10	152	0.0292
100%		0	105	0.0202
100%		+10	173	0.0333
100%		+20	151	0.0290
100%		+30	156	0.0300
100%		+40	158	0.0304
100%		+50	155	0.0298
Low Battery power	3.5	+20	128	0.0246
High Battery power	4.4	+20	132	0.0254

U-NII-3:5725-5850MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	3.85	-30	141	0.0244
100%		-20	156	0.0270
100%		-10	155	0.0268
100%		0	137	0.0237
100%		+10	157	0.0271
100%		+20	164	0.0283
100%		+30	111	0.0192
100%		+40	168	0.0290
100%		+50	127	0.0220
Low Battery power	3.5	+20	160	0.0277
High Battery power	4.4	+20	113	0.0195

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

***** END OF REPORT *****