

LABORATORY TEST REPORT

RADIO PERFORMANCE MEASUREMENTS

for the

TPDB1D Handportable Transceiver

Tested in accordance with:

FCC 47 CFR Parts 22 and 90

RSS-119 Issue 12
RSS-Gen Issue 5

Report Revision: 1
Issue Date: 3 October 2018

PREPARED BY: L. M. White
Test Technician

CHECKED & APPROVED BY: M. C. James
Laboratory Technical Manager



FCC REGISTRATION: 838288
IC LISTING REGISTRATION: SITE# 737A-1

All tests reported herein have been performed in accordance with the laboratory's scope of accreditation.

This document must not be reproduced except in full, without the written permission of the Compliance Laboratory Manager

TABLE OF CONTENTS

REVISION	3
INTRODUCTION	4
STATEMENT OF COMPLIANCE	5
MODULATION TYPES, NECESSARY BANDWIDTH & EMISSION DESIGNATORS	6
TEST RESULTS.....	8
TRANSMITTER OUTPUT POWER (CONDUCTED)	8
TRANSMITTER AUDIO FREQUENCY RESPONSE - PRE-EMPHASIS.....	10
TRANSMITTER MODULATION LIMITING	18
TRANSMITTER OCCUPIED BANDWIDTH AND SPECTRUM MASKS.....	24
TRANSMITTER SPURIOUS EMISSIONS (CONDUCTED).....	115
TRANSMITTER SPURIOUS EMISSIONS (RADIATED).....	147
TRANSIENT FREQUENCY BEHAVIOUR	154
TRANSMITTER FREQUENCY STABILITY - TEMPERATURE	185
TRANSMITTER FREQUENCY STABILITY - VOLTAGE	188
RECEIVER SPURIOUS EMISSIONS (CONDUCTED)	189
TEST EQUIPMENT LIST.....	197
ANNEX A – TEST SETUP DETAILS.....	199

REVISION

Date	Revision	Comments
3 October 2018	1	Initial test report

INTRODUCTION

Type approval testing of the TPDB1D, 5 Watt, Handportable transceiver in order to demonstrate compliance with FCC 47 Parts 22 & 90, and RSS-119 Issue 12 & RSS-Gen Issue 5. This radio supports analogue, digital FFSK, Digital Mobile Radio (DMR), APCO P25 phase-1 and APCO P25 phase-2 modulations.

REPORT PREPARED FOR

Tait International Ltd
245 Wooldridge Road
Harewood
Christchurch 8051
New Zealand

DESCRIPTION OF SAMPLE

Manufacturer: Tait International Limited
Equipment: Handportable Transceiver
Type: TPDB1D
Product Code: T03-00043-BZZL
Serial Number(s): 26072208
Frequency range: 136 → 174 MHz
Transmit Power: 5 W

Modulation		Channel Spacing	Speech Channels	Symbol Rate (symbols/sec)	Data Rate (bps)
Analogue FM		12.5 kHz	1	-	-
FFSK	Fast Frequency Shift Keying	12.5 kHz	-	1200	1200
		12.5 kHz	-	2400	2400
Digital Mobile Radio (DMR)	4 Level FSK (2 slot TDMA) (ETSI TS102 361-1)	12.5 kHz	2	4800	9600
APCO P25 Phase 1	C4FM (TIA 102)	12.5 kHz	1	4800	9600
APCO P25 Phase 2	H-CPM (2 slot TDMA) (TIA 102)	12.5 kHz	2	6000	12000

HARDWARE & SOFTWARE

Quantity: 1

	Analogue, FFSK and DMR tests	P25 tests
Hardware ID	TPDB5X-B100_0001	TPDB5X-B100_0001
Boot Code	QPD5B_S00_3.05.11.0001	QPD5B_S00_3.05.11.0001
DSP	QPD5A_E00_2.19.03.0049	QPD5A_A02_2.12.11.0061
Radio Application	QPD5F_E00_2.19.03.0049	QPD5F_A00_2.12.11.0061
Firmware Package	QI93P_E00_2.19.03.0049	QI94P_A02_2.12.11.0061
FPGA Image	QPD5G_S00_1.12.14.0001	QPD5G_S00_1.12.13.0001

TEST CONDITIONS

All testing was performed between 19 September → 2 October 2018, and under the following conditions:

Ambient temperature: 15°C → 30°C
Relative Humidity: 20% → 75%
Standard Test Voltage: 7.5 V_{DC}

STATEMENT OF COMPLIANCE

We, TELTEST LABORATORIES of 558 Wairakei Road, Christchurch, New Zealand, declare under our sole responsibility that the product:

Equipment: Handportable Transceiver
Type: TPDB1D
Product Code: T03-00043-BZZL
Serial Number(s): 26072208
Quantity: 1

to which this declaration relates, is in conformity with the following standards:

FCC 47 CFR Parts 22 and 90

RSS-119 Issue 12 & RSS-Gen Issue 5

Signature: _____

M. C. James
Laboratory Technical Manager

Date: _____

MODULATION TYPES, NECESSARY BANDWIDTH & EMISSION DESIGNATORS

MODULATION TYPES:

F3E	Analogue Frequency Modulation (FM)	
F2D	FFSK	1200 bps and 2400 bps
FXW	DMR Digital Voice	9600 bps
FXD	DMR Digital Data	9600 bps
F1E, F7E	P25 phase 1 Digital Voice	9600 bps
F1D, F7D	P25 phase 1 Digital Data	9600 bps
F1W	P25 phase 2 Digital Voice / Data	12000 bps

CHANNEL SPACING: 12.5 kHz

EMISSION DESIGNATORS:

	12.5 kHz
Analogue FM	11K0F3E
FFSK Data 1200 bps	6K60F2D
FFSK Data 2400 bps	7K80F2D
Digital Voice DMR	7K60FXW
Digital Data DMR	7K60FXD
Digital Voice P25 phase 1	8K10F1E
Digital Data P25 phase 1	8K10F1D
Digital Voice P25 phase 2	8K10F1W
Digital Data P25 phase 2	8K10F1W

CALCULATIONS

Equation: $B_n = 2M + 2Dk$

(M is highest modulating frequency; D is peak allowable deviation; k is a constant of 1 for FM)

Analogue Voice 12.5 kHz Bandwidth

Necessary bandwidth

M = 3.0 kHz

D = 2.5 kHz

$$B_n = (2 \times 3.0) + (2 \times 2.5) \times 1$$

$$= 11.0 \text{ kHz}$$

Emission Designator

11K0F3E

F3E represents an FM voice transmission

Fast Frequency Shift Keying (FFSK – 1200 bps) 12.5 kHz Bandwidth

Necessary bandwidth

M = 1.8 kHz

D = 1.5 kHz (60% of peak deviation)

$$B_n = (2 \times 1.8) + (2 \times 1.5) \times 1$$

$$= 6.6 \text{ kHz}$$

Emission Designator

6K60F2D

F2D represents a FM data transmission with the use of a modulating sub carrier

Fast Frequency Shift Keying (FFSK – 2400 bps) 12.5 kHz Bandwidth

Necessary bandwidth

M = 2.4 kHz

D = 1.5 kHz (60% of peak deviation)

$$B_n = (2 \times 2.4) + (2 \times 1.5) \times 1$$

$$= 7.8 \text{ kHz}$$

Emission Designator

7K80F2D

F2D represents a FM data transmission with the use of a modulating sub carrier

Emission Designators – Continued

Digital Voice 12.5 kHz Bandwidth DMR

99% bandwidth

= 7.6 kHz

Emission Designator

7K60FXW

FXW represents a FM Time Division Multiple Access (TDMA) combination of data and telephony

Digital Data 12.5 kHz Bandwidth DMR

99% bandwidth

= 7.6 kHz

Emission Designator

7K60FXD

FXD represents FM Time Division Multiple Access (TDMA) data only

Digital Voice 12.5 kHz Bandwidth P25 phase 1

99% bandwidth

= 8.1 kHz

Emission Designator

8K10F1E

F1E represents a digital FM voice transmission

Digital Data 12.5 kHz Bandwidth P25 phase 1

99% bandwidth

= 8.1 kHz

Emission Designator

8K10F1D

F1D represents an digital FM data transmission

Digital Voice 12.5 kHz Bandwidth P25 phase 2

99% bandwidth

= 8.1 kHz

Emission Designator

8K10F1W

F1W represents a single FM telephony channel

Digital Data 12.5 kHz Bandwidth P25 phase 2

99% bandwidth

= 8.1 kHz

Emission Designator

8K10F1W

F1W represents digital FM data transmission

TEST RESULTS

TRANSMITTER OUTPUT POWER (CONDUCTED)

SPECIFICATION: FCC 47 CFR 2.1046
RSS-119 5.4

GUIDE: TIA/EIA-603D 2.2.1

MEASUREMENT PROCEDURE:

1. Refer Annex A for Equipment set up.
2. The coaxial attenuator has an impedance of 50 Ohms.
3. The unmodulated output power was measured with an RF Power meter.

MEASUREMENT RESULTS:

Manufacturer's Rated Output Power:

Switchable: 5 W and 1 W

Nominal 5 W	Measured	Variation (%)	Variation (dB)
138.1 MHz	5.4	7.13	0.3
143.9 MHz	5.2	4.28	0.2
148.1 MHz	5.3	6.04	0.3
149.8 MHz	5.4	7.02	0.3
150.1 MHz	5.4	7.54	0.3
152.0 MHz	5.4	7.95	0.3
156.3 MHz	5.4	7.23	0.3
156.67 MHz	5.4	7.31	0.3
157.0 MHz	5.4	7.93	0.3
160.0 MHz	5.2	4.85	0.2
161.0 MHz	5.3	5.86	0.2
162.0 MHz	5.3	5.21	0.2
162.1 MHz	5.3	5.10	0.2
168.0 MHz	5.0	0.04	0.0
173.9 MHz	5.0	-0.70	0.0
Measurement Uncertainty		± 0.6 dB	

Transmitter Output Power (Conducted) - continued

Nominal 1 W	Measured	Variation (%)	Variation (dB)
138.1 MHz	1.1	10.64	0.4
143.9 MHz	1.1	7.44	0.3
148.1 MHz	1.1	10.00	0.4
149.8 MHz	1.1	11.64	0.5
150.1 MHz	1.1	11.34	0.5
152.0 MHz	1.1	12.28	0.5
156.3 MHz	1.1	11.69	0.5
156.67 MHz	1.1	10.86	0.4
157.0 MHz	1.1	11.79	0.5
160.0 MHz	1.1	12.04	0.5
161.0 MHz	1.1	10.59	0.4
162.0 MHz	1.1	9.41	0.4
162.1 MHz	1.1	8.87	0.4
168.0 MHz	1.0	2.39	0.1
173.9 MHz	1.1	5.16	0.2
Measurement Uncertainty		± 0.6 dB	

LIMIT CLAUSES:

FCC 47 CFR 90.205 (s)

The output power shall not exceed by more than 20%... the manufacturer's rated output power for the particular transmitter specifically listed on the authorization.

RSS-119 5.4

The output power shall be within ±1.0 dB of the manufacturer's rated power.

TRANSMITTER AUDIO FREQUENCY RESPONSE - PRE-EMPHASIS

SPECIFICATION: FCC 47 CFR 2.1047 (a)

GUIDE: TIA/EIA-603D 2.2.6

MEASUREMENT PROCEDURE:

1. Refer Annex A for Equipment set up.
2. An audio input tone of 1000 Hz was applied with the level set to obtain 20% of maximum deviation. This was used as the 0 dB reference point.
3. The AF was varied while the audio level was held constant.
4. The response in dB relative to 1000 Hz was measured.

MEASUREMENT RESULTS:

See the plots on the following pages for 12.5 kHz channel spacing tested at 5 W transmit power.


LIMIT CLAUSE: TIA/EIA-603D 3.2.6

MEASUREMENT UNCERTAINTY: $\pm 1.5 \%$

SPECIFICATION: FCC CFR 2.1047 (a)

Tx FREQUENCY: 138.1 MHz

12.5 kHz Channel Spacing

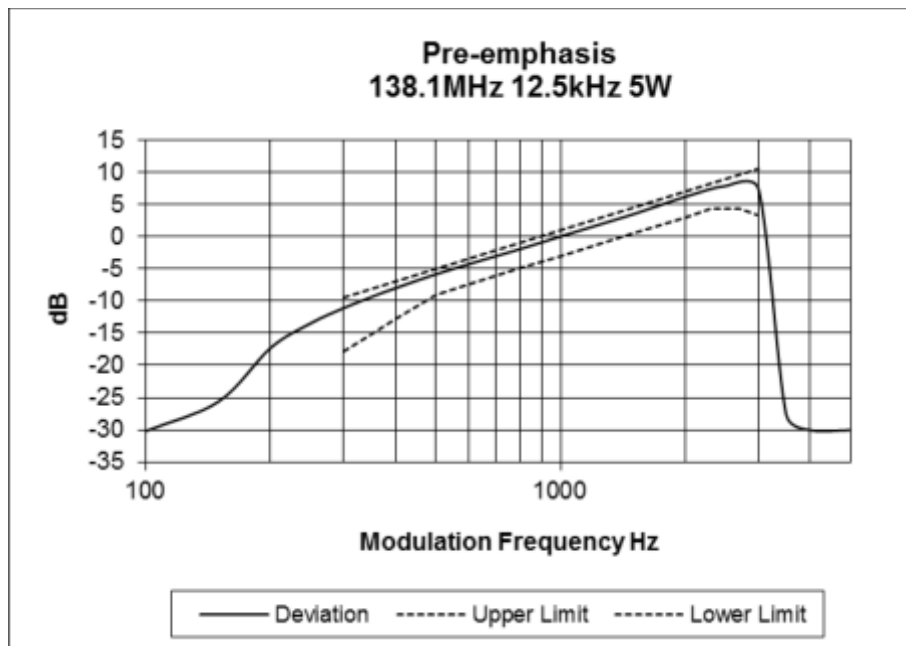


Transmitter Audio Frequency Response – Pre-emphasis

SPECIFICATION: FCC CFR 2.1047 (a)

Tx FREQUENCY: 143.9 MHz


12.5 kHz Channel Spacing

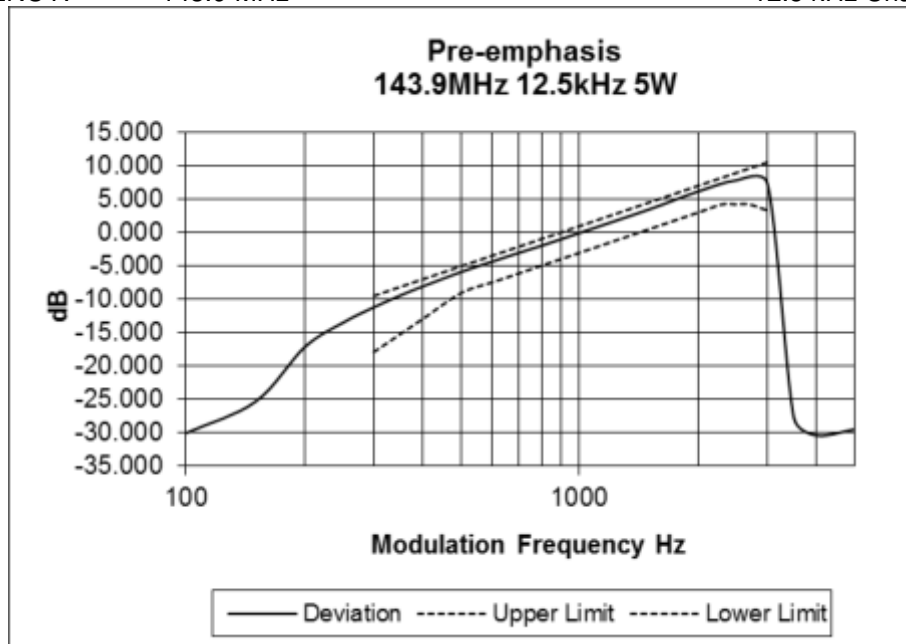

SPECIFICATION: FCC CFR 2.1047 (a)

Tx FREQUENCY: 148.1 MHz

12.5 kHz Channel Spacing

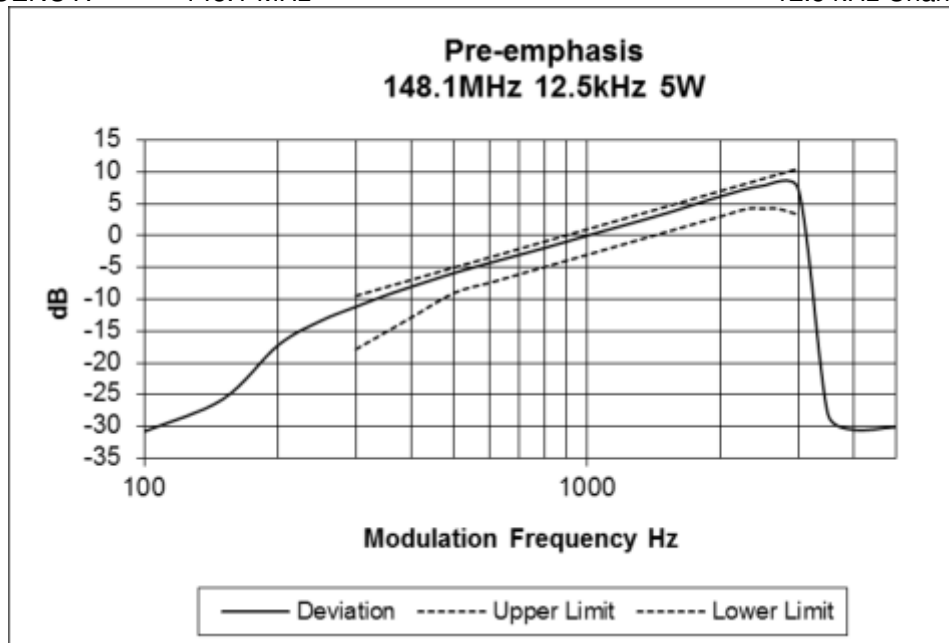


Transmitter Audio Frequency Response – Pre-emphasis

SPECIFICATION: FCC CFR 2.1047 (a)

Tx FREQUENCY: 149.8 MHz


12.5 kHz Channel Spacing

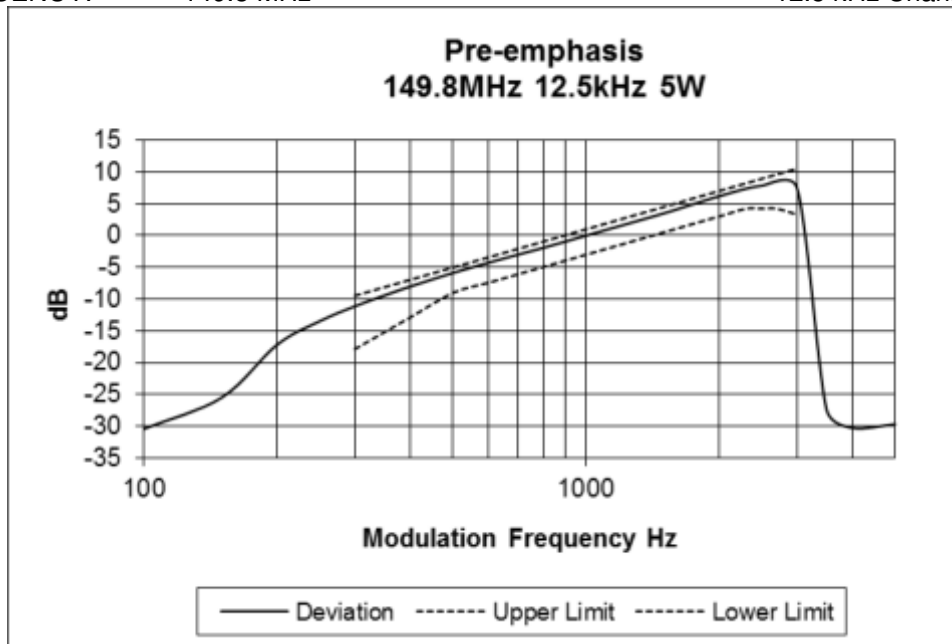

SPECIFICATION: FCC CFR 2.1047 (a)

Tx FREQUENCY: 150.1 MHz

12.5 kHz Channel Spacing

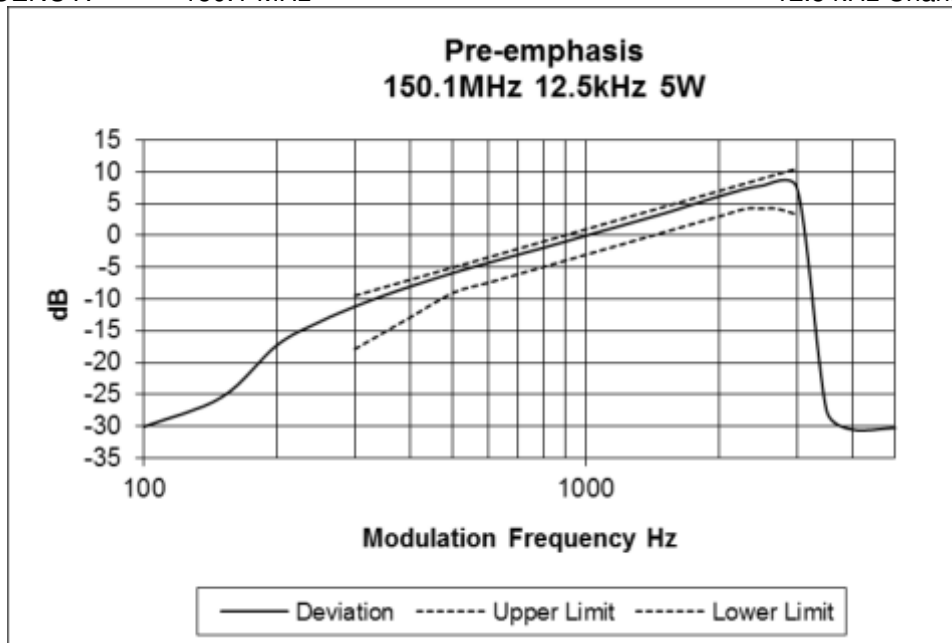


Transmitter Audio Frequency Response – Pre-emphasis

SPECIFICATION: FCC CFR 2.1047 (a)

Tx FREQUENCY: 152.0 MHz


12.5 kHz Channel Spacing

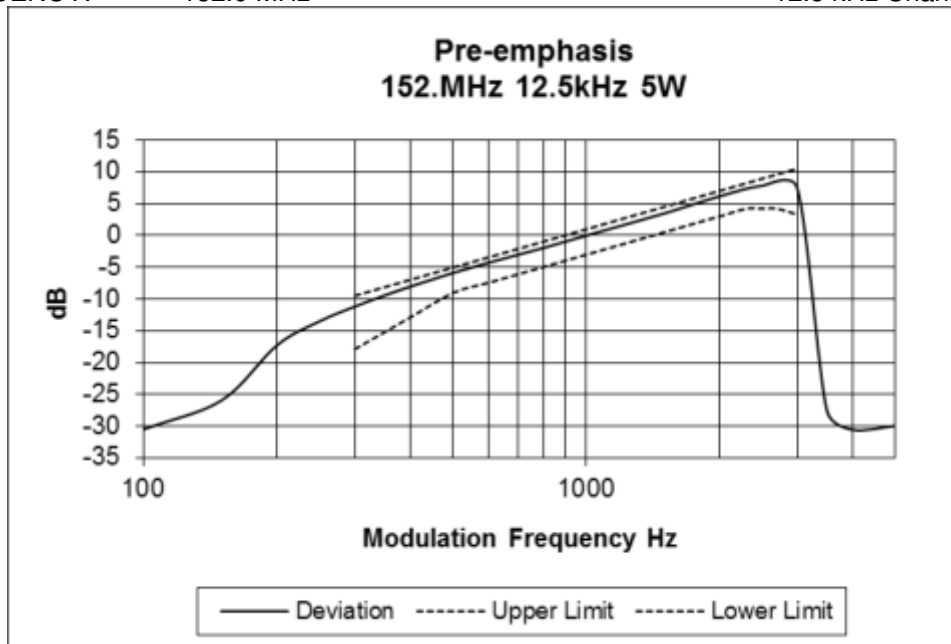

SPECIFICATION: FCC CFR 2.1047 (a)

Tx FREQUENCY: 156.3 MHz

12.5 kHz Channel Spacing

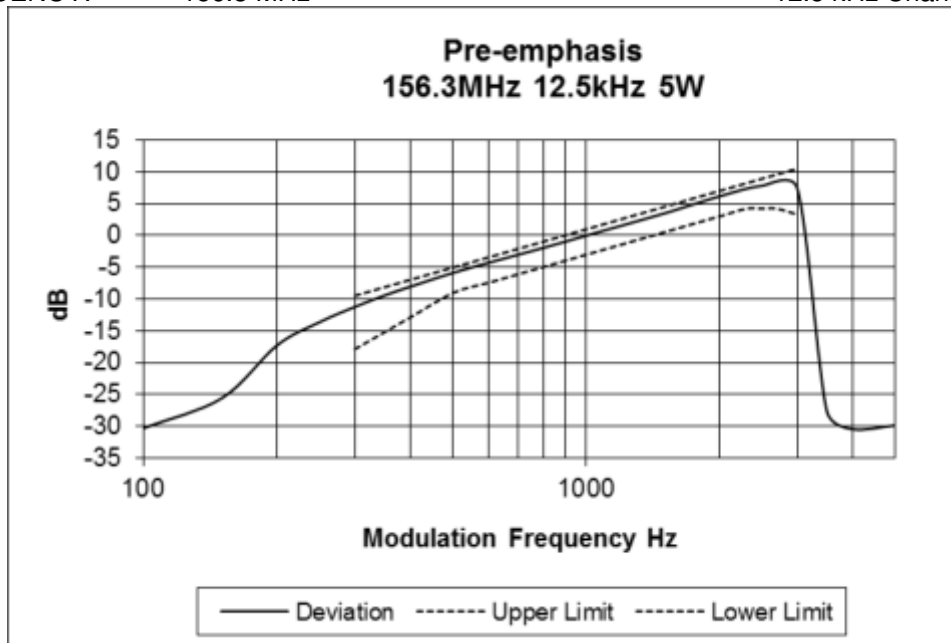


Transmitter Audio Frequency Response – Pre-emphasis

SPECIFICATION: FCC CFR 2.1047 (a)

Tx FREQUENCY: 156.67 MHz


12.5 kHz Channel Spacing

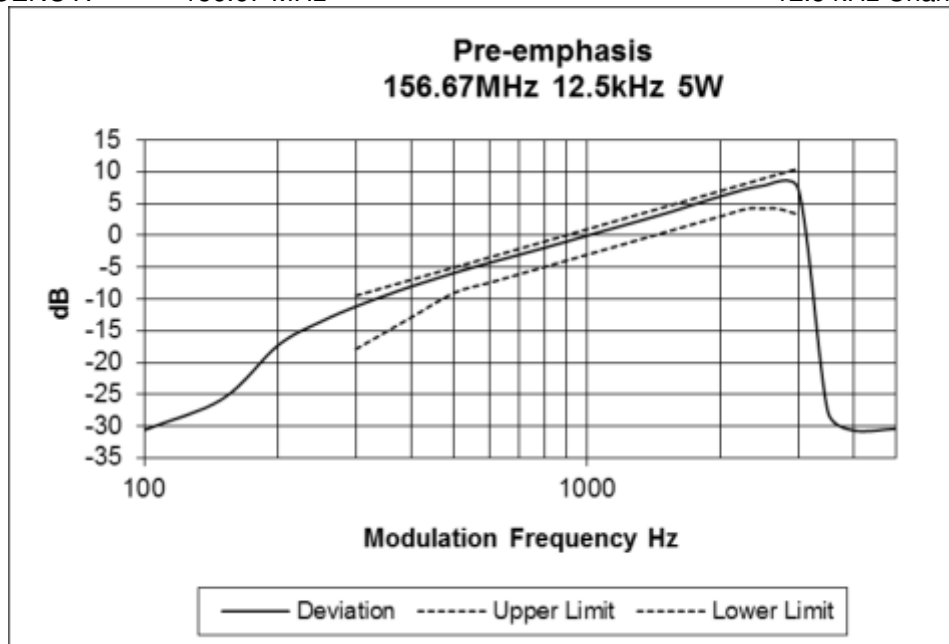

SPECIFICATION: FCC CFR 2.1047 (a)

Tx FREQUENCY: 157.0 MHz


12.5 kHz Channel Spacing

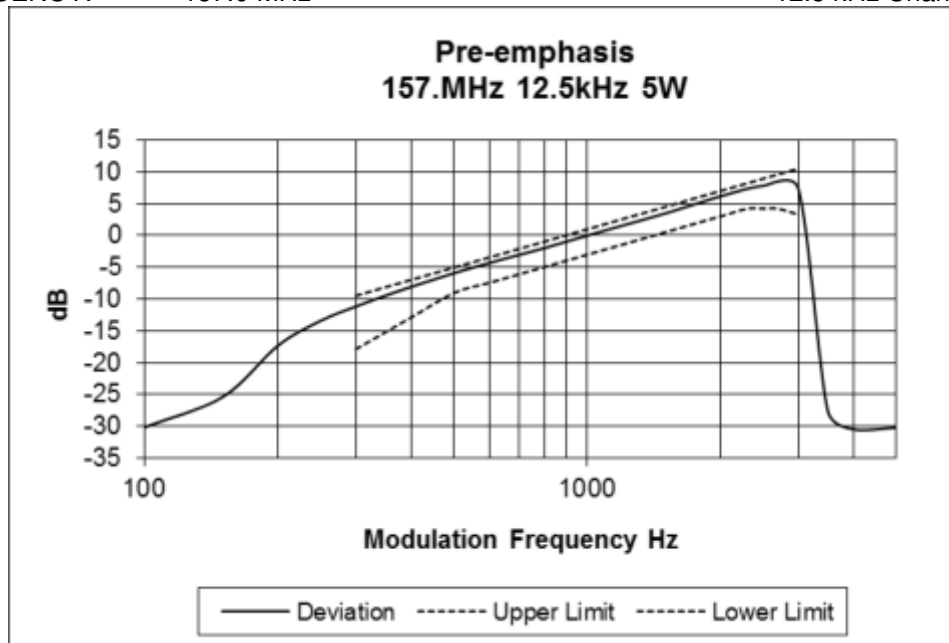

Transmitter Audio Frequency Response – Pre-emphasis


SPECIFICATION: FCC CFR 2.1047 (a)

Tx FREQUENCY: 160.0 MHz 12.5 kHz Channel Spacing

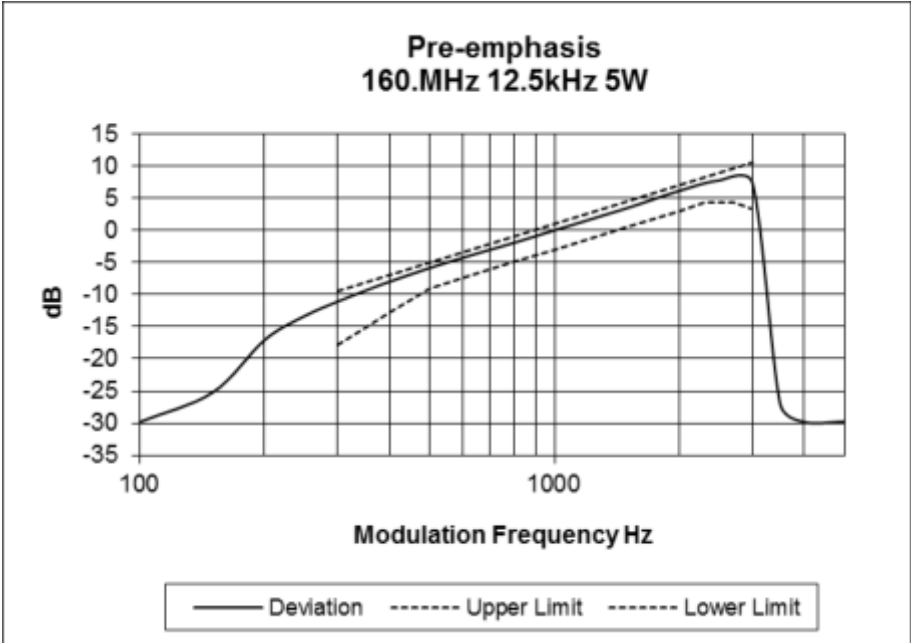

SPECIFICATION: FCC CFR 2.1047 (a)


Tx FREQUENCY: 161.0 MHz 12.5 kHz Channel Spacing

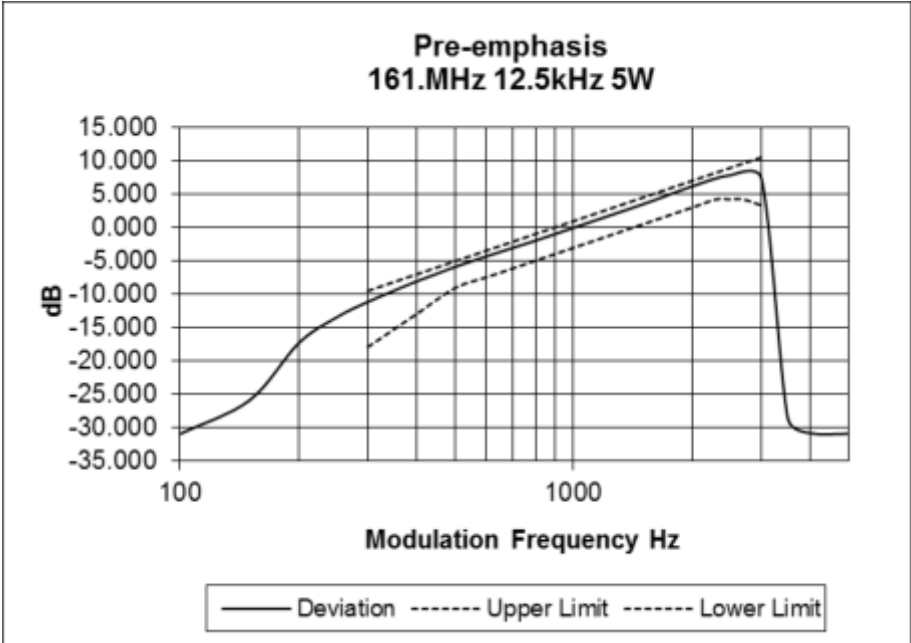

Transmitter Audio Frequency Response – Pre-emphasis


SPECIFICATION: FCC CFR 2.1047 (a)

Tx FREQUENCY: 162.0 MHz 12.5 kHz Channel Spacing

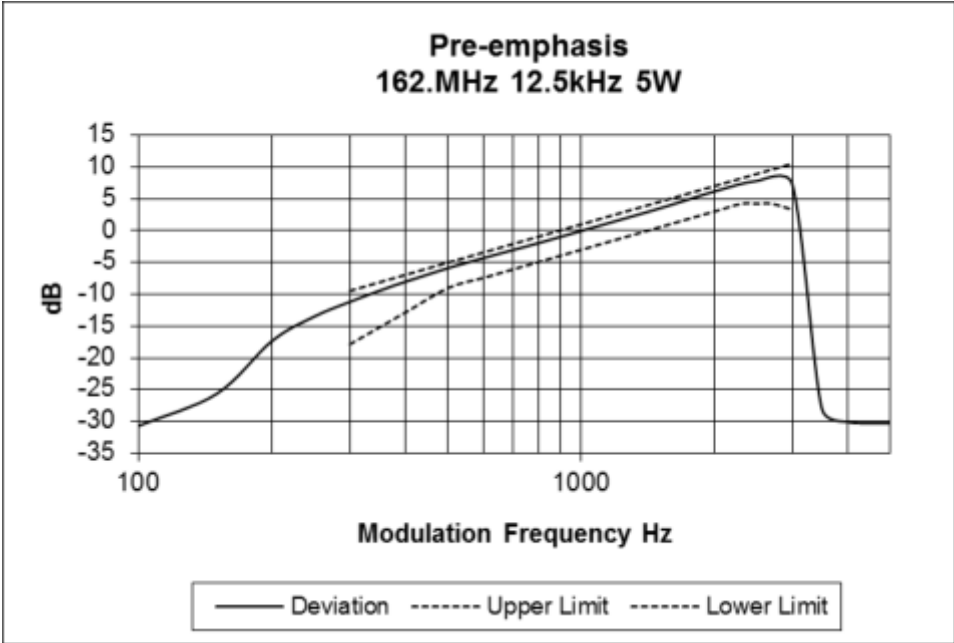

SPECIFICATION: FCC CFR 2.1047 (a)


Tx FREQUENCY: 162.1 MHz 12.5 kHz Channel Spacing

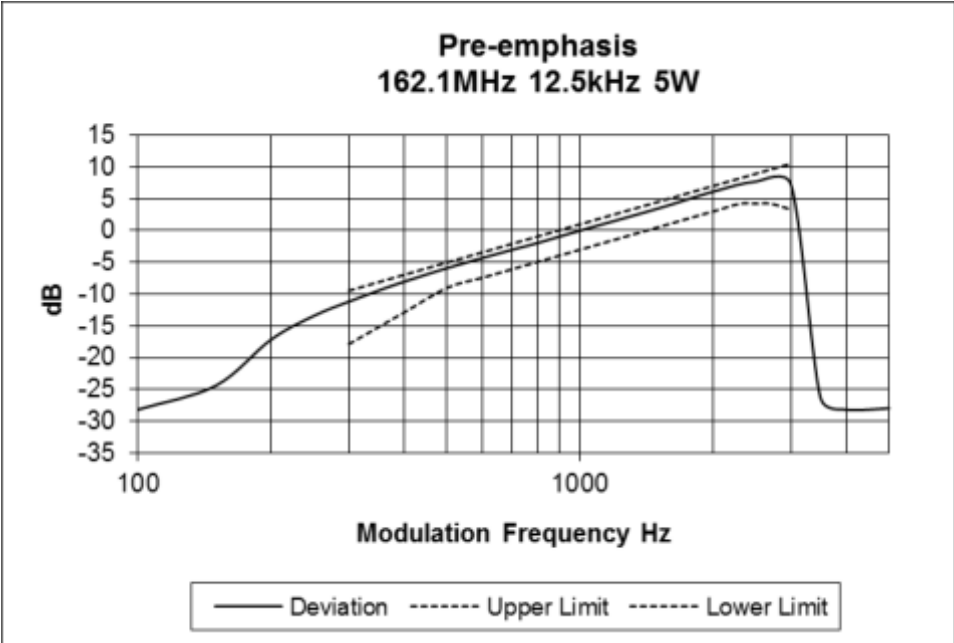

Transmitter Audio Frequency Response – Pre-emphasis


SPECIFICATION: FCC CFR 2.1047 (a)

Tx FREQUENCY: 168.0 MHz 12.5 kHz Channel Spacing

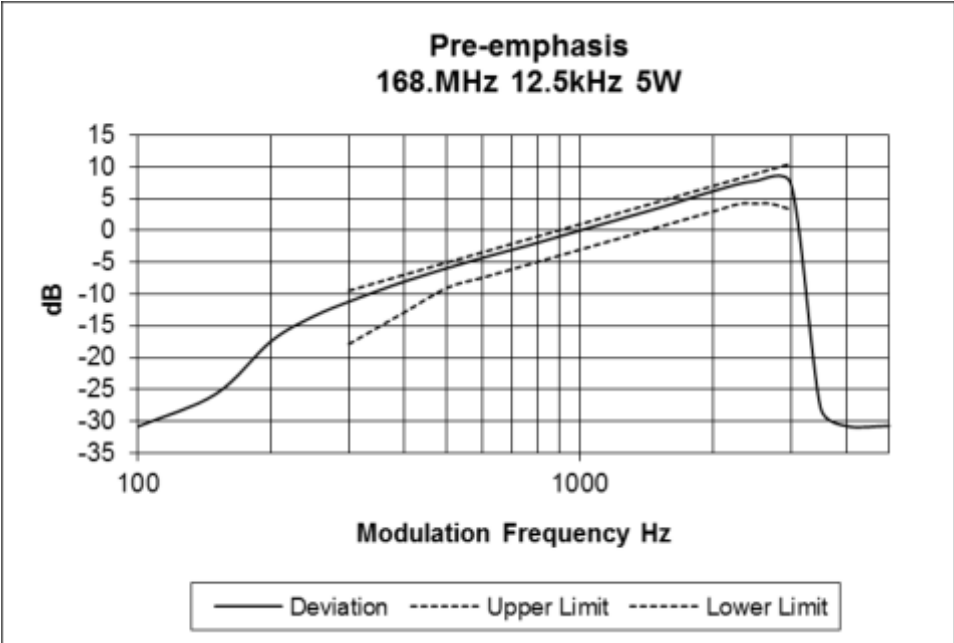

SPECIFICATION: FCC CFR 2.1047 (a)

Tx FREQUENCY: 173.9 MHz 12.5 kHz Channel Spacing

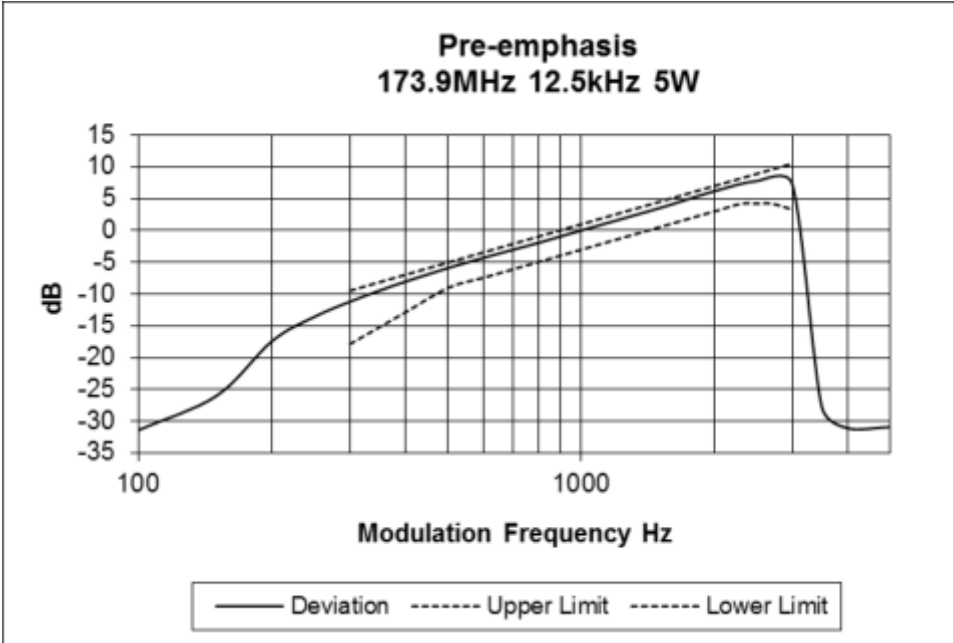

TRANSMITTER MODULATION LIMITING

SPECIFICATION: FCC 47 CFR 2.1047 (b)

GUIDE: TIA/EIA-603D 2.2.3

MEASUREMENT PROCEDURE:

1. Refer Annex A for Equipment set up.
2. The modulation response was measured at three audio frequencies while varying the input level.
3. Measurements were made for both Positive and Negative Deviation.

MEASUREMENT RESULTS:

See the plots on the following pages for 12.5 kHz channel spacing.

LIMIT CLAUSE: TIA/EIA-603D 1.3.4.4


MEASUREMENT UNCERTAINTY: $\pm 1.5 \%$

Transmitter Modulation Limiting

SPECIFICATION: FCC CFR 2.1047 (b)


Tx FREQUENCY: 138.1 MHz

12.5 kHz Channel Spacing

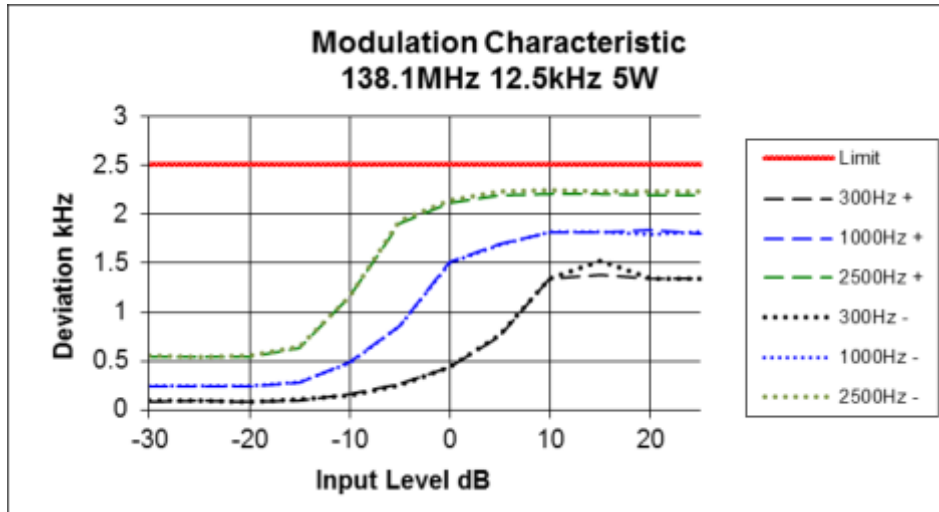


Tx FREQUENCY: 143.9 MHz

12.5 kHz Channel Spacing

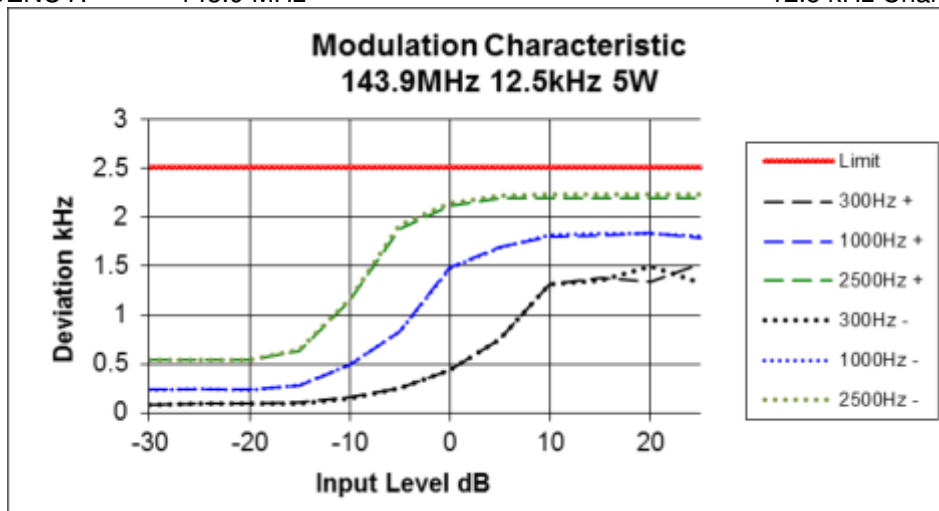

Tx FREQUENCY: 148.1 MHz

12.5 kHz Channel Spacing

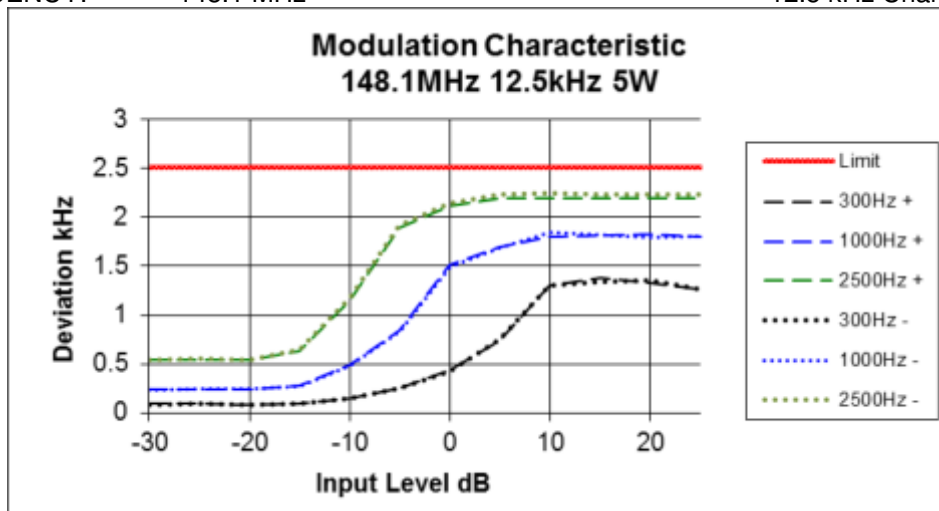


Transmitter Modulation Limiting

SPECIFICATION: FCC CFR 2.1047 (b)


Tx FREQUENCY: 149.8 MHz

12.5 kHz Channel Spacing

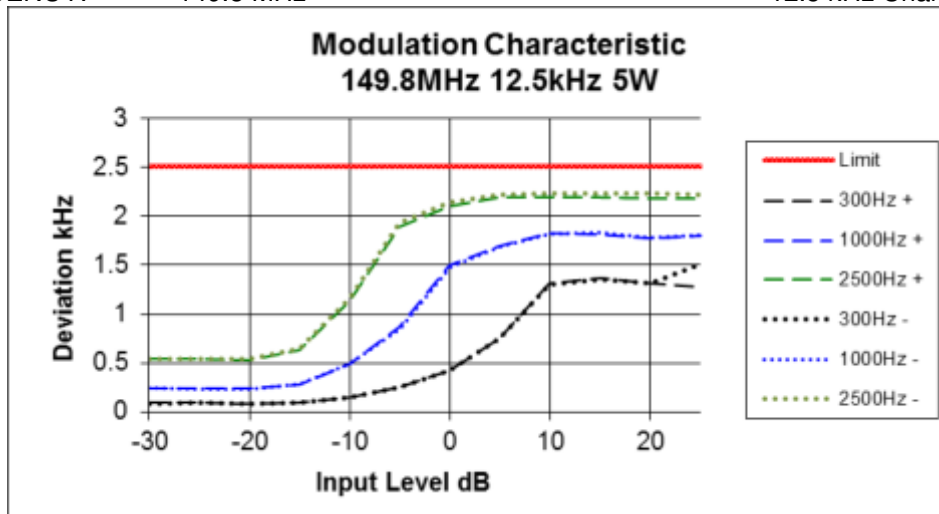


Tx FREQUENCY: 150.1 MHz

12.5 kHz Channel Spacing

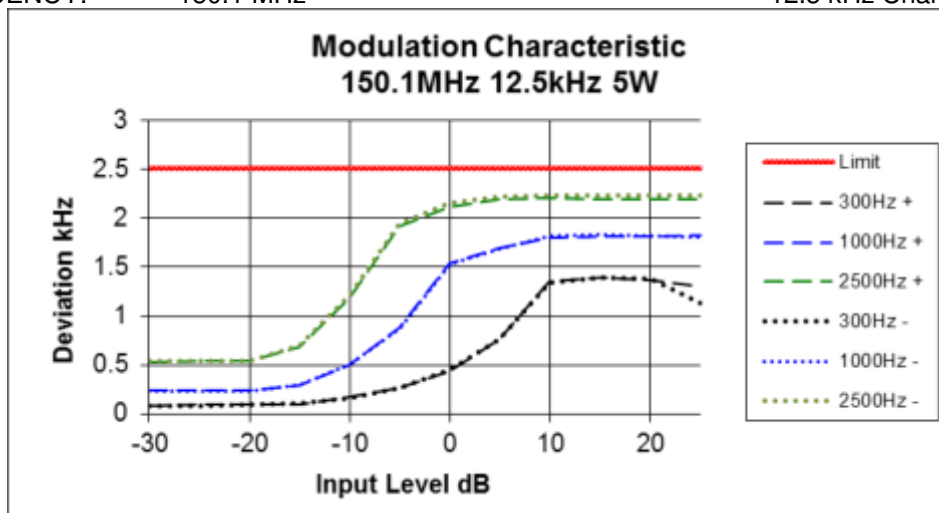

Tx FREQUENCY: 152.0 MHz

12.5 kHz Channel Spacing

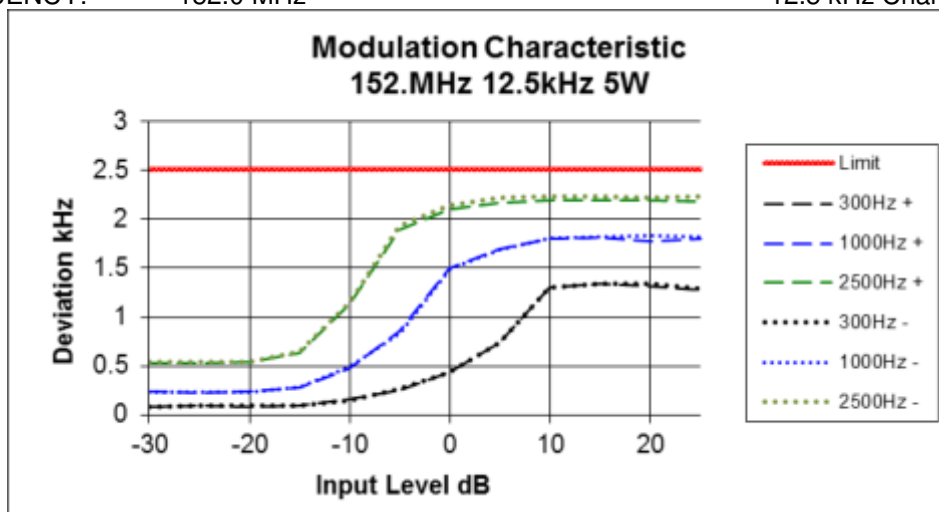


Transmitter Modulation Limiting

SPECIFICATION: FCC CFR 2.1047 (b)


Tx FREQUENCY: 156.3 MHz

12.5 kHz Channel Spacing

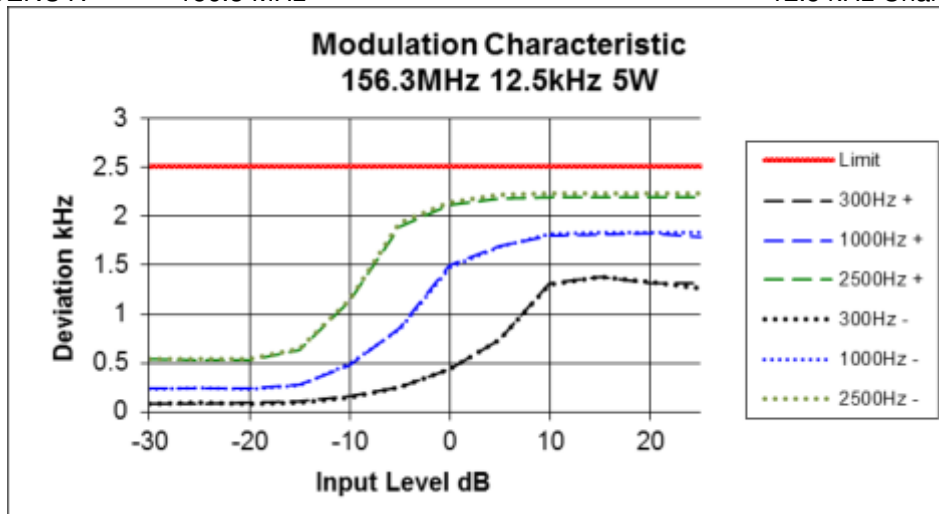


Tx FREQUENCY: 156.67 MHz

12.5 kHz Channel Spacing

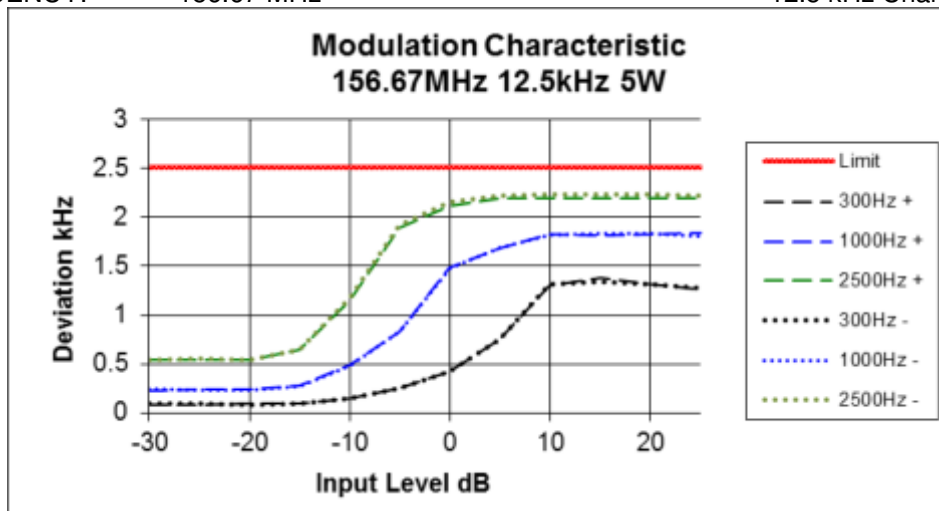

Tx FREQUENCY: 157.0 MHz

12.5kHz Channel Spacing

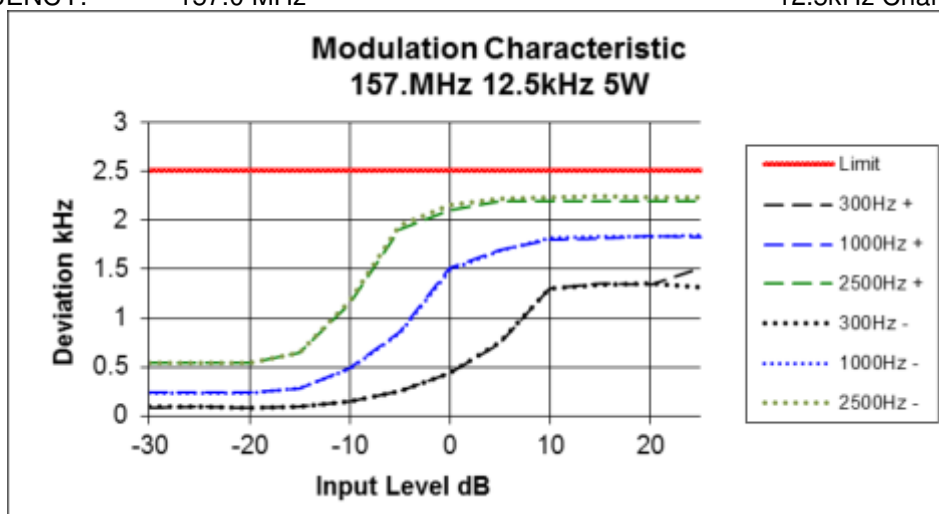


Transmitter Modulation Limiting

SPECIFICATION: FCC CFR 2.1047 (b)


Tx FREQUENCY: 160.0 MHz

12.5kHz Channel Spacing

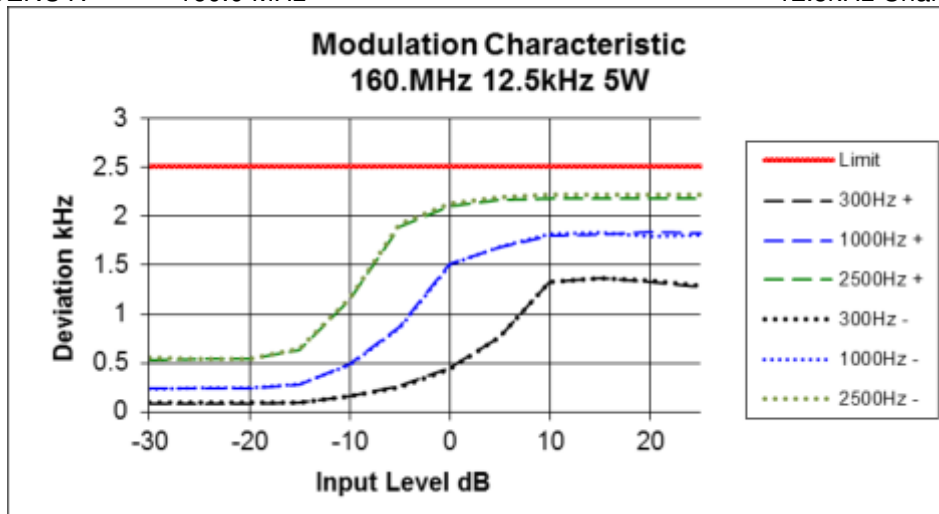


Tx FREQUENCY: 161.0 MHz

12.5kHz Channel Spacing

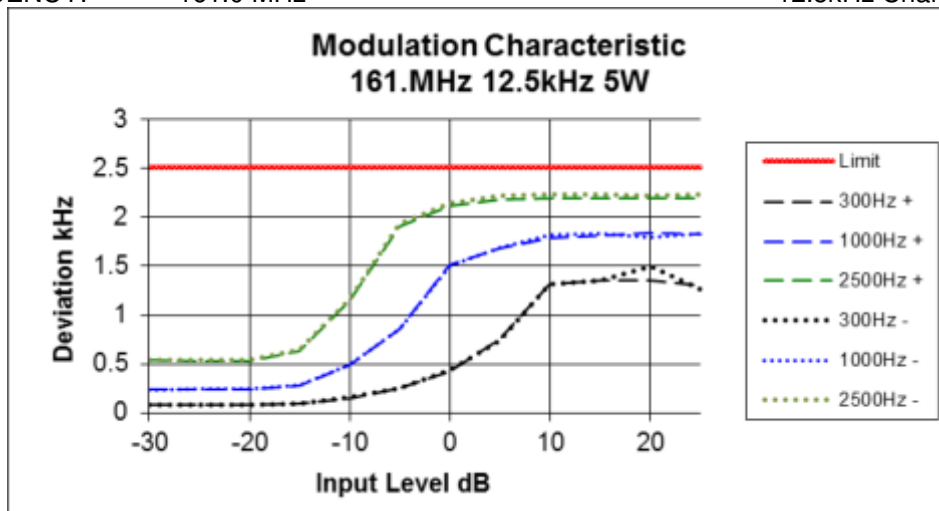

Tx FREQUENCY: 162.0 MHz

12.5kHz Channel Spacing

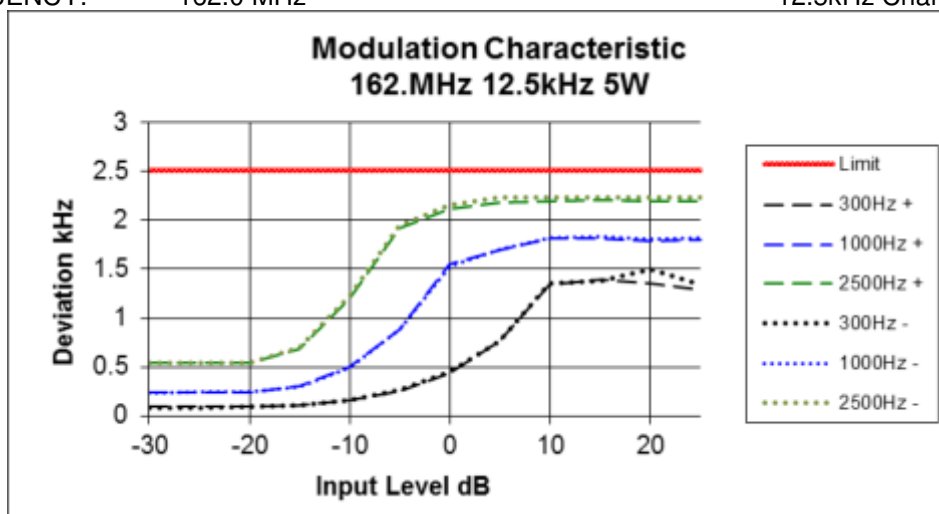


Transmitter Modulation Limiting

SPECIFICATION: FCC CFR 2.1047 (b)


Tx FREQUENCY: 162.1 MHz

12.5kHz Channel Spacing

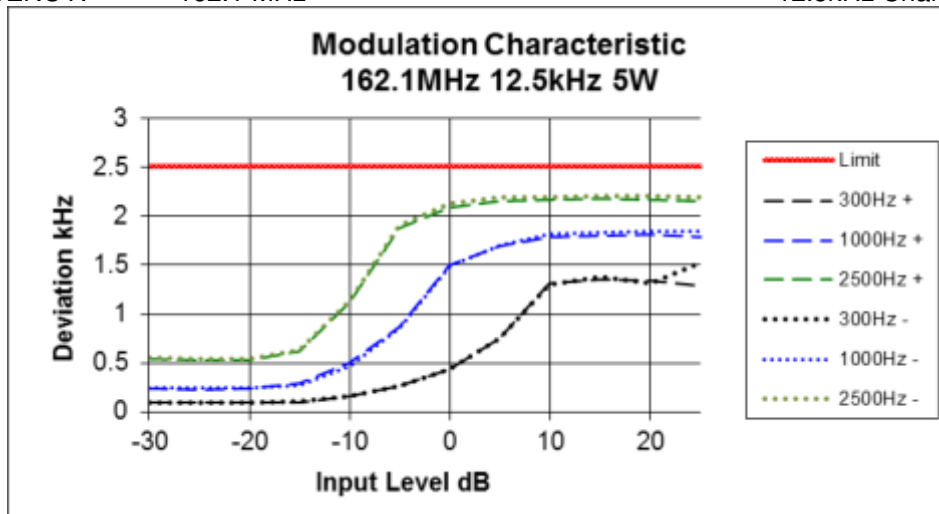


Tx FREQUENCY: 168.0 MHz

12.5kHz Channel Spacing

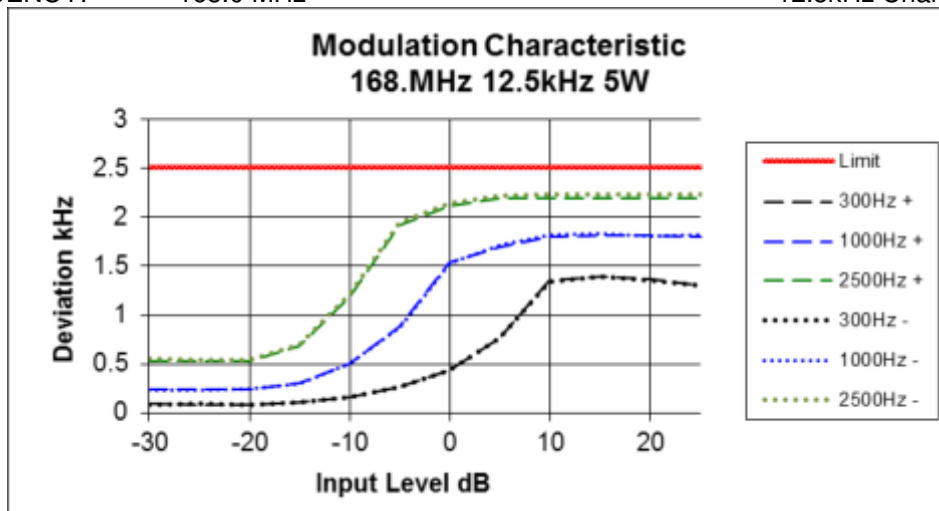

Tx FREQUENCY: 173.9 MHz

12.5kHz Channel Spacing

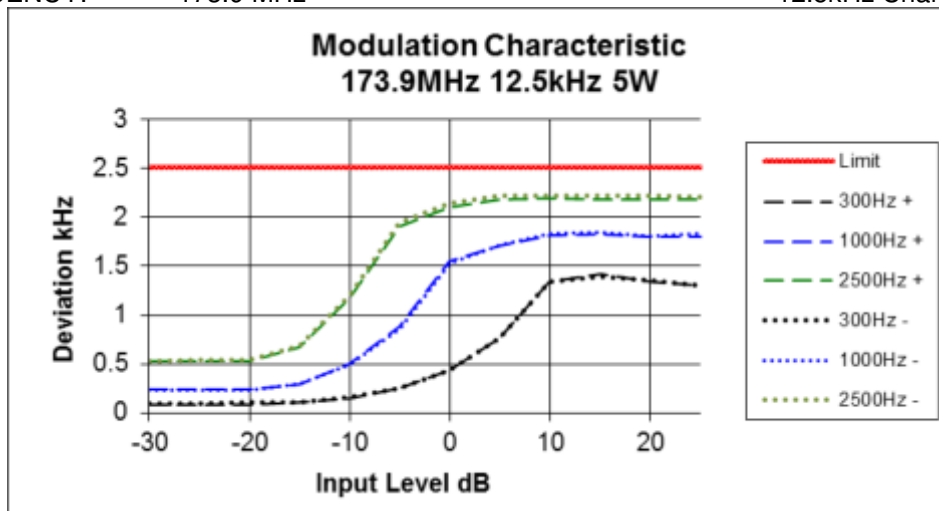

TRANSMITTER OCCUPIED BANDWIDTH AND SPECTRUM MASKS

SPECIFICATION: FCC 47 CFR 2.1049 (c) RSS-119 5.5

GUIDE: TIA/EIA-603D 2.2.11 (Analogue)
TIA-102.CAAA-C 2.2.5 (Digital)

MEASUREMENT PROCEDURE:

1. Refer Annex A for Equipment Set up.
2. For Analogue measurements: The EUT was modulated by a 2500 Hz tone at an input level 16 dB above a level that produced 50% deviation. The input level was established at the frequency of maximum response of the audio modulating circuit.
For Data measurements: The EUT was modulated with an internally generated pseudo random bit sequence at the appropriate Baud rates.
3. The Occupied Bandwidth was measured on the Spectrum Analyser, with bandwidth settings as follows.

Emission Mask D – Resolution Bandwidth = 100 Hz, Video Bandwidth = 1 kHz

MEASUREMENT RESULTS:

See the plots on the following pages for 12.5 kHz channel spacing.

MEASUREMENT UNCERTAINTY 95% $\pm 0.65\text{dB}$

LIMIT CLAUSE: FCC 47 CFR 90.210 RSS-119 5.5

EMISSION MASKS

Emission Mask D 12.5 kHz Channel Spacing Analogue, FFSK, Digital Voice/data

DATA SPEED


Digital Voice/Data	12.5 kHz Channel Spacing	9600 bps & 12000 bps
FFSK	12.5 kHz Channel Spacing	1200 bps & 2400 bps

Occupied Bandwidth and Spectrum Masks

ANALOGUE VOICE


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 138.1 MHz 5 W 12.5 kHz Channel Spacing

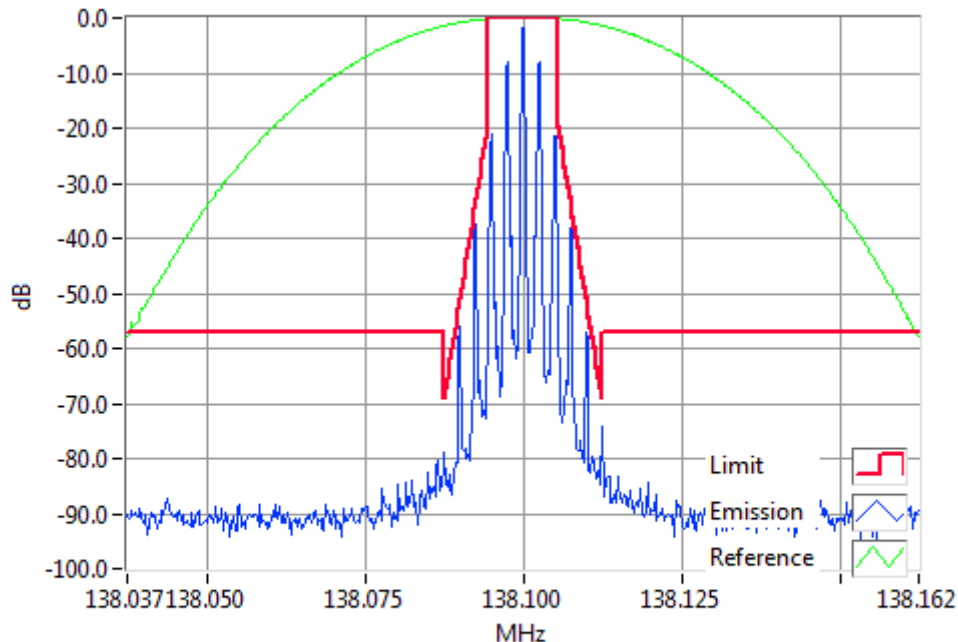

Analogue Modulation 138.1000MHz Mask D 5W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 138.1 MHz 1 W 12.5 kHz Channel Spacing

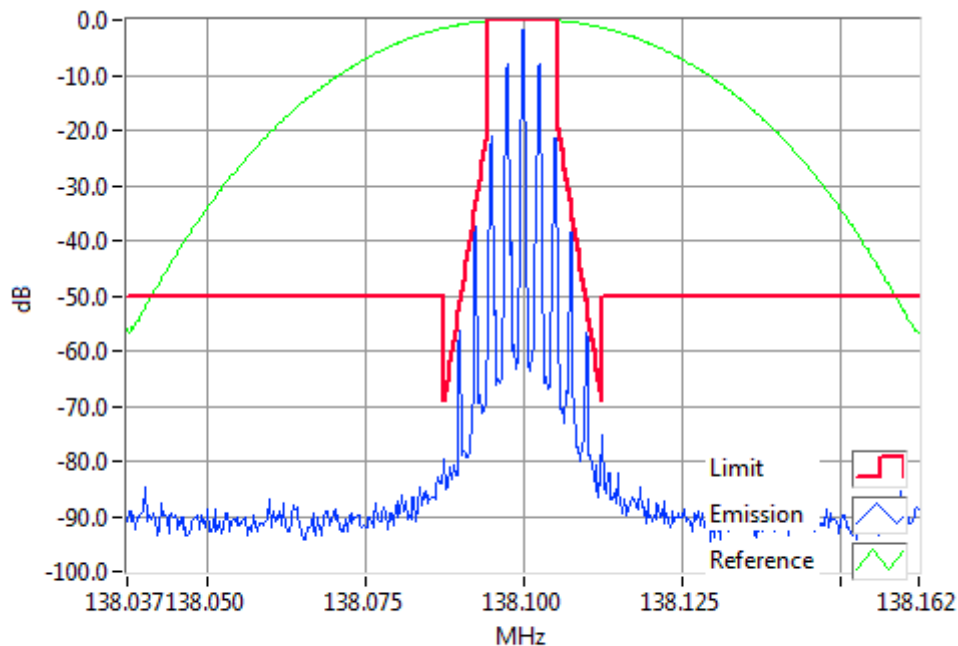


Analogue Modulation 138.1000MHz Mask D 1W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks


ANALOGUE VOICE

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 143.9 MHz 5 W 12.5 kHz Channel Spacing

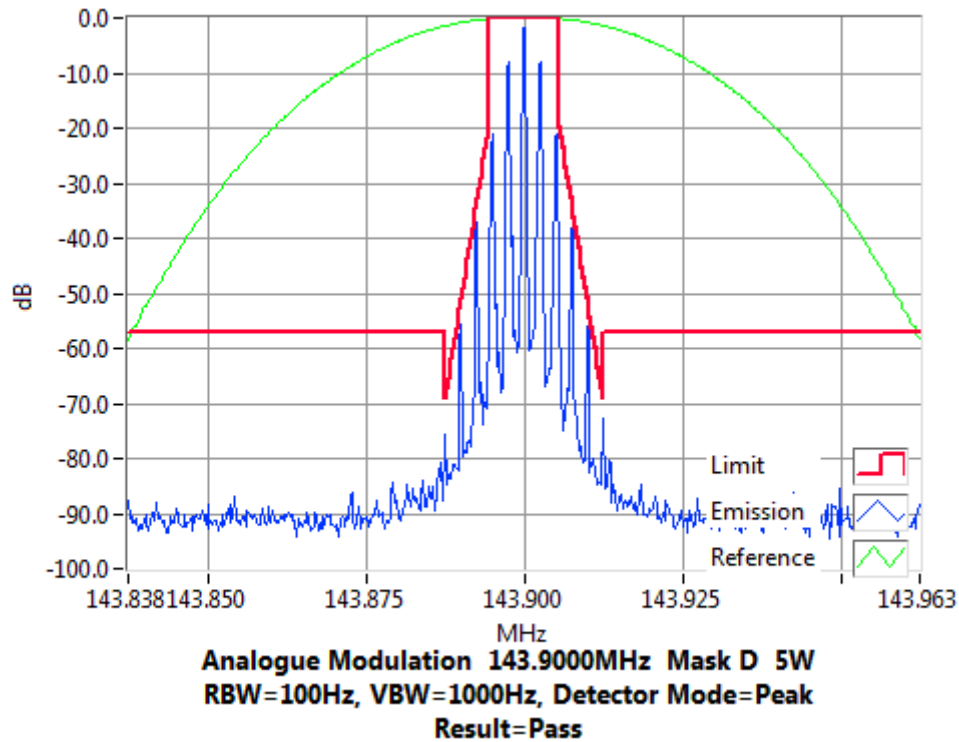

Tx FREQUENCY: 143.9 MHz 1 W 12.5 kHz Channel Spacing

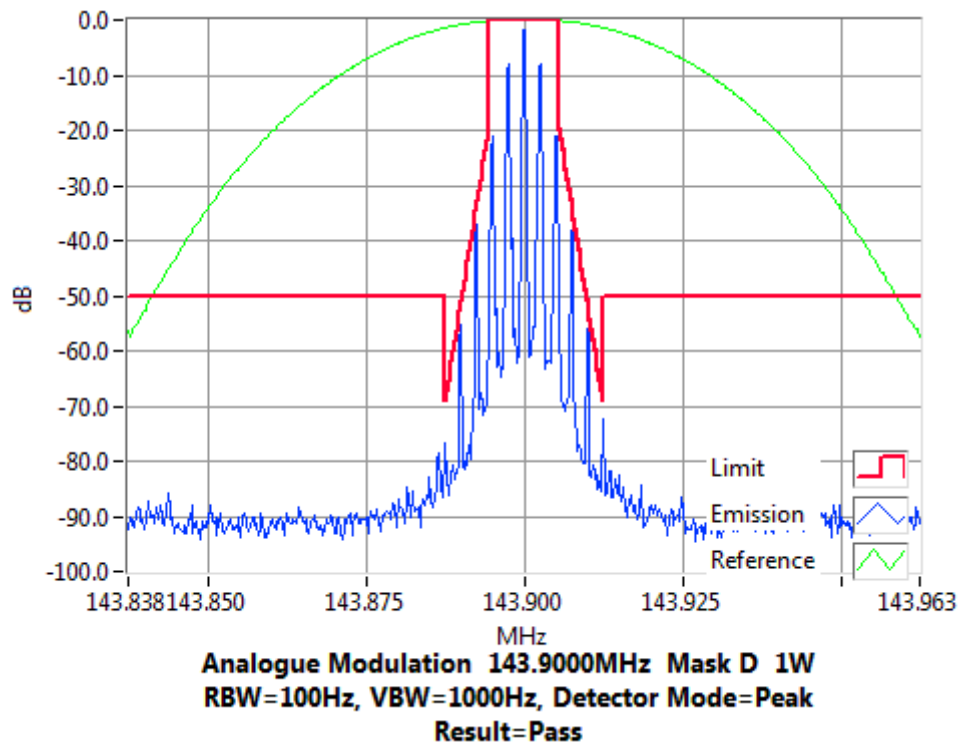


Occupied Bandwidth and Spectrum Masks


ANALOGUE VOICE

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 148.1 MHz 5 W 12.5 kHz Channel Spacing

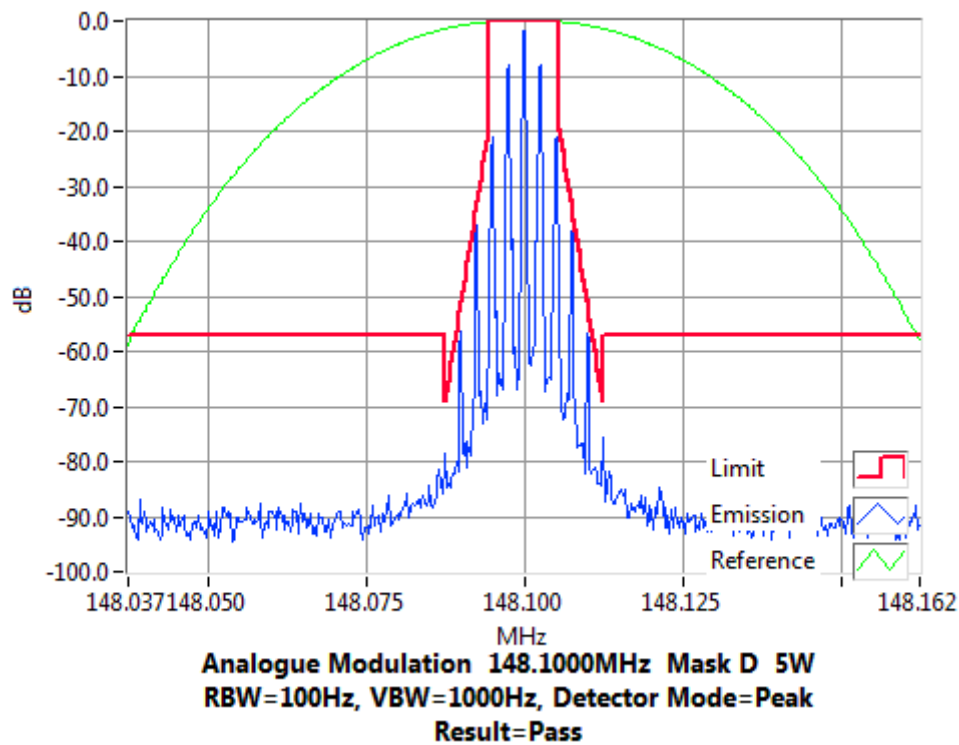

Tx FREQUENCY: 148.1 MHz 1 W 12.5 kHz Channel Spacing

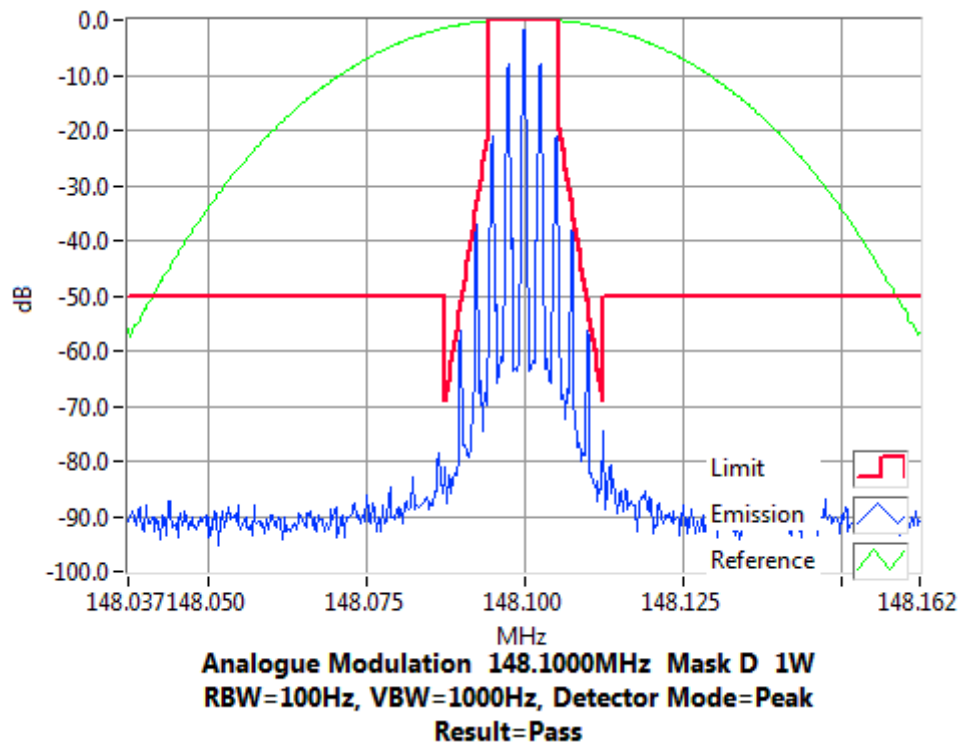


Occupied Bandwidth and Spectrum Masks


ANALOGUE VOICE

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 149.8 MHz 5 W 12.5 kHz Channel Spacing

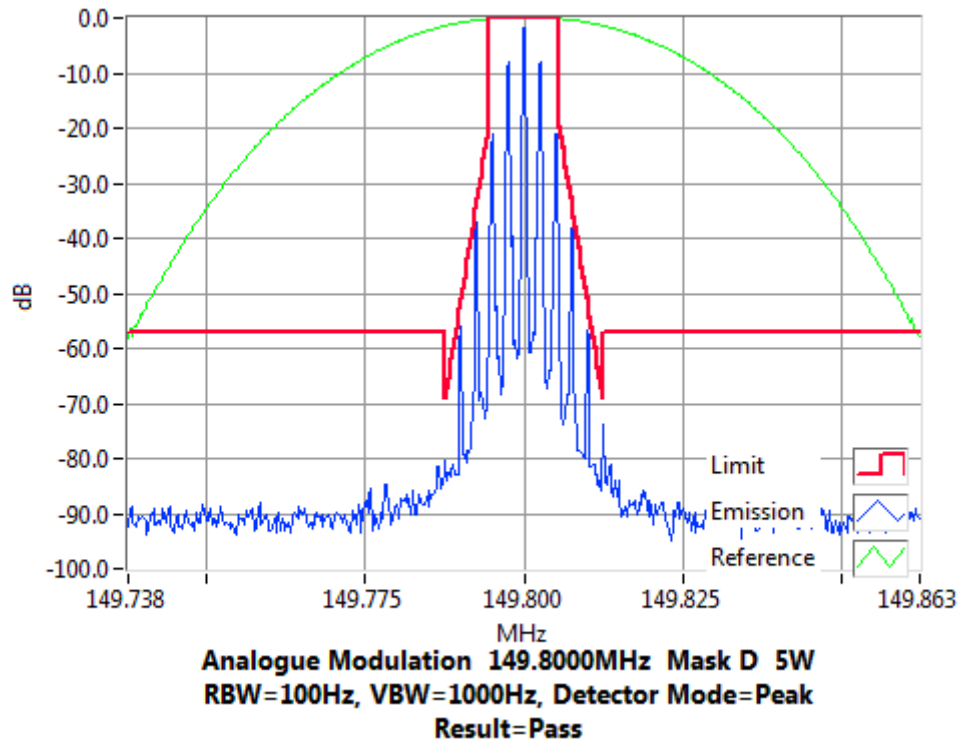

Tx FREQUENCY: 149.8 MHz 1 W 12.5 kHz Channel Spacing

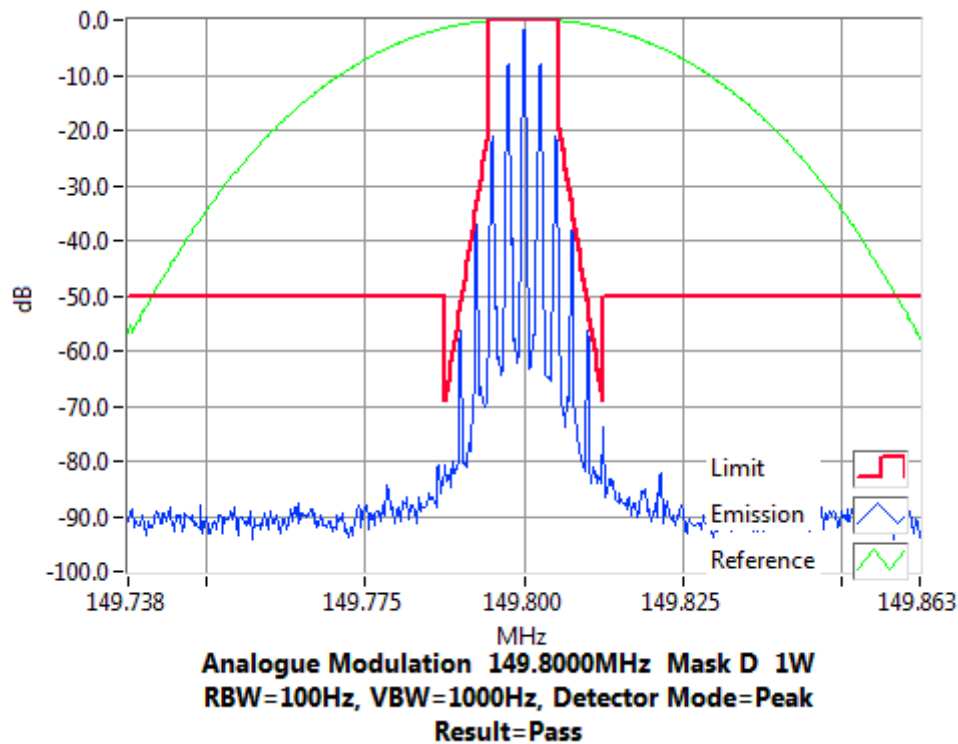


Occupied Bandwidth and Spectrum Masks


ANALOGUE VOICE

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 150.1 MHz 5 W 12.5 kHz Channel Spacing

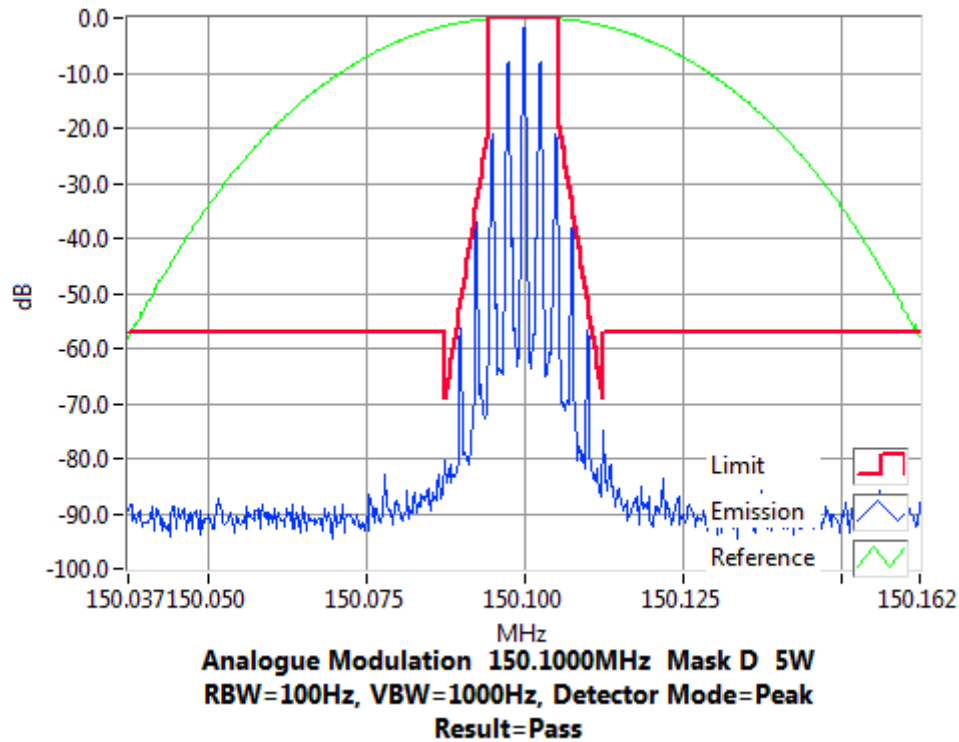

Tx FREQUENCY: 150.1 MHz 1 W 12.5 kHz Channel Spacing

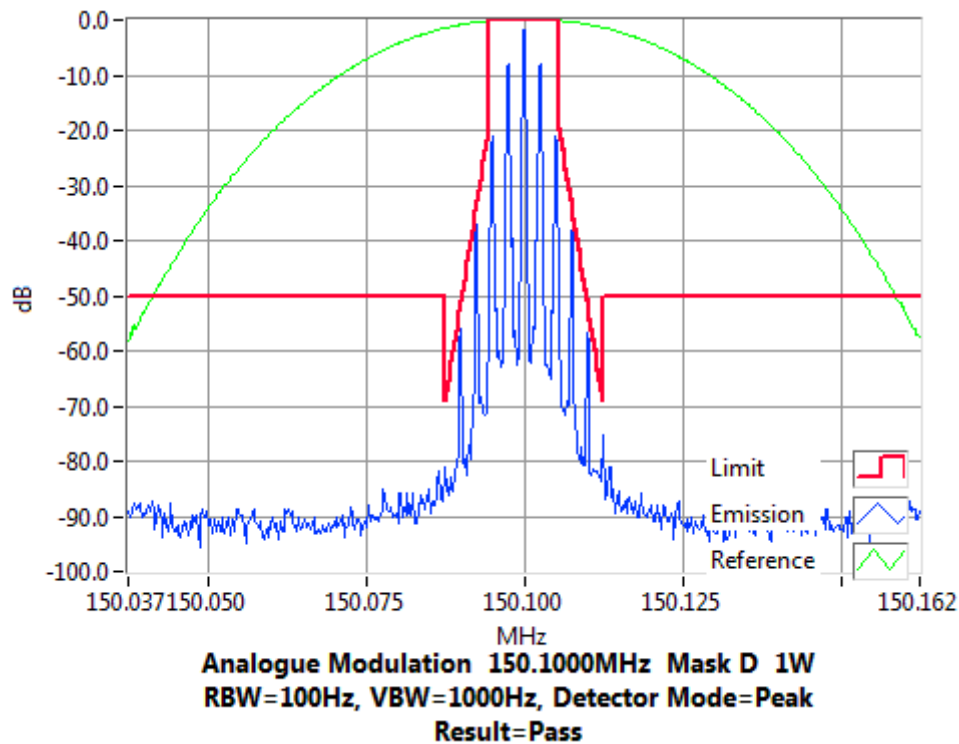


Occupied Bandwidth and Spectrum Masks


ANALOGUE VOICE

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 152.0 MHz 5 W 12.5 kHz Channel Spacing

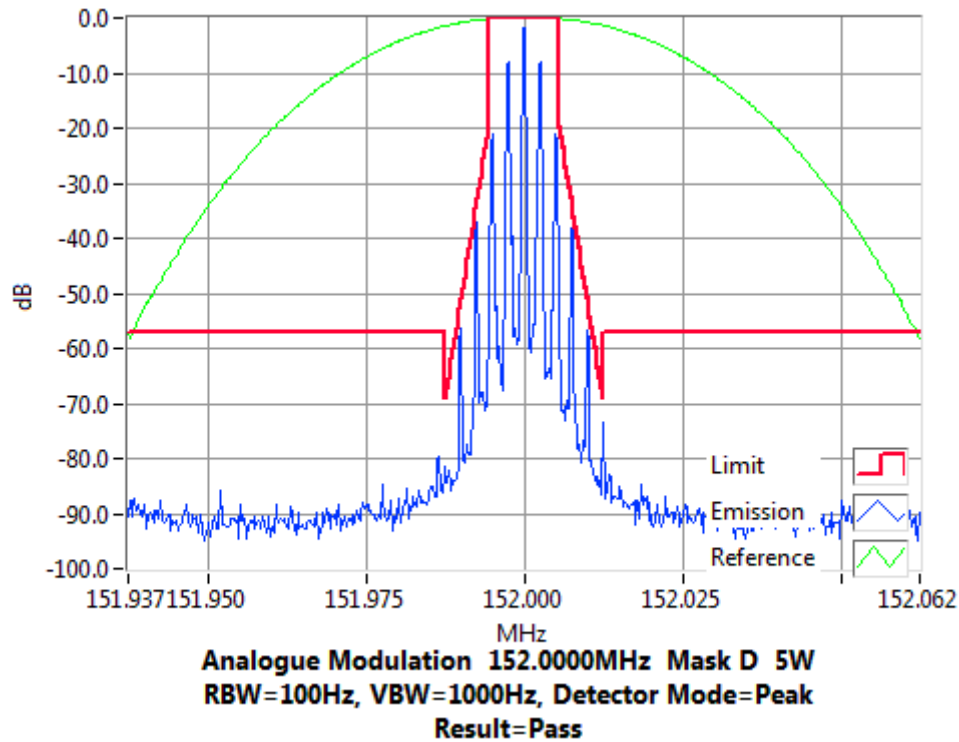

Tx FREQUENCY: 152.0 MHz 1 W 12.5 kHz Channel Spacing

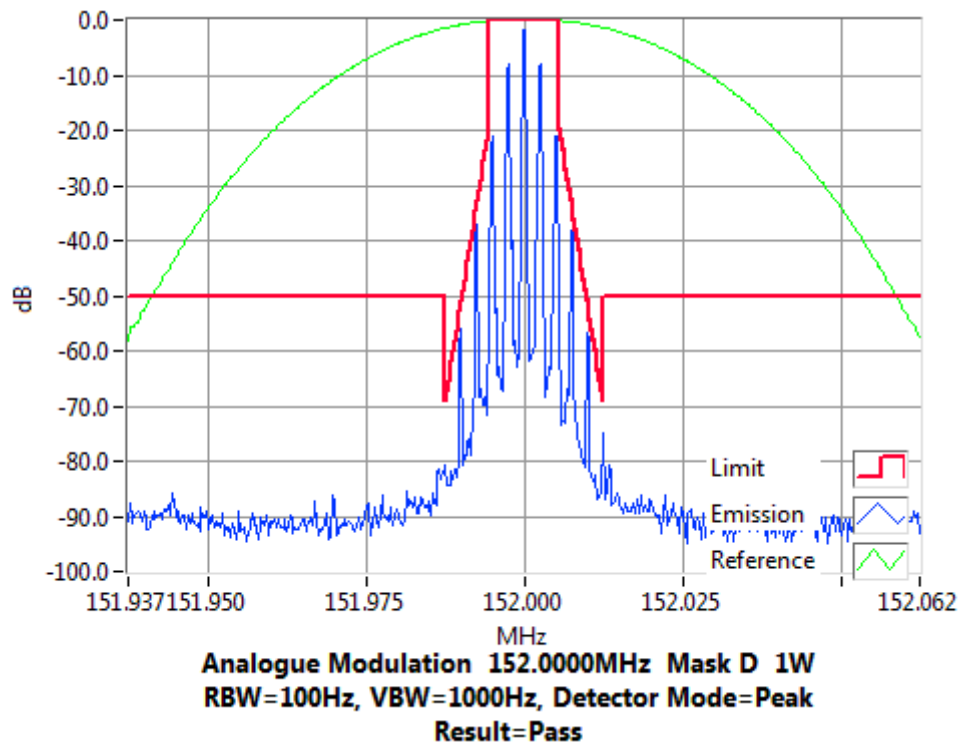


Occupied Bandwidth and Spectrum Masks


ANALOGUE VOICE

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 156.3 MHz 5 W 12.5 kHz Channel Spacing

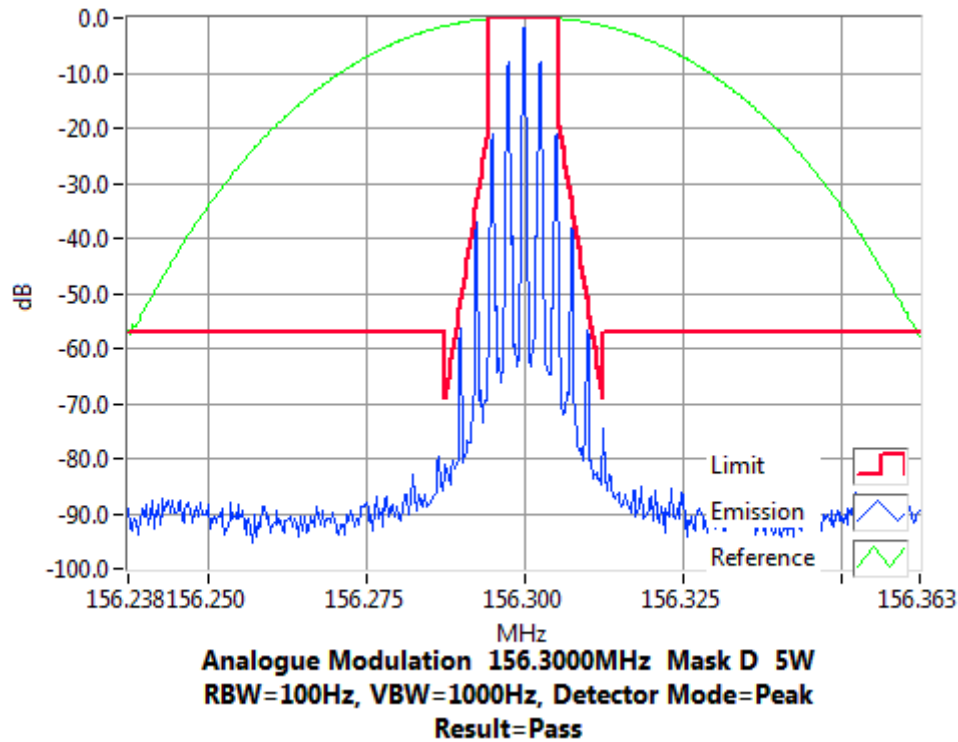

Tx FREQUENCY: 156.3 MHz 1 W 12.5 kHz Channel Spacing

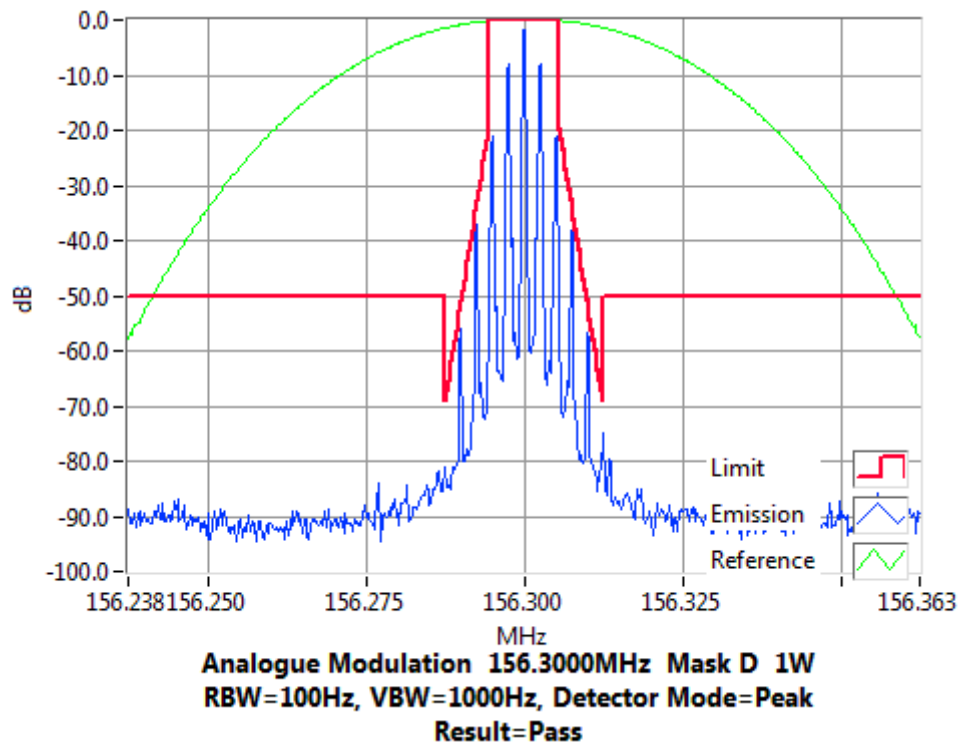


Occupied Bandwidth and Spectrum Masks


ANALOGUE VOICE

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 156.67 MHz 5 W 12.5 kHz Channel Spacing

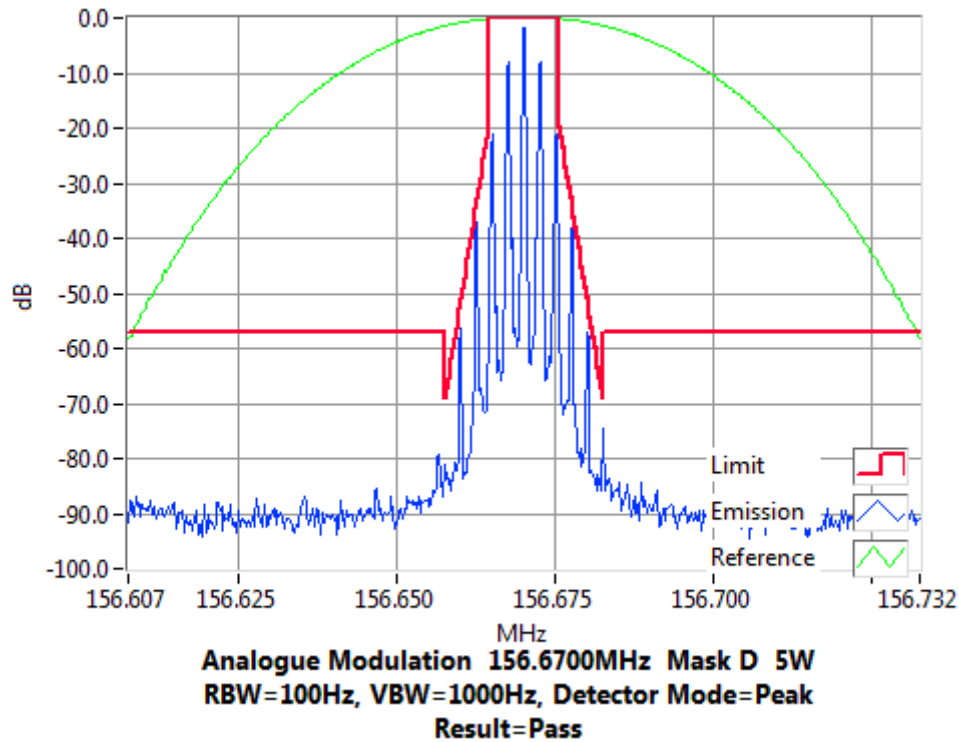

Tx FREQUENCY: 156.67 MHz 1 W 12.5 kHz Channel Spacing

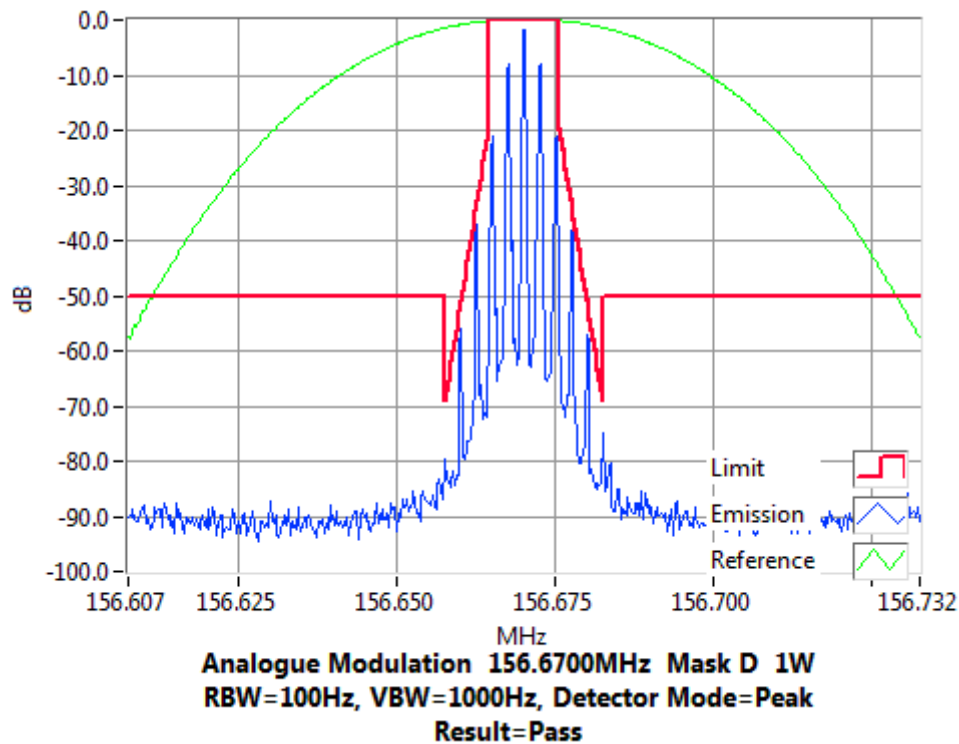


Occupied Bandwidth and Spectrum Masks


ANALOGUE VOICE

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 157.0 MHz 5 W 12.5 kHz Channel Spacing

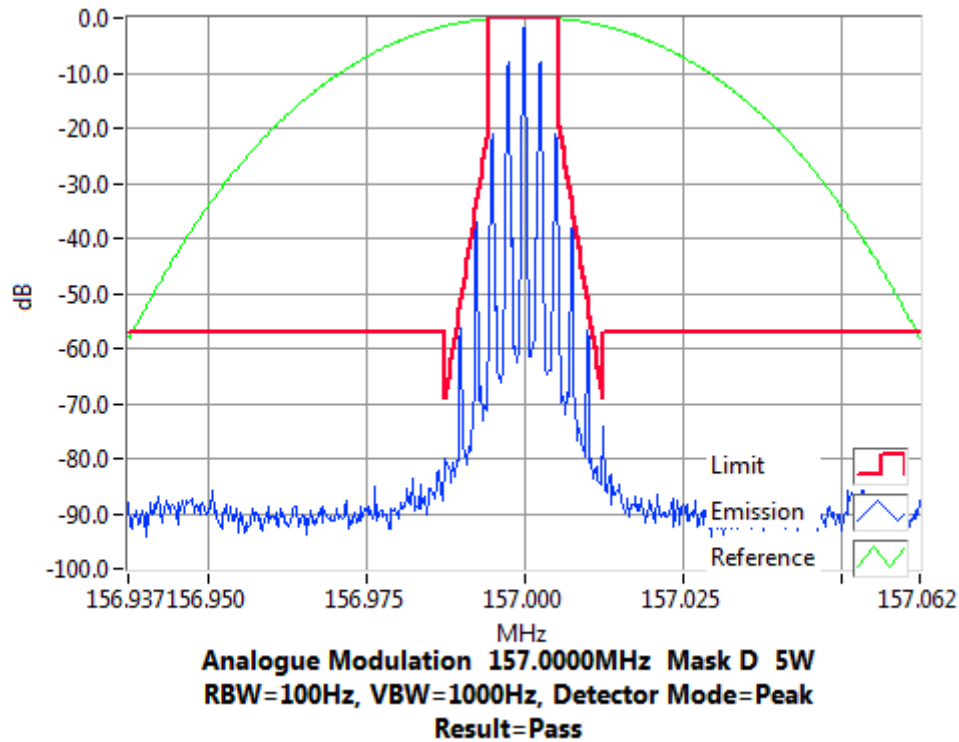

Tx FREQUENCY: 157.0 MHz 1 W 12.5 kHz Channel Spacing

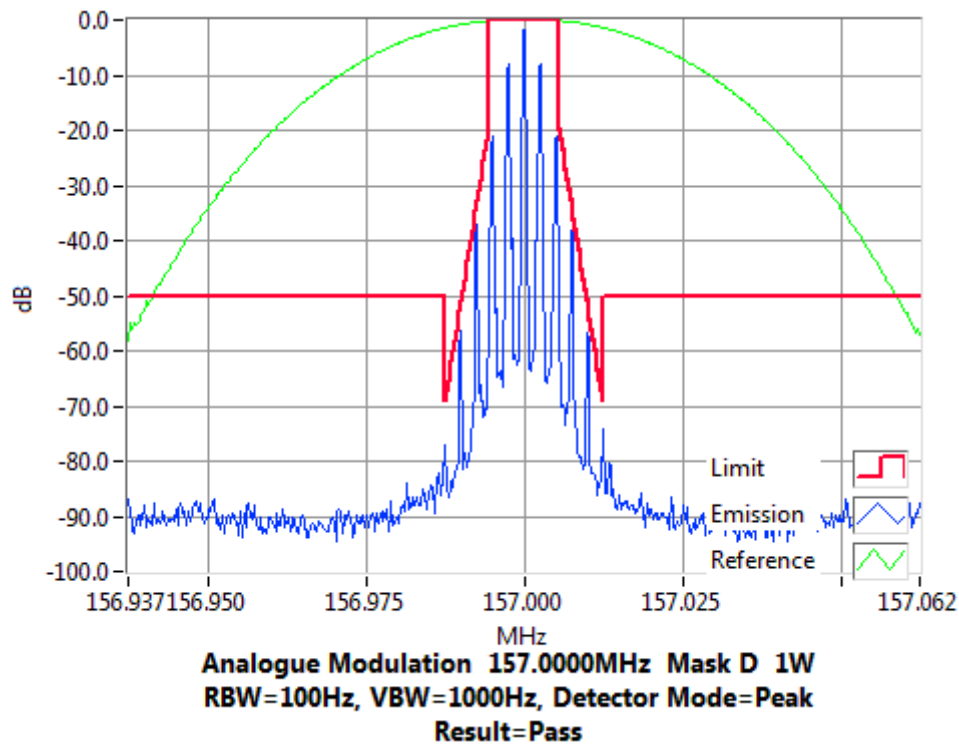


Occupied Bandwidth and Spectrum Masks


ANALOGUE VOICE

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 160.0 MHz 5 W 12.5 kHz Channel Spacing

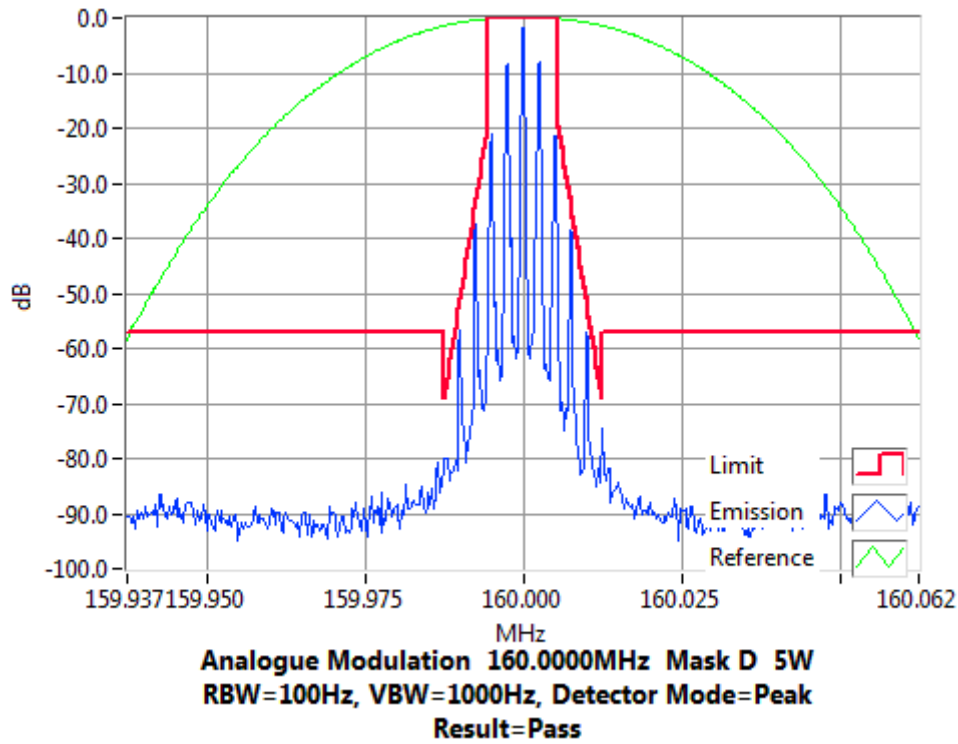

Tx FREQUENCY: 160.0 MHz 1 W 12.5 kHz Channel Spacing

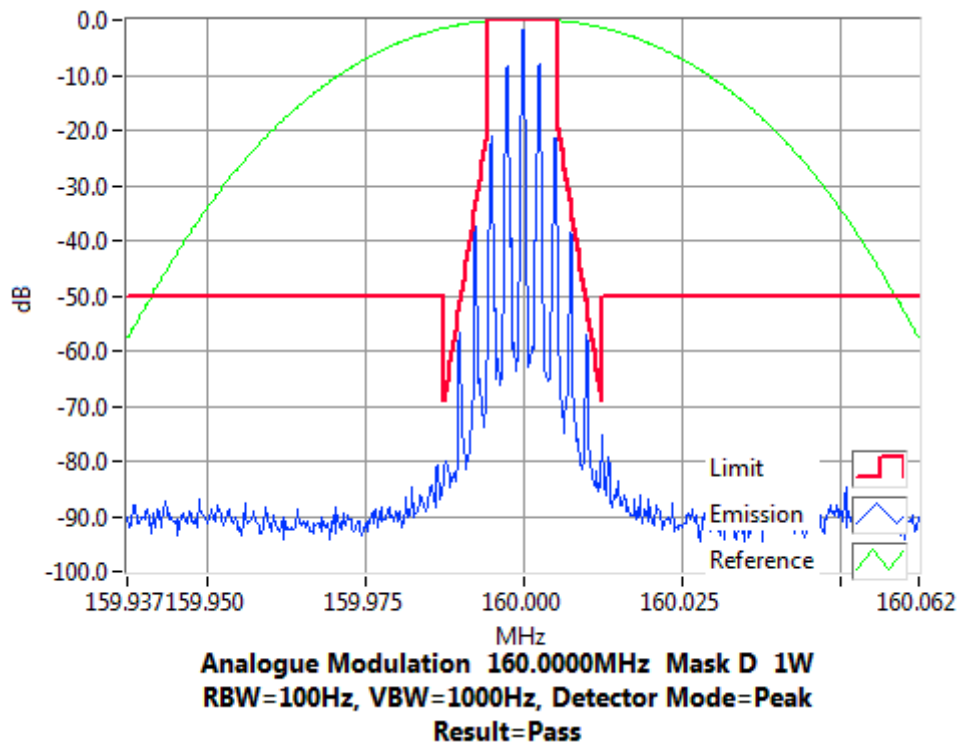


Occupied Bandwidth and Spectrum Masks


ANALOGUE VOICE

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 161.0 MHz 5 W 12.5 kHz Channel Spacing

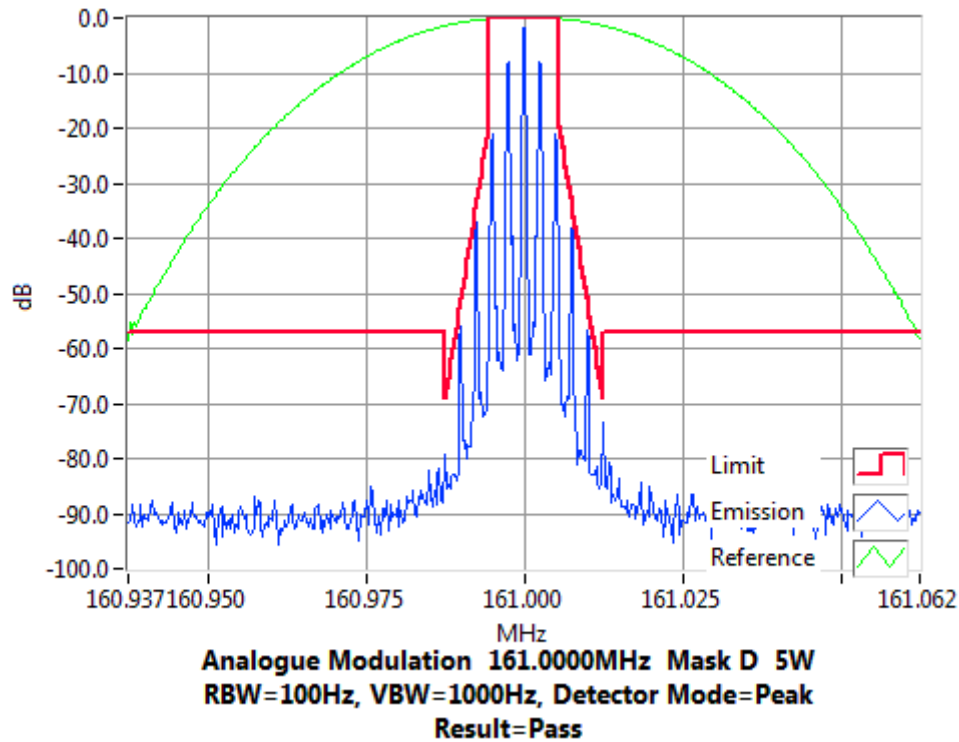

Tx FREQUENCY: 161.0 MHz 1 W 12.5 kHz Channel Spacing

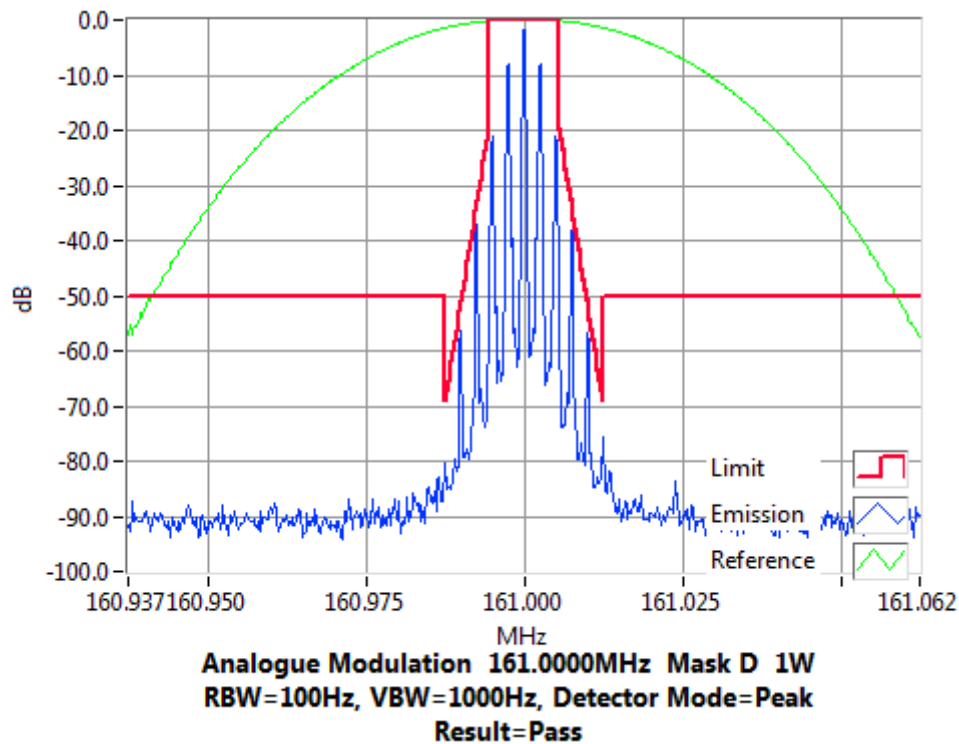


Occupied Bandwidth and Spectrum Masks


ANALOGUE VOICE

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 162.0 MHz 5 W 12.5 kHz Channel Spacing

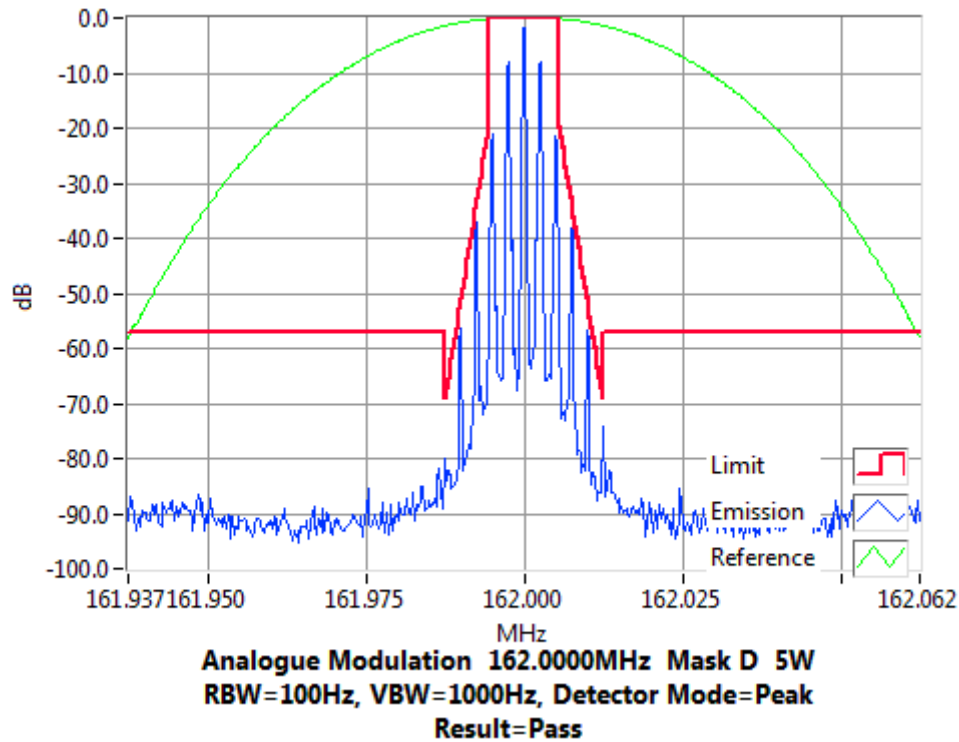

Tx FREQUENCY: 162.0 MHz 1 W 12.5 kHz Channel Spacing

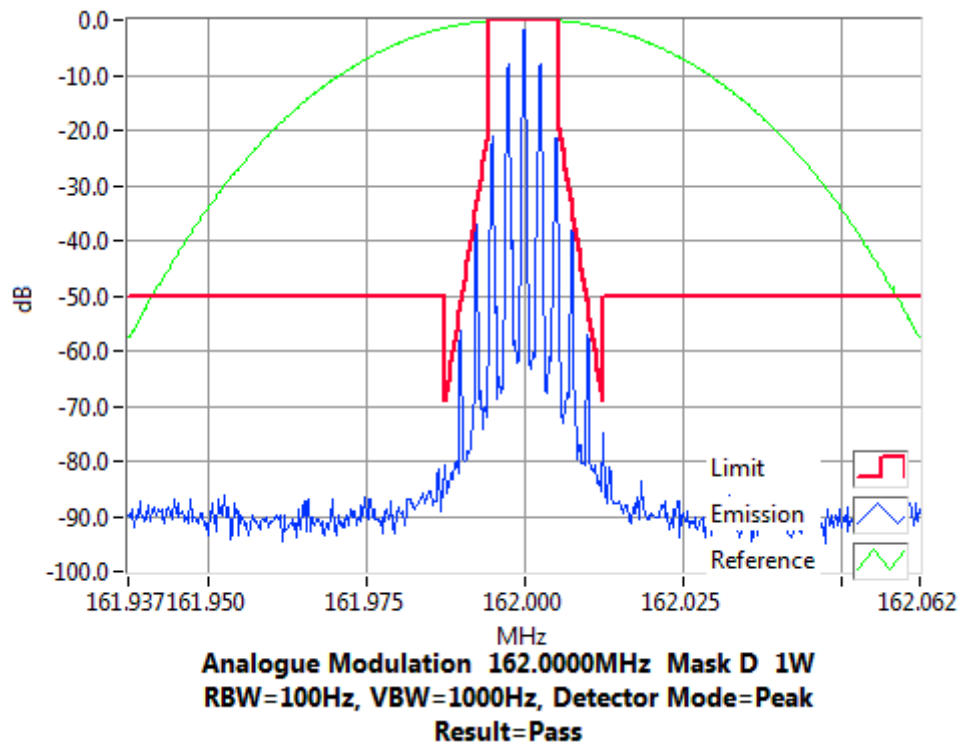


Occupied Bandwidth and Spectrum Masks


ANALOGUE VOICE

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 162.1 MHz 5 W 12.5 kHz Channel Spacing

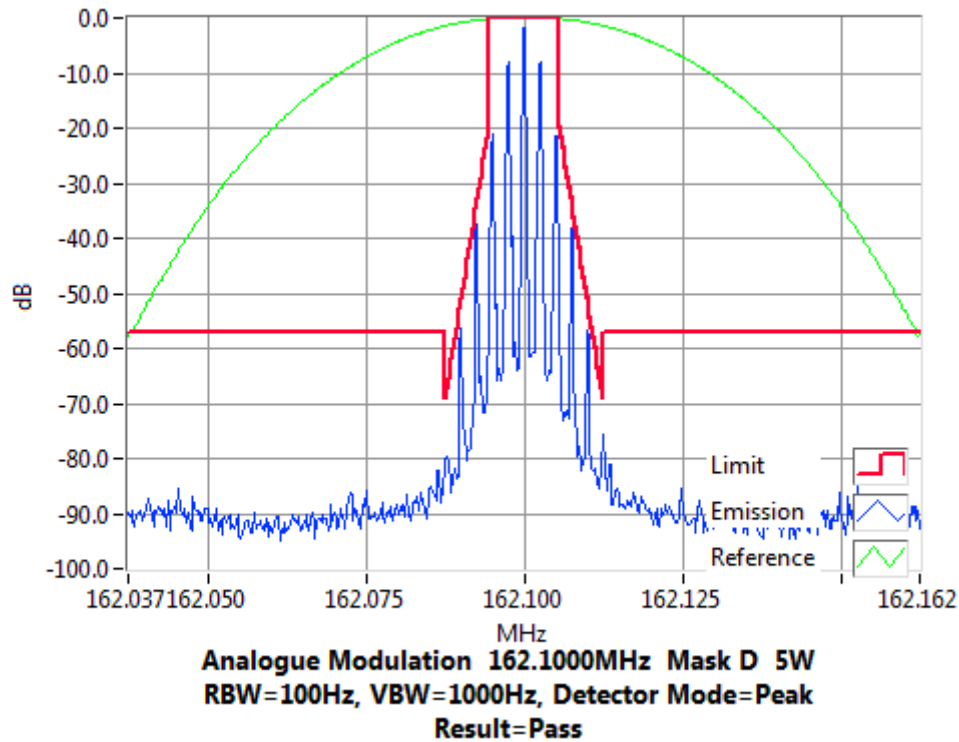

Tx FREQUENCY: 162.1 MHz 1 W 12.5 kHz Channel Spacing

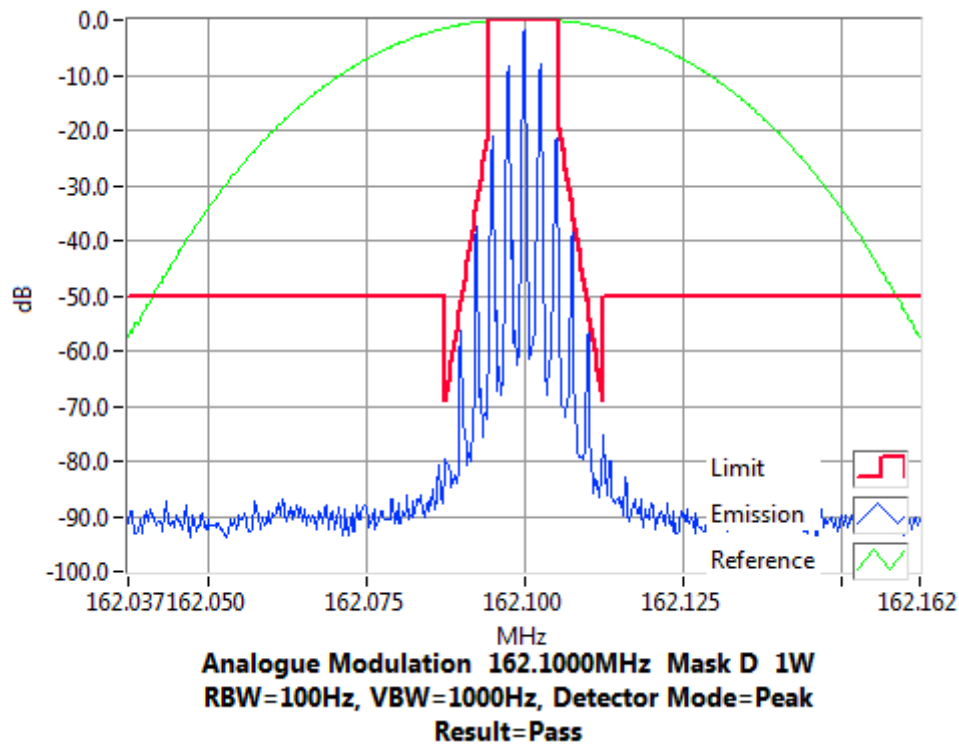


Occupied Bandwidth and Spectrum Masks


ANALOGUE VOICE

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 168.0 MHz 5 W 12.5 kHz Channel Spacing

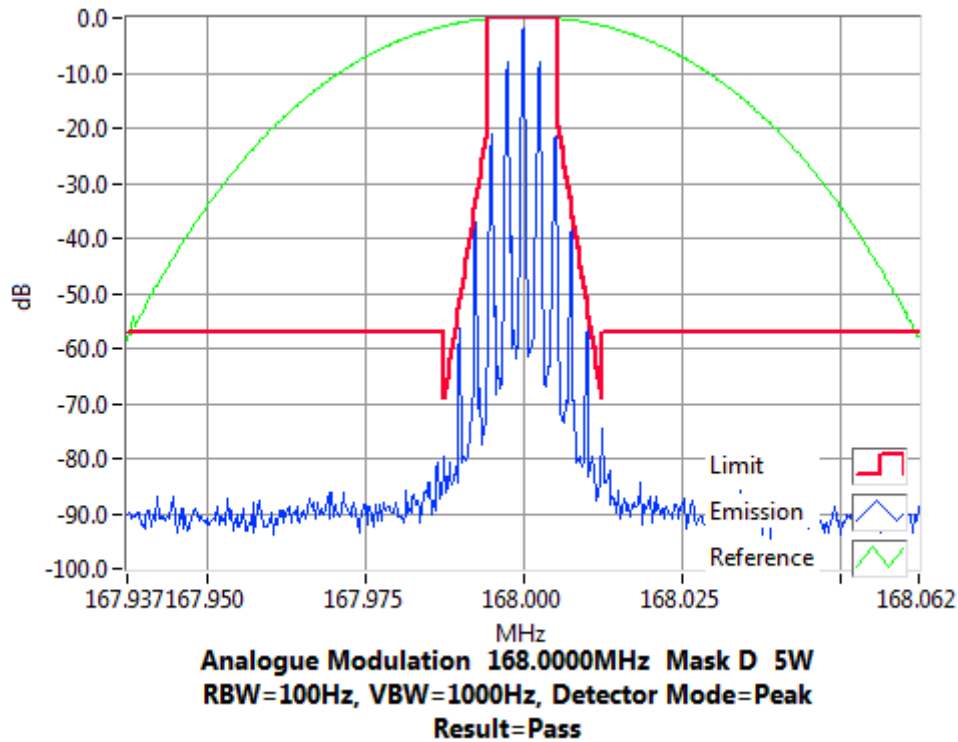

Tx FREQUENCY: 168.0 MHz 1 W 12.5 kHz Channel Spacing

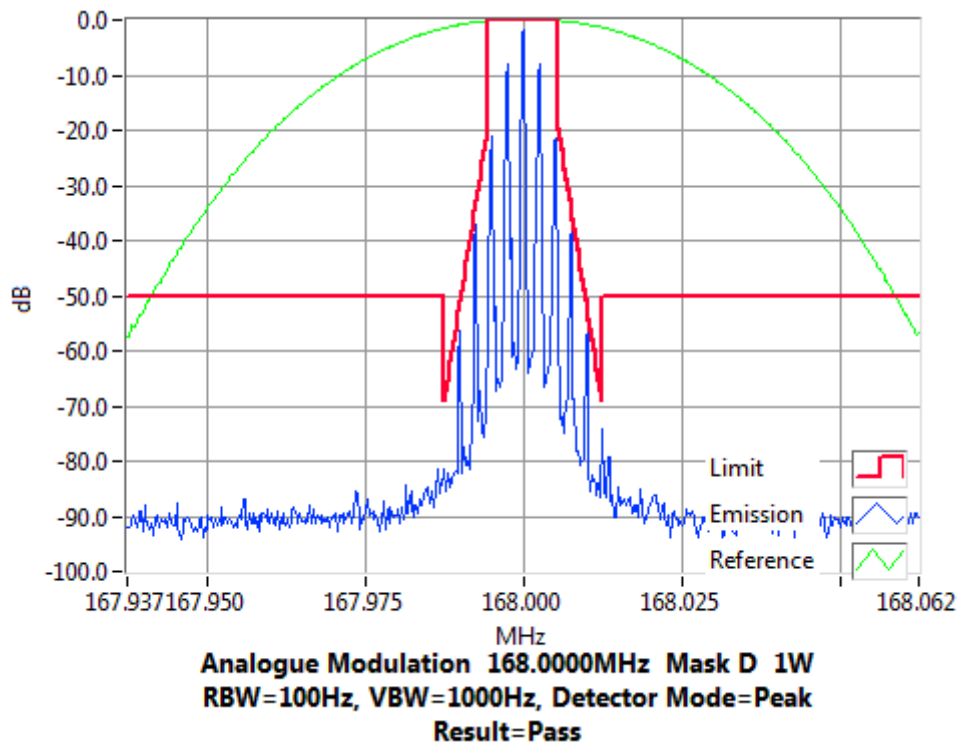


Occupied Bandwidth and Spectrum Masks


ANALOGUE VOICE

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 173.9 MHz 5 W 12.5 kHz Channel Spacing

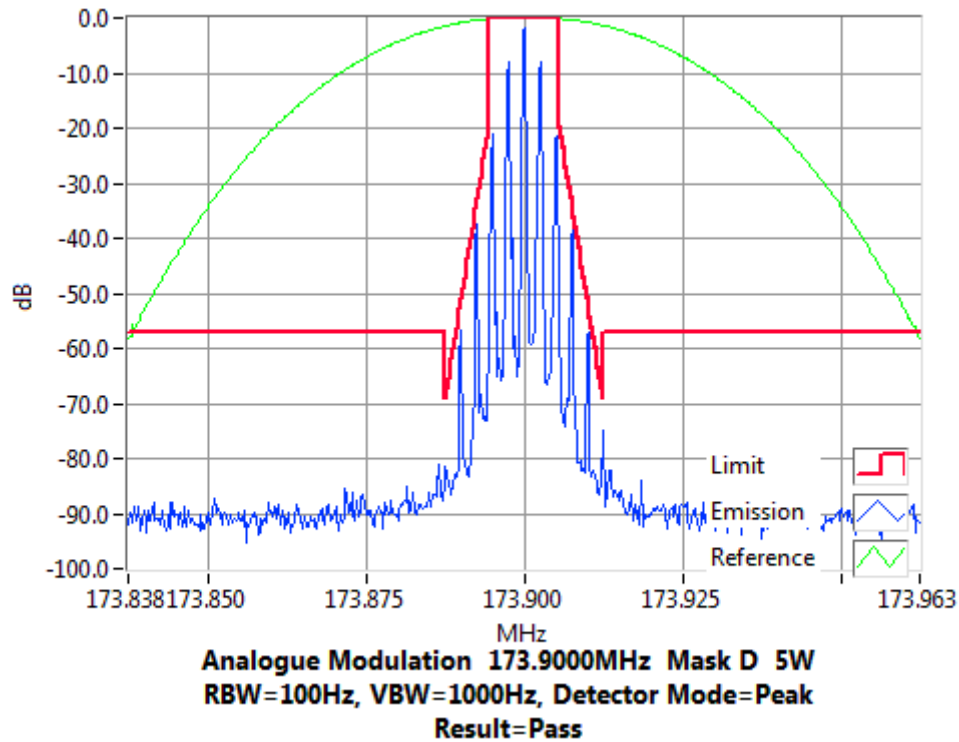

Tx FREQUENCY: 173.9 MHz 1 W 12.5 kHz Channel Spacing

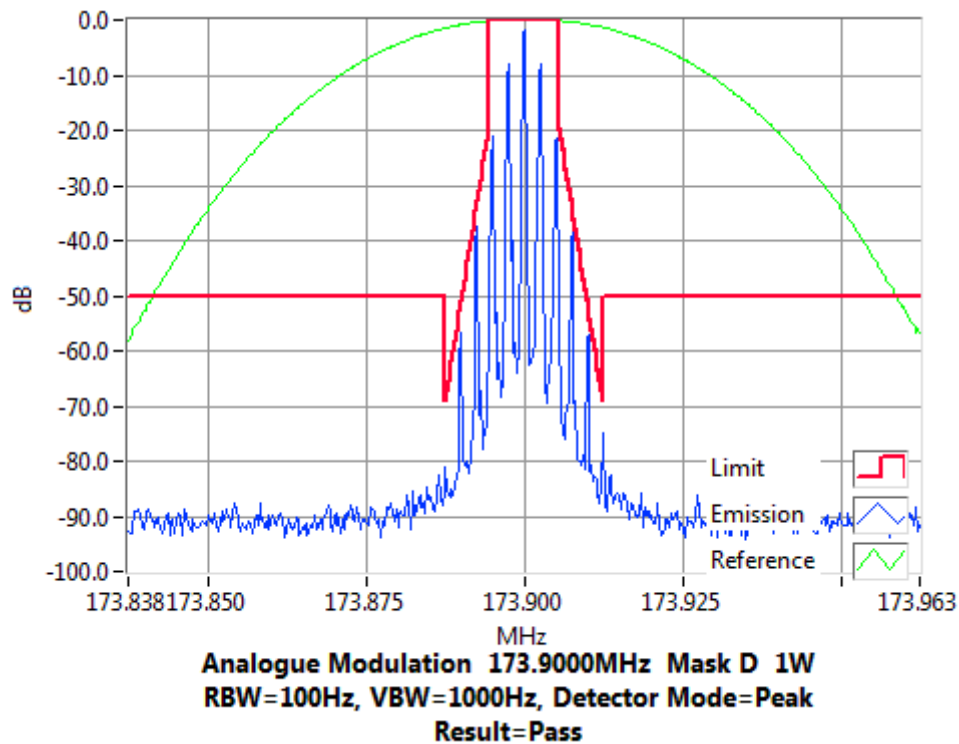


Occupied Bandwidth and Spectrum Masks


FFSK 1200 bps

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 138.1 MHz 5 W 12.5 kHz Channel Spacing

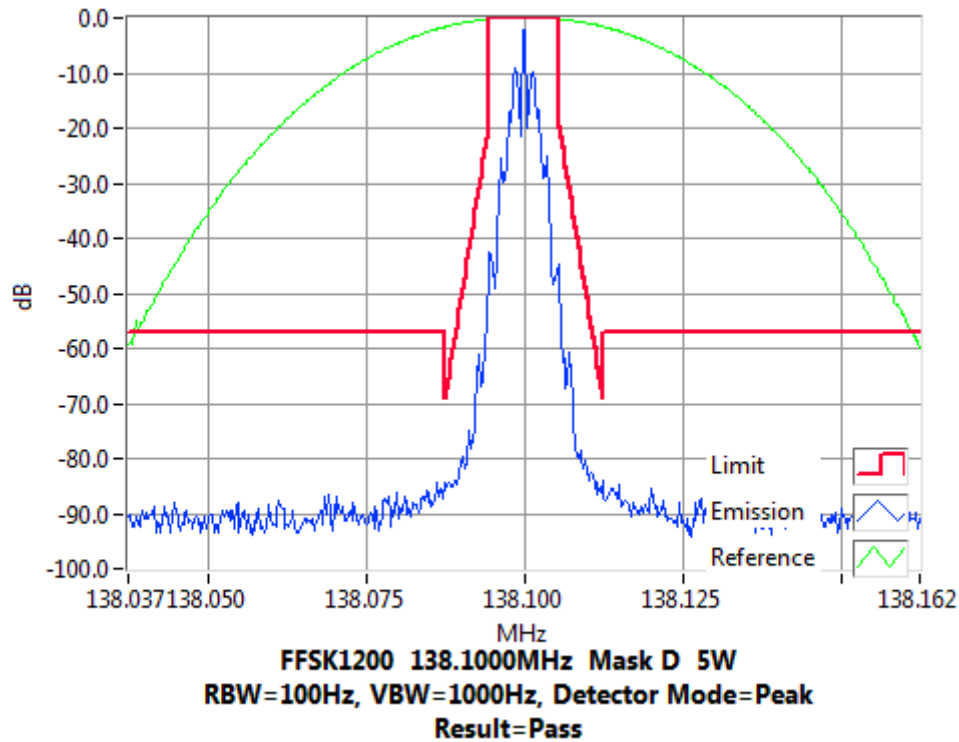

Tx FREQUENCY: 138.1 MHz 1 W 12.5 kHz Channel Spacing

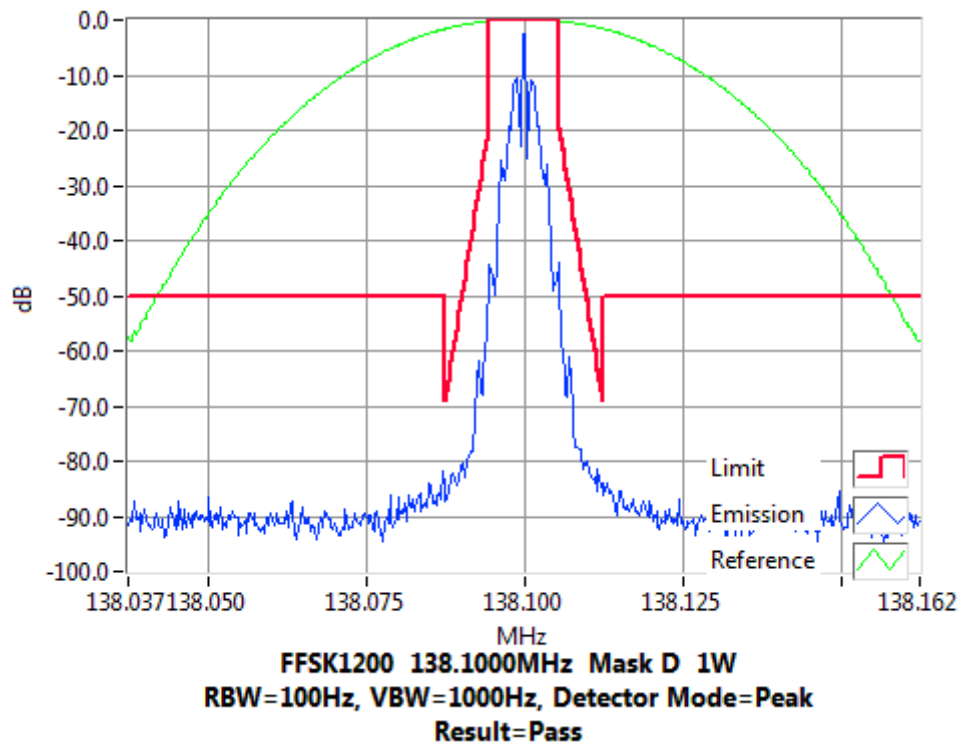


Occupied Bandwidth and Spectrum Masks


FFSK 1200 bps

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 143.9 MHz 5 W 12.5 kHz Channel Spacing

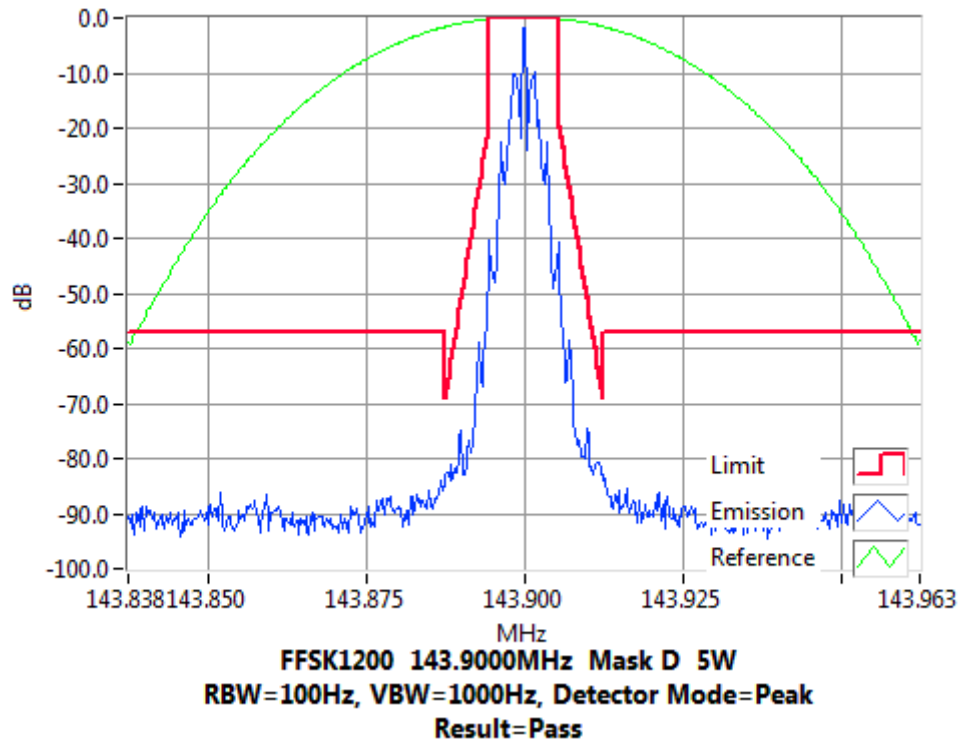

Tx FREQUENCY: 143.9 MHz 1 W 12.5 kHz Channel Spacing

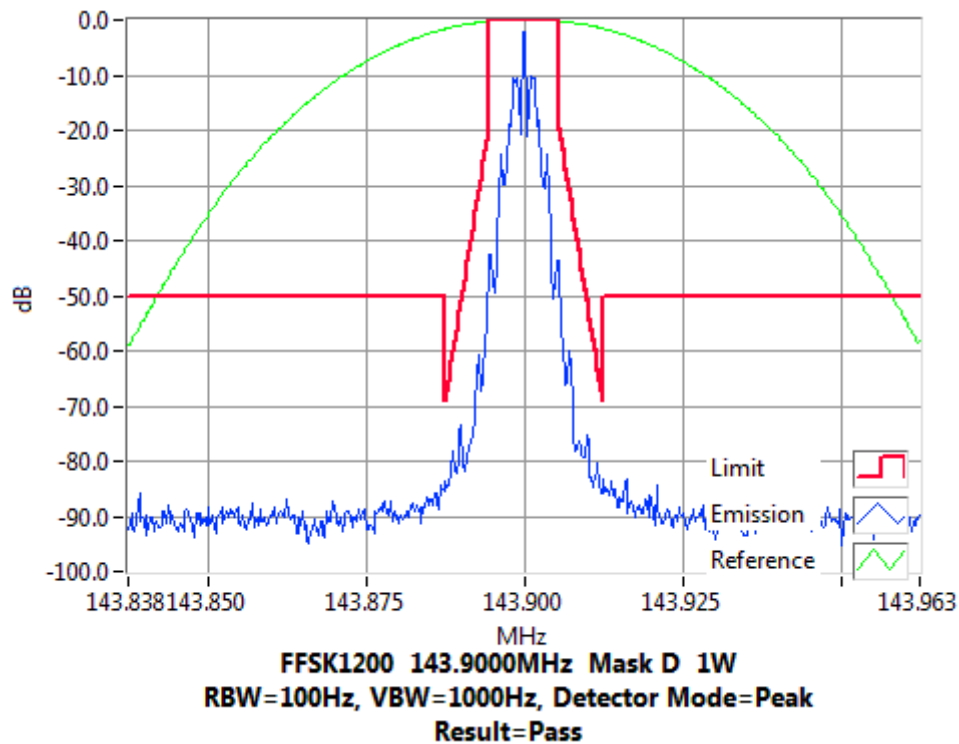


Occupied Bandwidth and Spectrum Masks


FSK 1200 bps

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 148.1 MHz 5 W 12.5 kHz Channel Spacing

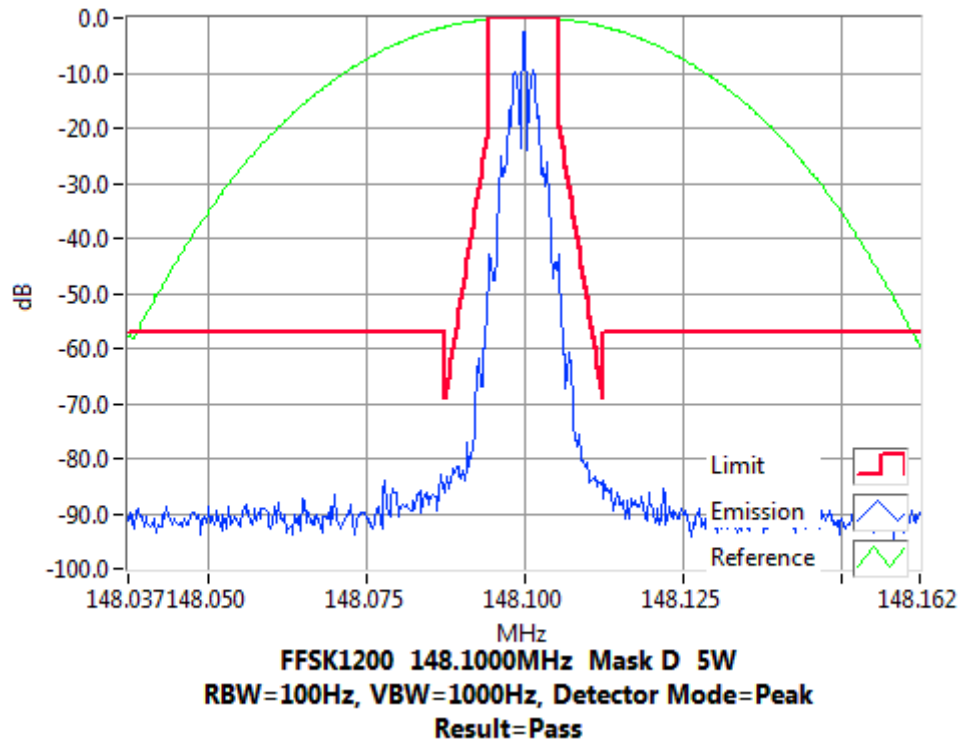

Tx FREQUENCY: 148.1 MHz 1 W 12.5 kHz Channel Spacing

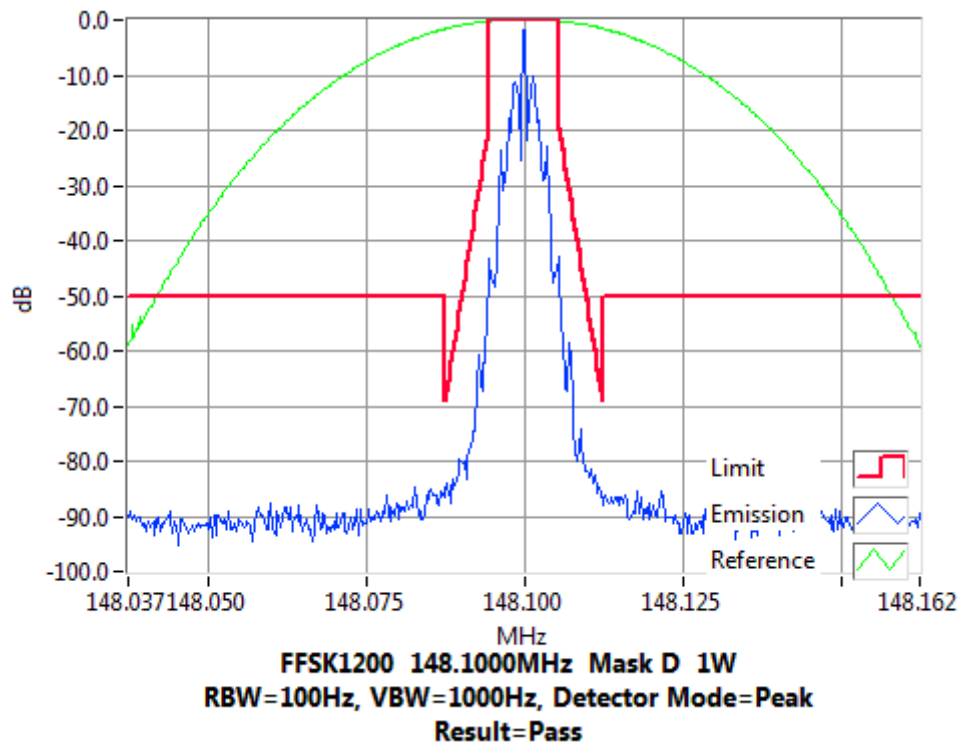


Occupied Bandwidth and Spectrum Masks


FSK 1200 bps

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 149.8 MHz 5 W 12.5 kHz Channel Spacing

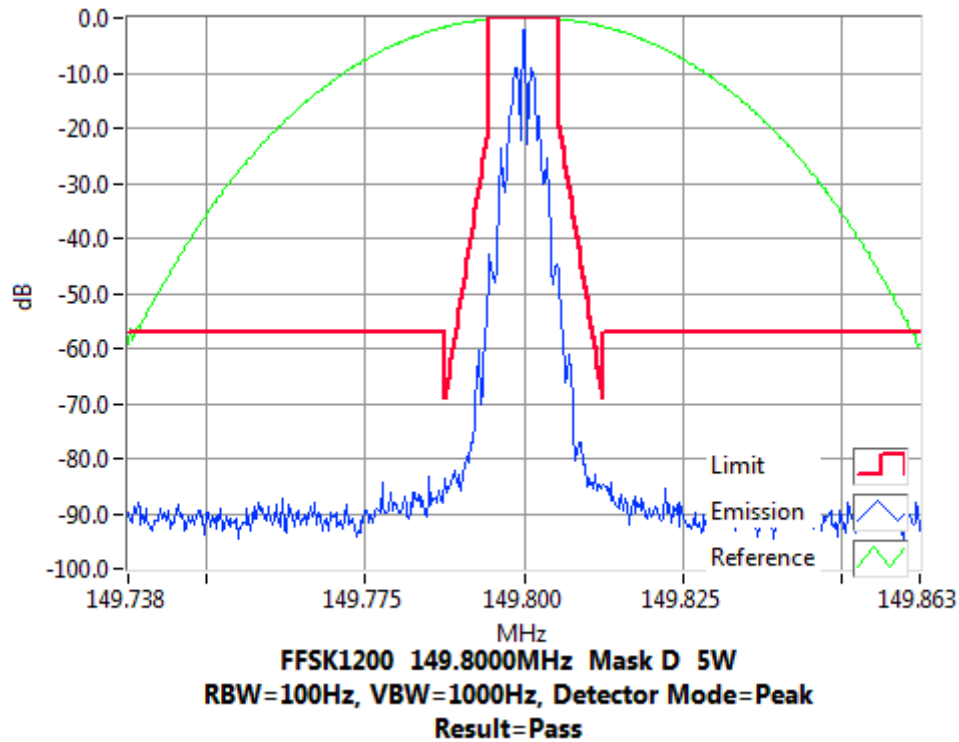

Tx FREQUENCY: 149.8 MHz 1 W 12.5 kHz Channel Spacing

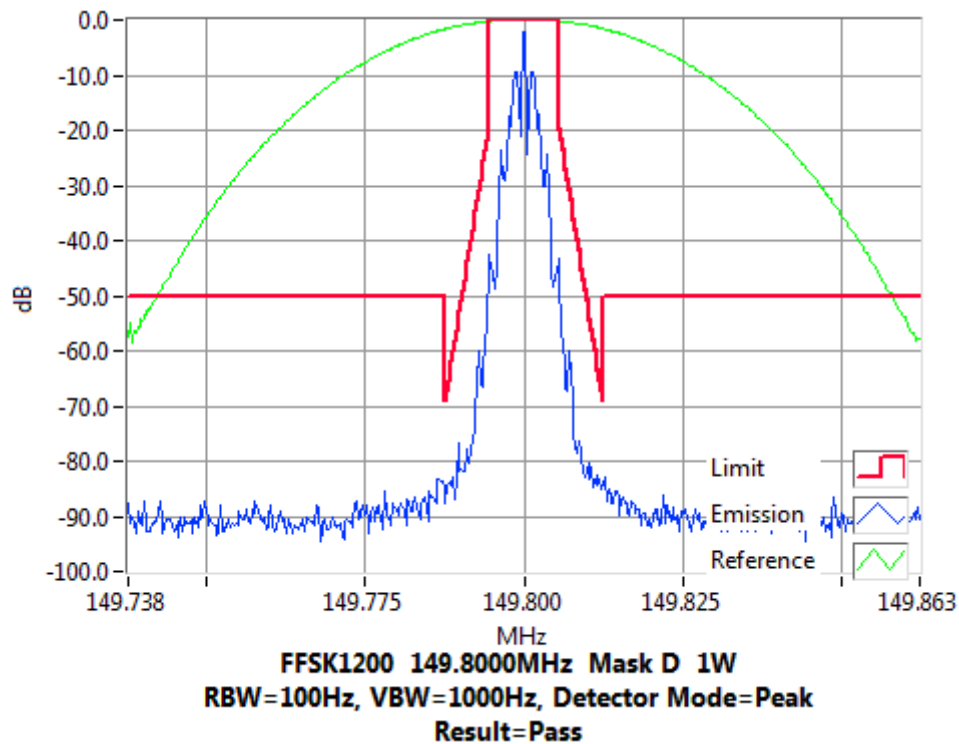


Occupied Bandwidth and Spectrum Masks


FFSK 1200 bps

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 150.1 MHz 5 W 12.5 kHz Channel Spacing

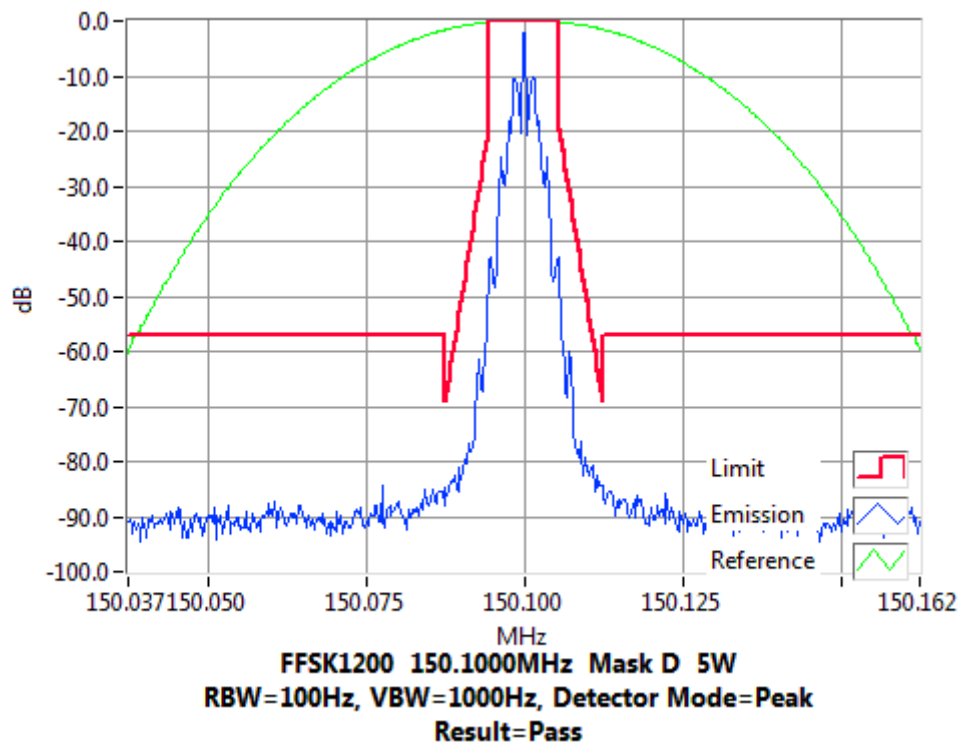

Tx FREQUENCY: 150.1 MHz 1 W 12.5 kHz Channel Spacing

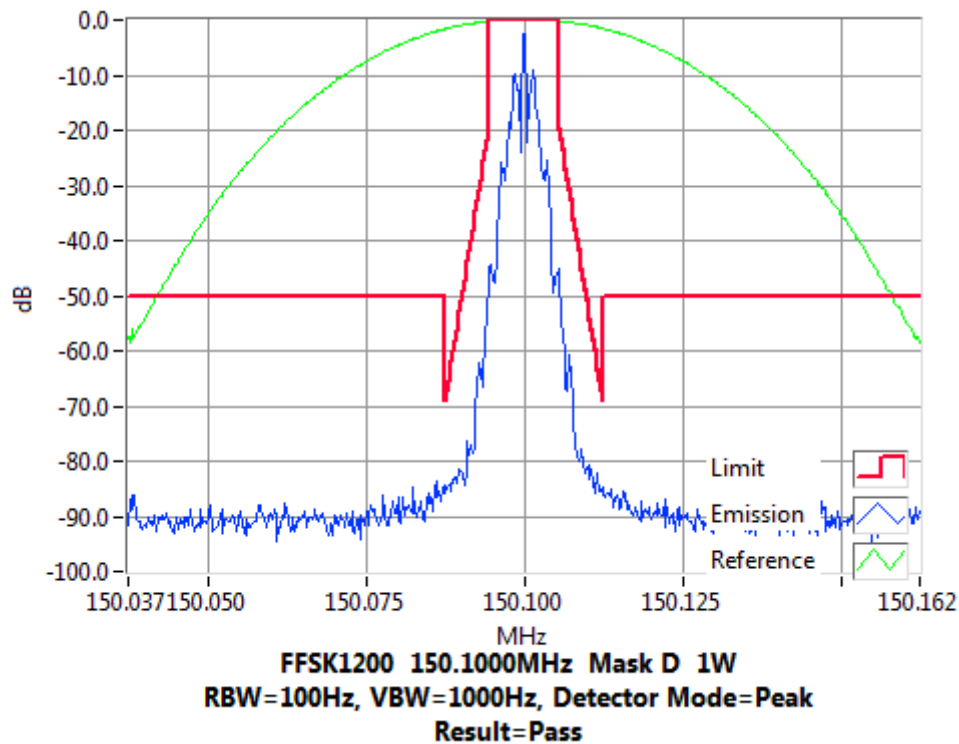


Occupied Bandwidth and Spectrum Masks


FFSK 1200 bps

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 152.0 MHz 5 W 12.5 kHz Channel Spacing

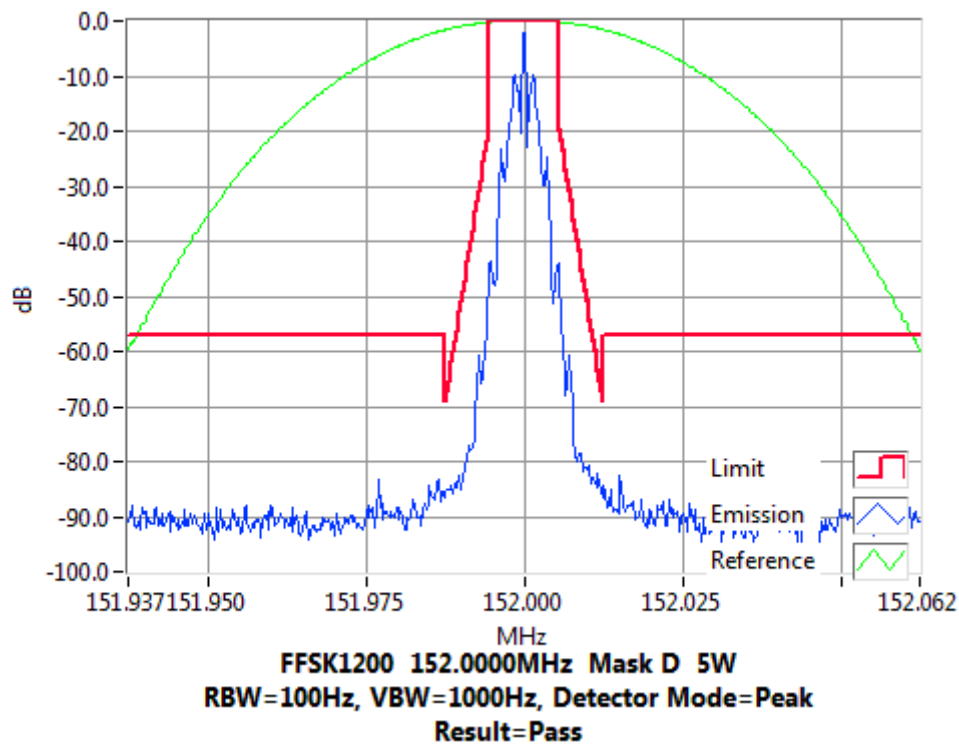

Tx FREQUENCY: 152.0 MHz 1 W 12.5 kHz Channel Spacing

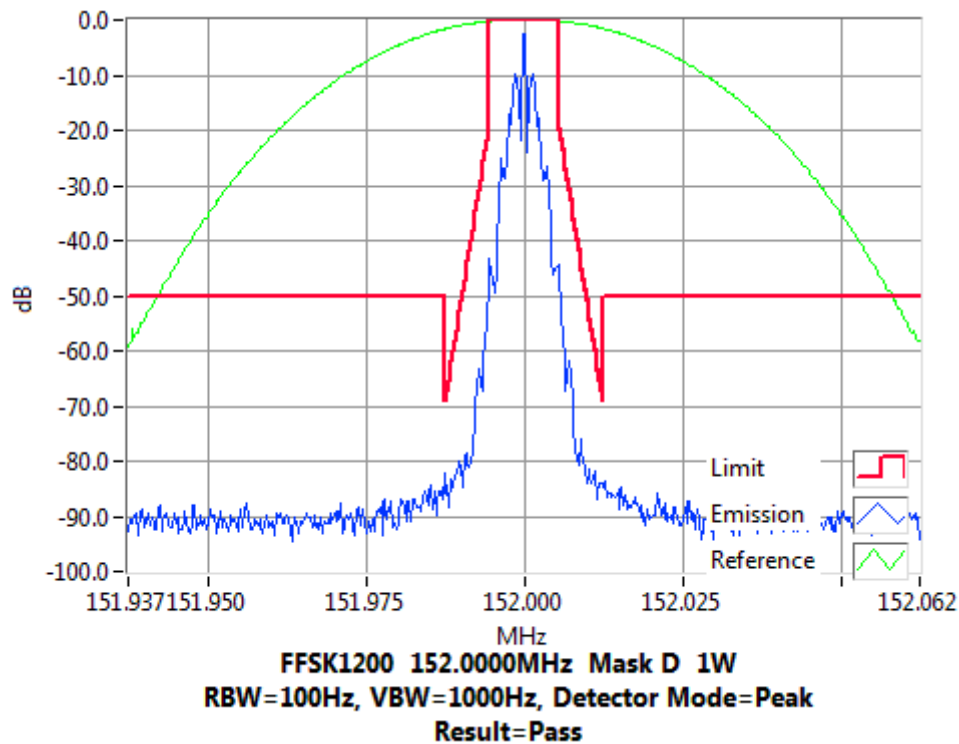


Occupied Bandwidth and Spectrum Masks


FSK 1200 bps

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 156.3 MHz 5 W 12.5 kHz Channel Spacing

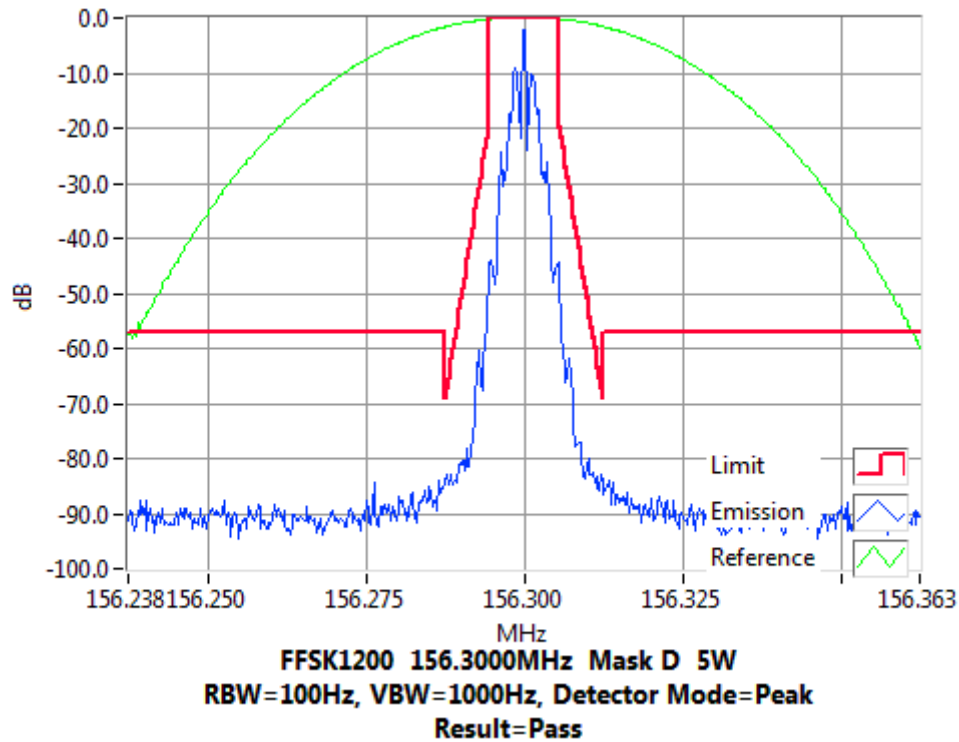

Tx FREQUENCY: 156.3 MHz 1 W 12.5 kHz Channel Spacing

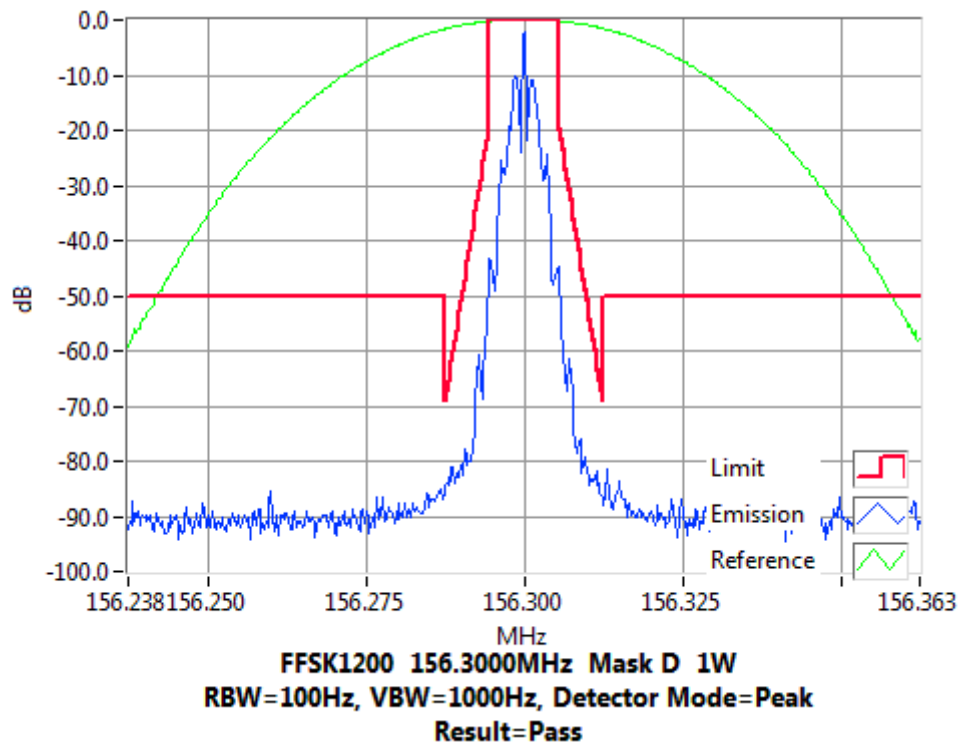


Occupied Bandwidth and Spectrum Masks


FFSK 1200 bps

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 156.67 MHz 5 W 12.5 kHz Channel Spacing

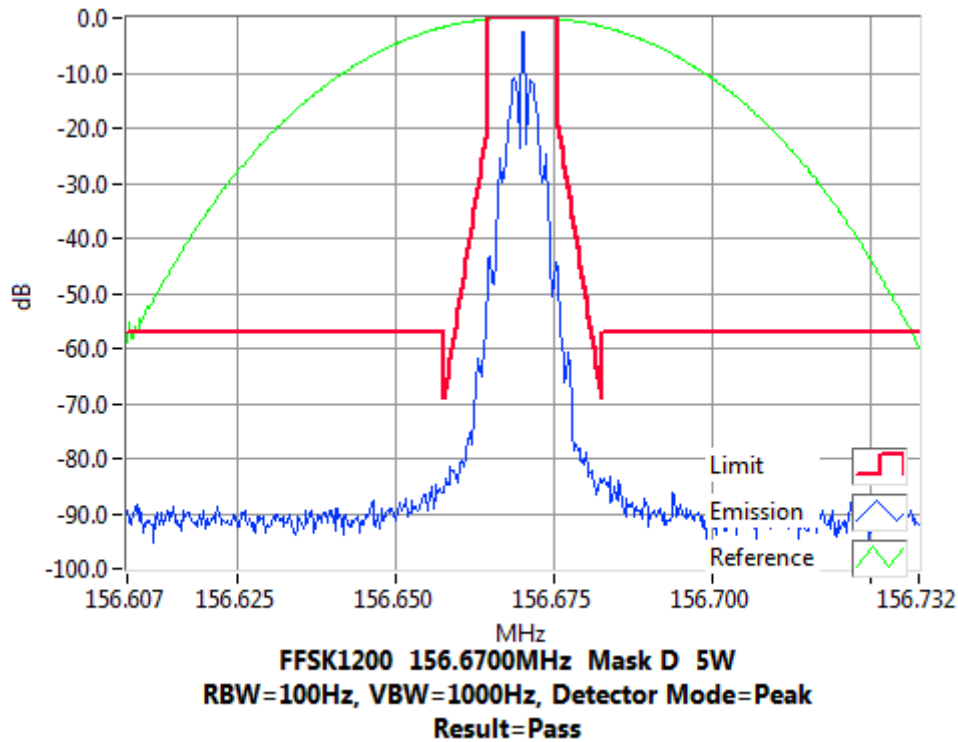

Tx FREQUENCY: 156.67 MHz 1 W 12.5 kHz Channel Spacing

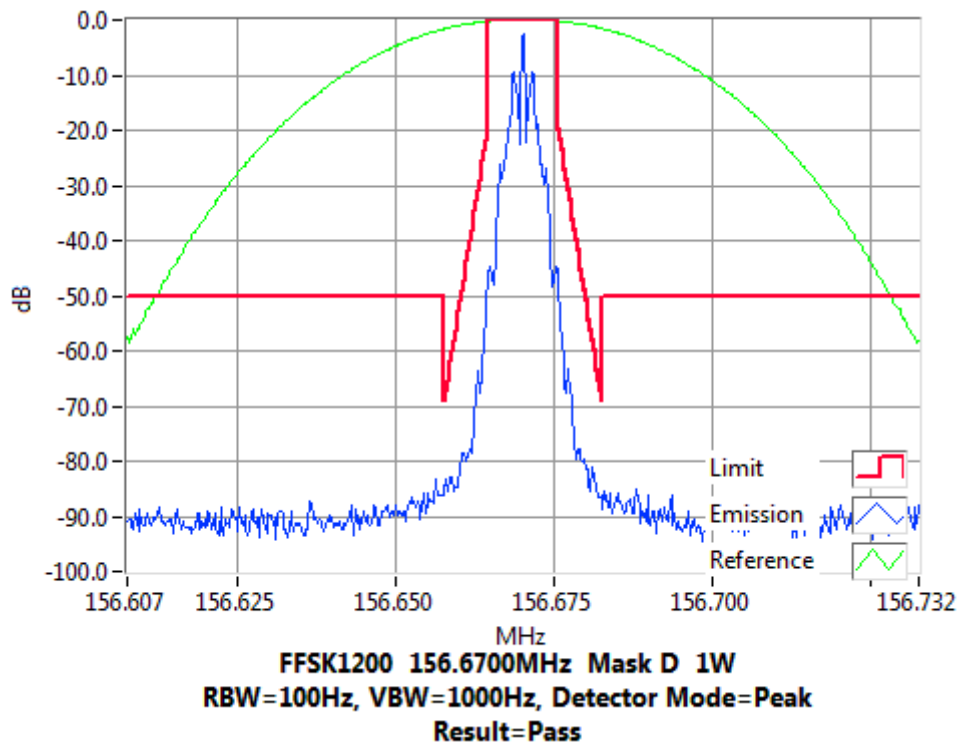


Occupied Bandwidth and Spectrum Masks


FSK 1200 bps

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 157.0 MHz 5 W 12.5 kHz Channel Spacing

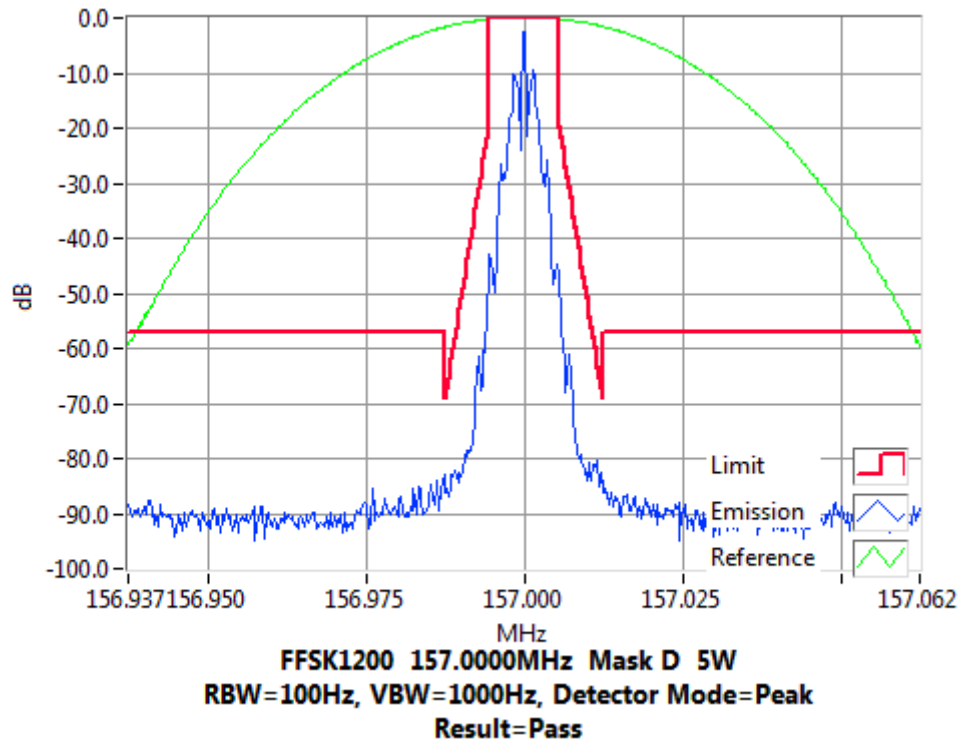

Tx FREQUENCY: 157.0 MHz 1 W 12.5 kHz Channel Spacing

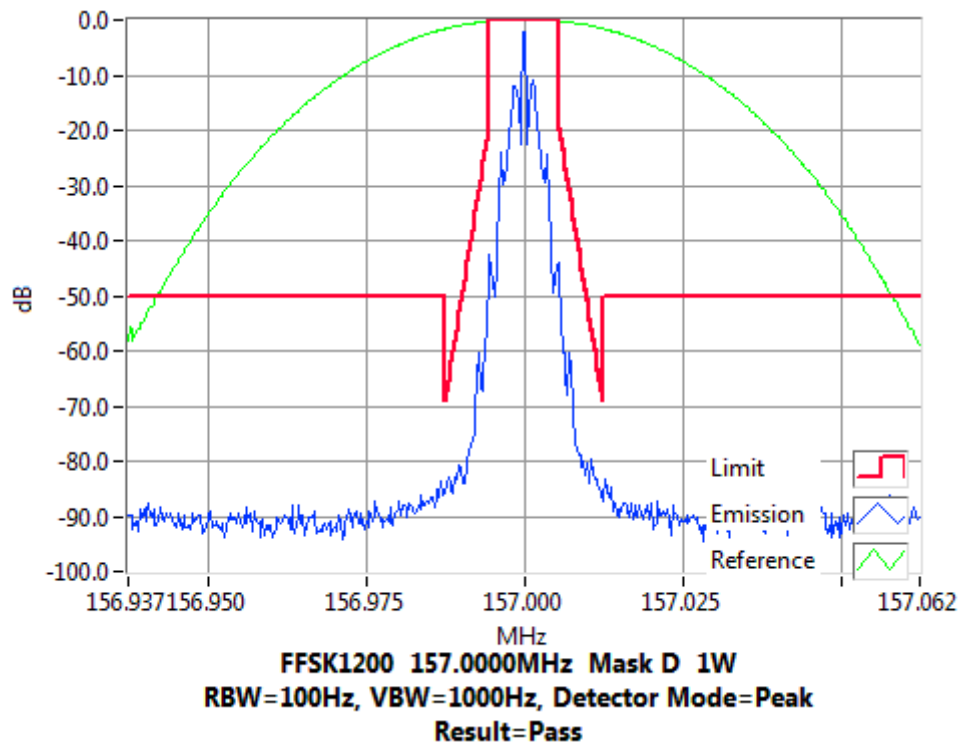


Occupied Bandwidth and Spectrum Masks


FFSK 1200 bps

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 160.0 MHz 5 W 12.5 kHz Channel Spacing

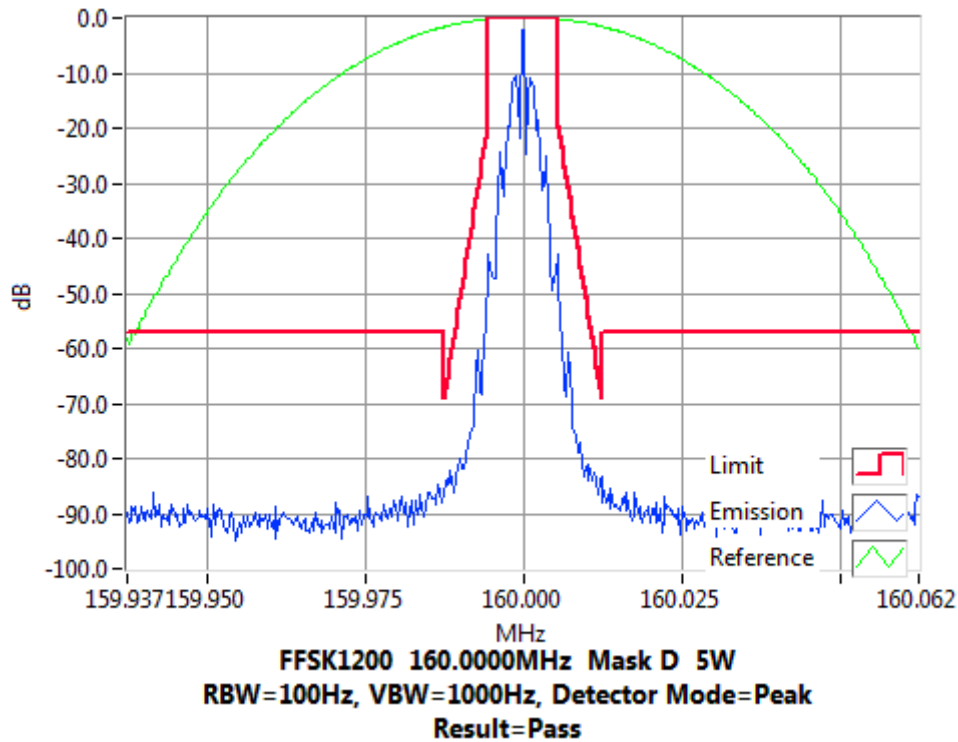

Tx FREQUENCY: 160.0 MHz 1 W 12.5 kHz Channel Spacing

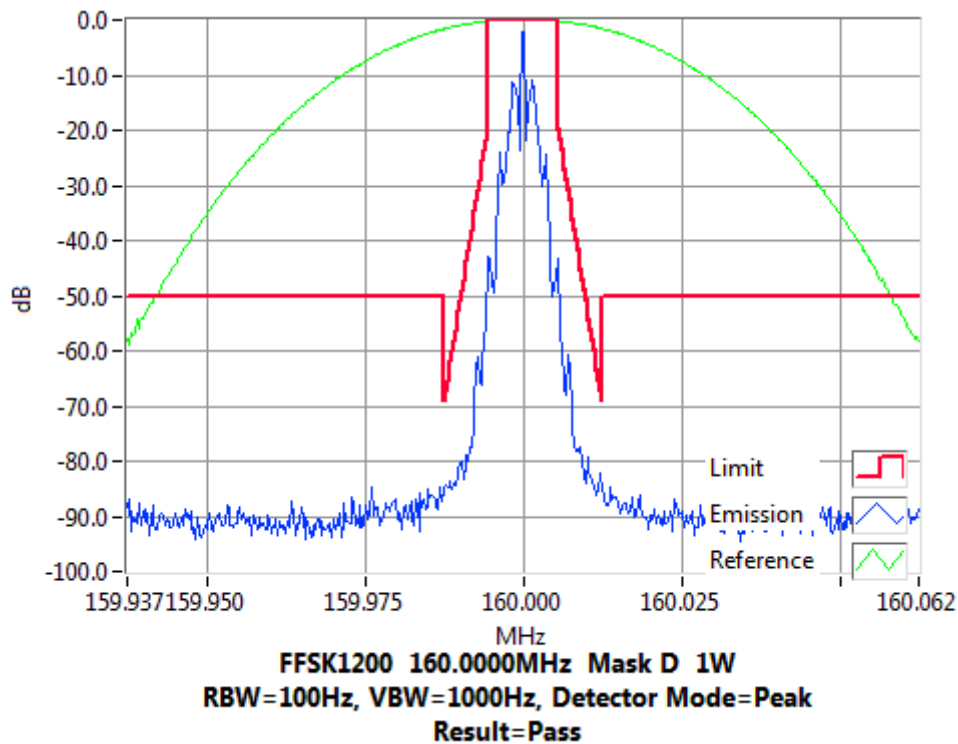


Occupied Bandwidth and Spectrum Masks


FSK 1200 bps

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 161.0 MHz 5 W 12.5 kHz Channel Spacing

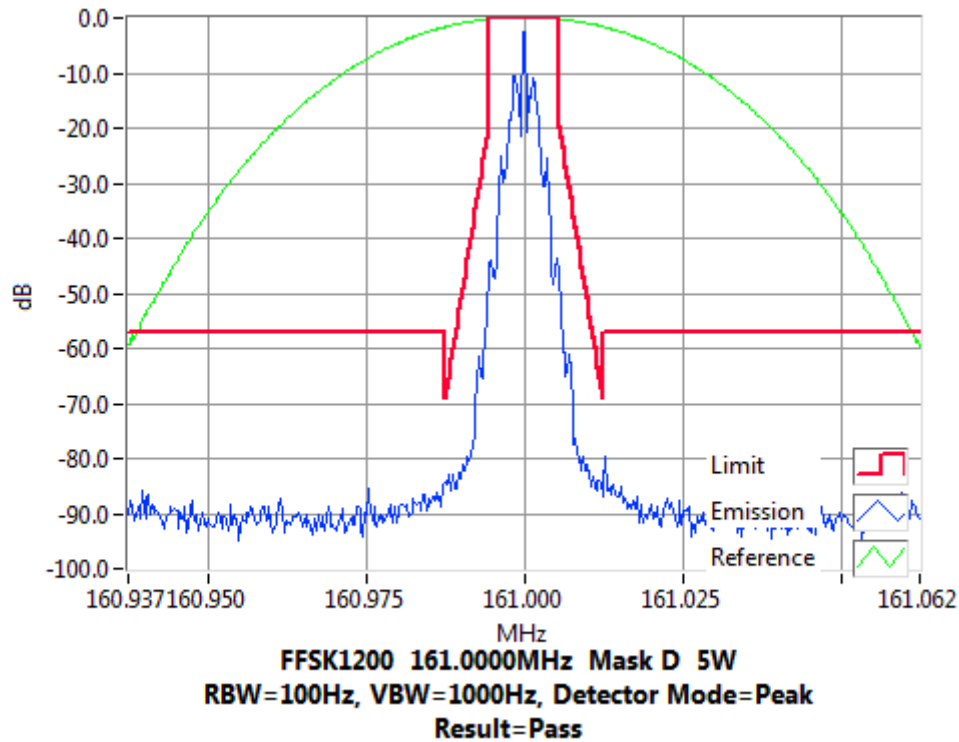

Tx FREQUENCY: 161.0 MHz 1 W 12.5 kHz Channel Spacing

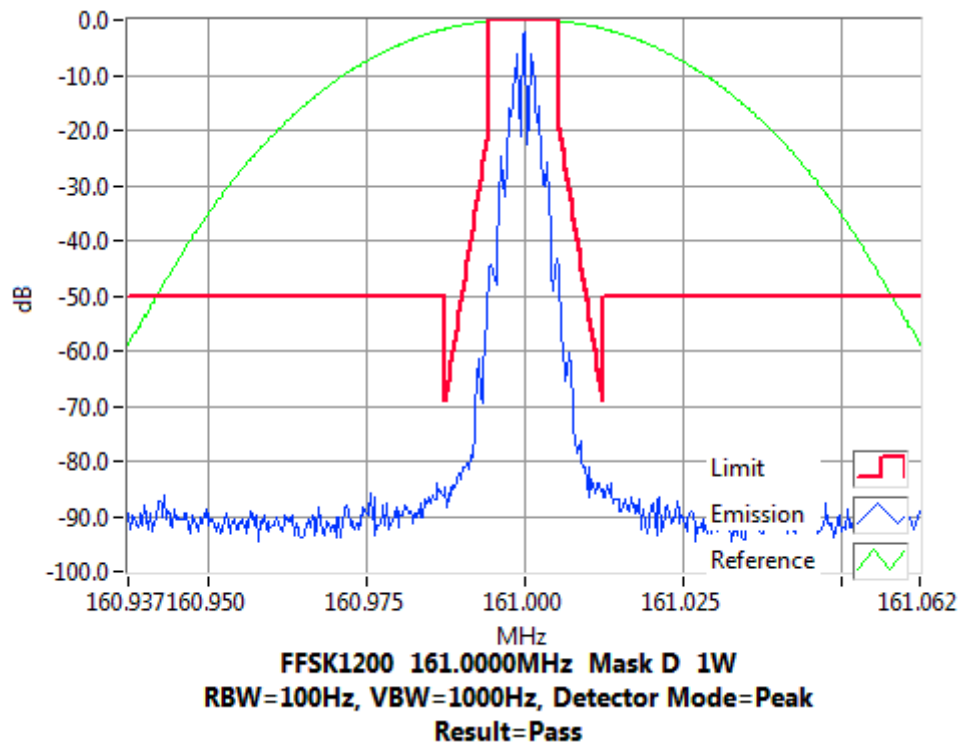


Occupied Bandwidth and Spectrum Masks


FFSK 1200 bps

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 162.0 MHz 5 W 12.5 kHz Channel Spacing

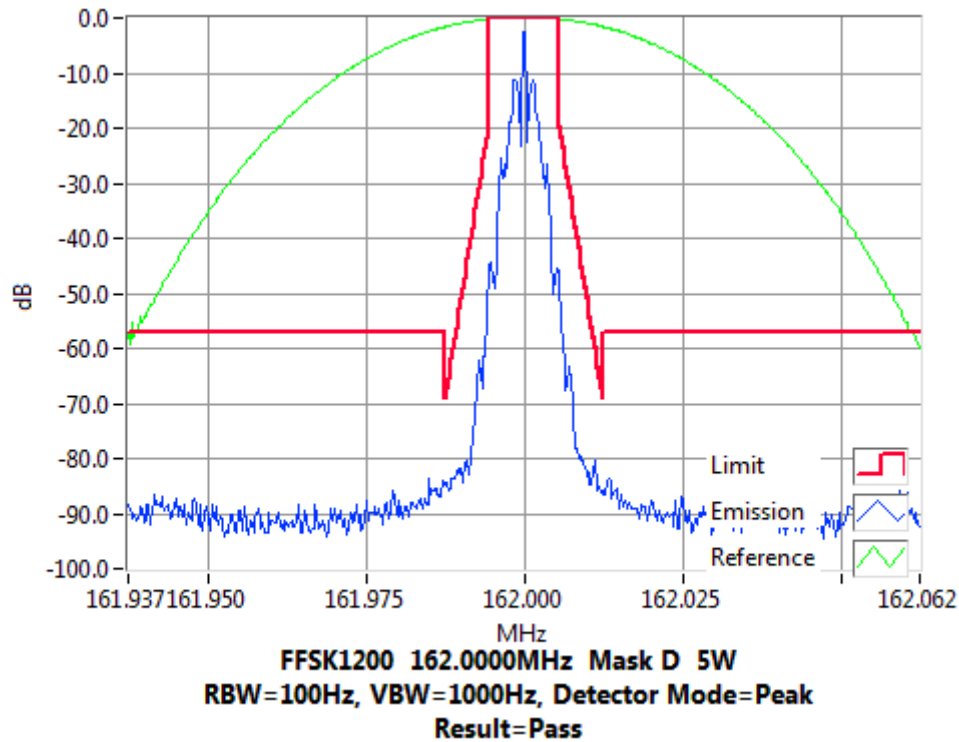

Tx FREQUENCY: 162.0 MHz 1 W 12.5 kHz Channel Spacing

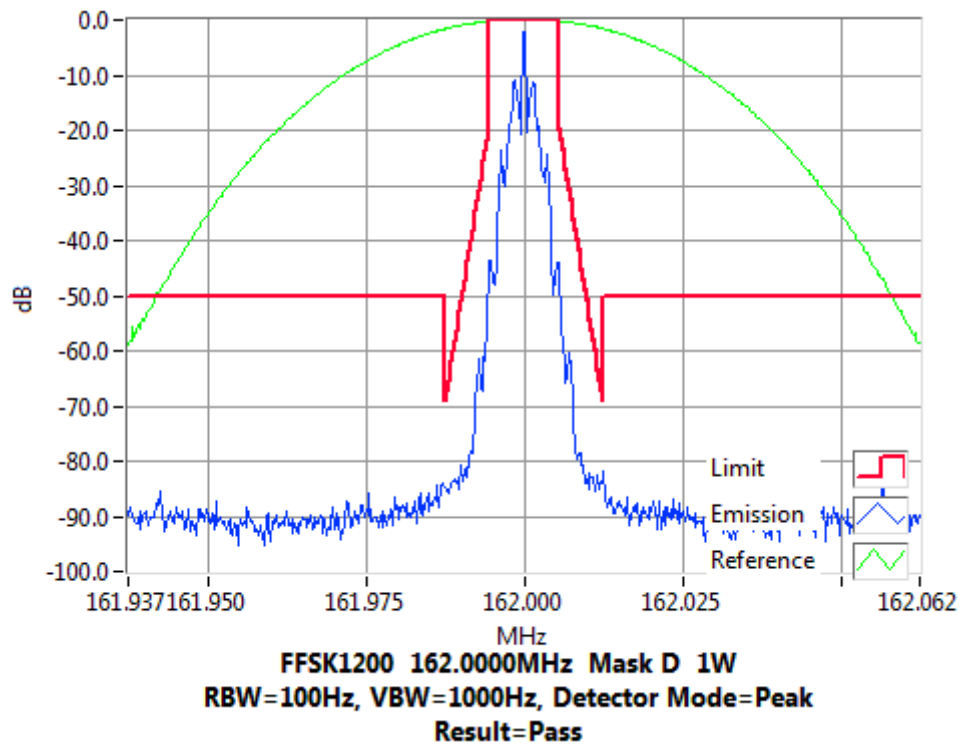


Occupied Bandwidth and Spectrum Masks


FSK 1200 bps

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 162.1 MHz 5 W 12.5 kHz Channel Spacing

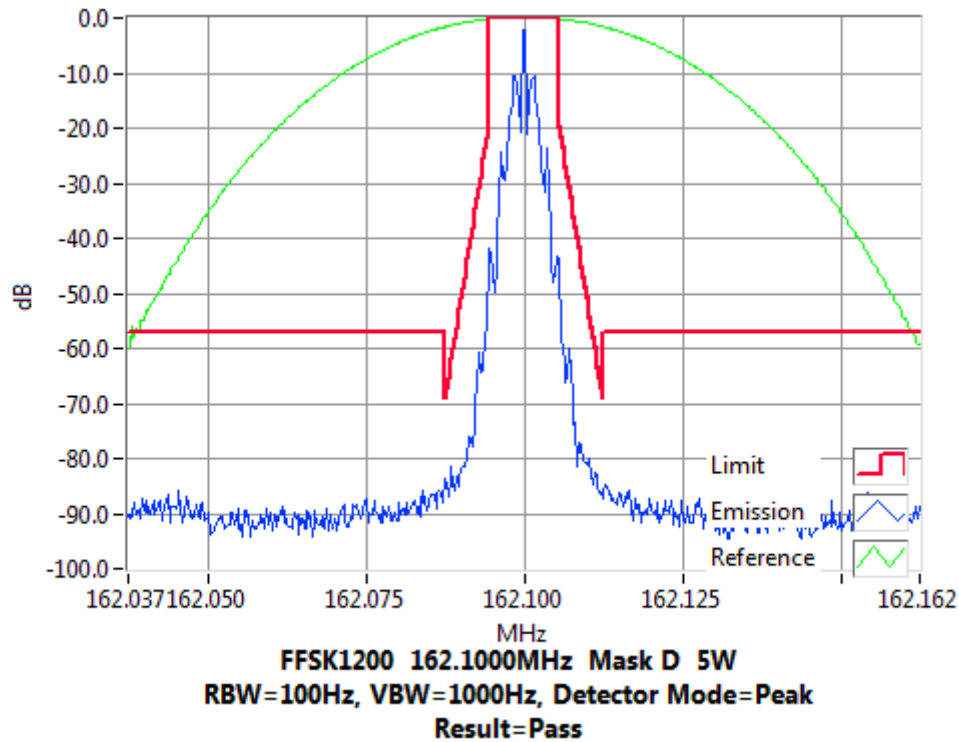

Tx FREQUENCY: 162.1 MHz 1 W 12.5 kHz Channel Spacing

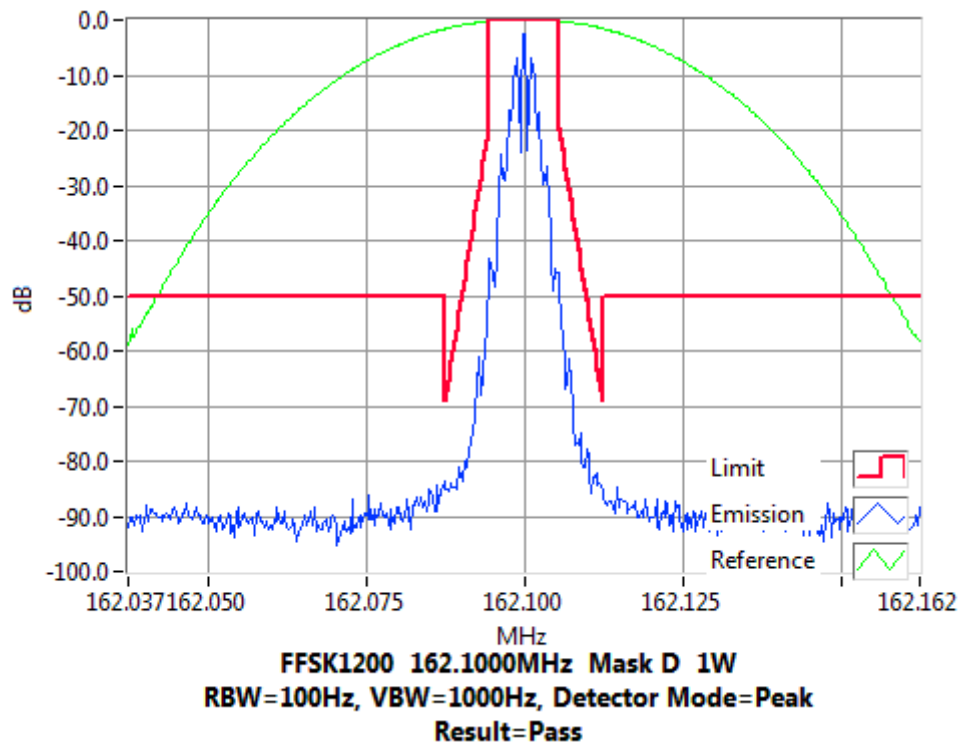


Occupied Bandwidth and Spectrum Masks


FSK 1200 bps

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 168.0 MHz 5 W 12.5 kHz Channel Spacing

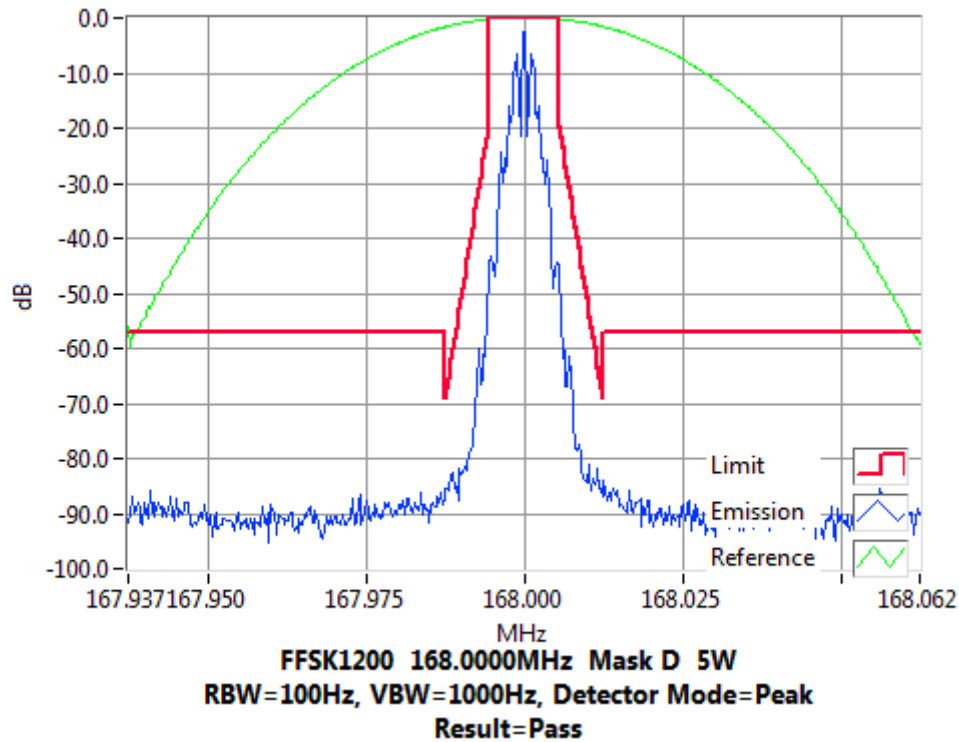

Tx FREQUENCY: 168.0 MHz 1 W 12.5 kHz Channel Spacing

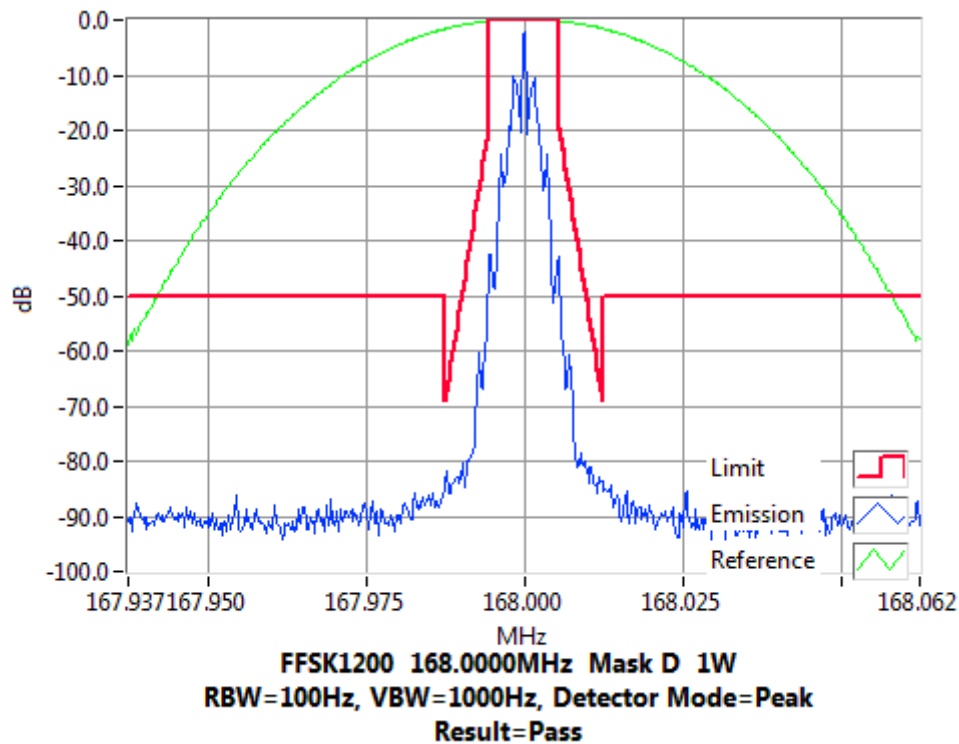


Occupied Bandwidth and Spectrum Masks


FSK 1200 bps

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 173.9 MHz 5 W 12.5 kHz Channel Spacing

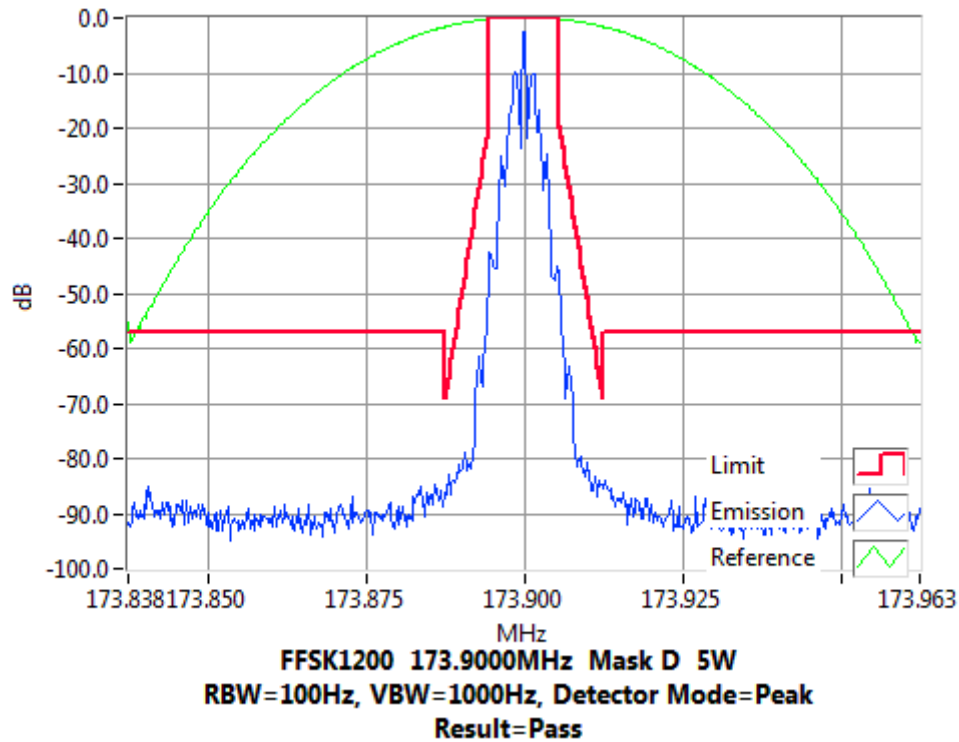

Tx FREQUENCY: 173.9 MHz 1 W 12.5 kHz Channel Spacing

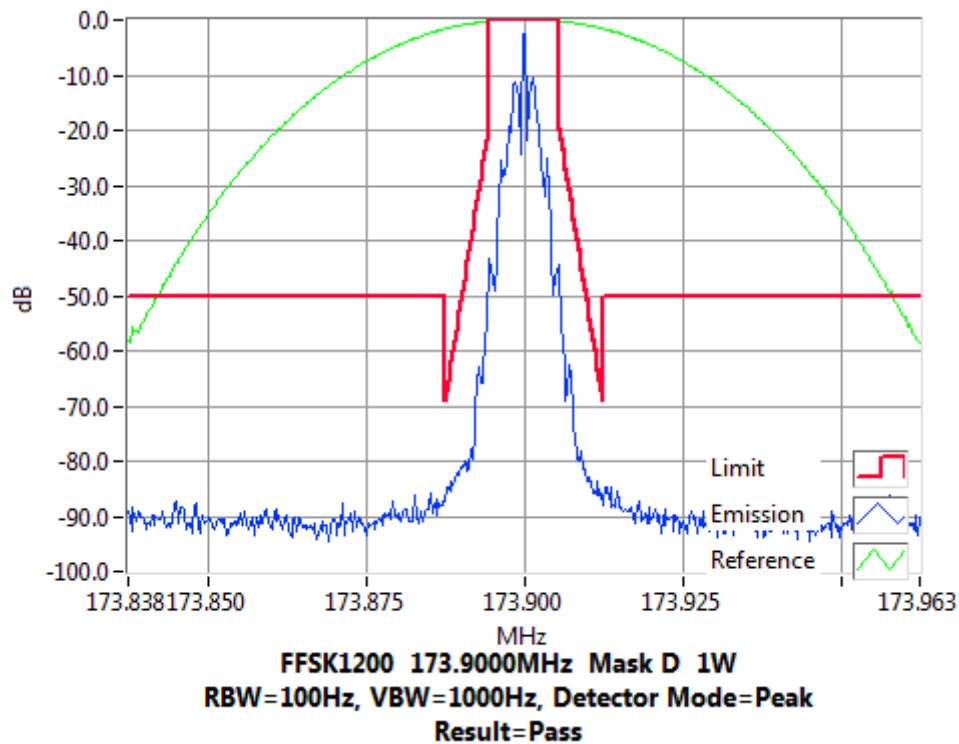


Occupied Bandwidth and Spectrum Masks


FFSK 2400 bps

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 138.1 MHz 5 W 12.5 kHz Channel Spacing

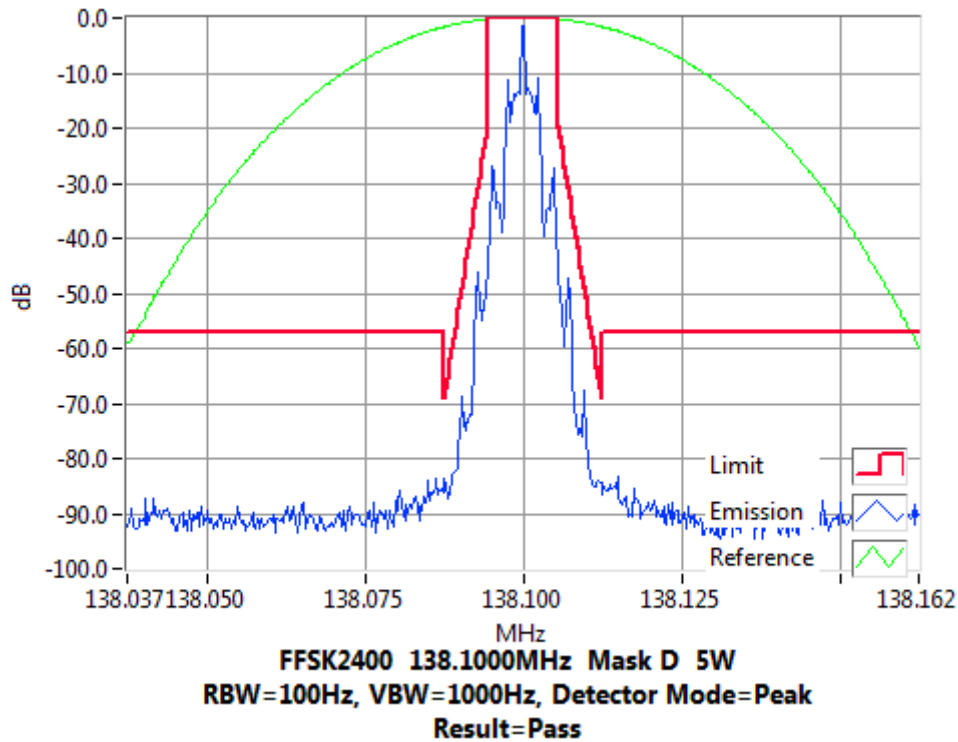

Tx FREQUENCY: 138.1 MHz 1 W 12.5 kHz Channel Spacing

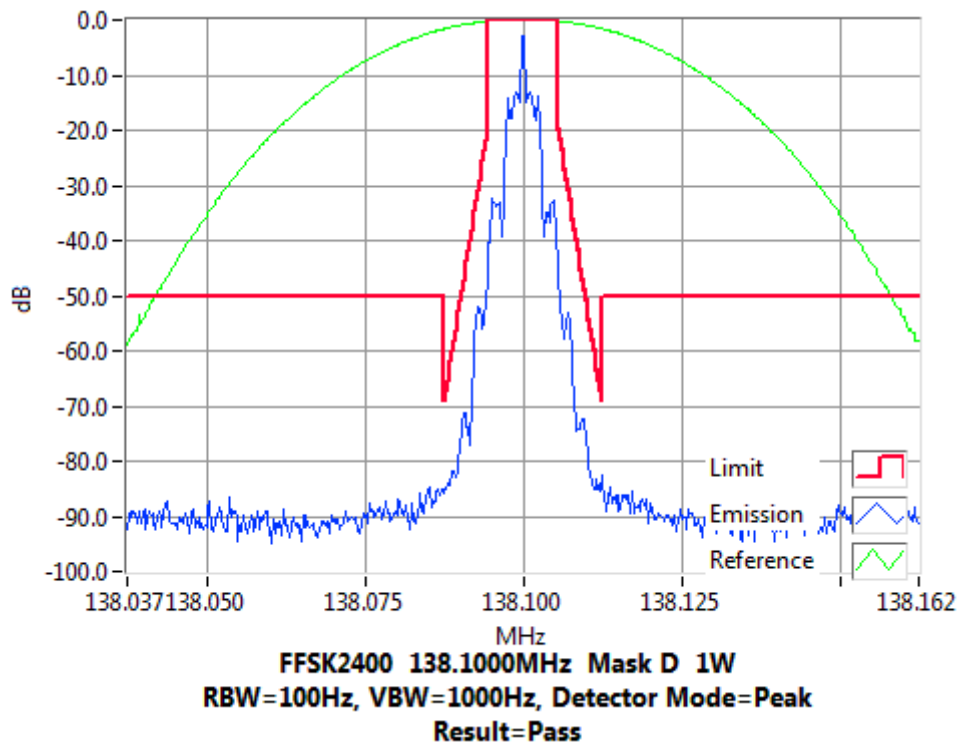


Occupied Bandwidth and Spectrum Masks


FFSK 2400 bps

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 143.9 MHz 5 W 12.5 kHz Channel Spacing

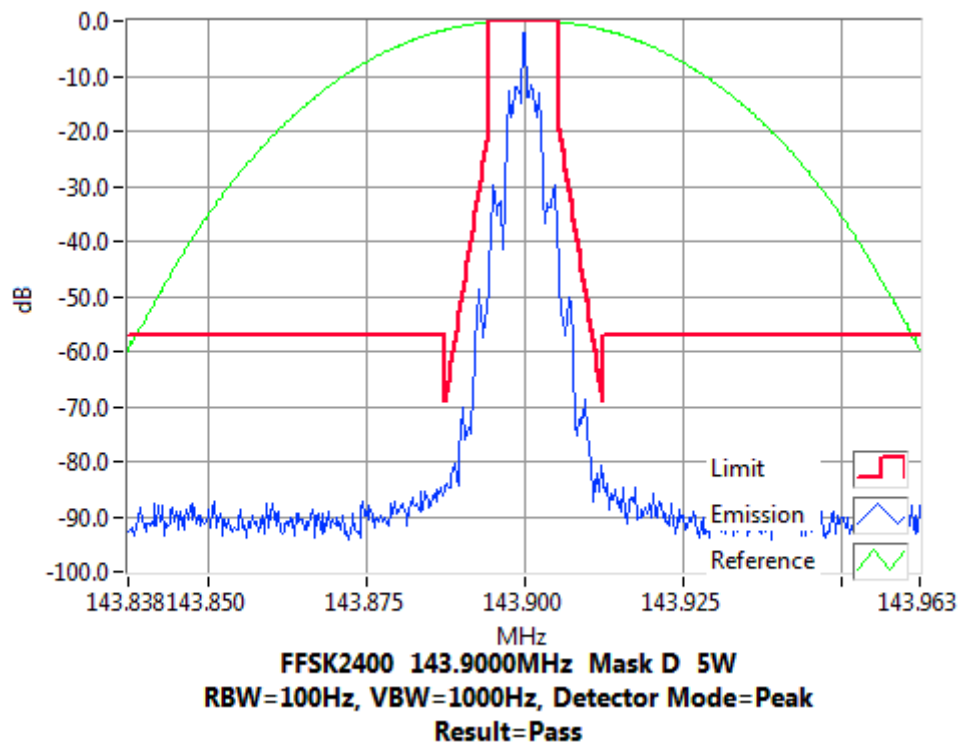

Tx FREQUENCY: 143.9 MHz 1 W 12.5 kHz Channel Spacing

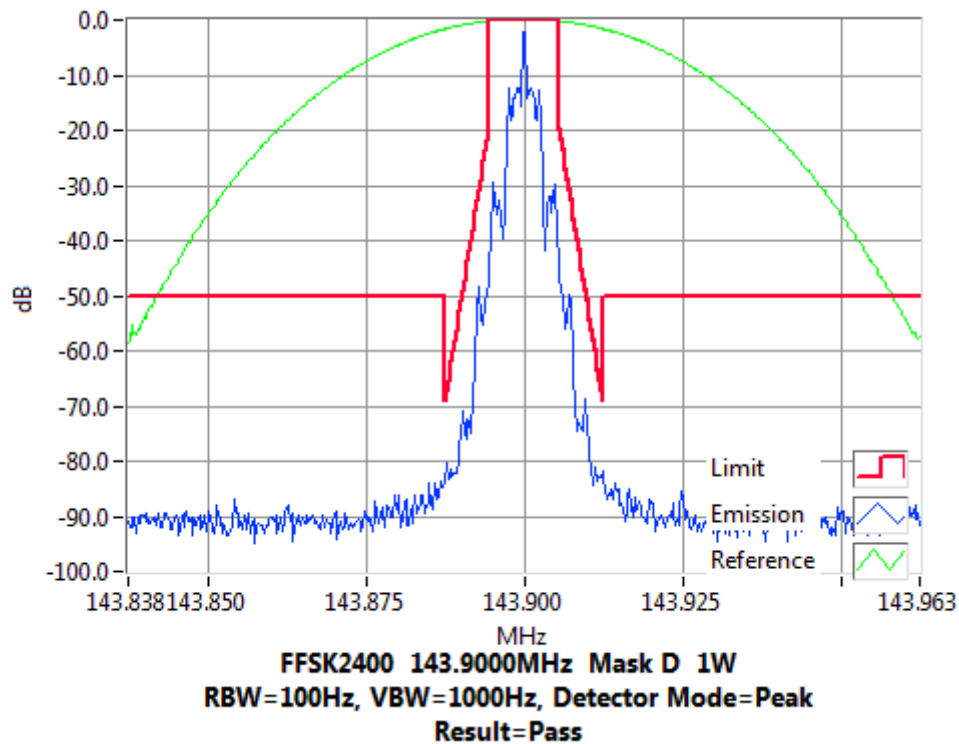


Occupied Bandwidth and Spectrum Masks


FFSK 2400 bps

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 148.1 MHz 5 W 12.5 kHz Channel Spacing

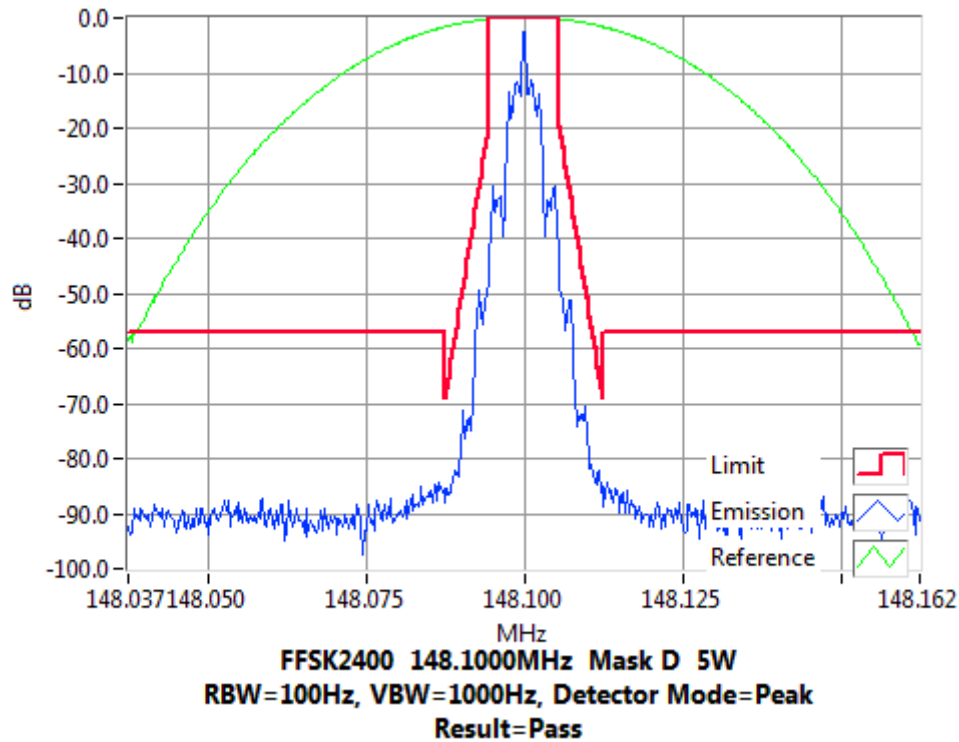

Tx FREQUENCY: 148.1 MHz 1 W 12.5 kHz Channel Spacing

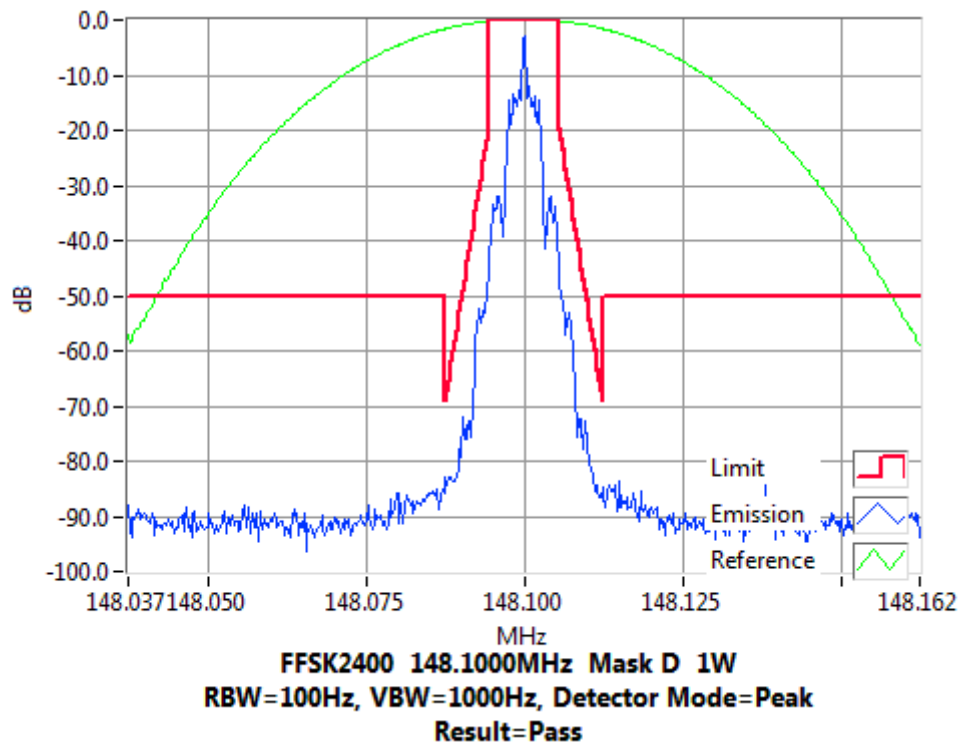


Occupied Bandwidth and Spectrum Masks


FFSK 2400 bps

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 149.8 MHz 5 W 12.5 kHz Channel Spacing

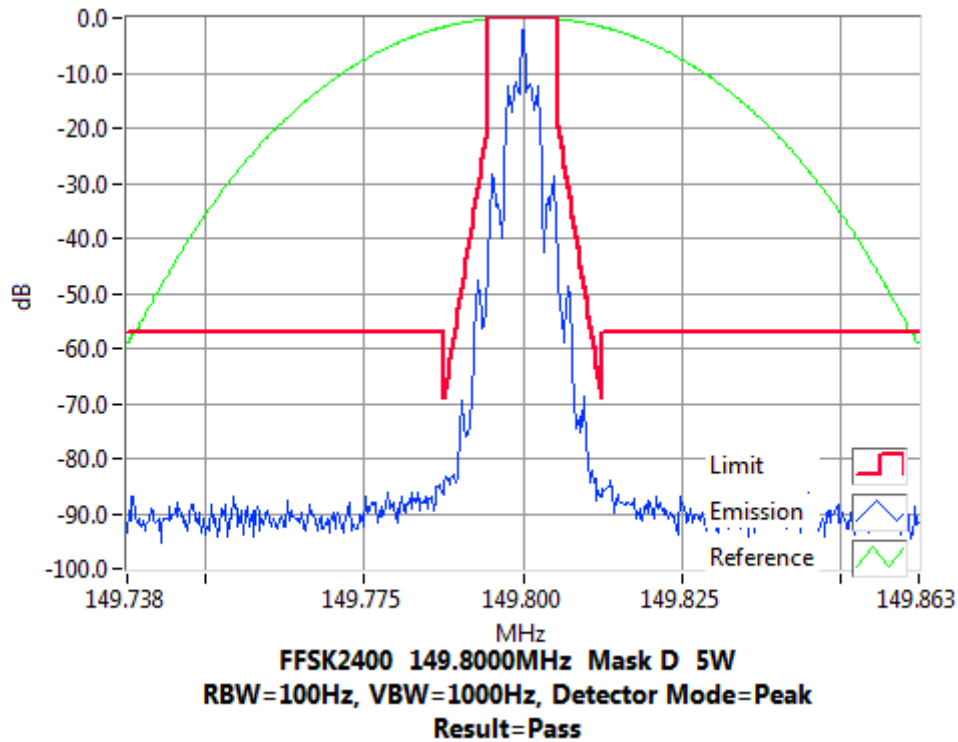

Tx FREQUENCY: 149.8 MHz 1 W 12.5 kHz Channel Spacing

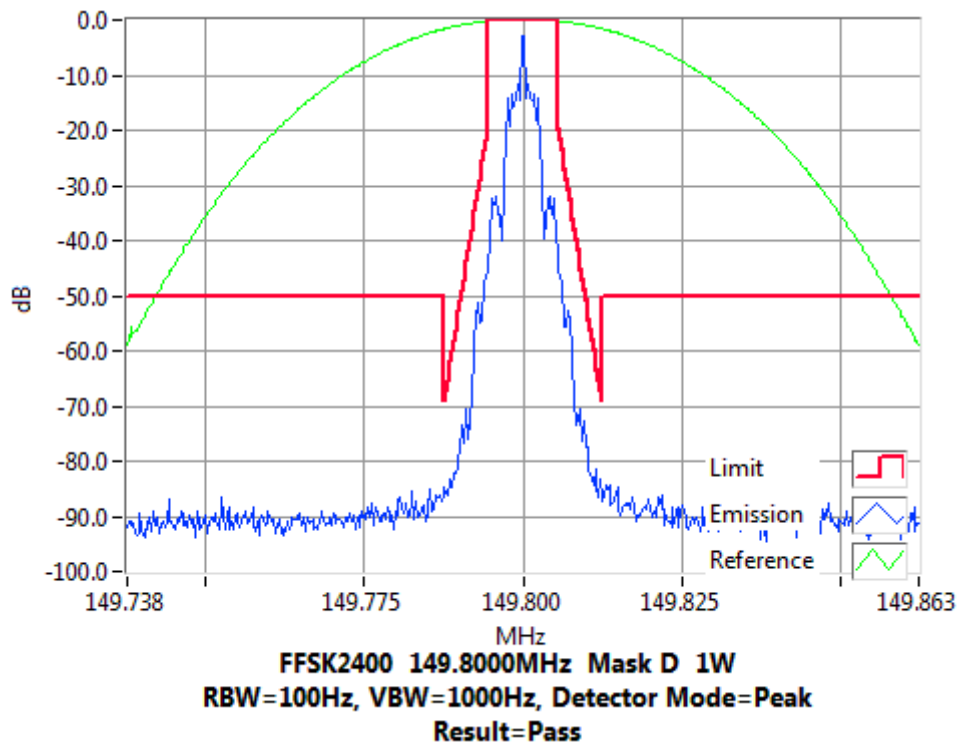


Occupied Bandwidth and Spectrum Masks


FFSK 2400 bps

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 150.1 MHz 5 W 12.5 kHz Channel Spacing

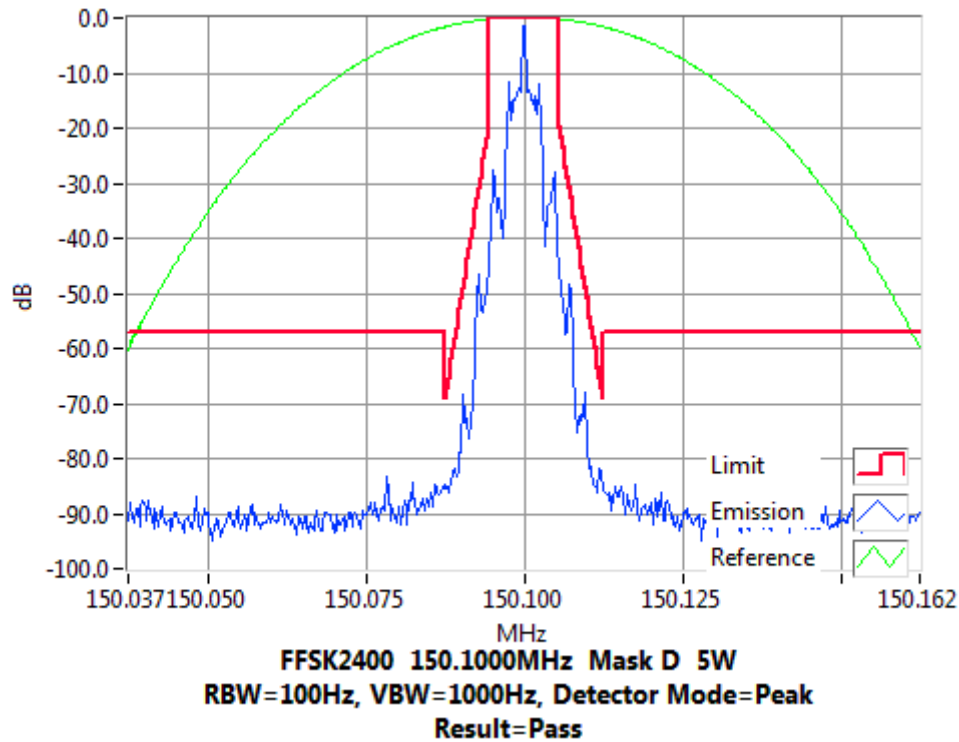

Tx FREQUENCY: 150.1 MHz 1 W 12.5 kHz Channel Spacing

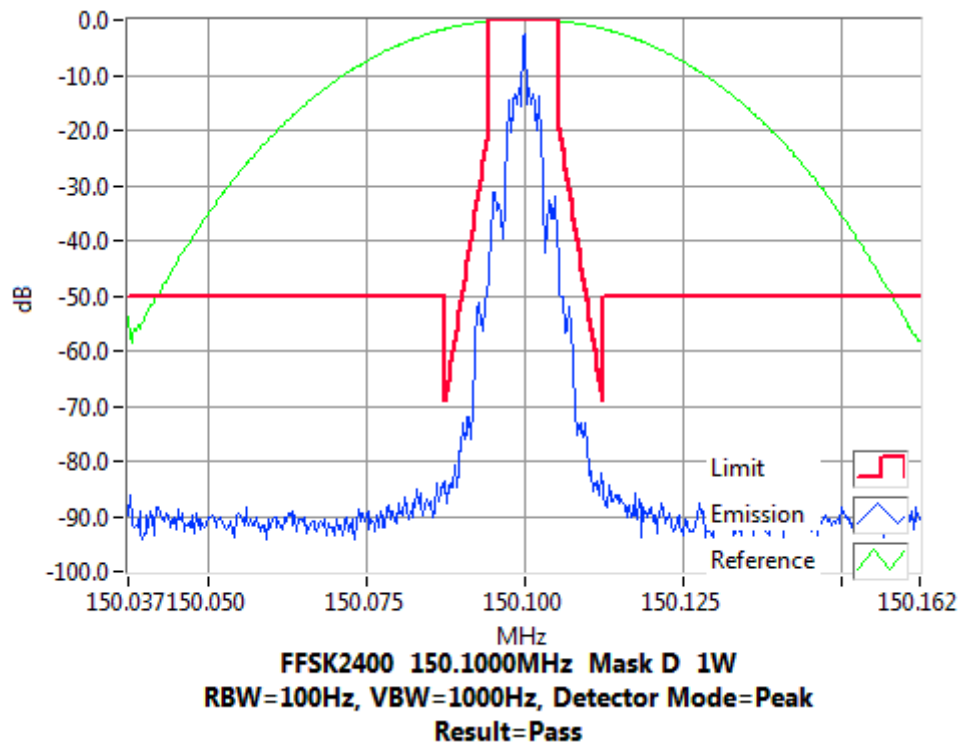


Occupied Bandwidth and Spectrum Masks


FFSK 2400 bps

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 152.0 MHz 5 W 12.5 kHz Channel Spacing

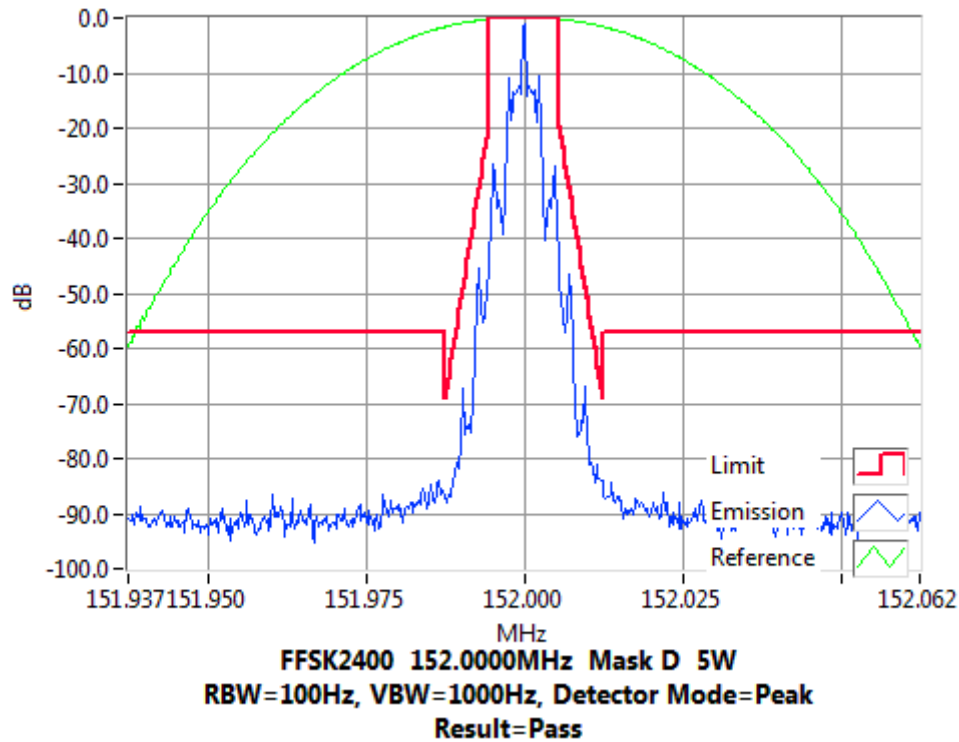

Tx FREQUENCY: 152.0 MHz 1 W 12.5 kHz Channel Spacing

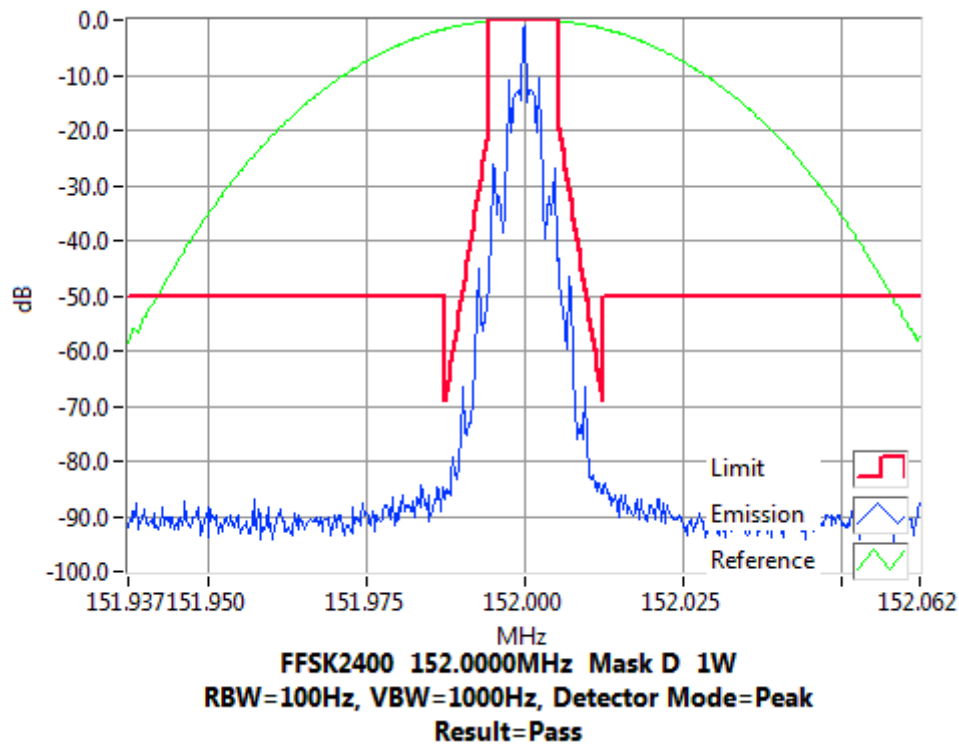


Occupied Bandwidth and Spectrum Masks


FFSK 2400 bps

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 156.3 MHz 5 W 12.5 kHz Channel Spacing

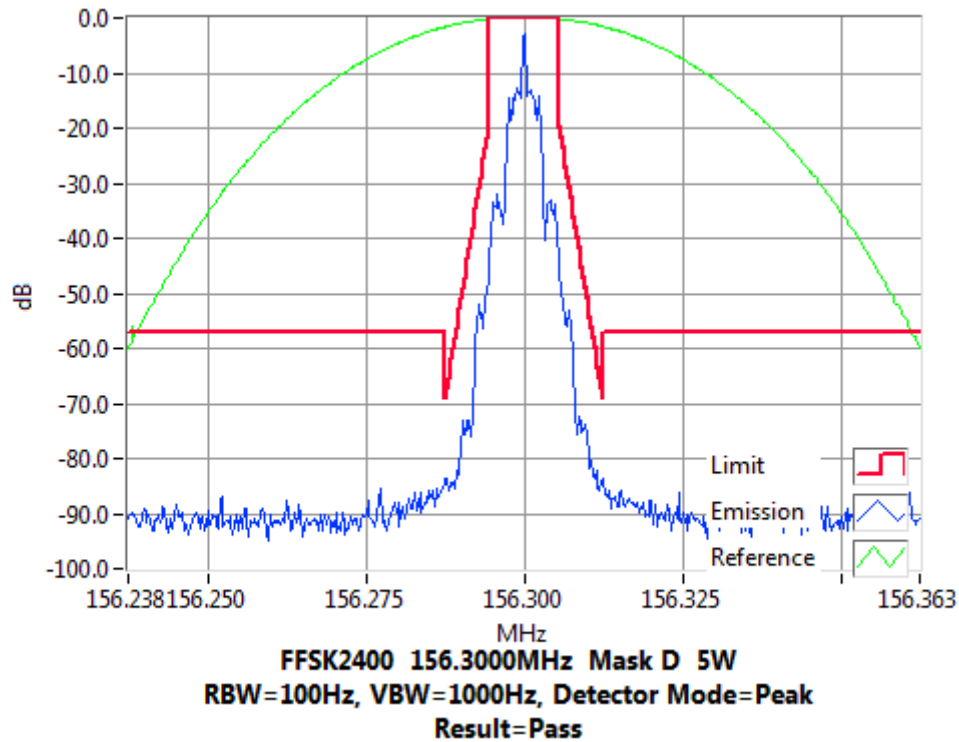

Tx FREQUENCY: 156.3 MHz 1 W 12.5 kHz Channel Spacing

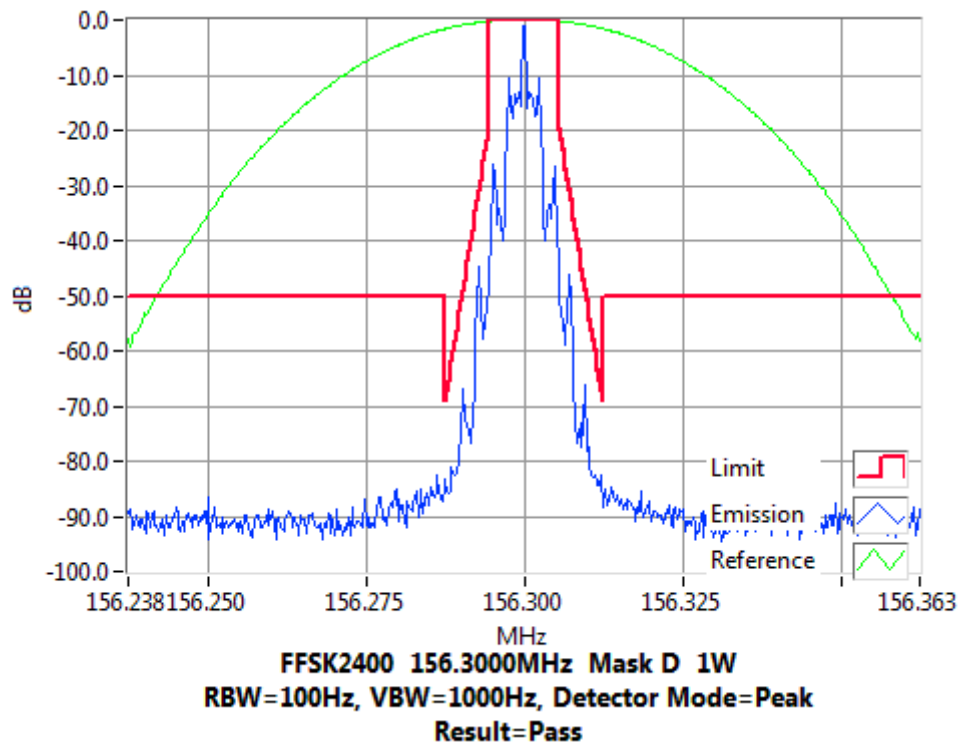


Occupied Bandwidth and Spectrum Masks


FFSK 2400 bps

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 156.67 MHz 5 W 12.5 kHz Channel Spacing

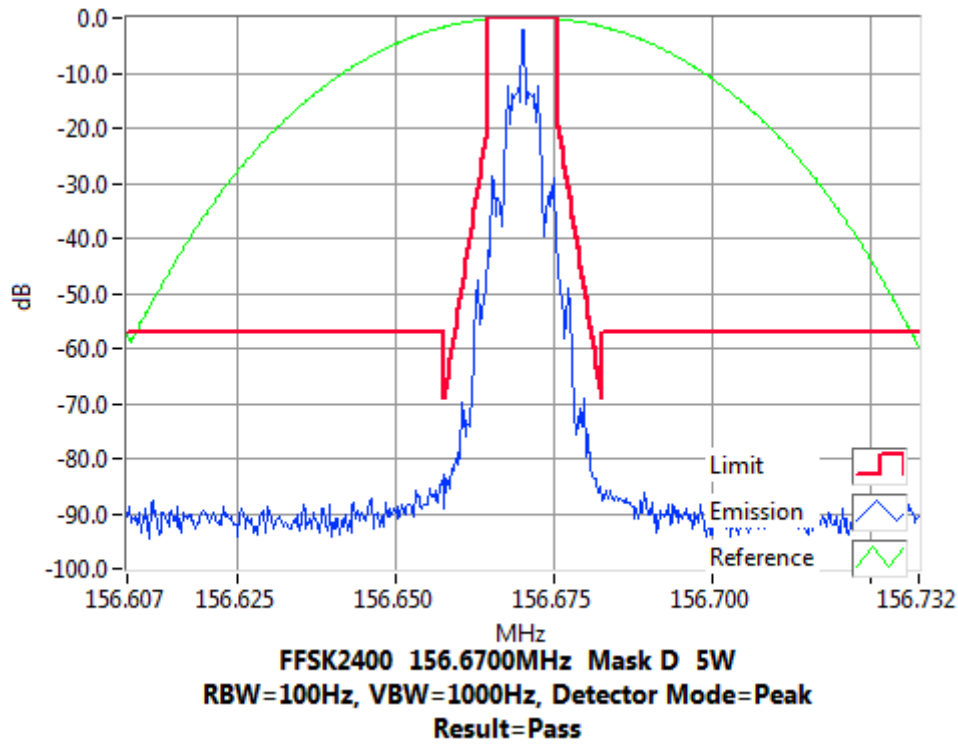

Tx FREQUENCY: 156.67 MHz 1 W 12.5 kHz Channel Spacing

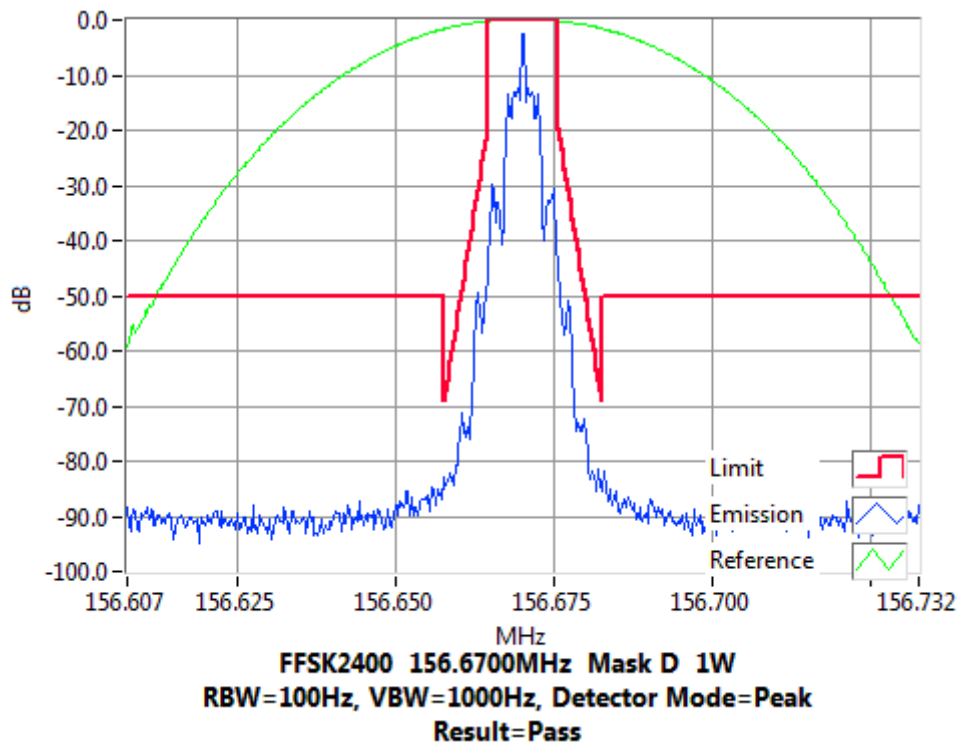


Occupied Bandwidth and Spectrum Masks


FFSK 2400 bps

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 157.0 MHz 5 W 12.5 kHz Channel Spacing

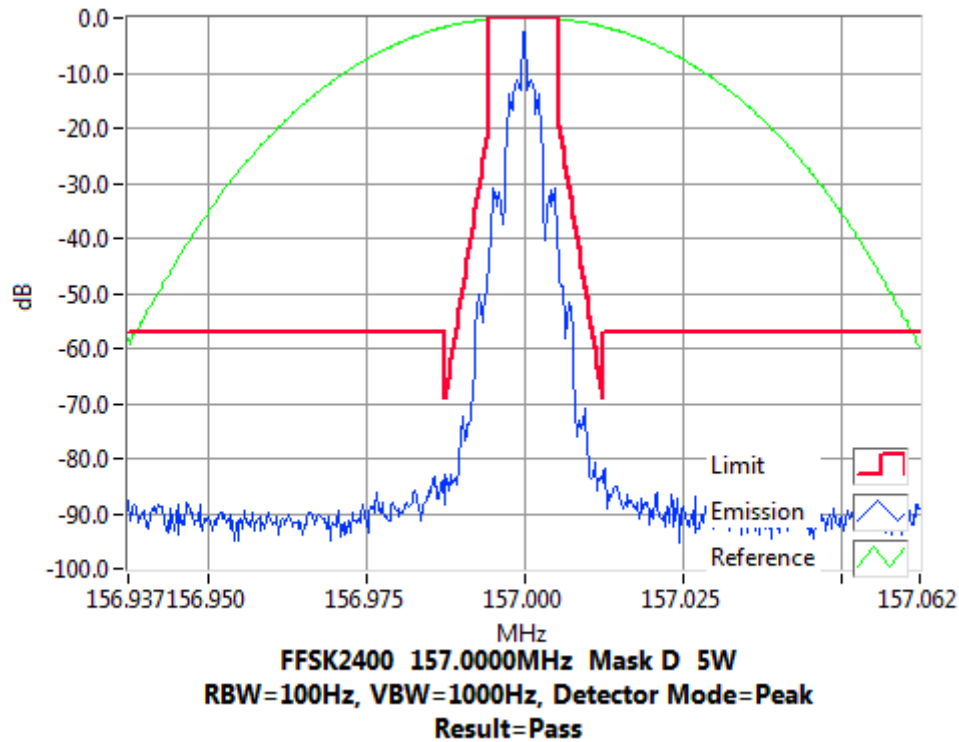

Tx FREQUENCY: 157.0 MHz 1 W 12.5 kHz Channel Spacing

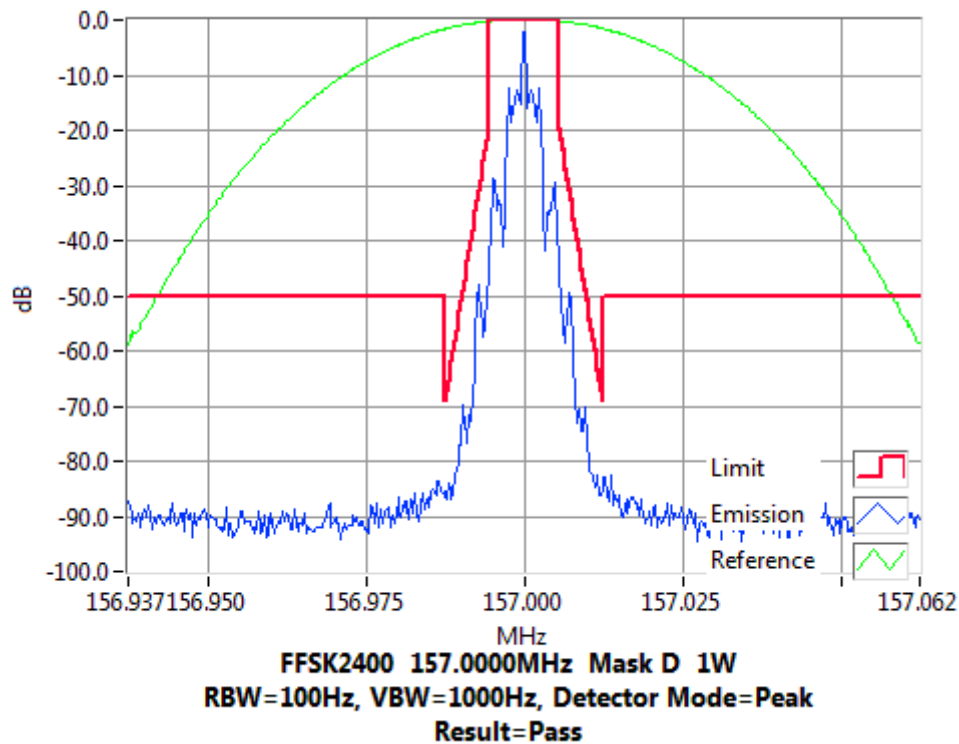


Occupied Bandwidth and Spectrum Masks


FFSK 2400 bps

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 160.0 MHz 5 W 12.5 kHz Channel Spacing

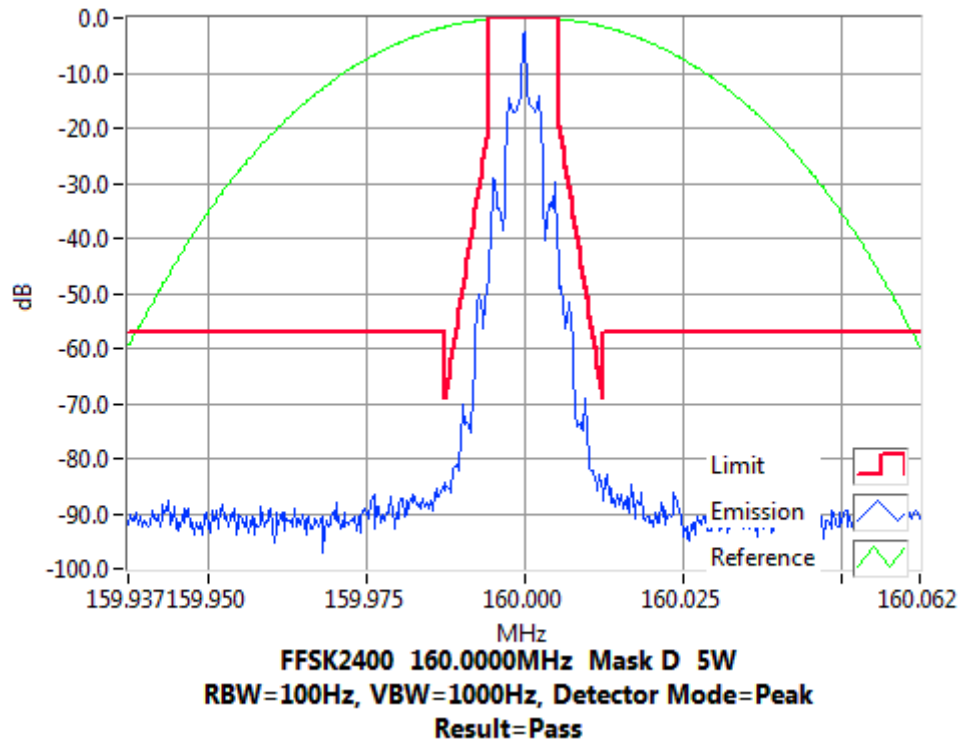

Tx FREQUENCY: 160.0 MHz 1 W 12.5 kHz Channel Spacing

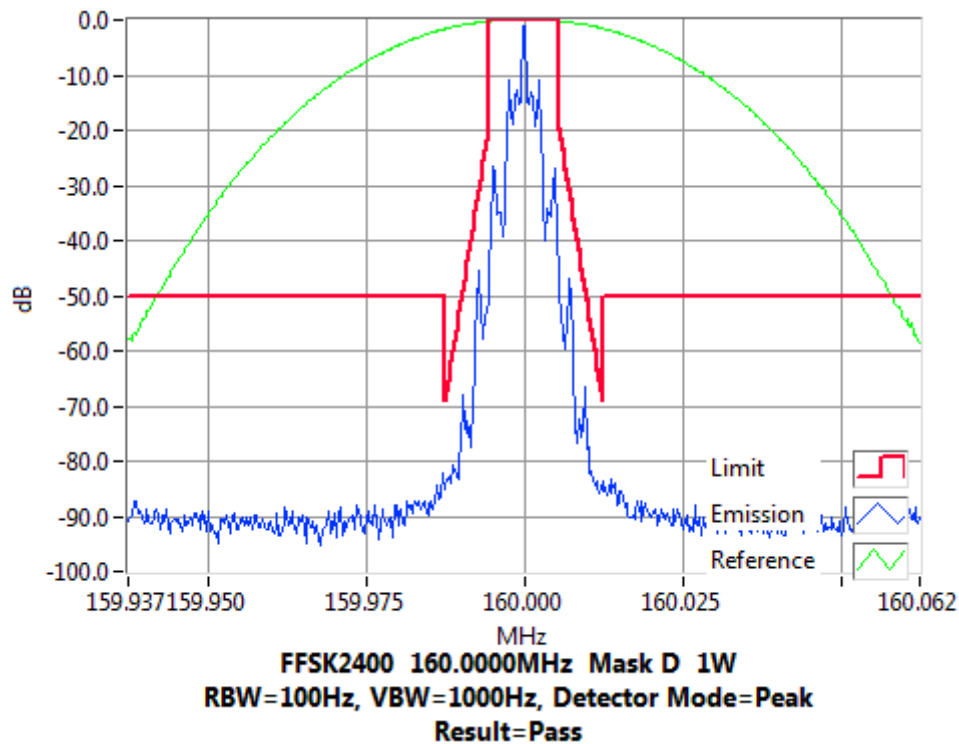


Occupied Bandwidth and Spectrum Masks


FFSK 2400 bps

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 161.0 MHz 5 W 12.5 kHz Channel Spacing

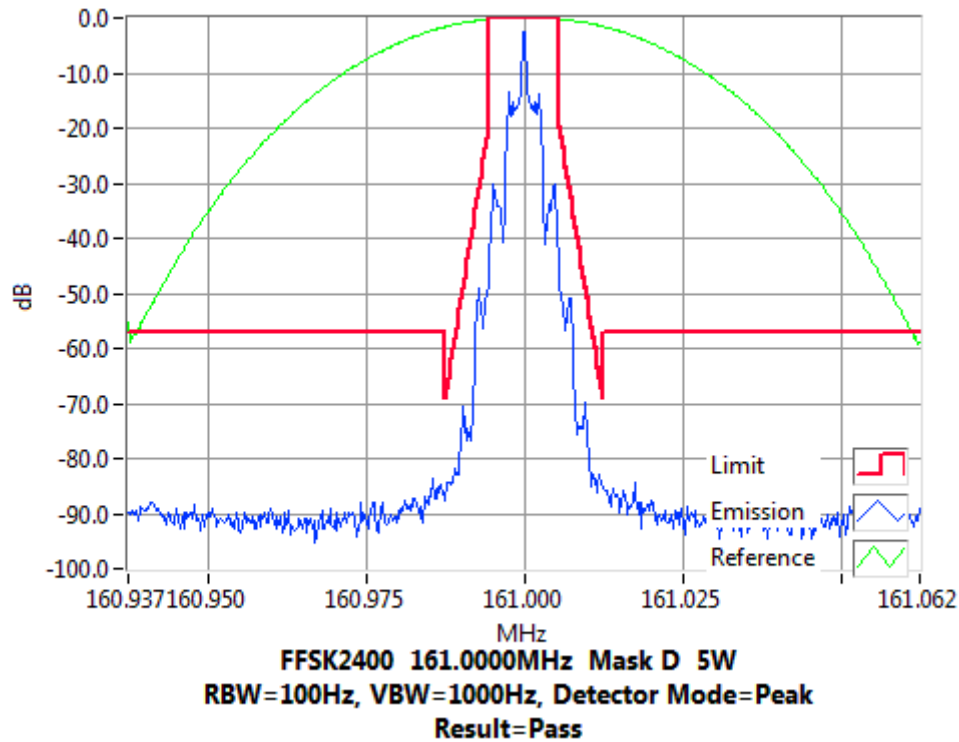

Tx FREQUENCY: 161.0 MHz 1 W 12.5 kHz Channel Spacing

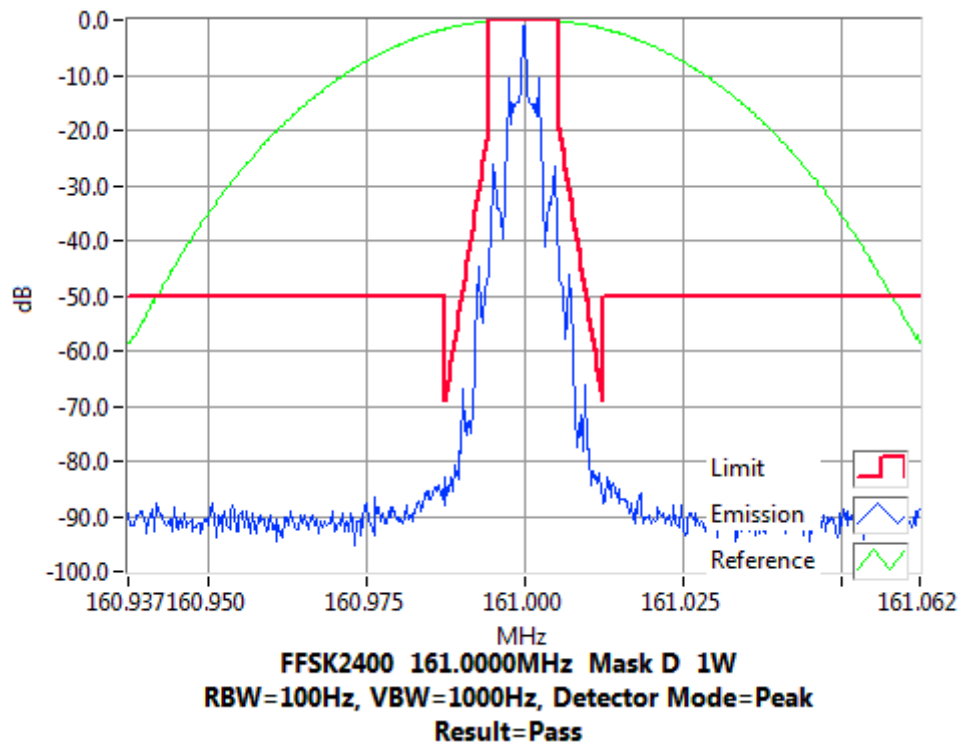


Occupied Bandwidth and Spectrum Masks


FFSK 2400 bps

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 162.0 MHz 5 W 12.5 kHz Channel Spacing

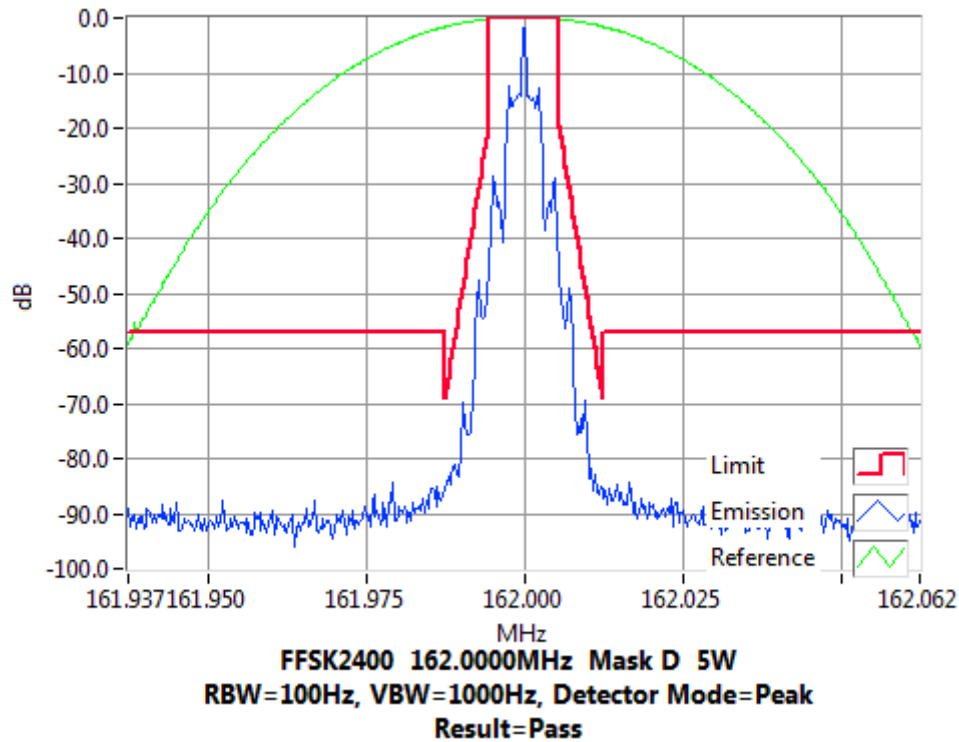

Tx FREQUENCY: 162.0 MHz 1 W 12.5 kHz Channel Spacing

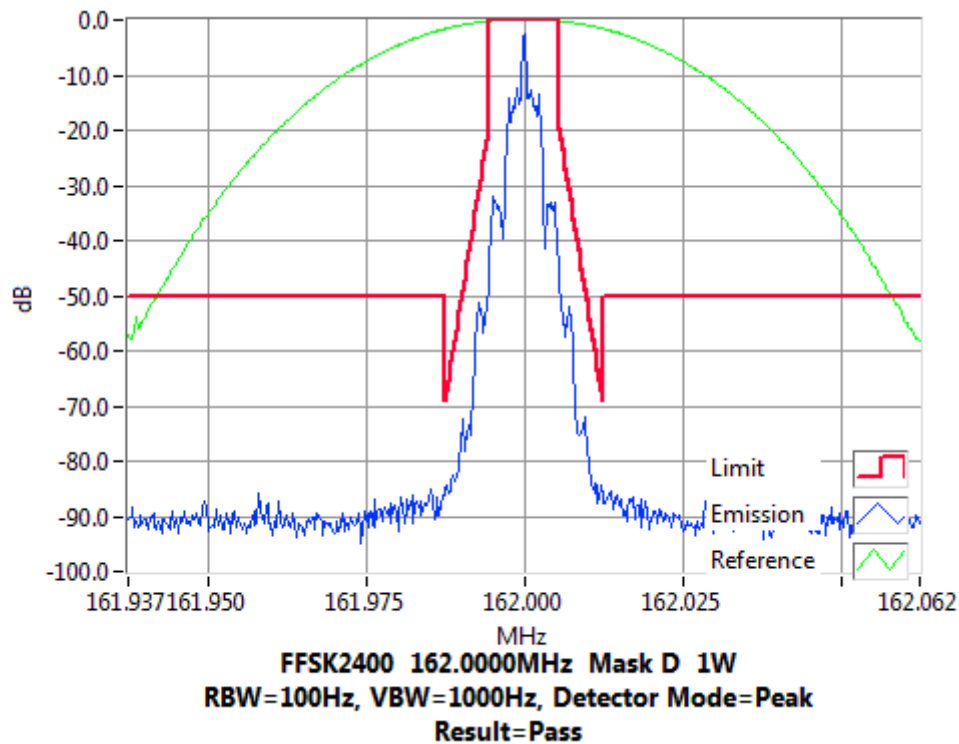


Occupied Bandwidth and Spectrum Masks


FFSK 2400 bps

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 162.1 MHz 5 W 12.5 kHz Channel Spacing

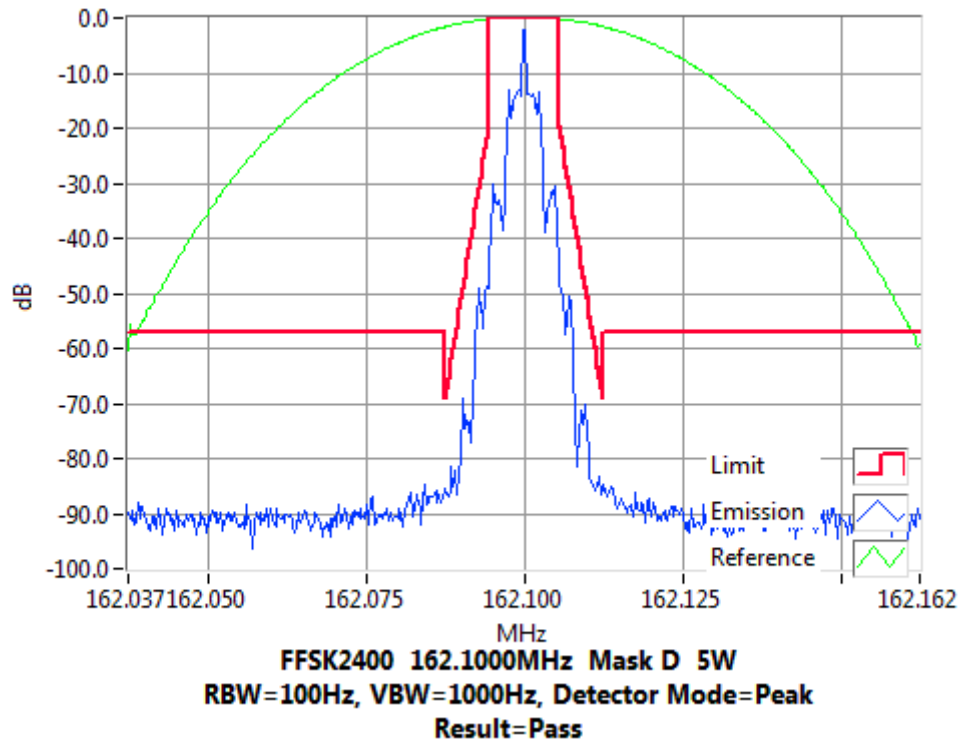

Tx FREQUENCY: 162.1 MHz 1 W 12.5 kHz Channel Spacing

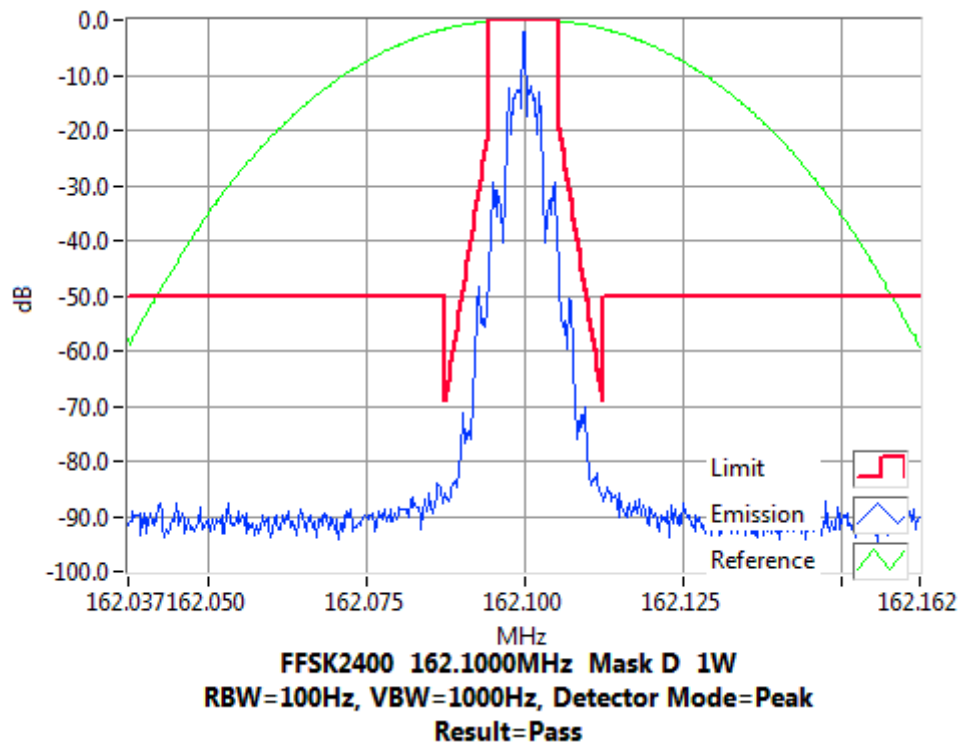


Occupied Bandwidth and Spectrum Masks


FFSK 2400 bps

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 168.0 MHz 5 W 12.5 kHz Channel Spacing

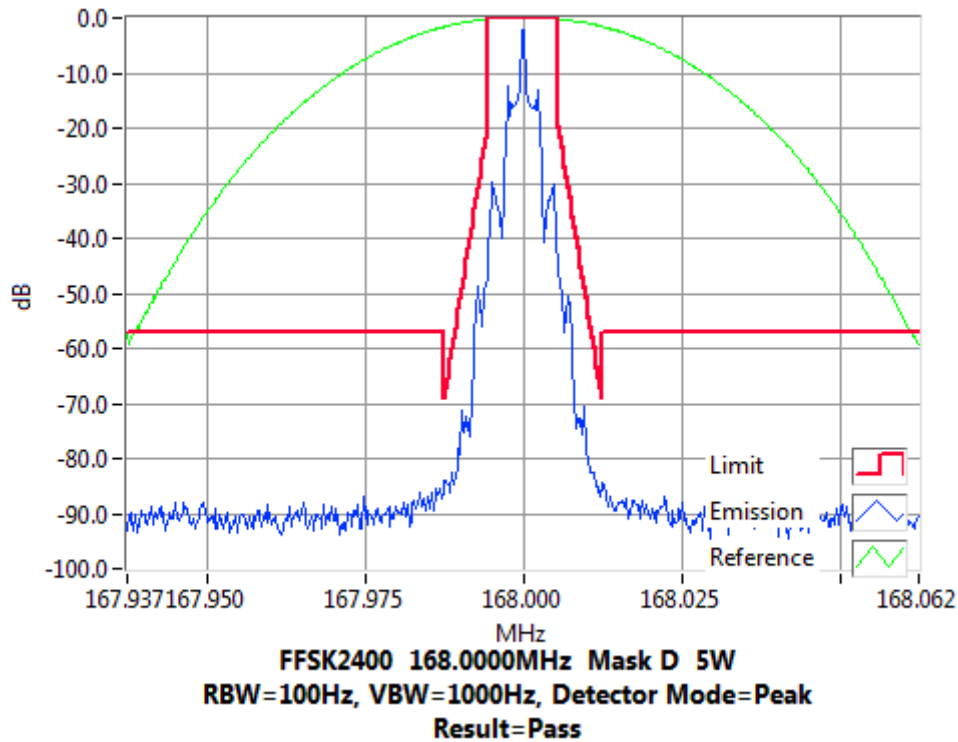

Tx FREQUENCY: 168.0 MHz 1 W 12.5 kHz Channel Spacing

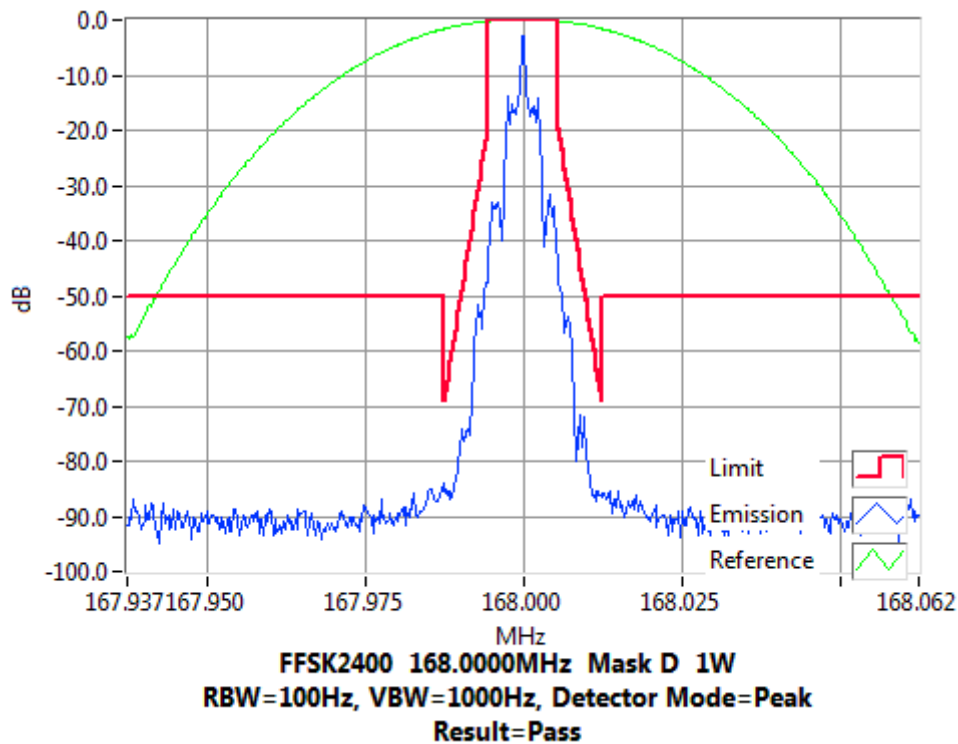


Occupied Bandwidth and Spectrum Masks


FFSK 2400 bps

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 173.9 MHz 5 W 12.5 kHz Channel Spacing

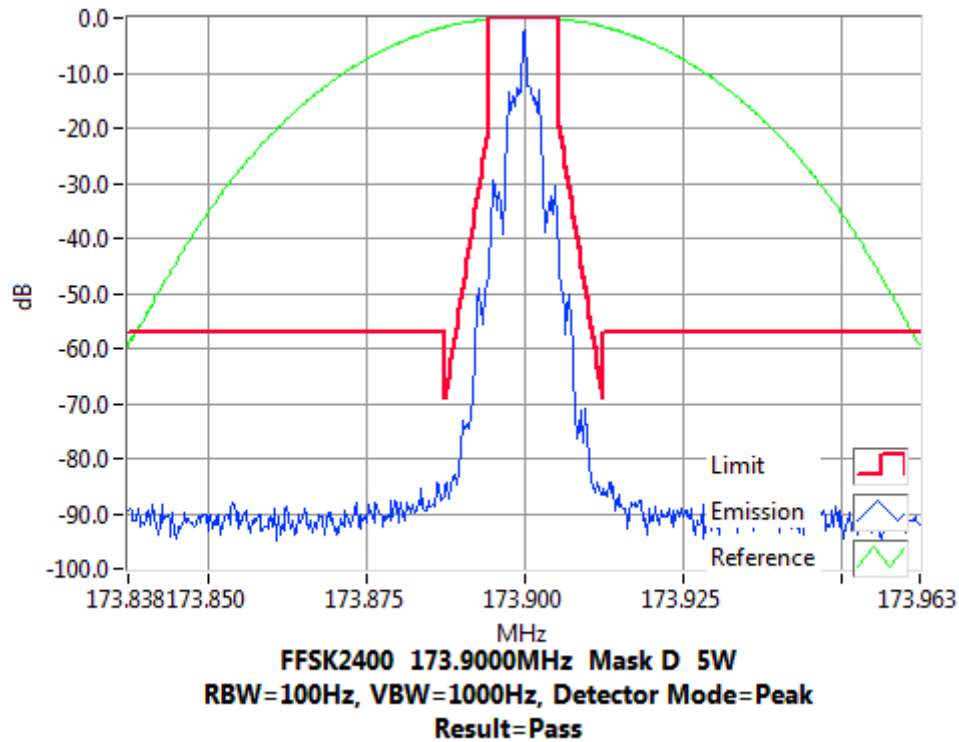

Tx FREQUENCY: 173.9 MHz 1 W 12.5 kHz Channel Spacing

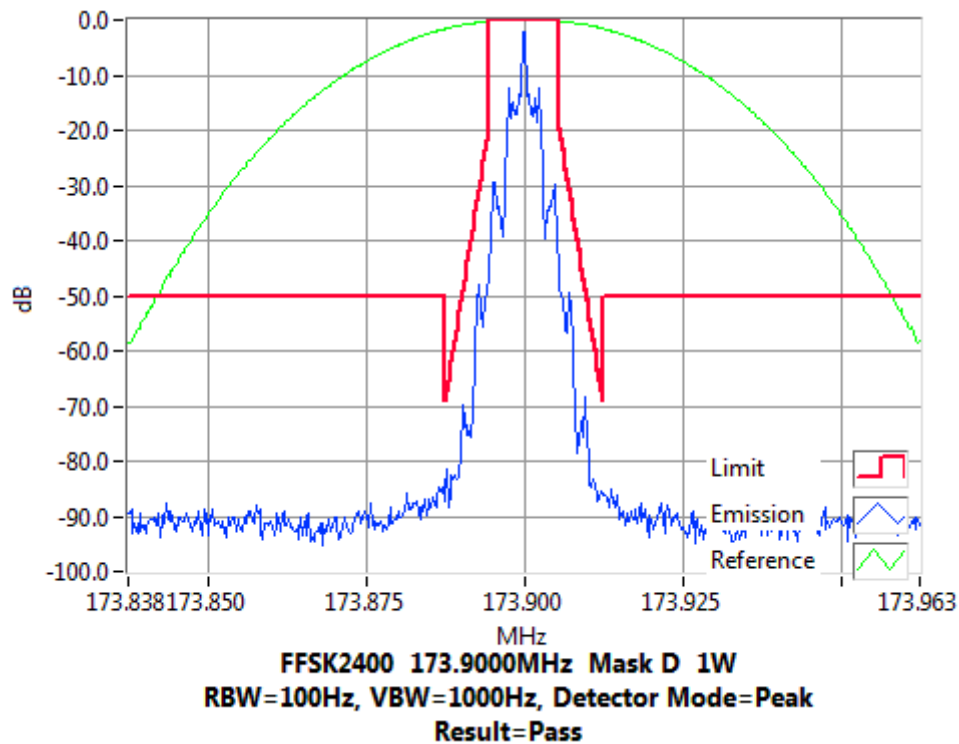


Occupied Bandwidth and Spectrum Masks

DMR


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 138.1 MHz 5 W 12.5 kHz Channel Spacing

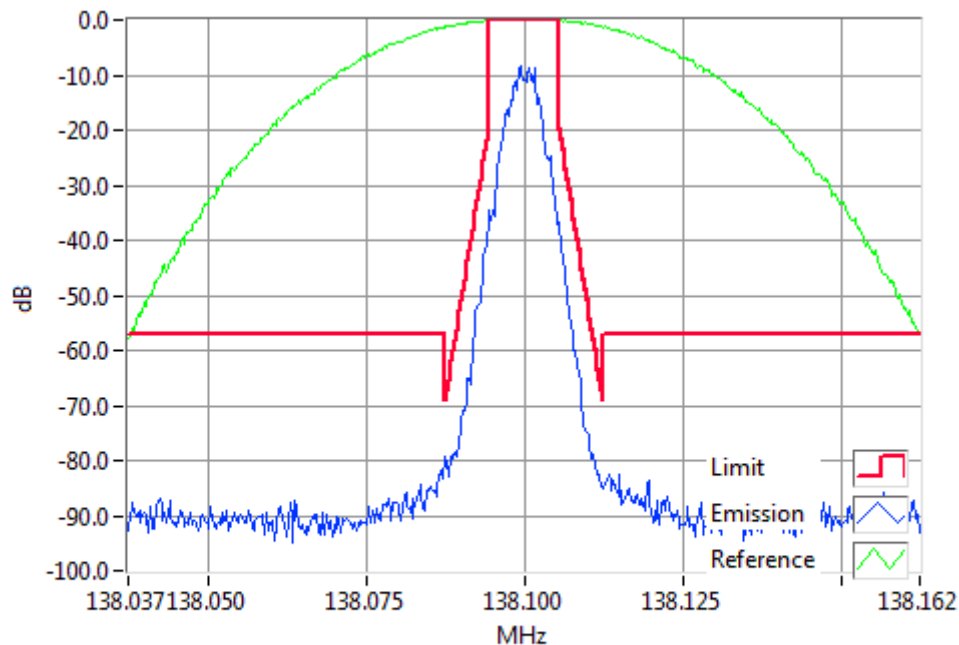

DMR 138.1000MHz Mask D 5W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 138.1 MHz 1 W 12.5 kHz Channel Spacing

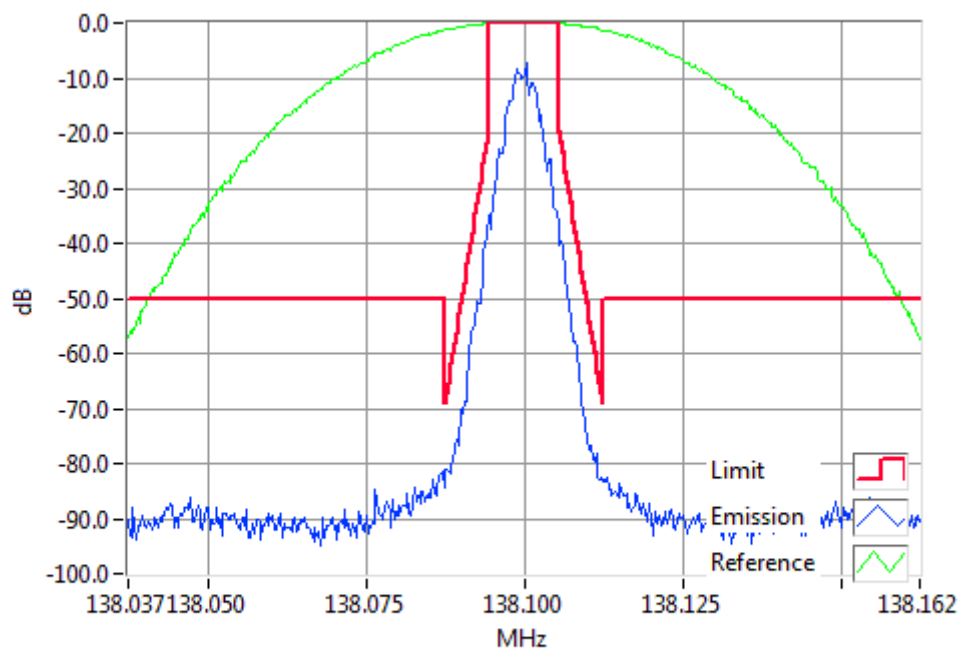


DMR 138.1000MHz Mask D 1W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

DMR


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 143.9 MHz 5 W 12.5 kHz Channel Spacing

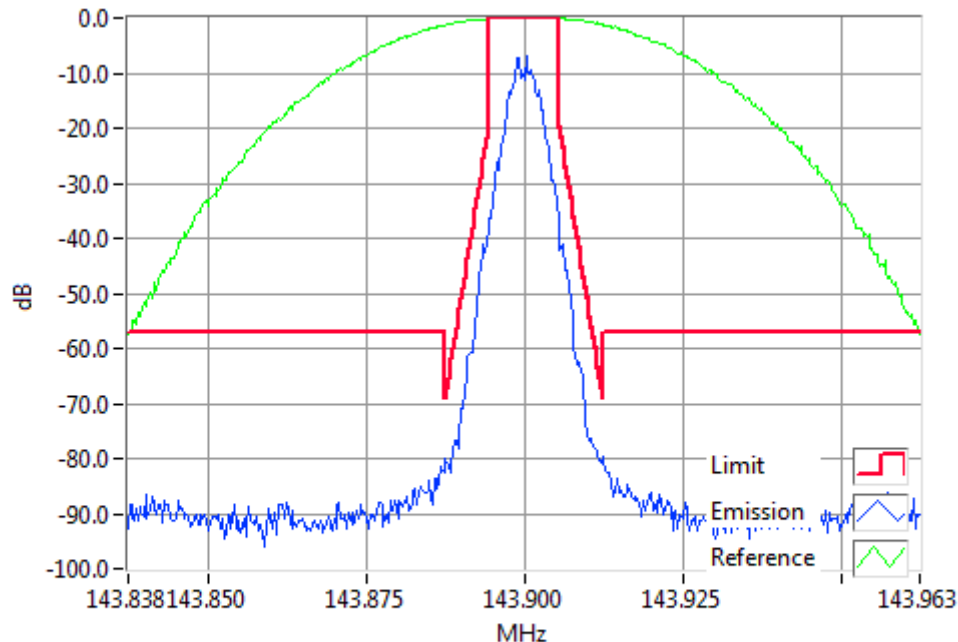

DMR 143.9000MHz Mask D 5W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 143.9 MHz 1 W 12.5 kHz Channel Spacing

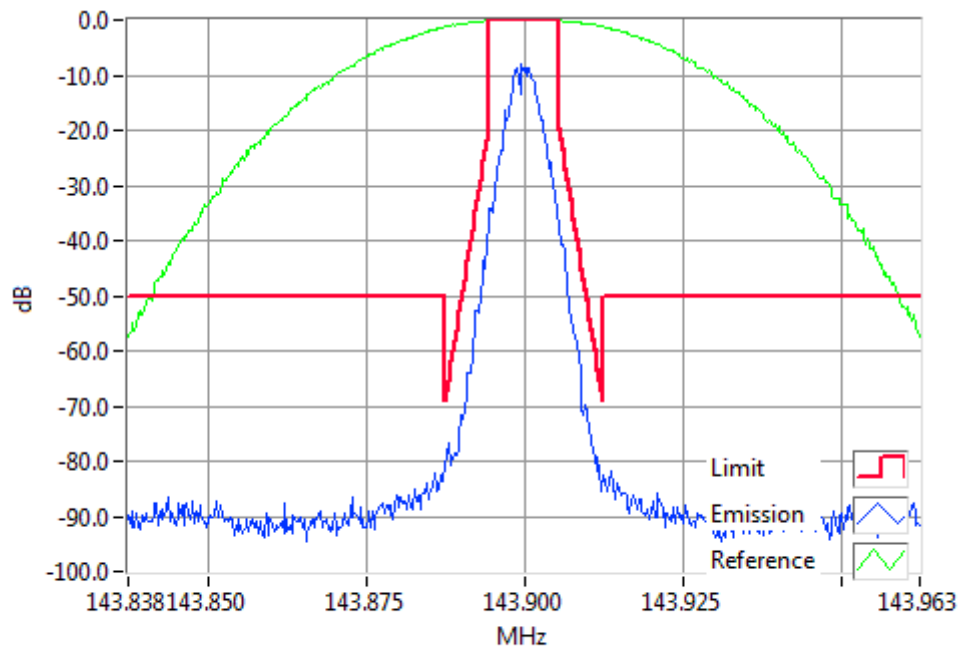


DMR 143.9000MHz Mask D 1W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

DMR


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 148.1 MHz 5 W 12.5 kHz Channel Spacing

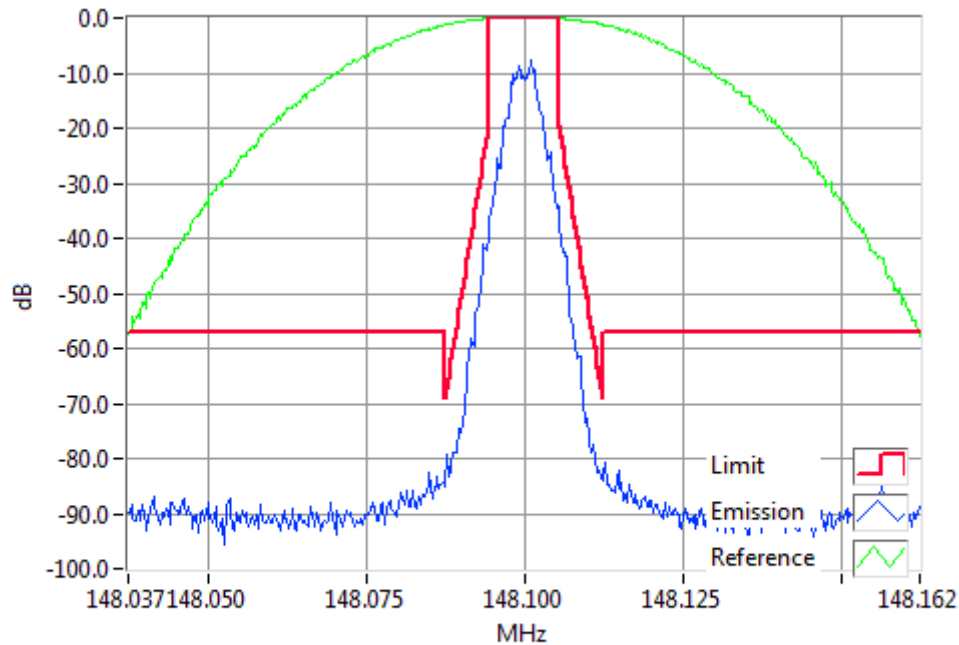

DMR 148.1000MHz Mask D 5W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 148.1 MHz 1 W 12.5 kHz Channel Spacing

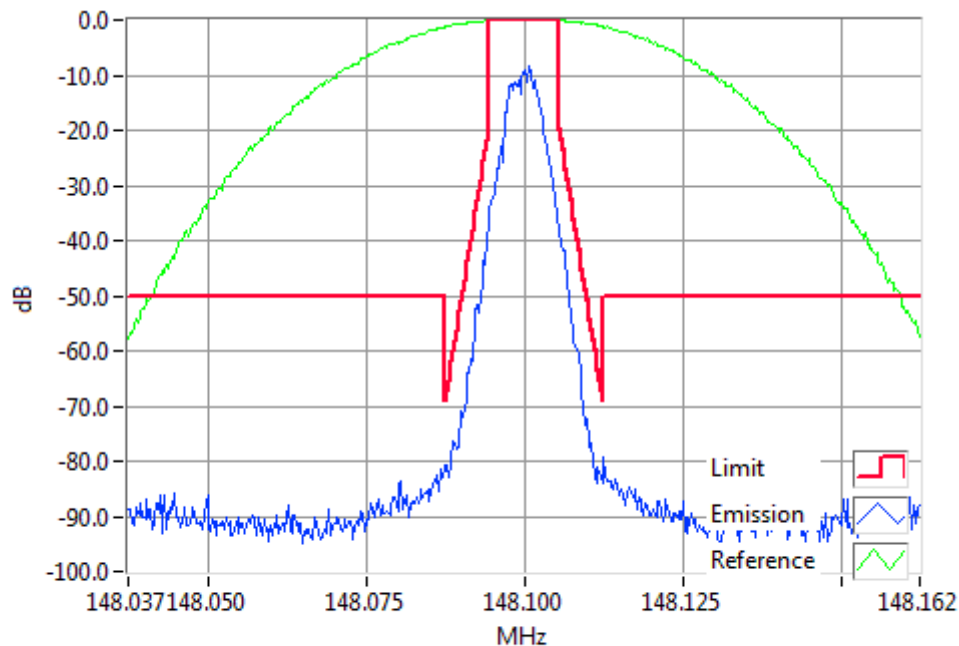


DMR 148.1000MHz Mask D 1W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

DMR


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 149.8 MHz 5 W 12.5 kHz Channel Spacing

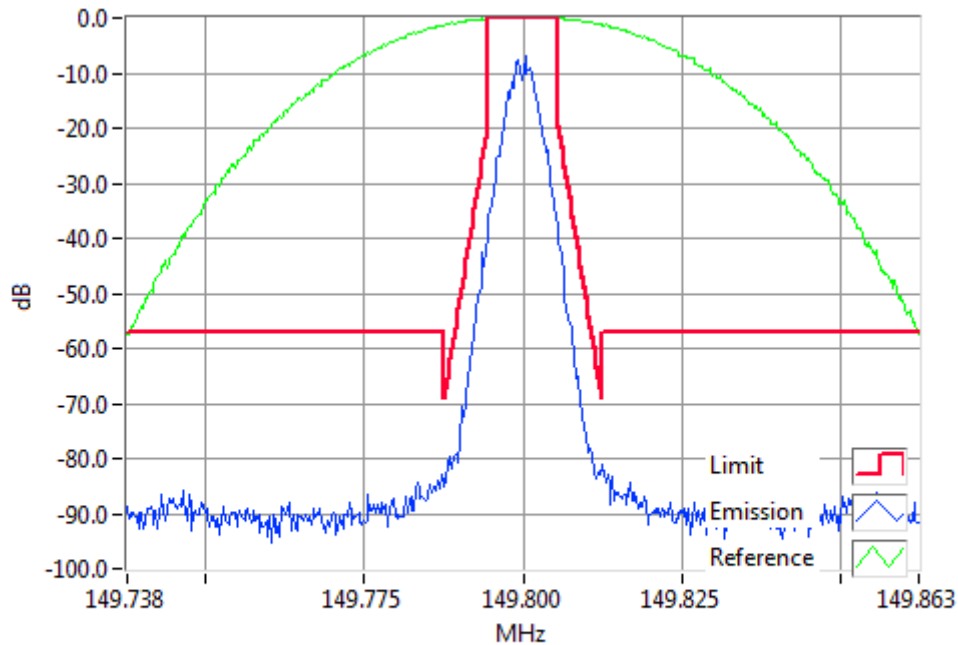

DMR 149.8000MHz Mask D 5W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 149.8 MHz 1 W 12.5 kHz Channel Spacing

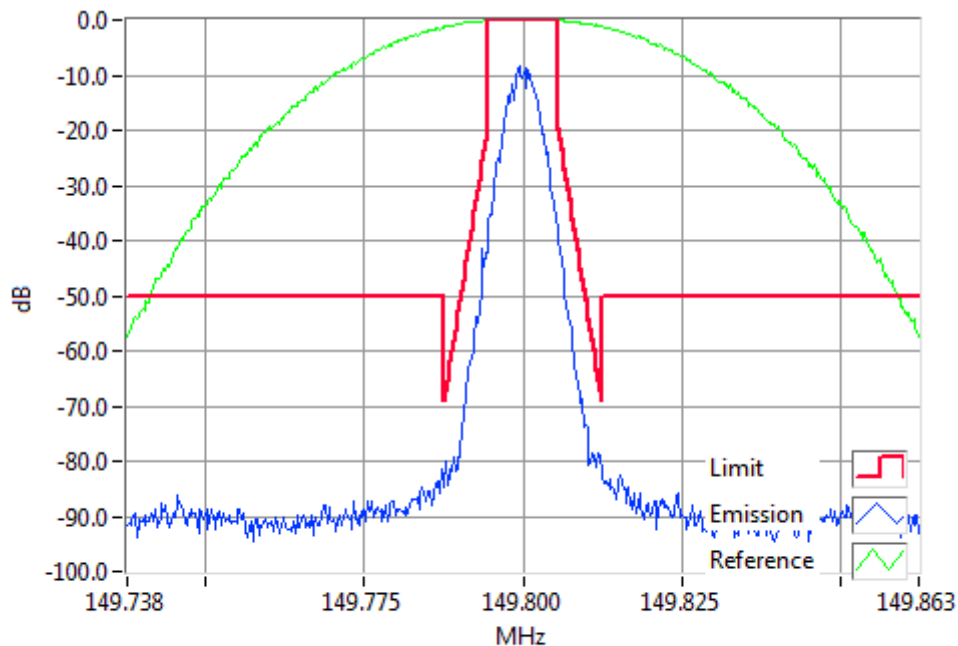


DMR 149.8000MHz Mask D 1W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

DMR


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 150.1 MHz 5 W 12.5 kHz Channel Spacing

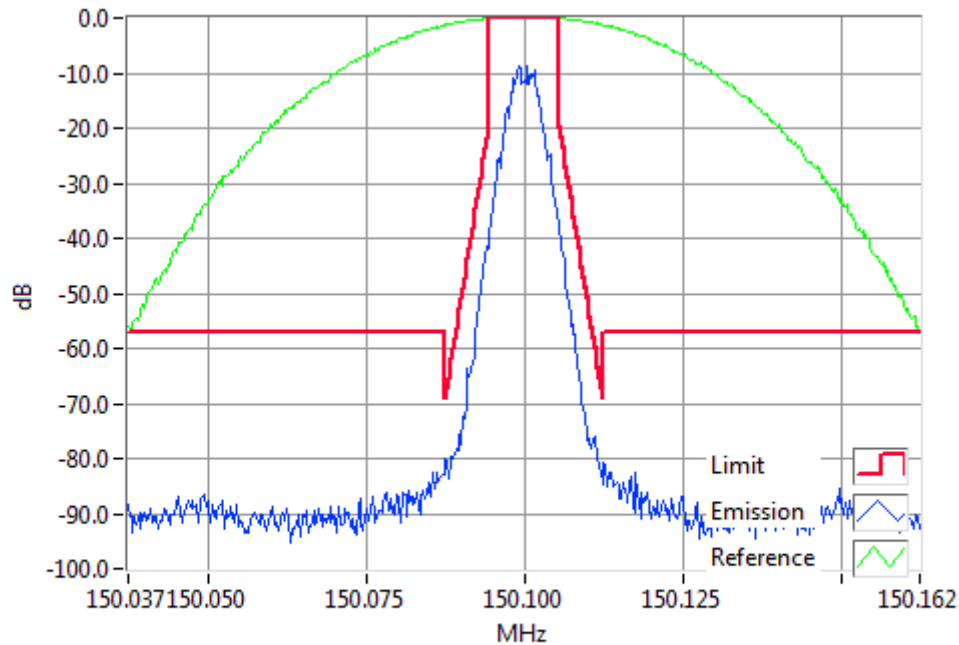

DMR 150.1000MHz Mask D 5W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 150.1 MHz 1 W 12.5 kHz Channel Spacing

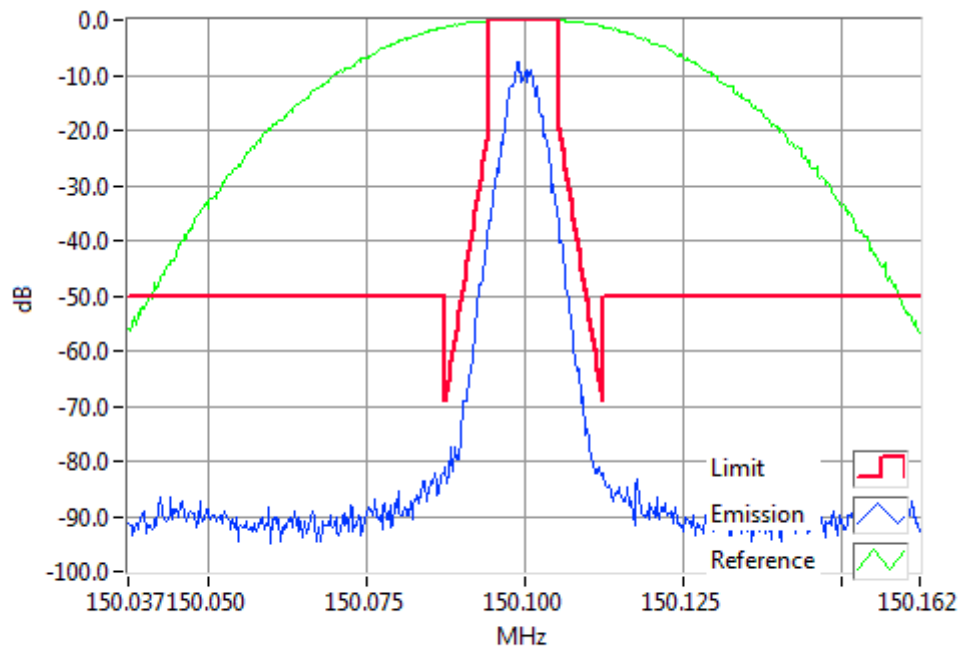


DMR 150.1000MHz Mask D 1W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

DMR


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 152.0 MHz 5 W 12.5 kHz Channel Spacing

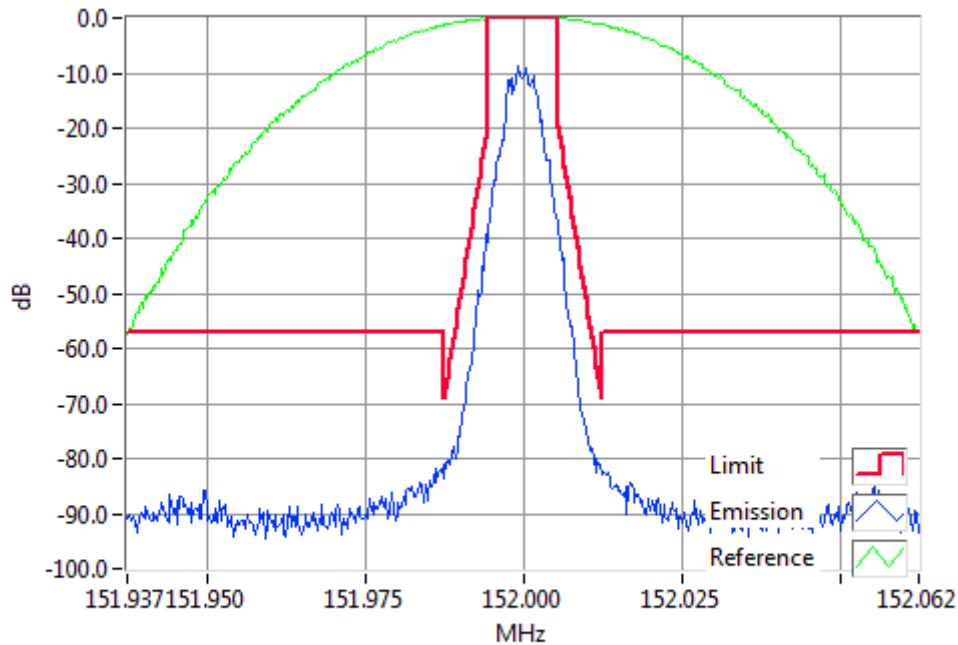

DMR 152.0000MHz Mask D 5W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 152.0 MHz 1 W 12.5 kHz Channel Spacing

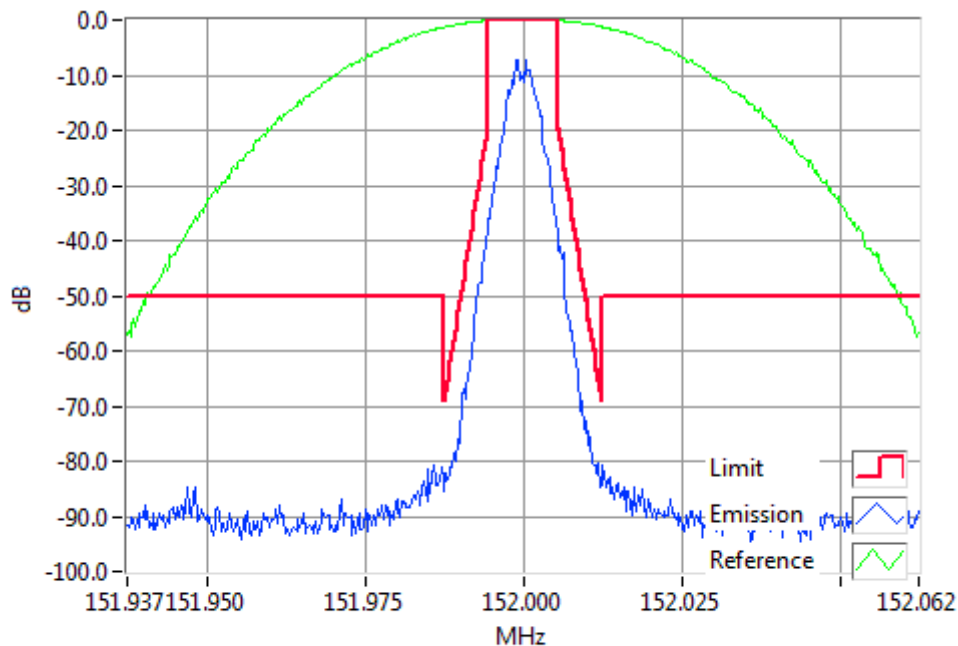


DMR 152.0000MHz Mask D 1W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

DMR


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 156.3 MHz 5 W 12.5 kHz Channel Spacing

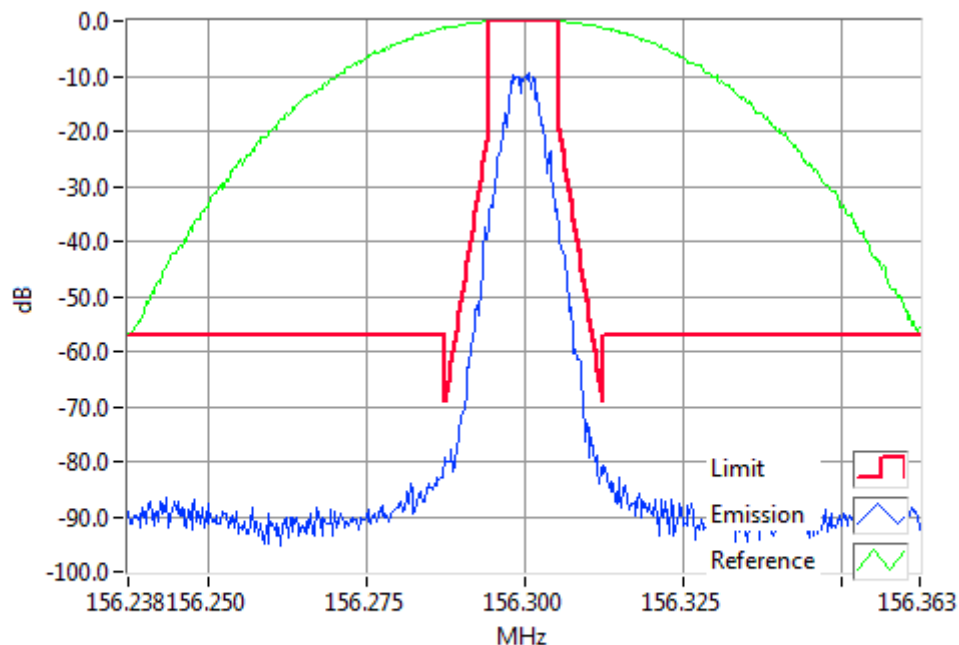

DMR 156.3000MHz Mask D 5W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 156.3 MHz 1 W 12.5 kHz Channel Spacing

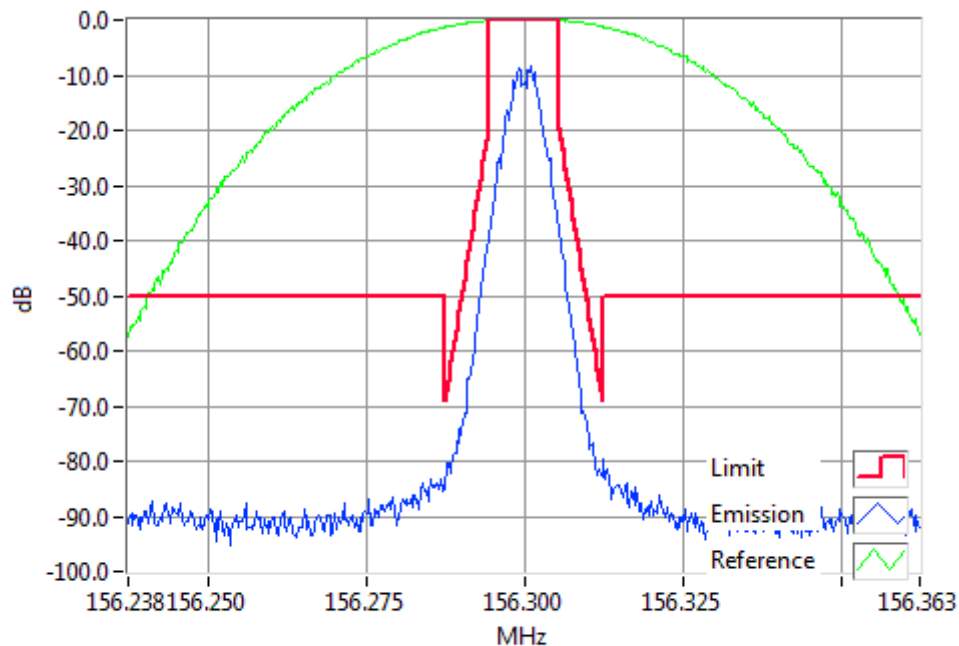


DMR 156.3000MHz Mask D 1W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

DMR


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 156.67 MHz 5 W 12.5 kHz Channel Spacing

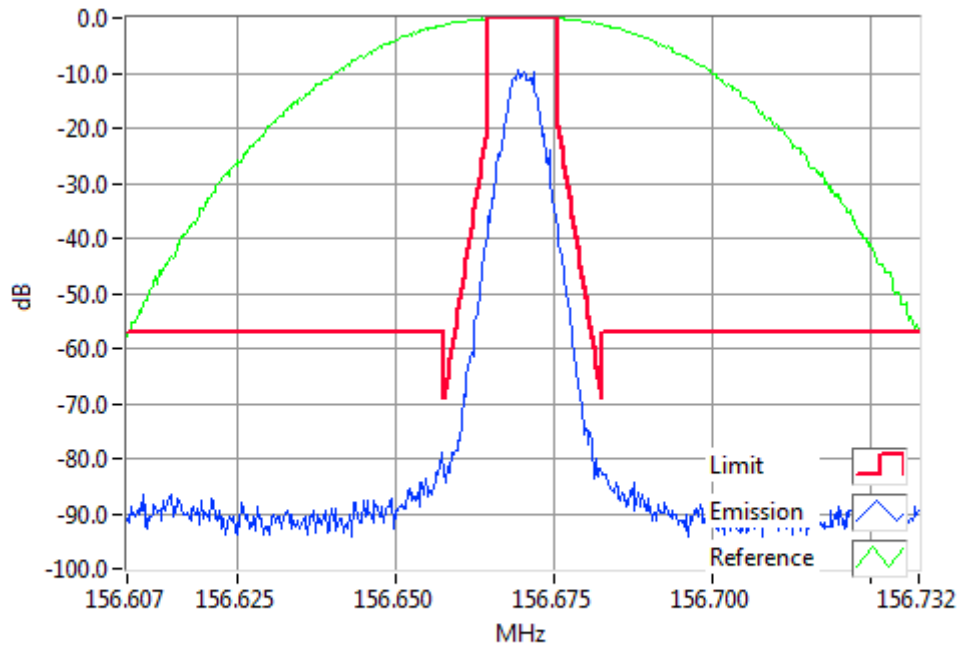

DMR 156.6700MHz Mask D 5W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 156.67 MHz 1 W 12.5 kHz Channel Spacing

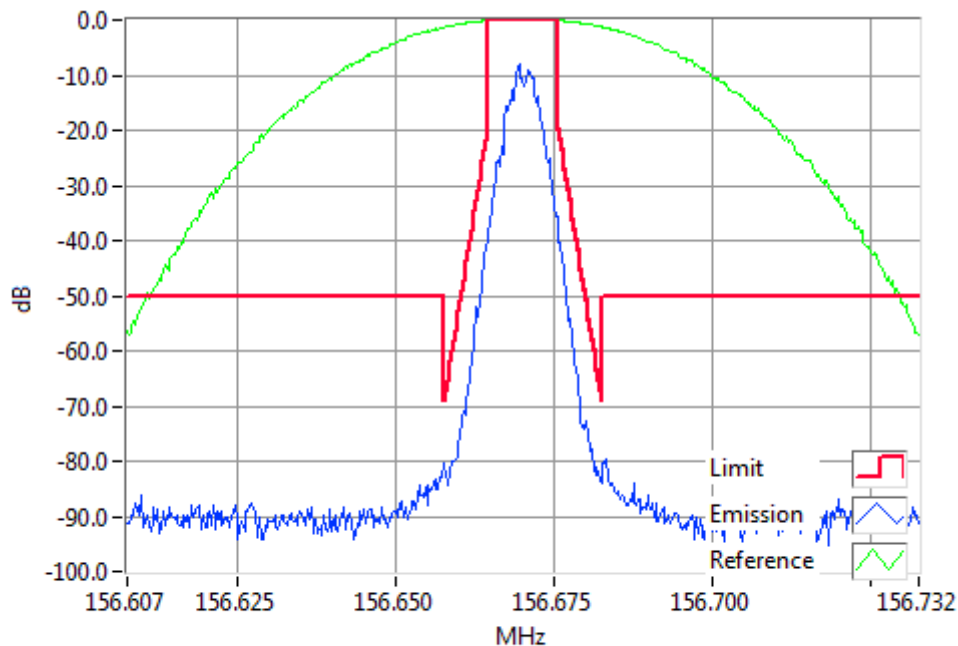


DMR 156.6700MHz Mask D 1W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

DMR


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 157.0 MHz 5 W 12.5 kHz Channel Spacing

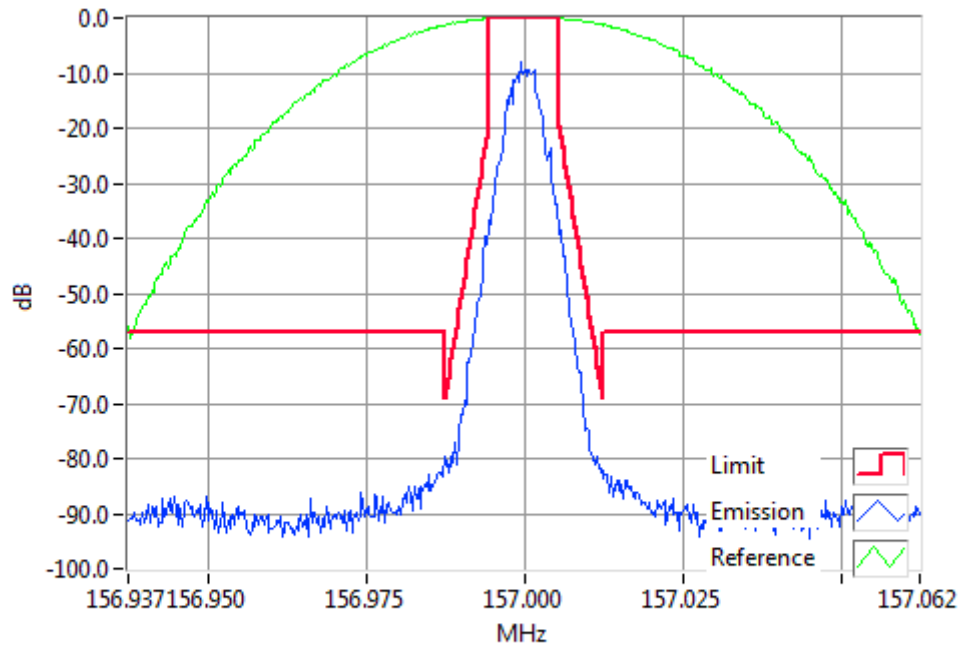

DMR 157.0000MHz Mask D 5W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 157.0 MHz 1 W 12.5 kHz Channel Spacing

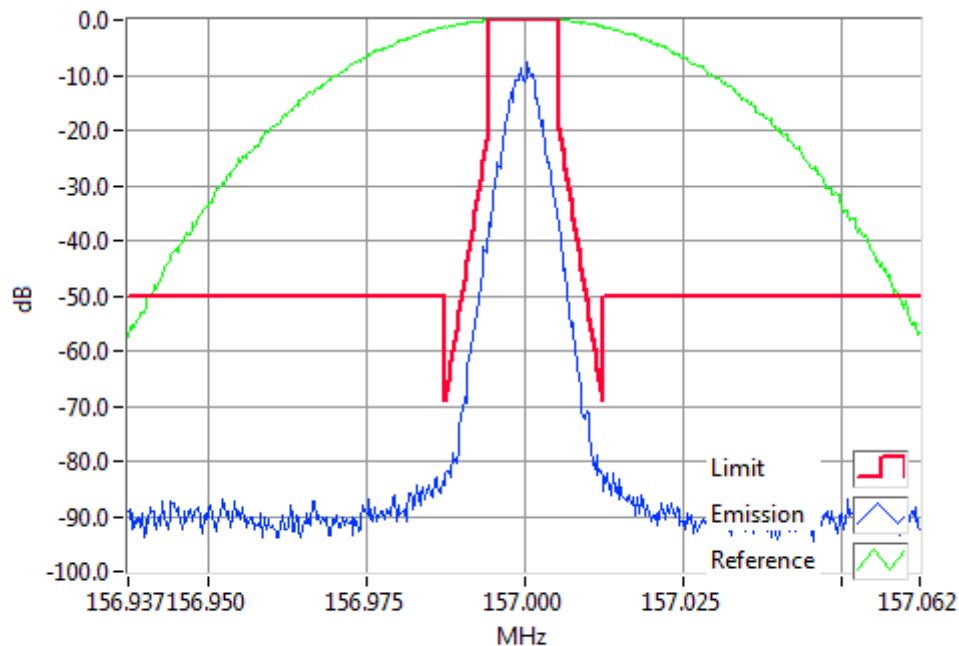


DMR 157.0000MHz Mask D 1W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

DMR


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 160.0 MHz 5 W 12.5 kHz Channel Spacing

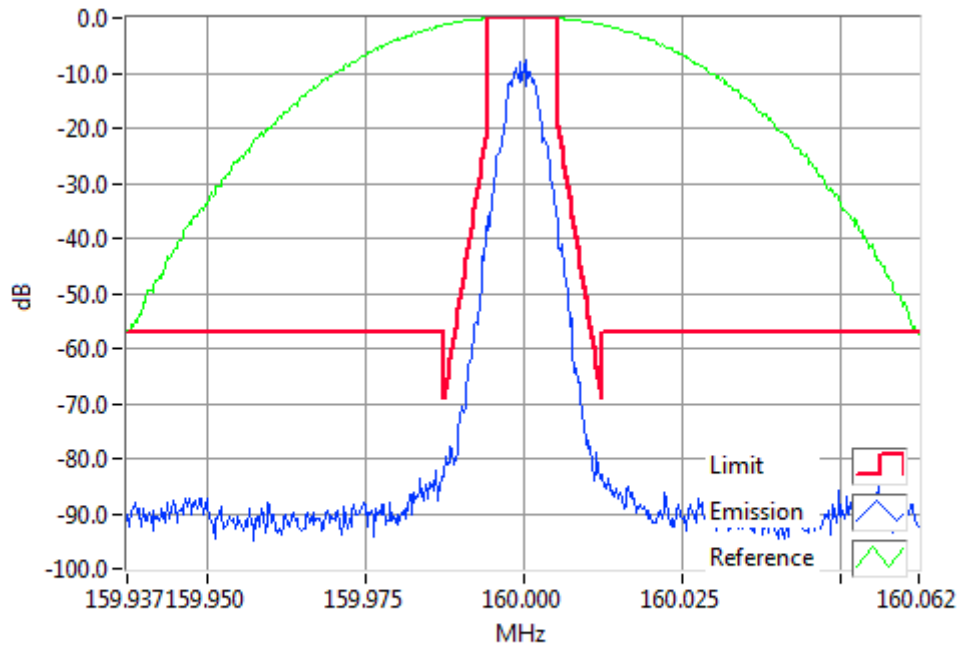

DMR 160.0000MHz Mask D 5W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 160.0 MHz 1 W 12.5 kHz Channel Spacing

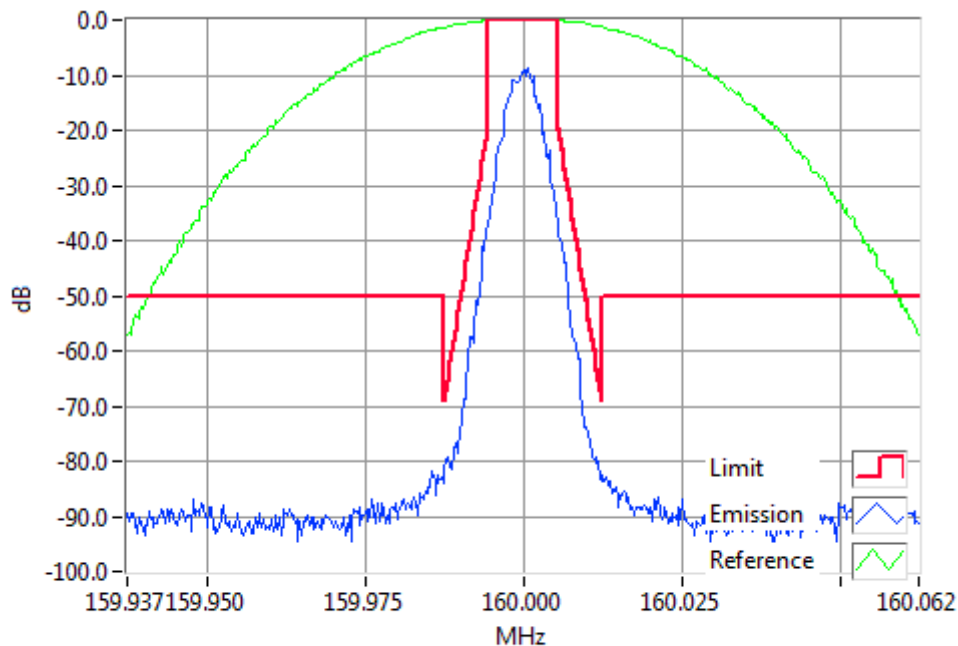


DMR 160.0000MHz Mask D 1W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

DMR


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 161.0 MHz 5 W 12.5 kHz Channel Spacing

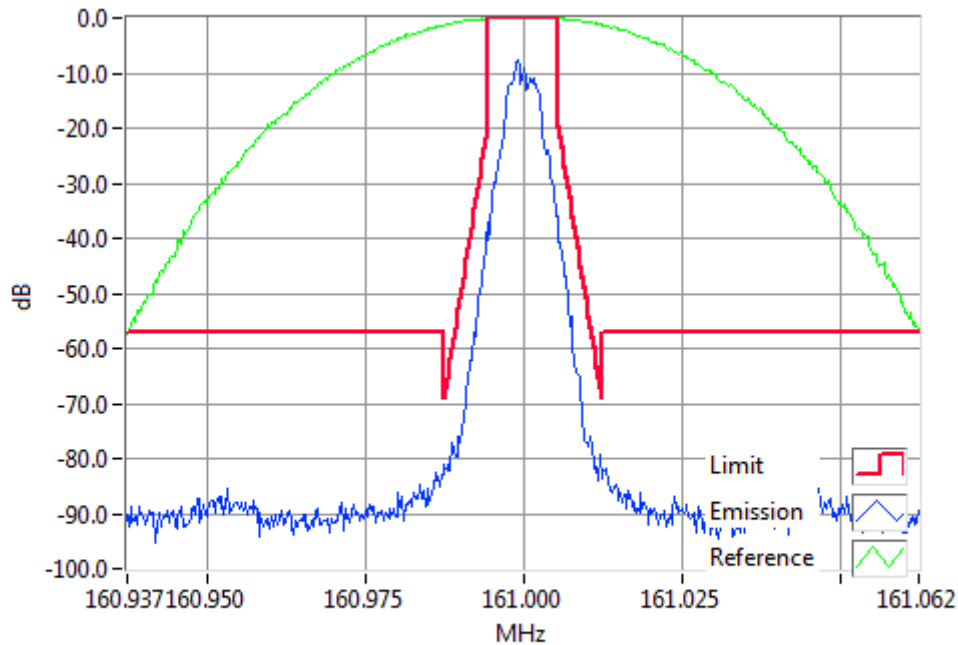

DMR 161.0000MHz Mask D 5W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 161.0 MHz 1 W 12.5 kHz Channel Spacing

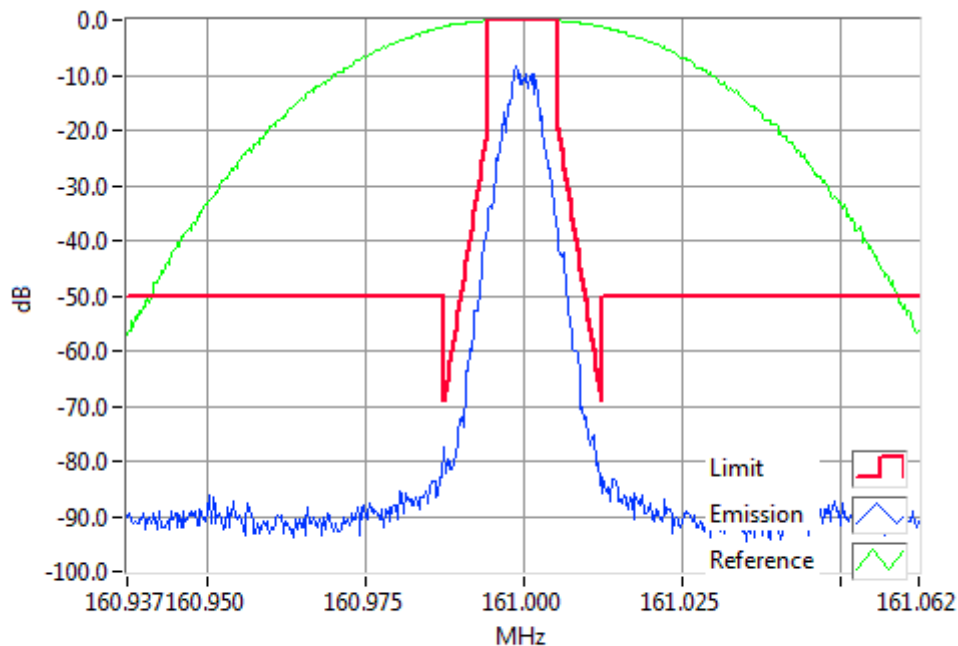


DMR 161.0000MHz Mask D 1W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

DMR


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 162.0 MHz 5 W 12.5 kHz Channel Spacing

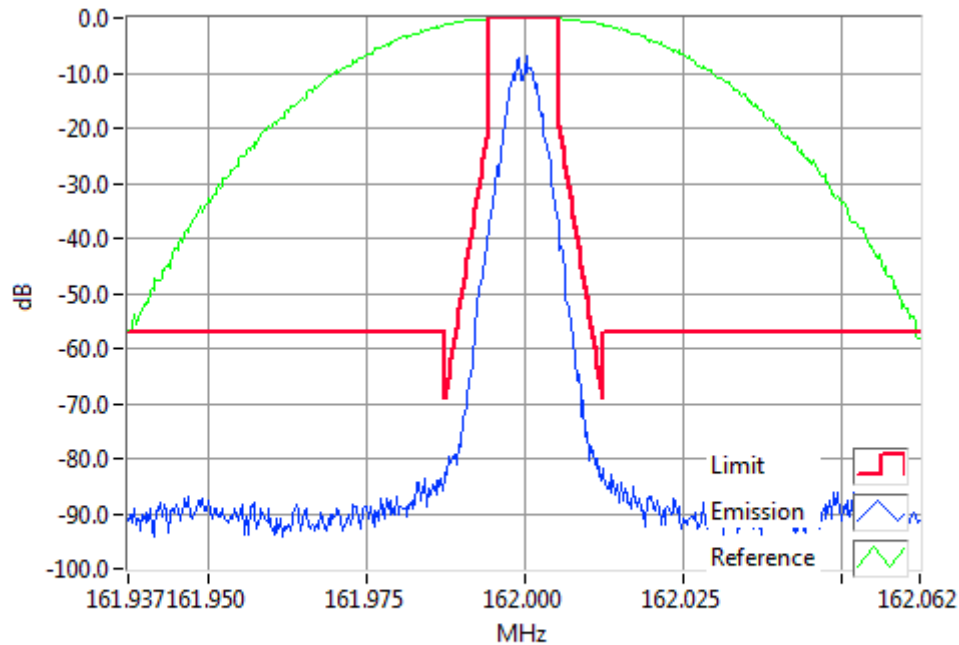

DMR 162.0000MHz Mask D 5W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 162.0 MHz 1 W 12.5 kHz Channel Spacing

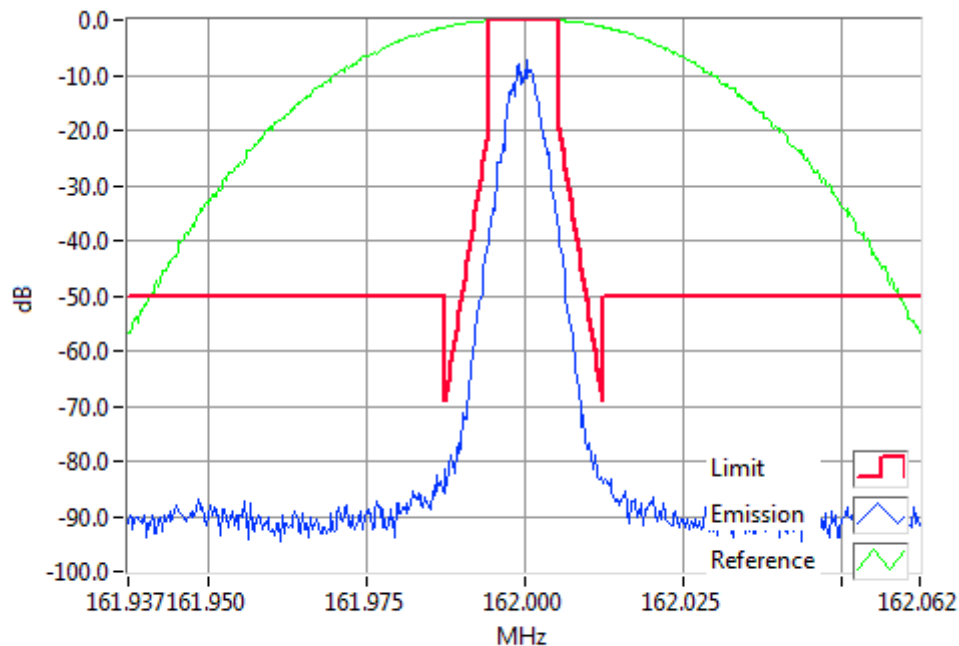


DMR 162.0000MHz Mask D 1W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

DMR


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 162.1 MHz 5 W 12.5 kHz Channel Spacing

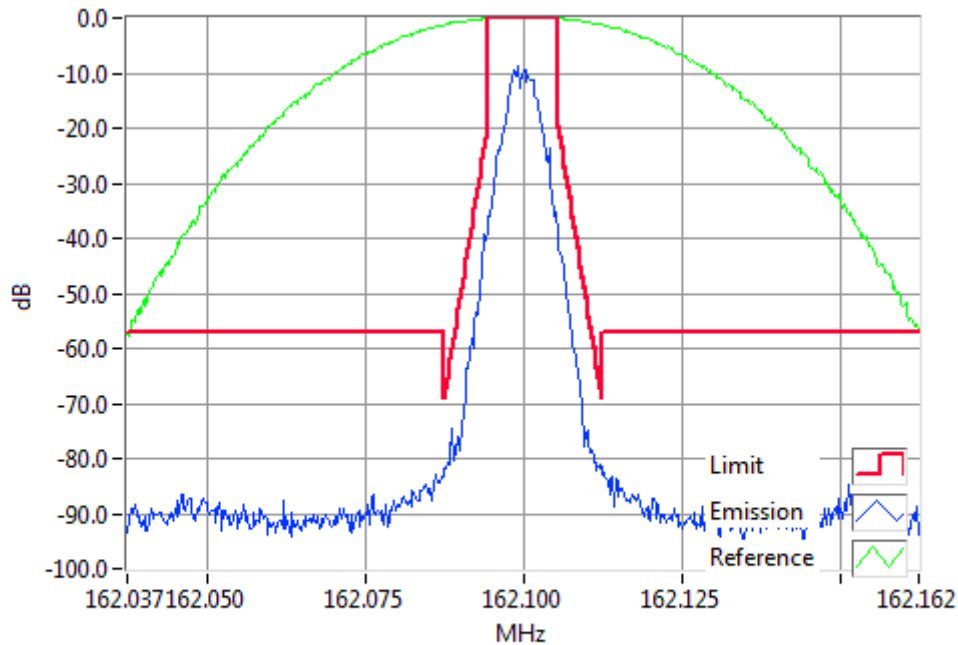

DMR 162.1000MHz Mask D 5W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 162.1 MHz 1 W 12.5 kHz Channel Spacing

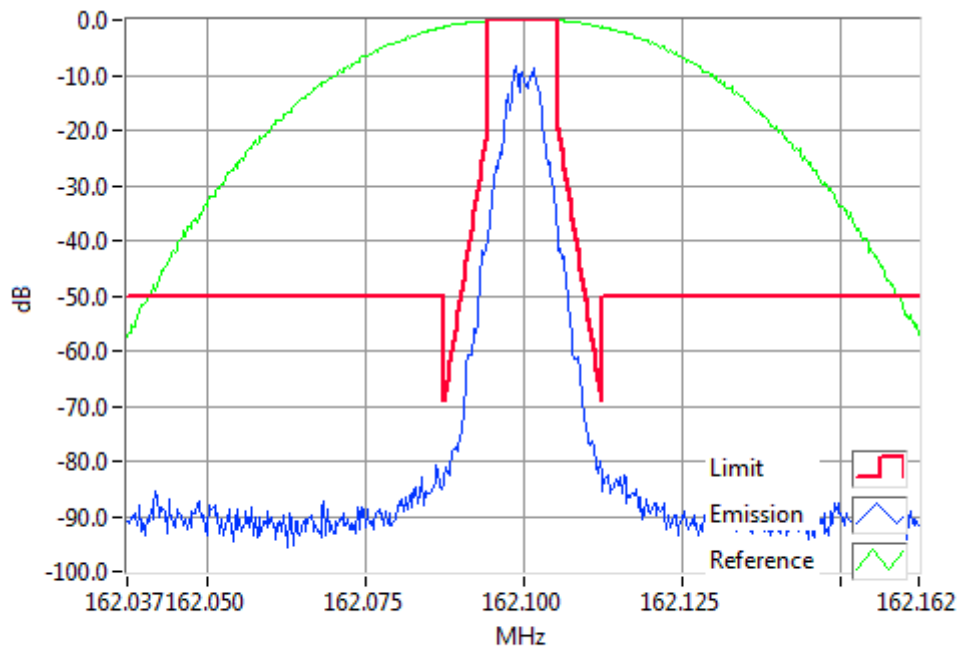


DMR 162.1000MHz Mask D 1W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

DMR


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 168.0 MHz 5 W 12.5 kHz Channel Spacing

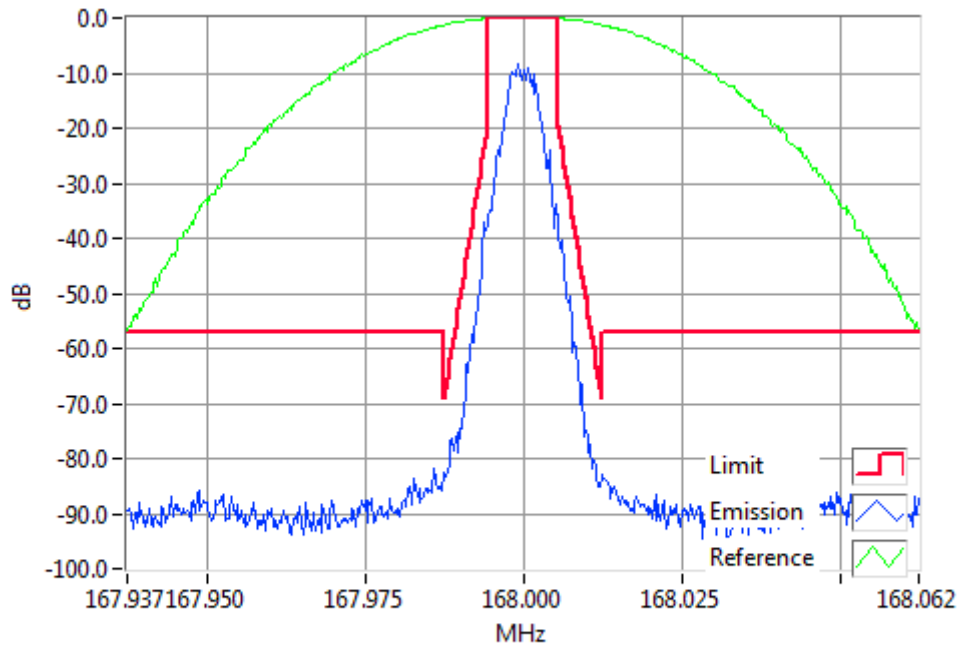

DMR 168.0000MHz Mask D 5W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 168.0 MHz 1 W 12.5 kHz Channel Spacing

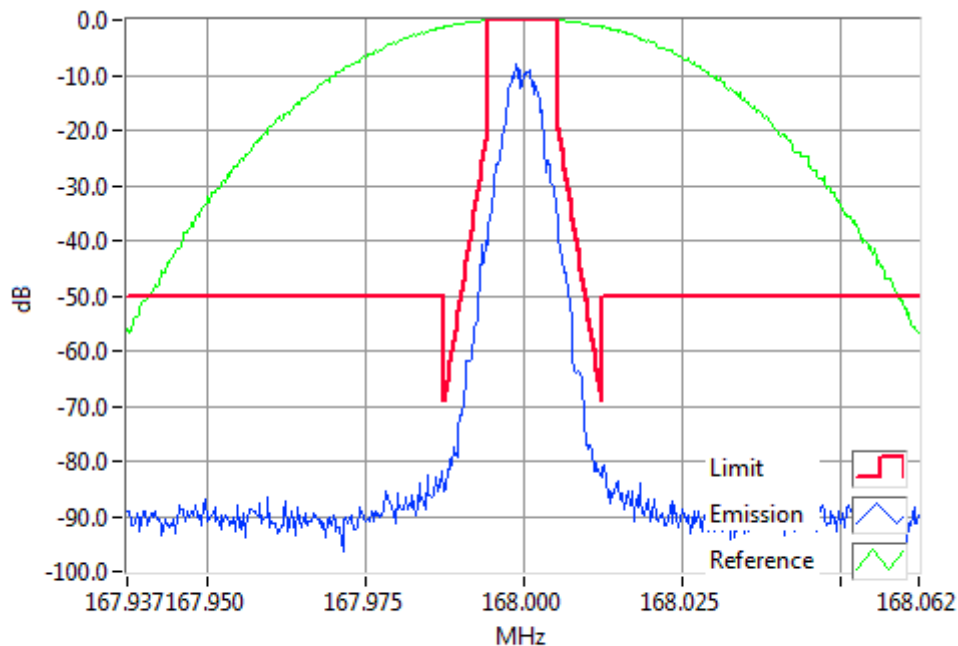


DMR 168.0000MHz Mask D 1W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks

DMR


SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 173.9 MHz 5 W 12.5 kHz Channel Spacing

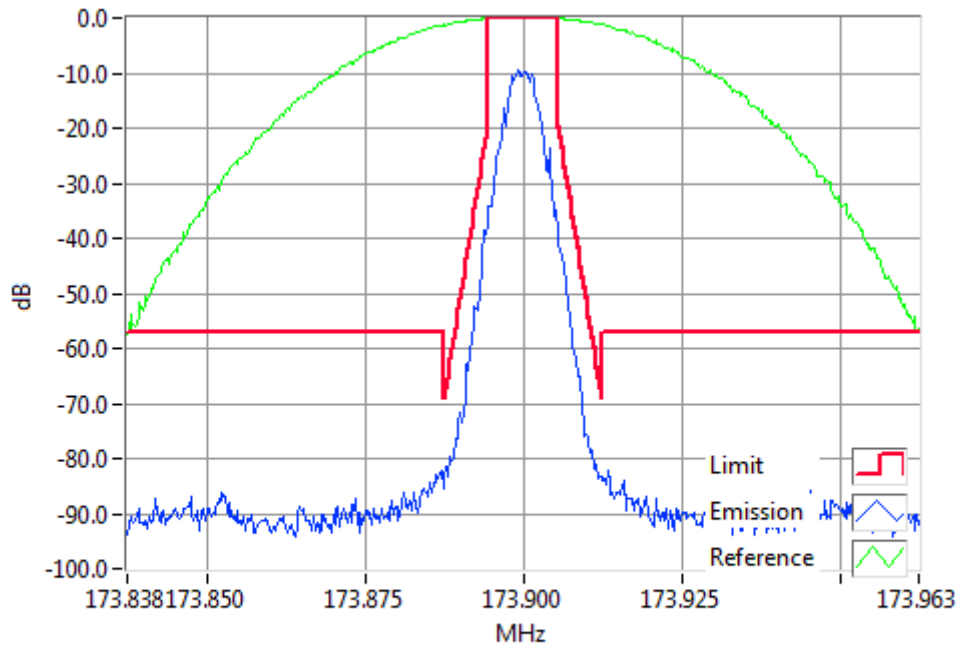

DMR 173.9000MHz Mask D 5W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Tx FREQUENCY: 173.9 MHz 1 W 12.5 kHz Channel Spacing

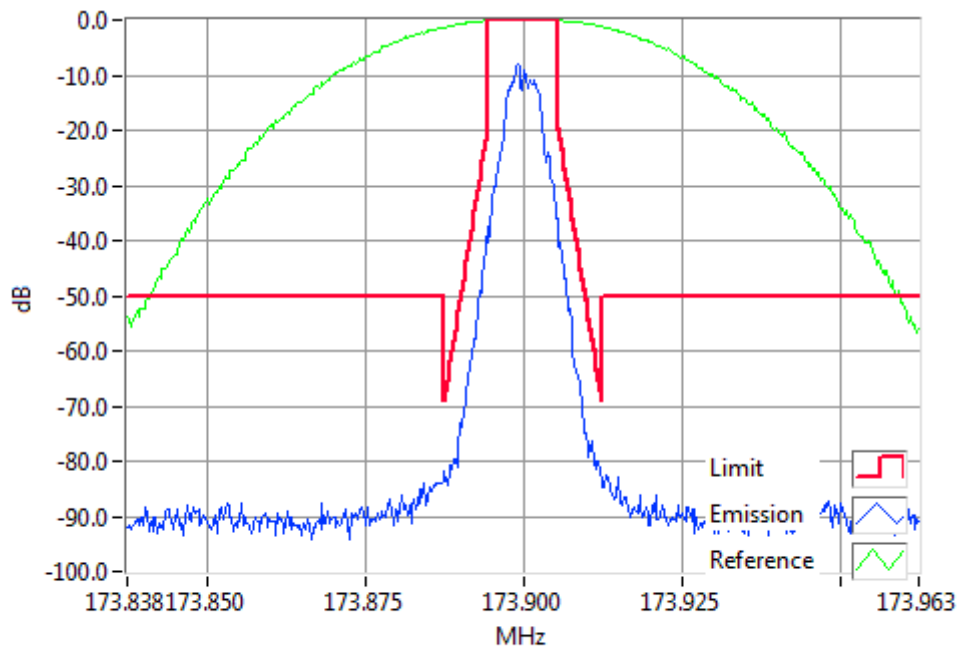


DMR 173.9000MHz Mask D 1W
RBW=100Hz, VBW=1000Hz, Detector Mode=Peak
Result=Pass

Occupied Bandwidth and Spectrum Masks


APCO P25 phase-1

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 138.1 MHz 5 W 12.5 kHz Channel Spacing

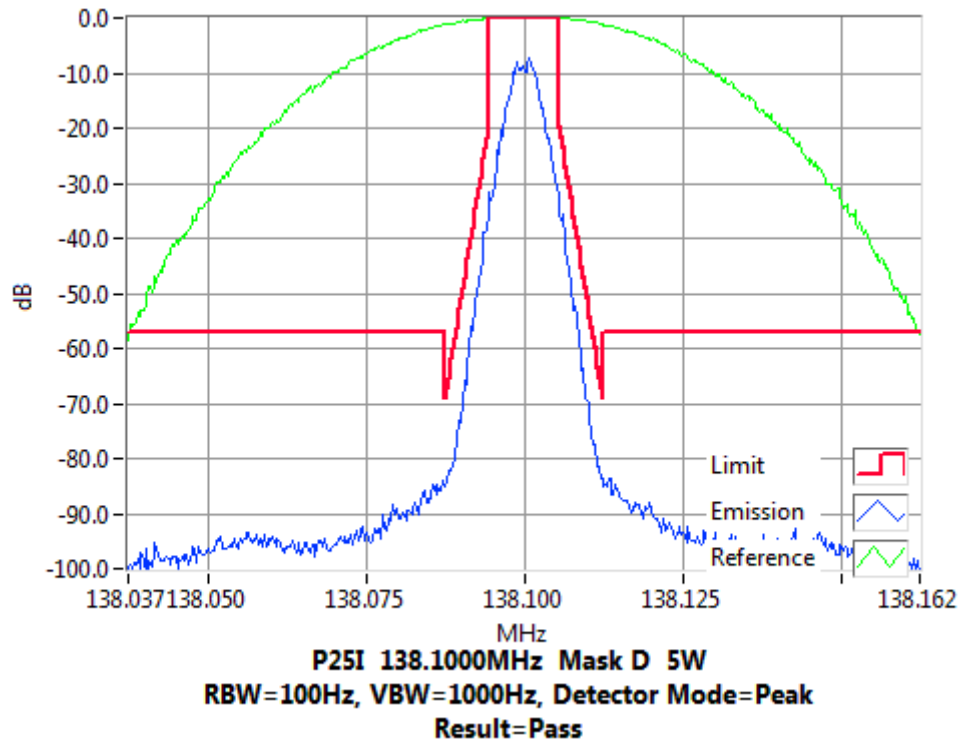

Tx FREQUENCY: 138.1 MHz 1 W 12.5 kHz Channel Spacing

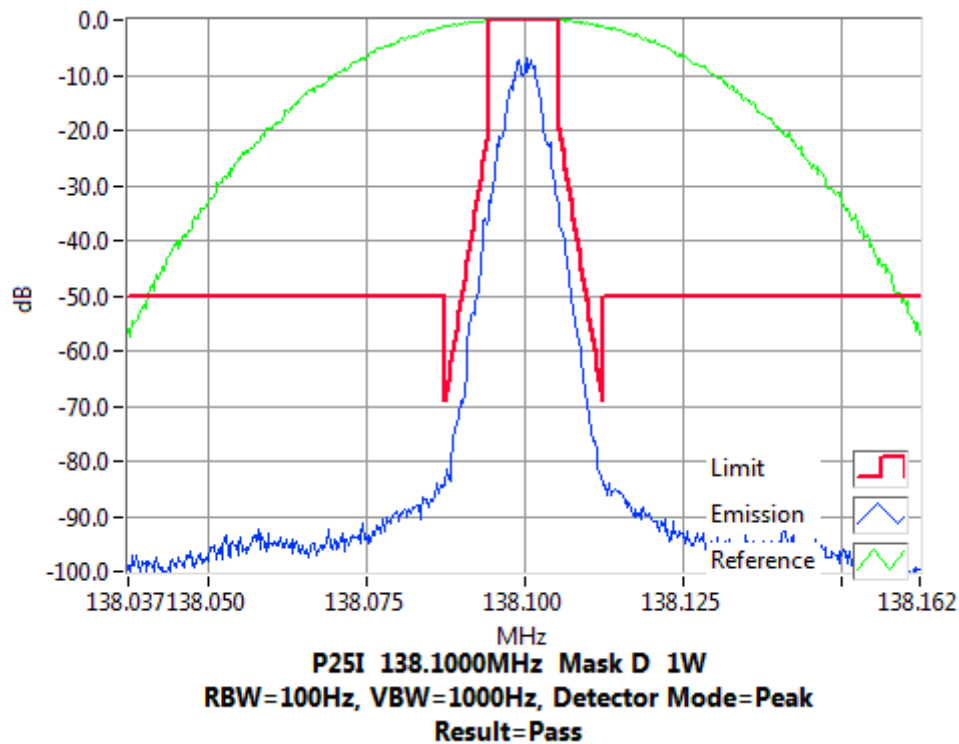


Occupied Bandwidth and Spectrum Masks


APCO P25 phase-1

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 143.9 MHz 5 W 12.5 kHz Channel Spacing

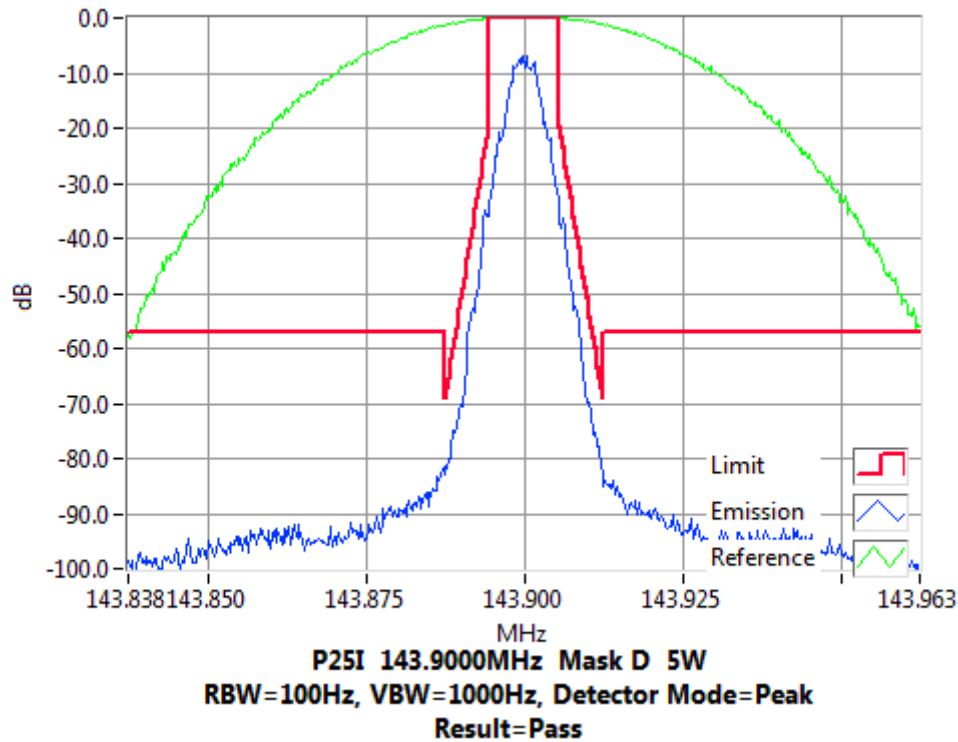

Tx FREQUENCY: 143.9 MHz 1 W 12.5 kHz Channel Spacing

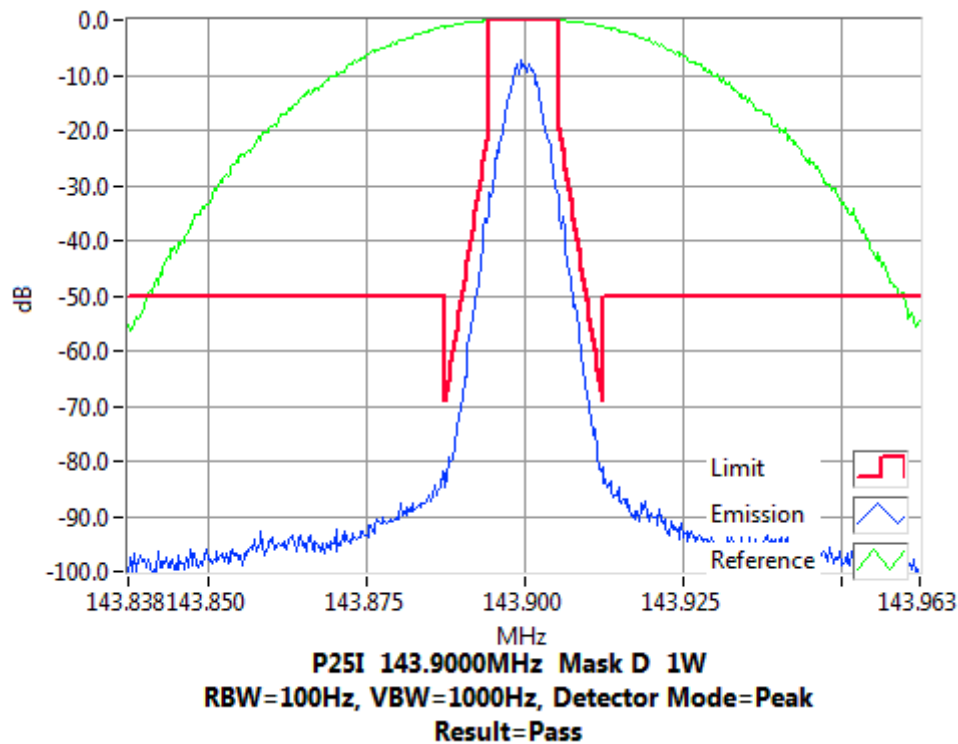


Occupied Bandwidth and Spectrum Masks


APCO P25 phase-1

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 148.1 MHz 5 W 12.5 kHz Channel Spacing

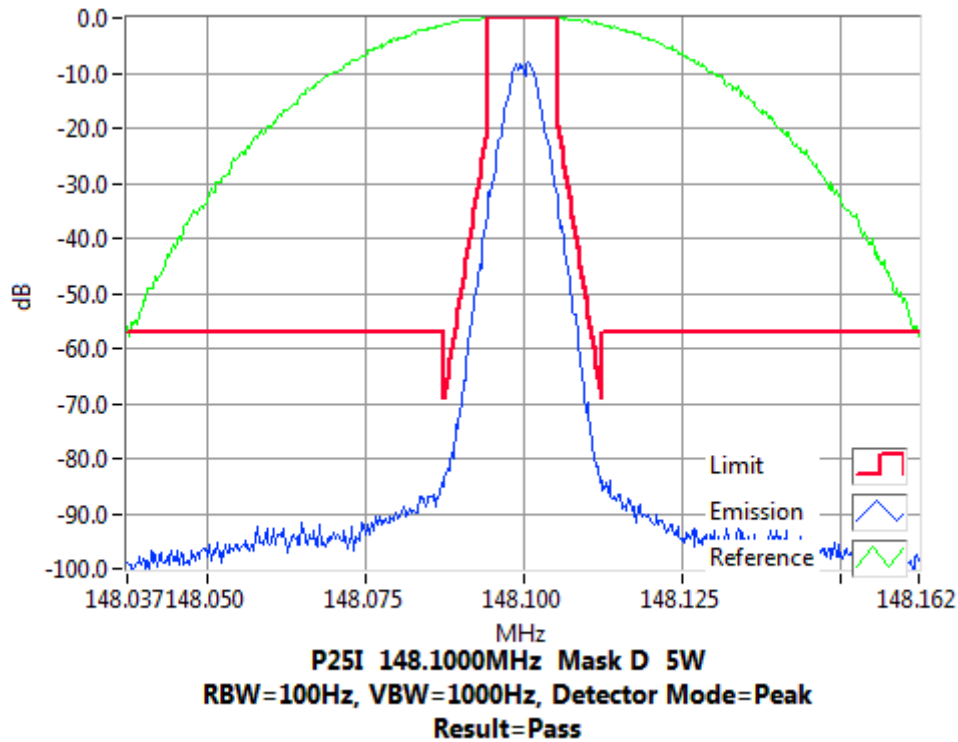

Tx FREQUENCY: 148.1 MHz 1 W 12.5 kHz Channel Spacing

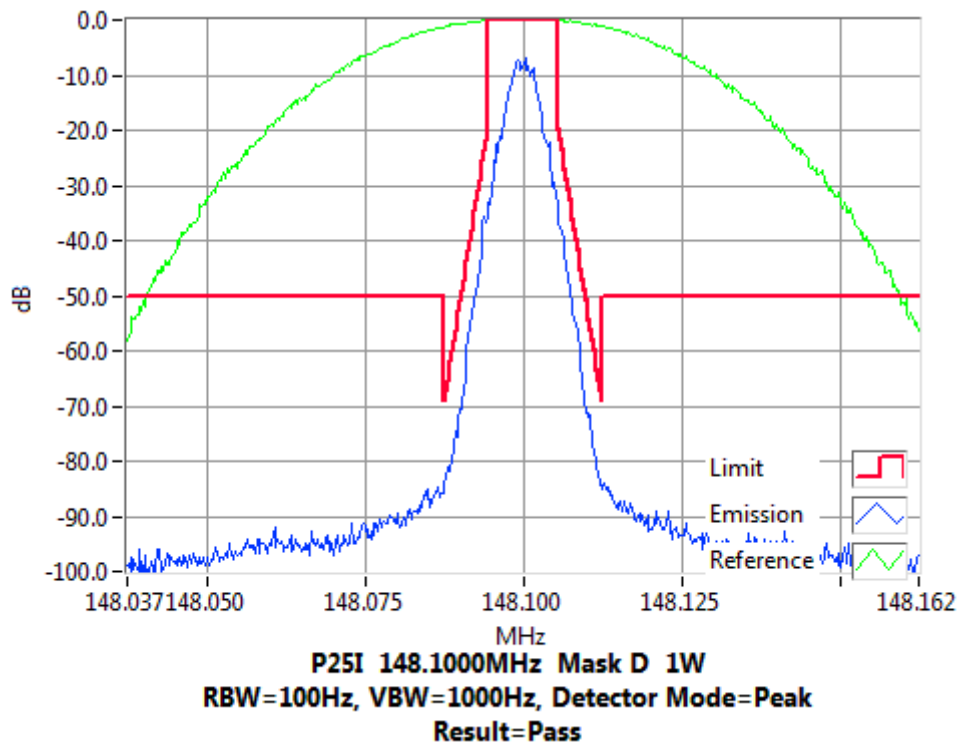


Occupied Bandwidth and Spectrum Masks


APCO P25 phase-1

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 149.8 MHz 5 W 12.5 kHz Channel Spacing

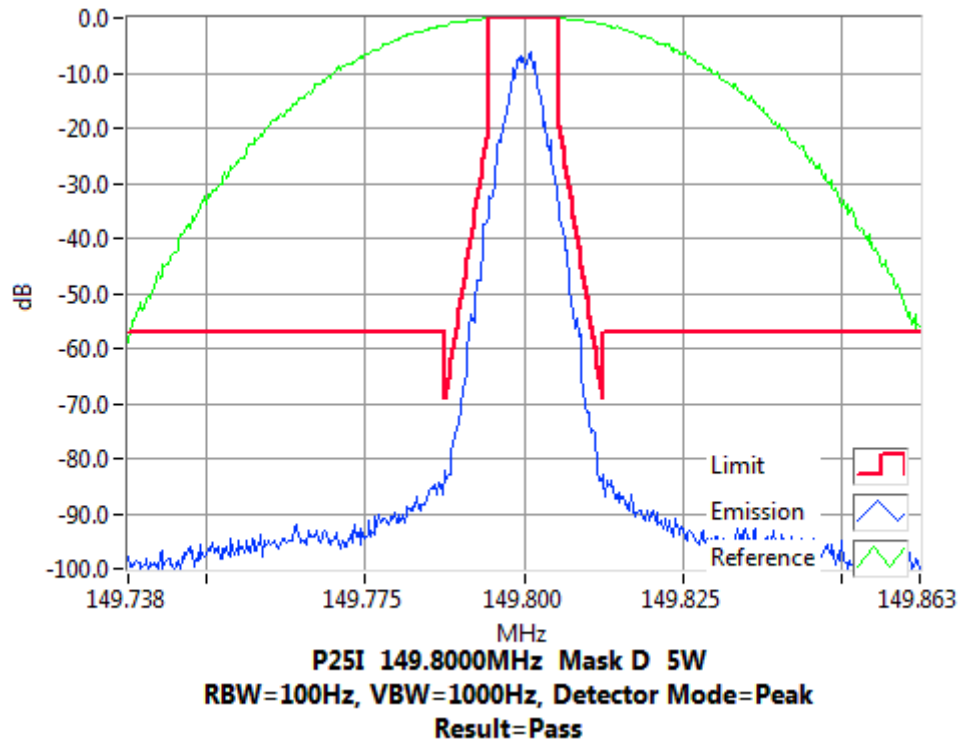

Tx FREQUENCY: 149.8 MHz 1 W 12.5 kHz Channel Spacing

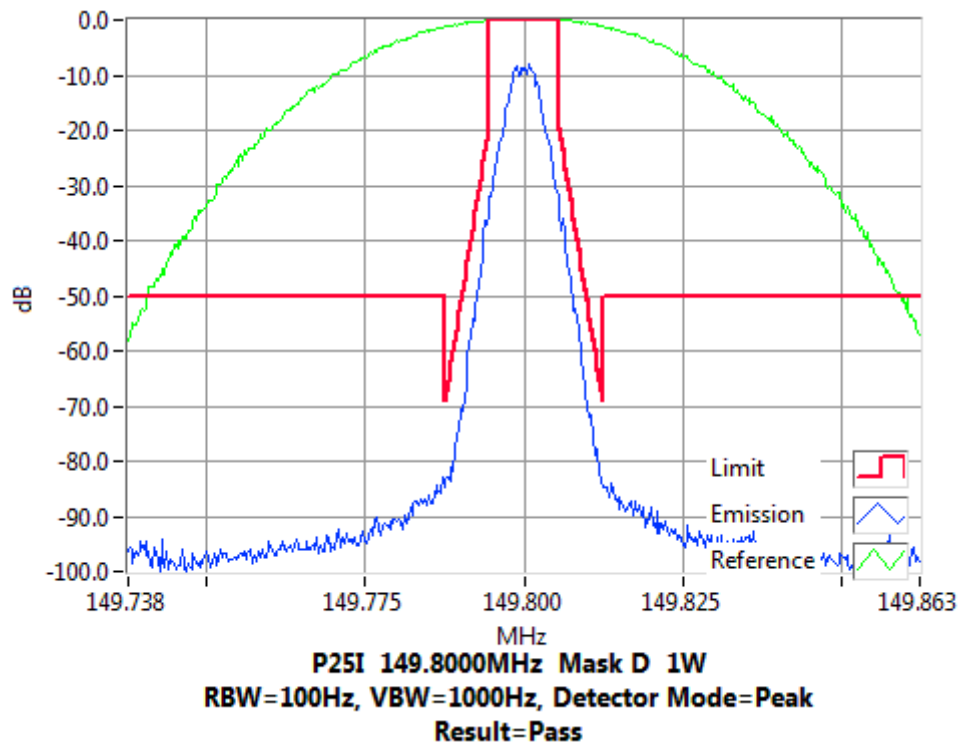


Occupied Bandwidth and Spectrum Masks


APCO P25 phase-1

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 150.1 MHz 5 W 12.5 kHz Channel Spacing

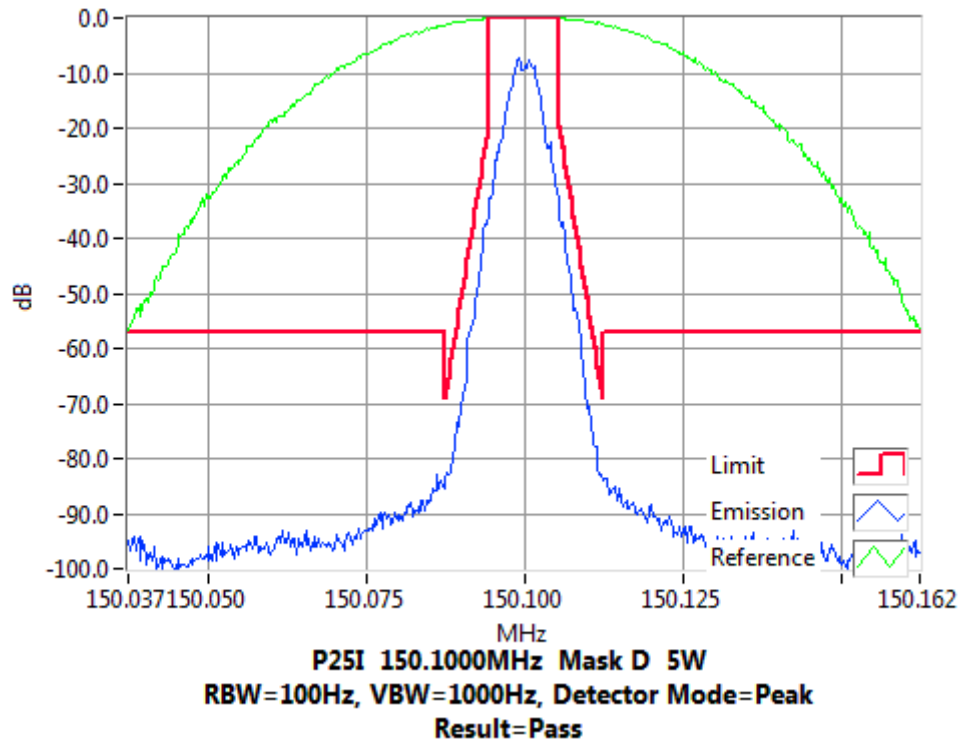

Tx FREQUENCY: 150.1 MHz 1 W 12.5 kHz Channel Spacing

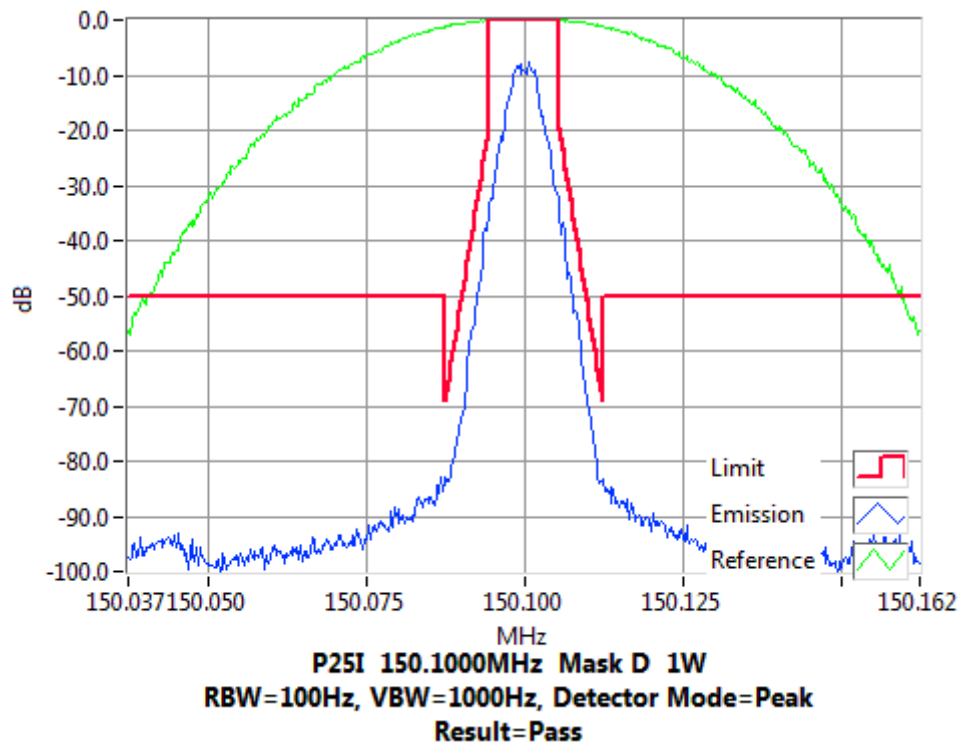


Occupied Bandwidth and Spectrum Masks


APCO P25 phase-1

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 152.0 MHz 5 W 12.5 kHz Channel Spacing

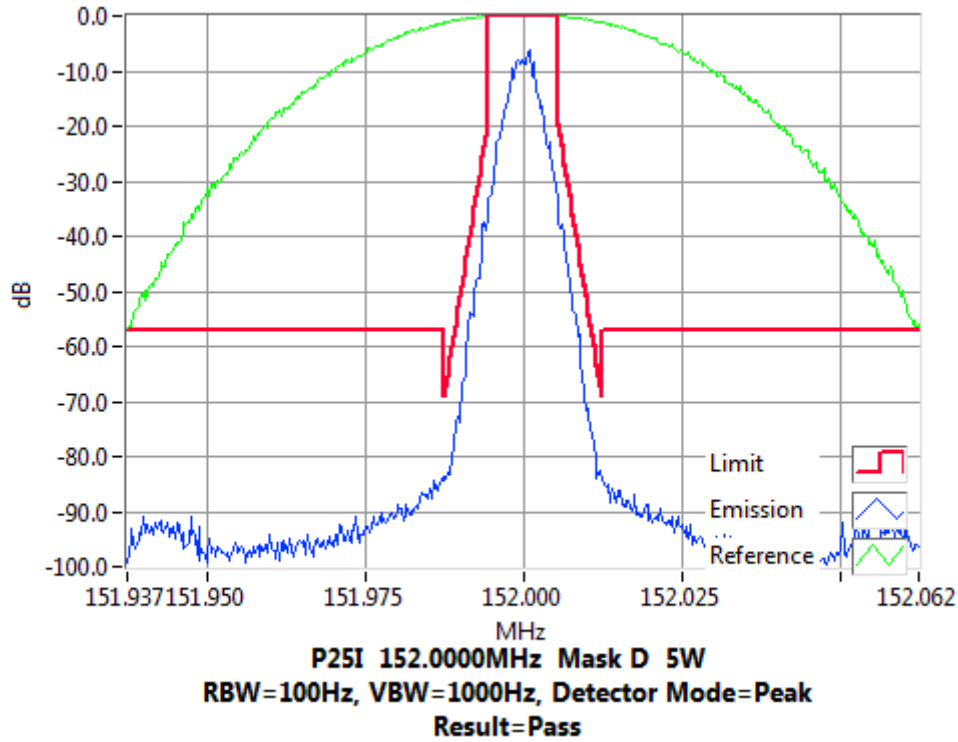

Tx FREQUENCY: 152.0 MHz 1 W 12.5 kHz Channel Spacing

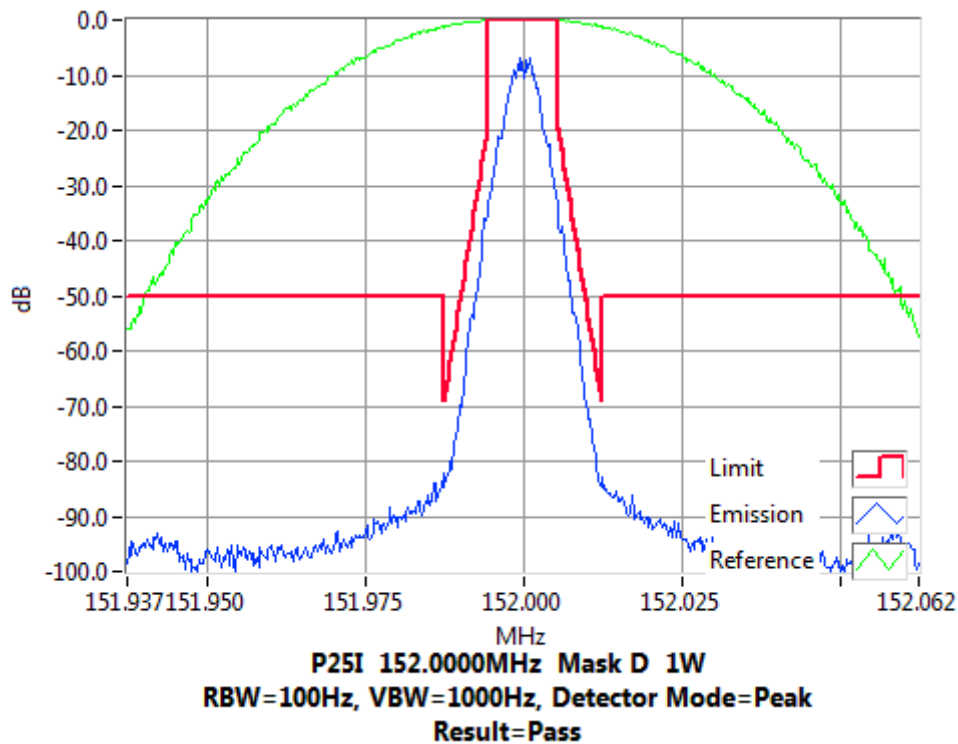


Occupied Bandwidth and Spectrum Masks


APCO P25 phase-1

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 156.3 MHz 5 W 12.5 kHz Channel Spacing

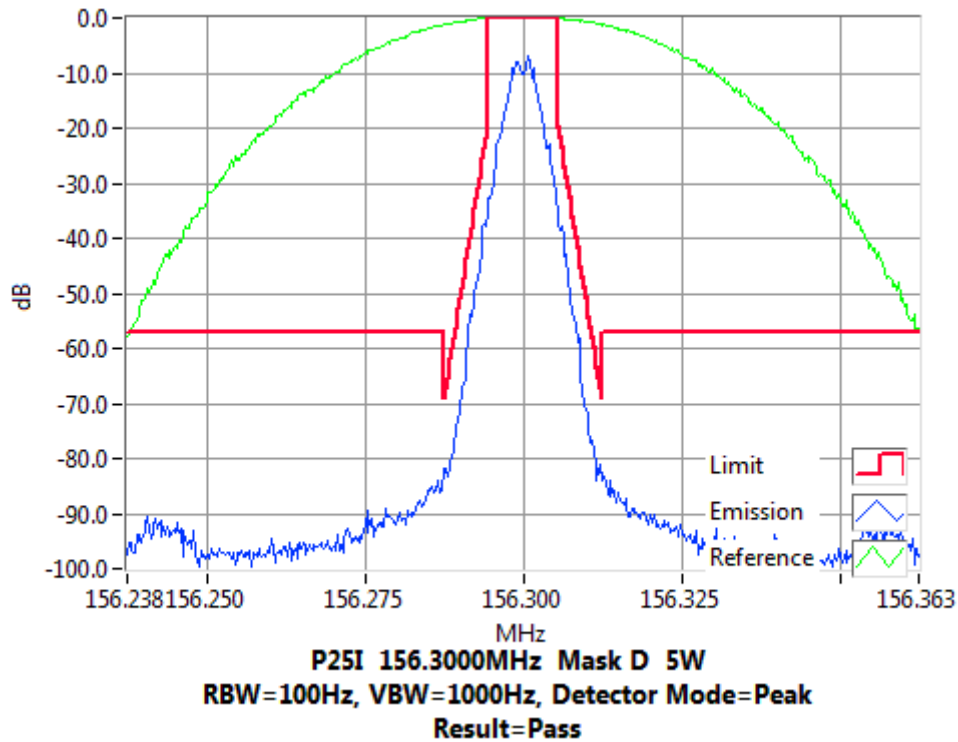

Tx FREQUENCY: 156.3 MHz 1 W 12.5 kHz Channel Spacing

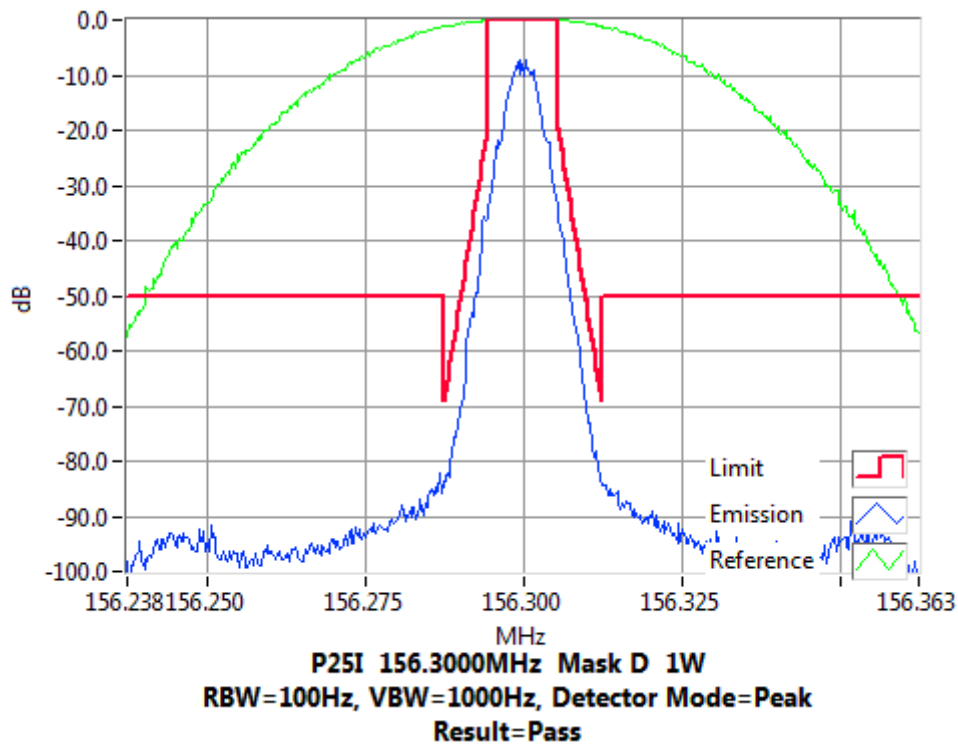


Occupied Bandwidth and Spectrum Masks


APCO P25 phase-1

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 156.67 MHz 5 W 12.5 kHz Channel Spacing

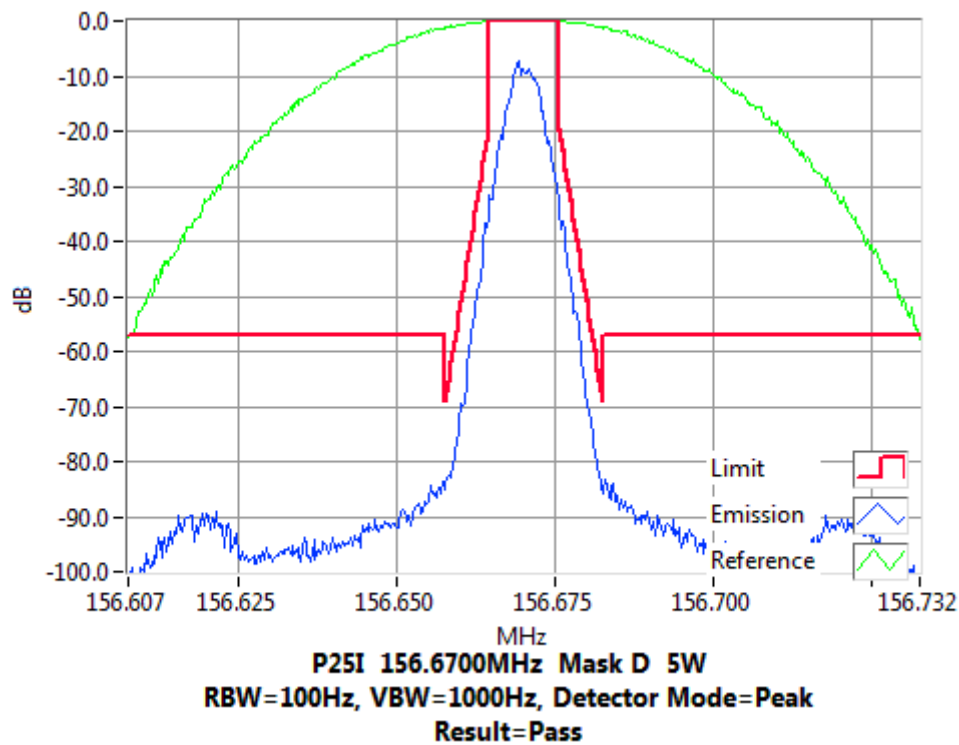

Tx FREQUENCY: 156.67 MHz 1 W 12.5 kHz Channel Spacing

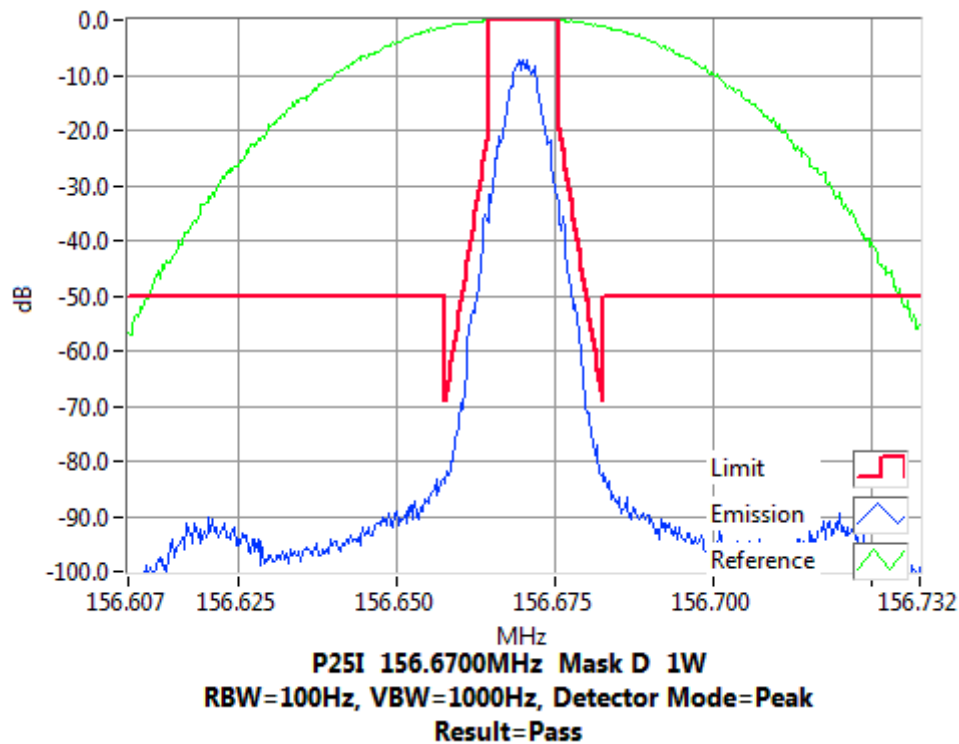


Occupied Bandwidth and Spectrum Masks


APCO P25 phase-1

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 157.0 MHz 5 W 12.5 kHz Channel Spacing

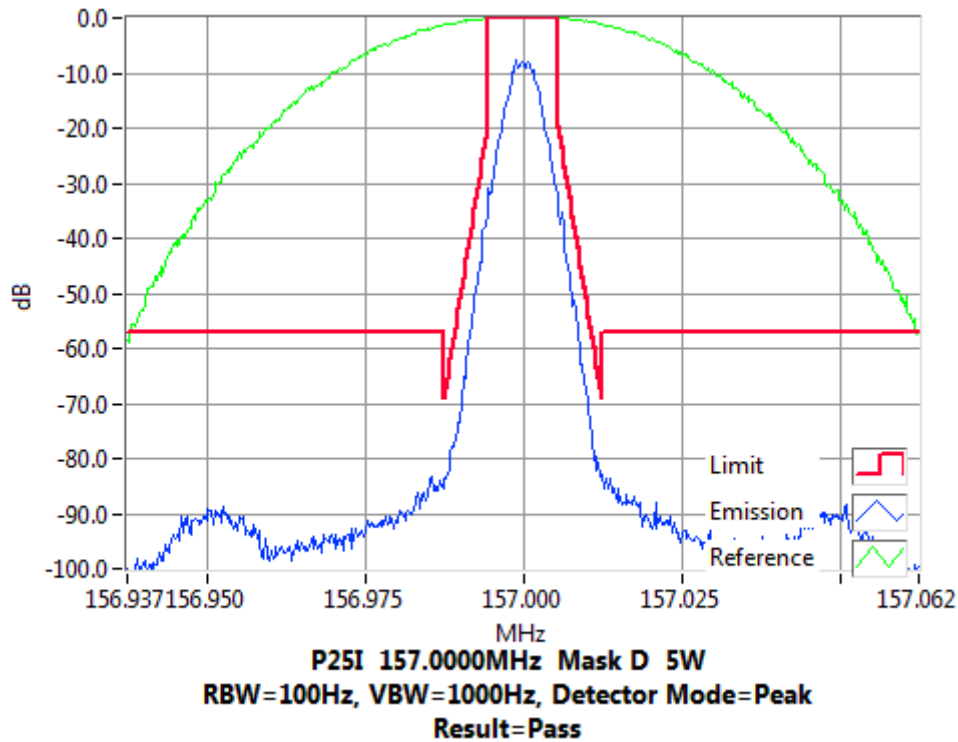

Tx FREQUENCY: 157.0 MHz 1 W 12.5 kHz Channel Spacing

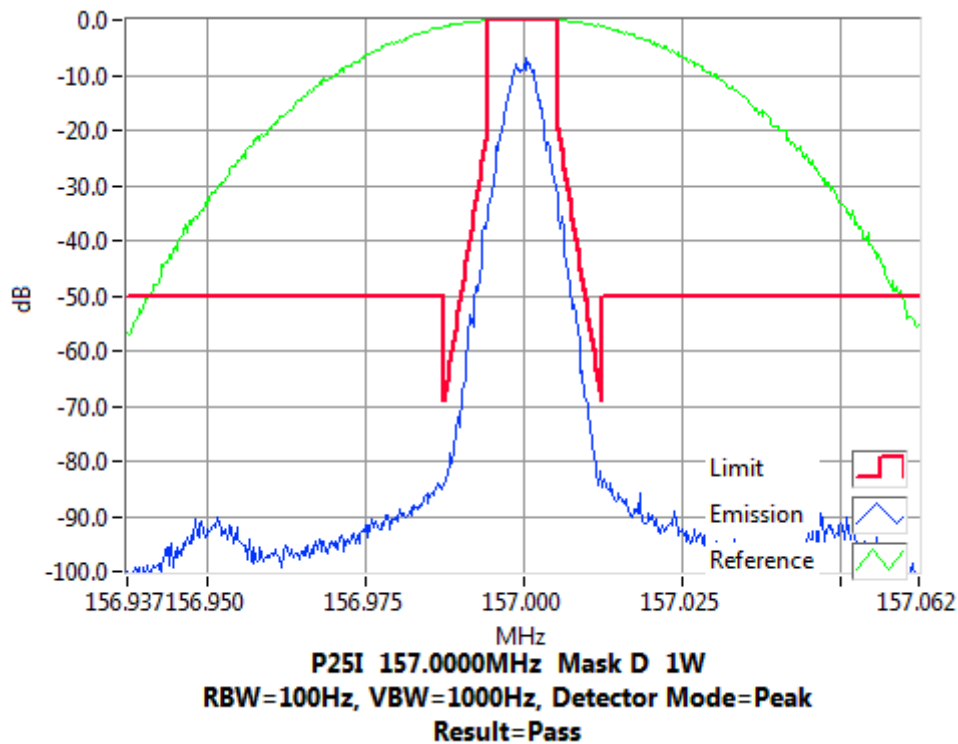


Occupied Bandwidth and Spectrum Masks


APCO P25 phase-1

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 160.0 MHz 5 W 12.5 kHz Channel Spacing

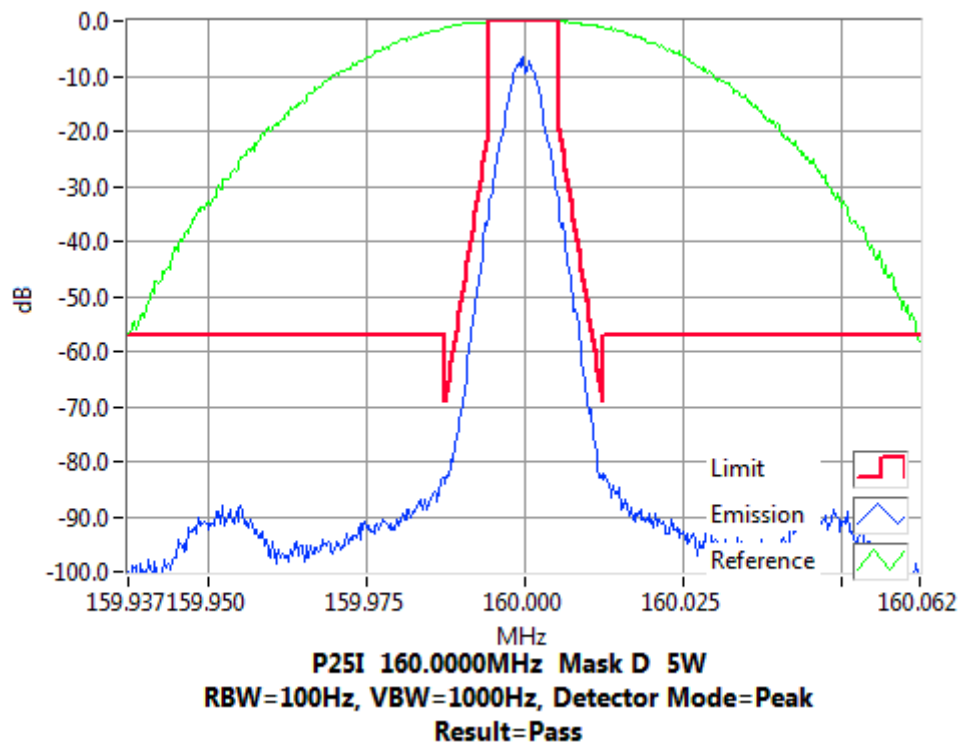

Tx FREQUENCY: 160.0 MHz 1 W 12.5 kHz Channel Spacing

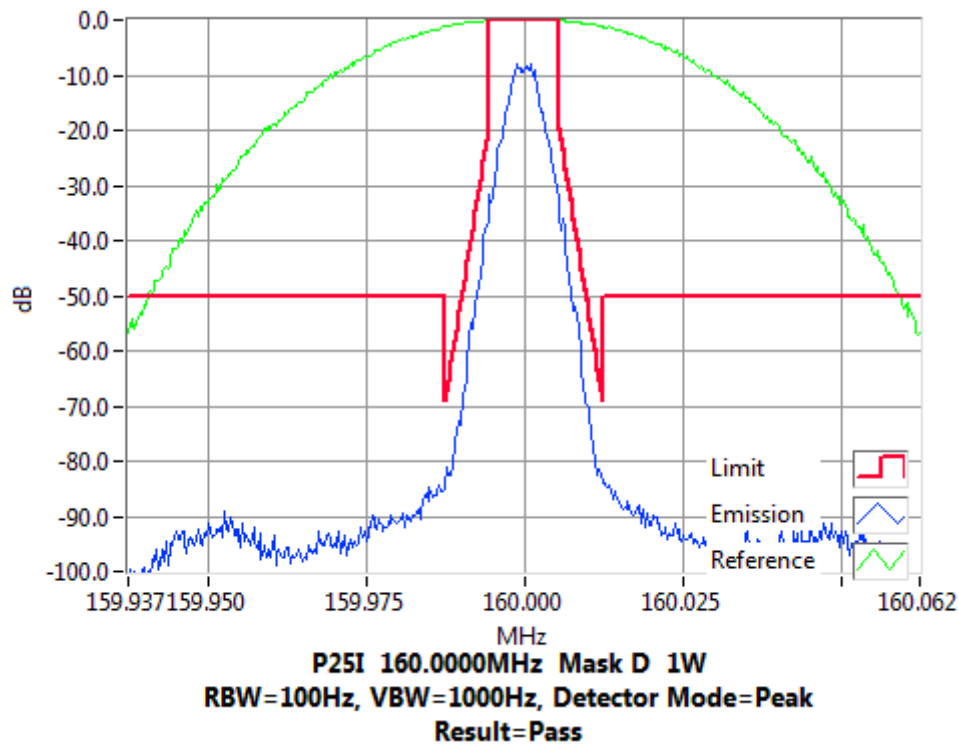


Occupied Bandwidth and Spectrum Masks


APCO P25 phase-1

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 161.0 MHz 5 W 12.5 kHz Channel Spacing

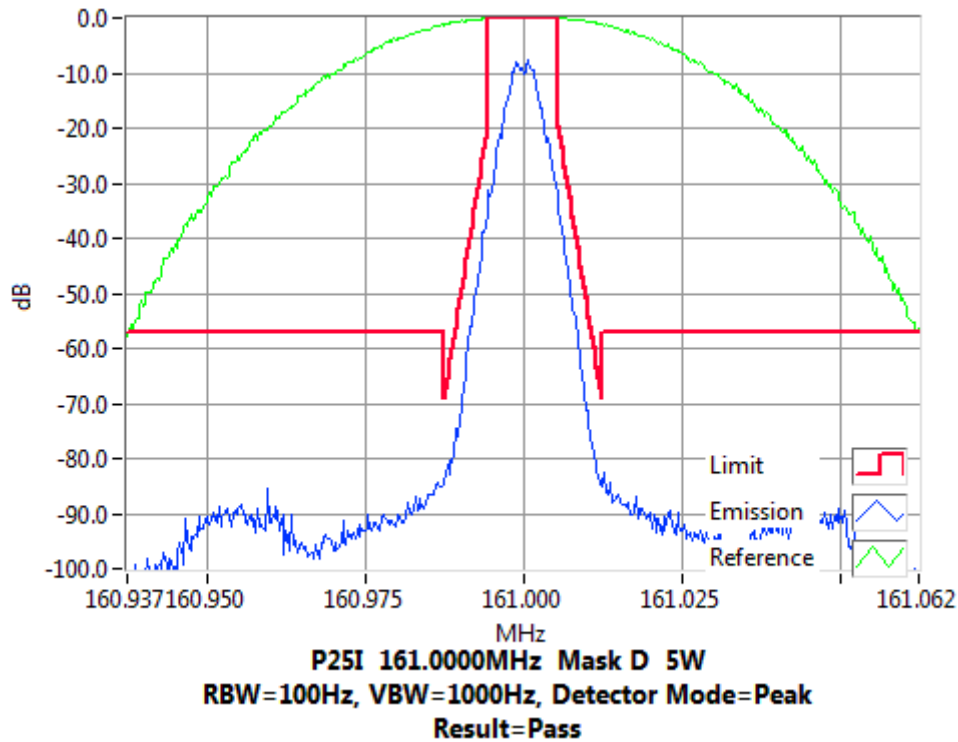

Tx FREQUENCY: 161.0 MHz 1 W 12.5 kHz Channel Spacing

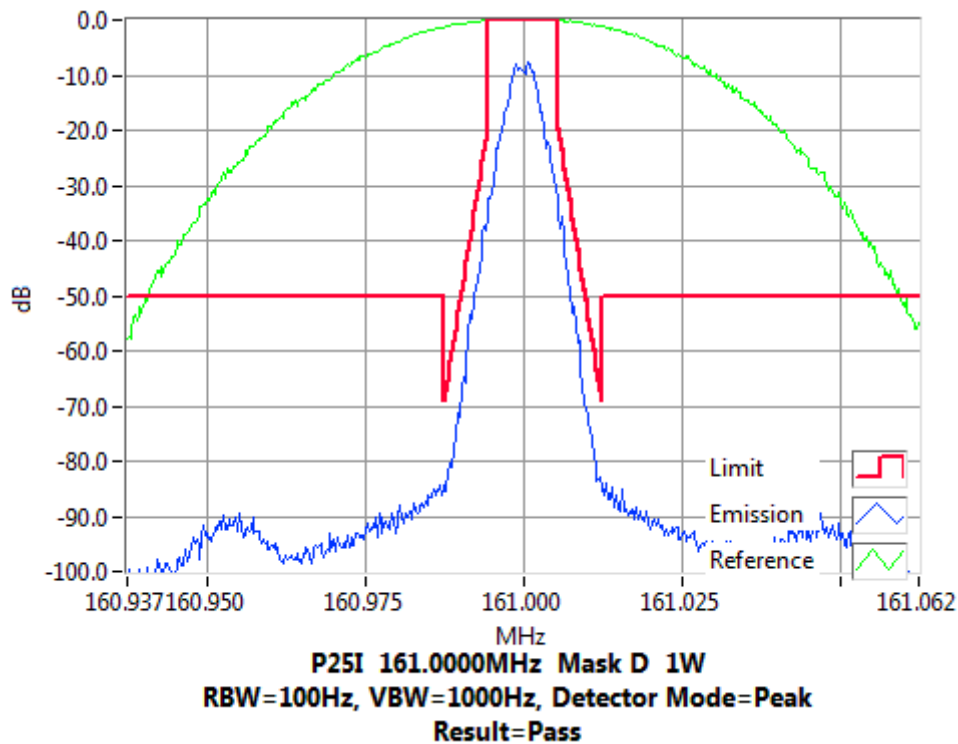


Occupied Bandwidth and Spectrum Masks


APCO P25 phase-1

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 162.0 MHz 5 W 12.5 kHz Channel Spacing

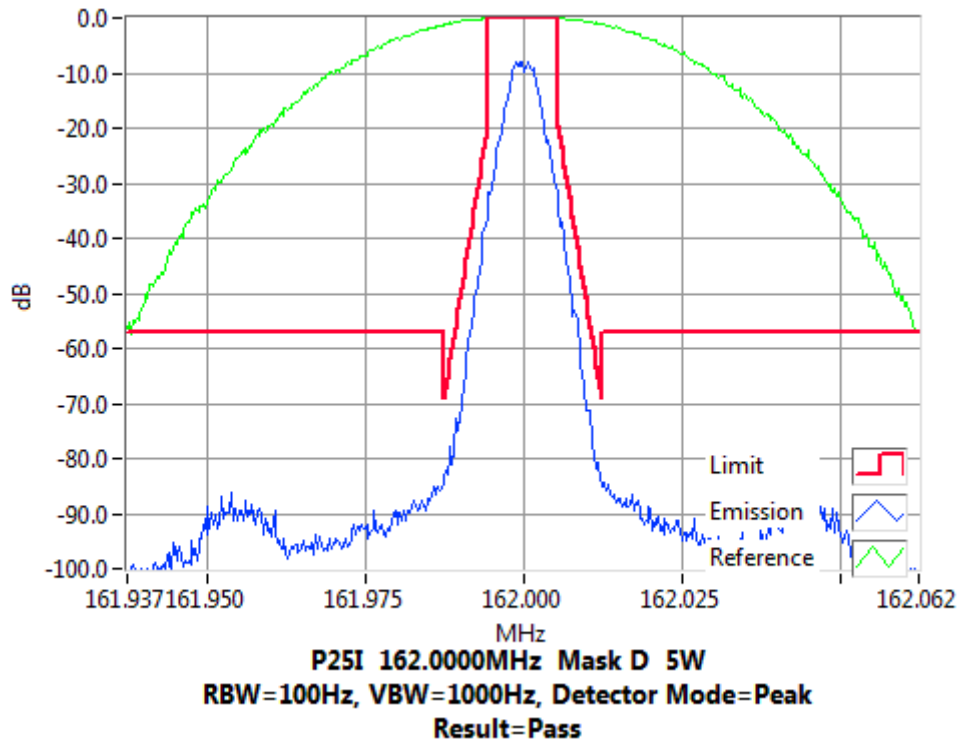

Tx FREQUENCY: 162.0 MHz 1 W 12.5 kHz Channel Spacing

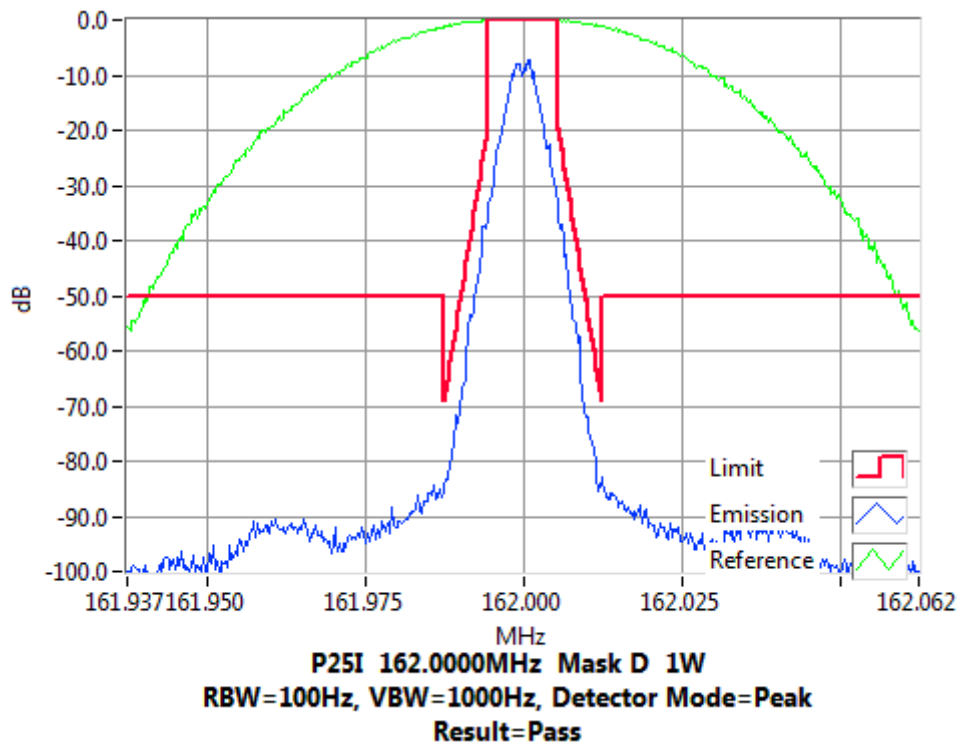


Occupied Bandwidth and Spectrum Masks


APCO P25 phase-1

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 162.1 MHz 5 W 12.5 kHz Channel Spacing

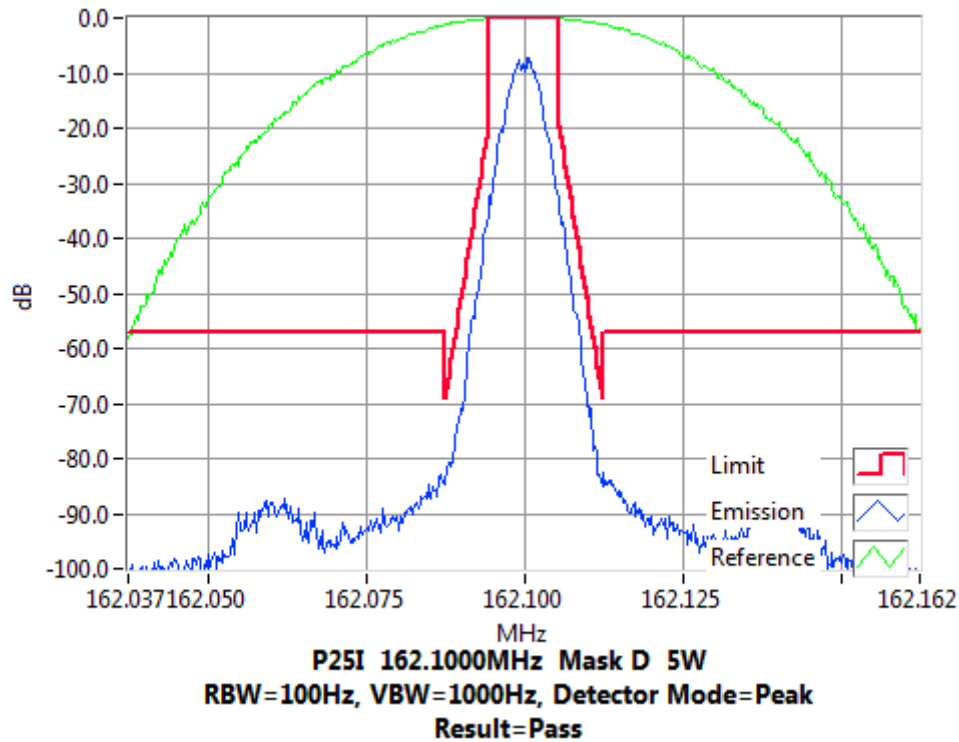

Tx FREQUENCY: 162.1 MHz 1 W 12.5 kHz Channel Spacing

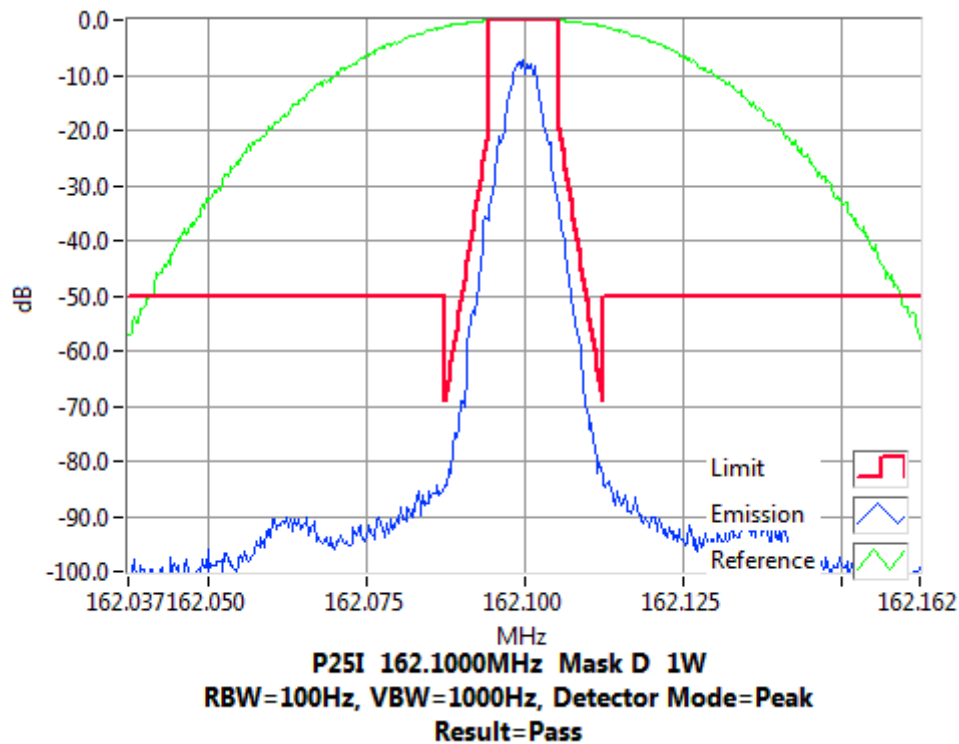


Occupied Bandwidth and Spectrum Masks


APCO P25 phase-1

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 168.0 MHz 5 W 12.5 kHz Channel Spacing

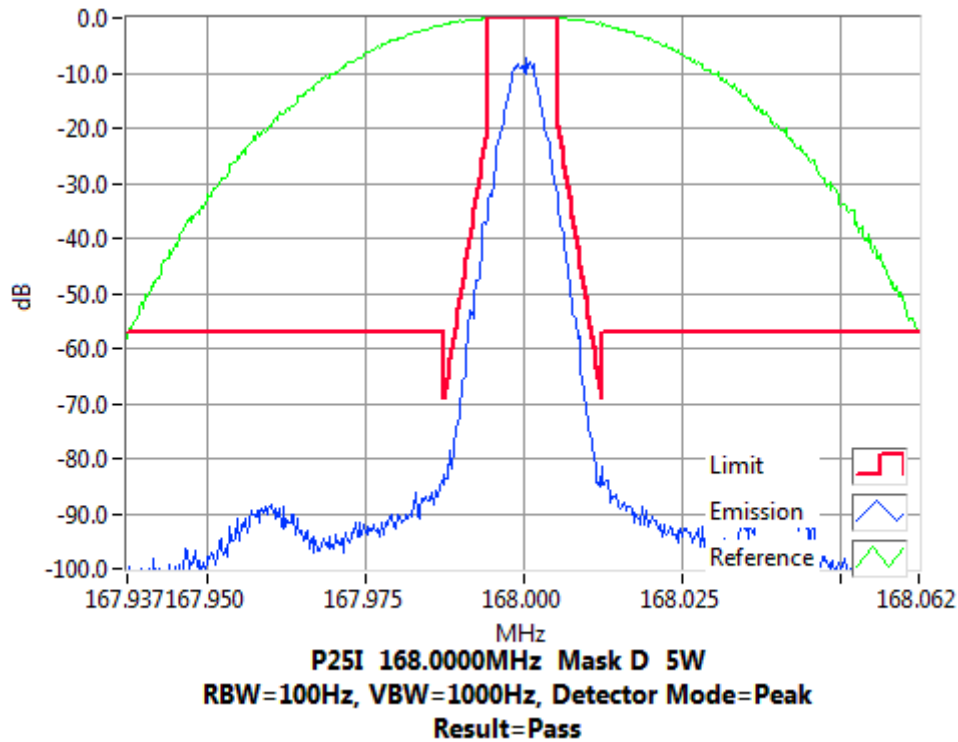

Tx FREQUENCY: 168.0 MHz 1 W 12.5 kHz Channel Spacing

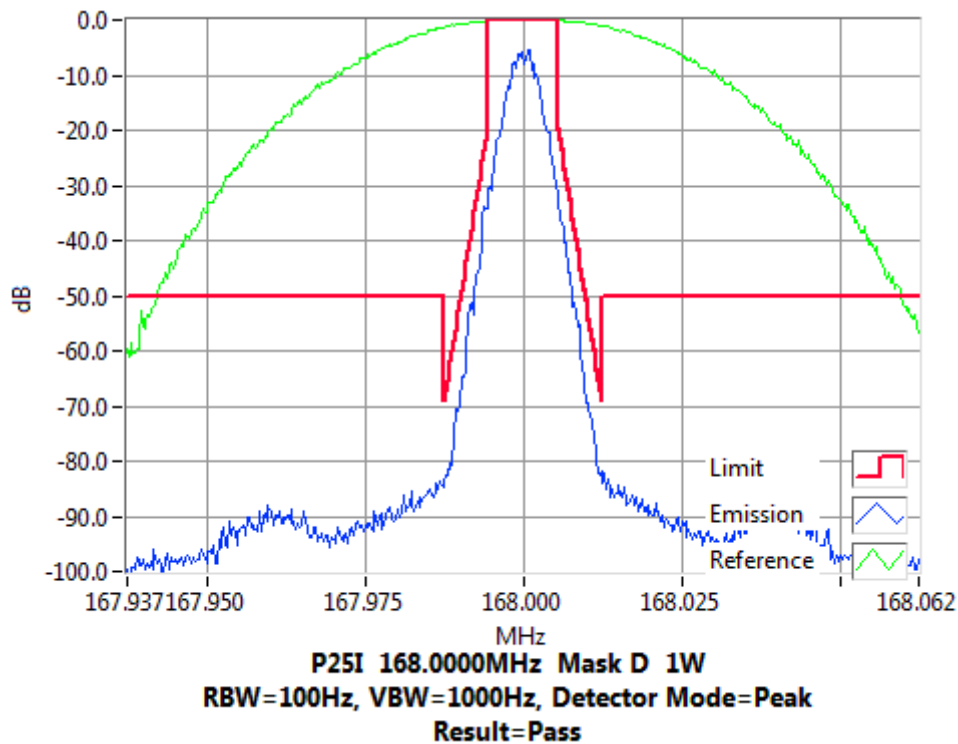


Occupied Bandwidth and Spectrum Masks


APCO P25 phase-1

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 173.9 MHz 5 W 12.5 kHz Channel Spacing

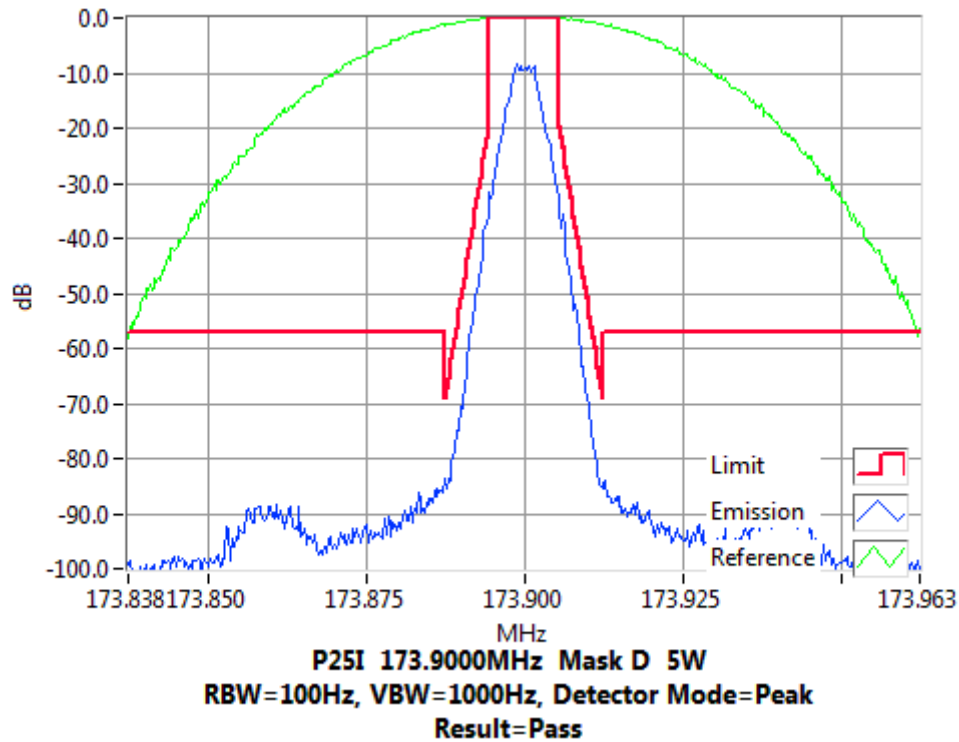

Tx FREQUENCY: 173.9 MHz 1 W 12.5 kHz Channel Spacing

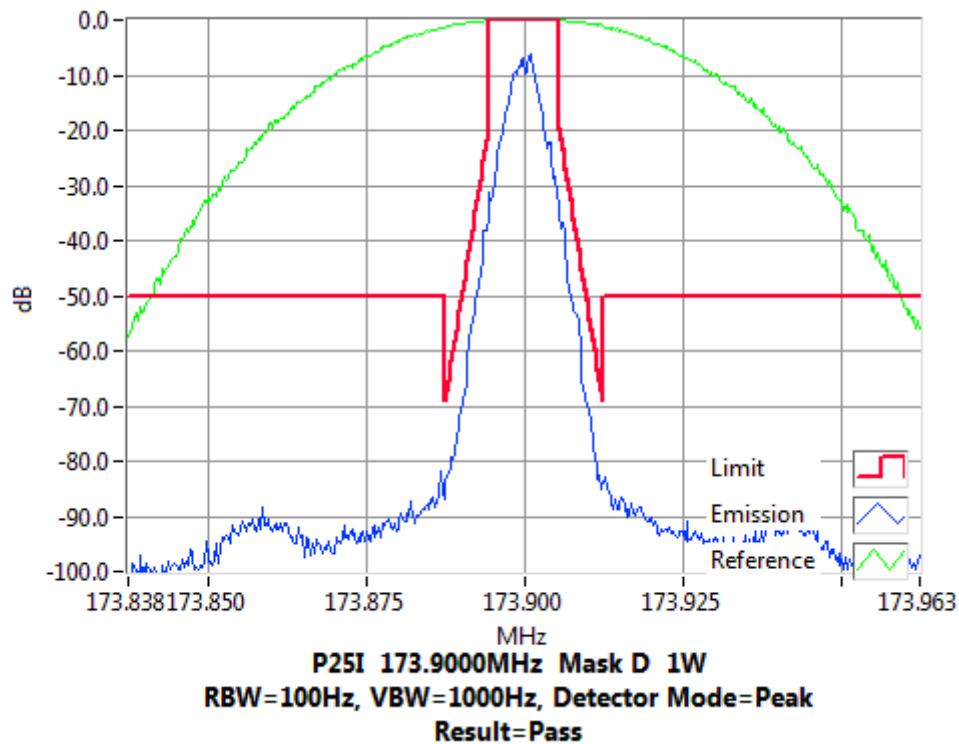


Occupied Bandwidth and Spectrum Masks


APCO P25 phase-2

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 138.1 MHz 5 W 12.5 kHz Channel Spacing

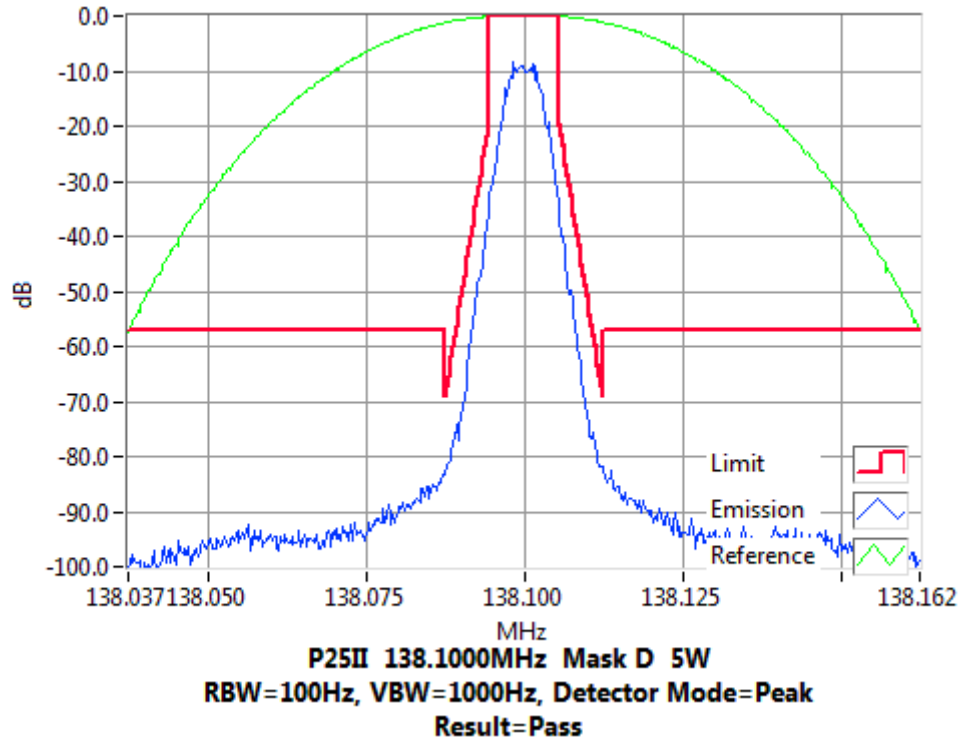

Tx FREQUENCY: 138.1 MHz 1 W 12.5 kHz Channel Spacing

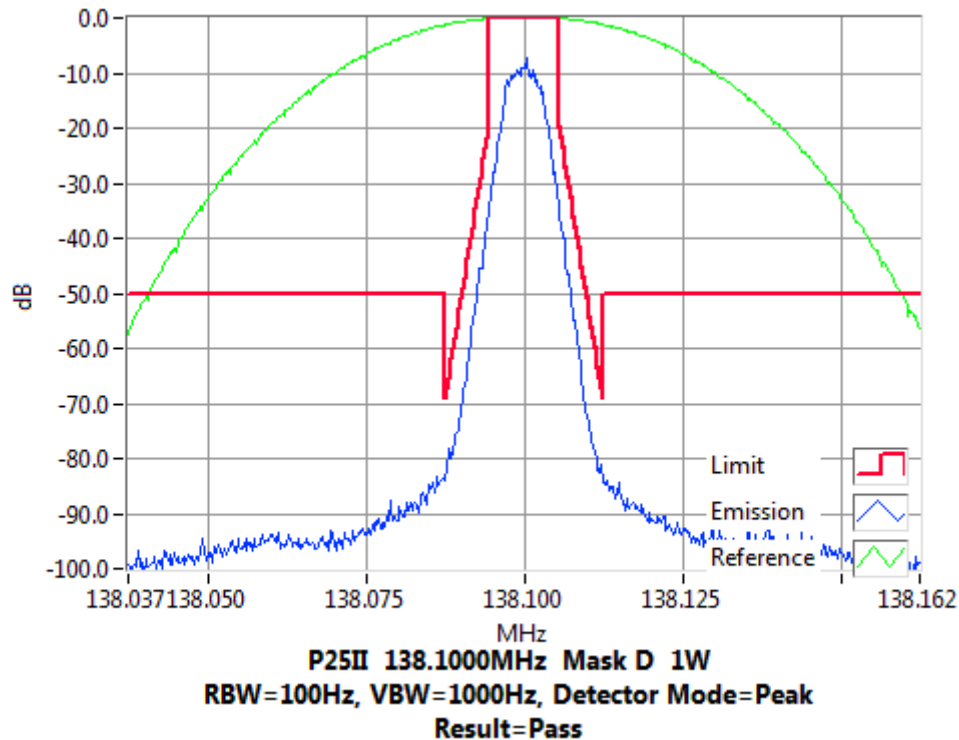


Occupied Bandwidth and Spectrum Masks


APCO P25 phase-2

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 143.9 MHz 5 W 12.5 kHz Channel Spacing

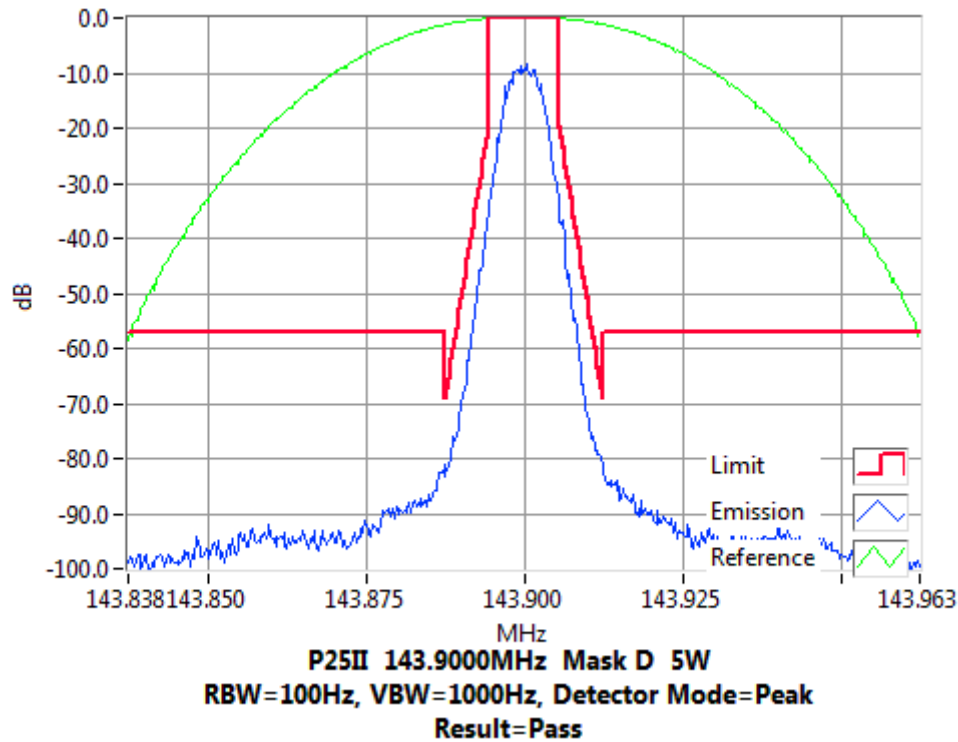

Tx FREQUENCY: 143.9 MHz 1 W 12.5 kHz Channel Spacing

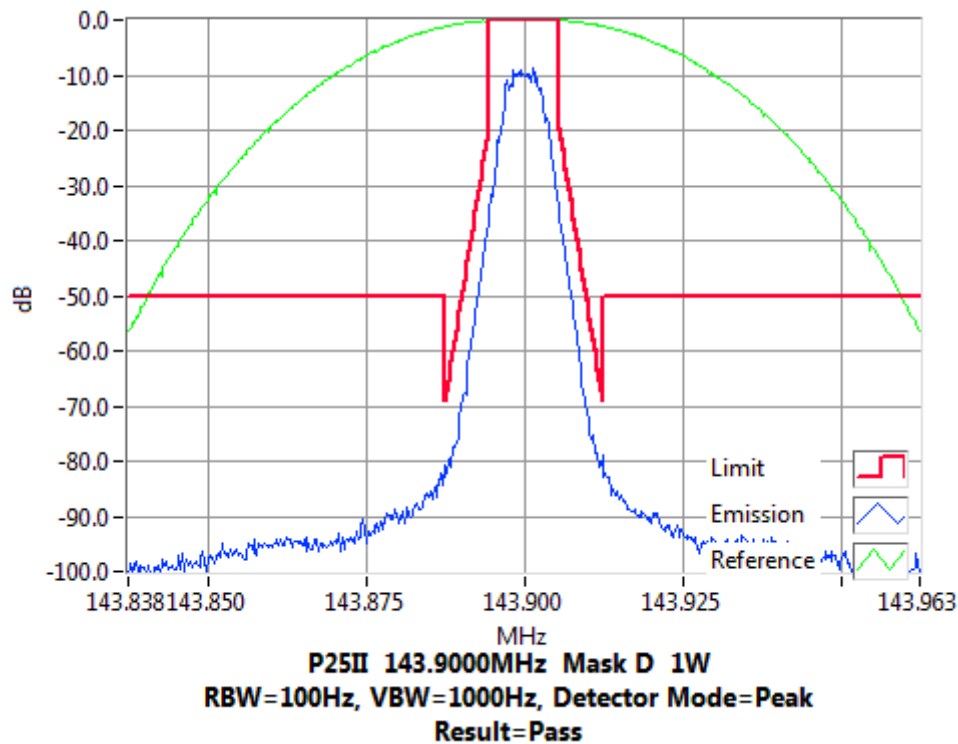


Occupied Bandwidth and Spectrum Masks


APCO P25 phase-2

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 148.1 MHz 5 W 12.5 kHz Channel Spacing

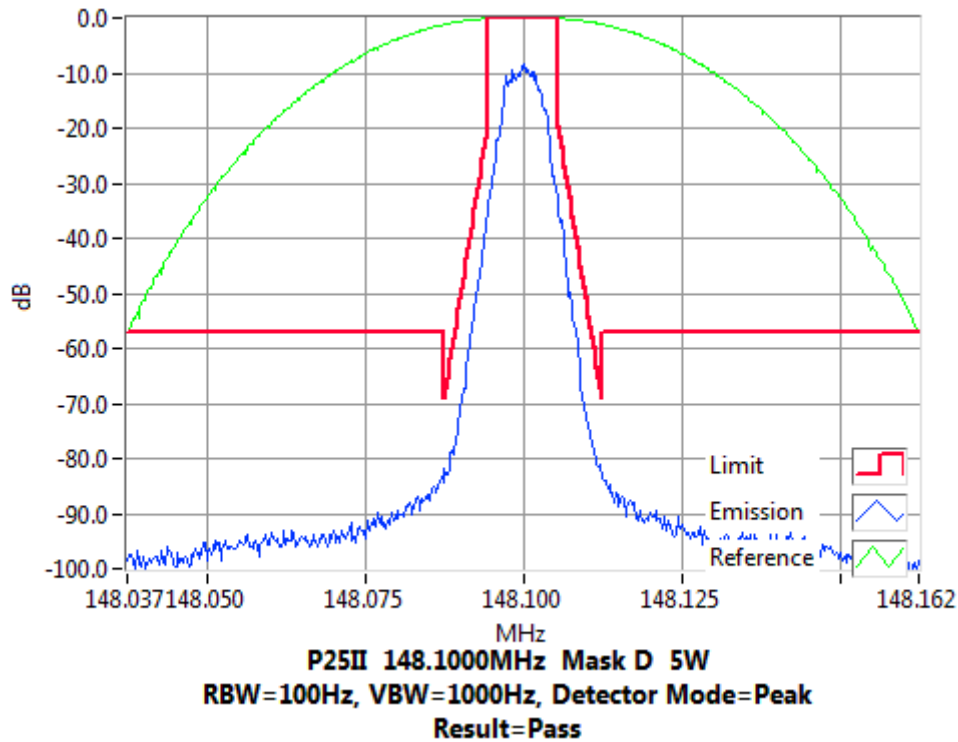

Tx FREQUENCY: 148.1 MHz 1 W 12.5 kHz Channel Spacing

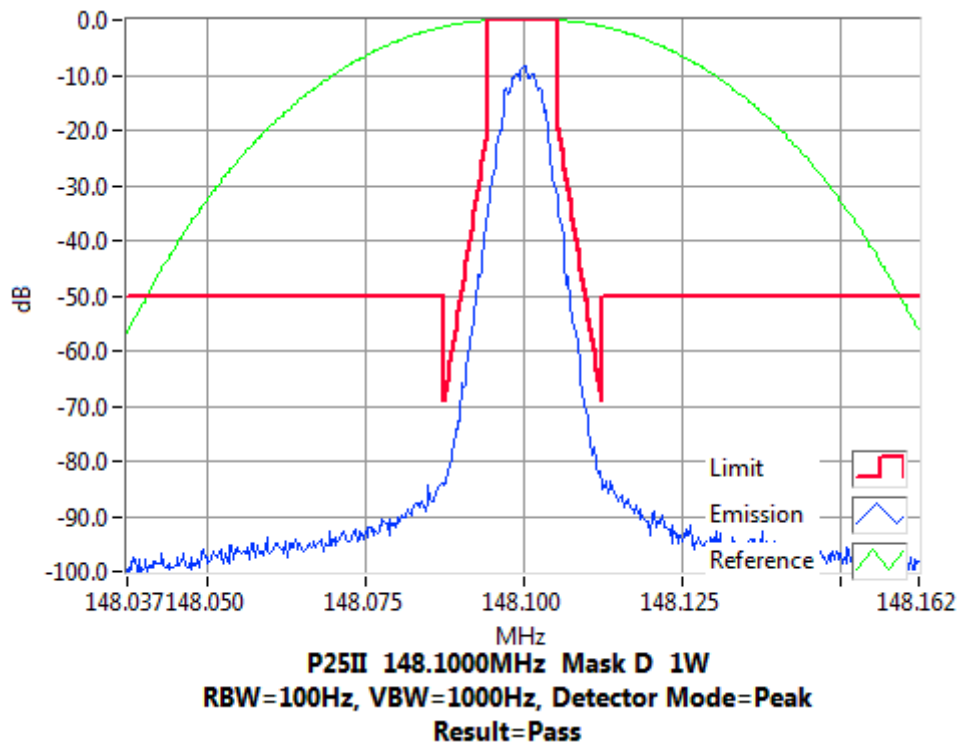


Occupied Bandwidth and Spectrum Masks


APCO P25 phase-2

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 149.8 MHz 5 W 12.5 kHz Channel Spacing

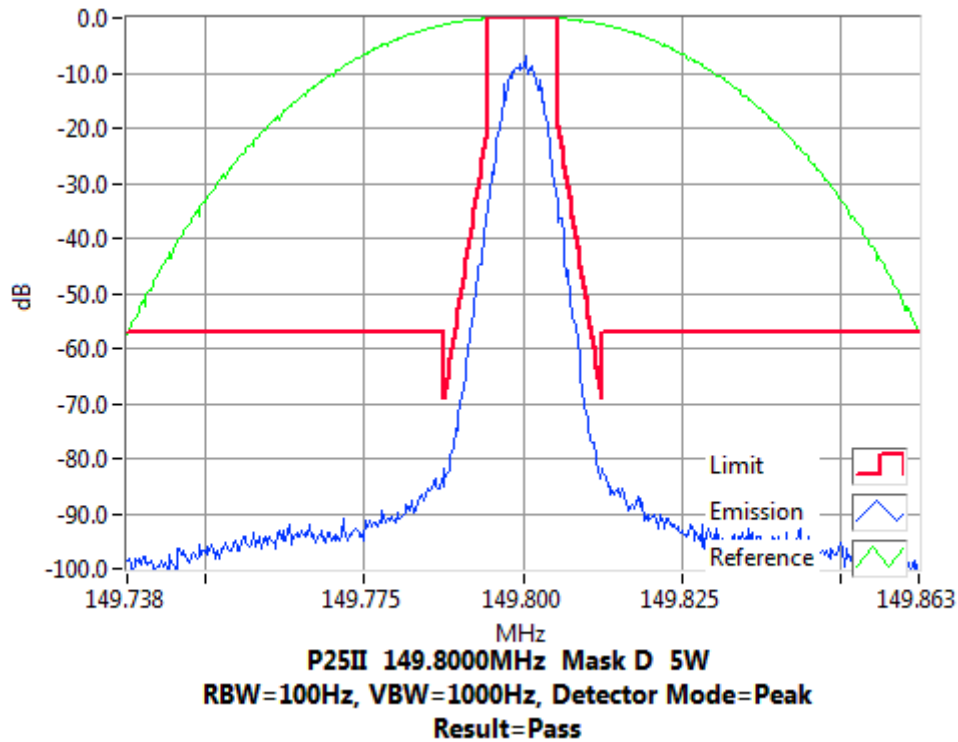

Tx FREQUENCY: 149.8 MHz 1 W 12.5 kHz Channel Spacing

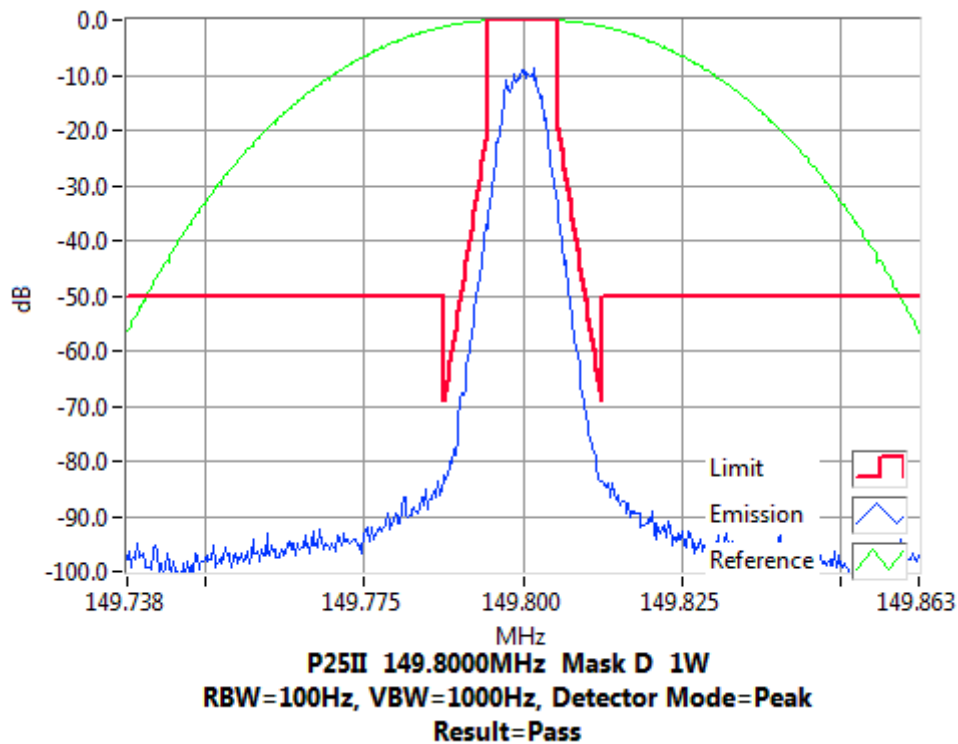


Occupied Bandwidth and Spectrum Masks


APCO P25 phase-2

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 150.1 MHz 5 W 12.5 kHz Channel Spacing

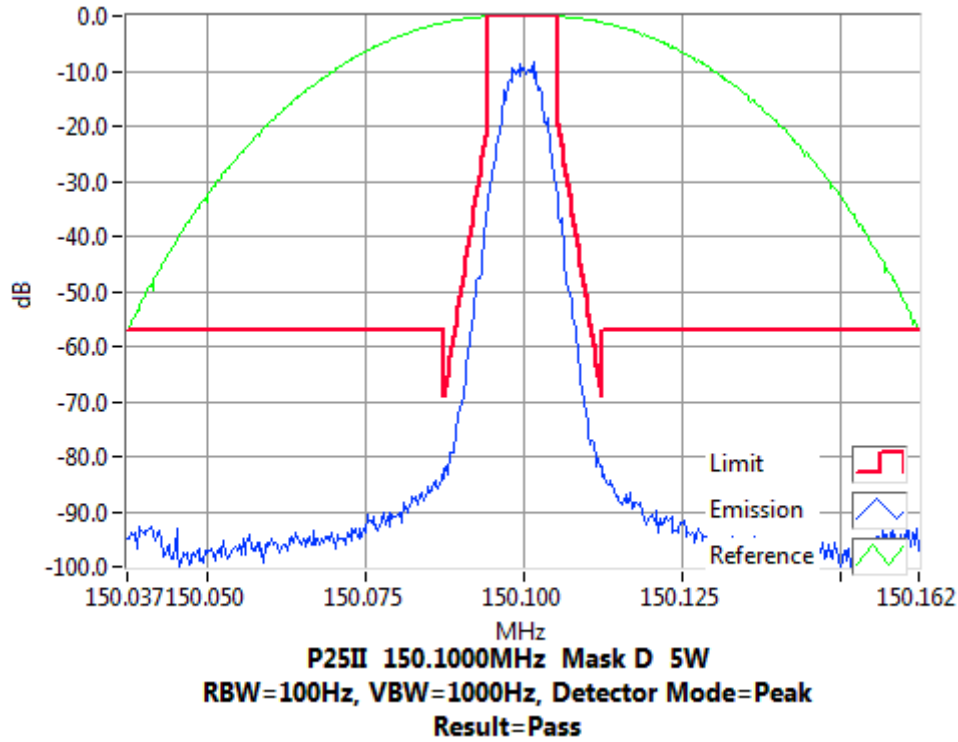

Tx FREQUENCY: 150.1 MHz 1 W 12.5 kHz Channel Spacing

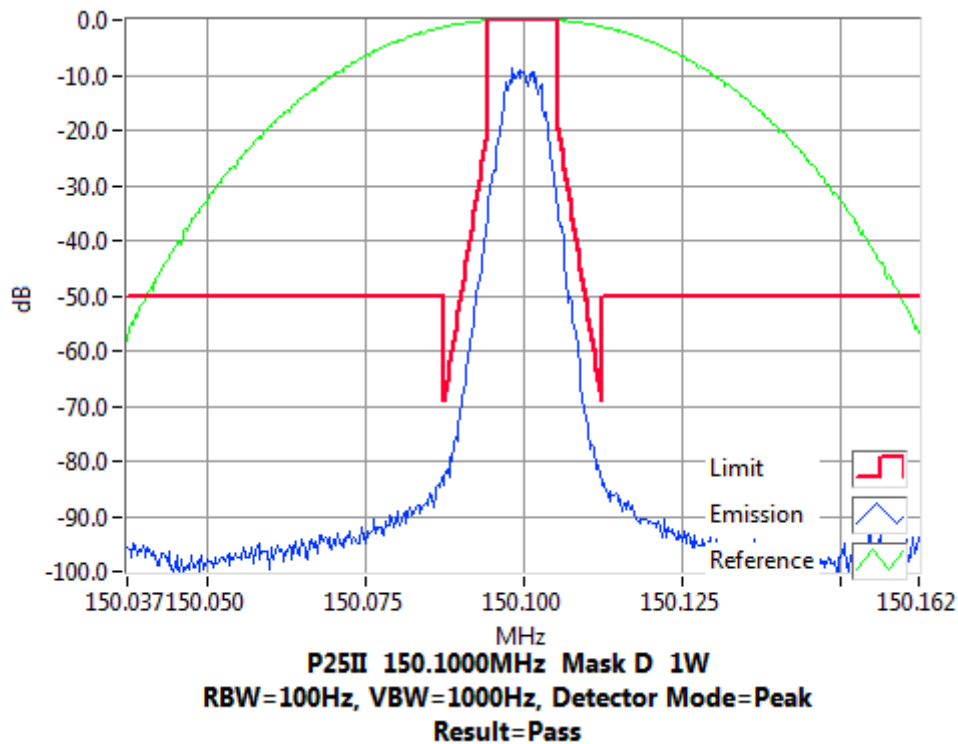


Occupied Bandwidth and Spectrum Masks


APCO P25 phase-2

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 152.0 MHz 5 W 12.5 kHz Channel Spacing

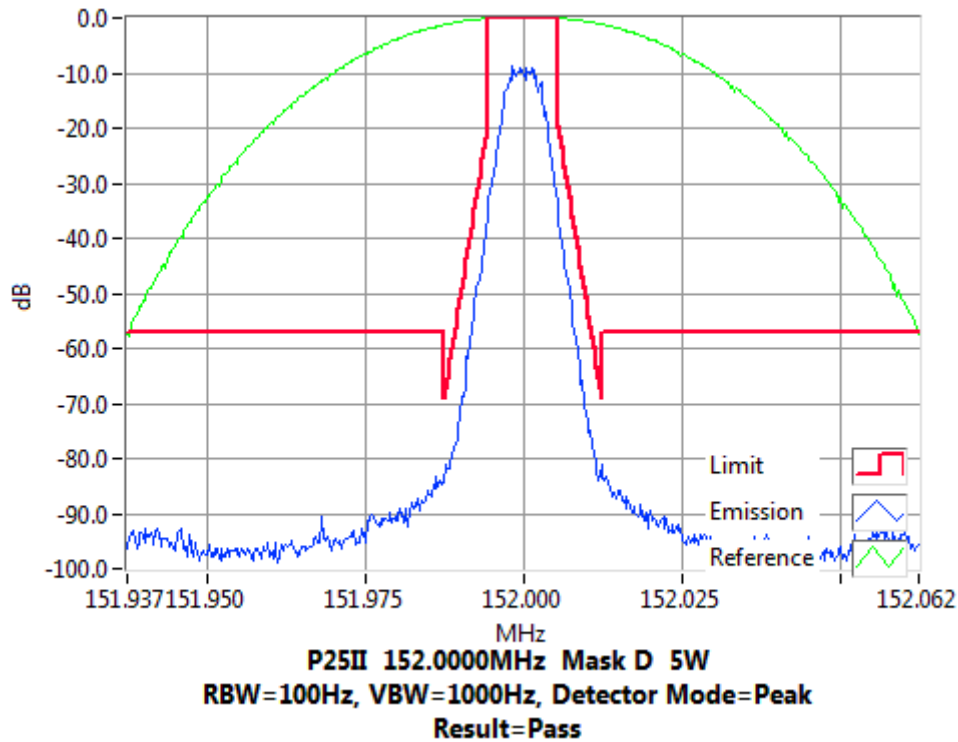

Tx FREQUENCY: 152.0 MHz 1 W 12.5 kHz Channel Spacing

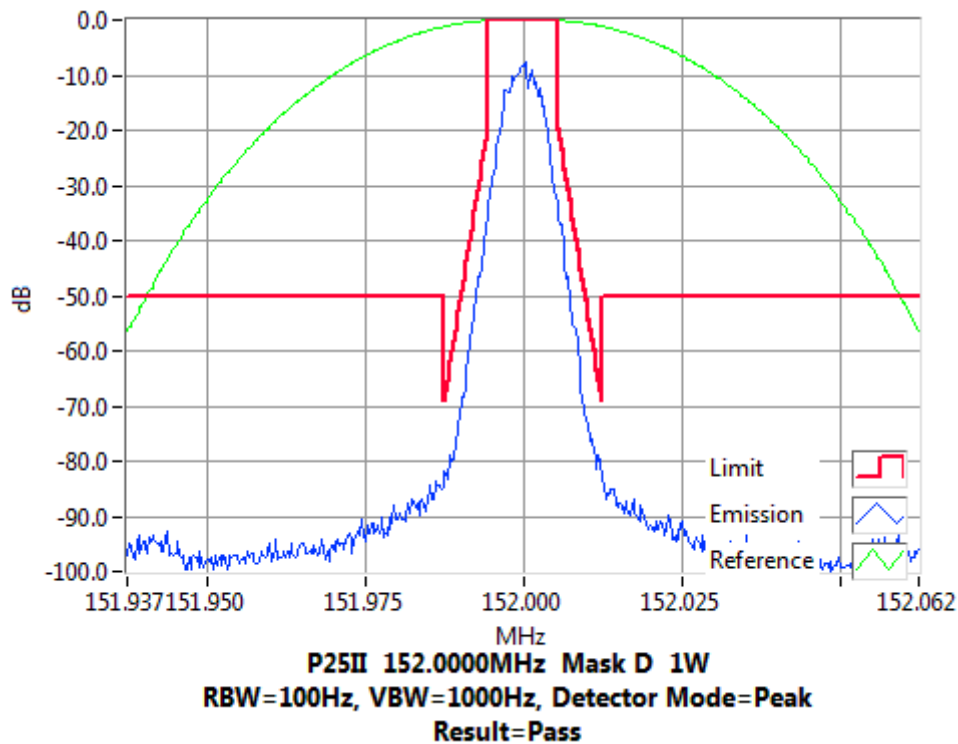


Occupied Bandwidth and Spectrum Masks


APCO P25 phase-2

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 156.3 MHz 5 W 12.5 kHz Channel Spacing

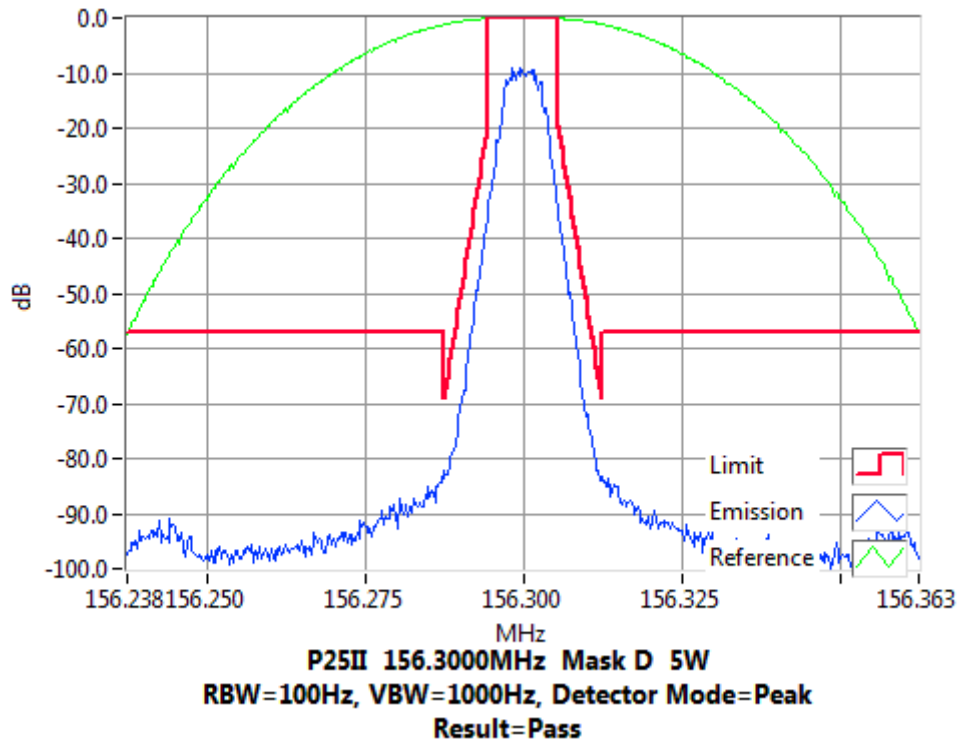

Tx FREQUENCY: 156.3 MHz 1 W 12.5 kHz Channel Spacing

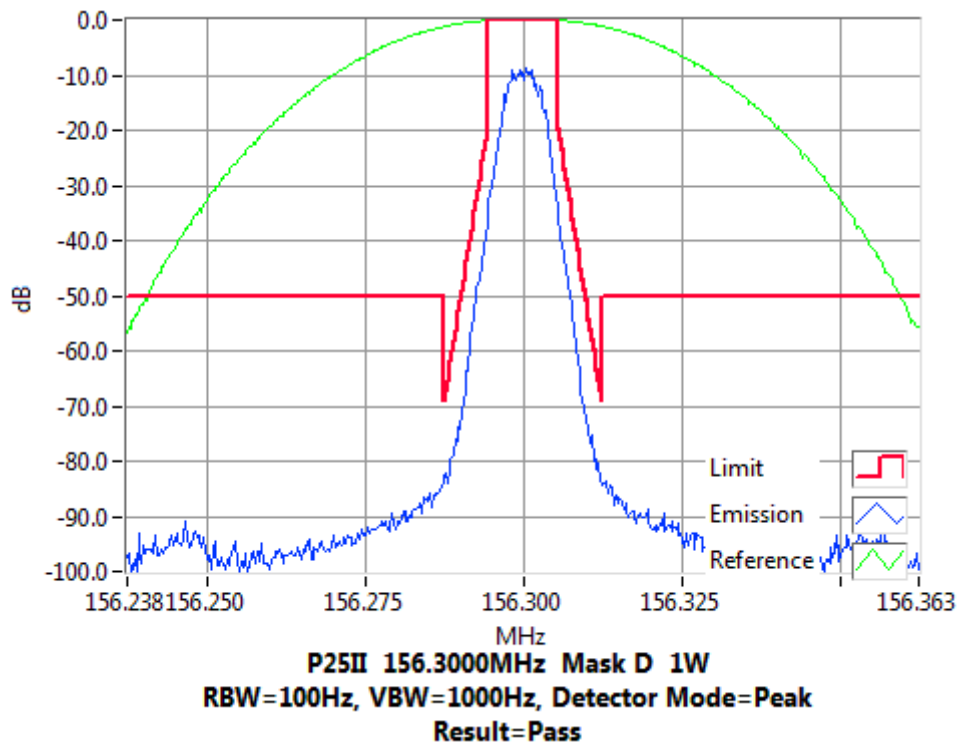


Occupied Bandwidth and Spectrum Masks


APCO P25 phase-2

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 156.67 MHz 5 W 12.5 kHz Channel Spacing

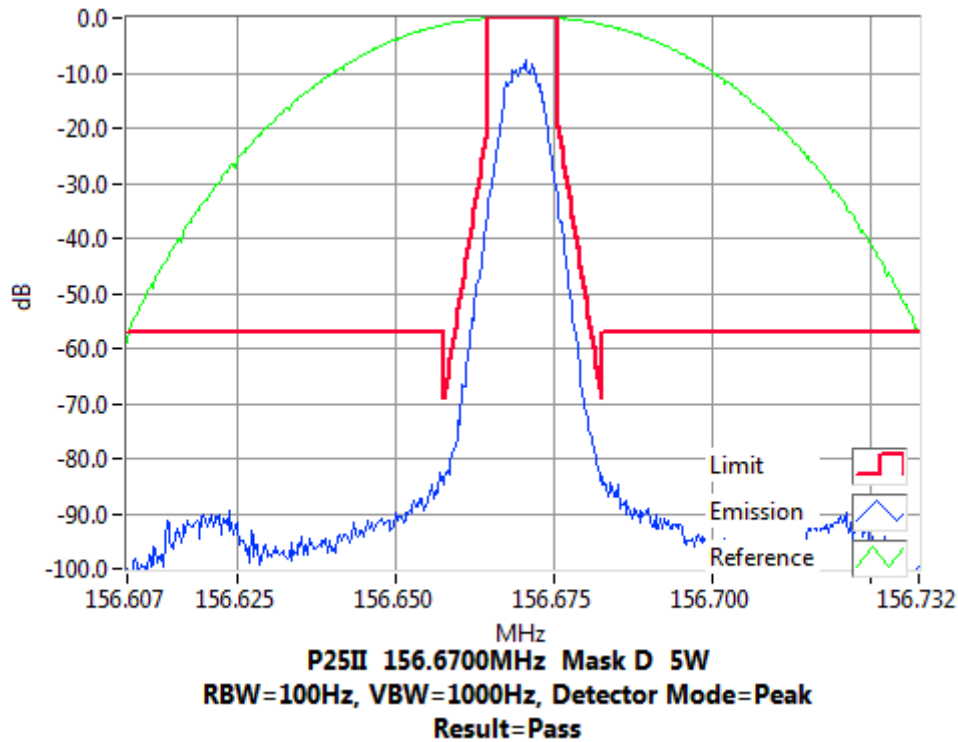

Tx FREQUENCY: 156.67 MHz 1 W 12.5 kHz Channel Spacing

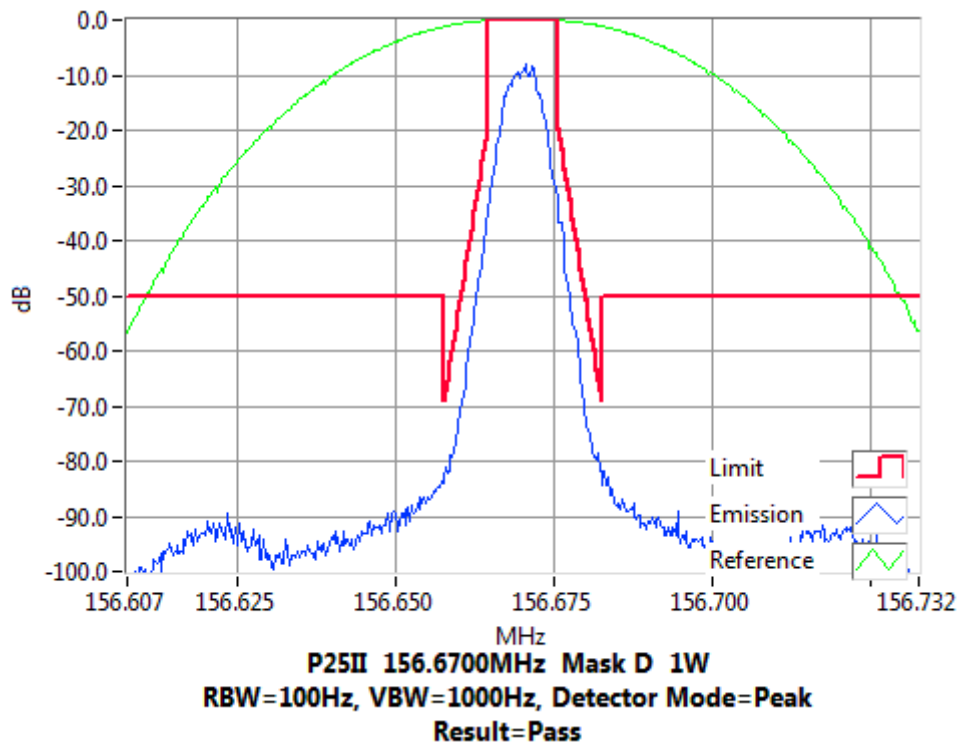


Occupied Bandwidth and Spectrum Masks


APCO P25 phase-2

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 157.0 MHz 5 W 12.5 kHz Channel Spacing

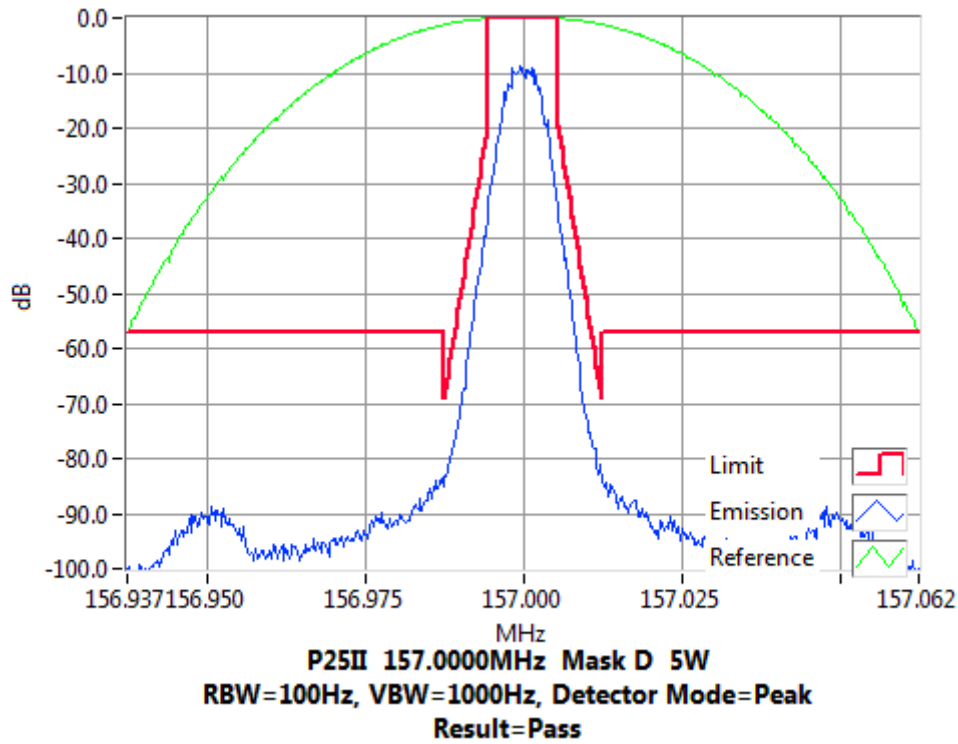

Tx FREQUENCY: 157.0 MHz 1 W 12.5 kHz Channel Spacing

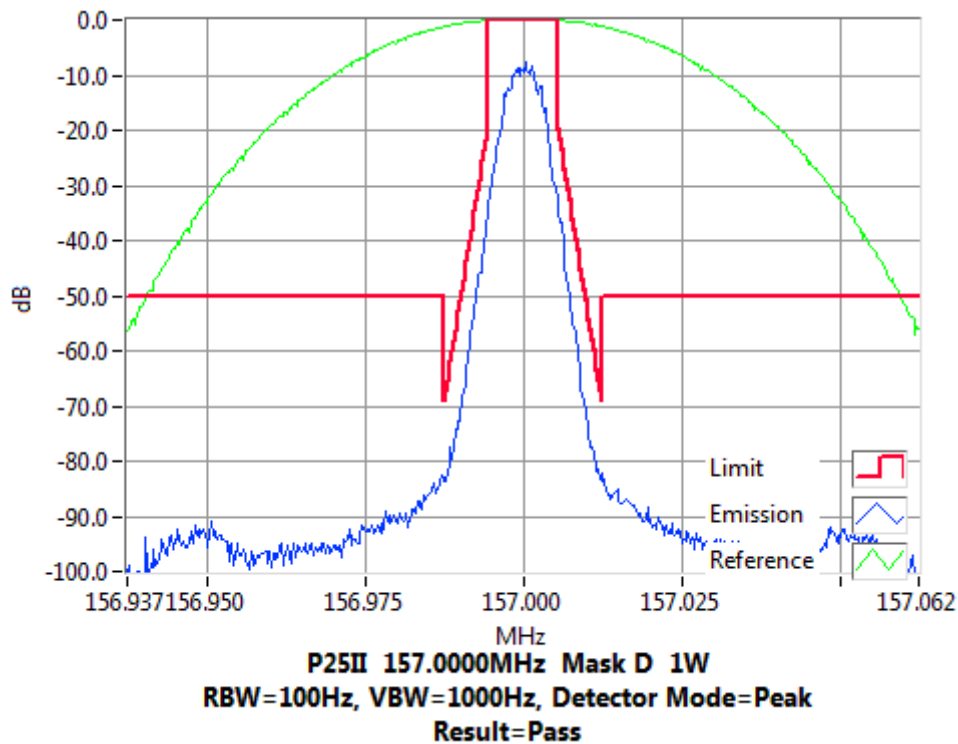


Occupied Bandwidth and Spectrum Masks


APCO P25 phase-2

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 160.0 MHz 5 W 12.5 kHz Channel Spacing

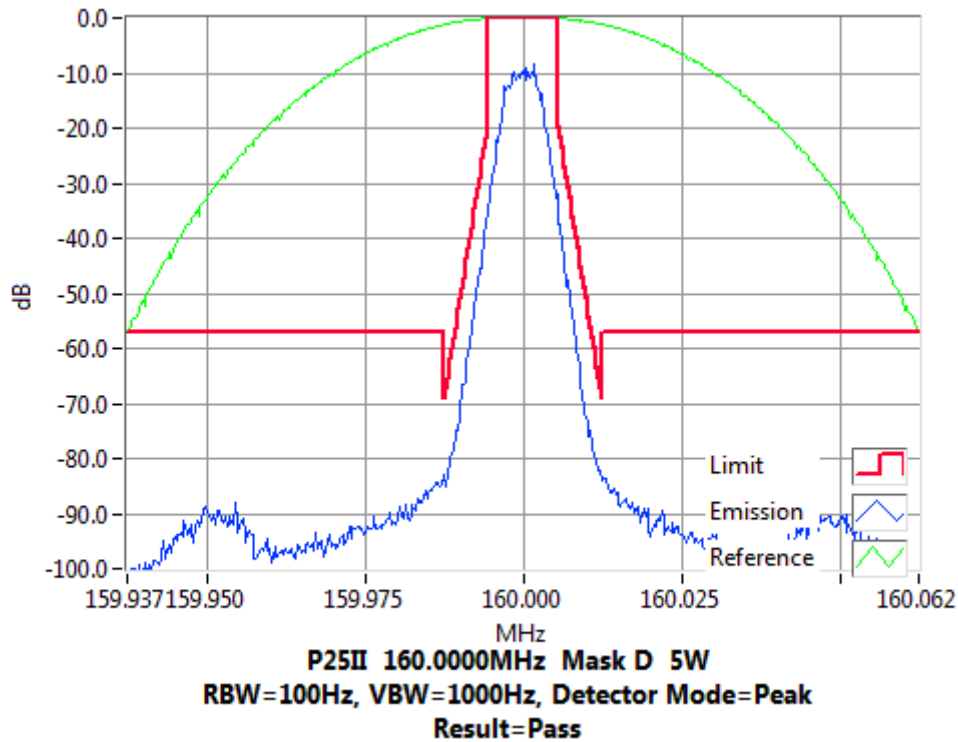

Tx FREQUENCY: 160.0 MHz 1 W 12.5 kHz Channel Spacing

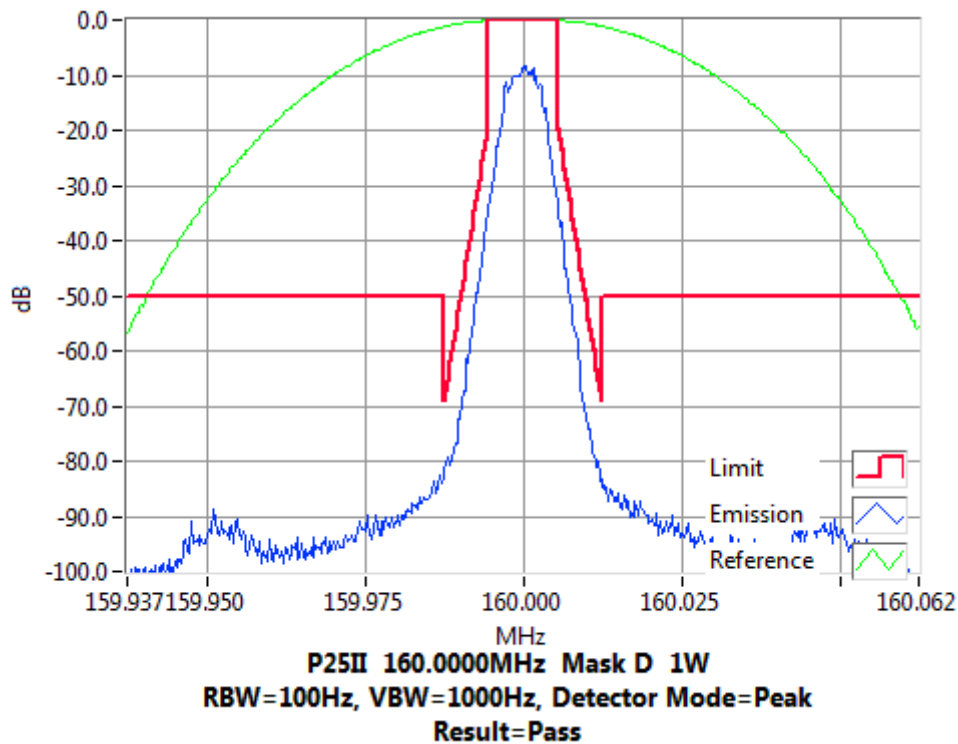


Occupied Bandwidth and Spectrum Masks


APCO P25 phase-2

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 161.0 MHz 5 W 12.5 kHz Channel Spacing

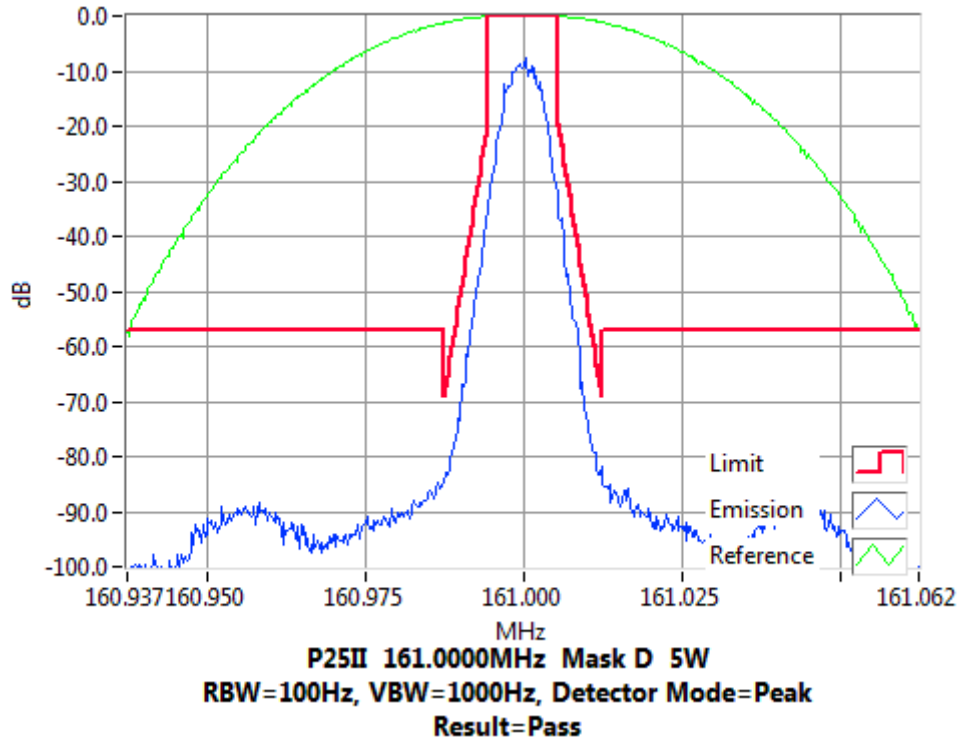

Tx FREQUENCY: 161.0 MHz 1 W 12.5 kHz Channel Spacing

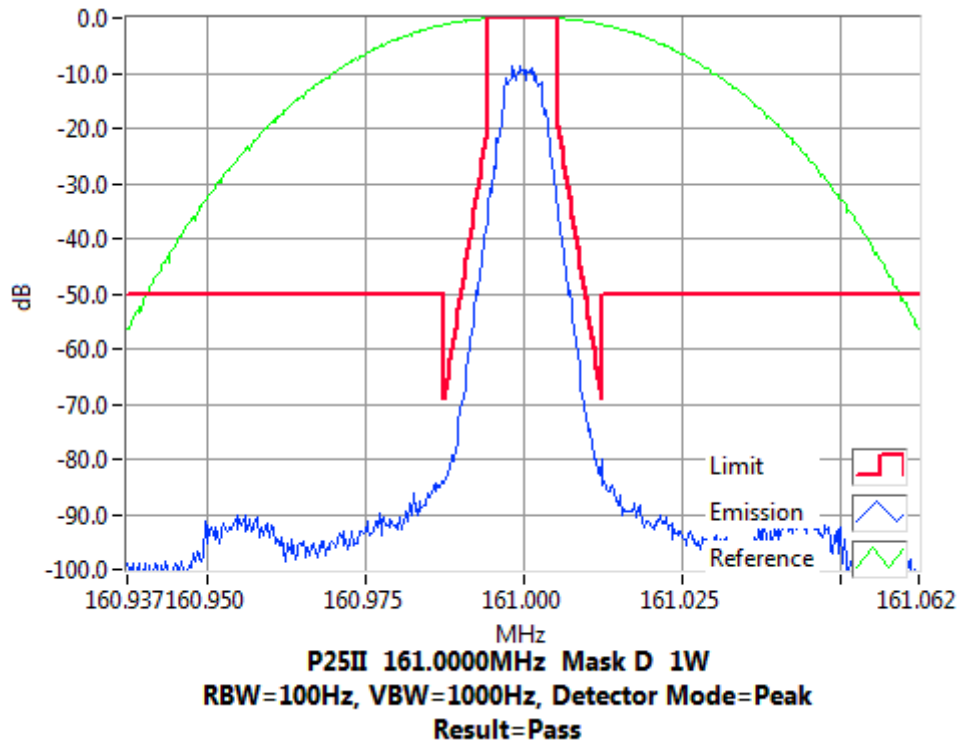


Occupied Bandwidth and Spectrum Masks


APCO P25 phase-2

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 162.0 MHz 5 W 12.5 kHz Channel Spacing

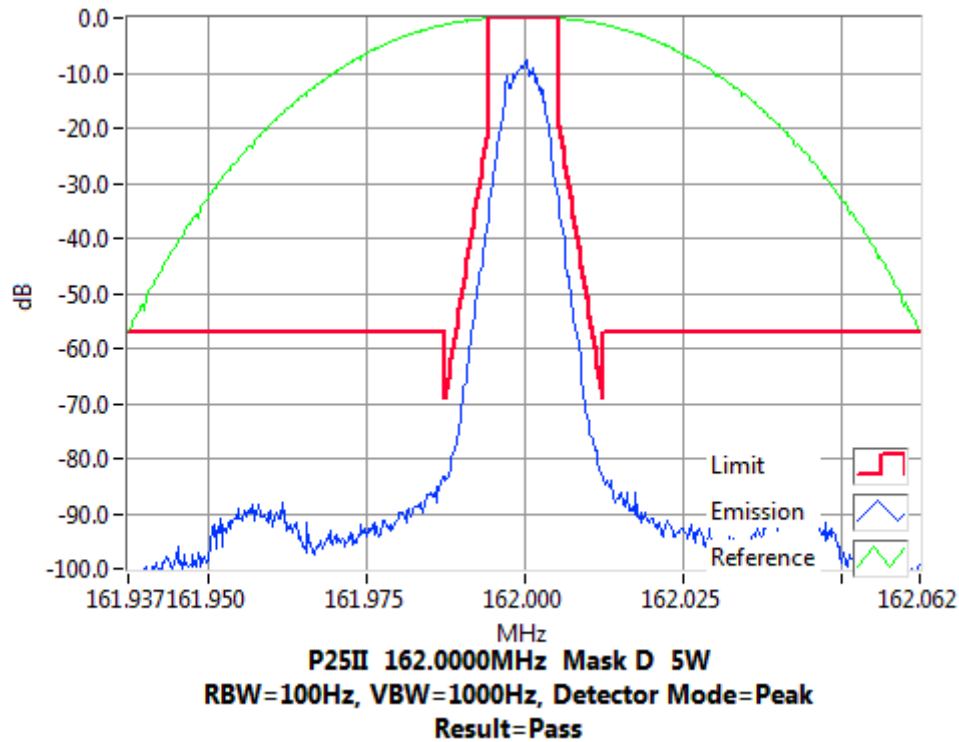

Tx FREQUENCY: 162.0 MHz 1 W 12.5 kHz Channel Spacing

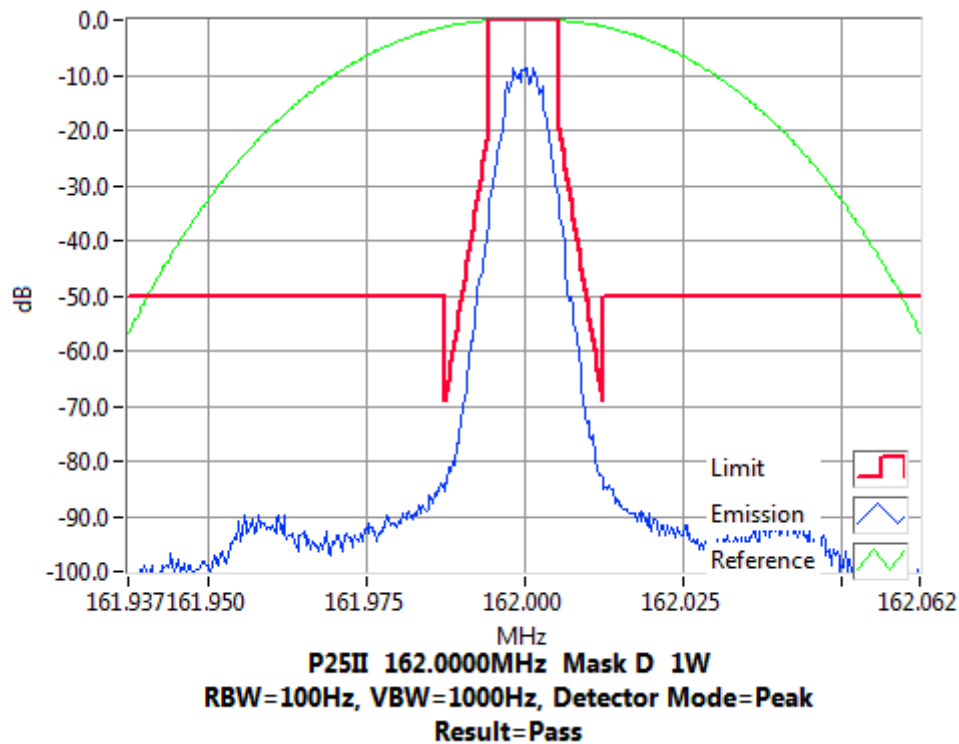


Occupied Bandwidth and Spectrum Masks


APCO P25 phase-2

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 162.1 MHz 5 W 12.5 kHz Channel Spacing

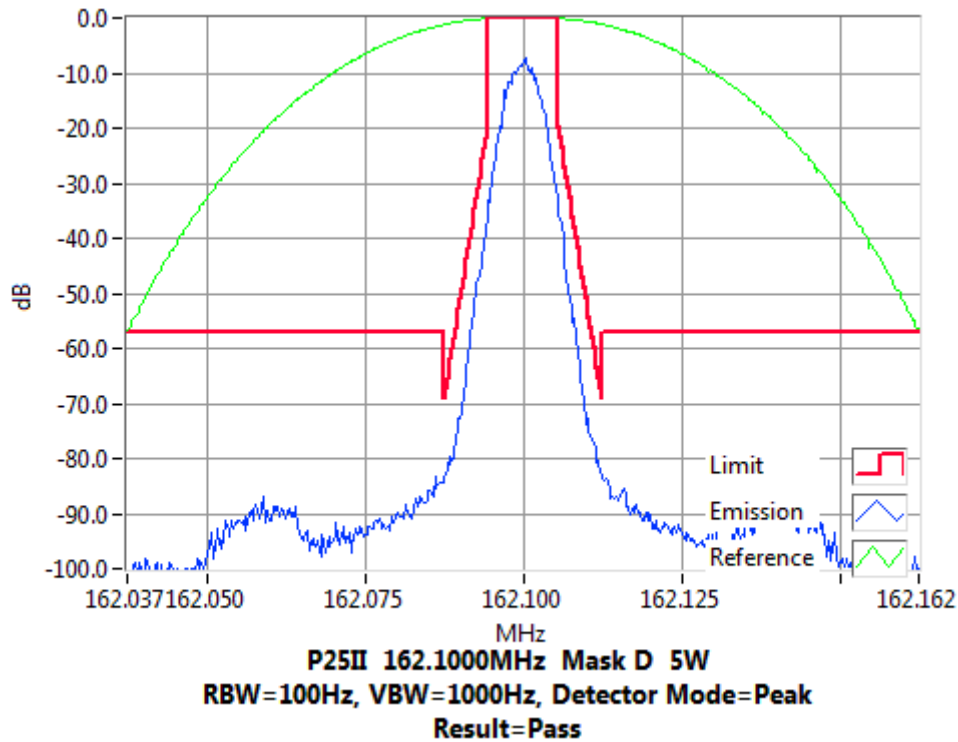

Tx FREQUENCY: 162.1 MHz 1 W 12.5 kHz Channel Spacing

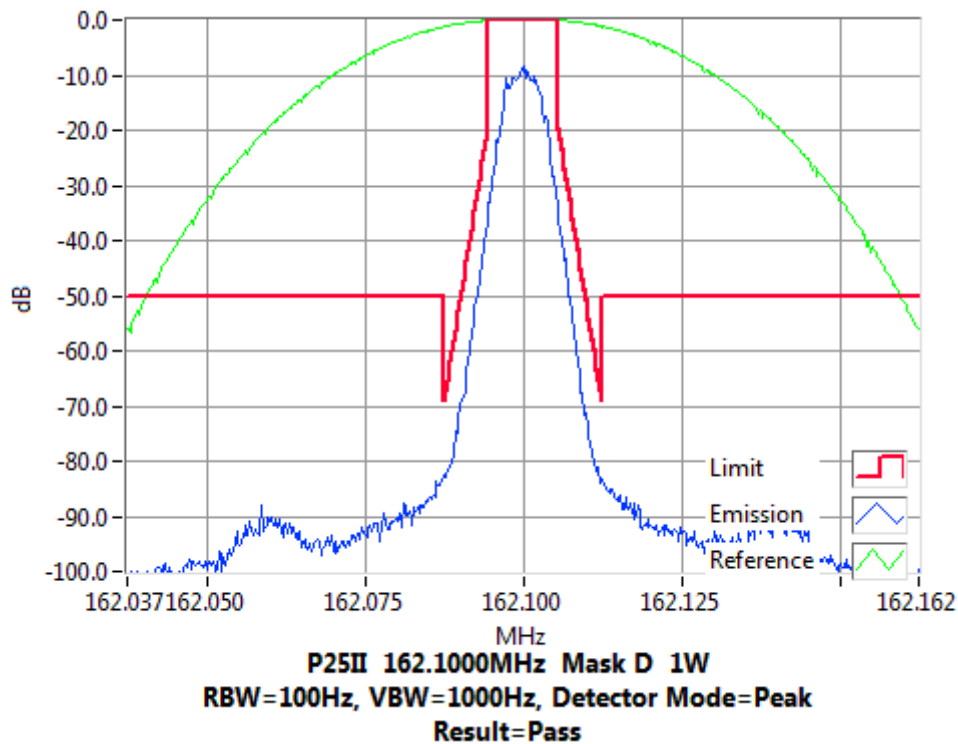


Occupied Bandwidth and Spectrum Masks


APCO P25 phase-2

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 168.0 MHz 5 W 12.5 kHz Channel Spacing

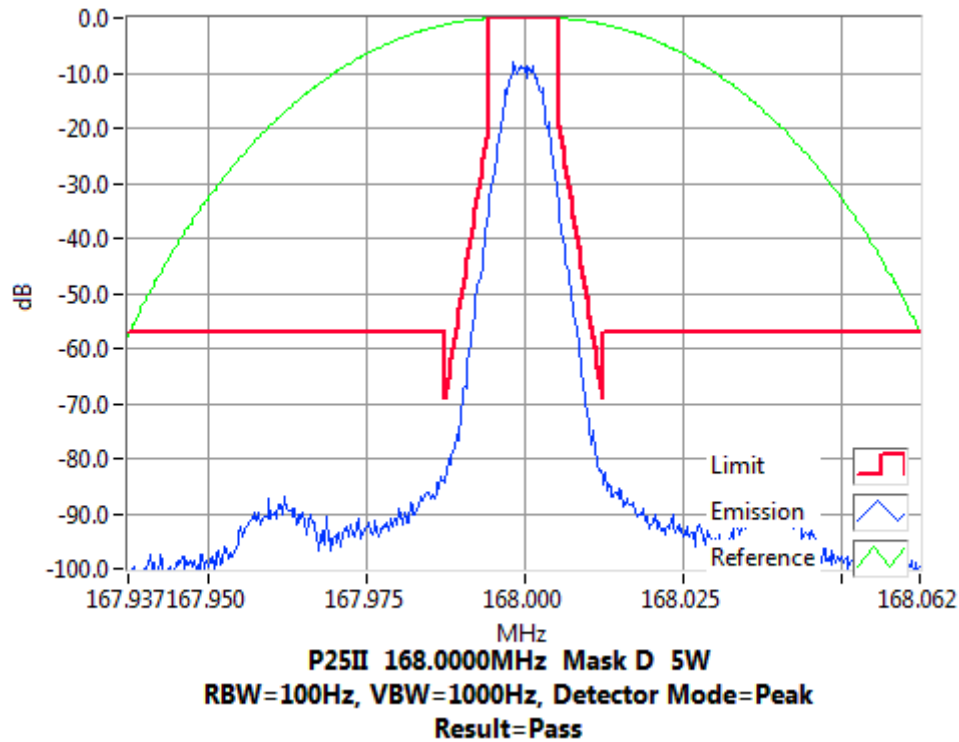

Tx FREQUENCY: 168.0 MHz 1 W 12.5 kHz Channel Spacing

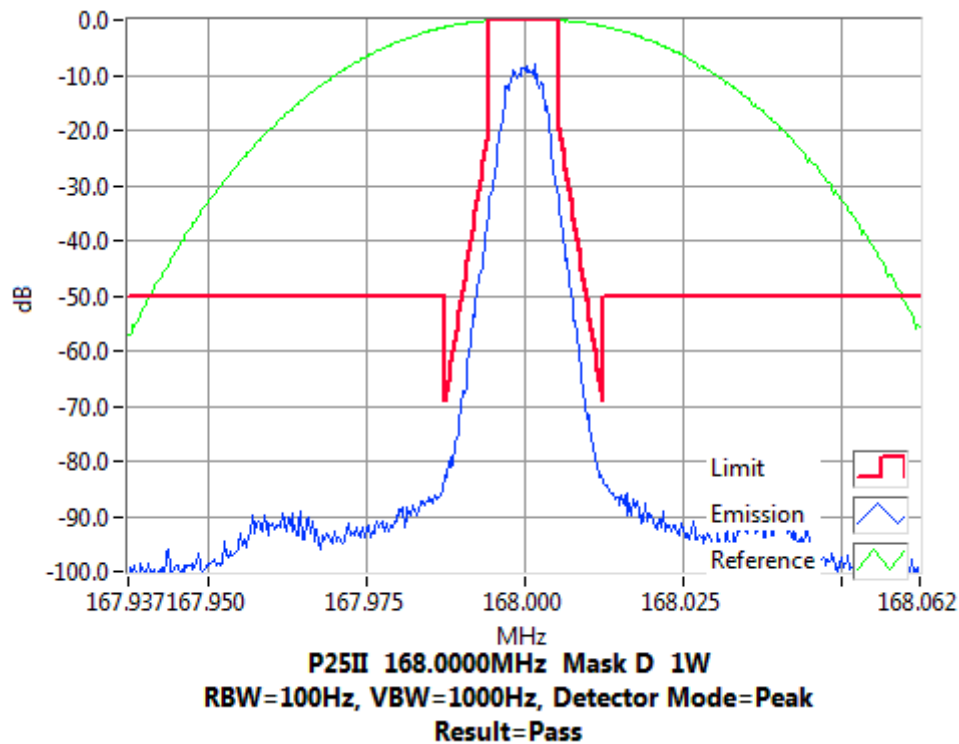


Occupied Bandwidth and Spectrum Masks


APCO P25 phase-2

SPECIFICATION: FCC CFR 2.1049 (c) RSS-119 5.5

Tx FREQUENCY: 173.9 MHz 5 W 12.5 kHz Channel Spacing

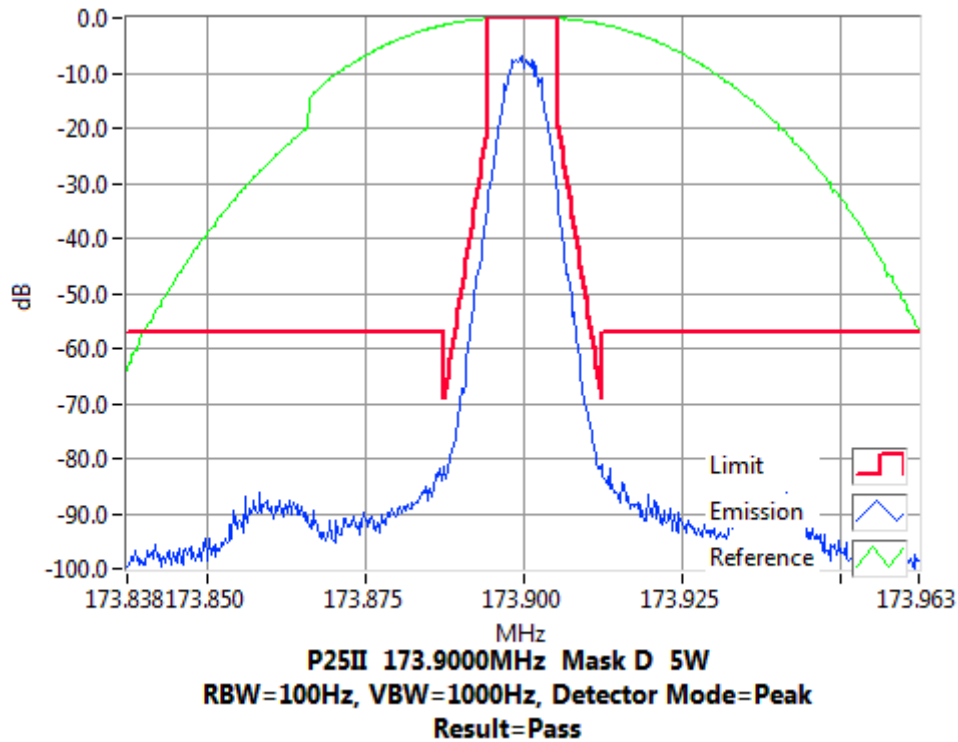

Tx FREQUENCY: 173.9 MHz 1 W 12.5 kHz Channel Spacing

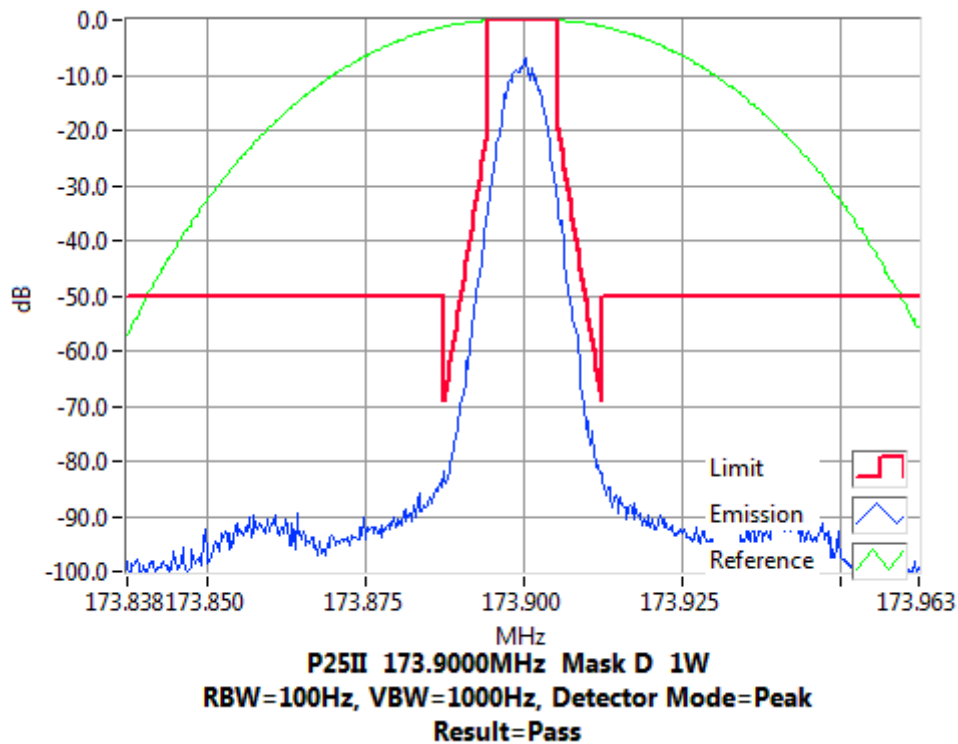

TRANSMITTER SPURIOUS EMISSIONS (CONDUCTED)

SPECIFICATIONS: FCC 47 CFR 2.1051

RSS-119 5.8

GUIDE: TIA/EIA-603D 2.2.13

MEASUREMENT PROCEDURE:

1. Refer Annex A for equipment set up.
2. The frequency range examined was from the lowest frequency generated within the EUT, to a frequency higher than the 10th Harmonic: 10 kHz to Fc-BW
Fc+ BW to >10Fc (2 GHz)
3. Frequencies above 270 MHz were measured using a band-stop filter to suppress the on-channel signal.
4. The spectrum analyser was loaded with the appropriate calibration figures to compensate for the cables, attenuator and filter losses.

Spurious emissions which were attenuated by more than 20 dB below the limit were not recorded.

A photograph of the test set-up is included below.


MEASUREMENT RESULTS:

See the tables and plots on the following pages for 12.5 kHz channel spacing.

LIMIT CLAUSES: FCC 47 CFR 90.210

RSS-119 5.8

Photo: Conducted Emissions Test Setup

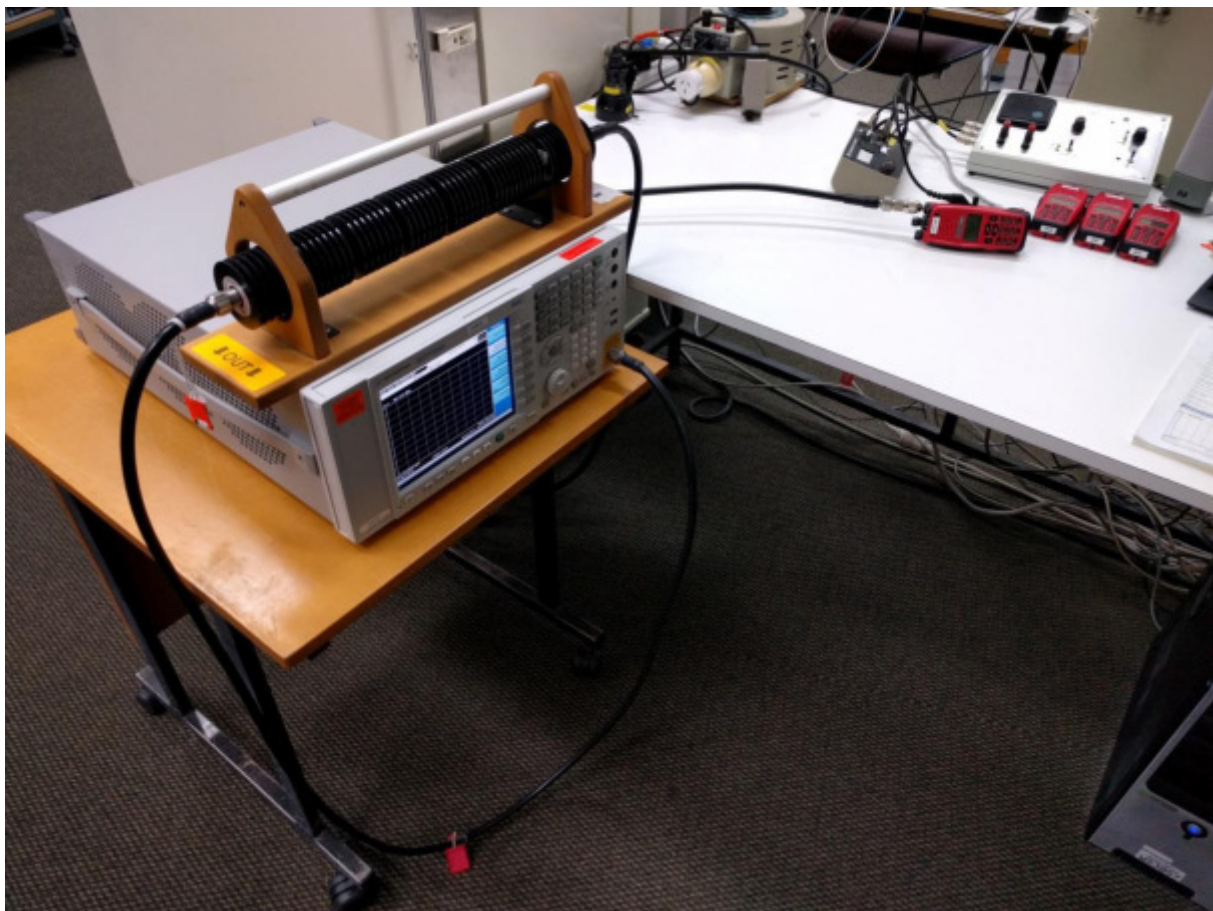

Spurious Emissions (Tx Conducted)

SPECIFICATION: FCC CFR 2.1051

RSS-119 5.8

12.5 kHz Channel Spacing

138.1 MHz @ 5 W

Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~

12.5 kHz Channel Spacing


138.1 MHz @ 1 W

Emission Mask D






Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~
Measurement Uncertainty:	≤12.75 GHz ± 3.0 dB	
No emissions were detected at a level greater than 20 dB below the limit.		

Spurious Emissions (Tx Conducted)

138.1 MHz 5 watts

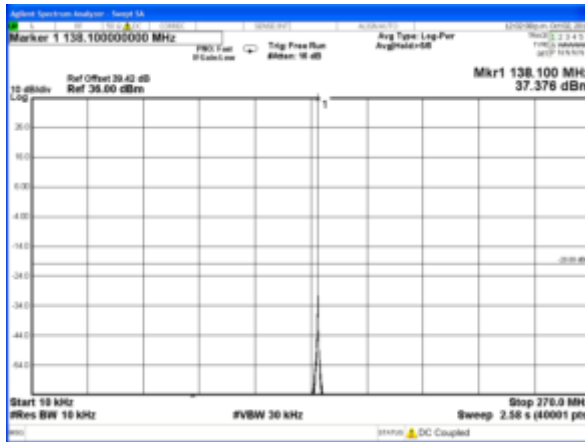

138.1 MHz 1 watt

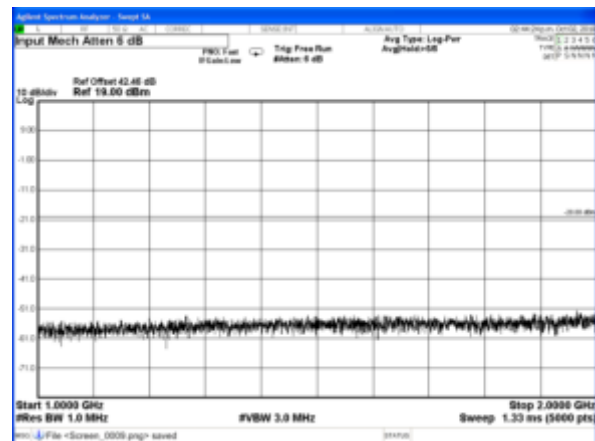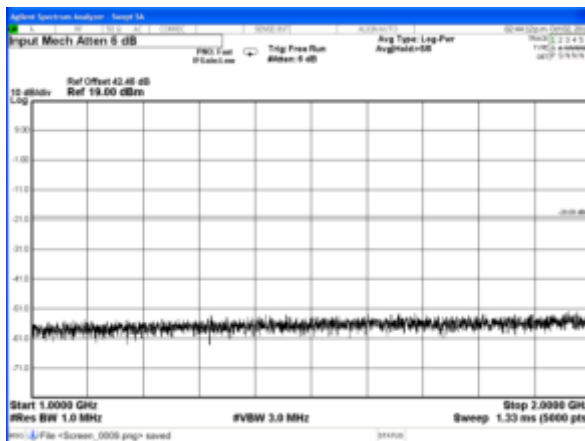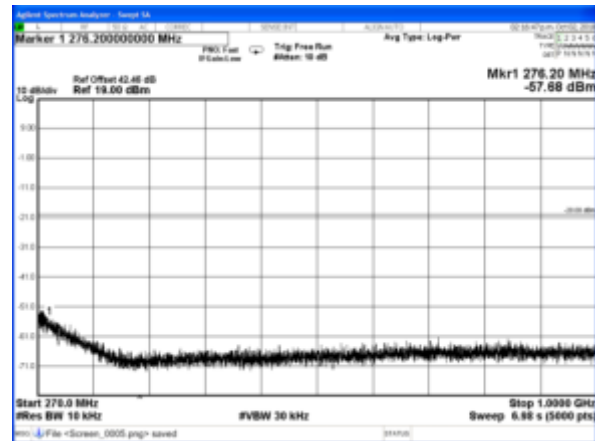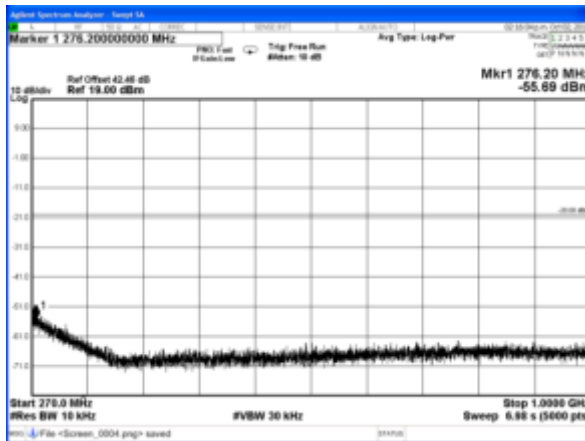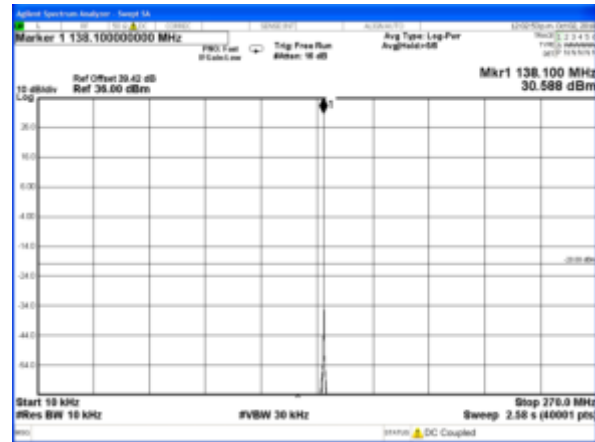

Spurious Emissions (Tx Conducted)

SPECIFICATION: FCC CFR 2.1051

RSS-119 5.8

12.5 kHz Channel Spacing

143.9 MHz @ 5 W

Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~

12.5 kHz Channel Spacing


143.9 MHz @ 1 W

Emission Mask D






Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~
Measurement Uncertainty:	≤12.75 GHz ± 3.0 dB	
No emissions were detected at a level greater than 20 dB below the limit.		

Spurious Emissions (Tx Conducted)

143.9 MHz 5 watts

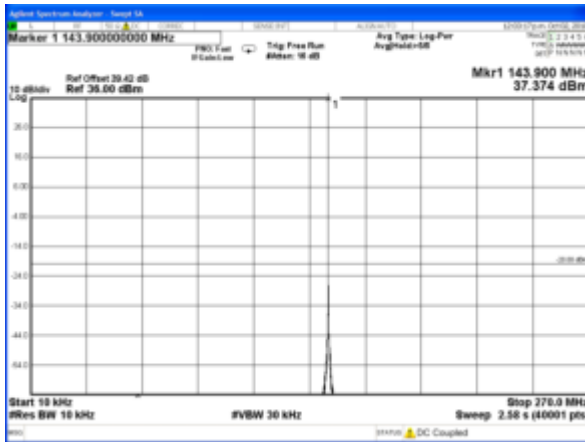

143.9 MHz 1 watt

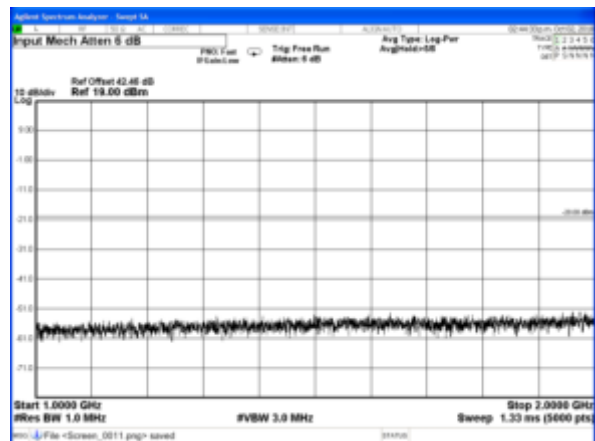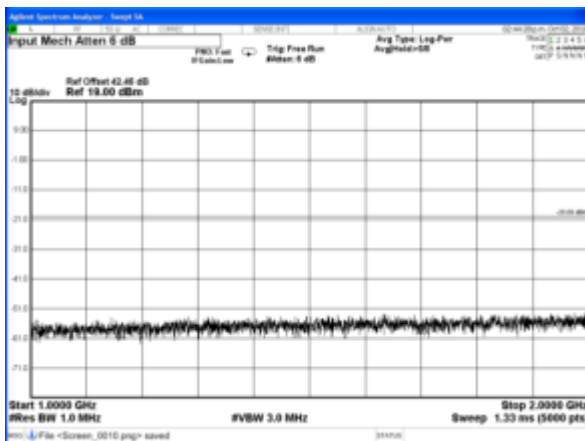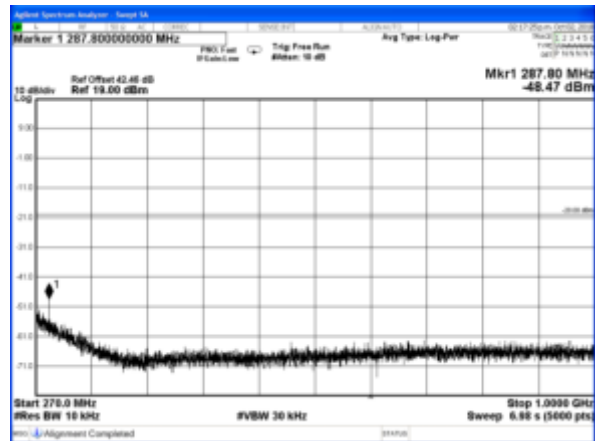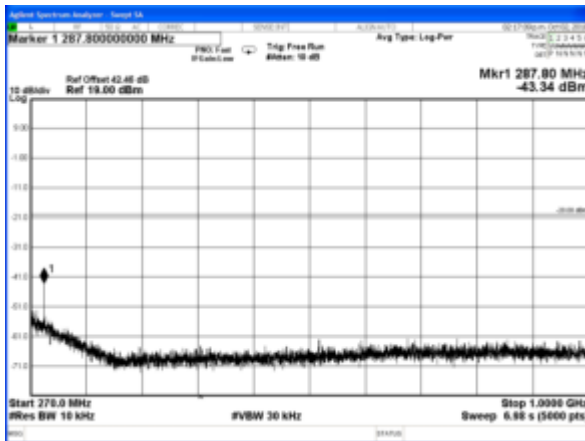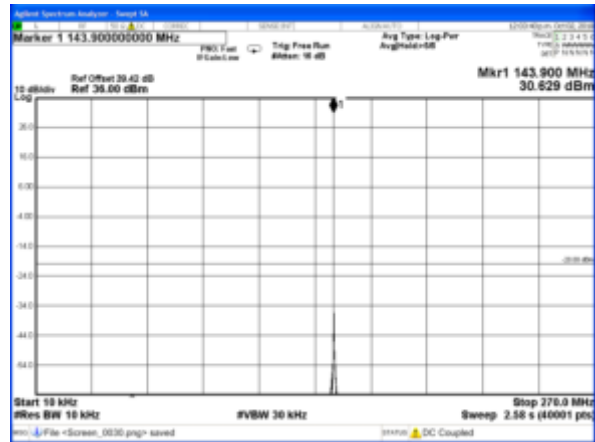

Spurious Emissions (Tx Conducted)

SPECIFICATION: FCC CFR 2.1051

RSS-119 5.8

12.5 kHz Channel Spacing

148.1 MHz @ 5 W

Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~

12.5 kHz Channel Spacing

148.1 MHz @ 1 W







Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~
Measurement Uncertainty:	≤12.75 GHz ± 3.0 dB	
No emissions were detected at a level greater than 20 dB below the limit.		

Spurious Emissions (Tx Conducted)

148.1 MHz 5 watts

148.1 MHz 1 watt

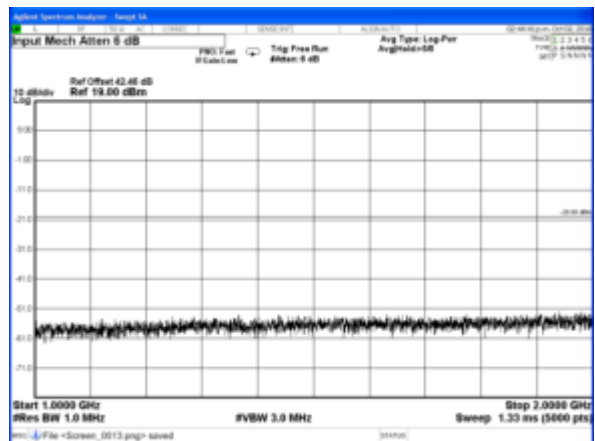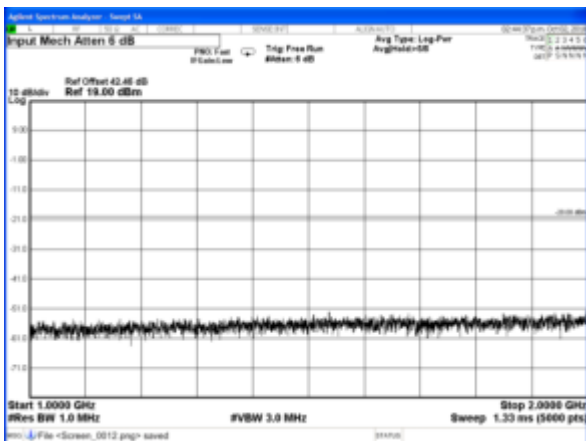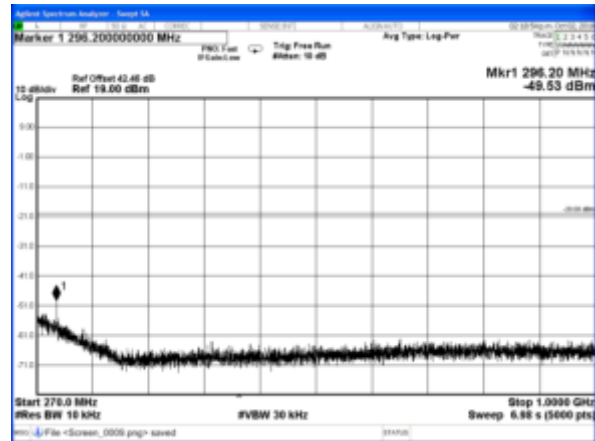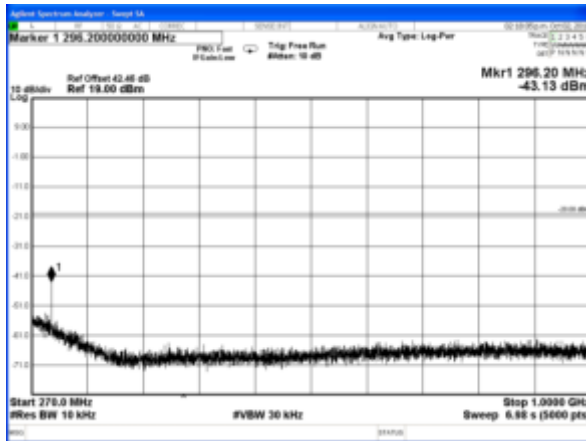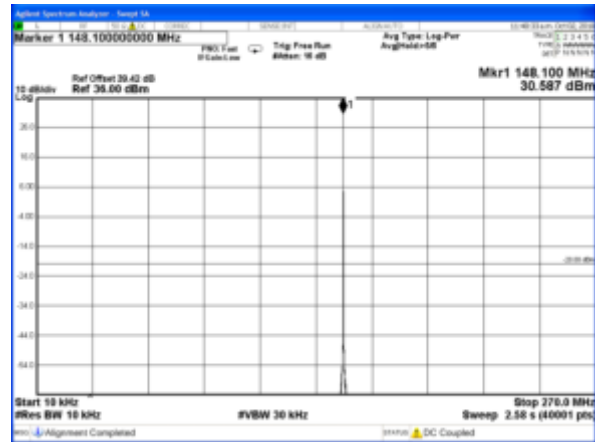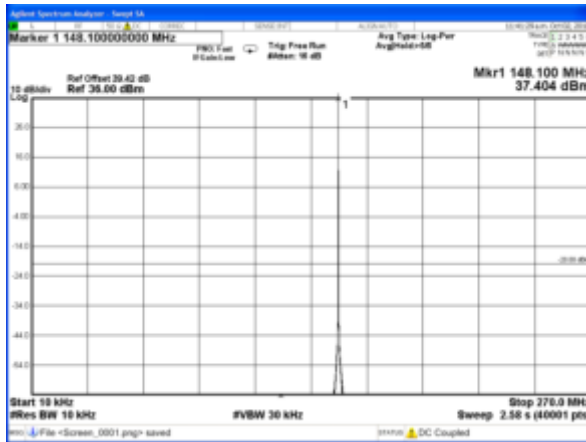

Spurious Emissions (Tx Conducted)

SPECIFICATION: FCC CFR 2.1051

RSS-119 5.8

12.5 kHz Channel Spacing

149.8 MHz @ 5 W

Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~

12.5 kHz Channel Spacing


149.8 MHz @ 1 W

Emission Mask D






Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~
Measurement Uncertainty:	≤12.75 GHz ± 3.0 dB	
No emissions were detected at a level greater than 20 dB below the limit.		

Spurious Emissions (Tx Conducted)

149.8 MHz 5 watts

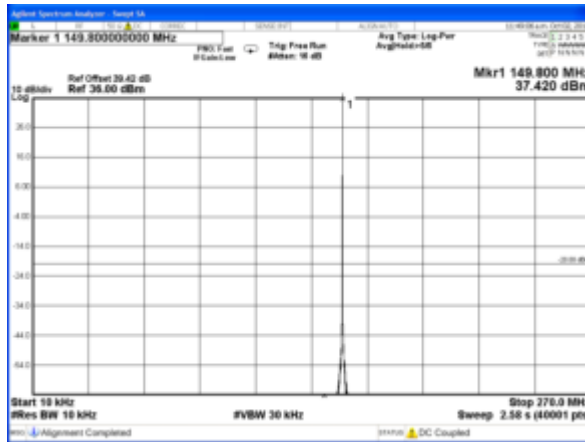

149.8 MHz 1 watt

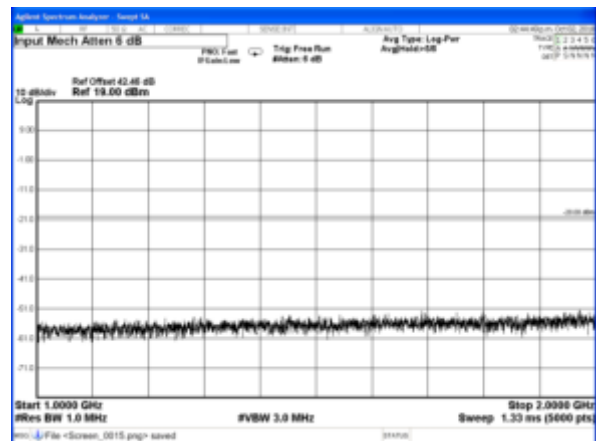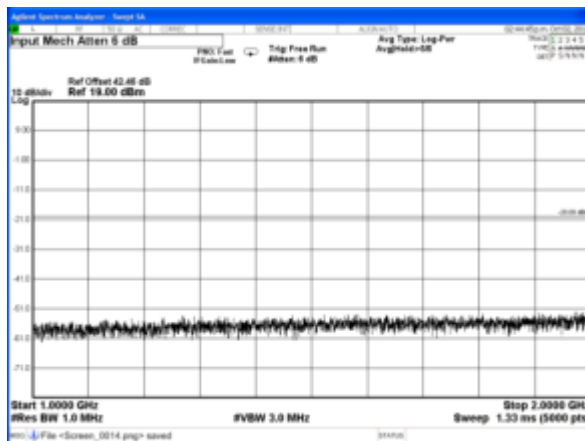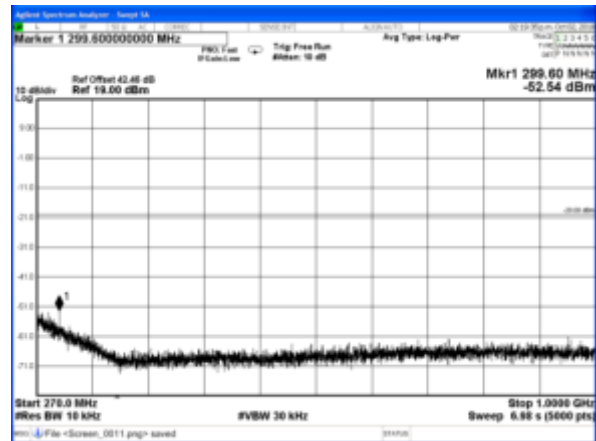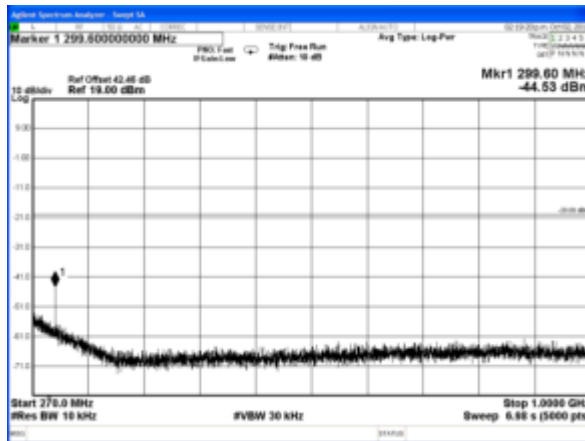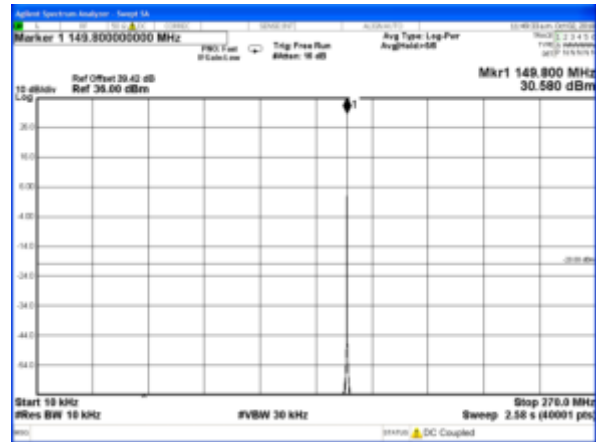

Spurious Emissions (Tx Conducted)

SPECIFICATION: FCC CFR 2.1051

RSS-119 5.8

12.5 kHz Channel Spacing

150.1 MHz @ 5 W

Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~

12.5 kHz Channel Spacing

150.1 MHz @ 1 W







Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~
Measurement Uncertainty:	≤12.75 GHz ± 3.0 dB	
No emissions were detected at a level greater than 20 dB below the limit.		

Spurious Emissions (Tx Conducted)

150.1 MHz 5 watts

150.1 MHz 1 watt

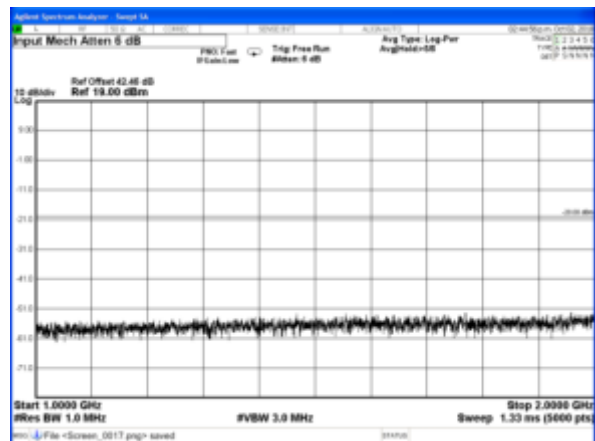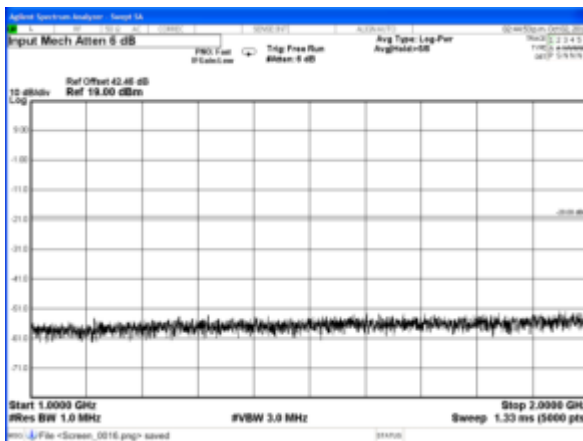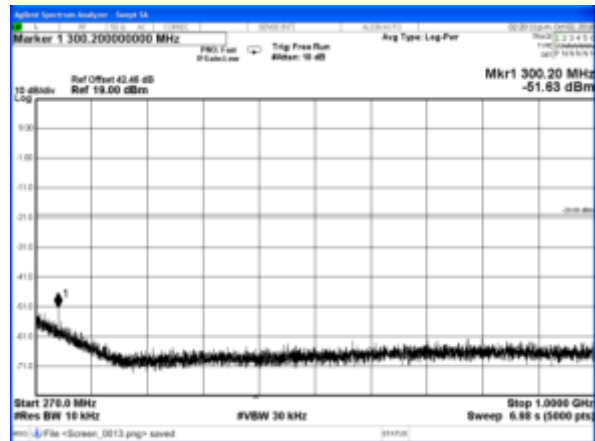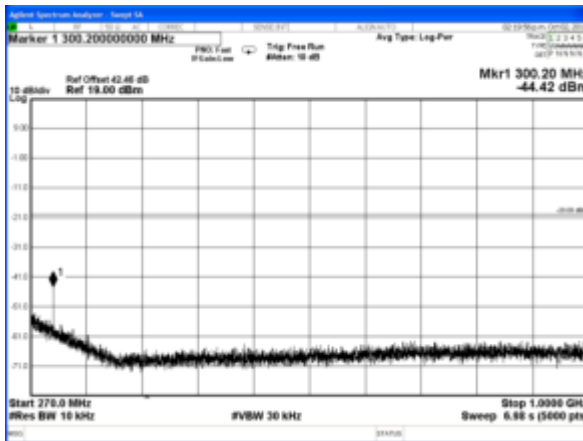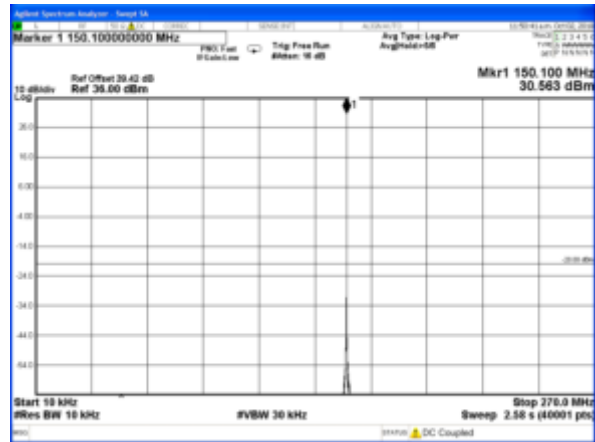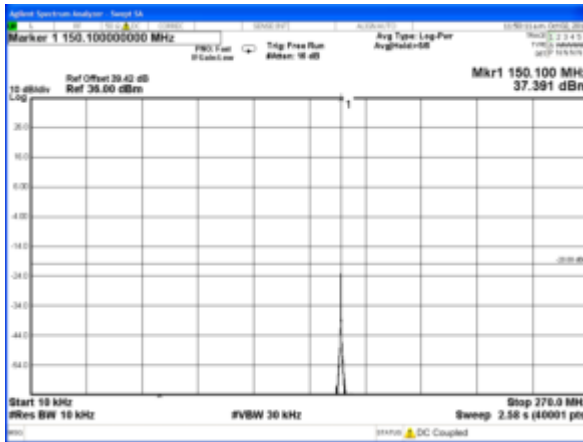

Spurious Emissions (Tx Conducted)

SPECIFICATION: FCC CFR 2.1051

RSS-119 5.8

12.5 kHz Channel Spacing

152.0 MHz @ 5 W

Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~

12.5 kHz Channel Spacing

152.0 MHz @ 1 W







Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~
Measurement Uncertainty:	≤12.75 GHz ± 3.0 dB	
No emissions were detected at a level greater than 20 dB below the limit.		

Spurious Emissions (Tx Conducted)

152.0 MHz 5 watts

152.0 MHz 1 watt

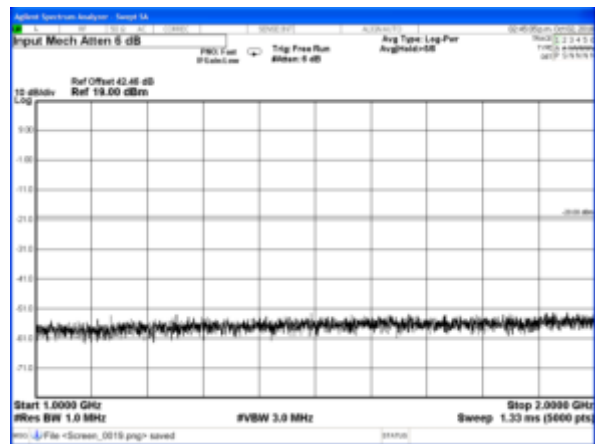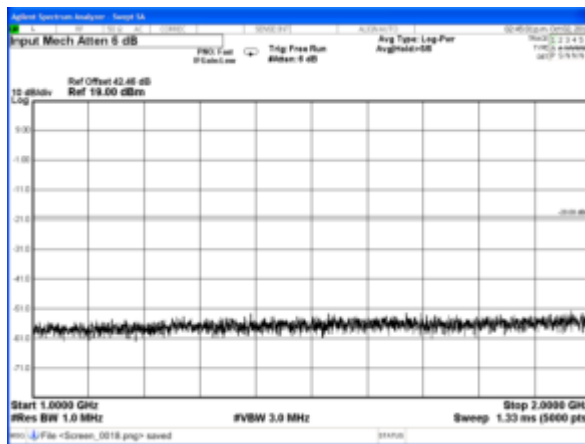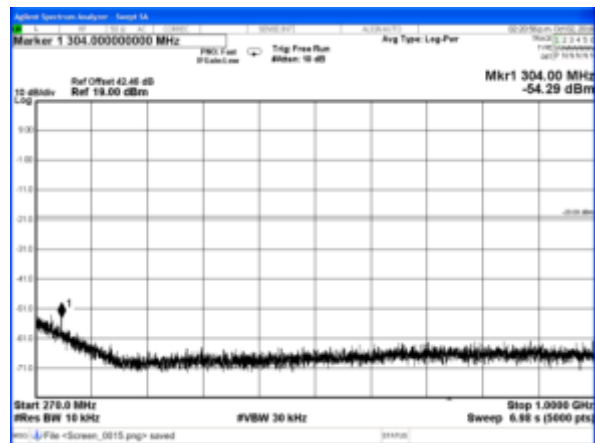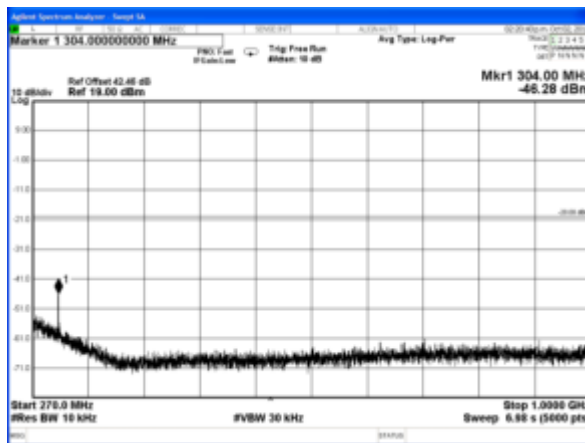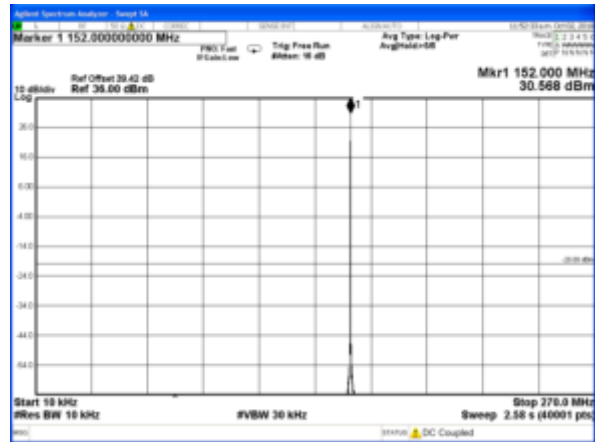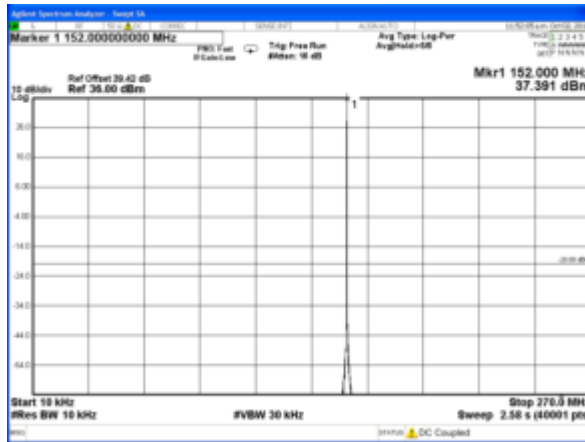

Spurious Emissions (Tx Conducted)

SPECIFICATION: FCC CFR 2.1051

RSS-119 5.8

12.5 kHz Channel Spacing

156.3 MHz @ 5 W

Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~

12.5 kHz Channel Spacing


156.3 MHz @ 1 W

Emission Mask D






Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~
Measurement Uncertainty:	≤12.75 GHz ± 3.0 dB	
No emissions were detected at a level greater than 20 dB below the limit.		

Spurious Emissions (Tx Conducted)

156.3 MHz 5 watts

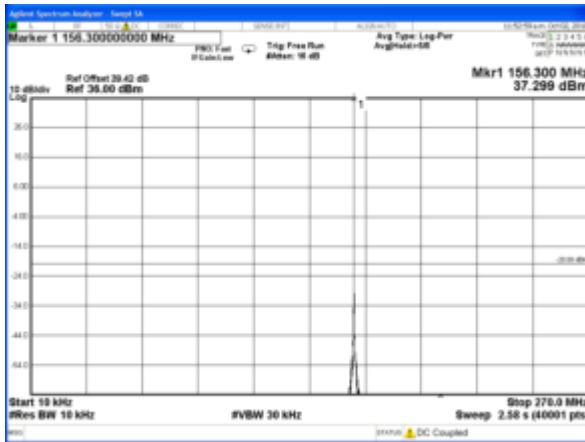

156.3 MHz 1 watt

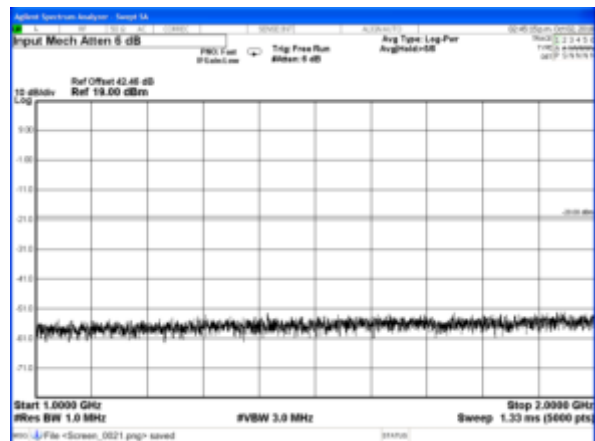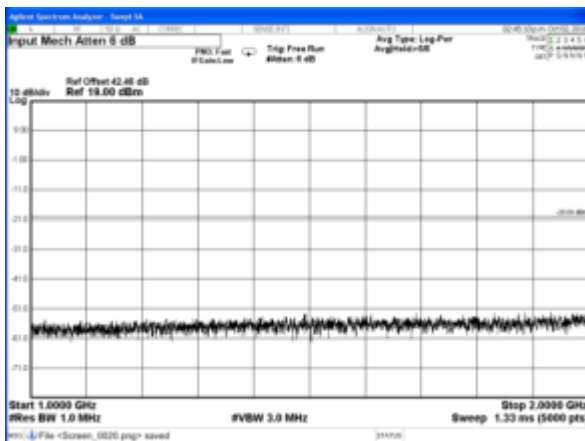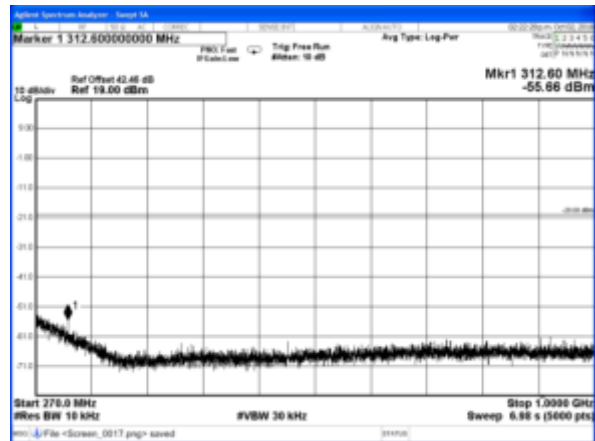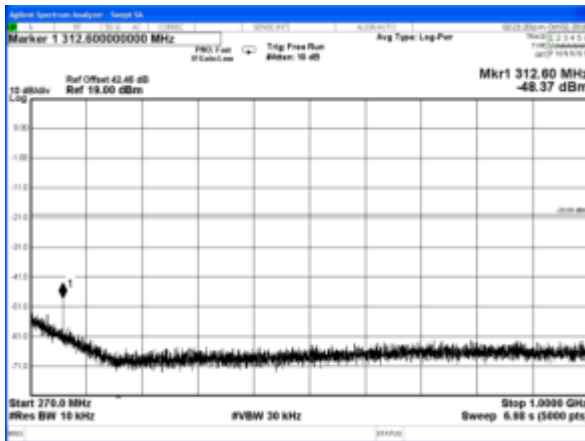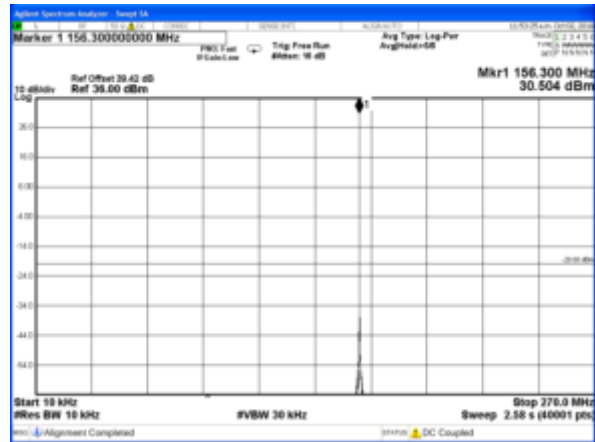

Spurious Emissions (Tx Conducted)

SPECIFICATION: FCC CFR 2.1051

RSS-119 5.8

12.5 kHz Channel Spacing

156.67 MHz @ 5 W

Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~

12.5 kHz Channel Spacing

156.67 MHz @ 1 W







Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~
Measurement Uncertainty:	≤12.75 GHz ± 3.0 dB	
No emissions were detected at a level greater than 20 dB below the limit.		

Spurious Emissions (Tx Conducted)

156.67 MHz 5 watts

156.67 MHz 1 watt

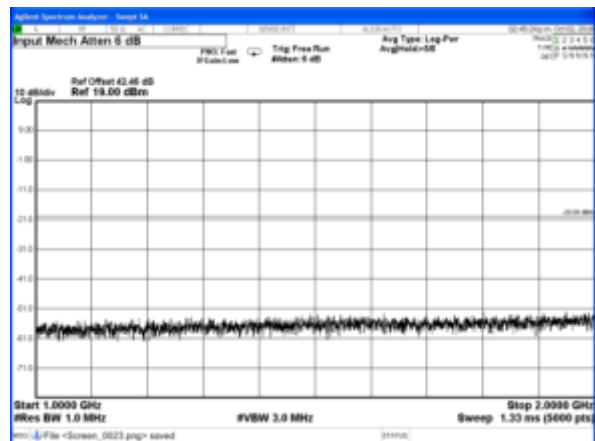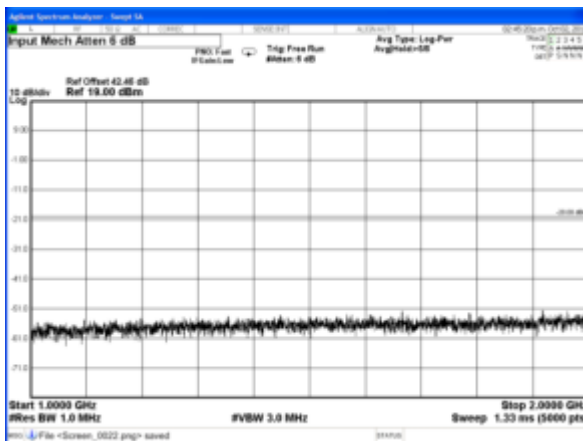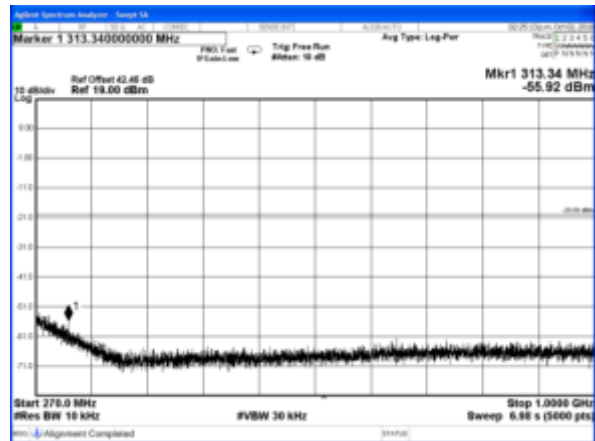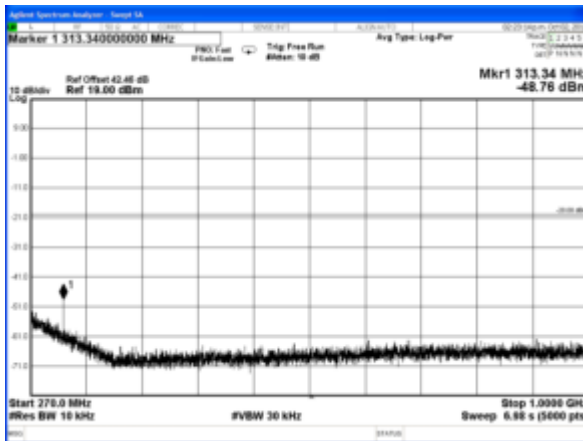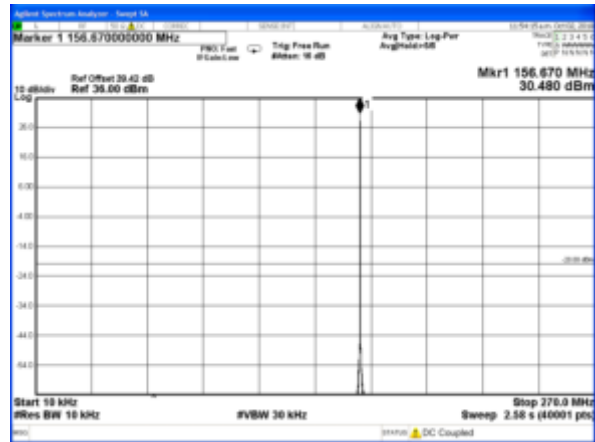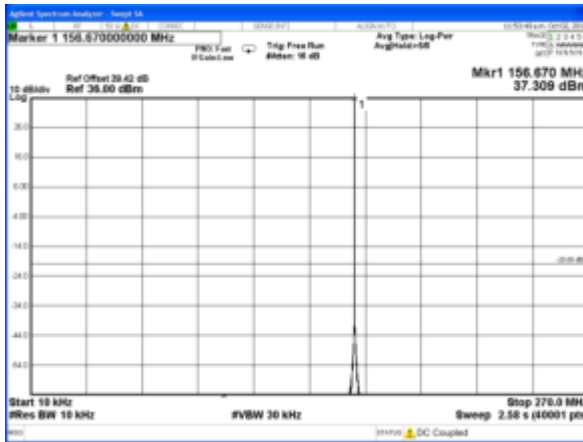

Spurious Emissions (Tx Conducted)

SPECIFICATION: FCC CFR 2.1051

RSS-119 5.8

12.5 kHz Channel Spacing

157.0 MHz @ 5 W

Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~

12.5 kHz Channel Spacing

157.0 MHz @ 1 W







Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~
Measurement Uncertainty:	≤12.75 GHz ± 3.0 dB	
No emissions were detected at a level greater than 20 dB below the limit.		

Spurious Emissions (Tx Conducted)

157.0 MHz 5 watts

157.0 MHz 1 watt

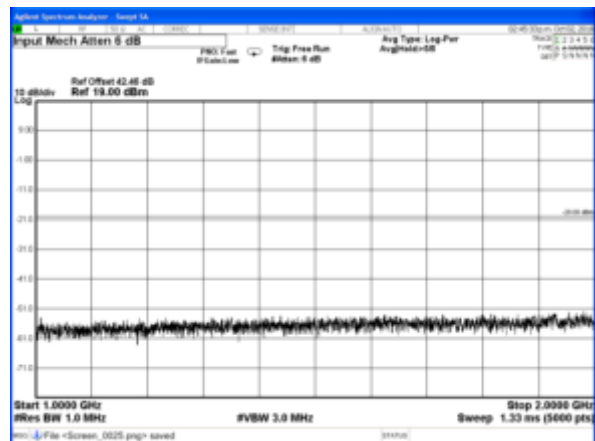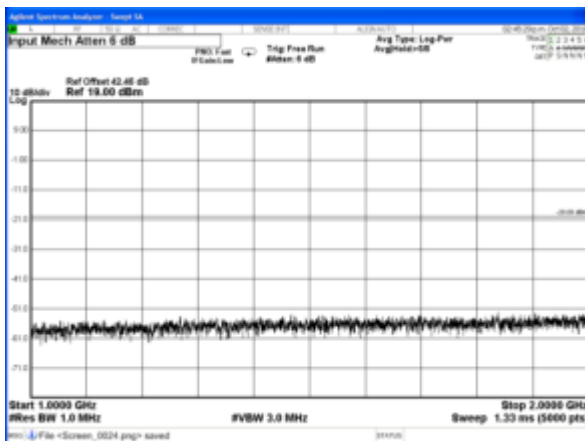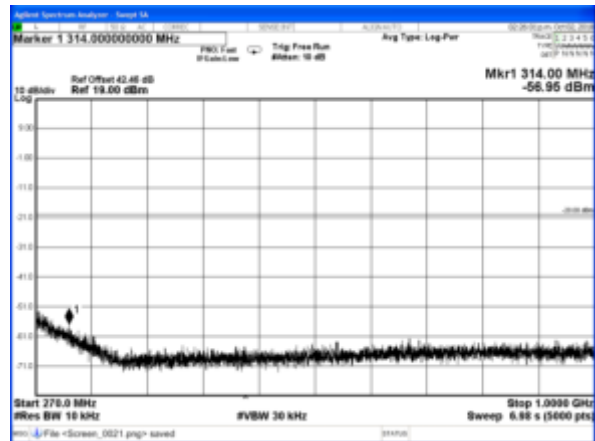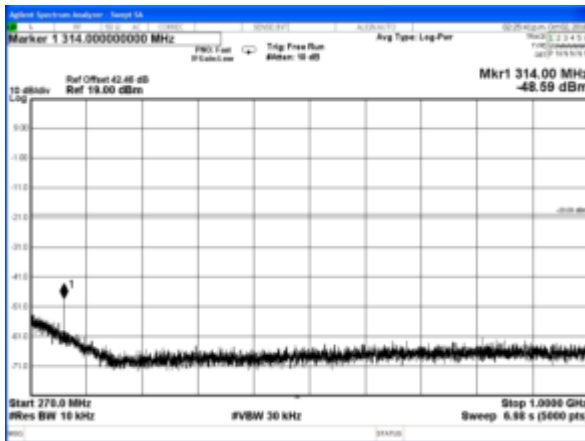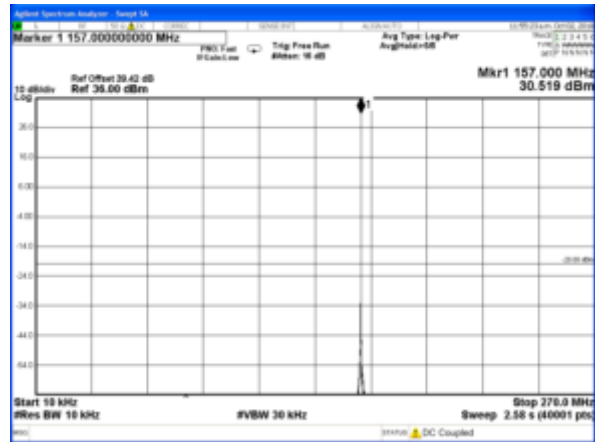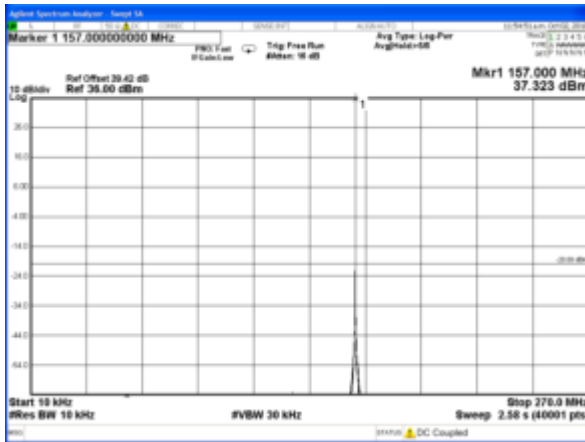

Spurious Emissions (Tx Conducted)

SPECIFICATION: FCC CFR 2.1051

RSS-119 5.8

12.5 kHz Channel Spacing

160.0 MHz @ 5 W

Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~

12.5 kHz Channel Spacing

160.0 MHz @ 1 W







Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~
Measurement Uncertainty:	≤12.75 GHz ± 3.0 dB	
No emissions were detected at a level greater than 20 dB below the limit.		

Spurious Emissions (Tx Conducted)

160.0 MHz 5 watts

160.0 MHz 1 watt

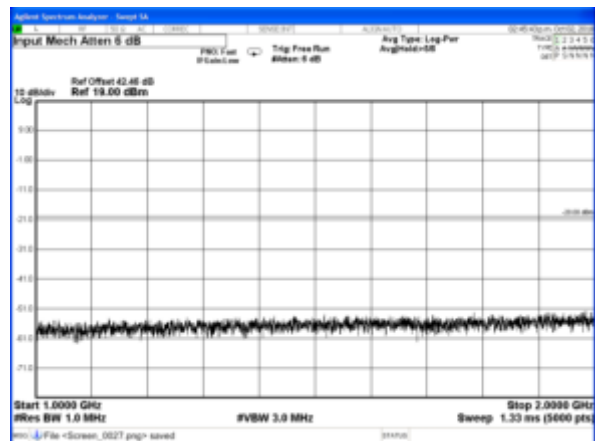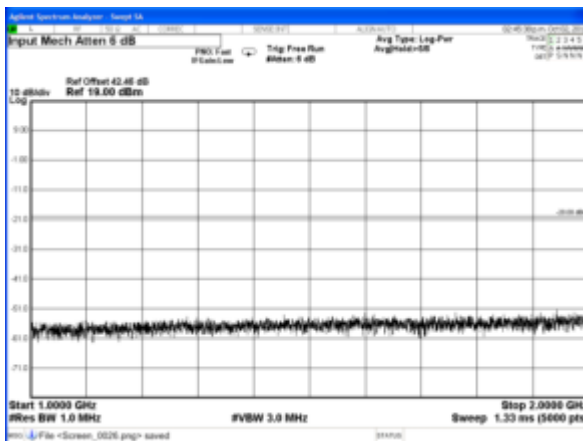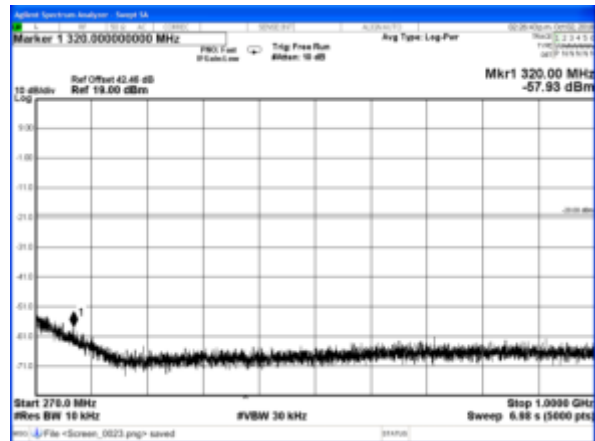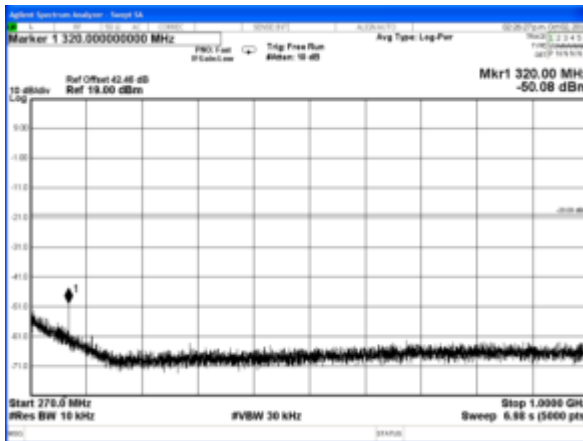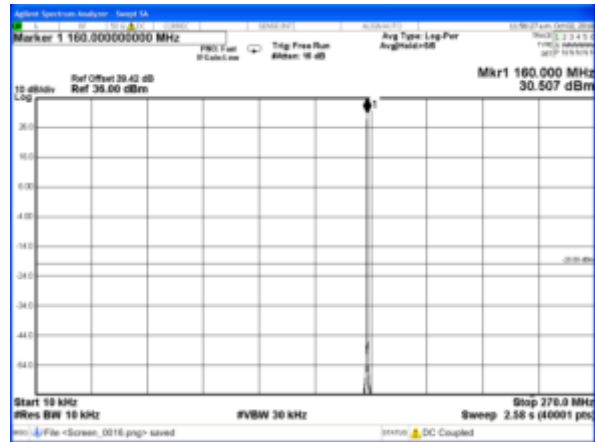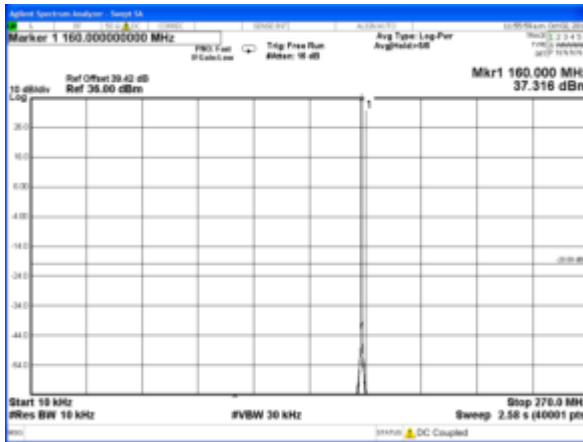

Spurious Emissions (Tx Conducted)

SPECIFICATION: FCC CFR 2.1051

RSS-119 5.8

12.5 kHz Channel Spacing

161.0 MHz @ 5 W

Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~

12.5 kHz Channel Spacing

161.0 MHz @ 1 W







Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~
Measurement Uncertainty:	≤12.75 GHz ± 3.0 dB	
No emissions were detected at a level greater than 20 dB below the limit.		

Spurious Emissions (Tx Conducted)

161.0 MHz 5 watts

161.0 MHz 1 watt

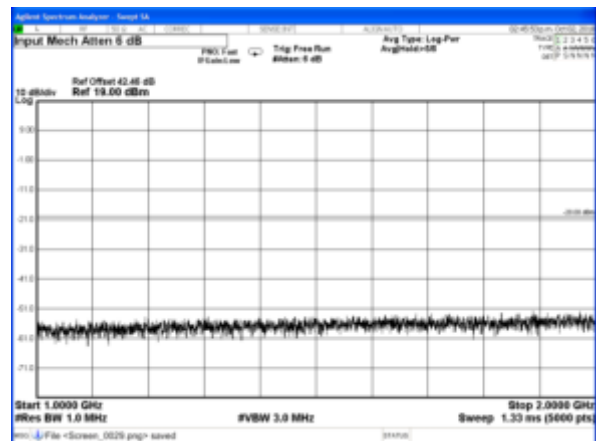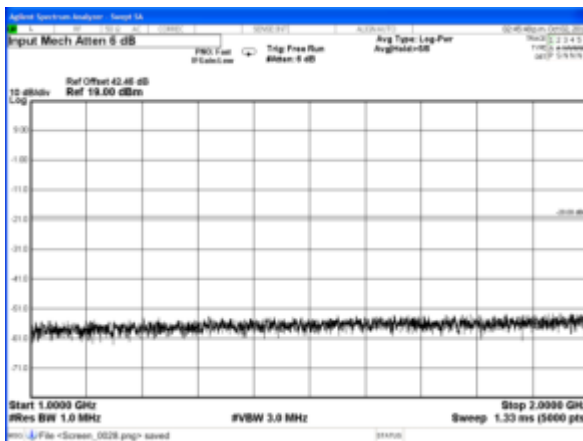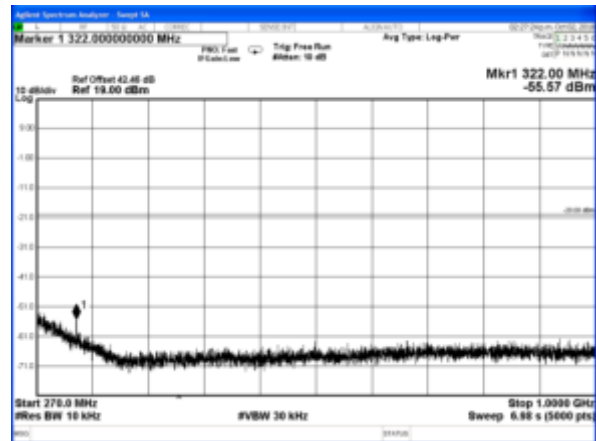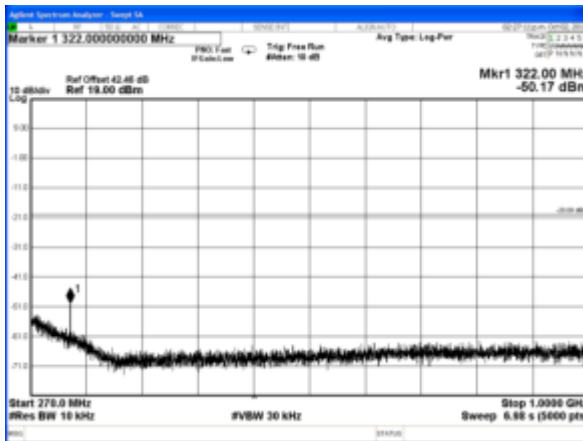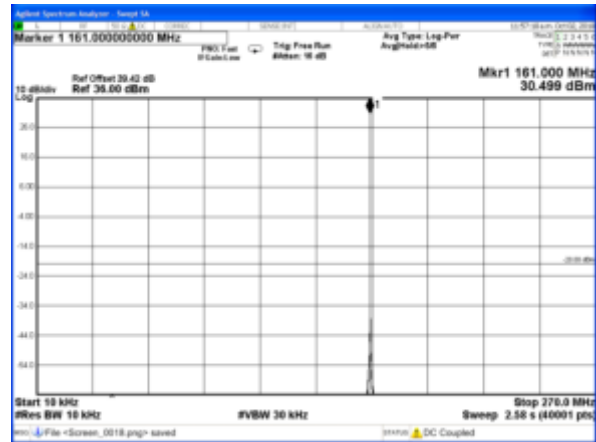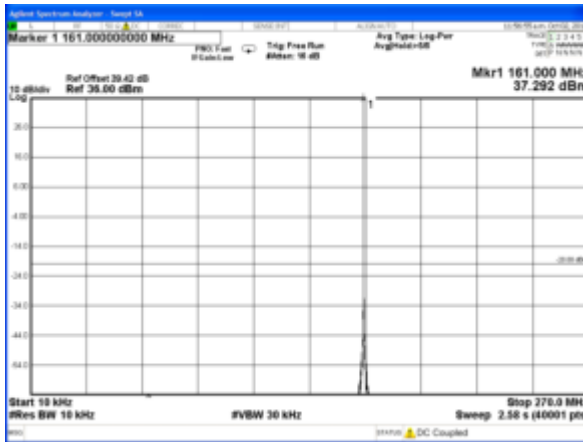

Spurious Emissions (Tx Conducted)

SPECIFICATION: FCC CFR 2.1051

RSS-119 5.8

12.5 kHz Channel Spacing

162.0 MHz @ 5 W

Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~

12.5 kHz Channel Spacing

162.0 MHz @ 1 W







Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~
Measurement Uncertainty:	≤12.75 GHz ± 3.0 dB	
No emissions were detected at a level greater than 20 dB below the limit.		

Spurious Emissions (Tx Conducted)

162.0 MHz 5 watts

162.0 MHz 1 watt

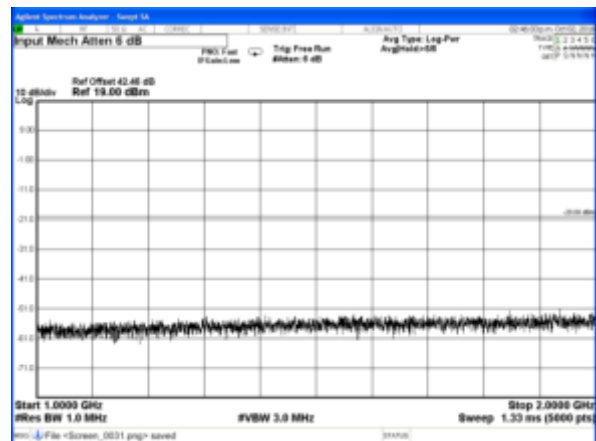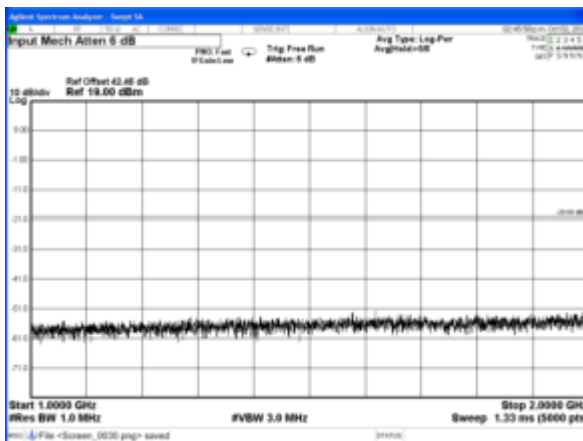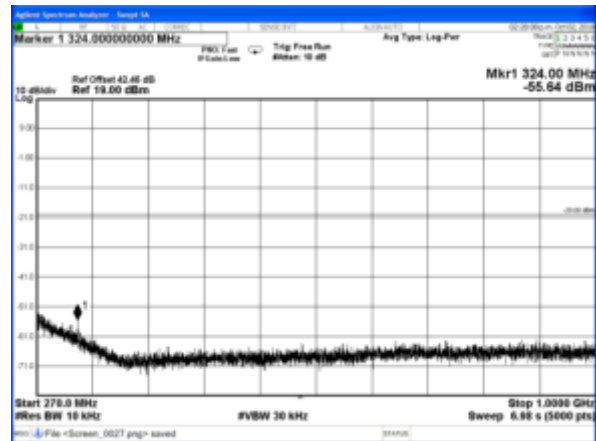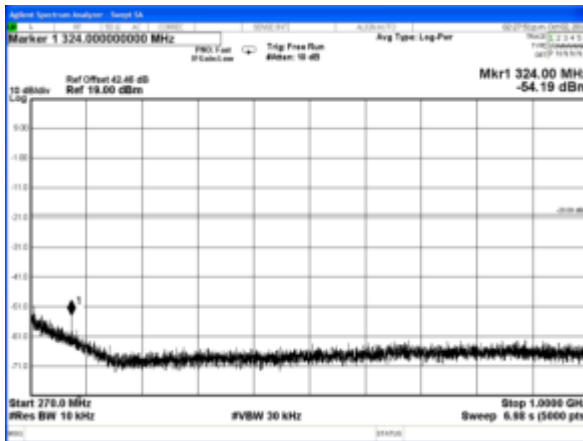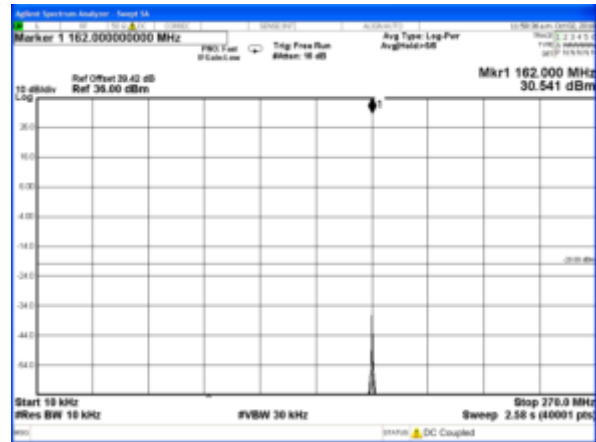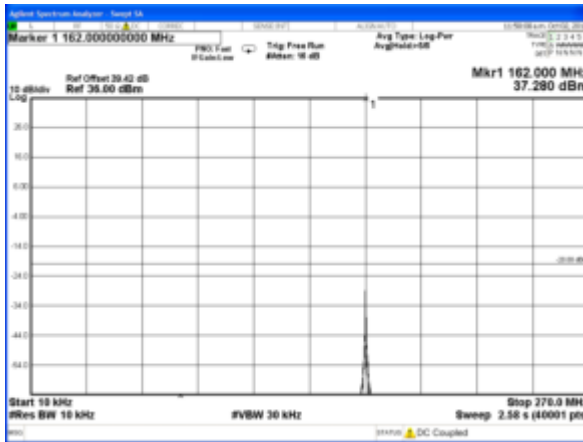

Spurious Emissions (Tx Conducted)

SPECIFICATION: FCC CFR 2.1051

RSS-119 5.8

12.5 kHz Channel Spacing

162.1 MHz @ 5 W

Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~

12.5 kHz Channel Spacing

162.1 MHz @ 1 W







Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~
Measurement Uncertainty:	≤12.75 GHz ± 3.0 dB	
No emissions were detected at a level greater than 20 dB below the limit.		

Spurious Emissions (Tx Conducted)

162.1 MHz 5 watts

162.1 MHz 1 watt

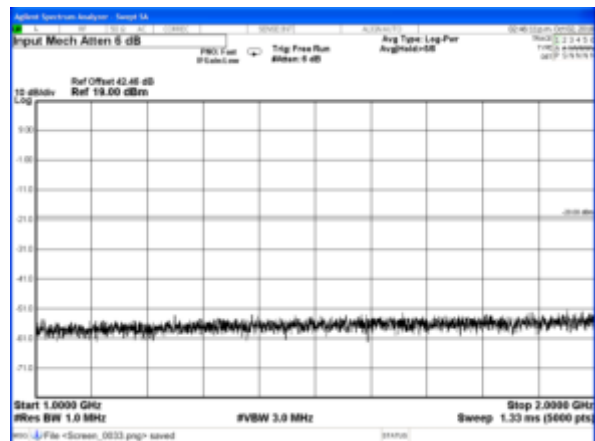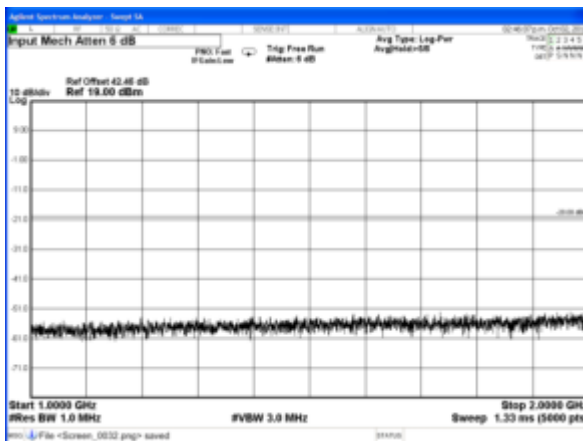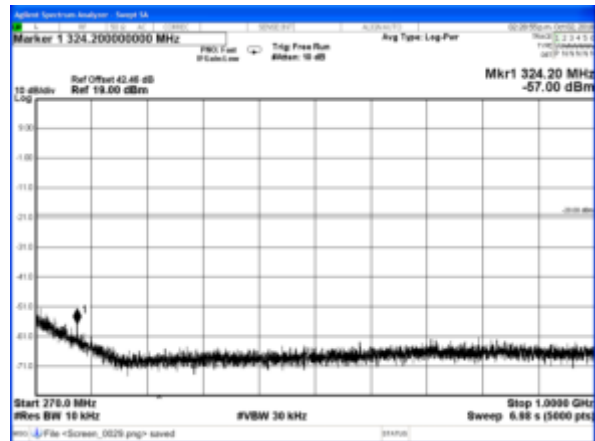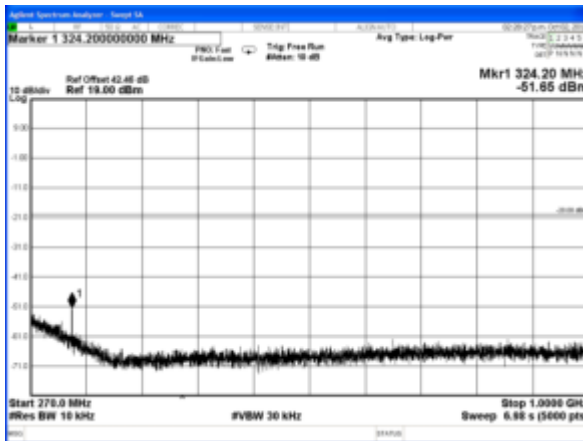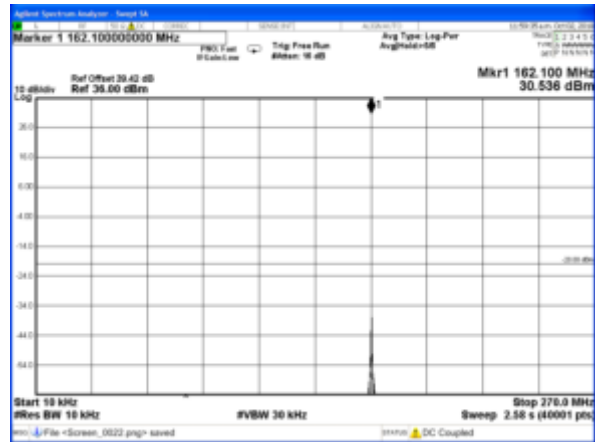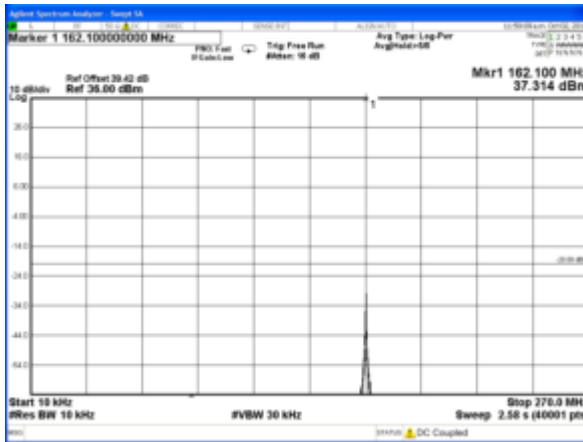

Spurious Emissions (Tx Conducted)

SPECIFICATION: FCC CFR 2.1051

RSS-119 5.8

12.5 kHz Channel Spacing

168.0 MHz @ 5 W

Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~

12.5 kHz Channel Spacing

168.0 MHz @ 1 W







Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~
Measurement Uncertainty:	≤12.75 GHz ± 3.0 dB	
No emissions were detected at a level greater than 20 dB below the limit.		

Spurious Emissions (Tx Conducted)

168.0 MHz 5 watts

168.0 MHz 1 watt

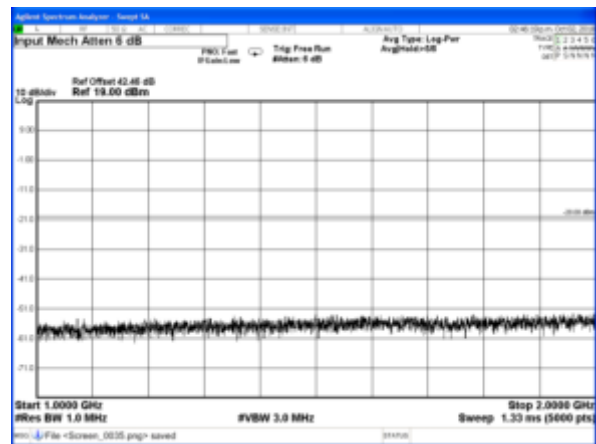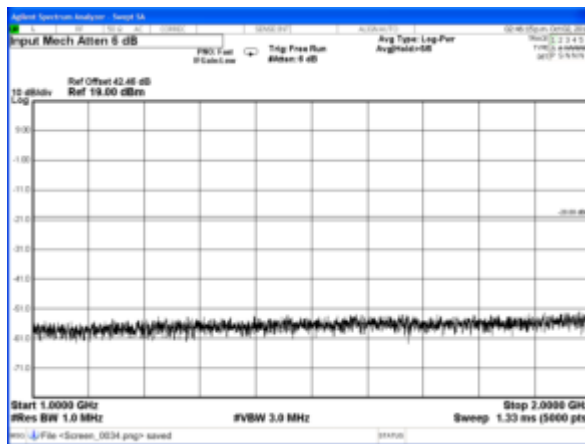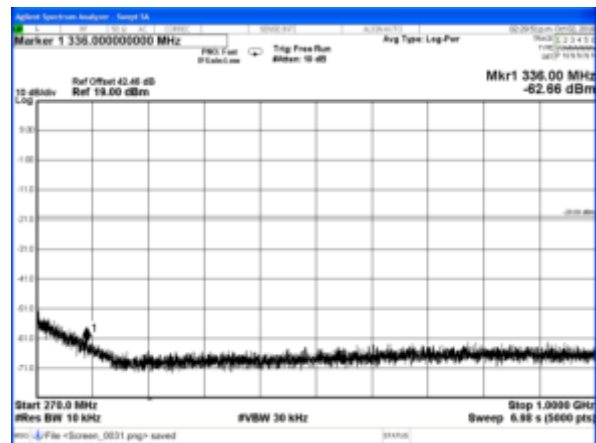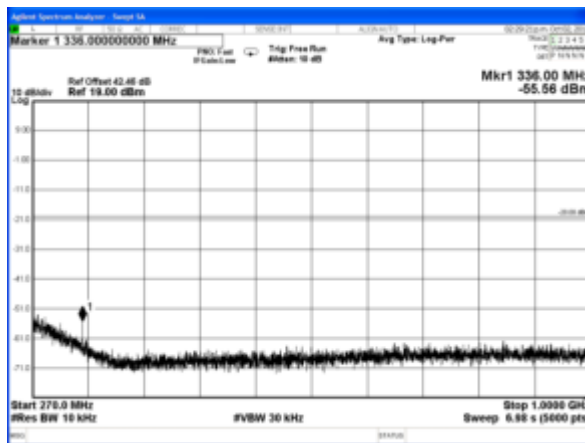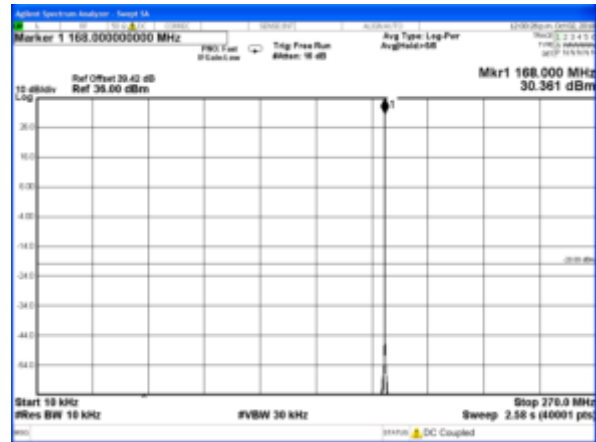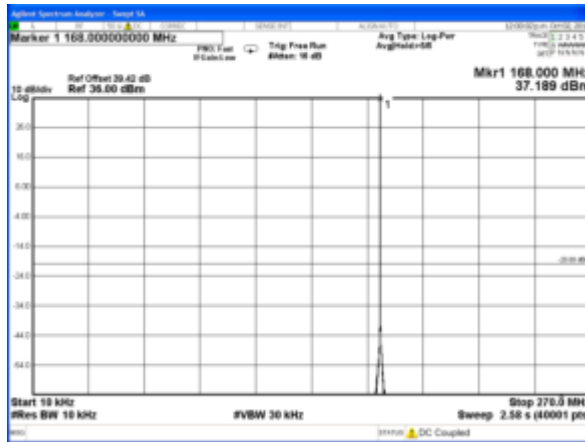

Spurious Emissions (Tx Conducted)

SPECIFICATION: FCC CFR 2.1051

RSS-119 5.8

12.5 kHz Channel Spacing

173.9 MHz @ 5 W

Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~

12.5 kHz Channel Spacing

173.9 MHz @ 1 W







Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~
Measurement Uncertainty:	≤12.75 GHz ± 3.0 dB	
No emissions were detected at a level greater than 20 dB below the limit.		

Spurious Emissions (Tx Conducted)

173.9 MHz 5 watts

173.9 MHz 1 watt

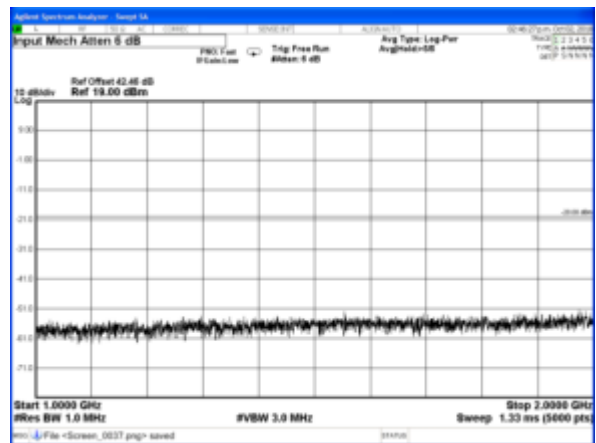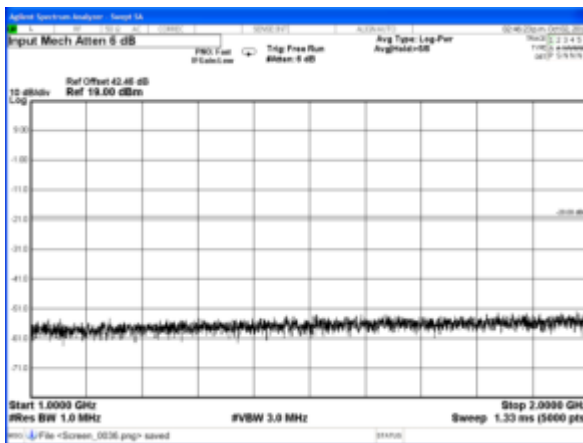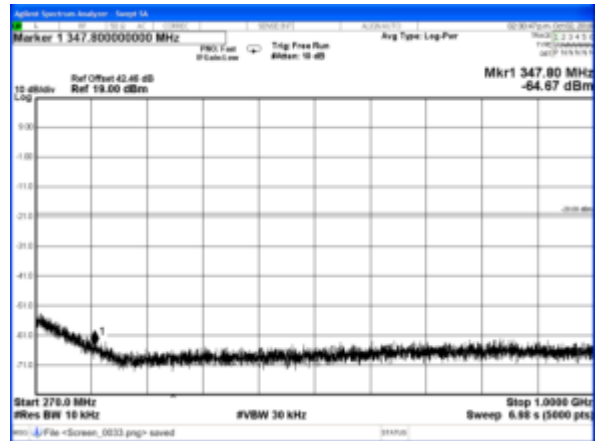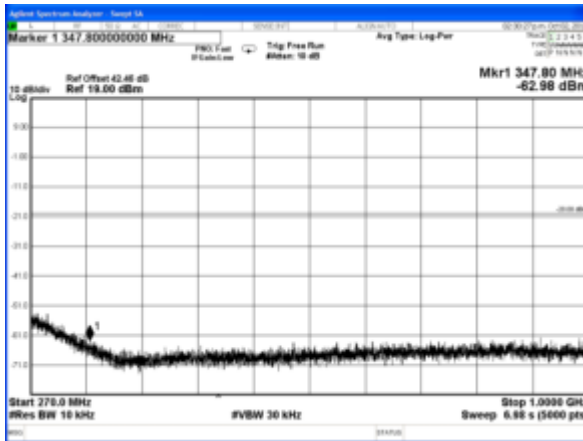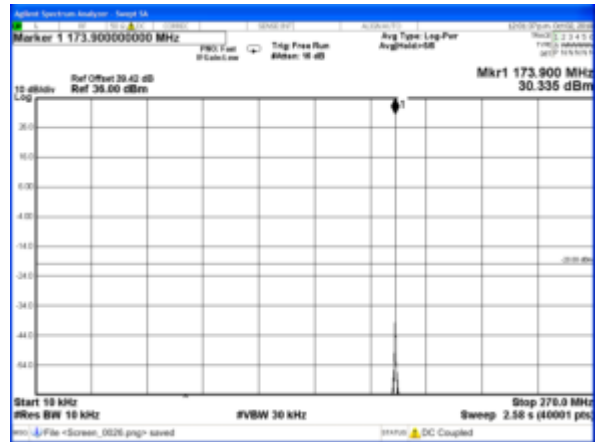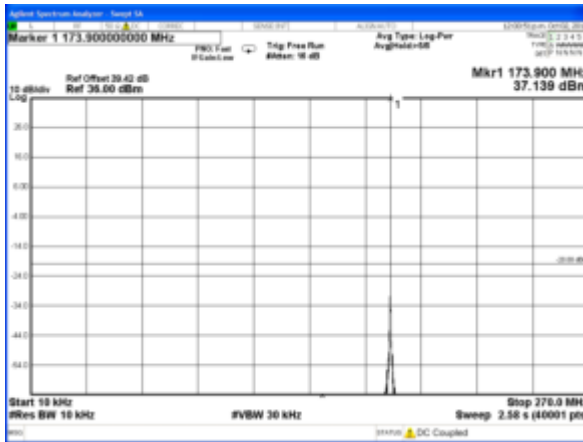

Spurious Emissions (Tx Conducted)

SPECIFICATION: FCC CFR 2.1051 RSS-119 5.8

LIMITS: FCC 47 CFR 90.210 RSS-119 5.8

Carrier Output Power	Emission Mask D 12.5 kHz Channel Spacing $50 + 10 \log_{10} (P_{\text{Watts}})$	
	-20 dBm	-57 dBc
5 W	-20 dBm	-57 dBc
1 W	-20 dBm	-50 dBc

TRANSMITTER SPURIOUS EMISSIONS (RADIATED)

SPECIFICATION: FCC 47 CFR 2.1053

GUIDE: TIA/EIA-603D 2.2.12

MEASUREMENT PROCEDURE:

Initial Scan:

1. The EUT is placed in the S-Line TEM cell and emissions are measured from 30 MHz to 800 MHz. Any emission within 20 dB of the limit is then re-tested on the OATS.
2. The EUT is placed in the reverberation chamber and emissions are measured from 800 MHz to the upper frequency required. Any emission within 20 dB of the limit is then re-tested on the OATS.
3. The harmonics emissions up to the 6th harmonic of the fundamental frequency are measured on the OATS

OATS Measurement:

1. The EUT is placed on a wooden turntable at a distance of three metres from the test antenna. The output terminal is connected to an RF dummy load.
2. The test antenna is raised from 1 m to 4 m to obtain a maximum reading; the turntable is then rotated through 360° to obtain the maximum response of each spurious emission. Valid emissions are determined by switching the EUT on and off.
3. The EUT is then replaced by a signal generator and substitution antenna to make measurements by the substitution method.

MEASUREMENT RESULTS:

See the tables on the following pages

LIMIT CLAUSE: FCC 47 CFR 90.210

Spurious Emissions (Tx Radiated) - Continued

SPECIFICATION: FCC CFR 2.1053

12.5 kHz Channel Spacing 138.1 MHz @ 5 W Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~

12.5 kHz Channel Spacing 138.1 MHz @ 1 W Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~
Measurement Uncertainty	± 4.6 dB	
No emissions were detected at a level greater than 20 dB below the limit.		

12.5 kHz Channel Spacing 143.9 MHz @ 5 W Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~

12.5 kHz Channel Spacing 143.9 MHz @ 1 W Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~
Measurement Uncertainty	± 4.6 dB	
No emissions were detected at a level greater than 20 dB below the limit.		

12.5 kHz Channel Spacing 148.1 MHz @ 5 W Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~

12.5 kHz Channel Spacing 148.1 MHz @ 1 W Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~
Measurement Uncertainty	± 4.6 dB	
No emissions were detected at a level greater than 20 dB below the limit.		

Spurious Emissions (Tx Radiated) - Continued

12.5 kHz Channel Spacing

149.8 MHz @ 5 W

Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~

12.5 kHz Channel Spacing

149.8 MHz @ 1 W

Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~
Measurement Uncertainty	± 4.6 dB	
No emissions were detected at a level greater than 20 dB below the limit.		

12.5 kHz Channel Spacing

150.1 MHz @ 5 W

Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~

12.5 kHz Channel Spacing

150.1 MHz @ 1 W

Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~
Measurement Uncertainty	± 4.6 dB	
No emissions were detected at a level greater than 20 dB below the limit.		

12.5 kHz Channel Spacing

152.0 MHz @ 5 W

Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~

12.5 kHz Channel Spacing

152.0 MHz @ 1 W

Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~
Measurement Uncertainty	± 4.6 dB	
No emissions were detected at a level greater than 20 dB below the limit.		

Spurious Emissions (Tx Radiated) - Continued

12.5 kHz Channel Spacing

156.3 MHz @ 5 W

Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~

12.5 kHz Channel Spacing

156.3 MHz @ 1 W

Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~
Measurement Uncertainty	± 4.6 dB	
No emissions were detected at a level greater than 20 dB below the limit.		

12.5 kHz Channel Spacing

156.67 MHz @ 5 W

Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~

12.5 kHz Channel Spacing

156.67 MHz @ 1 W

Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~
Measurement Uncertainty	± 4.6 dB	
No emissions were detected at a level greater than 20 dB below the limit.		

12.5 kHz Channel Spacing

157.0 MHz @ 5 W

Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~

12.5 kHz Channel Spacing

157.0 MHz @ 1 W

Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~
Measurement Uncertainty	± 4.6 dB	
No emissions were detected at a level greater than 20 dB below the limit.		

Spurious Emissions (Tx Radiated) - Continued

12.5 kHz Channel Spacing

160.0 MHz @ 5 W

Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~

12.5 kHz Channel Spacing

160.0 MHz @ 1 W

Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~
Measurement Uncertainty	± 4.6 dB	
No emissions were detected at a level greater than 20 dB below the limit.		

12.5 kHz Channel Spacing

161.0 MHz @ 5 W

Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~

12.5 kHz Channel Spacing

161.0 MHz @ 1 W

Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~
Measurement Uncertainty	± 4.6 dB	
No emissions were detected at a level greater than 20 dB below the limit.		

12.5 kHz Channel Spacing

162.0 MHz @ 5 W

Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~

12.5 kHz Channel Spacing

162.0 MHz @ 1 W

Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~
Measurement Uncertainty	± 4.6 dB	
No emissions were detected at a level greater than 20 dB below the limit.		

Spurious Emissions (Tx Radiated) - Continued

12.5 kHz Channel Spacing

162.1 MHz @ 5 W

Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~

12.5 kHz Channel Spacing

162.1 MHz @ 1 W

Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~
Measurement Uncertainty	± 4.6 dB	
No emissions were detected at a level greater than 20 dB below the limit.		

12.5 kHz Channel Spacing

168.0 MHz @ 5 W

Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~

12.5 kHz Channel Spacing

168.0 MHz @ 1 W

Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~
Measurement Uncertainty	± 4.6 dB	
No emissions were detected at a level greater than 20 dB below the limit.		

12.5 kHz Channel Spacing

173.9 MHz @ 5 W

Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~

12.5 kHz Channel Spacing

173.9 MHz @ 1 W

Emission Mask D

Emission Frequency (MHz)	Level (dBm)	Level (dBc)
~	~	~
Measurement Uncertainty	± 4.6 dB	
No emissions were detected at a level greater than 20 dB below the limit.		

Spurious Emissions (Tx Radiated) - Continued

LIMITS: FCC CFR 2.1053

Carrier Output Power	Emission Mask D 12.5 kHz Channel Spacing $50 + 10 \log_{10} (P_{\text{Watts}})$	
5 W	-20 dBm	-57 dBc
1 W	-20 dBm	-50 dBc

Open Area Test Site Results:

12.5 kHz Channel Spacing

156.3 MHz @ 5 W

Emission Mask D


Harmonics Emission Frequency (MHz)	Level (dBm)	Level (dBc)
312.6	-54.03	-91.03
468.9	-72.35	-109.35
625.2	-71.74	-108.74
781.5	-65.18	-102.18
937.8	-44.71	-81.71
1094.1	-69.72	-106.72
Measurement Uncertainty	$\pm 4.6 \text{ dB}$	

Sample Calculation

Sample Calculation	Measurement					Result	
	Reference	Substitution					
Emission Frequency (MHz)	Reference Level (dBm)	Sig-gen Level	Cable and Attenuator Gain	Antenna Gain (dBd)	Path and Boresight corrections	dBm	nW
312.6	-79.17	-40.20	-13.64	-0.35	0.16	-54.03	3.95
		A	B	C	D	E	

Result (E) = A+B+C+D

Photo: OATS Setup

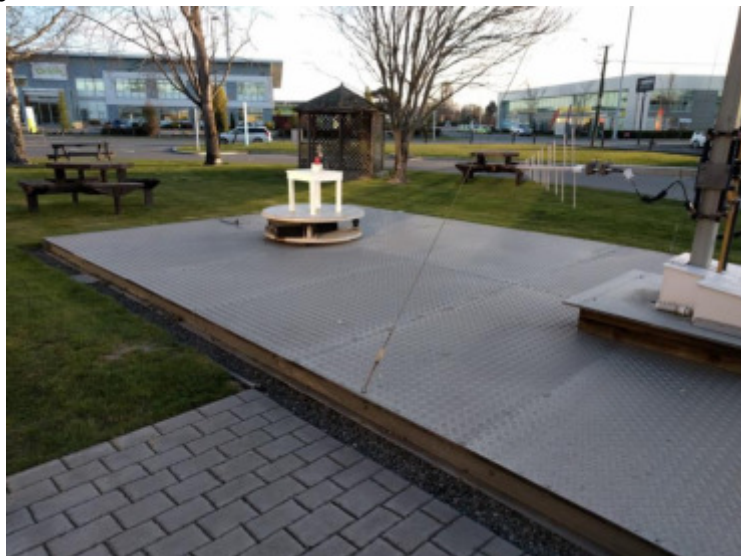

TRANSIENT FREQUENCY BEHAVIOUR

SPECIFICATION: FCC 47 CFR 90.214

RSS-119 5.9

GUIDE: TIA/EIA-603D 2.2.19

MEASUREMENT PROCEDURE:

1. Refer Annex A for equipment set up.
2. Measurements and plots were made following the TIA/EIA procedure.

MEASUREMENT RESULTS:

See the tables and plots on the following pages for 12.5 kHz channel spacing.

LIMIT CLAUSES: FCC 47 CFR 90.214

RSS-119 5.9

Transient Frequency Behaviour

SPECIFICATION: FCC 47 CFR 90.214

RSS-119 5.9

Tx FREQUENCY: 138.1 MHz

5 W

12.5 kHz Channel Spacing

TRANSIENT RESPONSE PERIOD	CARRIER PEAK VARIATION FROM NORMAL	
	Key ON (kHz)	Key OFF (kHz)
t1	0.6	N/A
t2	-0.8	N/A
t3	N/A	-0.8

Confirm that during periods t1 and t3 the frequency difference does not exceed the value of one channel separation.	YES	NO
	<input type="checkbox"/>	<input type="checkbox"/>
Confirm that during the period t2 the frequency difference does not exceed half a channel separation.	YES	NO
	<input type="checkbox"/>	<input type="checkbox"/>
Confirm that during the period t2 to t3 the frequency difference does not exceed the frequency error limit.	YES	NO
	<input type="checkbox"/>	<input type="checkbox"/>

Measurement Uncertainty: Frequency ± 130 Hz; Time $\pm 0.2\%$

LIMIT: FCC 47 CFR 90.214

TRANSIENT PERIODS	FREQUENCY RANGE	
	150 MHz – 174 MHz	421 MHz – 512 MHz
t1 (ms)	5 ms	10 ms
t2 (ms)	20 ms	25 ms
t3 (ms)	5 ms	10 ms

LIMIT: RSS-119 5.9

Transient Frequency Behaviour for Equipment Designed to Operate on 12.5 kHz Channels			
TRANSIENT PERIODS	Maximum Frequency Difference	FREQUENCY RANGE	
		138 – 174 MHz	406.1 – 470 MHz
t1 (ms)	± 12.5 kHz	5 ms	10 ms
t2 (ms)	± 6.25 kHz	20 ms	25 ms
t3 (ms)	± 12.5 kHz	5 ms	10 ms



Note: RSS-119 5.9 - If the transmitter carrier output power rating is 6 Watts or less, the frequency difference during the time periods t1 and t3 may exceed the maximum frequency difference for these time periods.

Transient Frequency Behaviour

SPECIFICATION: FCC 47 CFR 90.214

RSS-119 5.9

Tx FREQUENCY: 138.1 MHz 5 W 12.5 kHz Channel Spacing

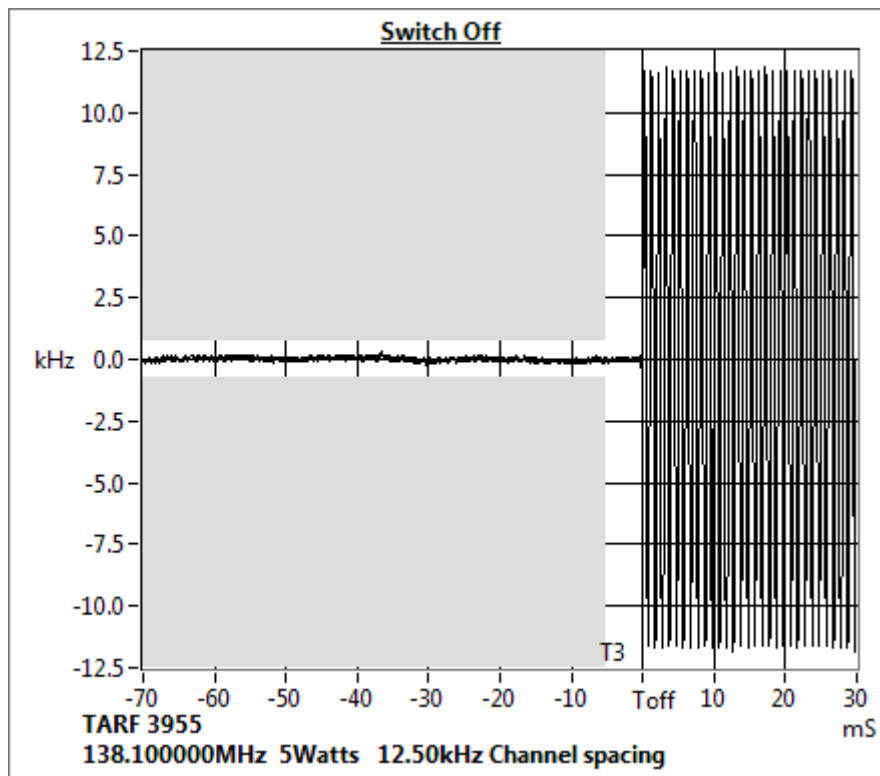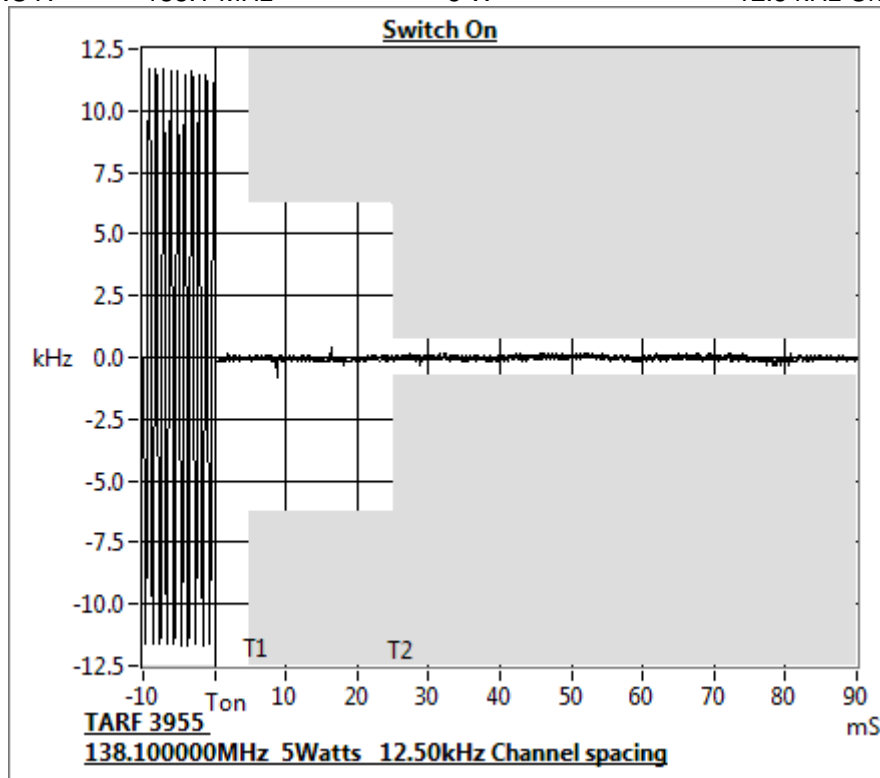

Transient Frequency Behaviour

SPECIFICATION: FCC 47 CFR 90.214

Tx FREQUENCY: 143.9 MHz 5 W 12.5 kHz Channel Spacing

TRANSIENT RESPONSE PERIOD	CARRIER PEAK VARIATION FROM NORMAL	
	Key ON (kHz)	Key OFF (kHz)
t1	2.8	N/A
t2	-0.9	N/A
t3	N/A	-0.4

Confirm that during periods t1 and t3 the frequency difference does not exceed the value of one channel separation.	YES	NO
	<input type="checkbox"/>	<input type="checkbox"/>
Confirm that during the period t2 the frequency difference does not exceed half a channel separation.	YES	NO
	<input type="checkbox"/>	<input type="checkbox"/>
Confirm that during the period t2 to t3 the frequency difference does not exceed the frequency error limit.	YES	NO
	<input type="checkbox"/>	<input type="checkbox"/>

Measurement Uncertainty: Frequency ± 130 Hz; Time $\pm 0.2\%$

LIMIT: FCC 47 CFR 90.214

TRANSIENT PERIODS	FREQUENCY RANGE	
	150 MHz – 174 MHz	421 MHz – 512 MHz
t1 (ms)	5 ms	10 ms
t2 (ms)	20 ms	25 ms
t3 (ms)	5 ms	10 ms

LIMIT: RSS-119 5.9



Transient Frequency Behaviour for Equipment Designed to Operate on 12.5 kHz Channels			
TRANSIENT PERIODS	Maximum Frequency Difference	FREQUENCY RANGE	
		138 – 174 MHz	406.1 – 470 MHz
t1 (ms)	± 12.5 kHz	5 ms	10 ms
t2 (ms)	± 6.25 kHz	20 ms	25 ms
t3 (ms)	± 12.5 kHz	5 ms	10 ms

Note: RSS-119 5.9 - If the transmitter carrier output power rating is 6 Watts or less, the frequency difference during the time periods t1 and t3 may exceed the maximum frequency difference for these time periods,

Transient Frequency Behaviour

SPECIFICATION: FCC 47 CFR 90.214

Tx FREQUENCY: 143.9 MHz 5 W 12.5 kHz Channel Spacing

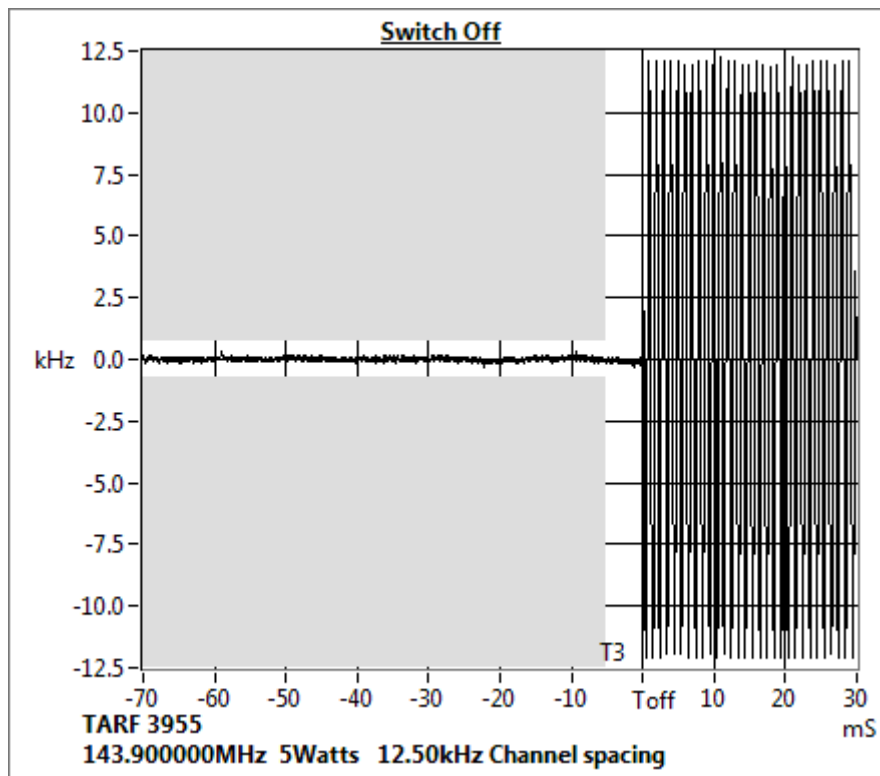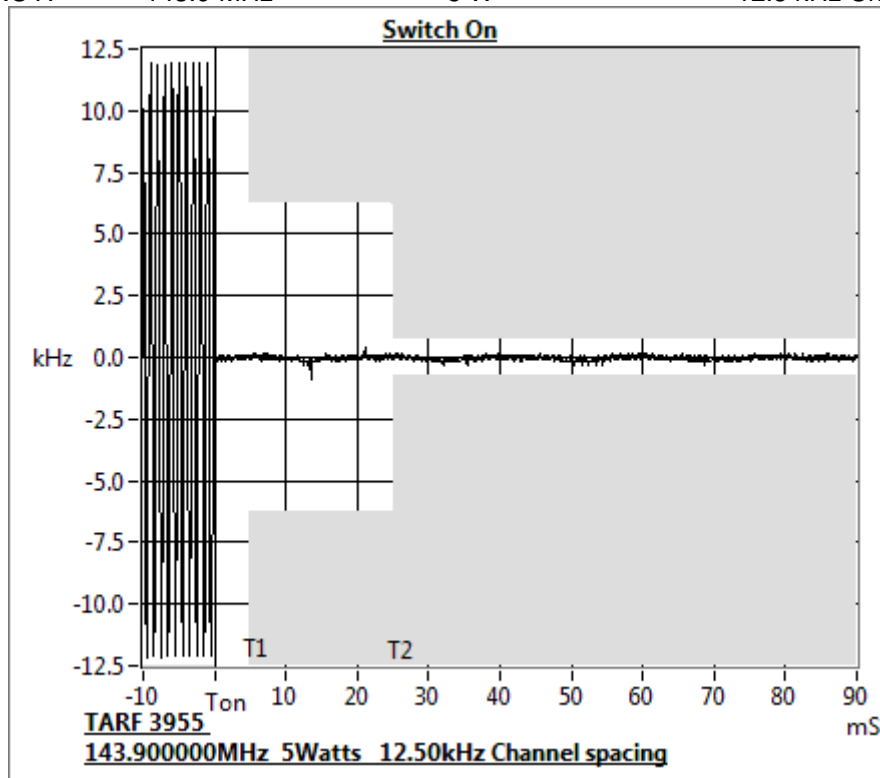

Transient Frequency Behaviour

SPECIFICATION: FCC 47 CFR 90.214

RSS-119 5.9

Tx FREQUENCY: 148.1 MHz

5 W

12.5 kHz Channel Spacing

TRANSIENT RESPONSE PERIOD	CARRIER PEAK VARIATION FROM NORMAL	
	Key ON (kHz)	Key OFF (kHz)
t1	1.5	N/A
t2	-0.3	N/A
t3	N/A	-0.4

Confirm that during periods t1 and t3 the frequency difference does not exceed the value of one channel separation.	YES	NO
	<input type="checkbox"/>	<input type="checkbox"/>
Confirm that during the period t2 the frequency difference does not exceed half a channel separation.	YES	NO
	<input type="checkbox"/>	<input type="checkbox"/>
Confirm that during the period t2 to t3 the frequency difference does not exceed the frequency error limit.	YES	NO
	<input type="checkbox"/>	<input type="checkbox"/>

Measurement Uncertainty: Frequency ± 130 Hz; Time $\pm 0.2\%$

LIMIT: FCC 47 CFR 90.214

TRANSIENT PERIODS	FREQUENCY RANGE	
	150 MHz – 174 MHz	421 MHz – 512 MHz
t1 (ms)	5 ms	10 ms
t2 (ms)	20 ms	25 ms
t3 (ms)	5 ms	10 ms

LIMIT: RSS-119 5.9

Transient Frequency Behaviour for Equipment Designed to Operate on 12.5 kHz Channels			
TRANSIENT PERIODS	Maximum Frequency Difference	FREQUENCY RANGE	
		138 – 174 MHz	406.1 – 470 MHz
t1 (ms)	± 12.5 kHz	5 ms	10 ms
t2 (ms)	± 6.25 kHz	20 ms	25 ms
t3 (ms)	± 12.5 kHz	5 ms	10 ms


Note: RSS-119 5.9 - If the transmitter carrier output power rating is 6 Watts or less, the frequency difference during the time periods t1 and t3 may exceed the maximum frequency difference for these time periods.

Transient Frequency Behaviour

SPECIFICATION: FCC 47 CFR 90.214

RSS-119 5.9

Tx FREQUENCY: 148.1 MHz 5 W 12.5 kHz Channel Spacing

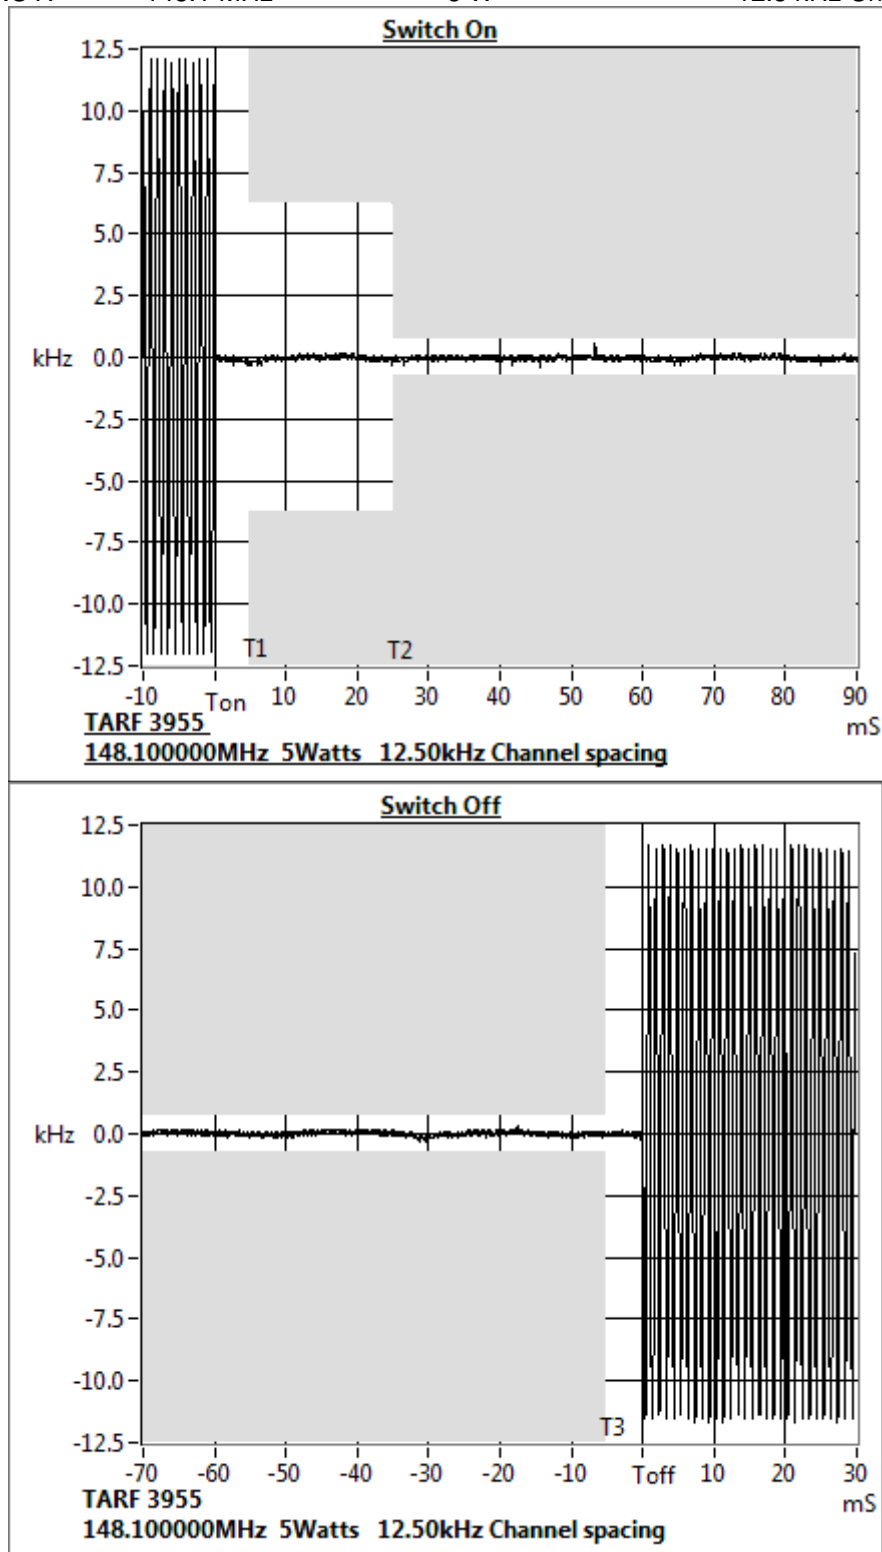

Transient Frequency Behaviour

SPECIFICATION: FCC 47 CFR 90.214

RSS-119 5.9

Tx FREQUENCY: 149.8 MHz

5 W

12.5 kHz Channel Spacing

TRANSIENT RESPONSE PERIOD	CARRIER PEAK VARIATION FROM NORMAL	
	Key ON (kHz)	Key OFF (kHz)
t1	-0.2	N/A
t2	-0.2	N/A
t3	N/A	-0.5

Confirm that during periods t1 and t3 the frequency difference does not exceed the value of one channel separation.	YES	NO
	<input type="checkbox"/>	<input type="checkbox"/>
Confirm that during the period t2 the frequency difference does not exceed half a channel separation.	YES	NO
	<input type="checkbox"/>	<input type="checkbox"/>
Confirm that during the period t2 to t3 the frequency difference does not exceed the frequency error limit.	YES	NO
	<input type="checkbox"/>	<input type="checkbox"/>

Measurement Uncertainty: Frequency ± 130 Hz; Time $\pm 0.2\%$

LIMIT: FCC 47 CFR 90.214

TRANSIENT PERIODS	FREQUENCY RANGE	
	150 MHz – 174 MHz	421 MHz – 512 MHz
t1 (ms)	5 ms	10 ms
t2 (ms)	20 ms	25 ms
t3 (ms)	5 ms	10 ms

LIMIT: RSS-119 5.9

Transient Frequency Behaviour for Equipment Designed to Operate on 12.5 kHz Channels			
TRANSIENT PERIODS	Maximum Frequency Difference	FREQUENCY RANGE	
		138 – 174 MHz	406.1 – 470 MHz
t1 (ms)	± 12.5 kHz	5 ms	10 ms
t2 (ms)	± 6.25 kHz	20 ms	25 ms
t3 (ms)	± 12.5 kHz	5 ms	10 ms


Note: RSS-119 5.9 - If the transmitter carrier output power rating is 6 Watts or less, the frequency difference during the time periods t1 and t3 may exceed the maximum frequency difference for these time periods.

Transient Frequency Behaviour

SPECIFICATION: FCC 47 CFR 90.214

RSS-119 5.9

Tx FREQUENCY: 149.8 MHz 5 W 12.5 kHz Channel Spacing

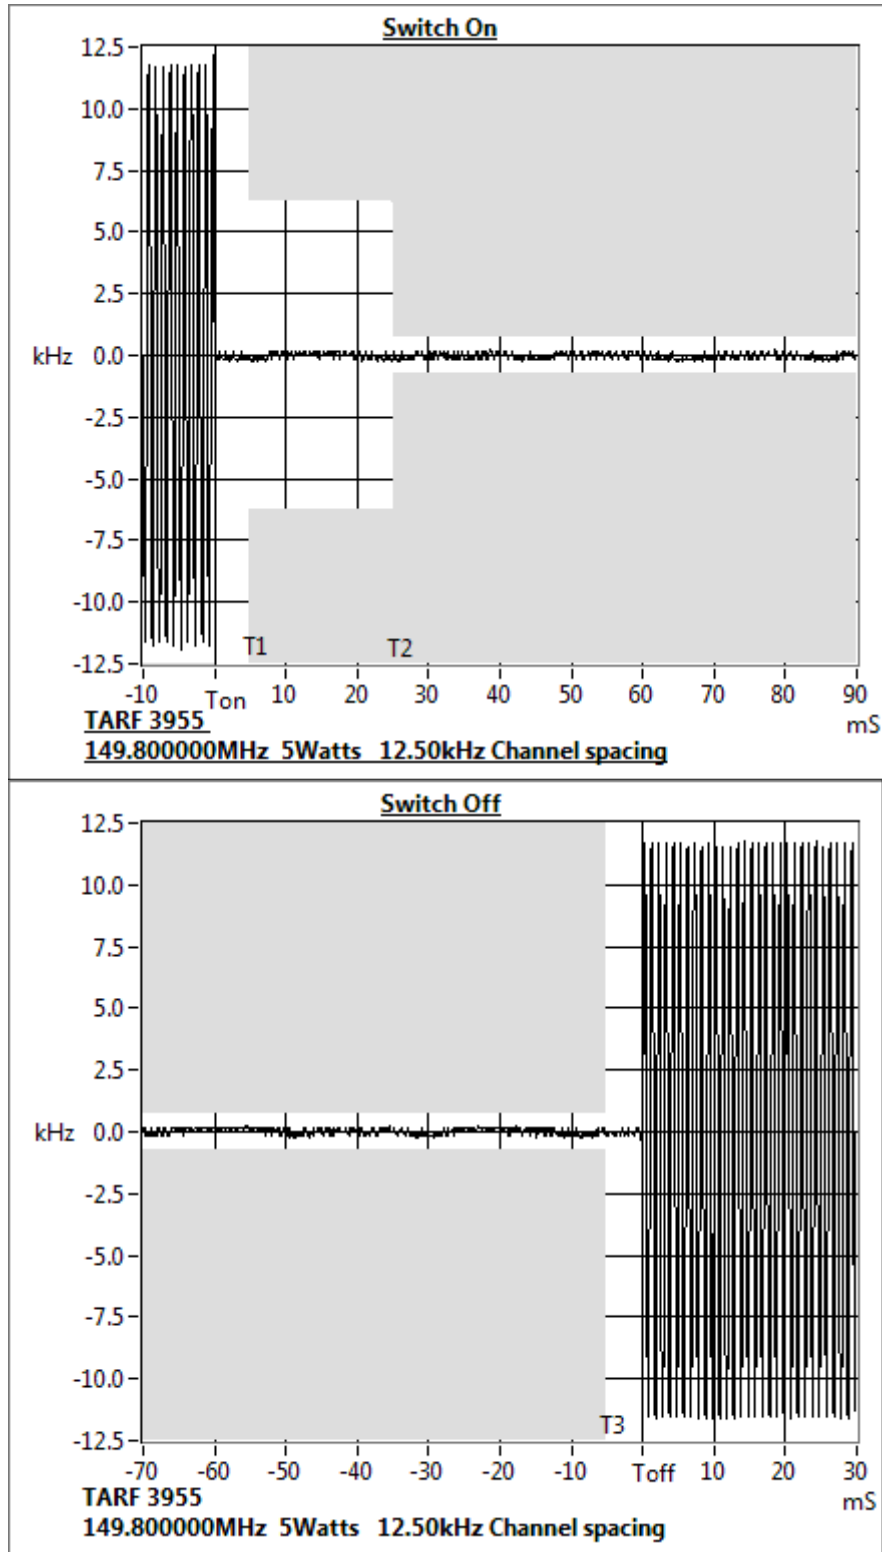

Transient Frequency Behaviour

SPECIFICATION: FCC 47 CFR 90.214

RSS-119 5.9

Tx FREQUENCY: 150.1 MHz

5 W

12.5 kHz Channel Spacing

TRANSIENT RESPONSE PERIOD	CARRIER PEAK VARIATION FROM NORMAL	
	Key ON (kHz)	Key OFF (kHz)
t1	-1.6	N/A
t2	-0.3	N/A
t3	N/A	-0.2

Confirm that during periods t1 and t3 the frequency difference does not exceed the value of one channel separation.	YES	NO
	<input type="checkbox"/>	<input type="checkbox"/>
Confirm that during the period t2 the frequency difference does not exceed half a channel separation.	YES	NO
	<input type="checkbox"/>	<input type="checkbox"/>
Confirm that during the period t2 to t3 the frequency difference does not exceed the frequency error limit.	YES	NO
	<input type="checkbox"/>	<input type="checkbox"/>

Measurement Uncertainty: Frequency ± 130 Hz; Time $\pm 0.2\%$

LIMIT: FCC 47 CFR 90.214

TRANSIENT PERIODS	FREQUENCY RANGE	
	150 MHz – 174 MHz	421 MHz – 512 MHz
t1 (ms)	5 ms	10 ms
t2 (ms)	20 ms	25 ms
t3 (ms)	5 ms	10 ms

LIMIT: RSS-119 5.9

Transient Frequency Behaviour for Equipment Designed to Operate on 12.5 kHz Channels			
TRANSIENT PERIODS	Maximum Frequency Difference	FREQUENCY RANGE	
		138 – 174 MHz	406.1 – 470 MHz
t1 (ms)	± 12.5 kHz	5 ms	10 ms
t2 (ms)	± 6.25 kHz	20 ms	25 ms
t3 (ms)	± 12.5 kHz	5 ms	10 ms


Note: RSS-119 5.9 - If the transmitter carrier output power rating is 6 Watts or less, the frequency difference during the time periods t1 and t3 may exceed the maximum frequency difference for these time periods.

Transient Frequency Behaviour

SPECIFICATION: FCC 47 CFR 90.214

RSS-119 5.9

Tx FREQUENCY: 150.1 MHz 5 W 12.5 kHz Channel Spacing

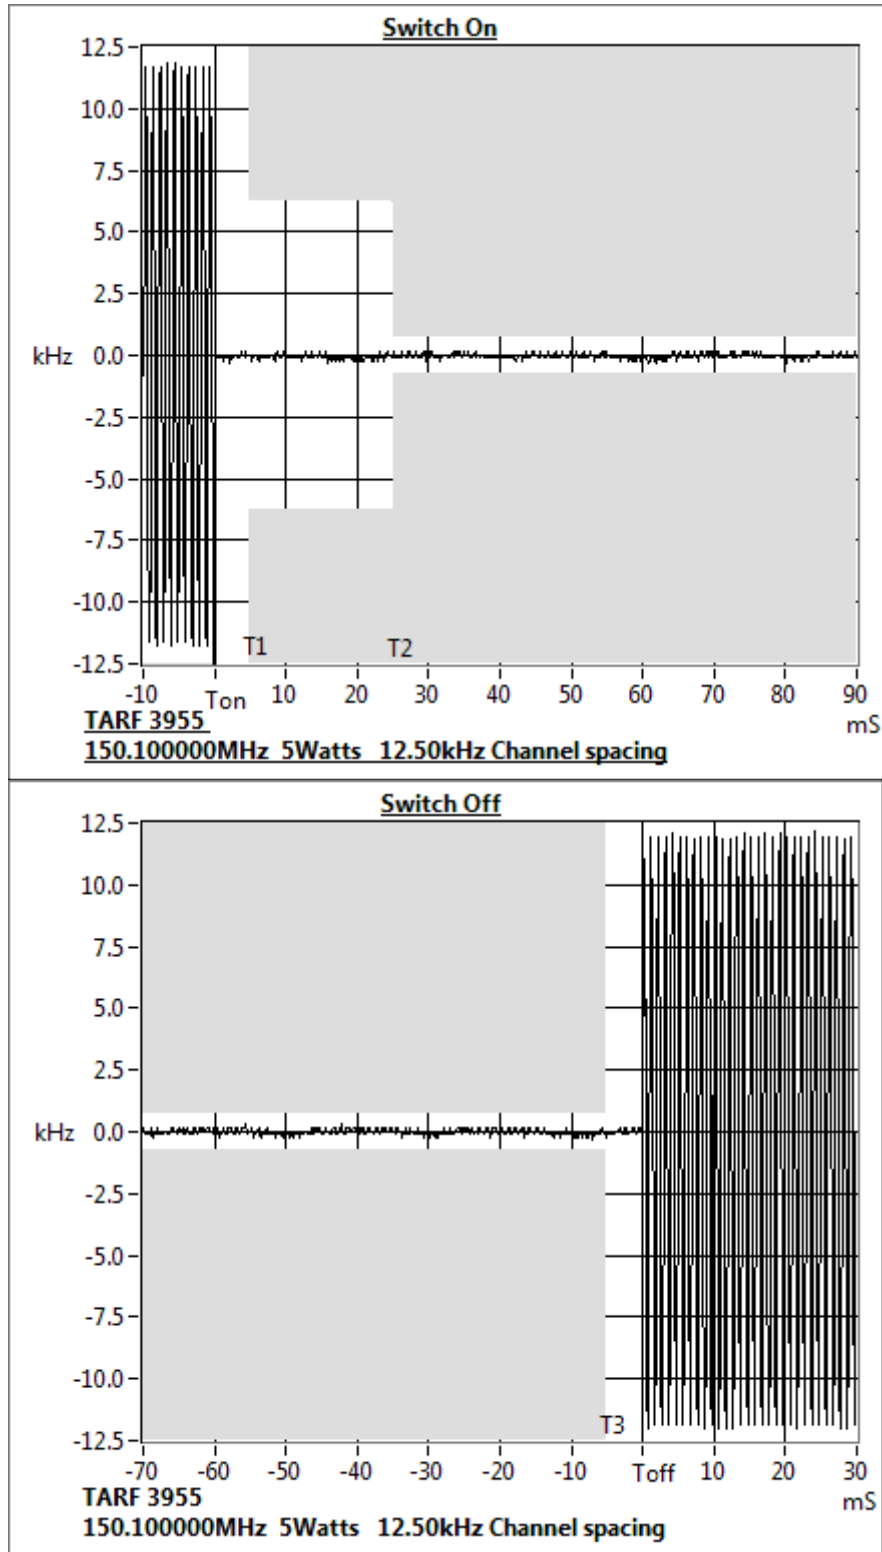

Transient Frequency Behaviour

SPECIFICATION: FCC 47 CFR 90.214

RSS-119 5.9

Tx FREQUENCY: 152.0 MHz

5 W

12.5 kHz Channel Spacing

TRANSIENT RESPONSE PERIOD	CARRIER PEAK VARIATION FROM NORMAL	
	Key ON (kHz)	Key OFF (kHz)
t1	-0.4	N/A
t2	0.7	N/A
t3	N/A	-0.3

Confirm that during periods t1 and t3 the frequency difference does not exceed the value of one channel separation.	YES	NO
	<input type="checkbox"/>	<input type="checkbox"/>
Confirm that during the period t2 the frequency difference does not exceed half a channel separation.	YES	NO
	<input type="checkbox"/>	<input type="checkbox"/>
Confirm that during the period t2 to t3 the frequency difference does not exceed the frequency error limit.	YES	NO
	<input type="checkbox"/>	<input type="checkbox"/>

Measurement Uncertainty: Frequency ± 130 Hz; Time $\pm 0.2\%$

LIMIT: FCC 47 CFR 90.214

TRANSIENT PERIODS	FREQUENCY RANGE	
	150 MHz – 174 MHz	421 MHz – 512 MHz
t1 (ms)	5 ms	10 ms
t2 (ms)	20 ms	25 ms
t3 (ms)	5 ms	10 ms

LIMIT: RSS-119 5.9

Transient Frequency Behaviour for Equipment Designed to Operate on 12.5 kHz Channels			
TRANSIENT PERIODS	Maximum Frequency Difference	FREQUENCY RANGE	
		138 – 174 MHz	406.1 – 470 MHz
t1 (ms)	± 12.5 kHz	5 ms	10 ms
t2 (ms)	± 6.25 kHz	20 ms	25 ms
t3 (ms)	± 12.5 kHz	5 ms	10 ms


Note: RSS-119 5.9 - If the transmitter carrier output power rating is 6 Watts or less, the frequency difference during the time periods t1 and t3 may exceed the maximum frequency difference for these time periods.

Transient Frequency Behaviour

SPECIFICATION: FCC 47 CFR 90.214

RSS-119 5.9

Tx FREQUENCY: 152.0 MHz 5 W 12.5 kHz Channel Spacing

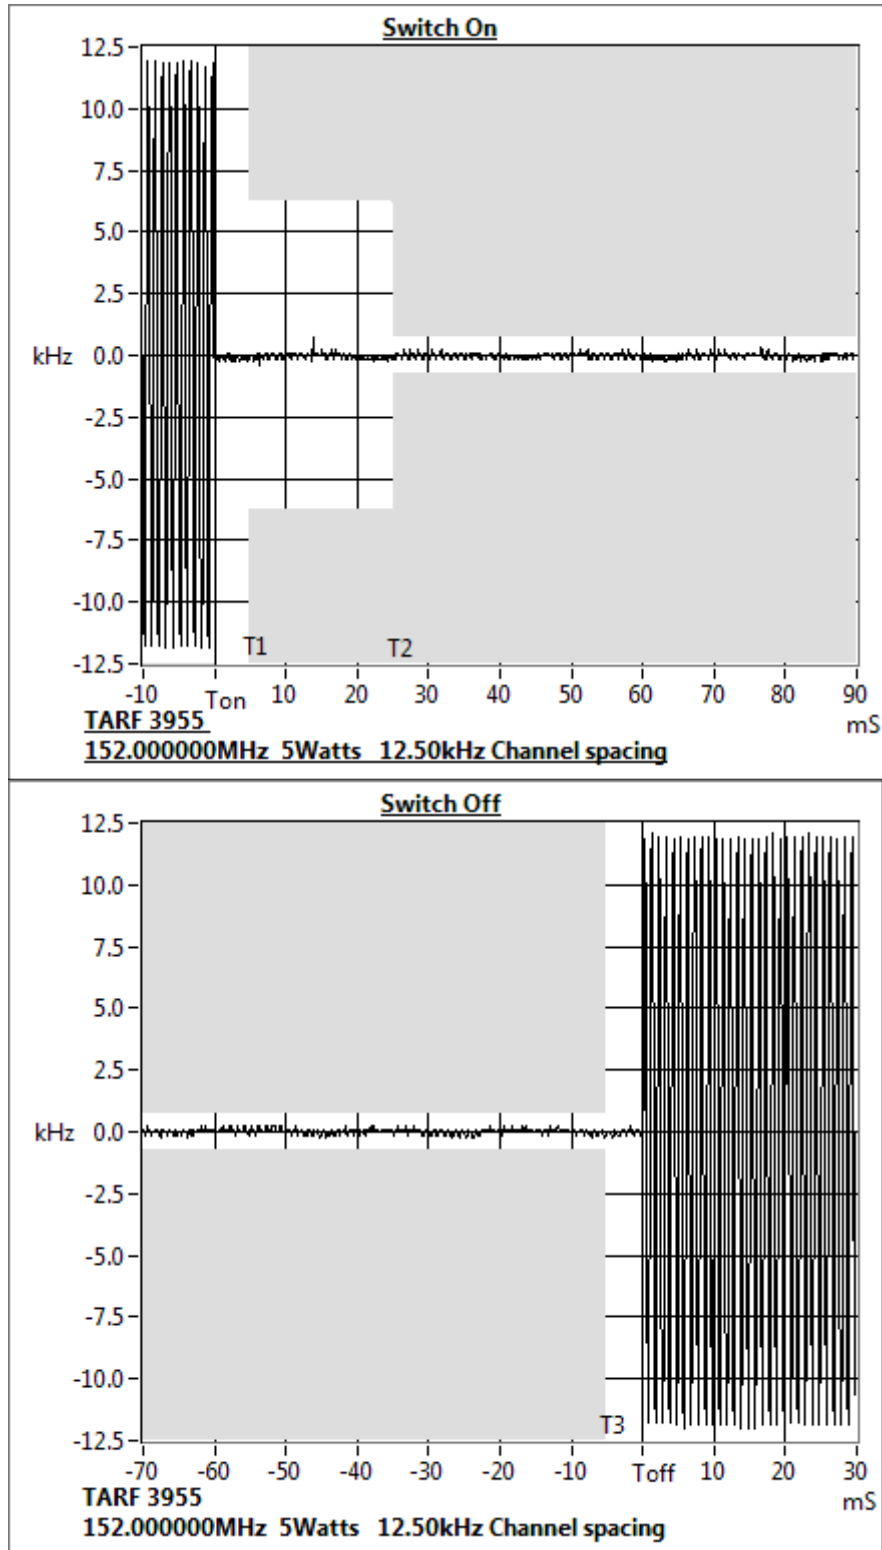

Transient Frequency Behaviour

SPECIFICATION: FCC 47 CFR 90.214

RSS-119 5.9

Tx FREQUENCY: 156.3 MHz

5 W

12.5 kHz Channel Spacing

TRANSIENT RESPONSE PERIOD	CARRIER PEAK VARIATION FROM NORMAL	
	Key ON (kHz)	Key OFF (kHz)
t1	-0.6	N/A
t2	-0.2	N/A
t3	N/A	0.3

Confirm that during periods t1 and t3 the frequency difference does not exceed the value of one channel separation.	YES	NO
	<input type="checkbox"/>	<input type="checkbox"/>
Confirm that during the period t2 the frequency difference does not exceed half a channel separation.	YES	NO
	<input type="checkbox"/>	<input type="checkbox"/>
Confirm that during the period t2 to t3 the frequency difference does not exceed the frequency error limit.	YES	NO
	<input type="checkbox"/>	<input type="checkbox"/>

Measurement Uncertainty: Frequency ± 130 Hz; Time $\pm 0.2\%$

LIMIT: FCC 47 CFR 90.214

TRANSIENT PERIODS	FREQUENCY RANGE	
	150 MHz – 174 MHz	421 MHz – 512 MHz
t1 (ms)	5 ms	10 ms
t2 (ms)	20 ms	25 ms
t3 (ms)	5 ms	10 ms

LIMIT: RSS-119 5.9

Transient Frequency Behaviour for Equipment Designed to Operate on 12.5 kHz Channels			
TRANSIENT PERIODS	Maximum Frequency Difference	FREQUENCY RANGE	
		138 – 174 MHz	406.1 – 470 MHz
t1 (ms)	± 12.5 kHz	5 ms	10 ms
t2 (ms)	± 6.25 kHz	20 ms	25 ms
t3 (ms)	± 12.5 kHz	5 ms	10 ms


Note: RSS-119 5.9 - If the transmitter carrier output power rating is 6 Watts or less, the frequency difference during the time periods t1 and t3 may exceed the maximum frequency difference for these time periods.

Transient Frequency Behaviour

SPECIFICATION: FCC 47 CFR 90.214

RSS-119 5.9

Tx FREQUENCY: 156.3 MHz 5 W 12.5 kHz Channel Spacing

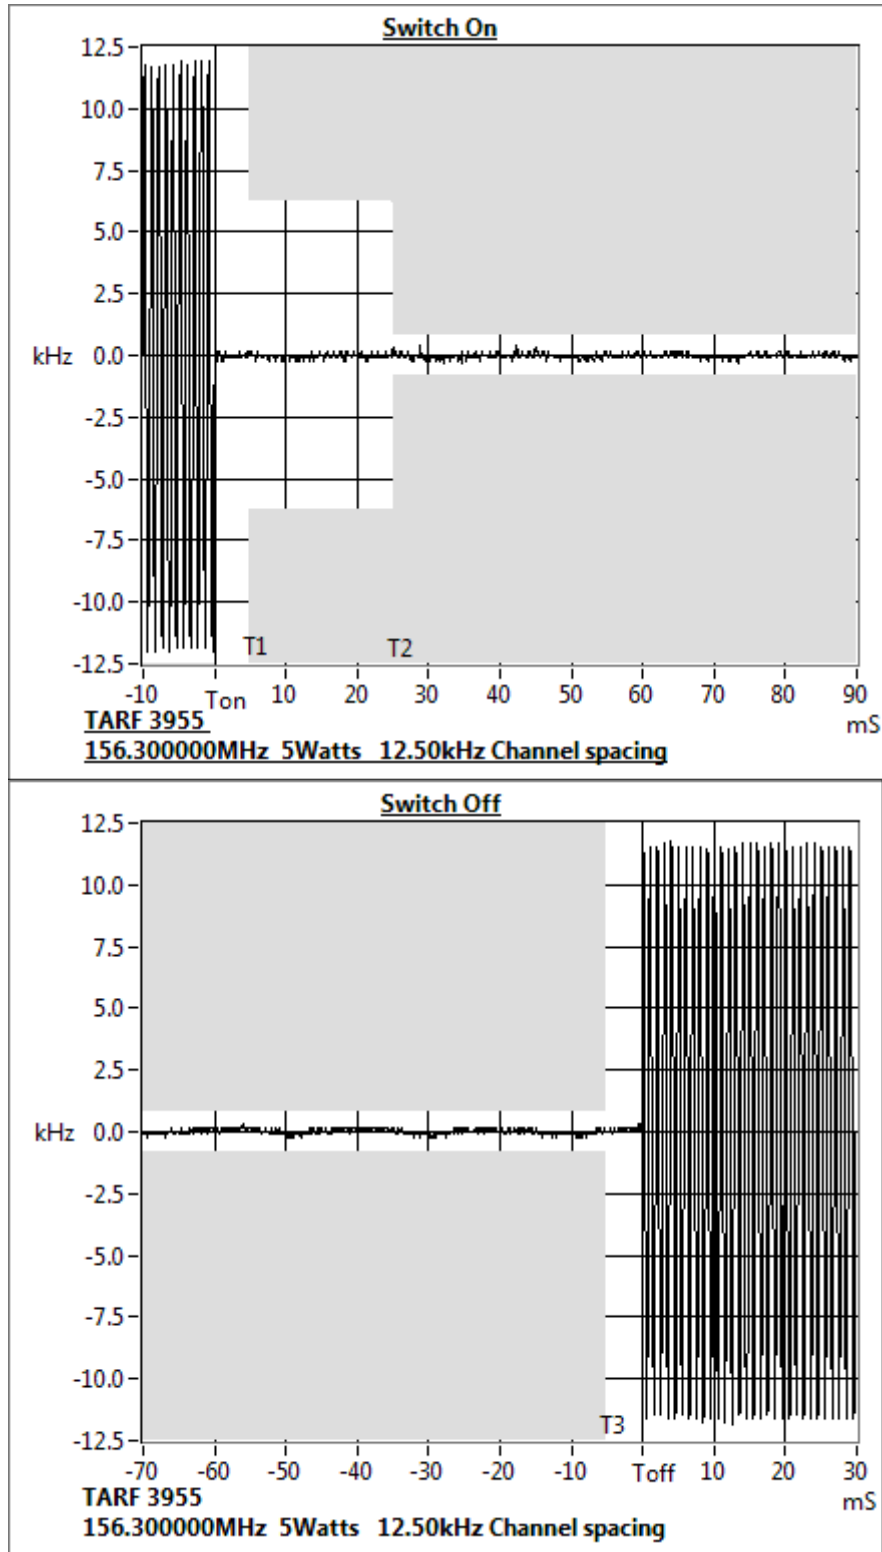

Transient Frequency Behaviour

SPECIFICATION: FCC 47 CFR 90.214

RSS-119 5.9

Tx FREQUENCY: 156.67 MHz

5 W

12.5 kHz Channel Spacing

TRANSIENT RESPONSE PERIOD	CARRIER PEAK VARIATION FROM NORMAL	
	Key ON (kHz)	Key OFF (kHz)
t1	1.5	N/A
t2	-0.2	N/A
t3	N/A	0.3

Confirm that during periods t1 and t3 the frequency difference does not exceed the value of one channel separation.	YES	NO
	<input type="checkbox"/>	<input type="checkbox"/>
Confirm that during the period t2 the frequency difference does not exceed half a channel separation.	YES	NO
	<input type="checkbox"/>	<input type="checkbox"/>
Confirm that during the period t2 to t3 the frequency difference does not exceed the frequency error limit.	YES	NO
	<input type="checkbox"/>	<input type="checkbox"/>

Measurement Uncertainty: Frequency ± 130 Hz; Time $\pm 0.2\%$

LIMIT: FCC 47 CFR 90.214

TRANSIENT PERIODS	FREQUENCY RANGE	
	150 MHz – 174 MHz	421 MHz – 512 MHz
t1 (ms)	5 ms	10 ms
t2 (ms)	20 ms	25 ms
t3 (ms)	5 ms	10 ms

LIMIT: RSS-119 5.9

Transient Frequency Behaviour for Equipment Designed to Operate on 12.5 kHz Channels			
TRANSIENT PERIODS	Maximum Frequency Difference	FREQUENCY RANGE	
		138 – 174 MHz	406.1 – 470 MHz
t1 (ms)	± 12.5 kHz	5 ms	10 ms
t2 (ms)	± 6.25 kHz	20 ms	25 ms
t3 (ms)	± 12.5 kHz	5 ms	10 ms


Note: RSS-119 5.9 - If the transmitter carrier output power rating is 6 Watts or less, the frequency difference during the time periods t1 and t3 may exceed the maximum frequency difference for these time periods.

Transient Frequency Behaviour

SPECIFICATION: FCC 47 CFR 90.214

RSS-119 5.9

Tx FREQUENCY: 156.67 MHz 5 W 12.5 kHz Channel Spacing

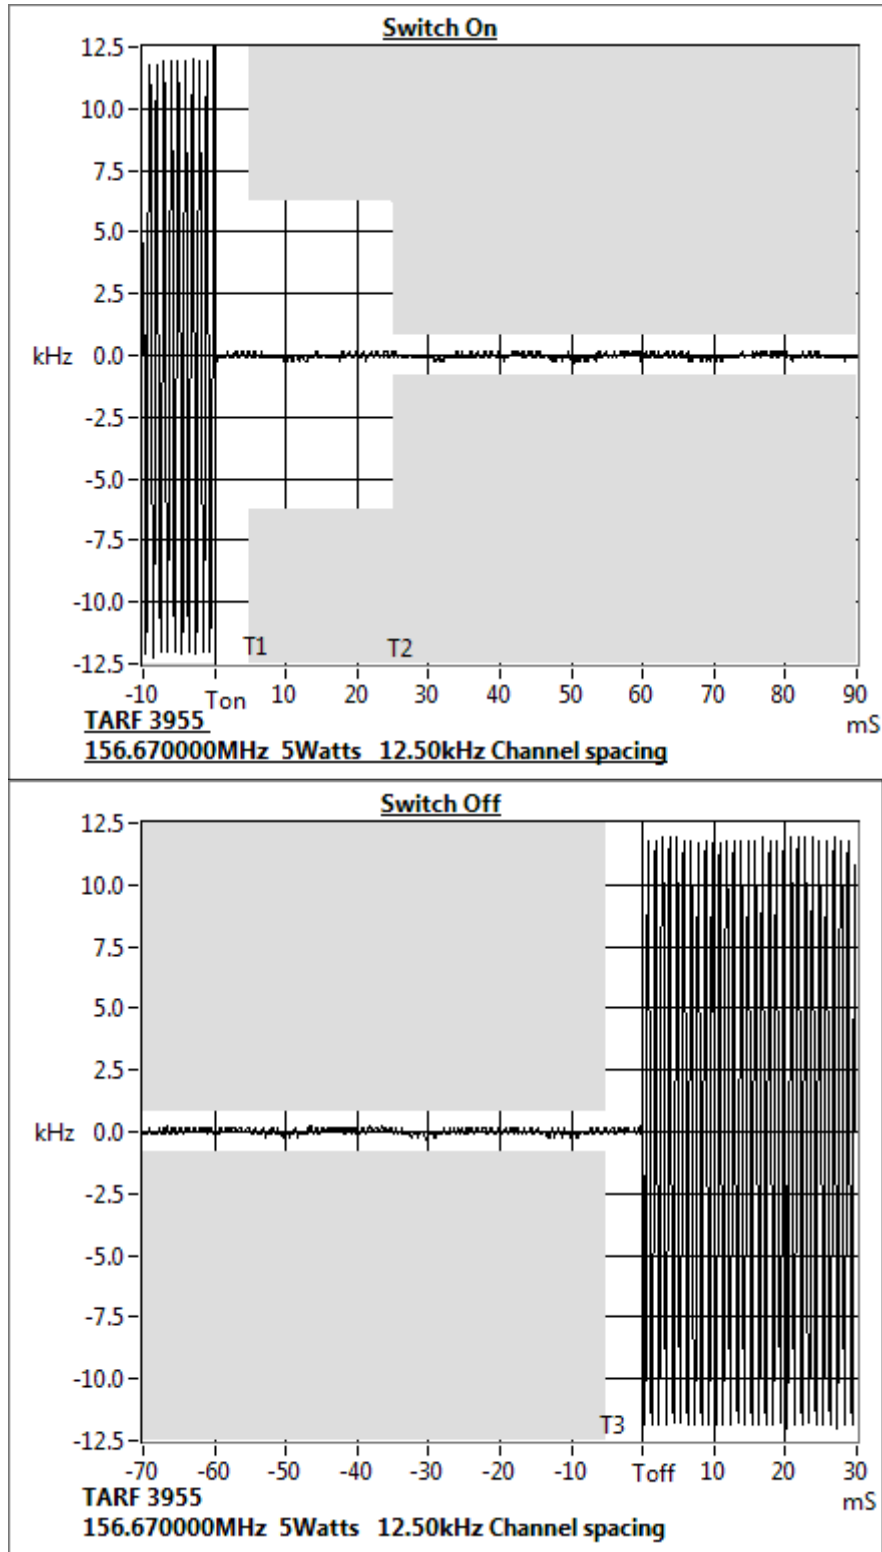

Transient Frequency Behaviour

SPECIFICATION: FCC 47 CFR 90.214

RSS-119 5.9

Tx FREQUENCY: 157.0 MHz

5 W

12.5 kHz Channel Spacing

TRANSIENT RESPONSE PERIOD	CARRIER PEAK VARIATION FROM NORMAL	
	Key ON (kHz)	Key OFF (kHz)
t1	3.8	N/A
t2	-0.3	N/A
t3	N/A	0.4

Confirm that during periods t1 and t3 the frequency difference does not exceed the value of one channel separation.	YES	NO
	<input type="checkbox"/>	<input type="checkbox"/>
Confirm that during the period t2 the frequency difference does not exceed half a channel separation.	YES	NO
	<input type="checkbox"/>	<input type="checkbox"/>
Confirm that during the period t2 to t3 the frequency difference does not exceed the frequency error limit.	YES	NO
	<input type="checkbox"/>	<input type="checkbox"/>

Measurement Uncertainty: Frequency ± 130 Hz; Time $\pm 0.2\%$

LIMIT: FCC 47 CFR 90.214

TRANSIENT PERIODS	FREQUENCY RANGE	
	150 MHz – 174 MHz	421 MHz – 512 MHz
t1 (ms)	5 ms	10 ms
t2 (ms)	20 ms	25 ms
t3 (ms)	5 ms	10 ms

LIMIT: RSS-119 5.9

Transient Frequency Behaviour for Equipment Designed to Operate on 12.5 kHz Channels			
TRANSIENT PERIODS	Maximum Frequency Difference	FREQUENCY RANGE	
		138 – 174 MHz	406.1 – 470 MHz
t1 (ms)	± 12.5 kHz	5 ms	10 ms
t2 (ms)	± 6.25 kHz	20 ms	25 ms
t3 (ms)	± 12.5 kHz	5 ms	10 ms



Note: RSS-119 5.9 - If the transmitter carrier output power rating is 6 Watts or less, the frequency difference during the time periods t1 and t3 may exceed the maximum frequency difference for these time periods.

Transient Frequency Behaviour

SPECIFICATION: FCC 47 CFR 90.214

RSS-119 5.9

Tx FREQUENCY: 157.0 MHz 5 W 12.5 kHz Channel Spacing

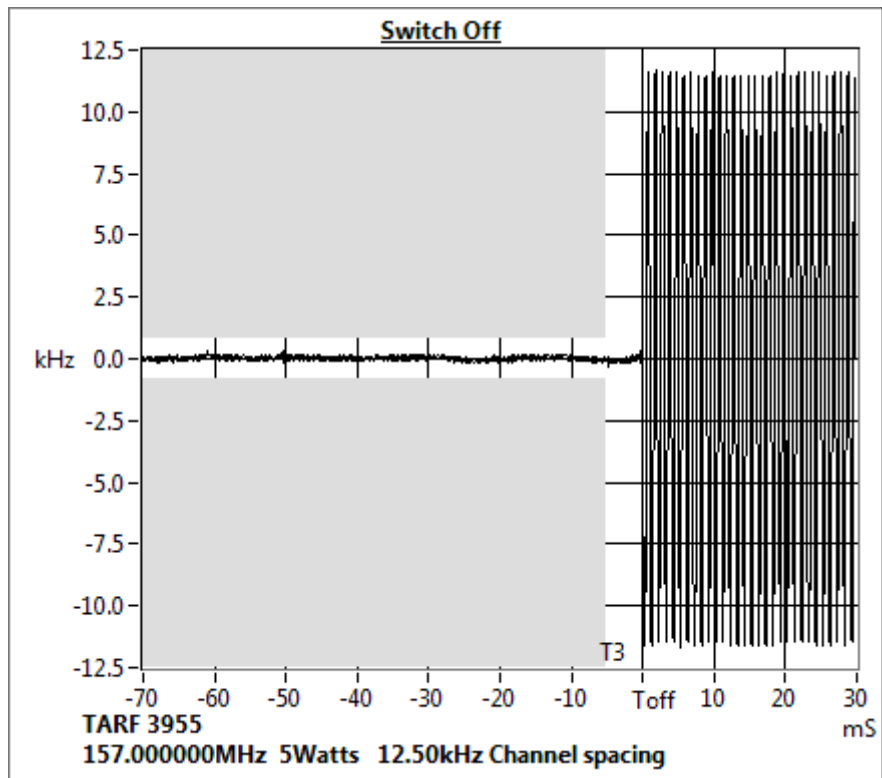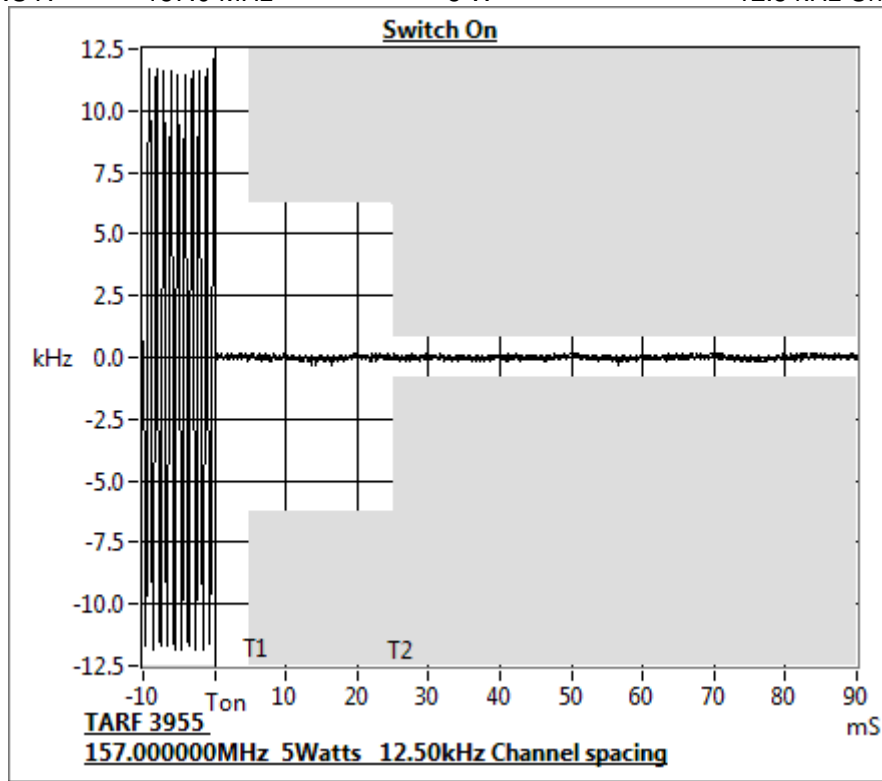

Transient Frequency Behaviour

SPECIFICATION: FCC 47 CFR 90.214

RSS-119 5.9

Tx FREQUENCY: 160.0 MHz

5 W

12.5 kHz Channel Spacing

TRANSIENT RESPONSE PERIOD	CARRIER PEAK VARIATION FROM NORMAL	
	Key ON (kHz)	Key OFF (kHz)
t1	-0.9	N/A
t2	-0.3	N/A
t3	N/A	-0.3

Confirm that during periods t1 and t3 the frequency difference does not exceed the value of one channel separation.	YES	NO
	<input type="checkbox"/>	<input type="checkbox"/>
Confirm that during the period t2 the frequency difference does not exceed half a channel separation.	YES	NO
	<input type="checkbox"/>	<input type="checkbox"/>
Confirm that during the period t2 to t3 the frequency difference does not exceed the frequency error limit.	YES	NO
	<input type="checkbox"/>	<input type="checkbox"/>

Measurement Uncertainty: Frequency ± 130 Hz; Time $\pm 0.2\%$

LIMIT: FCC 47 CFR 90.214

TRANSIENT PERIODS	FREQUENCY RANGE	
	150 MHz – 174 MHz	421 MHz – 512 MHz
t1 (ms)	5 ms	10 ms
t2 (ms)	20 ms	25 ms
t3 (ms)	5 ms	10 ms

LIMIT: RSS-119 5.9

Transient Frequency Behaviour for Equipment Designed to Operate on 12.5 kHz Channels			
TRANSIENT PERIODS	Maximum Frequency Difference	FREQUENCY RANGE	
		138 – 174 MHz	406.1 – 470 MHz
t1 (ms)	± 12.5 kHz	5 ms	10 ms
t2 (ms)	± 6.25 kHz	20 ms	25 ms
t3 (ms)	± 12.5 kHz	5 ms	10 ms


Note: RSS-119 5.9 - If the transmitter carrier output power rating is 6 Watts or less, the frequency difference during the time periods t1 and t3 may exceed the maximum frequency difference for these time periods.

Transient Frequency Behaviour

SPECIFICATION: FCC 47 CFR 90.214

RSS-119 5.9

Tx FREQUENCY: 160.0 MHz 5 W 12.5 kHz Channel Spacing

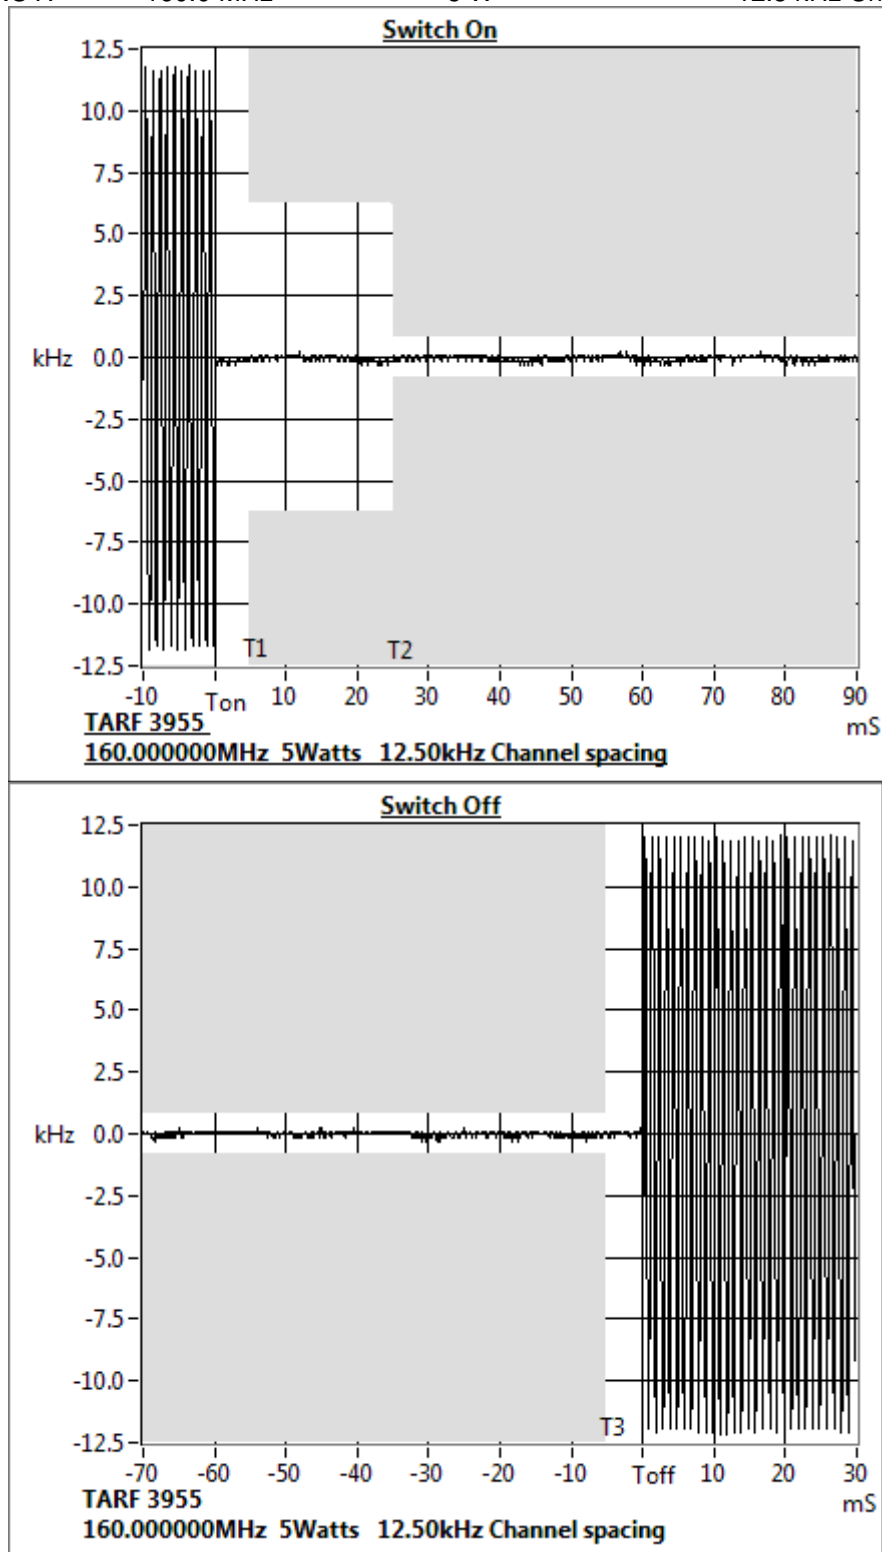

Transient Frequency Behaviour

SPECIFICATION: FCC 47 CFR 90.214

RSS-119 5.9

Tx FREQUENCY: 161.0 MHz

5 W

12.5 kHz Channel Spacing

TRANSIENT RESPONSE PERIOD	CARRIER PEAK VARIATION FROM NORMAL	
	Key ON (kHz)	Key OFF (kHz)
t1	0.9	N/A
t2	0.3	N/A
t3	N/A	-0.2

Confirm that during periods t1 and t3 the frequency difference does not exceed the value of one channel separation.	YES	NO
	<input type="checkbox"/>	<input type="checkbox"/>
Confirm that during the period t2 the frequency difference does not exceed half a channel separation.	YES	NO
	<input type="checkbox"/>	<input type="checkbox"/>
Confirm that during the period t2 to t3 the frequency difference does not exceed the frequency error limit.	YES	NO
	<input type="checkbox"/>	<input type="checkbox"/>

Measurement Uncertainty: Frequency ± 130 Hz; Time $\pm 0.2\%$

LIMIT: FCC 47 CFR 90.214

TRANSIENT PERIODS	FREQUENCY RANGE	
	150 MHz – 174 MHz	421 MHz – 512 MHz
t1 (ms)	5 ms	10 ms
t2 (ms)	20 ms	25 ms
t3 (ms)	5 ms	10 ms

LIMIT: RSS-119 5.9

Transient Frequency Behaviour for Equipment Designed to Operate on 12.5 kHz Channels			
TRANSIENT PERIODS	Maximum Frequency Difference	FREQUENCY RANGE	
		138 – 174 MHz	406.1 – 470 MHz
t1 (ms)	± 12.5 kHz	5 ms	10 ms
t2 (ms)	± 6.25 kHz	20 ms	25 ms
t3 (ms)	± 12.5 kHz	5 ms	10 ms


Note: RSS-119 5.9 - If the transmitter carrier output power rating is 6 Watts or less, the frequency difference during the time periods t1 and t3 may exceed the maximum frequency difference for these time periods.

Transient Frequency Behaviour

SPECIFICATION: FCC 47 CFR 90.214

RSS-119 5.9

Tx FREQUENCY: 161.0 MHz 5 W 12.5 kHz Channel Spacing

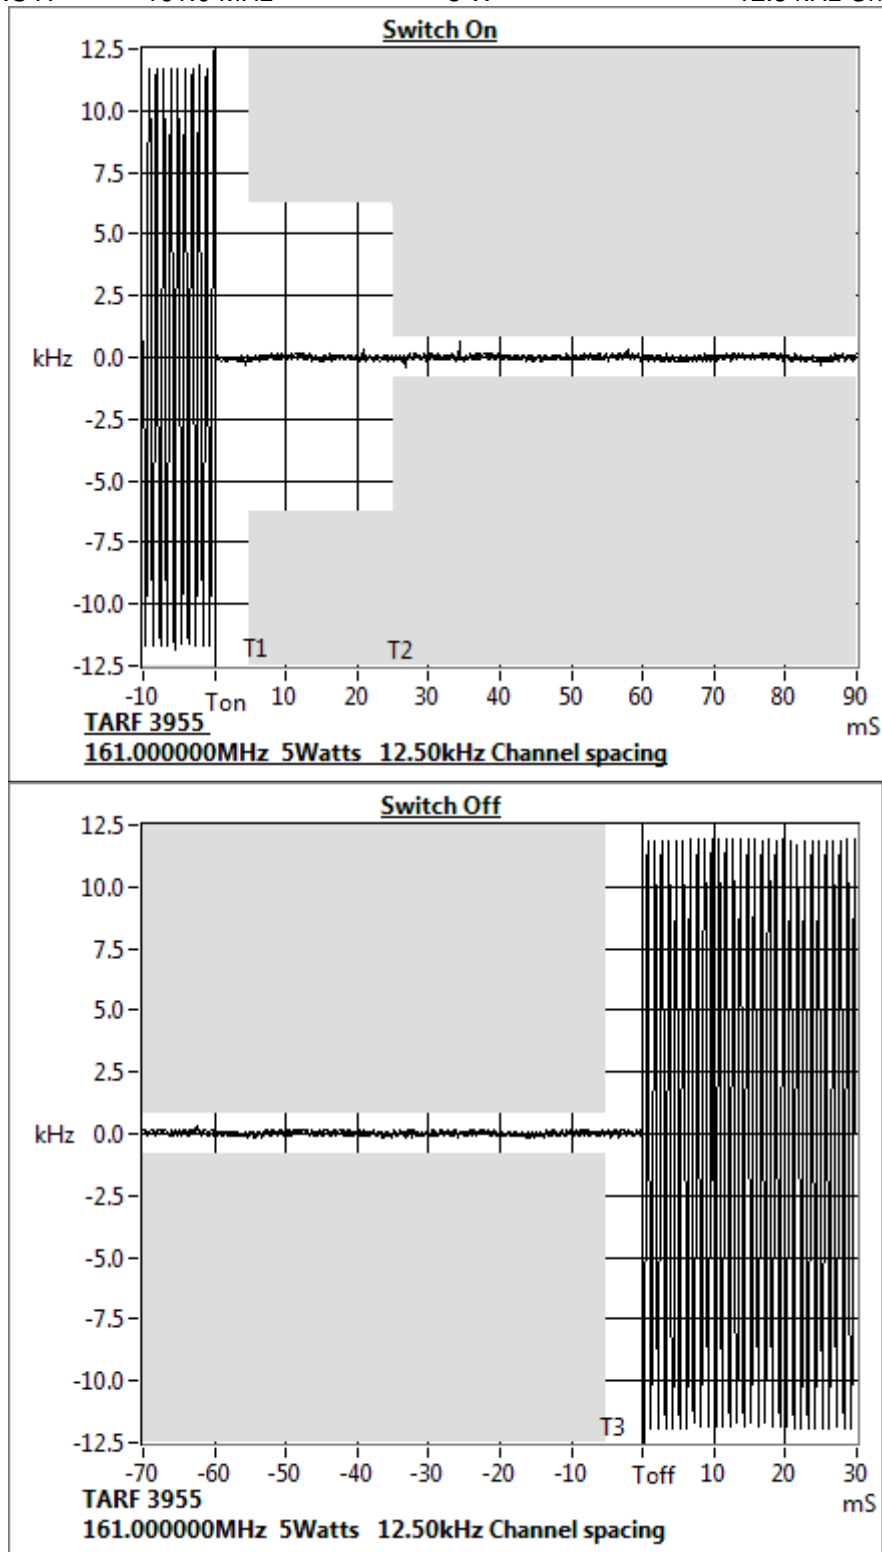

Transient Frequency Behaviour

SPECIFICATION: FCC 47 CFR 90.214

RSS-119 5.9

Tx FREQUENCY: 162.0 MHz

5 W

12.5 kHz Channel Spacing

TRANSIENT RESPONSE PERIOD	CARRIER PEAK VARIATION FROM NORMAL	
	Key ON (kHz)	Key OFF (kHz)
t1	-0.5	N/A
t2	-0.3	N/A
t3	N/A	-0.6

Confirm that during periods t1 and t3 the frequency difference does not exceed the value of one channel separation.	YES	NO
	<input type="checkbox"/>	<input type="checkbox"/>
Confirm that during the period t2 the frequency difference does not exceed half a channel separation.	YES	NO
	<input type="checkbox"/>	<input type="checkbox"/>
Confirm that during the period t2 to t3 the frequency difference does not exceed the frequency error limit.	YES	NO
	<input type="checkbox"/>	<input type="checkbox"/>

Measurement Uncertainty: Frequency ± 130 Hz; Time $\pm 0.2\%$

LIMIT: FCC 47 CFR 90.214

TRANSIENT PERIODS	FREQUENCY RANGE	
	150 MHz – 174 MHz	421 MHz – 512 MHz
t1 (ms)	5 ms	10 ms
t2 (ms)	20 ms	25 ms
t3 (ms)	5 ms	10 ms

LIMIT: RSS-119 5.9

Transient Frequency Behaviour for Equipment Designed to Operate on 12.5 kHz Channels			
TRANSIENT PERIODS	Maximum Frequency Difference	FREQUENCY RANGE	
		138 – 174 MHz	406.1 – 470 MHz
t1 (ms)	± 12.5 kHz	5 ms	10 ms
t2 (ms)	± 6.25 kHz	20 ms	25 ms
t3 (ms)	± 12.5 kHz	5 ms	10 ms


Note: RSS-119 5.9 - If the transmitter carrier output power rating is 6 Watts or less, the frequency difference during the time periods t1 and t3 may exceed the maximum frequency difference for these time periods.

Transient Frequency Behaviour

SPECIFICATION: FCC 47 CFR 90.214

RSS-119 5.9

Tx FREQUENCY: 162.0 MHz 5 W 12.5 kHz Channel Spacing

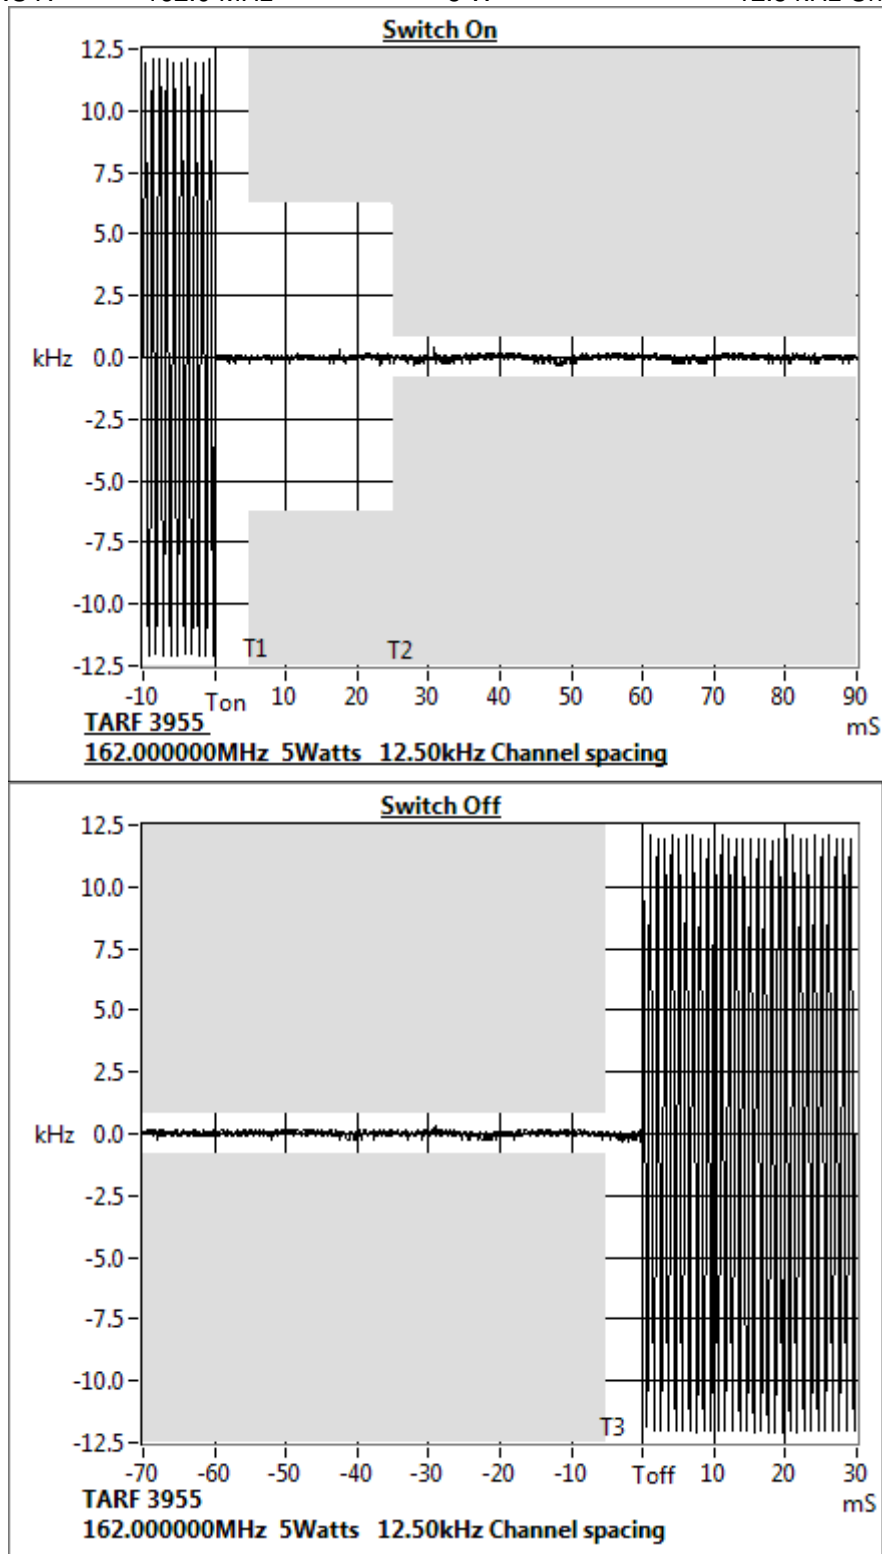

Transient Frequency Behaviour

SPECIFICATION: FCC 47 CFR 90.214

RSS-119 5.9

Tx FREQUENCY: 162.1 MHz

5 W

12.5 kHz Channel Spacing

TRANSIENT RESPONSE PERIOD	CARRIER PEAK VARIATION FROM NORMAL	
	Key ON (kHz)	Key OFF (kHz)
t1	-0.2	N/A
t2	-0.2	N/A
t3	N/A	0.5

Confirm that during periods t1 and t3 the frequency difference does not exceed the value of one channel separation.	YES	NO
	<input type="checkbox"/>	<input type="checkbox"/>
Confirm that during the period t2 the frequency difference does not exceed half a channel separation.	YES	NO
	<input type="checkbox"/>	<input type="checkbox"/>
Confirm that during the period t2 to t3 the frequency difference does not exceed the frequency error limit.	YES	NO
	<input type="checkbox"/>	<input type="checkbox"/>

Measurement Uncertainty: Frequency ± 130 Hz; Time $\pm 0.2\%$

LIMIT: FCC 47 CFR 90.214

TRANSIENT PERIODS	FREQUENCY RANGE	
	150 MHz – 174 MHz	421 MHz – 512 MHz
t1 (ms)	5 ms	10 ms
t2 (ms)	20 ms	25 ms
t3 (ms)	5 ms	10 ms

LIMIT: RSS-119 5.9

Transient Frequency Behaviour for Equipment Designed to Operate on 12.5 kHz Channels			
TRANSIENT PERIODS	Maximum Frequency Difference	FREQUENCY RANGE	
		138 – 174 MHz	406.1 – 470 MHz
t1 (ms)	± 12.5 kHz	5 ms	10 ms
t2 (ms)	± 6.25 kHz	20 ms	25 ms
t3 (ms)	± 12.5 kHz	5 ms	10 ms


Note: RSS-119 5.9 - If the transmitter carrier output power rating is 6 Watts or less, the frequency difference during the time periods t1 and t3 may exceed the maximum frequency difference for these time periods.

Transient Frequency Behaviour

SPECIFICATION: FCC 47 CFR 90.214

RSS-119 5.9

Tx FREQUENCY: 162.1 MHz 5 W 12.5 kHz Channel Spacing

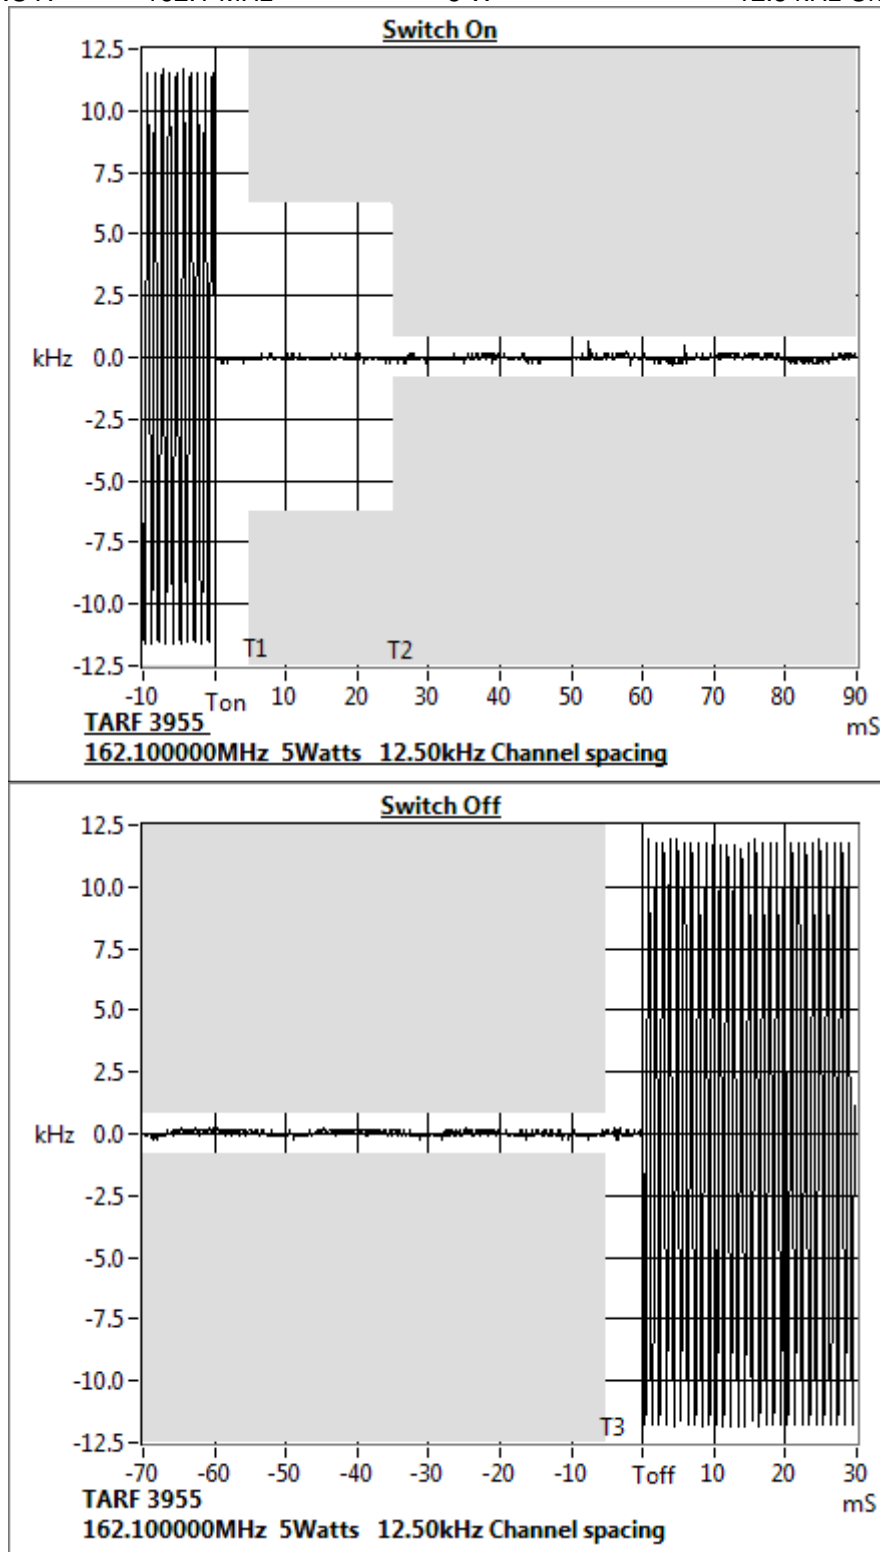

Transient Frequency Behaviour

SPECIFICATION: FCC 47 CFR 90.214

RSS-119 5.9

Tx FREQUENCY: 168.0 MHz

5 W

12.5 kHz Channel Spacing

TRANSIENT RESPONSE PERIOD	CARRIER PEAK VARIATION FROM NORMAL	
	Key ON (kHz)	Key OFF (kHz)
t1	-0.2	N/A
t2	-0.2	N/A
t3	N/A	-0.4

Confirm that during periods t1 and t3 the frequency difference does not exceed the value of one channel separation.	YES	NO
	<input type="checkbox"/>	<input type="checkbox"/>
Confirm that during the period t2 the frequency difference does not exceed half a channel separation.	YES	NO
	<input type="checkbox"/>	<input type="checkbox"/>
Confirm that during the period t2 to t3 the frequency difference does not exceed the frequency error limit.	YES	NO
	<input type="checkbox"/>	<input type="checkbox"/>

Measurement Uncertainty: Frequency ± 130 Hz; Time $\pm 0.2\%$

LIMIT: FCC 47 CFR 90.214

TRANSIENT PERIODS	FREQUENCY RANGE	
	150 MHz – 174 MHz	421 MHz – 512 MHz
t1 (ms)	5 ms	10 ms
t2 (ms)	20 ms	25 ms
t3 (ms)	5 ms	10 ms

LIMIT: RSS-119 5.9

Transient Frequency Behaviour for Equipment Designed to Operate on 12.5 kHz Channels			
TRANSIENT PERIODS	Maximum Frequency Difference	FREQUENCY RANGE	
		138 – 174 MHz	406.1 – 470 MHz
t1 (ms)	± 12.5 kHz	5 ms	10 ms
t2 (ms)	± 6.25 kHz	20 ms	25 ms
t3 (ms)	± 12.5 kHz	5 ms	10 ms


Note: RSS-119 5.9 - If the transmitter carrier output power rating is 6 Watts or less, the frequency difference during the time periods t1 and t3 may exceed the maximum frequency difference for these time periods.

Transient Frequency Behaviour

SPECIFICATION: FCC 47 CFR 90.214

RSS-119 5.9

Tx FREQUENCY: 168.0 MHz 5 W 12.5 kHz Channel Spacing

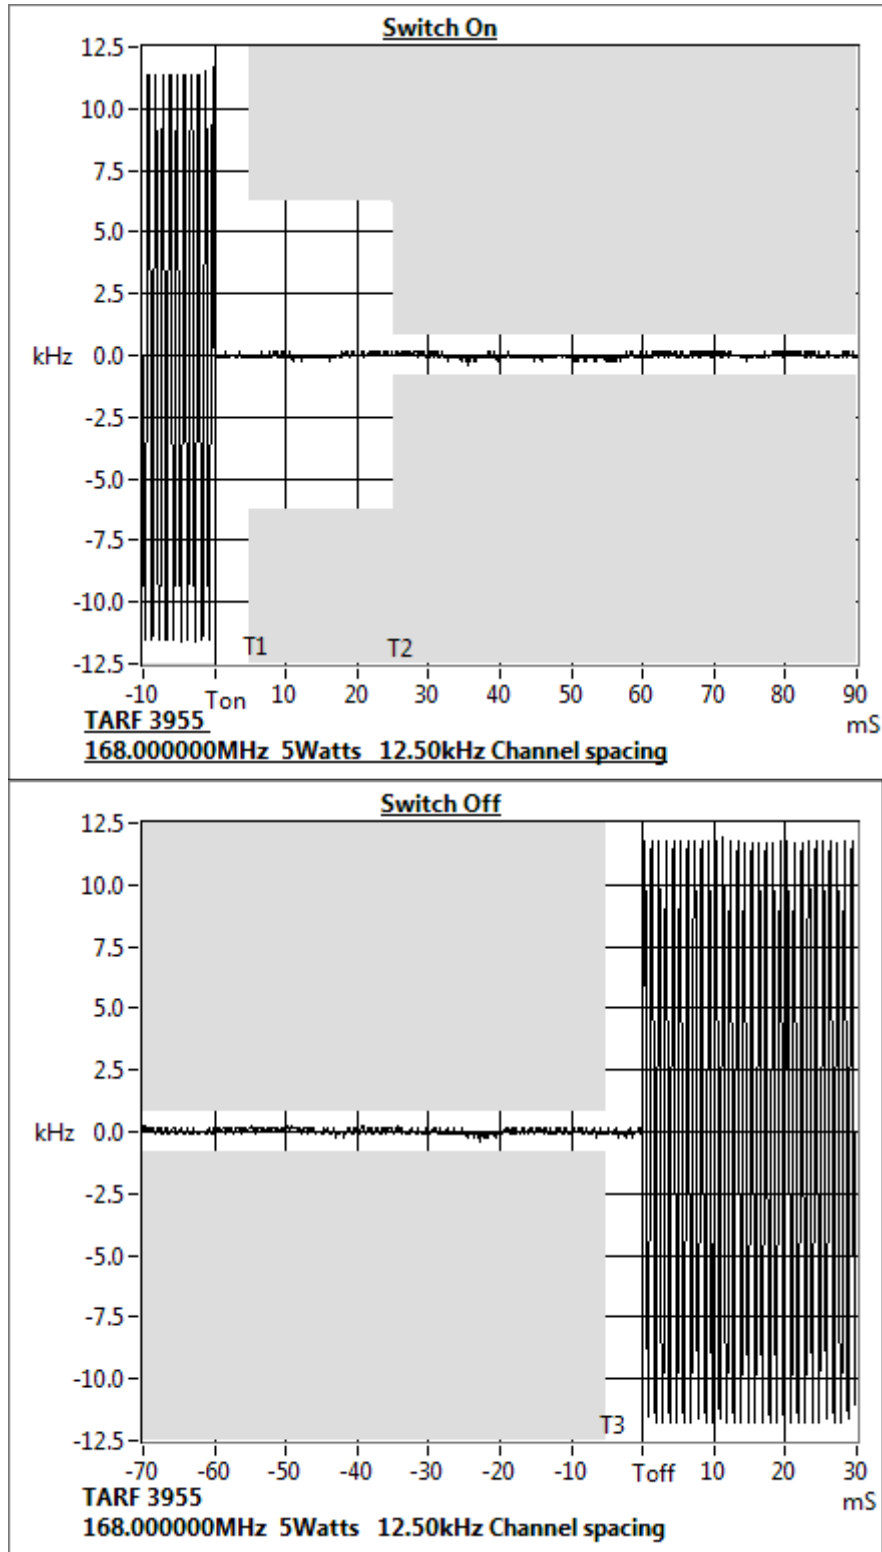

Transient Frequency Behaviour

SPECIFICATION: FCC 47 CFR 90.214

RSS-119 5.9

Tx FREQUENCY: 173.9 MHz

5 W

12.5 kHz Channel Spacing

TRANSIENT RESPONSE PERIOD	CARRIER PEAK VARIATION FROM NORMAL	
	Key ON (kHz)	Key OFF (kHz)
t1	0.7	N/A
t2	-0.9	N/A
t3	N/A	0.3

Confirm that during periods t1 and t3 the frequency difference does not exceed the value of one channel separation.	YES	NO
	<input type="checkbox"/>	<input type="checkbox"/>
Confirm that during the period t2 the frequency difference does not exceed half a channel separation.	YES	NO
	<input type="checkbox"/>	<input type="checkbox"/>
Confirm that during the period t2 to t3 the frequency difference does not exceed the frequency error limit.	YES	NO
	<input type="checkbox"/>	<input type="checkbox"/>

Measurement Uncertainty: Frequency ± 130 Hz; Time $\pm 0.2\%$

LIMIT: FCC 47 CFR 90.214

TRANSIENT PERIODS	FREQUENCY RANGE	
	150 MHz – 174 MHz	421 MHz – 512 MHz
t1 (ms)	5 ms	10 ms
t2 (ms)	20 ms	25 ms
t3 (ms)	5 ms	10 ms

LIMIT: RSS-119 5.9

Transient Frequency Behaviour for Equipment Designed to Operate on 12.5 kHz Channels			
TRANSIENT PERIODS	Maximum Frequency Difference	FREQUENCY RANGE	
		138 – 174 MHz	406.1 – 470 MHz
t1 (ms)	± 12.5 kHz	5 ms	10 ms
t2 (ms)	± 6.25 kHz	20 ms	25 ms
t3 (ms)	± 12.5 kHz	5 ms	10 ms



Note: RSS-119 5.9 - If the transmitter carrier output power rating is 6 Watts or less, the frequency difference during the time periods t1 and t3 may exceed the maximum frequency difference for these time periods.

Transient Frequency Behaviour

SPECIFICATION: FCC 47 CFR 90.214

RSS-119 5.9

Tx FREQUENCY: 173.9 MHz 5 W 12.5 kHz Channel Spacing

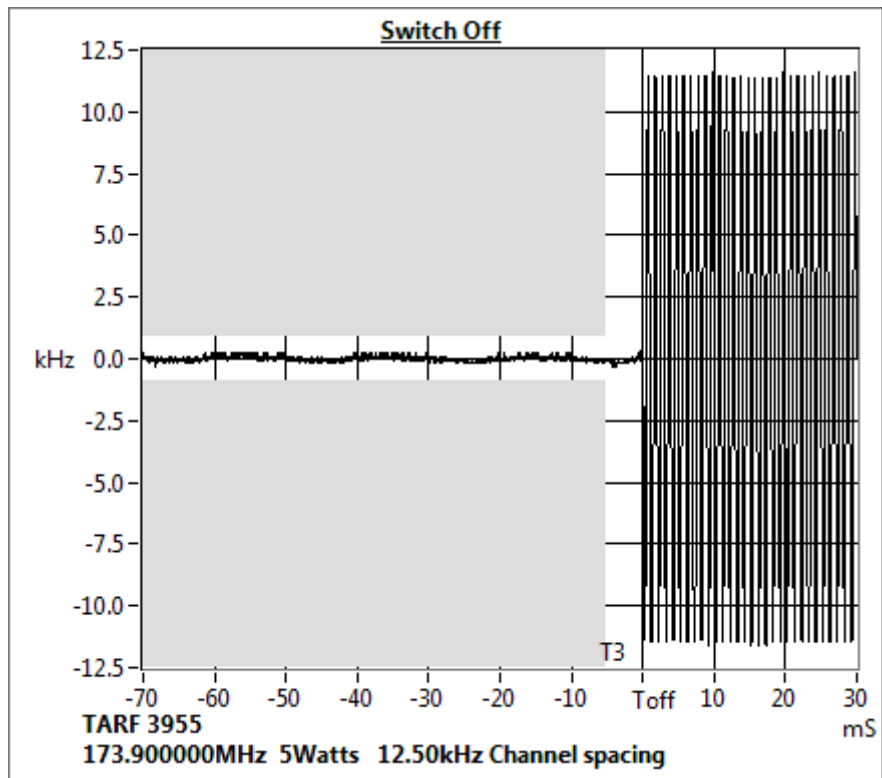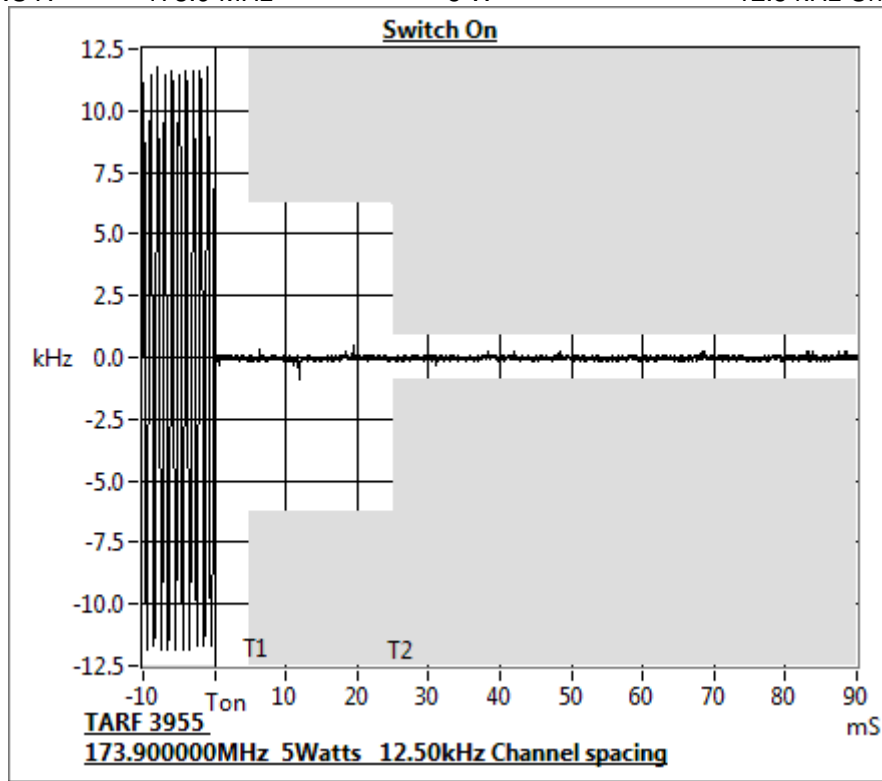

TRANSMITTER FREQUENCY STABILITY - TEMPERATURE

SPECIFICATION: FCC 47 CFR 2.1055 (a) (1)

RSS-119 5.3

GUIDE: TIA/EIA-603D 2.2.2

MEASUREMENT PROCEDURE:

1. Refer Annex A for equipment set up.
2. The EUT was tested for frequency error from -30°C to $+50^{\circ}\text{C}$ in 10°C increments
3. The frequency error was recorded in parts per million (ppm).

MEASUREMENT RESULTS:

See the plots on the following pages for 12.5 kHz channel spacing.

Temperature ($^{\circ}\text{C}$)	Error (ppm)							
	138.1 MHz	143.9 MHz	148.1 MHz	149.8 MHz	150.1 MHz	152.0 MHz	156.3 MHz	156.67 MHz
-30	-0.04	-0.03	-0.03	-0.04	-0.04	-0.06	-0.06	-0.07
-20	-0.07	-0.07	-0.06	-0.04	-0.03	-0.01	-0.01	0.02
-10	0.06	0.08	0.07	0.07	0.07	0.06	0.04	0.03
0	-0.01	-0.01	-0.01	-0.02	-0.01	-0.01	0.01	0.01
10	0.05	0.06	0.09	0.09	0.10	0.12	0.12	0.14
20	0.15	0.16	0.16	0.17	0.17	0.18	0.18	0.17
30	0.14	0.14	0.14	0.13	0.13	0.13	0.13	0.13
40	0.12	0.12	0.12	0.13	0.13	0.14	0.15	0.15
50	0.17	0.17	0.18	0.18	0.19	0.20	0.19	0.20
Measurement Uncertainty				$\pm 7 \times 10^{-8}$				









Temperature ($^{\circ}\text{C}$)	Error (ppm)						
	157.0 MHz	160.0 MHz	161.0 MHz	162.0 MHz	162.1 MHz	168.0 MHz	173.9 MHz
-30	-0.07	-0.01	-0.01	-0.01	-0.02	-0.04	-0.03
-20	0.04	-0.04	-0.03	-0.01	0	0.01	0.04
-10	0.03	0.01	0.01	-0.01	-0.01	-0.01	-0.02
0	0.02	-0.03	-0.02	-0.01	-0.01	0.01	0.03
10	0.15	0.08	0.08	0.10	0.11	0.13	0.16
20	0.17	0.15	0.16	0.17	0.16	0.17	0.17
30	0.13	0.13	0.14	0.14	0.13	0.14	0.14
40	0.16	0.11	0.12	0.13	0.14	0.15	0.16
50	0.22	0.19	0.19	0.19	0.20	0.21	0.21
Measurement Uncertainty				$\pm 7 \times 10^{-8}$			

LIMIT: FCC 47 CFR 90.213








RSS-119 5.3

Channel Spacing (kHz)	Frequency Error (ppm)
12.5	5.0

Transmitter Frequency Stability – Temperature

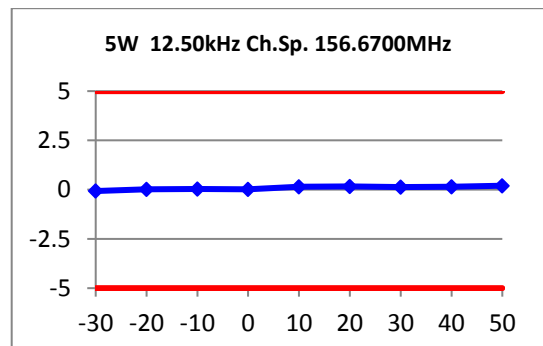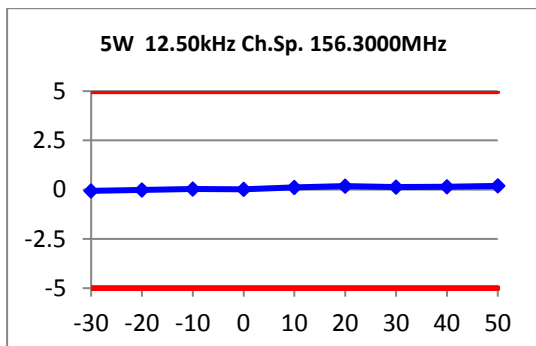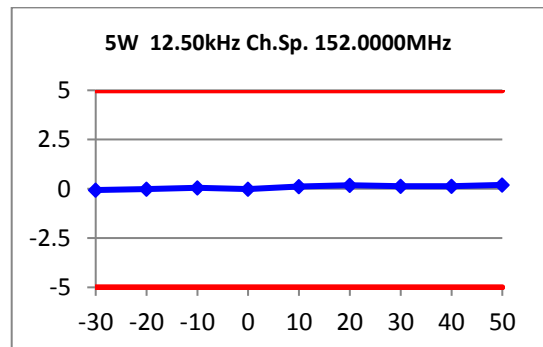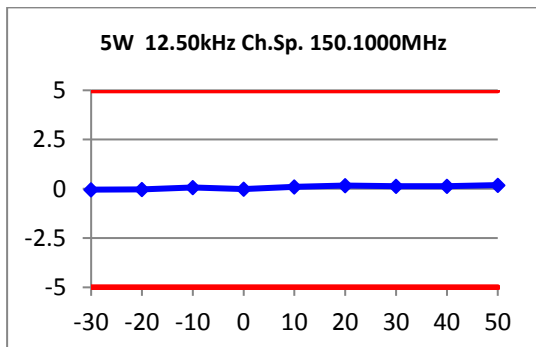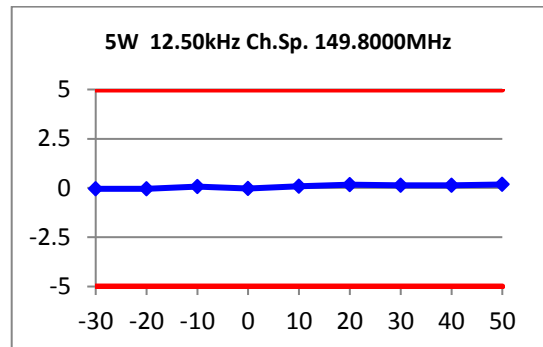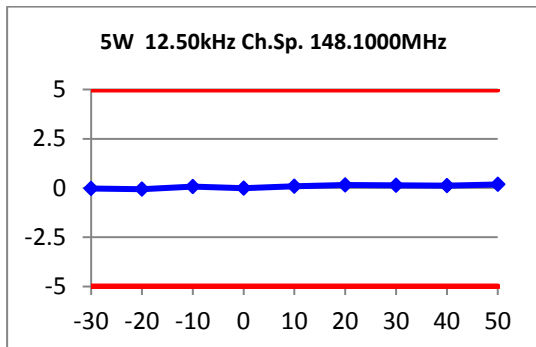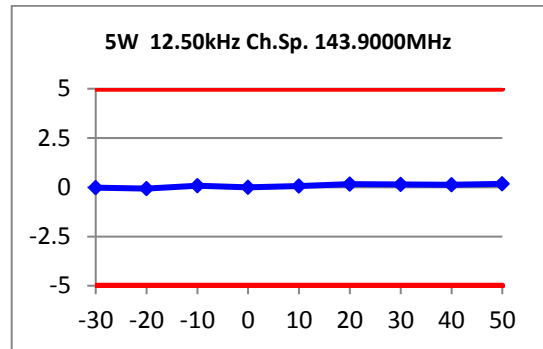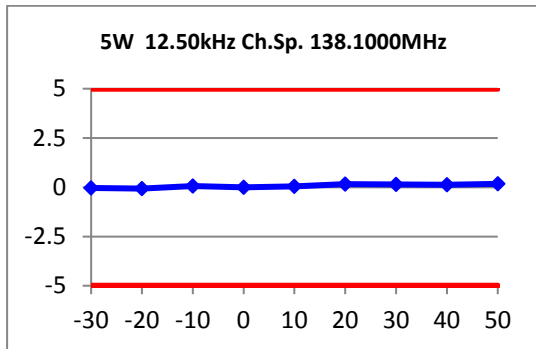

Transmitter Frequency Stability – Temperature

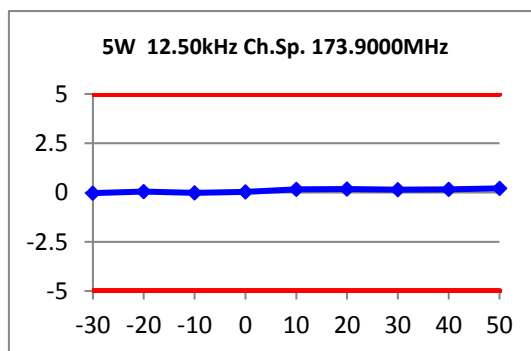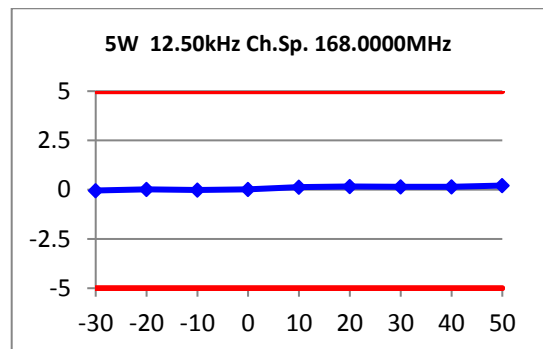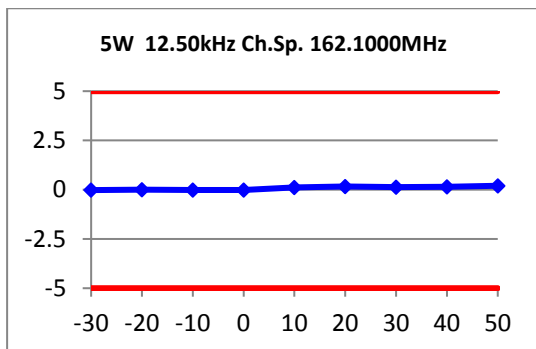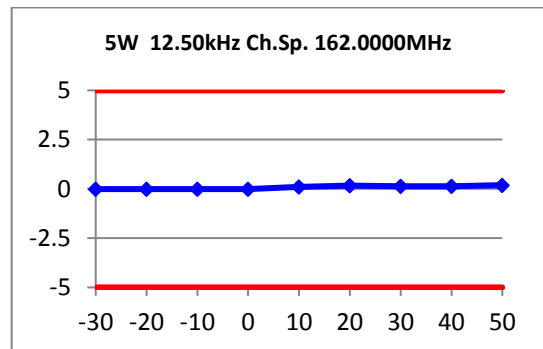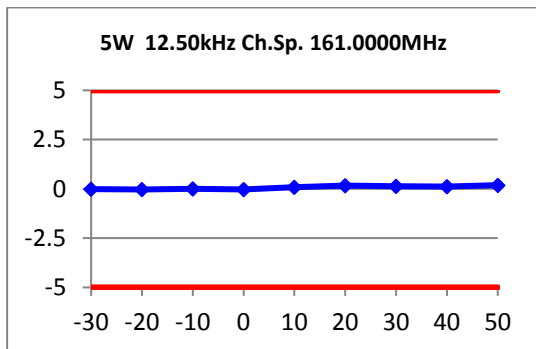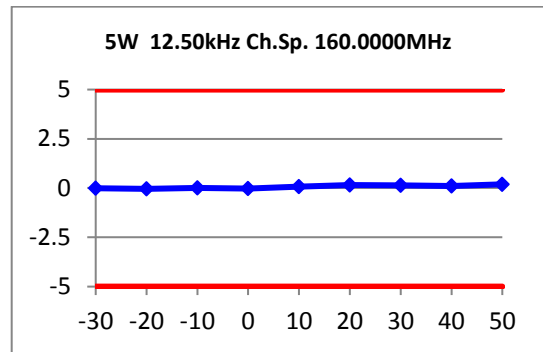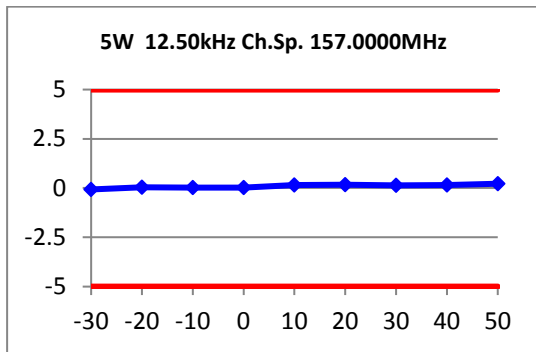

TRANSMITTER FREQUENCY STABILITY - VOLTAGE

SPECIFICATION: FCC 47 CFR 2.1055 (d) (1)

RSS-119 5.3

GUIDE: TIA/EIA-603D 2.2.2

MEASUREMENT PROCEDURE:

1. Refer Annex A for equipment set up.
2. The EUT was tested for frequency error at an input voltage to the radio of nominal battery voltage and battery end point .
3. The frequency error was recorded in parts per million (ppm).

MEASUREMENT RESULTS:

	FREQUENCY ERROR (ppm) for 12.5 kHz	
	7.5 V _{DC}	6.375 V _{DC}
138.1 MHz	0.14	0.15
143.9 MHz	0.012	0.13
148.1 MHz	0.11	0.12
149.8 MHz	0.09	0.09
150.1 MHz	0.09	0.09
152.0 MHz	0.08	0.09
156.3 MHz	0.08	0.06
156.67 MHz	0.06	0.08
157.0 MHz	0.16	0.15
160.0 MHz	0.06	0.07
161.0 MHz	0.16	0.15
162.0 MHz	0.19	0.18
162.1 MHz	0.14	0.15
168.0 MHz	0.11	0.11
173.9 MHz	0.07	0.07
Measurement Uncertainty		$\pm 7 \times 10^{-8}$

LIMIT CLAUSES: FCC 47 CFR 90.213

RSS-119 5.3

Channel Spacing (kHz)	Frequency Error (ppm)
12.5	5.0

RECEIVER SPURIOUS EMISSIONS (CONDUCTED)


SPECIFICATION: RSS-119 5.8

GUIDE: TIA/EIA-603D 2.1.2

MEASUREMENT PROCEDURE:



- 1. Refer Annex A for Equipment set up diagram.
- 2. The frequency range examined was from 30 MHz to 3 times highest tunable frequency.
- 3. Spurious emissions which were attenuated more than 20 dB below the limit were not recorded.

138.1 MHz Receive, 138.1 MHz Tx standby		
Emission Frequency (MHz)	Level (nW)	Level (dBm)
~	~	~
Measurement Uncertainty	≤12.75 GHz ± 3.0 dB	
No emissions were detected within 20 dB of Limit.		


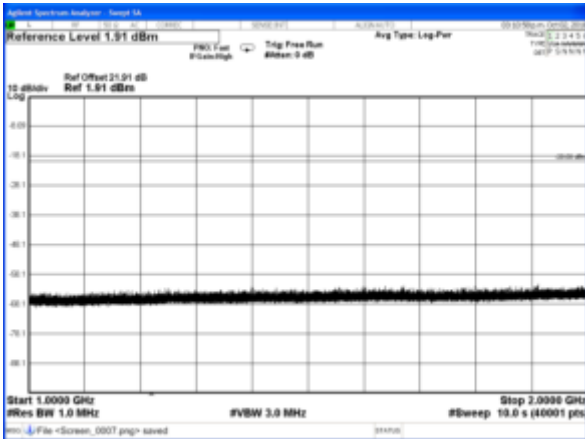


Receiver Spurious Emissions (Conducted) – Continued

143.9 MHz Receive, 143.9 MHz Tx standby		
Emission Frequency (MHz)	Level (nW)	Level (dBm)
~	~	~
Measurement Uncertainty	≤12.75 GHz ± 3.0 dB	
No emissions were detected within 20 dB of Limit.		

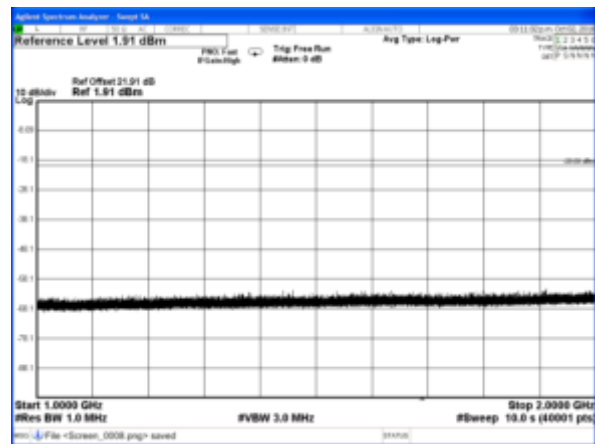
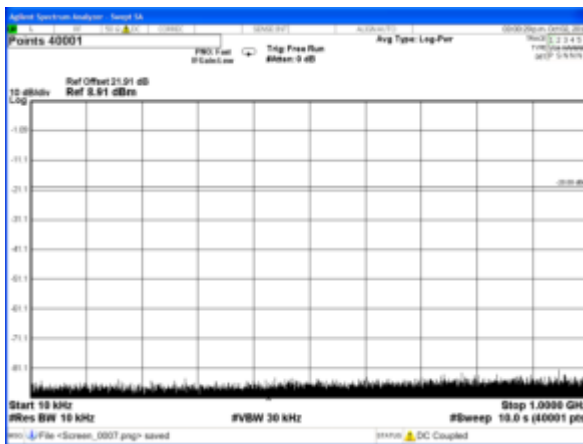


148.1 MHz Receive, 148.1 MHz Tx standby		
Emission Frequency (MHz)	Level (nW)	Level (dBm)
~	~	~
Measurement Uncertainty	≤12.75 GHz ± 3.0 dB	
No emissions were detected within 20 dB of Limit.		

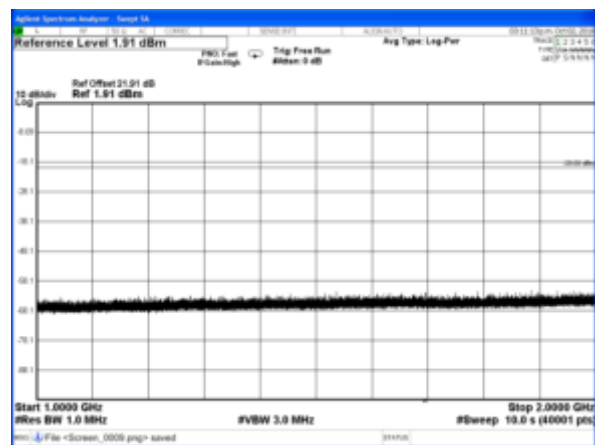
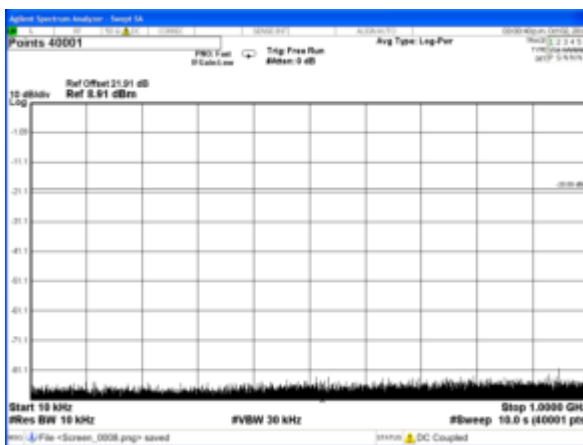


Receiver Spurious Emissions (Conducted) – Continued

149.8 MHz Receive, 149.8 MHz Tx standby		
Emission Frequency (MHz)	Level (nW)	Level (dBm)
~	~	~
Measurement Uncertainty	≤12.75 GHz ± 3.0 dB	
No emissions were detected within 20 dB of Limit.		

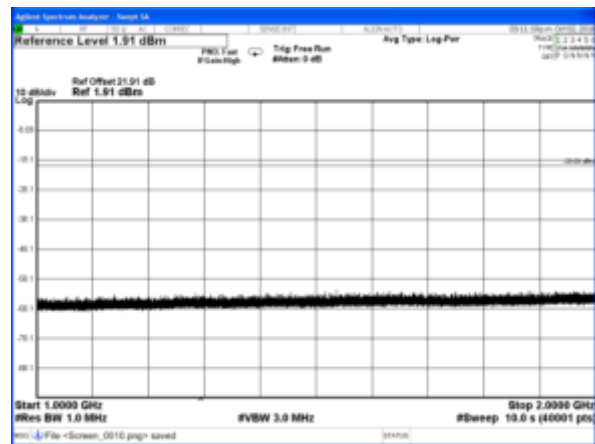
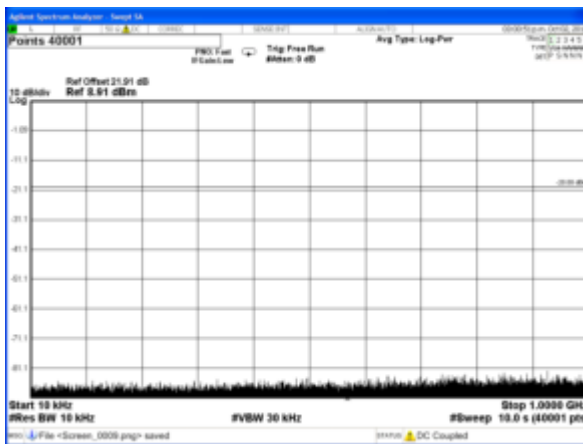


150.1 MHz Receive, 150.1 MHz Tx standby		
Emission Frequency (MHz)	Level (nW)	Level (dBm)
~	~	~
Measurement Uncertainty	≤12.75 GHz ± 3.0 dB	
No emissions were detected within 20 dB of Limit.		

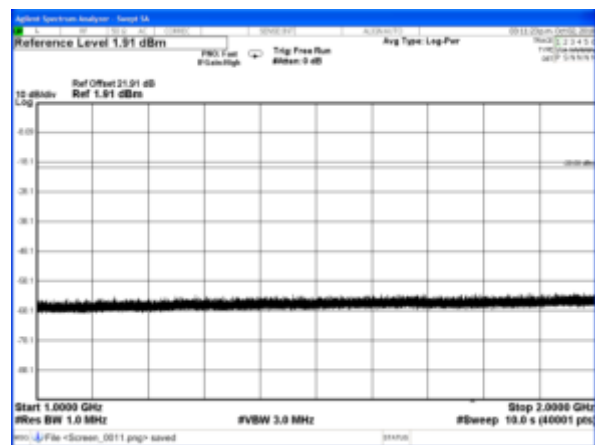
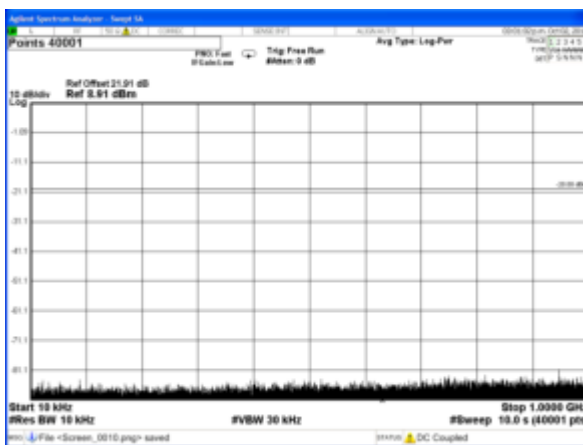


Receiver Spurious Emissions (Conducted) – Continued

152.0 MHz Receive, 152.0 MHz Tx standby		
Emission Frequency (MHz)	Level (nW)	Level (dBm)
~	~	~
Measurement Uncertainty	≤12.75 GHz ± 3.0 dB	
No emissions were detected within 20 dB of Limit.		

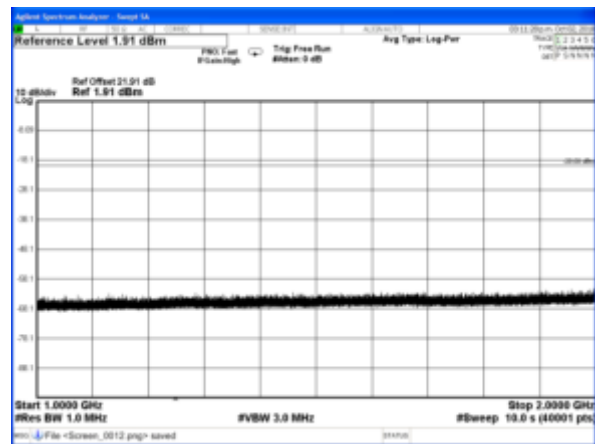
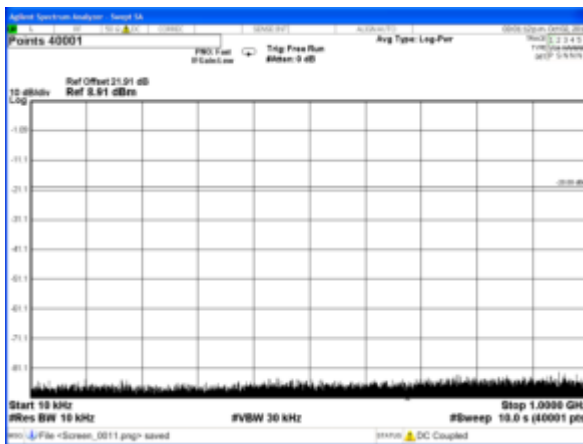


156.3 MHz Receive, 156.3 MHz Tx standby		
Emission Frequency (MHz)	Level (nW)	Level (dBm)
~	~	~
Measurement Uncertainty	≤12.75 GHz ± 3.0 dB	
No emissions were detected within 20 dB of Limit.		

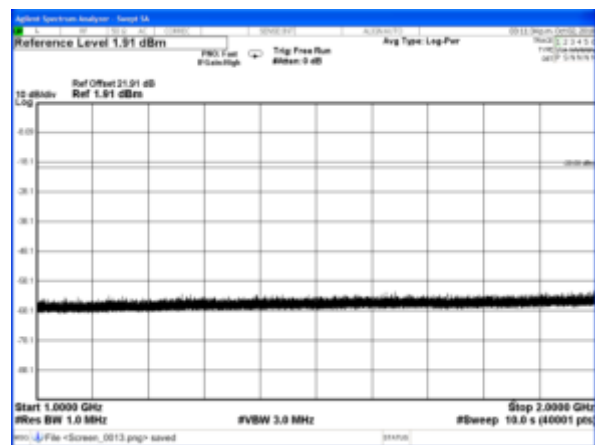
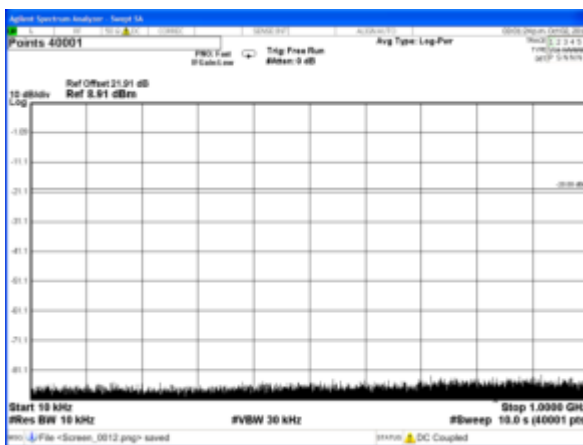


Receiver Spurious Emissions (Conducted) – Continued

156.67 MHz Receive, 156.67 MHz Tx standby		
Emission Frequency (MHz)	Level (nW)	Level (dBm)
~	~	~
Measurement Uncertainty	≤12.75 GHz ± 3.0 dB	
No emissions were detected within 20 dB of Limit.		

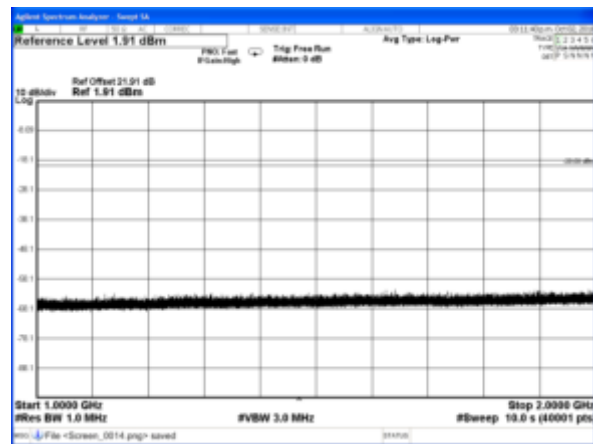
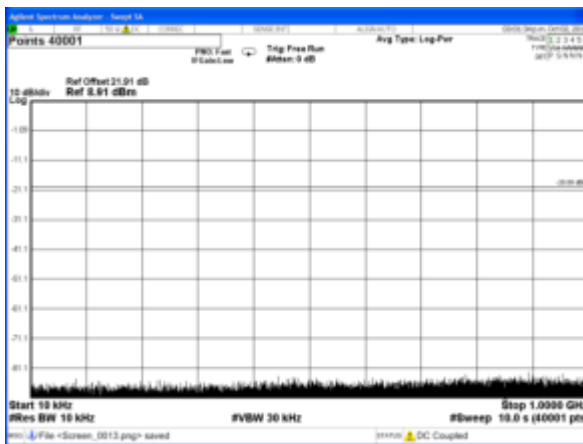


157.0 MHz Receive, 157.0 MHz Tx standby		
Emission Frequency (MHz)	Level (nW)	Level (dBm)
~	~	~
Measurement Uncertainty	≤12.75 GHz ± 3.0 dB	
No emissions were detected within 20 dB of Limit.		

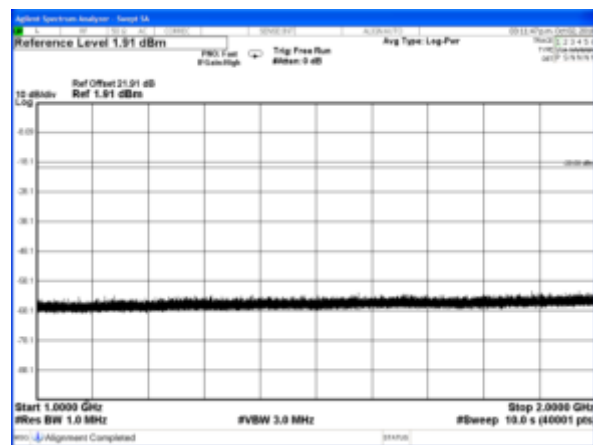
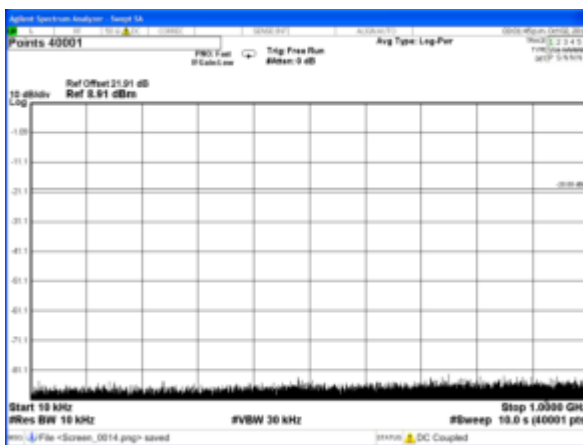


Receiver Spurious Emissions (Conducted) – Continued

160.0 MHz Receive, 160.0 MHz Tx standby		
Emission Frequency (MHz)	Level (nW)	Level (dBm)
~	~	~
Measurement Uncertainty	≤12.75 GHz ± 3.0 dB	
No emissions were detected within 20 dB of Limit.		

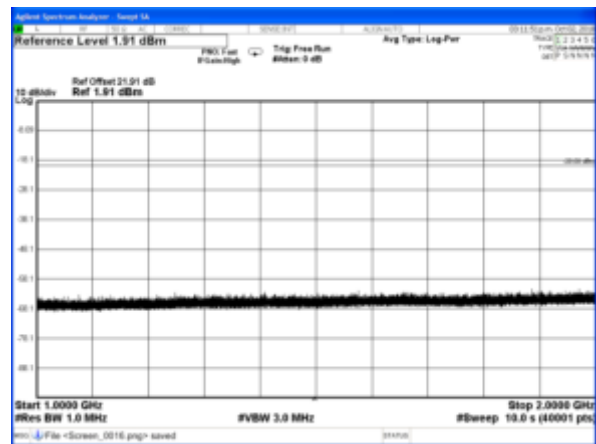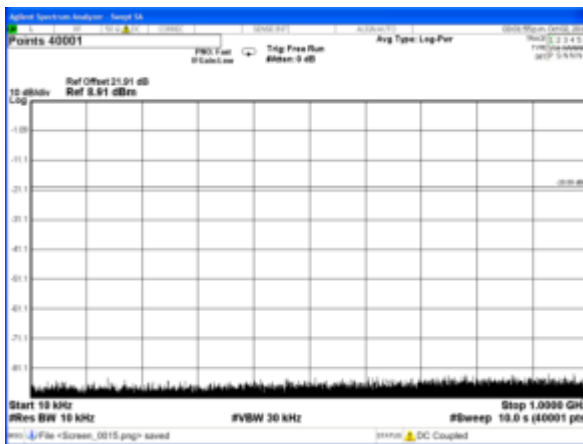


161.0 MHz Receive, 161.0 MHz Tx standby		
Emission Frequency (MHz)	Level (nW)	Level (dBm)
~	~	~
Measurement Uncertainty	≤12.75 GHz ± 3.0 dB	
No emissions were detected within 20 dB of Limit.		

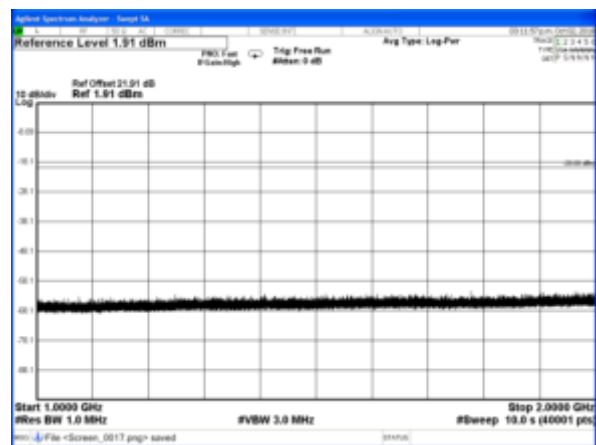
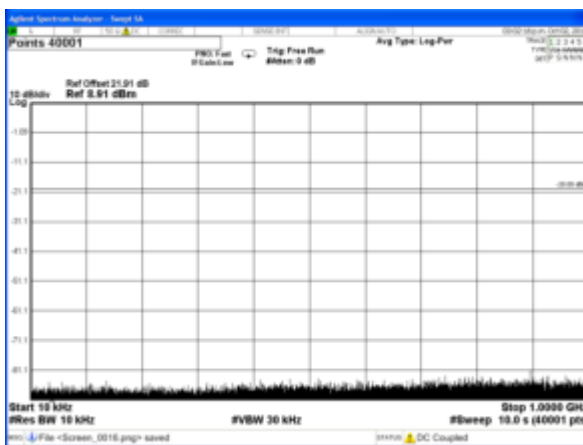


Receiver Spurious Emissions (Conducted) – Continued

162.0 MHz Receive, 162.0 MHz Tx standby		
Emission Frequency (MHz)	Level (nW)	Level (dBm)
~	~	~
Measurement Uncertainty	≤12.75 GHz ± 3.0 dB	
No emissions were detected within 20 dB of Limit.		


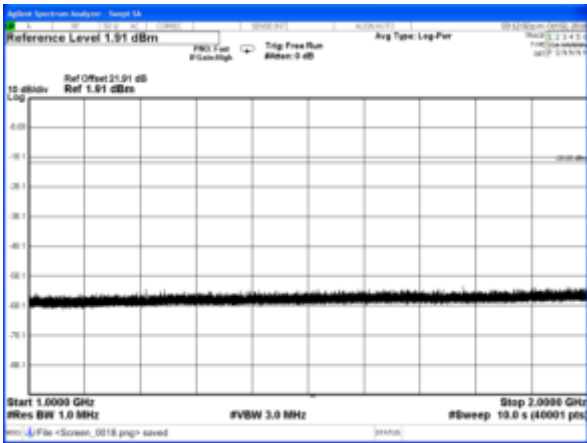


162.1 MHz Receive, 162.1 MHz Tx standby		
Emission Frequency (MHz)	Level (nW)	Level (dBm)
~	~	~
Measurement Uncertainty	≤12.75 GHz ± 3.0 dB	
No emissions were detected within 20 dB of Limit.		

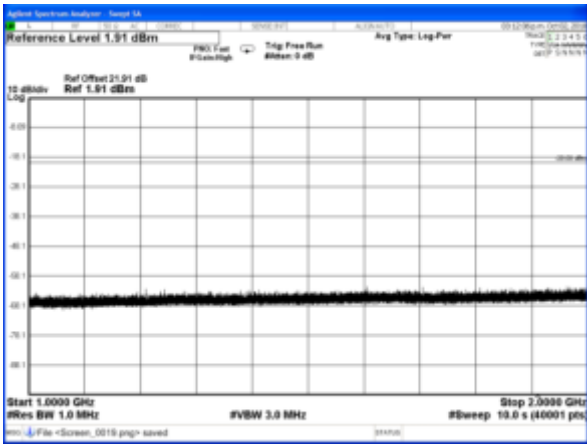
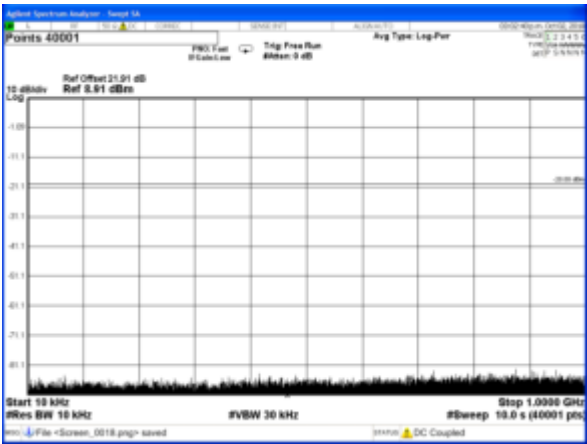


Receiver Spurious Emissions (Conducted) – Continued

168.0 MHz Receive, 168.0 MHz Tx standby		
Emission Frequency (MHz)	Level (nW)	Level (dBm)
~	~	~
Measurement Uncertainty	≤12.75 GHz ± 3.0 dB	
No emissions were detected within 20 dB of Limit.		

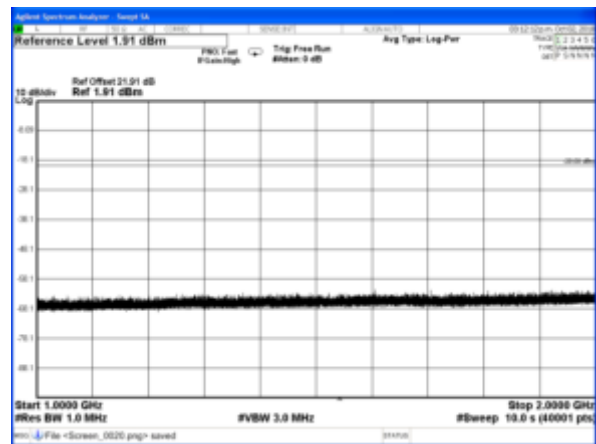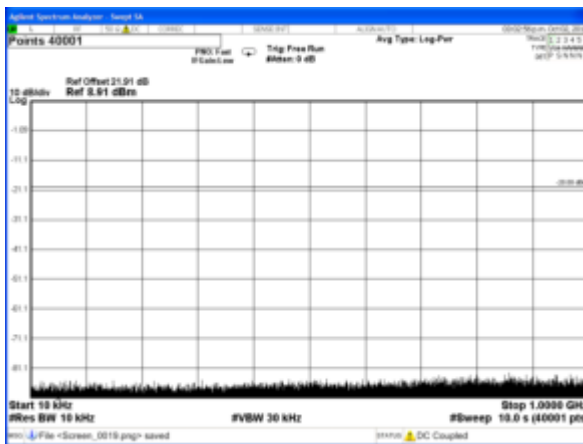

173.9 MHz Receive, 173.9 MHz Tx standby		
Emission Frequency (MHz)	Level (nW)	Level (dBm)
~	~	~
Measurement Uncertainty	≤12.75 GHz ± 3.0 dB	
No emissions were detected within 20 dB of Limit.		

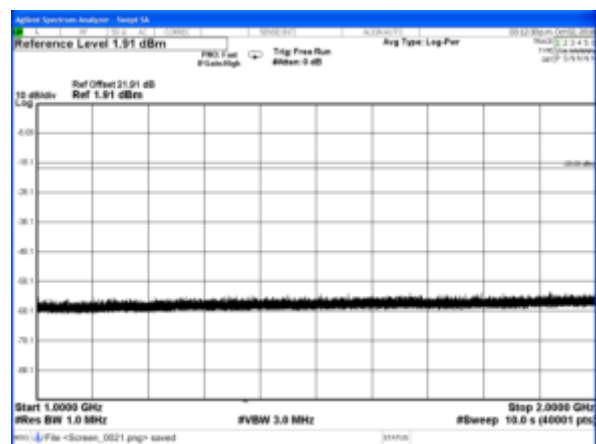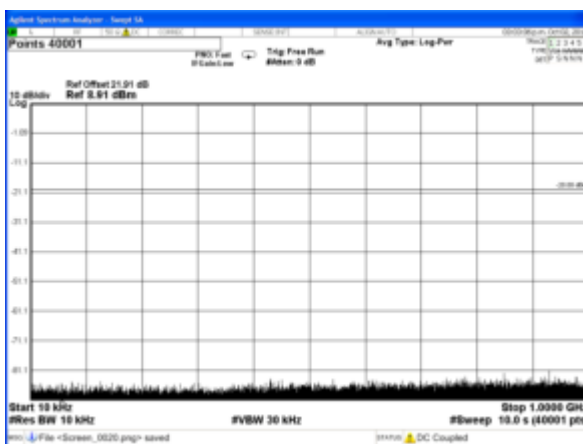

LIMIT CLAUSE: RSS-Gen 7.4

LIMIT	30 → 1000 MHz	2 nW	- 57 dBm
	> 1000 MHz	5 nW	- 53 dBm

TEST EQUIPMENT LIST

Equipment Type	Information	Manufacturer	Model No	Serial No#	Tait ID	Cal Due
Antenna	Reference Dipoles	Emco	3121C DB1	9510-1164	E3559	14-Apr-19
Antenna	Log Periodic	Schwarzbeck	VUSLP	9111-219	E4617	
Antenna	Reverb - 1-18GHz DRG	Schwarzbeck	BBHA 9120 D	9120D-885	E4857	
Antenna	Reverb - 1-18GHz DRG	Schwarzbeck	BBHA 9120 D	9120D-884	E4858	
Audio Analyser	TREVA1	Hewlett Packard	HP8903A	2437A04625	E4986	28-Sep-18*
Coax Cable	2m Black	Suhner	RG214HF/Nm/Nm/2000	TeltestBlack2	E4623	20-Dec-18
Coax Cable	2m Black	Suhner	RG214HF/Nm/Nm/2000	TeltestBlack3	E4624	20-Dec-18
Coax Cable	2m Black	Suhner	RG214HF/Nm/Nm/2000	TeltestBlack4	E4653	21-Dec-18
Coax Cable	OATS Turntable Cable 1	Intelcom	RG214	OATS1	E4621	1-Jan-19
Coax Cable	OATS Tower Cable	Intelcom	RG214	OATS2	E4622	1-Jan-19
Coax Cable	2m Black	Suhner	RG214HF/Nm/Nm/2000	TeltestBlack5	E4850	20-Dec-18
Coax Cable	Reverb - 4.5m Multiflex 141	TeltestBlue6	MF 141	TeltestBlue6	E4843	20-Dec-18
Coax Cable	Reverb - 2m Multiflex 141	TeltestBlue5	MF 141	TeltestBlue5	E4844	20-Dec-18
Coax Cable	Reverb - 2m Multiflex 141	TeltestBlue4	MF 141	TeltestBlue4	E4845	20-Dec-18
Coax Cable	Reverb - 1m Multiflex 141	TeltestBlue2	MF 141	TeltestBlue2	E4847	20-Dec-18
Coax Cable	Reverb - 1m Multiflex 141	TeltestBlue1	MF 141	TeltestBlue1	E4848	20-Dec-18
Coax Cable	OATS Turntable Cable 2	Intelcom	RG215	OATS3	E4995	1-Jan-19
Coax Cable	2m Black	Suhner	RG214HF/Nm/Nm/2000	TeltestBlack7	E5004	1-Jan-19
Environ. Chamber	Upright	Contherm	5400 RHSLT.M	1416	E4051	23-Apr-19
Modulation Analyser	TREVA1	Hewlett Packard	HP8901B (Opt 002)	2441A00393	E3073	3-Oct-18
OATS	Antenna Tower	Electrometrics	EM-4720-2	112	E4447	
OATS	Controller	Electrometrics	EM-4700	119	E4445	
OATS	Turntable	Electrometrics	EM-4704A	105	E4446	
Oscilloscope	100MHz Digital	Tektronics	TDS340	B013611	E3585	28-Sep-19
Power Meter	TREVA1 Power Head for HP8901	Hewlett Packard	HP11722A	3111A05573	E7054	30-Sep-18*
Power Supply	60V/50A/1000W	Hewlett Packard	HP6012B	2524A00616	E3712	30-Sep-19
Power Supply	60V/25A	Agilent	N5767A	3111A05573	E4979	10-Oct-18
Power Supply	40V/38A	Agilent	N5766A	US09E4663L	E4719	26-Sep-19
RF Amplifier	+21.7 dB 1GHz	Tait	ZFL-1000LN	E3660	E3360	17-Apr-19
RF Amplifier	Pre-amplifier	Agilent	87405C	MY47010688	E4941	9-Oct-18
RF Attenuator	30dB 350W	Weinschel	67-30-33	BR0531	E4280	20-Dec-18
RF Attenuator	10dB 50W	Weinschel	24-10-34	AZ0401	E3388	20-Dec-18
RF Attenuator	20dB 25W	Weinschel	33-20-33	BD5871	E3673	20-Dec-18
RF Attenuator	10dB 50W	Weinschel	24-10-34	BC3293	E4364	21-Dec-18
RF Attenuator	TREVA1 3dB	Weinschel	Model 1	BL9958	E4081	20-Dec-18
RF Attenuator	TREVA 1 20dB 150W	Weinschel	40-20-23	MF817	E4082	20-Dec-18
RF Chamber	S-LINE TEM CELL	Rohde & Schwarz	1089.9296.02	338232/003	E3636	12-Sep-20


TELTEST Laboratories
Tait International Ltd
Report Number 3955

Equipment Type	Information	Manufacturer	Model No	Serial No#	Tait ID	Cal Due
RF Chamber	Reverb - Stirrer controller for reverb chamber	Teseq	Stirrer Controller	29765.1	E4854	
RF Chamber	Reverb - 0.5 - 18GHz Reverberation Chamber	Teseq	RVC XS	29765	E4855	
RF Combiner	TREVA1	Minicircuits	ZFSC-4-1	-	E4083	
RF Filter	135-175MHz band stop filter	Tait	-	-	E3382	25-Sep-19
RF Load	50W	Weinschel	F1426	AE2490	E3624	20-Dec-18
Signal Generator	Analog 4GHz	Agilent	E4422B	GB40050320	E3788	27-Sep-19
Signal Generator	TREVA1 Analog 3.2GHz	Agilent	E8663D	MY50420224	E4908	20-Oct-18
Signal Generator	Digital 4GHz	Agilent	E4437B	US39260389	E4764	30-Sep-19
Spectrum Analyser	26.5GHz	Agilent	PXA N9030A	MY49432161	E4907	18-Oct-18
Spectrum Analyser	13.2GHz	Agilent	E4445A	MY42510072	E4139	19-Jul-20
Spectrum Analyser	13.2GHz	Hewlett Packard	HP8562E	3821A00779	E3715	26-Sep-19
Temp & Humidity datalogger		Hobo	U21-011	10134276	E4981	22-Apr-19
Testware	Frequency Vs Temperature		April 2018	-	-	
Testware	Occupied Bandwidth		March 2018	-	-	
Testware	Radiated Emissions		April 2018	-	-	
Testware	Reverb Emissions		June 2018	-	-	
Testware	Sideband Spectrum		February 2017	-	-	
Testware	S-Line Radiated Emissions		April 2018	-	-	
Testware	TREVA		April 2018	-	-	

NOTE: Items without calibration dates are calibrated immediately before use, or set using calibrated instruments.

*The Audio Analyser and Power meter power head were in use for tests before the calibration due date.

ANNEX A – TEST SETUP DETAILS

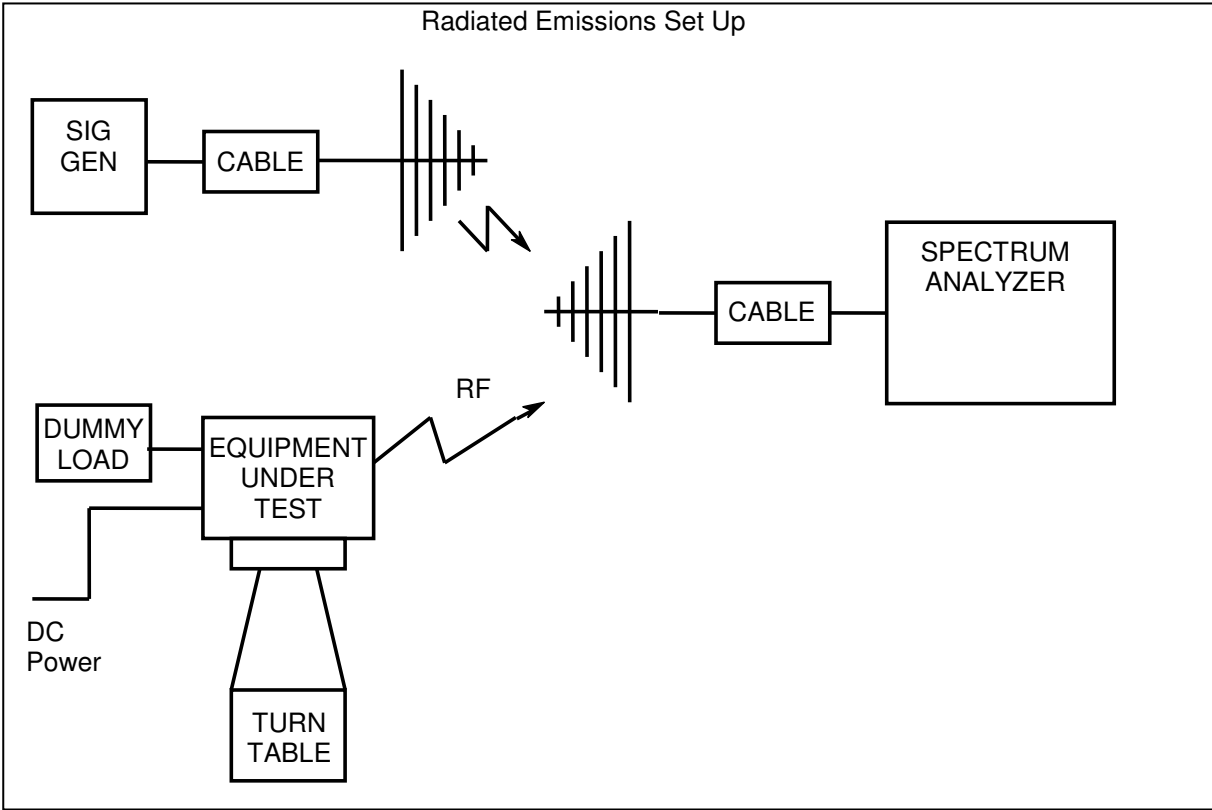

All other testing is performed using the Teltest Radio **EVA**luation system (TREVA), which is configured as shown below. The Spectrum Analyser is connected to the EUT via the attenuator network for Conducted Emissions testing, and Occupied Bandwidth.

