



NOKIA MOBILE PHONES

6000 Connection Drive

Irving, TX 75039

972 894 5000

972 894 4988

February 10, 2002

Federal Communications Commission,
Authorization & Evaluation Division,
7435 Oakland Mills Road
Columbia, MD. 21046

Attention: Equipment Authorization Branch

We hereby certify that the transceiver FCC ID: GMLNPM-8 complies with
ANSI/IEEE C95.1-1992 Standard for Safety Levels with Respect to Human
Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

Compliance was determined by testing appropriate parameters according to
standard.

NOKIA MOBILE PHONES

A handwritten signature in black ink, appearing to read "Mike Linstrom", with a long horizontal stroke extending to the right.

Mike Linstrom
Product Program Manager, Dallas

first need to turn those features off before you can make an emergency call. Consult this user guide and your local cellular service provider.

- When making an emergency call, remember to give all the necessary information as accurately as possible. Remember that your wireless phone may be the only means of communication at the scene of an accident - do not end the call until given permission to do so.

• CERTIFICATION INFORMATION (SAR)

THIS MODEL PHONE MEETS THE GOVERNMENT'S REQUIREMENTS FOR EXPOSURE TO RADIO WAVES.

Your wireless phone is a radio transmitter and receiver. It is designed and manufactured not to exceed the emission limits for exposure to radio frequency (RF) energy set by the Federal Communications Commission of the U.S. Government. These limits are part of comprehensive guidelines and establish permitted levels of RF energy for the general population. The guidelines are based on standards that were developed by independent scientific organizations through periodic and thorough evaluation of scientific studies. The standards include a substantial safety margin designed to assure the safety of all persons, regardless of age and health.

The exposure standard for wireless mobile phones employs a unit of measurement known as the Specific Absorption Rate, or SAR. The SAR limit set by the FCC is 1.6W/kg.* Tests for SAR are conducted using standard operating positions accepted by the FCC with the phone transmitting at its highest certified power level in all tested frequency bands. Although the SAR is determined at the highest certified power level, the actual SAR level of the phone while operating can be well below the maximum value. This is because the phone is designed to operate at multiple power levels so as to use only the power required to reach the network. In general, the closer you are to a wireless base station antenna, the lower the power output.




Before a phone model is available for sale to the public, it must be tested and certified to the FCC that it does not exceed the limit established by the government-adopted requirement for safe exposure. The tests are performed in positions and locations (for example, at the ear and worn on the body) as required by the FCC for each model. The highest SAR value for this model phone as reported to the FCC when tested for use at the ear is 1.03 W/kg, and when worn on the body, as described in this user guide, is 0.38 W/kg. (Body-worn measurements differ among phone models, depending upon available accessories and FCC requirements).

While there may be differences between the SAR levels of various phones and at various positions, they all meet the government requirement.

The FCC has granted an Equipment Authorization for this model phone with all reported SAR levels evaluated as in compliance with the FCC RF exposure guidelines. SAR information on this model phone is on file with the FCC and can be found under the Display Grant section of <http://www.fcc.gov/oet/fccid> after searching on FCC ID GMLNPM-8.

For body worn operation, this phone has been tested and meets the FCC RF exposure guidelines when used with the Nokia accessories supplied or designated for this product. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

*In the United States and Canada, the SAR limit for mobile phones used by the public is 1.6 watts/kilogram (W/kg) averaged over one gram of tissue. The standard incorporates a substantial margin of safety to give additional protection for the public and to account for any variations in measurements. SAR values may vary depending on national reporting requirements and the network band. For SAR information in other regions please look under product information at www.nokia.com.



SAR Compliance Test Report

Test report no.:	Not numbered	Date of report:	2002-02-14
Number of pages:	61	Contact person:	Olli Kautio
		Responsible test engineer:	Pertti Mäkikyrö
Testing laboratory:	Nokia Corporation Elektroniikkatie 10 P.O. Box 50 FIN-90571 OULU Finland Tel. +358-7180-08000 Fax. +358-7180-47222	Client:	Nokia Inc. 6000 Connection Dr. Mailstop 2:200 Irving Tx, 75039 USA Tel. +1 972 894 5000 Fax. +1 972 894 4589
Tested devices:	GMLNPM-8, CSL-30		
Supplement reports:	-		
Testing has been carried out in accordance with:	IEEE P1528-200X Draft 6.4 Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques		
Documentation:	The documentation of the testing performed on the tested devices is archived for 15 years at PC Site Oulu		
Test results:	The tested device complies with the requirements in respect of all parameters subject to the test. The test results and statements relate only to the items tested. The test report shall not be reproduced except in full, without written approval of the laboratory.		

Date and signatures: 2002-02-14

For the contents:



Pertti Mäkikyrö
Engineering Manager, EMC



Miia Nurkkala
Test Engineer

CONTENTS

1.	SUMMARY FOR SAR TEST REPORT	3
1.1	MAXIMUM RESULTS FOUND DURING SAR EVALUATION.....	3
1.1.1	Head Configuration.....	3
1.1.2	Body Worn Configuration.....	3
1.1.3	Measurement Uncertainty	3
2.	DESCRIPTION OF TESTED DEVICE.....	4
2.1	PICTURE OF PHONE	4
2.2	DESCRIPTION OF THE ANTENNA	4
2.3	BATTERY OPTIONS	4
2.4	BODY WORN ACCESSORIES	4
3.	TEST CONDITIONS	5
3.1	AMBIENT CONDITIONS	5
3.2	RF CHARACTERISTICS OF THE TEST SITE	5
3.3	TEST SIGNAL, FREQUENCIES, AND OUTPUT POWER	5
4.	DESCRIPTION OF THE TEST EQUIPMENT.....	5
4.1	SYSTEM ACCURACY VERIFICATION.....	6
4.2	TISSUE SIMULANTS.....	6
4.2.1	Head Tissue Simulant	6
4.2.2	Muscle Tissue Simulant.....	7
4.3	PHANTOMS.....	8
4.4	ISOTROPIC E-FIELD PROBE ET3DV6	8
5.	DESCRIPTION OF THE TEST PROCEDURE	9
5.1	TEST POSITIONS.....	9
5.1.1	Against Phantom Head	9
5.1.2	Body Worn Configuration.....	10
5.2	SCAN PROCEDURES.....	11
5.3	SAR AVERAGING METHODS.....	11
6.	MEASUREMENT UNCERTAINTY	12
6.1	DESCRIPTION OF INDIVIDUAL MEASUREMENT UNCERTAINTY	12
7.	RESULTS.....	13
7.1	BODY WORN CONFIGURATION	13
	BOTH COVERS, BATTERY BLC-1:	13
7.2	BATTERY CHECK	14
APPENDIX A: Validation Test Printouts (4 pages)		
APPENDIX B: SAR Distribution Printouts (28 pages)		
APPENDIX C: Calibration Certificate(s) (12 pages)		

1. SUMMARY FOR SAR TEST REPORT

Date of test	2002-01-21 – 2002-01-25
Contact person	Olli Kautio
Test plan referred to	-
FCC ID	GMLNPM-8
SN, HW, SW and DUT numbers of tested device	SN: 001004/50/048146/1 HW:B4.0 SW:V4.00 DUT:A210102/2
Accessories used in testing	Batteries BLC-2, BLC-1 Headset HDE-2, Xpress-on Active Cover™
Notes	-
Document code	DTX03810-EN
Responsible test engineer	Pertti Mäkikyrö
Measurement performed by	Miia Nurkkala

1.1 Maximum Results Found during SAR Evaluation

The equipment is deemed to fulfil the requirements if the measured values are less than or equal to the limit.

1.1.1 Head Configuration

Ch / f (MHz)	Power	Position	Limit	Measured	Result
251/848.80	33.3 dBm	Cheek	1.6 mW/g	1.03 mW/g	PASSED

1.1.2 Body Worn Configuration

Ch / f (MHz)	Power	Accessory	Limit	Measured	Result
128/824.20	31.5dBm	CSL-30	1.6 mW/g	0.38 mW/g	PASSED

1.1.3 Measurement Uncertainty

Combined Uncertainty (Assessment & Source)	± 13.6%
Extended Uncertainty (k=2) 95.5%	± 27.1%

2. DESCRIPTION OF TESTED DEVICE

Device category	Portable device	
Exposure environment	Uncontrolled exposure	
Unit type	Prototype unit	
Case type	Fixed case	
Modes of Operation	GSM850	GSM1900
Modulation Mode	Gaussian Minimum Shift Keying	Gaussian Minimum Shift Keying
Duty Cycle	1/8	1/8
Transmitter Frequency Range (MHz)	824.2 – 848.8	1850.2 - 1909.8

2.1 Picture of Phone

Original Cover



Xpress-on Active Cover™



There is an accessory cover available for GMLNPM-8. Xpress-on Active Cover™ contains electronics and it was therefore tested for SAR compliance.

2.2 Description of the Antenna

Type	Internal integrated antenna
Location	Inside the back cover, near the top of the device

2.3 Battery Options

There are two battery options available for tested device. Li-ion batteries BLC-2 and BLC-1. First all measurements were done with BLC-1 and the measurements giving the highest SAR values were repeated with battery BLC-2.

In body worn configuration they do not affect the separation distance between flat-phantom and tested device.

2.4 Body Worn Accessories

Following body worn accessories are available for GMLNPM-8:



- CSL-30

3. TEST CONDITIONS

3.1 Ambient Conditions

Ambient temperature (°C)	22 ±1
Tissue simulating liquid temperature (°C)	22±1
Humidity	35

3.2 RF characteristics of the test site

Tests were performed in a fully enclosed RF shielded environment.

3.3 Test Signal, Frequencies, and Output Power

The device was controlled by using a radio tester. Communication between the device and the tester was established by air link.

In all operating bands the measurements were performed on lowest, middle and highest channels.

The phone was set to maximum power level during the all tests and at the beginning of the each test the battery was fully charged. Radiated power output was measured by A2LA accredited test laboratory, TCC Dallas, from the same unit that was used in SAR testing .

DASY3 system measures power drift during SAR testing by comparing e-field in the same location at the beginning and at the end of measurement. These records were used to monitor stability of power output.

4. DESCRIPTION OF THE TEST EQUIPMENT

The measurements were performed with an automated near-field scanning system, DASY3, manufactured by Schmid & Partner Engineering AG (SPEAG) in Switzerland.

Test Equipment	Serial Number	Due Date
DASY3 DAE V1	371	10/02
E-field Probe ET3DV6	1381	10/02
Dipole Validation Kit, D835V2	448	11/03

Dipole Validation Kit, D1900V2	511	02/03
--------------------------------	-----	-------

E-field probe calibration records are presented in Appendix C.

Additional equipment needed in validation

Test Equipment	Model	Serial Number	Due Date
Signal Generator	R&S SMIQ03B	100012	02/02
Amplifier	Amplifier Research 5S1G4	27573	-
Power Meter	R&S NRT	835065/049	05/02
Power Sensor	R&S NRT-Z44	835374/021	05/02
Thermometer	DO9416	1505985462	-
Vector Network Analyzer	Anritsu 37347A	992604	01/03
Transmission Line Dielectric Probe	Damaskos T1500	-	-

4.1 System Accuracy Verification

The probes are calibrated annually by the manufacturer. Dielectric parameters of the simulating liquids are measured using a Damaskos Inc. transmission line model T1500 and Anritsu 37347A vector network analyzer.

The SAR measurement of the DUT were done within 24 hours of system accuracy verification, which was done using the dipole validation kit. Power level of 250 mW was supplied to a dipole antenna placed under the flat section of SAM phantom. The validation results are in the table below and printout of the validation test is presented in Appendix A. All the measured parameters were within the specification.

Tissue	f (MHz)	Description	SAR (W/kg), 1g	Dielectric Parameters		Temp (°C)
				ϵ_r	σ (S/m)	
Head	835	Measured	2.69	40.1	0.90	22
		Reference Result	2.59	42.3	0.91	N/A
Head	1900	Measured	11.1	38.7	1.41	22
		Reference Result	10.7	39.2	1.47	N/A
Muscle	835	Measured	2.64	57.4	0.94	22
		Reference Result	2.73	56.0	0.98	N/A
Muscle	1900	Measured	10.9	53.5	1.49	22
		Reference Result	10.6	53.5	1.46	N/A

4.2 Tissue Simulants

All dielectric parameters of tissue simulants were measured within 24 hours of SAR measurements. The depth of the tissue simulant in the ear reference point of the phantom was 15 cm $\pm$ 5mm during all the tests.

4.2.1 Head Tissue Simulant

The composition of the brain tissue simulating liquid for 835MHz is

58.31% Sugar
 39.74% De-Ionized Water
 1.55% Salt
 0.25% HEC
 0.15% Bactericide

and for 1900MHz

44.91% 2-(2-butoxyethoxy) Ethanol
 54.88% De-Ionized Water
 0.21% Salt

f (MHz)	Description	Dielectric Parameters		Temp (°C)
		ϵ_r	σ (S/m)	
835	Measured	40.1	0.91	22
	Recommended Values	41.5	0.90	20-26
1880	Measured	38.8	1.39	22
	Recommended Values	40.0	1.40	20-26

Recommended values are adopted from OET Bulletin 65 (97-01) Supplement C (01-01).

4.2.2

Muscle Tissue Simulant

The composition of the muscle tissue simulating liquid for 835MHz is

55.97% De-Ionized Water
 41.76% Sugar
 1.21% HEC
 0.79% Salt
 0.27% Preservative

and for 1900MHz

69.02% De-Ionized Water
 30.76% Diethylene Glycol Monobutyl Ether
 0.22% Salt

f (MHz)	Description	Dielectric Parameters		Temp (°C)
		ϵ_r	σ (S/m)	
835	Measured	57.4	0.94	22
	Recommended Values	55.2	0.97	20-26
1880	Measured	53.6	1.45	22
	Recommended Values	53.3	1.52	20-26

Recommended values are adopted from OET Bulletin 65 (97-01) Supplement C (01-01).

4.3 Phantoms

"SAM v4.0" phantom", manufactured by SPEAG, was used during the measurement. It has fiberglass shell integrated in a wooden table. The shape of the shell corresponds to the phantom defined by SCC34-SC2. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.



The thickness of phantom shell is 2 mm except for the ear, where an integrated ear spacer provides a 6 mm spacing from the tissue boundary. Manufacturer reports tolerance in shell thickness to be $\pm 0.1\text{mm}$.

4.4 Isotropic E-Field Probe ET3DV6


Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection system Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., glycolether)
Calibration	Calibration certificate in Appendix C
Frequency	10 MHz to 3 GHz (dosimetry); Linearity: ± 0.2 dB (30 MHz to 3 GHz)
Optical Surface Detection	± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.4 dB in HSL (rotation normal to probe axis)
Dynamic Range	5 $\mu\text{W/g}$ to > 100 mW/g; Linearity: ± 0.2 dB
Dimensions	Overall length: 330 mm Tip length: 16 mm Body diameter: 12 mm Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm
Application	General dosimetry up to 3 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms



5. DESCRIPTION OF THE TEST PROCEDURE

5.1 Test Positions

The device was placed in holder using a special positioning tool, which aligns the bottom of the device with holder and ensures that holder contacts only to the sides of the device. After positioning is done, tool is removed. This method provides standard positioning and separation, and also ensures free space for antenna.



Device holder was provided by SPEAG together with DASY3.

5.1.1 Against Phantom Head

Measurements were made on both the "left hand" and "right hand" side of the phantom.

The device was positioned against phantom according to OET Bulletin 65 (97-01) Supplement C (01-01) . Definitions of terms used in aligning the device to a head phantom are available in IEEE Draft Standard P1528-2001 "Recommended Practice for Determining the Spatial-Peak Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques"

5.1.1.1 Initial Ear Position

The device was initially positioned with the earpiece region pressed against the ear spacer of a head phantom parallel to the "Neck-Front" line defined along the base of the ear spacer that contains the "ear reference point". The "test device reference point" is aligned to the "ear reference point" on the head phantom and the "vertical centerline" is aligned to the "phantom reference plane".

5.1.1.2 Cheek Position

"Initial ear position" alignments are maintained and the device is brought toward the mouth of the head phantom by pivoting along the "Neck-Front" line until any point on the display, keypad or mouthpiece portions of the handset is in contact with the phantom or when any portion of a foldout, sliding or similar keypad cover opened to its intended self-adjusting normal use position is in contact with the cheek or mouth of the phantom.



▪ Cheek Position

5.1.1.3 Tilt Position


In the “Cheek Position”, if the earpiece of the device is not in full contact with the phantom’s ear spacer and the peak SAR location for the “cheek position” is located at the ear spacer region or corresponds to the earpiece region of the handset, the device is returned to the “initial ear position” by rotating it away from the mouth until the earpiece is in full contact with the ear spacer. Otherwise, the device is moved away from the cheek perpendicular to the line passes through both “ear reference points” for approximate 2-3 cm. While it is in this position, the device is tilted away from the mouth with respect to the “test device reference point” by 15°. After the tilt, it is then moved back toward the head perpendicular to the line passes through both “ear reference points” until the device touches the phantom or the ear spacer. If the antenna touches the head first, the positioning process is repeated with a tilt angle less than 15° so that the device and its antenna would touch the phantom simultaneously.



- Tilt position

5.1.2 Body Worn Configuration

CSL-30 was tested for the FCC RF exposure compliance. The phone was positioned into the carrying case and placed below of the flat phantom. Headset was connected during measurements.

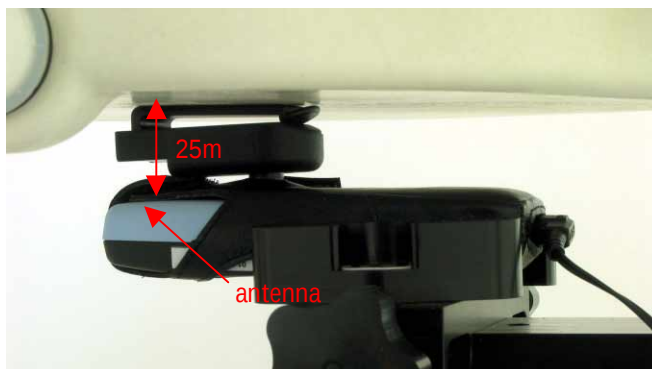

5.2 Scan Procedures

First coarse scans are used for quick determination of the field distribution. Next a cube scan, 5x5x7 points; spacing between each point 8x8x5 mm, is performed around the highest E-field value to determine the averaged SAR-distribution over 1g.

5.3 SAR Averaging Methods

The maximum SAR value is averaged over its volume using interpolation and extrapolation.

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot" -condition [W. Gander, Computermathematik, p. 141-150] (x, y and z -directions) [Numerical Recipes in C, Second Edition, p 123].

The extrapolation is based on least square algorithm [W. Gander, Computermathematik, p.168-180]. Through the points in the first 30 mm in all z-axis, polynomials of order four are calculated. This polynomial is then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1mm from one another.

6. MEASUREMENT UNCERTAINTY

6.1 Description of Individual Measurement Uncertainty

Uncertainty description	Uncert. value %	Probability distribution	Div.	c_i^1 1g	Stand. uncert (1g) %	v_i^2 or v_{eff}
Measurement System						
Probe calibration	± 4.4	normal	1	1	± 4.4	∞
Axial isotropy of the probe	± 4.7	rectangular	√3	$(1-c_p)^{1/2}$	± 1.9	∞
Sph. Isotropy of the probe	± 9.6	rectangular	√3	$(c_p)^{1/2}$	± 3.9	∞
Spatial resolution	± 0.0	rectangular	√3	1	± 0.0	∞
Boundary effects	± 5.5	rectangular	√3	1	± 3.2	∞
Probe linearity	± 4.7	rectangular	√3	1	± 2.7	∞
Detection limit	± 1.0	rectangular	√3	1	± 0.6	∞
Readout electronics	± 1.0	normal	1	1	± 1.0	∞
Response time	± 0.8	rectangular	√3	1	± 0.5	∞
Integration time	± 1.4	rectangular	√3	1	± 0.8	∞
RF ambient conditions	± 3.0	rectangular	√3	1	± 1.7	∞
Mech. constrains of robot	± 0.4	rectangular	√3	1	± 0.2	∞
Probe positioning	± 2.9	rectangular	√3	1	± 1.7	∞
Extrap. and integration	± 3.9	rectangular	√3	1	± 2.3	∞
Test Sample Related						
Device positioning	± 6.0	normal	0.89	1	± 6.7	12
Device holder uncertainty	± 5.0	normal	0.84	1	± 5.9	8
Power drift	± 5.0	rectangular	√3	1	± 2.9	∞
Phantom and Setup						
Phantom uncertainty	± 4.0	rectangular	√3	1	± 2.3	∞
Liquid conductivity (target)	± 5.0	rectangular	√3	0.6	± 1.7	∞
Liquid conductivity (meas.)	± 10.0	rectangular	√3	0.6	± 3.5	∞
Liquid permittivity (target)	± 5.0	rectangular	√3	0.6	± 1.7	∞
Liquid permittivity (meas.)	± 5.0	rectangular	√3	0.6	± 1.7	∞
Combined Standard Uncertainty					± 13.6	
Extended Standard Uncertainty (k=2)					± 27.1	

7. RESULTS

Corresponding SAR distribution printouts of maximum results with battery option BLC-1 in every position are shown in Appendix B. The SAR distributions are substantially similar or equivalent to the plots submitted regardless of used channel.

Original cover, battery BLC-1:

Mode	Channel/ <i>F</i> (MHz)	Power (dBm)	SAR, averaged over 1g (mW/g)			
			Left-hand		Right-hand	
			Cheek	Tilted	Cheek	Tilted
GSM 850	128/824.20	31.5	0.78	0.43	0.75	0.44
	190/836.60	32.6	0.90	0.50	0.88	0.50
	251/848.80	33.3	1.02	0.52	0.99	0.54
GSM 1900	512/1850.20	31.2	0.45	0.58	0.46	0.61
	661/1880.00	31.0	0.43	0.57	0.38	0.52
	810/1909.80	30.0	0.31	0.45	0.34	0.42

Xpress-on Active cover, battery BLC-1:

Mode	Channel/ <i>F</i> (MHz)	Power (dBm)	SAR, averaged over 1g (mW/g)			
			Left-hand		Right-hand	
			Cheek	Tilted	Cheek	Tilted
GSM 850	128/824.20	31.5	0.79	0.43	0.76	0.43
	190/836.60	32.6	0.88	0.51	0.86	0.49
	251/848.80	33.3	0.99	0.52	0.99	0.50
GSM 1900	512/1850.20	31.2	0.38	0.49	0.42	0.56
	661/1880.00	31.0	0.35	0.43	0.36	0.51
	810/1909.80	30.0	0.28	0.37	0.31	0.38

7.1 Body Worn Configuration

Both Covers, battery BLC-1:

Mode	Channel/ <i>F</i> (MHz)	Power (dBm)	SAR, averaged over 1g (mW/g)	
			CSL-30	
			Original Cover	Xpress-on Active Cover
GSM 850	128/824.20	31.5	0.38	0.21
	190/836.60	32.6	0.36	0.23
	251/848.80	33.3	0.37	0.29
GSM 1900	512/1850.20	31.2	0.16	0.17
	661/1880.00	31.0	0.12	0.14
	810/1909.80	30.0	0.11	0.11

7.2 Battery Check

Measurements giving the highest SAR values with Battery BLC-1 were repeated with battery option BLC-2.

SAR distribution printouts of maximum results with battery option BLC-2 are shown in Appendix B.

Mode	Battery	Channel/ <i>f</i> (MHz)	Power (dBm)	SAR, averaged over 1g (mW/g)			
				Original Cover Left-hand		Xpress-on Active Cover Left-hand	
				Cheek	Tilted	Cheek	Tilted
GSM 850	BLC-1	251/848.80	33.3	1.02	0.52	0.99	0.52
	BLC-2	251/848.80	33.3	1.03	0.53	1.01	0.52
GSM 1900	BLC-1	512/1850.2	31.2	0.46	0.61	0.42	0.56
	BLC-2	512/1850.2	31.2	0.39	0.50	0.36	0.46

Mode	Battery	Channel/ <i>f</i> (MHz)	Power (dBm)	SAR, averaged over 1g (mW/g)	
				Original Cover	
				Body worn, CSL-30	
GSM 850	BLC-1	128/824.20	31.5	0.38	
	BLC-2	128/824.20	31.5	0.35	
GSM 1900	BLC-1	512/1850.2	31.2	0.16	
	BLC-2	512/1850.2	31.2	0.12	

Mode	Battery	Channel/ <i>f</i> (MHz)	Power (dBm)	SAR, averaged over 1g (mW/g)	
				Xpress-on Active Cover	
				Body worn, CSL-30	
GSM 850	BLC-1	251/848.80	33.3	0.29	
	BLC-2	251/848.80	33.3	0.30	
GSM 1900	BLC-1	512/1850.2	31.2	0.17	
	BLC-2	512/1850.2	31.2	0.13	


APPENDIX A.

Validation Test Printouts

Dipole 835 MHz

SAM 2; Flat

Probe: ET3DV6 - SN1381; ConvF(6.20,6.20,6.20); Crest factor: 1.0; Brain 836 MHz SCC34: $\sigma = 0.90$ mho/m $\epsilon = 40.1$ $\rho = 1.00$ g/cm³
Cubes (2): Peak: 4.31 mW/g ± 0.06 dB, SAR (1g): 2.69 mW/g ± 0.05 dB, SAR (10g): 1.71 mW/g ± 0.05 dB, (Worst-case extrapolation)
Penetration depth: 11.7 (10.5, 13.5) [mm]
Powerdrift: -0.06 dB

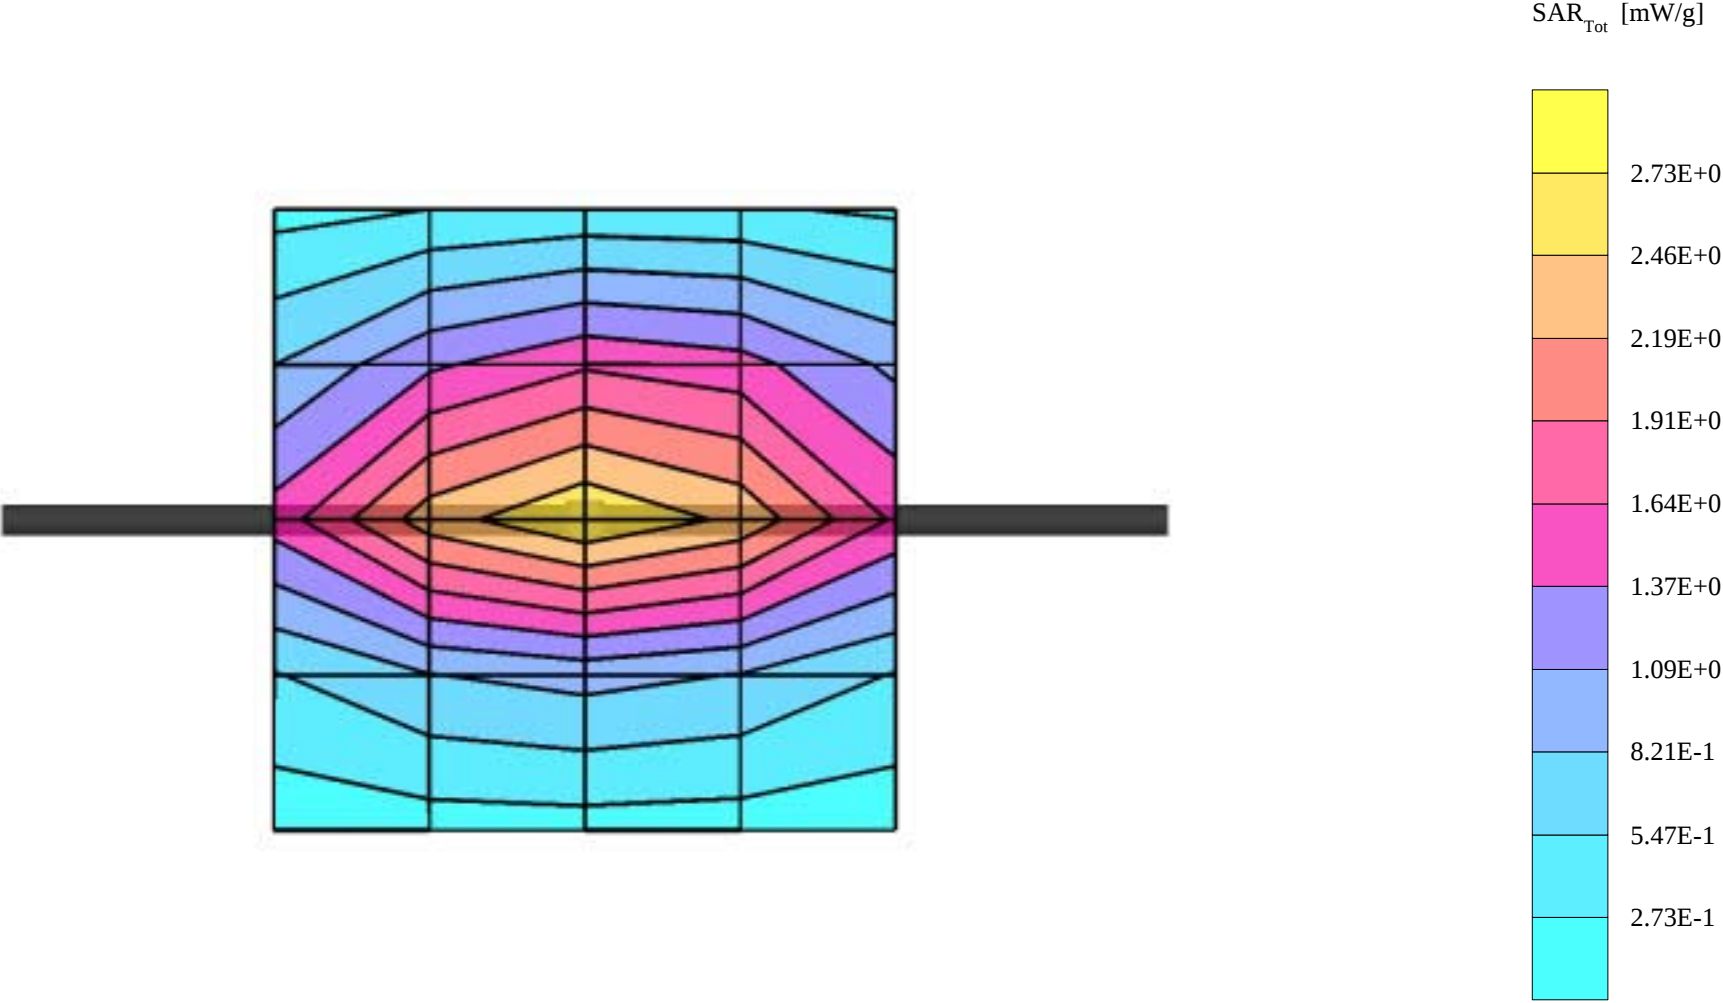

Dipole 835 MHz


SAM 2; Flat

Probe: ET3DV6 - SN1381; ConvF(6.04,6.04,6.04); Crest factor: 1.0; Muscle 836 MHz: $\sigma = 0.94 \text{ mho/m}$ $\epsilon = 57.4$ $\rho = 1.00 \text{ g/cm}^3$

Cubes (2): Peak: $4.16 \text{ mW/g} \pm 0.01 \text{ dB}$, SAR (1g): $2.64 \text{ mW/g} \pm 0.02 \text{ dB}$, SAR (10g): $1.70 \text{ mW/g} \pm 0.02 \text{ dB}$, (Worst-case extrapolation)

Penetration depth: 12.7 (11.1, 14.7) [mm]


Powerdrift: -0.01 dB

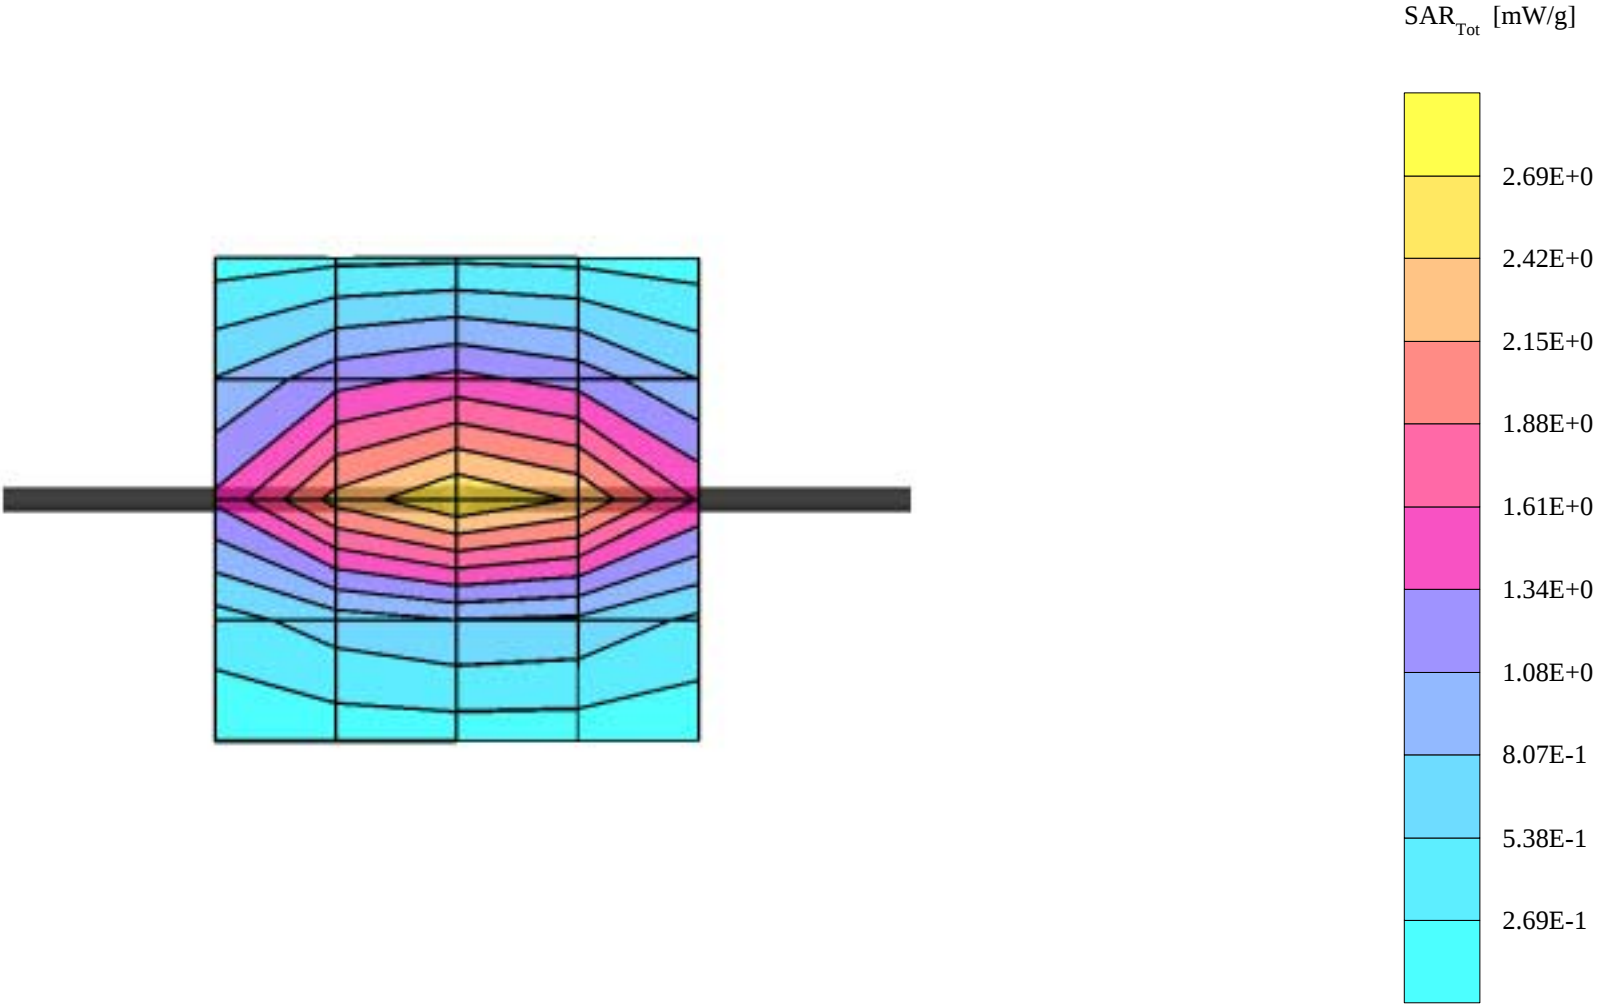

Dipole 1900 MHz


SAM 1; Flat

Probe: ET3DV6 - SN1381; ConvF(5.22,5.22,5.22); Crest factor: 1.0; Brain 1900 MHz SCC34: $\sigma = 1.41 \text{ mho/m}$ $\epsilon = 38.7$ $\rho = 1.00 \text{ g/cm}^3$
Cubes (2): Peak: $20.9 \text{ mW/g} \pm 0.01 \text{ dB}$, SAR (1g): $11.1 \text{ mW/g} \pm 0.00 \text{ dB}$, SAR (10g): $5.66 \text{ mW/g} \pm 0.02 \text{ dB}$, (Worst-case extrapolation)
Penetration depth: 8.1 (7.7, 9.0) [mm]
Powerdrift: -0.04 dB

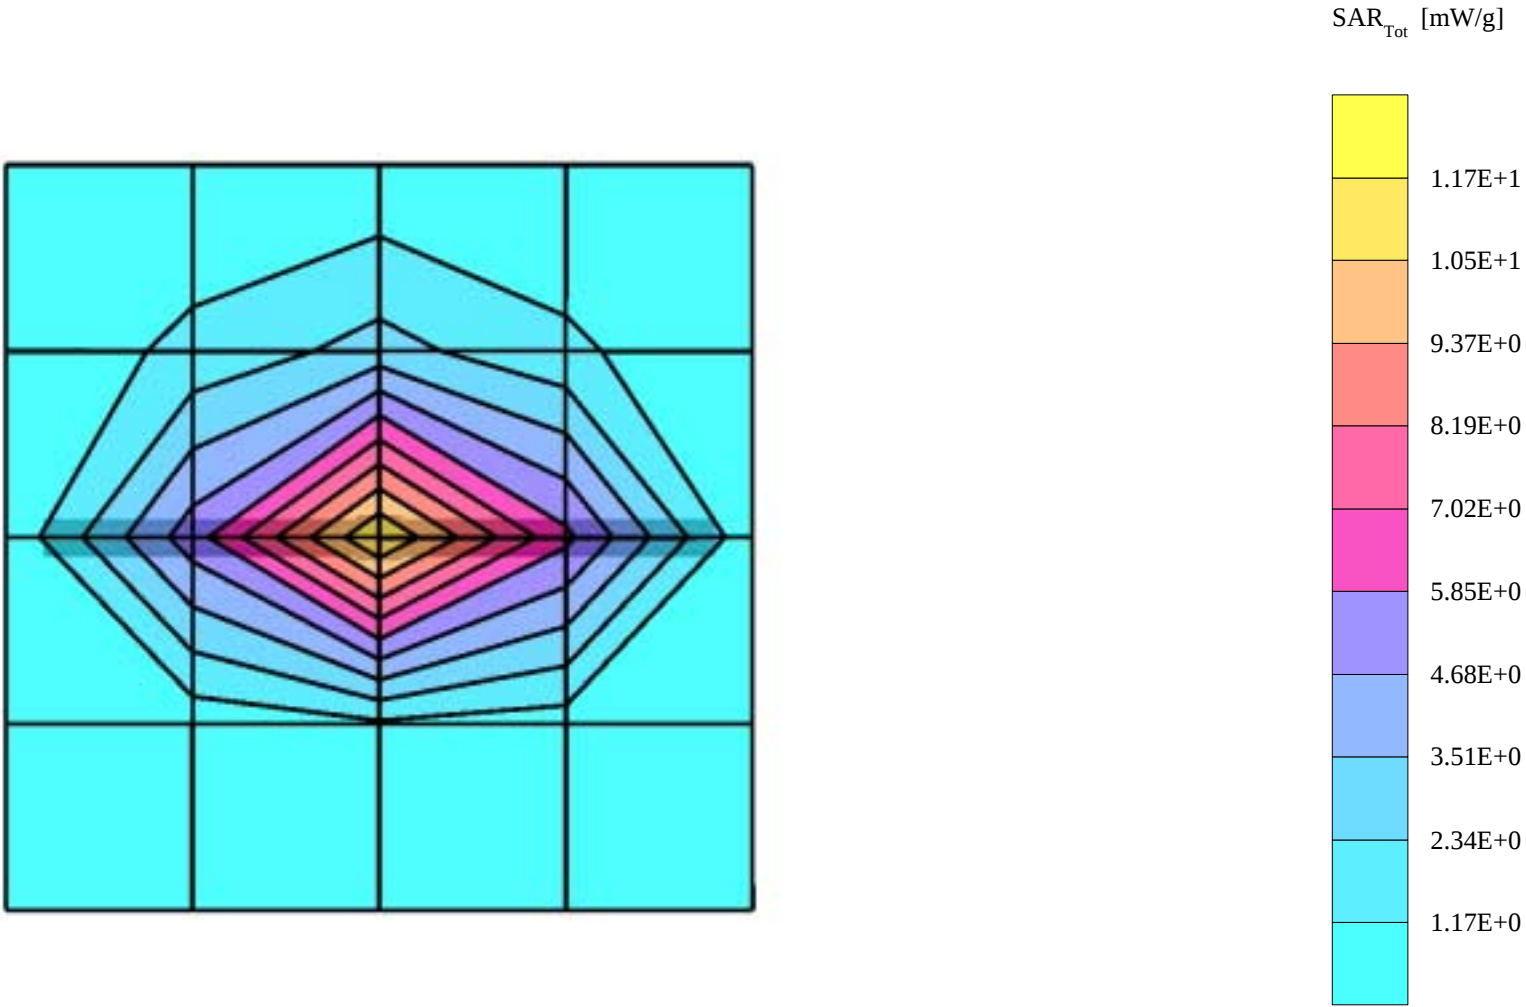

Dipole 1900 MHz

SAM 1; Flat
Probe: ET3DV6 - SN1381; ConvF(4.96,4.96,4.96); Crest factor: 1.0; Muscle 1900 MHz: $\sigma = 1.49 \text{ mho/m}$ $\epsilon = 53.5$ $\rho = 1.00 \text{ g/cm}^3$
Cubes (2): Peak: $20.8 \text{ mW/g} \pm 0.01 \text{ dB}$, SAR (1g): $10.9 \text{ mW/g} \pm 0.01 \text{ dB}$, SAR (10g): $5.50 \text{ mW/g} \pm 0.00 \text{ dB}$, (Worst-case extrapolation)
Penetration depth: 8.3 (7.7, 9.6) [mm]
Powerdrift: -0.03 dB

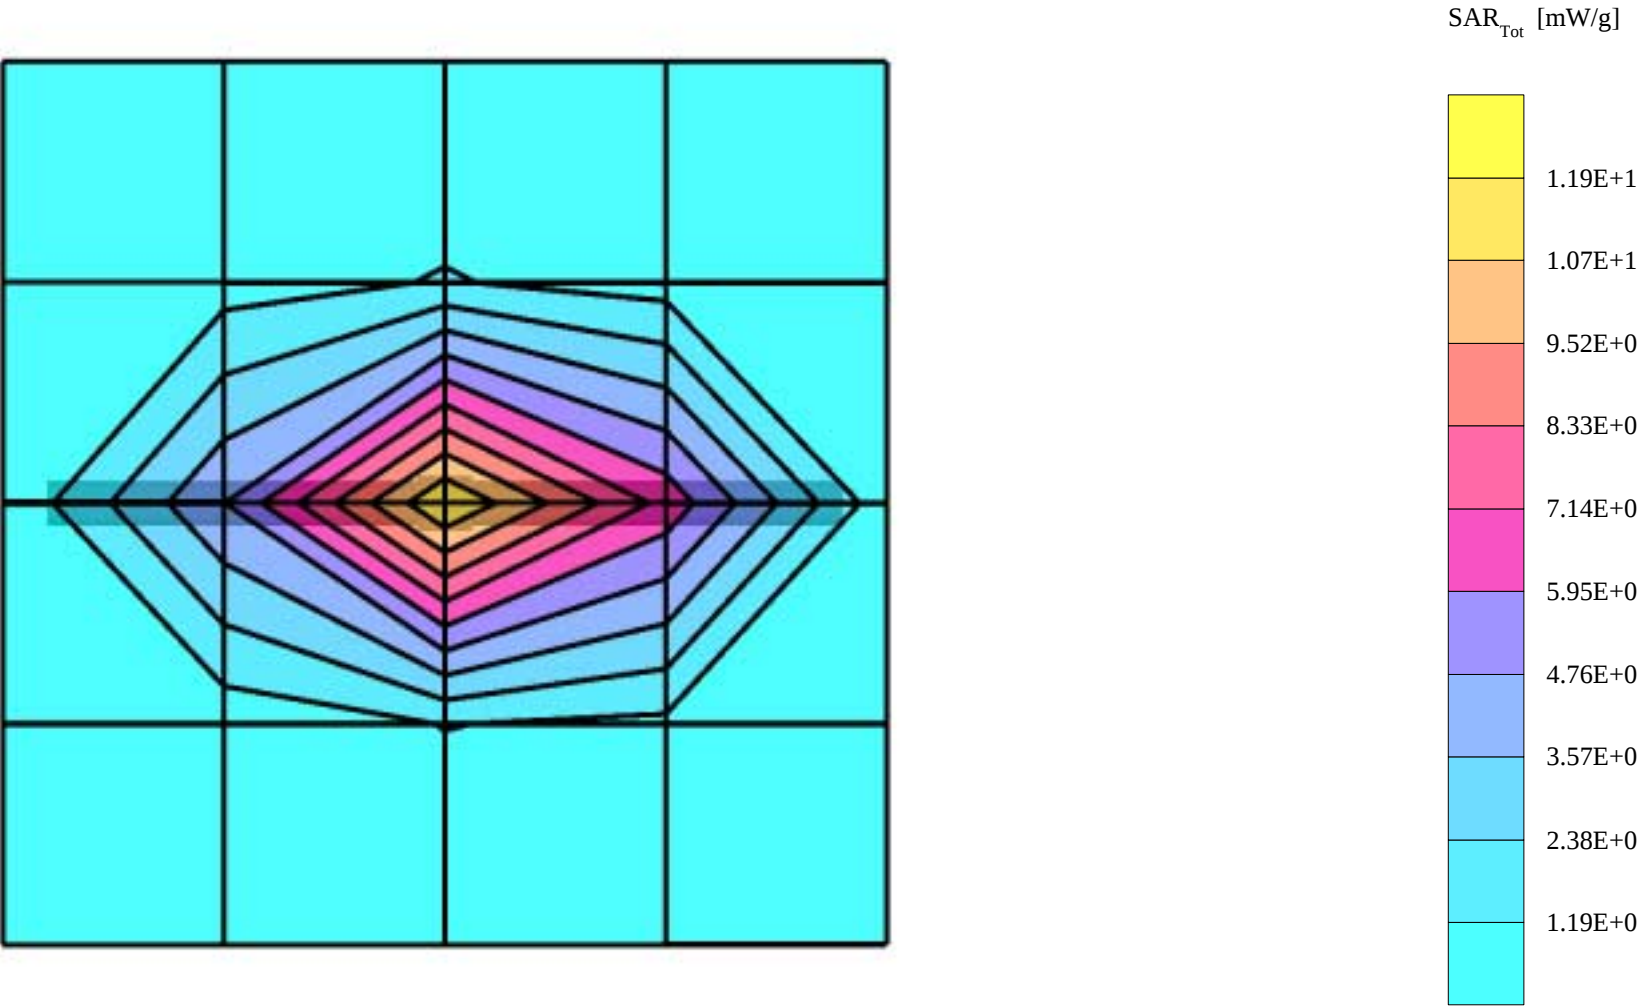


APPENDIX B.

SAR Distribution Printouts


GMLNPM-8

SAM 2 Phantom; Left Hand Section; Position: cheek ; Frequency: 849 MHz
Probe: ET3DV6 - SN1381; ConvF(6.20,6.20,6.20); Crest factor: 8.0; Brain 836 MHz SCC34: $\sigma = 0.90$ mho/m $\epsilon = 40.1$ $\rho = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 1.02 mW/g, SAR (10g): 0.707 mW/g,
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: -0.06 dB

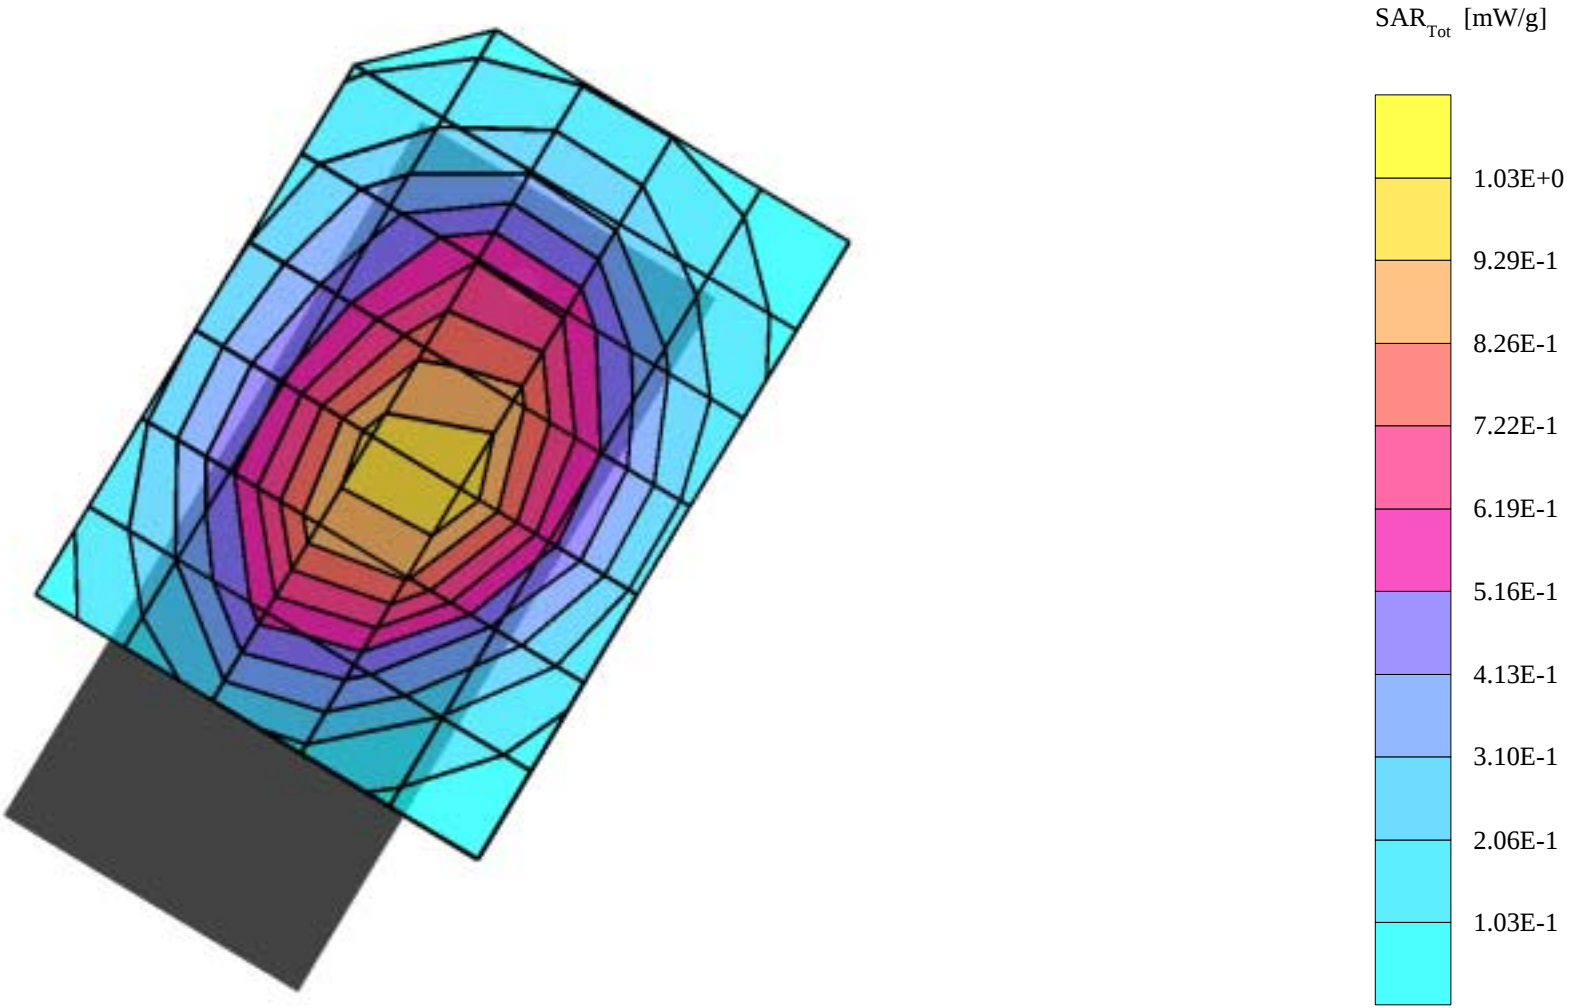


GMLNPM-8

SAM 2 Phantom; Left Hand Section; Position: tilted ; Frequency: 849 MHz
Probe: ET3DV6 - SN1381; ConvF(6.20,6.20,6.20); Crest factor: 8.0; Brain 836 MHz SCC34: $\sigma = 0.90$ mho/m $\epsilon = 40.1$ $\rho = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 0.523 mW/g, SAR (10g): 0.365 mW/g,
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: -0.09 dB

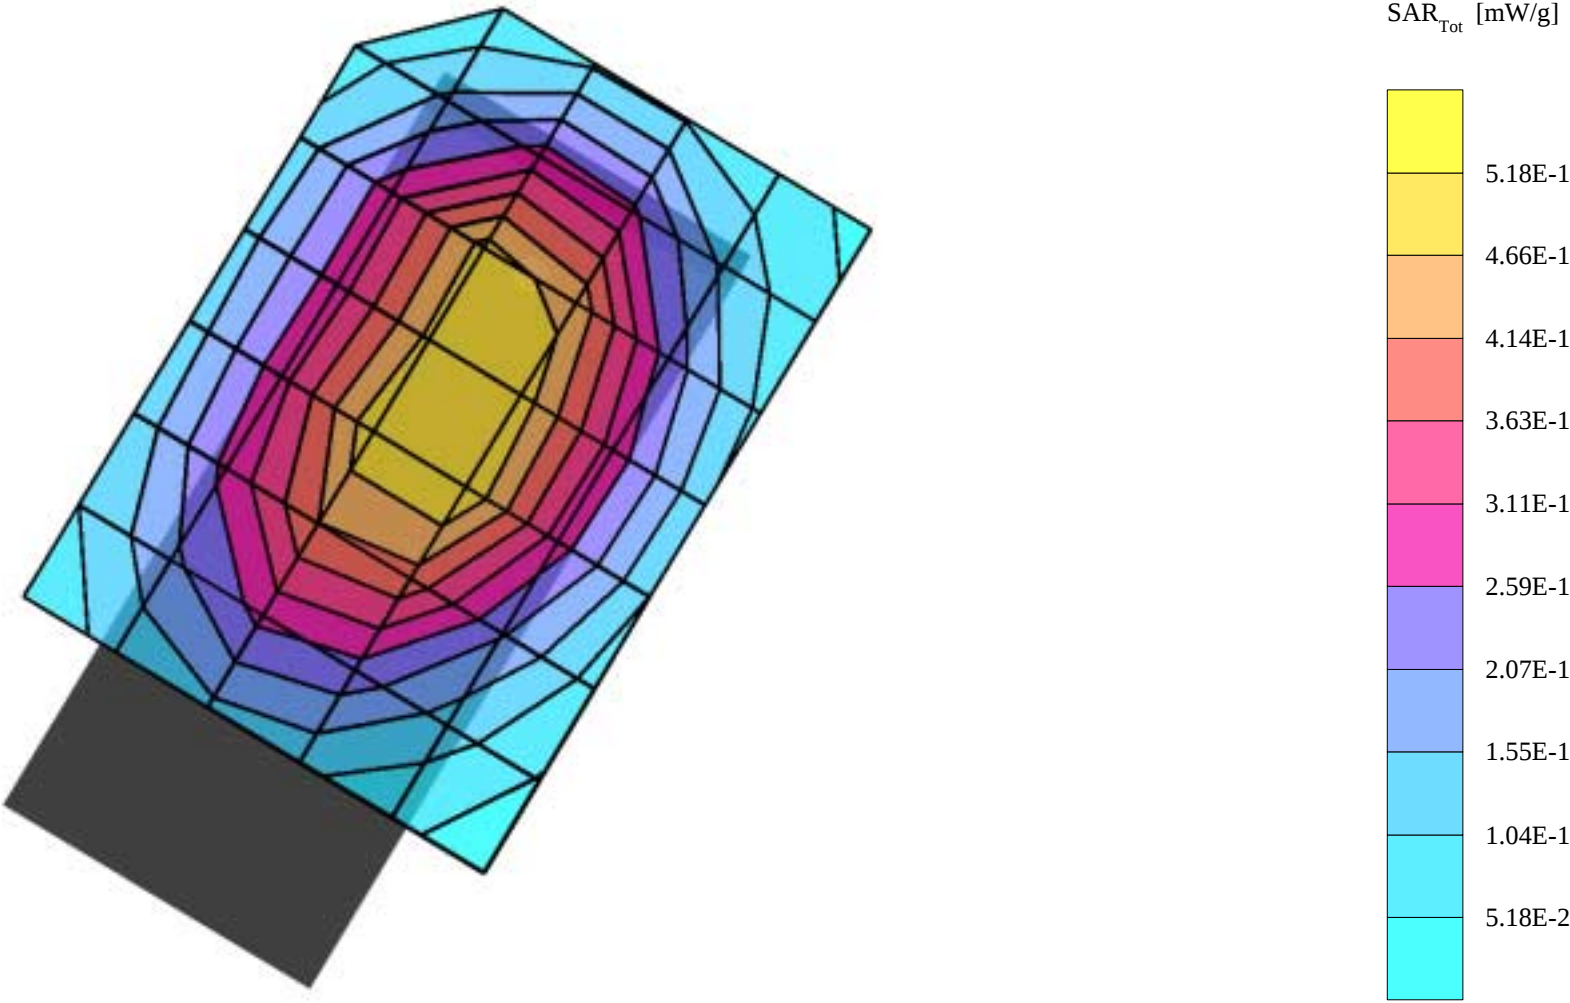


GMLNPM-8

SAM 2 Phantom; Righ Hand Section; Position: cheek; Frequency: 849 MHz
Probe: ET3DV6 - SN1381; ConvF(6.20,6.20,6.20); Crest factor: 8.0; Brain 836 MHz SCC34: $\sigma = 0.90$ mho/m $\epsilon = 40.1$ $\rho = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 0.991 mW/g, SAR (10g): 0.684 mW/g,
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: -0.05 dB

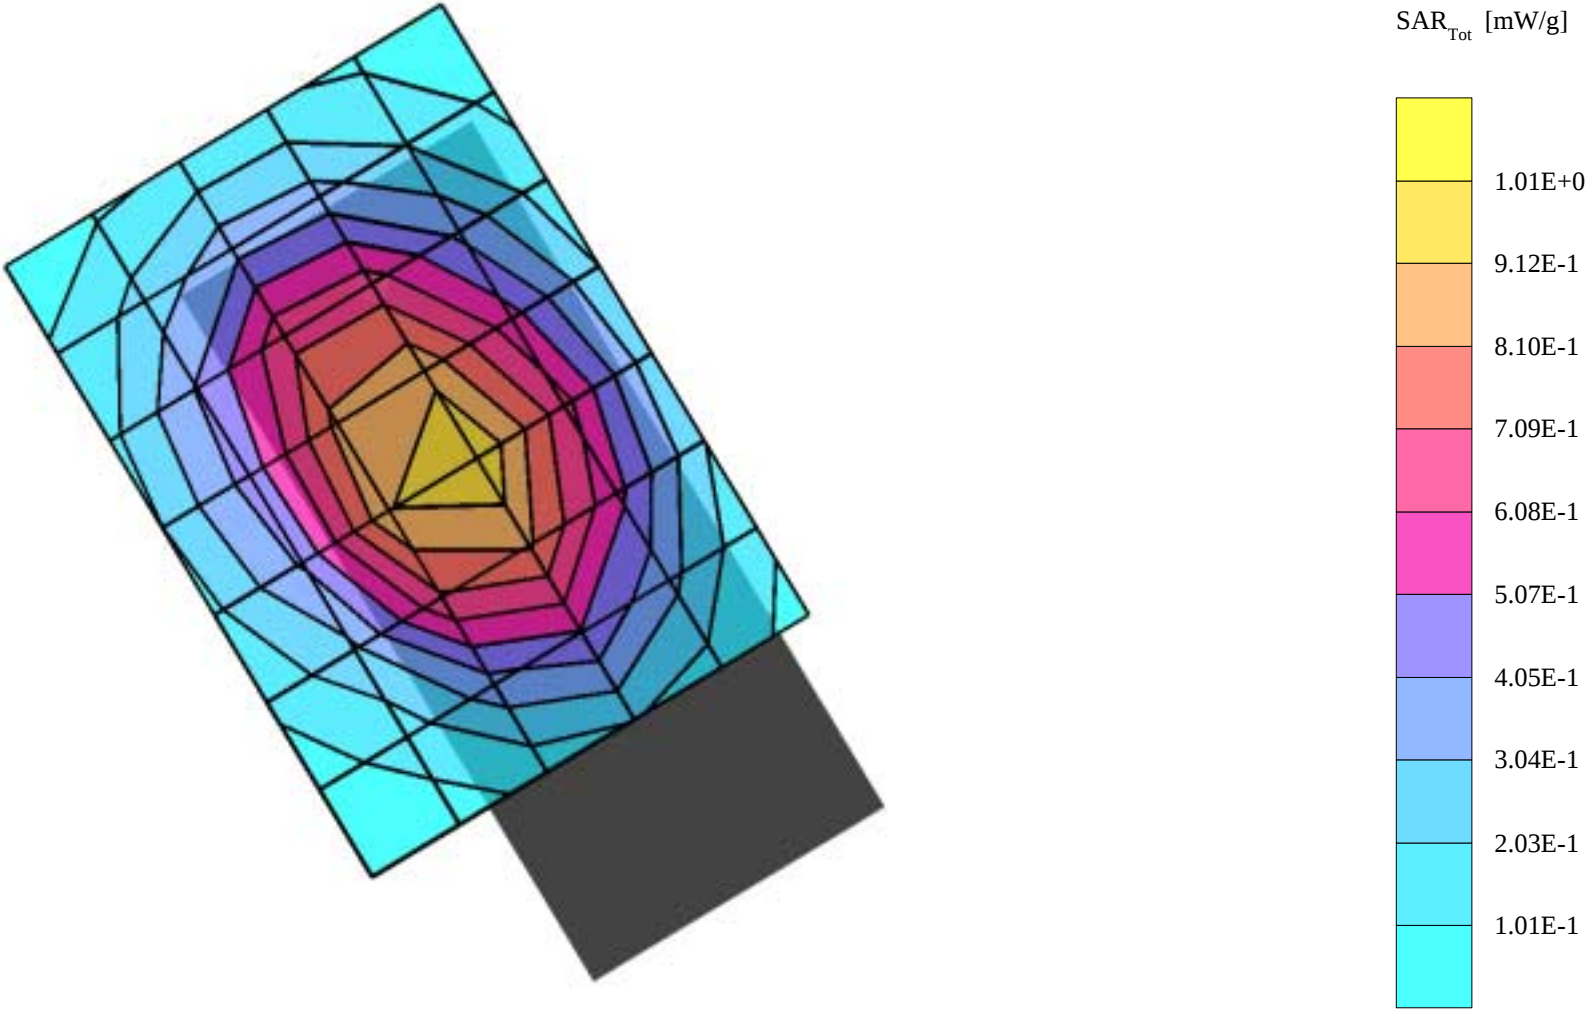


GMLNPM-8

SAM 2 Phantom; Righ Hand Section; Position:tilted; Frequency: 849 MHz
Probe: ET3DV6 - SN1381; ConvF(6.20,6.20,6.20); Crest factor: 8.0; Brain 836 MHz SCC34: $\sigma = 0.90$ mho/m $\epsilon = 40.1$ $\rho = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 0.543 mW/g, SAR (10g): 0.349 mW/g,
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: 0.02 dB

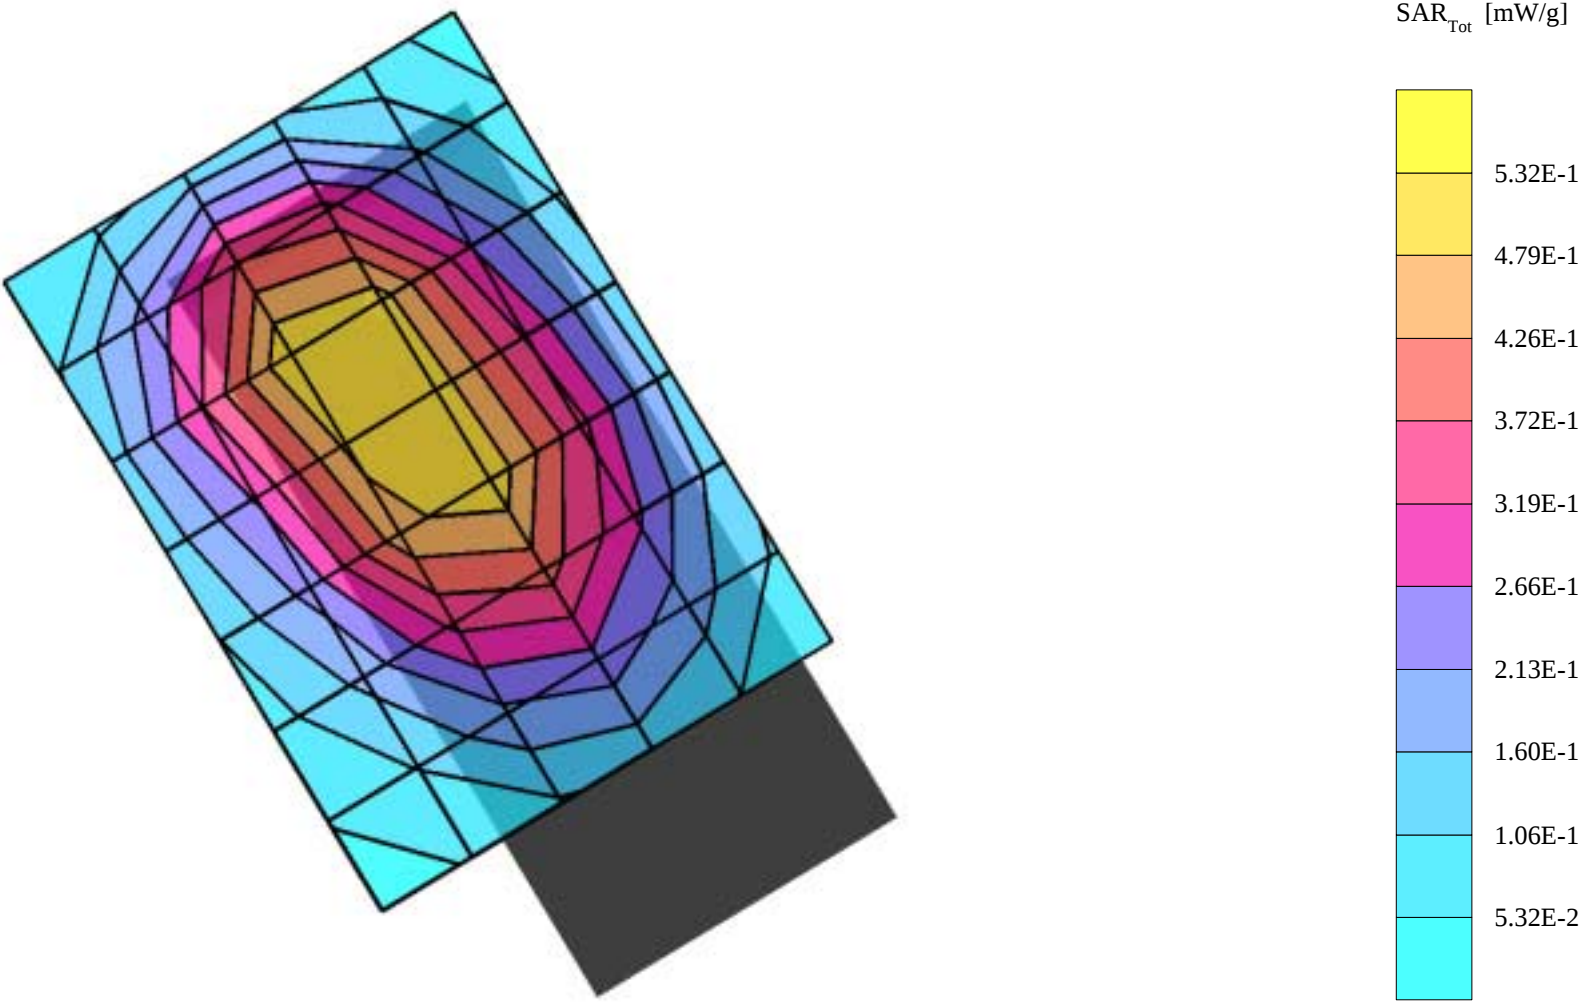


GMLNPM-8

SAM 1 Phantom; Righ Hand Section; Position: cheek; Frequency: 1850 MHz
Probe: ET3DV6 - SN1381; ConvF(5.22,5.22,5.22); Crest factor: 8.0; Brain 1880 MHz SCC34: $\sigma = 1.39$ mho/m $\epsilon = 38.8$ $\rho = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 0.463 mW/g, SAR (10g): 0.264 mW/g,
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: -0.13 dB

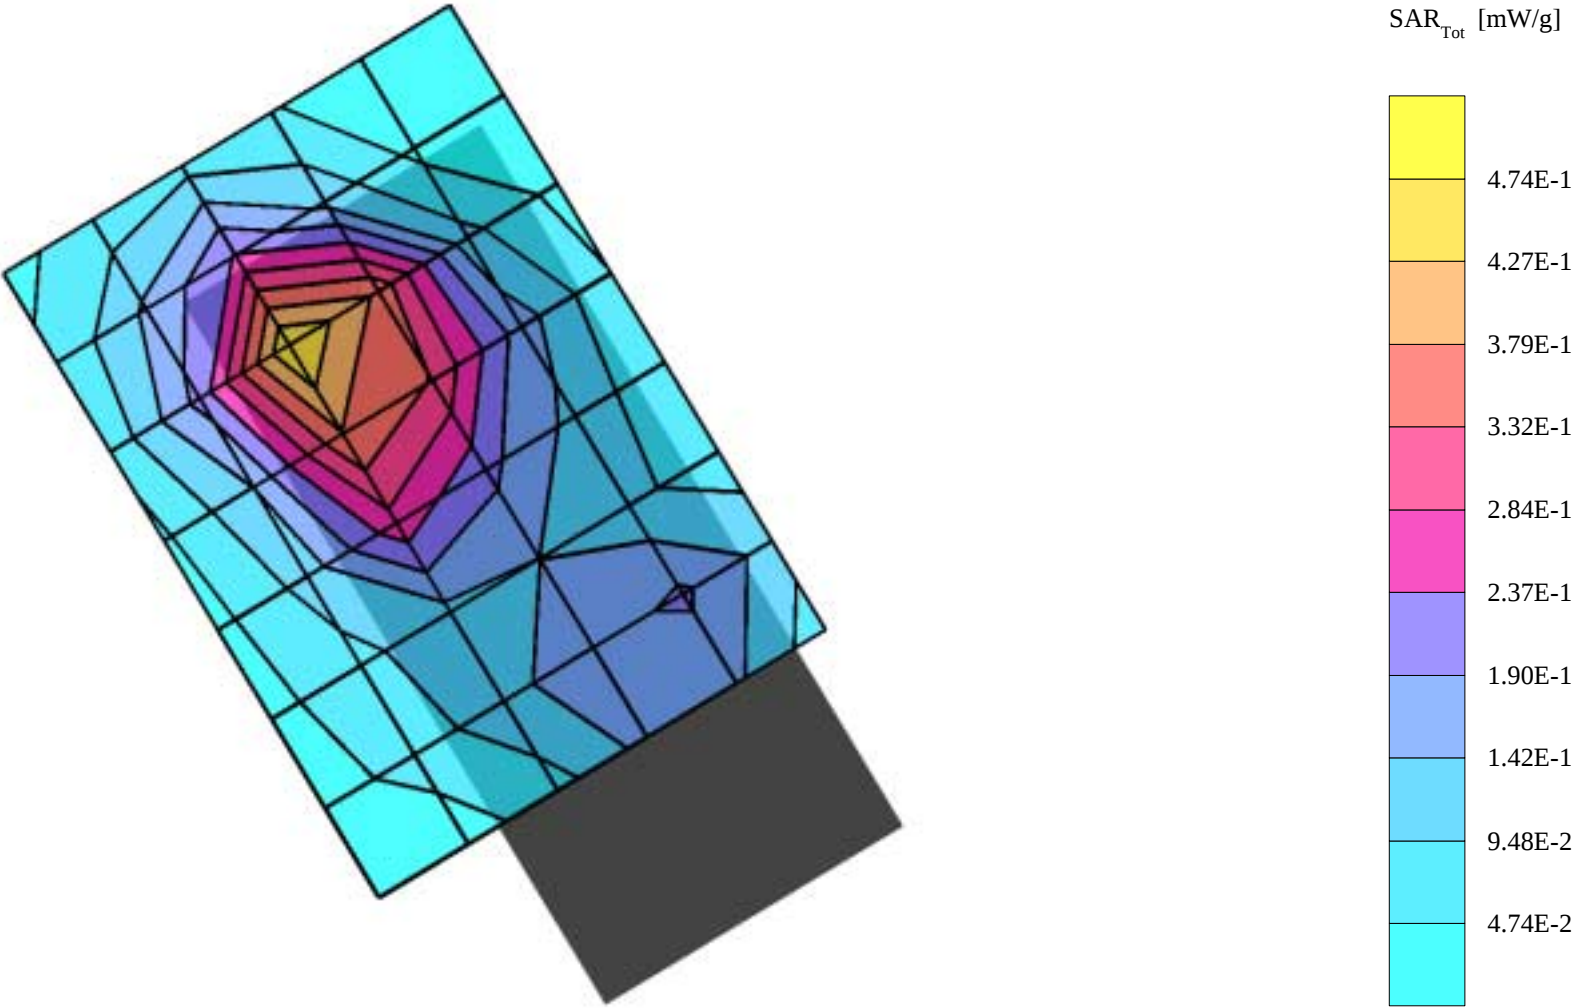


GMLNPM-8

SAM 1 Phantom; Righ Hand Section; Position: tilted; Frequency: 1850 MHz
Probe: ET3DV6 - SN1381; ConvF(5.22,5.22,5.22); Crest factor: 8.0; Brain 1880 MHz SCC34: $\sigma = 1.39$ mho/m $\epsilon = 38.8$ $\rho = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 0.613 mW/g, SAR (10g): 0.339 mW/g,
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: -0.03 dB

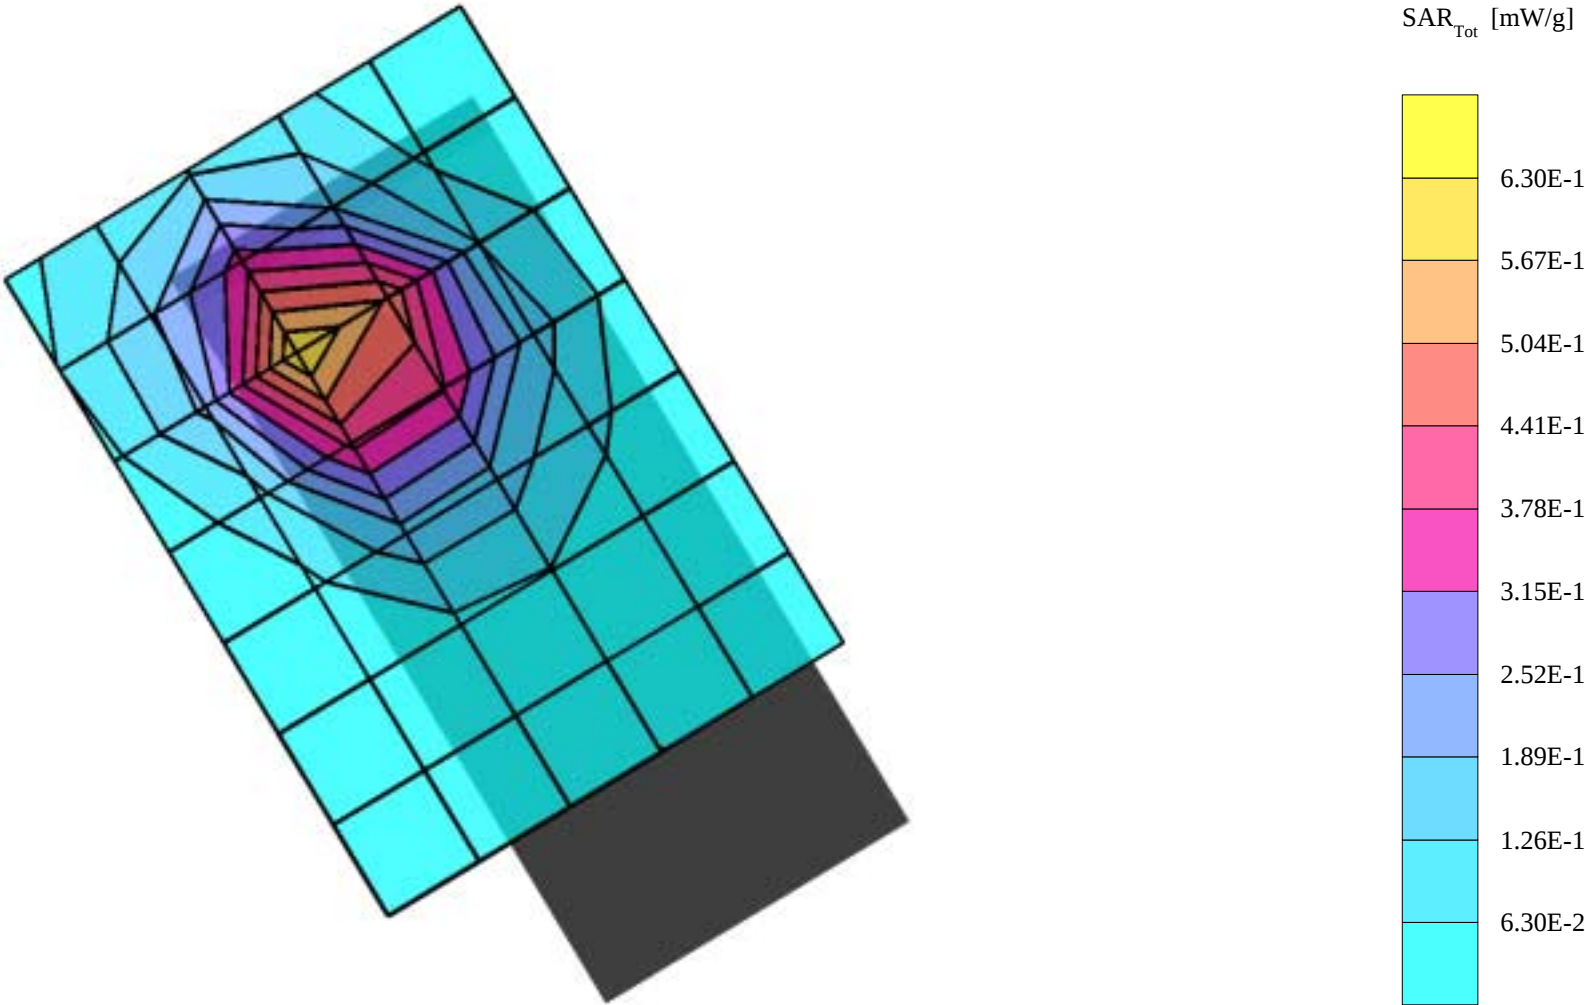


GMLNPM-8

SAM 1 Phantom; Left Hand Section; Position: cheek; Frequency: 1850 MHz
Probe: ET3DV6 - SN1381; ConvF(5.22,5.22,5.22); Crest factor: 8.0; Brain 1880 MHz SCC34: $\sigma = 1.39 \text{ mho/m}$ $\epsilon = 38.8$ $\rho = 1.00 \text{ g/cm}^3$
Cube 5x5x7: SAR (1g): 0.450 mW/g, SAR (10g): 0.261 mW/g,
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: 0.07 dB

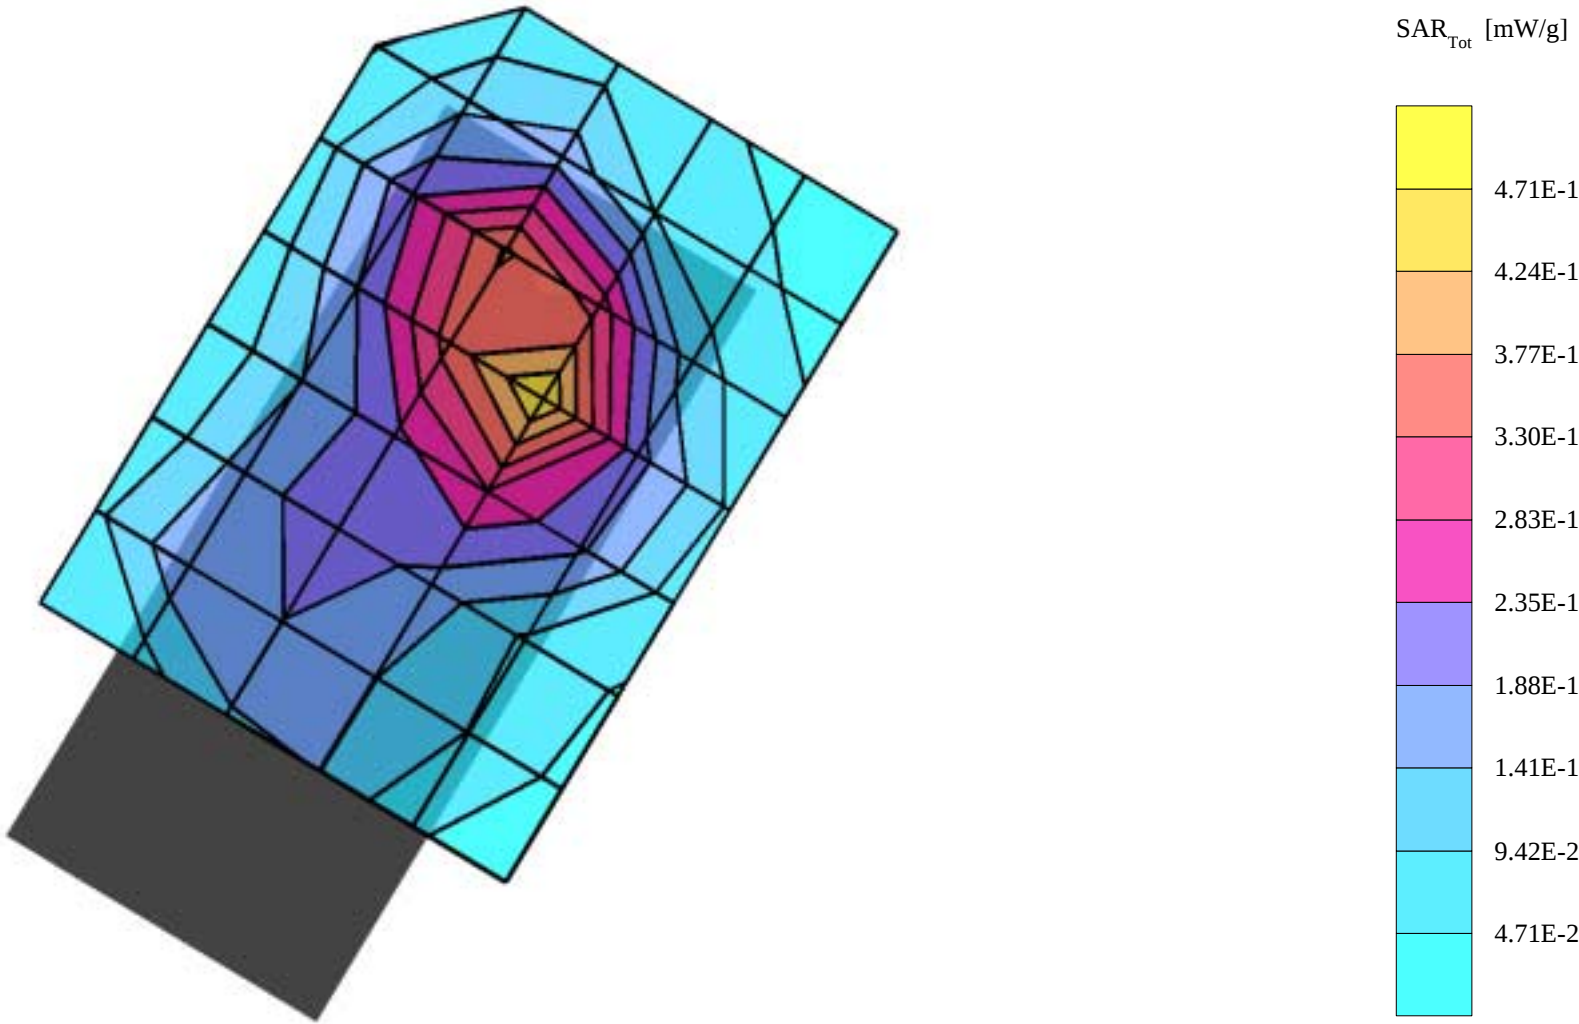


GMLNPM-8

SAM 1 Phantom; Left Hand Section; Position: tilted; Frequency: 1850 MHz
Probe: ET3DV6 - SN1381; ConvF(5.22,5.22,5.22); Crest factor: 8.0; Brain 1880 MHz SCC34: $\sigma = 1.39 \text{ mho/m}$ $\epsilon = 38.8$ $\rho = 1.00 \text{ g/cm}^3$
Cube 5x5x7: SAR (1g): 0.577 mW/g, SAR (10g): 0.325 mW/g,
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: 0.00 dB

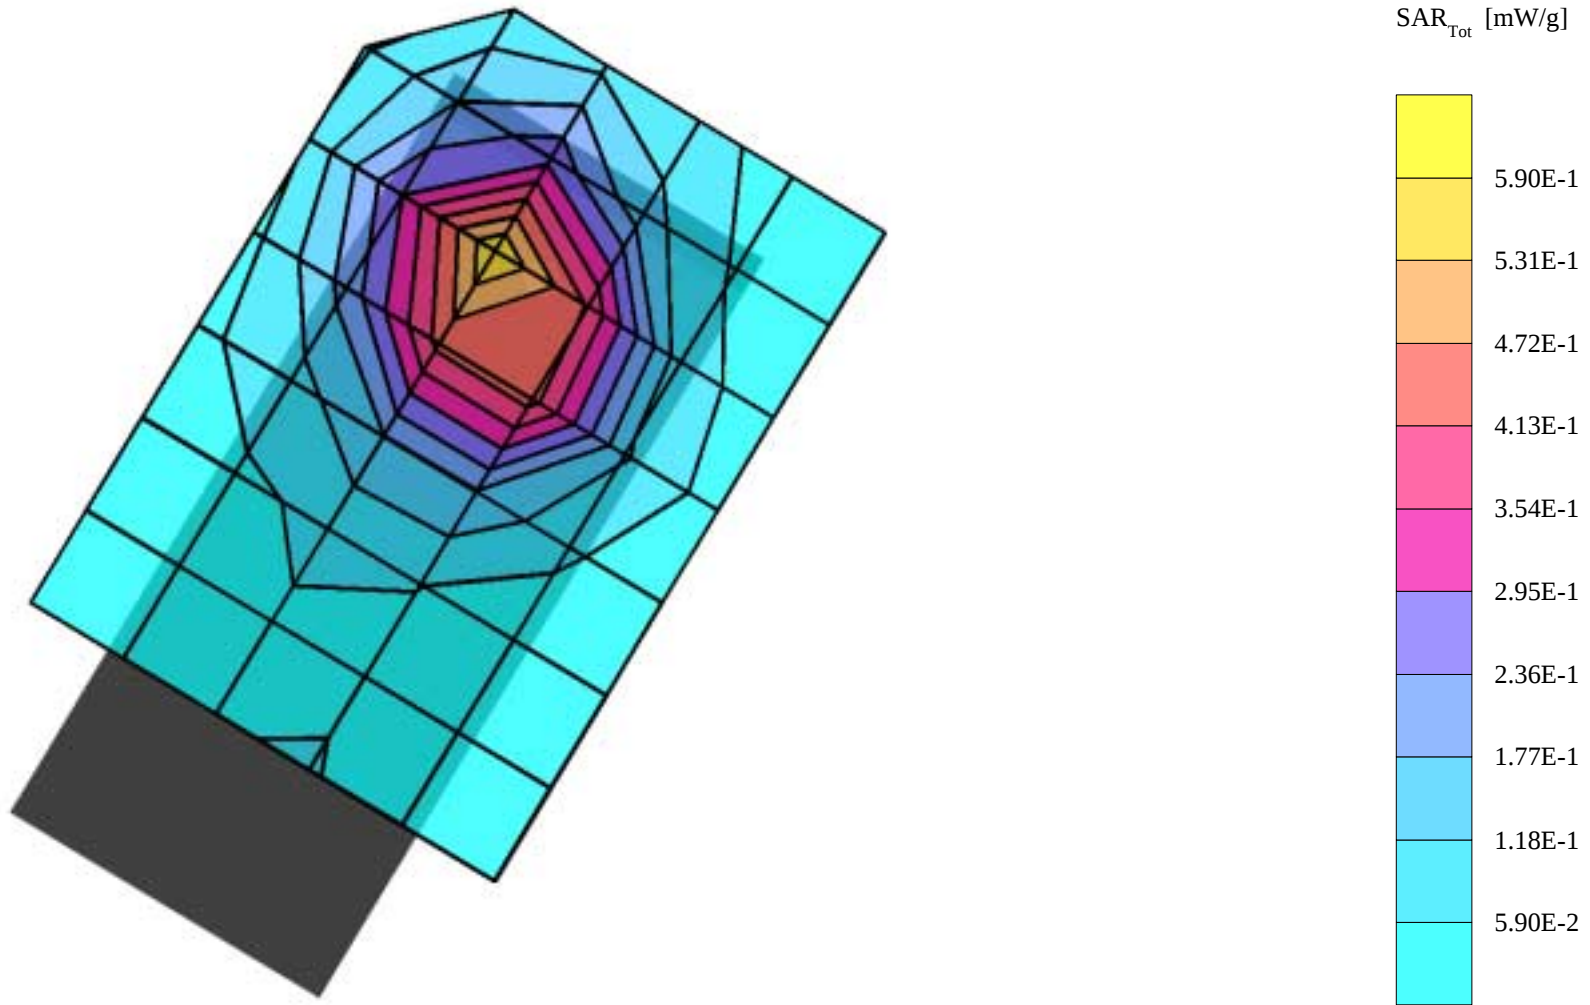


GMLNPM-8 with accessory cover

SAM 2 Phantom; Righ Hand Section; Position: cheek ; Frequency: 849 MHz
Probe: ET3DV6 - SN1381; ConvF(6.20,6.20,6.20); Crest factor: 8.0; Brain 836 MHz SCC34: $\sigma = 0.90$ mho/m $\epsilon = 40.1$ $\rho = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 0.991 mW/g, SAR (10g): 0.684 mW/g,
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: 0.01 dB

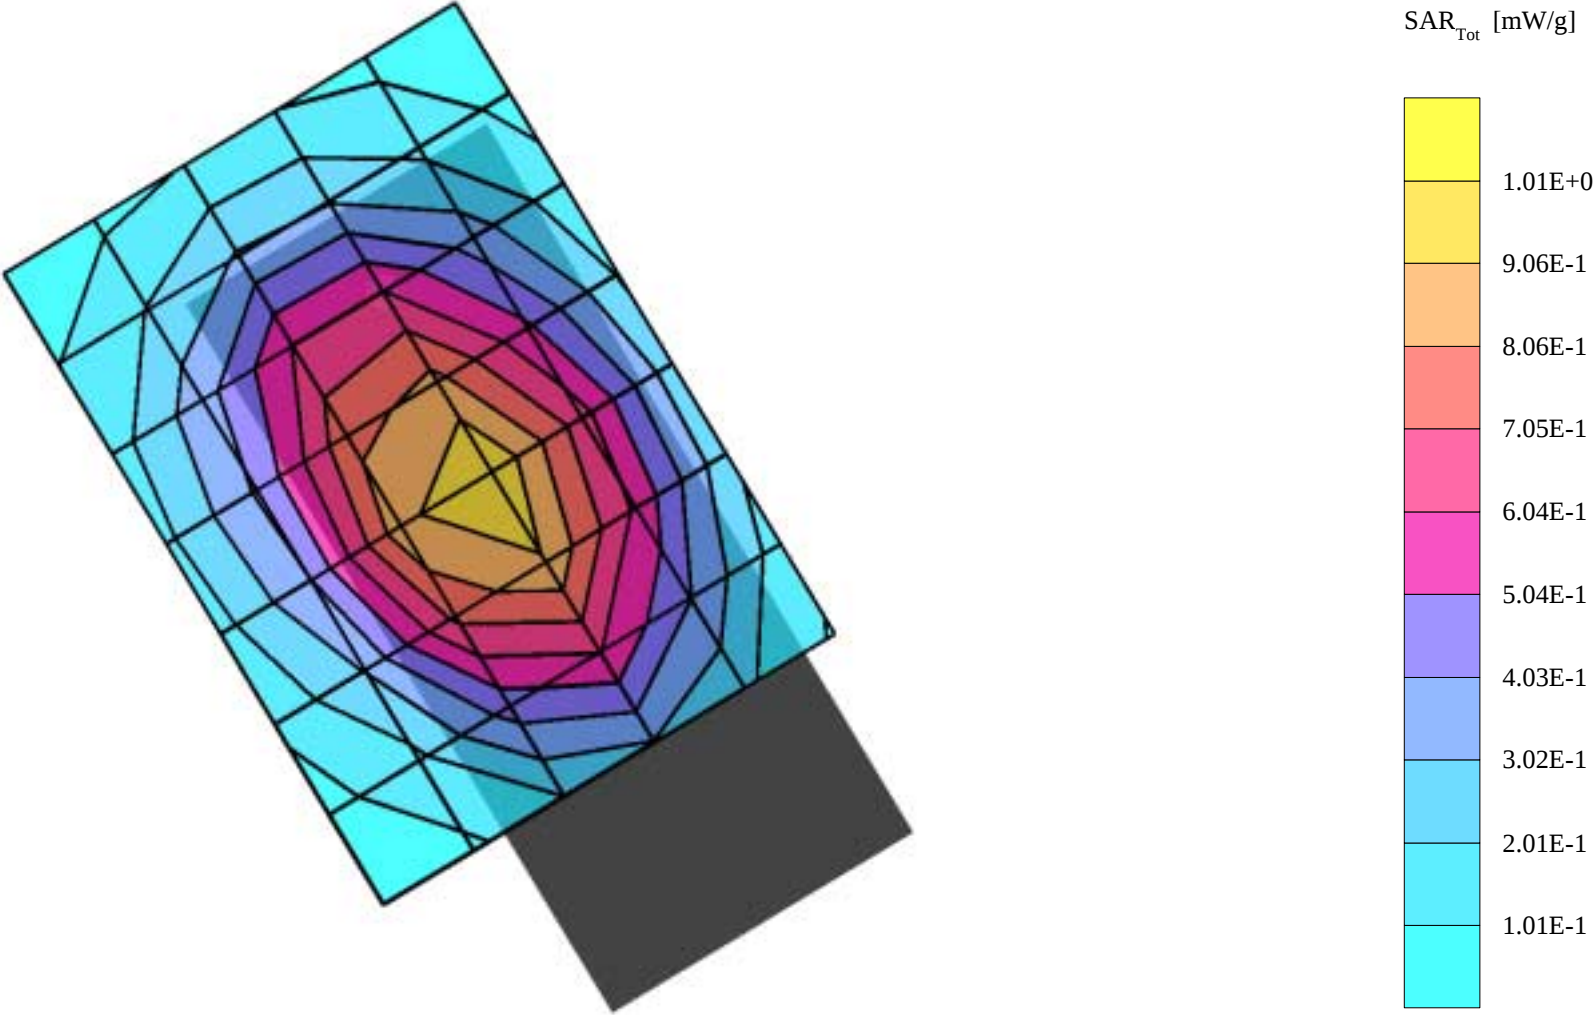


GMLNPM-8 with accessory cover

SAM 2 Phantom; Righ Hand Section; Position: tilted; Frequency: 849 MHz
Probe: ET3DV6 - SN1381; ConvF(6.20,6.20,6.20); Crest factor: 8.0; Brain 836 MHz SCC34: $\sigma = 0.90$ mho/m $\epsilon = 40.1$ $\rho = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 0.502 mW/g, SAR (10g): 0.351 mW/g,
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: -0.01 dB

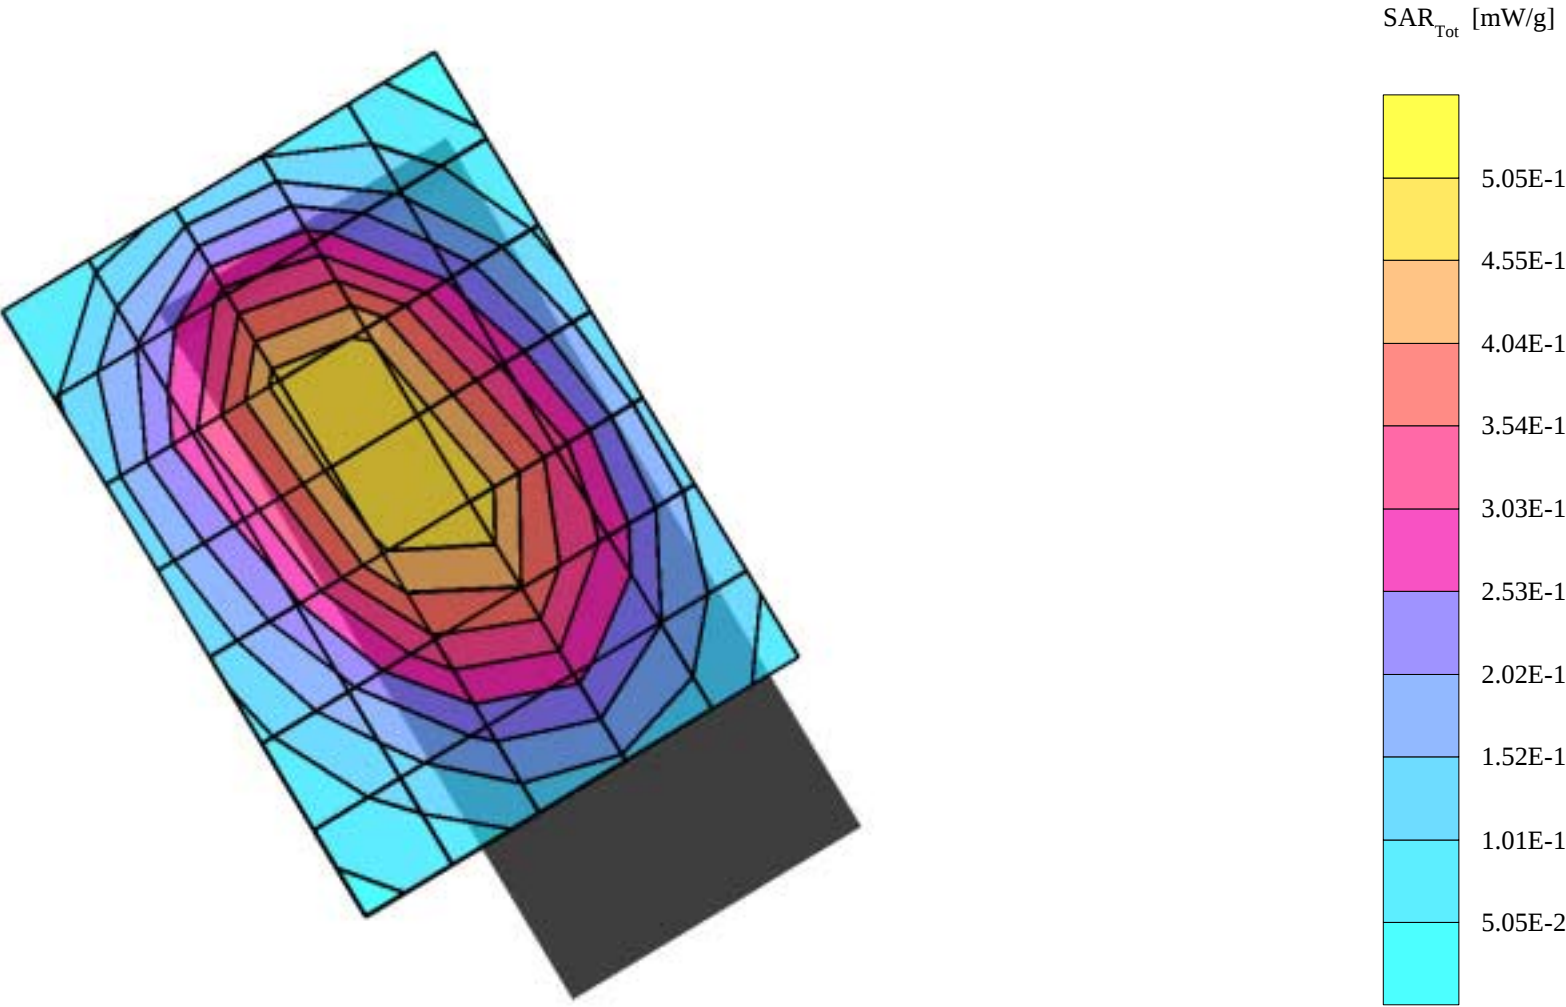


GMLNPM-8 with accessory cover

SAM 2 Phantom; Left Hand Section; Position: cheek; Frequency: 849 MHz
Probe: ET3DV6 - SN1381; ConvF(6.20,6.20,6.20); Crest factor: 8.0; Brain 836 MHz SCC34: $\sigma = 0.90$ mho/m $\epsilon = 40.1$ $\rho = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 0.985 mW/g, SAR (10g): 0.681 mW/g,
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: 0.02 dB

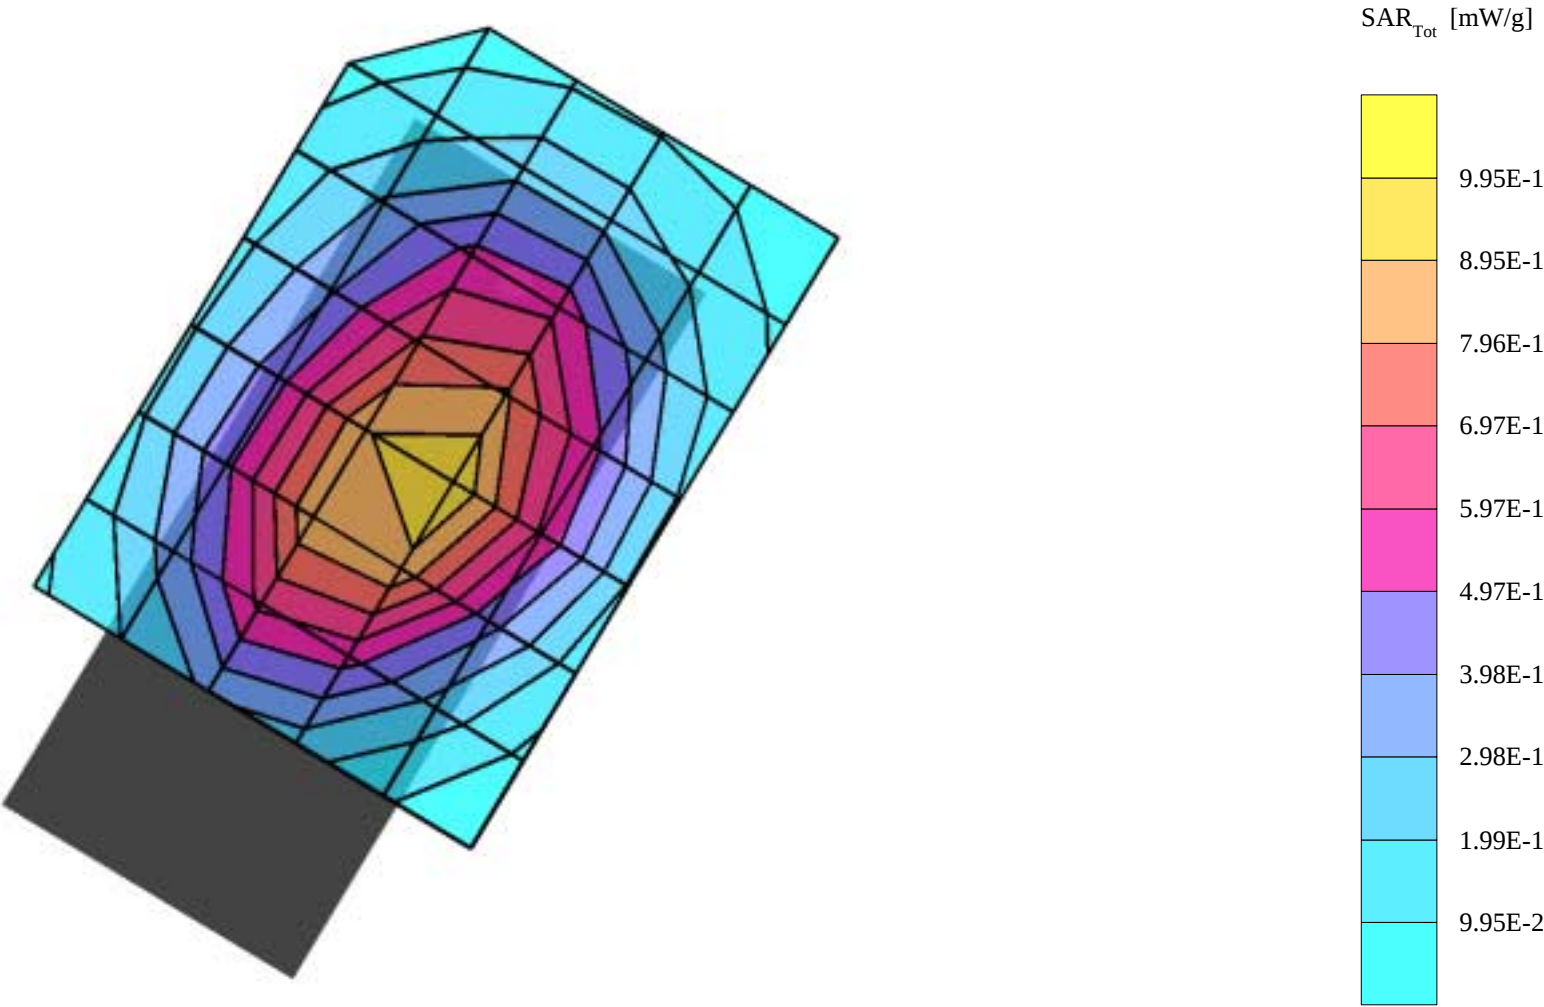


GMLNPM-8 with accessory cover

SAM 2 Phantom; Left Hand Section; Position: tilted; Frequency: 849 MHz
Probe: ET3DV6 - SN1381; ConvF(6.20,6.20,6.20); Crest factor: 8.0; Brain 836 MHz SCC34: $\sigma = 0.90$ mho/m $\epsilon = 40.1$ $\rho = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 0.518 mW/g, SAR (10g): 0.359 mW/g,
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: 0.02 dB

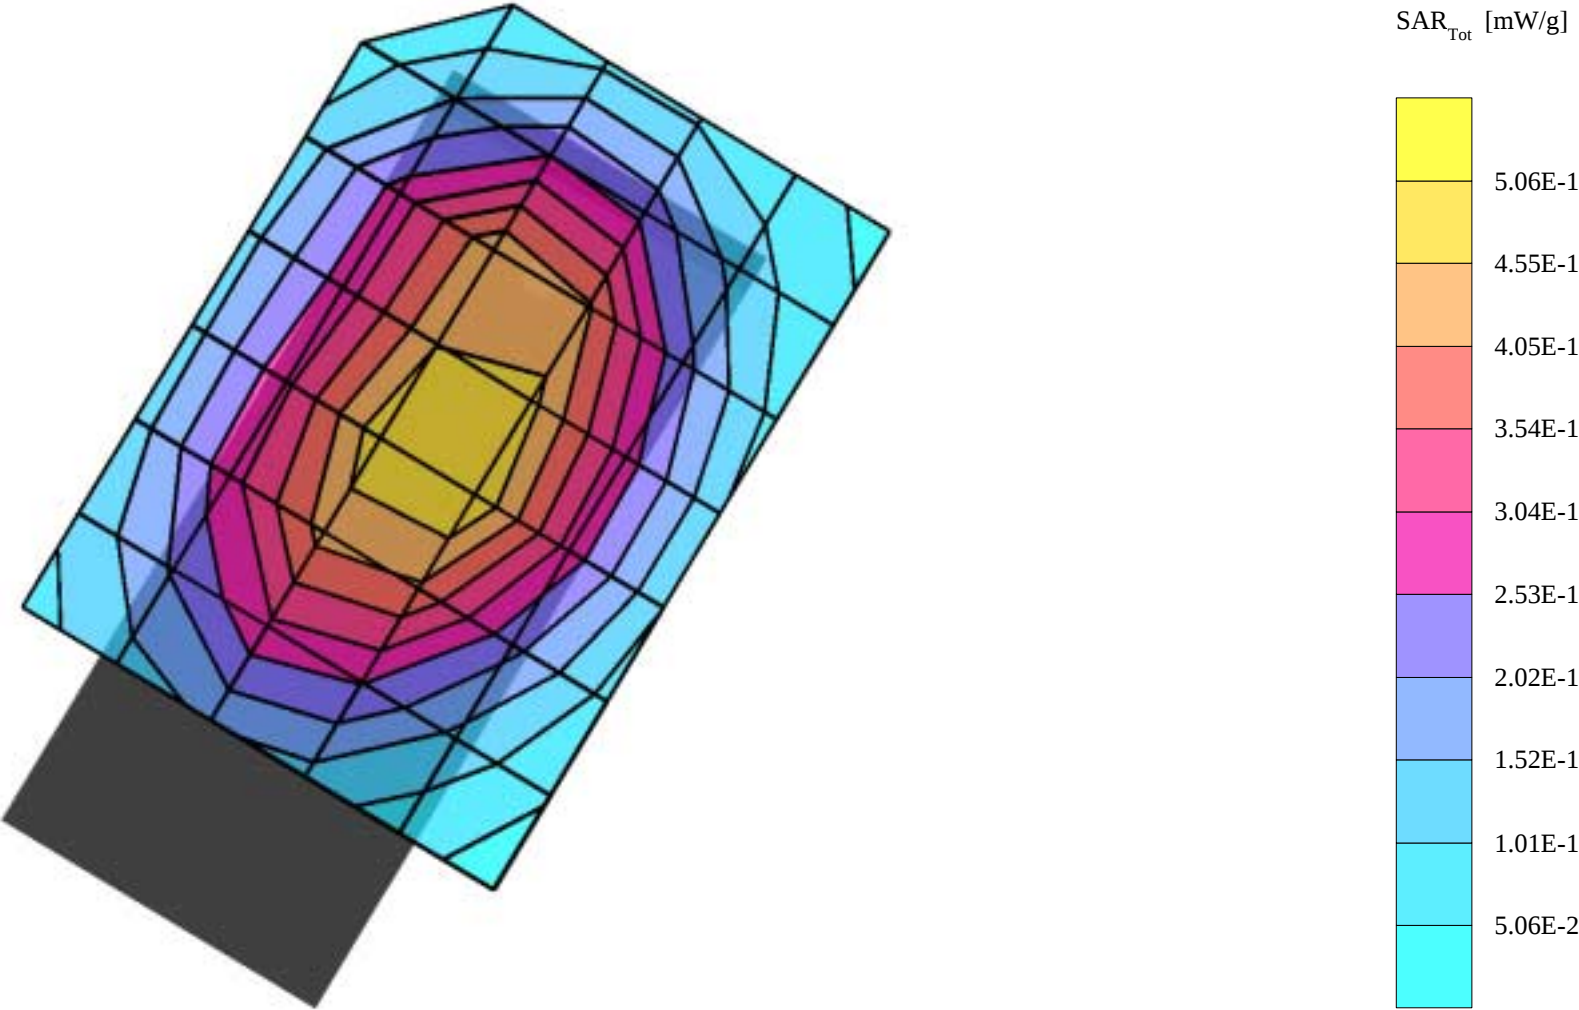


GMLNPM-8 with accessory cover

SAM 1 Phantom; Left Hand Section; Position: cheek ; Frequency: 1850 MHz
Probe: ET3DV6 - SN1381; ConvF(5.22,5.22,5.22); Crest factor: 8.0; Brain 1880 MHz SCC34: $\sigma = 1.39 \text{ mho/m}$ $\epsilon = 38.8$ $\rho = 1.00 \text{ g/cm}^3$
Cube 5x5x7: SAR (1g): 0.381 mW/g, SAR (10g): 0.226 mW/g,
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: -0.02 dB

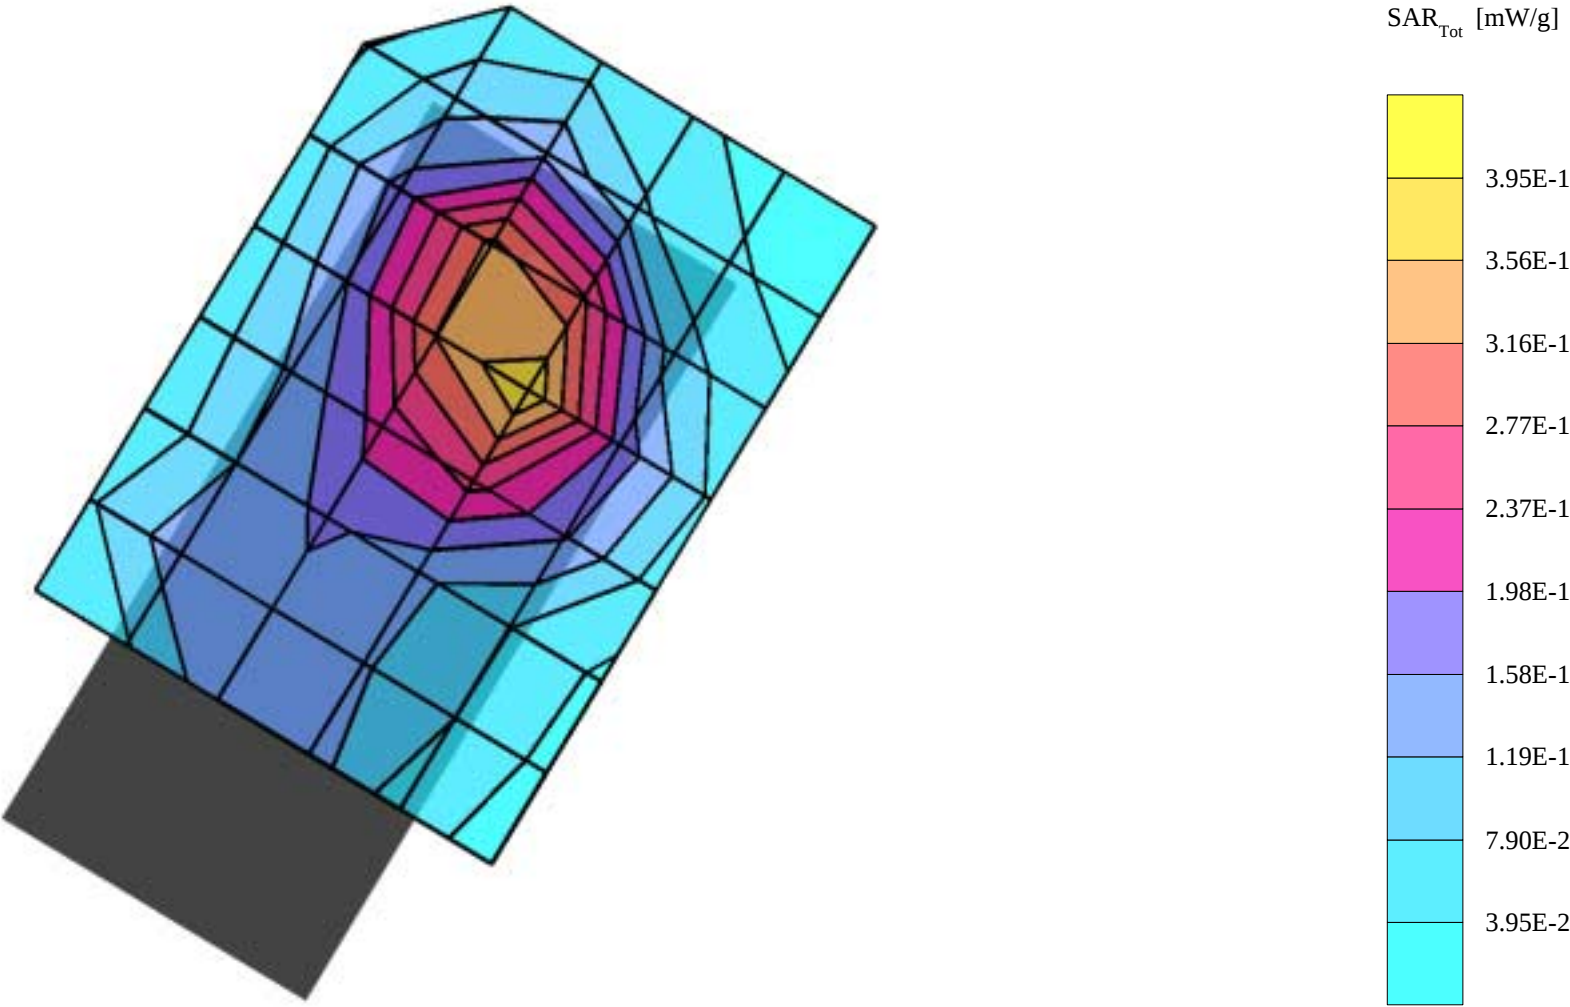


GMLNPM-8 with accessory cover

SAM 1 Phantom; Left Hand Section; Position: tilted; Frequency: 1850 MHz
Probe: ET3DV6 - SN1381; ConvF(5.22,5.22,5.22); Crest factor: 8.0; Brain 1880 MHz SCC34: $\sigma = 1.39 \text{ mho/m}$ $\epsilon = 38.8$ $\rho = 1.00 \text{ g/cm}^3$
Cube 5x5x7: SAR (1g): 0.493 mW/g, SAR (10g): 0.280 mW/g,
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: 0.04 dB

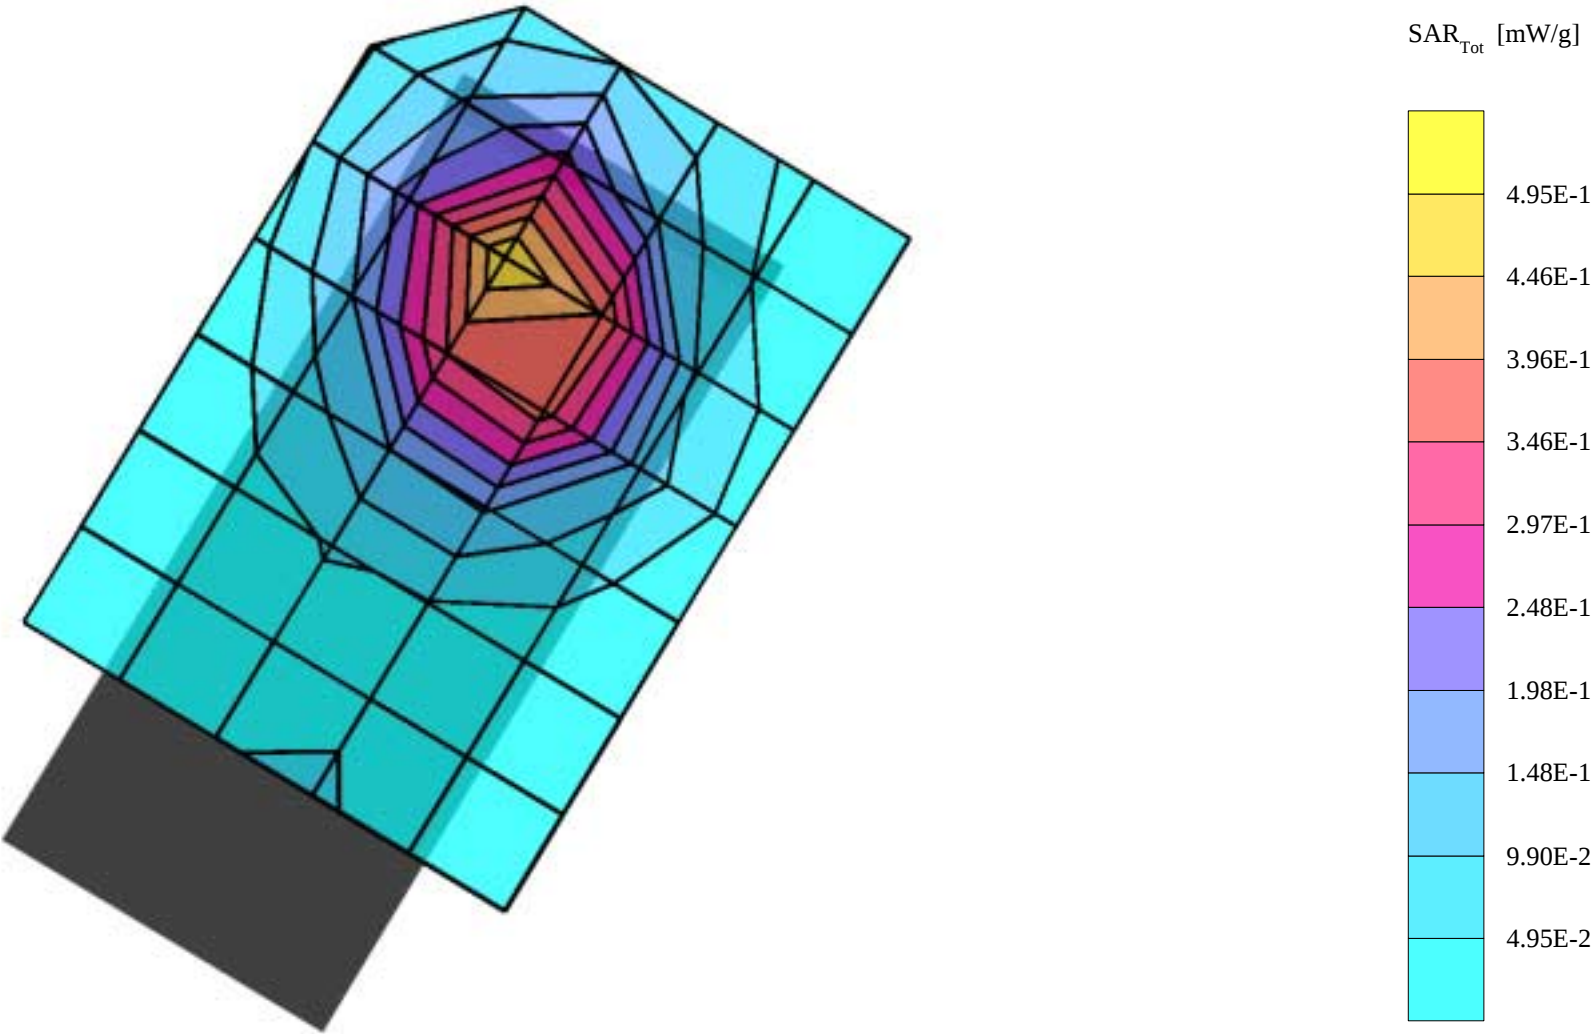


GMLNPM-8 with accessory cover

SAM 1 Phantom; Righ Hand Section; Position: cheek; Frequency: 1850 MHz
Probe: ET3DV6 - SN1381; ConvF(5.22,5.22,5.22); Crest factor: 8.0; Brain 1880 MHz SCC34: $\sigma = 1.39 \text{ mho/m}$ $\epsilon = 38.8$ $\rho = 1.00 \text{ g/cm}^3$
Cube 5x5x7: SAR (1g): 0.417 mW/g, SAR (10g): 0.245 mW/g,
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: 0.00 dB

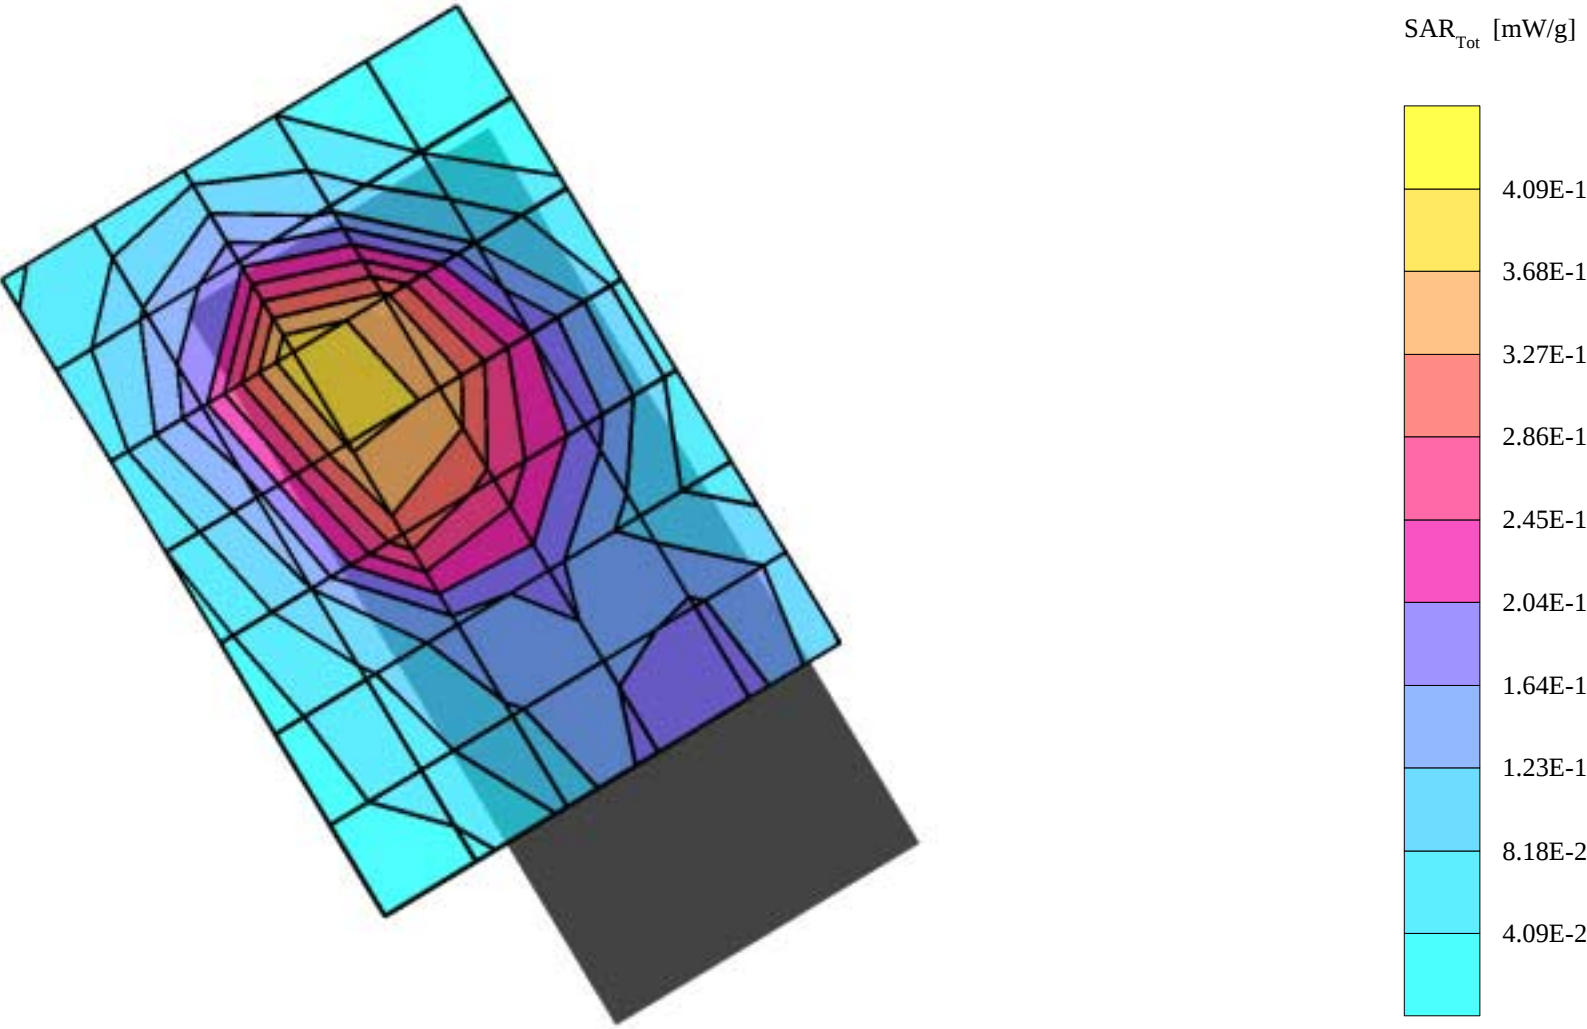


GMLNPM-8 with accessory cover

SAM 1 Phantom; Righ Hand Section; Position: tilted; Frequency: 1850 MHz
Probe: ET3DV6 - SN1381; ConvF(5.22,5.22,5.22); Crest factor: 8.0; Brain 1880 MHz SCC34: $\sigma = 1.39 \text{ mho/m}$ $\epsilon = 38.8$ $\rho = 1.00 \text{ g/cm}^3$
Cube 5x5x7: SAR (1g): 0.561 mW/g, SAR (10g): 0.316 mW/g,
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: -0.09 dB

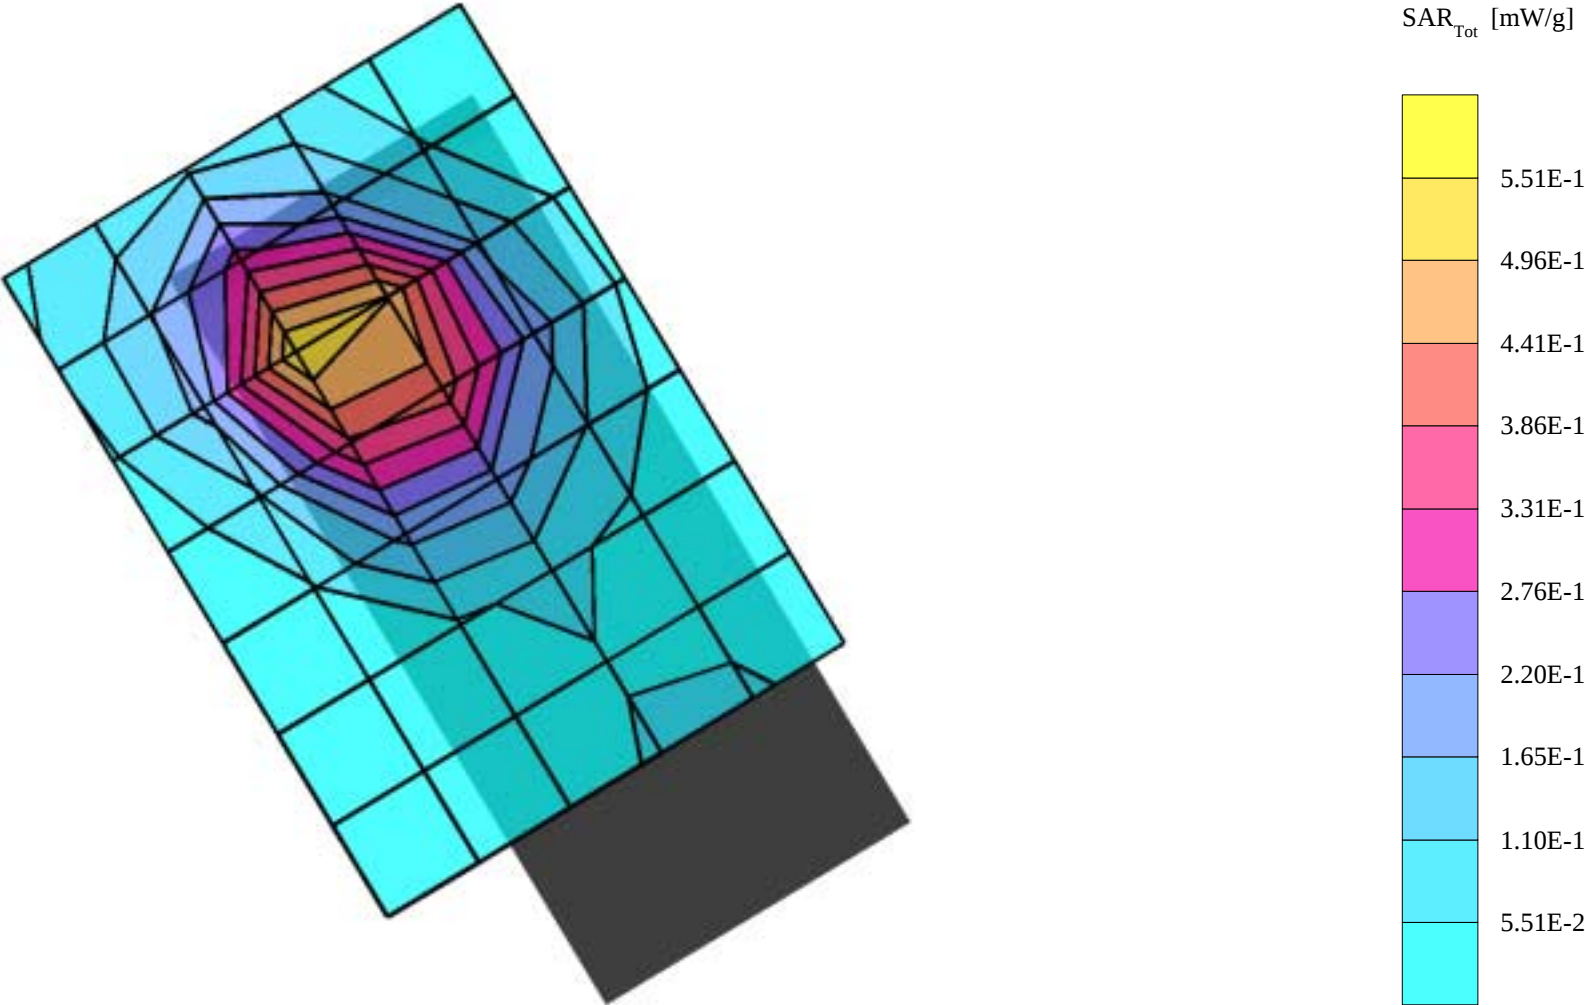


GMLNPM-8, CSL-30

SAM 2 Phantom; Flat Section; Position: body worn; Frequency: 824 MHz
Probe: ET3DV6 - SN1381; ConvF(6.04,6.04,6.04); Crest factor: 8.0; Muscle 836 MHz: $\sigma = 0.94 \text{ mho/m}$ $\epsilon = 57.4$ $\rho = 1.00 \text{ g/cm}^3$
Cube 5x5x7: SAR (1g): 0.375 mW/g, SAR (10g): 0.266 mW/g,
Coarse: Dx = 15.0, Dy = 15.0, Dz = 15.0
Powerdrift: -0.16 dB

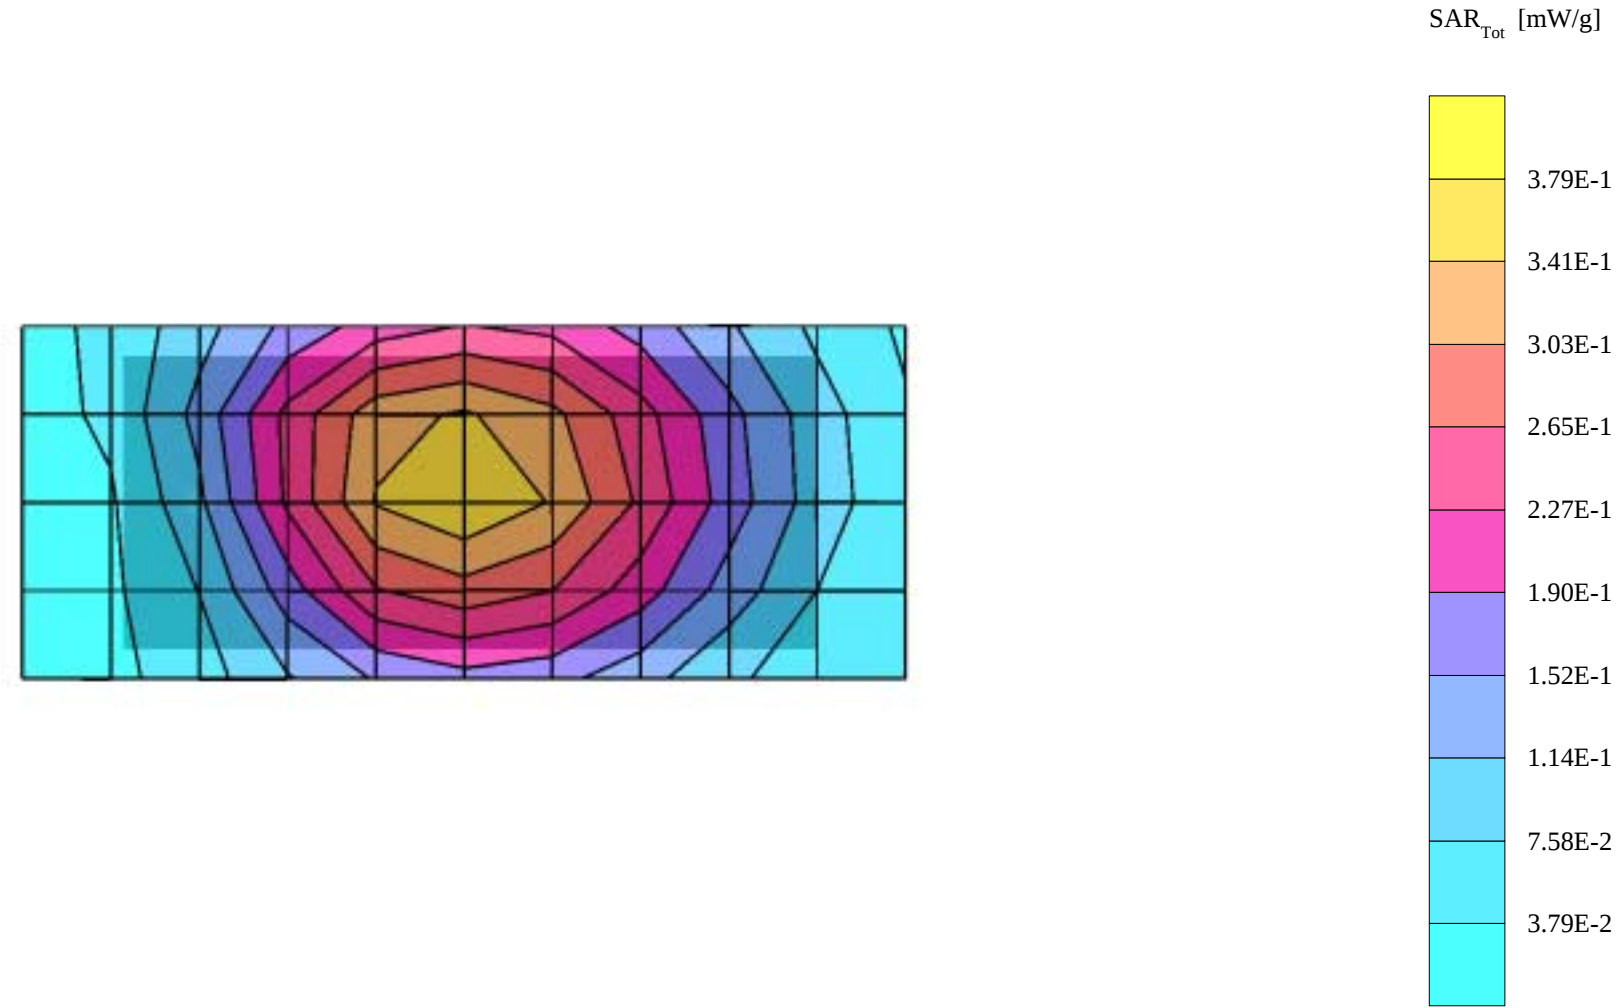

GMLNPM-8, CSL-30

SAM 1 Phantom; Flat Section; Position: body worn; Frequency: 1850 MHz
Probe: ET3DV6 - SN1381; ConvF(4.96,4.96,4.96); Crest factor: 8.0; Muscle 1880MHz: $\sigma = 1.45 \text{ mho/m}$ $\epsilon = 53.6$ $\rho = 1.00 \text{ g/cm}^3$
Cube 5x5x7: SAR (1g): 0.163 mW/g, SAR (10g): 0.101 mW/g,
Coarse: Dx = 12.0, Dy = 12.0, Dz = 10.0
Powerdrift: -0.01 dB

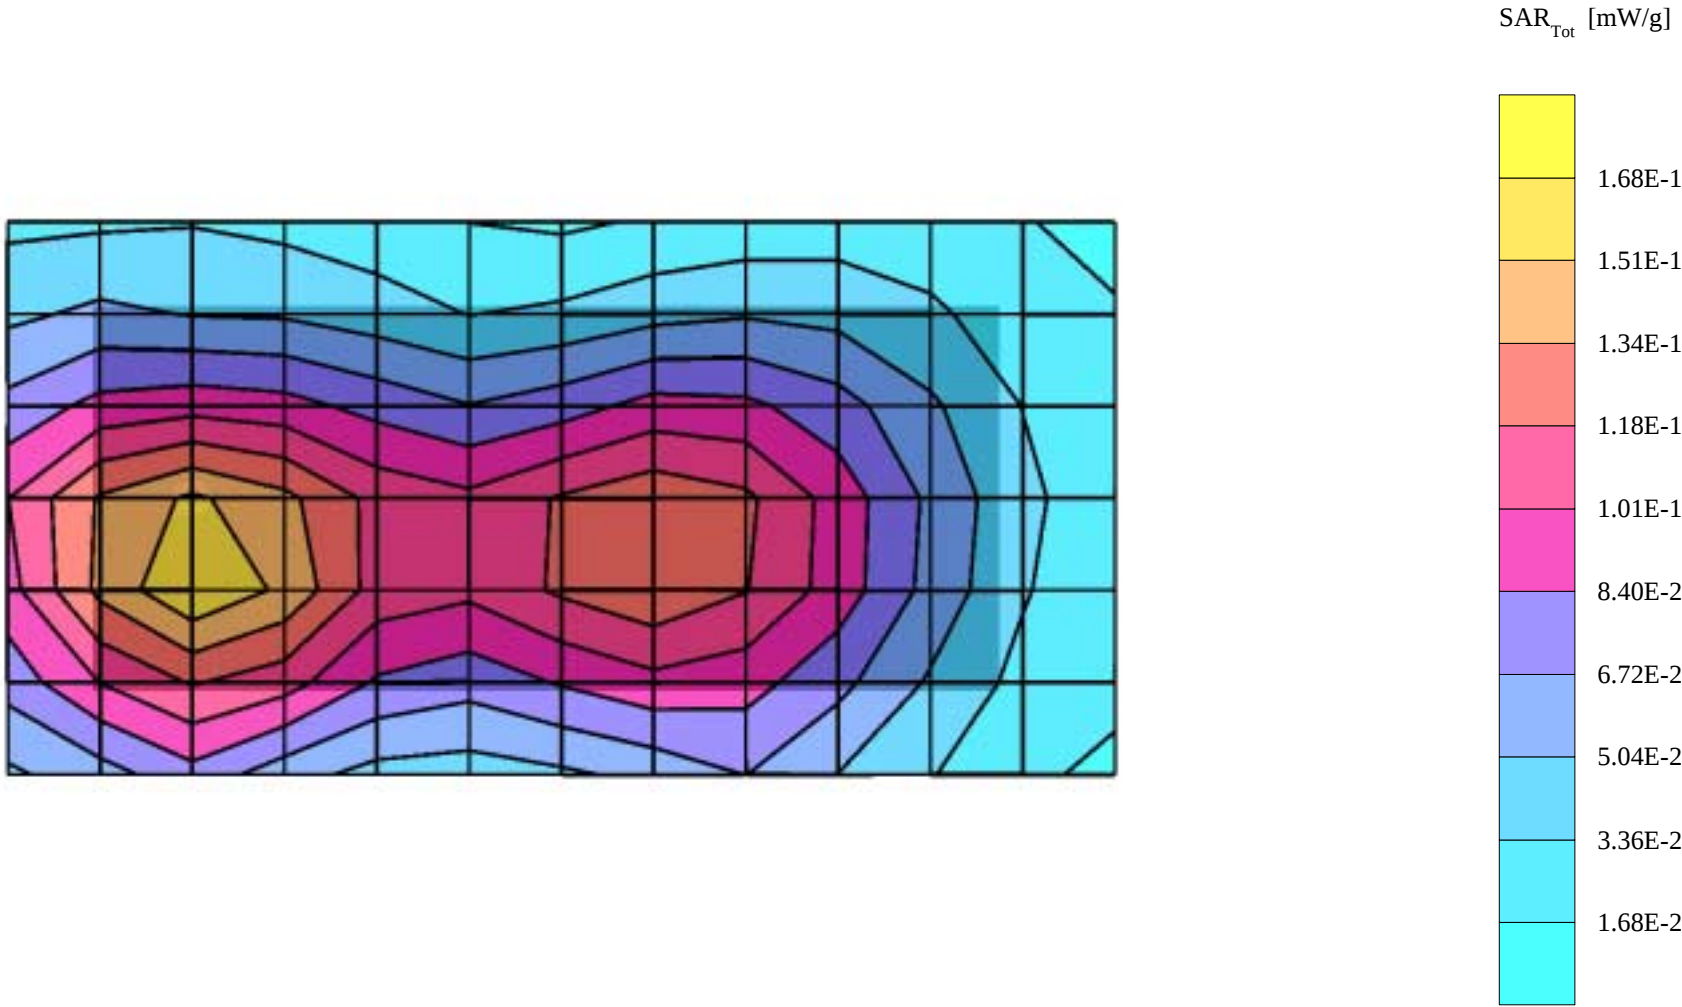

GMLNPM-8 with accessory cover, CSL-30


SAM 2 Phantom; Flat Section; Position:body worn ; Frequency: 849 MHz

Probe: ET3DV6 - SN1381; ConvF(6.04,6.04,6.04); Crest factor: 8.0; Muscle 836 MHz: $\sigma = 0.94 \text{ mho/m}$ $\epsilon = 57.4$ $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: SAR (1g): 0.284 mW/g, SAR (10g): 0.197 mW/g,

Coarse: Dx = 15.0, Dy = 15.0, Dz = 15.0

Powerdrift: -0.06 dB

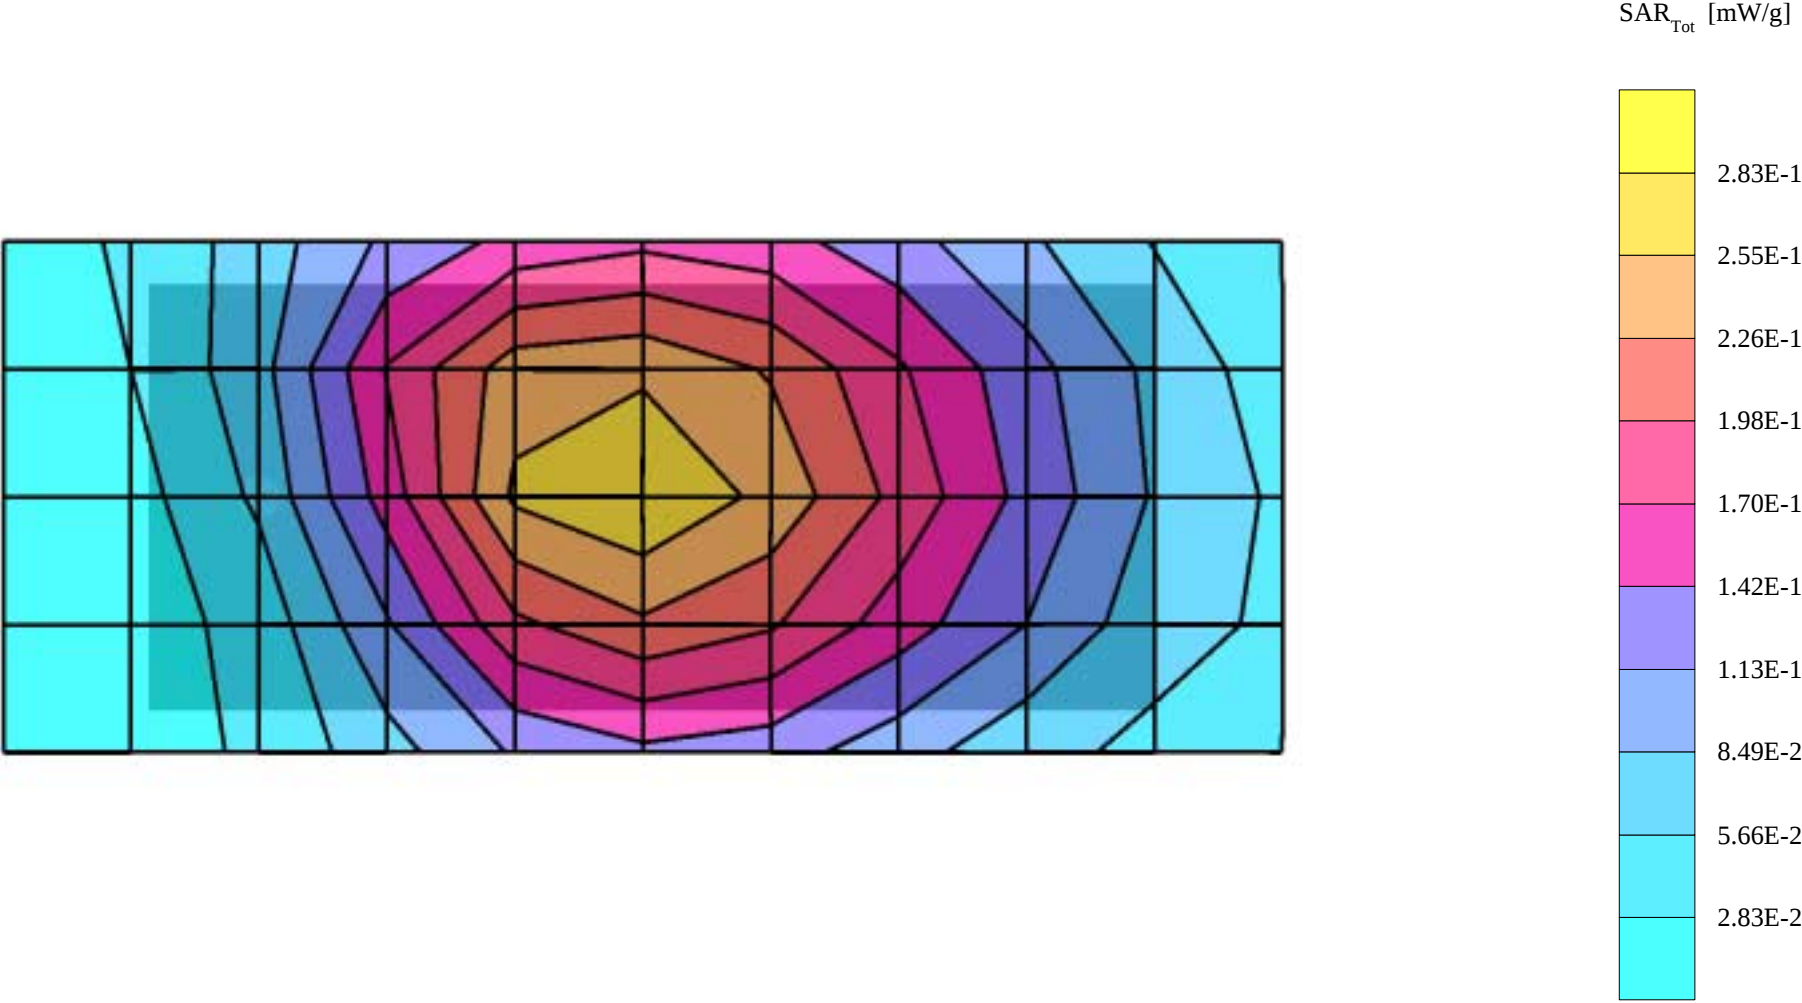

GMLNPM-8 with accessory cover, CSL-30


SAM 1 Phantom; Flat Section; Position: body worn; Frequency: 1850 MHz

Probe: ET3DV6 - SN1381; ConvF(4.96,4.96,4.96); Crest factor: 8.0; Muscle 1880MHz: $\sigma = 1.45 \text{ mho/m}$ $\epsilon = 53.6$ $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: SAR (1g): 0.173 mW/g, SAR (10g): 0.107 mW/g,


Coarse: Dx = 12.0, Dy = 12.0, Dz = 10.0

Powerdrift: -0.03 dB

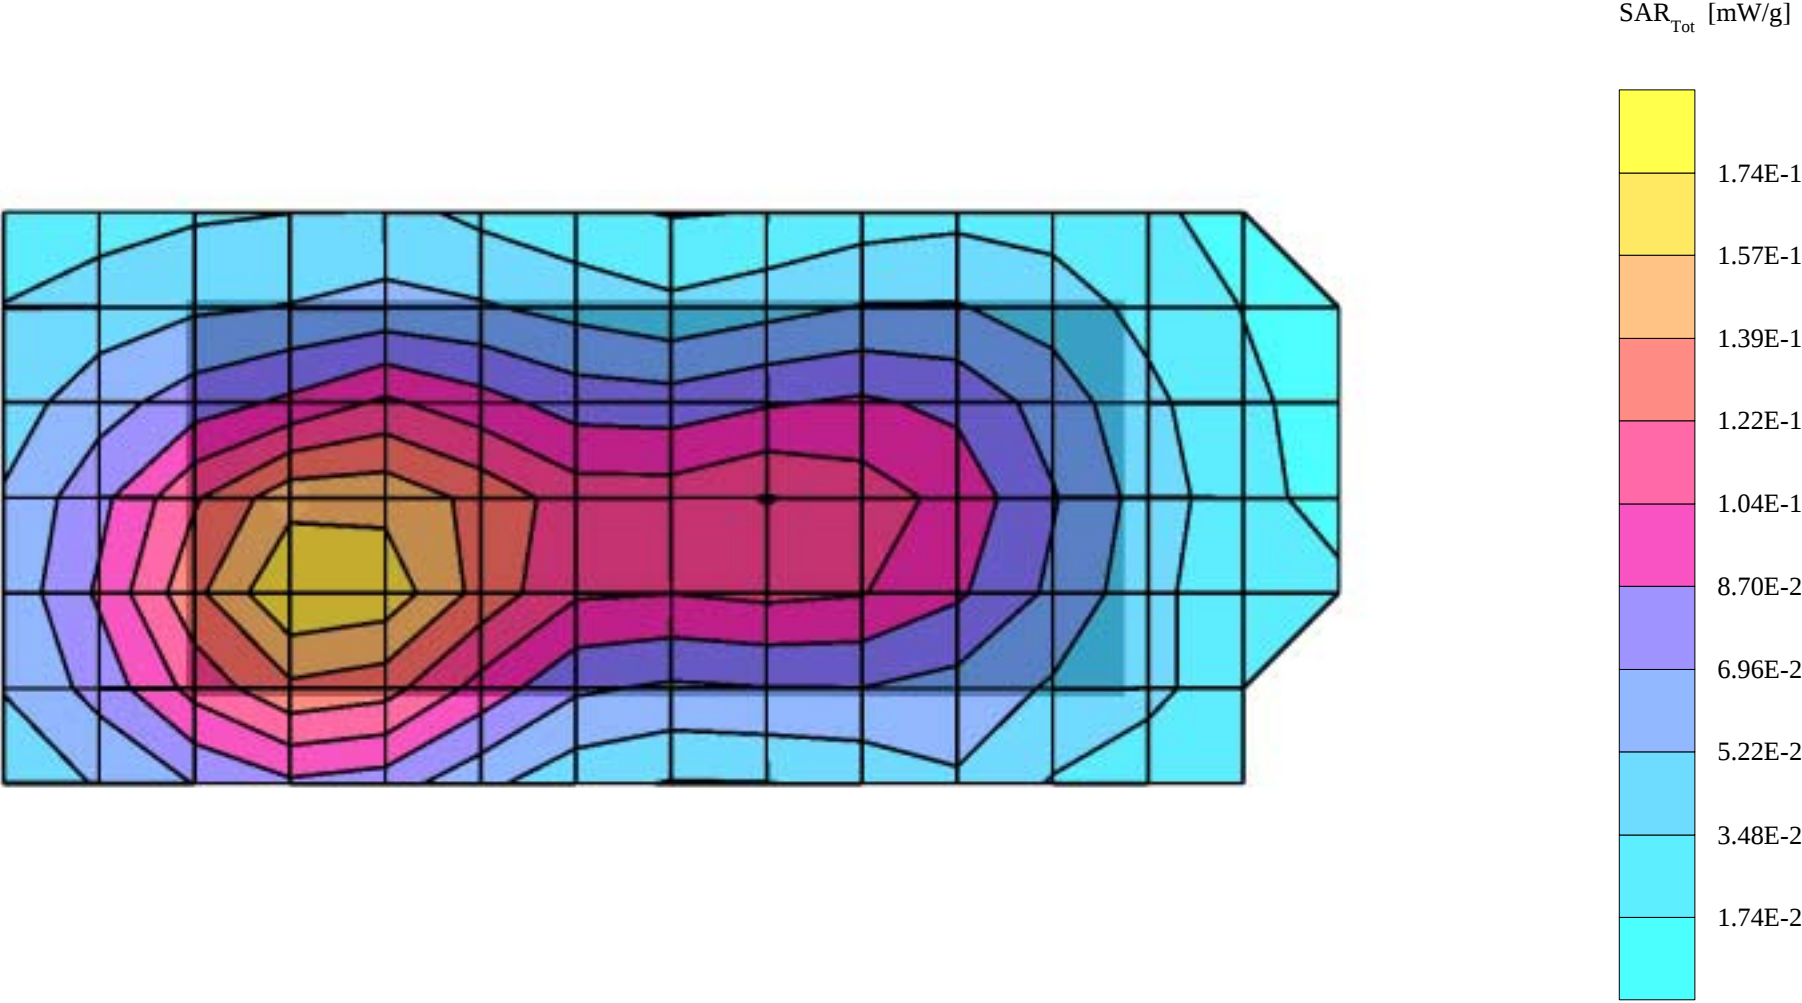


GMLNPM-8, optional battery BLC-2

SAM 2 Phantom; Left Hand Section; Position: cheek ; Frequency: 849 MHz
Probe: ET3DV6 - SN1381; ConvF(6.20,6.20,6.20); Crest factor: 8.0; Brain 836 MHz SCC34: $\sigma = 0.90$ mho/m $\epsilon = 40.1$ $\rho = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 1.03 mW/g, SAR (10g): 0.709 mW/g,
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: -0.04 dB

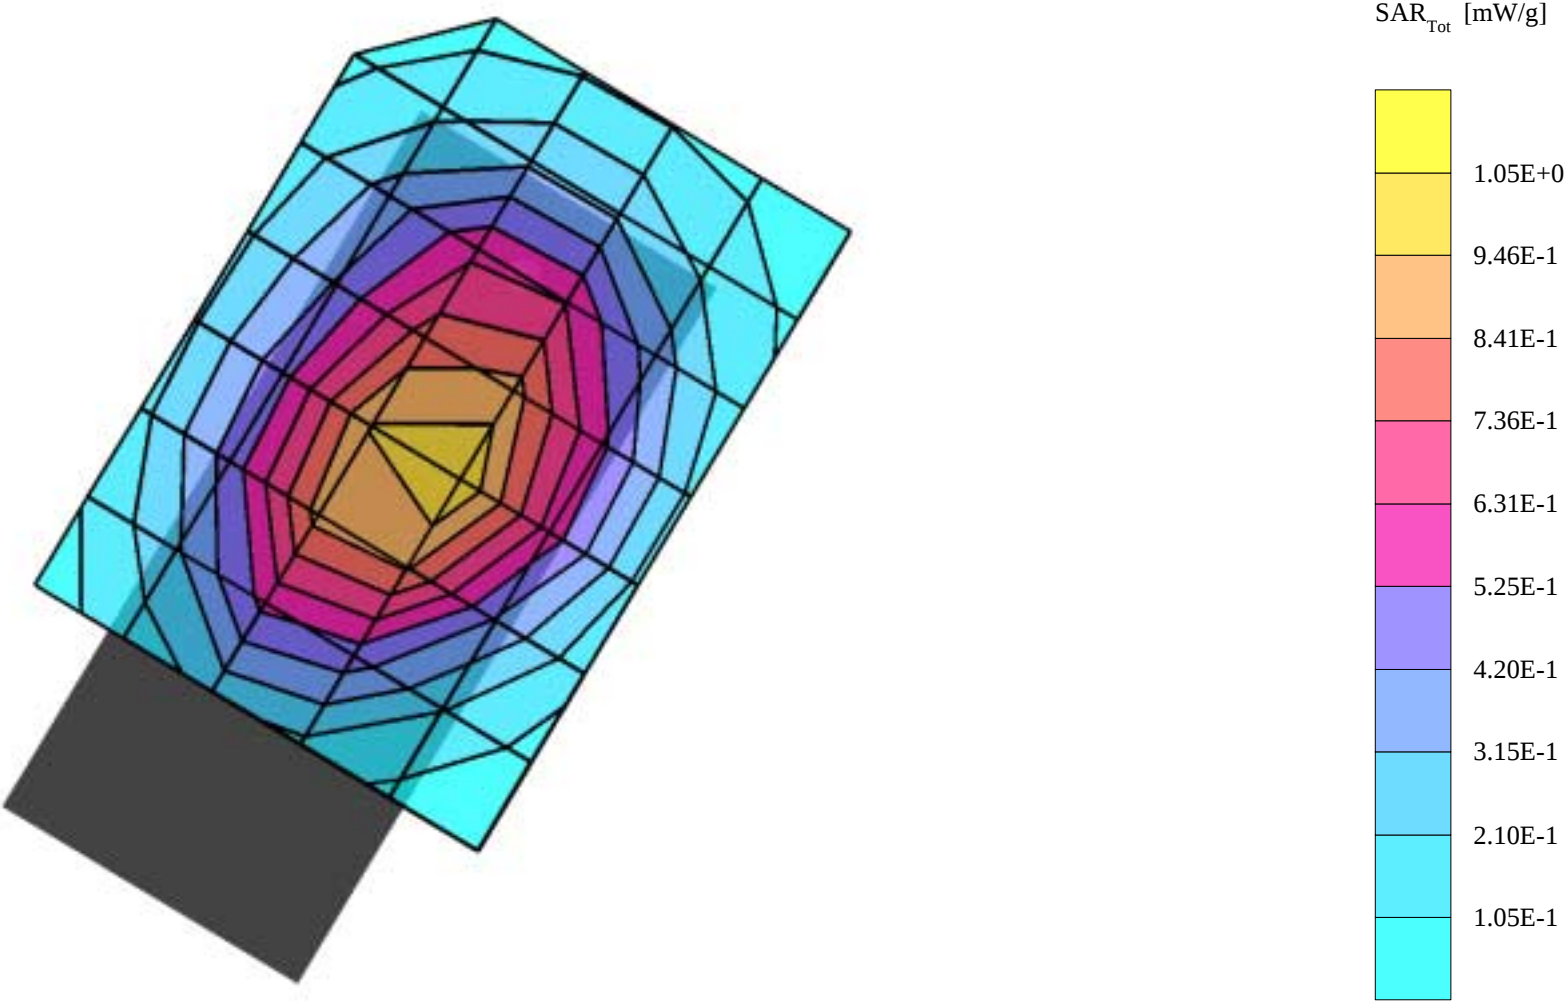


GMLNPM-8, optional battery BLC-2

SAM 1 Phantom; Righ Hand Section; Position: tilted; Frequency: 1850 MHz
Probe: ET3DV6 - SN1381; ConvF(5.22,5.22,5.22); Crest factor: 8.0; Brain 1880 MHz SCC34: $\sigma = 1.39$ mho/m $\epsilon = 38.8$ $\rho = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 0.497 mW/g, SAR (10g): 0.270 mW/g,
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: 0.02 dB

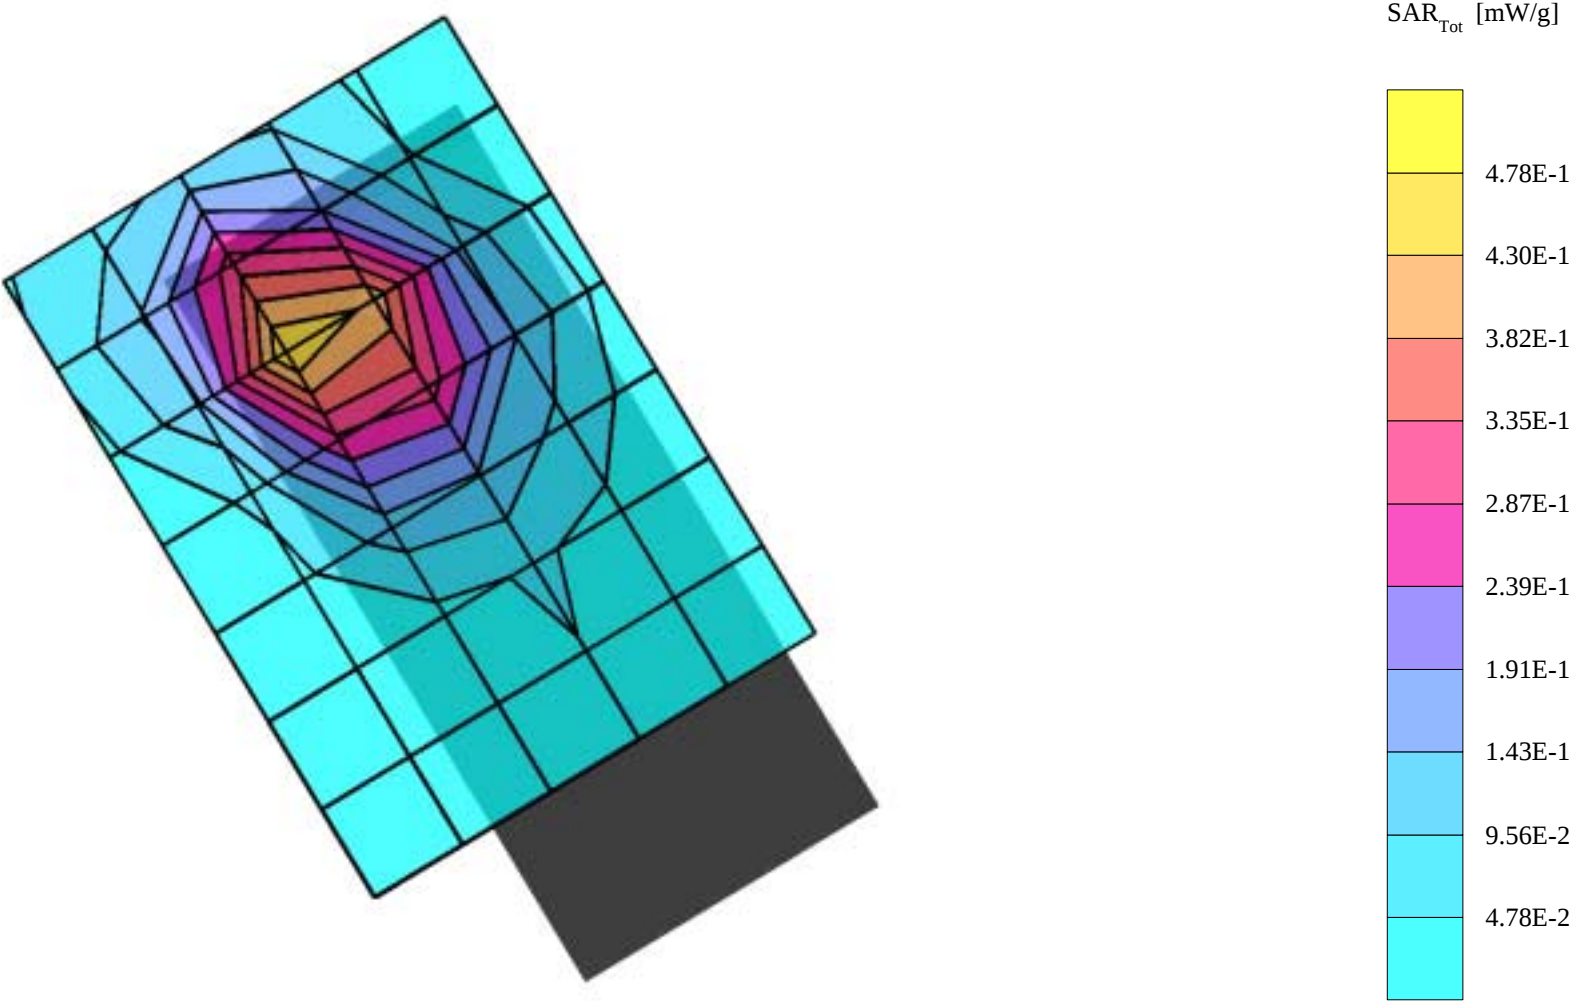


GMLNPM-8 with accessory cover, optional battery BLC-2

SAM 2 Phantom; Left Hand Section; Position: cheek ; Frequency: 849 MHz
Probe: ET3DV6 - SN1381; ConvF(6.20,6.20,6.20); Crest factor: 8.0; Brain 836 MHz SCC34: $\sigma = 0.90$ mho/m $\epsilon = 40.1$ $\rho = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 1.01 mW/g, SAR (10g): 0.695 mW/g,
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: -0.03 dB

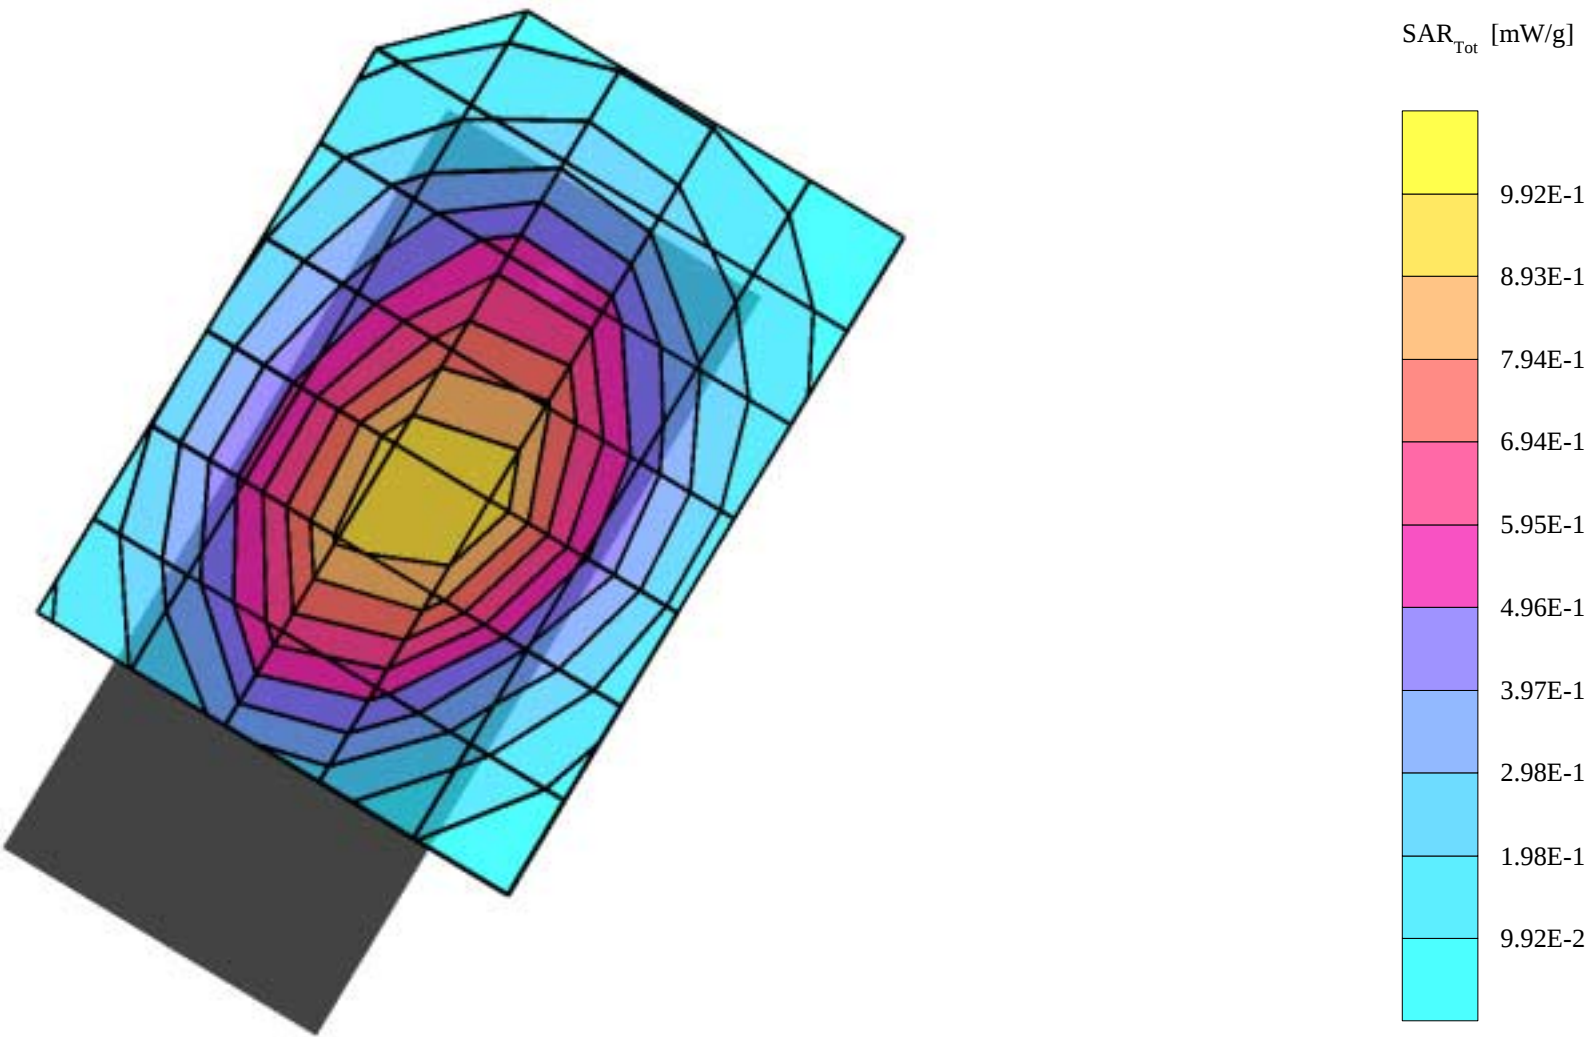

GMLNPM-8 with accessory cover, optinal battery BLC-2

SAM 1 Phantom; Righ Hand Section; Position: tilted; Frequency: 1850 MHz
Probe: ET3DV6 - SN1381; ConvF(5.22,5.22,5.22); Crest factor: 8.0; Brain 1880 MHz SCC34: $\sigma = 1.39 \text{ mho/m}$ $\epsilon = 38.8$ $\rho = 1.00 \text{ g/cm}^3$
Cube 5x5x7: SAR (1g): 0.459 mW/g, SAR (10g): 0.257 mW/g
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: 0.03 dB

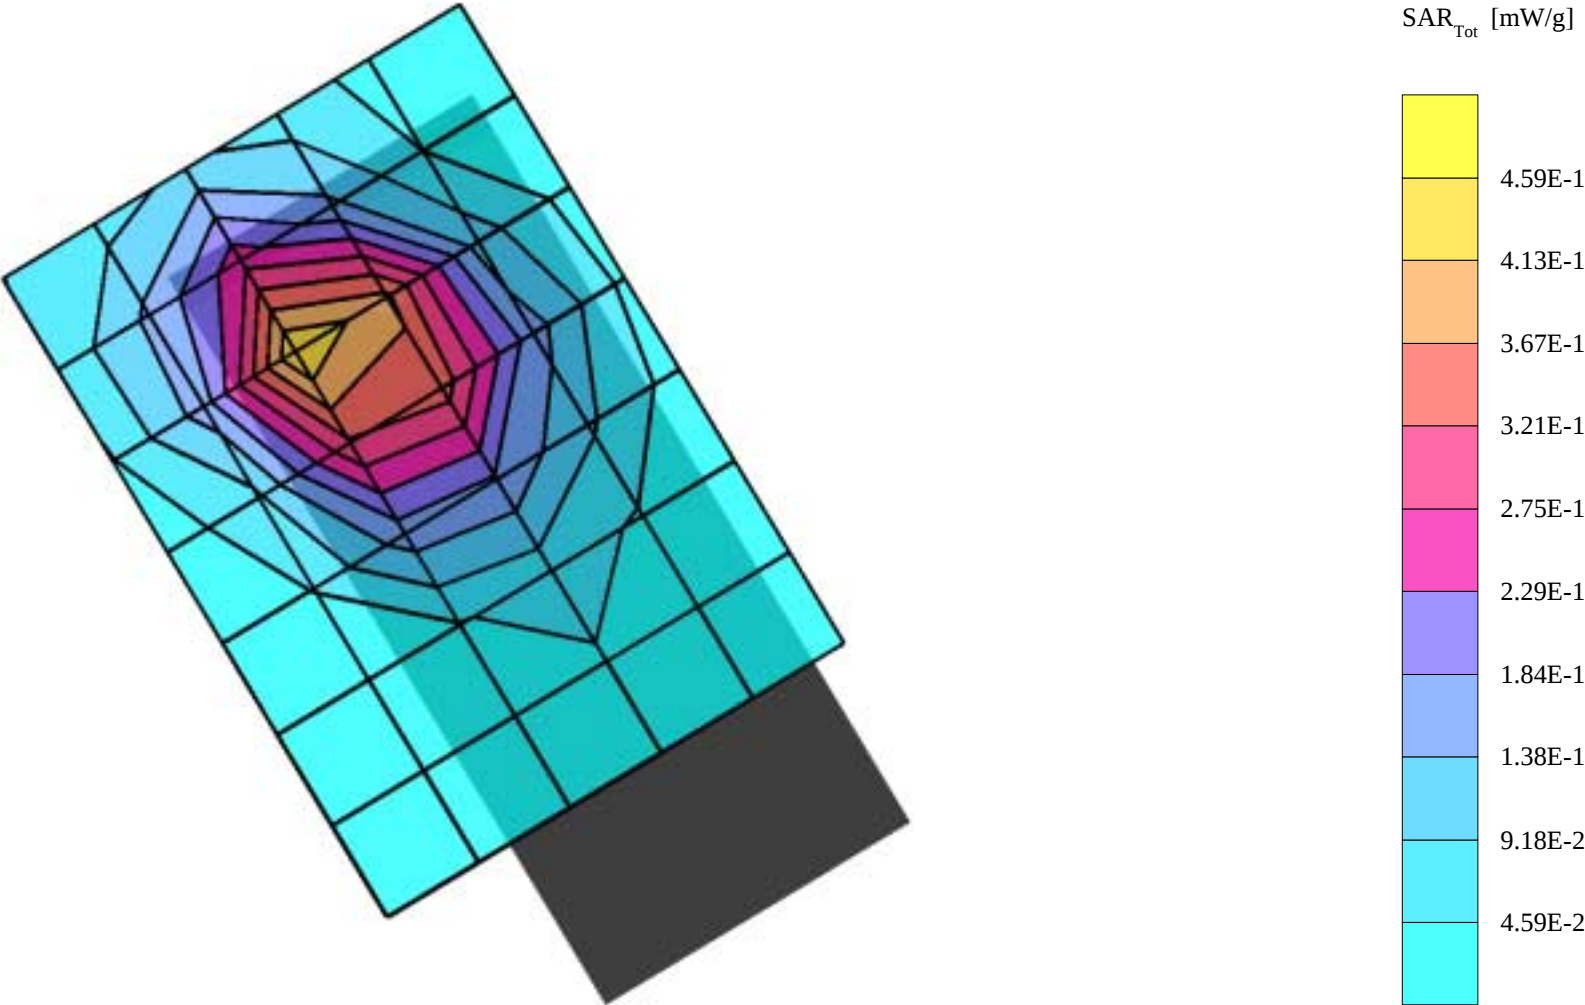

GMLNPM-8, CSL-30, optinal battery BLC-2


SAM 2 Phantom; Flat Section; Position: body worn ; Frequency: 824 MHz

Probe: ET3DV6 - SN1381; ConvF(6.04,6.04,6.04); Crest factor: 8.0; Muscle 836 MHz: $\sigma = 0.94 \text{ mho/m}$ $\epsilon = 57.4$ $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: SAR (1g): 0.349 mW/g, SAR (10g): 0.248 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 15.0

Powerdrift: -0.10 dB

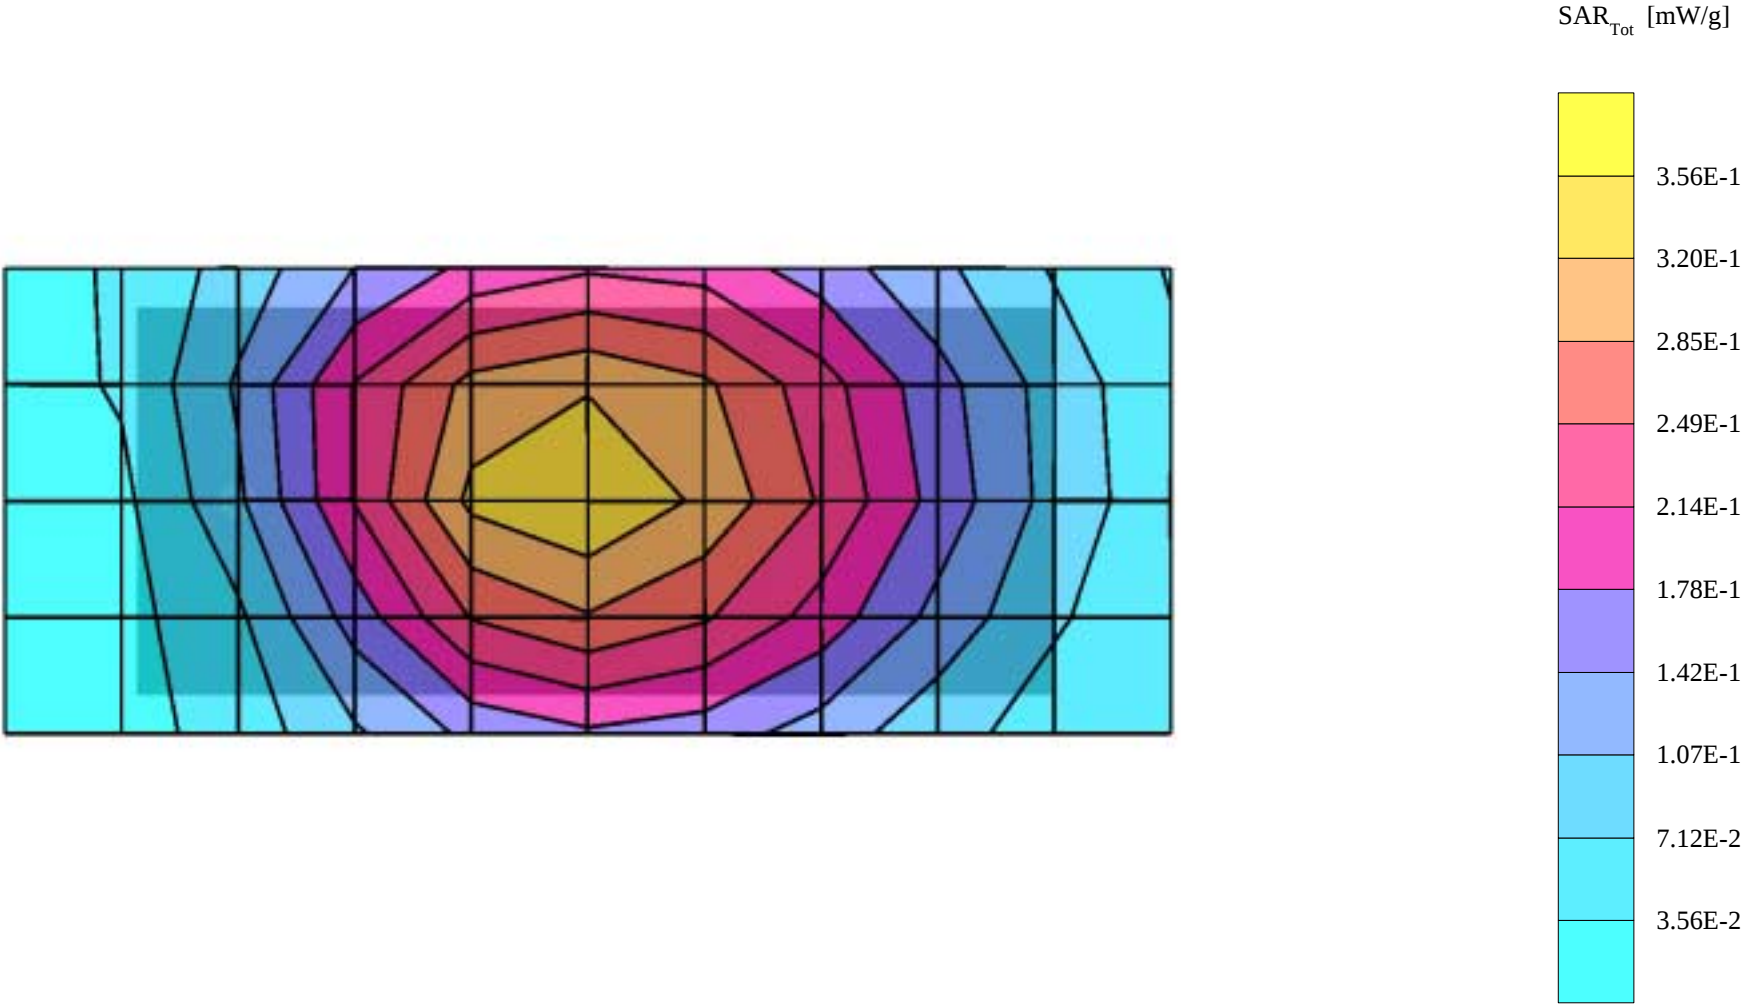

GMLNPM-8, CSL-30, optional battery BLC-2


SAM 1 Phantom; Flat Section; Position: body worn; Frequency: 1850 MHz

Probe: ET3DV6 - SN1381; ConvF(4.96,4.96,4.96); Crest factor: 8.0; Muscle 1880MHz: $\sigma = 1.45 \text{ mho/m}$ $\epsilon = 53.6$ $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: SAR (1g): 0.122 mW/g, SAR (10g): 0.0764 mW/g,

Coarse: Dx = 12.0, Dy = 12.0, Dz = 10.0

Powerdrift: -0.17 dB

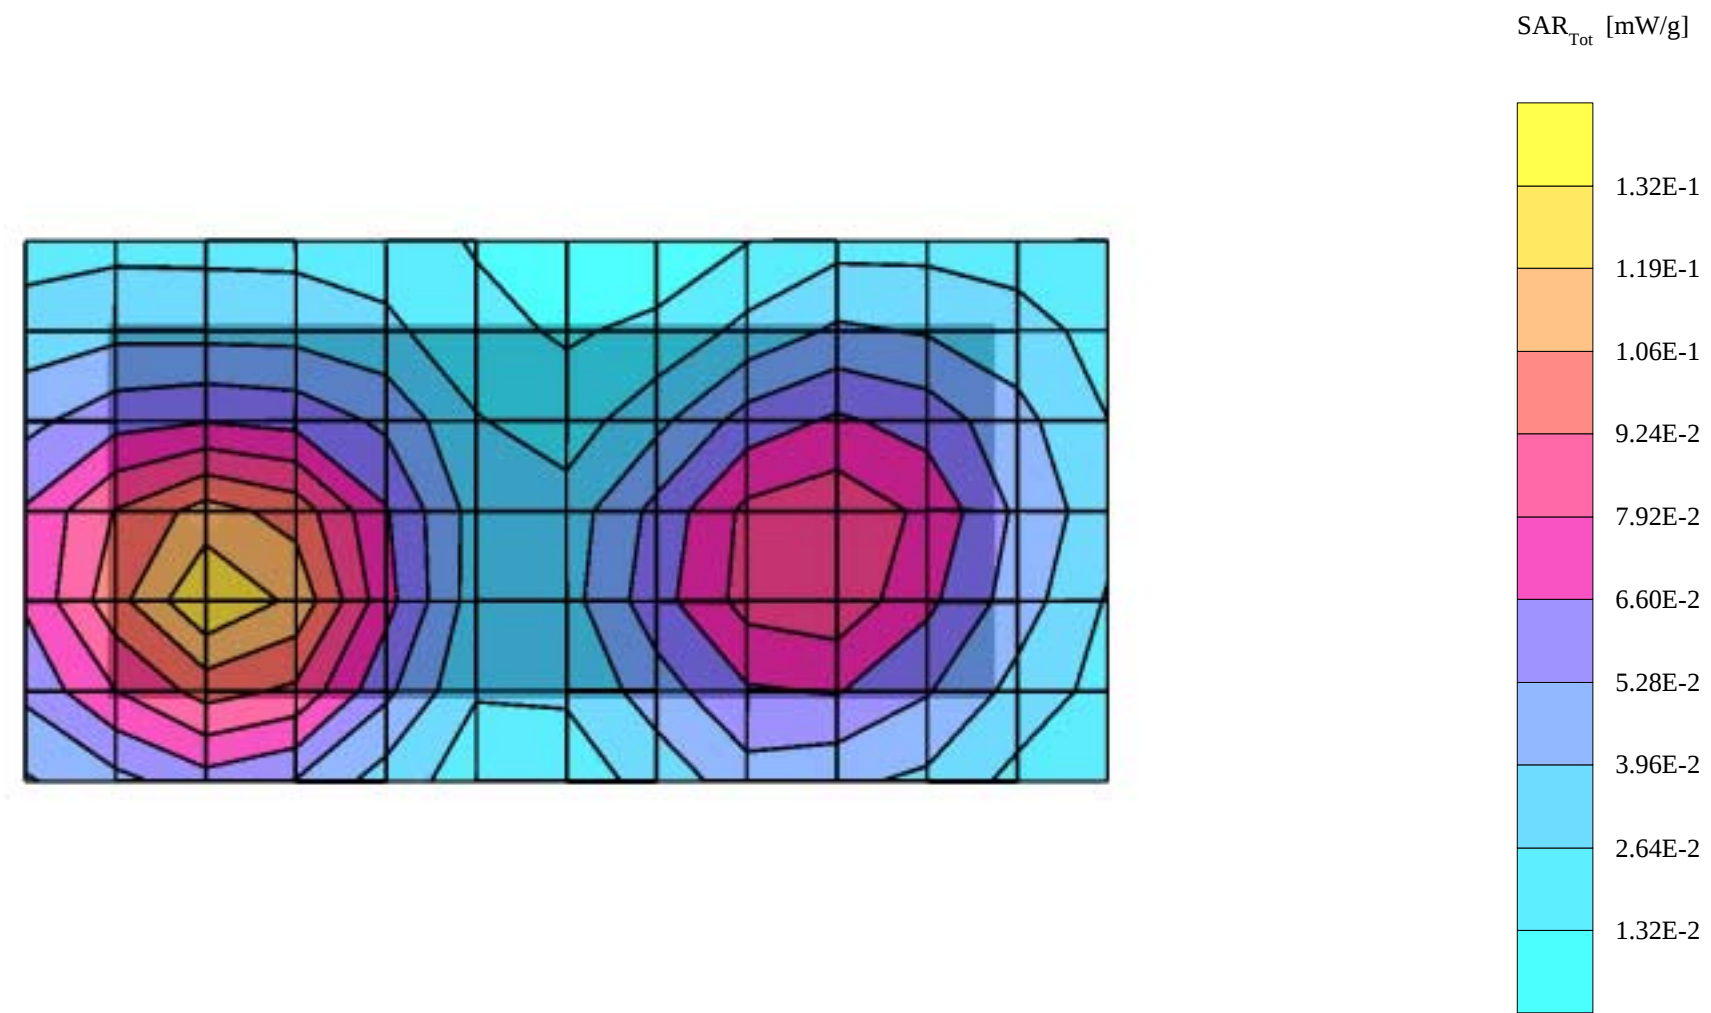

GMLNPM-8 with accessory cover, CSL-30, optional battery BLC-2


SAM 2 Phantom; Flat Section; Position:body worn ; Frequency: 849 MHz

Probe: ET3DV6 - SN1381; ConvF(6.04,6.04,6.04); Crest factor: 8.0; Muscle 836 MHz: $\sigma = 0.94 \text{ mho/m}$ $\epsilon = 57.4$ $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: SAR (1g): 0.296 mW/g, SAR (10g): 0.214 mW/g,

Coarse: Dx = 15.0, Dy = 15.0, Dz = 15.0

Powerdrift: -0.04 dB

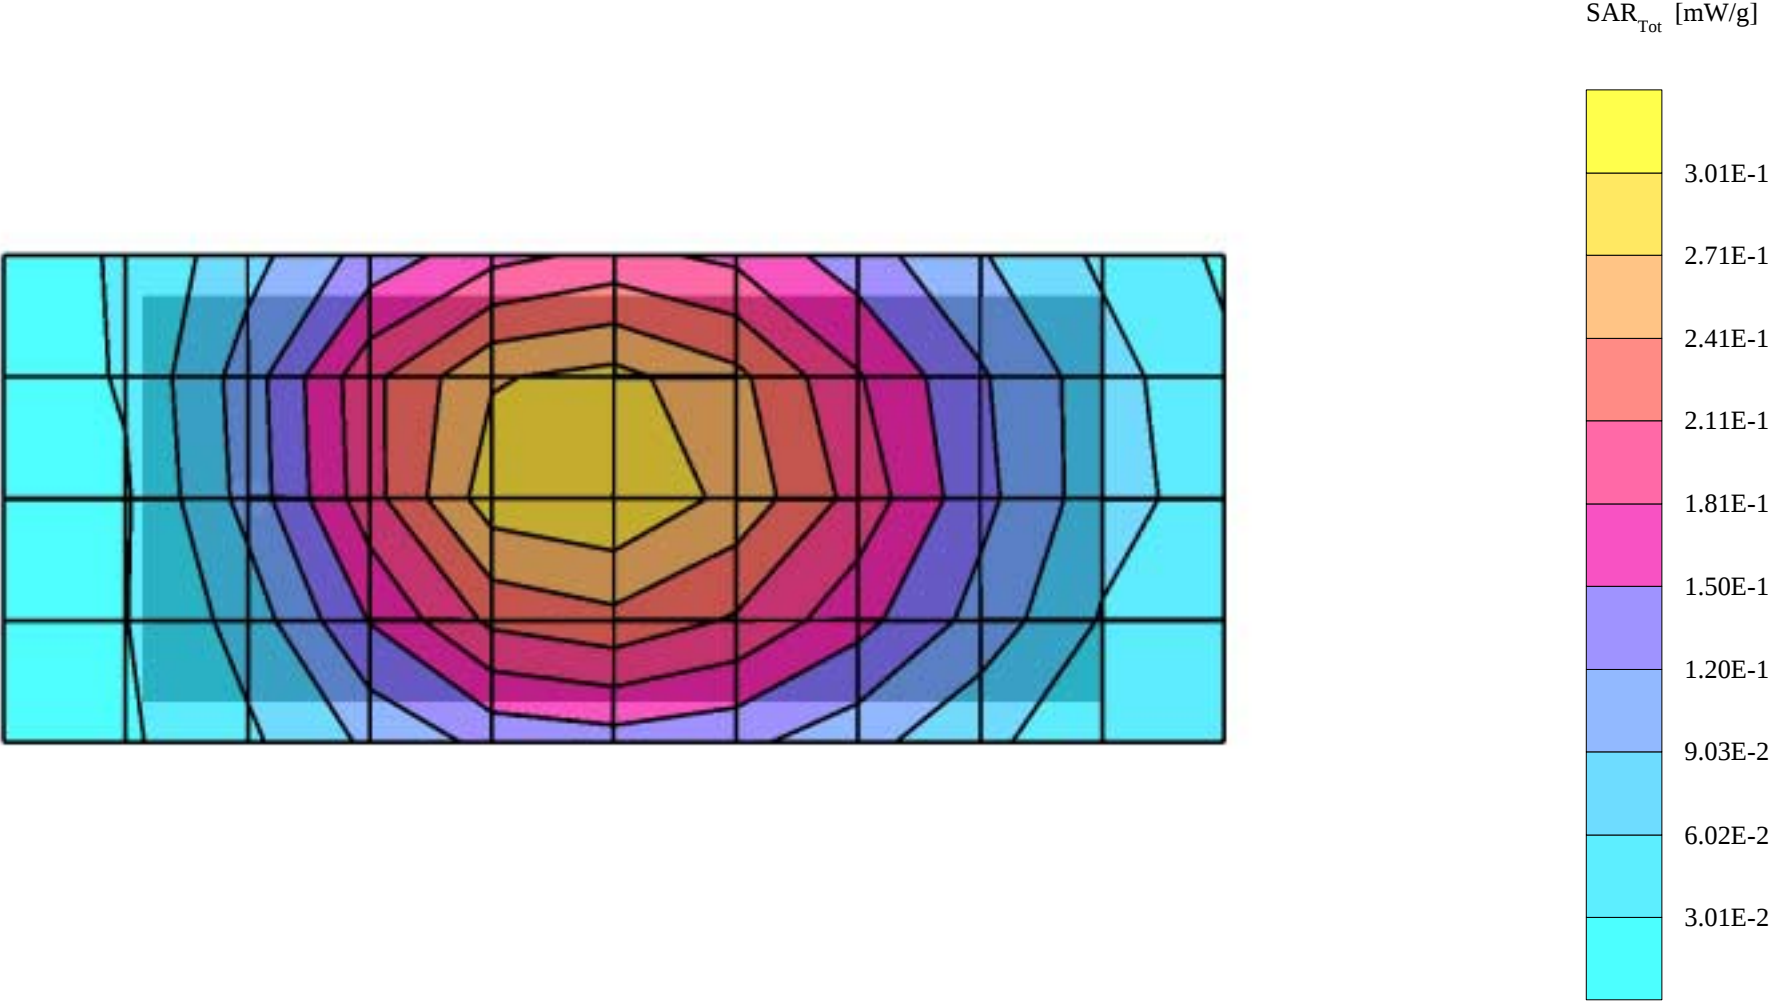

GMLNPM-8 with accessory cover, CSL-30, optional battery BLC-2


SAM 1 Phantom; Flat Section; Position: body worn; Frequency: 1850 MHz

Probe: ET3DV6 - SN1381; ConvF(4.96,4.96,4.96); Crest factor: 8.0; Muscle 1880MHz: $\sigma = 1.45 \text{ mho/m}$ $\epsilon = 53.6$ $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: SAR (1g): 0.130 mW/g, SAR (10g): 0.0803 mW/g,

Coarse: Dx = 12.0, Dy = 12.0, Dz = 10.0

Powerdrift: -0.01 dB

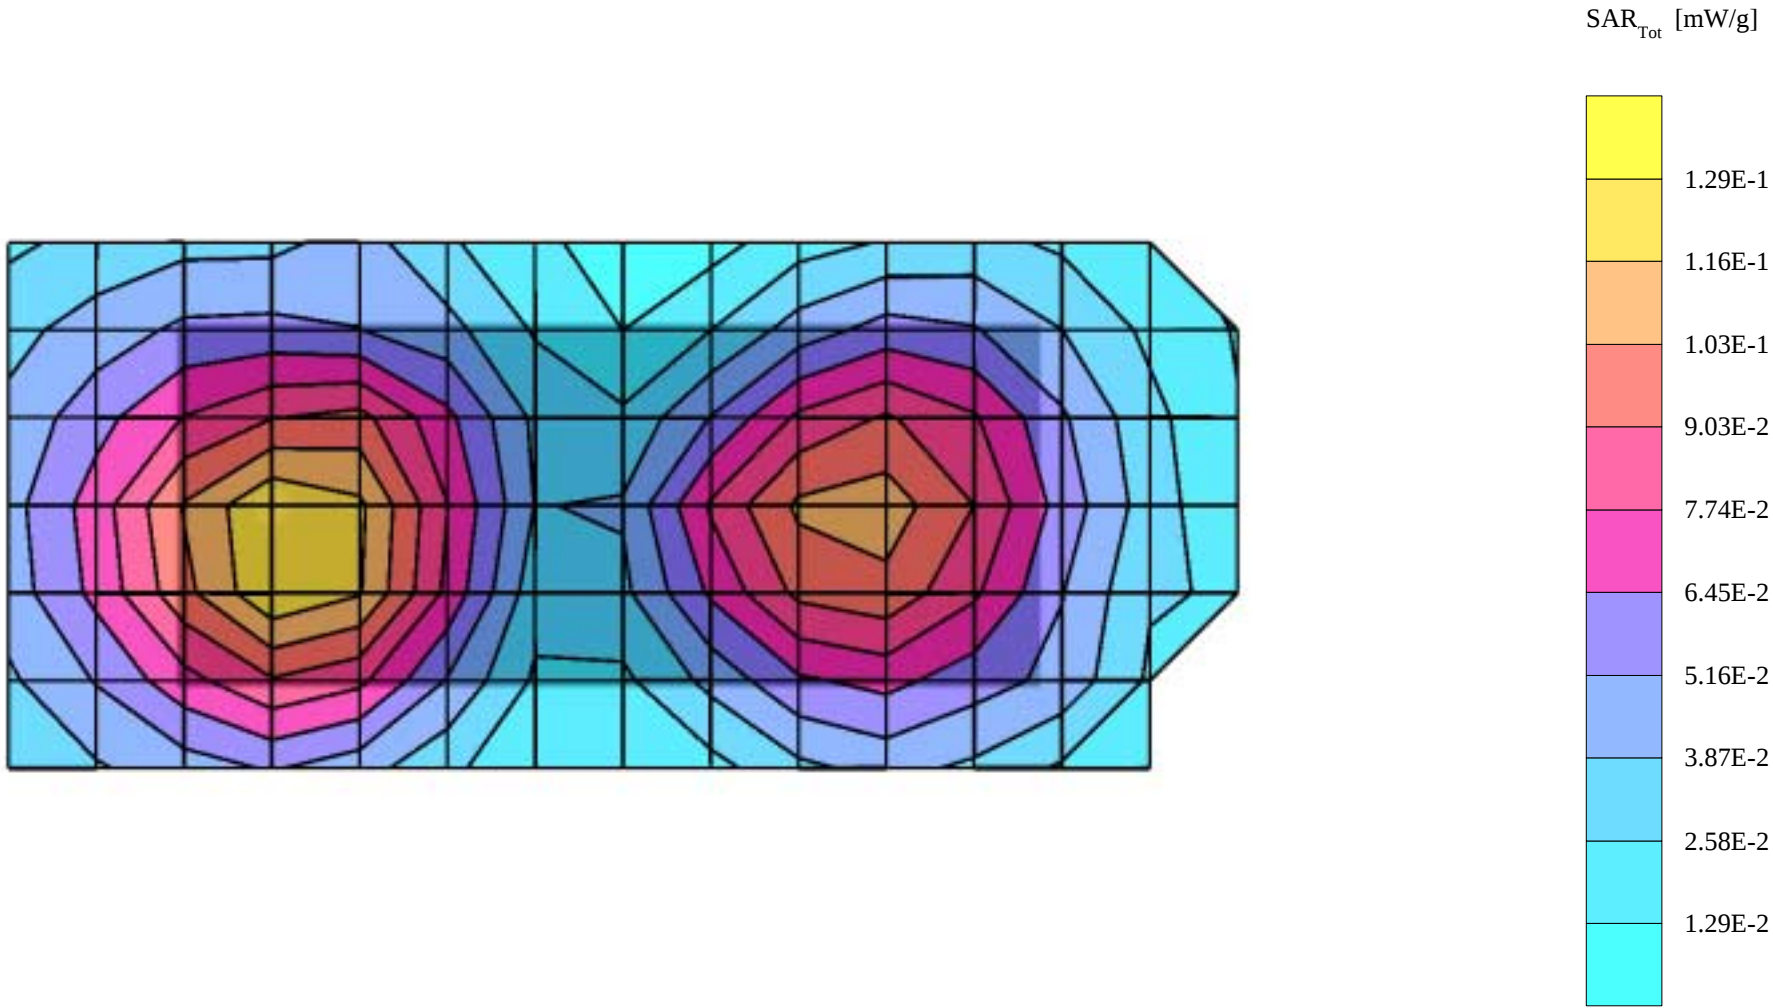

APPENDIX C.

Calibration Certificate(s)

Calibration Certificate

Dosimetric E-Field Probe

Type:

ET3DV6

Serial Number:

1381

Place of Calibration:

Zurich

Date of Calibration:

October 25, 2001

Calibration Interval:

12 months

Schmid & Partner Engineering AG hereby certifies, that this device has been calibrated on the date indicated above. The calibration was performed in accordance with specifications and procedures of Schmid & Partner Engineering AG.

Wherever applicable, the standards used in the calibration process are traceable to international standards. In all other cases the standards of the Laboratory for EMF and Microwave Electronics at the Swiss Federal Institute of Technology (ETH) in Zurich, Switzerland have been applied.

Calibrated by:

Nikolaus Meriana

Approved by:

Julian Kofja

Probe ET3DV6

SN:1381

Manufactured:	September 18, 1999
Last calibration:	October 6, 2000
Recalibrated:	October 25, 2001

Calibrated for System DASY3

DASY3 - Parameters of Probe: ET3DV6 SN:1381

Sensitivity in Free Space

Diode Compression

NormX	1.57 $\mu\text{V}/(\text{V}/\text{m})^2$	DCP X	95 mV
NormY	1.70 $\mu\text{V}/(\text{V}/\text{m})^2$	DCP Y	95 mV
NormZ	1.78 $\mu\text{V}/(\text{V}/\text{m})^2$	DCP Z	95 mV

Sensitivity in Tissue Simulating Liquid


Head	450 MHz	$\epsilon_r = 43.5 \pm 5\%$	$s = 0.87 \pm 10\% \text{ mho/m}$
ConvF X	6.66 extrapolated	Boundary effect:	
ConvF Y	6.66 extrapolated	Alpha	0.29
ConvF Z	6.66 extrapolated	Depth	2.78
Head	800 - 1000 MHz	$\epsilon_r = 39.0 - 43.5$	$s = 0.80 - 1.10 \text{ mho/m}$
ConvF X	6.21 $\pm 9.5\%$ (k=2)	Boundary effect:	
ConvF Y	6.21 $\pm 9.5\%$ (k=2)	Alpha	0.40
ConvF Z	6.21 $\pm 9.5\%$ (k=2)	Depth	2.61
Head	1500 MHz	$\epsilon_r = 40.4 \pm 5\%$	$s = 1.23 \pm 10\% \text{ mho/m}$
ConvF X	5.61 interpolated	Boundary effect:	
ConvF Y	5.61 interpolated	Alpha	0.55
ConvF Z	5.61 interpolated	Depth	2.38
Head	1700 - 1910 MHz	$\epsilon_r = 39.5 - 41.0$	$s = 1.20 - 1.55 \text{ mho/m}$
ConvF X	5.31 $\pm 9.5\%$ (k=2)	Boundary effect:	
ConvF Y	5.31 $\pm 9.5\%$ (k=2)	Alpha	0.62
ConvF Z	5.31 $\pm 9.5\%$ (k=2)	Depth	2.27

Sensor Offset


Probe Tip to Sensor Center	2.7	mm
Optical Surface Detection	1.6 $\pm$ 0.2	mm

Receiving Pattern (f), $q = 0^\circ$


f = 30 MHz, TEM cell ifi110

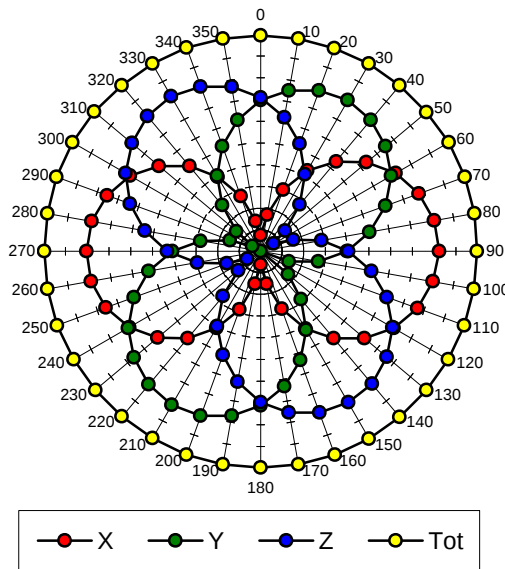


f = 100 MHz, TEM cell ifi110

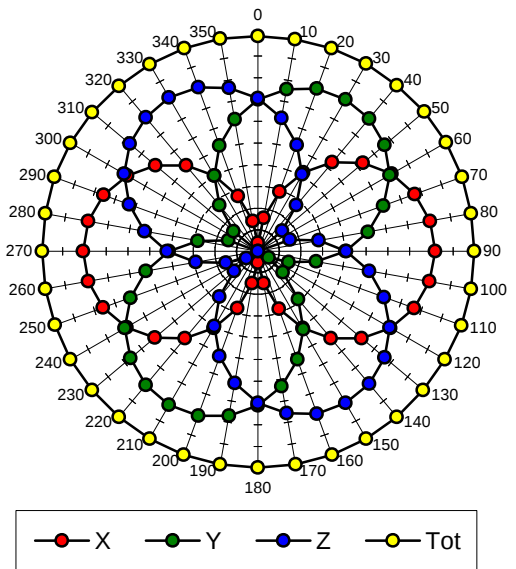


f = 300 MHz, TEM cell ifi110

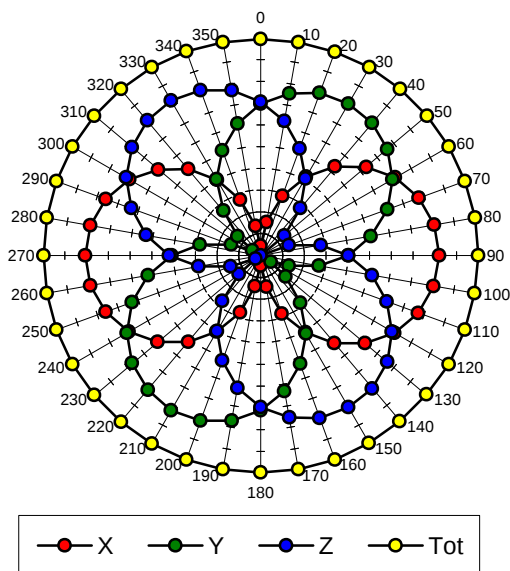


f = 900 MHz, TEM cell ifi110

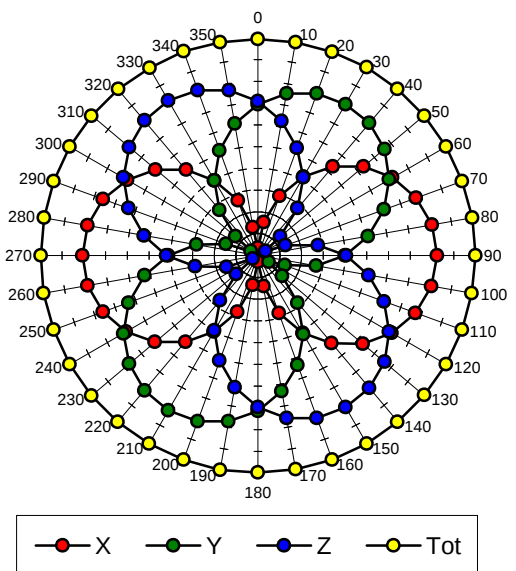

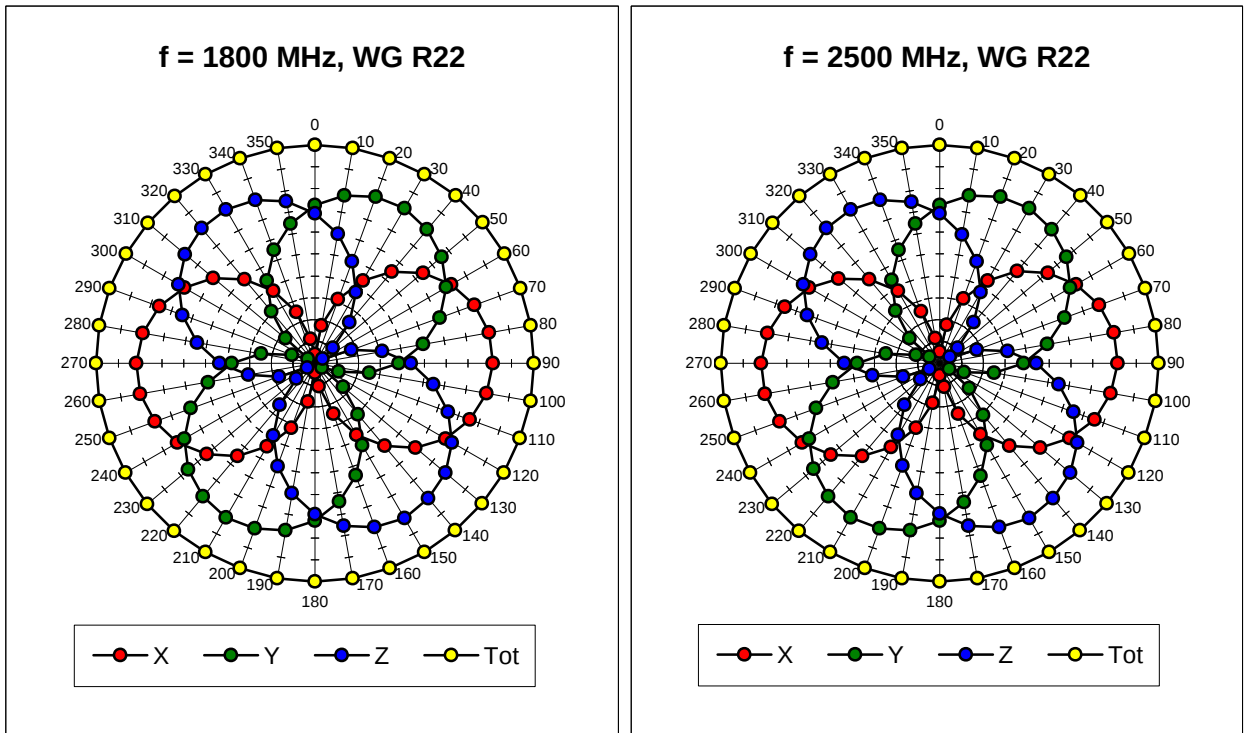


Isotropy Error (f), $q = 0^\circ$


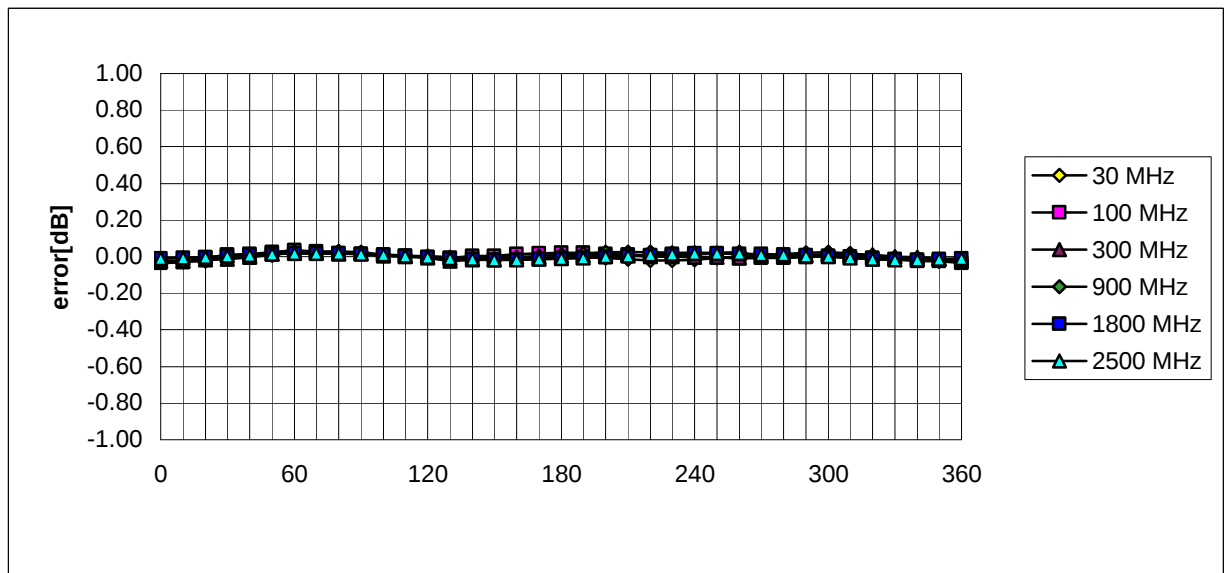


Frequency Response of E-Field


(TEM-Cell:ifi110, Waveguide R22)

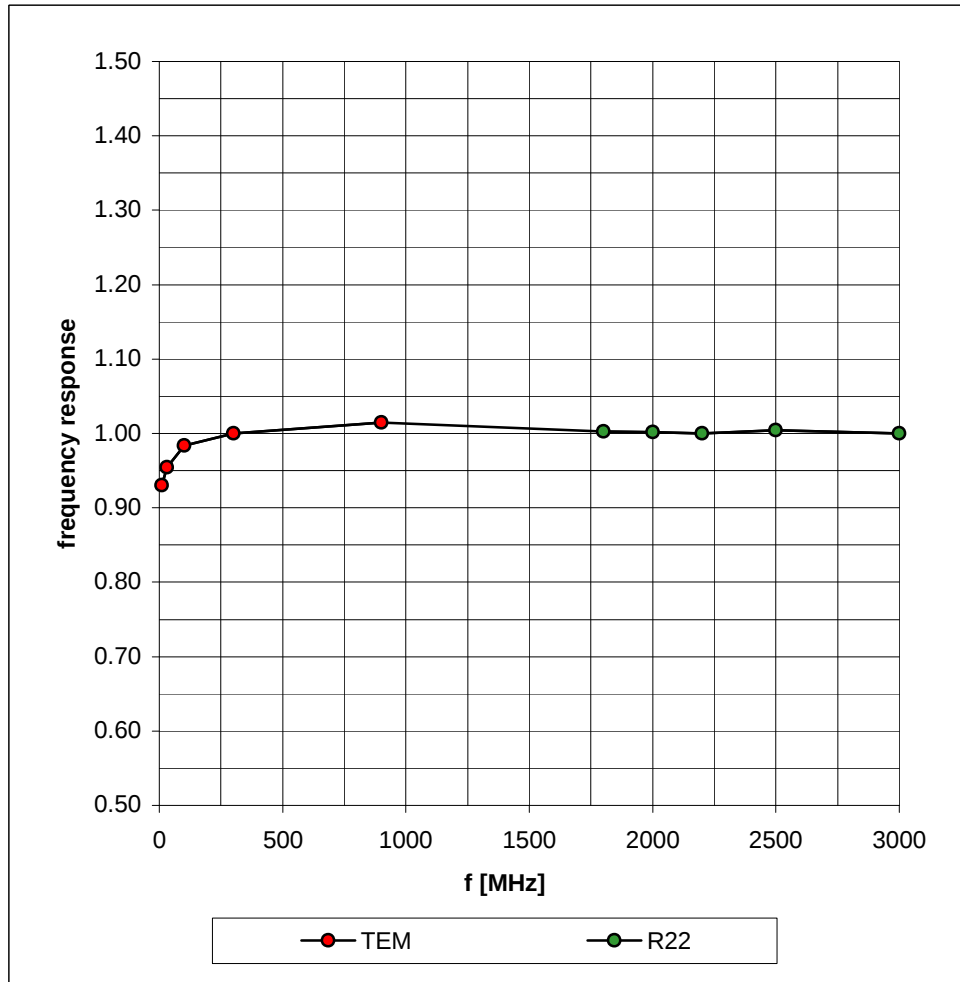

Dynamic Range f(SAR_{brain}) (Waveguide R22)

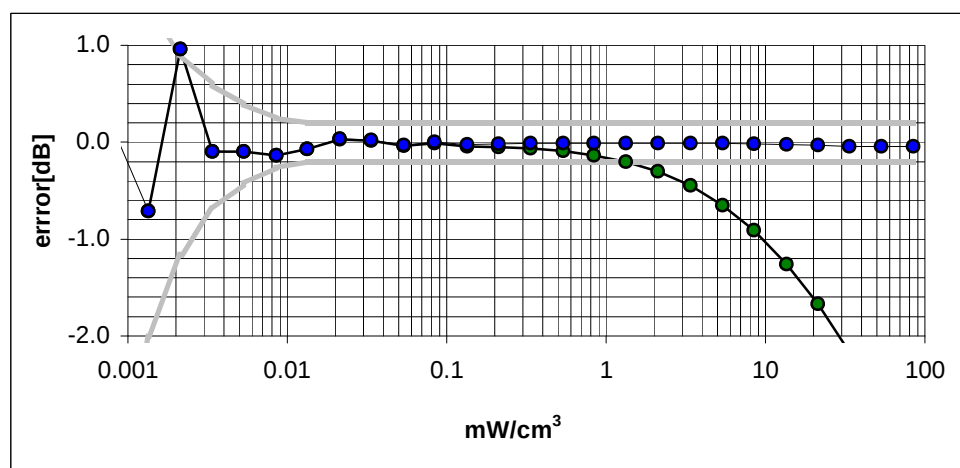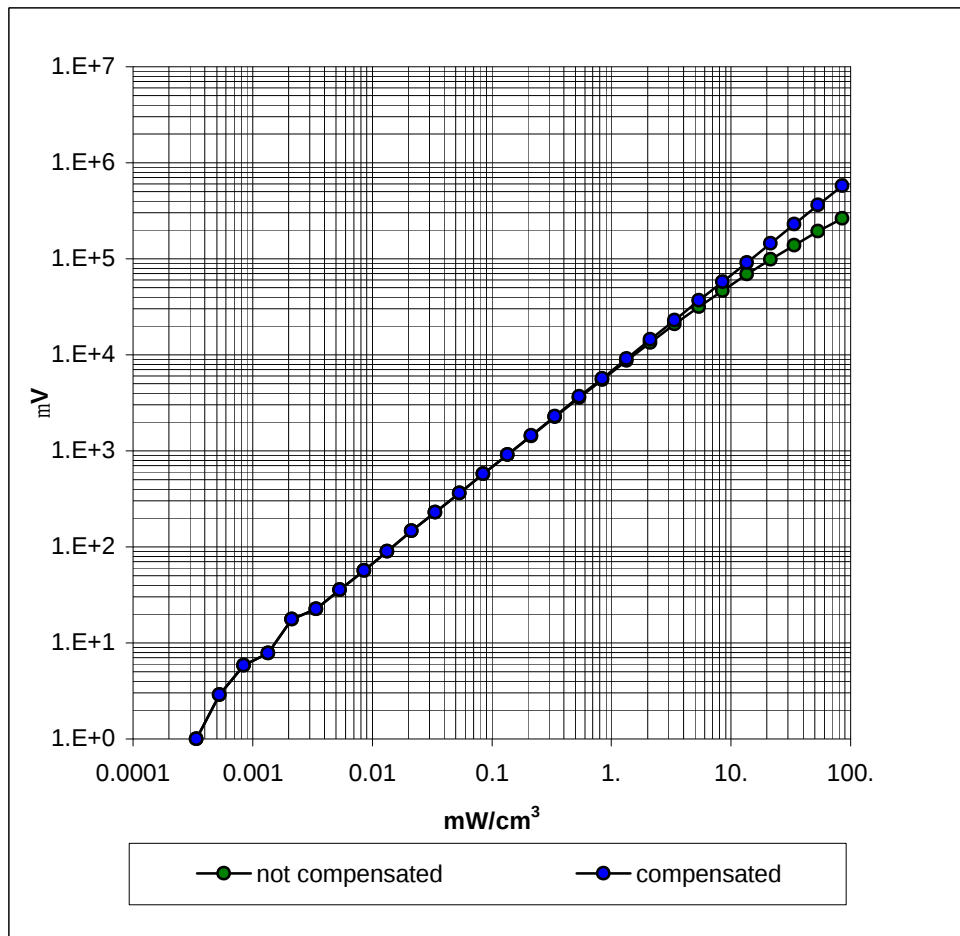

Conversion Factor Assessment

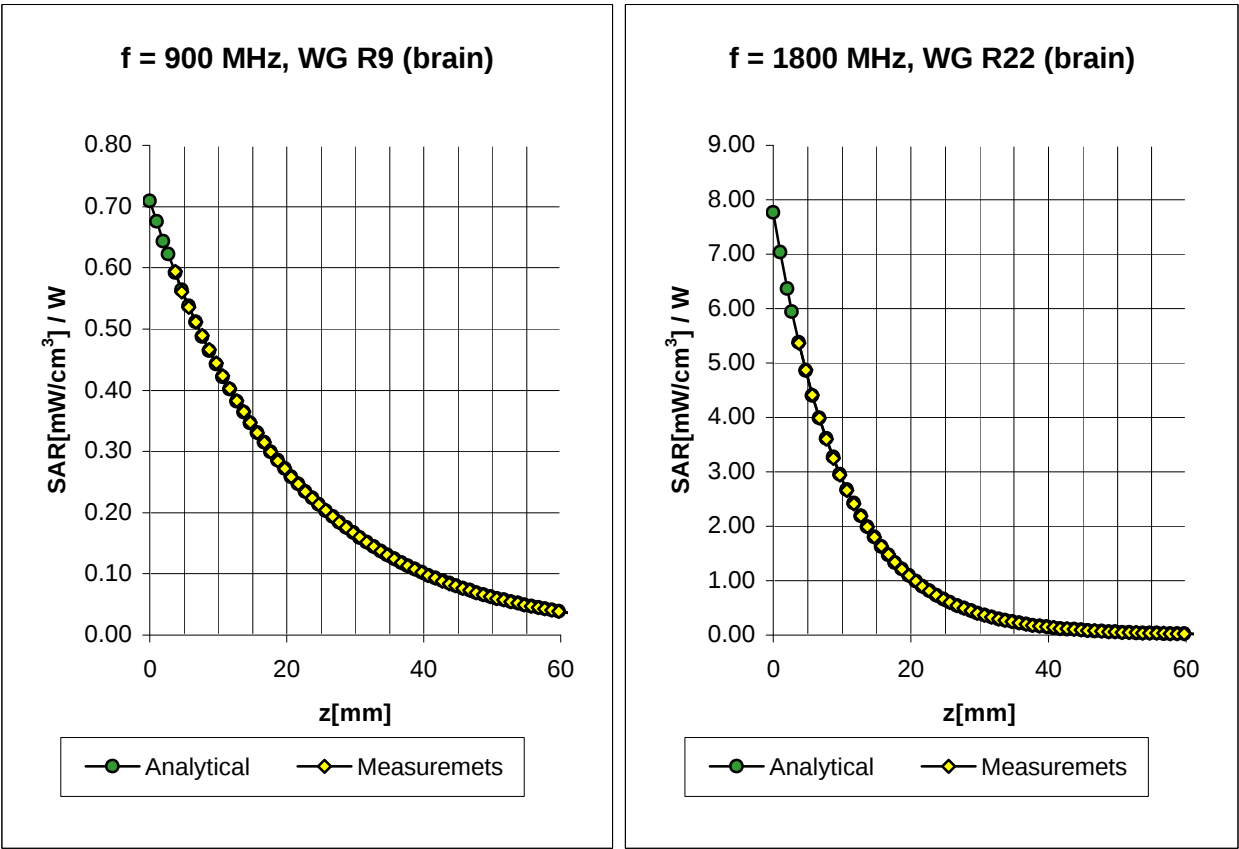


Brain 800 - 1000 MHz $\epsilon_r = 39.3 - 43.0$ $s = 0.75 - 1.00$ mho/m

ConvF X	6.13 ± 9.5% (k=2)	Boundary effect:
ConvF Y	6.13 ± 9.5% (k=2)	Alpha 0.45
ConvF Z	6.13 ± 9.5% (k=2)	Depth 2.36

Brain 1700 - 1910 MHz $\epsilon_r = 39.3 - 41.6$ $s = 1.53 - 1.90$ mho/m

ConvF X	5.53 ± 9.5% (k=2)	Boundary effect:
ConvF Y	5.53 ± 9.5% (k=2)	Alpha 0.66
ConvF Z	5.53 ± 9.5% (k=2)	Depth 2.07

Conversion Factor Assessment

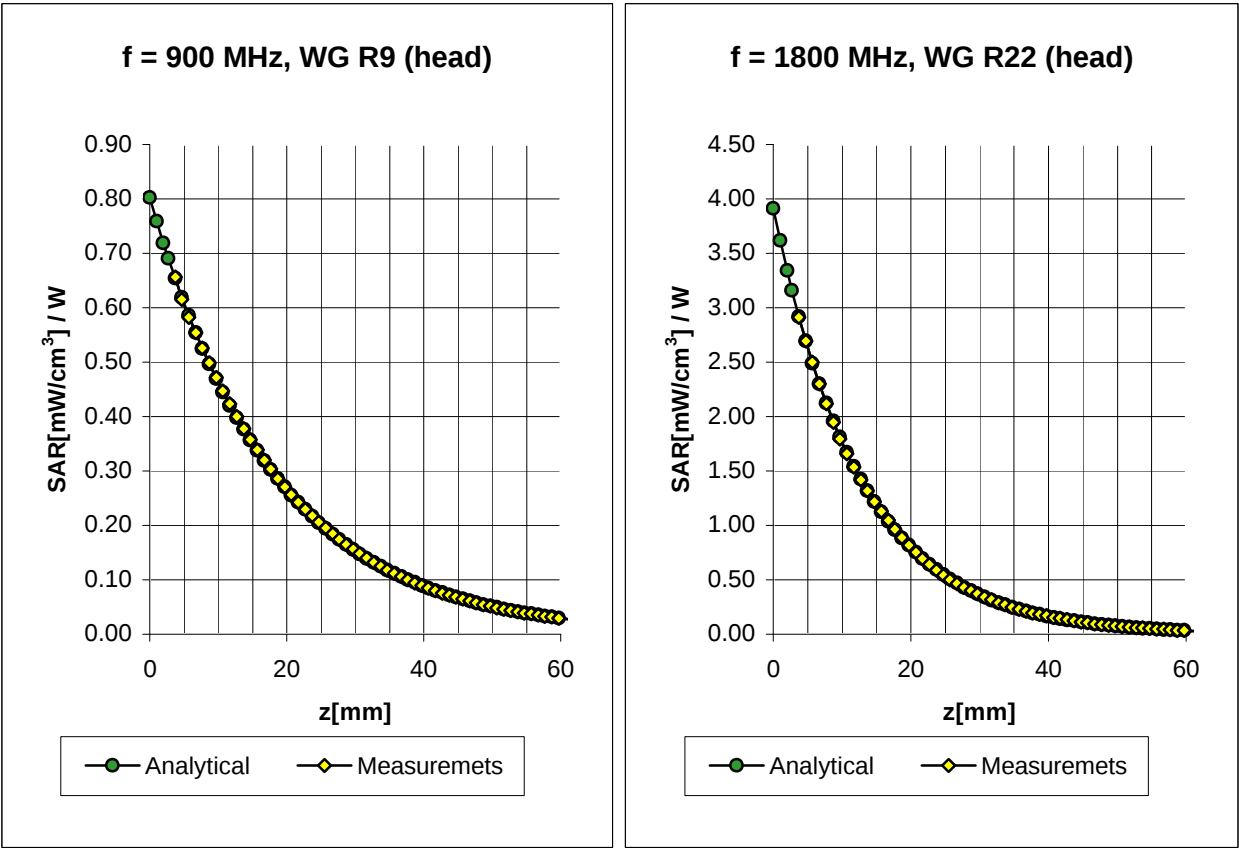

Head 800 - 1000 MHz $\epsilon_r = 39.0 - 43.5$ $s = 0.80 - 1.10$ mho/m


ConvF X	6.21 $\pm 9.5\%$ (k=2)	Boundary effect:
ConvF Y	6.21 $\pm 9.5\%$ (k=2)	Alpha 0.40
ConvF Z	6.21 $\pm 9.5\%$ (k=2)	Depth 2.61

Head 1700 - 1910 MHz $\epsilon_r = 39.5 - 41.0$ $s = 1.20 - 1.55$ mho/m

ConvF X	5.31 $\pm 9.5\%$ (k=2)	Boundary effect:
ConvF Y	5.31 $\pm 9.5\%$ (k=2)	Alpha 0.62
ConvF Z	5.31 $\pm 9.5\%$ (k=2)	Depth 2.27

ET3DV6 SN:1381

Conversion Factor Assessment

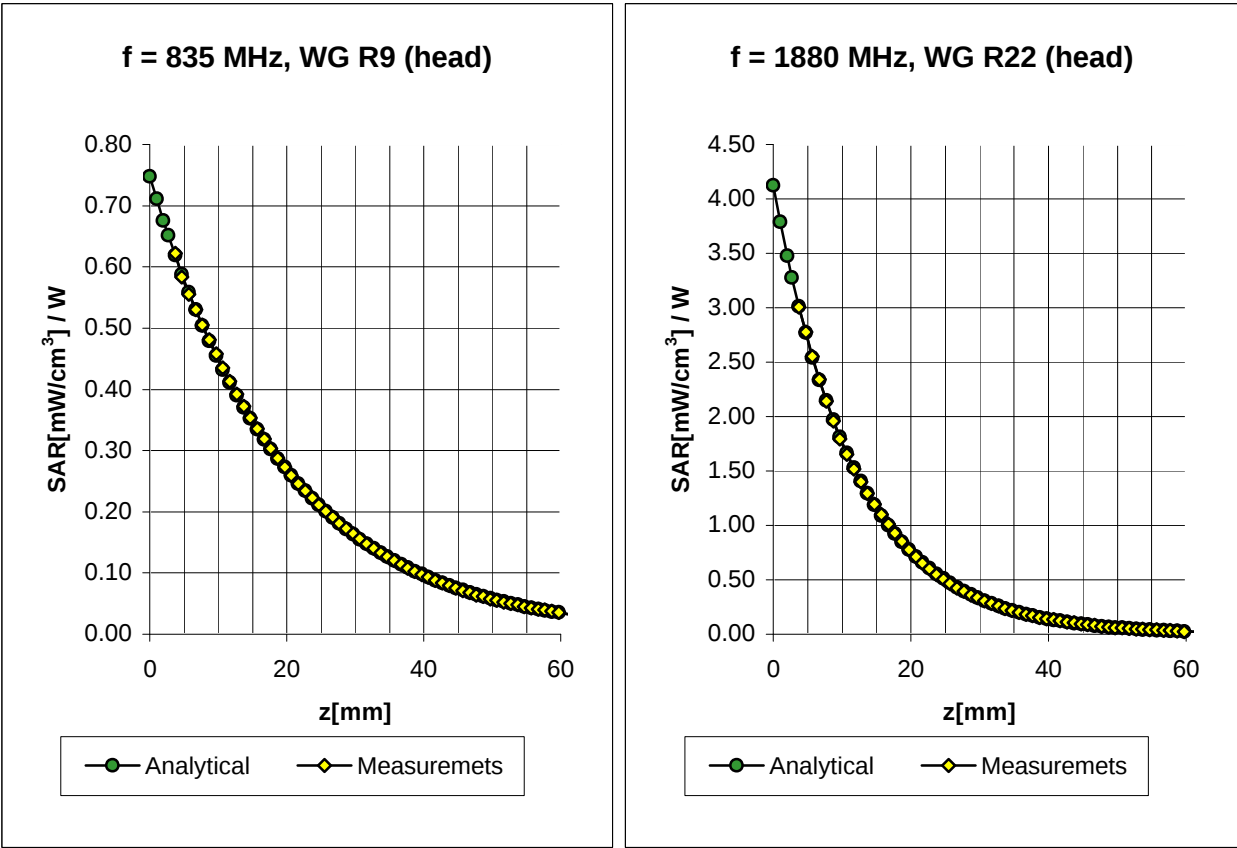


Head	835 MHz	$\epsilon_r = 41.5 \pm 5\%$	$s = 0.90 \pm 5\% \text{ mho/m}$
ConvF X	6.20 $\pm 8.9\%$ (k=2)	Boundary effect:	
ConvF Y	6.20 $\pm 8.9\%$ (k=2)	Alpha	0.41
ConvF Z	6.20 $\pm 8.9\%$ (k=2)	Depth	2.58

Head	1880 MHz	$\epsilon_r = 40.0 \pm 5\%$	$s = 1.540 \pm 5\% \text{ mho/m}$
ConvF X	5.22 $\pm 8.9\%$ (k=2)	Boundary effect:	
ConvF Y	5.22 $\pm 8.9\%$ (k=2)	Alpha	0.64
ConvF Z	5.22 $\pm 8.9\%$ (k=2)	Depth	2.23

ET3DV6 SN:1381

Conversion Factor Assessment

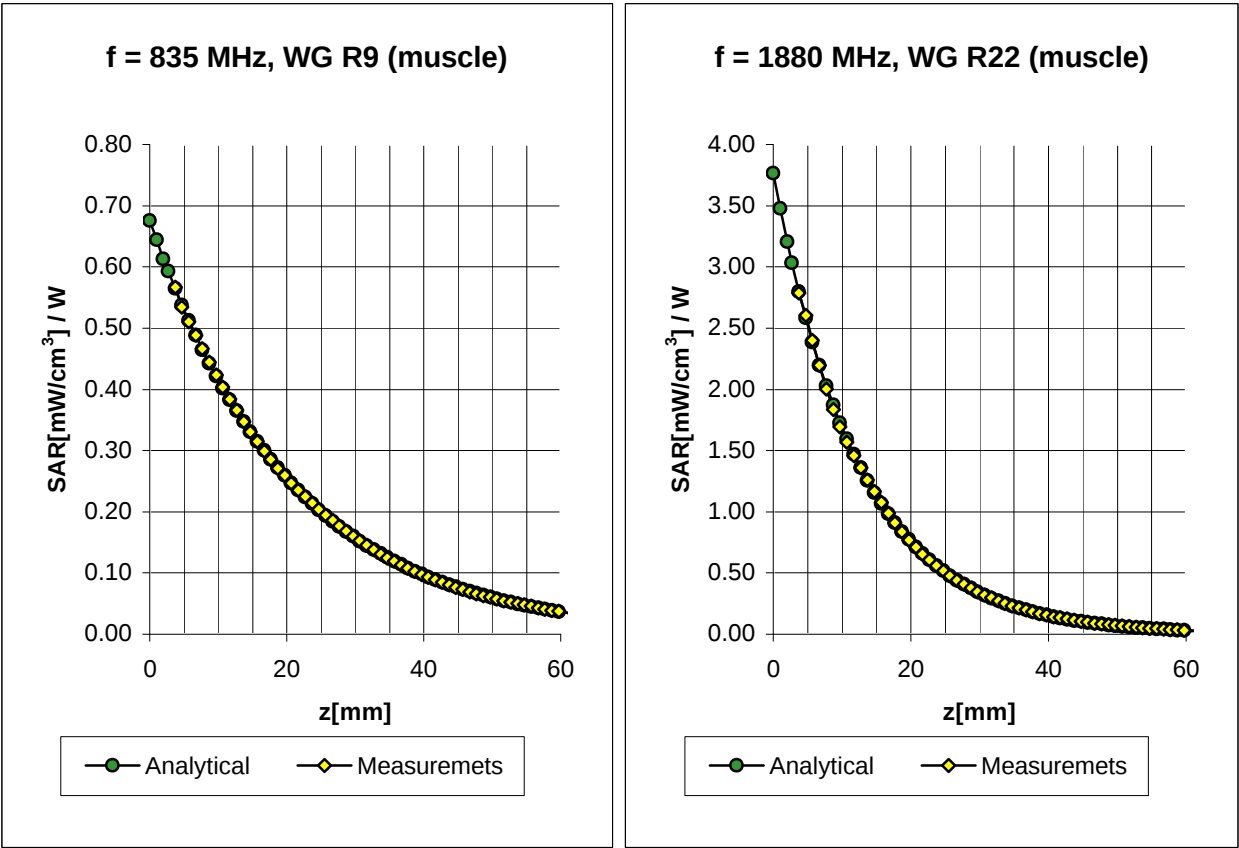

Muscle	835 MHz	$\epsilon_r = 55.2 \pm 5\%$	$s = 0.97 \pm 5\% \text{ mho/m}$
ConvF X	6.04 $\pm 8.9\%$ (k=2)	Boundary effect:	
ConvF Y	6.04 $\pm 8.9\%$ (k=2)	Alpha	0.42
ConvF Z	6.04 $\pm 8.9\%$ (k=2)	Depth	2.73

Muscle	1880 MHz	$\epsilon_r = 53.3 \pm 5\%$	$s = 1.52 \pm 5\% \text{ mho/m}$
ConvF X	4.96 $\pm 8.9\%$ (k=2)	Boundary effect:	
ConvF Y	4.96 $\pm 8.9\%$ (k=2)	Alpha	0.91
ConvF Z	4.96 $\pm 8.9\%$ (k=2)	Depth	1.88

ET3DV6 SN:1381

Deviation from Isotropy in HSL

Error (q, f), $f = 900$ MHz

