

CommScope Technologies, LLC TEST REPORT

SCOPE OF WORK

EMISSIONS TESTING – RPM-A5A11-B02 with W/ 5G NR waveform With OneCell® RP5100

REPORT NUMBER 104751739BOX-013

ISSUE DATE

09/29/2021

[REVISED DATE]
January 12, 2022

February 2, 2022

PAGES

194

DOCUMENT CONTROL NUMBER

Non-Specific Radio Report Shell Rev. December 20 © 2017 INTERTEK





EMISSIONS TEST REPORT

(Class II Permissive Change)

Report Number: 104751739BOX-001 Project Number: G104751739

Report Issue Date: 09/29/2021 Report Issue Date: 02/02/2022

Model(s) Tested: RPM-A5A11-B02 with W/ 5G NR

waveform With OneCell® RP5100

Model(s) Partially Tested: None

Model(s) Not Tested but declared equivalent by the client: None

Standards: CFR47 FCC Part 24 (09/2021)

Tested by:
Intertek Testing Services NA, Inc.
70 Codman Hill Road
Boxborough, MA 01719
USA

Client:
CommScope Technologies LLC
900 Chelmsford St.
Lowell, MA 01851
USA

Report prepared by

Report reviewed by

Vathana Ven / EMC Engineering Supervisor

Kouma Sinn / EMC Engineering Supervisor

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Intertek

Report Number: 104751739BOX-013

Issued: 09/29/2021 Revised: 02/02/2022

Table of Contents

1	Introduction and Conclusion	4
2	Test Summary	4
3	Client Information	5
4	Description of Equipment Under Test and Variant Models	5
5	System Setup and Method	6
6	Maximum Peak Output Power and Human RF exposure	8
7	Occupied Bandwidth	65
8	Band Edge Compliance	120
9	Frequency Stability Due Voltage Variation	157
10	Transmitter spurious emissions	164
11	Revision History	194

1 Introduction and Conclusion

The tests indicated in section 2.0 were performed on the product constructed as described in section 4.0. The remaining test sections are the verbatim text from the actual data sheets used during the investigation. These test sections include the test name, the specified test Method, a list of the actual Test Equipment Used, documentation Photos, Results and raw Data. No additions, deviations, or exclusions have been made from the standard(s) unless specifically noted.

Based on the results of our investigation, we have concluded the product tested **complies** with the requirements of the standard(s) indicated. The results obtained in this test report pertain only to the item(s) tested. Intertek does not make any claims of compliance for samples or variants which were not tested.

2 Test Summary

Section	Test full name	Result
3	Client Information	
4	Description of Equipment Under Test and Variant Models	
5	System Setup and Method	
6	Maximum Peak Output Power and Human RF exposure CFR47 FCC Parts 2.1046 and 24.232(a-b)	Pass
7	Occupied Bandwidth CFR47 FCC Parts 2.1049 and 24.238(b)	
8	Band Edge Compliance CFR47 FCC Parts 2.1051, 2.1053, and 24.238(a-b)	Pass
9	Frequency Stability Due to Voltage Variation CFR47 FCC Parts 2.1055 and 24.235	Pass
10	Transmitter Spurious Emissions CFR47 FCC Parts 2.1051, 2.1053, 2.1057 and 24.238(a-b)	Pass
11	Revision History	

3 Client Information

This EUT was tested at the request of:

Client: CommScope Technologies LLC

900 Chelmsford St. Lowell. MA 01851

USA

Contact: Mr. Kevin Craig **Telephone:** (978) 250-2678

Fax: None

Email: kevin.craig@commscope.com

4 Description of Equipment Under Test and Variant Models

Manufacturer: CommScope Telecommunications (China) Ltd.

68 Su Hong Xi Lu, Suzhou Industrial Park.

Suzhou, Jiangsu, 215021, China

Equipment Under Test				
Description	Manufacturer	Mod	el Number	Serial Number
Band 2 Radio Module With OneCell® RP5200 host	CommScope Technolo	ogies LLC	RPM-A5A11-B02	19513000008
OneCell® RP5100	CommScope Technology	gies LLC	RP-A51xxi	19198000019

Receive Date:	07/30/2021
Received Condition:	Good
Type:	Production

Description of Equipment Under Test (provided by client)

The Radio Module is band specific using the Analog devices RF Agile Transceiver IC, AD936x. The device combines an RF front end with a flexible mixed-signal baseband section and integrated frequency synthesizers providing a configurable digital interface to the processor. The Radio Module also contains a band specific front end, band specific antenna and required power rails. All power rails required are derived from the 12 VDC bus supplied by the Baseband card. The reference frequency for the radio IC is 38.4 MHz is derived from the from an OCXO which is disciplined from a 1588 reference clock.

The original LTE radio has included the 5G NR capabilities for this Class II Permissive Change.

It supports bandwidths of 5, 10, 15, and 20 MHz with four modulations; TM1.1-QPSK, TM3.2-16QAM, TM3.1-64QAM, and TM3.1a-256QAM. The radio is fixed.

Description of Radio Host (provided by client)

The OneCell® RP5200 family is factory configurable with 2 – 4 Radios Modules mounted to a Baseband card. The same PCB's will be used in both indoor and outdoor version of the radio point. The device is fixed.

The baseband card is the host for the modular radios. It contains a two ethernet PHY's with one supporting 100M/1G/2.5G/5G/10G ethernet and the other supporting 100M/1G. The main processor is Zylinx Ultrascale+ MPSoC with 2 GB DDR3 and 4 GB Flash memory. The baseband PCBA converts POE power to +12 VDC bus voltage require as input to the radio modules.

Equipment Under Test Power Configuration					
Rated Voltage Rated Current Rated Frequency Number of Phases					
48 VDC	0.960 mA per pair max	DC	N/A		

Operating modes of the EUT:

No.	Descriptions of EUT Exercising
1	Pre-programmed to transmit at Low, Mid, and High channels at four different modulations, TM1.1-QPSK, TM3.2-16QAM, TM3.1-64QAM, and TM3.1a-256QAM.

Software used by the EUT:

No.	Descriptions of EUT Exercising
1	RP5100 Diagnostics Ver 1009

Radio	Radio/Receiver Characteristics				
Frequency Band(s)	1930-1990 MHz				
Modulation Type(s)	TM1.1-QPSK, TM3.2-16QAM, TM3.1-64 QAM, TM3.1a-				
	256QAM				
Maximum Output Power (conducted):	22.95 dBm (Conducted)				
Test Channels	Low, Middle, High Channels of 5 MHz, 10 MHz, 15 MHz, and				
	20 MHz Bandwidths, Single Channel operation only				
Occupied Bandwidth	17.9 MHz (Worst-case)				
MIMO Information (# of Transmit and	2x2 MIMO using cross polarized antennas and uncorrelated				
Receive antenna ports)	data streams				
Equipment Type	Module in a host				
Antenna Type and Gain	Detachable Antenna: +4 dBi (as provided by the client.				
	Intertek takes no responsibility for the accuracy of this				
	information. Actual antenna gain will be determined at the				
	time of licensing)				

Variant Models:

The following variant models were not tested as part of this evaluation, but have been identified by the manufacturer as being electrically identical models, depopulated models, or with reasonable similarity to the model(s) tested. Intertek does not make any claims of compliance for samples or variants which were not tested.

None

System Setup and Method

	Cables						
ID	Description	Length (m)	Shielding	Ferrites	Termination		
	LAN (POE Power Cable)	2.58	Shielded	None	POE P/S		
	LAN (Communication)	9.00	Shielded	None	Laptop		

Support Equipment				
Description	Manufacturer	Model Number	Serial Number	
Laptop	Dell	LATITUDE	None	
Power Device Analzyer	Sifos Technologies	PDA-604A	604A0033	

Non-Specific Radio Report Shell Rev. December 2017 Page 6 of 194 Client: CommScope Technologies LLC / Model: RPM-A5A11-B02 with W/ 5G NR waveform With OneCell® RP5100

Intertek

Report Number: 104751739BOX-013 Issued: 09/29/2021 Revised: 02/02/2022

5.1 Method:

Configuration as required by ANSI C63.26-2015, KDB 662911, and CFR47 FCC Part 24 (09/2021).

5.2 EUT Block Diagram:

Photographs are available in a separate exhibit

6 Maximum Peak Output Power and Human RF exposure

Method 6.1

Tests are performed in accordance with CFR47 FCC Parts 2.1046 and 24, KDB662911, and ANSI C63.26 Section 5.2.4.4.

TEST SITE: EMC Lab

The EMC Lab has one Semi-anechoic Chamber and one Shielded Chamber. AC Mains Power is available at 120, 230, and 277 Single Phase; 208, 400, and 480 3-Phase. Large reference ground-planes are installed in the general lab area to facilitate EMC work not requiring a shielded environment.

6.2 Test Equipment Used:

Asset	Description	Manufacturer	Model	Serial	Cal Date	Cal Due
CEN001'	DC-40GHz attenuator 20dB	Centric RF	C411-20	CEN001	01/22/2021	01/22/2022
CBLSHF204'	Cable, SMA - SMA, 9kHz -40GHz, (Cable Kit 5)	Huber + Suhner	Sucoflex 102EA	234714001	02/03/2021	02/03/2022
ROS005-1'	Signal and Spectrum Analyzer	Rohde and Shwartz	FSW43	100646	10/27/2020	10/27/2021
DAV005'	Weather Station	Davis	6250	MS191218083	02/07/2021	02/07/2022

Software Utilized:

Name	Manufacturer	Version
None		

6.3 Results:

The maximum conducted output power was measured to be 22.95 dBm, which is much less than the EIRP limit of 24.232(a-b). The sample tested was found to Comply. Antenna gain limitations will depend on geographical locations and Height Above Average Terrain (HAAT). Output power from the two antenna ports was not summed since the data streams are uncorrelated and the antennas are cross polarized.

Non-Specific Radio Report Shell Rev. December 2017 Page 8 of 194

§24.232(a-b):

- (a)(1) Base stations with an emission bandwidth of 1 MHz or less are limited to 1640 watts equivalent isotropically radiated power (EIRP) with an antenna height up to 300 meters HAAT, except as described in paragraph (b) below.
- (2) Base stations with an emission bandwidth greater than 1 MHz are limited to 1640 watts/MHz equivalent isotropically radiated power (EIRP) with an antenna height up to 300 meters HAAT, except as described in paragraph (b) below.
- (3) Base station antenna heights may exceed 300 meters HAAT with a corresponding reduction in power: seeTables 1 and 2 of this section.
- (4) The service area boundary limit and microwave protection criteria specified in §§24.236 and 24.237 apply.

Table 1—Reduced Power for Base Station Antenna Heights Over 300 Meters, With Emission Bandwidth of 1 MHz or Less

HAAT in meters	Maximum EIRP watts
≤300	1640
≤500	1070
≤1000	490
≤1500	270
≤2000	160

TABLE 2—REDUCED POWER FOR BASE STATION ANTENNA HEIGHTS OVER 300 METERS, WITH EMISSION BANDWIDTH GREATER THAN 1 MHz

HAAT in meters	Maximum EIRP watts/MHz
≤300	1640
≤500	1070
≤1000	490
≤1500	270
≤2000	160

- (b)(1) Base stations that are located in counties with population densities of 100 persons or fewer per square mile, based upon the most recently available population statistics from the Bureau of the Census, with an emission bandwidth of 1 MHz or less are limited to 3280 watts equivalent isotropically radiated power (EIRP) with an antenna height up to 300 meters HAAT.
- (2) Base stations that are located in counties with population densities of 100 persons or fewer per square mile, based upon the most recently available population statistics from the Bureau of the Census, with an emission bandwidth greater than 1 MHz are limited to 3280 watts/MHz equivalent isotropically radiated power (EIRP) with an antenna height up to 300 meters HAAT.
- (3) Base station antenna heights may exceed 300 meters HAAT with a corresponding reduction in power; *see*Tables 3 and 4 of this section.

(4) The service area boundary limit and microwave protection criteria specified in §§24.236 and 24.237 apply.

(5) Operation under this paragraph (b) at power limits greater than permitted under paragraph (a) of this section must be coordinated in advance with all broadband PCS licensees authorized to operate on adjacent frequency blocks within 120 kilometers (75 miles) of the base station and is limited to base stations located more than 120 kilometers (75 miles) from the Canadian border and more than 75 kilometers (45 miles) from the Mexican border.

TABLE 3—REDUCED POWER FOR BASE STATION ANTENNA HEIGHTS OVER 300 METERS, WITH EMISSION BANDWIDTH OF 1 MHz or Less

HAAT in meters	Maximum EIRP watts
≤300	3280
≤500	2140
≤1000	980
≤1500	540
≤2000	320

TABLE 4—REDUCED POWER FOR BASE STATION ANTENNA HEIGHTS OVER 300 METERS, WITH EMISSION BANDWIDTH GREATER THAN 1 MHz

HAAT in meters	Maximum EIRP watts/MHz
≤300	3280
≤500	2140
≤1000	980
≤1500	540
≤2000	320

Slot 2 (Band 2), Bandwidth: 5 MHz, Modulation: TM1.1-QPSK

Channel	Frequency (MHz)	Antenna Port	Output Power (dBm)
Low	1932.50	ANT0	21.43
		ANT1	21.46
Mid	1960.00	ANT0	22.53
		ANT1	22.51
High	1987.50	ANT0	22.65
		ANT1	22.50

Slot 2 (Band 2), Bandwidth: 10 MHz, Modulation: TM1.1-QPSK

Channel	Frequency (MHz)	Antenna Port	Output Power (dBm)
Low	1935.00	ANT0	22.32
		ANT1	22.28
Mid	1960.00	ANT0	22.46
		ANT1	22.45
High	1985.00	ANT0	22.65
		ANT1	22.29

Slot 2 (Band 2), Bandwidth: 15 MHz, Modulation: TM1.1-QPSK

0.00 = (20.00 =), 20.00 = 10.0			
Channel	Frequency (MHz)	Antenna Port	Output Power (dBm)
Low	1937.50	ANT0	22.33
		ANT1	22.54
Mid	1960.00	ANT0	22.48
		ANT1	22.39
High	1982.50	ANT0	22.54
		ANT1	22.25

Slot 2 (Band 2), Bandwidth: 20 MHz, Modulation: TM1.1-QPSK

Channel	Frequency (MHz)	Antenna Port	Output Power (dBm)
Low	1940.00	ANT0	22.45
		ANT1	22.40
Mid	1960.00	ANT0	22.34
		ANT1	22.28
High	1980.00	ANT0	22.58
_		ANT1	22.25

Slot 2 (Band 2), Bandwidth: 5 MHz, Modulation: TM3.2-16QAM

Channel	Frequency (MHz)	Antenna Port	Output Power (dBm)
Low	1932.50	ANT0	21.87
		ANT1	21.93
Mid	1960.00	ANT0	22.67
		ANT1	22.44
High	1987.50	ANT0	22.57
		ANT1	22.55

Slot 2 (Band 2), Bandwidth: 10 MHz, Modulation: TM3,2-16QAM

Channel	Frequency (MHz)	Antenna Port	Output Power (dBm)
Low	1935.00	ANT0	22.52
		ANT1	22.33
Mid	1960.00	ANT0	22.57
		ANT1	22.64
High	1985.00	ANT0	22.41
		ANT1	22.55

Non-Specific Radio Report Shell Rev. December 2017 Page 11 of 194 Client: CommScope Technologies LLC / Model: RPM-A5A11-B02 with W/ 5G NR waveform With OneCell® RP5100

Slot 2 (Band 2), Bandwidth: 15 MHz, Modulation: TM3.2-16QAM

Channel	Frequency (MHz)	Antenna Port	Output Power (dBm)
Low	1937.50	ANT0	22.33
		ANT1	22.59
Mid	1960.00	ANT0	22.50
		ANT1	22.32
High	1982.50	ANT0	22.45
		ANT1	22.26

Slot 2 (Band 2), Bandwidth: 20 MHz, Modulation: TM3.2-16QAM

Channel	Frequency (MHz)	Antenna Port	Output Power (dBm)
Low	1940.00	ANT0	22.32
		ANT1	22.35
Mid	1960.00	ANT0	22.36
		ANT1	22.24
High	1980.00	ANT0	22.40
		ANT1	22.25

Slot 2 (Band 2), Bandwidth: 5 MHz, Modulation: TM3.1-64QAM

0:00 = (-0:00 =), -0:00 = 0:00			
Channel	Frequency (MHz)	Antenna Port	Output Power (dBm)
Low	1932.50	ANT0	21.87
		ANT1	21.94
Mid	1960.00	ANT0	22.64
		ANT1	22.48
High	1987.50	ANT0	22.55
		ANT1	22.51

Slot 2 (Band 2), Bandwidth: 10 MHz, Modulation: TM3.1-64QAM

Channel	Frequency (MHz)	Antenna Port	Output Power (dBm)
Low	1935.00	ANT0	22.31
		ANT1	22.50
Mid	1960.00	ANT0	22.75
		ANT1	22.43
High	1985.00	ANT0	22.40
_		ANT1	22.52

Slot 2 (Band 2), Bandwidth: 15 MHz, Modulation: TM3.1-64QAM

Siot 2 (Band 2), Bandwidth. 13 Mil2, Modulation. 1 Mis. 1-04QAM			
Channel	Frequency (MHz)	Antenna Port	Output Power (dBm)
Low	1937.50	ANT0	22.49
		ANT1	22.71
Mid	1960.00	ANT0	22.95
		ANT1	22.74
High	1982.50	ANT0	22.38
		ANT1	22.29

Slot 2 (Band 2), Bandwidth: 20 MHz, Modulation: TM3.1-64QAM

Channel	Frequency (MHz)	Antenna Port	Output Power (dBm)
Low	1940.00	ANT0	22.42
		ANT1	22.44
Mid	1960.00	ANT0	22.39
		ANT1	22.23
High	1980.00	ANT0	22.53
		ANT1	22.35

Non-Specific Radio Report Shell Rev. December 2017 Page 12 of 194 Client: CommScope Technologies LLC / Model: RPM-A5A11-B02 with W/ 5G NR waveform With OneCell® RP5100

Slot 2 (Band 2), Bandwidth: 5 MHz, Modulation: TM3.1a-256QAM

Channel	Frequency (MHz)	Antenna Port	Output Power (dBm)
Low	1932.50	ANT0	21.92
		ANT1	22.88
Mid	1960.00	ANT0	22.48
		ANT1	22.45
High	1987.50	ANT0	22.42
_		ANT1	22.36

Slot 2 (Band 2), Bandwidth: 10 MHz, Modulation: TM3.1a-256QAM

0.00 = \(\(\sigma \) = \(\sigma \			
Channel	Frequency (MHz)	Antenna Port	Output Power (dBm)
Low	1935.00	ANT0	22.51
		ANT1	22.31
Mid	1960.00	ANT0	22.55
		ANT1	22.60
High	1985.00	ANT0	22.69
-		ANT1	22.37

Slot 2 (Band 2), Bandwidth: 15 MHz, Modulation: TM3.1a-256QAM

0:00 = (= 0:00 = 7), = 0:00 = 1			
Channel	Frequency (MHz)	Antenna Port	Output Power (dBm)
Low	1937.500	ANT0	22.49
		ANT1	22.72
Mid	1960.00	ANT0	22.50
		ANT1	22.40
High	1982.50	ANT0	22.54
		ANT1	22.27

Slot 2 (Band 2), Bandwidth: 20 MHz, Modulation: TM3.1a-256QAM

Channel	Frequency (MHz)	Antenna Port	Output Power (dBm)
Low	1940	ANT0	22.51
		ANT1	22.44
Mid	1960	ANT0	22.33
		ANT1	22.28
High	1980	ANT0	22.58
		ANT1	22.26

Non-Specific Radio Report Shell Rev. December 2017 Page 13 of 194 Client: CommScope Technologies LLC / Model: RPM-A5A11-B02 with W/ 5G NR waveform With OneCell® RP5100

Intertek


Report Number: 104751739BOX-013 Issued: 09/29/2021 Revised: 02/02/2022

6.4 Setup Photograph:


Photographs are available in another exhibit

6.5 Plots/Data:

TM1.1-QPSK_5 MHz Bandwidth Slot 2 (Band 2), ANT0, Low Channel 1932.5 MHz, Output Power = 21.43 dBm

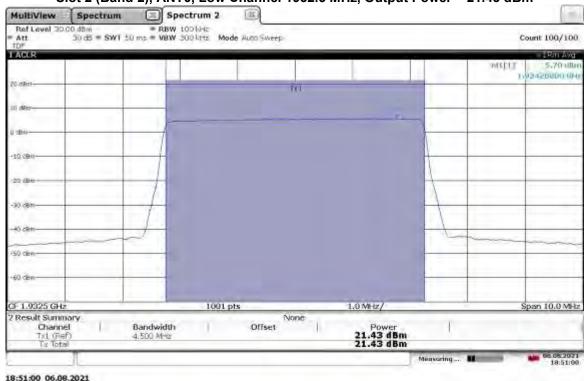


TM1.1-QPSK 5 MHz Bandwidth Slot 2 (Band 2), ANT1, Low Channel 1932.5 MHz, Output Power = 21.46 dBm

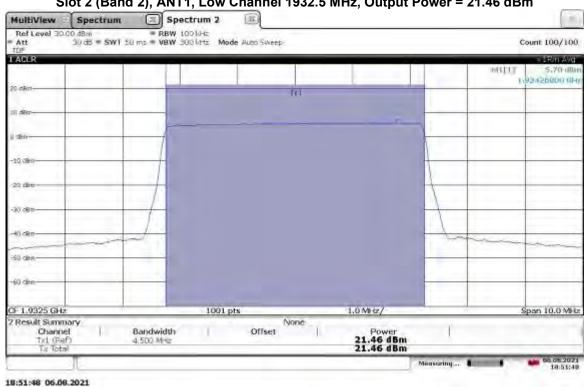


Non-Specific Radio Report Shell Rev. December 2017 Client: CommScope Technologies LLC / Model: RPM-A5A11-B02 with W/ 5G NR waveform With OneCell® RP5100


TM1.1-QPSK_5 MHz Bandwidth
Slot 2 (Band 2), ANT0, Mid Channel 1960 MHz, Output Power = 22.53 dBm

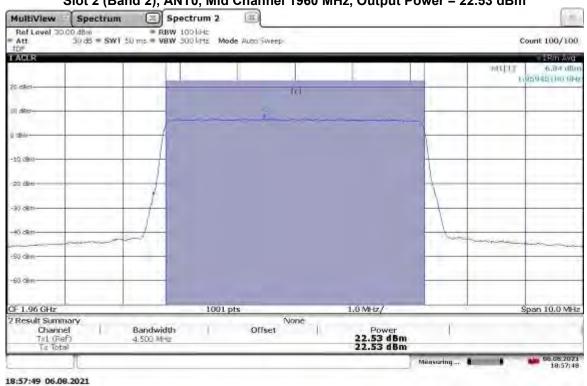


TM1.1-QPSK_5 MHz Bandwidth
Slot 2 (Band 2), ANT1, Mid Channel 1960 MHz, Output Power = 22.51 dBm

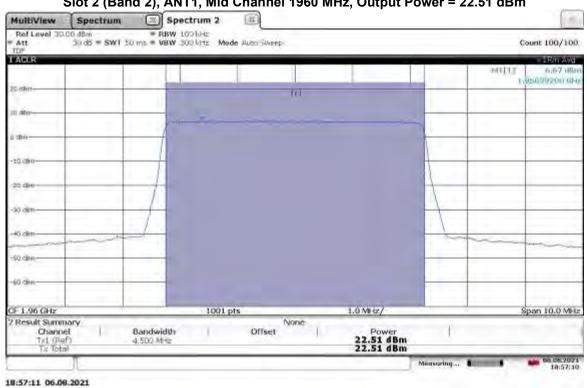


TM1.1-QPSK_5 MHz Bandwidth
Slot 2 (Band 2), ANT0, High Channel 1987.5 MHz, Output Power = 22.65 dBm

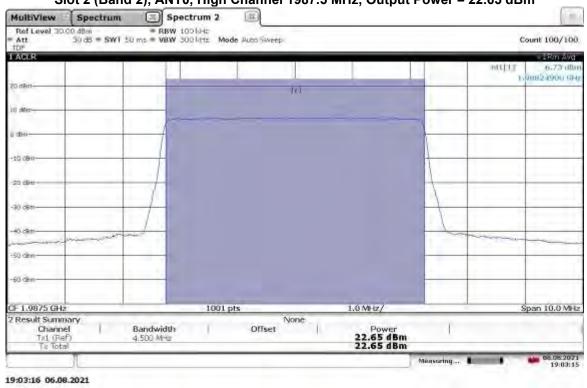


TM1.1-QPSK_5 MHz Bandwidth
Slot 2 (Band 2), ANT1, High Channel 1987.5 MHz, Output Power = 22.50 dBm

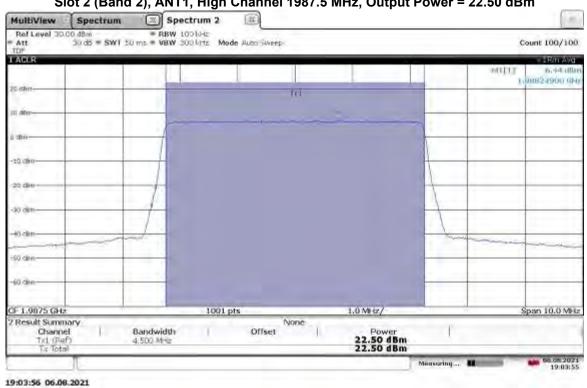


TM1.1-QPSK_10 MHz Bandwidth
Slot 2 (Band 2), ANT0, Low Channel 1935 MHz, Output Power = 22.32 dBm

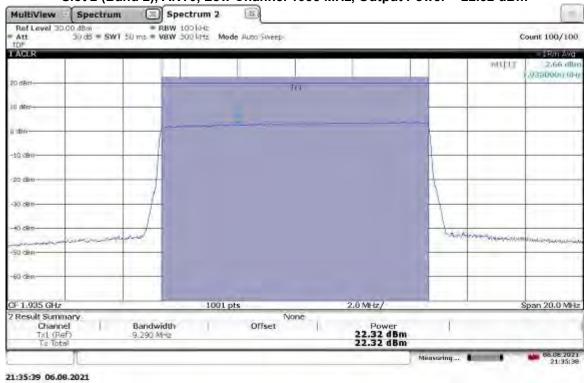


TM1.1-QPSK_10 MHz Bandwidth
Slot 2 (Band 2), ANT1, Low Channel 1935 MHz, Output Power = 22.28 dBm

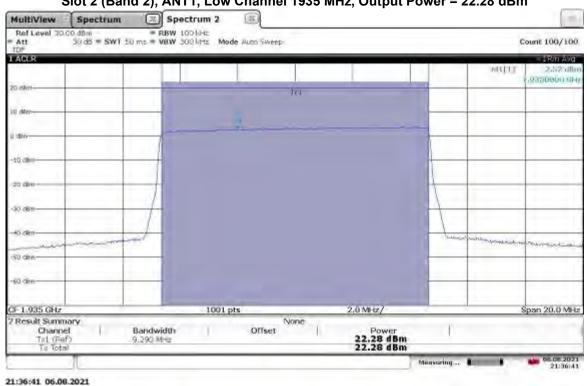


TM1.1-QPSK_10 MHz Bandwidth
Slot 2 (Band 2), ANT0, Mid Channel 1960 MHz, Output Power = 22.46 dBm

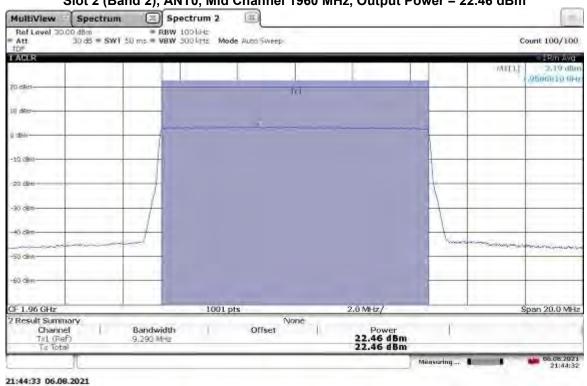


TM1.1-QPSK_10 MHz Bandwidth
Slot 2 (Band 2), ANT1, Mid Channel 1960 MHz, Output Power = 22.45 dBm

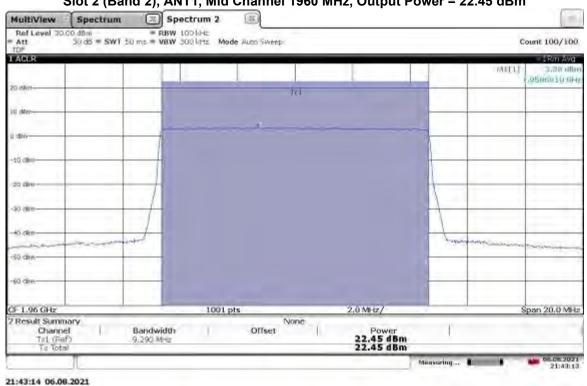


TM1.1-QPSK_10 MHz Bandwidth
Slot 2 (Band 2), ANT0, High Channel 1985 MHz, Output Power = 22.65 dBm

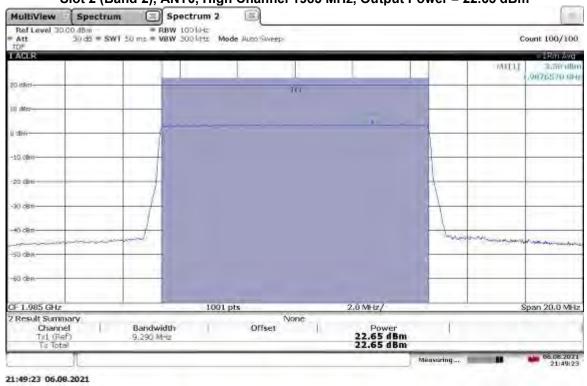


TM1.1-QPSK_10 MHz Bandwidth
Slot 2 (Band 2), ANT1, High Channel 1985 MHz, Output Power = 22.29 dBm

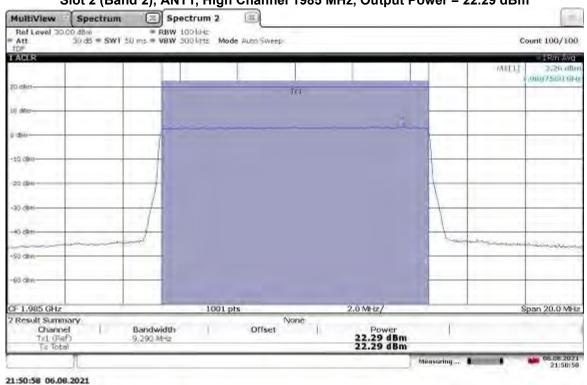


TM1.1-QPSK_15 MHz Bandwidth
Slot 2 (Band 2), ANT0, Low Channel 1937.5 MHz, Output Power = 22.33 dBm

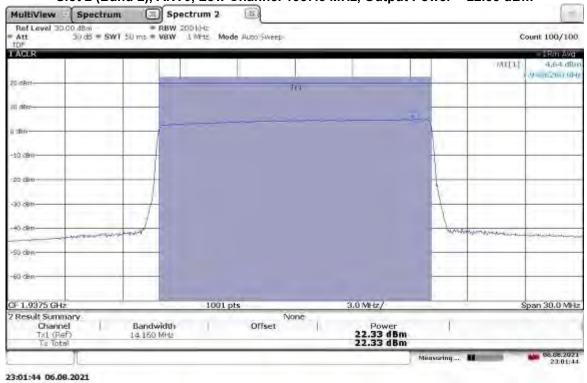


TM1.1-QPSK_15 MHz Bandwidth
Slot 2 (Band 2), ANT1, Low Channel 1937.5 MHz, Output Power = 22.54 dBm

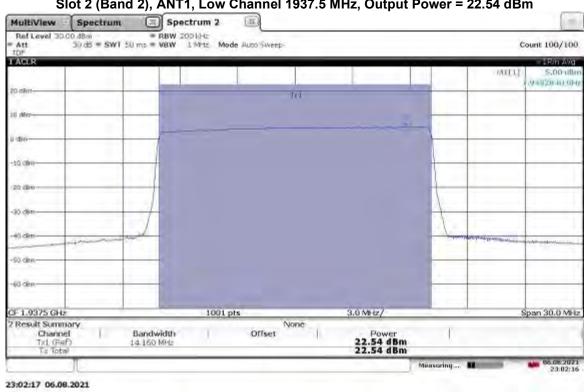

TM1.1-QPSK_15 MHz Bandwidth
Slot 2 (Band 2), ANT0, Mid Channel 1960 MHz, Output Power = 22.48 dBm

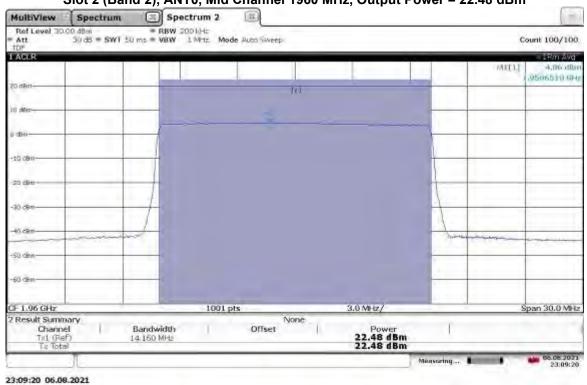


TM1.1-QPSK_15 MHz Bandwidth
Slot 2 (Band 2), ANT1, Mid Channel 1960 MHz, Output Power = 22.39 dBm

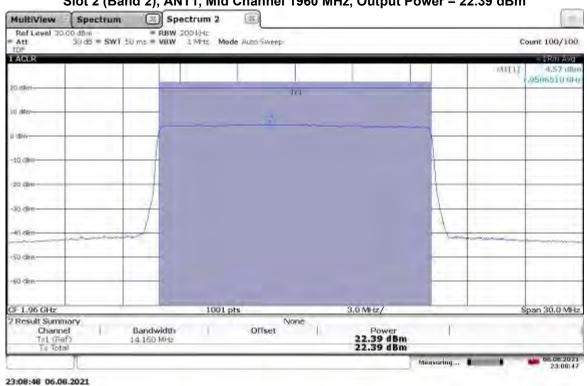


Non-Specific Radio Report Shell Rev. December 2017

Page 22 of 194

TM1.1-QPSK_15 MHz Bandwidth
Slot 2 (Band 2), ANT0, High Channel 1982.5 MHz, Output Power = 22.54 dBm

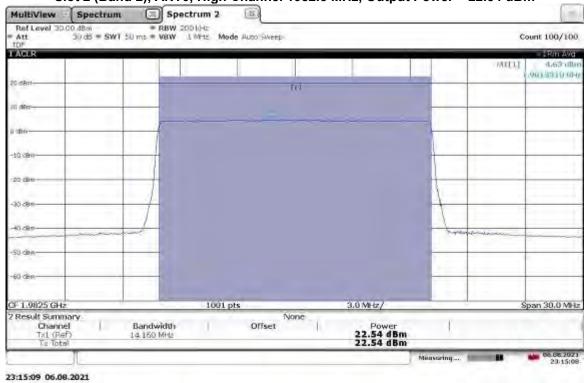


TM1.1-QPSK_15 MHz Bandwidth
Slot 2 (Band 2), ANT1, High Channel 1982.5 MHz, Output Power = 22.25 dBm

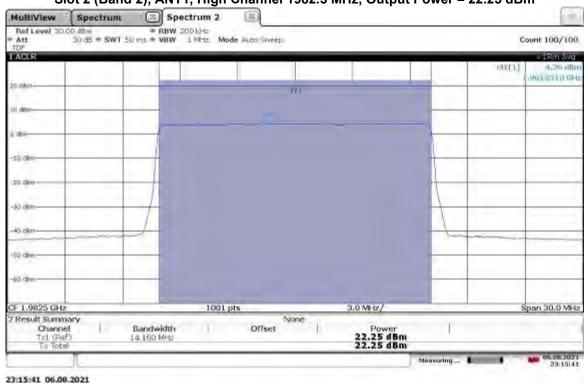


Non-Specific Radio Report Shell Rev. December 2017

Page 23 of 194


TM1.1-QPSK_20 MHz Bandwidth
Slot 2 (Band 2), ANT0, Low Channel 1940 MHz, Output Power = 22.45 dBm

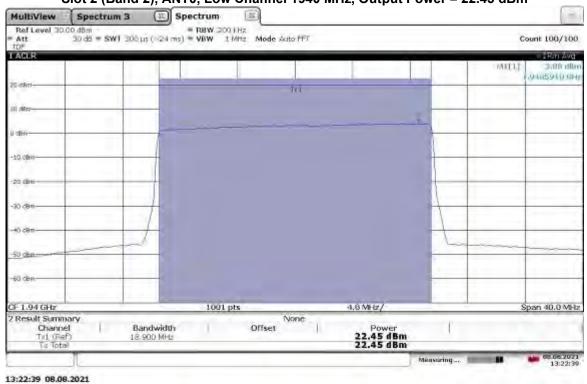


TM1.1-QPSK_20 MHz Bandwidth
Slot 2 (Band 2), ANT1, Low Channel 1940 MHz, Output Power = 22.40 dBm

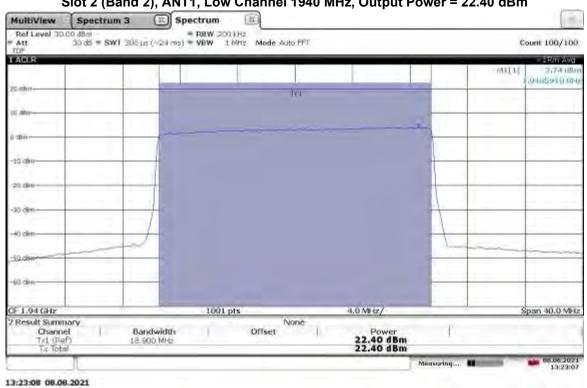


TM1.1-QPSK_20 MHz Bandwidth
Slot 2 (Band 2), ANT0, Mid Channel 1960 MHz, Output Power = 22.34 dBm

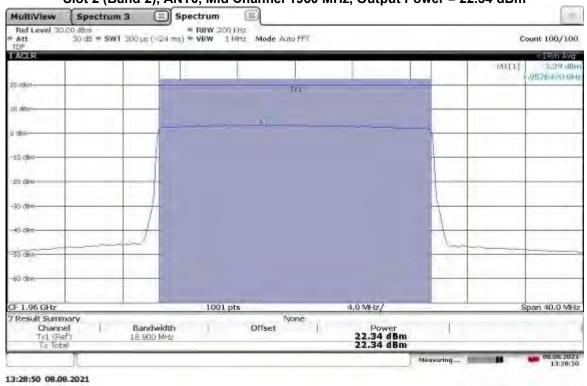


TM1.1-QPSK_20 MHz Bandwidth
Slot 2 (Band 2), ANT1, Mid Channel 1960 MHz, Output Power = 22.28 dBm

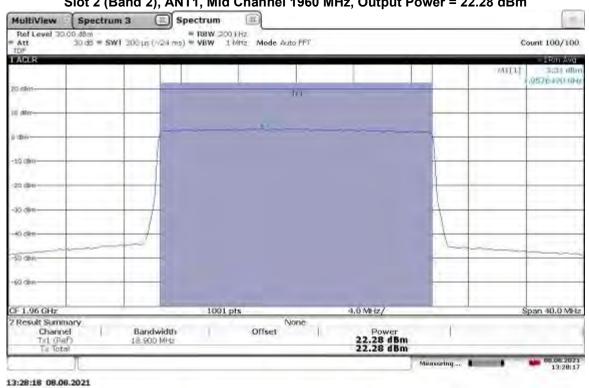

TM1.1-QPSK_20 MHz Bandwidth
Slot 2 (Band 2), ANT0, High Channel 1980 MHz, Output Power = 22.58 dBm

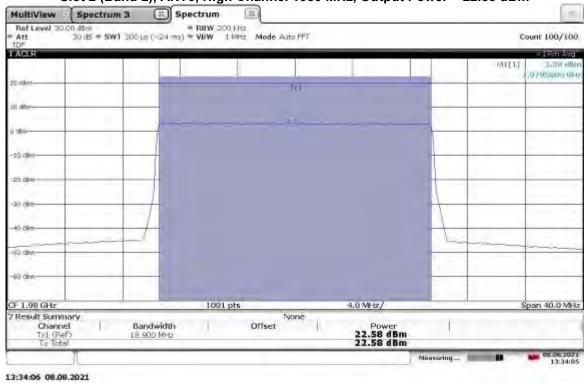


TM1.1-QPSK_20 MHz Bandwidth
Slot 2 (Band 2), ANT1, High Channel 1980 MHz, Output Power = 22.25 dBm

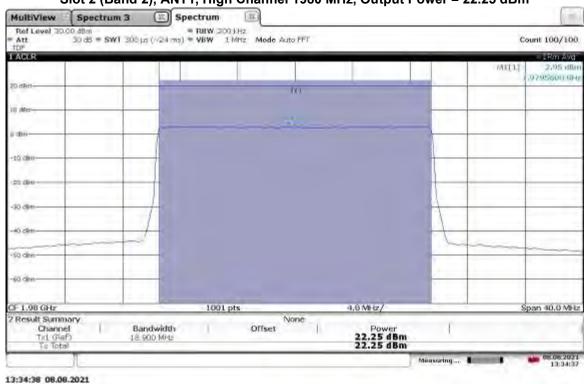


Non-Specific Radio Report Shell Rev. December 2017

Page 26 of 194


TM3.2-16QAM_5 MHz Bandwidth
Slot 2 (Band 2), ANT0, Low Channel 1932.5 MHz, Output Power = 21.87 dBm

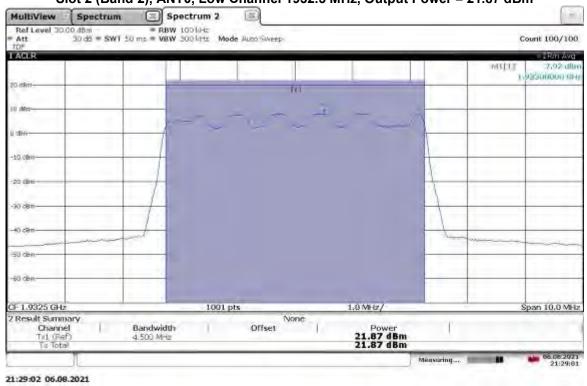


TM3.2-16QAM_5 MHz Bandwidth
Slot 2 (Band 2), ANT1, Low Channel 1932.5 MHz, Output Power = 21.93 dBm

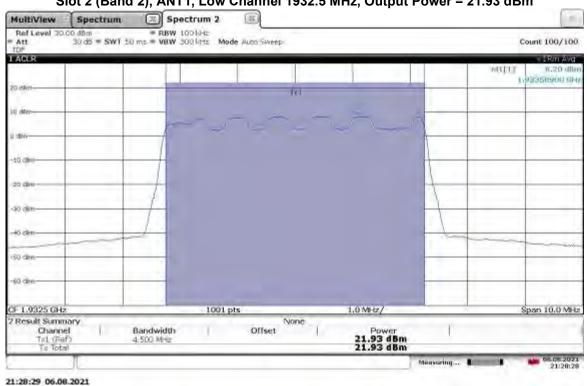


TM3.2-16QAM_5 MHz Bandwidth
Slot 2 (Band 2), ANT0, Mid Channel 1960 MHz, Output Power = 22.67 dBm

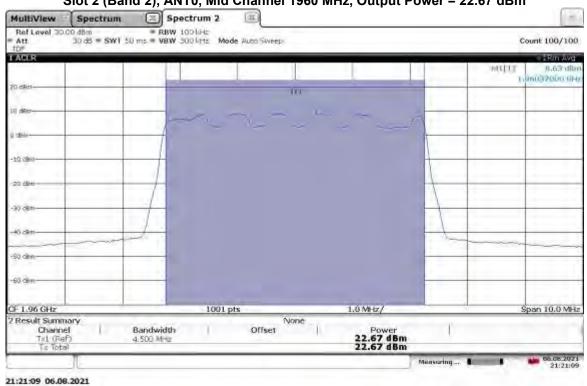


TM3.2-16QAM_5 MHz Bandwidth
Slot 2 (Band 2), ANT1, Mid Channel 1960 MHz, Output Power = 22.44 dBm

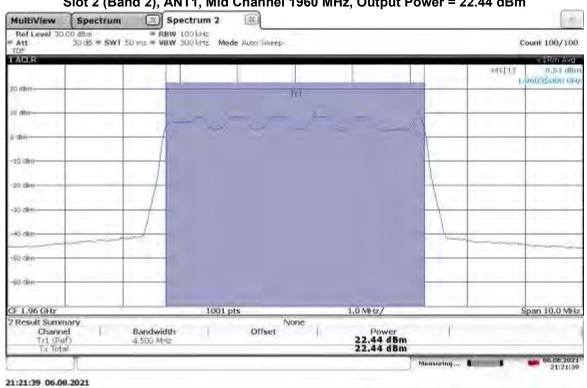


TM3.2-16QAM_5 MHz Bandwidth
Slot 2 (Band 2), ANT0, High Channel 1987.5 MHz, Output Power = 22.57 dBm

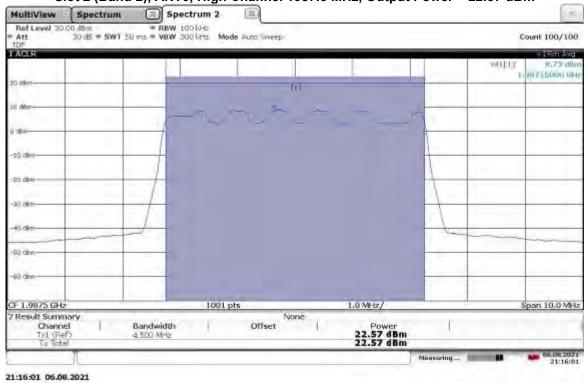


TM3.2-16QAM_5 MHz Bandwidth
Slot 2 (Band 2), ANT1, High Channel 1987.5MHz, Output Power = 22.55 dBm

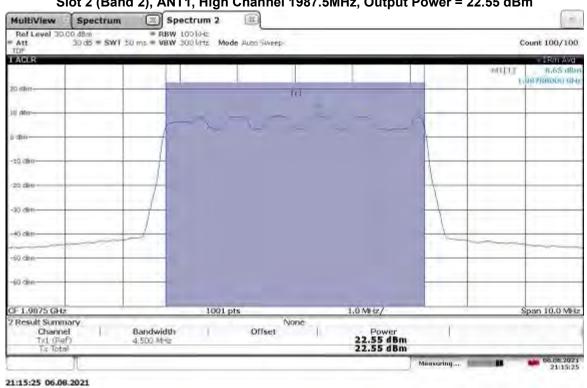


TM3.2-16QAM_10 MHz Bandwidth
Slot 2 (Band 2), ANT0, Low Channel 1935 MHz, Output Power = 22.52 dBm

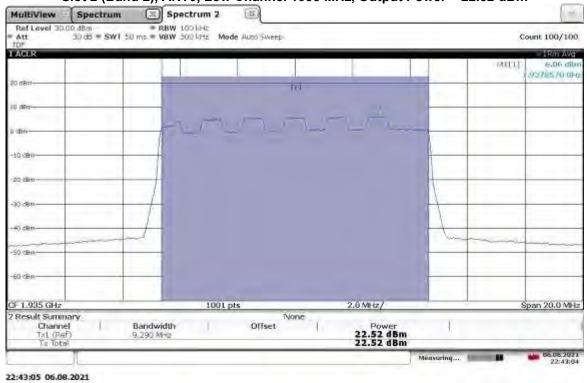


TM3.2-16QAM_10 MHz Bandwidth
Slot 2 (Band 2), ANT1, Low Channel 1935 MHz, Output Power = 22.33 dBm

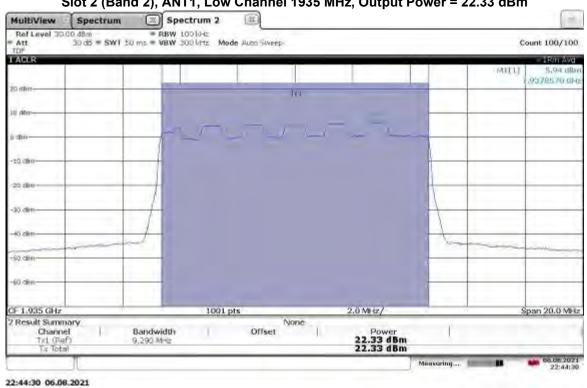


TM3.2-16QAM_10 MHz Bandwidth
Slot 2 (Band 2), ANT0, Mid Channel 1960 MHz, Output Power = 22.57 dBm

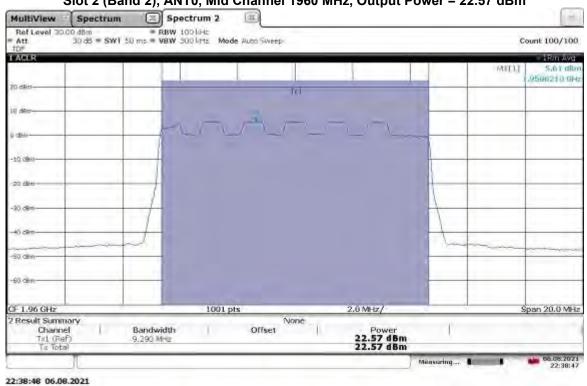


TM3.2-16QAM_10 MHz Bandwidth
Slot 2 (Band 2), ANT1, Mid Channel 1960 MHz, Output Power = 22.64 dBm

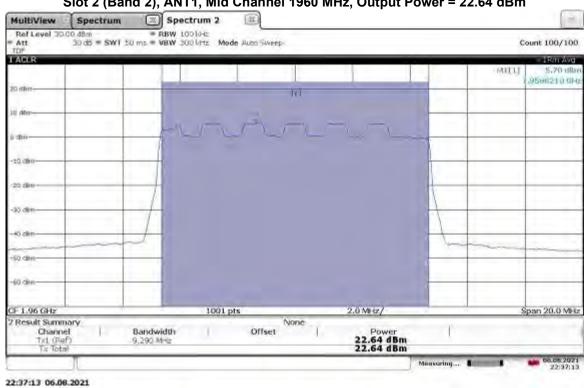

TM3.2-16QAM_10 MHz Bandwidth
Slot 2 (Band 2), ANT0, High Channel 1985 MHz, Output Power = 22.41 dBm

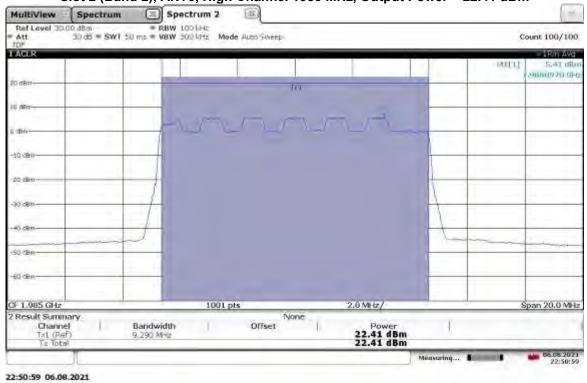

TM3.2-16QAM_10 MHz Bandwidth
Slot 2 (Band 2), ANT1, High Channel 1985 MHz, Output Power =22.55 dBm

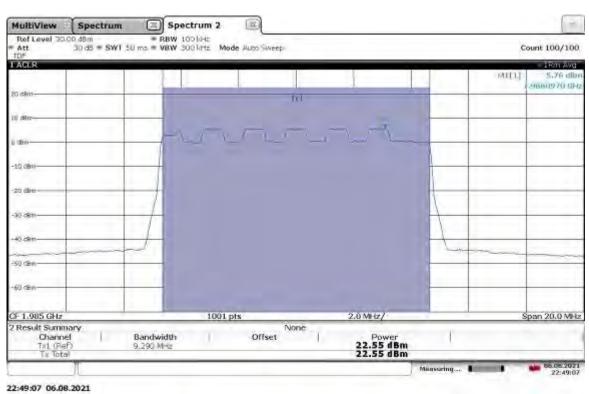


Non-Specific Radio Report Shell Rev. December 2017


Page 32 of 194

Client: CommScope Technologies LLC / Model: RPM-A5A11-B02 with W/ 5G NR waveform With OneCell® RP5100


TM3.2-16QAM_15 MHz Bandwidth
Slot 2 (Band 2), ANT0, Low Channel 1937.5 MHz, Output Power = 22.41 dBm

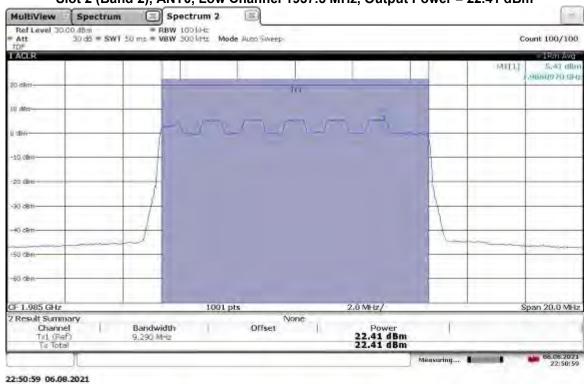


TM3.2-16QAM_15 MHz Bandwidth
Slot 2 (Band 2), ANT1, Low Channel 1937.5 MHz, Output Power = 22.55 dBm

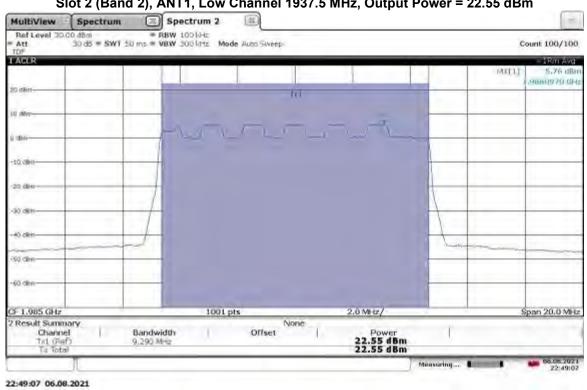


TM3.2-16QAM_15 MHz Bandwidth
Slot 2 (Band 2), ANT0, Mid Channel 1960 MHz, Output Power = 22.57 dBm

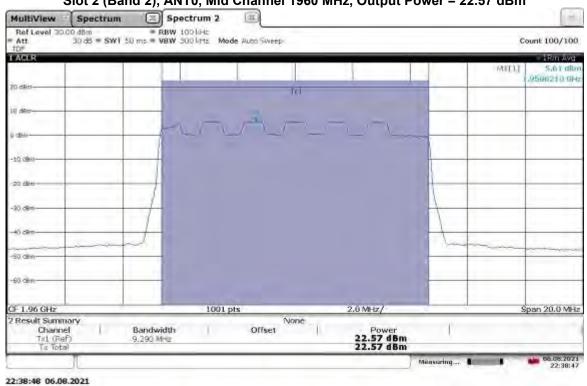


TM3.2-16QAM_15 MHz Bandwidth
Slot 2 (Band 2), ANT1, Mid Channel 1960 MHz, Output Power = 22.64 dBm

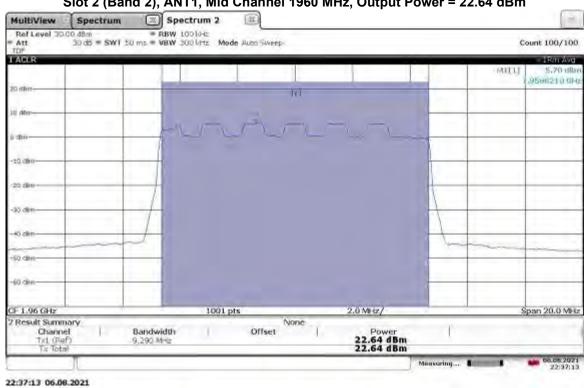


TM3.2-16QAM_15 MHz Bandwidth
Slot 2 (Band 2), ANT0, High Channel 1982 MHz, Output Power =22.41 dBm

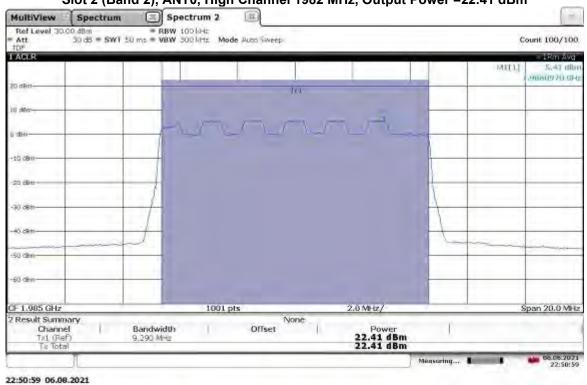


TM3.2-16QAM_15 MHz Bandwidth
Slot 2 (Band 2), ANT1, High Channel 1982.5 MHz, Output Power = 22.55 dBm

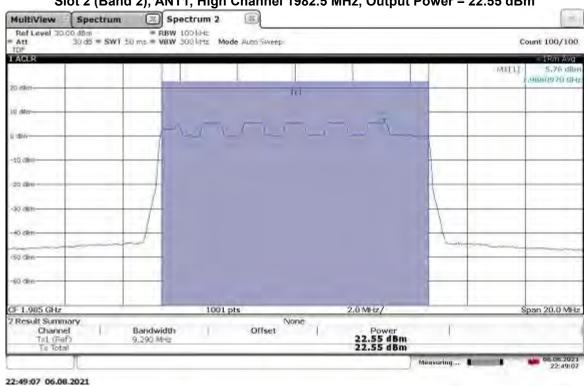


TM3.2-16QAM_20 MHz Bandwidth
Slot 2 (Band 2), ANT0, Low Channel 1940 MHz, Output Power = 22.52 dBm

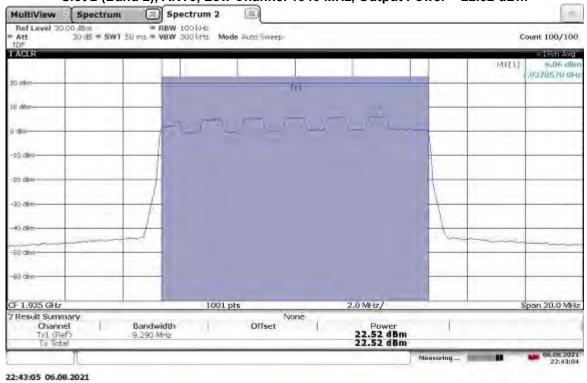


TM3.2-16QAM_20 MHz Bandwidth
Slot 2 (Band 2), ANT1, Low Channel 1940 MHz, Output Power = 22.93 dBm

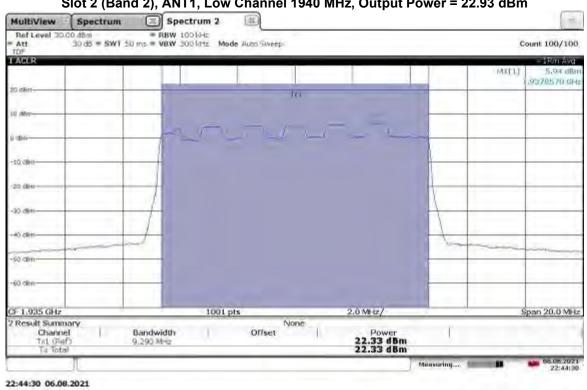


TM3.2-16QAM_20 MHz Bandwidth
Slot 2 (Band 2), ANT0, Mid Channel 1960 MHz, Output Power = 22.36 dBm

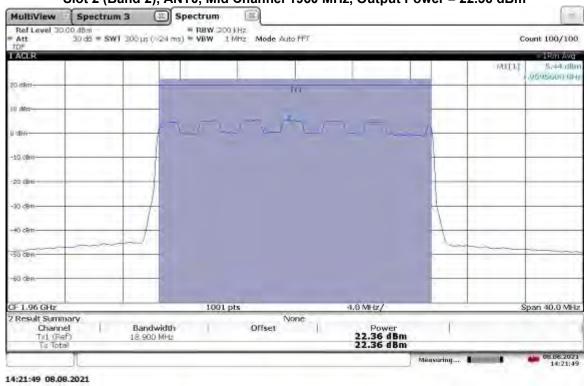


TM3.2-16QAM_20 MHz Bandwidth
Slot 2 (Band 2), ANT1, Mid Channel 1960 MHz, Output Power = 22.24 dBm

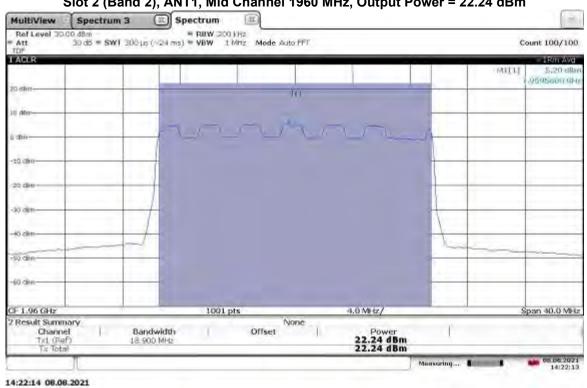


TM3.2-16QAM_20 MHz Bandwidth
Slot 2 (Band 2), ANT0, High Channel 1980 MHz, Output Power = 22.40 dBm

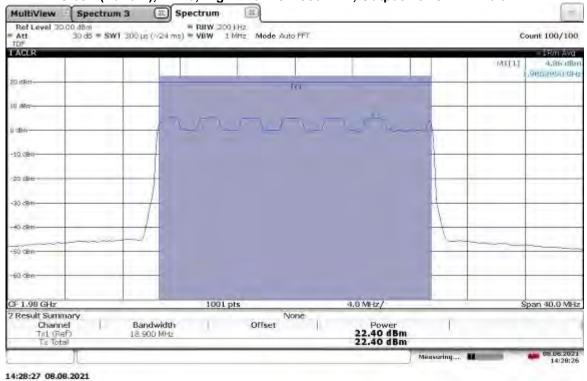


TM3.2-16QAM_20 MHz Bandwidth
Slot 2 (Band 2), ANT1, High Channel 1980 MHz, Output Power = 22.25 dBm

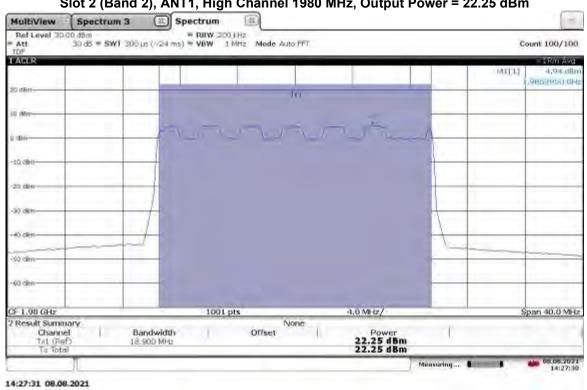


TM3.1-64QAM_5 MHz Bandwidth
Slot 2 (Band 2), ANT0, Low Channel 1932.5 MHz, Output Power = 21.87 dBm

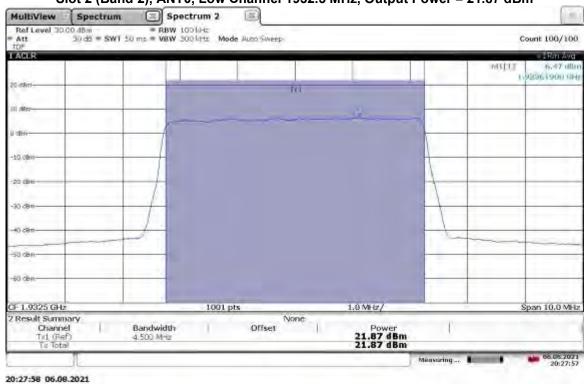


TM3.1-64QAM_5 MHz Bandwidth
Slot 2 (Band 2), ANT1, Low Channel 1932.5 MHz, Output Power = 21.94 dBm

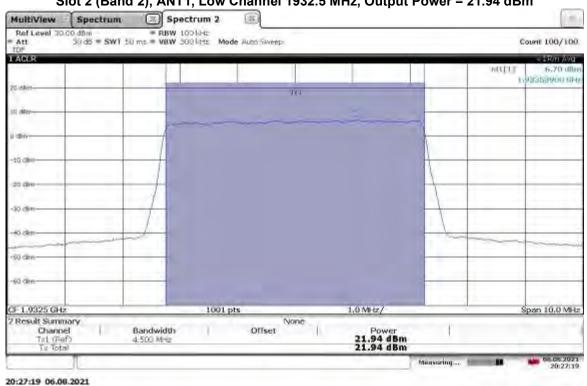


TM3.1-64QAM_5 MHz Bandwidth
Slot 2 (Band 2), ANT0, Mid Channel 1960 MHz, Output Power = 22.64 dBm

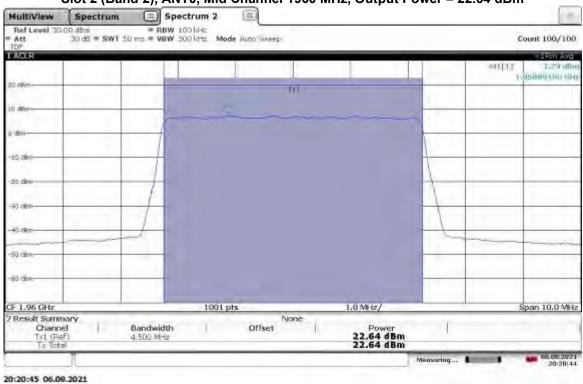


TM3.1-64QAM_5 MHz Bandwidth
Slot 2 (Band 2), ANT1, Mid Channel 1960 MHz, Output Power = 22.48 dBm

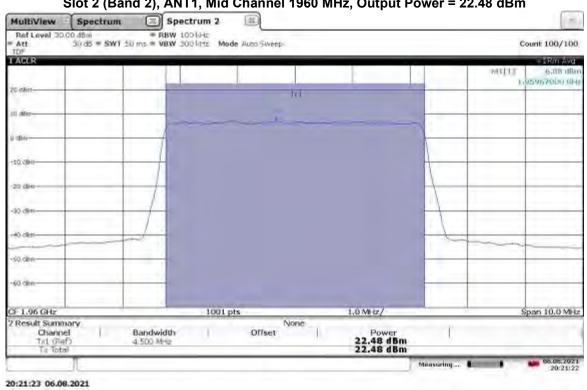

TM3.1-64QAM_5 MHz Bandwidth
Slot 2 (Band 2), ANT0, High Channel 1987.5 MHz, Output Power = 22.55 dBm

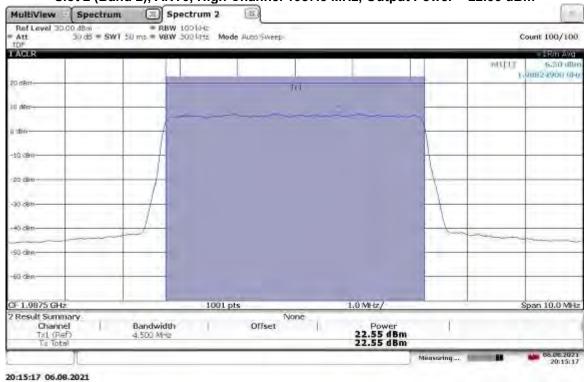


TM3.1-64QAM_5 MHz Bandwidth
Slot 2 (Band 2), ANT1, High Channel 1987.5 MHz, Output Power = 22.51 dBm

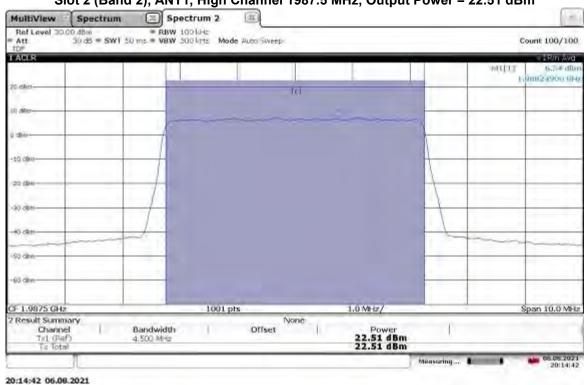


Non-Specific Radio Report Shell Rev. December 2017

Page 41 of 194


TM3.1-64QAM_10 MHz Bandwidth
Slot 2 (Band 2), ANT0, Low Channel 1935 MHz, Output Power = 22.31 dBm

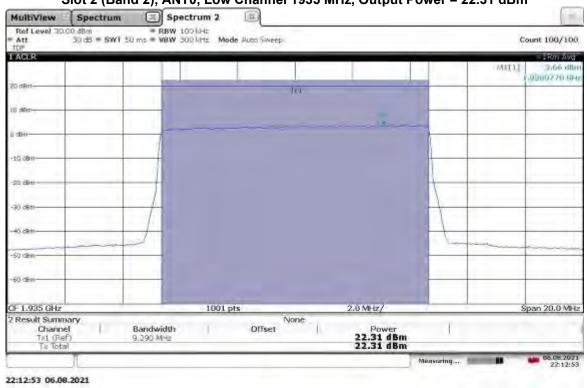


TM3.1-64QAM_10 MHz Bandwidth
Slot 2 (Band 2), ANT1, Low Channel 1935 MHz, Output Power = 22.50 dBm

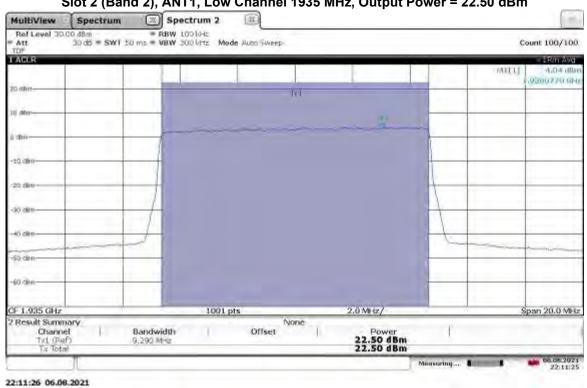


TM3.1-64QAM_10 MHz Bandwidth
Slot 2 (Band 2), ANT0, Mid Channel 1960 MHz, Output Power = 22.75 dBm

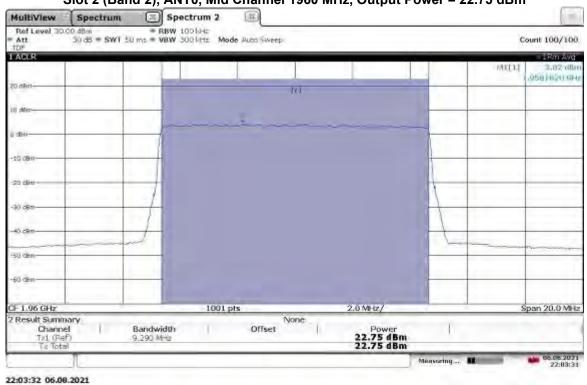


TM3.1-64QAM_10 MHz Bandwidth
Slot 2 (Band 2), ANT1, Mid Channel 1960 MHz, Output Power = 22.43 dBm

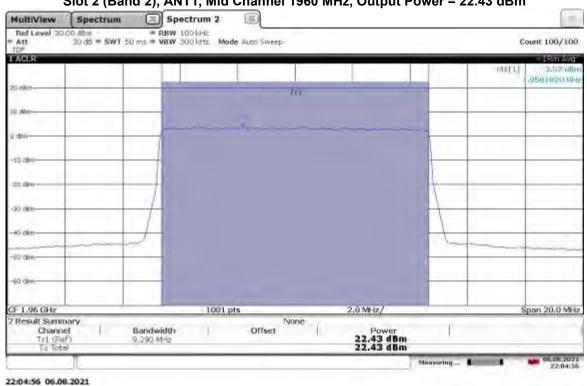


TM3.1-64QAM_10 MHz Bandwidth
Slot 2 (Band 2), ANT0, High Channel 1985 MHz, Output Power = 22.40 dBm

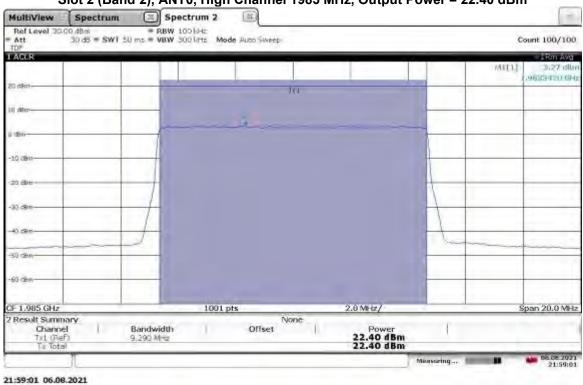


TM3.1-64QAM_10 MHz Bandwidth
Slot 2 (Band 2), ANT1, High Channel 1985 MHz, Output Power = 22.52 dBm

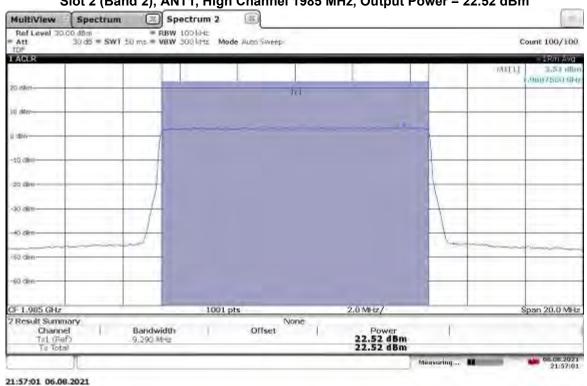


TM3.1-64QAM_15 MHz Bandwidth
Slot 2 (Band 2), ANT0, Low Channel 1937.5 MHz, Output Power = 22.49 dBm

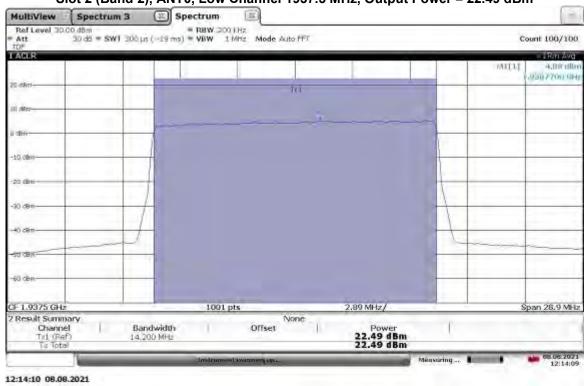


TM3.1-64QAM_15 MHz Bandwidth
Slot 2 (Band 2), ANT1, Low Channel 1937.5 MHz, Output Power = 22.71 dBm

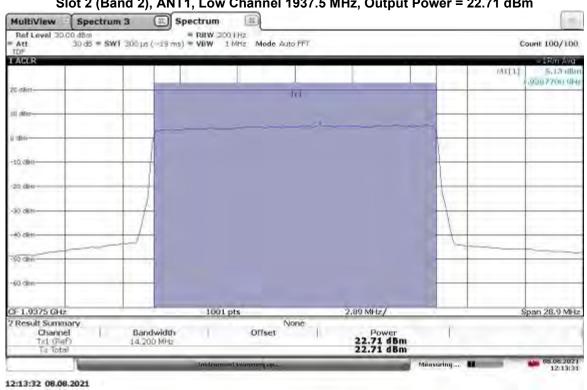


TM3.1-64QAM_15 MHz Bandwidth
Slot 2 (Band 2), ANT0, Mid Channel 1960 MHz, Output Power = 22.95 dBm

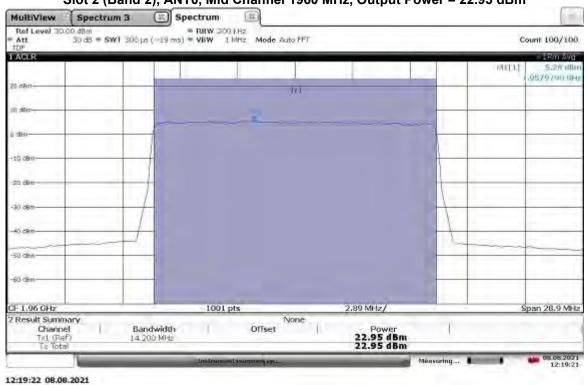


TM3.1-64QAM_15 MHz Bandwidth
Slot 2 (Band 2), ANT1, Mid Channel 1960 MHz, Output Power = 22.74 dBm

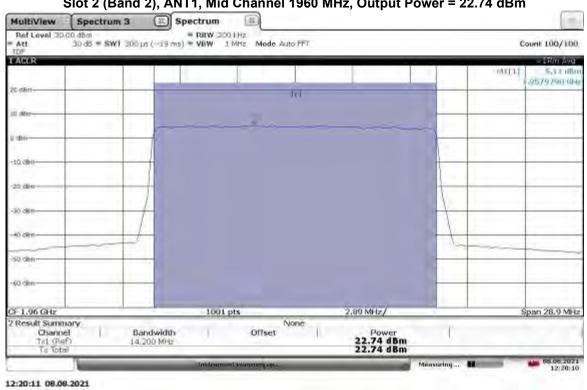


TM3.1-64QAM_15 MHz Bandwidth
Slot 2 (Band 2), ANT0, High Channel 1982.5 MHz, Output Power = 22.38 dBm

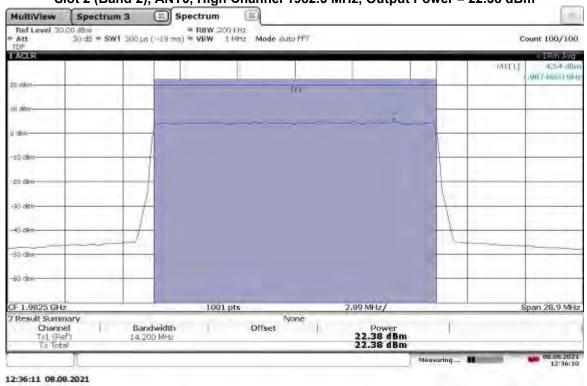


TM3.1-64QAM_15 MHz Bandwidth
Slot 2 (Band 2), ANT1, High Channel 1982.5 MHz, Output Power = 22.29 dBm

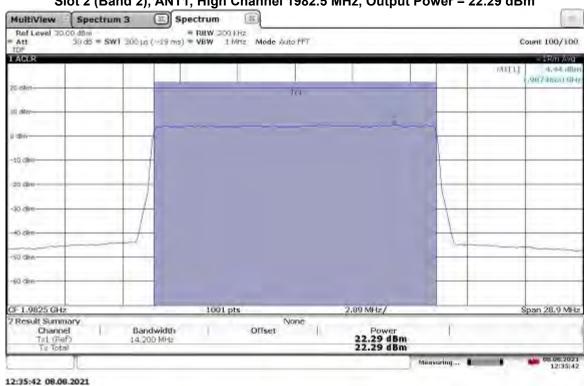


TM3.1-64QAM_20 MHz Bandwidth
Slot 2 (Band 2), ANT0, Low Channel 1940 MHz, Output Power = 22.42 dBm

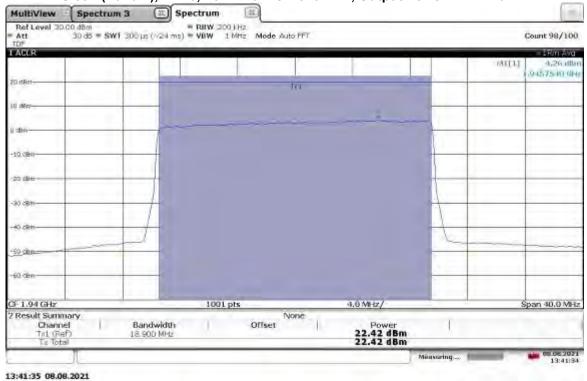


TM3.1-64QAM_20 MHz Bandwidth
Slot 2 (Band 2), ANT1, Low Channel 1940 MHz, Output Power = 22.44 dBm

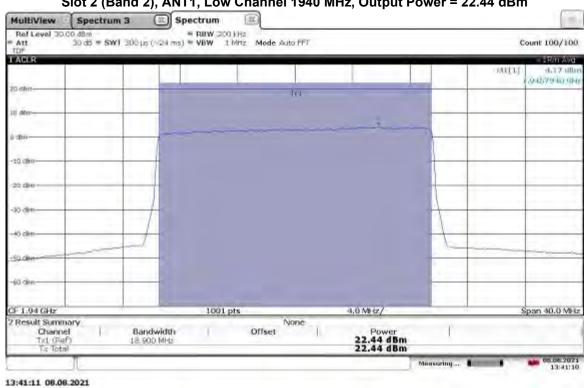


TM3.1-64QAM_20 MHz Bandwidth
Slot 2 (Band 2), ANT0, Mid Channel 1960 MHz, Output Power = 22.39 dBm

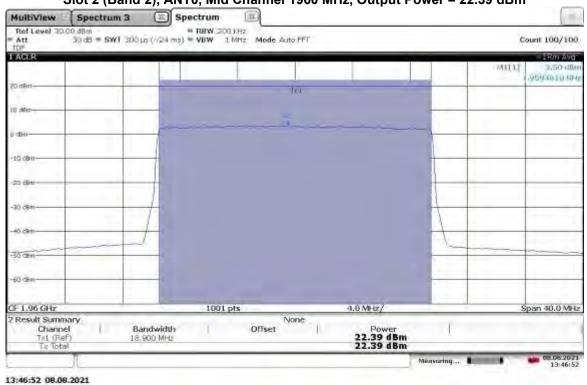


TM3.1-64QAM_20 MHz Bandwidth
Slot 2 (Band 2), ANT1, Mid Channel 1960 MHz, Output Power = 22.23 dBm

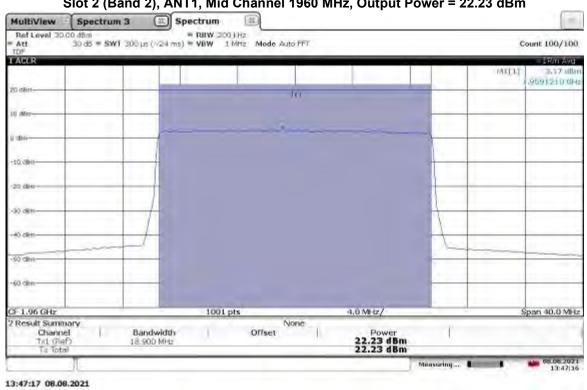


TM3.1-64QAM_20 MHz Bandwidth
Slot 2 (Band 2), ANT0, High Channel 1980 MHz, Output Power = 22.53 dBm

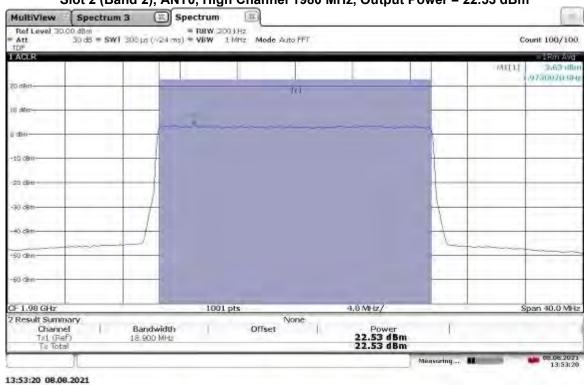


TM3.1-64QAM_20 MHz Bandwidth
Slot 2 (Band 2), ANT1, High Channel 1980 MHz, Output Power = 22.35 dBm

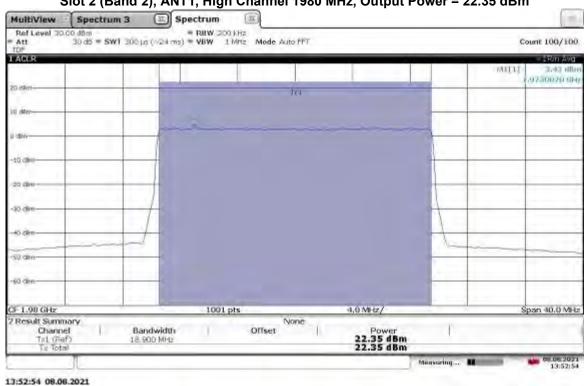

> TM3.1a-256QAM _5 MHz Bandwidth Slot 2 (Band 2), ANT0, Low Channel 1932.5 MHz, Output Power = 21.92 dBm

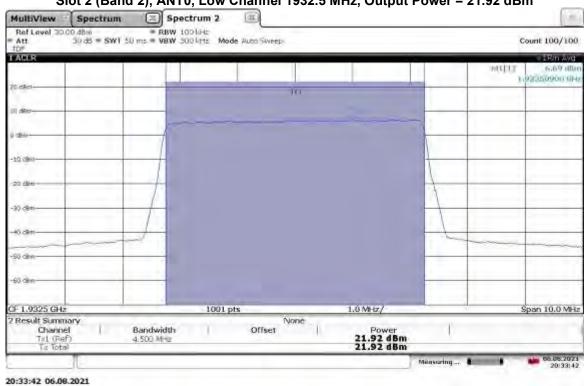


TM3.1a-256QAM _5 MHz Bandwidth Slot 2 (Band 2), ANT1, Low Channel 1932.5 MHz, Output Power = 21.88 dBm

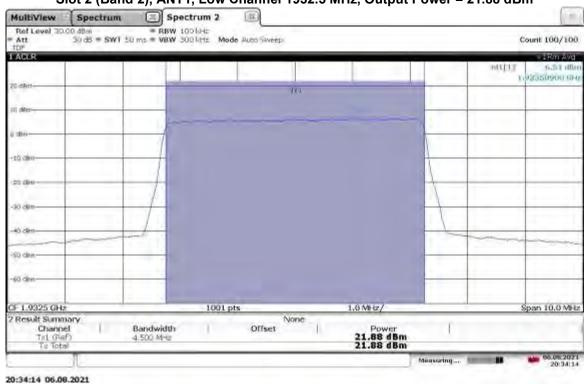


Page 51 of 194

Client: CommScope Technologies LLC / Model: RPM-A5A11-B02 with W/ 5G NR waveform With OneCell® RP5100


TM3.1a-256QAM _5 MHz Bandwidth
Slot 2 (Band 2), ANT0, Mid Channel 1960 MHz, Output Power = 22.48 dBm

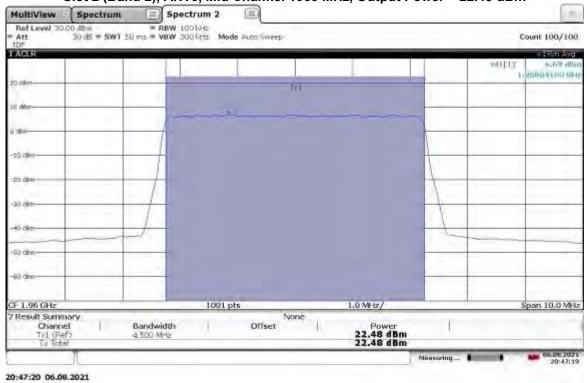


TM3.1a-256QAM _5 MHz Bandwidth
Slot 2 (Band 2), ANT1, Mid Channel 1960 MHz, Output Power = 22.45 dBm

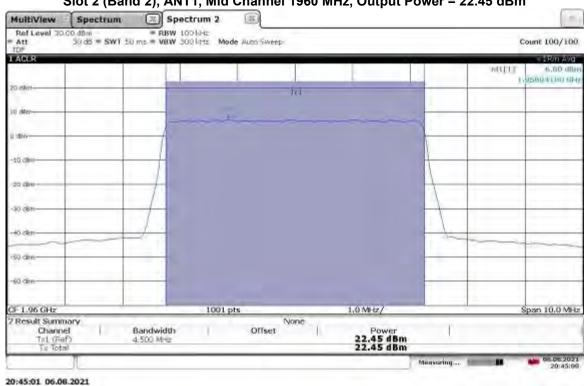


TM3.1a-256QAM _5 MHz Bandwidth
Slot 2 (Band 2), ANT0, High Channel 1987.5 MHz, Output Power = 22.42 dBm

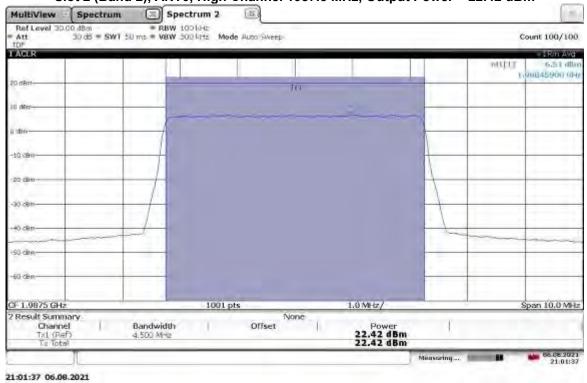


TM3.1a-256QAM _5 MHz Bandwidth
Slot 2 (Band 2), ANT1, High Channel 1987.5 MHz, Output Power = 22.36 dBm

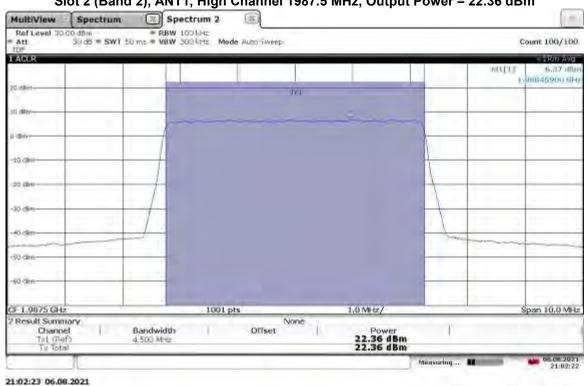


TM3.1a-256QAM _10 MHz Bandwidth
Slot 2 (Band 2), ANT0, Low Channel 1935 MHz, Output Power = 22.51 dBm

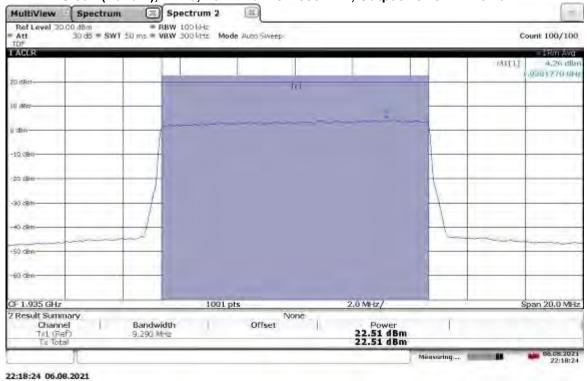


TM3.1a-256QAM _10 MHz Bandwidth
Slot 2 (Band 2), ANT1, Low Channel 1935 MHz, Output Power = 22.31 dBm

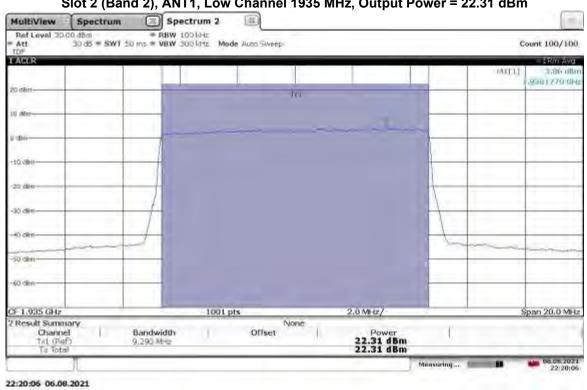


TM3.1a-256QAM _10 MHz Bandwidth
Slot 2 (Band 2), ANT0, Mid Channel 1960 MHz, Output Power = 22.55 dBm

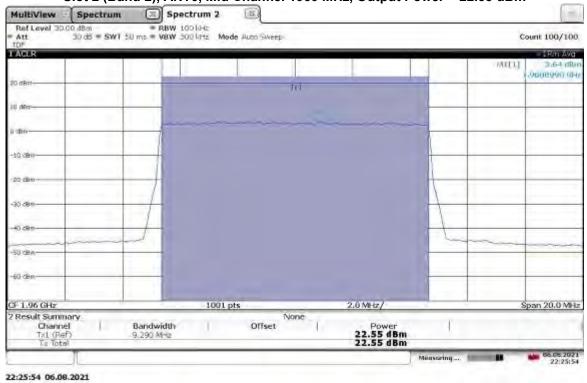


TM3.1a-256QAM _10 MHz Bandwidth
Slot 2 (Band 2), ANT1, Mid Channel 1960 MHz, Output Power = 22.60 dBm

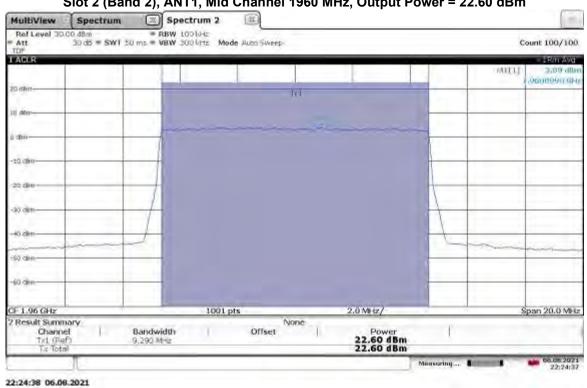


TM3.1a-256QAM _10 MHz Bandwidth
Slot 2 (Band 2), ANT0, High Channel 1985 MHz, Output Power = 22.69 dBm

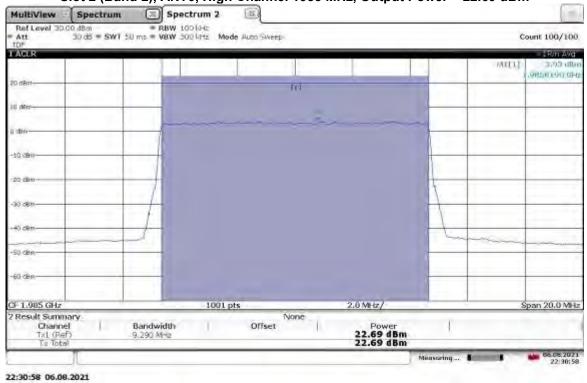


TM3.1a-256QAM _10 MHz Bandwidth
Slot 2 (Band 2), ANT1, High Channel 1985 MHz, Output Power = 22.37 dBm

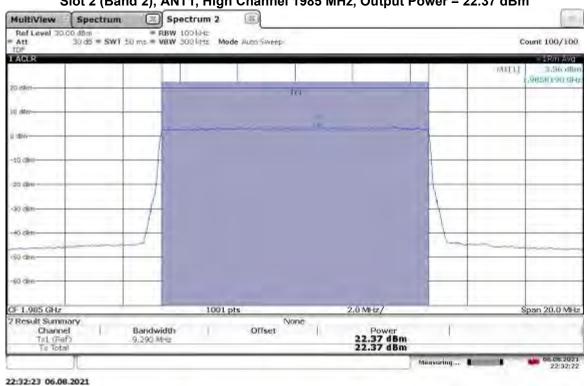


TM3.1a-256QAM _15 MHz Bandwidth
Slot 2 (Band 2), ANT0, Low Channel 1937.5 MHz, Output Power = 22.49 dBm

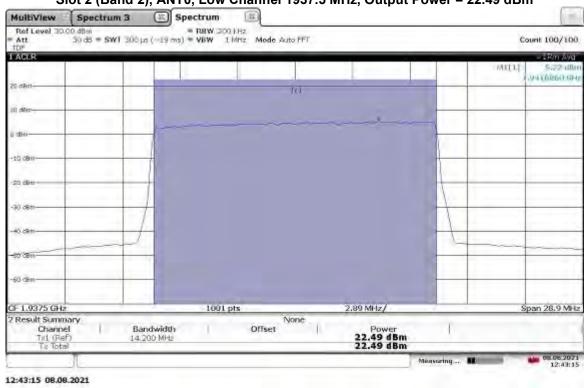


TM3.1a-256QAM _15 MHz Bandwidth
Slot 2 (Band 2), ANT1, Low Channel 1937.5 MHz, Output Power = 22.72 dBm

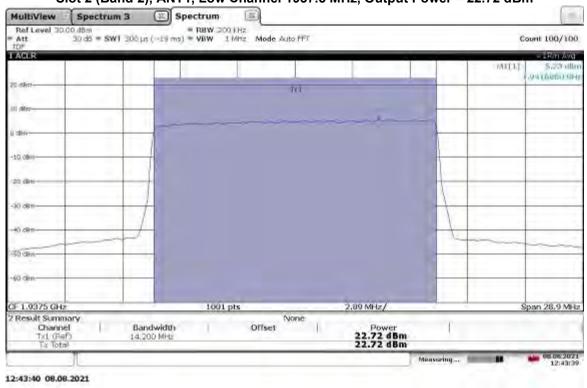


TM3.1a-256QAM _15 MHz Bandwidth
Slot 2 (Band 2), ANT0, Mid Channel 1960 MHz, Output Power = 22.50 dBm

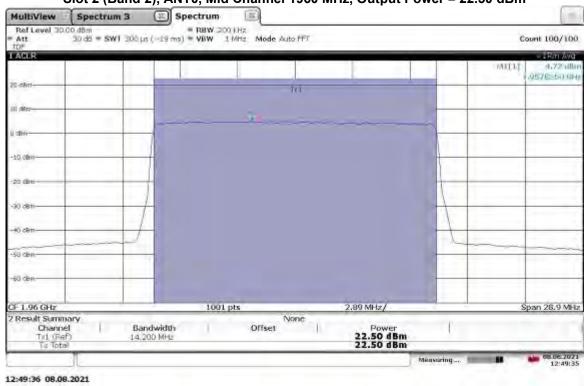


TM3.1a-256QAM _15 MHz Bandwidth
Slot 2 (Band 2), ANT1, Mid Channel 1960 MHz, Output Power = 22.44 dBm

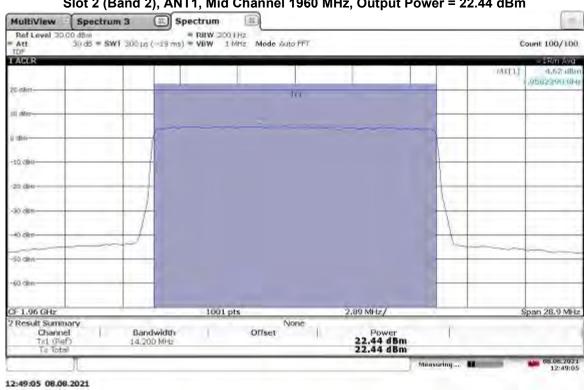


TM3.1a-256QAM _15 MHz Bandwidth
Slot 2 (Band 2), ANT0, High Channel 1932.5 MHz, Output Power = 22.54 dBm

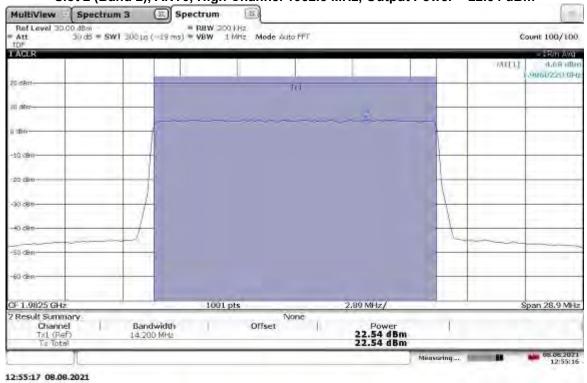


TM3.1a-256QAM _15 MHz Bandwidth
Slot 2 (Band 2), ANT1, High Channel 1982.5 MHz, Output Power = 22.27 dBm

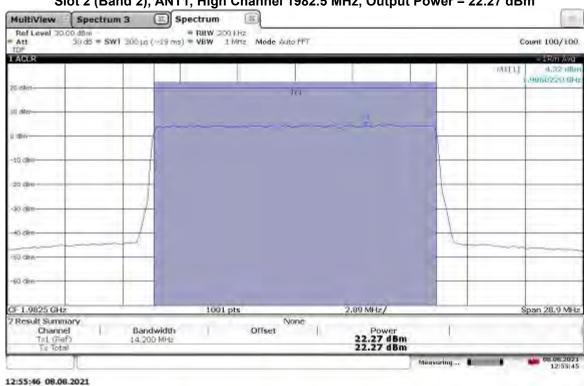

TM3.1a-256QAM _20 MHz Bandwidth Slot 2 (Band 2), ANT0, Low Channel 1940 MHz, Output Power = 22.51 dBm

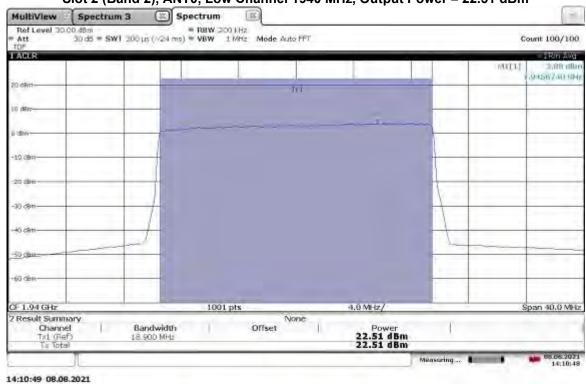


TM3.1a-256QAM _20 MHz Bandwidth Slot 2 (Band 2), ANT1, Low Channel 1940 MHz, Output Power = 22.44 dBm

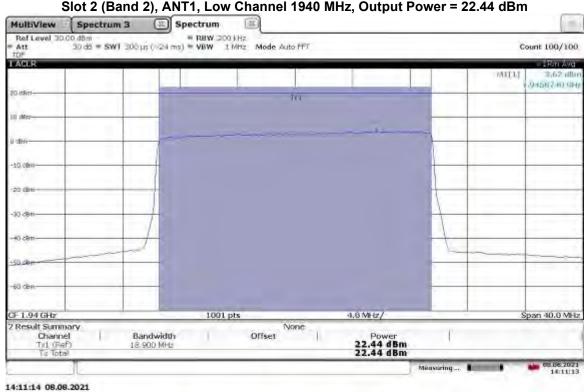


Page 60 of 194


TM3.1a-256QAM _20 MHz Bandwidth
Slot 2 (Band 2), ANT0, Mid Channel 1960 MHz, Output Power = 22.33 dBm

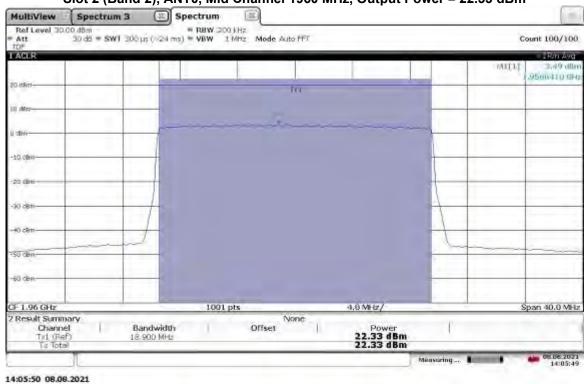


TM3.1a-256QAM _20 MHz Bandwidth
Slot 2 (Band 2), ANT1, Mid Channel 1960 MHz, Output Power = 22.28 dBm

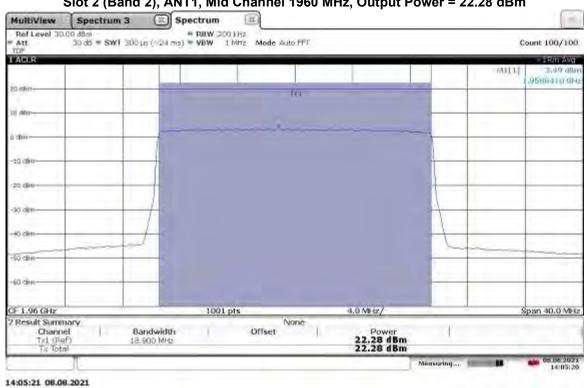

TM3.1a-256QAM _20 MHz Bandwidth
Slot 2 (Band 2), ANT0, High Channel 1980 MHz, Output Power = 22.58 dBm

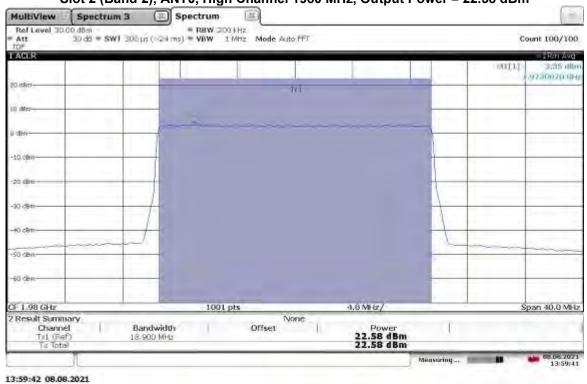

TM3.1a-256QAM _20 MHz Bandwidth
Slot 2 (Band 2), ANT1, High Channel 1980 MHz, Output Power = 22.26 dBm

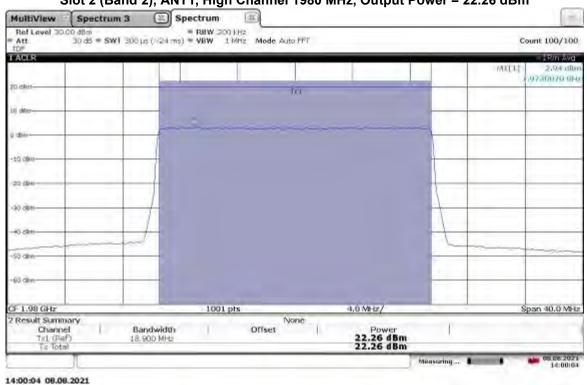

Limit for Maximum Permissible Exposure (MPE)

FCC Human RF Exposure Limits:

The FCC §1.1310 The criteria listed in table 1 was used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices shall be evaluated according to the provisions of §2.1093 of this chapter.

Part §1.1310 Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
	(A) Limits for Oc	cupational/Controlled Expo	sure	
0.3-3.0	614	1.63	*100	- 6
3.0-30	1842/f	4.89/f	*900/f ²	6
30-300	61.4	0.163	1.0	6
300-1,500	- 2		f/300	6
1,500-100,000	= = 0 7 - 2 /- 1 1 1	74 - 2.3.E 22.3 A	5	6
	(B) Limits for Genera	al Population/Uncontrolled E	xposure	
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f ²	30
30-300	27.5	0.073	0.2	30
300-1,500			f/1500	30
1,500-100,000			1.0	30

f = frequency in MHz * = Plane-wave equivalent power density

⁽¹⁾ Occupational/controlled exposure limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when a person is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure. The phrase fully aware in the context of applying these exposure limits means that an exposed person has received written and/or verbal information fully explaining the potential for RF exposure resulting from his or her employment. With the exception of transient persons, this phrase also means that an exposed person has received appropriate training regarding work practices relating to controlling or mitigating his or her exposure. Such training is not required for transient persons, but they must receive written and/or verbal information and notification (for example, using signs) concerning their exposure potential and appropriate means available to mitigate their exposure. The phrase exercise control means that an exposed person is allowed to and knows how to reduce or avoid exposure by administrative or engineering controls and work practices, such as use of personal protective equipment or time averaging of exposure.

⁽²⁾ General population/uncontrolled exposure limits apply in situations in which the general public may be exposed, or in which persons who are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.

Test Procedure

RF exposure for licensed transmitter is handled at the time of licensing, however, an MPE calculation was performed in order to show the distance at which the device is compliant with the limits of §1.1310, assuming antenna gains of 0 dBi and 4 dBi. The highest measured conducted output power was used, adjusted by +3dB to account for two antenna MIMO operation.

FCC Limit For General Population/Uncontrolled Exposure at 1.985 GHz = 1 mW/cm²

Power Density = $[EIRP] / [4\pi \times (D_{cm})^2]$

Where EIRP is in milliwatts and D is in centimeters. Setting the power density equal to the limit of 1 mW/cm² and solving for D_{cm} yields the following results.

Results:

EUT EIRP = Conducted power + Array Gain + Antenna gain in dBi

Power Density Limit = [EIRP] / $[4\pi \text{ x } (D_{cm})^2]$ 1 mW/cm² = [EIRP] / $[4\pi \text{ x } (D_{cm})^2]$ D_{cm} = ([EIRP] / $[4\pi]$)^{1/2}

For Gain = 0 dBi,

EIRP = 22.95 dBm + 10*LOG(2) + 0 dBi = 22.95 dBm + 3 dB + 0dBi

EIRP = 25.95 dBm or 393.55007546 mW

Therefore, the minimum safe distance D_{cm} is D_{cm} = ([393.55007546] / [4 π]) $^{1/2}$

D_{cm} = 5.60 cm at 0 dBi gain two antenna MIMO

For Gain = 4 dBi,

EIRP = 22.95 dBm + 10*LOG(2) + 4 dBi = 22.95 dBm + 3 dB + 4dBi

EIRP = 29.95 dBm or 988.55309466 mW

Therefore, the minimum safe distance D_{cm} is $D_{cm} = ([1078.94672] / [4\pi])^{1/2}$

D_{cm} = 8.87 cm at 4 dBi gain two antenna MIMO

For Gain = X dBi,

EIRP = 22.95 dBm + 10*LOG(2) + X dBi = 22.95 dBm + 3 dB + XdBi

EIRP = 25.95+X dBm or 393.55007546 + 10^(X/10) mW

Therefore, the minimum safe distance D_{cm} is D_{cm} = ([393.55007546 + 10^(X/10)] / [4 π])^{1/2}

 $D_{cm} = 0.282 * (393.55007546 + 10^{\Lambda}(X/10))^{1/2}$ cm at X dBi gain two antenna MIMO

07/28/2021, 07/29/2021, 07/30/2021, Test Date: Test Personnel: Vathana Ven 08/03/2021 Supervising/Reviewing Engineer: (Where Applicable) N/A Product Standard: FCC Part 24 Limit Applied: See report section 6.3 Input Voltage: 48 VDC (POE) Pretest Verification w/ Ambient Temperature: 22, 23, 23, 23 °C Ambient Signals or BB Source: N/A Relative Humidity: 21, 15, 26, 47 % Atmospheric Pressure: 1004, 1013, 1004, 980 mbars

Deviations, Additions, or Exclusions: None

Intertek

Report Number: 104751739BOX-013 Issued: 09/29/2021 Revised: 02/02/2022

7 **Occupied Bandwidth**

7.1 Method

Tests are performed in accordance with ANSI C63.26 and CFR47 FCC Parts 2.1049 and 24.

TEST SITE: EMC Lab

The EMC Lab has one Semi-anechoic Chamber and one Shielded Chamber. AC Mains Power is available at 120, 230, and 277 Single Phase; 208, 400, and 480 3-Phase. Large reference ground-planes are installed in the general lab area to facilitate EMC work not requiring a shielded environment.

7.2 Test Equipment Used:

Asset	Description	Manufacturer	Model	Serial	Cal Date	Cal Due
CEN001'	DC-40GHz attenuator 20dB	Centric RF	C411-20	CEN001	01/22/2021	01/22/2022
CBLSHF204'	Cable, SMA - SMA, 9kHz -40GHz, (Cable Kit 5)	Huber + Suhner	Sucoflex 102EA	234714001	02/03/2021	02/03/2022
ROS005-1'	Signal and Spectrum Analyzer	Rohde and Shwartz	FSW43	100646	10/27/2020	10/27/2021
DAV005'	Weather Station	Davis	6250	MS191218083	02/07/2021	02/07/2022

Software Utilized:

Name	Manufacturer	Version
None		

7.3 Results:

The sample tested was found to Comply.

§24.238(b) The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

§2.1049: The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission.

Non-Specific Radio Report Shell Rev. December 2017 Client: CommScope Technologies LLC / Model: RPM-A5A11-B02 with W/ 5G NR waveform With OneCell® RP5100

Slot 2 (Band 2), Bandwidth: 5 MHz, Modulation: TM1.1-QPSK

Channel	Frequency (MHz)	Antenna Port	Occupied BW (MHz)
Low	1932.50	ANT0	4.47
		ANT1	4.47
Mid	1960.00	ANT0	4.47
		ANT1	4.47
High	1987.50	ANT0	4.47
		ANT1	4.47

Slot 2 (Band 2), Bandwidth: 10 MHz, Modulation: TM1.1-QPSK

Channel	Frequency (MHz)	Antenna Port	Occupied BW (MHz)
Low	1935.00	ANT0	9.29
		ANT1	9.29
Mid	1960.00	ANT0	9.30
		ANT1	9.30
High	1985.00	ANT0	9.30
_		ANT1	9.30

Slot 2 (Band 2), Bandwidth: 15 MHz, Modulation: TM1.1-QPSK

	0.01 = (Dania =), Dania matini 10 mm=, modali anomi 1 mm = q: 0.11			
Channel	Frequency (MHz)	Antenna Port	Occupied BW (MHz)	
Low	1937.50	ANT0	14.16	
		ANT1	14.16	
Mid	1960.00	ANT0	14.16	
		ANT1	14.16	
High	1982.50	ANT0	14.18	
		ANT1	14.18	

Slot 2 (Band 2), Bandwidth: 20 MHz, Modulation: TM1.1-QPSK

	0.012 (Dana 2); Danamatin 20 iiii 2; iii 0 aaaata 1 iii 1 a			
Channel	Frequency (MHz)	Antenna Port	Occupied BW (MHz)	
Low	1940.00	ANT0	18.89	
		ANT1	18.89	
Mid	1960.00	ANT0	18.88	
		ANT1	18.89	
High	1980.00	ANT0	18.92	
		ANT1	18.93	

Slot 2 (Band 2), Bandwidth: 5 MHz, Modulation: TM3.2-16QAM

	Siot 2 (Band 2), Bandwidth. 5 MHZ, Modulation. TMS.2-16QAM				
Channel	Frequency (MHz)	Antenna Port	Occupied BW (MHz)		
Low	1932.50	ANT0	4.51		
		ANT1	4.51		
Mid	1960.00	ANT0	4.50		
		ANT1	4.50		
High	1987.50	ANT0	4.50		
		ANT1	4.50		

Non-Specific Radio Report Shell Rev. December 2017 Page 66 of 194

Slot 2 (Band 2), Bandwidth: 10 MHz, Modulation: TM3.2-16QAM

Channel	Frequency (MHz)	Antenna Port	Occupied BW (MHz)
Low	1935.00	ANT0	9.23
		ANT1	9.23
Mid	1960.00	ANT0	9.23
		ANT1	9.23
High	1985.00	ANT0	9.24
		ANT1	9.24

Slot 2 (Band 2), Bandwidth: 15 MHz, Modulation: TM3.2-16QAM

Channel	Frequency (MHz)	Antenna Port	Occupied BW (MHz)
Low	1937.50	ANT0	14.15
		ANT1	14.15
Mid	1960.00	ANT0	14.16
		ANT1	14.16
High	1982.50	ANT0	14.17
		ANT1	14.17

Slot 2 (Band 2), Bandwidth: 20 MHz, Modulation: TM3,2-16QAM

•	Clot 2 (Bulla 2), Bullawiath. 20 Mil 2, Modulation: Time:2 TogAn			
Channel	Frequency (MHz)	Antenna Port	Occupied BW (MHz)	
Low	1940.00	ANT0	18.95	
		ANT1	18.95	
Mid	1960.00	ANT0	18.95	
		ANT1	18.93	
High	1980.00	ANT0	18.98	
		ANT1	18.98	

Slot 2 (Band 2), Bandwidth: 5 MHz, Modulation: TM3.1-64QAM

	0.00 = (Dana =); Danamatin 0 iiii =; iiio aanatioiii 1 iiio 1 · · · · · · · · · ·			
Channel	Frequency (MHz)	Antenna Port	Occupied BW (MHz)	
Low	1932.50	ANT0	4.48	
		ANT1	4.48	
Mid	1960.00	ANT0	4.48	
		ANT1	4.48	
High	1987.50	ANT0	4.48	
		ANT1	4.48	

Slot 2 (Band 2), Bandwidth: 10 MHz, Modulation: TM3.1-64QAM

Siot 2 (Band 2), Bandwidth. 10 MHz, Modulation. 1M3.1-64QAM			
Channel	Frequency (MHz)	Antenna Port	Occupied BW (MHz)
Low	1935.00	ANT0	9.30
		ANT1	9.29
Mid	1960.00	ANT0	9.30
		ANT1	9.30
High	1985.00	ANT0	9.30
		ANT1	9.30

Non-Specific Radio Report Shell Rev. December 2017 Page 67 of 194

Slot 2 (Band 2), Bandwidth: 15 MHz, Modulation: TM3.1-64QAM

Channel	Frequency (MHz)	Antenna Port	Occupied BW (MHz)
Low	1937.50	ANT0	14.12
		ANT1	14.12
Mid	1960.00	ANT0	14.13
		ANT1	14.12
High	1982.50	ANT0	14.14
		ANT1	14.15

Slot 2 (Band 2), Bandwidth: 20 MHz, Modulation: TM3.1-64QAM

0.01 = (2.01.0 -); 2.01.0 11.0 11.0 1.0 1.0 1.0 1.0 1.0 1.0			
Channel	Frequency (MHz)	Antenna Port	Occupied BW (MHz)
Low	1940.00	ANT0	18.88
		ANT1	18.87
Mid	1960.00	ANT0	18.87
		ANT1	18.89
High	1980.00	ANT0	18.91
		ANT1	18.92

Slot 2 (Band 2), Bandwidth: 5 MHz, Modulation: TM3.1a-256QAM

Siot 2 (Band 2), Bandwidth. 5 Will2, Woddiation. 1 Wis. 14-250QAW			
Channel	Frequency (MHz)	Antenna Port	Occupied BW (MHz)
Low	1932.50	ANT0	4.48
		ANT1	4.48
Mid	1960.00	ANT0	4.48
		ANT1	4.48
High	1987.50	ANT0	4.48
		ANT1	4.48

Slot 2 (Band 2), Bandwidth: 10 MHz, Modulation: TM3.1a-256QAM_

Siot 2 (Bana 2), Banawiath. 10 MHz, Modulation. 1143.14-230QAM			
Channel	Frequency (MHz)	Antenna Port	Occupied BW (MHz)
Low	1935.00	ANT0	9.29
		ANT1	9.29
Mid	1960.00	ANT0	9.29
		ANT1	9.29
High	1985.00	ANT0	9.30
		ANT1	9.30

Slot 2 (Band 2), Bandwidth: 15 MHz, Modulation: TM3.1a-256QAM

Channel	Frequency (MHz)	Antenna Port	Occupied BW (MHz)
Low	1937.500	ANT0	14.12
		ANT1	14.13
Mid	1960.00	ANT0	14.12
		ANT1	14.12
High	1982.50	ANT0	14.11
		ANT1	14.14

Non-Specific Radio Report Shell Rev. December 2017 Page 68 of 194 Client: CommScope Technologies LLC / Model: RPM-A5A11-B02 with W/ 5G NR waveform With OneCell® RP5100

Intertek

Report Number: 104751739BOX-013 Issued: 09/29/2021 Revised: 02/02/2022

Slot 2 (Band 2), Bandwidth: 20 MHz, Modulation: TM3.1a-256QAM

Channel	Frequency (MHz)	Antenna Port	Occupied BW (MHz)
Low	1940	ANT0	18.90
		ANT1	18.92
Mid	1960	ANT0	18.92
		ANT1	18.92
High	1980	ANT0	18.96
		ANT1	18.95

Intertek


Report Number: 104751739BOX-013 Issued: 09/29/2021 Revised: 02/02/2022

7.4 Setup Photograph:


Photographs are available in another exhibit

7.5 Plots/Data:

TM1.1-QPSK_5 MHz Bandwidth
Slot 2 (Band 2), ANT0, Low Channel Occupied Bandwidth

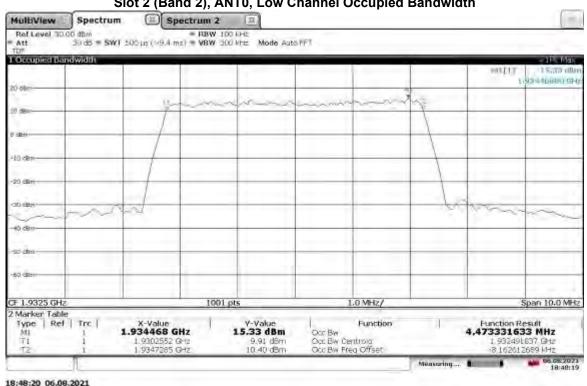


TM1.1-QPSK_5 MHz Bandwidth
Slot 2 (Band 2), ANT1, Low Channel Occupied Bandwidth

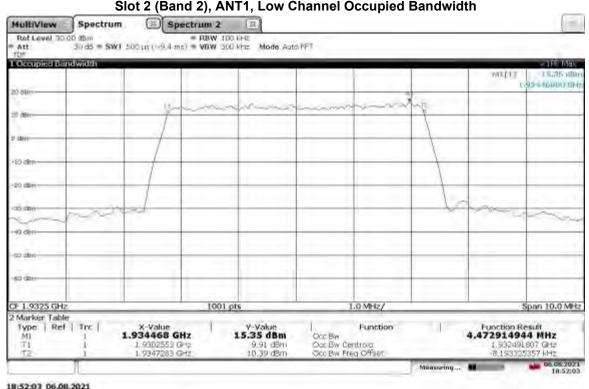


Non-Specific Radio Report Shell Rev. December 2017

Page 71 of 194

TM1.1-QPSK_5 MHz Bandwidth
Slot 2 (Band 2), ANT0, Mid Channel Occupied Bandwidth

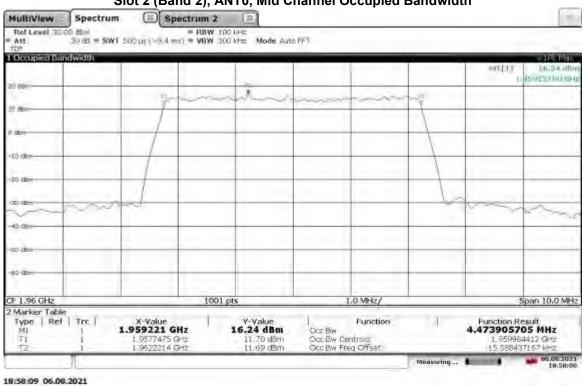


TM1.1-QPSK_5 MHz Bandwidth
Slot 2 (Band 2), ANT1, Mid Channel Occupied Bandwidth

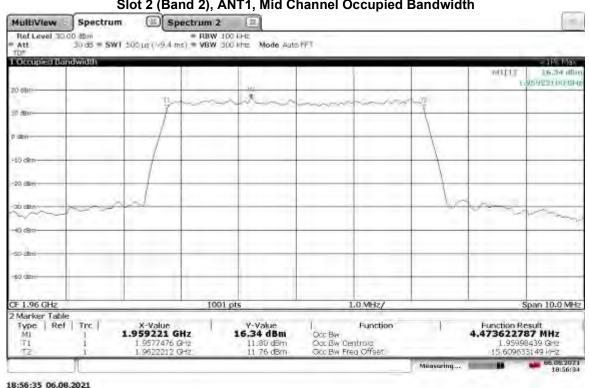


Non-Specific Radio Report Shell Rev. December 2017

Page 72 of 194

TM1.1-QPSK_5 MHz Bandwidth
Slot 2 (Band 2), ANT0, High Channel Occupied Bandwidth

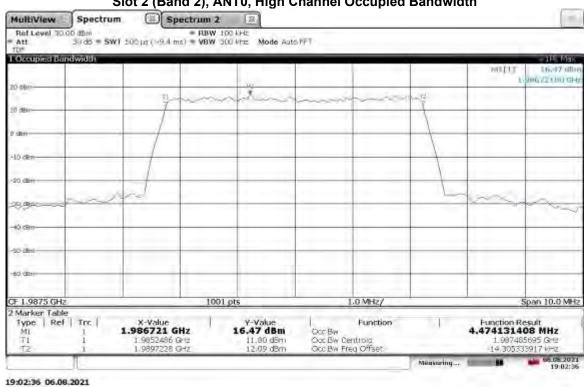


TM1.1-QPSK_5 MHz Bandwidth
Slot 2 (Band 2), ANT1, High Channel Occupied Bandwidth

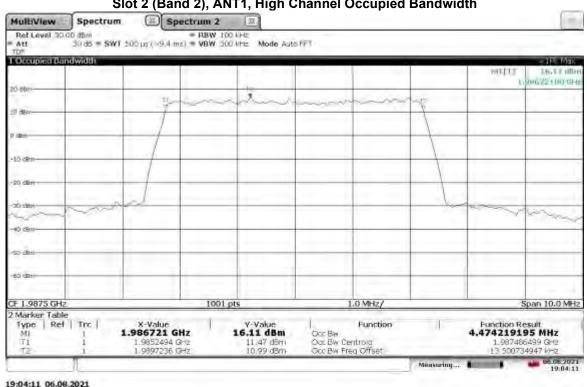


Non-Specific Radio Report Shell Rev. December 2017

Page 73 of 194


TM1.1-QPSK_10 MHz Bandwidth Slot 2 (Band 2), ANT0, Low Channel Occupied Bandwidth

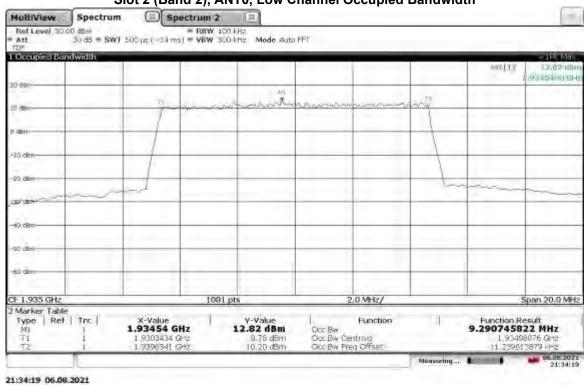


TM1.1-QPSK_10 MHz Bandwidth
Slot 2 (Band 2), ANT1, Low Channel Occupied Bandwidth

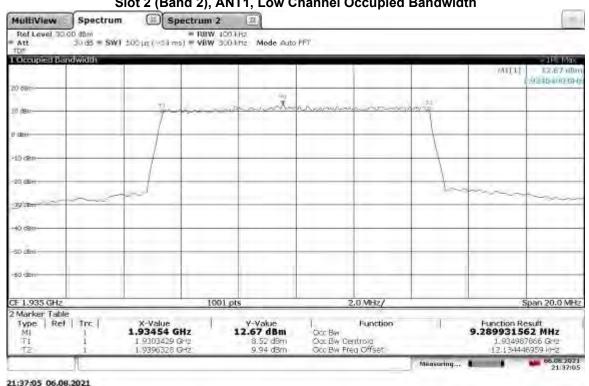

TM1.1-QPSK_10 MHz Bandwidth Slot 2 (Band 2), ANT0, Mid Channel Occupied Bandwidth

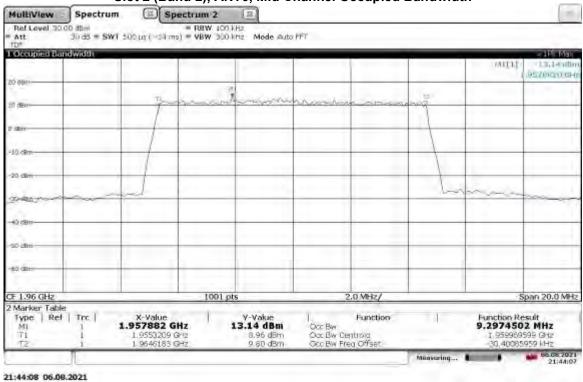


TM1.1-QPSK_10 MHz Bandwidth Slot 2 (Band 2), ANT1, Mid Channel Occupied Bandwidth

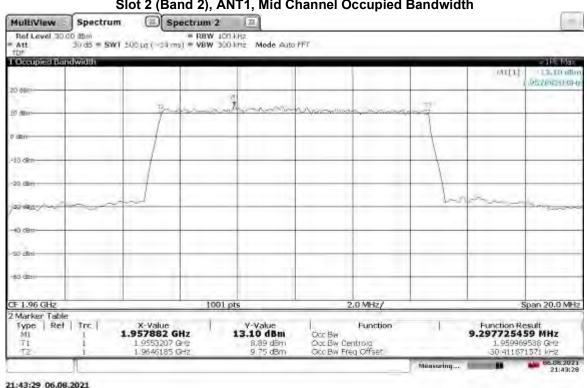


Non-Specific Radio Report Shell Rev. December 2017

Page 75 of 194

TM1.1-QPSK_10 MHz Bandwidth
Slot 2 (Band 2), ANT0, High Channel Occupied Bandwidth

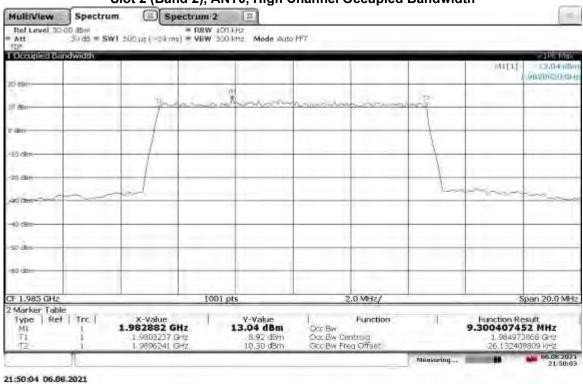


TM1.1-QPSK_10 MHz Bandwidth
Slot 2 (Band 2), ANT1, High Channel Occupied Bandwidth

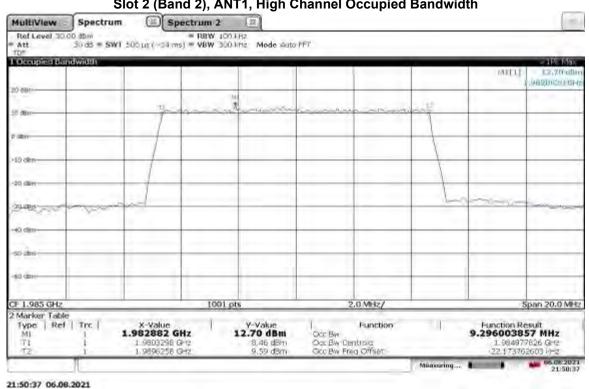


Non-Specific Radio Report Shell Rev. December 2017

Page 76 of 194

TM1.1-QPSK_15 MHz Bandwidth Slot 2 (Band 2), ANT0, Low Channel Occupied Bandwidth

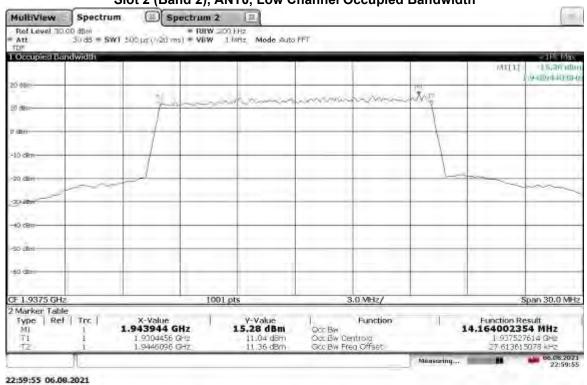


TM1.1-QPSK_15 MHz Bandwidth
Slot 2 (Band 2), ANT1, Low Channel Occupied Bandwidth

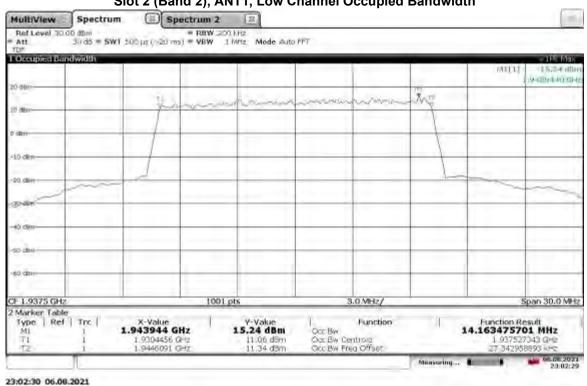


Report Number: 104751739BOX-013

Issued: 09/29/2021 Revised: 02/02/2022


TM1.1-QPSK_15 MHz Bandwidth
Slot 2 (Band 2), ANT0, Mid Channel Occupied Bandwidth

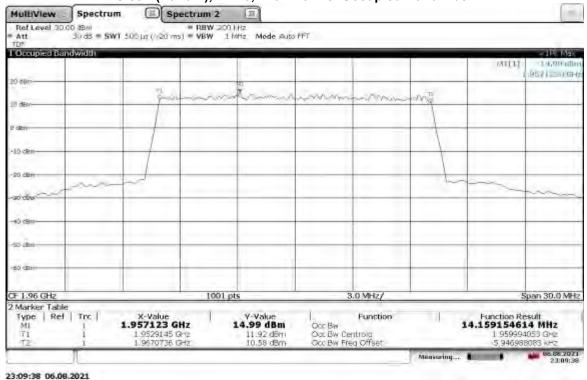


TM1.1-QPSK_15 MHz Bandwidth
Slot 2 (Band 2), ANT1, Mid Channel Occupied Bandwidth

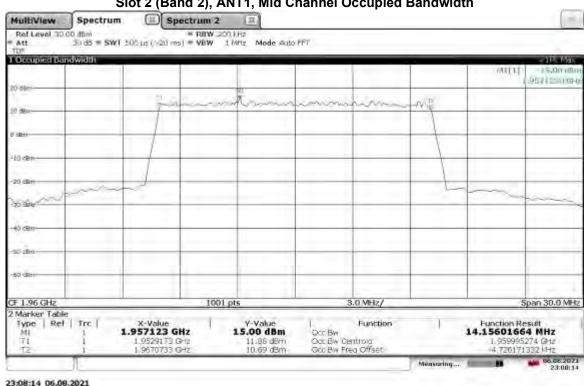


TM1.1-QPSK_15 MHz Bandwidth
Slot 2 (Band 2), ANT0, High Channel Occupied Bandwidth

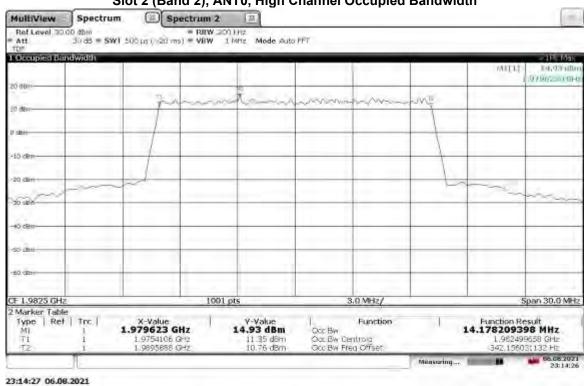


TM1.1-QPSK_15 MHz Bandwidth

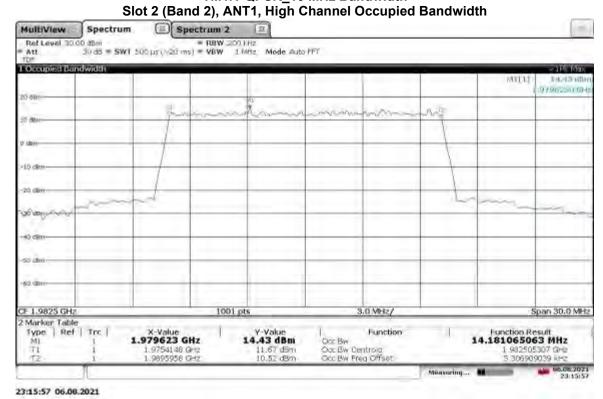


TM1.1-QPSK_20 MHz Bandwidth Slot 2 (Band 2), ANT0, Low Channel Occupied Bandwidth

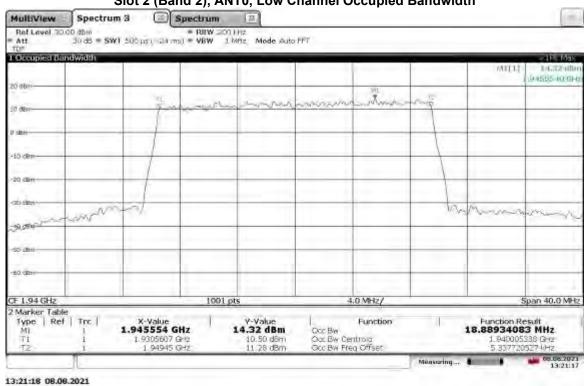


TM1.1-QPSK_20 MHz Bandwidth
Slot 2 (Band 2), ANT1, Low Channel Occupied Bandwidth

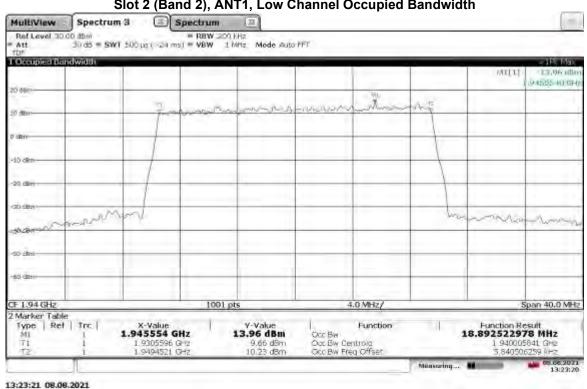


TM1.1-QPSK_20 MHz Bandwidth Slot 2 (Band 2), ANT0, Mid Channel Occupied Bandwidth

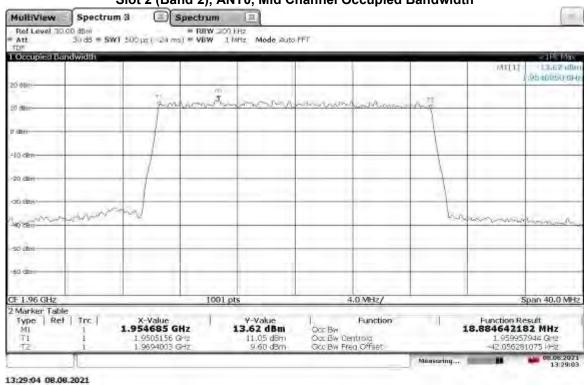


TM1.1-QPSK_20 MHz Bandwidth Slot 2 (Band 2), ANT1, Mid Channel Occupied Bandwidth

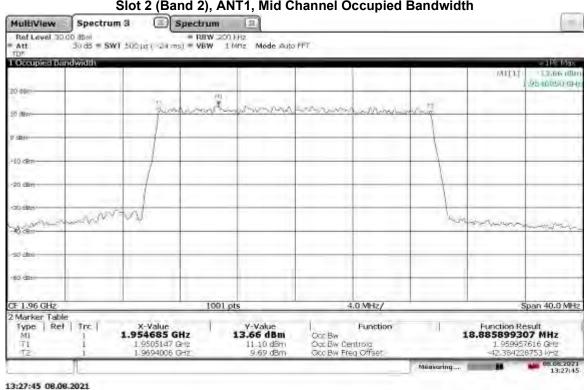

TM1.1-QPSK_20 MHz Bandwidth
Slot 2 (Band 2), ANT0, High Channel Occupied Bandwidth

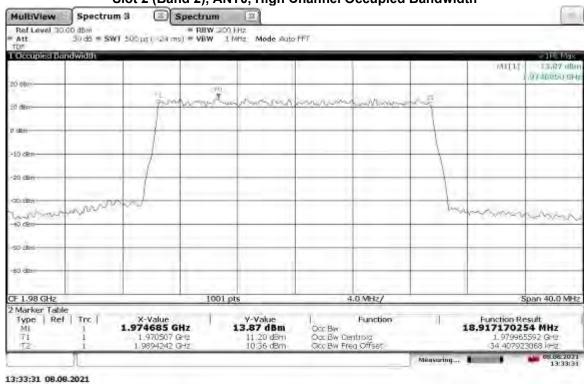


TM1.1-QPSK_20 MHz Bandwidth
Slot 2 (Band 2), ANT1, High Channel Occupied Bandwidth

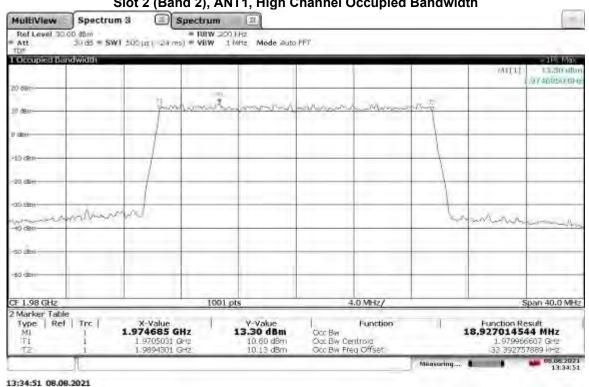


Non-Specific Radio Report Shell Rev. December 2017

Page 82 of 194

TM3.2-16QAM_5 MHz Bandwidth Slot 2 (Band 2), ANT0, Low Channel Occupied Bandwidth

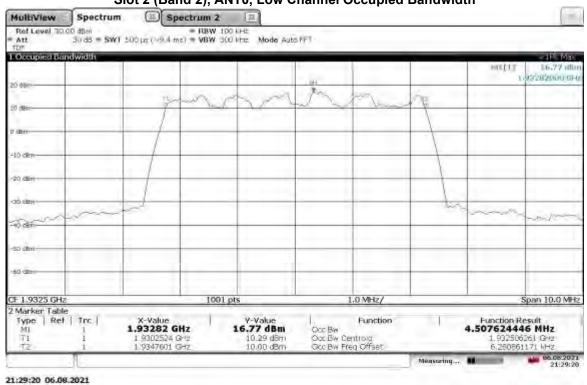


TM3.2-16QAM_5 MHz Bandwidth
Slot 2 (Band 2), ANT1, Low Channel Occupied Bandwidth

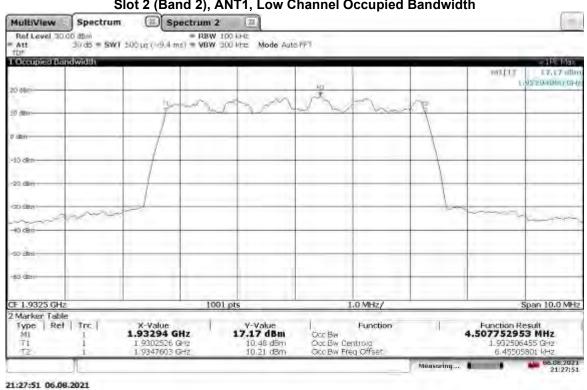


Non-Specific Radio Report Shell Rev. December 2017


Page 83 of 194

TM3.2-16QAM_5 MHz Bandwidth Slot 2 (Band 2), ANT0, Mid Channel Occupied Bandwidth

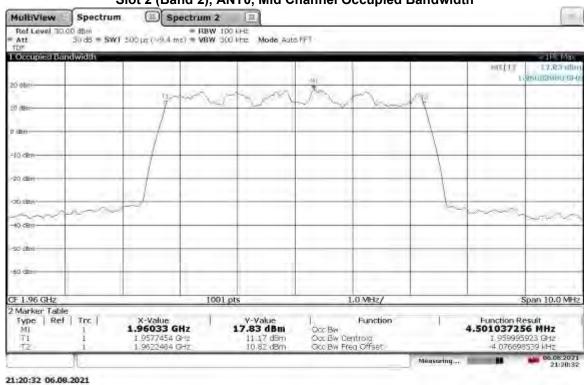


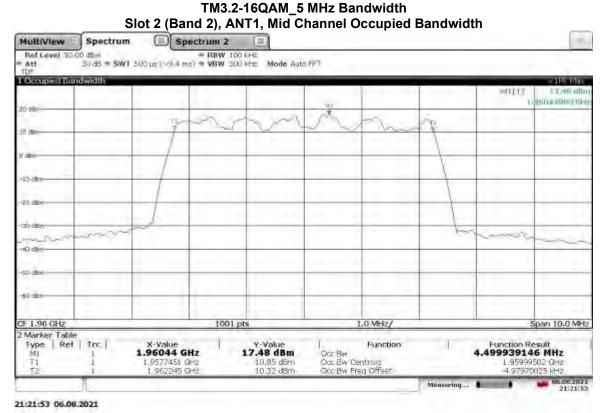


TM3.2-16QAM_5 MHz Bandwidth
Slot 2 (Band 2), ANT0, High Channel Occupied Bandwidth

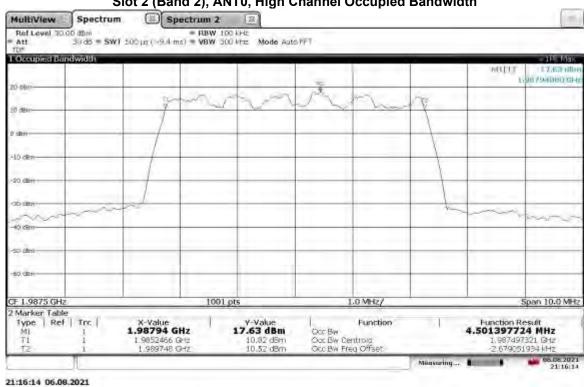


TM3.2-16QAM_5 MHz Bandwidth
Slot 2 (Band 2), ANT1, High Channel Occupied Bandwidth

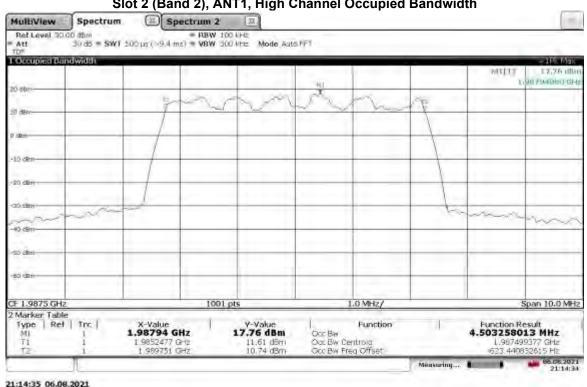

TM3.2-16QAM_10 MHz Bandwidth
Slot 2 (Band 2), ANT0, Low Channel Occupied Bandwidth

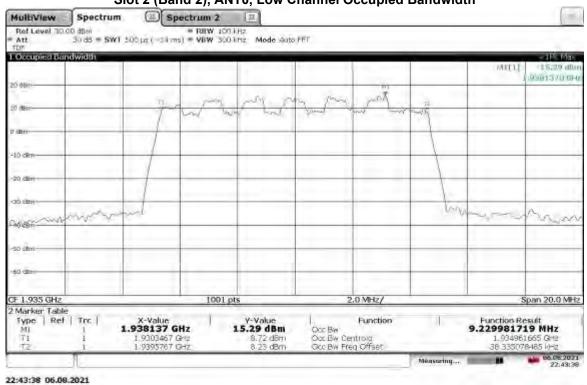


TM3.2-16QAM_10 MHz Bandwidth
Slot 2 (Band 2), ANT1, Low Channel Occupied Bandwidth

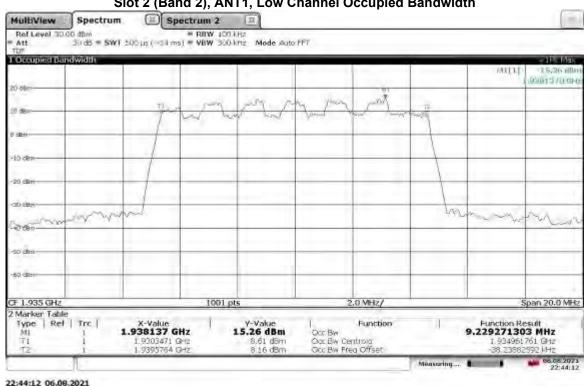


Non-Specific Radio Report Shell Rev. December 2017

Page 86 of 194


TM3.2-16QAM_10 MHz Bandwidth
Slot 2 (Band 2), ANT0, Mid Channel Occupied Bandwidth

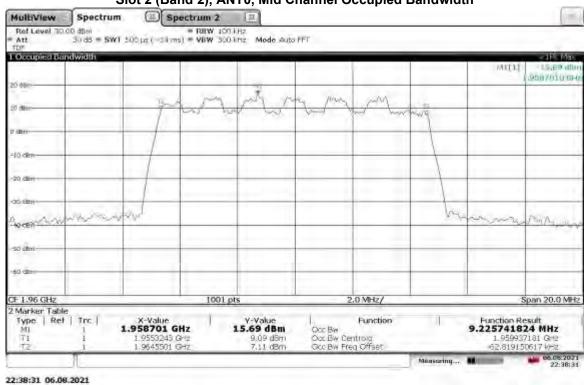


TM3.2-16QAM_10 MHz Bandwidth
Slot 2 (Band 2), ANT1, Mid Channel Occupied Bandwidth

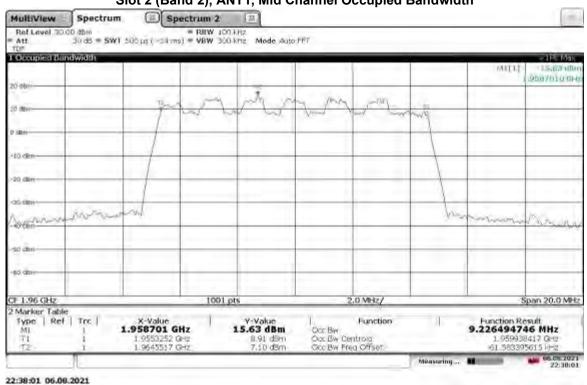


TM3.2-16QAM_10 MHz Bandwidth Slot 2 (Band 2), ANT0, High Channel Occupied Bandwidth

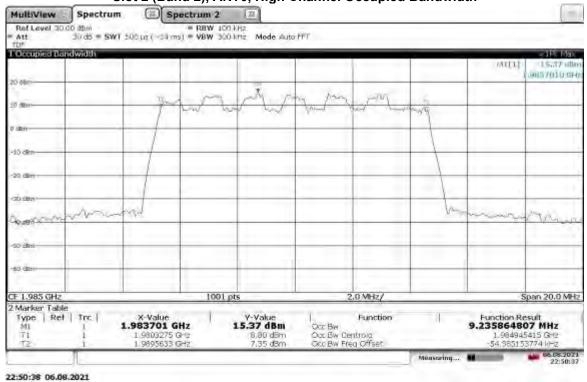


TM3.2-16QAM_10 MHz Bandwidth
Slot 2 (Band 2), ANT1, High Channel Occupied Bandwidth

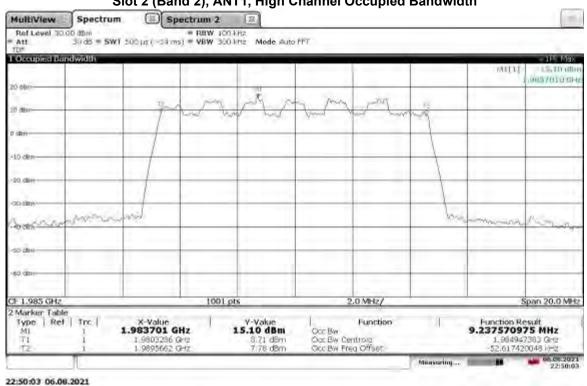


TM3.2-16QAM_15 MHz Bandwidth
Slot 2 (Band 2), ANT0, Low Channel Occupied Bandwidth

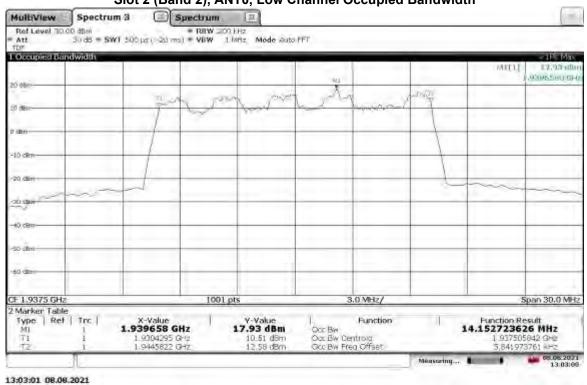


TM3.2-16QAM_15 MHz Bandwidth
Slot 2 (Band 2), ANT1, Low Channel Occupied Bandwidth

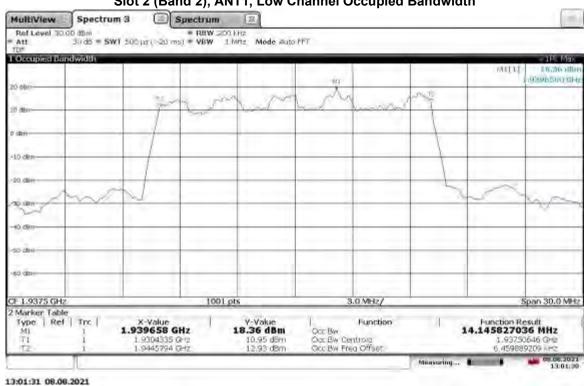


TM3.2-16QAM_15 MHz Bandwidth Slot 2 (Band 2), ANT0, Mid Channel Occupied Bandwidth

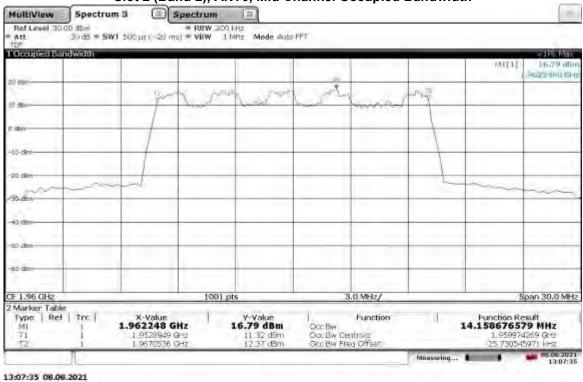


TM3.2-16QAM_15 MHz Bandwidth Slot 2 (Band 2), ANT1, Mid Channel Occupied Bandwidth

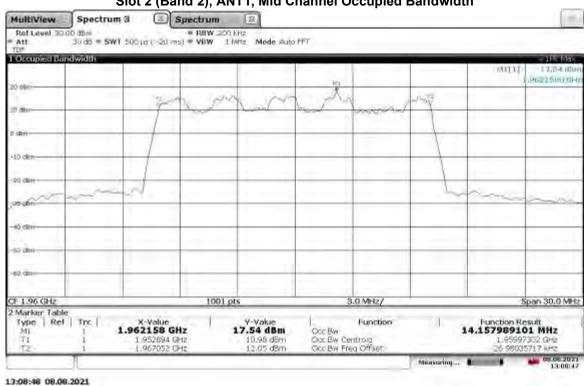


TM3.2-16QAM_15 MHz Bandwidth Slot 2 (Band 2), ANT0, High Channel Occupied Bandwidth

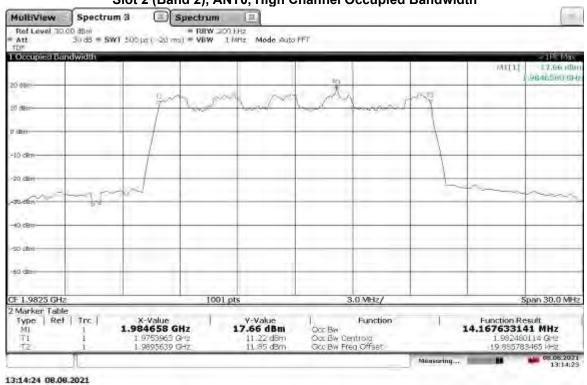


TM3.2-16QAM_15 MHz Bandwidth Slot 2 (Band 2), ANT1, High Channel Occupied Bandwidth

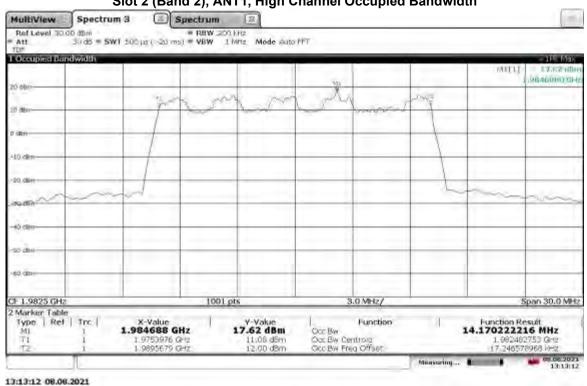


TM3.2-16QAM_20 MHz Bandwidth
Slot 2 (Band 2), ANT0, Low Channel Occupied Bandwidth

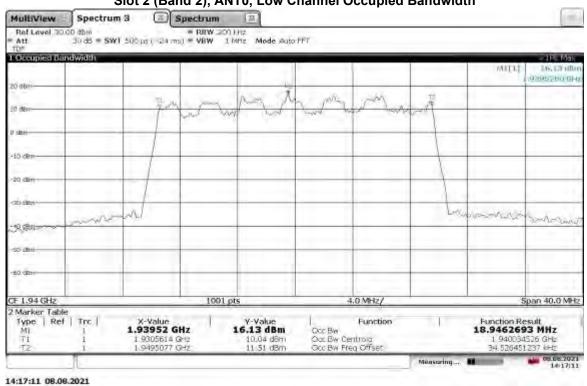


TM3.2-16QAM_20 MHz Bandwidth Slot 2 (Band 2), ANT1, Low Channel Occupied Bandwidth

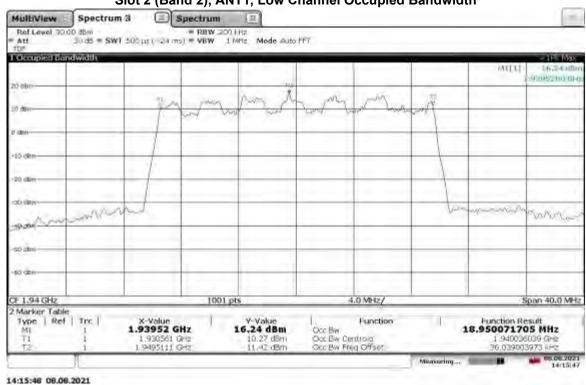


TM3.2-16QAM_20 MHz Bandwidth Slot 2 (Band 2), ANT0, Mid Channel Occupied Bandwidth

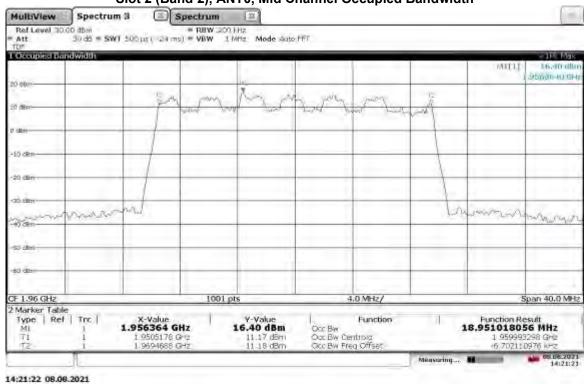


TM3.2-16QAM_20 MHz Bandwidth
Slot 2 (Band 2), ANT1, Mid Channel Occupied Bandwidth

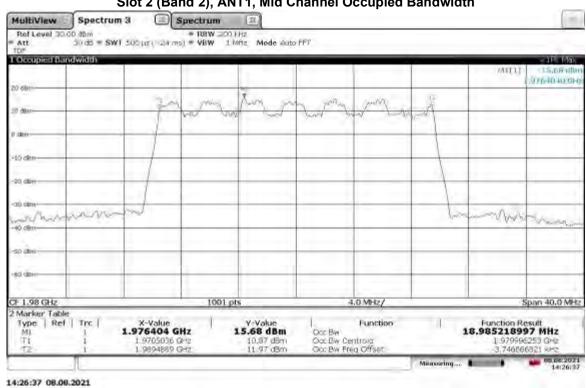


TM3.2-16QAM_20 MHz Bandwidth
Slot 2 (Band 2), ANT0, High Channel Occupied Bandwidth

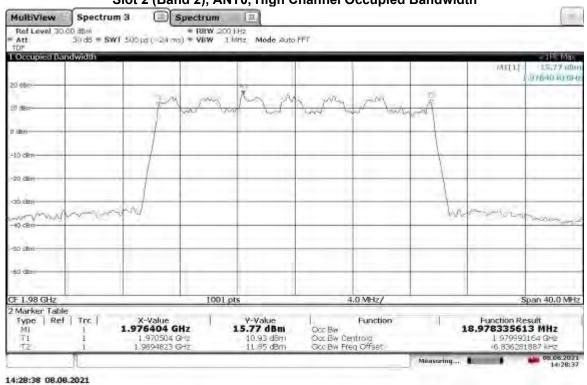


TM3.2-16QAM_20 MHz Bandwidth
Slot 2 (Band 2), ANT1, High Channel Occupied Bandwidth

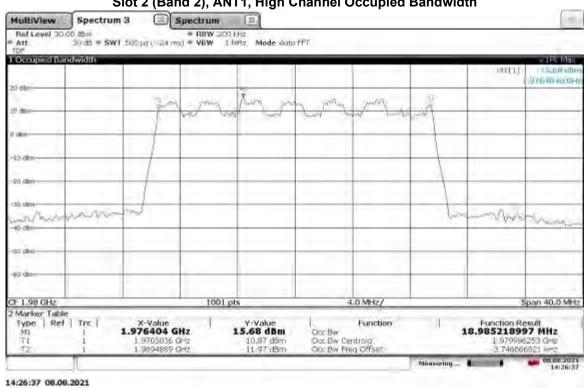


TM3.1-64QAM_5 MHz Bandwidth Slot 2 (Band 2), ANT0, Low Channel Occupied Bandwidth

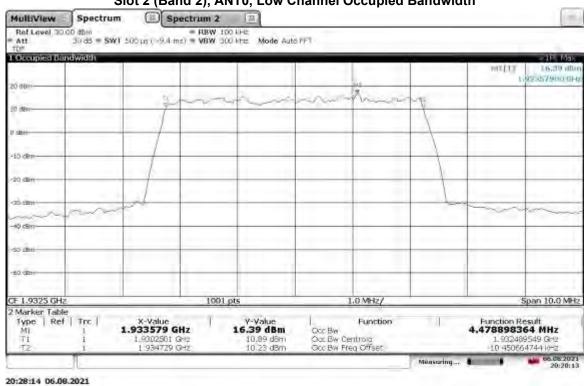


TM3.1-64QAM_5 MHz Bandwidth
Slot 2 (Band 2), ANT1, Low Channel Occupied Bandwidth

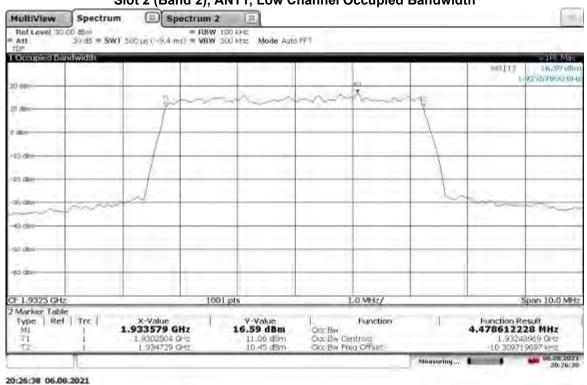


TM3.1-64QAM_5 MHz Bandwidth Slot 2 (Band 2), ANT0, Mid Channel Occupied Bandwidth

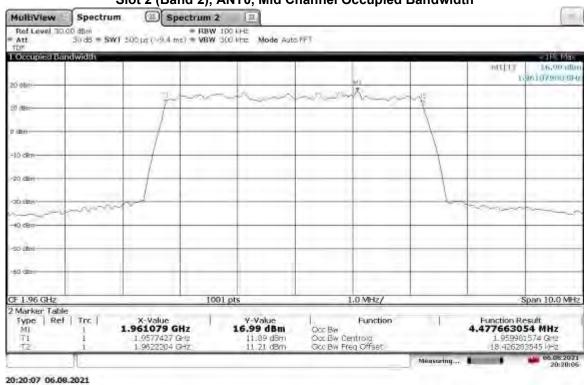


TM3.1-64QAM_5 MHz Bandwidth Slot 2 (Band 2), ANT1, Mid Channel Occupied Bandwidth

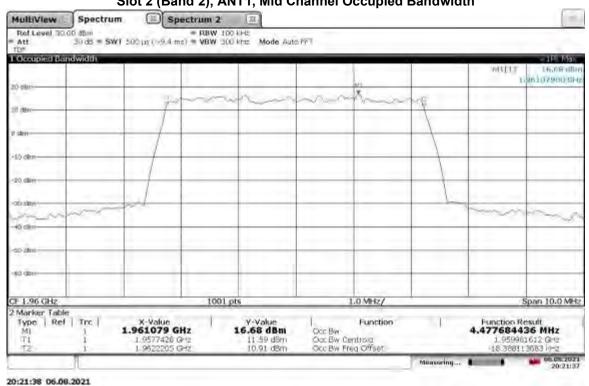


TM3.1-64QAM_5 MHz Bandwidth
Slot 2 (Band 2), ANT0, High Channel Occupied Bandwidth

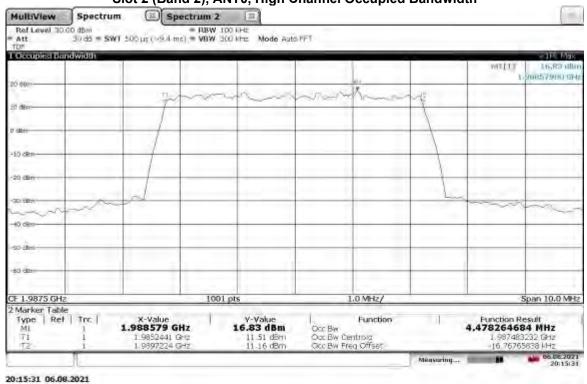


TM3.1-64QAM_5 MHz Bandwidth
Slot 2 (Band 2), ANT1, High Channel Occupied Bandwidth

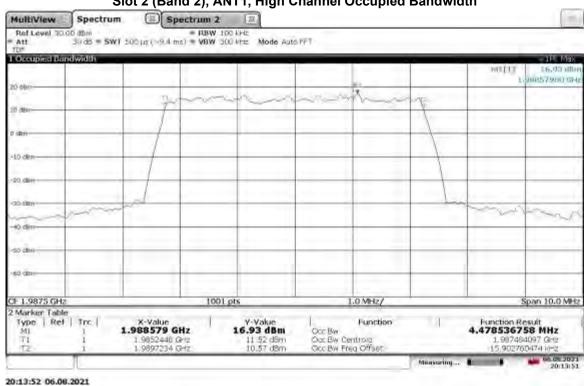

TM3.1-64QAM_10 MHz Bandwidth
Slot 2 (Band 2), ANT0, Low Channel Occupied Bandwidth

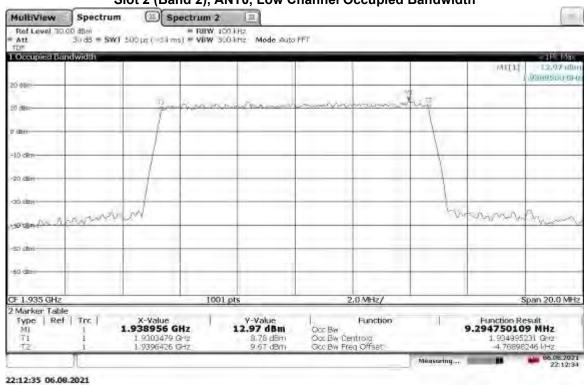


TM3.1-64QAM_10 MHz Bandwidth
Slot 2 (Band 2), ANT1, Low Channel Occupied Bandwidth

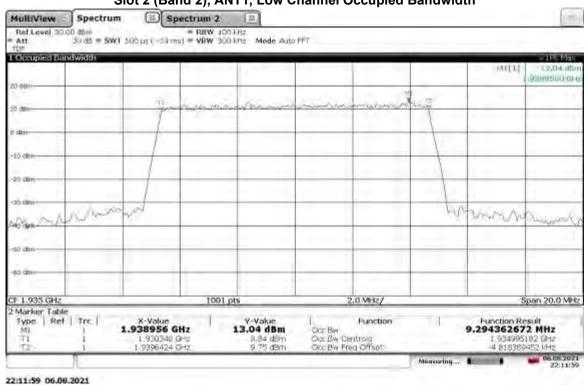


Non-Specific Radio Report Shell Rev. December 2017

Page 98 of 194

TM3.1-64QAM_10 MHz Bandwidth
Slot 2 (Band 2), ANT0, Mid Channel Occupied Bandwidth

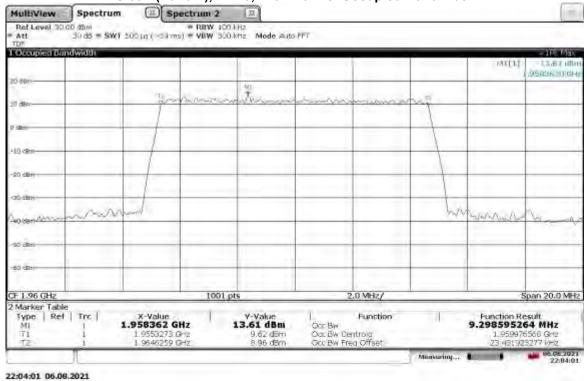

TM3.1-64QAM_10 MHz Bandwidth Slot 2 (Band 2), ANT1, Mid Channel Occupied Bandwidth

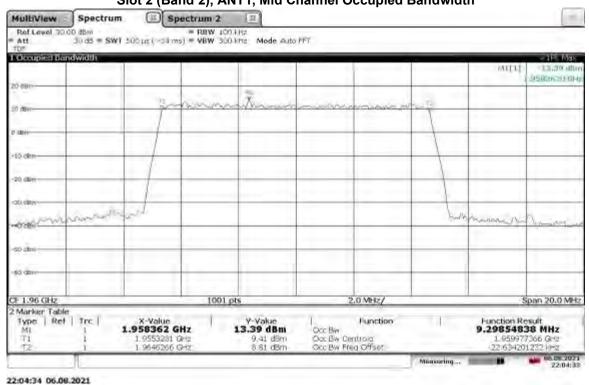


TM3.1-64QAM_10 MHz Bandwidth
Slot 2 (Band 2), ANT0, High Channel Occupied Bandwidth



21:58:42 06.08.2021


TM3.1-64QAM_10 MHz Bandwidth
Slot 2 (Band 2), ANT1, High Channel Occupied Bandwidth

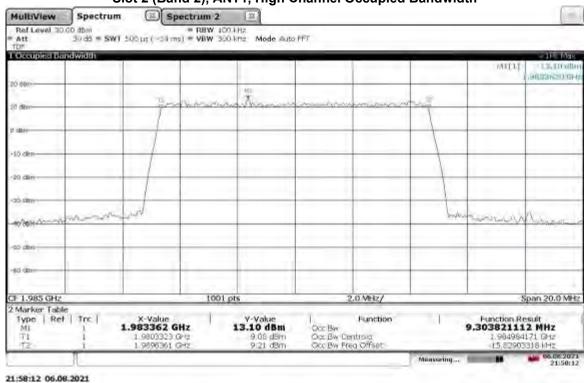


Non-Specific Radio Report Shell Rev. December 2017

Page 100 of 194


TM3.1-64QAM_15 MHz Bandwidth
Slot 2 (Band 2), ANT0, Low Channel Occupied Bandwidth

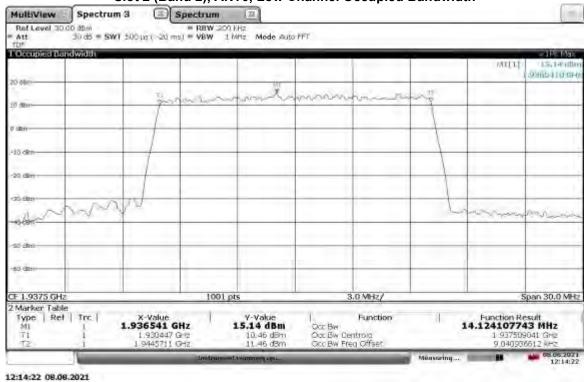


TM3.1-64QAM_15 MHz Bandwidth Slot 2 (Band 2), ANT1, Low Channel Occupied Bandwidth

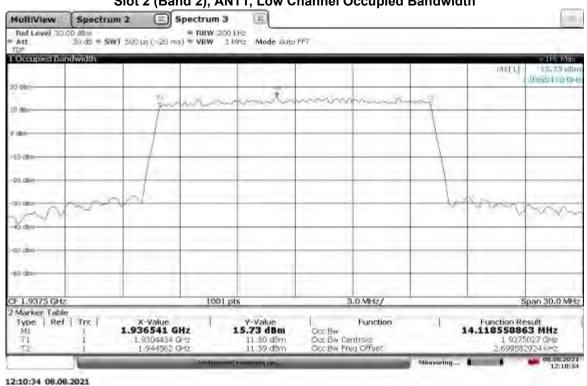


TM3.1-64QAM_15 MHz Bandwidth Slot 2 (Band 2), ANT0, Mid Channel Occupied Bandwidth

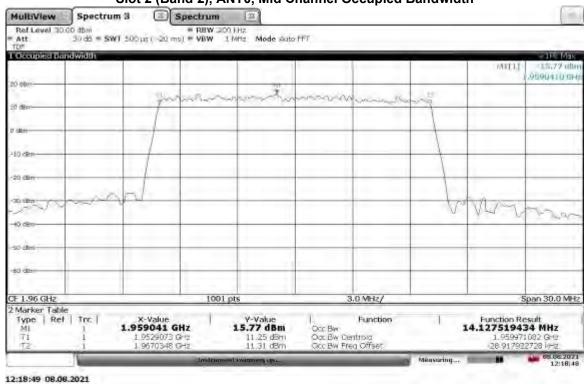


TM3.1-64QAM_15 MHz Bandwidth Slot 2 (Band 2), ANT1, Mid Channel Occupied Bandwidth

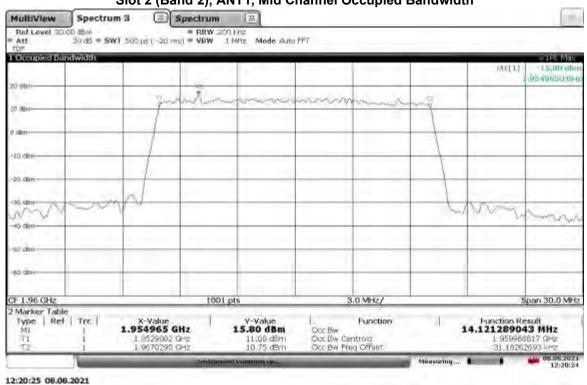

> TM3.1-64QAM_15 MHz Bandwidth Slot 2 (Band 2), ANT0, High Channel Occupied Bandwidth

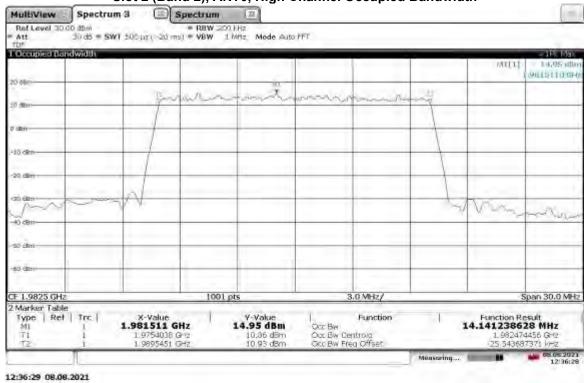

TM3.1-64QAM_15 MHz Bandwidth Slot 2 (Band 2), ANT1, High Channel Occupied Bandwidth

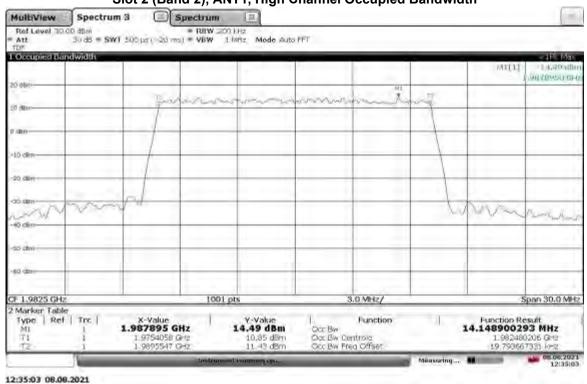


Non-Specific Radio Report Shell Rev. December 2017


Page 103 of 194

Client: CommScope Technologies LLC / Model: RPM-A5A11-B02 with W/ 5G NR waveform With OneCell® RP5100


TM3.1-64QAM_20 MHz Bandwidth
Slot 2 (Band 2), ANT0, Low Channel Occupied Bandwidth

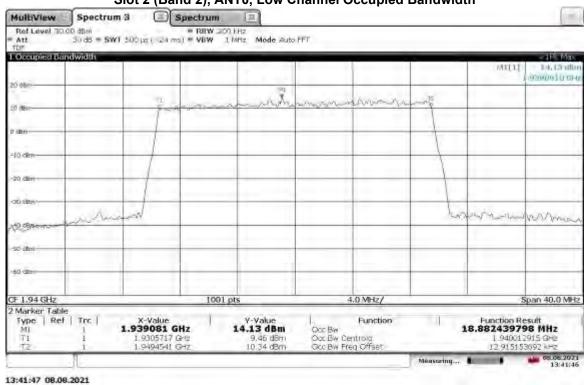


TM3.1-64QAM_20 MHz Bandwidth Slot 2 (Band 2), ANT1, Low Channel Occupied Bandwidth

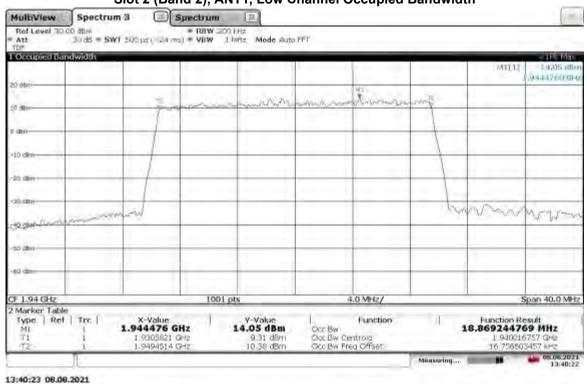


TM3.1-64QAM_20 MHz Bandwidth Slot 2 (Band 2), ANT0, Mid Channel Occupied Bandwidth

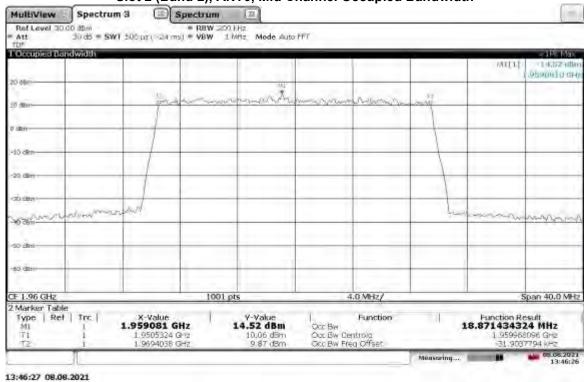


TM3.1-64QAM_20 MHz Bandwidth Slot 2 (Band 2), ANT1, Mid Channel Occupied Bandwidth

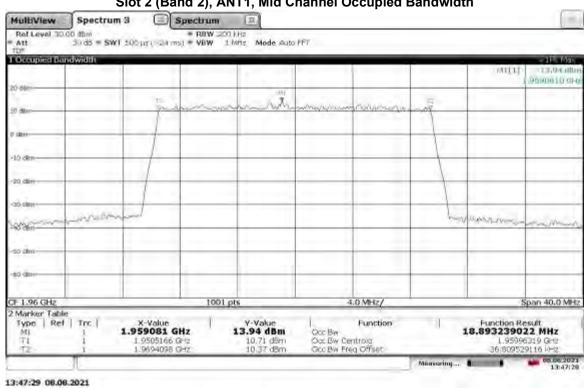


TM3.1-64QAM_20 MHz Bandwidth Slot 2 (Band 2), ANT0, High Channel Occupied Bandwidth

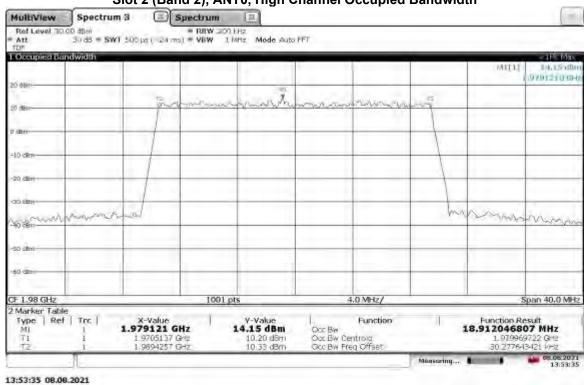


TM3.1-64QAM_20 MHz Bandwidth Slot 2 (Band 2), ANT1, High Channel Occupied Bandwidth

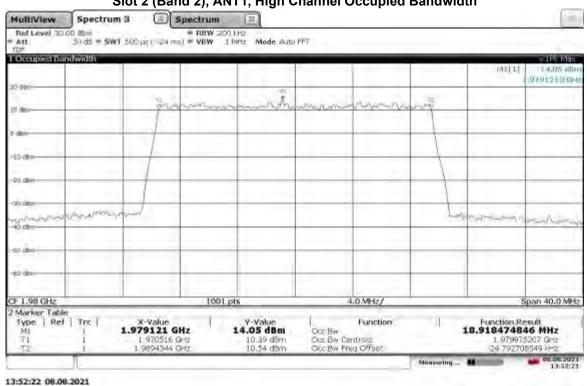


TM3.1a-256QAM_5 MHz Bandwidth Slot 2 (Band 2), ANT0, Low Channel Occupied Bandwidth

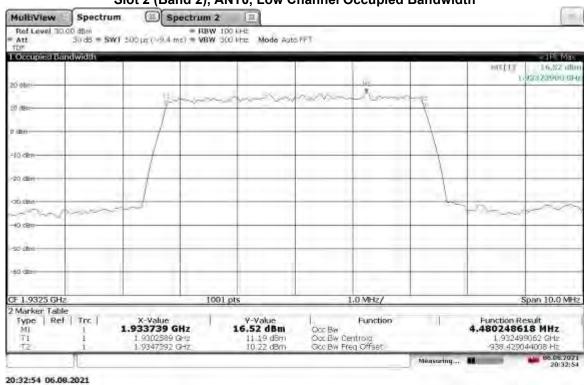


TM3.1a-256QAM_5 MHz Bandwidth Slot 2 (Band 2), ANT1, Low Channel Occupied Bandwidth

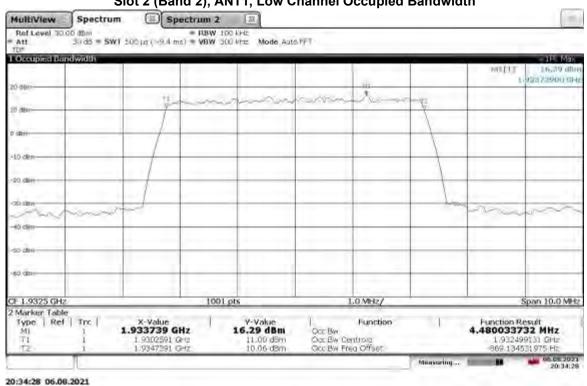

TM3.1a-256QAM_5 MHz Bandwidth Slot 2 (Band 2), ANT0, Mid Channel Occupied Bandwidth

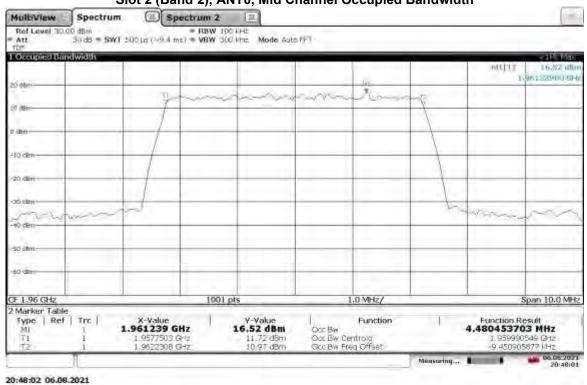

TM3.1a-256QAM_5 MHz Bandwidth Slot 2 (Band 2), ANT1, Mid Channel Occupied Bandwidth

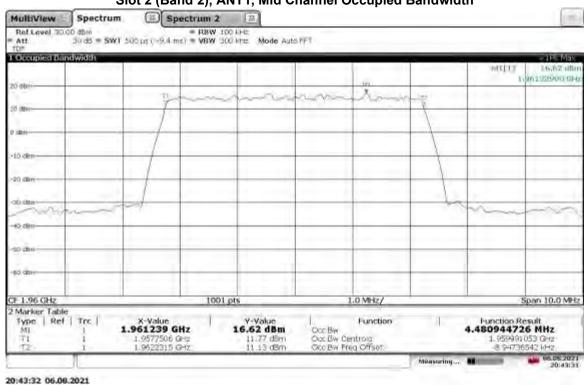


TM3.1a-256QAM_5 MHz Bandwidth Slot 2 (Band 2), ANT0, High Channel Occupied Bandwidth



21:00:42 06.08.2021


TM3.1a-256QAM_5 MHz Bandwidth
Slot 2 (Band 2), ANT1, High Channel Occupied Bandwidth

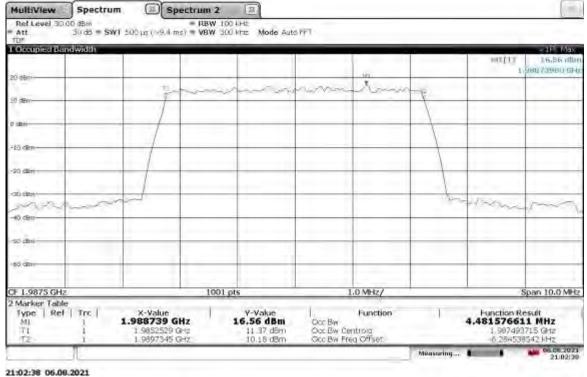


Non-Specific Radio Report Shell Rev. December 2017

Page 109 of 194


TM3.1a-256QAM_10 MHz Bandwidth Slot 2 (Band 2), ANT0, Low Channel Occupied Bandwidth

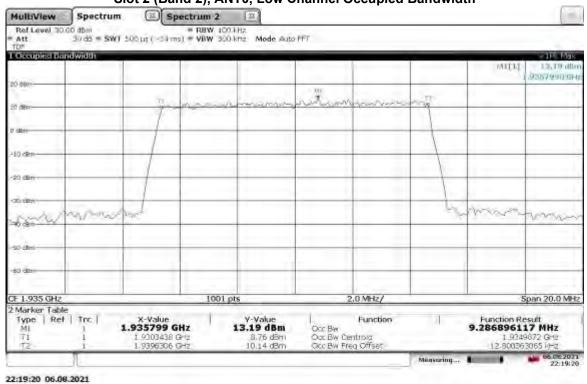

TM3.1a-256QAM_10 MHz Bandwidth Slot 2 (Band 2), ANT1, Low Channel Occupied Bandwidth

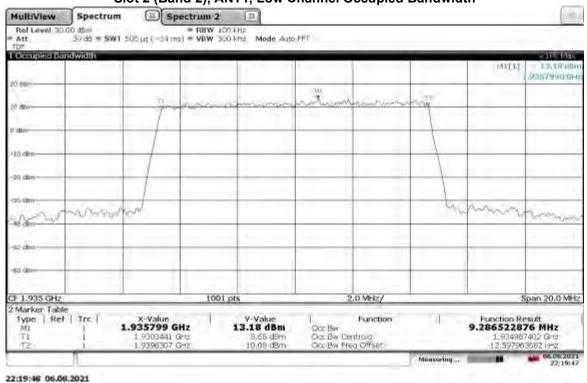

TM3.1a-256QAM_10 MHz Bandwidth Slot 2 (Band 2), ANT0, Mid Channel Occupied Bandwidth

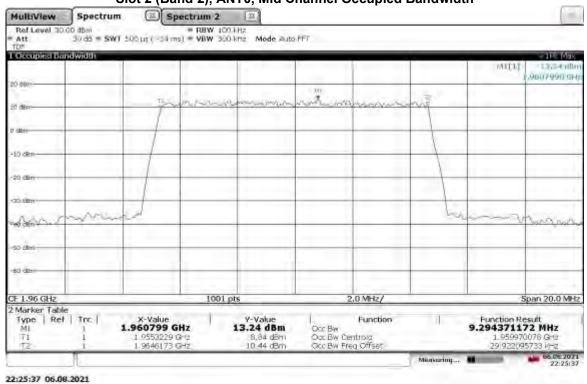


TM3.1a-256QAM_10 MHz Bandwidth Slot 2 (Band 2), ANT1, Mid Channel Occupied Bandwidth




Non-Specific Radio Report Shell Rev. December 2017

Page 111 of 194

TM3.1a-256QAM_10 MHz Bandwidth Slot 2 (Band 2), ANT0, High Channel Occupied Bandwidth

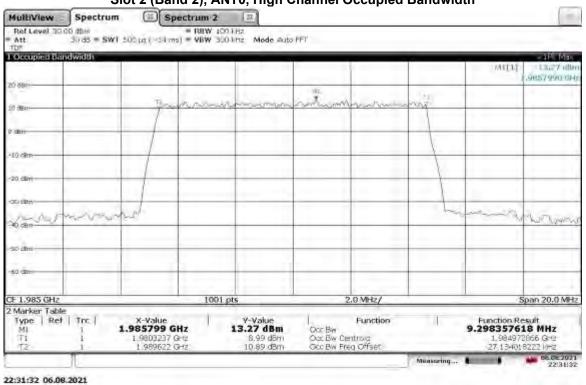

TM3.1a-256QAM_10 MHz Bandwidth
Slot 2 (Band 2), ANT1, High Channel Occupied Bandwidth

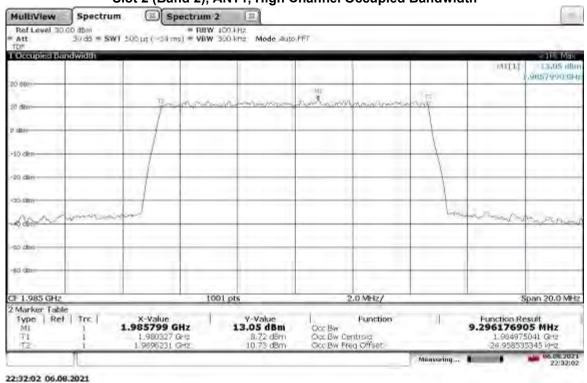


Non-Specific Radio Report Shell Rev. December 2017


Page 112 of 194

Client: CommScope Technologies LLC / Model: RPM-A5A11-B02 with W/ 5G NR waveform With OneCell® RP5100


TM3.1a-256QAM_15 MHz Bandwidth Slot 2 (Band 2), ANT0, Low Channel Occupied Bandwidth

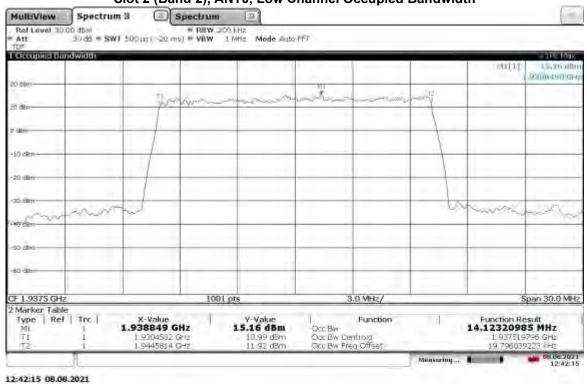


TM3.1a-256QAM_15 MHz Bandwidth Slot 2 (Band 2), ANT1, Low Channel Occupied Bandwidth

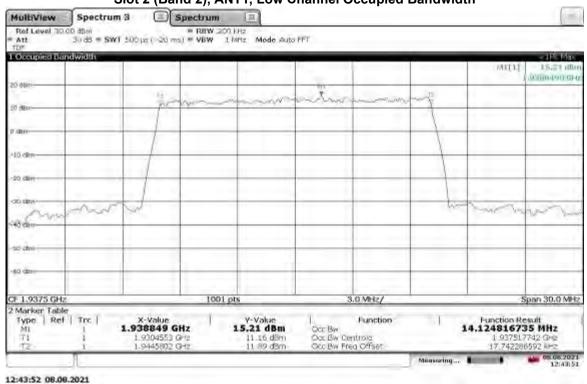

TM3.1a-256QAM_15 MHz Bandwidth Slot 2 (Band 2), ANT0, Mid Channel Occupied Bandwidth

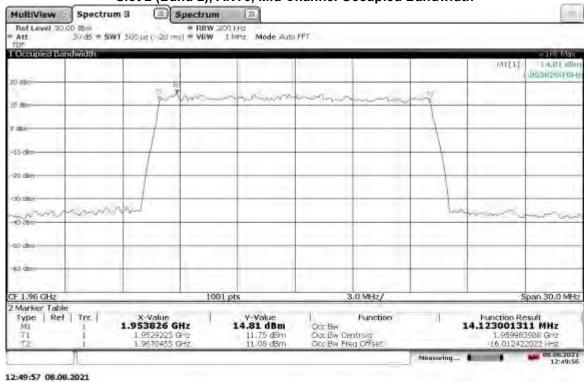


TM3.1a-256QAM_15 MHz Bandwidth Slot 2 (Band 2), ANT1, Mid Channel Occupied Bandwidth

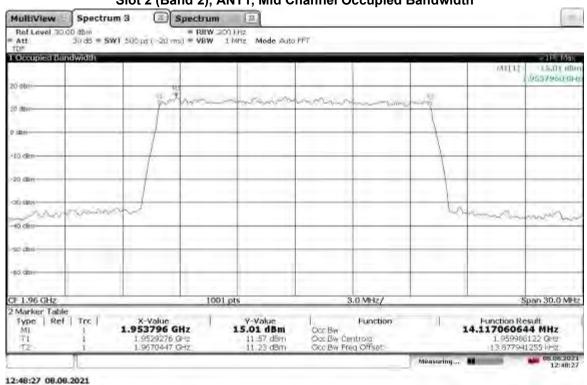


Report Number: 104751739BOX-013

Issued: 09/29/2021 Revised: 02/02/2022


TM3.1a-256QAM_15 MHz Bandwidth Slot 2 (Band 2), ANT0, High Channel Occupied Bandwidth

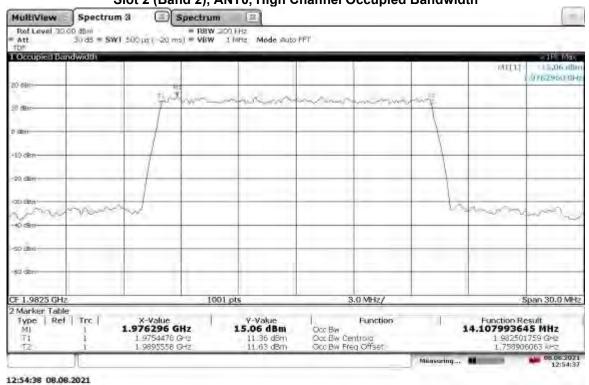


TM3.1a-256QAM_15 MHz Bandwidth Slot 2 (Band 2), ANT1, High Channel Occupied Bandwidth

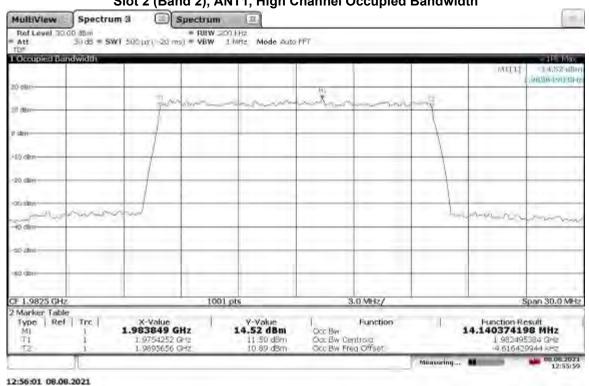


TM3.1a-256QAM_20 MHz Bandwidth Slot 2 (Band 2), ANT0, Low Channel Occupied Bandwidth

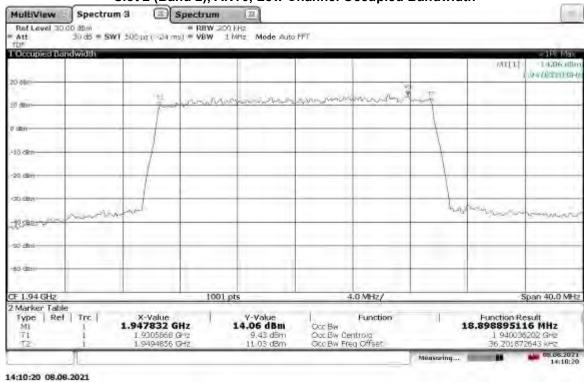


TM3.1a-256QAM_20 MHz Bandwidth Slot 2 (Band 2), ANT1, Low Channel Occupied Bandwidth

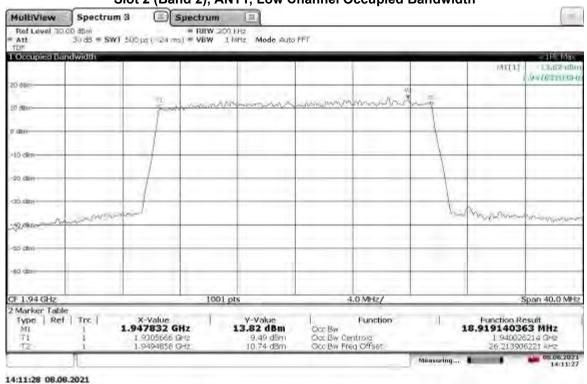


TM3.1a-256QAM_20 MHz Bandwidth Slot 2 (Band 2), ANT0, Mid Channel Occupied Bandwidth

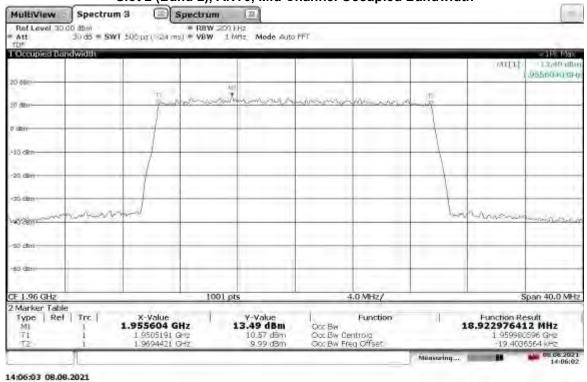


TM3.1a-256QAM_20 MHz Bandwidth Slot 2 (Band 2), ANT1, Mid Channel Occupied Bandwidth

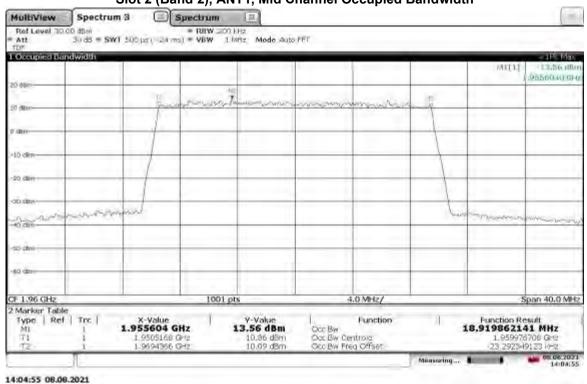

TM3.1a-256QAM_20 MHz Bandwidth Slot 2 (Band 2), ANT0, High Channel Occupied Bandwidth

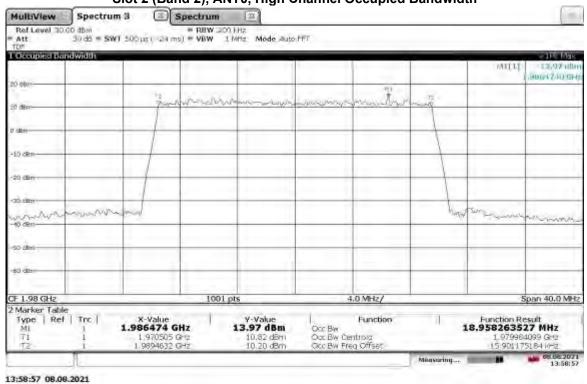

TM3.1a-256QAM_20 MHz Bandwidth Slot 2 (Band 2), ANT1, High Channel Occupied Bandwidth

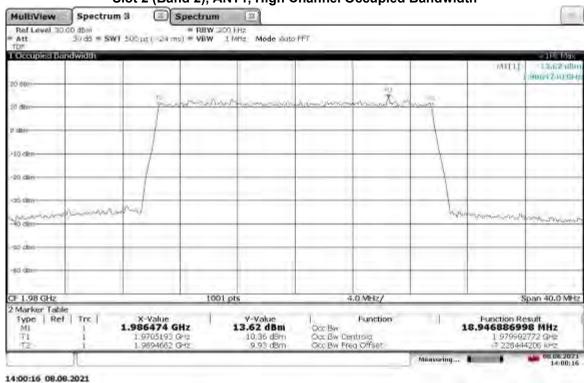

Intertek

Report Number: 104751739BOX-013 Issued: 09/29/2021 Revised: 02/02/2022

Test Personnel: Vathana Ven Va

Supervising/Reviewing

Engineer:
(Where Applicable) N/A

Product Standard: FCC Part 24 Limit Applied: See report section 7.3

Input Voltage: 48 VDC (POE)

Pretest Verification w/ Ambient Temperature: 22, 23, 23 °C
Ambient Signals or

BB Source: N/A Relative Humidity: _21, 15, 26, 47, 20, 22 %

Atmospheric Pressure: _1004, 1013, 1004, 980 mbars

Deviations, Additions, or Exclusions: None

Intertek

Report Number: 104751739BOX-013 Issued: 09/29/2021 Revised: 02/02/2022

8 **Band Edge Compliance**

8.1 Method

Tests are performed in accordance with ANSI C63.26 and CFR47 FCC Parts 2.1051, 2.1053, and 24.

TEST SITE: EMC Lab & 10m ALSE

<u>The EMC Lab</u> has one Semi-anechoic Chamber and one Shielded Chamber. AC Mains Power is available at 120, 230, and 277 Single Phase; 208, 400, and 480 3-Phase. Large reference ground-planes are installed in the general lab area to facilitate EMC work not requiring a shielded environment.

8.2 Test Equipment Used:

Asset	Description	Manufacturer	Model	Serial	Cal Date	Cal Due
CEN001'	DC-40GHz attenuator 20dB	Centric RF	C411-20	CEN001	01/22/2021	01/22/2022
CBLSHF204'	Cable, SMA - SMA, 9kHz -40GHz, (Cable Kit 5)	Huber + Suhner	Sucoflex 102EA	234714001	02/03/2021	02/03/2022
ROS005-1'	Signal and Spectrum Analyzer	Rohde and Shwartz	FSW43	100646	10/27/2020	10/27/2021
DAV005'	Weather Station	Davis	6250	MS191218083	02/07/2021	02/07/2022

Software Utilized:

Name	Manufacturer	Version
None		

8.3 Results:

The sample tested was found to Comply.

§24.238(a)(b) The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.

Non-Specific Radio Report Shell Rev. December 2017 Page 120 of 194

Slot 2 (Band 2), Bandwidth: 5 MHz, Modulation: TM1.1-QPSK

Band Edge	Frequency (MHz)	Antenna Port	Reading (dBm)
Low	1932.50	ANT0	-30.38
		ANT1	-29.60
High	1987.50	ANT0	-28.84
_		ANT1	-12.75

Slot 2 (Band 2), Bandwidth: 10 MHz, Modulation: TM1.1-QPSK

Band Edge	Frequency (MHz)	Antenna Port	Reading (dBm)
Low	1935.00	ANT0	-26.89
		ANT1	-27.03
High	1985.00	ANT0	-26.66
		ANT1	-28.43

Slot 2 (Band 2), Bandwidth: 15 MHz, Modulation: TM1.1-QPSK

Band Edge	Frequency (MHz)	Antenna Port	Reading (dBm)
Low	1937.50	ANT0	-27.25
		ANT1	-27.18
High	1982.50	ANT0	-26.24
		ANT1	-27.90

Slot 2 (Band 2), Bandwidth: 20 MHz, Modulation: TM1.1-QPSK

Band Edge	Frequency (MHz)	Antenna Port	Reading (dBm)		
Low	1940	ANT0	-31.30		
		ANT1	-30.06		
High	1980	ANT0	-30.68		
_		ANT1	-29.48		

Slot 2 (Band 2), Bandwidth: 5 MHz, Modulation: TM3.2-16QAM

Band Edge	Frequency (MHz)	Antenna Port	Reading (dBm)
Low	1932.50	ANT0	-31.42
		ANT1	-27.59
High	1987.50	ANT0	-28.16
_		ANT1	-31.05

Slot 2 (Band 2), Bandwidth: 10 MHz, Modulation: TM3,2-16QAM

olot 2 (Balla 2), Ballawiatin. 10 mil2, modalation. 1 mo.2 104Am					
Ban	d Edge	Frequency (MHz)	Antenna Port	Reading (dBm)	
l	_OW	1935.00	ANT0	-28.98	
			ANT1	-26.75	
H	High	1985.00	ANT0	-32.10	
			ANT1	-29.80	

Slot 2 (Band 2), Bandwidth: 15 MHz, Modulation: TM3.2-16QAM

Band Edge	Frequency (MHz)	Antenna Port	Reading (dBm)
Low	1937.50	ANT0	-28.03
		ANT1	-27.43
High	1982.50	ANT0	-29.18
		ANT1	-28.24

Slot 2 (Band 2), Bandwidth: 20 MHz, Modulation: TM3.2-16QAM

Band Edge	Frequency (MHz)	Antenna Port	Reading (dBm)
Low	1940.00	ANT0	-30.90
		ANT1	-29.69
High	1980.00	ANT0	-14.62
_		ANT1	-14.98

Non-Specific Radio Report Shell Rev. December 2017 Page 121 of 194 Client: CommScope Technologies LLC / Model: RPM-A5A11-B02 with W/ 5G NR waveform With OneCell® RP5100

Slot 2 (Band 2), Bandwidth: 5 MHz, Modulation: TM3.1-64QAM

Band Edge	Frequency (MHz)	Antenna Port	Reading (dBm)
Low	1932.50	ANT0	-31.71
		ANT1	-30.28
High	1987.50	ANT0	-29.72
		ANT1	-30.24

Slot 2 (Band 2), Bandwidth: 10 MHz, Modulation: TM3.1-64QAM

Band Edge	Frequency (MHz)	Antenna Port	Reading (dBm)
Low	1935.00	ANT0	-30.40
		ANT1	-27.84
High	1985.00	ANT0	-30.01
		ANT1	-28.41

Slot 2 (Band 2), Bandwidth: 15 MHz, Modulation: TM3.1-64QAM

Band Edge	Frequency (MHz)	Antenna Port	Reading (dBm)
Low	1937.50	ANT0	-27.25
		ANT1	-29.92
High	1982.50	ANT0	-29.83
		ANT1	-28.65

Slot 2 (Band 2), Bandwidth: 20 MHz, Modulation: TM3.1-64QAM

0.00 = \(\sum_{i=1}^{2} \) = an an an an an = 0 min = \(min an				
Band Edge	Frequency (MHz)	Antenna Port	Reading (dBm)	
Low	1940.00	ANT0	-31.30	
		ANT1	-30.06	
High	1980.00	ANT0	-29.56	
		ANT1	-29.92	

Slot 2 (Band 2), Bandwidth: 5 MHz, Modulation: TM3.1a-256QAM

Band Edge	Frequency (MHz)	Antenna Port	Reading (dBm)
Low	1932.50	ANT0	-28.58
		ANT1	-30.66
High	1987.50	ANT0	-26.76
_		ANT1	-26.76

Slot 2 (Band 2), Bandwidth: 10 MHz, Modulation: TM3.1a-256QAM

Band Edge	Frequency (MHz)	Antenna Port	Reading (dBm)
Low	1935.00	ANT0	-27.11
		ANT1	-28.84
High	1985.00	ANT0	-27.58
		ANT1	-21.79

Slot 2 (Band 2), Bandwidth: 15 MHz, Modulation: TM3.1a-256QAM

Band Edge	Frequency (MHz)	Antenna Port	Reading (dBm)
Low	1937.00	ANT0	-30.13
		ANT1	-31.13
High	1982.50	ANT0	-27.70
_		ANT1	-28.58

Slot 2 (Band 2), Bandwidth: 20 MHz, Modulation: TM3.1a-256QAM

Band Edge	Frequency (MHz)	Antenna Port	Reading (dBm)
Low	1940.50	ANT0	-29.58
		ANT1	-30.78
High	1980.00	ANT0	-28.09
_		ANT1	-27.53

Non-Specific Radio Report Shell Rev. December 2017 Page 122 of 194 Client: CommScope Technologies LLC / Model: RPM-A5A11-B02 with W/ 5G NR waveform With OneCell® RP5100

Intertek


Report Number: 104751739BOX-013 Issued: 09/29/2021 Revised: 02/02/2022

8.4 Setup Photograph:


Photographs are available in another exhibit

8.5 Plots/Data:

Band Edge Compliant, Lower Band Edge, 1932.5 MHz Slot 2 (Band 2), Antenna Port: ANT0, Bandwidth: 5 MHz, Modulation: TM1.1-QPSK

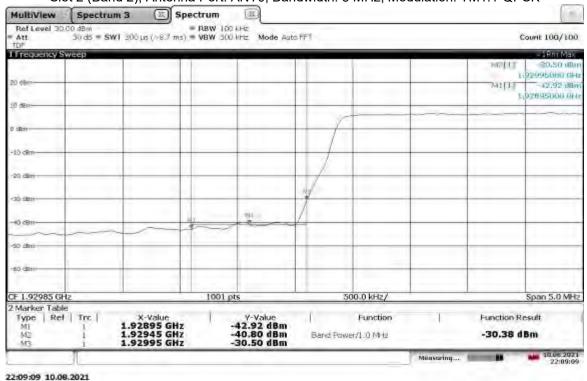


Band Edge Compliant, Upper Band Edge, 1987.5 MHz Slot 2 (Band 2), Antenna Port: ANTO, Bandwidth: 5 MHz, Modulation: TM1.1-QPSK

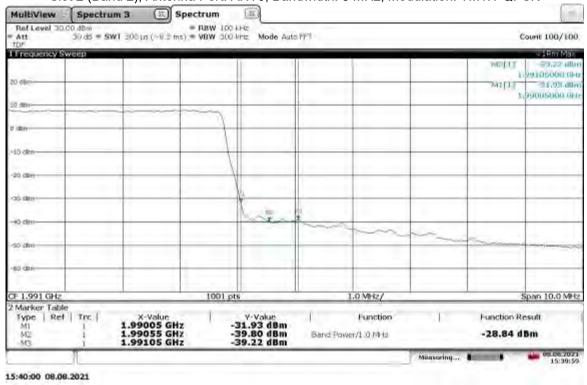


Non-Specific Radio Report Shell Rev. December 2017 Page 124 of 194 Client: CommScope Technologies LLC / Model: RPM-A5A11-B02 with W/ 5G NR waveform With OneCell® RP5100


Band Edge Compliant, Lower Band Edge, 1935 MHz Slot 2 (Band 2), Antenna Port: ANTO, Bandwidth: 10 MHz, Modulation: TM1.1-QPSK

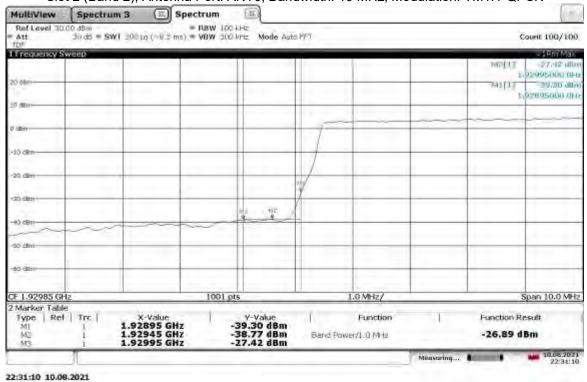


Band Edge Compliant, Upper Edge, 1985 MHz Slot 2 (Band 2), Antenna Port: ANTO, Bandwidth: 10 MHz, Modulation: TM1.1-QPSK

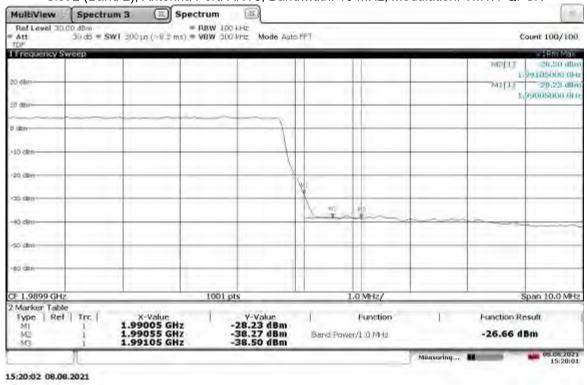

Band Edge Compliant, Lower Band Edge, 1937.5 MHz Slot 2 (Band 2), Antenna Port: ANTO, Bandwidth: 15 MHz, Modulation: TM1.1-QPSK

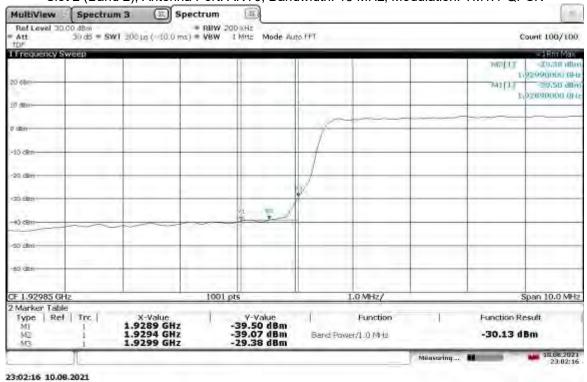

Band Edge Compliant, Upper Band Edge, 1982.5 MHz Slot 2 (Band 2), Antenna Port: ANTO, Bandwidth: 15 MHz, Modulation: TM1.1-QPSK

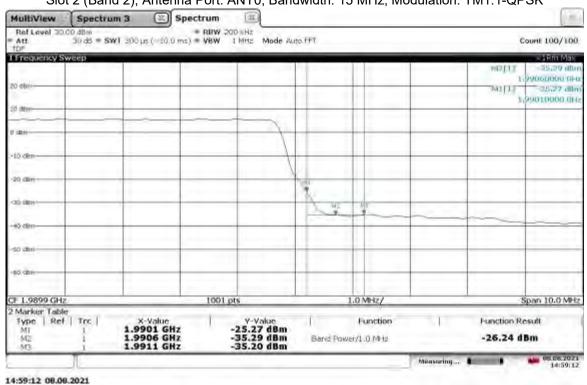


Non-Specific Radio Report Shell Rev. December 2017 Page Client: CommScope Technologies LLC / Model: RPM-A5A11-B02 with W/ 5G NR waveform With OneCell® RP5100

Band Edge Compliant, Lower Band Edge, 1940 MHz Slot 2 (Band 2), Antenna Port: ANT0, Bandwidth: 20 MHz, Modulation: TM1.1-QPSK




Band Edge Compliant, Upper Band Edge, 1980 MHz Slot 2 (Band 2), Antenna Port: ANTO, Bandwidth: 20 MHz, Modulation: TM1.1-QPSK

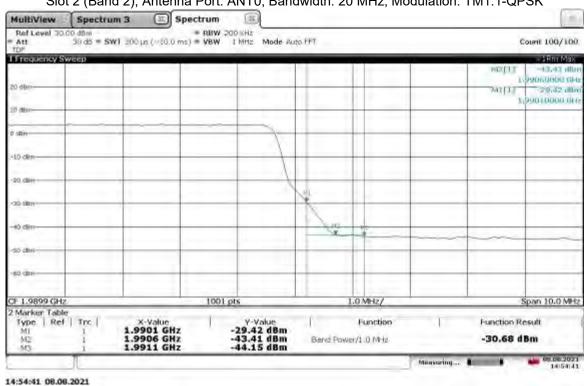


Non-Specific Radio Report Shell Rev. December 2017 Page 127 of 194 Client: CommScope Technologies LLC / Model: RPM-A5A11-B02 with W/ 5G NR waveform With OneCell® RP5100

Band Edge Compliant, Lower Band Edge, 1932.5 MHz Slot 2 (Band 2), Antenna Port: ANT1, Bandwidth: 5 MHz, Modulation: TM1.1-QPSK

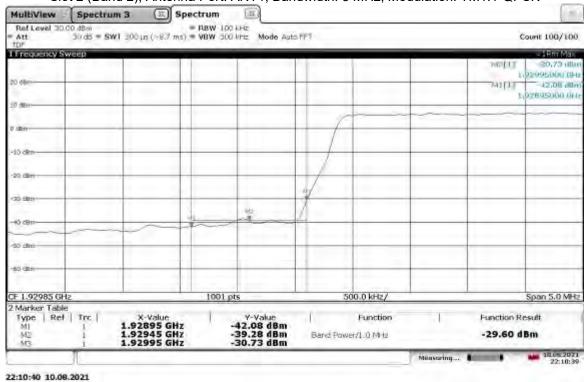

Band Edge Compliant, Lower Band Edge, 1987.5 MHz Slot 2 (Band 2), Antenna Port: ANT1, Bandwidth: 5 MHz, Modulation: TM1.1-QPSK

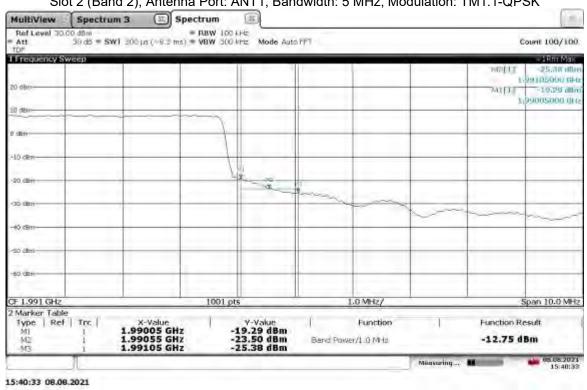


Page 128 of 194


Report Number: 104751739BOX-013

Issued: 09/29/2021 Revised: 02/02/2022


Band Edge Compliant, Lower Band Edge, 1935 MHz Slot 2 (Band 2), Antenna Port: ANT1, Bandwidth: 10 MHz, Modulation: TM1.1-QPSK

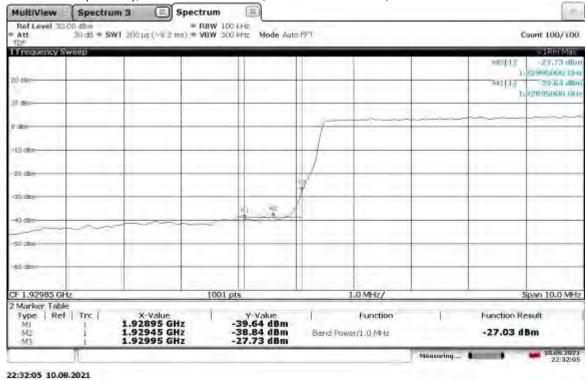


Band Edge Compliant, Upper Band Edge, 1985 MHz Slot 2 (Band 2), Antenna Port: ANT1, Bandwidth: 10 MHz, Modulation: TM1.1-QPSK

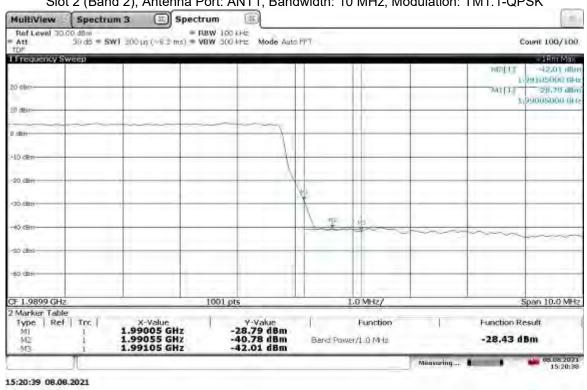

Band Edge Compliant, Lower Band Edge, 1937.5 MHz Slot 2 (Band 2), Antenna Port: ANT1, Bandwidth: 15 MHz, Modulation: TM1.1-QPSK

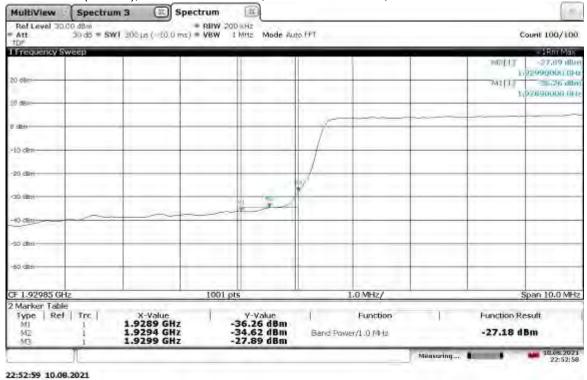


Band Edge Compliant, Upper Band Edge, 1982.5 MHz Slot 2 (Band 2), Antenna Port: ANT1, Bandwidth: 15 MHz, Modulation: TM1.1-QPSK

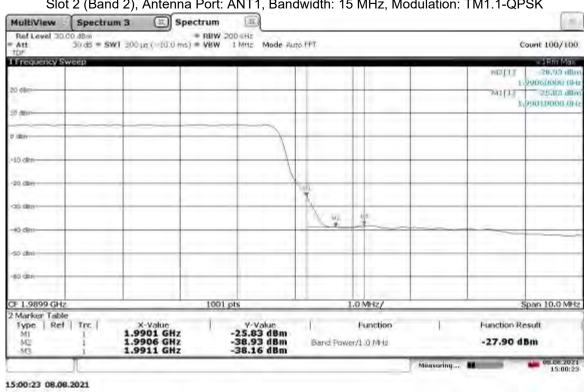


Non-Specific Radio Report Shell Rev. December 2017 Page 130 of 194 Client: CommScope Technologies LLC / Model: RPM-A5A11-B02 with W/ 5G NR waveform With OneCell® RP5100

> Band Edge Compliant, Lower Band Edge, 1940 MHz Slot 2 (Band 2), Antenna Port: ANT1, Bandwidth: 20 MHz, Modulation: TM1.1-QPSK

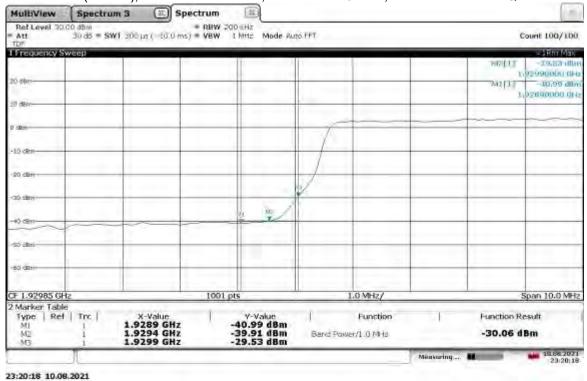


Band Edge Compliant, Upper Band Edge, 1980 MHz Slot 2 (Band 2), Antenna Port: ANT1, Bandwidth: 20 MHz, Modulation: TM1.1-QPSK

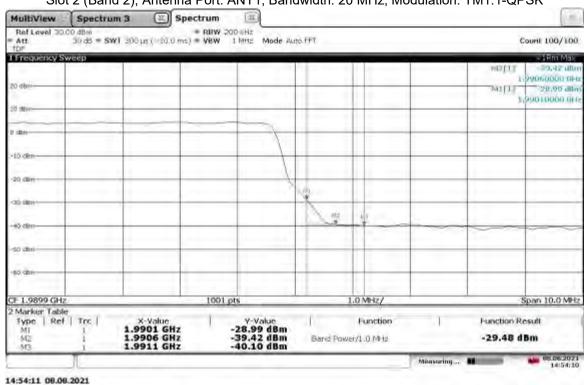


Non-Specific Radio Report Shell Rev. December 2017 Page 131 of 194


Band Edge Compliant, Lower Band Edge, 1932.5MHz Slot 2 (Band 2), Antenna Port: ANTO, Bandwidth: 5 MHz, Modulation: TM3.2-16QAM

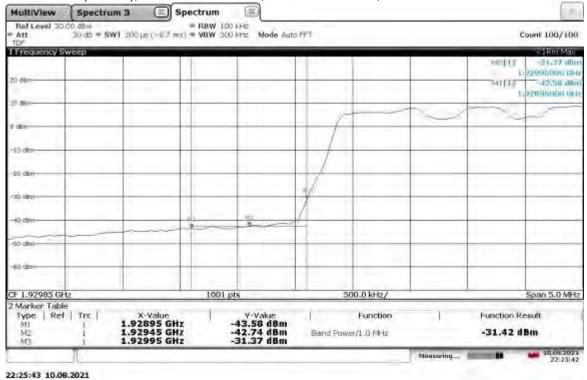


Band Edge Compliant, Upper Band Edge, 1987.5 MHz Slot 2 (Band 2), Antenna Port: ANTO, Bandwidth: 5 MHz, Modulation: TM3.2-16QAM

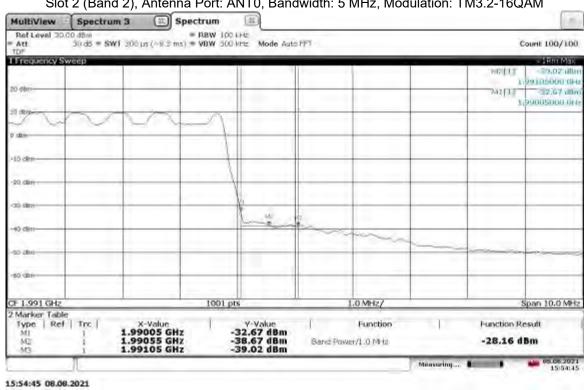


Band Edge Compliant, Lower Band Edge, 1935 MHz Slot 2 (Band 2), Antenna Port: ANT0, Bandwidth: 10 MHz, Modulation: TM3.2-16QAM

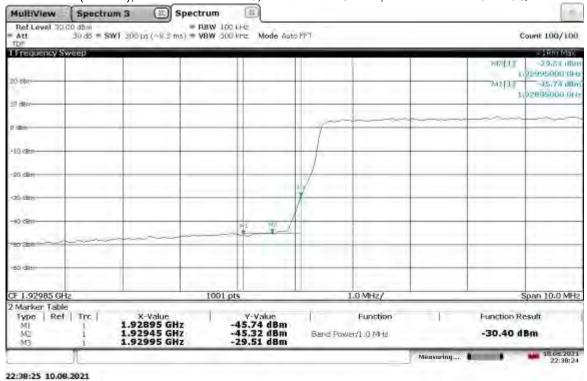


Band Edge Compliant, Upper Band Edge, 1985 MHz Slot 2 (Band 2), Antenna Port: ANT0, Bandwidth: 10 MHz, Modulation: TM3.2-16QAM

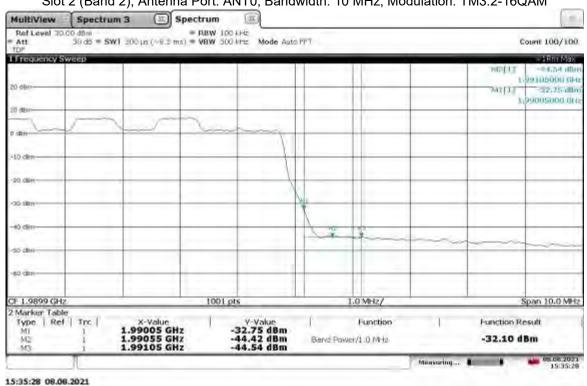


Band Edge Compliant, Lower Band Edge, 1937.5 MHz Slot 2 (Band 2), Antenna Port: ANT0, Bandwidth: 15 MHz, Modulation: TM3.2-16QAM

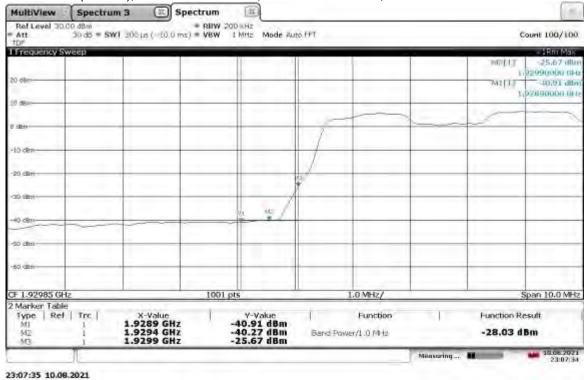


Band Edge Compliant, Upper Band Edge, 1982.5 MHz Slot 2 (Band 2), Antenna Port: ANT0, Bandwidth: 15 MHz, Modulation: TM3.2-16QAM

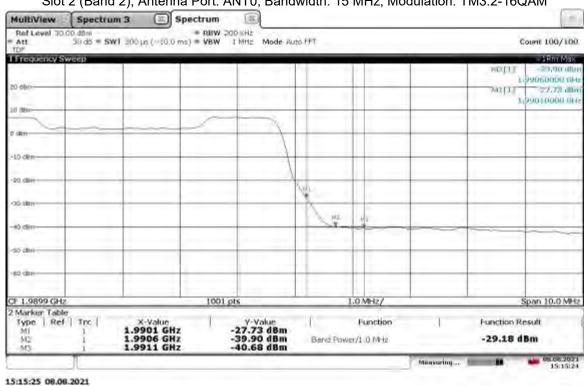


Band Edge Compliant, Lower Band Edge, 1940 MHz Slot 2 (Band 2), Antenna Port: ANT0, Bandwidth: 20 MHz, Modulation: TM3.2-16QAM

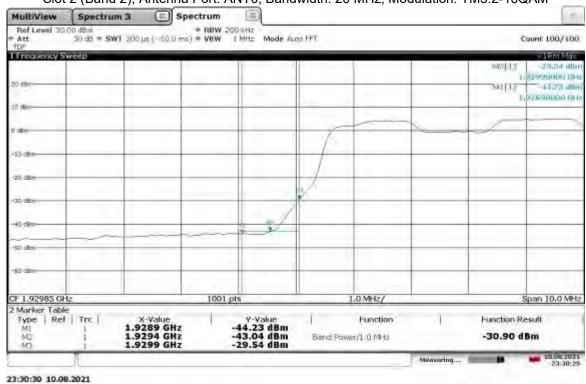


Band Edge Compliant, Upper Band Edge, 1980 MHz Slot 2 (Band 2), Antenna Port: ANT0, Bandwidth: 20 MHz, Modulation: TM3.2-16QAM

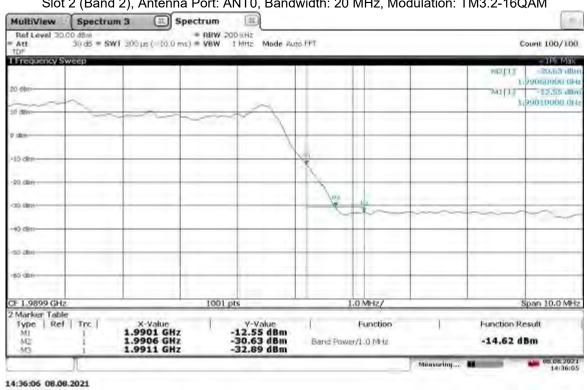


Band Edge Compliant, Lower Band Edge, 1932.5 MHz Slot 2 (Band 2), Antenna Port: ANT1, Bandwidth: 5 MHz, Modulation: TM3.2-16QAM

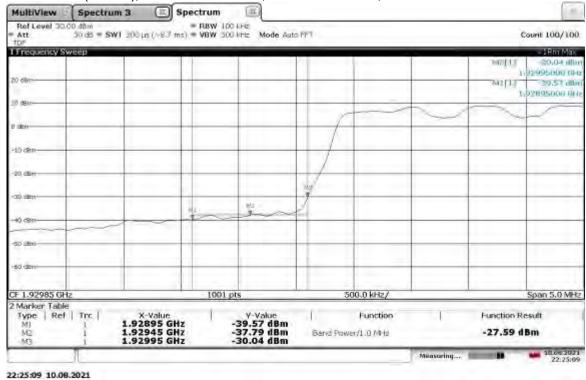


Band Edge Compliant, Upper Band Edge, 1987.5 MHz Slot 2 (Band 2), Antenna Port: ANT1, Bandwidth: 5 MHz, Modulation: TM3.2-16QAM

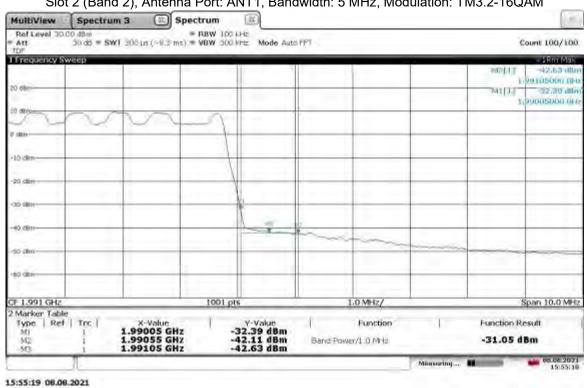


Band Edge Compliant, Lower Band Edge, 1935 MHz Slot 2 (Band 2), Antenna Port: ANT1, Bandwidth: 10 MHz, Modulation: TM3.2-16QAM

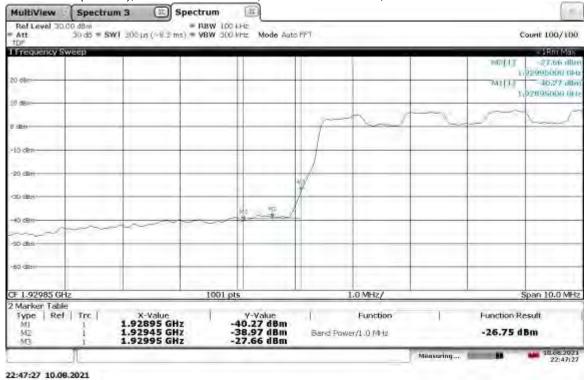


Band Edge Compliant, Upper Band Edge, 1985 MHz Slot 2 (Band 2), Antenna Port: ANT1, Bandwidth: 10 MHz, Modulation: TM3.2-16QAM

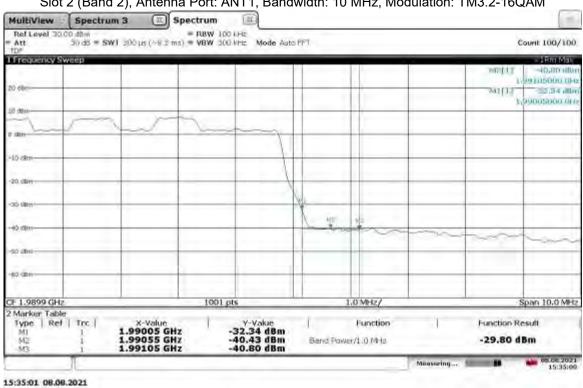

Band Edge Compliant, Lower Band Edge, 1937.5 MHz Slot 2 (Band 2), Antenna Port: ANT1, Bandwidth: 15 MHz, Modulation: TM3.2-16QAM

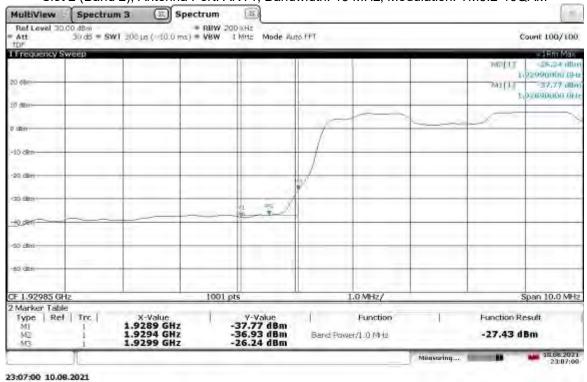


Band Edge Compliant, Upper Band Edge, 1982.5 MHz Slot 2 (Band 2), Antenna Port: ANT1, Bandwidth: 15 MHz, Modulation: TM3.2-16QAM

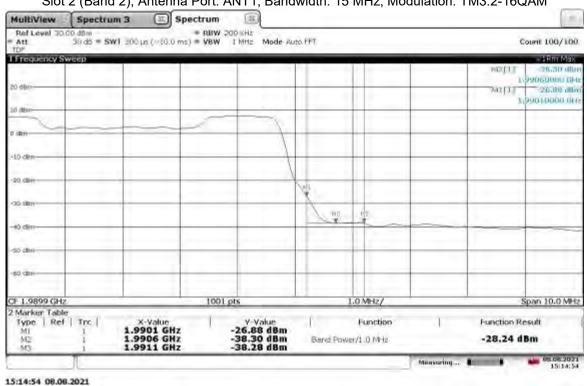

Non-Specific Radio Report Shell Rev. December 2017 Page Client: CommScope Technologies LLC / Model: RPM-A5A11-B02 with W/ 5G NR waveform With OneCell® RP5100

Band Edge Compliant, Lower Band Edge, 1940 MHz Slot 2 (Band 2), Antenna Port: ANT1, Bandwidth: 20 MHz, Modulation: TM3.2-16QAM

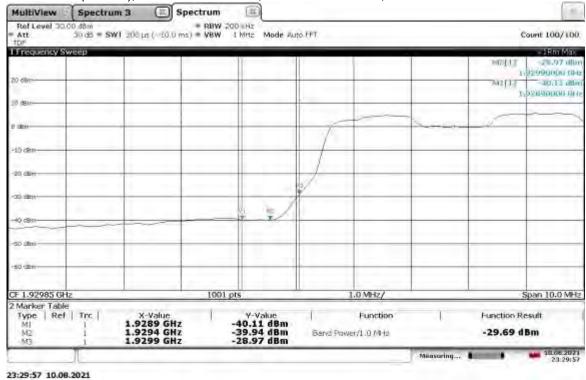


Band Edge Compliant, Upper Band Edge, 1980 MHz Slot 2 (Band 2), Antenna Port: ANT1, Bandwidth: 20 MHz, Modulation: TM3.2-16QAM




Report Number: 104751739BOX-013

Issued: 09/29/2021 Revised: 02/02/2022


Band Edge Compliant, Lower Band Edge, 1932.5 MHz Slot 2 (Band 2), Antenna Port: ANTO, Bandwidth: 5 MHz, Modulation: TM3.1-64QAM

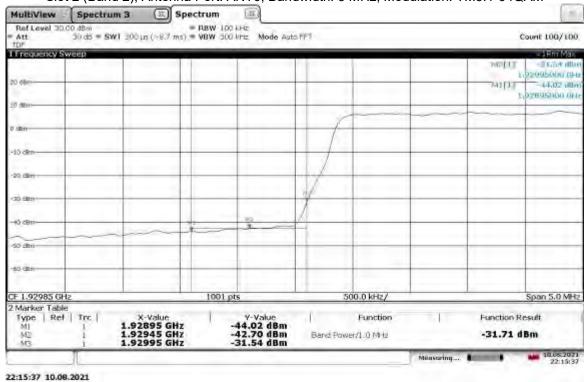


Band Edge Compliant, Upper Band Edge, 1987.5 MHz Slot 2 (Band 2), Antenna Port: ANTO, Bandwidth: 5 MHz, Modulation: TM3.1-64QAM

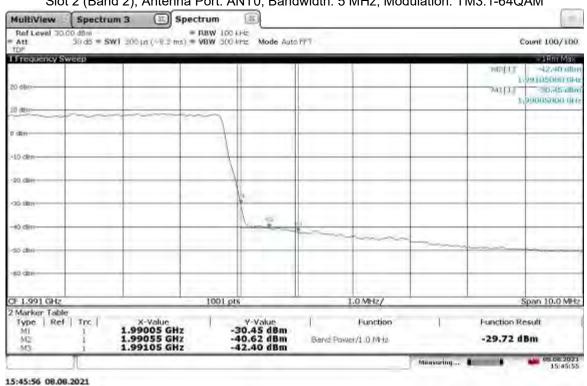

Band Edge Compliant, Lower Band Edge, 1935 MHz Slot 2 (Band 2), Antenna Port: ANTO, Bandwidth: 10 MHz, Modulation: TM3.1-64QAM

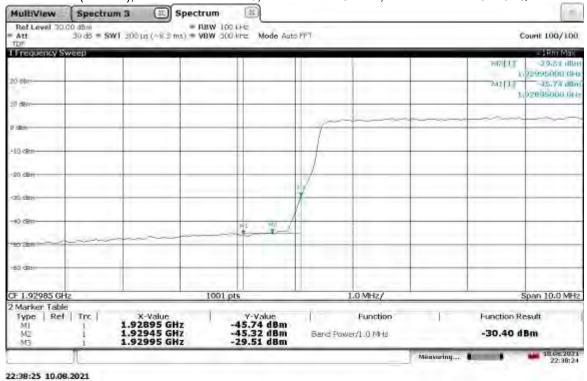

Band Edge Compliant, Upper Band Edge, 1985 MHz Slot 2 (Band 2), Antenna Port: ANT0, Bandwidth: 10 MHz, Modulation: TM3.1-64QAM

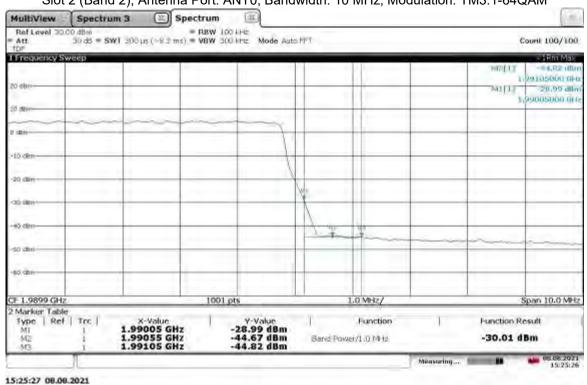


Non-Specific Radio Report Shell Rev. December 2017 Page Client: CommScope Technologies LLC / Model: RPM-A5A11-B02 with W/ 5G NR waveform With OneCell® RP5100


Report Number: 104751739BOX-013

Issued: 09/29/2021 Revised: 02/02/2022

Band Edge Compliant, Lower Band Edge, 1937.5 MHz Slot 2 (Band 2), Antenna Port: ANTO, Bandwidth: 15 MHz, Modulation: TM3.1-64QAM

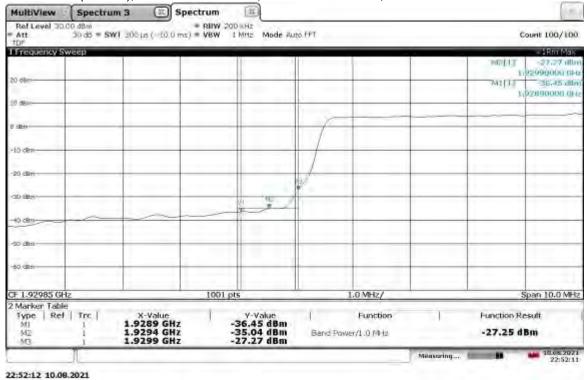


Band Edge Compliant, Upper Band Edge, 1982.5 MHz Slot 2 (Band 2), Antenna Port: ANT0, Bandwidth: 15 MHz, Modulation: TM3.1-64QAM

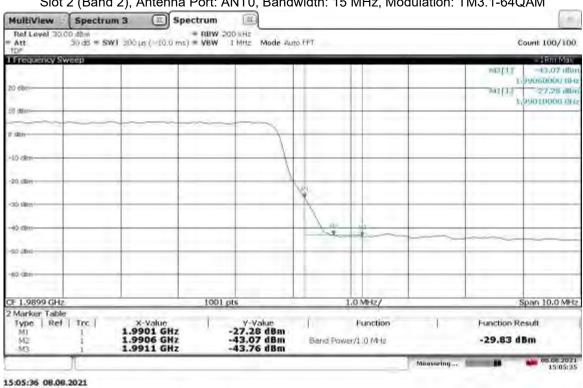


Report Number: 104751739BOX-013

Issued: 09/29/2021 Revised: 02/02/2022


Band Edge Compliant, Lower Band Edge, 1940 MHz Slot 2 (Band 2), Antenna Port: ANT0, Bandwidth: 20 MHz, Modulation: TM3.1-64QAM

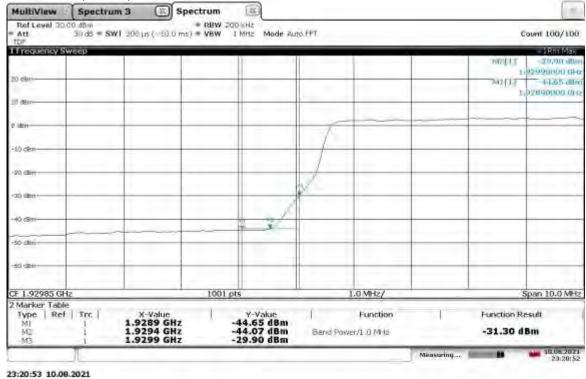


Band Edge Compliant, Upper Band Edge, 1980 MHz Slot 2 (Band 2), Antenna Port: ANT0, Bandwidth: 20 MHz, Modulation: TM3.1-64QAM

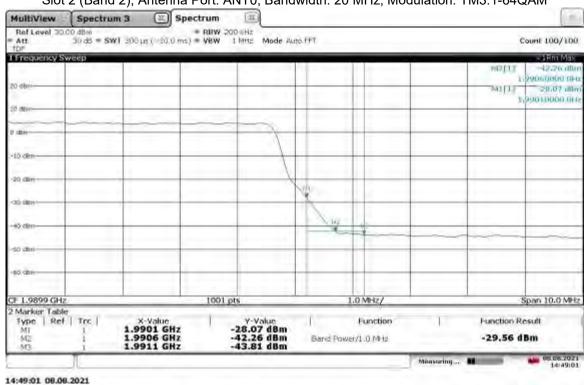

Band Edge Compliant, Lower Band Edge, 1932.5 MHz Slot 2 (Band 2), Antenna Port: ANT1, Bandwidth: 5 MHz, Modulation: TM3.1-64QAM

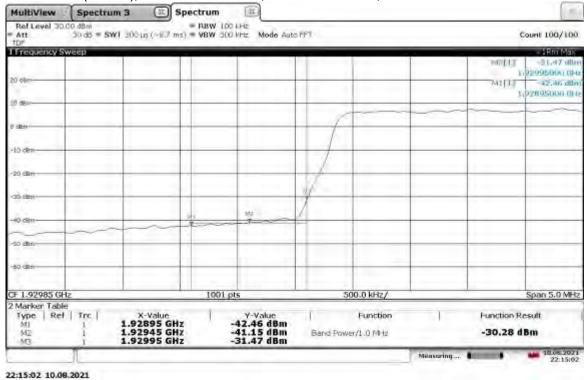


Band Edge Compliant, Upper Band Edge, 1987.5 MHz Slot 2 (Band 2), Antenna Port: ANT1, Bandwidth: 5 MHz, Modulation: TM3.1-64QAM

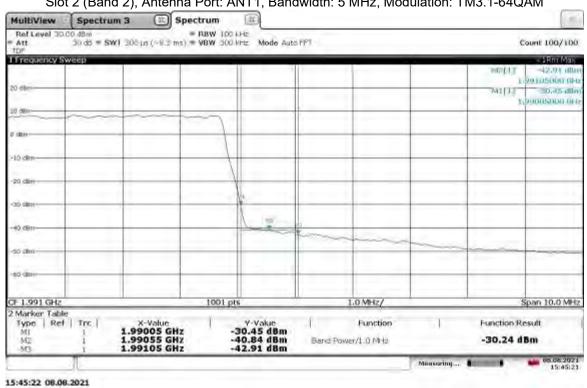


Report Number: 104751739BOX-013

Issued: 09/29/2021 Revised: 02/02/2022


Band Edge Compliant, Lower Band Edge, 1935 MHz Slot 2 (Band 2), Antenna Port: ANT1, Bandwidth: 10 MHz, Modulation: TM3.1-64QAM

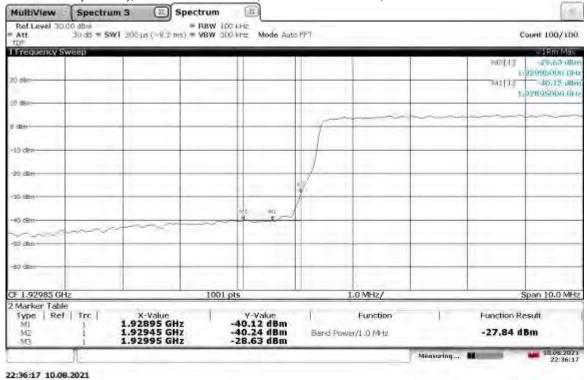


Band Edge Compliant, Upper Band Edge, 1985 MHz Slot 2 (Band 2), Antenna Port: ANT1, Bandwidth: 10 MHz, Modulation: TM3.1-64QAM

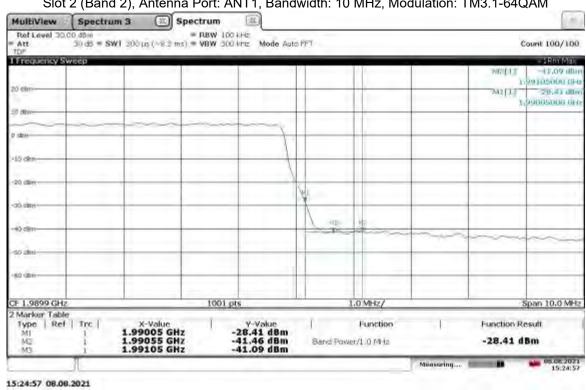

Band Edge Compliant, Lower Band Edge, 1937.5 MHz Slot 2 (Band 2), Antenna Port: ANT1, Bandwidth: 15 MHz, Modulation: TM3.1-64QAM

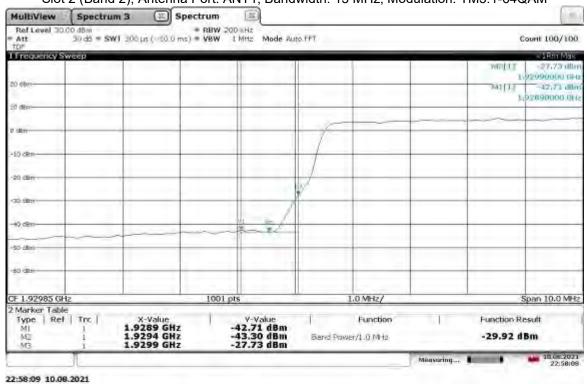


Band Edge Compliant, Upper Band Edge, 1982.5 MHz Slot 2 (Band 2), Antenna Port: ANT1, Bandwidth: 15 MHz, Modulation: TM3.1-64QAM

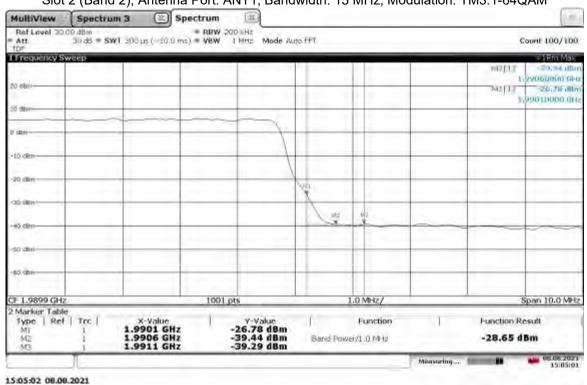


Non-Specific Radio Report Shell Rev. December 2017 Client: CommScope Technologies LLC / Model: RPM-A5A11-B02 with W/ 5G NR waveform With OneCell® RP5100 Report Number: 104751739BOX-013

Issued: 09/29/2021 Revised: 02/02/2022

Band Edge Compliant, Lower Band Edge, 1940 MHz Slot 2 (Band 2), Antenna Port: ANT1, Bandwidth: 20 MHz, Modulation: TM3.1-64QAM

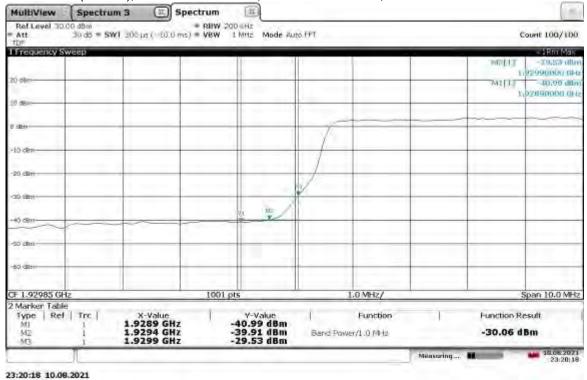


Band Edge Compliant, Upper Band Edge, 1980 MHz Slot 2 (Band 2), Antenna Port: ANT1, Bandwidth: 20 MHz, Modulation: TM3.1-64QAM

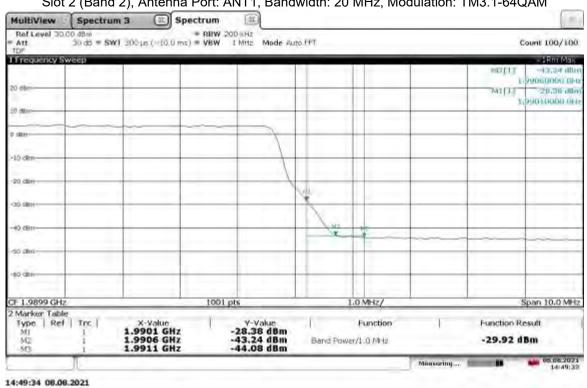


Non-Specific Radio Report Shell Rev. December 2017 Page 147 of 194 Client: CommScope Technologies LLC / Model: RPM-A5A11-B02 with W/ 5G NR waveform With OneCell® RP5100

Band Edge Compliant, Lower Band Edge, 1932.5 MHz Slot 2 (Band 2), Antenna Port: ANTO, Bandwidth: 5 MHz, Modulation: TM3.1a-256QAM

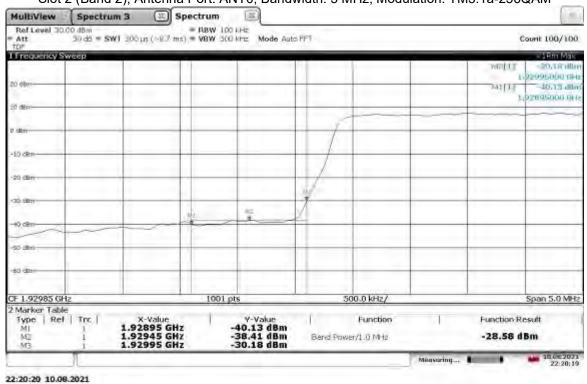


Band Edge Compliant, Upper Band Edge, 1987.5 MHz Slot 2 (Band 2), Antenna Port: ANTO, Bandwidth: 5 MHz, Modulation: TM3.1a-256QAM

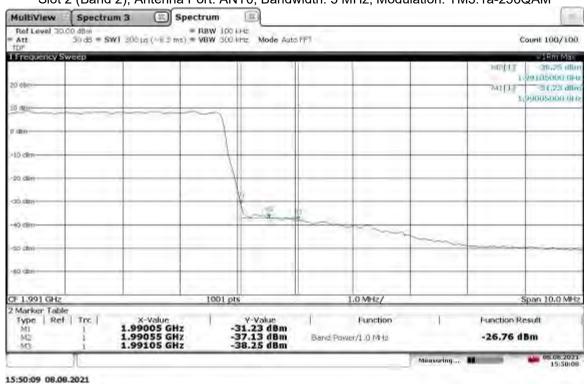


Report Number: 104751739BOX-013

Issued: 09/29/2021 Revised: 02/02/2022


Band Edge Compliant, Lower Band Edge, 1935 MHz Slot 2 (Band 2), Antenna Port: ANT0, Bandwidth: 10 MHz, Modulation: TM3.1a-256QAM

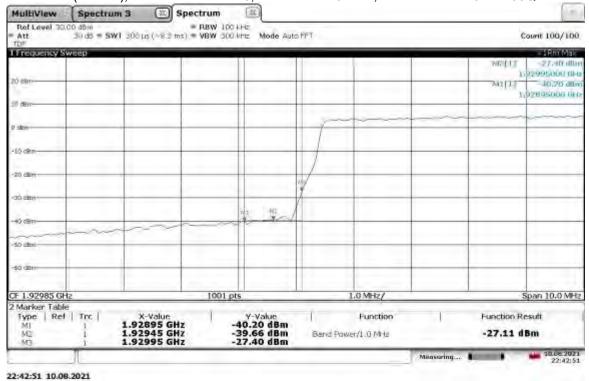


Band Edge Compliant, Upper Band Edge, 1985 MHz Slot 2 (Band 2), Antenna Port: ANT0, Bandwidth: 10 MHz, Modulation: TM3.1a-256QAM

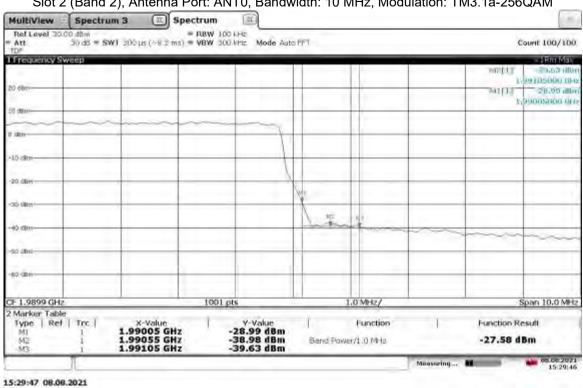


Band Edge Compliant, Lower Band Edge,1937.5MHz
Slot 2 (Band 2), Antenna Port: ANTO, Bandwidth: 15 MHz, Modulation: TM3.1a-256QAM

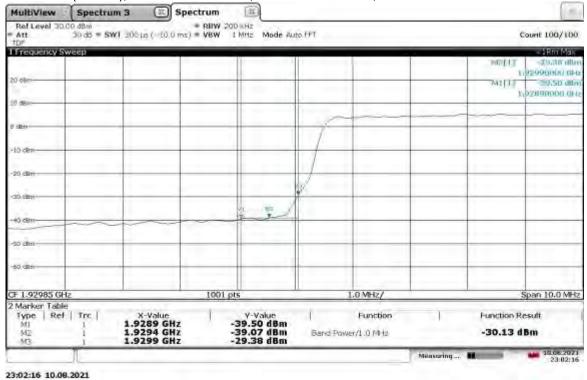


Band Edge Compliant, Upper Band Edge, 1982.5 MHz Slot 2 (Band 2), Antenna Port: ANT0, Bandwidth: 15 MHz, Modulation: TM3.1a-256QAM

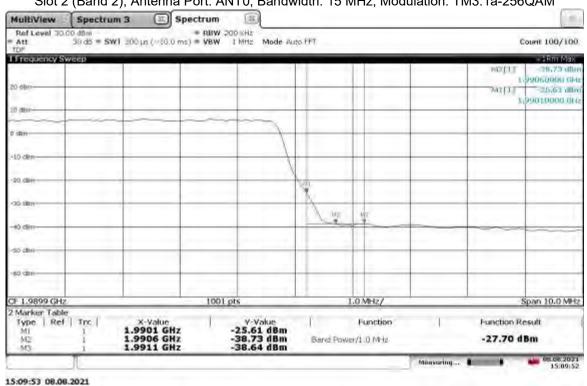


Band Edge Compliant, Lower Band Edge, 1940 MHz Slot 2 (Band 2), Antenna Port: ANT0, Bandwidth: 20 MHz, Modulation: TM3.1a-256QAM

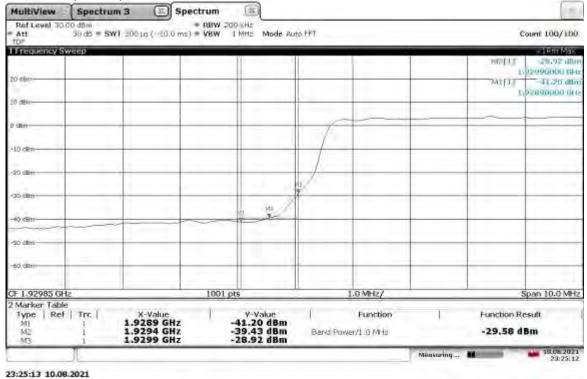


Band Edge Compliant, Upper Band Edge, 1980 MHz Slot 2 (Band 2), Antenna Port: ANT0, Bandwidth: 20 MHz, Modulation: TM3.1a-256QAM

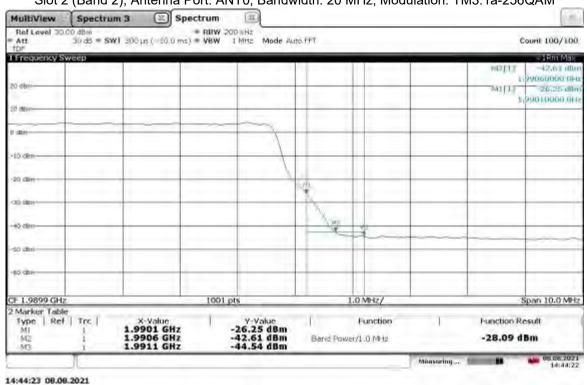


Band Edge Compliant, Lower Band Edge, 1932.5 MHz Slot 2 (Band 2), Antenna Port: ANT1, Bandwidth: 5 MHz, Modulation: TM3.1a-256QAM

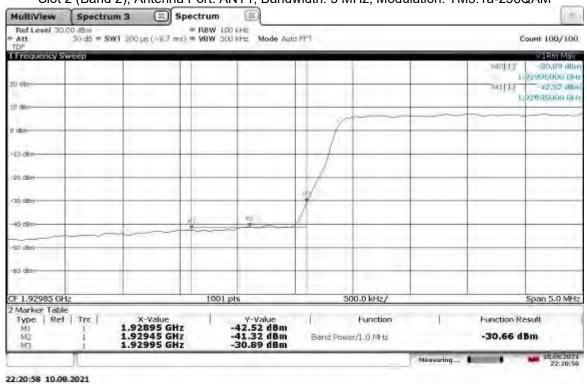


Band Edge Compliant, Upper Band Edge, 1987.5 MHz

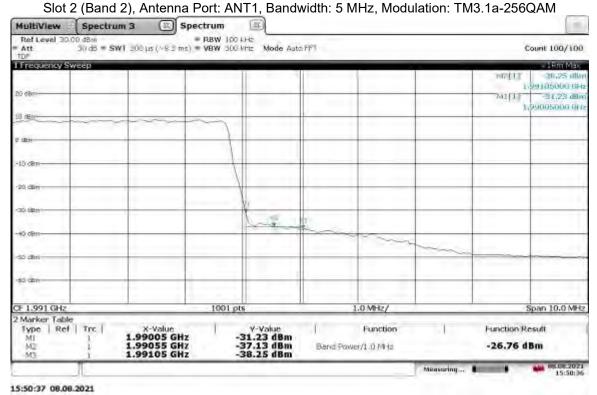

Band Edge Compliant, Lower Band Edge, 1935 MHz Slot 2 (Band 2), Antenna Port: ANT1, Bandwidth: 10 MHz, Modulation: TM3.1a-256QAM

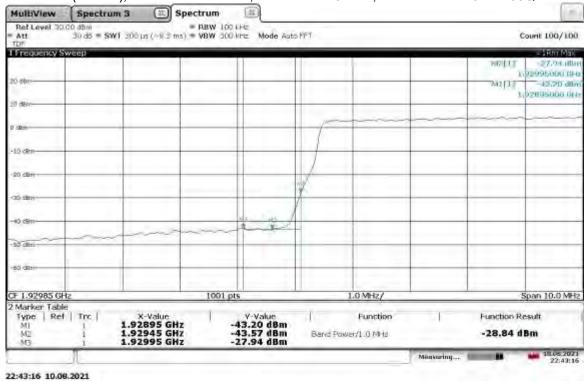


Band Edge Compliant, Upper Band Edge, 1985 MHz Slot 2 (Band 2), Antenna Port: ANT1, Bandwidth: 10 MHz, Modulation: TM3.1a-256QAM

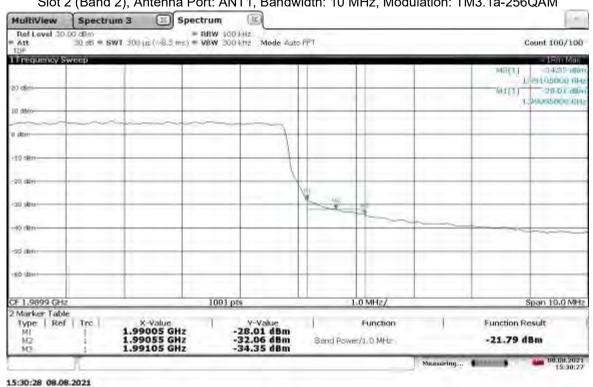


Non-Specific Radio Report Shell Rev. December 2017

Client: CommScope Technologies LLC / Model: RPM-A5A11-B02 with W/ 5G NR waveform With OneCell® RP5100


Band Edge Compliant, Lower Band Edge, 1937.5 MHz Slot 2 (Band 2), Antenna Port: ANT1, Bandwidth: 15 MHz, Modulation: TM3.1a-256QAM

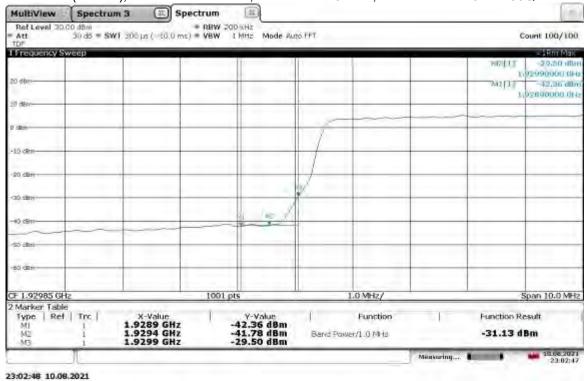


Band Edge Compliant, Upper Band Edge, 1982.5 MHz Slot 2 (Band 2), Antenna Port: ANT1, Bandwidth: 15 MHz, Modulation: TM3.1a-256QAM

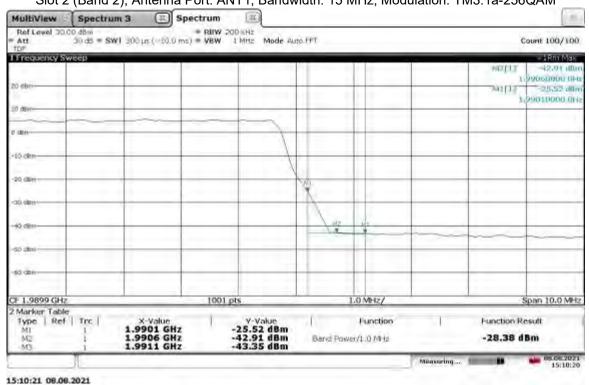

Band Edge Compliant, Lower Band Edge, 1940 MHz Slot 2 (Band 2), Antenna Port: ANT1, Bandwidth: 20 MHz, Modulation: TM3.1a-256QAM

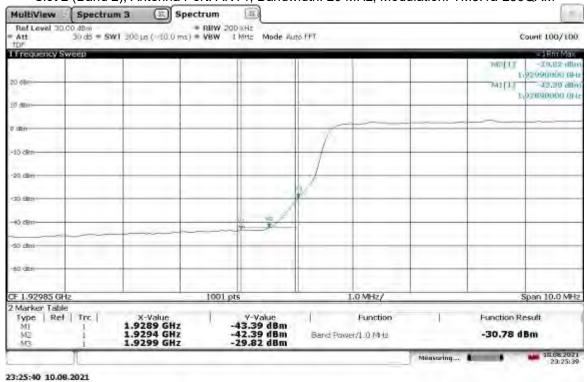

Band Edge Compliant, Upper Band Edge, 1980 MHz Slot 2 (Band 2), Antenna Port: ANT1, Bandwidth: 20 MHz, Modulation: TM3.1a-256QAM

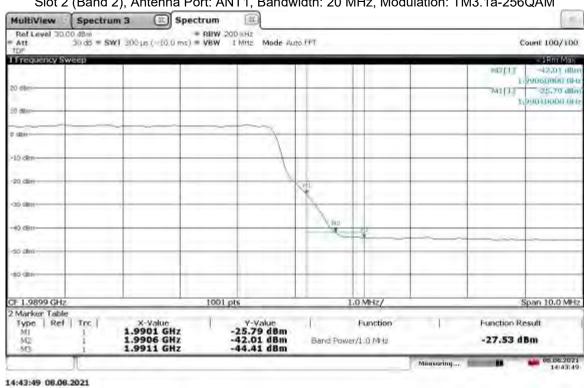

Report Number: 104751739BOX-013 Issued: 09/29/2021 Revised: 02/02/2022

Test Date: 07/28/2021, 07/29/2021, 07/30/2021, 08/03/2021

Supervising/Reviewing

Engineer: (Where Applicable) N/A

Product Standard: FCC Part 24 Limit Applied: See report section 8.3 Input Voltage: 48 VDC (POE)

Pretest Verification w/ Ambient Temperature: 22, 23, 23, 23 °C Ambient Signals or

BB Source: Relative Humidity: __21, 15, 26, 47, 20, 22 % N/A

Atmospheric Pressure: __1004, 1013, 1004, 980 mbars

Deviations, Additions, or Exclusions: None

Report Number: 104751739BOX-013 Issued: 09/29/2021 Revised: 02/02/2022

9 Frequency Stability Due Voltage Variation

9.1 Method

Tests are performed in accordance with ANSI C63.26 and CFR47 FCC Parts 2.1055 and 24.

TEST SITE: Safety Lab

9.2 Test Equipment Used:

0.2 .000	=quipinoni e e e a i					
Asset	Description	Manufacturer	Model	Serial	Cal Date	Cal Due
CEN001'	DC-40GHz attenuator 20dB	Centric RF	C411-20	CEN001	01/22/2021	01/22/2022
CBLHF2012-5M-2'	5m 9kHz-40GHz Coaxial Cable - SET2	Huber & Suhner	SF102	252676002	02/19/2021	02/19/2022
ROS005-1'	Signal and Spectrum Analyzer	Rohde and Shwartz	FSW43	100646	10/27/2020	10/27/2021
DAV005'	Weather Station	Davis	6250	MS191218083	02/07/2021	02/07/2022
	Freezing Rain\lcing\Temp\Humidity\ -					
	73deg C to +190deg C, 95% humidity,		CTH-(FR)64-6-6-			
SAF1153'	Ice Freezing Rain	Cincinnati Sub-Zero	SC/AC	12-CT15628	11/18/2020	11/18/2021

Software Utilized:

Name	Manufacturer	Version
None		

9.3 Results:

The sample tested was found to Comply.


§24.235 Frequency stability – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The occupied bandwidth measurement was used to make sure the lower and upper frequencies of the occupied bandwidth remains within the assigned band of 1930-1990 MHz MHz.

Report Number: 104751739BOX-013 Issued: 09/29/2021 Revised: 02/02/2022


9.4 Setup Photographs:

9.5 Plots/Data:

Slot 2 (Band 2), ANT1, Modulation: QPSK, Bandwidth: 5 MHz, Low Channel, Lower Extreme Voltage: 41.1VDC

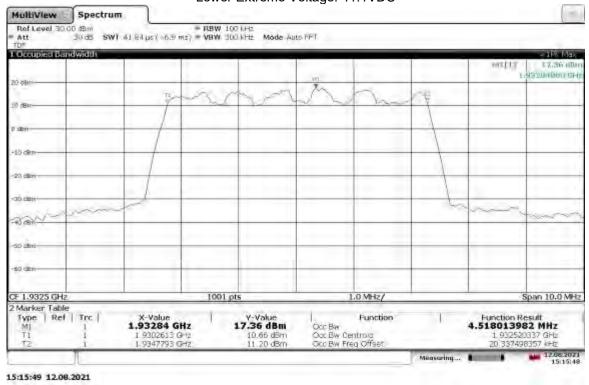


Slot 2 (Band 2), ANT1, Modulation: QPSK, Bandwidth: 5 MHz, High Channel,

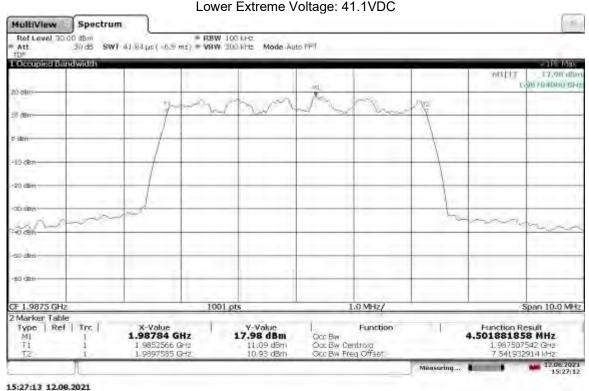


Non-Specific Radio Report Shell Rev. December 2017 Page 159 of 194 Client: CommScope Technologies LLC / Model: RPM-A5A11-B02 with W/ 5G NR waveform With OneCell® RP5100

Slot 2 (Band 2), ANT1, Modulation: QPSK, Bandwidth: 5 MHz, Low Channel, Upper Extreme Voltage: 57.0VDC

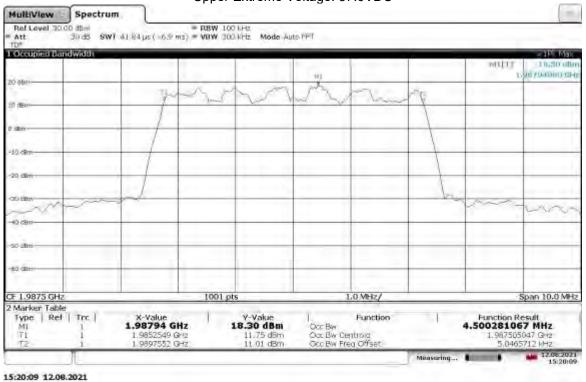


Slot 2 (Band 2), ANT1, Modulation: QPSK, Bandwidth: 5 MHz, High Channel, Upper Extreme Voltage: 57.0VDC

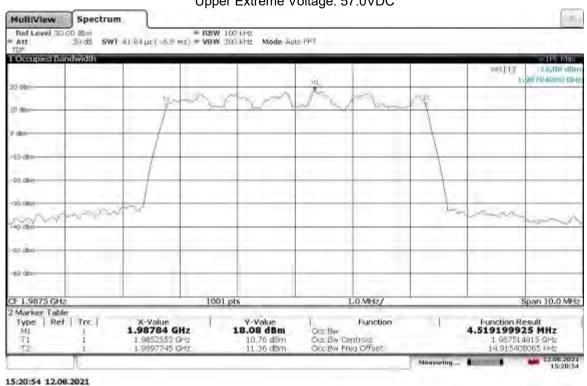


Non-Specific Radio Report Shell Rev. December 2017 Page 160 of 194 Client: CommScope Technologies LLC / Model: RPM-A5A11-B02 with W/ 5G NR waveform With OneCell® RP5100

Slot 2 (Band 2), ANT0, Modulation: QPSK, Bandwidth: 20 MHz, Low Channel, Lower Extreme Voltage: 41.1VDC

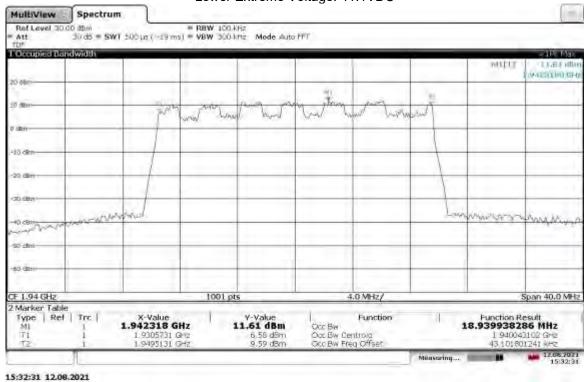


Slot 2 (Band 2), ANT0, Modulation: QPSK, Bandwidth: 20 MHz, High Channel, Lower Extreme Voltage: 41.1VDC

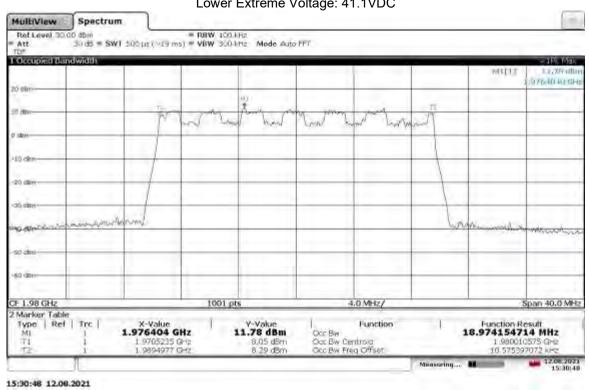


Non-Specific Radio Report Shell Rev. December 2017 Page 161 of 194 Client: CommScope Technologies LLC / Model: RPM-A5A11-B02 with W/ 5G NR waveform With OneCell® RP5100

Slot 0 (Band 2), ANT1, Modulation: QPSK, Bandwidth: 20 MHz, Low Channel, Upper Extreme Voltage: 57.0VDC

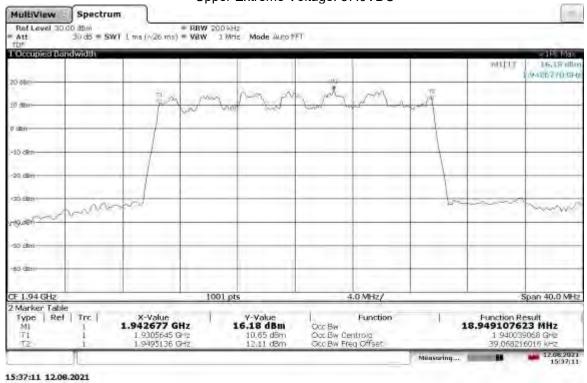

Slot 2 (Band 2), ANT1, Modulation: QPSK, Bandwidth: 20 MHz, High Channel, Upper Extreme Voltage: 57.0VDC

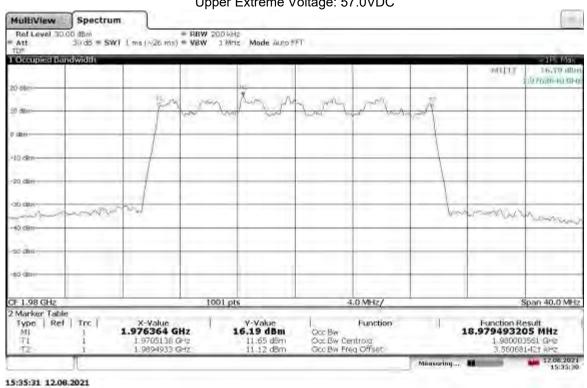

Non-Specific Radio Report Shell Rev. December 2017 Page 162 of 194

Report Number: 104751739BOX-013 Issued: 09/29/2021 Revised: 02/02/2022

Test Date: 08/12/202021, 08/19/2021, Test Personnel: Vathana Ven 08/16/2021, 08/19/2021

Supervising/Reviewing

Engineer: (Where Applicable) N/A

Product Standard: FCC Part 24 Limit Applied: See report section 9.3 48VDC (POE)

Input Voltage: Pretest Verification w/ Ambient Temperature: 22, 22, 23, 24 °C

Ambient Signals or Relative Humidity: __41, 44,34,68 % BB Source: N/A

Atmospheric Pressure: __1011, 1002, 1005,1008 mbars

Deviations, Additions, or Exclusions: None

10 Transmitter spurious emissions

10.1 Method

Tests are performed in accordance with ANSI C63.26 and CFR47 FCC Parts 2.1051, 2.1053, 2.1057, and 24

TEST SITE: EMC Lab & 10m ALSE

<u>The EMC Lab</u> has one Semi-anechoic Chamber and one Shielded Chamber. AC Mains Power is available at 120, 230, and 277 Single Phase; 208, 400, and 480 3-Phase. Large reference ground-planes are installed in the general lab area to facilitate EMC work not requiring a shielded environment.

The 10m ALSE is 13m (Length) x 21m (Depth) x 10m (Height) with the effective size in terms of space from the tips of the absorber is 12m (Length) x 20m (Depth) x 8.5m (Height). This chamber achieves broadband performance using a unique arrangement of hybrid and ferrite tile absorber. This chamber has a built in 3m diameter turntable (Embedded type). The metal structure of the table makes electrical connection around the entire circumference of the turntable to the ground plane with a metal brush type connection. The turntable is located on one end of the chamber and the antennas are mounted 3 and 10 meters away at the other end of the chamber on the adjustable an Antenna Mast. The antenna mast is a non-conductive bore sighted type with remote control of antenna height and polarization. The Antenna Mast and the turntable can be remotely controlled through the controller located in the adjacent Control room. A Styrofoam table 80 cm high is used for table-top equipment.

Measurement Uncertainty

Measurement	Frequency Range	Expanded Uncertainty (k=2)	Ucispr
Radiated Emissions, 10m	30-1000 MHz	4.6dB	6.3 dB
Radiated Emissions, 3m	30-1000 MHz	5.3 dB	6.3 dB
Radiated Emissions, 3m	1-6 GHz	4.5 dB	5.2 dB
Radiated Emissions, 3m	6-15 GHz	5.2 dB	5.5 dB
Radiated Emissions, 3m	15-18 GHz	5.0 dB	5.5 dB
Radiated Emissions, 3m	18-40 GHz	5.0 dB	5.5 dB

As shown in the table above our radiated emissions $U_{\it lab}$ is less than the corresponding $U_{\it CISPR}$ reference value in CISPR 16-4-2 Table 1, hence the compliance of the product is only based on the measured value, and no measurement uncertainty correction is required, based on CISPR 22 and CISPR 11 (for 2006 and later revisions) Clause 11.

Sample Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CF - AG

Where FS = Field Strength in $dB\mu V/m$

RA = Receiver Amplitude (including preamplifier) in dBμV

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB AG = Amplifier Gain in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows.

Assume a receiver reading of 52.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted, giving a field strength of 32 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

RA = $52.0 \text{ dB}_{\mu}\text{V}$ AF = 7.4 dB/mCF = 1.6 dBAG = 29.0 dBFS = $32 \text{ dB}_{\mu}\text{V/m}$

To convert from $dB\mu V$ to μV or mV the following was used:

```
UF = 10^{(NF/20)} where UF = Net Reading in \muV NF = Net Reading in dB\muV
```

Example:

FS = RA + AF + CF - AG =
$$52.0 + 7.4 + 1.6 - 29.0 = 32.0$$
 UF = $10^{(32 \text{ dB}\mu\text{V}\,/\,20)} = 39.8 \ \mu\text{V/m}$

Alternately, when BAT-EMC Emission Software is used, the "Level" includes all losses and gains and is compared directly in the "Margin" column to the "Limit". The "Correction" includes Antenna Factor, Preamp, and Cable Loss. These are already accounted for in the "Level" column.

10.2 Test Equipment Used:

Test equipment used for antenna port conducted test

Asset	Description	Manufacturer	Model	Serial	Cal Date	Cal Due
CEN001'	DC-40GHz attenuator 20dB	Centric RF	C411-20	CEN001	01/22/2021	01/22/2022
CBLSHF204'	Cable, SMA - SMA, 9kHz -40GHz, (Cable Kit 5)	Huber + Suhner	Sucoflex 102EA	234714001	02/03/2021	02/03/2022
ROS005-1'	Signal and Spectrum Analyzer	Rohde and Shwartz	FSW43	100646	10/27/2020	10/27/2021
DAV005'	Weather Station	Davis	6250	MS191218083	02/07/2021	02/07/2022

Software Utilized:

Name	Manufacturer	Version
None		

Test equipment used for Radiated emissions

Asset	Description	Manufacturer	Model	Serial	Cal Date	Cal Due
IW001`	2 meter cable	Insulated Wire	2801-NPS	001	10/07/2020	10/07/2021
HS003'	10m under floor cable	Huber-Schuner	10m-1	HS003	02/17/2021	02/17/2022
HS002`	DC-18GHz cable 1.4m long	Huber & Suhner	SucoFlex 106A	HS002	11/25/2020	11/25/2021
PRE11'	50dB gain preamp	Pasternack	PRE11	PRE11	09/11/2020	09/11/2021
IW006`	DC-18GHz cable 8.4m long	Insulated Wire	2800-NPS	IW006	11/25/2020	11/25/2021
PRE12'	Pre-amplifier	Com Power	PAM-118A	18040117	12/07/2020	12/07/2021
145106	Bilog Antenna (30MHz - 5GHz)	Sunol Sciences	JB5	A111003	06/16/2020	06/16/2021
EMC04'	ANTENNA, RIDGED GUIDE, 18-40 GHZ	EMCO	3116	2090	01/28/2021	01/28/2022
CBLSHF204'	Cable, SMA - SMA, 9kHz -40GHz, (Cable Kit 5)	Huber + Suhner	Sucoflex 102EA	234714001	02/03/2021	02/03/2022
145108`	EMI Test Receiver (20Hz – 40GHz)	Rohde & Schwarz	ESIB40	100209	06/22/2021	06/22/2022
PRE8'	PREAMPLFIER 1- 40 GHz	MITEQ	NSP4000-NF	507145	11/25/2020	11/25/2021
				MS19121200		
DAV007`	Weather Station Vantage Vue	Davis	6250	3	03/22/2021	03/22/2022
ETS005'	1-18GHz horn antenna	ETS-Lindgren	3117	00218279	09/28/2020	09/28/2021

Software Utilized:

Name	Manufacturer	Version
BAT-EMC	Nexio	3.18.0.16

10.3 Results:

The sample tested was found to Comply. Where a resolution bandwidth of less than 1 MHz was used (in some cases, 120 kHz or 100 kHz), more than 10 dB margin to the limit is shown. Since the two antenna ports transmit uncorrelated data streams and use cross polarized antennas, no adjustments to the test results were applied due to MIMO operation, per KDB 662911.

§24.238(a): The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB. (b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

Note: All spurious emissions were tested with narrowest bandwidth and QPSK modulation settings. Since there were no emissions within 30dB of limit, and settings had ~1dB effect on peak readings, other settings were not tested and EUT was considered compliant.

Non-Specific Radio Report Shell Rev. December 2017 Page 166 of 194 Client: CommScope Technologies LLC / Model: RPM-A5A11-B02 with W/ 5G NR waveform With OneCell® RP5100

Report Number: 104751739BOX-013 Issued: 09/29/2021 Revised: 02/02/2022

10.4 Setup Photographs:

9kHz - 30 MHz

Report Number: 104751739BOX-013 Issued: 09/29/2021 Revised: 02/02/2022

30-1000 MHz Test Setup

Report Number: 104751739BOX-013 Issued: 09/29/2021 Revised: 02/02/2022

1-18 GHz Test Setup

Report Number: 104751739BOX-013 Issued: 09/29/2021 Revised: 02/02/2022


18-22 GHz

Report Number: 104751739BOX-013 Issued: 09/29/2021 Revised: 02/02/2022


Antenna Port Conducted Test Setup

10.5 Plots/Data:

Slot 2 (Band 2), ANT0, Modulation: TM1.1-QPSK, Bandwidth: 5 MHz, Low Channel 1932.5 MHz 9KHz-30MHz

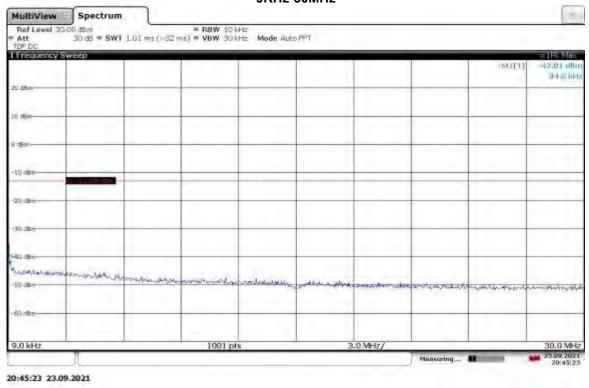

Slot 2 (Band 2), ANT0, Modulation: TM1.1-QPSK, Bandwidth: 5 MHz, Low Channel 1932.5 MHz 30MHz-1GHz

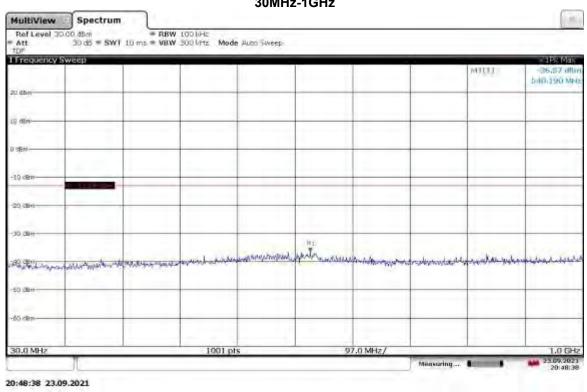

Non-Specific Radio Report Shell Rev. December 2017 Page 172 of 194 Client: CommScope Technologies LLC / Model: RPM-A5A11-B02 with W/ 5G NR waveform With OneCell® RP5100


Report Number: 104751739BOX-013

Issued: 09/29/2021 Revised: 02/02/2022


Slot 2 (Band 2), ANT0, Modulation: TM1.1-QPSK, Bandwidth: 5 MHz, Low Channel 1932.5 MHz 1-22 GHz



Slot 2 (Band 2), ANT0, Modulation: TM1.1-QPSK, Bandwidth: 5 MHz, Mid Channel 1960 MHz 9kHz-30MHz

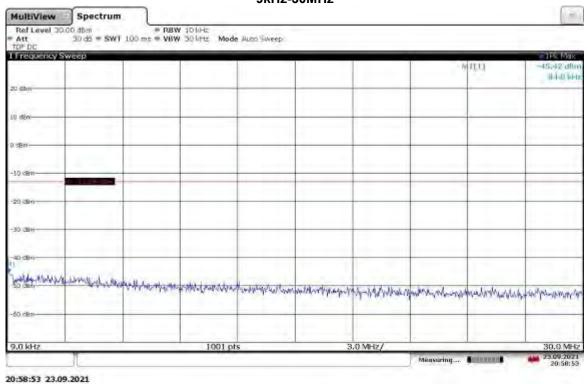

Slot 2 (Band 2), ANT0, Modulation: TM1.1-QPSK, Bandwidth: 5 MHz, Mid Channel 1960 MHz 30MHz-1GHz

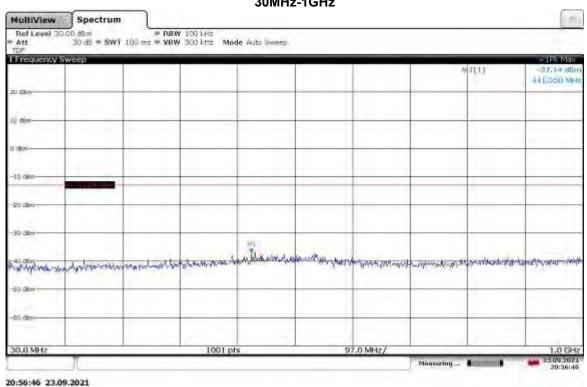


Non-Specific Radio Report Shell Rev. December 2017 Page 174 of 194 Client: CommScope Technologies LLC / Model: RPM-A5A11-B02 with W/ 5G NR waveform With OneCell® RP5100


Slot 2 (Band 2), ANT0, Modulation: TM1.1-QPSK, Bandwidth: 5 MHz, Mid Channel 1960 MHz 1-22GHz



Slot 2 (Band 2), ANT0, Modulation: TM1.1-QPSK, Bandwidth: 5 MHz, High Channel 1987.5 MHz 9kHz-30Hz

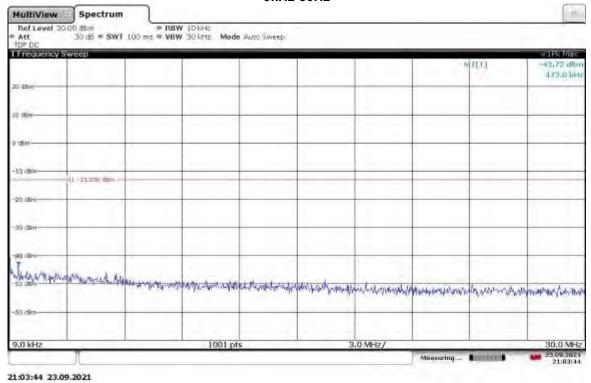


Slot 2 (Band 2), ANT0, Modulation: TM1.1-QPSK, Bandwidth: 5 MHz, High Channel 1987.5 MHz 30MHz-1GHz

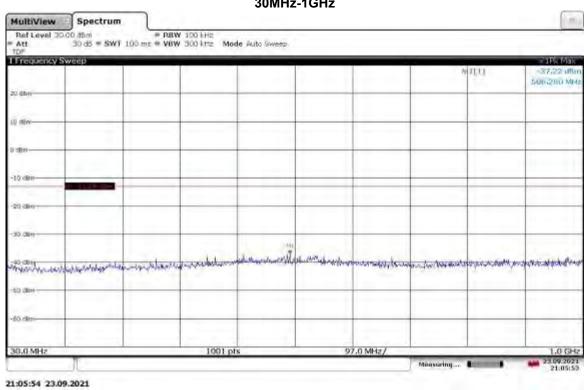


Non-Specific Radio Report Shell Rev. December 2017 Client: CommScope Technologies LLC / Model: RPM-A5A11-B02 with W/ 5G NR waveform With OneCell® RP5100


Slot 2 (Band 2), ANT0, Modulation: TM1.1-QPSK, Bandwidth: 5 MHz, High Channel 1987.5 MHz 1-22GHz

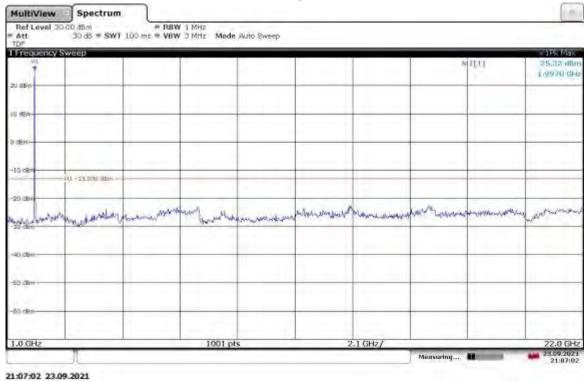

Slot 2 (Band 2), ANT1, Modulation: TM1.1-QPSK, Bandwidth: 5 MHz, Low Channel 1932.5 MHz 9kHz-30MHz

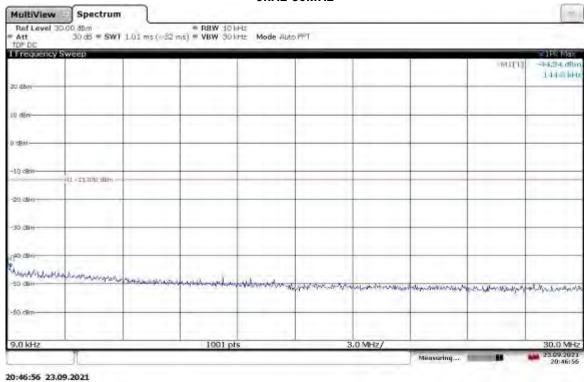


Slot 2 (Band 2), ANT1, Modulation: TM1.1-QPSK, Bandwidth: 5 MHz, Low Channel 1932.5 MHz 30MHz-1GHz

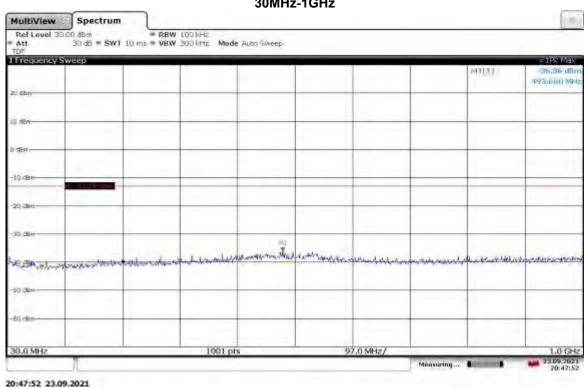


Non-Specific Radio Report Shell Rev. December 2017 Page 178 of 194 Client: CommScope Technologies LLC / Model: RPM-A5A11-B02 with W/ 5G NR waveform With OneCell® RP5100


Slot 2 (Band 2), ANT1, Modulation: TM1.1-QPSK, Bandwidth: 5 MHz, Low Channel 1932.5 MHz 1-22GHz

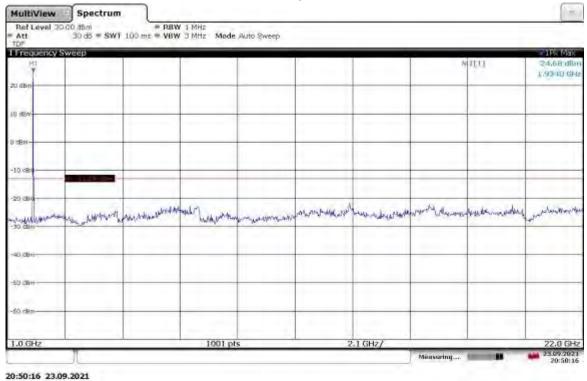

Slot 2 (Band 2), ANT1, Modulation: TM1.1-QPSK, Bandwidth: 5 MHz, Mid Channel 1960 MHz 9kHz-30MHz

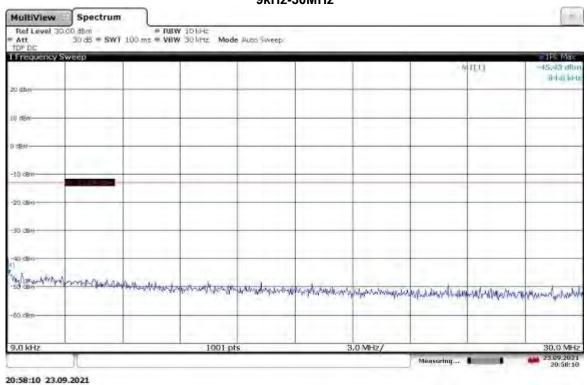


Slot 2 (Band 2), ANT1, Modulation: TM1.1-QPSK, Bandwidth: 5 MHz, Mid Channel 1960 MHz 30MHz-1GHz

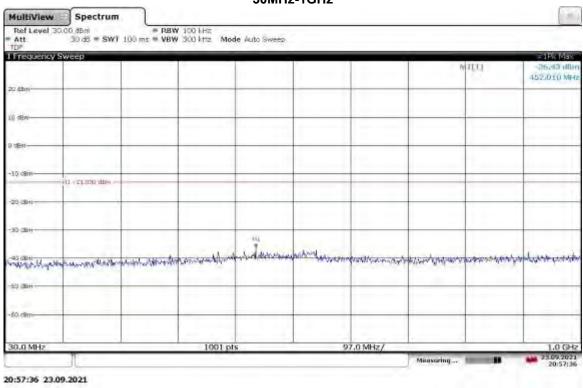


Page 180 of 194 Non-Specific Radio Report Shell Rev. December 2017 Client: CommScope Technologies LLC / Model: RPM-A5A11-B02 with W/ 5G NR waveform With OneCell® RP5100


Slot 2 (Band 2), ANT1, Modulation: TM1.1-QPSK, Bandwidth: 5 MHz, Mid Channel 1960 MHz 1-22GHz

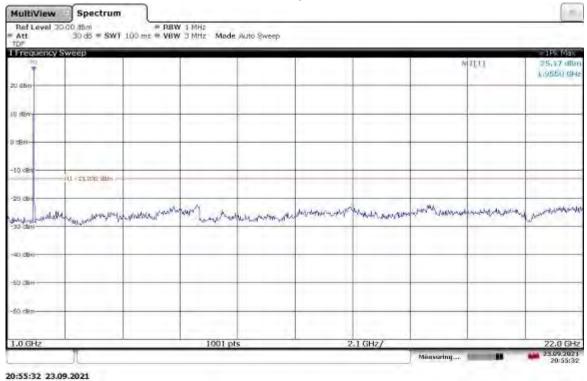


Slot 2 (Band 2), ANT1, Modulation: TM1.1-QPSK, Bandwidth: 5 MHz, High Channel 1987.5 MHz 9kHz-30MHz

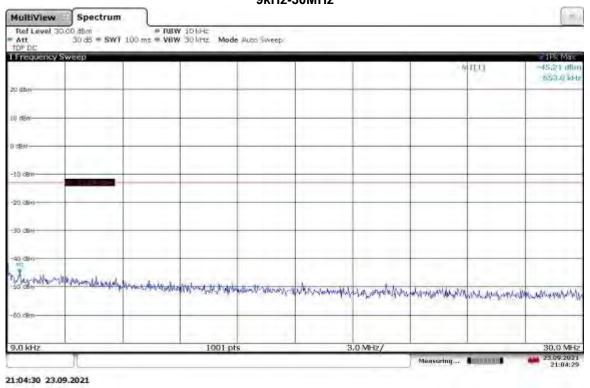

Slot 2 (Band 2), ANT1, Modulation: TM1.1-QPSK, Bandwidth: 5 MHz, High Channel 1987.5 MHz 30MHz-1GHz

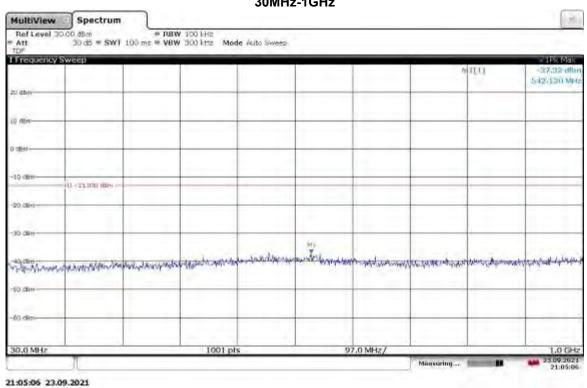

Slot 2 (Band 2), ANT1, Modulation: TM1.1-QPSK, Bandwidth: 5 MHz, High Channel 1987.5 MHz 1-22GHz

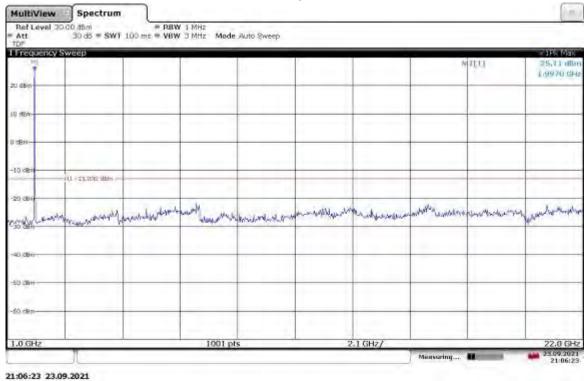


Radiated Emissions, 9kHz-30 MHz Slot 2 (Band 2), Modulation: TM1.1-QPSK, Bandwidth 5 MHz, Transmit @ Low Channel Test Information:

Date and Time	8/27/2021 9:55:37 PM
Client and Project Number	CommScope_G104751739
Engineer	Vathana Ven
Temperature	31 deg C
Humidity	39%
Atmospheric Pressure	1007 mB
Comments	RE 9kHz-30MHz_POE_Band 2 5MHz BW_TM1.1 (worst-case)_Tx Low CH
	1932.5MHz_RP5100 host

Graph:



- Level (QuasiPeak (PASS)) (Vertical)
- Level (Peak (PASS)) (Vertical)

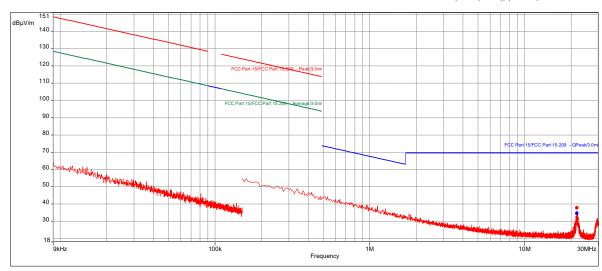

Results:


Peak (PASS) (1)


Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Azimuth (°) (dB)	Height (m) (dB)	Pol. (dB)	RBW (dB)	Correction (dB)
21.7365	37.75	69.54	-31.79	342.00	1.00	Vertical	9000.00	11.04
QuasiPeak (P.	ASS) (1)							
Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Azimuth (°) (dB)	Height (m) (dB)	Pol. (dB)	RBW (dB)	Correction (dB)
21.7365	34.63	69.54	-34.91	342.00	1.00	Vertical	9000.00	11.04

Radiated Emissions, 30-1000 MHz Slot 2 (Band 2), Modulation: TM1.1-QPSK, Bandwidth 5 MHz, Transmit @ Low Channel Test Information:

Date and Time	9/12/2021 12:29:50 PM
Client and Project Number	CommScope_G104751739
Engineer	Vathana Ven
Temperature	31 deg C
Humidity	39%
Atmospheric Pressure	1007 mB
Comments	RE 30-1000MHz_POE_Band 2 5MHz BW_TM1.1 _Tx Low CH 1932.5MHz_RP5100
	host

Graph:



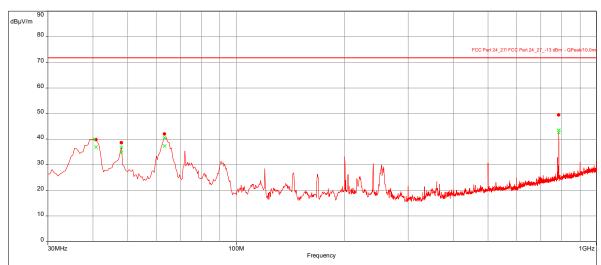

Results:

Peak (PASS) (4)

Frequency	Level	Level	Limit	Margin	Azimuth	Height	Pol. (dB)	RBW (dB)	Correction
(MHz)	(dBµV/m)	(dBm)	(dBm)	(dB)	(°) (dB)	(m) (dB)			(dB)
40.93684211	39.77	-45.03	-13.00	-32.03	17.00	2.07	Vertical	120000.00	-20.23
48	38.55	-46.25	-13.00	-33.25	358.00	3.22	Vertical	120000.00	-24.48
63.26315789	42.02	-42.78	-13.00	-29.78	83.00	2.53	Vertical	120000.00	-25.27
785.6	49.44	-35.36	-13.00	-22.36	226.00	2.92	Vertical	120000.00	-7.96


Level EIRP (dBm) = Level Peak (dBuV/m) - 84.8


Issued: 09/29/2021 Revised: 02/02/2022

Radiated Emissions, 1-22 GHz Slot 2 (Band 2), Modulation: TM1.1-QPSK, Bandwidth 5 MHz, Transmit @ Low Channel Test Information:

Date and Time	9/19/2021 10:48:26 AM
Client and Project Number	CommScope_G104751739
Engineer	Vathana Ven
Temperature	31 deg C
Humidity	39%
Atmospheric Pressure	1007 mB
Comments	RE 1 to 13 GHz_POE_Band 2 5MHz BW_TM1.1_Tx Low CH 1932.5MHz_RP5100
	host

Graph:



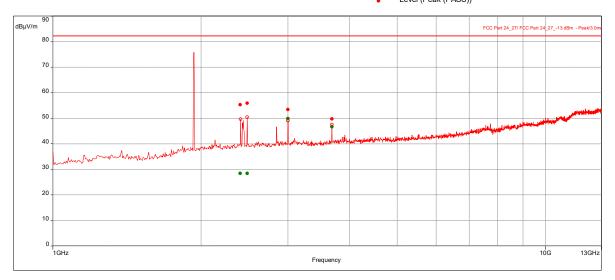

Results:

Peak (PASS) (4)

Frequency (MHz)	Level (dBµV/m)	Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (°) (dB)	Height (m) (dB)	Pol. (dB)	RBW (dB)	Correction (dB)
2402.105263	55.29	-39.97	-13.0	-26.97	220.00	1.75	Horizontal	1000000.00	-3.15
2480.263158	55.88	-39.38	-13.0	-26.38	322.00	1.85	Horizontal	1000000.00	-3.26
3000	53.37	-41.89	-13.0	-28.89	134.00	1.65	Horizontal	1000000.00	-2.35
3686.315789	49.71	-45.55	-13.0	-32.55	176.00	1.05	Horizontal	1000000.00	-1.29

Level EIRP (dBm) = Level Peak (dBuV/m) - 95.30

Big peak was from the fundamental frequency. Manual scan was performed from 13 to 22GHz. No emissions were detected above the measuring equipment noise floor.


Radiated Emissions, 9kHz-30 MHz Slot 2 (Band 2), Modulation: TM1.1-QPSK, Bandwidth 5 MHz, Transmit @ Mid Channel Test Information:

Date and Time	8/27/2021 10:31:43 PM
Client and Project Number	CommScope_G104751739
Engineer	Vathana Ven
Temperature	31 deg C
Humidity	39%
Atmospheric Pressure	1007 mB
Comments	RE 9kHz-30MHz_POE_Band 2 5MHz BW_TM1.1 (worst-case)_Tx Mid CH
	1960MHz_RP5100 host

Graph:



- Level (QuasiPeak (PASS)) (Vertical)
- Level (Peak (PASS)) (Vertical)

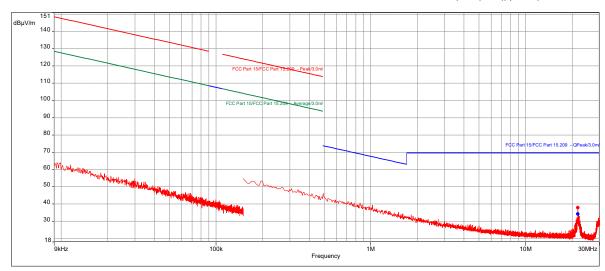

Results:

Peak (PASS) (1)


Frequency	Levei	Limit	Margin	Azimuth (°)	Height (m)	POI.	KRM	Correction		
(MHz)	(dBµV/m)	(dBµV/m)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)		
21.73413158	37.83	69.54	-31.71	0.00	1.00	Vertical	9000.00	11.04		
QuasiPeak (PASS) (1)										
Frequency	Level	Limit	Margin	Azimuth (°)	Height (m)	Pol.	RBW	Correction		
(MHz)	(dBµV/m)	(dBµV/m)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)		
21.73413158	34.16	69.54	-35.38	0.00	1.00	Vertical	9000.00	11.04		

Issued: 09/29/2021 Revised: 02/02/2022


Radiated Emissions, 30-1000 MHz Slot 2 (Band 2), Modulation: TM1.1-QPSK, Bandwidth 5 MHz, Transmit @ Mid Channel **Test Information:**

Date and Time	8/28/2021 12:39:48 AM
Client and Project Number	CommScope_G104751739
Engineer	Vathana Ven
Temperature	31 deg C
Humidity	39%
Atmospheric Pressure	1007 mB
Comments	RE 30-1000MHz_POE_Band 2 5MHz BW_TM1.1 (worst-case)_Tx Mid CH
	1960MHz_RP5100 host

Graph:





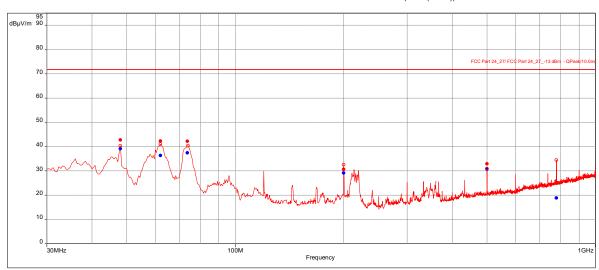

Results:

Peak (PASS) (6)

Frequency (MHz)	Level (dBµV/m)	Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (°) (dB)	Height (m) (dB)	Pol. (dB)	RBW (dB)	Correction (dB)
48	42.76	-42.04	-13.00	-29.04	291.00	1.00	Vertical	120000.00	-24.52
61.90526316	42.26	-42.54	-13.00	-29.54	0.00	2.08	Vertical	120000.00	-25.46
73.74736842	42.22	-42.58	-13.00	-29.58	144.00	2.01	Vertical	120000.00	-24.90
200	30.62	-54.18	-13.00	-41.18	359.00	2.25	Vertical	120000.00	-19.48
500	32.85	-51.95	-13.00	-38.95	55.00	1.69	Horizontal	120000.00	-13.40
778.9578947	24.88	-59.92	-13.00	-46.92	235.00	2.35	Vertical	120000.00	-8.44


Level EIRP (dBm) = Level Peak (dBuV/m) -84.8


Issued: 09/29/2021 Revised: 02/02/2022

Radiated Emissions, 1-22 GHz Slot 2 (Band 2), Modulation: TM1.1-QPSK, Bandwidth 5 MHz, Transmit @ Mid Channel Test Information:

Date and Time	9/19/2021 11:15:23 AM
Client and Project Number	CommScope_G104751739
Engineer	Vathana Ven
Temperature	31 deg C
Humidity	39%
Atmospheric Pressure	1007 mB
Comments	RE 1 to 13 GHz_POE_Band 2 5MHz BW_TM1.1_Tx Mid CH 1960MHz_RP5100
	host

Graph:



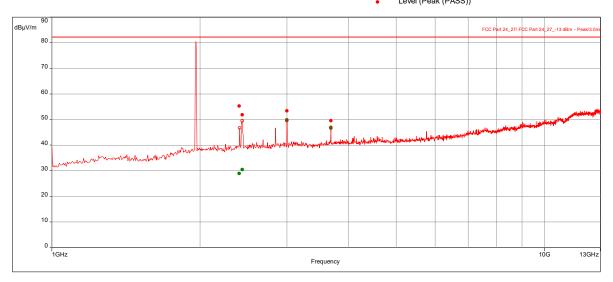

Results:

Peak (PASS) (4)

Frequency (MHz)	Level (dBuV/m)	Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth	Height (m) (dB)	Pol. (dB)	RBW (dB)	Correction (dB)
2401.842105	55.29	-39.97	-13.0	-26.97	97.00	3.25	Horizontal	1000000.00	-3.15
2434.473684	51.87	-43.39	-13.0	-30.39	104.00	1.01	Horizontal	1000000.00	-3.32
3000	53.37	-41.89	-13.0	-28.89	133.00	1.71	Horizontal	1000000.00	-2.35
3686.315789	49.56	-45.70	-13.0	-32.70	175.00	1.00	Horizontal	1000000.00	-1.29

Level EIRP (dBm) = Level Peak (dBuV/m) - 95.30

Big peak was from the fundamental frequency. Manual scan was performed from 13 to 22GHz. No emissions were detected above the measuring equipment noise floor.


Radiated Emissions, 9kHz-30 MHz Slot 2 (Band 2), Modulation: TM1.1-QPSK, Bandwidth 5 MHz, Transmit @ High Channel Test Information:

Date and Time	8/27/2021 11:07:41 PM
Client and Project Number	CommScope_G104751739
Engineer	Vathana Ven
Temperature	31 deg C
Humidity	39%
Atmospheric Pressure	1007 mB
Comments	RE 9kHz-30MHz_POE_Band 2 5MHz BW_TM1.1 (worst-case)_Tx High CH
	1987.5MHz_RP5100 host

Graph:



- Level (QuasiPeak (PASS)) (Vertical)
- Level (Peak (PASS)) (Vertical)

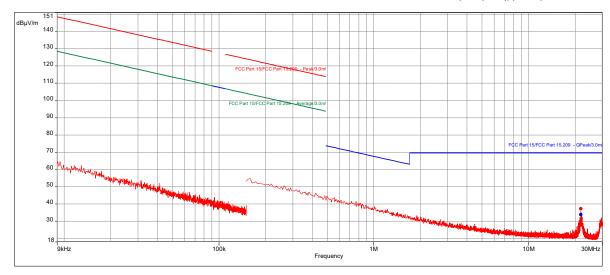

Results:

Peak (PASS) (1)


Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Azimuth (°) (dB)	Height (m) (dB)	Pol. (dB)	RBW (dB)	Correction (dB)		
21.73626316	37.25	69.54	-32.29	265.00	1.00	Vertical	9000.00	11.04		
QuasiPeak (PA	QuasiPeak (PASS) (1)									
Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Azimuth (°) (dB)	Height (m) (dB)	Pol. (dB)	RBW (dB)	Correction (dB)		
21.73626316	33.84	69.54	-35.70	265.00	1.00	Vertical	9000.00	11.04		

Issued: 09/29/2021 Revised: 02/02/2022


Radiated Emissions, 30-1000 MHz Slot 2 (Band 2), Modulation: TM1.1-QPSK, Bandwidth 5 MHz, Transmit @ High Channel Test Information:

Date and Time	8/27/2021 11:46:42 PM
Client and Project Number	CommScope_G104751739
Engineer	Vathana Ven
Temperature	31 deg C
Humidity	39%
Atmospheric Pressure	1007 mB
Comments	RE 30-1000MHz_POE_Band 2 5MHz BW_TM1.1 (worst-case)_Tx High CH
	1987.5MHz_RP5100 host

Graph:





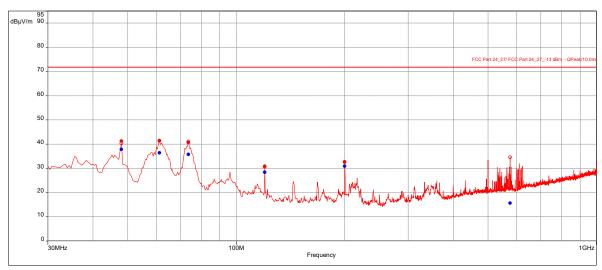

Results:

Peak (PASS) (6)

Frequency (MHz)	Level (dBuV/m)	Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (°) (dB)	Height (m) (dB)	Pol. (dB)	RBW (dB)	Correction (dB)
48	41.25	-43.55	-13.00	-30.55	259.00	1.46	Vertical	120000.00	-24.52
61.23157895	41.50	-43.30	-13.00	-30.30	189.00	1.90	Vertical	120000.00	-25.46
73.75789474	40.69	-44.11	-13.00	-31.11	214.00	1.93	Vertical	120000.00	-24.91
120.0315789	30.85	-53.95	-13.00	-40.95	176.00	1.47	Vertical	120000.00	-18.77
200	32.69	-52.11	-13.00	-39.11	359.00	1.58	Vertical	120000.00	-19.48
575.6947368	21.96	-62.84	-13.00	-49.84	239.00	2.05	Horizontal	120000.00	-12.02


Level EIRP (dBm) = Level Peak (dBuV/m) -84.8


Issued: 09/29/2021 Revised: 02/02/2022

Radiated Emissions, 1-22 GHz Slot 2 (Band 2), Modulation: TM1.1-QPSK, Bandwidth 5 MHz, Transmit @ High Channel Test Information:

Date and Time	9/19/2021 11:42:08 AM
Client and Project Number	CommScope_G104751739
Engineer	Vathana Ven
Temperature	31 deg C
Humidity	39%
Atmospheric Pressure	1007 mB
Comments	RE 1 to 13 GHz_POE_Band 2 5MHz BW_TM1.1_Tx High CH 1987.5MHz_RP5100
	host

Graph:



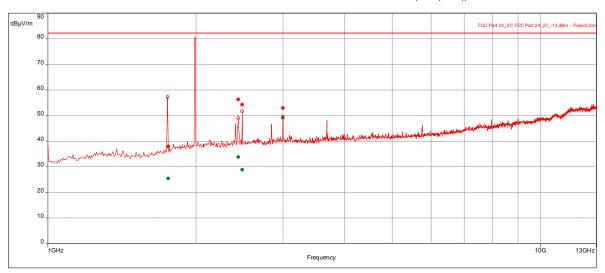

Results:

Peak (PASS) (4)

Frequency (MHz)	Level (dBuV/m)	Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth	Height (m) (dB)	Pol. (dB)	RBW (dB)	Correction (dB)
1752.894737	37.90	-57.36	-13.0	-44.36	17.00	1.85	Horizontal	1000000.00	-6.15
2435.789474	56.28	-38.98	-13.0	-25.98	125.00	1.20	Horizontal	1000000.00	-3.33
2480.263158	54.25	-41.01	-13.0	-28.01	177.00	1.00	Horizontal	1000000.00	-3.26
3000	52.97	-42.29	-13.0	-29.29	132.00	2.10	Horizontal	1000000.00	-2.35

Level EIRP (dBm) = Level Peak (dBuV/m) - 95.30

Big peak was from the fundamental frequency. Manual scan was performed from 13 to 22GHz. No emissions were detected above the measuring equipment noise floor.

Intertek

Report Number: 104751739BOX-013 Issued: 09/29/2021 Revised: 02/02/2022

Test Date: _09/19/2021, 09/23/2021 Test Personnel: Supervising/Reviewing Engineer: (Where Applicable) N/A Product Standard: FCC Part 24 Limit Applied: See report section 10.3 Input Voltage: 48 VDC (POE) Pretest Verification w/ Ambient Temperature: 31, 23 °C Ambient Signals or BB Source: N/A Relative Humidity: 39, 59 % Atmospheric Pressure: 1007, 1008 mbars

Deviations, Additions, or Exclusions: None

Intertek

Report Number: 104751739BOX-013 Issued: 09/29/2021 Revised: 02/02/2022

11 Revision History

Revision Level	Date	Report Number	Prepared By	Reviewed By	Notes
0	09/29/2021	104751739BOX-013	VFV	KPS 45	Original Issue
1	01/12/2022	104751739BOX-013	VFVV	KPS 45	Removed test setup photos, added frequency stability vs. voltage test results tables, referenced the original LTE and new 5G NR capabilities of this device in product description
2	02/02/2022	104751739BOX-013	VFV	KPS 45	Added justification for worst case for spurious emissions on page 166