


(graph 1)

The coil parameters	
model	HY01-78 UH
Coil sense	/
Assembly sense	78 uH $\pm$ 2uH 100KHz / 1V receiving coil plus magnetic chip
DCR	/
Q price	XX 100KHz/1V
Wire approach	500 strands around 14 laps, counterclockwise, the length and size of the outlet are shown in Figure 1 (the outlet should be wrapped with high temperature tape shown in Figure 2).


order number	number	name	description	dosa ge	position
1	160200000000	silk-covered wire	Of 0.1MM * 500 shares		
2	120200000004	magnetic sheet	50 * 50 * 2mm magnetic sheet	12	
3	120200000004	magnetic sheet	50 * 40 * 2mm magnetic chip (cut with 50 * 50 * 2)	4	
4	120200000004	magnetic sheet	50 * 25 * 2mm magnetic chip (cut with 50 * 50 * 2)	2	
5		Wire plate bracket	3240 Epoxy board, L200xW190xH1mm, plain smooth, yellow color, meet environmental requirements	1	
6	160200000079	heat-shrinkable tubing	4. 0*240mm	2	

7	200200001053	Line plate cover	360 * 260 wire disk cover PCV 0, L360xW260xH25mm, a matte surface, black, meet the environmental requirements	1	
8	1901LS000072	self-tapping screw	PWA 2.6 * 6 Round head with a gasket	4	bottom
9	170200000080	pouring sealant	JL-913 A A / B=1:1 thermal conductivity of 1.0	100g	
10	170200000081	pouring sealant	JL-913 B A / B=1:1 thermal conductivity of 1.0	100g	

Physical picture:

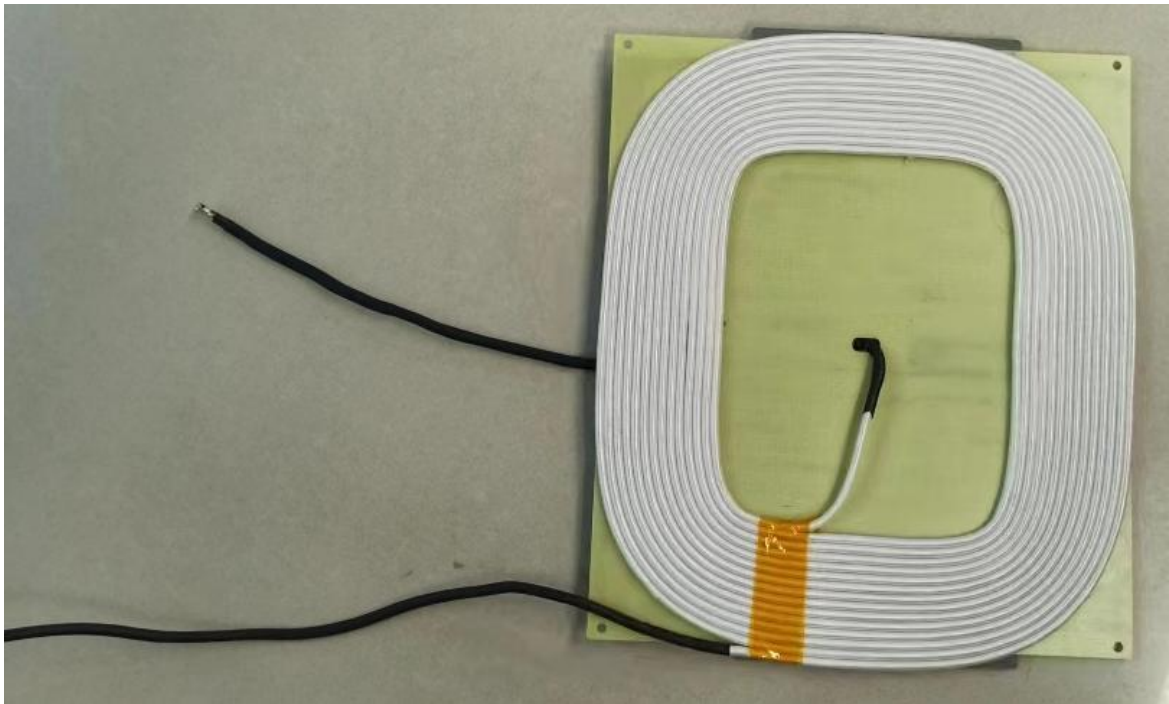

Front (Figure 2)

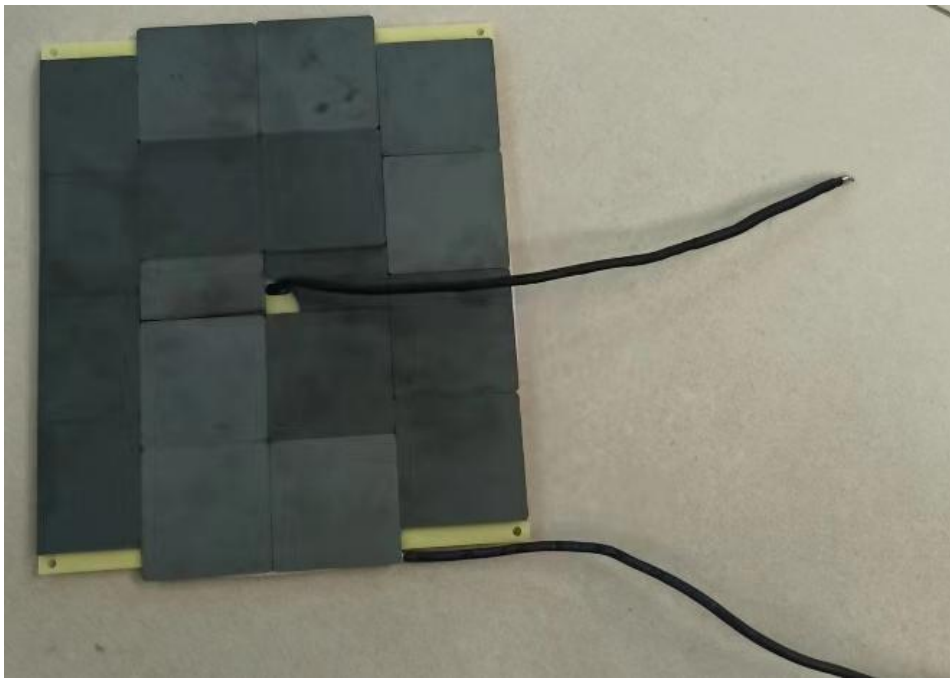

The opposite side (Figure 3)