



No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053

Fax: +86 (0) 755 2671 0594

Email: ee.shenzhen@sgs.com

Report No.: ZR/2018/C000703

Page: 1 of 77

FCC TEST REPORT

Application No.: ZR/2018/C0007
Applicant: WWZN Information Technology Company Limited
Address of Applicant: Room 901, 9th Floor, No.19, Zhong Guancun Street, Haidian District, Beijing, China
Manufacturer: WWZN Information Technology Company Limited
Address of Manufacturer: Room 901, 9th Floor, No.19, Zhong Guancun Street, Haidian District, Beijing, China
Factory: Compal Display Electronics (Kunshan) Co.,Ltd.
Address of Factory: No.1881 Liji Road Shipai Bacheng Town, Kunshan, Jiangsu, P.R.China
EUT Description: Smart watch
Model No.: WF11026 (smart watch, 3G/4G/BT/WLAN/NFC/GPS)
Trade Mark: TicWatch
FCC ID: 2AP42-WF11026
Standards: 47 CFR FCC Part 2, Subpart J
47 CFR Part 15, Subpart C
Test Method: ANSI C63.10 (2013)
Date of Receipt: 2018/12/3
Date of Test: 2018/12/4 to 2018/12/28
Date of Issue: 2018/12/28

| | |
|---------------------|---------------|
| Test Result: | PASS * |
|---------------------|---------------|

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Derek Yang

Wireless Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

1 Version

| Revision Record | | | | |
|-----------------|---------|------------|----------|----------|
| Version | Chapter | Date | Modifier | Remark |
| 00 | | 2018/12/28 | | Original |
| | | | | |
| | | | | |

| | | | | |
|--------------------------|--|---|--|-----------------------------|
| Authorized for issue by: | | | | |
| Tested By | |  _____ (Mike Hu) /Project Engineer | | 2018/12/28 _____ Date |
| Checked By | |  _____ (David Chen) /Reviewer | | 2018/12/28 _____ Date |



2 Test Summary

| Test Item | Test Requirement | Test method | Test Result | Result |
|---|--------------------------|--------------------|-------------|--------|
| AC Power Line Conducted Emission | 15.207 | ANSI C63.10 (2013) | Clause 4.2 | PASS |
| Conducted Peak Output Power | 15.247 (a)(1) | ANSI C63.10 (2013) | Clause 4.3 | PASS |
| 20dB Emission Bandwidth & 99% Occupied Bandwidth | 15.247 (a)(1) | ANSI C63.10 (2013) | Clause 4.4 | PASS |
| Carrier Frequencies Separation | 15.247 (a)(1) | ANSI C63.10 (2013) | Clause 4.5 | PASS |
| Hopping Channel Number | 15.247 (a)(1) | ANSI C63.10 (2013) | Clause 4.6 | PASS |
| Dwell Time | 15.247 (a)(1) | ANSI C63.10 (2013) | Clause 4.7 | PASS |
| Band-edge for RF Conducted Emissions | 15.247(d) | ANSI C63.10 (2013) | Clause 4.8 | PASS |
| RF Conducted Spurious Emissions | 15.247(d) | ANSI C63.10 (2013) | Clause 4.9 | PASS |
| Radiated Spurious emissions | 15.247(d) ;15.205/15.209 | ANSI C63.10 (2013) | Clause 4.10 | PASS |
| Restricted bands around fundamental frequency (Radiated Emission) | 15.247(d) ;15.205/15.209 | ANSI C63.10 (2013) | Clause 4.11 | PASS |



Contents

| | | |
|----------|--|-----------|
| 1 | VERSION..... | 2 |
| 2 | TEST SUMMARY..... | 3 |
| 3 | GENERAL INFORMATION..... | 5 |
| 3.1 | CLIENT INFORMATION | 5 |
| 3.2 | TEST LOCATION..... | 5 |
| 3.3 | TEST FACILITY..... | 5 |
| 3.4 | GENERAL DESCRIPTION OF EUT..... | 6 |
| 3.5 | TEST ENVIRONMENT..... | 7 |
| 3.6 | DESCRIPTION OF SUPPORT UNITS | 7 |
| 4 | TEST RESULTS AND MEASUREMENT DATA..... | 8 |
| 4.1 | ANTENNA REQUIREMENT | 8 |
| 4.2 | AC POWER LINE CONDUCTED EMISSIONS | 9 |
| 4.3 | CONDUCTED PEAK OUTPUT POWER..... | 13 |
| 4.3.1 | <i>Test Results.....</i> | <i>14</i> |
| 4.3.2 | <i>Test plots.....</i> | <i>15</i> |
| 4.4 | 20dB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH | 20 |
| 4.4.1 | <i>Test Results.....</i> | <i>20</i> |
| 4.4.1 | <i>Test plots.....</i> | <i>21</i> |
| 4.5 | CARRIER FREQUENCIES SEPARATION | 30 |
| 4.5.1 | <i>Test Results.....</i> | <i>31</i> |
| 4.5.2 | <i>Test plots.....</i> | <i>32</i> |
| 4.6 | HOPPING CHANNEL NUMBER..... | 34 |
| 4.6.1 | <i>Test Results.....</i> | <i>34</i> |
| 4.6.2 | <i>Test plots.....</i> | <i>35</i> |
| 4.7 | DWELL TIME..... | 37 |
| 4.7.1 | <i>Test Results.....</i> | <i>38</i> |
| 4.7.2 | <i>Test plots.....</i> | <i>39</i> |
| 4.8 | BAND-EDGE FOR RF CONDUCTED EMISSIONS | 44 |
| 4.8.1 | <i>Test plots.....</i> | <i>45</i> |
| 4.9 | SPURIOUS RF CONDUCTED EMISSIONS | 51 |
| 4.9.1 | <i>Test plots.....</i> | <i>52</i> |
| 4.10 | RADIATED SPURIOUS EMISSION..... | 57 |
| 4.10.1 | <i>Radiated Emission below 1GHz.....</i> | <i>60</i> |
| 4.10.2 | <i>Transmitter Emission above 1GHz.....</i> | <i>62</i> |
| 4.11 | RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY | 69 |
| 4.11.1 | <i>Test plots.....</i> | <i>71</i> |
| 5 | MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2)..... | 75 |
| 6 | EQUIPMENT LIST | 76 |
| 7 | PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS..... | 77 |



3 General Information

3.1 Client Information

| | |
|--------------------------|--|
| Applicant: | WWZN Information Technology Company Limited |
| Address of Applicant: | Room 901, 9th Floor, No.19, Zhong Guancun Street, Haidian District, Beijing, China |
| Manufacturer: | WWZN Information Technology Company Limited |
| Address of Manufacturer: | Room 901, 9th Floor, No.19, Zhong Guancun Street, Haidian District, Beijing, China |
| Factory: | Compal Display Electronics (Kunshan) Co.,Ltd. |
| Address of Factory: | No.1881 Liji Road Shipai Bacheng Town, Kunshan, Jiangsu, P.R.China |

3.2 Test Location

| | |
|------------|---|
| Company: | SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch |
| Address: | No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China |
| Post code: | 518057 |
| Telephone: | +86 (0) 755 2601 2053 |
| Fax: | +86 (0) 755 2671 0594 |
| E-mail: | ee.shenzhen@sgs.com |

3.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

• **VCCI**

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

• **FCC –Designation Number: CN1178**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

• **Industry Canada (IC)**

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

3.4 General Description of EUT

| | |
|-----------------------|--|
| EUT Description:: | Smart watch |
| Model No.: | WF11026 (smart watch, 3G/4G/BT/WLAN/NFC/GPS) |
| Trade Mark: | TicWatch |
| Hardware Version: | B2.1 |
| Software Version: | OWDM.181016.006_catshark |
| Operation Frequency: | 2400MHz~2483.5MHz $f_c = 2402 \text{ MHz} + N * 1 \text{ MHz}$, where: - f_c = "Operating Frequency" in MHz, - N = "Channel Number" with the range from 0 to 78. |
| Bluetooth Version: | BT V4.2 +BLE |
| Modulation Technique: | Frequency Hopping Spread Spectrum(FHSS) |
| Modulation Type: | GFSK, $\pi/4$ DQPSK, 8DPSK |
| Number of Channel: | 79 |
| Hopping Channel Type: | Adaptive Frequency Hopping systems |
| Sample Type: | <input checked="" type="checkbox"/> Portable Device, <input type="checkbox"/> Module |
| Antenna Type: | <input type="checkbox"/> External, <input checked="" type="checkbox"/> Integrated |
| Antenna Gain: | -1dBi |
| Power Supply | <input type="checkbox"/> AC/DC Adapter; <input checked="" type="checkbox"/> Battery <input type="checkbox"/> PoE;; <input type="checkbox"/> Other: |

| Operation Frequency each of channel | | | | | | | |
|-------------------------------------|-----------|---------|-----------|---------|-----------|---------|-----------|
| Channel | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 0 | 2402MHz | 20 | 2422MHz | 40 | 2442MHz | 60 | 2462MHz |
| 1 | 2403MHz | 21 | 2423MHz | 41 | 2443MHz | 61 | 2463MHz |
| 2 | 2404MHz | 22 | 2424MHz | 42 | 2444MHz | 62 | 2464MHz |
| 3 | 2405MHz | 23 | 2425MHz | 43 | 2445MHz | 63 | 2465MHz |
| 4 | 2406MHz | 24 | 2426MHz | 44 | 2446MHz | 64 | 2466MHz |
| 5 | 2407MHz | 25 | 2427MHz | 45 | 2447MHz | 65 | 2467MHz |
| 6 | 2408MHz | 26 | 2428MHz | 46 | 2448MHz | 66 | 2468MHz |
| 7 | 2409MHz | 27 | 2429MHz | 47 | 2449MHz | 67 | 2469MHz |
| 8 | 2410MHz | 28 | 2430MHz | 48 | 2450MHz | 68 | 2470MHz |
| 9 | 2411MHz | 29 | 2431MHz | 49 | 2451MHz | 69 | 2471MHz |
| 10 | 2412MHz | 30 | 2432MHz | 50 | 2452MHz | 70 | 2472MHz |
| 11 | 2413MHz | 31 | 2433MHz | 51 | 2453MHz | 71 | 2473MHz |
| 12 | 2414MHz | 32 | 2434MHz | 52 | 2454MHz | 72 | 2474MHz |
| 13 | 2415MHz | 33 | 2435MHz | 53 | 2455MHz | 73 | 2475MHz |
| 14 | 2416MHz | 34 | 2436MHz | 54 | 2456MHz | 74 | 2476MHz |
| 15 | 2417MHz | 35 | 2437MHz | 55 | 2457MHz | 75 | 2477MHz |
| 16 | 2418MHz | 36 | 2438MHz | 56 | 2458MHz | 76 | 2478MHz |
| 17 | 2419MHz | 37 | 2439MHz | 57 | 2459MHz | 77 | 2479MHz |
| 18 | 2420MHz | 38 | 2440MHz | 58 | 2460MHz | 78 | 2480MHz |
| 19 | 2421MHz | 39 | 2441MHz | 59 | 2461MHz | | |



Remark:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel

see below:

| Channel | Frequency |
|---------------------|-----------|
| The Lowest channel | 2402MHz |
| The Middle channel | 2441MHz |
| The Highest channel | 2480MHz |

3.5 Test Environment

| Operating Environment | |
|-----------------------|------------|
| Temperature: | 24.0 °C |
| Humidity: | 55 % RH |
| Atmospheric Pressure: | 101.30 KPa |

3.6 Description of Support Units

The EUT has been tested independent unit.




4 Test results and Measurement Data

4.1 Antenna Requirement

| Standard requirement: | 47 CFR Part 15C Section 15.203 /247(c) |
|--|--|
| <p>15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> | |
| <p>The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is -1dBi.</p> | |

4.2 AC Power Line Conducted Emissions

| | | | |
|--|---|--------------|-----------|
| Test Requirement: | 47 CFR Part 15C Section 15.207 | | |
| Test Method: | ANSI C63.10: 2013 | | |
| Test Frequency Range: | 150kHz to 30MHz | | |
| Limit: | Frequency range (MHz) | Limit (dBuV) | |
| | | Quasi-peak | Average |
| | 0.15-0.5 | 66 to 56* | 56 to 46* |
| | 0.5-5 | 56 | 46 |
| | 5-30 | 60 | 50 |
| * Decreases with the logarithm of the frequency. | | | |
| Test Procedure: | <ol style="list-style-type: none"> 1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement. | | |

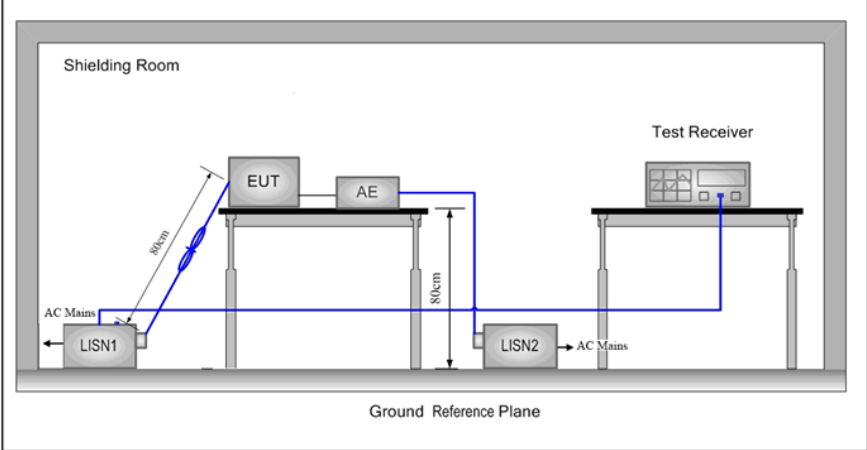
| | |
|------------------------|---|
| Test Setup: |  |
| Exploratory Test Mode: | <p>Non-hopping transmitting mode with all kind of modulation and all kind of data type at the lowest, middle, high channel.</p> <p>Charge + Transmitting mode.</p> |
| Final Test Mode: | <p>Through Pre-scan, find the DH5 of data type and GFSK modulation at the lowest channel is the worst case.</p> <p>Charge + Transmitting mode</p> <p>Only the worst case is recorded in the report.</p> |
| Instruments Used: | Refer to section 5.10 for details |
| Test Results: | Pass |

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

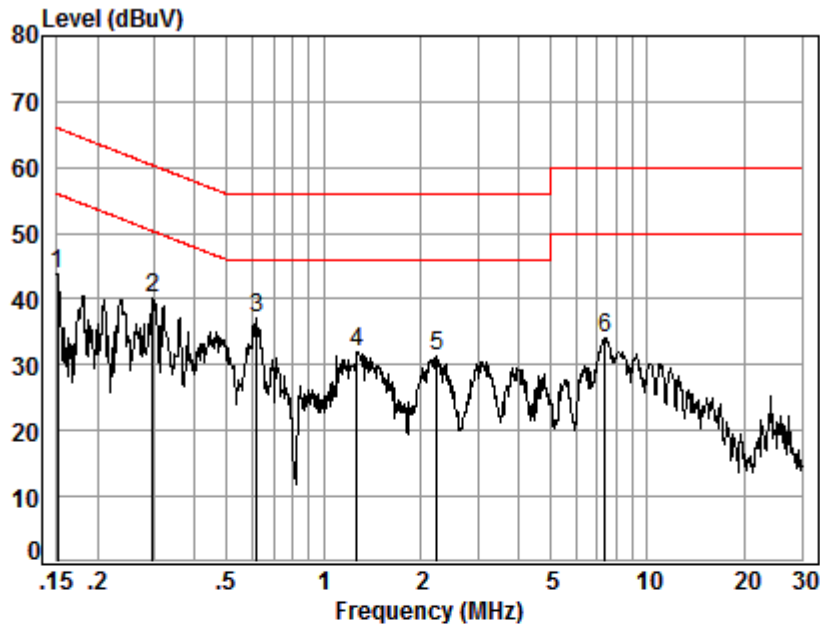

Site : Shielding Room


Condition: Line

Job No. : C0007

Test mode: c

| | Freq | Cable Loss | LISN Factor | Read Level | Level | Limit Line | Over Limit | Remark |
|---|------|------------|-------------|------------|-------|------------|------------|--------|
| | MHz | dB | dB | dBuV | dBuV | dBuV | dB | |
| 1 | 0.15 | 0.01 | 9.66 | 34.24 | 43.91 | 55.96 | -12.05 | Peak |
| 2 | 0.30 | 0.04 | 9.67 | 30.32 | 40.03 | 50.32 | -10.29 | Peak |
| 3 | 0.62 | 0.07 | 9.67 | 27.36 | 37.10 | 46.00 | -8.90 | Peak |
| 4 | 1.26 | 0.11 | 9.73 | 22.04 | 31.88 | 46.00 | -14.12 | Peak |
| 5 | 2.24 | 0.16 | 9.71 | 21.34 | 31.21 | 46.00 | -14.79 | Peak |
| 6 | 7.41 | 0.17 | 9.79 | 24.18 | 34.14 | 50.00 | -15.86 | Peak |

Neutral line:

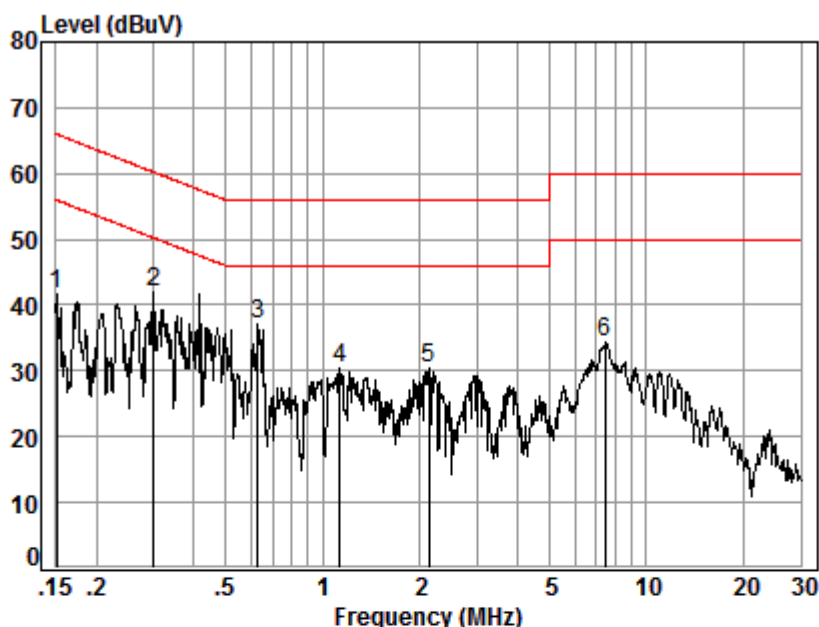

Site : Shielding Room

Condition: Neutral

Job No. : C0007


Test mode: c

| | Freq | Cable Loss | LISN Factor | Read Level | Level | Limit Line | Over Limit | Remark |
|---|------|------------|-------------|------------|-------|------------|------------|--------|
| | MHz | dB | dB | dBuV | dBuV | dBuV | dB | |
| 1 | 0.15 | 0.01 | 9.63 | 32.01 | 41.65 | 55.96 | -14.31 | Peak |
| 2 | 0.30 | 0.04 | 9.64 | 32.38 | 42.06 | 50.24 | -8.18 | Peak |
| 3 | 0.63 | 0.07 | 9.64 | 27.45 | 37.16 | 46.00 | -8.84 | Peak |
| 4 | 1.13 | 0.10 | 9.70 | 20.50 | 30.30 | 46.00 | -15.70 | Peak |
| 5 | 2.13 | 0.16 | 9.69 | 20.52 | 30.37 | 46.00 | -15.63 | Peak |
| 6 | 7.45 | 0.17 | 9.77 | 24.32 | 34.26 | 50.00 | -15.74 | Peak |

Remarks:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.

4.3 Conducted Peak Output Power
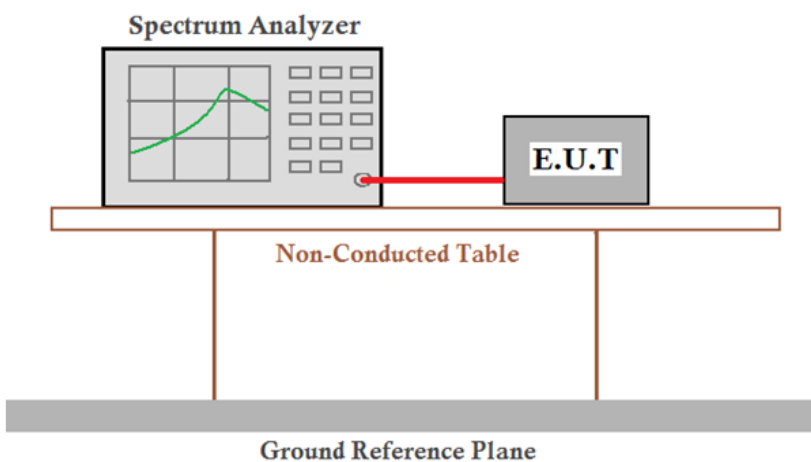
| | |
|------------------------|---|
| Test Requirement: | 47 CFR Part 15C Section 15.247 (a)(1) |
| Test Method: | ANSI C63.10:2013 Section 7.8.5 |
| Test Setup: |  <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by two vertical legs. Below the table is a Ground Reference Plane, represented by a thick grey bar.</p> |
| Limit: | (20.97dBm) 125mW |
| Exploratory Test Mode: | Non-hopping transmitting with all kind of modulation and all kind of data type. |
| Final Test Mode: | Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type. |
| Instruments Used: | Refer to section 5.10 for details |
| Test Results: | Pass |

4.3.1 Test Results

Measurement Data of Average power:

| GFSK mode | | |
|--------------------|----------------------------|---------------------|
| Test channel | Average Output Power (dBm) | Result |
| Lowest | 6.8 | Report purpose only |
| Middle | 7.9 | Report purpose only |
| Highest | 7.4 | Report purpose only |
| $\pi/4$ DQPSK mode | | |
| Test channel | Average Output Power (dBm) | Result |
| Lowest | 0.7 | Report purpose only |
| Middle | 2.0 | Report purpose only |
| Highest | 1.4 | Report purpose only |
| 8DPSK mode | | |
| Test channel | Average Output Power (dBm) | Result |
| Lowest | 0.7 | Report purpose only |
| Middle | 2.0 | Report purpose only |
| Highest | 1.4 | Report purpose only |


Measurement Data of Peak power:

| GFSK mode | | | |
|--------------------|-------------------------|-------------|--------|
| Test channel | Peak Output Power (dBm) | Limit (dBm) | Result |
| Lowest | 7.59 | 20.97 | Pass |
| Middle | 8.63 | 20.97 | Pass |
| Highest | 7.59 | 20.97 | Pass |
| $\pi/4$ DQPSK mode | | | |
| Test channel | Peak Output Power (dBm) | Limit (dBm) | Result |
| Lowest | 3.67 | 20.97 | Pass |
| Middle | 4.94 | 20.97 | Pass |
| Highest | 3.51 | 20.97 | Pass |
| 8DPSK mode | | | |
| Test channel | Peak Output Power (dBm) | Limit (dBm) | Result |
| Lowest | 4.15 | 20.97 | Pass |
| Middle | 5.50 | 20.97 | Pass |
| Highest | 4.04 | 20.97 | Pass |




4.3.2 Test plots

| | | | |
|------------|------|---------------|--------|
| Test mode: | GFSK | Test channel: | Lowest |
|------------|------|---------------|--------|

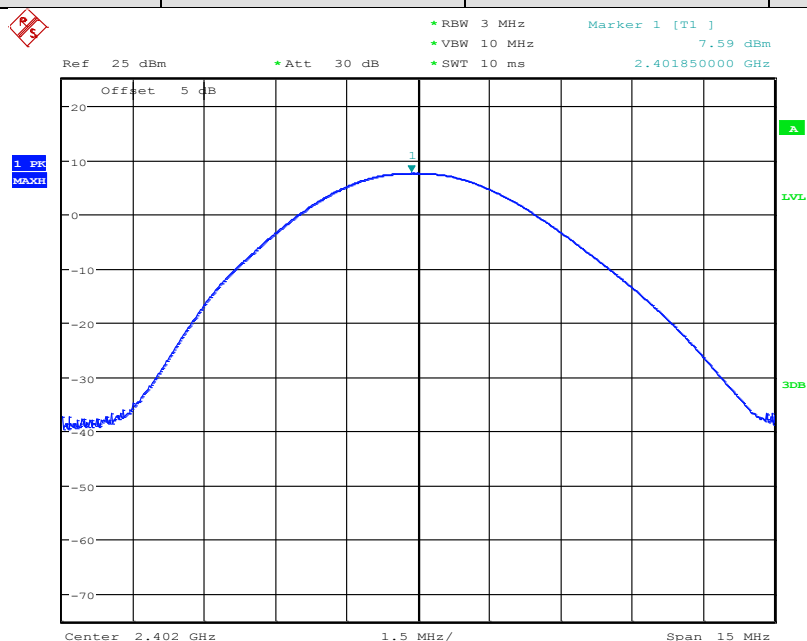

Date: 27.DEC.2018 09:21:09


| | | | |
|------------|------|---------------|--------|
| Test mode: | GFSK | Test channel: | Middle |
|------------|------|---------------|--------|

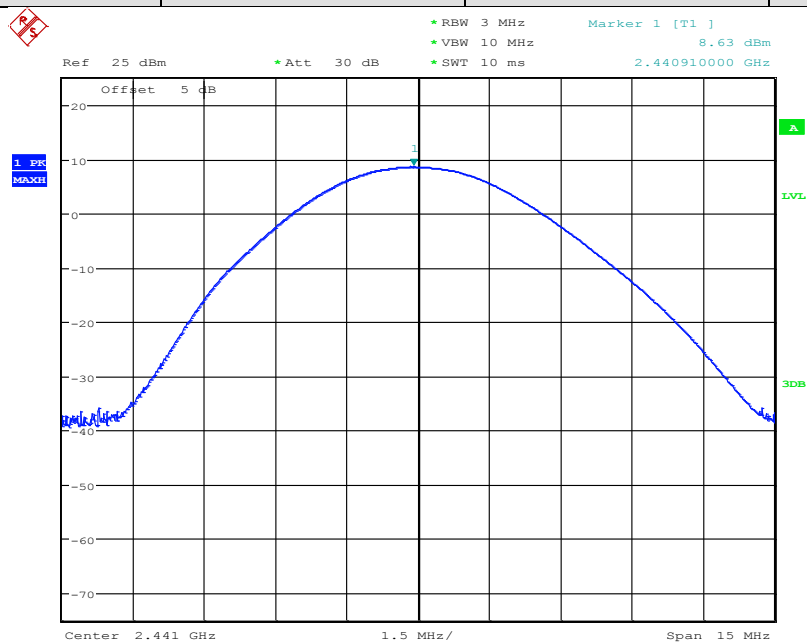

Date: 27.DEC.2018 09:24:08




| | | | |
|------------|------|---------------|---------|
| Test mode: | GFSK | Test channel: | Highest |
|------------|------|---------------|---------|

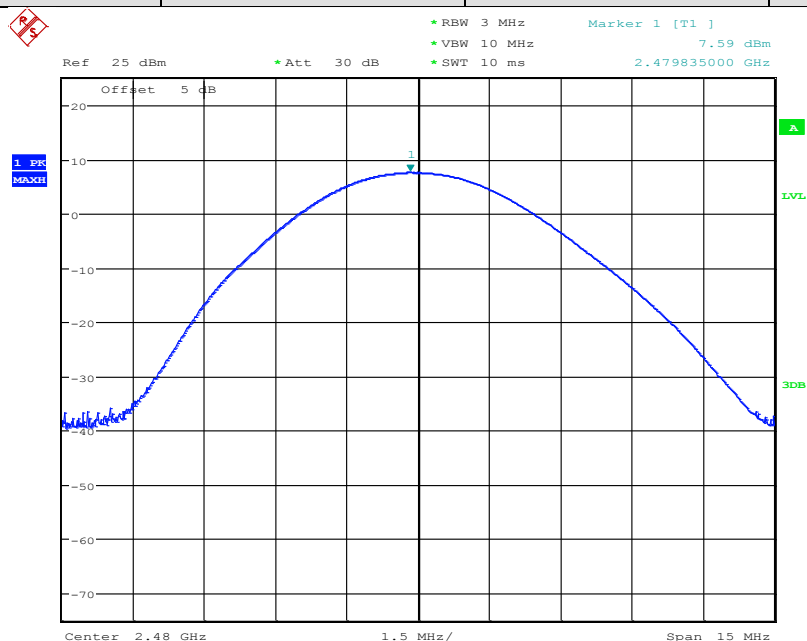

Date: 27.DEC.2018 09:25:03


| | | | |
|------------|---------------|---------------|--------|
| Test mode: | $\pi/4$ DQPSK | Test channel: | Lowest |
|------------|---------------|---------------|--------|

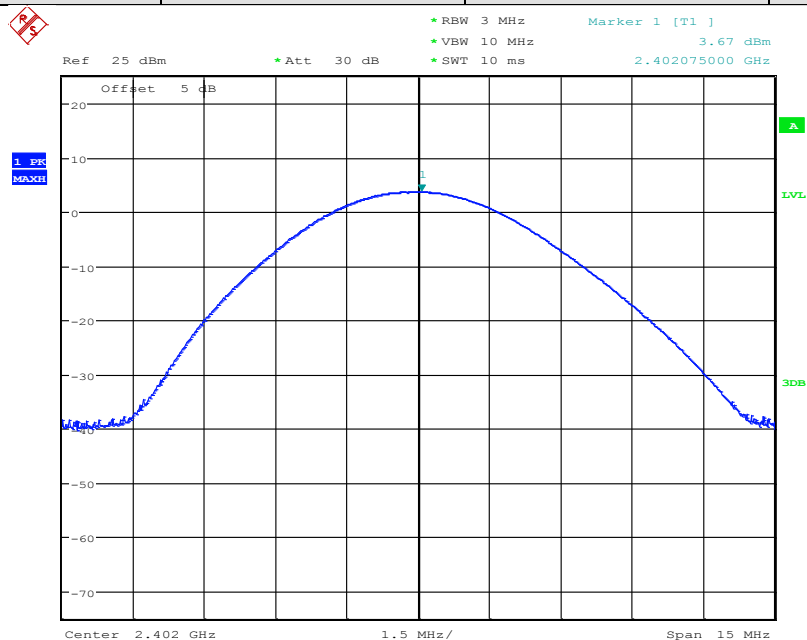

Date: 27.DEC.2018 09:21:41




| | | | |
|------------|---------------|---------------|--------|
| Test mode: | $\pi/4$ DQPSK | Test channel: | Middle |
|------------|---------------|---------------|--------|

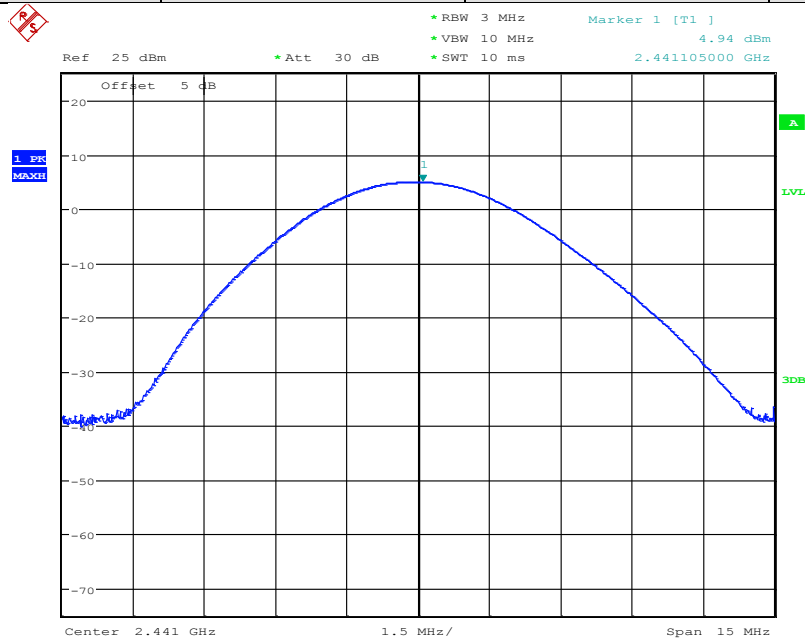

Date: 27.DEC.2018 09:23:29


| | | | |
|------------|---------------|---------------|---------|
| Test mode: | $\pi/4$ DQPSK | Test channel: | Highest |
|------------|---------------|---------------|---------|

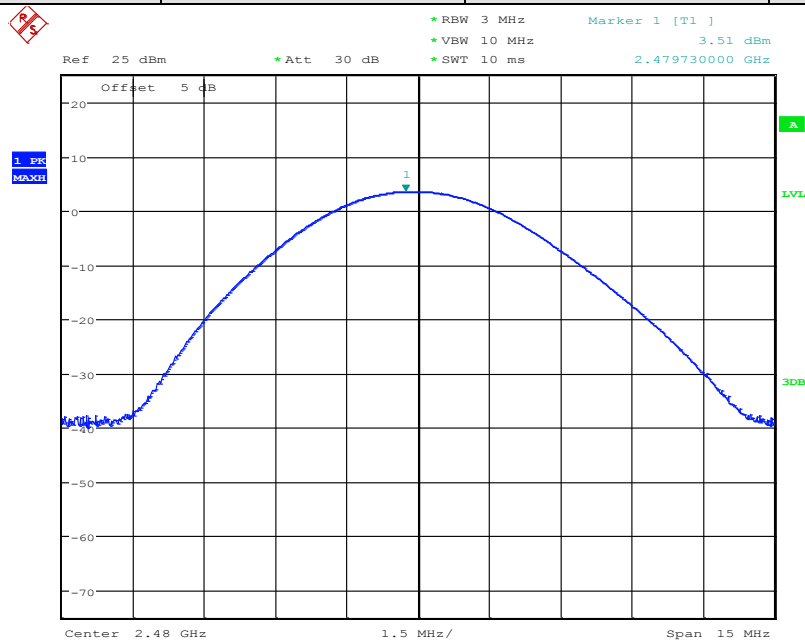

Date: 27.DEC.2018 09:25:29




| | | | |
|------------|-------|---------------|--------|
| Test mode: | 8DPSK | Test channel: | Lowest |
|------------|-------|---------------|--------|

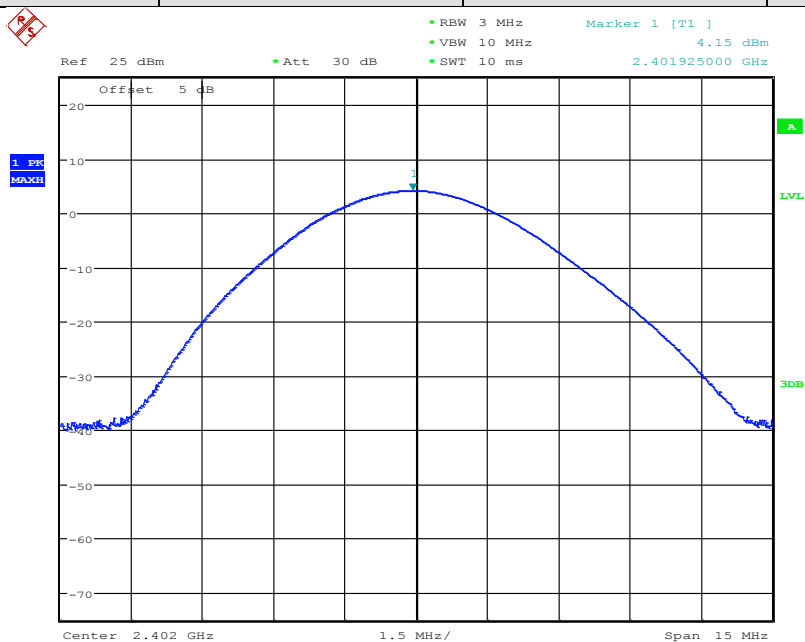

Date: 27.DEC.2018 09:22:14


| | | | |
|------------|-------|---------------|--------|
| Test mode: | 8DPSK | Test channel: | Middle |
|------------|-------|---------------|--------|

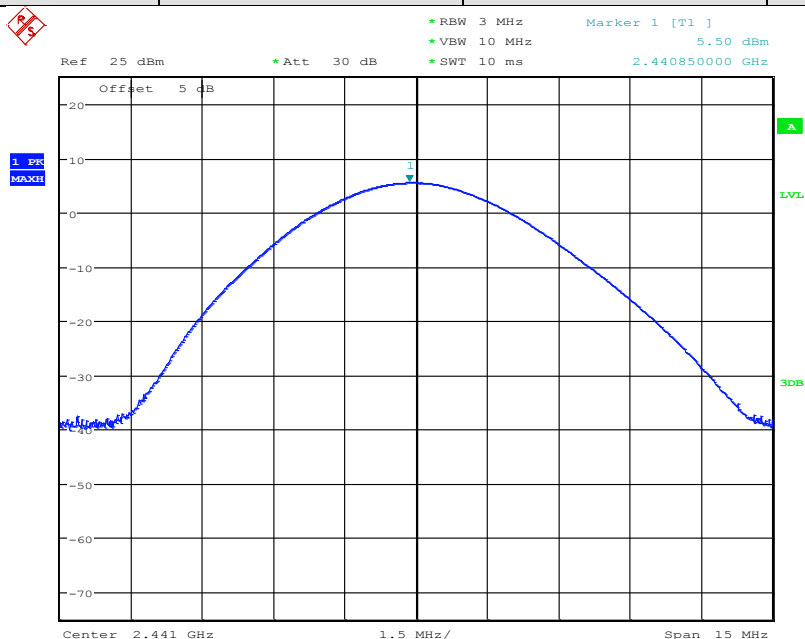

Date: 27.DEC.2018 09:22:54




| | | | |
|------------|-------|---------------|---------|
| Test mode: | 8DPSK | Test channel: | Highest |
|------------|-------|---------------|---------|

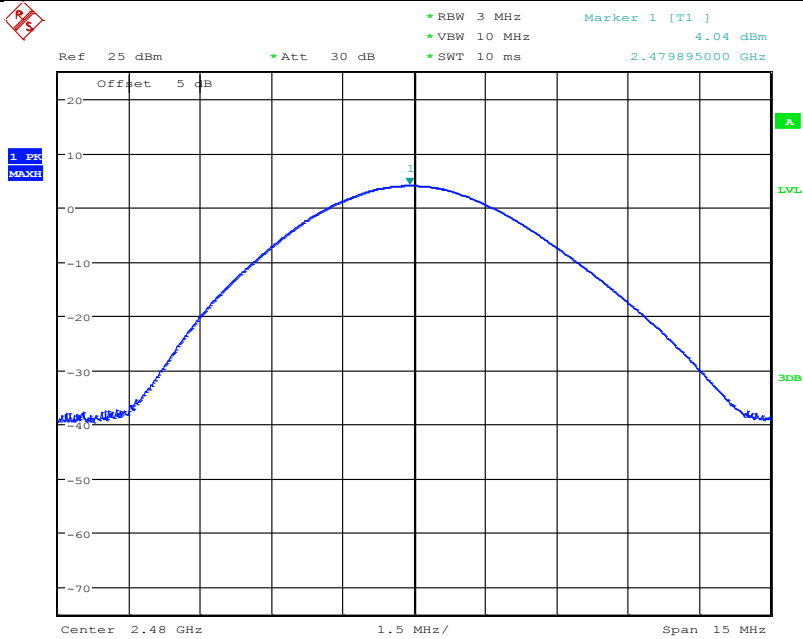

Date: 27.DEC.2018 09:25:59

This document is issued by the Company subject to its General Conditions of Service printed overleaf, -available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

4.4 20dB Emission Bandwidth & 99% Occupied Bandwidth

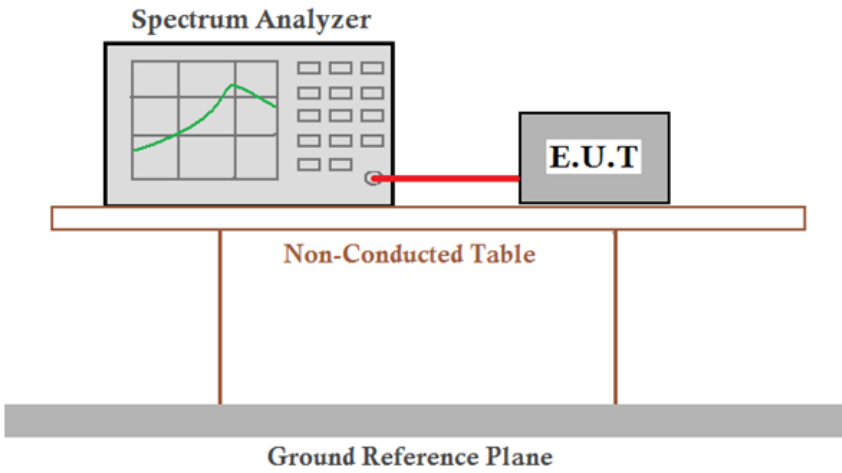
| | |
|------------------------|--|
| Test Requirement: | 47 CFR Part 15C Section 15.247 (a)(1) |
| Test Method: | ANSI C63.10:2013 Section 7.8.7 |
| Test Setup: |  <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p> |
| Limit: | NA |
| Exploratory Test Mode: | Non-hopping transmitting with all kind of modulation and all kind of data type. |
| Final Test Mode: | Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type. |
| Instruments Used: | Refer to section 5.10 for details |
| Test Results: | Pass |

4.4.1 Test Results


| Mode | Test Channel | 99% Occupied Bandwidth (KHz) | 20dB Emission Bandwidth (KHz) | Result |
|---------------|--------------|------------------------------|-------------------------------|--------|
| GFSK | Lowest | 908.65 | 971.15 | Pass |
| | Middle | 908.65 | 1033.65 | Pass |
| | Highest | 913.46 | 1004.80 | Pass |
| $\pi/4$ DQPSK | Lowest | 1197.11 | 1346.15 | Pass |
| | Middle | 1192.30 | 1346.15 | Pass |
| | Highest | 1187.5 | 1355.76 | Pass |
| 8DPSK | Lowest | 1201.92 | 1341.35 | Pass |
| | Middle | 1201.92 | 1312.50 | Pass |
| | Highest | 1197.12 | 1336.53 | Pass |

4.4.1 Test plots

4.4.1.1 GFSK _Lowest Channel

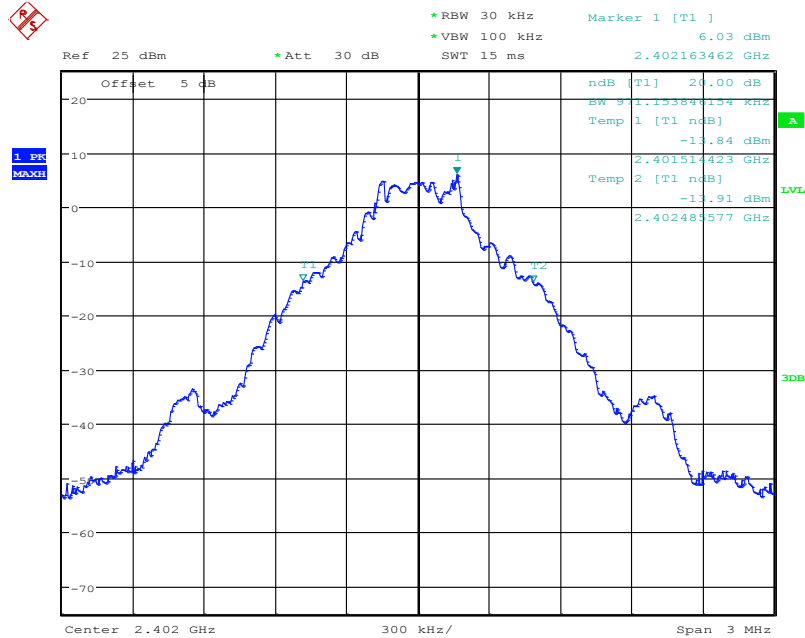


Date: 27.DEC.2018 09:54:34

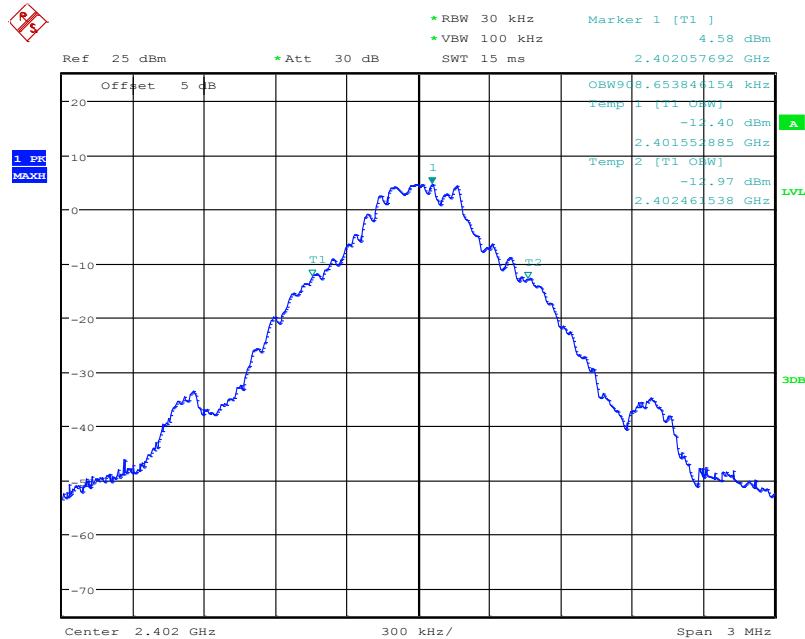


Date: 27.DEC.2018 09:57:05

4.4.1.2

GFSK _Middle Channel

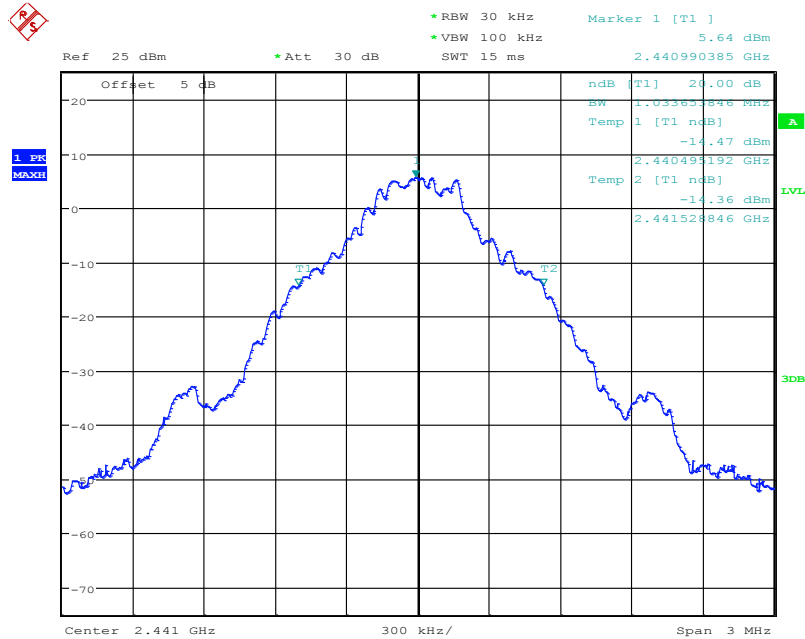


Date: 27.DEC.2018 09:50:45

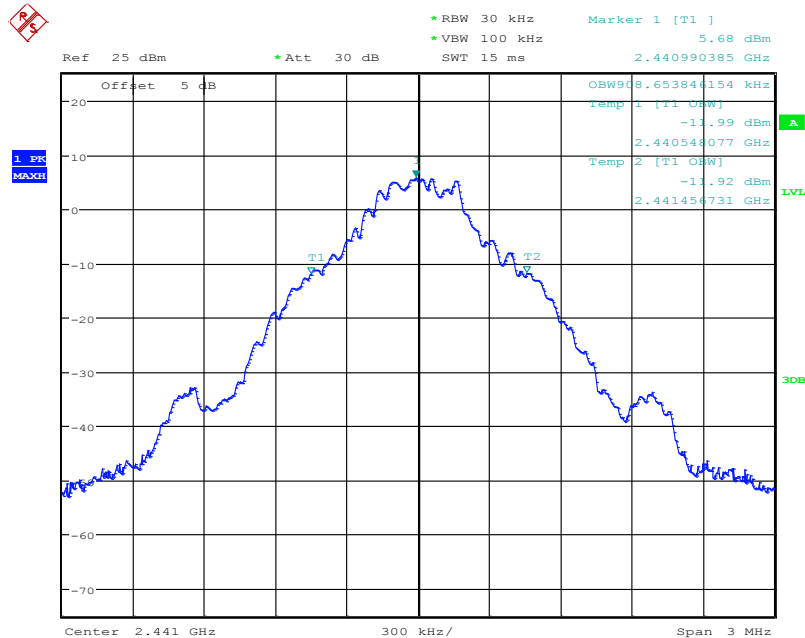


Date: 27.DEC.2018 10:00:20

4.4.1.3

GFSK _Highest Channel

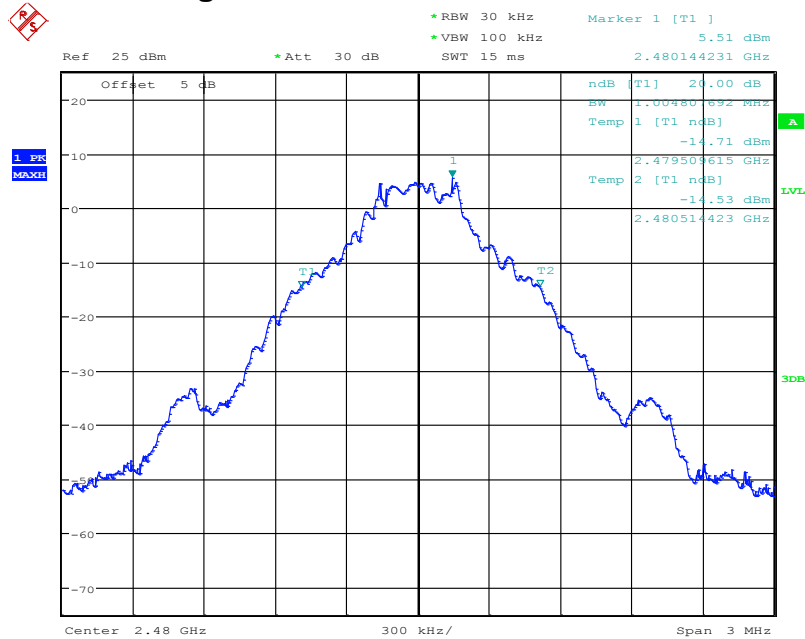


Date: 27.DEC.2018 09:49:44

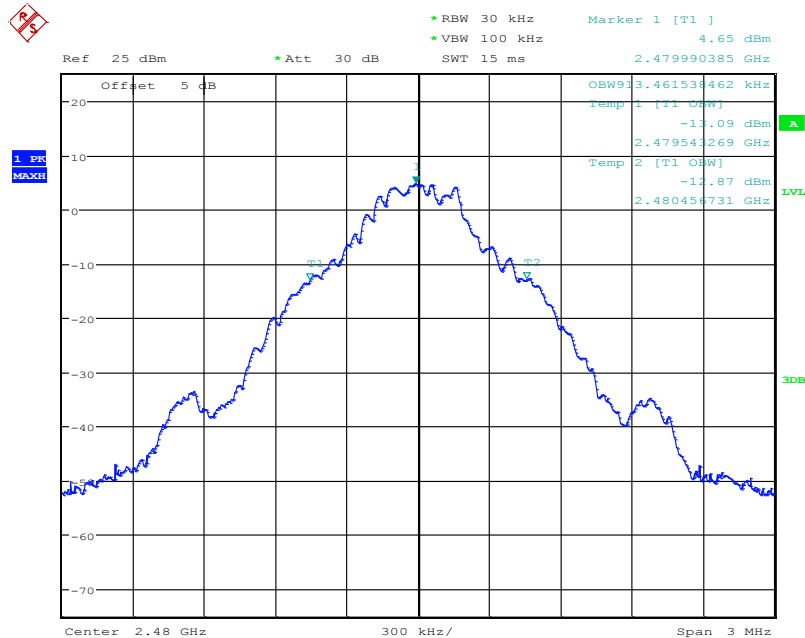


Date: 27.DEC.2018 10:01:14

4.4.1.4

$\pi/4$ DQPSK _Lowest Channel

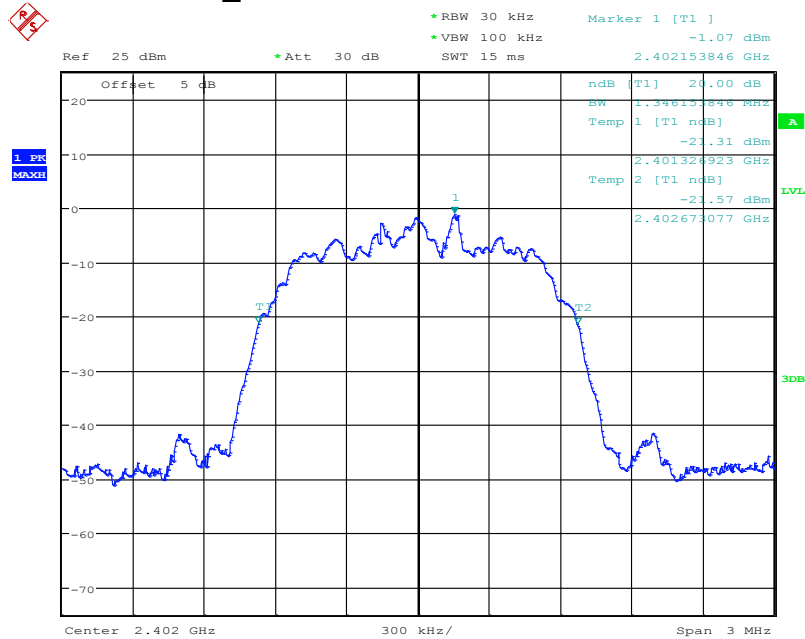


Date: 27.DEC.2018 09:53:54

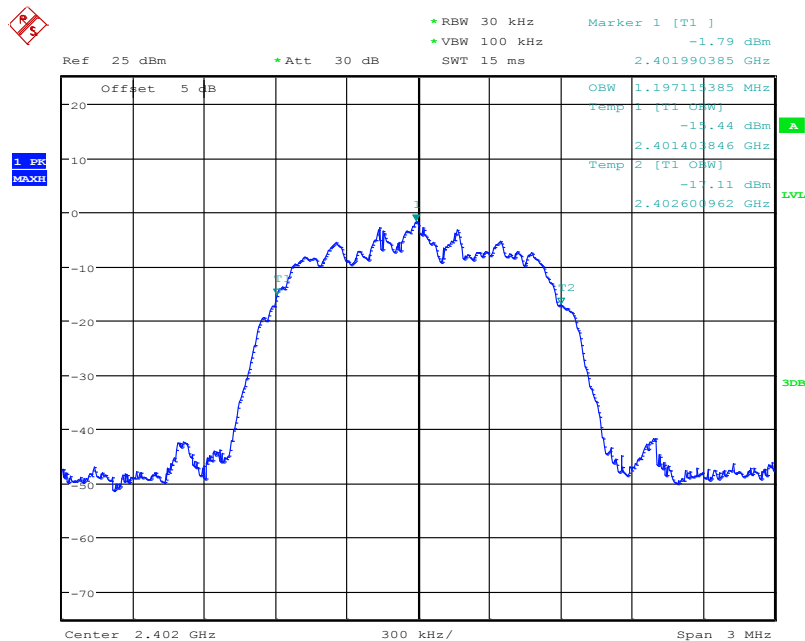


Date: 27.DEC.2018 09:57:36

4.4.1.5

$\pi/4$ DQPSK_Middle Channel

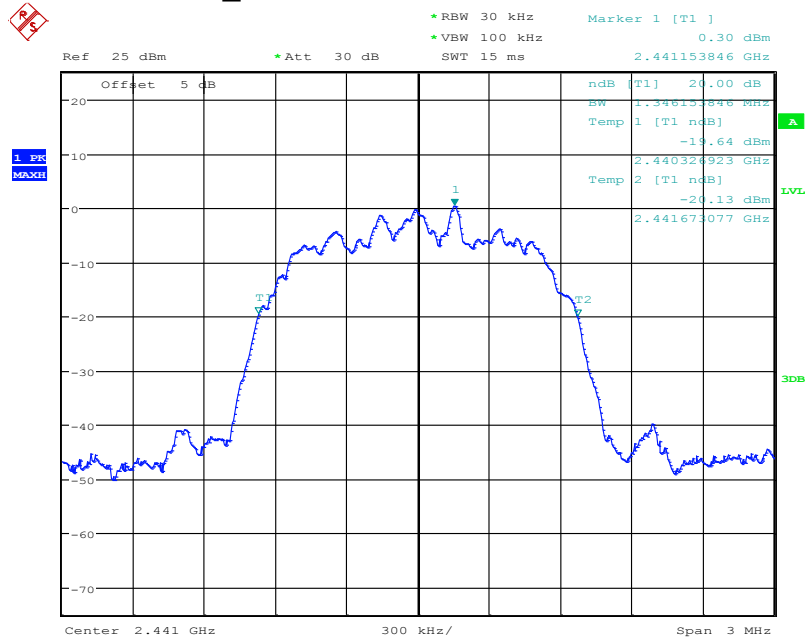


Date: 27.DEC.2018 09:51:47

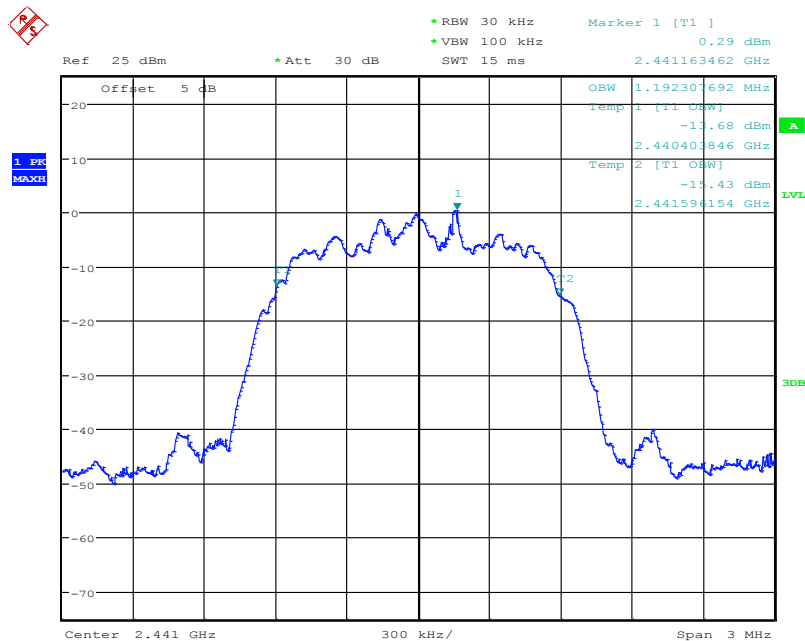


Date: 27.DEC.2018 09:59:37

4.4.1.6

$\pi/4$ DQPSK_Highest Channel

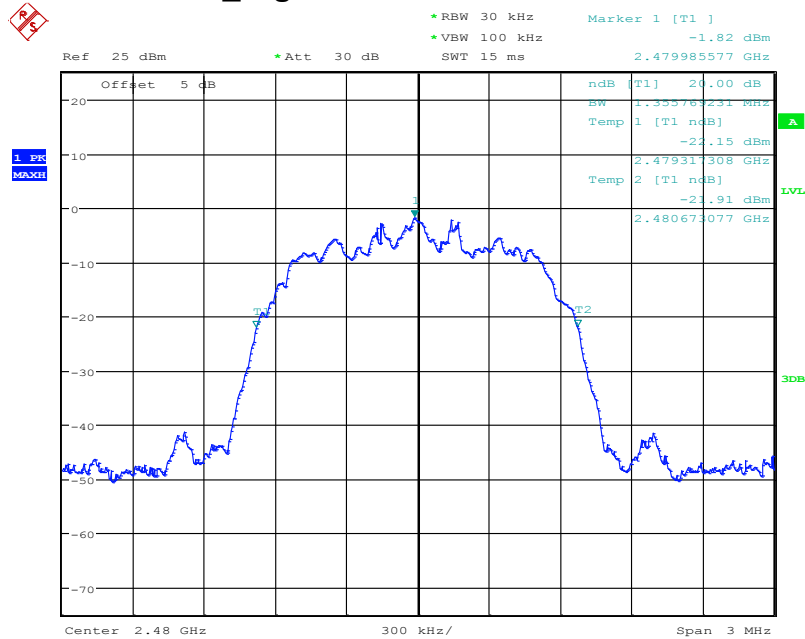


Date: 27.DEC.2018 09:49:08

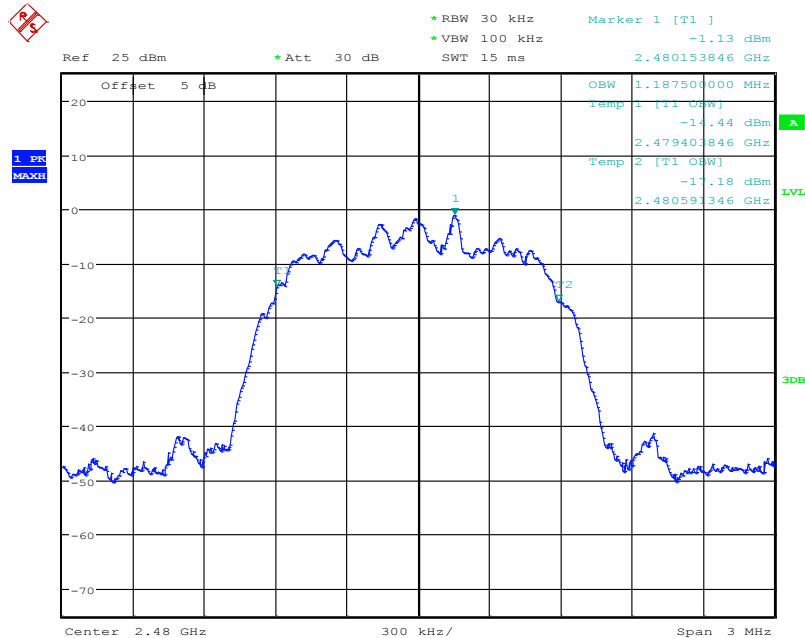


Date: 27.DEC.2018 10:01:55

4.4.1.7

8DPSK_Lowest Channel

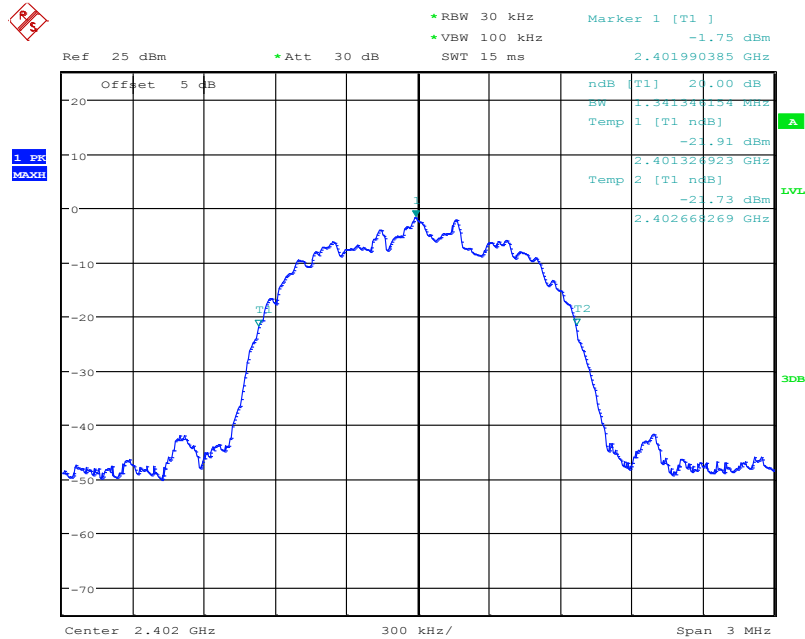


Date: 27.DEC.2018 09:53:21

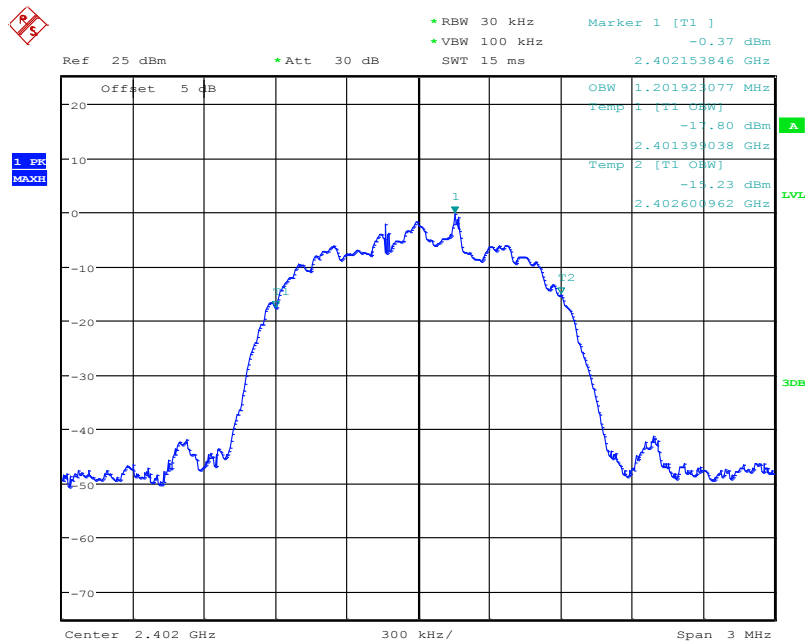


Date: 27.DEC.2018 09:58:14

4.4.1.8

8DPSK _Middle Channel

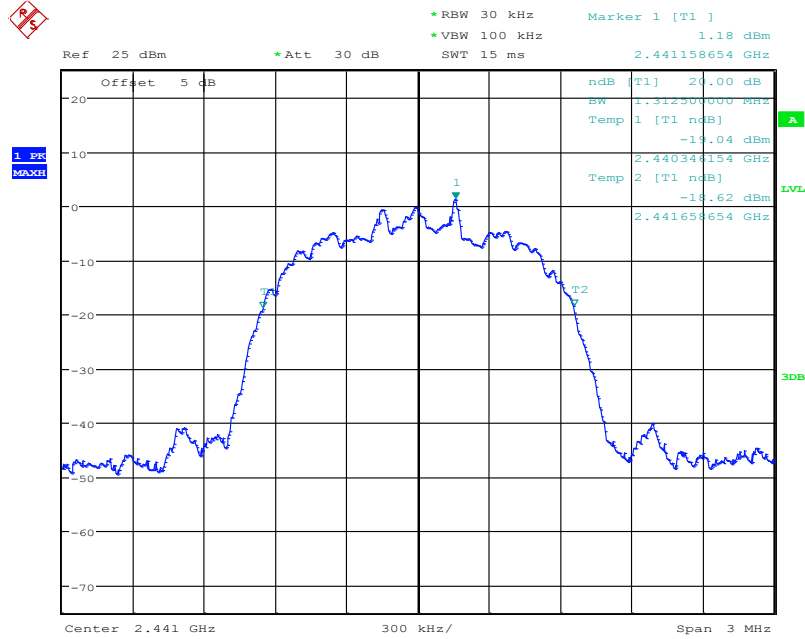


Date: 27.DEC.2018 09:52:25

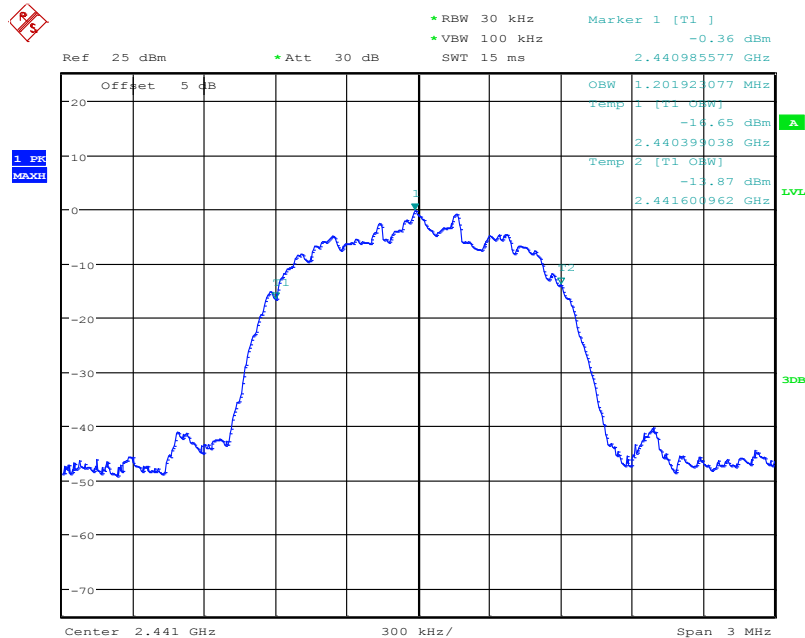


Date: 27.DEC.2018 09:59:00

4.4.1.9

8DPSK_Highest Channel

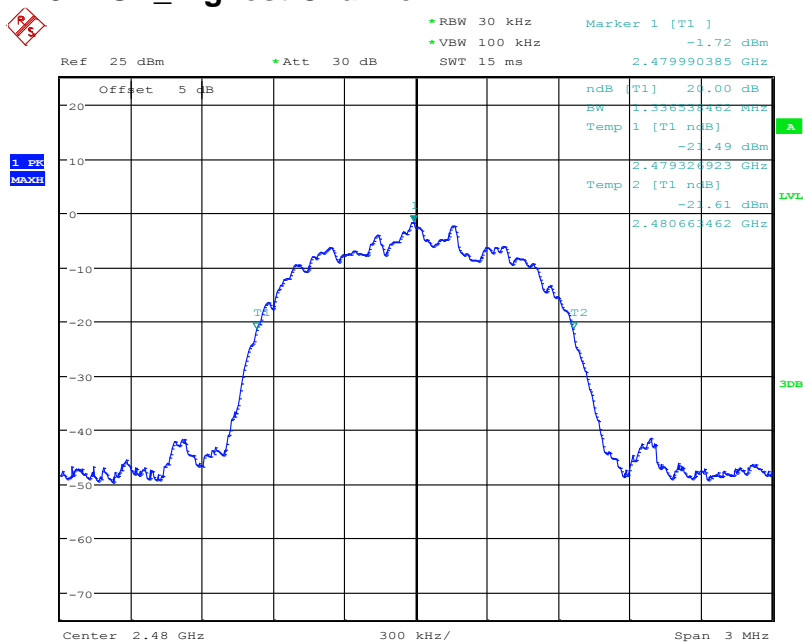


Date: 27.DEC.2018 09:48:37

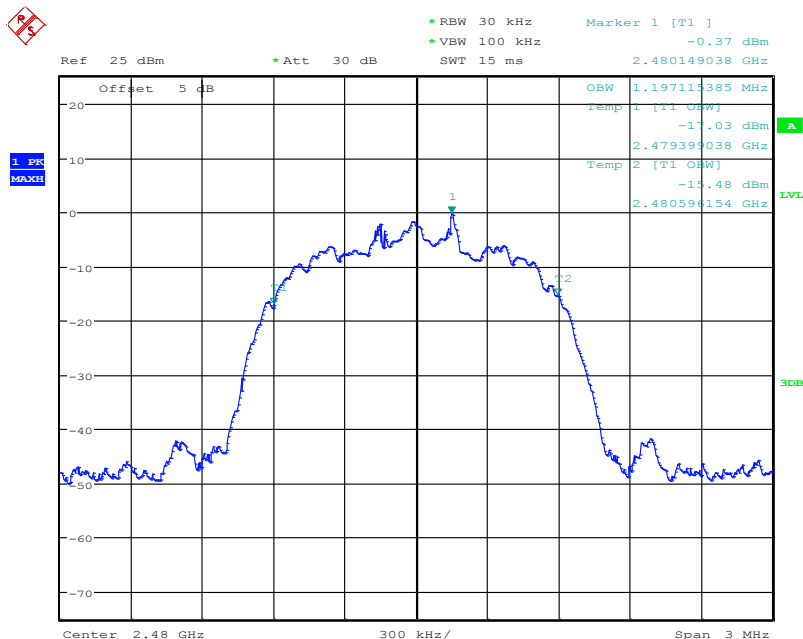

Date: 27.DEC.2018 10:02:38

4.5 Carrier Frequencies Separation
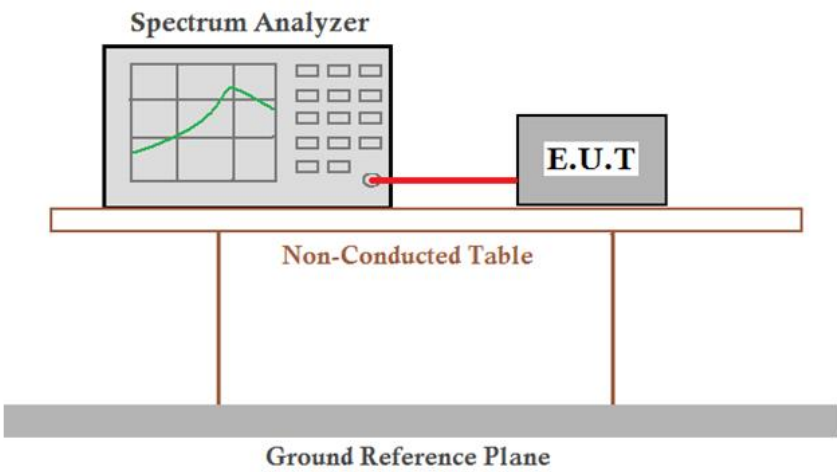
| | |
|------------------------|---|
| Test Requirement: | 47 CFR Part 15C Section 15.247 (a)(1) |
| Test Method: | ANSI C63.10:2013 Section 7.8.2 |
| Test Setup: |  <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by two vertical legs. Below the table is a Ground Reference Plane.</p> |
| Limit: | 2/3 of the 20dB bandwidth |
| | Remark: the transmission power is less than 0.125W. |
| Exploratory Test Mode: | Hopping transmitting with all kind of modulation and all kind of data type. |
| Final Test Mode: | Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type. |
| Instruments Used: | Refer to section 5.10 for details |
| Test Results: | Pass |



4.5.1 Test Results


| GFSK mode | | | |
|--------------------|--------------------------------------|-------------|--------|
| Test channel | Carrier Frequencies Separation (kHz) | Limit (kHz) | Result |
| Middle | 1000.0 | 608.97 | Pass |
| $\pi/4$ DQPSK mode | | | |
| Test channel | Carrier Frequencies Separation (kHz) | Limit (kHz) | Result |
| Middle | 1004.8 | 794.87 | Pass |
| 8DPSK mode | | | |
| Test channel | Carrier Frequencies Separation (kHz) | Limit (kHz) | Result |
| Middle | 1000.0 | 801.28 | Pass |

Remark: According to section 6.4,



| Mode | 20dB bandwidth (kHz) (worse case) | Limit (kHz) (Carrier Frequencies Separation) |
|---------------|--------------------------------------|---|
| GFSK | 913.46 | 608.97 |
| $\pi/4$ DQPSK | 1192.30 | 794.87 |
| 8DPSK | 1201.92 | 801.28 |

4.5.2

Test plots:

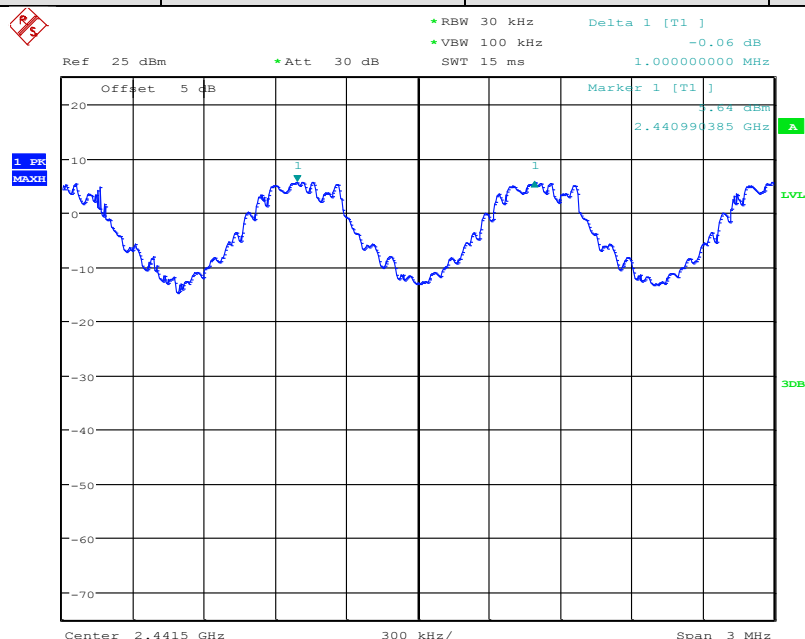


Date: 27.DEC.2018 10:08:45

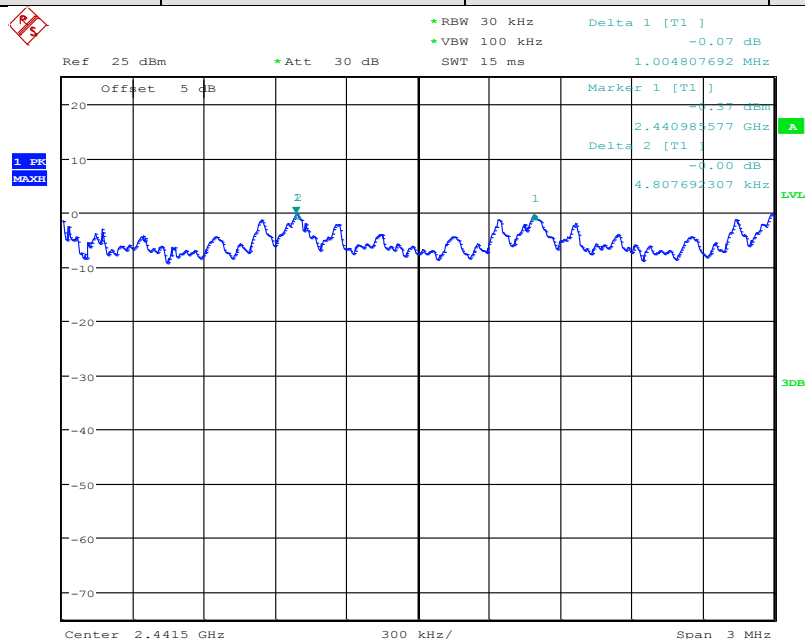

Date: 27.DEC.2018 10:07:09




| | | | |
|------------|-------|---------------|--------|
| Test mode: | 8DPSK | Test channel: | Middle |
|------------|-------|---------------|--------|

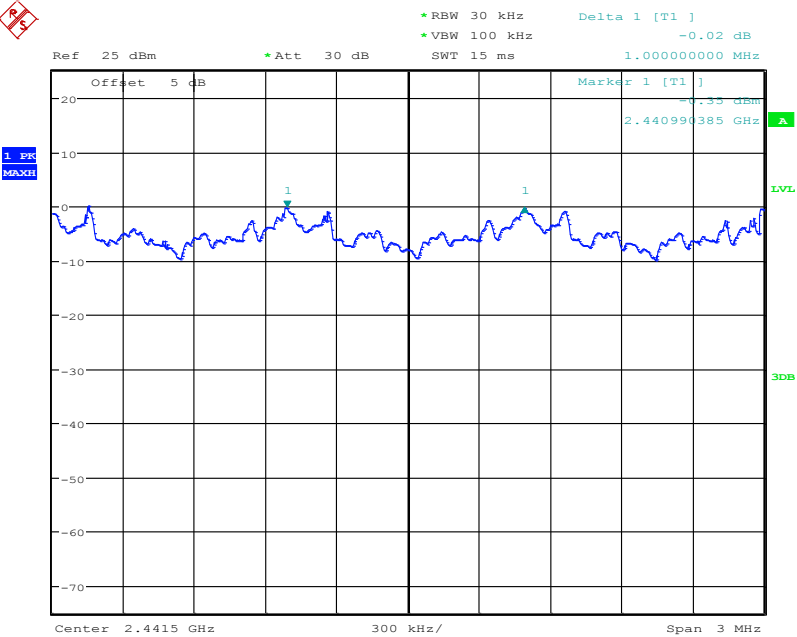

Date: 27.DEC.2018 10:05:12

4.6 Hopping Channel Number

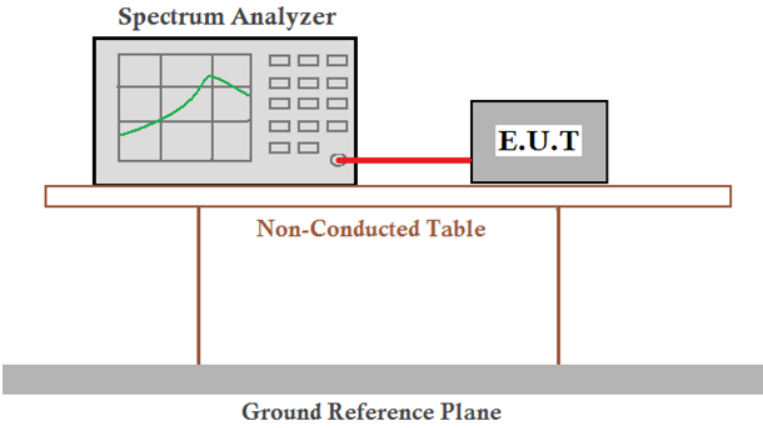
| | |
|-------------------|--|
| Test Requirement: | 47 CFR Part 15C Section 15.247 (a)(1) |
| Test Method: | ANSI C63.10:2013 Section 7.8.3 |
| Test Setup: |  <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.</p> |
| Limit: | At least 15 channels |
| Test Mode: | Hopping transmitting with all kind of modulation |
| Instruments Used: | Refer to section 5.10 for details |
| Test Results: | Pass |

4.6.1 Test Results

| Mode | Hopping channel numbers | Limit |
|---------------|-------------------------|-------|
| GFSK | 79 | ≥15 |
| $\pi/4$ DQPSK | 79 | ≥15 |
| 8DPSK | 79 | ≥15 |


4.6.2 Test plots

4.6.2.1 GFSK

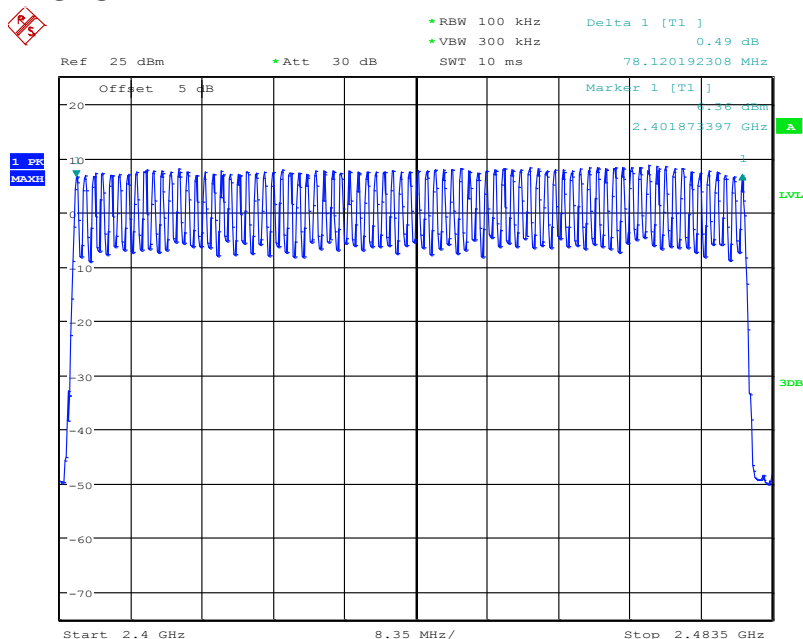

Date: 27.DEC.2018 10:12:36


4.6.2.2 $\pi/4$ DQPSK

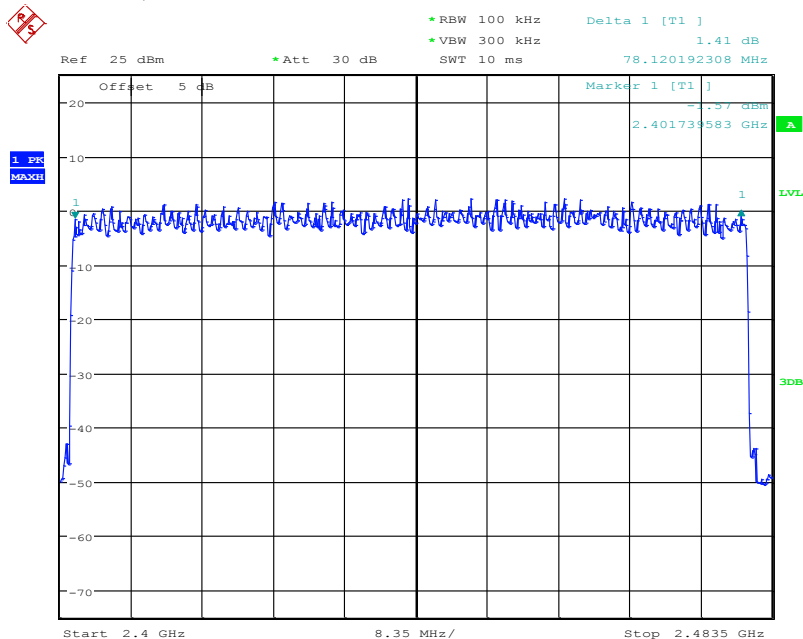

Date: 27.DEC.2018 10:13:44




4.6.2.3 8DPSK

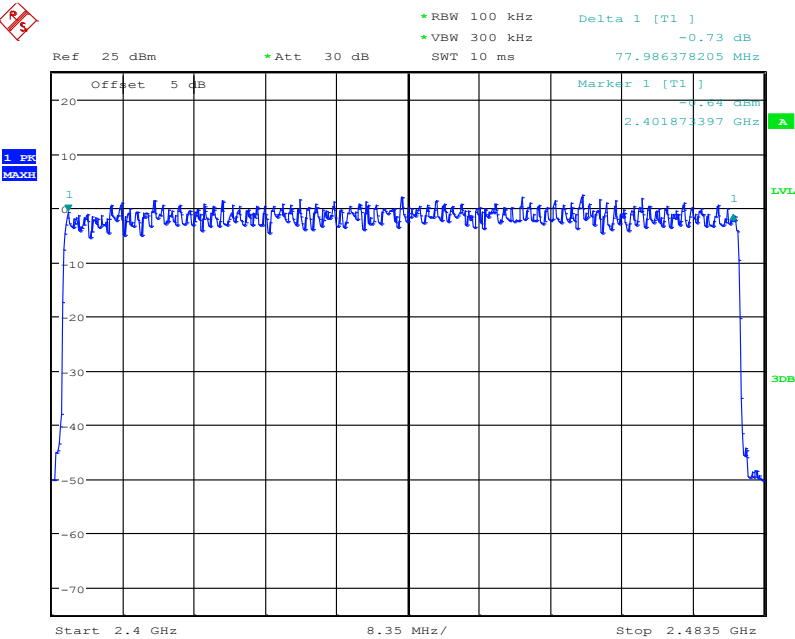

Date: 27.DEC.2018 10:15:09

4.7 Dwell Time
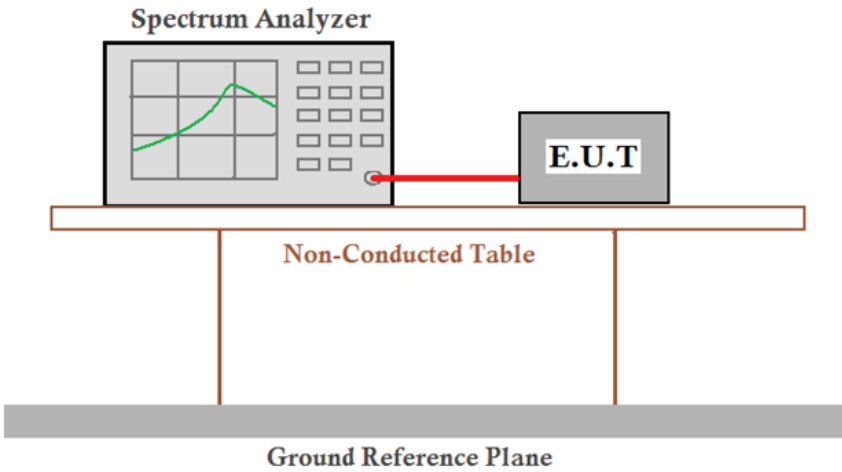
| | |
|-------------------|---|
| Test Requirement: | 47 CFR Part 15C Section 15.247 (a)(1) |
| Test Method: | ANSI C63.10:2013 Section 7.8.4 |
| Test Setup: |  <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p> |
| Instruments Used: | Refer to section 5.10 for details |
| Test Mode: | Hopping transmitting with all kind of modulation and all kind of data type. |
| Limit: | 0.4 Second |
| Test Results: | Pass |



4.7.1 Test Results

| Operation Modes | On time (ms) on one channel |
|-----------------|-------------------------------|
| DH1 | 0.400 |
| DH3 | 1.683 |
| DH5 | 2.948 |
| 2-DH1 | 0.407 |
| 2-DH3 | 1.683 |
| 2-DH5 | 2.924 |
| 3-DH1 | 0.409 |
| 3-DH3 | 1.674 |
| 3-DH5 | 2.940 |

Bluetooth Time of Occupancy Calculation

Typically, Bluetooth 1x/EDR mode has a channel hopping rate of 1600 hops/s, since 1x/EDR modes use 5 transmit and 1 receive slot, for a total of 6 slots, the Bluetooth transmitter is actually hopping at a rate of $1600/6=266.67$ hops/slot

$400\text{ms} \times 79 \text{ Channel} = 31.6 \text{ s}$ (Time of Occupancy Limit)

Worst case BT has 266.67 hops/second (for 1x/EDR modes with DH5 operation)

$266.67 \text{ hops/second} / 79 \text{ channels} = 3.38 \text{ hops/second}$ (# of hops/second on one channel)

$3.38 \text{ hops/second} / \text{channel} \times 31.6 \text{ seconds} = 106.67 \text{ hops}$ (#hops over a 31.6 second period)

$106.67 \text{ hops} \times 2.948 \text{ ms/channel} = 314.46 \text{ ms}$ (worst case dwell time for one channel in 1x/EDR modes)

With AFH, the number of channels is reduced to a minimum of 20 channels and the channel hopping rate is reduced by 50% to 800hops/s, AFH mode also uses 6 slots so the Bluetooth transmitter hops at a rate of $800/6=133.3$ hops/s/slot

$400\text{ms} \times 20 \text{ Channel} = 8 \text{ s}$ (Time of Occupancy Limit)

Worst case BT has 133.3 hops/second/slot (for AFH mode with DH5 operation)

$133.3 \text{ hops/second} / 20 \text{ channels} = 6.67 \text{ hops/second}$ (#hops/second on one channel)


$6.67 \text{ hops/second} \times 8 \text{ seconds} = 53.34 \text{ hops}$ (#hops over a 8 seconds period)

$53.34 \text{ hops} \times 2.948 \text{ ms/channel} = 157.25 \text{ ms}$ (worst case dwell time for one channel in AFH mode)




4.7.2 Test plots

4.7.2.1 DH1 Middle Channel

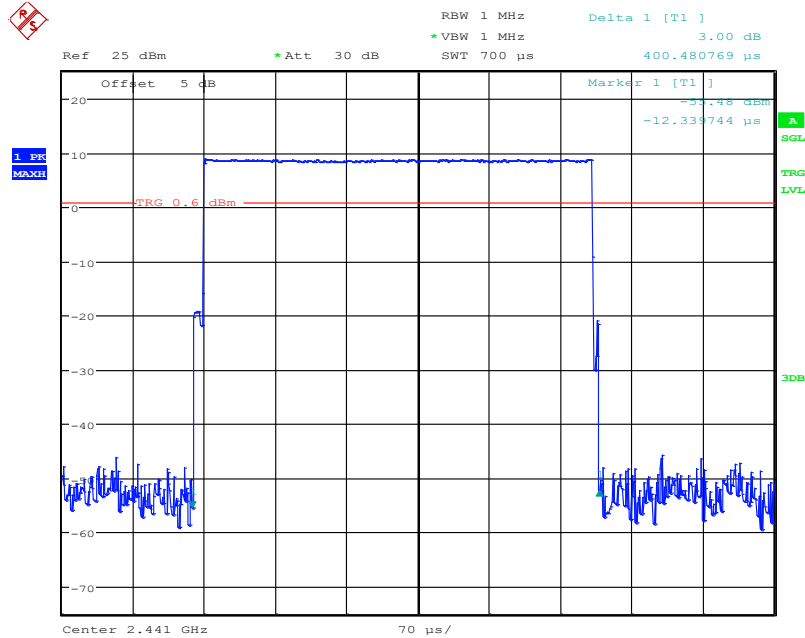

Date: 27.DEC.2018 13:58:50


4.7.2.2 DH3 Middle Channel

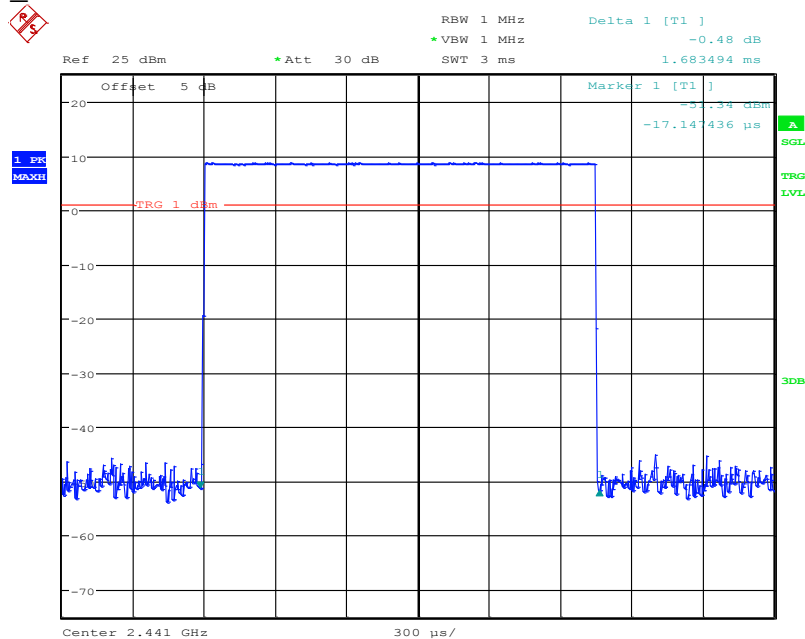

Date: 27.DEC.2018 14:01:13




4.7.2.3 DH5_Middle Channel

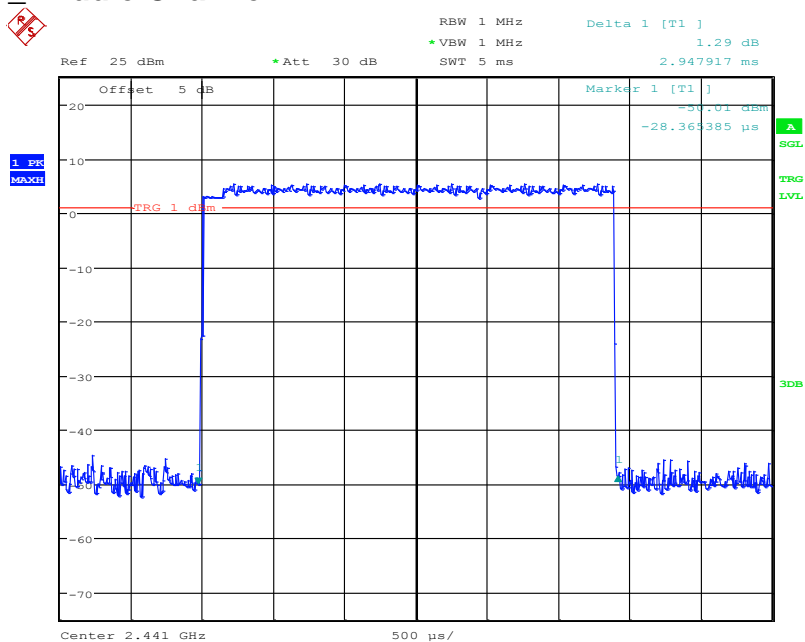

Date: 27.DEC.2018 14:04:36


4.7.2.4 2DH1_Middle Channel

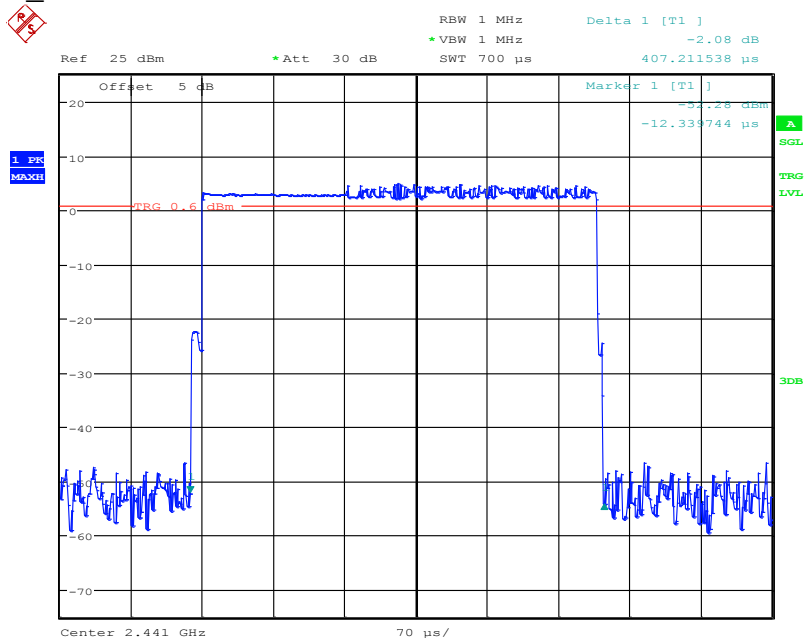

Date: 27.DEC.2018 13:59:37




4.7.2.5 2DH3 Middle Channel

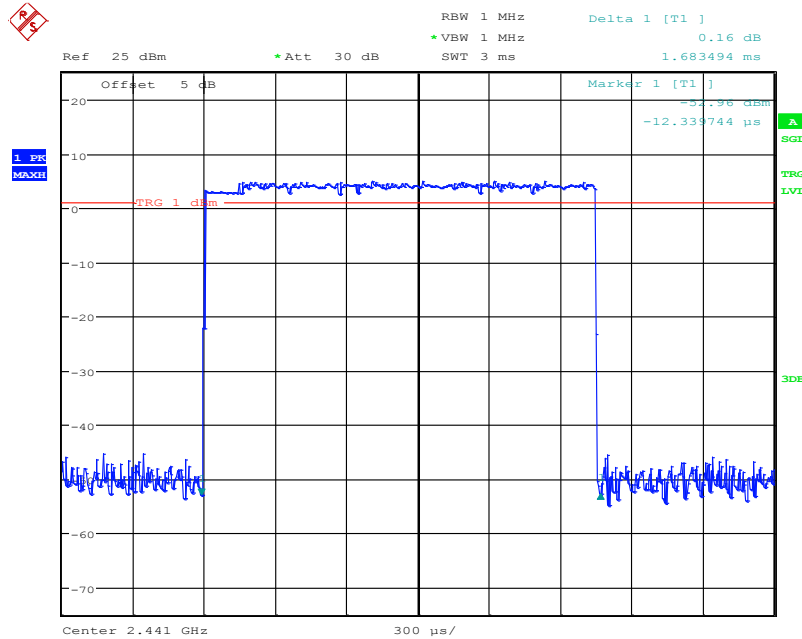


Date: 27.DEC.2018 14:01:53

4.7.2.6 2DH5 Middle Channel

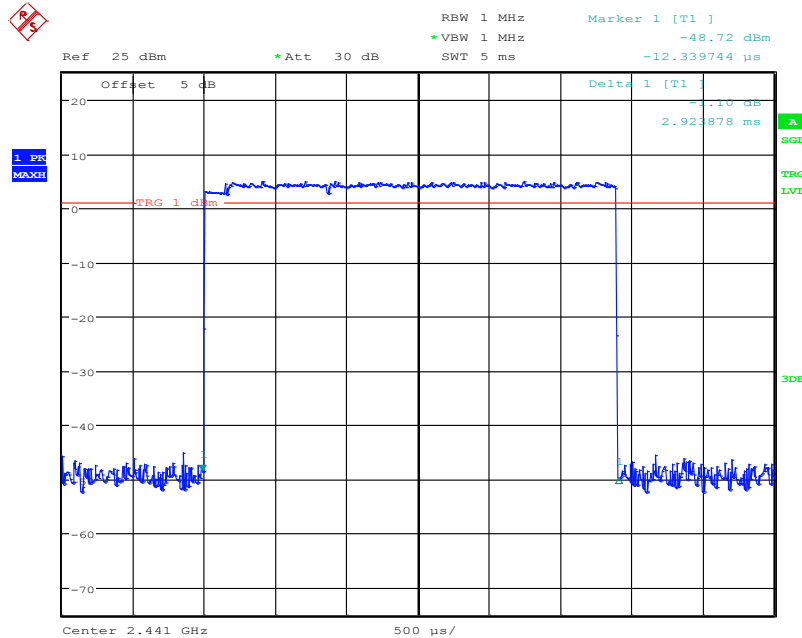


Date: 27.DEC.2018 14:03:50

4.7.2.7 3DH1_Middle Channel

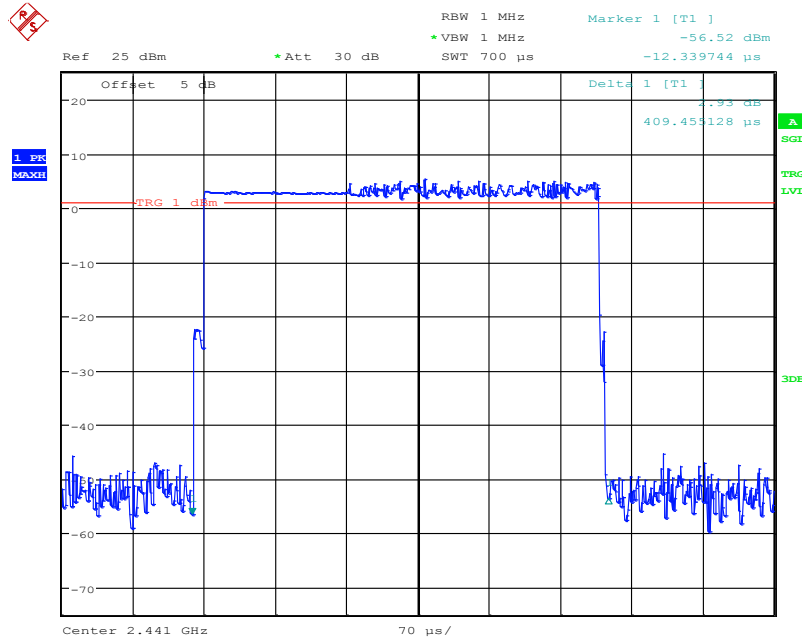

Date: 27.DEC.2018 14:00:21


4.7.2.8 3DH3_Middle Channel

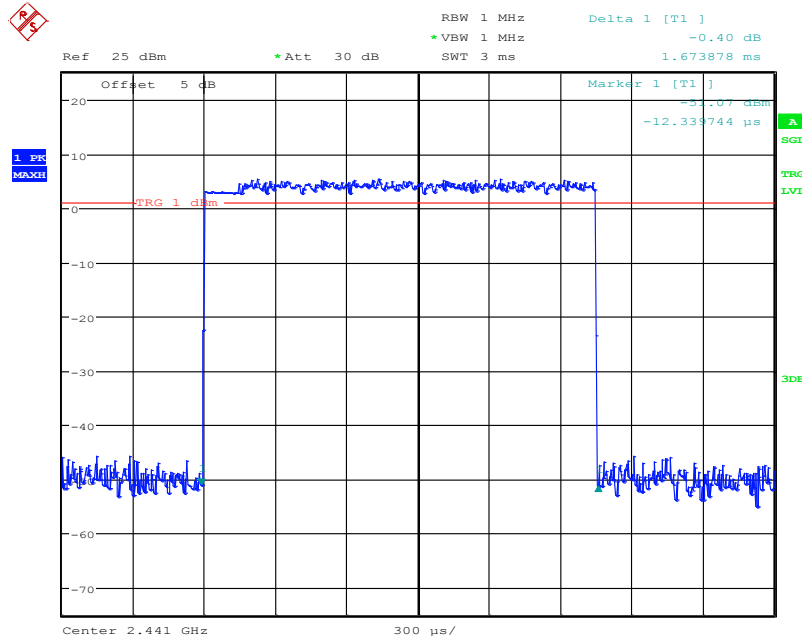

Date: 27.DEC.2018 14:02:30




4.7.2.9 3DH5 Middle Channel

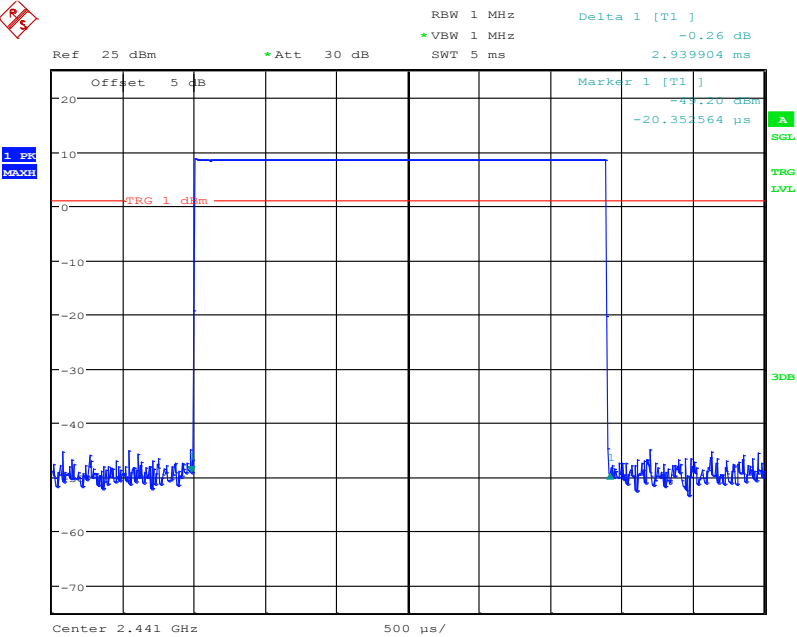

Date: 27.DEC.2018 14:03:19


4.8 Band-edge for RF Conducted Emissions
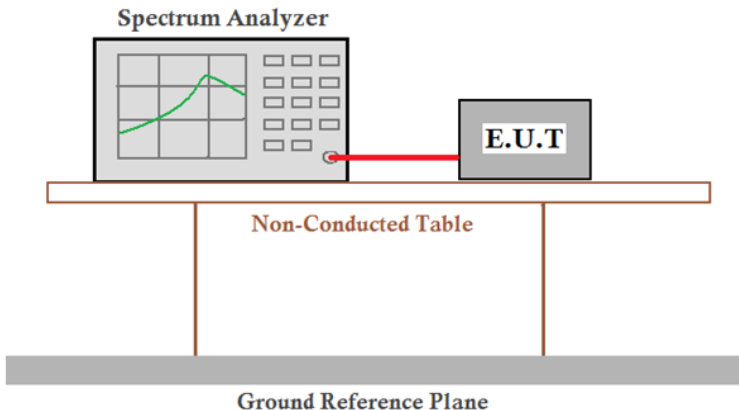
| | |
|------------------------|---|
| Test Requirement: | 47 CFR Part 15C Section 15.247 (d) |
| Test Method: | ANSI C63.10:2013 Section 7.8.6 |
| Test Setup: |  <p>The diagram illustrates the test setup for RF conducted emissions. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table, which is supported by two vertical legs. Below the table is a Ground Reference Plane.</p> |
| Limit: | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. |
| Exploratory Test Mode: | Hopping and Non-hopping transmitting with all kind of modulation and all kind of data type |
| Final Test Mode: | Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type. |
| Instruments Used: | Refer to section 5.10 for details |
| Test Results: | Pass |




4.8.1 Test plots

4.8.1.1 GFSK_Lowest Channel_ Hopping ON

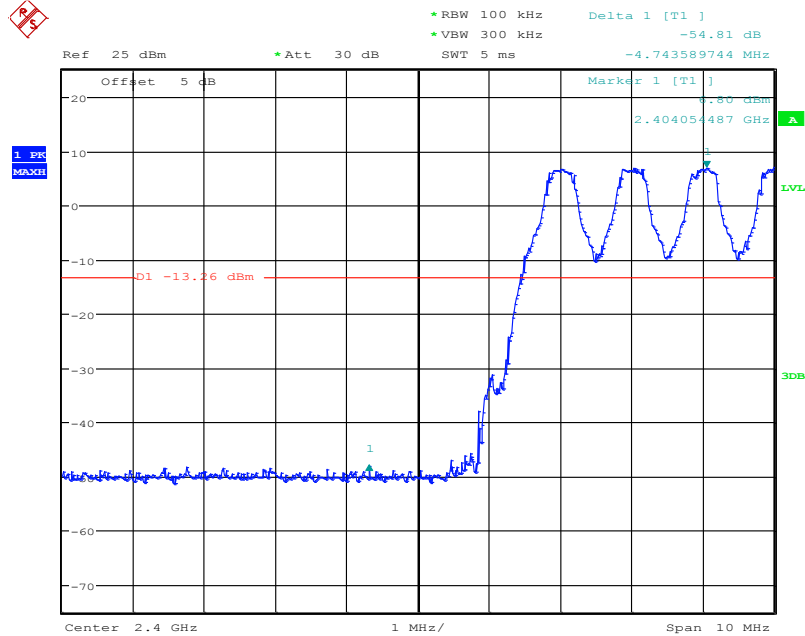

Date: 27.DEC.2018 10:48:44


4.8.1.2 GFSK_Lowest Channel_ Hopping OFF

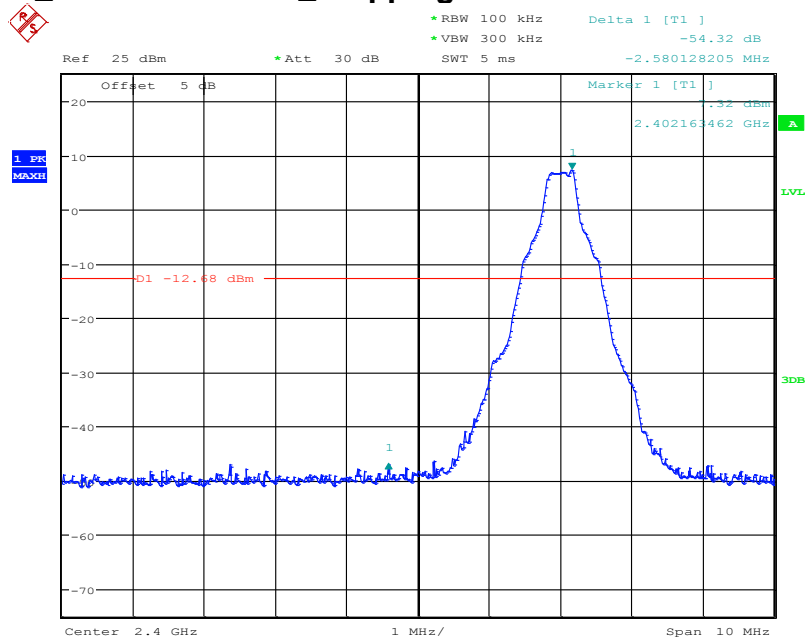

Date: 27.DEC.2018 10:21:23




4.8.1.3 GFSK_Highest Channel_Hopping ON

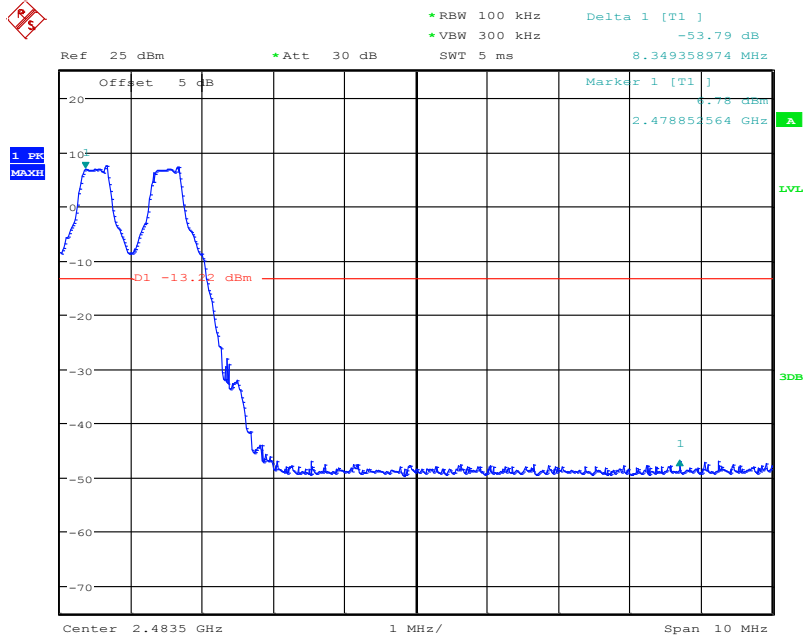

Date: 27.DEC.2018 10:40:07


4.8.1.4 GFSK_Highest Channel_Hopping OFF

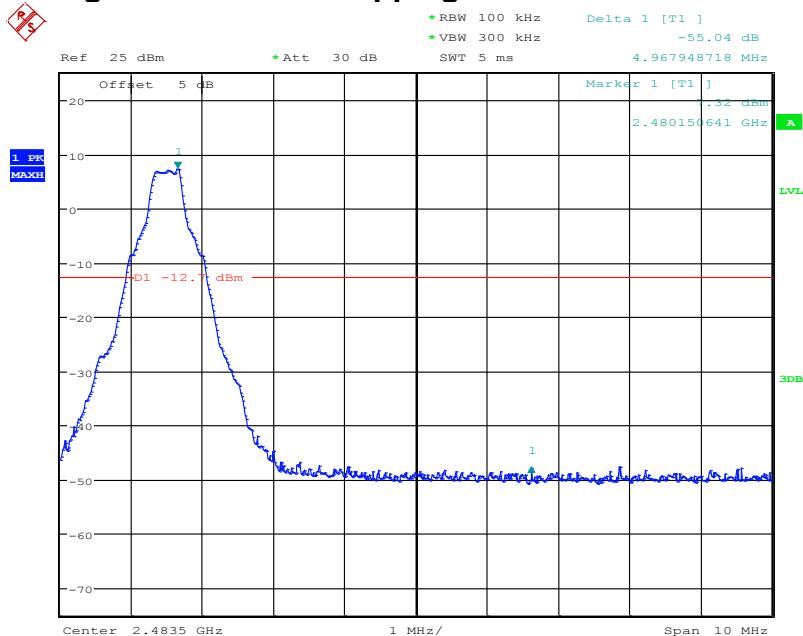

Date: 27.DEC.2018 10:24:48




4.8.1.5 $\pi/4$ DQPSK _Lowest Channel_ Hopping ON

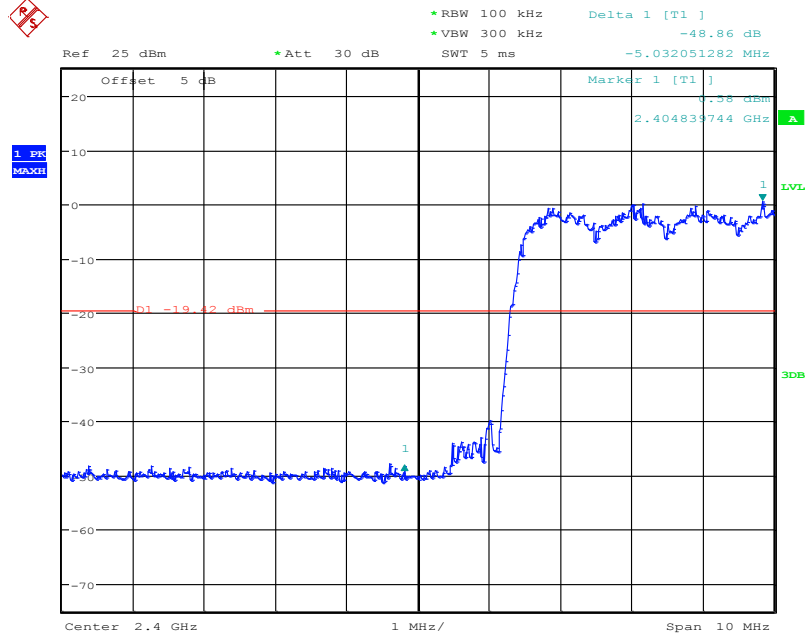

Date: 27.DEC.2018 10:47:25


4.8.1.6 $\pi/4$ DQPSK _Lowest Channel_ Hopping OFF

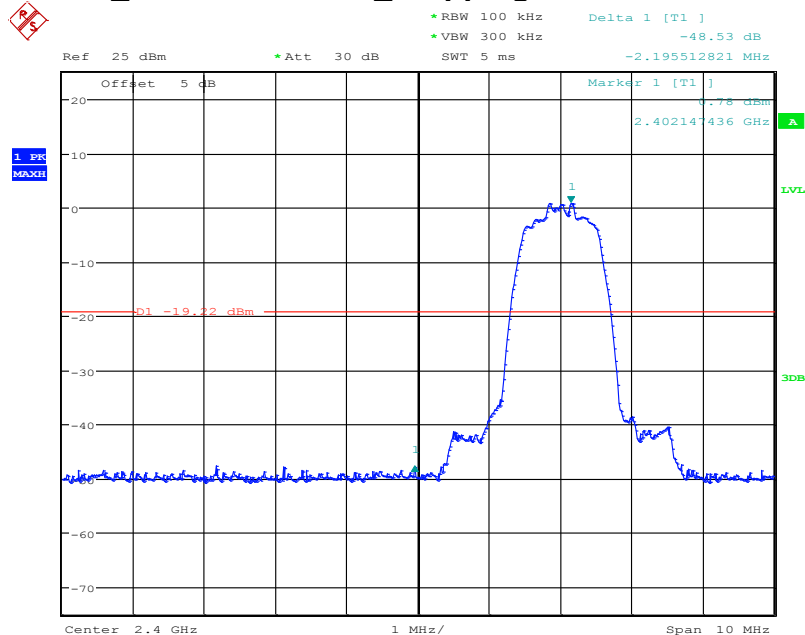

Date: 27.DEC.2018 10:20:11




4.8.1.7 $\pi/4$ DQPSK_Highest Channel_Hopping ON

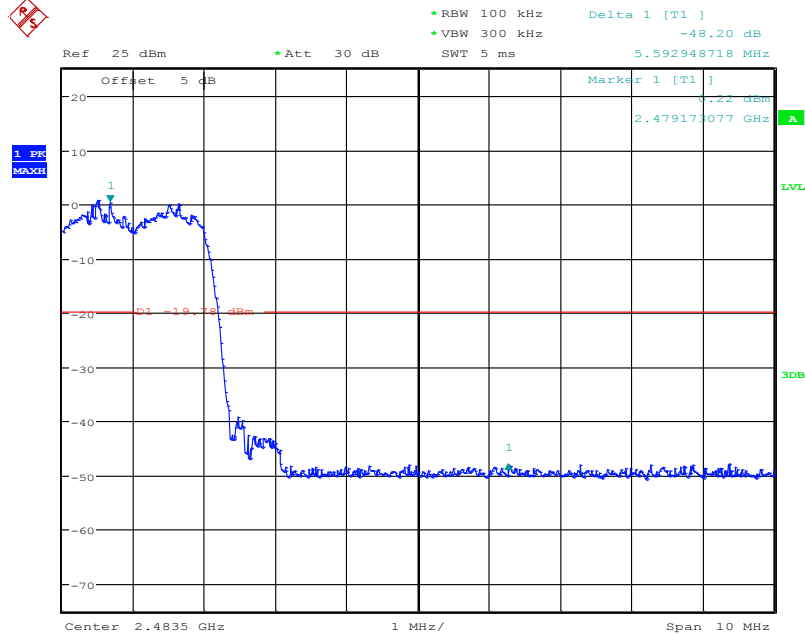


Date: 27.DEC.2018 10:41:55

4.8.1.8 $\pi/4$ DQPSK_Highest Channel_Hopping OFF

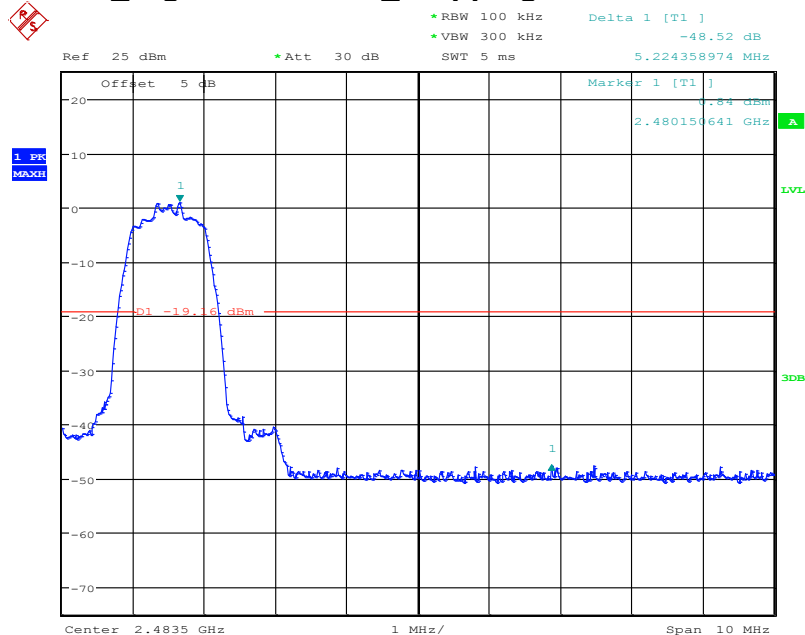


Date: 27.DEC.2018 10:26:17

4.8.1.9 8DPSK_Lowest Channel_ Hopping ON

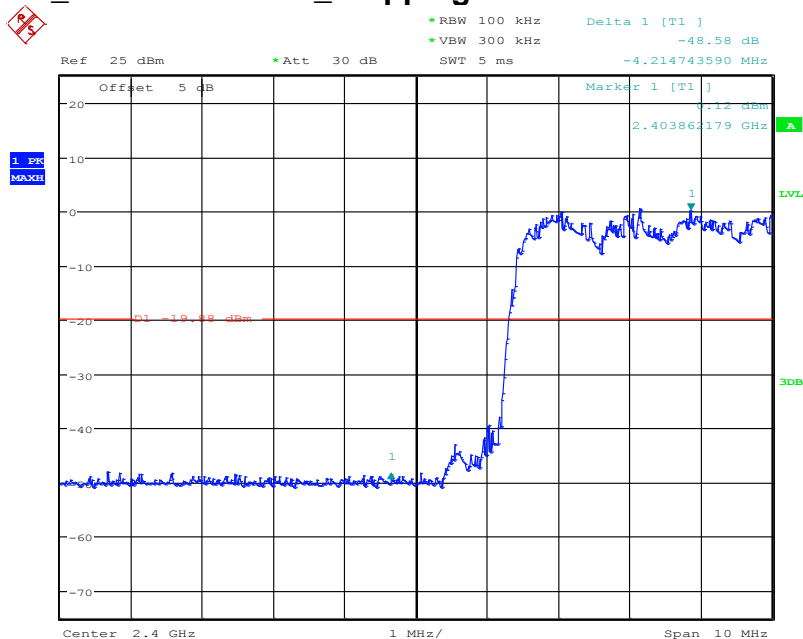

Date: 27.DEC.2018 10:46:05


4.8.1.10 8DPSK_Lowest Channel_ Hopping OFF

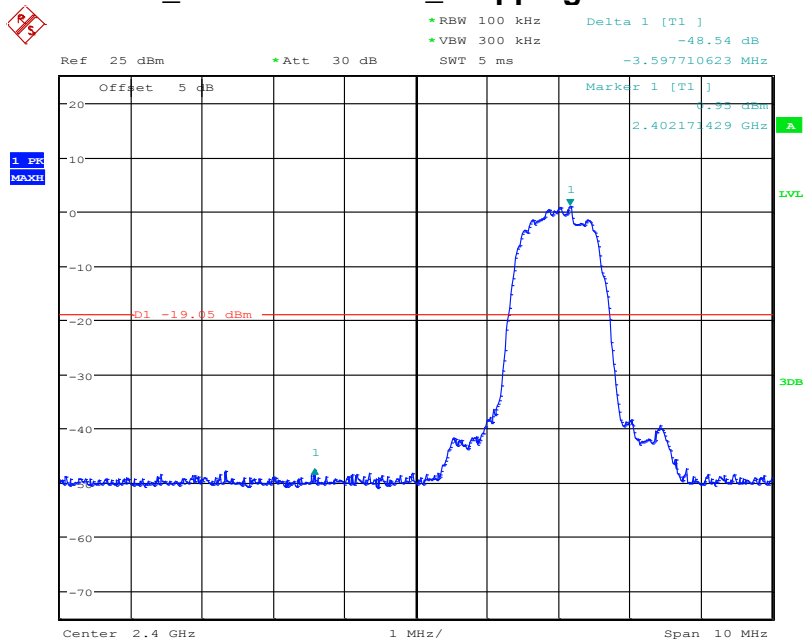

Date: 27.DEC.2018 11:06:53

4.8.1.11


8DPSK _Highest Channel_ Hopping ON

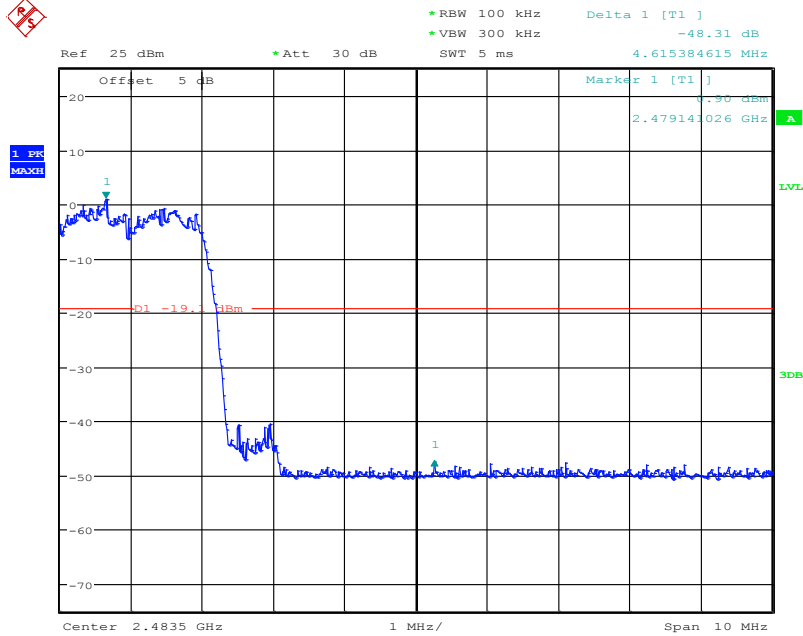

Date: 27.DEC.2018 10:44:08


4.8.1.12

8DPSK _Highest Channel_ Hopping OFF

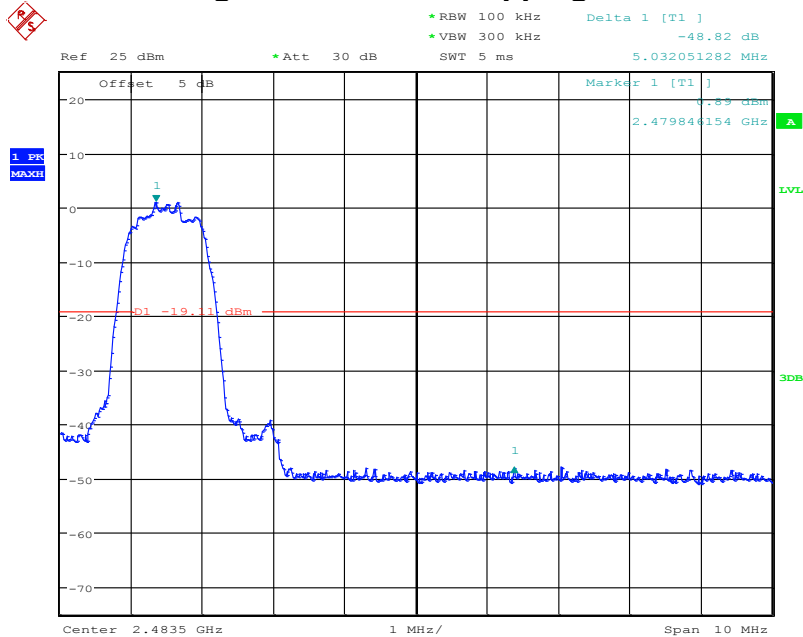


Date: 27.DEC.2018 10:27:21

4.9 Spurious RF Conducted Emissions
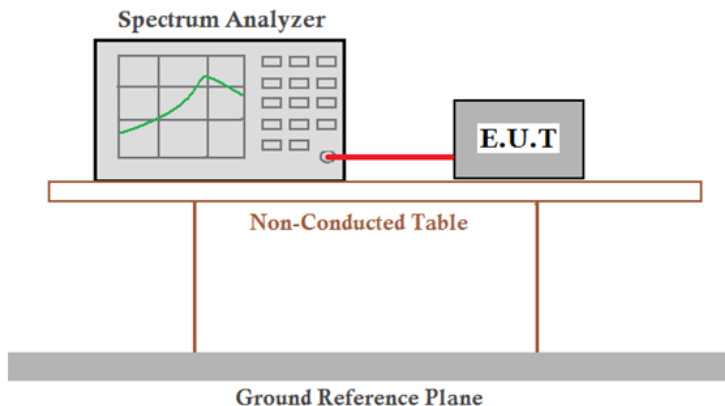
| | |
|------------------------|---|
| Test Requirement: | 47 CFR Part 15C Section 15.247 (d) |
| Test Method: | ANSI C63.10:2013 Section 7.8.8 |
| Test Setup: |  |
| Limit: | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. |
| Exploratory Test Mode: | Non-hopping transmitting with all kind of modulation and all kind of data type |
| Final Test Mode: | Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type. |
| Instruments Used: | Refer to section 5.10 for details |
| Test Results: | Pass |


4.9.1 Test plots

4.9.1.1 GFSK Lowest Channel

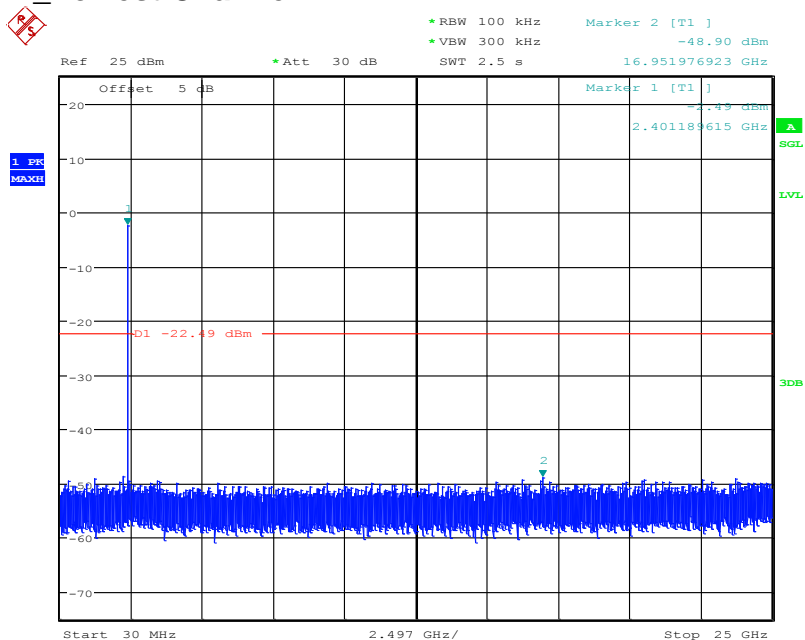


Date: 27.DEC.2018 11:36:31

4.9.1.2 GFSK Middle Channel

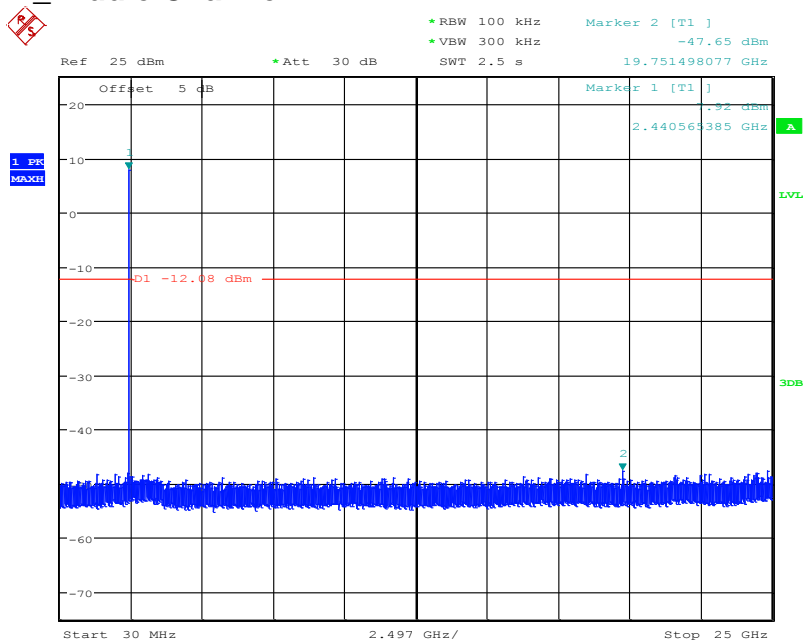


Date: 27.DEC.2018 11:43:56

4.9.1.3 GFSK_Highest Channel

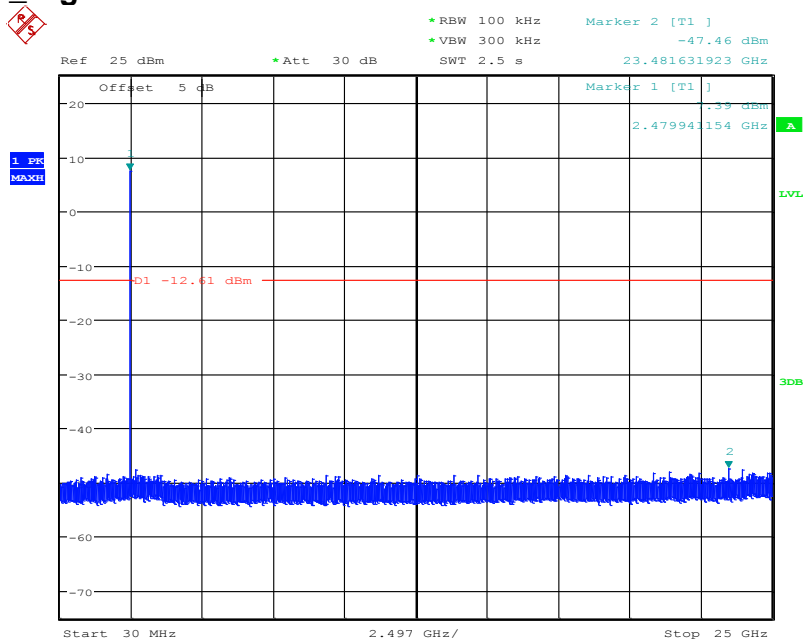

Date: 27.DEC.2018 11:45:09


4.9.1.4 $\pi/4$ DQPSK Lowest Channel

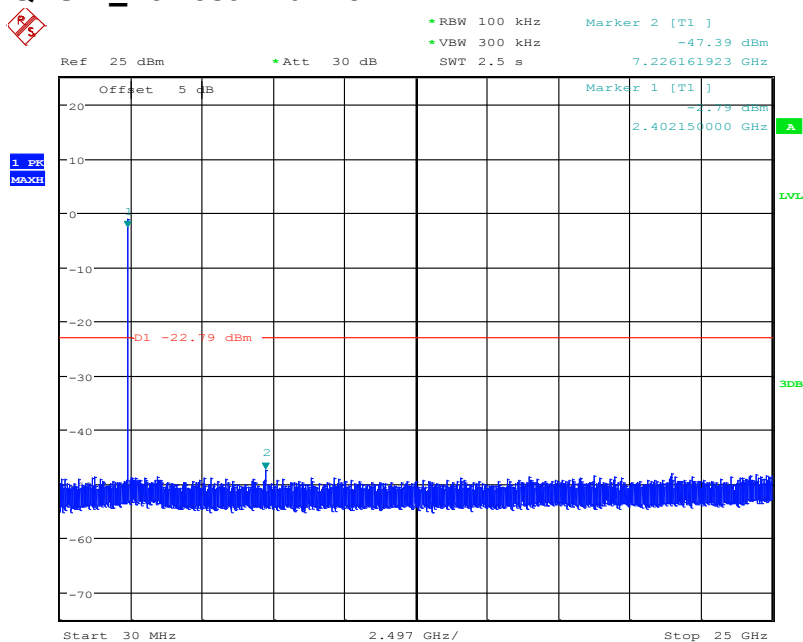

Date: 27.DEC.2018 11:38:05




4.9.1.5 $\pi/4$ DQPSK_Middle Channel

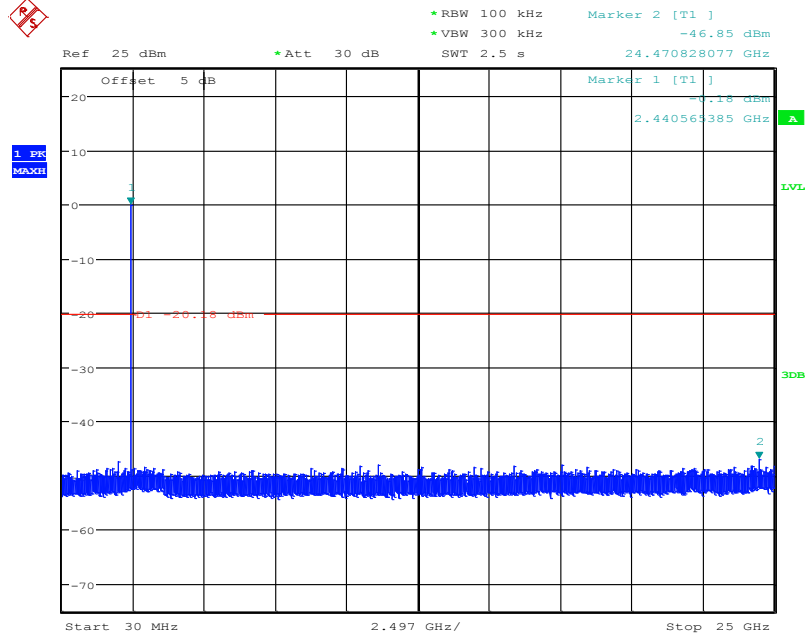

Date: 27.DEC.2018 11:41:51


4.9.1.6 $\pi/4$ DQPSK_Highest Channel

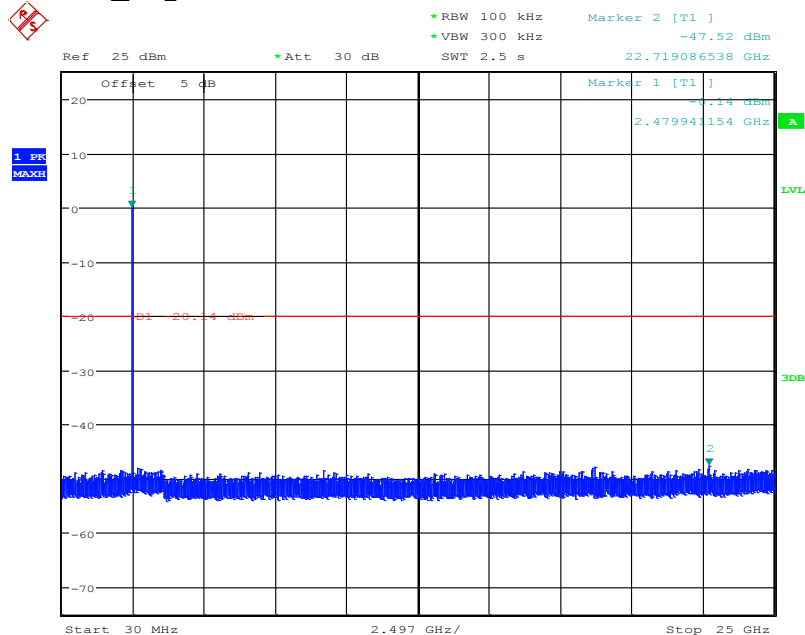

Date: 27.DEC.2018 11:46:37




4.9.1.7 8DPSK_Lowest Channel

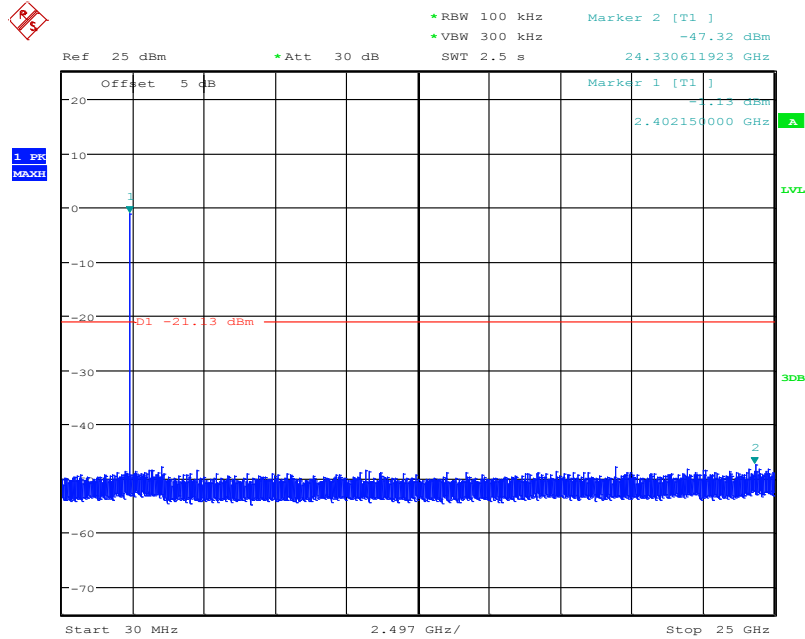

Date: 27.DEC.2018 11:39:10


4.9.1.8 8DPSK_Middle Channel

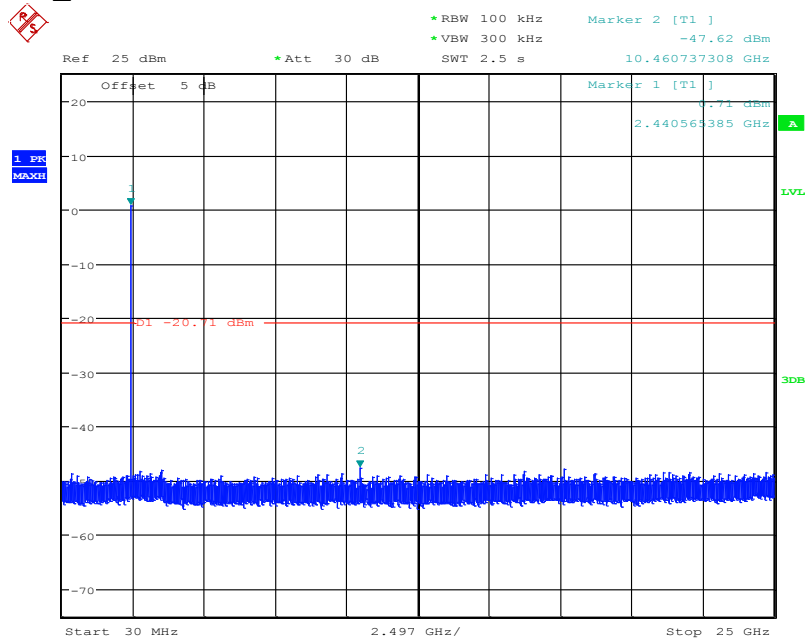

Date: 27.DEC.2018 11:42:39



4.9.1.9 8DPSK_Highest Channel

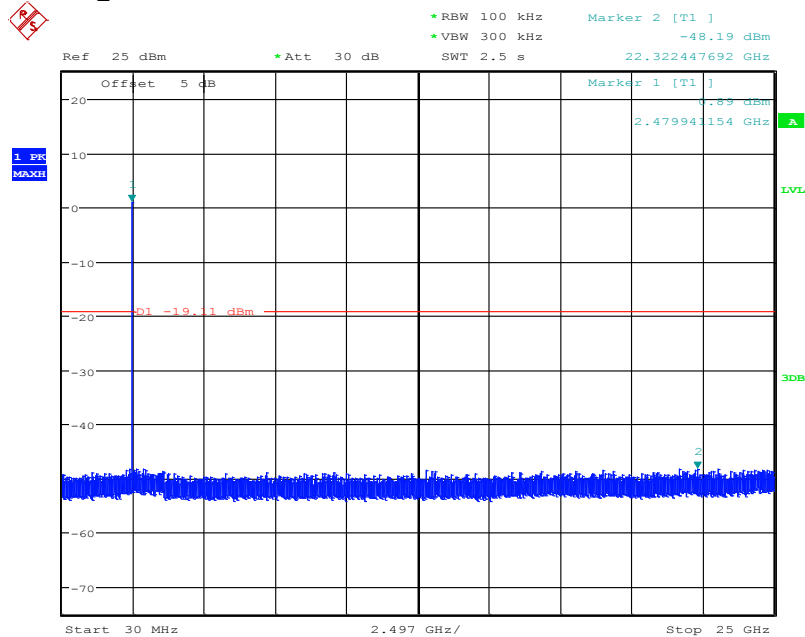

Date: 27.DEC.2018 11:47:56

Remark:

Scan from 9kHz to 25GHz, the disturbance between 9KHz to 30MHz was very low, and the above harmonics were the highest point could be found when testing, The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

4.10 Radiated Spurious Emission

| | | | | | |
|-------------------|---|--------------------------------------|------------------------|------------|-----------------------------|
| Test Requirement: | 47 CFR Part 15C Section 15.209 and 15.205 | | | | |
| Test Method: | ANSI C63.10: 2013 | | | | |
| Test Site: | Measurement Distance: 3m or 10m (Semi-Anechoic Chamber) | | | | |
| Receiver Setup: | Frequency | Detector | RBW | VBW | Remark |
| | 0.009MHz-0.090MHz | Peak | 10kHz | 30kHz | Peak |
| | 0.009MHz-0.090MHz | Average | 10kHz | 30kHz | Average |
| | 0.090MHz-0.110MHz | Quasi-peak | 10kHz | 30kHz | Quasi-peak |
| | 0.110MHz-0.490MHz | Peak | 10kHz | 30kHz | Peak |
| | 0.110MHz-0.490MHz | Average | 10kHz | 30kHz | Average |
| | 0.490MHz -30MHz | Quasi-peak | 10kHz | 30kHz | Quasi-peak |
| | 30MHz-1GHz | Quasi-peak | 100 kHz | 300kHz | Quasi-peak |
| | Above 1GHz | Peak | 1MHz | 3MHz | Peak |
| | | Peak | 1MHz | 10Hz | Average |
| Limit: | Frequency | Field strength (microvolt/meter) | Limit (dBuV/ m) | Remark | Measurement distance (m) |
| | 0.009MHz-0.490MHz | 2400/F(kHz) | - | - | 300 |
| | 0.490MHz-1.705MHz | 24000/F(kHz) | - | - | 30 |
| | 1.705MHz-30MHz | 30 | - | - | 30 |
| | 30MHz-88MHz | 100 | 40.0 | Quasi-peak | 3 |
| | 88MHz-216MHz | 150 | 43.5 | Quasi-peak | 3 |
| | 216MHz-960MHz | 200 | 46.0 | Quasi-peak | 3 |
| | 960MHz-1GHz | 500 | 54.0 | Quasi-peak | 3 |
| | Above 1GHz | 500 | 54.0 | Average | 3 |
| | Remark: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device. | | | | |

Test Setup:

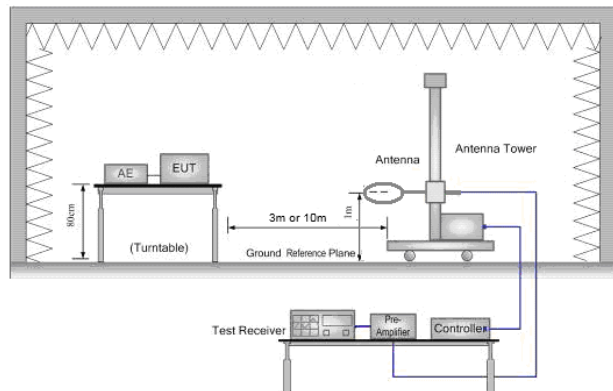


Figure 1. Below 30MHz

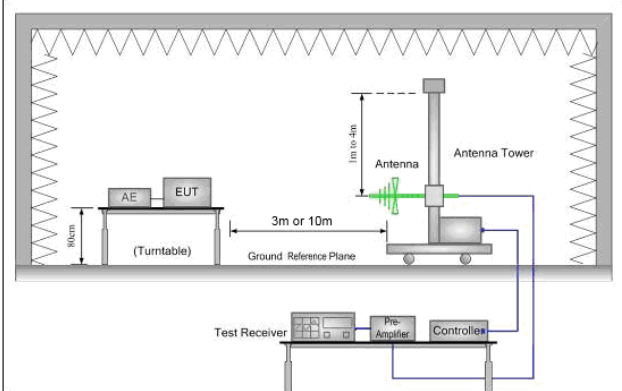


Figure 2. 30MHz to 1GHz

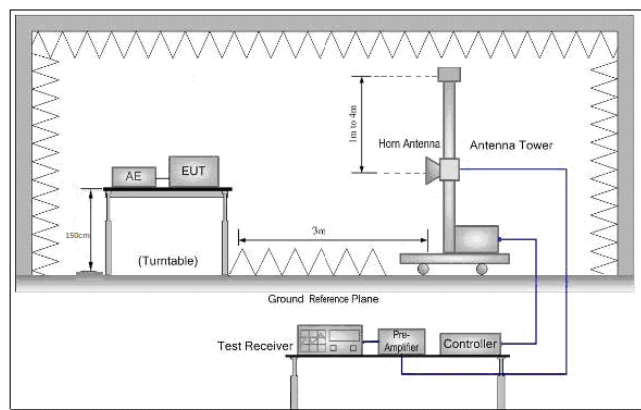



Figure 3. Above 1 GHz



| | |
|------------------------|--|
| Test Procedure: | <ul style="list-style-type: none">a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.h. Test the EUT in the lowest channel (2402MHz), the middle channel (2441MHz), the Highest channel (2480MHz)i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.j. Repeat above procedures until all frequencies measured was complete. |
| Exploratory Test Mode: | Non-hopping transmitting mode with all kind of modulation and all kind of data type Charge + Transmitting mode. |
| Final Test Mode: | Through Pre-scan, find the DH5 of data type and GFSK modulation is the worst case. Pretest the EUT at Charge + Transmitting mode For below 1GHz part, through pre-scan, the worst case is the lowest channel. Only the worst case is recorded in the report. |
| Instruments Used: | Refer to section 5.10 for details |
| Test Results: | Pass |

4.10.1 Radiated Emission below 1GHz

4.10.1.1 Charge + Transmitting, Vertical

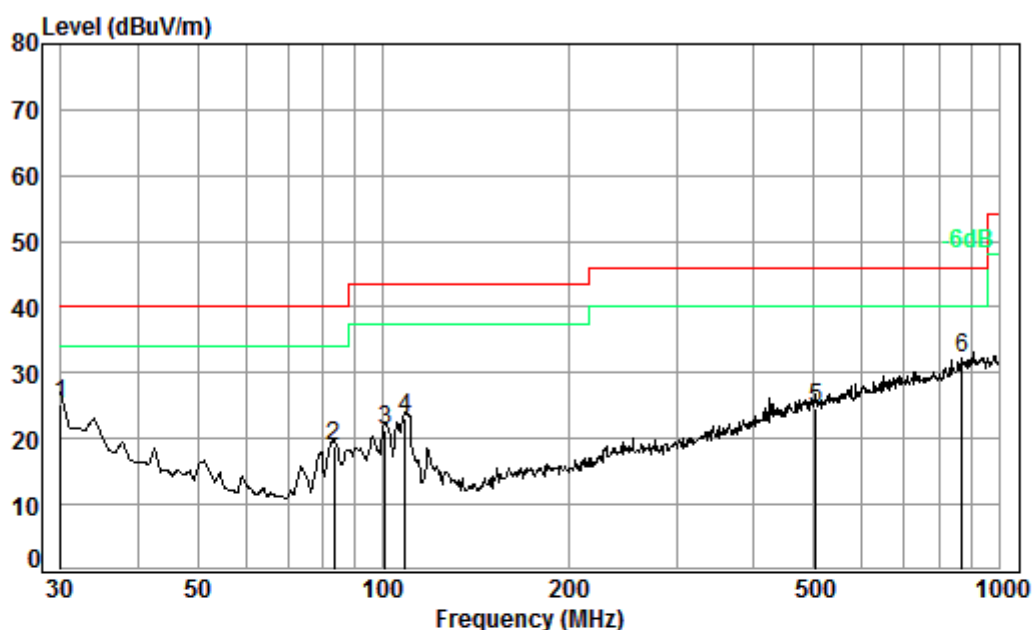


Condition: 3m VERTICAL

Job No. : c0007

Test mode: c

| | Freq | Cable Loss | Ant Factor | Preamp Factor | Read Level | Level | Limit | Over |
|------|--------|------------|------------|---------------|------------|--------|--------|--------|
| | MHz | dB | dB/m | dB | dBuV | dBuV/m | dBuV/m | dB |
| 1 | 30.00 | 0.60 | 22.50 | 27.45 | 29.52 | 25.17 | 40.00 | -14.83 |
| 2 | 83.23 | 1.10 | 12.37 | 27.37 | 32.64 | 18.74 | 40.00 | -21.26 |
| 3 | 100.93 | 1.20 | 13.95 | 27.34 | 33.58 | 21.39 | 43.50 | -22.11 |
| 4 | 108.65 | 1.22 | 13.59 | 27.30 | 35.67 | 23.18 | 43.50 | -20.32 |
| 5 | 504.71 | 2.61 | 24.70 | 27.62 | 24.96 | 24.65 | 46.00 | -21.35 |
| 6 pp | 872.18 | 3.49 | 29.45 | 27.21 | 26.41 | 32.14 | 46.00 | -13.86 |

4.10.1.2 Charge + Transmitting, Horizontal

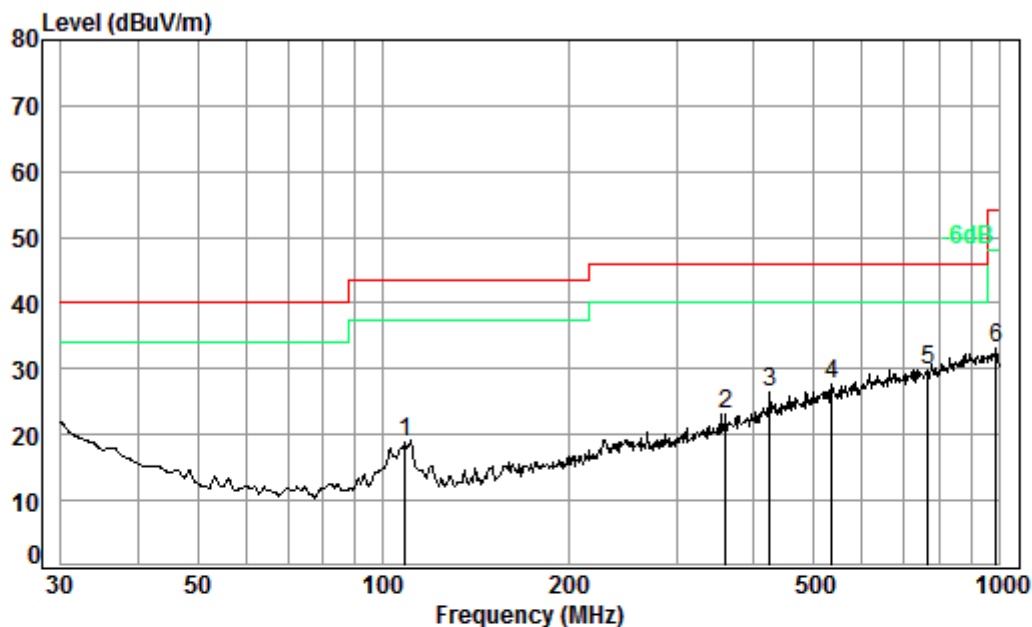

Condition: 3m HORIZONTAL


Job No. : c0007

Test mode: c

| | Freq | Cable Loss | Ant Factor | Preamp Factor | Read Level | Level | Limit Line | Over Limit |
|------|--------|------------|------------|---------------|------------|--------|------------|------------|
| | MHz | dB | dB/m | dB | dBuV | dBuV/m | dBuV/m | dB |
| 1 | 108.65 | 1.22 | 13.59 | 27.30 | 31.20 | 18.71 | 43.50 | -24.79 |
| 2 | 360.45 | 2.09 | 21.39 | 26.99 | 26.76 | 23.25 | 46.00 | -22.75 |
| 3 | 425.03 | 2.31 | 23.00 | 27.30 | 28.41 | 26.42 | 46.00 | -19.58 |
| 4 | 535.71 | 2.64 | 25.36 | 27.74 | 27.28 | 27.54 | 46.00 | -18.46 |
| 5 pp | 766.06 | 3.11 | 28.31 | 27.69 | 26.10 | 29.83 | 46.00 | -16.17 |
| 6 | 989.54 | 3.69 | 30.25 | 26.58 | 25.77 | 33.13 | 54.00 | -20.87 |

4.10.2 Transmitter Emission above 1GHz


4.10.2.1 GFSK(DH5) _Lowest Channel_ Peak _Vertical

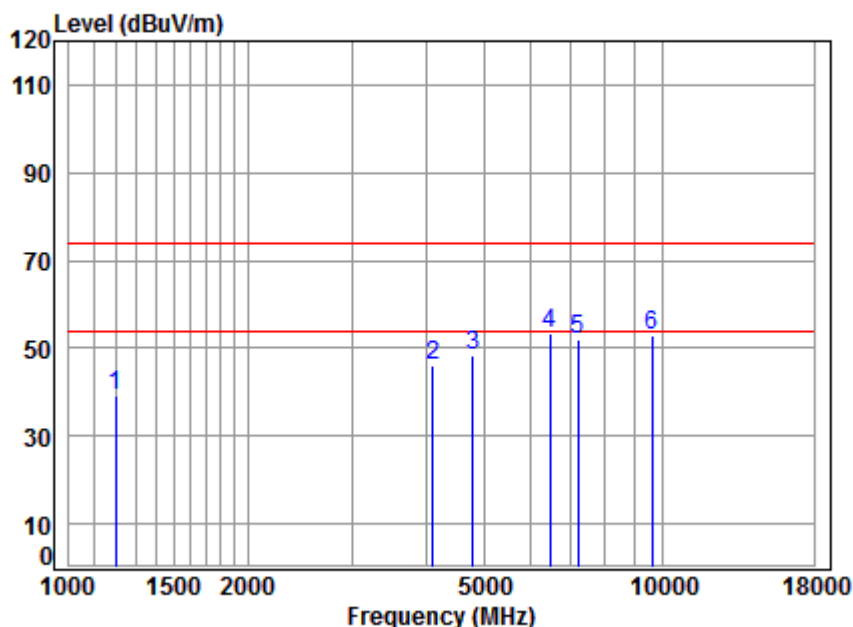

Site : chamber
Condition: 3m VERTICAL
Job No : C0007
Mode : 2402 TX RSE
Note : BT

| | Freq | Cable Loss | Ant Factor | Preamp Factor | Read Level | Level | Limit | Over Limit | Remark |
|---|----------|------------|------------|---------------|------------|--------|--------|------------|--------|
| | MHz | dB | dB/m | dB | dBuV | dBuV/m | dBuV/m | dB | |
| 1 | 1199.726 | 4.42 | 24.59 | 40.48 | 50.64 | 39.17 | 74.00 | -34.83 | peak |
| 2 | 4098.010 | 7.10 | 32.88 | 42.87 | 49.10 | 46.21 | 74.00 | -27.79 | peak |
| 3 | 4804.000 | 7.89 | 33.97 | 43.61 | 50.18 | 48.43 | 74.00 | -25.57 | peak |
| 4 | 6470.026 | 11.48 | 35.57 | 42.43 | 48.71 | 53.33 | 74.00 | -20.67 | peak |
| 5 | 7206.000 | 10.08 | 36.07 | 41.86 | 47.63 | 51.92 | 74.00 | -22.08 | peak |
| 6 | 9608.000 | 10.75 | 37.67 | 38.43 | 42.90 | 52.89 | 74.00 | -21.11 | peak |


4.10.2.2 GFSK(DH5) _Middle Channel_ Peak _Vertical

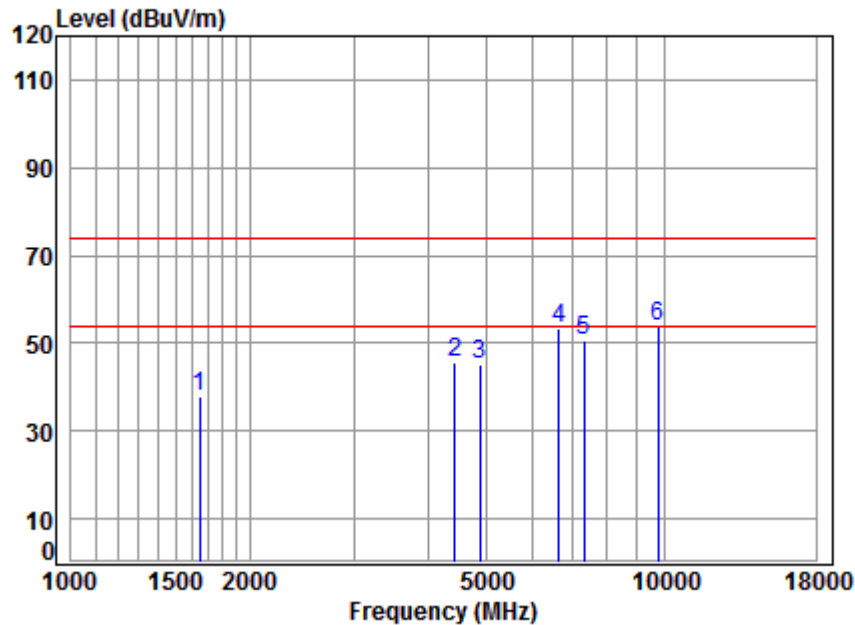

Site : chamber
Condition: 3m VERTICAL
Job No : C0007
Mode : 2441 TX RSE
Note : BT

| | Freq | Cable Loss | Ant Factor | Preamp Factor | Read Level | Level | Limit | Over Limit | Remark |
|---|----------|------------|------------|---------------|------------|--------|--------|------------|--------|
| | MHz | dB | dB/m | dB | dBuV | dBuV/m | dBuV/m | dB | |
| 1 | 1648.778 | 5.29 | 26.46 | 40.80 | 46.79 | 37.74 | 74.00 | -36.26 | peak |
| 2 | 4430.628 | 7.48 | 33.48 | 43.23 | 47.71 | 45.44 | 74.00 | -28.56 | peak |
| 3 | 4882.000 | 7.97 | 34.06 | 43.69 | 47.04 | 45.38 | 74.00 | -28.62 | peak |
| 4 | 6640.542 | 11.13 | 35.69 | 42.29 | 48.89 | 53.42 | 74.00 | -20.58 | peak |
| 5 | 7323.000 | 10.05 | 36.16 | 41.77 | 46.21 | 50.65 | 74.00 | -23.35 | peak |
| 6 | 9764.000 | 10.82 | 37.76 | 38.17 | 43.35 | 53.76 | 74.00 | -20.24 | peak |


4.10.2.3 GFSK(DH5) _Highest Channel_ Peak _Vertical

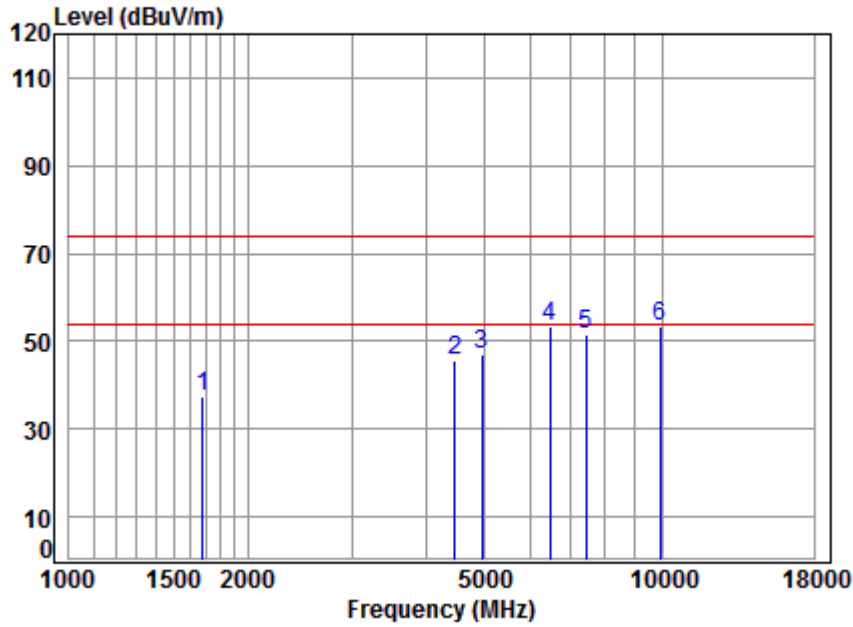

Site : chamber
Condition: 3m VERTICAL
Job No : C0007
Mode : 2480 TX RSE
Note : BT

| | Freq | Cable Loss | Ant Factor | Preamp Factor | Read Level | Level | Limit | Over Limit | Remark |
|---|----------|------------|------------|---------------|------------|--------|--------|------------|--------|
| | MHz | dB | dB/m | dB | dBuV | dBuV/m | dBuV/m | dB | |
| 1 | 1682.477 | 5.25 | 26.60 | 40.82 | 46.56 | 37.59 | 74.00 | -36.41 | peak |
| 2 | 4469.214 | 7.53 | 33.55 | 43.27 | 47.93 | 45.74 | 74.00 | -28.26 | peak |
| 3 | 4960.000 | 8.05 | 34.15 | 43.76 | 48.69 | 47.13 | 74.00 | -26.87 | peak |
| 4 | 6470.026 | 11.48 | 35.57 | 42.43 | 48.55 | 53.17 | 74.00 | -20.83 | peak |
| 5 | 7440.000 | 10.02 | 36.25 | 41.69 | 46.78 | 51.36 | 74.00 | -22.64 | peak |
| 6 | 9920.000 | 10.90 | 37.85 | 37.93 | 42.45 | 53.27 | 74.00 | -20.73 | peak |


4.10.2.4 GFSK(DH5) _Lowest Channel_ Peak _Horizontal

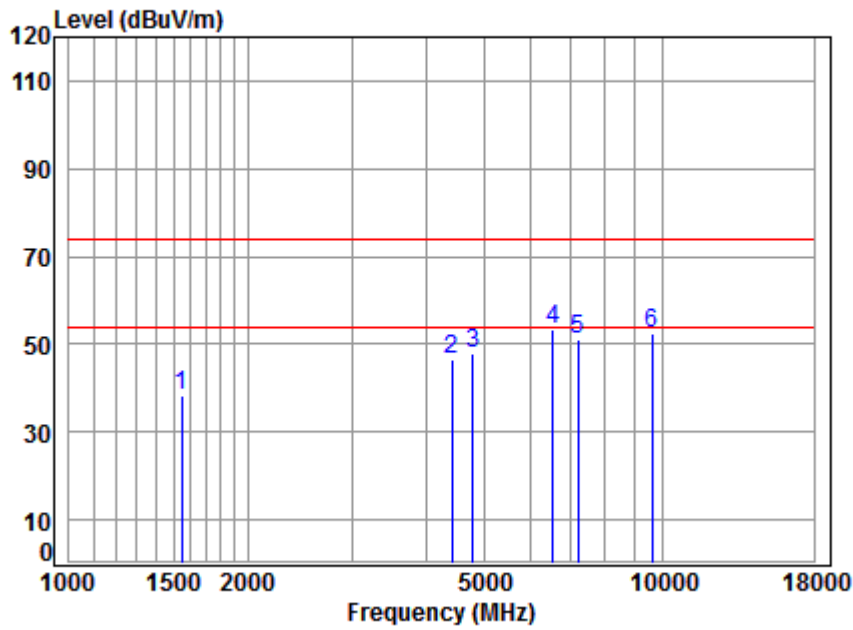

Site : chamber
Condition: 3m HORIZONTAL
Job No : C0007
Mode : 2402 TX RSE
Note : BT

| | Freq | Cable Loss | Ant Factor | Preamp Factor | Read Level | Level | Limit | Over Limit | Remark |
|---|----------|------------|------------|---------------|------------|--------|--------|------------|--------|
| | MHz | dB | dB/m | dB | dBuV | dBuV/m | dBuV/m | dB | |
| 1 | 1547.199 | 5.42 | 26.02 | 40.74 | 47.60 | 38.30 | 74.00 | -35.70 | peak |
| 2 | 4417.841 | 7.47 | 33.46 | 43.22 | 48.79 | 46.50 | 74.00 | -27.50 | peak |
| 3 | 4804.000 | 7.89 | 33.97 | 43.61 | 49.45 | 47.70 | 74.00 | -26.30 | peak |
| 4 | 6545.263 | 11.41 | 35.63 | 42.37 | 48.66 | 53.33 | 74.00 | -20.67 | peak |
| 5 | 7206.000 | 10.08 | 36.07 | 41.86 | 47.02 | 51.31 | 74.00 | -22.69 | peak |
| 6 | 9608.000 | 10.75 | 37.67 | 38.43 | 42.69 | 52.68 | 74.00 | -21.32 | peak |


4.10.2.5 GFSK(DH5) _Middle Channel_ Peak _ Horizontal

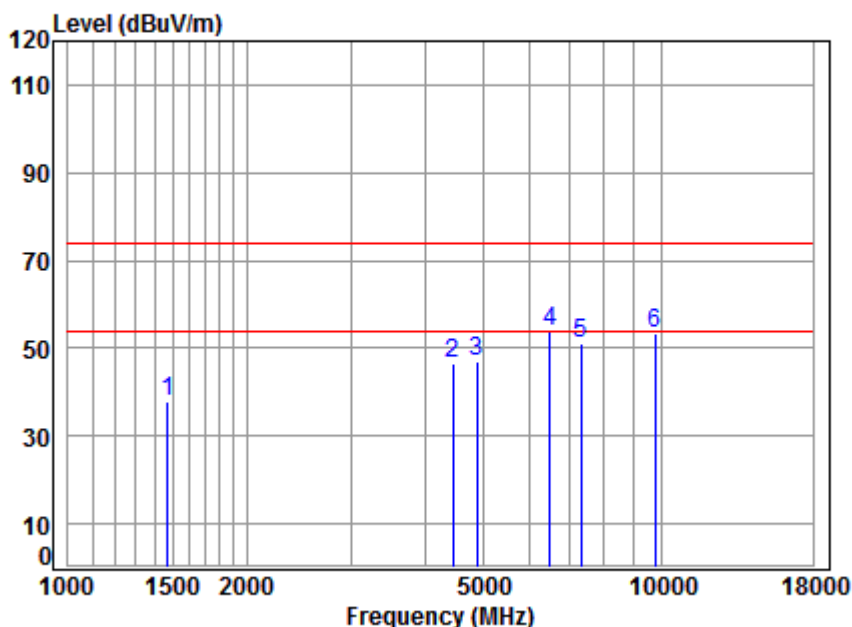

Site : chamber
Condition: 3m HORIZONTAL
Job No : C0007
Mode : 2441 TX RSE
Note : BT

| | Freq | Cable Loss | Ant Factor | Preamp Factor | Read Level | Level | Limit | Over Limit | Remark |
|---|----------|------------|------------|---------------|------------|--------|--------|------------|--------|
| | MHz | dB | dB/m | dB | dBuV | dBuV/m | dBuV/m | dB | |
| 1 | 1473.013 | 5.39 | 25.70 | 40.69 | 47.59 | 37.99 | 74.00 | -36.01 | peak |
| 2 | 4456.315 | 7.51 | 33.53 | 43.26 | 48.59 | 46.37 | 74.00 | -27.63 | peak |
| 3 | 4882.000 | 7.97 | 34.06 | 43.69 | 48.66 | 47.00 | 74.00 | -27.00 | peak |
| 4 | 6488.754 | 11.52 | 35.59 | 42.41 | 49.13 | 53.83 | 74.00 | -20.17 | peak |
| 5 | 7323.000 | 10.05 | 36.16 | 41.77 | 46.60 | 51.04 | 74.00 | -22.96 | peak |
| 6 | 9764.000 | 10.82 | 37.76 | 38.17 | 43.01 | 53.42 | 74.00 | -20.58 | peak |

4.10.2.6 GFSK(DH5) _Highest Channel_ Peak _ Horizontal

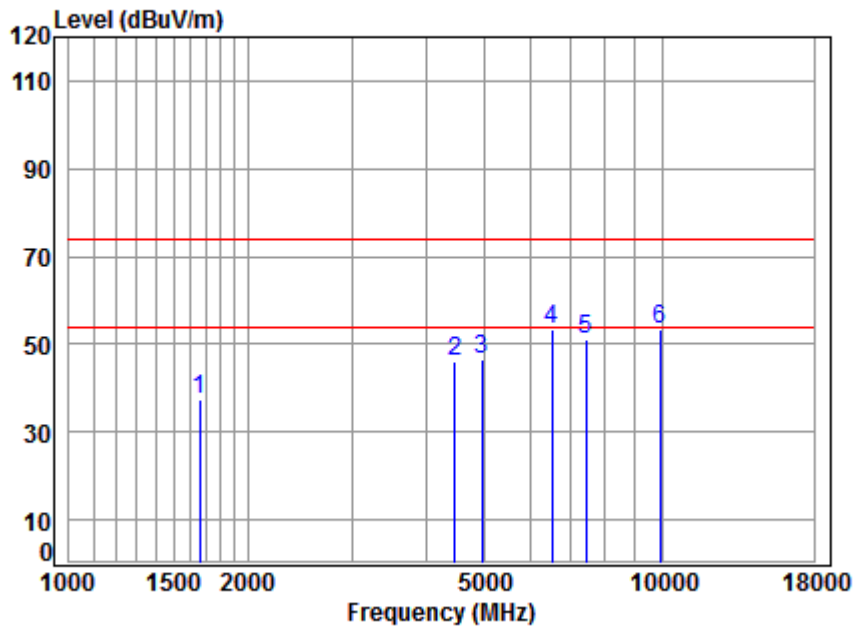

Site : chamber
Condition: 3m HORIZONTAL
Job No : C0007
Mode : 2480 TX RSE
Note : BT

| | Freq | Cable Loss | Ant Factor | Preamp Factor | Read Level | Level | Limit | Over Limit | Remark |
|---|----------|------------|------------|---------------|------------|--------|--------|------------|--------|
| | MHz | dB | dB/m | dB | dBuV | dBuV/m | dBuV/m | dB | |
| 1 | 1658.337 | 5.28 | 26.50 | 40.81 | 46.32 | 37.29 | 74.00 | -36.71 | peak |
| 2 | 4469.214 | 7.53 | 33.55 | 43.27 | 48.12 | 45.93 | 74.00 | -28.07 | peak |
| 3 | 4960.000 | 8.05 | 34.15 | 43.76 | 48.15 | 46.59 | 74.00 | -27.41 | peak |
| 4 | 6507.536 | 11.52 | 35.60 | 42.40 | 48.82 | 53.54 | 74.00 | -20.46 | peak |
| 5 | 7440.000 | 10.02 | 36.25 | 41.69 | 46.74 | 51.32 | 74.00 | -22.68 | peak |
| 6 | 9920.000 | 10.90 | 37.85 | 37.93 | 42.73 | 53.55 | 74.00 | -20.45 | peak |



Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

2) Scan from 9kHz to 25GHz, the disturbance between 9KHz to 30MHz and 18GHz to 25GHz was very low, and the above harmonics were the highest point could be found when testing, The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

4) All Modes have been tested, but only the worst case data displayed in this report.

4.11 Restricted bands around fundamental frequency

| | | | |
|-------------------|---|--------------------|------------------|
| Test Requirement: | 47 CFR Part 15C Section 15.209 and 15.205 | | |
| Test Method: | ANSI C63.10: 2013 | | |
| Test Site: | Measurement Distance: 3m or 10m (Semi-Anechoic Chamber) | | |
| Limit: | Frequency | Limit (dBuV/m @3m) | Remark |
| | 0.009MHz-0.490MHz | - | - |
| | 0.490MHz-1.705MHz | - | - |
| | 1.705MHz-30MHz | - | - |
| | 30MHz-88MHz | 40.0 | Quasi-peak Value |
| | 88MHz-216MHz | 43.5 | Quasi-peak Value |
| | 216MHz-960MHz | 46.0 | Quasi-peak Value |
| | 960MHz-1GHz | 54.0 | Quasi-peak Value |
| | Above 1GHz | 54.0 | Average Value |
| | | 74.0 | Peak Value |
| Test Setup: | | | |

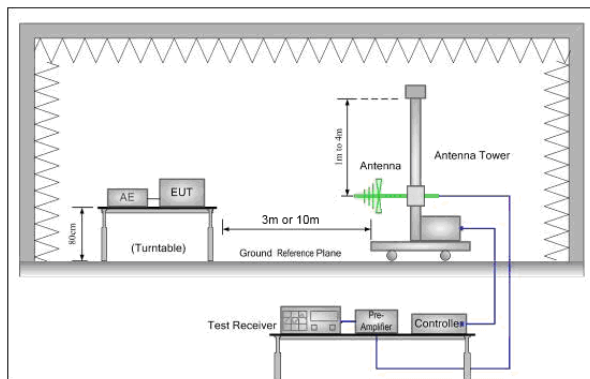


Figure 1. 30MHz to 1GHz

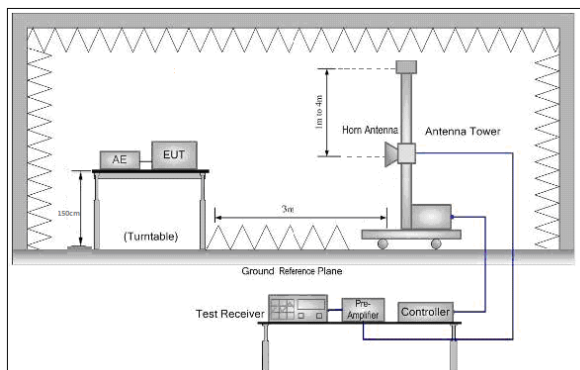



Figure 2. Above 1 GHz



| | |
|------------------------|---|
| Test Procedure: | <ul style="list-style-type: none">a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.g. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channelh. Test the EUT in the lowest channel , the Highest channeli. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.j. Repeat above procedures until all frequencies measured was complete. |
| Exploratory Test Mode: | Non-hopping transmitting mode with all kind of modulation and all kind of data type Charge + Transmitting mode. |
| Final Test Mode: | Through Pre-scan, find the DH5 of data type and GFSK modulation is the worst case. Pretest the EUT at Charge + Transmitting mode, Only the worst case is recorded in the report. |
| Instruments Used: | Refer to section 5.10 for details |
| Test Results: | Pass |

4.11.1 Test plots

4.11.1.1 Worst Case Mode (GFSK(DH5)) _Lowest Channel_ Peak _Vertical

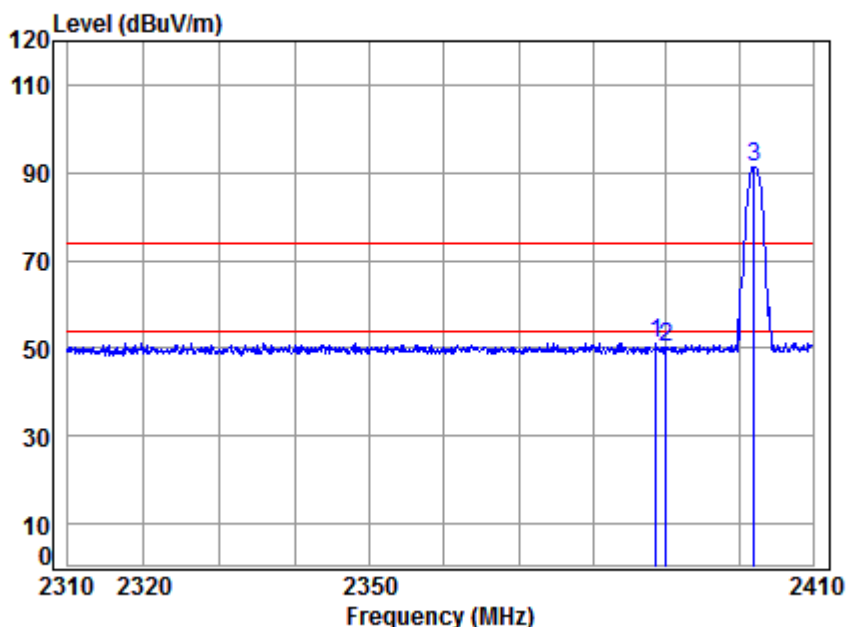

Site : chamber


Condition: 3m VERTICAL

Job No : C0007

Mode : 2402 Band edge

| | | Cable | Ant | Preamp | Read | Limit | Over | |
|-----|----------|-------|--------|--------|-------|--------|--------|-------------|
| | Freq | Loss | Factor | Factor | Level | Line | Limit | Remark |
| | MHz | dB | dB/m | dB | dBuV | dBuV/m | dBuV/m | dB |
| 1 | 2388.546 | 5.47 | 28.52 | 41.17 | 58.48 | 51.30 | 74.00 | -22.70 peak |
| 2 | 2390.000 | 5.47 | 28.52 | 41.17 | 57.26 | 50.08 | 74.00 | -23.92 peak |
| 3 * | 2402.000 | 5.49 | 28.54 | 41.18 | 98.61 | 91.46 | 74.00 | 17.46 peak |

4.11.1.2 Worst Case Mode (GFSK(DH5)) _Highest Channel_ Peak _Vertical

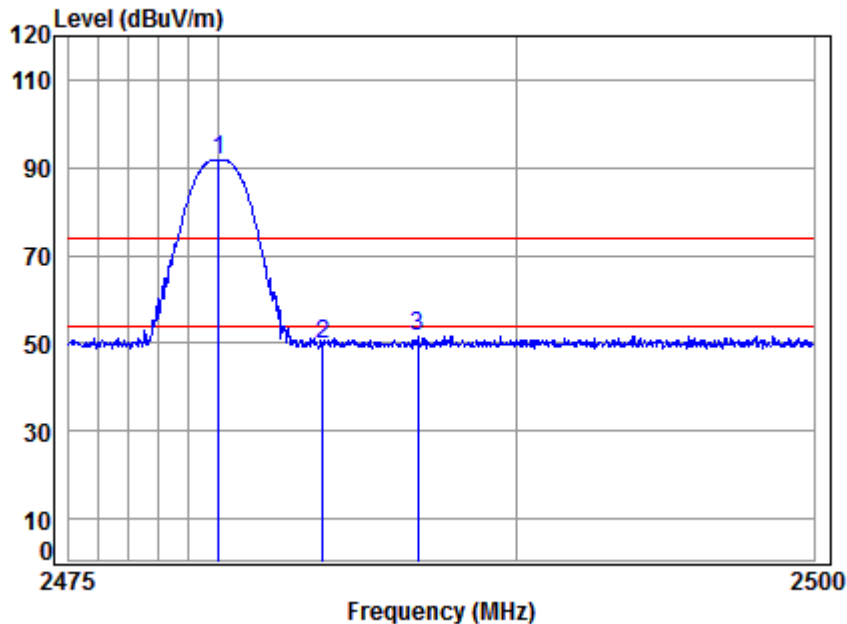

Site : chamber


Condition: 3m VERTICAL

Job No : C0007

Mode : 2480 Band edge

| | | Cable | Ant | Preamp | Read | Limit | Over | |
|--------------|------|--------|--------|--------|--------|--------|--------|--------|
| Freq | Loss | Factor | Factor | Level | Level | Line | Limit | Remark |
| MHz | dB | dB/m | dB | dBuV | dBuV/m | dBuV/m | dB | |
| 1 * 2480.000 | 5.59 | 28.67 | 41.21 | 98.75 | 91.80 | 74.00 | 17.80 | peak |
| 2 2483.500 | 5.60 | 28.67 | 41.21 | 56.69 | 49.75 | 74.00 | -24.25 | peak |
| 3 2486.669 | 5.60 | 28.68 | 41.21 | 58.49 | 51.56 | 74.00 | -22.44 | peak |

4.11.1.3 Worst Case Mode (GFSK(DH5)) _Lowest Channel_ Peak _Horizontal

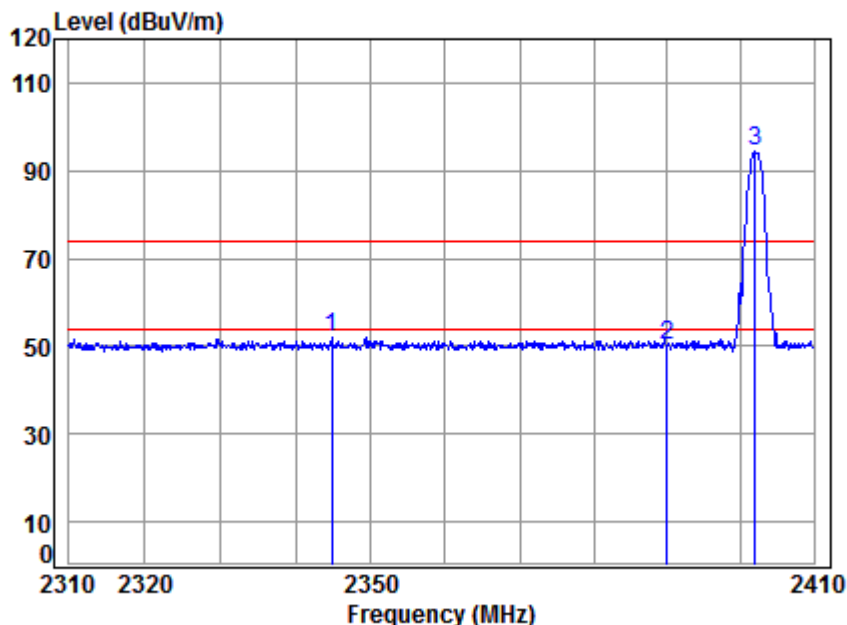

Site : chamber


Condition: 3m HORIZONTAL

Job No : C0007

Mode : 2402 Band edge

| | | Cable | Ant | Preamp | Read | | Limit | Over | |
|-----|----------|-------|--------|--------|--------|--------|--------|--------|--------|
| | Freq | Loss | Factor | Factor | Level | Level | Line | Limit | Remark |
| | MHz | dB | dB/m | dB | dBuV | dBuV/m | dBuV/m | dB | |
| 1 | 2344.817 | 5.41 | 28.44 | 41.15 | 59.45 | 52.15 | 74.00 | -21.85 | peak |
| 2 | 2390.000 | 5.47 | 28.52 | 41.17 | 57.48 | 50.30 | 74.00 | -23.70 | peak |
| 3 * | 2402.000 | 5.49 | 28.54 | 41.18 | 101.38 | 94.23 | 74.00 | 20.23 | peak |

4.11.1.4 Worst Case Mode (GFSK(DH5)) _Highest Channel_ Peak _ Horizontal

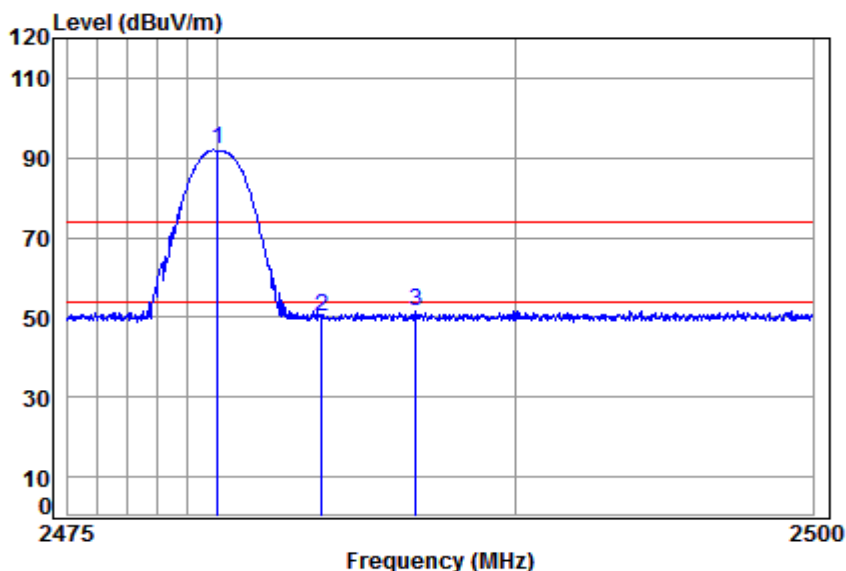

Site : chamber

Condition: 3m HORIZONTAL

Job No : C0007

Mode : 2480 Band edge

| | Freq | Cable Loss | Ant Factor | Preamp Factor | Read Level | Level | Limit Line | Over Limit | Remark |
|-----|----------|------------|------------|---------------|------------|--------|------------|------------|--------|
| | MHz | dB | dB/m | dB | dBuV | dBuV/m | dBuV/m | dB | |
| 1 * | 2480.000 | 5.59 | 28.67 | 41.21 | 98.99 | 92.04 | 74.00 | 18.04 | peak |
| 2 | 2483.500 | 5.60 | 28.67 | 41.21 | 57.22 | 50.28 | 74.00 | -23.72 | peak |
| 3 | 2486.644 | 5.60 | 28.68 | 41.21 | 58.72 | 51.79 | 74.00 | -22.21 | peak |

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

All Modes have been tested, but only the worst case data displayed in this report.



5 Measurement Uncertainty (95% confidence levels, k=2)

| No. | Item | Measurement Uncertainty |
|-----|---------------------------------|------------------------------------|
| 1 | Total RF power, conducted | $\pm 0.75\text{dB}$ |
| 2 | RF power density, conducted | $\pm 2.84\text{dB}$ |
| 3 | Spurious emissions, conducted | $\pm 0.75\text{dB}$ |
| 4 | Radiated Spurious emission test | $\pm 4.5\text{dB}$ (30MHz-1GHz) |
| | | $\pm 4.8\text{dB}$ (1GHz-25GHz) |
| 5 | Conduct emission test | $\pm 3.12\text{ dB}$ (9KHz- 30MHz) |
| 6 | Temperature test | $\pm 1^{\circ}\text{C}$ |
| 7 | Humidity test | $\pm 3\%$ |
| 8 | DC and low frequency voltages | $\pm 0.5\%$ |



6 Equipment List

| Conducted Emission | | | | | |
|------------------------------------|------------------------------------|-------------------|---------------|--------------|--------------|
| Test Equipment | Manufacturer | Model No. | Inventory No. | Cal. date | Cal.Duedate |
| | | | | (yyyy-mm-dd) | (yyyy-mm-dd) |
| Shielding Room | ZhongYu Electron | GB-88 | SEM001-06 | 2017/5/10 | 2020/5/9 |
| LISN | Rohde & Schwarz | ENV216 | SEM007-01 | 2018/9/2 | 2019/9/2 |
| LISN | ETS-LINDGREN | Feb-16 | SEM007-02 | 2018/4/2 | 2019/4/1 |
| Measurement Software | AUDIX | e3 V5.4.1221d | N/A | N/A | N/A |
| Coaxial Cable | SGS | N/A | SEM024-01 | 2018/7/12 | 2019/7/11 |
| 2 Line ISN | Fischer Custom Communications Inc. | FCC-TLISN-T2-02 | EMC0122 | 2019/2/11 | 2020/2/10 |
| EMI Test Receiver | Rohde & Schwarz | ESCI | SEM004-02 | 2018/4/2 | 2019/4/1 |
| RF conducted test | | | | | |
| Test Equipment | Manufacturer | Model No. | Inventory No. | Cal. date | Cal.Duedate |
| | | | | (yyyy-mm-dd) | (yyyy-mm-dd) |
| DC Power Supply | Agilent Technologies Inc | 66311B | W009-09 | 2018/9/15 | 2019/9/15 |
| Signal Analyzer | Rohde & Schwarz | FSV | W025-05 | 2018/3/13 | 2019/3/12 |
| Coaxial Cable | SGS | N/A | SEM031-01 | 2018/7/13 | 2019/7/12 |
| Attenuator | Weinschel Associates | WA41 | SEM021-09 | N/A | N/A |
| Signal Generator | KEYSIGHT | N5173B | SEM006-05 | 2018/9/2 | 2019/9/2 |
| Temperature Chamber | GIANT FORCE | ICT-150-40-CP-AR | W027-03 | 2018/11/27 | 2019/11/27 |
| Power Meter | Rohde & Schwarz | NRVS | SEM014-02 | 2018/9/2 | 2019/9/2 |
| RE in Chamber | | | | | |
| Test Equipment | Manufacturer | Model No. | Inventory No. | Cal. date | Cal.Due date |
| | | | | (yyyy-mm-dd) | (yyyy-mm-dd) |
| 3m Semi-Anechoic Chamber | ETS-LINDGREN | N/A | SEM001-01 | 2017/8/5 | 2020/8/4 |
| Measurement Software | AUDIX | e3 V8.2014-6-27 | N/A | N/A | N/A |
| Coaxial Cable | SGS | N/A | SEM025-01 | 2018/7/12 | 2019/7/11 |
| MXE EMI Receiver (20Hz-8.4GHz) | Agilent Technologies | N9038A | SEM004-05 | 2018/9/2 | 2019/9/2 |
| BiConiLog Antenna (26-3000MHz) | ETS-LINDGREN | 3142C | SEM003-01 | 2017/6/27 | 2020/6/26 |
| Pre-amplifier (0.1-1.3GHz) | Agilent Technologies | 8447D | SEM005-01 | 2018/4/2 | 2019/4/1 |
| RE in Chamber | | | | | |
| Test Equipment | Manufacturer | Model No. | Inventory No. | Cal. date | Cal.Due date |
| | | | | (yyyy-mm-dd) | (yyyy-mm-dd) |
| 3m Semi-Anechoic Chamber | AUDIX | N/A | SEM001-02 | 2018/3/13 | 2021/3/12 |
| Measurement Software | AUDIX | e3V8.2014-6-27 | N/A | N/A | N/A |
| Coaxial Cable | SGS | N/A | SEM026-01 | 2018/7/12 | 2019/7/11 |
| EXA Signal Analyzer (10Hz-26.5GHz) | Agilent Technologies Inc | N9010A | SEM004-09 | 2018/4/13 | 2019/4/12 |
| BiConiLog Antenna (26-3000MHz) | ETS-Lindgren | 3142C | SEM003-01 | 2017/6/27 | 2020/6/26 |
| Horn Antenna (0.8-18GHz) | Rohde & Schwarz | HF907 | SEM003-07 | 2018/4/13 | 2021/4/12 |
| Pre-amplifier(0.1-1.3GHz) | HP | 8447D | SEM005-02 | 2018/9/2 | 2019/9/2 |
| Low Noise Amplifier(100MHz-18GHz) | Black Diamond Series | BDLNA-0118-352810 | SEM005-05 | 2018/9/27 | 2019/9/27 |
| Horn Antenna (15-40GHz) | Schwarzbeck | BBHA 9170 | SEM003-15 | 2017/10/17 | 2020/10/16 |
| Pre-amplifier(18-26GHz) | Rohde & Schwarz | CH14-H052 | SEM005-17 | 2018/4/2 | 2019/4/1 |
| Band filter | N/A | N/A | SEM023-01 | N/A | N/A |



| RE in Chamber | | | | | |
|------------------------------------|-----------------|-----------------|---------------|---------------------------|-------------------------------|
| Test Equipment | Manufacturer | Model No. | Inventory No. | Cal. Date (yyyy-mm-dd) | Cal. Due date (yyyy-mm-dd) |
| 10m Semi-Anechoic Chamber | SAEMC | FSAC1018 | SEM001-03 | 2018/3/31 | 2021/3/30 |
| EMI Test Receiver (9k-7GHz) | Rohde & Schwarz | ESR | SEM004-03 | 2018/4/2 | 2019/4/1 |
| Trilog-Broadband Antenna(25M-2GHz) | Schwarzbeck | VULB9168 | SEM003-18 | 2016/6/29 | 2019/6/28 |
| Pre-amplifier (9k-1GHz) | Sonoma | 310N | SEM005-03 | 2018/4/13 | 2019/4/12 |
| Loop Antenna (9kHz-30MHz) | ETS-Lindgren | 6502 | SEM003-08 | 2017/8/22 | 2020/8/21 |
| Measurement Software | AUDIX | e3 V8.2014-6-27 | N/A | N/A | N/A |
| Coaxial Cable | SGS | N/A | SEM029-01 | 2018/7/12 | 2019/7/11 |

7 Photographs - EUT Constructional Details

Refer to Appendix A - Photographs of EUT Constructional Details for ZR/2018/C0007.

The End