


FCC PART 15.247 TEST REPORT

For

ACSL Ltd.

Hulic Kasai Rinkai Bldg. 2F, 3-6-4 Rinkaicho, Edogawa-ku, Tokyo, Japan 134-0086

FCC ID: 2A8JK-GS5US-FALCON

Report Type: Original Report	Product Name: Smart Controller
Report Number: <u>RSHA240424001-00C</u>	
Report Date: <u>2024-07-30</u>	
Reviewed By:	<u>Bard Liu</u> 
Approved By:	<u>Oscar Ye</u> 
Prepared By:	Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu Province, China Tel: +86-512-86175000 Fax: +86-512-88934268 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Kunshan). This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, or any agency of the U.S.Government.

TABLE OF CONTENTS

REPORT REVISION HISTORY.....	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	5
OBJECTIVE	5
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	6
TEST FACILITY	6
SYSTEM TEST CONFIGURATION.....	7
DESCRIPTION OF TEST CONFIGURATION	7
EUT EXERCISE SOFTWARE	7
SPECIAL ACCESSORIES.....	7
EQUIPMENT MODIFICATIONS	7
SUPPORT EQUIPMENT LIST AND DETAILS	8
EXTERNAL I/O CABLE.....	8
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS	10
TEST EQUIPMENT LIST	11
FCC §15.203 – ANTENNA REQUIREMENT.....	12
APPLICABLE STANDARD	12
ANTENNA CONNECTOR CONSTRUCTION	12
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	13
APPLICABLE STANDARD	13
TEST SYSTEM SETUP.....	13
EMI TEST RECEIVER SETUP.....	13
TEST PROCEDURE	14
TEST RESULTS SUMMARY	14
TEST DATA: SEE APPENDIX	14
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS.....	15
APPLICABLE STANDARD	15
TEST SYSTEM SETUP.....	15
EMI TEST RECEIVER SETUP.....	16
TEST PROCEDURE	16
TEST RESULTS SUMMARY	17
TEST DATA: SEE APPENDIX	17
FCC §15.247(a) (1)-CHANNEL SEPARATION TEST	18
APPLICABLE STANDARD	18
TEST PROCEDURE	18
TEST DATA: SEE APPENDIX	18
FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....	19
APPLICABLE STANDARD	19
TEST PROCEDURE	19
TEST DATA: SEE APPENDIX	19
FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST	20
APPLICABLE STANDARD	20
TEST PROCEDURE	20
TEST DATA: SEE APPENDIX	20

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)	21
APPLICABLE STANDARD	21
TEST PROCEDURE	21
TEST DATA: SEE APPENDIX	21
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	22
APPLICABLE STANDARD	22
TEST PROCEDURE	22
TEST DATA: SEE APPENDIX	22
FCC §15.247(d) - BAND EDGES TESTING	23
APPLICABLE STANDARD	23
TEST PROCEDURE	23
TEST DATA: SEE APPENDIX	23
APPENDIX - TEST DATA	24
ENVIRONMENTAL CONDITIONS & TEST INFORMATION	24
AC LINE CONDUCTED EMISSIONS	26
RADIATED EMISSIONS &BAND EDGE EMISSIONS.....	28
CHANNEL SEPARATION TEST	43
20 dB BANDWIDTH TEST	48
QUANTITY OF HOPPING CHANNEL TEST	53
TIME OF OCCUPANCY (DWELL TIME).....	55
PEAK OUTPUT POWER MEASUREMENT.....	61
BAND EDGES.....	66
EUT PHOTOGRAPHS	73
TEST SETUP PHOTOGRAPHS	74

REPORT REVISION HISTORY

Number of Revisions	Report No.	Version	Issue Date	Description
0	RSHA240424001-00C	R1V1	2024-07-30	Initial Release

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant:	ACSL Ltd.
Manufacturer:	Aerora North America, Inc.
Tested Model:	TENSO-F3
Product Name:	Smart Controller
Power Supply:	DC 3.7V
RF Function:	Classic BT
Operating Band/Frequency:	2402-2480 MHz
Maximum Output Power:	GFSK: 6.65 dBm $\pi/4$ -DQPSK: 5.70 dBm 8DPSK: 6.00 dBm
Channel Number:	79
Channel Separation:	1 MHz
Modulation Type:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Antenna Type:	FPC Antenna
★Maximum Antenna Gain:	0.9 dBi

Note: The maximum antenna gain was declared by the manufacturer.

All measurement and test data in this report was gathered from production sample serial number: RSHA240424001-1 (Assigned by the BACL (Kunshan). The EUT supplied by the applicant was received on 2024-04-24.)

Objective

This test report is prepared for *ACSL Ltd.* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine Compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and 558074 D01 15.247 Meas Guidance v05r02.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	9 kHz~150 kHz	3.8dB
	150 kHz~30 MHz	3.4dB
	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu Province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) is accredited in accordance with ISO/IEC 17025:2017 by NVLAP (Lab code: 600338-0), and the lab has been recognized as the FCC accredited lab under the KDB 974614 D01, the FCC Designation No. : CN5055.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

Channel list:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	40	2442
1	2403	...	...
...	...	...	...
...	...	78	2480
39	2441	/	/

EUT was tested with Channel 0, 39 and 78.

EUT Exercise Software

“QRCT3” used to test.

★Power level: default

Note: The power level was declared by the applicant.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
XIAOMI	Monitor	P24FBA-RA	50715/313100001953
Lenovo	NOTEBOOK	LJJ6K3U	9DD96DBA
Lenovo	USB flash disk	T180	0A1266865200521
Unknown	Earphone	Unknown	Unknown

External I/O Cable


Cable Description	Length (m)	From Port	To
Power Cable	1.0	LISN/AC Source	Adapter
USB Cable	1.0	Adapter	EUT
RJ45	1.0	Notebook	EUT
HDMI Cable	2.0	Monitor	EUT

Block Diagram of Test Setup


For Conducted Emissions:

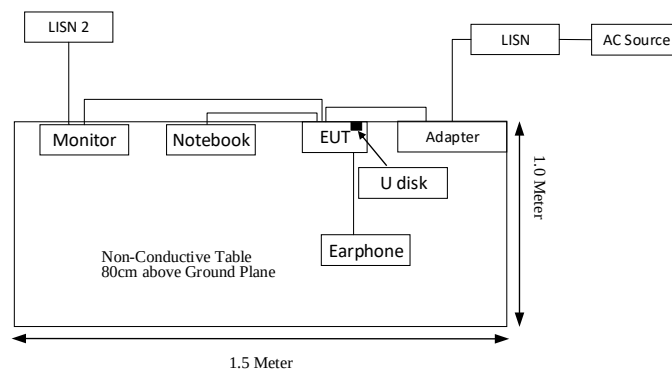

For Radiated Emissions (Below 1GHz):

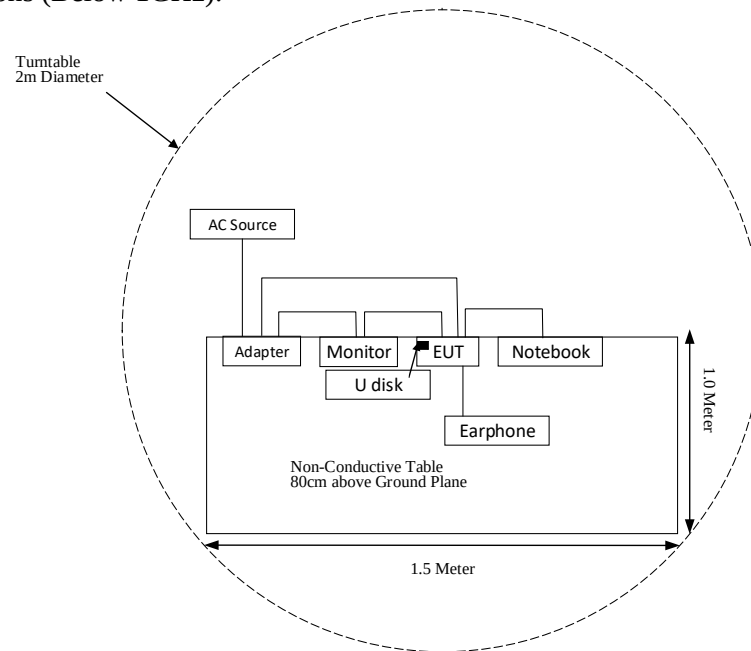

For Radiated Emissions (Above 1GHz):

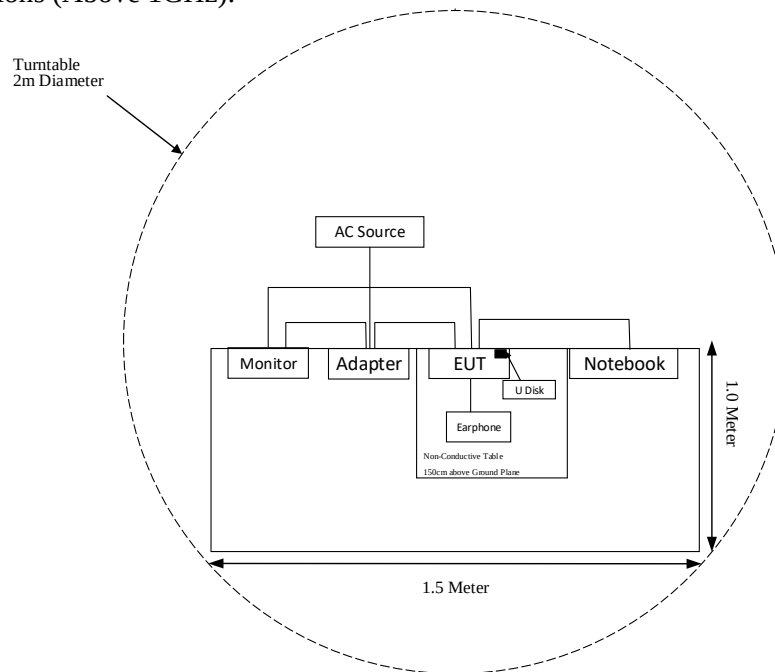

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliant
§15.207(a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209 & §15.247(d)	Radiated Emissions & Band Edge Emissions	Compliant
§15.247(a)(1)	20 dB Emission Bandwidth	Compliant
§15.247(a)(1)	Channel Separation Test	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliant
§15.247(b)(1)	Peak Output Power Measurement	Compliant
§15.247(d)	Band edges	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber #1)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2024-04-23	2025-04-22
Sunol Sciences	Broadband Antenna	JB3	A090314-1	2023-11-11	2024-11-10
Narda	6dB Attenuator	773-6	10690812-2-1	2023-11-11	2024-11-10
ETS-LINDGREN	Loop Antenna	6512	108100	2023-11-09	2024-11-08
Sonoma Instrument	Pre-amplifier	310N	171205	2024-04-23	2025-04-22
Rohde & Schwarz	Auto Test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-8	008	2024-04-23	2025-04-22
MICRO-COAX	Coaxial Cable	Cable-9	009	2024-04-23	2025-04-22
MICRO-COAX	Coaxial Cable	Cable-10	010	2024-04-23	2025-04-22
Radiated Emission Test (Chamber #2)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207/040	2024-04-25	2025-04-24
ETS-LINDGREN	Horn Antenna	3115	9311-4159	2023-12-02	2024-12-01
ETS-LINDGREN	Horn Antenna	3116	2516	2023-12-08	2024-12-07
A.H.Systems, inc	Amplifier	PAM-0118P	512	2024-04-25	2025-04-24
SELECTOR	Amplifier	EM18G40G	060726	2024-04-25	2025-04-24
MICRO-TRONICS	Band Reject Filter	BRM50702	G024	2023-08-05	2024-08-04
Narda	Attenuator	10dB	010	2023-08-15	2024-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-6	006	2024-04-23	2025-04-22
MICRO-COAX	Coaxial Cable	Cable-11	011	2024-04-23	2025-04-22
MICRO-COAX	Coaxial Cable	Cable-12	012	2024-04-23	2025-04-22
MICRO-COAX	Coaxial Cable	Cable-13	013	2024-04-23	2025-04-22
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSV40-N	103298	2024-04-24	2025-04-23
Narda	Attenuator	10dB	010	2024-04-23	2025-04-22
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR	101746	2024-04-23	2025-04-22
Rohde & Schwarz	LISN	ENV216	101115	2024-04-23	2025-04-22
Audix	Test Software	e3	V9	N/A	N/A
Rohde & Schwarz	Pulse limiter	ESH3-Z2	100552	2024-04-23	2025-04-22
MICRO-COAX	Coaxial Cable	Cable-15	015	2024-04-23	2025-04-22

Statement of Traceability: Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has an FPC antenna which was permanently attached, and the antenna gain is 0.9 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliant.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

Test System Setup

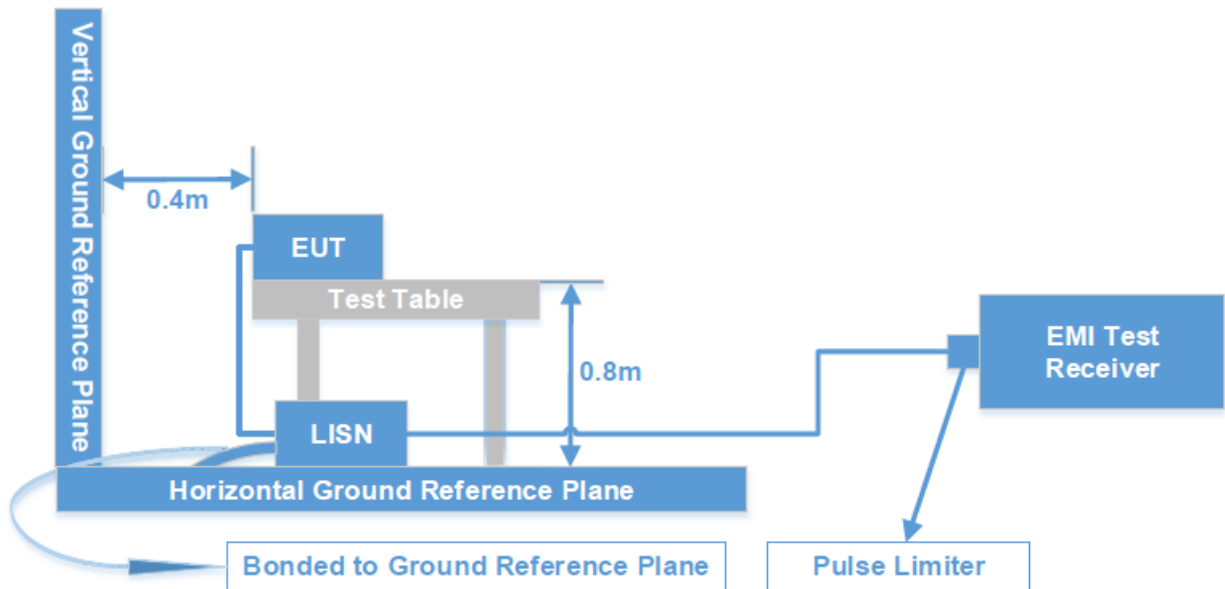

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

EMI Test Receiver Setup

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	VBW
150 kHz - 30 MHz	9 kHz	30 kHz

Test Procedure

ANSI C63.10-2013 clause 6.2

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

If the maximum peak value of the emissions is below the average limit, the QP value and average value measurement will not need to be performed and only record the maximum peak measured value to meet the requirements.

Level & Over Limit Calculation

The Level is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation from the Meter Reading. The basic equation is as follows:

Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)

Level (dBμV) = Read level (dBμV) + Factor (dB)

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit of 7 dB means the emission is 7 dB above the limit. The equation for Over Limit calculation is as follows:

Over Limit (dB) = Level (dBμV) - Limit (dBμV)



Test Results Summary


According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data: See Appendix

FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS**Applicable Standard**

FCC §15.205; §15.209; §15.247(d)

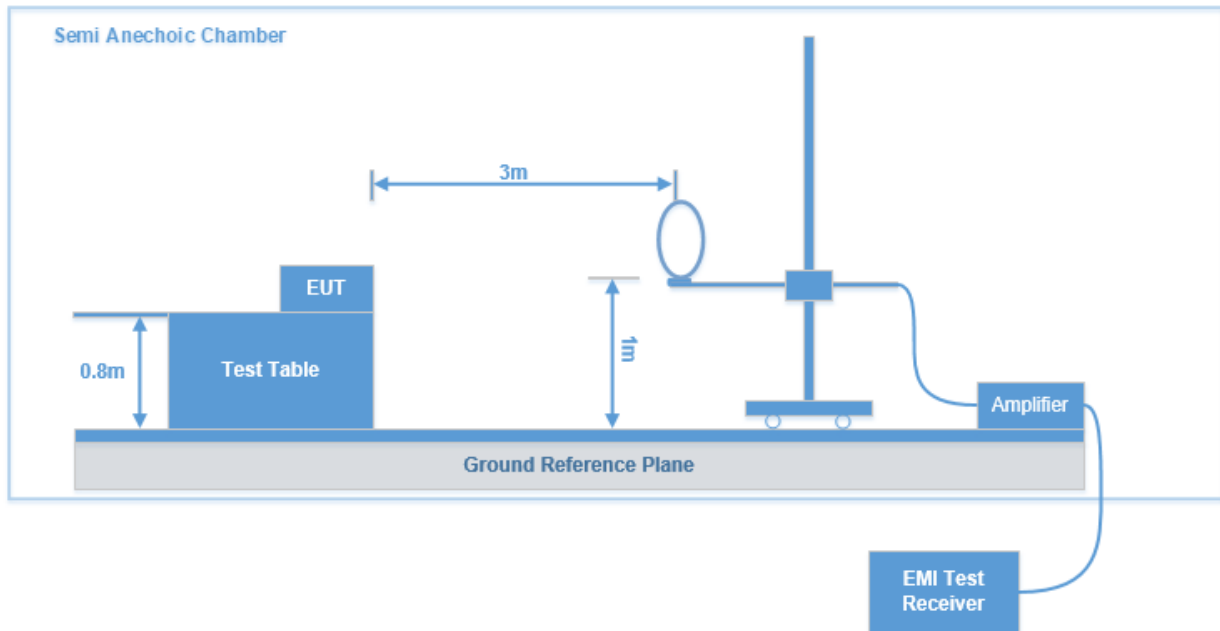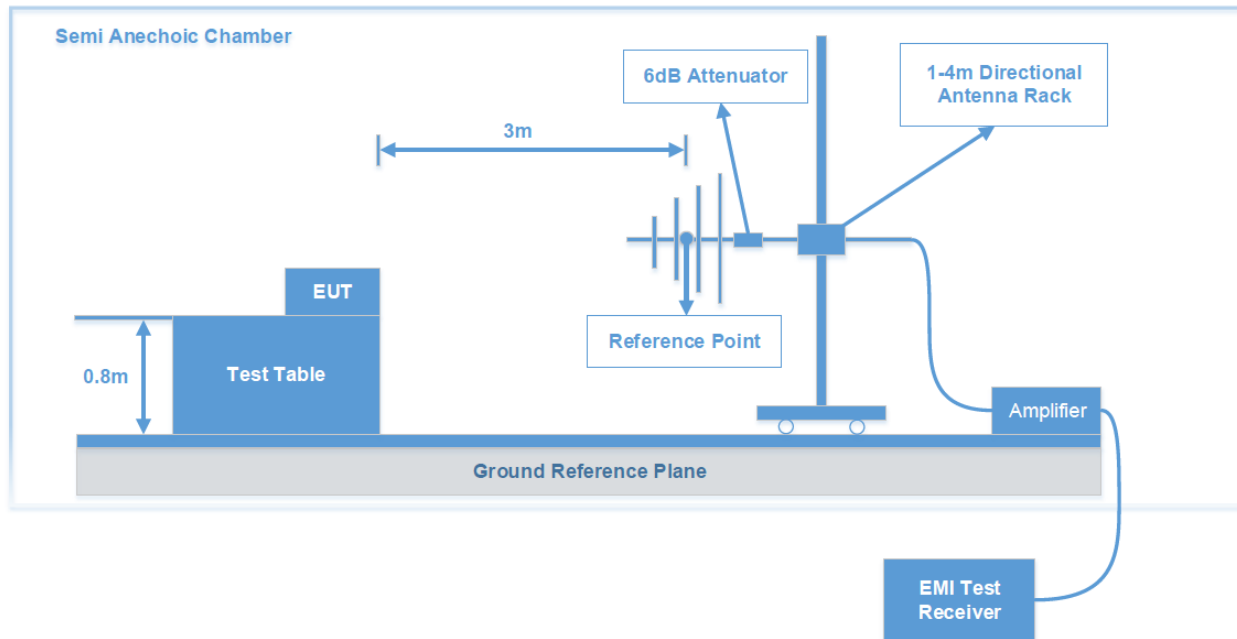Test System Setup**9 kHz-30MHz:****30MHz-1GHz:**

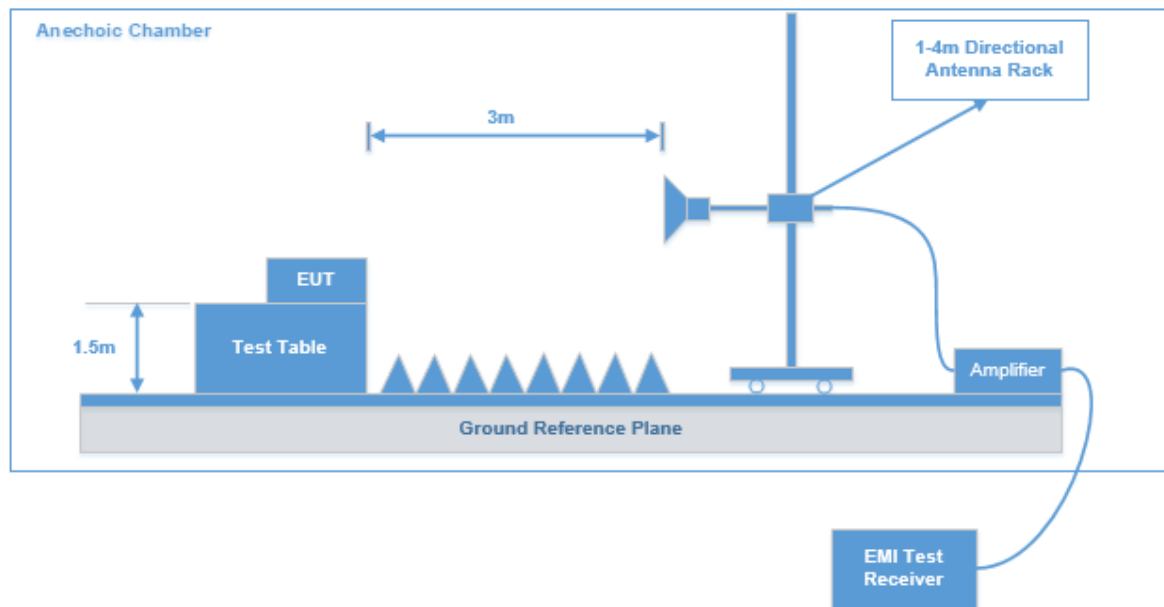Above 1GHz:

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

EMI Test Receiver Setup

During the radiated emission test, the EMI test receiver Setup was set with the following configurations:

Frequency Range	RBW	VBW	IF B/W	Measurement
9 kHz - 150 kHz	200 Hz	1 kHz	200 Hz	QP/Average
150 kHz - 30 MHz	9 kHz	30 kHz	9 kHz	QP/ Average
30 MHz - 1000 MHz	100 kHz	300 kHz	/	Peak
	/	/	120 kHz	QP
Above 1GHz	1MHz	3 MHz	/	Peak
	1MHz	3 MHz	/	Average

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

If the measured peak level of the emissions that the measuring receiver reading level plus corrected factor is at least 6 dB below the QP emission limit, there's no need to record the measured QP level of the emissions in the report.

For 9 kHz-30MHz test, the lowest height of the magnetic antenna shall be 1 m above the ground and three antenna orientations (parallel, perpendicular, and ground-parallel) shall be measured.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude (dB}\mu\text{V/m)} = \text{Meter Reading (dB}\mu\text{V)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V/m)} - \text{Corrected Amplitude (dB}\mu\text{V/m)}$$

Note: The QuasiPeak (dB μ V/m), MaxPeak (dB μ V/m), Average (dB μ V/m) which shown in the data table are all Corrected Amplitude.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Test Data: See Appendix

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

Applicable Standard


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a. Span: Wide enough to capture the peaks of two adjacent channels.
- b. RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- c. Video (or average) bandwidth (VBW) $\geq$ RBW.
- d. Sweep: Auto.
- e. Detector function: Peak.
- f. Trace: Max hold.
- g. Allow the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels.



Test Data: See Appendix


FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.



Test Data: See Appendix

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard


Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a. Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- b. RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- c. VBW $\geq$ RBW.
- d. Sweep: Auto.
- e. Detector function: Peak.
- f. Trace: Max hold.
- g. Allow the trace to stabilize.

It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies.



Test Data: See Appendix

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)


Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a Span: Zero span, centered on a hopping channel.
- b RBW shall be $\leq$ channel spacing and where possible RBW should be set $\geq 1 / T$, where T is the expected dwell time per channel.
- c Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- d Detector function: Peak.
- e Trace: Max hold.



Test Data: See Appendix


FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

- a. Use the following spectrum analyzer settings:
 - 1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
 - 2) RBW > 20 dB bandwidth of the emission being measured.
 - 3) VBW $\geq$ RBW.
 - 4) Sweep: Auto.
 - 5) Detector function: Peak.
 - 6) Trace: Max hold.
- b. Allow trace to stabilize.
- c. Use the marker-to-peak function to set the marker to the peak of the emission.
- d. The indicated level is the peak output power, after any corrections for external attenuators and cables.
- e. A plot of the test results and setup description shall be included in the test report.



Test Data: See Appendix


FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates Compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



Test Data: See Appendix


APPENDIX - TEST DATA**Environmental Conditions & Test Information**

Test Item:	AC LINE CONDUCTED EMISSIONS	RADIATED EMISSIONS
		9kHz - 1GHz
Test Date:	2024-05-27	2024-06-12
Temperature:	24.5 °C	21.5 °C
Relative Humidity:	57 %	52 %
ATM Pressure:	100.7kPa	100.7kPa
Test Result:	Pass	Pass
Test Engineer:	Frank Liu	Leah Li

Test Item:	RADIATED EMISSIONS	
	1 GHz – 18 GHz	18 GHz – 25 GHz
Test Date:	2024-05-11	2024-05-24
Temperature:	22.9 °C	25.5 °C
Relative Humidity:	50 %	52 %
ATM Pressure:	101.2kPa	100.5kPa
Test Result:	Pass	Pass
Test Engineer:	Hugh Wu	Hugh Wu

Test Item:	20 DB BANDWIDTH TEST	CHANNEL SEPARATION TEST	QUANTITY OF HOPPING CHANNEL TEST	TIME OF OCCUPANCY (DWELL TIME)
Test Date:	2024-06-14	2024-06-14	2024-06-14	2024-06-14
Temperature:	20.3 °C	20.3 °C	20.3 °C	20.3 °C
Relative Humidity:	52 %	52 %	52 %	52 %
ATM Pressure:	101.1kPa	101.1kPa	101.1kPa	101.1kPa
Test Result:	Pass	Pass	Pass	Pass
Test Engineer:	Jason Lu	Jason Lu	Jason Lu	Jason Lu


Test Item:	TRANSMITTER OUTPUT POWER MEASUREMENT	OUT OF BAND EMISSIONS
Test Date:	2024-06-14	2024-06-14
Temperature:	20.3 °C	20.3 °C
Relative Humidity:	52 %	52 %
ATM Pressure:	101.1kPa	101.1kPa
Test Result:	Pass	Pass
Test Engineer:	Jason Lu	Jason Lu

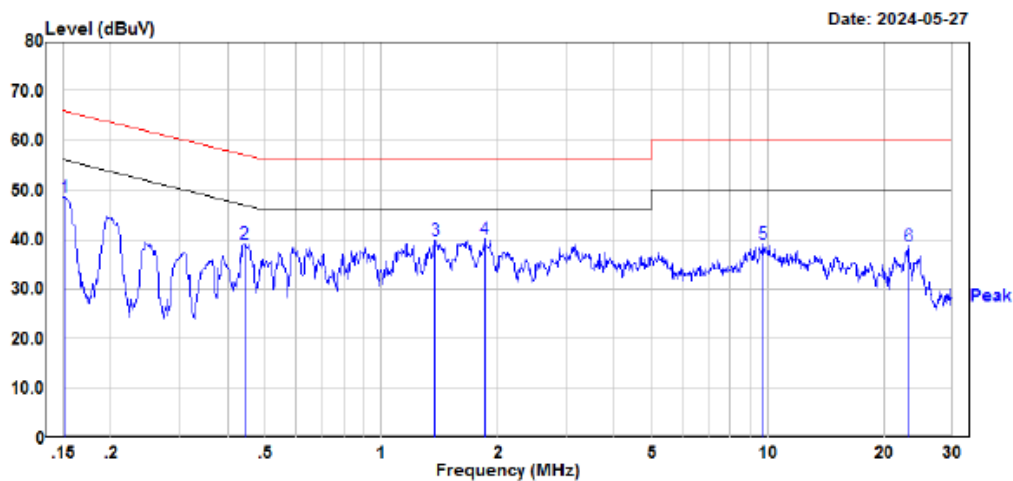AC LINE CONDUCTED EMISSIONS*EUT operation mode: Transmitting in maximum output power GFSK low channel***Line**

Site : CE
Condition : FCC PART 15.207
DET:Peak
Project No. : RSHA240424001
Model : TENSO-F3
Phase : L
Voltage : 120V/60Hz
Mode : BT
Test Equipment : ENV216,ESR
Temperature : 24.5°C
Humidity : 57%
Atmospheric pressure: 100.7kPa
Test Engineer : Frank Liu

	Freq	Read		Level	Limit	Over	Remark
		Level	Factor		Line	Limit	
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.152	28.51	20.12	48.63	65.92	-17.29	Peak
2	0.442	18.94	20.23	39.17	57.02	-17.85	Peak
3	1.378	20.02	19.93	39.95	56.00	-16.05	Peak
4	1.850	20.01	20.10	40.11	56.00	-15.89	Peak
5	9.725	19.03	20.02	39.05	60.00	-20.95	Peak
6	23.035	18.98	19.79	38.77	60.00	-21.23	Peak

Neutral

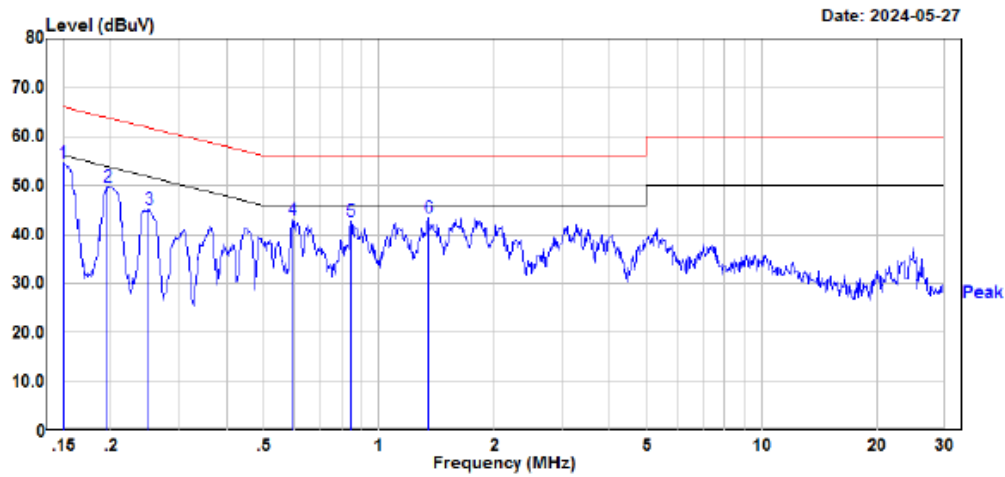

Site : CE
 Condition : FCC PART 15.207
 : DET:Peak
 Project No. : RSHA240424001
 Model : TENSO-F3
 Phase : N
 Voltage : 120V/60Hz
 Mode : BT
 Test Equipment : ENV216,ESR
 Temperature : 24.5°C
 Humidity : 57%
 Atmospheric pressure: 100.7kPa
 Test Engineer : Frank Liu

	Read		Limit	Over		
Freq	Level	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.150	34.41	20.12	54.53	66.00	-11.47 Peak
2	0.195	29.81	20.11	49.92	63.81	-13.89 Peak
3	0.251	25.18	20.14	45.32	61.74	-16.42 Peak
4	0.597	22.82	20.10	42.92	56.00	-13.08 Peak
5	0.846	22.89	19.88	42.77	56.00	-13.23 Peak
6	1.344	23.63	19.90	43.53	56.00	-12.47 Peak

RADIATED EMISSIONS & BAND EDGE EMISSIONS

EUT operation mode: Transmitting

After pre-scan in the X, Y and Z axes of orientation, the worst case is below:

9 kHz – 30 MHz: (Transmitting in maximum output power mode and channel)

The amplitude of spurious emissions attenuated more than 20 dB below the limit was not be recorded.


30MHz-1GHz:

EUT operation mode: Transmitting in GFSK mode (maximum output power mode)

Low Channel: 2402 MHz

Common Information

Project No:	RSHA240424001
EUT Model:	TENSO-F3
Test Mode:	BT
Standard:	FCC Part 15.247 & FCC Part 15.205 & FCC Part 15.209
Test Equipment:	ESCI, JB3, 310N
Temperature:	23.4°C
Humidity:	57%
Barometric Pressure:	100.5kPa
Test Engineer:	Leah Li
Test Date:	2024/6/12

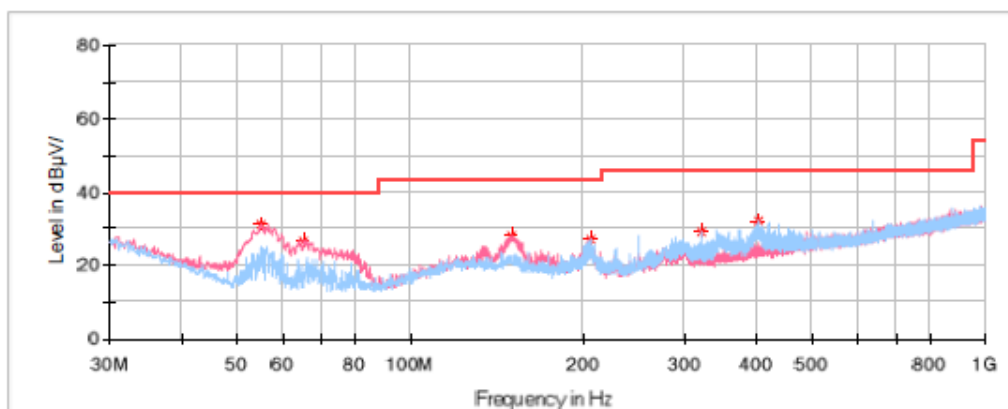


Critical Freqs

Frequency (MHz)	MaxPeak (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Pol	Corr. (dB/m)
54.977500	31.28	40.00	8.72	V	-17.2
65.283750	26.80	40.00	13.20	V	-17.3
149.673750	28.36	43.50	15.14	V	-11.8
205.570000	27.14	43.50	16.36	H	-12.6
320.030000	29.34	46.00	16.66	H	-10.0
404.177500	32.37	46.00	13.63	H	-7.9

Middle Channel: 2441 MHz

Common Information

Project No: RSHA240424001
EUT Model: TENSO-F3
Test Mode: BT
Standard: FCC Part 15.247 & FCC Part 15.205 & FCC Part 15.209
Test Equipment: ESCI, JB3, 310N
Temperature: 23.4°C
Humidity: 57%
Barometric Pressure: 100.5kPa
Test Engineer: Leah Li
Test Date: 2024/6/12

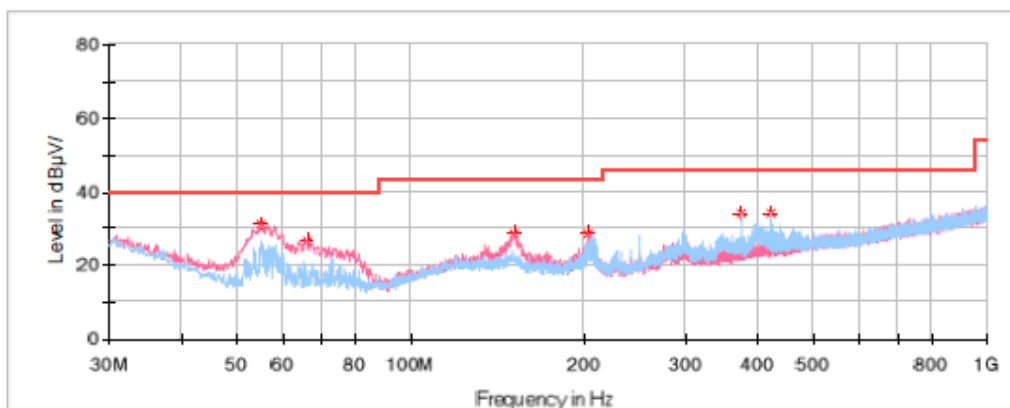


Critical Freqs

Frequency (MHz)	MaxPeak (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Pol	Corr. (dB/m)
54.856250	31.14	40.00	8.86	V	-17.2
65.890000	26.87	40.00	13.13	V	-17.3
151.007500	28.46	43.50	15.04	V	-11.8
203.387500	28.45	43.50	15.05	V	-12.4
375.077500	34.40	46.00	11.60	H	-8.6
421.637500	34.17	46.00	11.83	H	-7.4

High Channel: 2480 MHz**Common Information**


Project No:	RSHA240424001
EUT Model:	TENSO-F3
Test Mode:	BT
Standard:	FCC Part 15.247 & FCC Part 15.249 & FCC Part 15.407
Test Equipment:	ESCI, JB3, 310N
Temperature:	23.4°C
Humidity:	57%
Barometric Pressure:	100.5kPa
Test Engineer:	Leah Li
Test Date:	2024/6/12

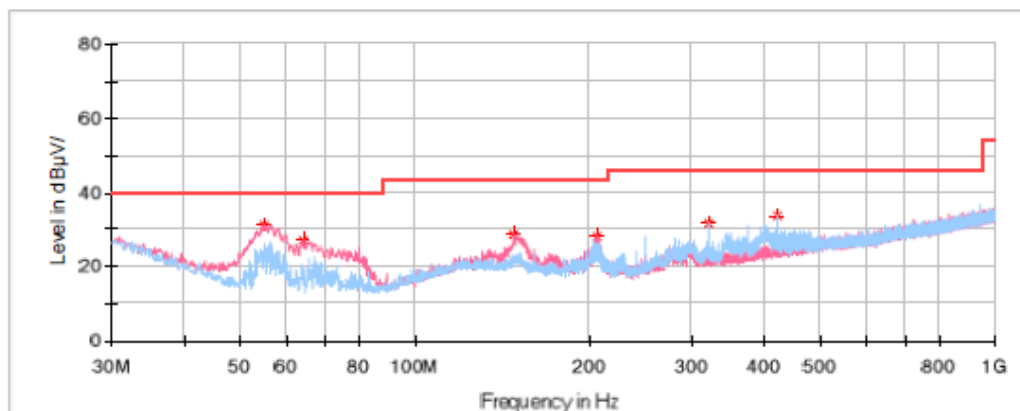**Critical Freqs**

Frequency (MHz)	MaxPeak (dBµ V/m)	Limit (dBµ V/m)	Margin (dB)	Pol	Corr. (dB/m)
55.098750	31.19	40.00	8.81	V	-17.2
64.192500	27.17	40.00	12.83	V	-17.3
148.218750	28.80	43.50	14.70	V	-11.7
205.327500	28.38	43.50	15.12	V	-12.5
320.030000	31.48	46.00	14.52	H	-10.0
421.637500	33.62	46.00	12.38	H	-7.4

1 GHz - 18 GHz:**GFSK:****Low Channel: 2402 MHz****Common Information**


Project No.: RSHA240424001
 Test Mode: BT
 Standard: FCC Part 15.247&FCC Part 15.209&FCC Part 15.205
 Test Engineer: Hugh Wu

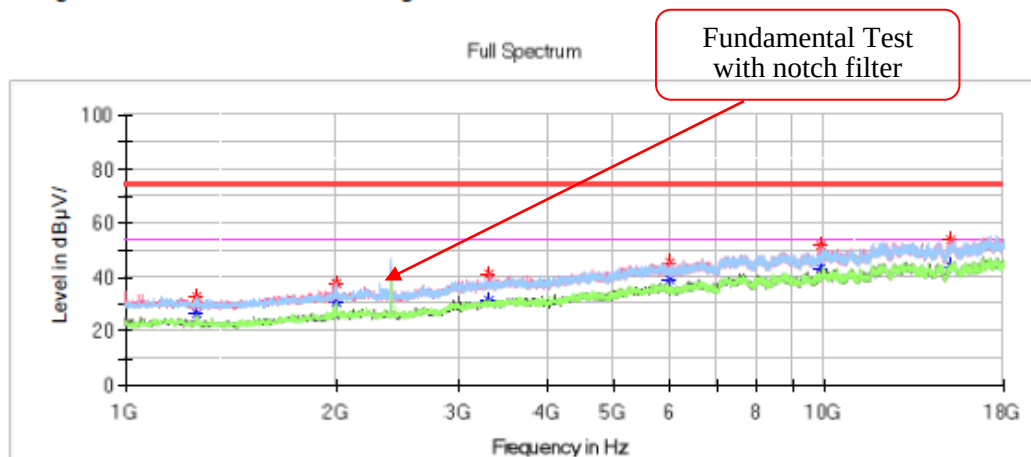**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1263.500000	---	26.33	54.00	27.67	H	-15.1
1263.500000	32.56	---	74.00	41.44	H	-15.1
1997.900000	---	30.50	54.00	23.50	H	-11.8
1997.900000	37.69	---	74.00	36.31	H	-11.8
3320.500000	---	31.17	54.00	22.83	V	-7.1
3320.500000	41.37	---	74.00	32.63	V	-7.1
5999.700000	45.19	---	74.00	28.81	V	0.0
5999.700000	---	39.14	54.00	14.86	V	0.0
9848.500000	---	43.42	54.00	10.58	V	6.5
9848.500000	51.70	---	74.00	22.30	V	6.5
15128.700000	---	44.37	54.00	9.63	V	9.5
15128.700000	53.63	---	74.00	20.37	V	9.5

Middle Channel: 2441 MHz**Common Information**


Project No.: RSHA240424001
 Test Mode: BT
 Standard: FCC Part 15.247&FCC Part 15.209&FCC Part 15.205
 Test Engineer: Hugh Wu

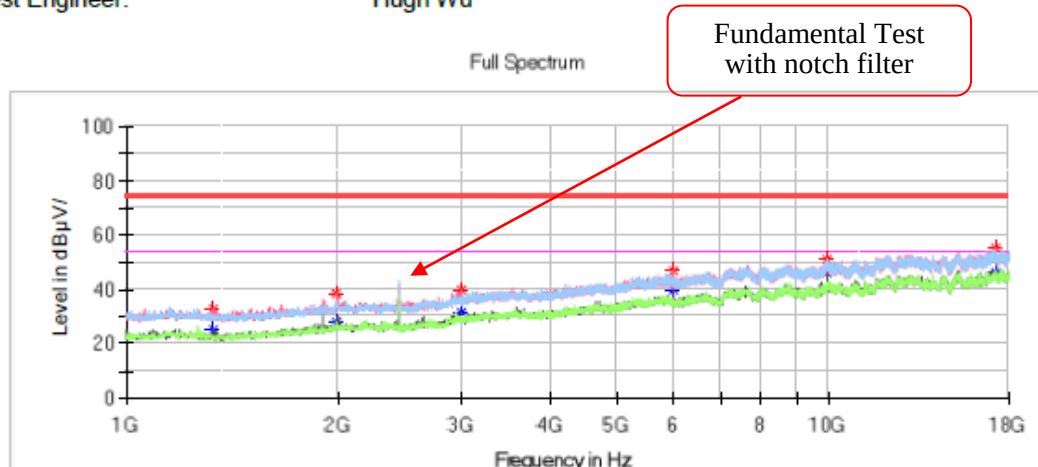**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1331.500000	---	25.02	54.00	28.98	H	-15.0
1331.500000	32.79	---	74.00	41.21	H	-15.0
1991.100000	---	28.14	54.00	25.86	V	-11.8
1991.100000	38.71	---	74.00	35.29	V	-11.8
2992.400000	---	31.60	54.00	22.40	V	-8.5
2992.400000	39.65	---	74.00	34.35	V	-8.5
5999.700000	---	39.72	54.00	14.28	V	0.0
5999.700000	46.77	---	74.00	27.23	V	0.0
9908.000000	---	45.94	54.00	8.06	V	6.7
9908.000000	51.31	---	74.00	22.69	V	6.7
17214.600000	---	46.47	54.00	7.53	V	12.0
17214.600000	55.10	---	74.00	18.90	V	12.0

High Channel: 2480 MHz**Common Information**

Project No.: RSHA240424001
 Test Mode: BT
 Standard: FCC Part 15.247&FCC Part 15.209&FCC Part 15.205
 Test Engineer: Hugh Wu

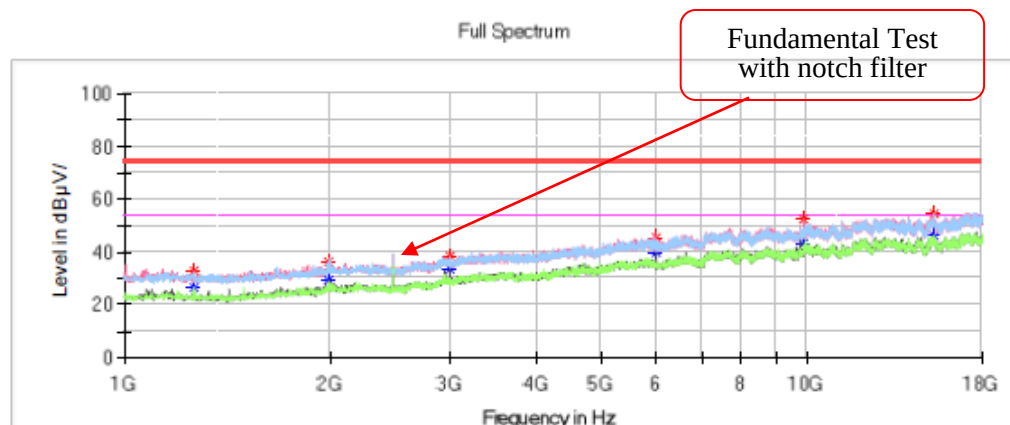**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1263.500000	---	26.26	54.00	27.74	V	-15.1
1263.500000	32.58	---	74.00	41.42	V	-15.1
1996.200000	36.28	---	74.00	37.72	V	-11.8
1996.200000	---	29.68	54.00	24.32	V	-11.8
2992.400000	---	33.55	54.00	20.45	V	-8.5
2992.400000	38.77	---	74.00	35.23	V	-8.5
5999.700000	45.21	---	74.00	28.79	V	0.0
5999.700000	---	39.99	54.00	14.01	V	0.0
9848.500000	---	43.10	54.00	10.90	V	6.5
9848.500000	52.40	---	74.00	21.60	V	6.5
15293.600000	---	46.06	54.00	7.94	H	9.6
15293.600000	54.35	---	74.00	19.65	H	9.6

$\pi/4$ -DQPSK:

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
Low Channel: 2402 MHz						
1326.400000	---	27.19	54.00	26.81	V	-15.0
1326.400000	34.58	---	74.00	39.42	V	-15.0
1991.100000	---	30.26	54.00	23.74	H	-11.8
1991.100000	38.32	---	74.00	35.68	H	-11.8
3264.400000	---	32.46	54.00	21.54	V	-7.3
3264.400000	40.32	---	74.00	33.68	V	-7.3
7607.900000	---	39.72	54.00	14.28	H	3.9
7607.900000	49.98	---	74.00	24.02	H	3.9
9848.500000	---	44.02	54.00	9.98	V	6.5
9848.500000	51.33	---	74.00	22.67	V	6.5
17003.800000	---	45.54	54.00	8.46	V	12.3
17003.800000	54.45	---	74.00	19.55	V	12.3
Middle Channel: 2441 MHz						
1263.500000	---	27.16	54.00	26.84	H	-15.1
1263.500000	33.76	---	74.00	40.24	H	-15.1
1997.900000	36.34	---	74.00	37.66	V	-11.8
1997.900000	---	28.42	54.00	25.58	V	-11.8
4083.800000	---	31.88	54.00	22.12	V	-5.6
4083.800000	41.12	---	74.00	32.88	V	-5.6
5999.700000	44.79	---	74.00	29.21	V	0.0
5999.700000	---	39.10	54.00	14.90	V	0.0
9727.800000	---	45.09	54.00	8.91	V	6.1
9727.800000	50.89	---	74.00	23.11	V	6.1
17306.400000	---	46.56	54.00	7.44	V	11.8
17306.400000	55.98	---	74.00	18.02	V	11.8
High Channel: 2480 MHz						
1263.500000	---	28.03	54.00	25.97	V	-15.1
1263.500000	32.77	---	74.00	41.23	V	-15.1
1997.900000	---	29.16	54.00	24.84	V	-11.8
1997.900000	37.35	---	74.00	36.65	V	-11.8
2992.400000	---	32.94	54.00	21.06	V	-8.5
2992.400000	38.79	---	74.00	35.21	V	-8.5
5999.700000	---	38.61	54.00	15.39	V	0.0
5999.700000	44.93	---	74.00	29.07	V	0.0
9908.000000	---	45.98	54.00	8.02	V	6.7
9908.000000	52.82	---	74.00	21.18	H	6.7
17580.100000	---	47.23	54.00	6.77	H	11.6
17580.100000	55.64	---	74.00	18.36	H	11.6

8DPSK:

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Pol	Corr. (dB/m)
Low Channel: 2412 MHz						
1331.500000	---	24.89	54.00	29.11	V	-15.0
1331.500000	34.31	---	74.00	39.69	V	-15.0
1994.500000	---	28.24	54.00	25.76	V	-11.8
1994.500000	37.28	---	74.00	36.72	V	-11.8
3852.600000	---	30.47	54.00	23.53	V	-6.0
3852.600000	40.26	---	74.00	33.74	V	-6.0
7630.000000	---	39.18	54.00	14.82	H	3.9
7630.000000	48.87	---	74.00	25.13	H	3.9
14054.300000	---	44.53	54.00	9.47	H	9.8
14054.300000	53.74	---	74.00	20.26	H	9.8
17622.600000	---	45.78	54.00	8.22	V	11.6
17622.600000	54.43	---	74.00	19.57	V	11.6
Middle Channel: 2437 MHz						
1263.500000	---	26.87	54.00	27.13	H	-15.1
1263.500000	33.66	---	74.00	40.34	H	-15.1
1997.900000	---	28.32	54.00	25.68	V	-11.8
1997.900000	38.68	---	74.00	35.32	V	-11.8
3210.000000	---	30.78	54.00	23.22	V	-7.6
3210.000000	39.05	---	74.00	34.95	V	-7.6
5999.700000	---	38.96	54.00	15.04	V	0.0
5999.700000	45.41	---	74.00	28.59	V	0.0
9727.800000	49.33	---	74.00	24.67	V	6.1
9727.800000	---	44.12	54.00	9.88	V	6.1
High Channel: 2462 MHz						
1326.400000	---	25.61	54.00	28.39	V	-15.0
1326.400000	32.66	---	74.00	41.34	V	-15.0
1991.100000	---	29.57	54.00	24.43	V	-11.8
1991.100000	36.80	---	74.00	37.20	V	-11.8
3028.100000	---	29.40	54.00	24.60	H	-8.3
3028.100000	39.09	---	74.00	34.91	H	-8.3
5999.700000	44.45	---	74.00	29.55	V	0.0
5999.700000	---	39.41	54.00	14.59	V	0.0
9908.000000	---	47.81	54.00	6.19	V	6.7
9908.000000	53.06	---	74.00	20.94	V	6.7
14005.000000	---	44.24	54.00	9.76	V	9.8
14005.000000	54.58	---	74.00	19.42	V	9.8


Band Edge:
GFSK:

Left Side

Common Information

Project No.: RSHA240424001
Test Mode: BT
Standard: FCC Part 15.247&FCC Part 15.209&FCC Part 15.205
Test Engineer: Hugh Wu

Full Spectrum

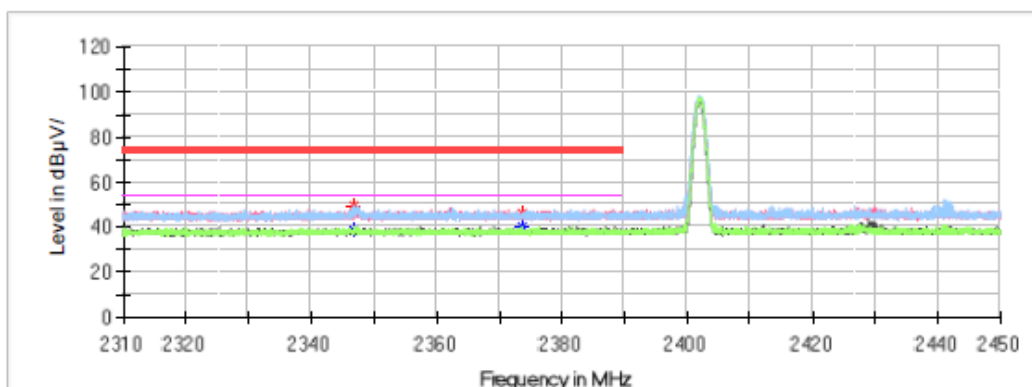


Critical Freqs

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2346.834000	49.19	---	74.00	24.81	H	-0.7
2346.834000	---	38.23	54.00	15.77	H	-0.7
2373.742000	46.13	---	74.00	27.87	H	-0.6
2373.742000	---	40.48	54.00	13.52	H	-0.6

Right Side**Common Information**

Project No.: RSHA240424001
Test Mode: BT
Standard: FCC Part 15.247&FCC Part 15.209&FCC Part 15.205
Test Engineer: Hugh Wu

Full Spectrum

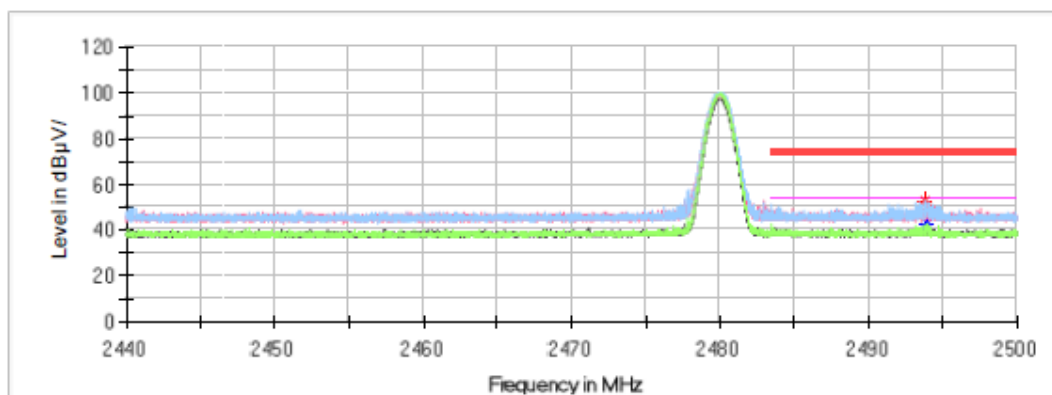**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µV/m)	Average (dB µV/m)	Limit (dB µV/m)	Margin (dB)	Pol	Corr. (dB/m)
2493.772000	52.88	---	74.00	21.12	H	-0.2
2493.772000	---	40.89	54.00	13.11	H	-0.2
2493.982000	49.80	---	74.00	24.20	H	-0.2
2493.982000	---	42.43	54.00	11.57	H	-0.2


$\pi/4$ -DQPSK:

Left Side

Common Information

Project No.: RSHA240424001
Test Mode: BT
Standard: FCC Part 15.247&FCC Part 15.209&FCC Part 15.205
Test Engineer: Hugh Wu

Full Spectrum

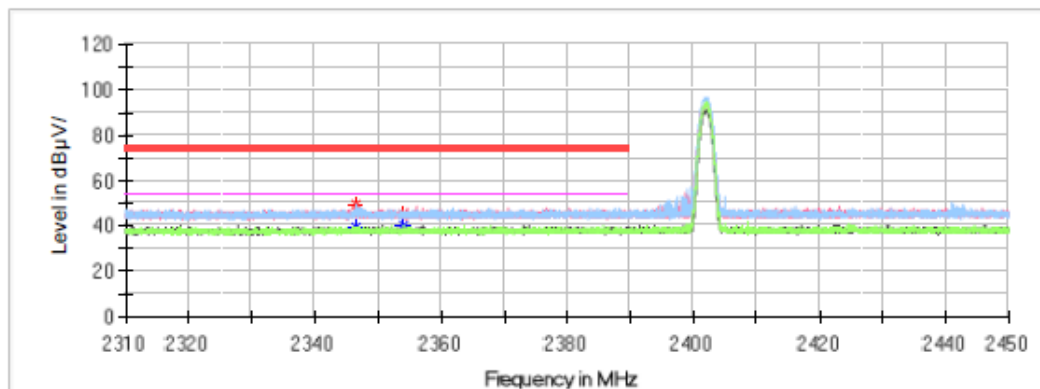
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2346.652000	49.46	---	74.00	24.54	H	-0.7
2346.652000	---	39.05	54.00	14.95	H	-0.7
2353.974000	45.58	---	74.00	28.42	H	-0.7
2353.974000	---	40.59	54.00	13.41	H	-0.7

Right Side**Common Information**

Project No.: RSHA240424001
Test Mode: BT
Standard: FCC Part 15.247&FCC Part 15.209&FCC Part 15.205
Test Engineer: Hugh Wu

Full Spectrum

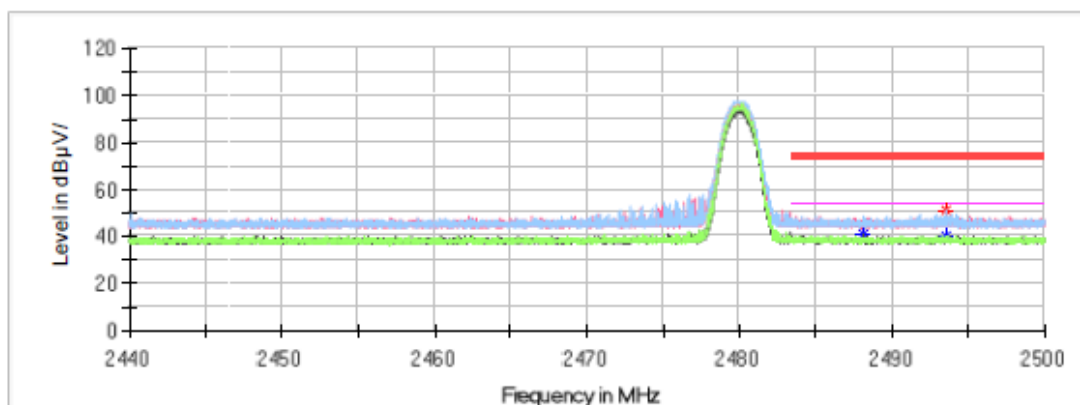
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2488.090000	---	40.95	54.00	13.05	V	-0.2
2488.090000	44.60	---	74.00	29.40	V	-0.2
2493.478000	---	40.22	54.00	13.78	H	-0.2
2493.478000	50.91	---	74.00	23.09	H	-0.2

8DPSK:**Left Side****Common Information**

Project No.: RSHA240424001
Test Mode: BT
Standard: FCC Part 15.247&FCC Part 15.209&FCC Part 15.205
Test Engineer: Hugh Wu

Full Spectrum

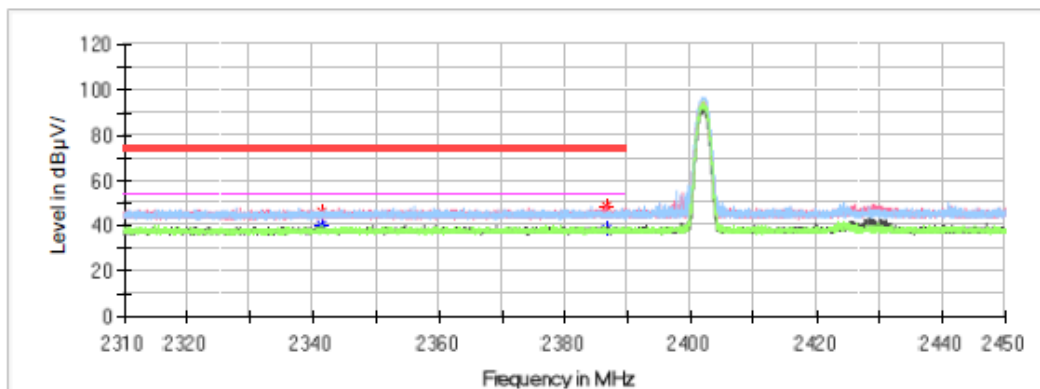
**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2341.248000	---	40.40	54.00	13.60	H	-0.7
2341.248000	45.98	---	74.00	28.02	H	-0.7
2386.664000	---	38.43	54.00	15.57	H	-0.6
2386.664000	48.36	---	74.00	25.64	H	-0.6


Right Side**Common Information**

Project No.: RSHA240424001
Test Mode: BT
Standard: FCC Part 15.247&FCC Part 15.209&FCC Part 15.205
Test Engineer: Hugh Wu


Full Spectrum

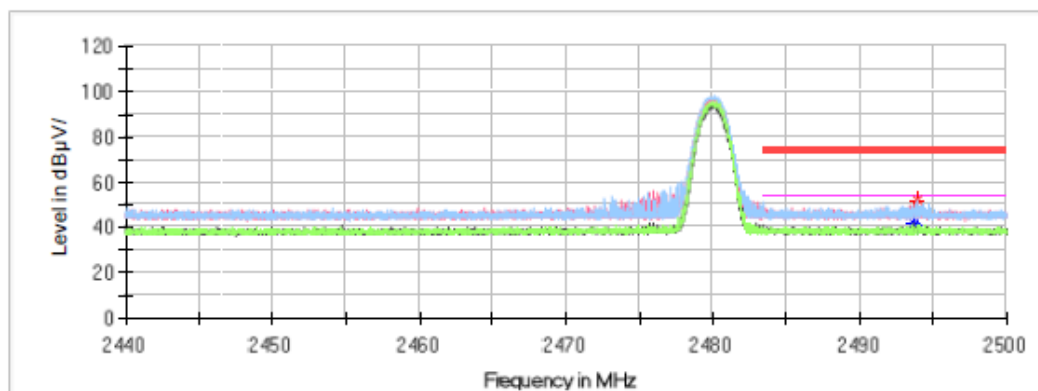**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2493.604000	---	41.66	54.00	12.34	V	-0.2
2493.604000	48.20	---	74.00	25.80	V	-0.2
2493.892000	---	39.30	54.00	14.70	H	-0.2
2493.892000	52.11	---	74.00	21.89	H	-0.2

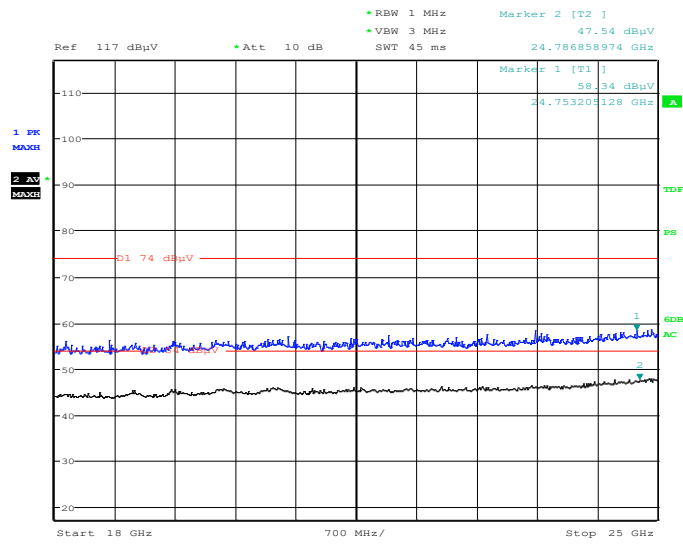18GHz-25GHz:*EUT operation mode: Transmitting in Low channel of GFSK mode (Worst case)***Horizontal**

Project No.: RSHA240424001 Tester: Hugh Wu
Date: 24.MAY.2024 20:43:32

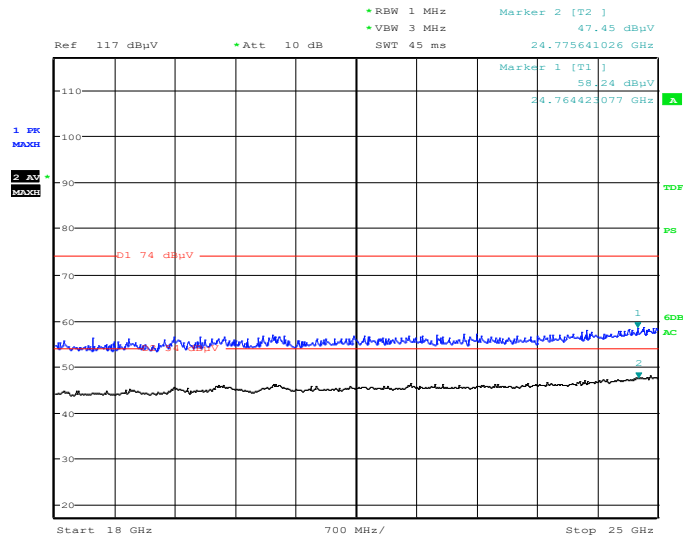Vertical


Project No.: RSHA240424001 Tester: Hugh Wu
Date: 24.MAY.2024 20:28:36

Note: The test distance is 3m. The limit is 74dBμV/m(Peak) and 54dBμV/m(Average).

CHANNEL SEPARATION TEST*EUT operation mode: Transmitting*


Mode	Channel	Channel frequency (MHz)	Result (MHz)	Limit (MHz)
GFSK	Low	2402-2403	1.005	0.620
	Middle	2441-2442	1.002	0.626
	High	2480-2479	1.002	0.626
$\pi/4$ DQPSK	Low	2402-2403	1.005	0.846
	Middle	2441-2442	1.002	0.844
	High	2480-2479	1.002	0.844
8DPSK	Low	2402-2403	1.002	0.838
	Middle	2441-2442	1.002	0.836
	High	2480-2479	1.002	0.838

Note: Limit = 20 dB bandwidth*2/3

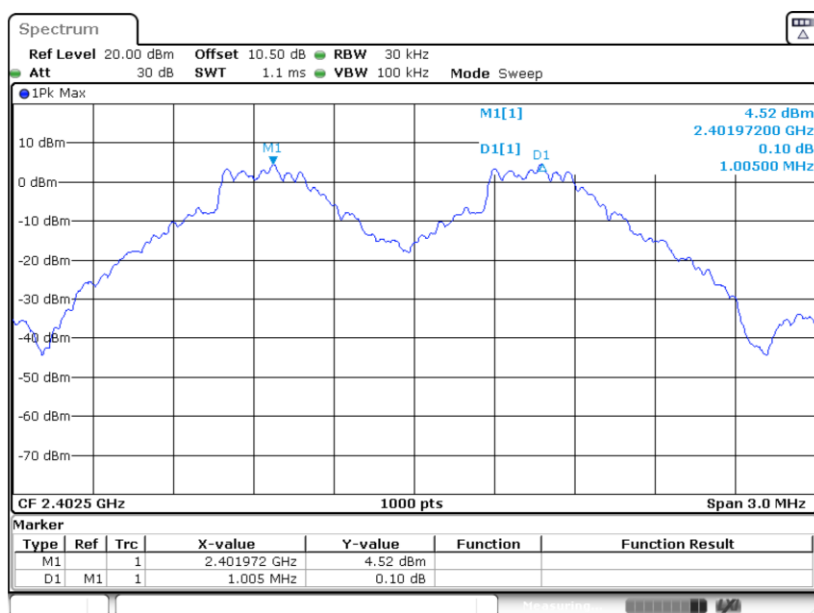BDR (GFSK): Low Channel


ProjectNo.: RSHA240424001 Tester: Jason Lu
Date: 14 JUN 2024 11:00:38

BDR (GFSK): Middle Channel

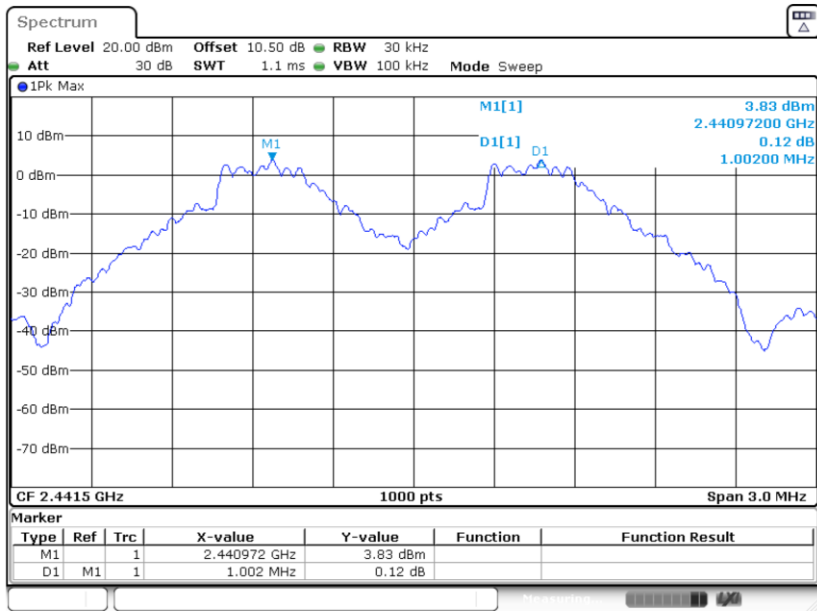


ProjectNo.: RSHA240424001 Tester: Jason Lu
Date: 14 JUN 2024 11:01:24

BDR (GFSK): High Channel

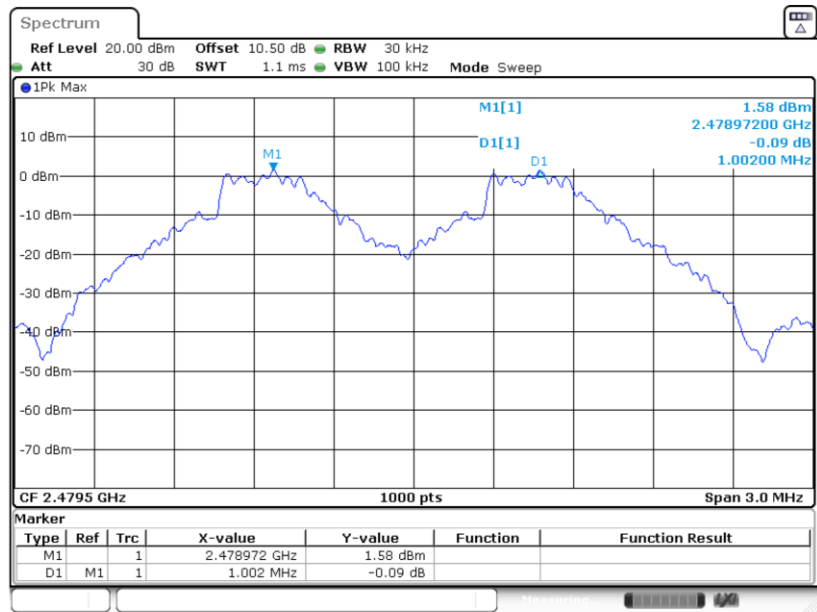


ProjectNo.: RSHA240424001 Tester: Jason Lu
Date: 14 JUN 2024 11:02:20

EDR ($\pi/4$ -DQPSK): Low Channel

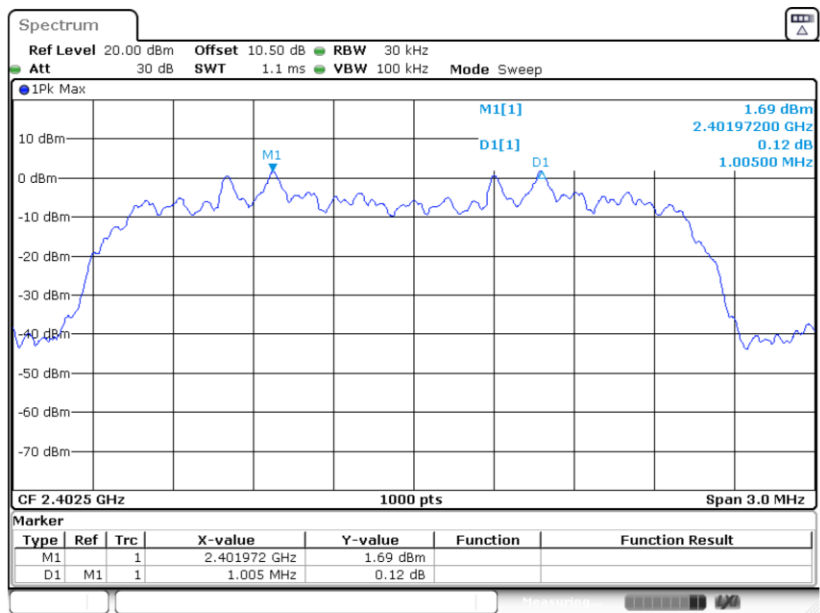


ProjectNo.: RSHA240424001 Tester: Jason Lu
Date: 14 JUN 2024 11:03:13

EDR ($\pi/4$ -DQPSK): Middle Channel

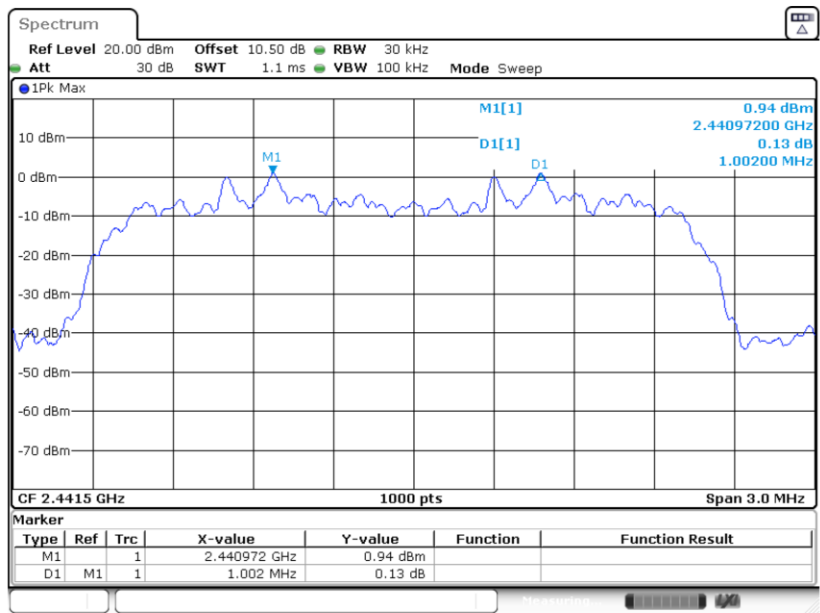


ProjectNo.: RSHA240424001 Tester: Jason Lu
Date: 14 JUN 2024 11:03:59

EDR ($\pi/4$ -DQPSK): High Channel

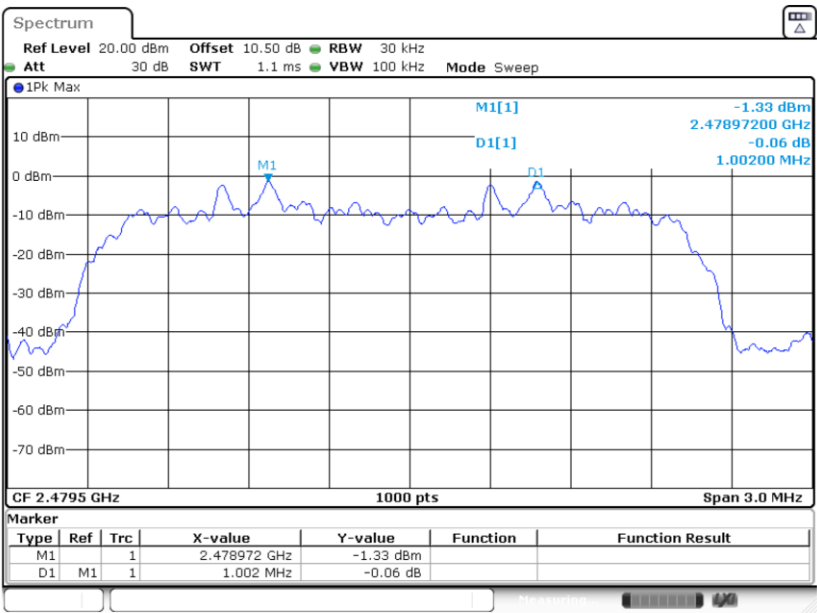


ProjectNo.:RSHA240424001 Tester:Jason Lu
Date: 14.JUN.2024 11:04:55

EDR (8DPSK): Low Channel

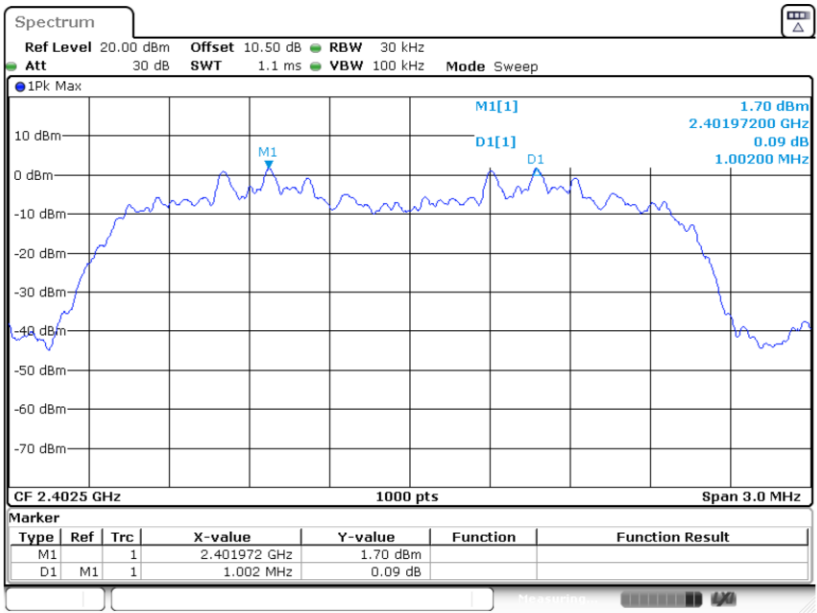


ProjectNo.:RSHA240424001 Tester:Jason Lu
Date: 14.JUN.2024 11:05:45

EDR (8DPSK): Middle Channel

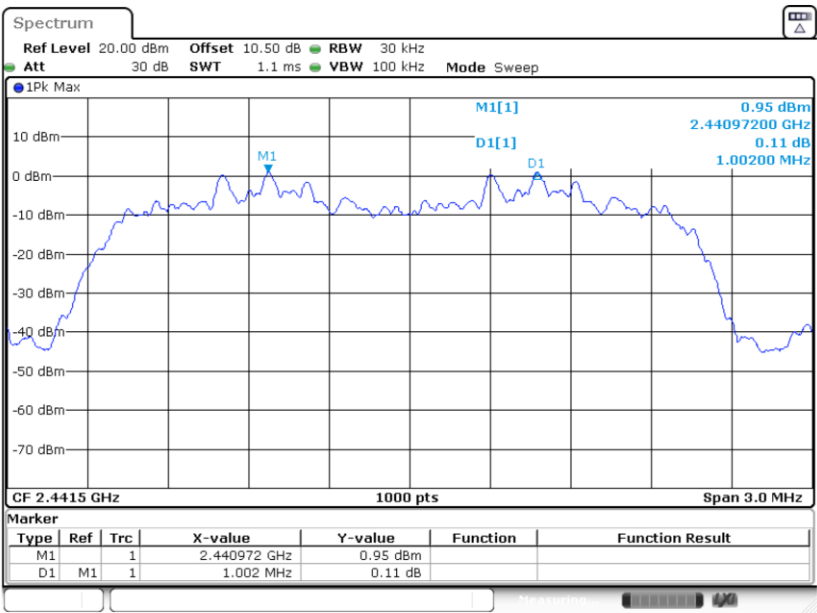

ProjectNo.:RSHA240424001 Tester:Jason Lu
Date: 14 JUN 2024 11:06:34

EDR (8DPSK): High Channel

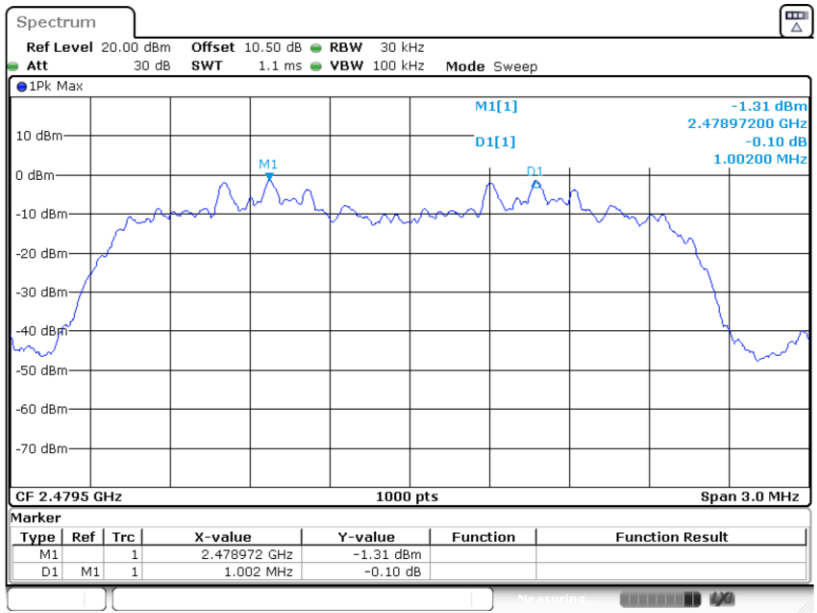


ProjectNo.:RSHA240424001 Tester:Jason Lu
Date: 14 JUN 2024 11:07:21


20 dB BANDWIDTH TEST

EUT operation mode: Transmitting

Mode	Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)
BDR (GFSK)	Low	2402	0.930
	Middle	2441	0.939
	High	2480	0.939
EDR ($\pi/4$ -DQPSK)	Low	2402	1.269
	Middle	2441	1.266
	High	2480	1.266
EDR (8DPSK)	Low	2402	1.257
	Middle	2441	1.254
	High	2480	1.257


BDR (GFSK): Low Channel

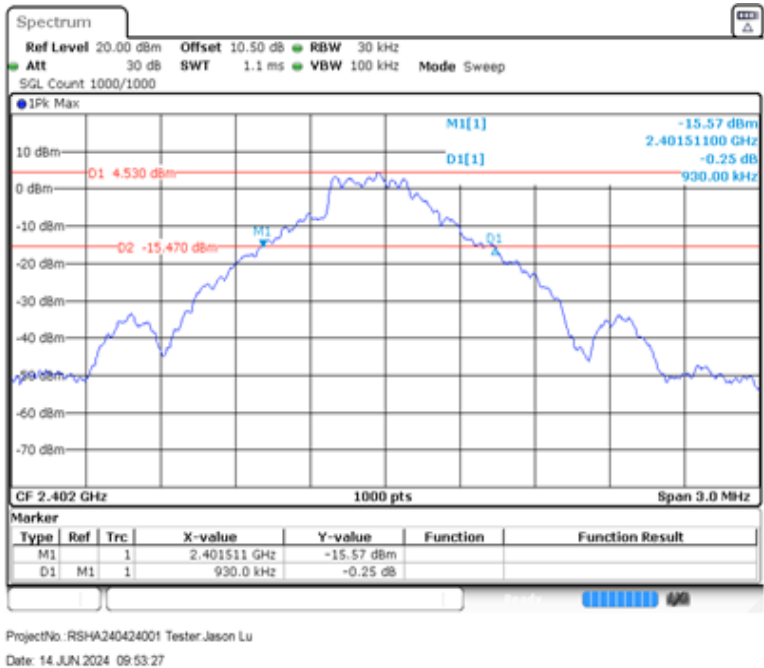

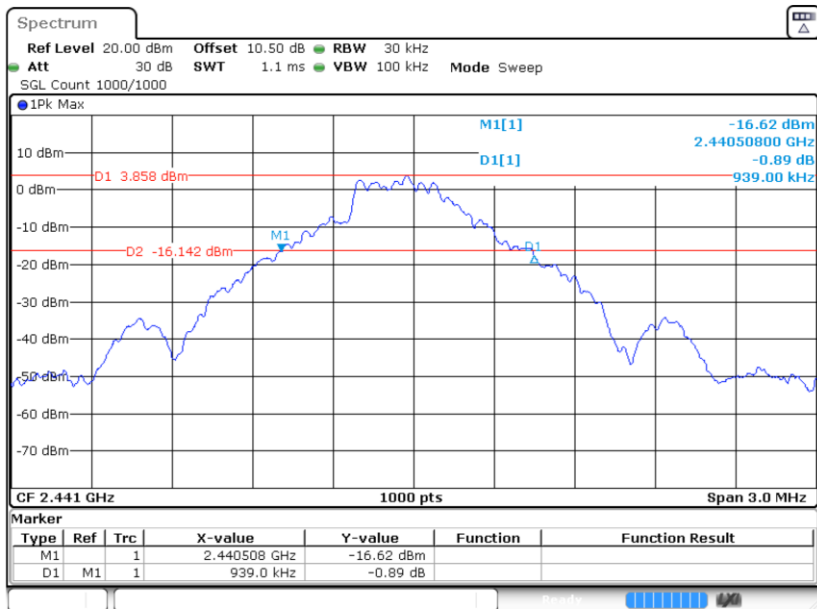BDR (GFSK): Middle Channel

ProjectNo.: RSHA240424001 Tester: Jason Lu


Date: 14 JUN 2024 09:54:14

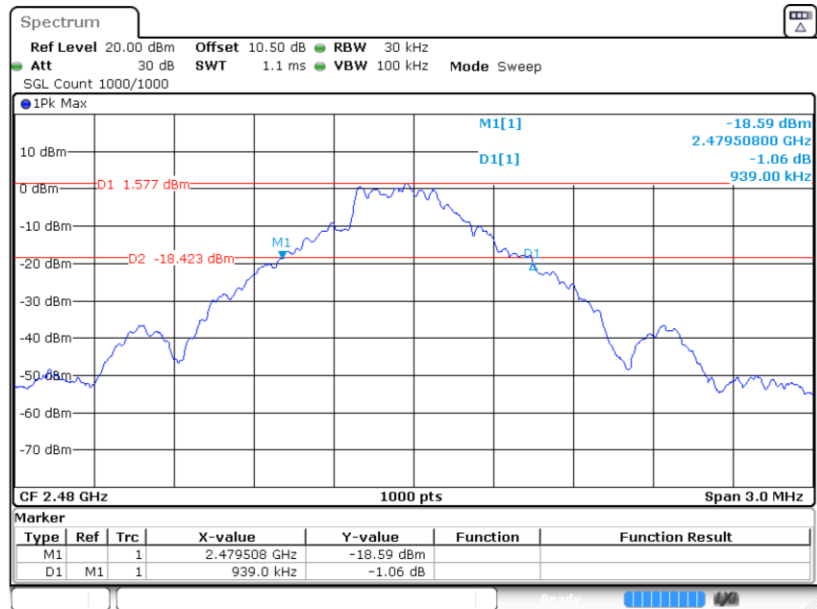BDR (GFSK): High Channel

ProjectNo.: RSHA240424001 Tester: Jason Lu


Date: 14 JUN 2024 09:56:56

EDR ($\pi/4$ -DQPSK): Low Channel

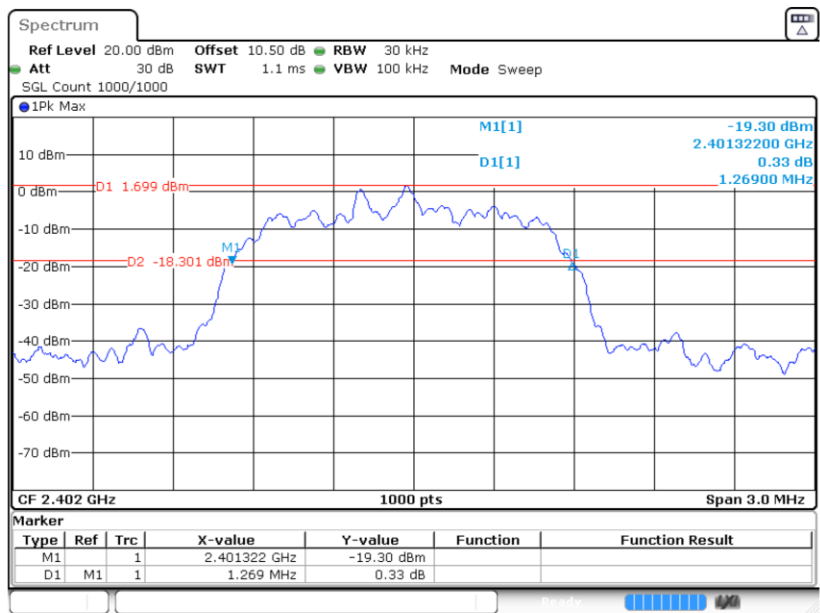


ProjectNo.: RSHA240424001 Tester: Jason Lu
Date: 14 JUN 2024 09:57:54

EDR($\pi/4$ -DQPSK): Middle Channel

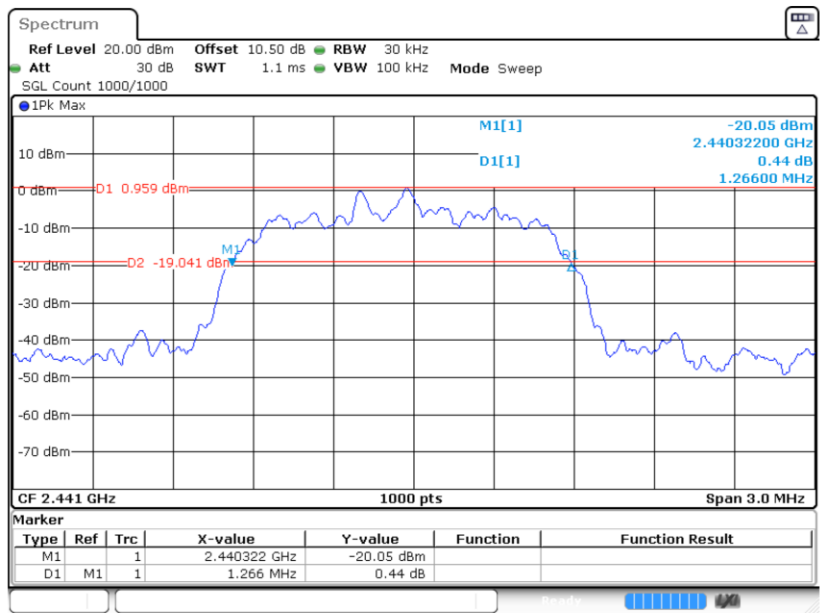


ProjectNo.: RSHA240424001 Tester: Jason Lu
Date: 14 JUN 2024 09:58:34

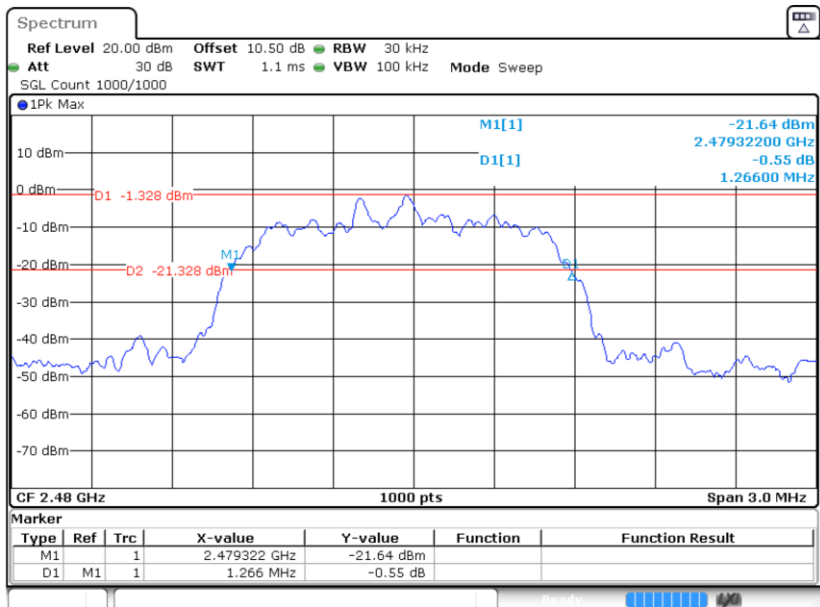EDR ($\pi/4$ -DQPSK): High Channel

ProjectNo.: RSHA240424001 Tester: Jason Lu

Date: 14 JUN 2024 09:59:10


EDR (8DPSK): Low Channel

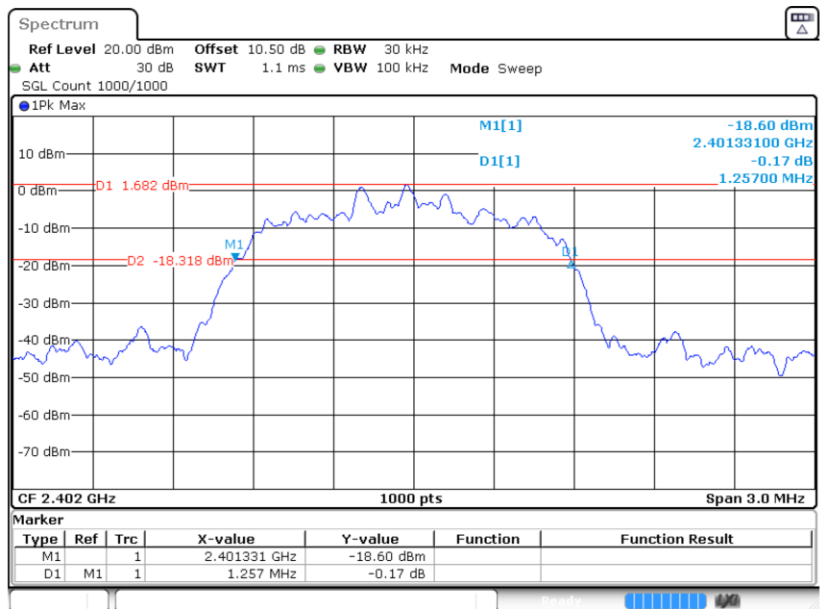

ProjectNo.: RSHA240424001 Tester: Jason Lu

Date: 14 JUN 2024 09:59:44


EDR (8DPSK): Middle Channel

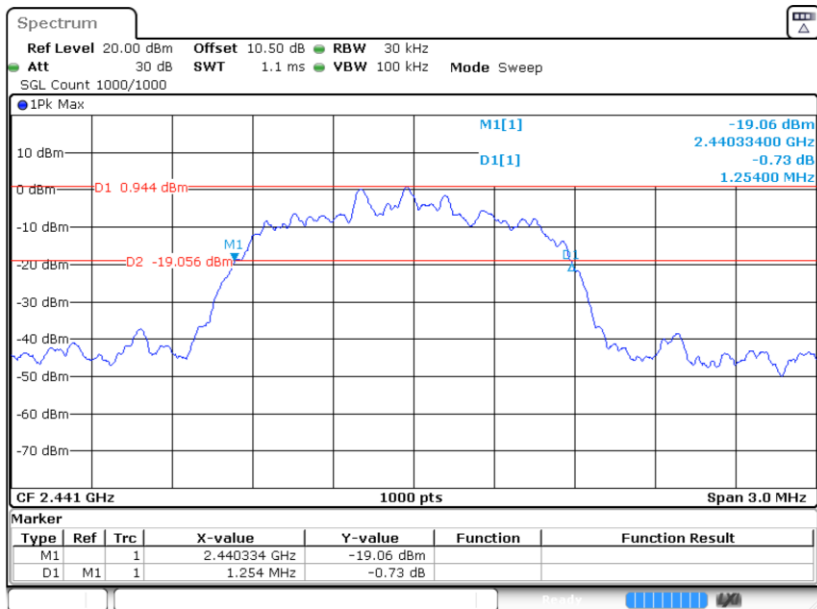

ProjectNo.: RSHA240424001 Tester: Jason Lu

Date: 14 JUN 2024 10:00:11

EDR (8DPSK): High Channel

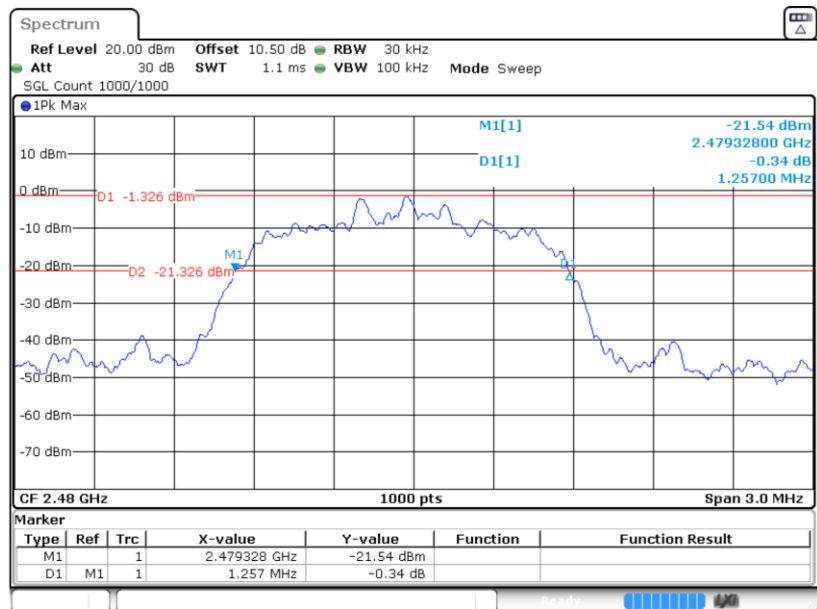

ProjectNo.: RSHA240424001 Tester: Jason Lu


Date: 14 JUN 2024 10:00:36

QUANTITY OF HOPPING CHANNEL TEST


EUT operation mode: Hopping

Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
BDR (GFSK)	2400-2483.5	79	≥15
EDR (π/4-DQPSK)	2400-2483.5	79	≥15
EDR (8DPSK)	2400-2483.5	79	≥15

BDR (GFSK): Number of Hopping Channels

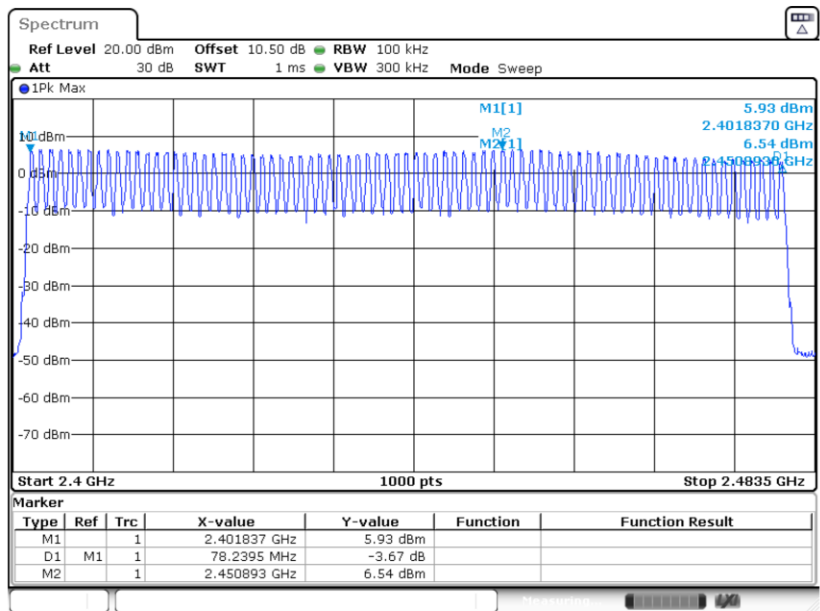


ProjectNo.: RSHA240424001 Tester: Jason Lu
Date: 14 JUN 2024 11:08:10

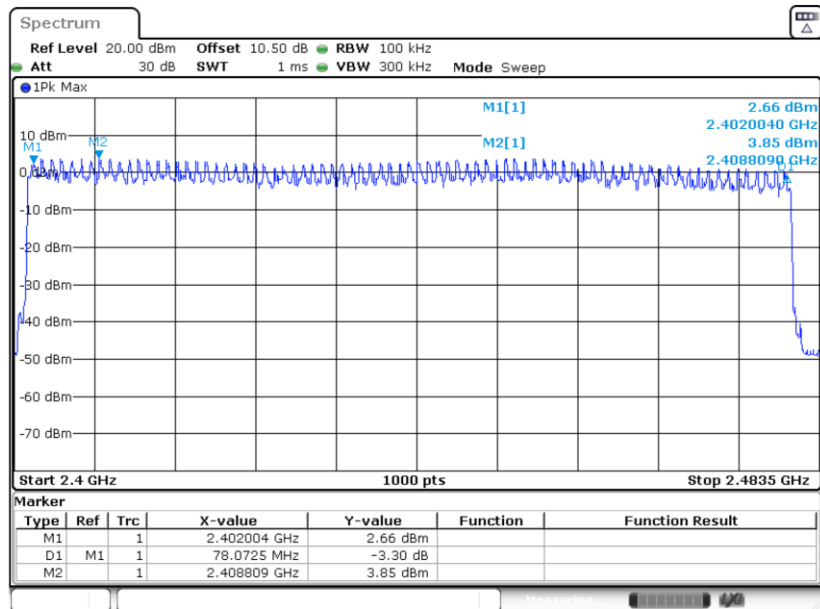EDR ($\pi/4$ -DQPSK): Number of Hopping Channels

ProjectNo.: RSHA240424001 Tester: Jason Lu

Date: 14 JUN 2024 11:09:00

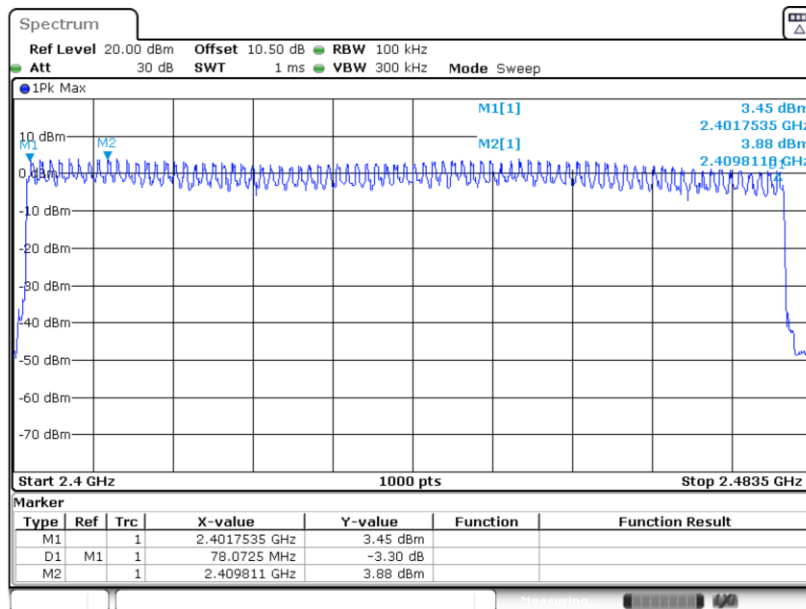EDR (8DPSK): Number of Hopping Channels


ProjectNo.: RSHA240424001 Tester: Jason Lu

Date: 14 JUN 2024 11:09:35

TIME OF OCCUPANCY (DWELL TIME)*EUT operation mode: Hopping*


Mode		Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
BDR (GFSK)	DH1	Middle	0.395	0.126	0.4	Pass
		Note: DH1: Dwell time = Pulse time*(1600/2/79)*31.6S				
	DH3	Middle	1.656	0.265	0.4	Pass
		Note: DH3: Dwell time = Pulse time*(1600/4/79)*31.6S				
	DH5	Middle	2.915	0.311	0.4	Pass
		Note: DH5: Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR ($\pi/4$ -DQPSK)	2DH1	Middle	0.400	0.128	0.4	Pass
		Note: 2DH1: Dwell time = Pulse time*(1600/2/79)*31.6S				
	2DH3	Middle	1.662	0.266	0.4	Pass
		Note: 2DH3: Dwell time = Pulse time*(1600/4/79)*31.6S				
	2DH5	Middle	2.920	0.311	0.4	Pass
		Note: 2DH5: Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR (8DPSK)	3DH1	Middle	0.399	0.128	0.4	Pass
		Note: 3 DH1: Dwell time = Pulse time*(1600/2/79)*31.6S				
	3DH3	Middle	1.659	0.265	0.4	Pass
		Note: 3DH3: Dwell time = Pulse time*(1600/4/79)*31.6S				
	3DH5	Middle	2.915	0.311	0.4	Pass
		Note: 3DH5: Dwell time = Pulse time*(1600/6/79)*31.6S				

BDR (GFSK): Pulse time, Middle Channel, DH1

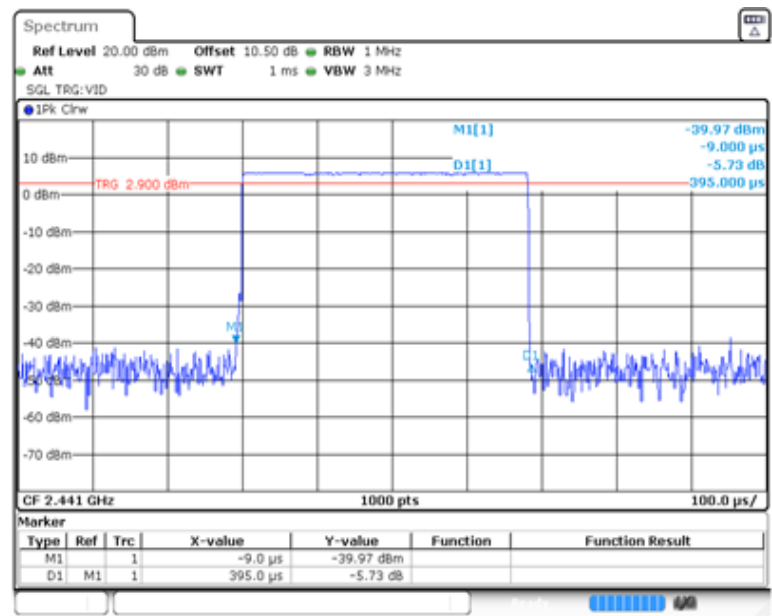


ProjectNo.:RSHA240424001 Tester:Jason Lu
Date: 14 JUN 2024 10:55:23

BDR (GFSK): Pulse time, Middle Channel, DH3

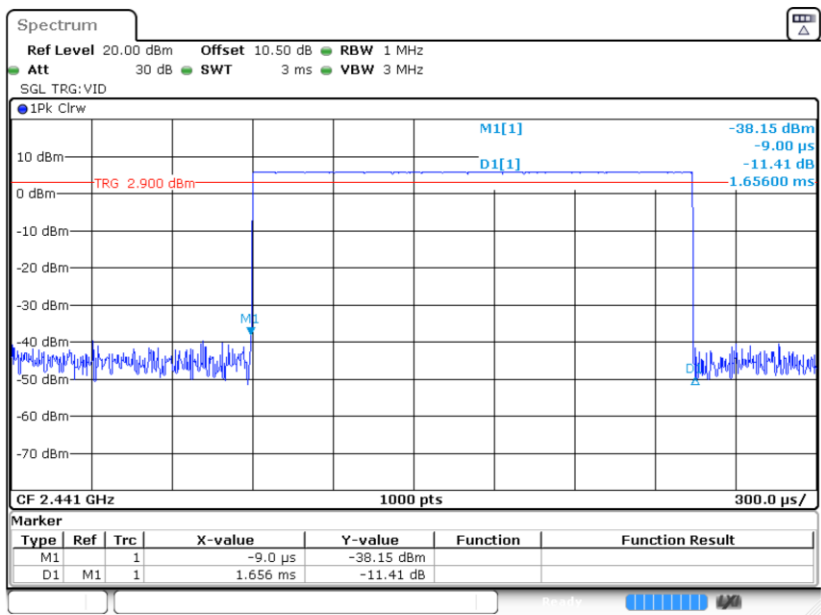

ProjectNo.:RSHA240424001 Tester:Jason Lu
Date: 14 JUN 2024 10:55:59


BDR (GFSK): Pulse time, Middle Channel, DH5

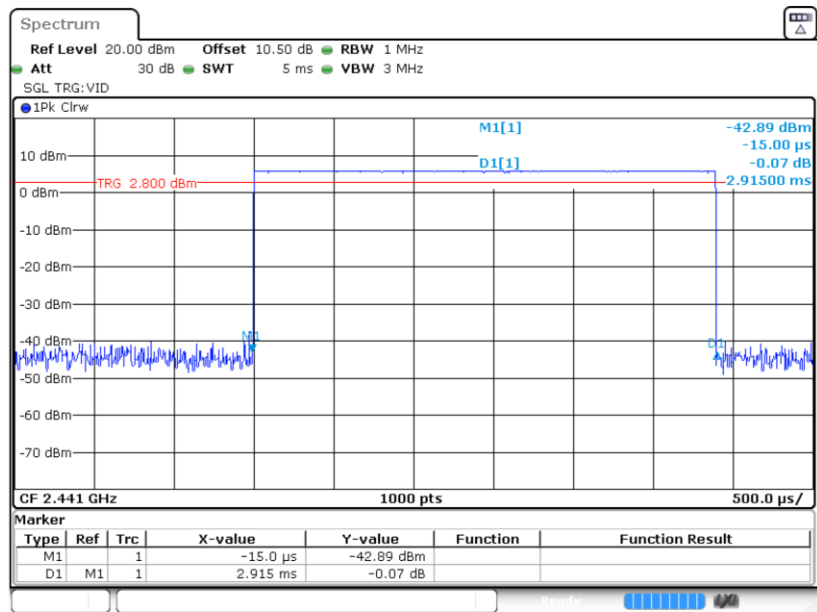

ProjectNo.: RSHA240424001 Tester: Jason Lu


Date: 14 JUN 2024 10:56:26

EDR ($\pi/4$ -DQPSK): Pulse time, Middle Channel, 2DH1

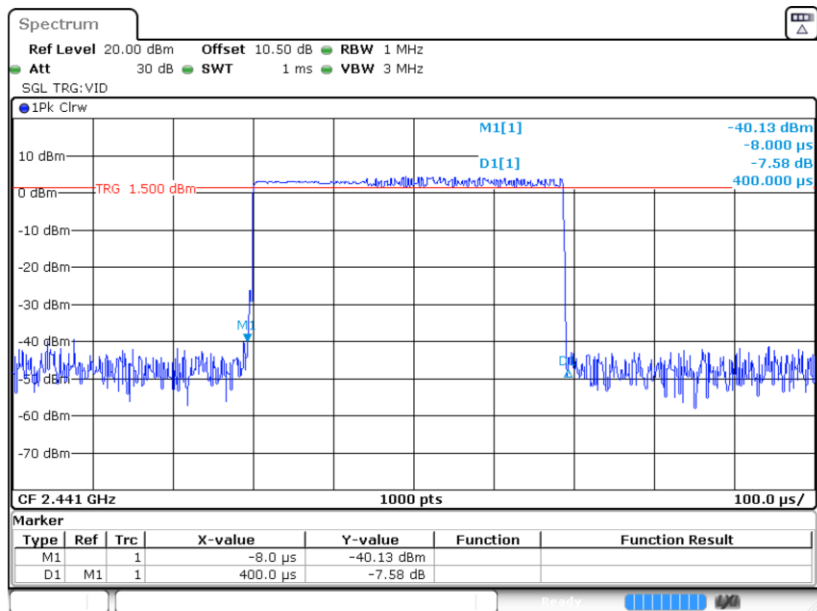


ProjectNo.: RSHA240424001 Tester: Jason Lu

Date: 14 JUN 2024 10:56:55

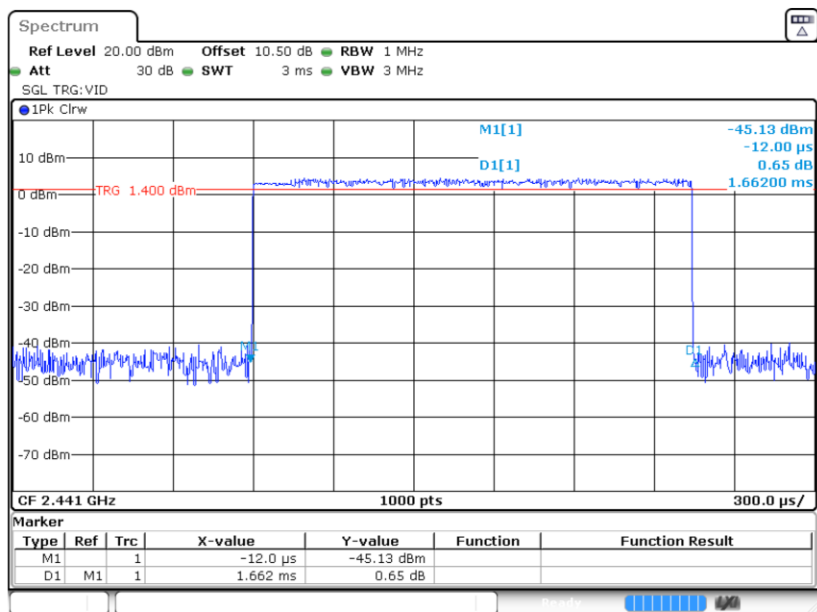EDR ($\pi/4$ -DQPSK): Pulse time, Middle Channel, 2DH3


ProjectNo.: RSHA240424001 Tester: Jason Lu

Date: 14 JUN. 2024 10:57:26

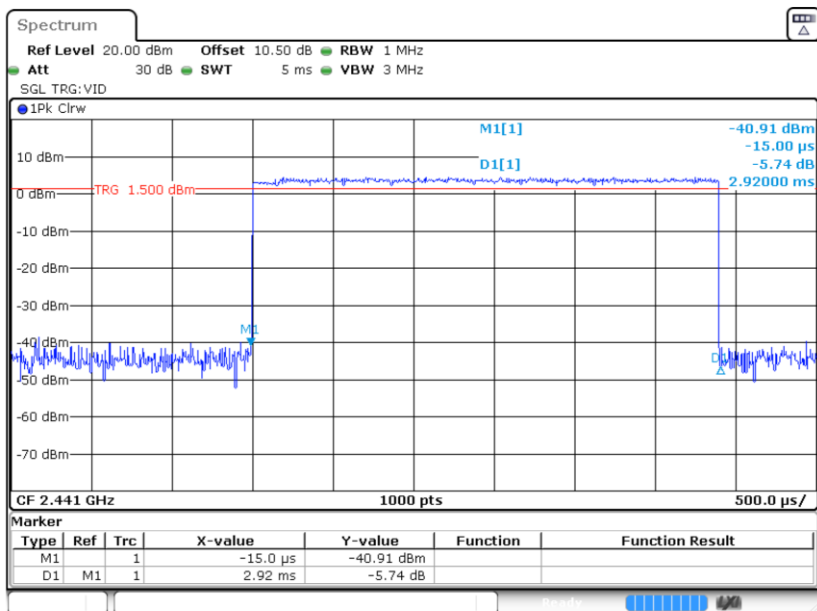EDR ($\pi/4$ -DQPSK): Pulse time, Middle Channel, 2DH5


ProjectNo.: RSHA240424001 Tester: Jason Lu

Date: 14 JUN. 2024 10:57:53

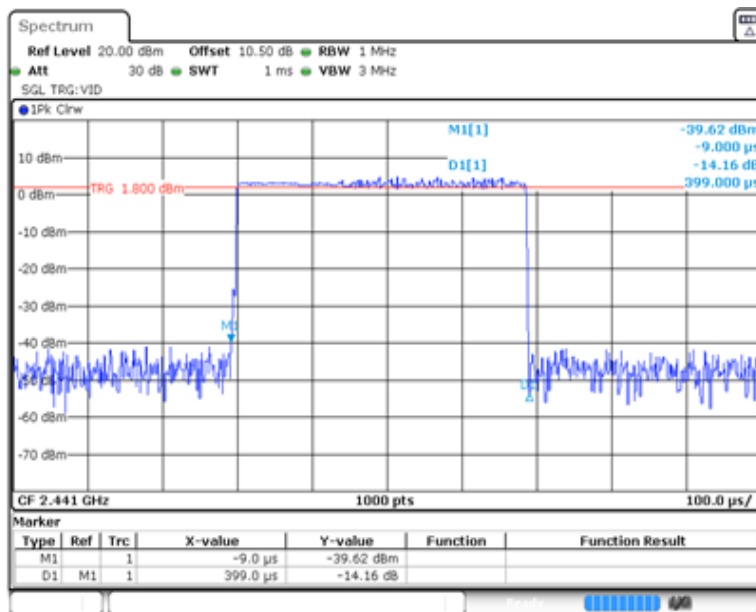EDR (8DPSK): Pulse time, Middle Channel, 3DH1

ProjectNo.: RSHA240424001 Tester: Jason Lu


Date: 14 JUN 2024 10:58:33

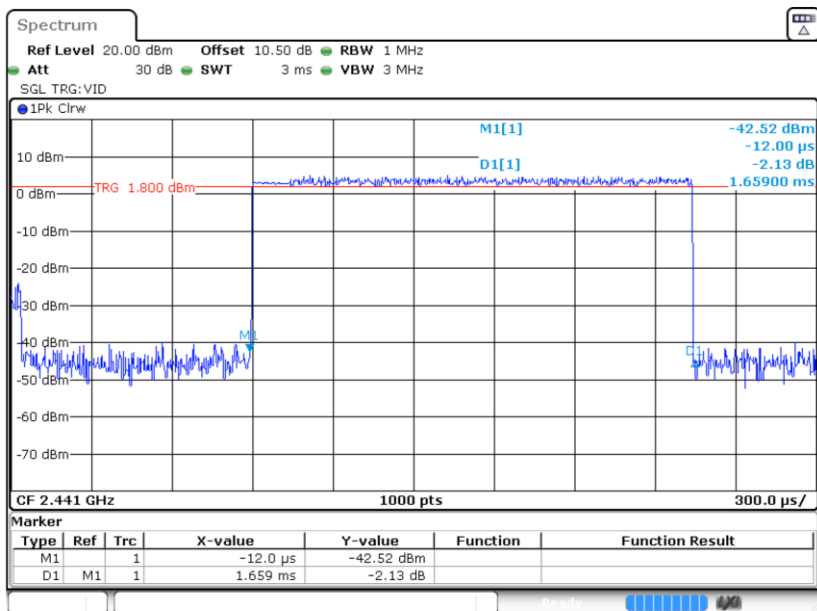EDR (8DPSK): Pulse time, Middle Channel, 3DH3

ProjectNo.: RSHA240424001 Tester: Jason Lu

Date: 14 JUN 2024 10:58:59

EDR (8DPSK): Pulse time, Middle Channel, 3DH5

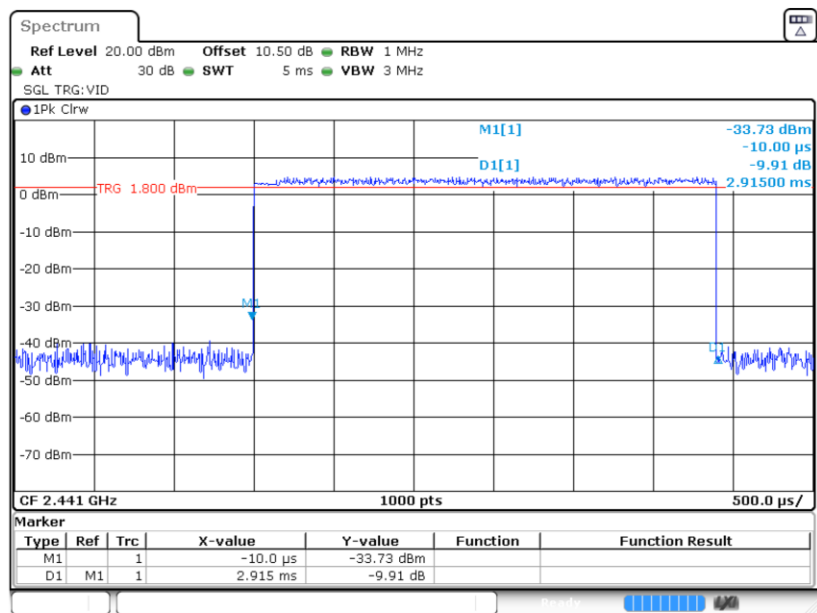


ProjectNo.: RSHA240424001 Tester: Jason Lu
Date: 14 JUN 2024 10:59:29

PEAK OUTPUT POWER MEASUREMENT


EUT operation mode: Transmitting

Mode	Channel	Frequency (MHz)	Result (dBm)	Limit (dBm)
GFSK	Low	2402	6.65	21
	Middle	2441	6.03	
	High	2480	3.80	
$\pi/4$ DQPSK	Low	2402	5.70	
	Middle	2441	5.03	
	High	2480	2.76	
8DPSK	Low	2402	6.00	
	Middle	2441	5.34	
	High	2480	3.11	

BDR (GFSK): 2402MHz

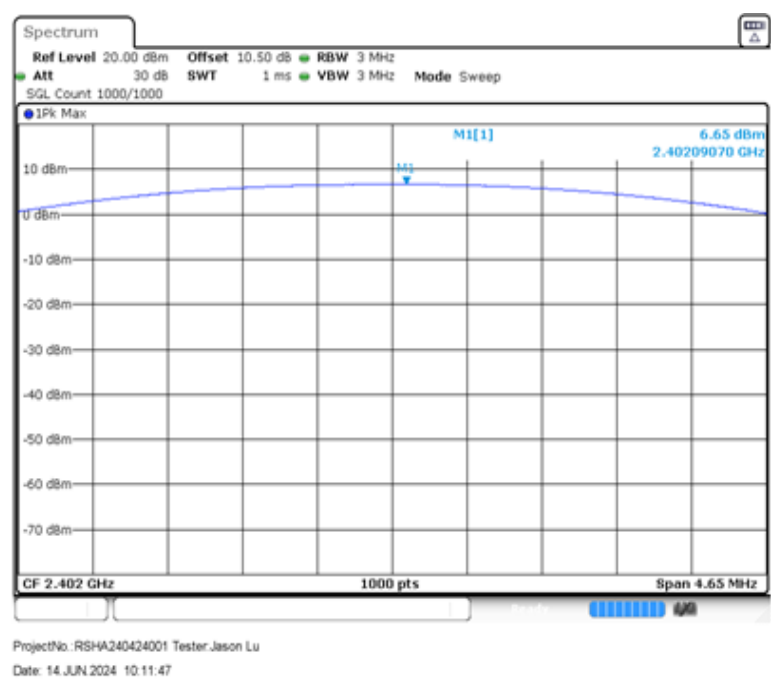


BDR (GFSK): 2441MHz

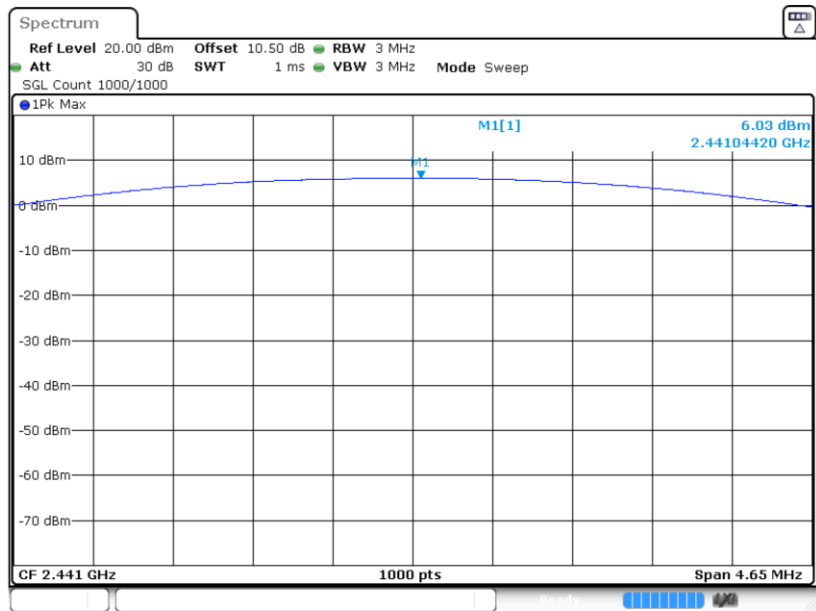


ProjectNo.: RSHA240424001 Tester: Jason Lu
 Date: 14 JUN 2024 10:12:16

BDR (GFSK): 2480MHz

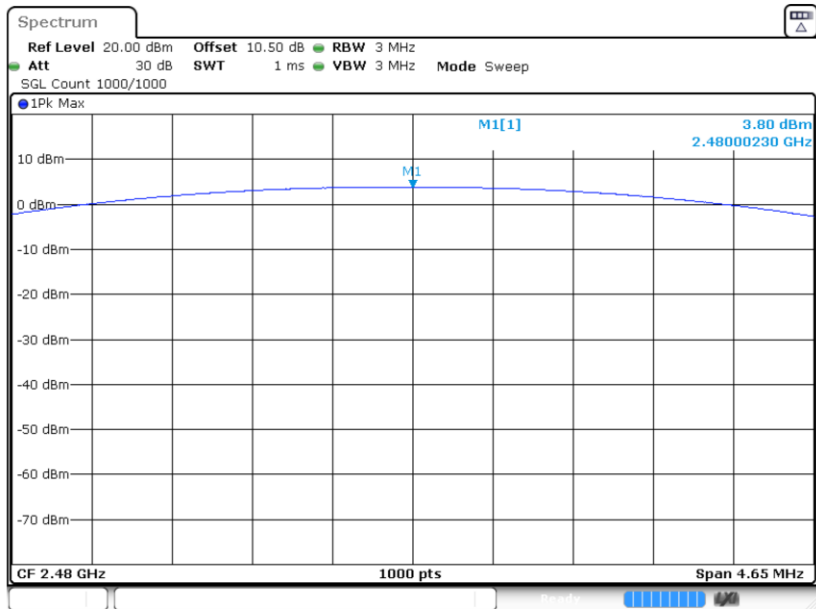


ProjectNo.: RSHA240424001 Tester: Jason Lu
 Date: 14 JUN 2024 10:12:41

EDR($\pi/4$ -DQPSK): 2402MHz

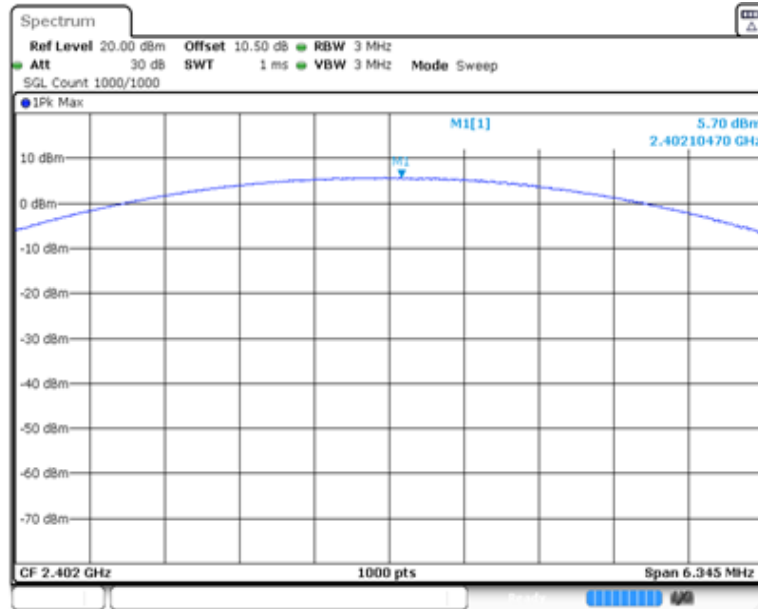


ProjectNo.: RSHA240424001 Tester: Jason Lu
 Date: 14 JUN 2024 10:15:10

EDR($\pi/4$ -DQPSK): 2441MHz

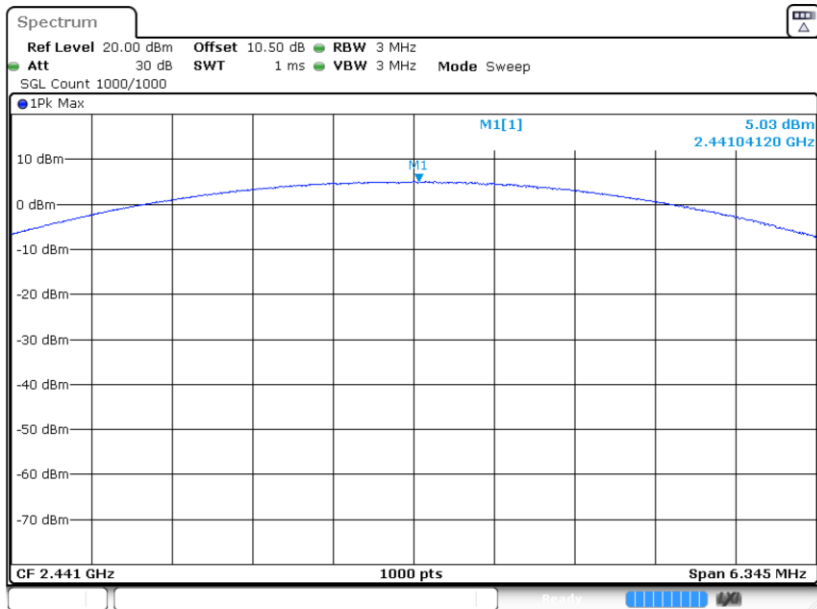


ProjectNo.: RSHA240424001 Tester: Jason Lu
 Date: 14 JUN 2024 10:15:39

EDR($\pi/4$ -DQPSK): 2480MHz

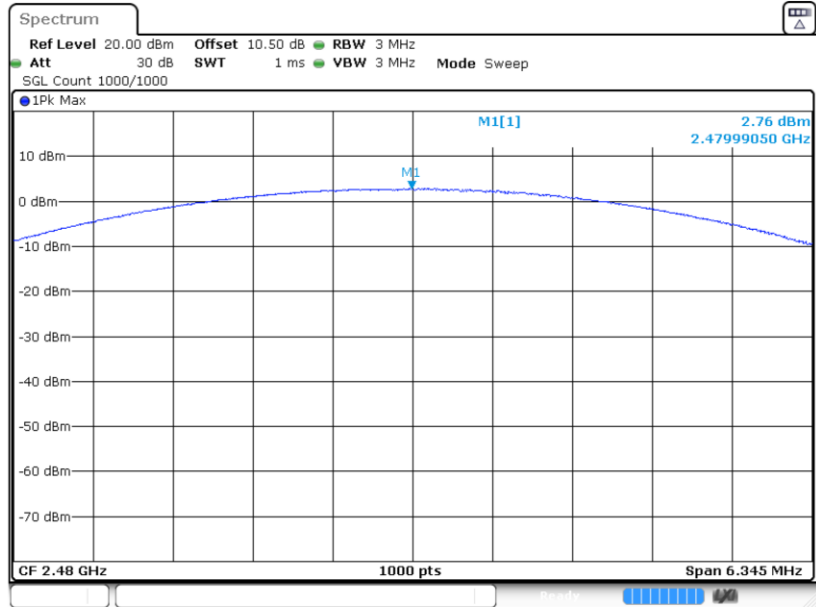


ProjectNo.: RSHA240424001 Tester: Jason Lu
 Date: 14 JUN 2024 10:17:19

EDR(8DPSK): 2402MHz

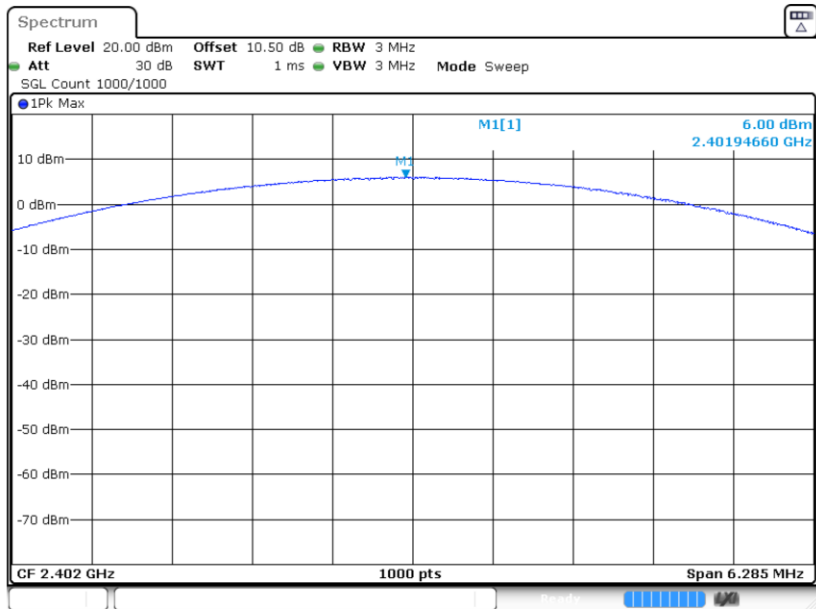


ProjectNo.: RSHA240424001 Tester: Jason Lu
 Date: 14 JUN 2024 10:18:04

EDR(8DPSK): 2441MHz

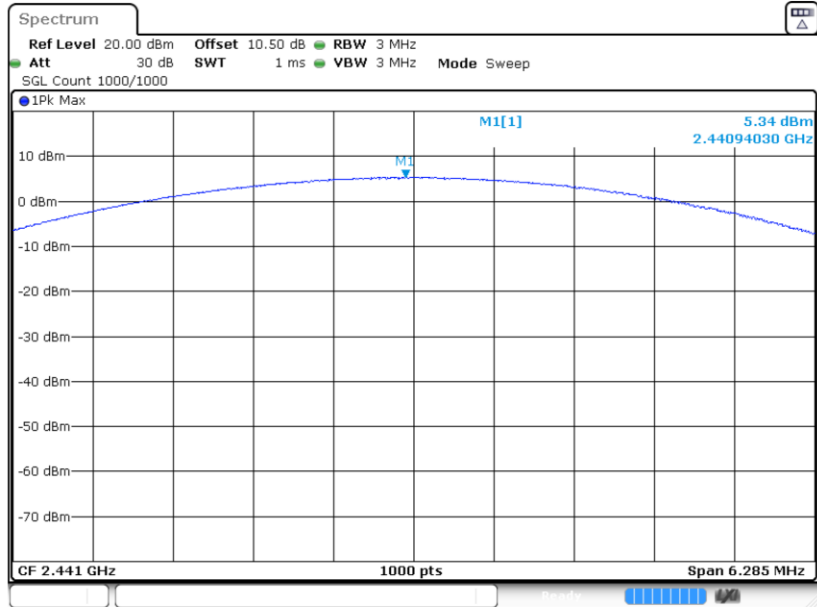

ProjectNo.: RSHA240424001 Tester: Jason Lu
 Date: 14 JUN 2024 10:18:26


EDR(8DPSK): 2480MHz

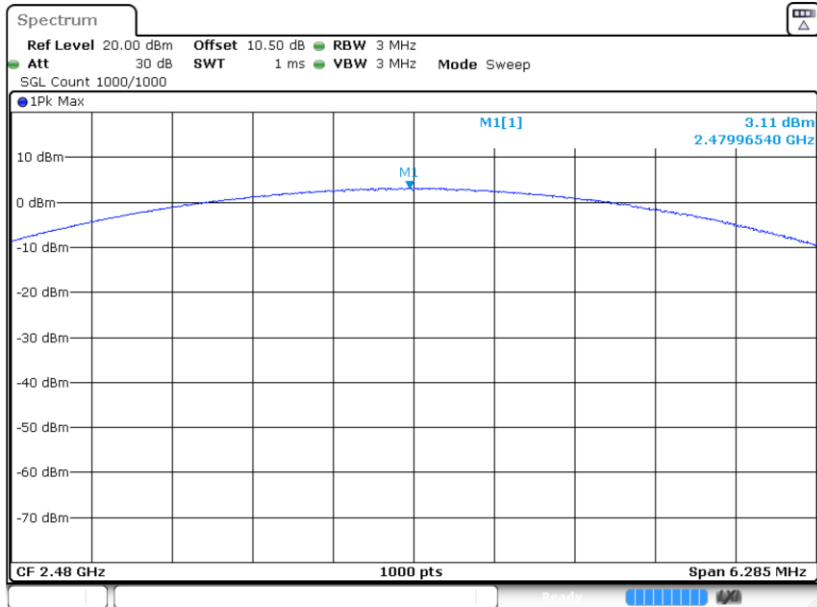


ProjectNo.: RSHA240424001 Tester: Jason Lu
 Date: 14 JUN 2024 10:18:46

BAND EDGES*EUT operation mode: Transmitting & Hopping**Test Result: Compliant.*


Mode	Channel	Frequency (MHz)	Result (dBc)	Limit (dBc)
GFSK	Low	2402	53.35	20
	High	2480	50.95	
$\pi/4$ DQPSK	Low	2402	50.41	
	High	2480	47.90	
8DPSK	Low	2402	50.64	
	High	2480	47.90	
GFSK (Hopping)	Low	2402	54.23	
	High	2480	50.94	
$\pi/4$ DQPSK (Hopping)	Low	2402	51.67	
	High	2480	47.74	
8DPSK (Hopping)	Low	2402	51.23	
	High	2480	47.94	

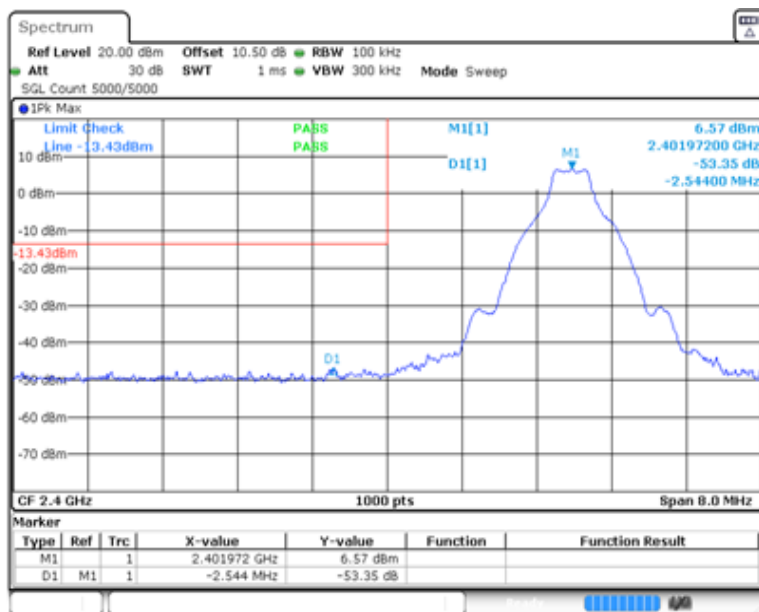Band Edge**BDR (GFSK): Left Side**

ProjectNo.: RSHA240424001 Tester: Jason Lu
Date: 14 JUN 2024 10:20:03

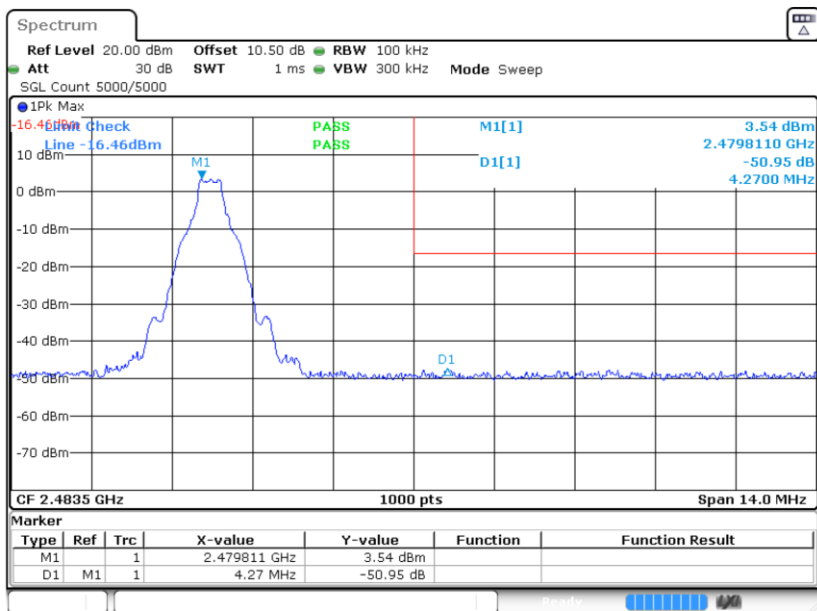
BDR (GFSK): Right Side

ProjectNo.: RSHA240424001 Tester: Jason Lu
Date: 14 JUN 2024 10:22:33

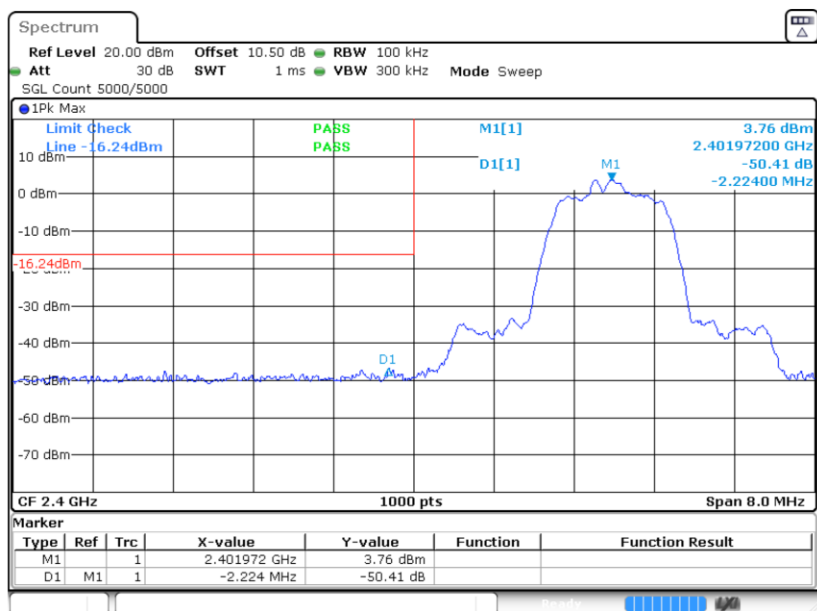EDR ($\pi/4$ -DQPSK): Left Side

ProjectNo.: RSHA240424001 Tester: Jason Lu


Date: 14 JUN 2024 10:23:38

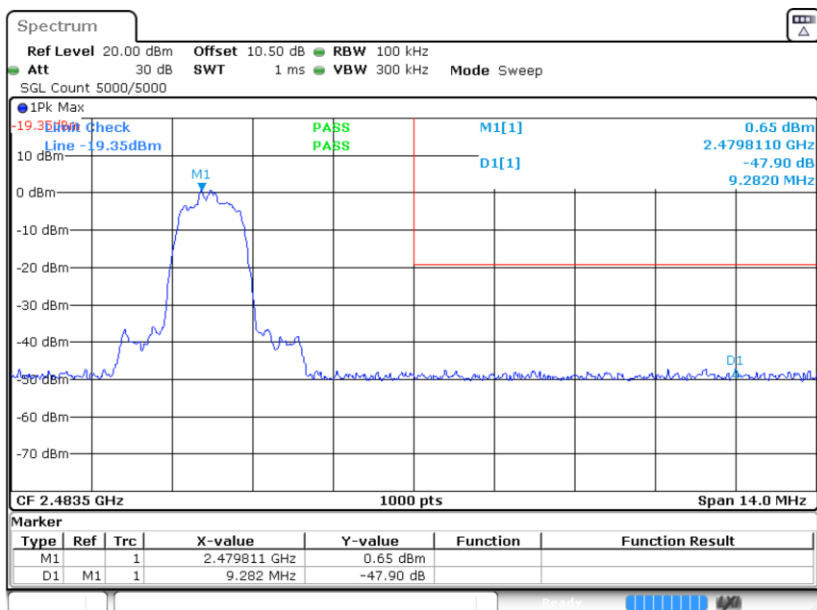EDR ($\pi/4$ -DQPSK): Right Side

ProjectNo.: RSHA240424001 Tester: Jason Lu

Date: 14 JUN 2024 10:27:12


EDR (8DPSK): Left Side

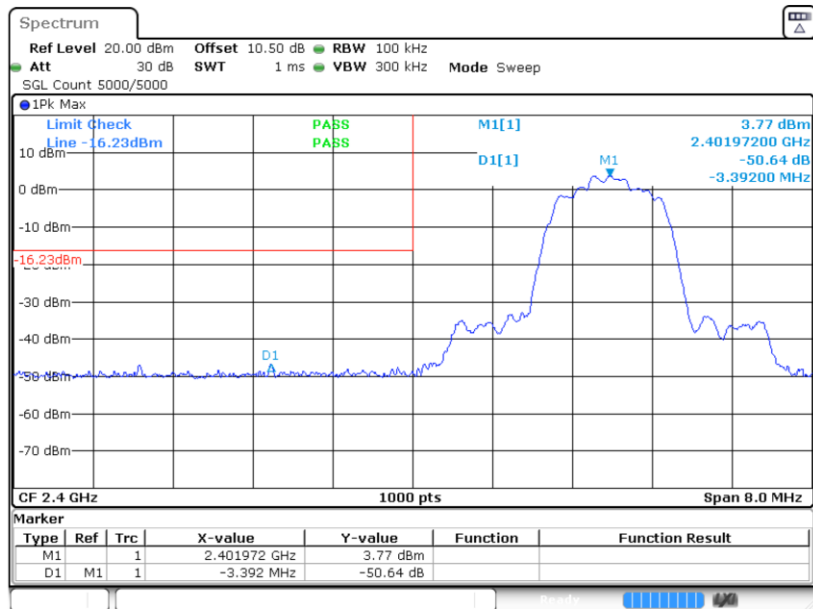

ProjectNo.: RSHA240424001 Tester: Jason Lu

Date: 14 JUN 2024 10:28:27


EDR (8DPSK): Right Side

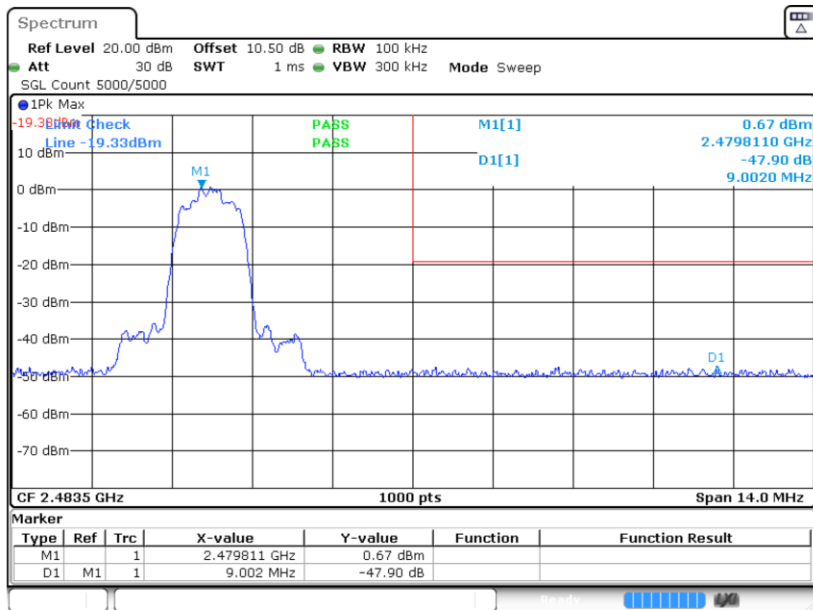

ProjectNo.: RSHA240424001 Tester: Jason Lu

Date: 14 JUN 2024 10:31:21


BDR (GFSK): Left Side - Hopping

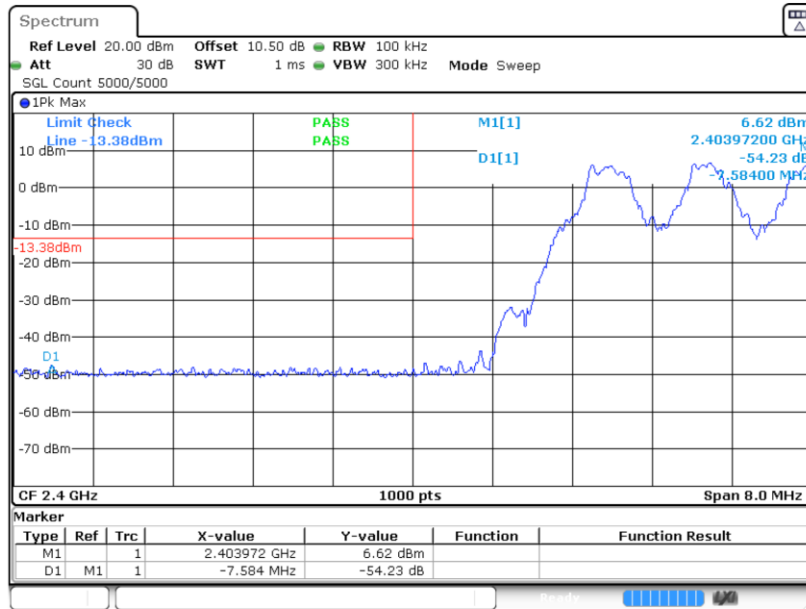

ProjectNo.: RSHA240424001 Tester: Jason Lu


Date: 14 JUN 2024 10:20:55

BDR (GFSK): Right Side- Hopping

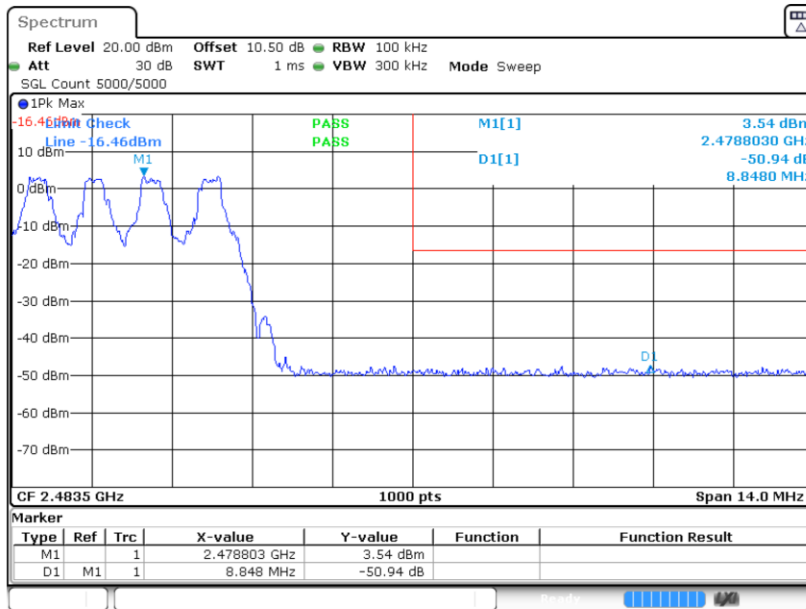


ProjectNo.: RSHA240424001 Tester: Jason Lu

Date: 14 JUN 2024 10:21:34

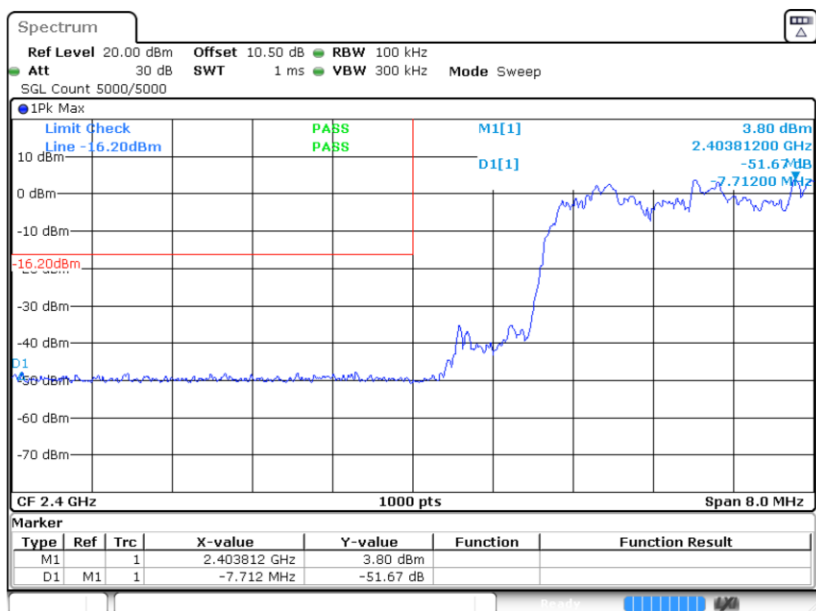EDR ($\pi/4$ -DQPSK): Left Side- Hopping

ProjectNo.: RSHA240424001 Tester: Jason Lu


Date: 14 JUN 2024 10:24:52

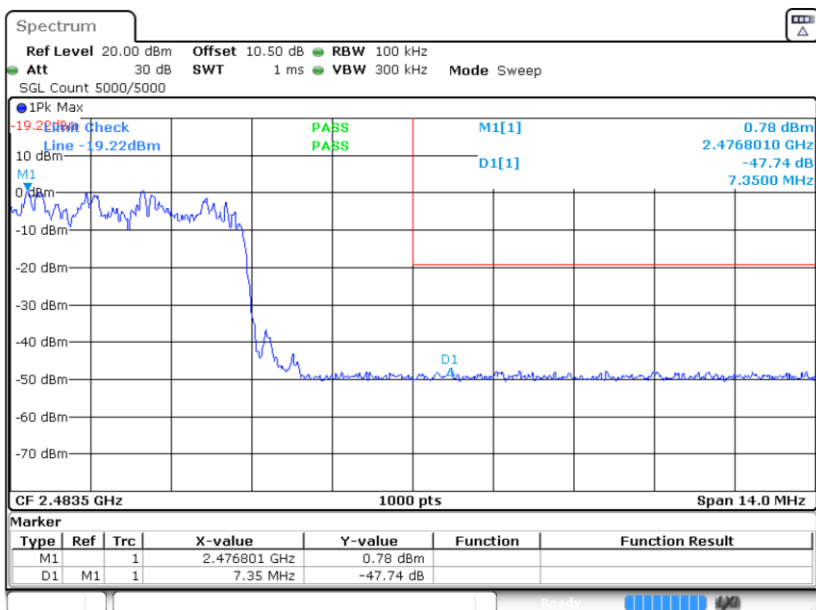EDR ($\pi/4$ -DQPSK): Right Side- Hopping

ProjectNo.: RSHA240424001 Tester: Jason Lu

Date: 14 JUN 2024 10:25:33


EDR (8DPSK): Left Side- Hopping

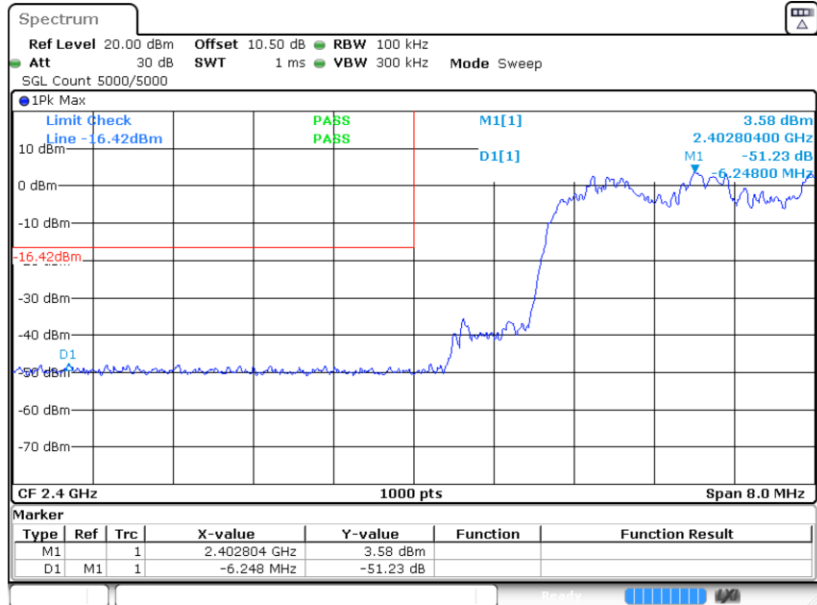

ProjectNo.: RSHA240424001 Tester: Jason Lu

Date: 14 JUN 2024 10:29:37

EDR (8DPSK): Right Side- Hopping

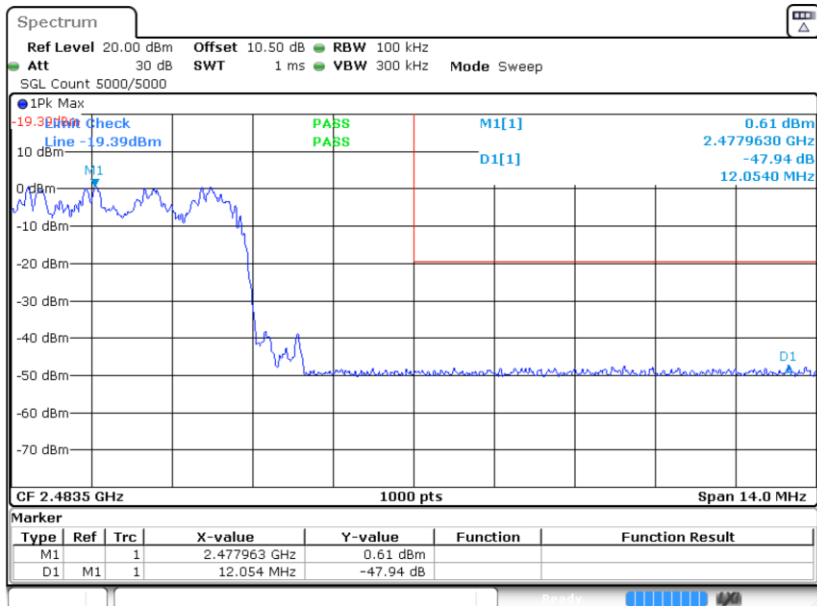

ProjectNo.: RSHA240424001 Tester: Jason Lu

Date: 14 JUN 2024 10:30:25

EUT PHOTOGRAPHS

Please refer to the attachment EXHIBIT A - EUT EXTERNAL PHOTOGRAPHS and EXHIBIT B - EUT INTERNAL PHOTOGRAPHS.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment EXHIBIT C - TEST SETUP PHOTOGRAPHS.

Declarations

1. The laboratory is not responsible for the authenticity of any information provided by the applicant. Information from the applicant that may affect test results is marked with “★”.
2. The test data was only valid for the test sample(s).
3. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.
4. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.
5. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor $k=2$ with the 95.45% confidence interval.

******* END OF REPORT *******