



**FCC PART 15C  
TEST REPORT  
No. I18N01882-WLAN**

**for**

**Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd**

**Mobile Hotspot**

**cp332A**

**with**

**Hardware Version: P1**

**Software Version: 2.0.057.P0.181214.cp332A**

**FCC ID: R38YLC332A**

**Issued Date: 2019-01-28**

**Designation Number: CN1210**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of SAICT.

**Test Laboratory:**

Shenzhen Academy of Information and Communications Technology  
Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen,  
Guangdong, P. R. China 518026.

Tel: +86(0)755-33322000, Fax: +86(0)755-33322001, Email: yewu@caict.ac.cn, [www.cszit.com](http://www.cszit.com)

## **REPORT HISTORY**

<b>Report Number</b>	<b>Revision</b>	<b>Description</b>	<b>Issue Date</b>
I18N01882-WLAN	Rev.0	1st edition	2019-01-28

## **CONTENTS**

<b>CONTENTS .....</b>	<b>3</b>
<b>1. TEST LABORATORY .....</b>	<b>4</b>
1.1. TESTING LOCATION .....	4
1.2. TESTING ENVIRONMENT.....	4
1.3. PROJECT DATA .....	4
1.4. SIGNATURE .....	4
<b>2. CLIENT INFORMATION.....</b>	<b>5</b>
2.1. APPLICANT INFORMATION .....	5
2.2. MANUFACTURER INFORMATION .....	5
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>6</b>
3.1. ABOUT EUT .....	6
3.2. INTERNAL IDENTIFICATION OF EUT .....	6
3.3. INTERNAL IDENTIFICATION OF AE.....	6
3.4. GENERAL DESCRIPTION.....	6
<b>4. REFERENCE DOCUMENTS .....</b>	<b>7</b>
4.1. DOCUMENTS SUPPLIED BY APPLICANT .....	7
4.2. REFERENCE DOCUMENTS FOR TESTING.....	7
<b>5. TEST RESULTS .....</b>	<b>8</b>
5.1. SUMMARY OF TEST RESULTS .....	8
5.2. STATEMENTS.....	8
5.3. TERMS USED IN THE RESULT TABLE .....	8
5.4. LABORATORY ENVIRONMENT.....	9
<b>6. TEST FACILITIES UTILIZED .....</b>	<b>10</b>
<b>7. MEASUREMENT UNCERTAINTY .....</b>	<b>11</b>
<b>ANNEX A: DETAILED TEST RESULTS.....</b>	<b>12</b>
A.0 ANTENNA REQUIREMENT .....	12
A.1 MAXIMUM OUTPUT POWER - CONDUCTED .....	13
A.2 PEAK POWER SPECTRAL DENSITY .....	14
A.3 6dB BANDWIDTH.....	21
A.4 BAND EDGES COMPLIANCE .....	28
A.5 CONDUCTED EMISSION .....	33
A.6 RADIATED EMISSION.....	40
A.7 AC POWERLINE CONDUCTED EMISSION .....	57

## **1. Test Laboratory**

### **1.1. Testing Location**

Location: Shenzhen Academy of Information and Communications Technology  
Address: Building G, Shenzhen International Innovation Center, No.1006  
Shennan Road, Futian District, Shenzhen, Guangdong  
Province, China  
Postal Code: 518026  
Telephone: +86(0)755-33322000  
Fax: +86(0)755-33322001

### **1.2. Testing Environment**

Normal Temperature: 15-30℃  
Relative Humidity: 35-60%

### **1.3. Project data**

Testing Start Date: 2018-12-21  
Testing End Date: 2019-01-25

### **1.4. Signature**



---

An Ran

(Prepared this test report)



---

Tang Weisheng

(Reviewed this test report)



---

Zhang Bojun

(Approved this test report)

## **2. Client Information**

### **2.1. Applicant Information**

Company Name: Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd  
Address: Building B, Boton Science Park, Chaguang Road, Xili Town, Nanshan  
District, Shenzhen  
Contact Person Yentl Chen  
E-Mail Chenyanting@yulong.com  
Telephone: +86 15927320221  
Fax: /

### **2.2. Manufacturer Information**

Company Name: Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd  
Address: Building B, Boton Science Park, Chaguang Road, Xili Town, Nanshan  
District, Shenzhen  
Contact Person Yentl Chen  
E-Mail Chenyanting@yulong.com  
Telephone: +86 15927320221  
Fax: /

### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Description	Mobile Hotspot
Model Name	cp332A
Market Name	/
RF Protocol	IEEE 802.11 b/g/n-HT20/n-HT40
Operating Frequency	2412MHz~2462MHz
Number of Channels	11
Antenna Type	Integrated
Antenna Gain	-0.50 dBi
Power Supply	3.8 V DC by Battery
FCC ID	R38YLCP332A
Condition of EUT as received	No abnormality in appearance

Note: Components list, please refer to documents of the manufacturer.

#### **3.2. Internal Identification of EUT**

EUT ID*	IMEI	HW Version	SW Version	Receive Date
EUT1	/	P1	2.0.057.P0.181214.cp332A	2018-12-19

\*EUT ID: is used to identify the test sample in the lab internally.

#### **3.3. Internal Identification of AE**

AE ID*	Description	Model	Manufacturer
AE1	Battery	Li-ion	LISHEN
AE2	5V1A Charger	RD0501000-USBA-18MG	Shenzhen Ruide
AE3	5V1A Charger	618045	Shenzhen Kosun

\*AE ID: is used to identify the test sample in the lab internally.

#### **3.4. General Description**

The Equipment Under Test (EUT) are a model of Mobile Phone with integrated antenna. It consists of normal options: travel Charger, USB cable. Manual and specifications of the EUT were provided to fulfil the test. Samples undergoing test were selected by the client.

## **4. Reference Documents**

### **4.1. Documents supplied by applicant**

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

### **4.2. Reference Documents for testing**

The following documents listed in this section are referred for testing.

<b>Reference</b>	<b>Title</b>	<b>Version</b>
FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902–928MHz, 2400–2483.5 MHz, and 5725–5850 MHz	2017
ANSI C63.10	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	2013

## 5. Test Results

### 5.1. Summary of Test Results

No	Test cases	Sub-clause of Part 15C	Verdict
0	Antenna Requirement	15.203	P
1	Maximum Output Power	15.247 (b)	P
2	Peak Power Spectral Density	15.247 (e)	P
3	6dB Bandwidth	15.247 (a)	P
4	Band Edges Compliance	15.247 (d)	P
5	Conducted Emission	15.247 (d)	P
6	Radiated Emission	15.247, 15.205, 15.209	P
7	AC Power line Conducted	15.207	P

See **ANNEX A** for details.

### 5.2. Statements

SAICT has evaluated the test cases requested by the applicant/manufacture as listed in section 5.1 of this report, for the EUT specified in section 3, according to the standards or reference documents listed in section 4.2.

### 5.3. Terms used in the result table

Terms used in Verdict column

P	Pass
NA	Not Available
F	Fail

Abbreviations

AC	Alternating Current
AFH	Adaptive Frequency Hopping
BW	Band Width
E.I.R.P.	equivalent isotropic radiated power
ISM	Industrial, Scientific and Medical
R&TTE	Radio and Telecommunications Terminal Equipment
RF	Radio Frequency
Tx	Transmitter



#### 5.4. Laboratory Environment

**Semi-anechoic Chamber** did not exceed following limits along the EMC testing

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz> 60 dB; 1MHz-18000MHz>90 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 4 Ω
Normalised site attenuation (NSA)	< ± 4 dB, 3 m distance, from 30 to 1000 MHz

**Shielded room** did not exceed following limits along the EMC testing

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. =20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz> 60 dB; 1MHz-10000MHz>90 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 4 Ω

**Fully-anechoic Chamber** did not exceed following limits along the EMC testing

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz> 60 dB; 1MHz-18000MHz>90 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 4 Ω
Voltage Standing Wave Ratio (VSWR)	≤ 6 dB, from 1 to 18 GHz, 3 m distance
Uniformity of field strength	Between 0 and 6 dB, from 80 to 6000 MHz

## 6. Test Facilities Utilized

### Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date	Calibration Period
1	Vector Signal Analyzer	FSV40	100903	Rohde & Schwarz	2020.01.16	1 year
2	Power Sensor	U2021XA	MY55430013	Agilent	2019.01.31	1 year
3	Test Receiver	ESCI	100702	Rohde & Schwarz	2019.06.20	1 year
4	LISN	ENV216	102067	Rohde & Schwarz	2019.07.18	1 year

### Radiated test system

NO.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date	Calibration Period
1	Loop Antenna	HLA6120	35779	TESEQ	2019.05.02	3 years
2	BiLog Antenna	3142E	00224831	ETS-Lindgren	2021.05.17	3 years
3	Horn Antenna	3117	00066577	ETS-Lindgren	2019.04.05	3 years
4	Test Receiver	ESR7	101676	Rohde & Schwarz	2019.11.28	1 year
5	Spectrum Analyser	FSV40	101192	Rohde & Schwarz	2019.05.21	1 year
6	Chamber	FACT3-2.0	1285	ETS-Lindgren	2020.07.20	3 years
7	Antenna	QSH-SL-18-26-S-20	17013	Q-par	2020.01.15	3 years
8	Antenna	QSH-SL-26-40-K-20	17014	Q-par	2020.01.11	3 years

### Test software

No.	Equipment	Manufacturer	Version
1	TechMgr Software	CAICT	2.1.1
2	EMC32	Rohde & Schwarz	8.53.0
3	EMC32	Rohde & Schwarz	10.01.00

EUT is engineering software provided by the customer to control the transmitting signal. The EUT was programmed to be in continuously transmitting mode.

### Anechoic Chamber

Fully anechoic Chamber by ETS-Lindgren.

## 7. Measurement Uncertainty

Test Name	Uncertainty	
1. RF Output Power - Conducted	$\pm 1.32\text{dB}$	
2. Power Spectral Density - Conducted	$\pm 2.32\text{dB}$	
3. Occupied channel bandwidth - Conducted	$\pm 66\text{Hz}$	
4 Transmitter Spurious Emission - Conducted	$30\text{MHz} \leq f \leq 1\text{GHz}$	$\pm 1.41\text{dB}$
	$1\text{GHz} \leq f \leq 7\text{GHz}$	$\pm 1.92\text{dB}$
	$7\text{GHz} \leq f \leq 13\text{GHz}$	$\pm 2.31\text{dB}$
	$13\text{GHz} \leq f \leq 26\text{GHz}$	$\pm 2.61\text{dB}$
5. Transmitter Spurious Emission - Radiated	$9\text{kHz} \leq f \leq 30\text{MHz}$	$\pm 1.94\text{dB}$
	$30\text{MHz} \leq f \leq 1\text{GHz}$	$\pm 5.12\text{dB}$
	$1\text{GHz} \leq f \leq 18\text{GHz}$	$\pm 5.05\text{dB}$
	$18\text{GHz} \leq f \leq 40\text{GHz}$	$\pm 4.08\text{dB}$
6. AC Power line Conducted Emission	$150\text{kHz} \leq f \leq 30\text{MHz}$	$\pm 3.00\text{dB}$

## **ANNEX A: Detailed Test Results**

### **A.0 Antenna requirement**

#### **Measurement Limit:**

<b>Standard</b>	<b>Requirement</b>
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

**Conclusion: The Directional gains of antenna used for transmitting is -0.50 dBi.**  
**The RF transmitter uses an integrate antenna without connector.**

## A.1 Maximum Output Power - Conducted

### Measurement of method :See ANSI C63.10-2013-Clause 11.9.2.3.2

Method AVGPM-G is a measurement using a gated RF average power meter.

Alternatively, measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

### Measurement Limit:

Standard	Limit (dBm)
FCC CRF Part 15.247(b)	< 30

### Measurement Results:

Mode	Channel	Frequency (MHz)	Average Conducted Power (dBm)	Conclusion
802.11b	CH 1	2412	17.19	<b>P</b>
	CH 6	2437	17.78	<b>P</b>
	CH 11	2462	17.80	<b>P</b>
802.11g	CH 1	2412	14.40	<b>P</b>
	CH 6	2437	14.97	<b>P</b>
	CH 11	2462	14.98	<b>P</b>
802.11n HT20	CH 1	2412	14.23	<b>P</b>
	CH 6	2437	14.90	<b>P</b>
	CH 11	2462	14.90	<b>P</b>
802.11n HT40	CH 3	2422	12.84	<b>P</b>
	CH 6	2437	13.23	<b>P</b>
	CH 9	2452	13.16	<b>P</b>

### Note:

Worst-case data rates as provided by the client were: 1Mbps (802.11b), 6Mbps (802.11g), MCS0 (802.11n). is selected as the worst condition.

The following cases and test graphs are performed with this condition.

The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.

## A.2 Peak Power Spectral Density

### Measurement Limit:


Standard	Limit
FCC CRF Part 15.247(e)	< 8 dBm/3 kHz

### Measurement Results:


Mode	Channel	Frequency (MHz)	Test Results (dBm)		Conclusion
802.11b	CH 1	2412	Fig.1	0.31	P
	CH 6	2437	Fig.2	1.29	P
	CH 11	2462	Fig.3	1.34	P
802.11g	CH 1	2412	Fig.4	-14.49	P
	CH 6	2437	Fig.5	-13.57	P
	CH 11	2462	Fig.6	-13.67	P
802.11n HT20	CH 1	2412	Fig.7	-13.72	P
	CH 6	2437	Fig.8	-11.92	P
	CH 11	2462	Fig.9	-11.90	P
802.11n HT40	CH 3	2422	Fig.10	-16.64	P
	CH 6	2437	Fig.11	-15.83	P
	CH 9	2452	Fig.12	-16.04	P

See below for test graphs.

**Conclusion: PASS**

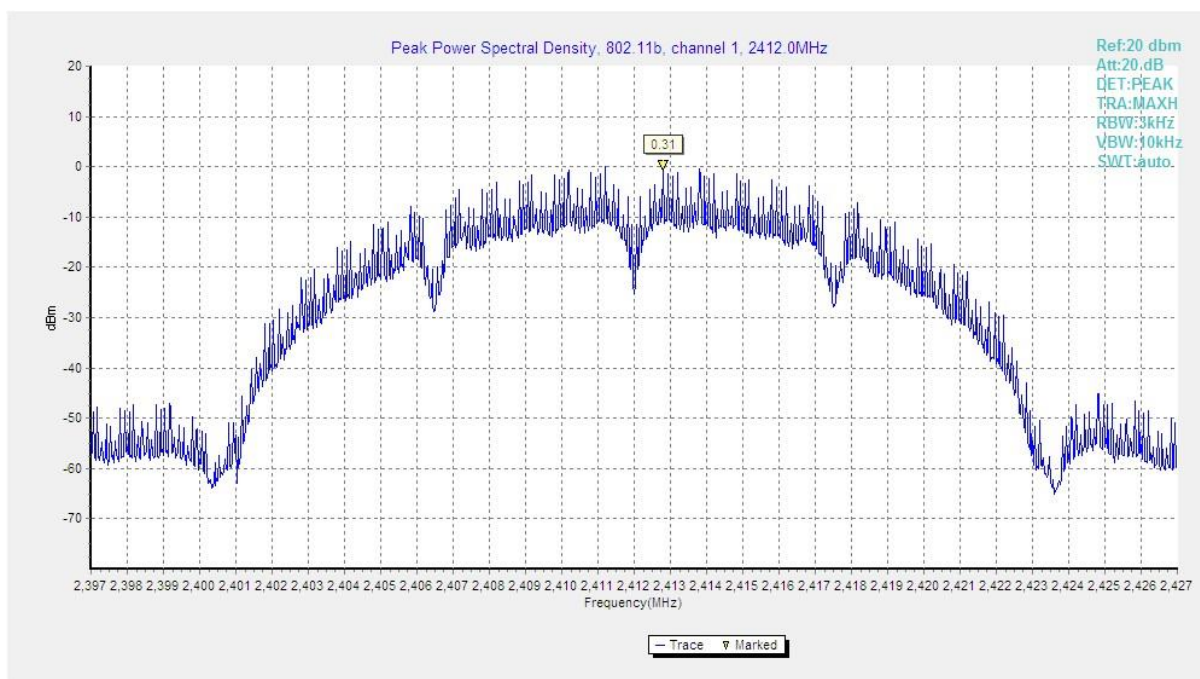


**Fig.1 Power Spectral Density (802.11b, CH 1)**

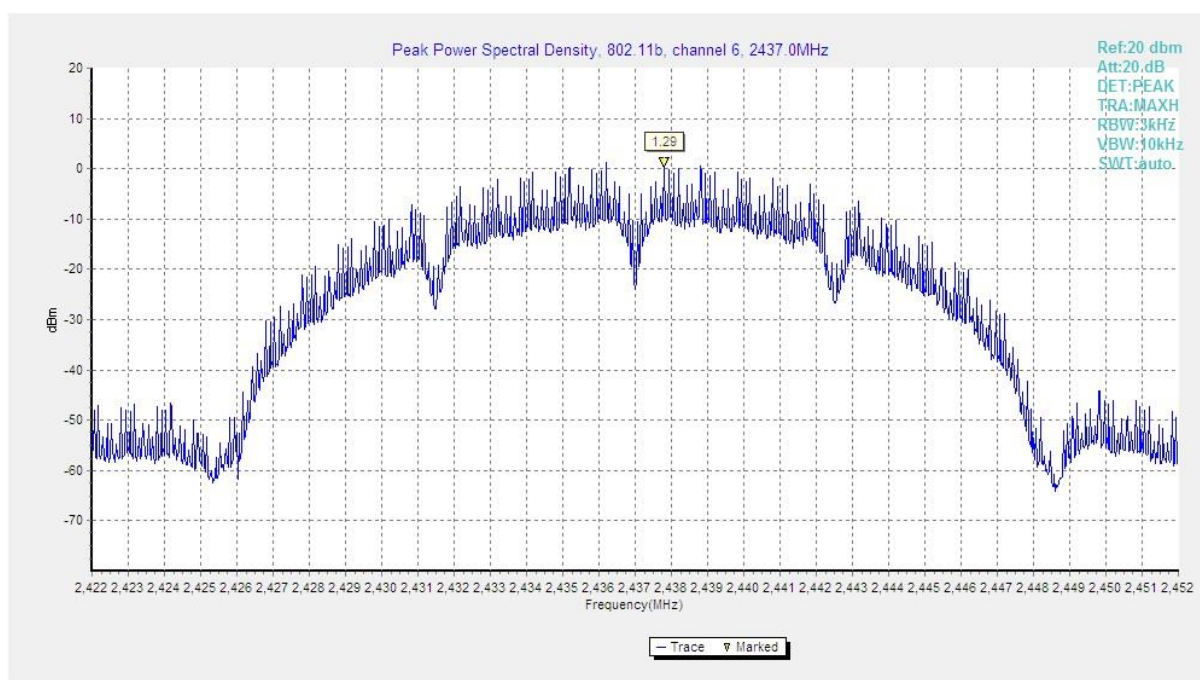


**Fig.2 Power Spectral Density (802.11b, CH 6)**



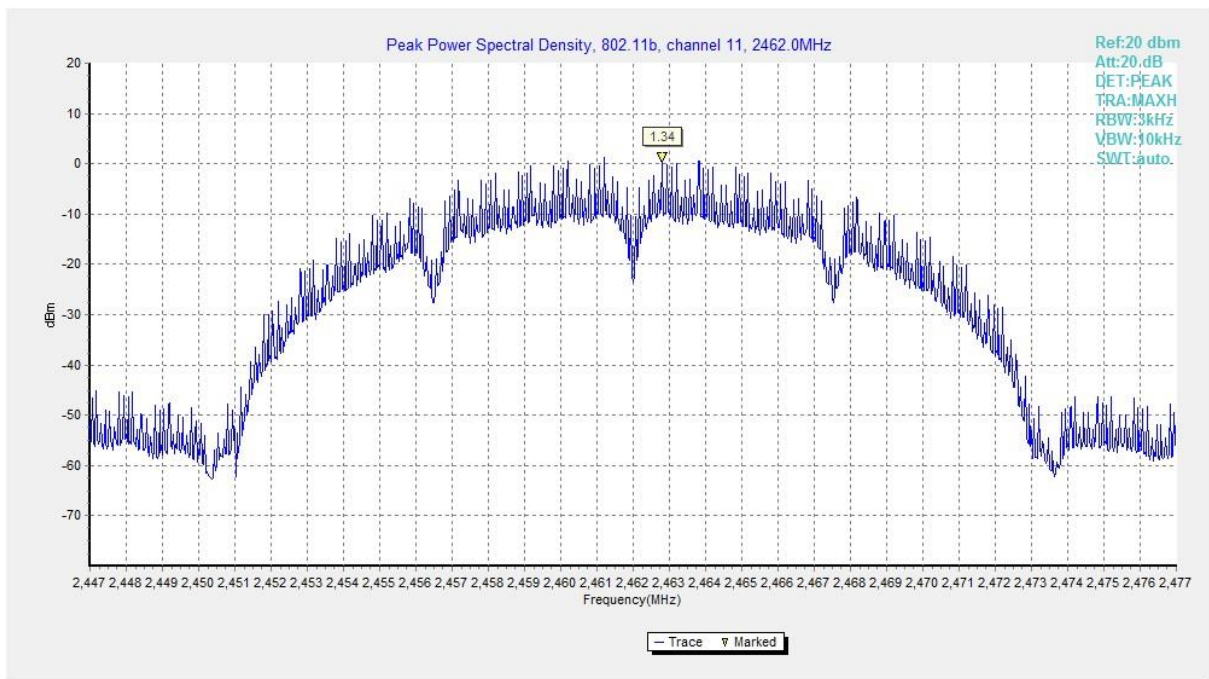


**Fig.3 Power Spectral Density (802.11b, CH 11)**

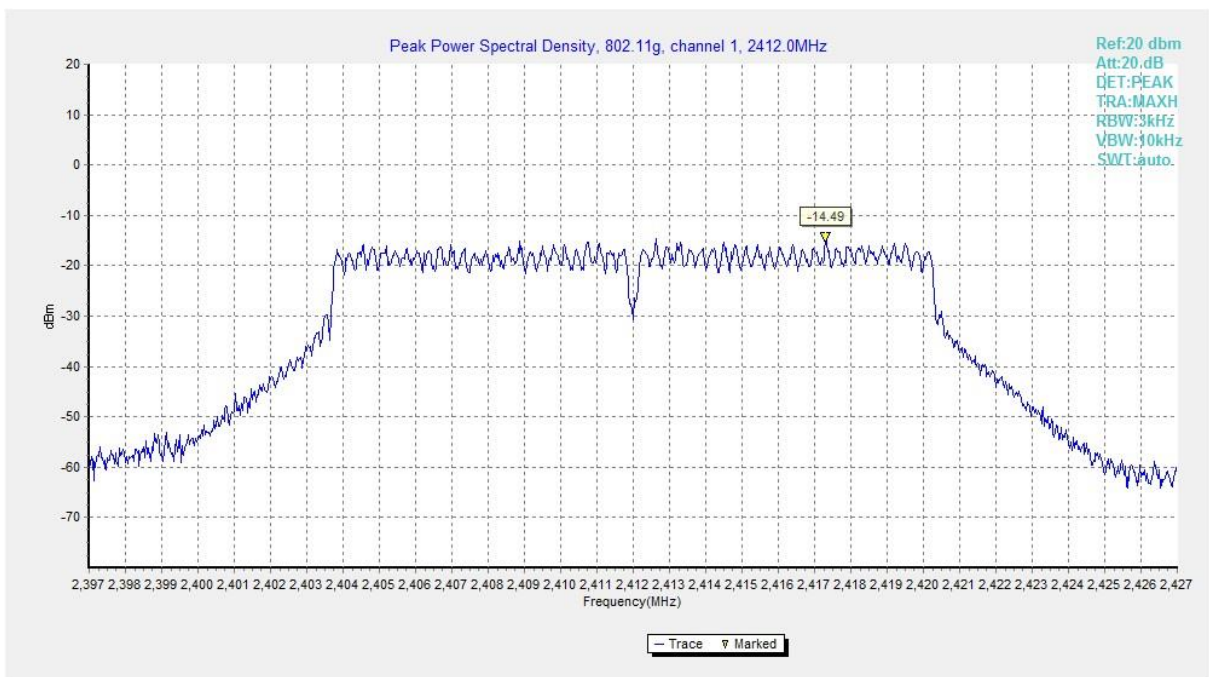


**Fig.4 Power Spectral Density (802.11g, CH 1)**




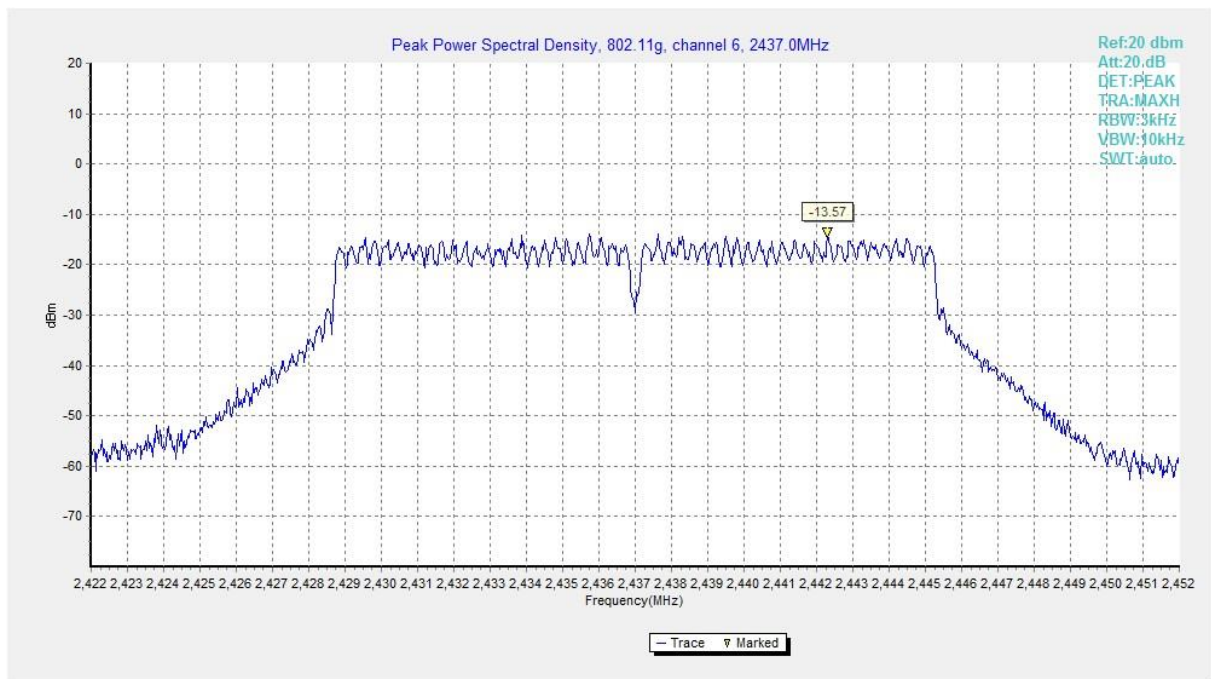


**Fig.5 Power Spectral Density (802.11g, CH 6)**

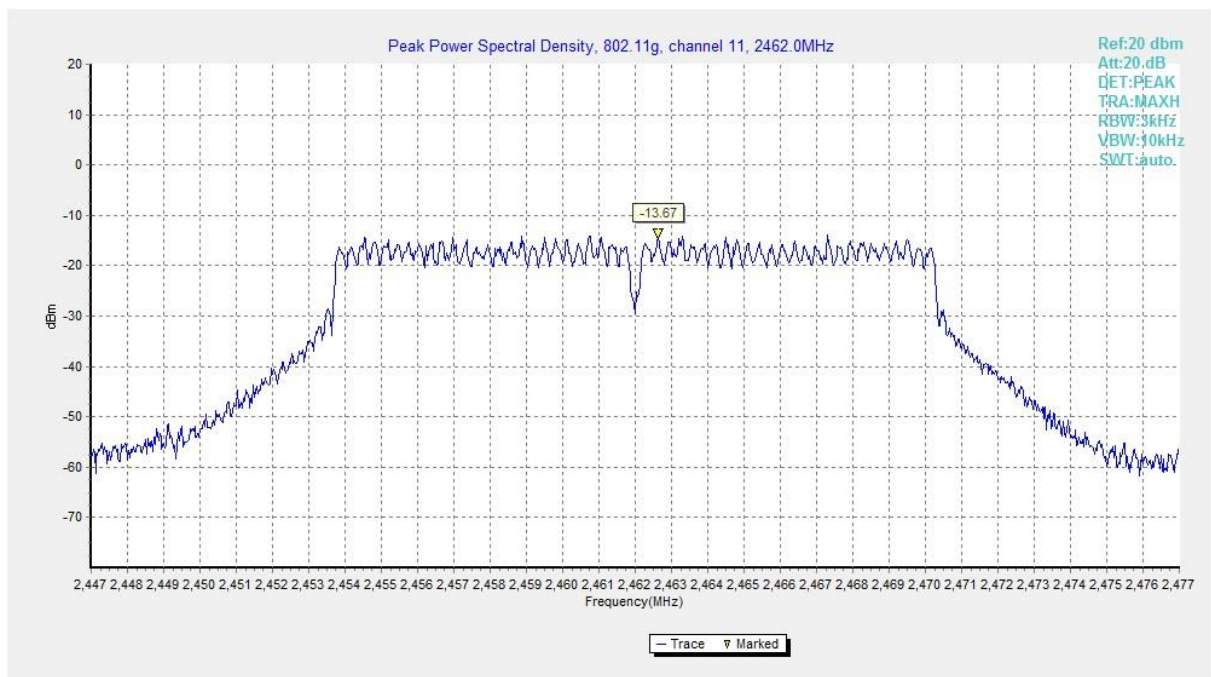


**Fig.6 Power Spectral Density (802.11g, CH 11)**

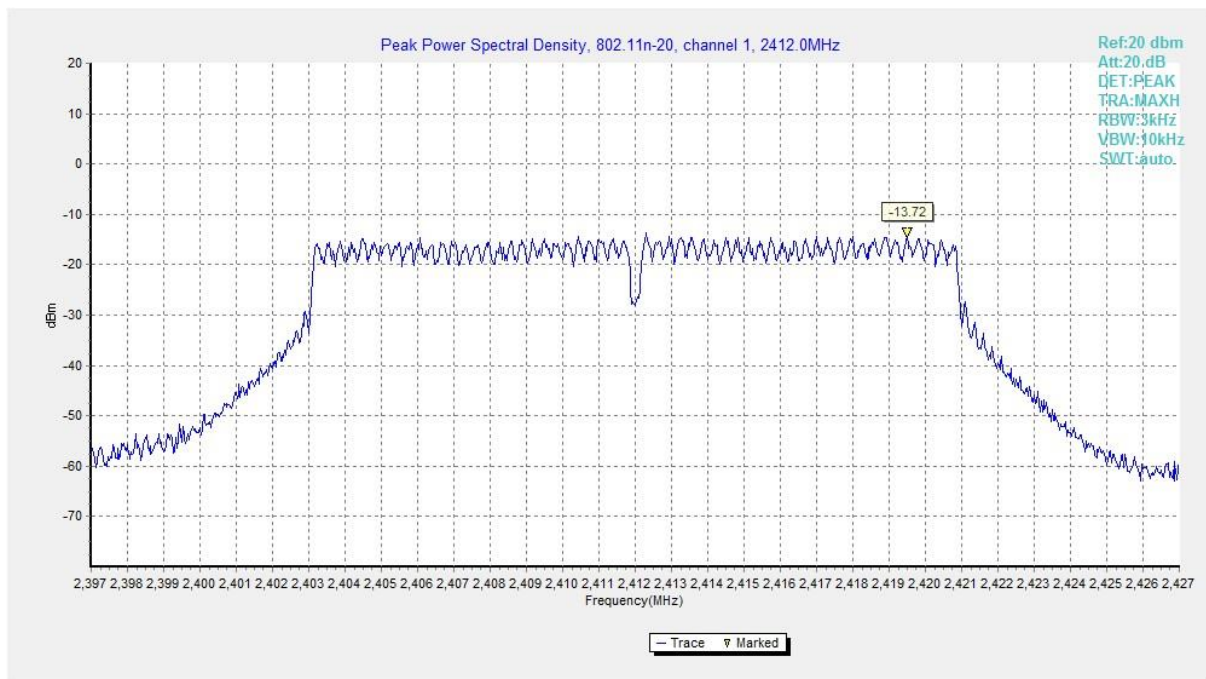


**Fig.7 Power Spectral Density (802.11n HT20, CH 1)**

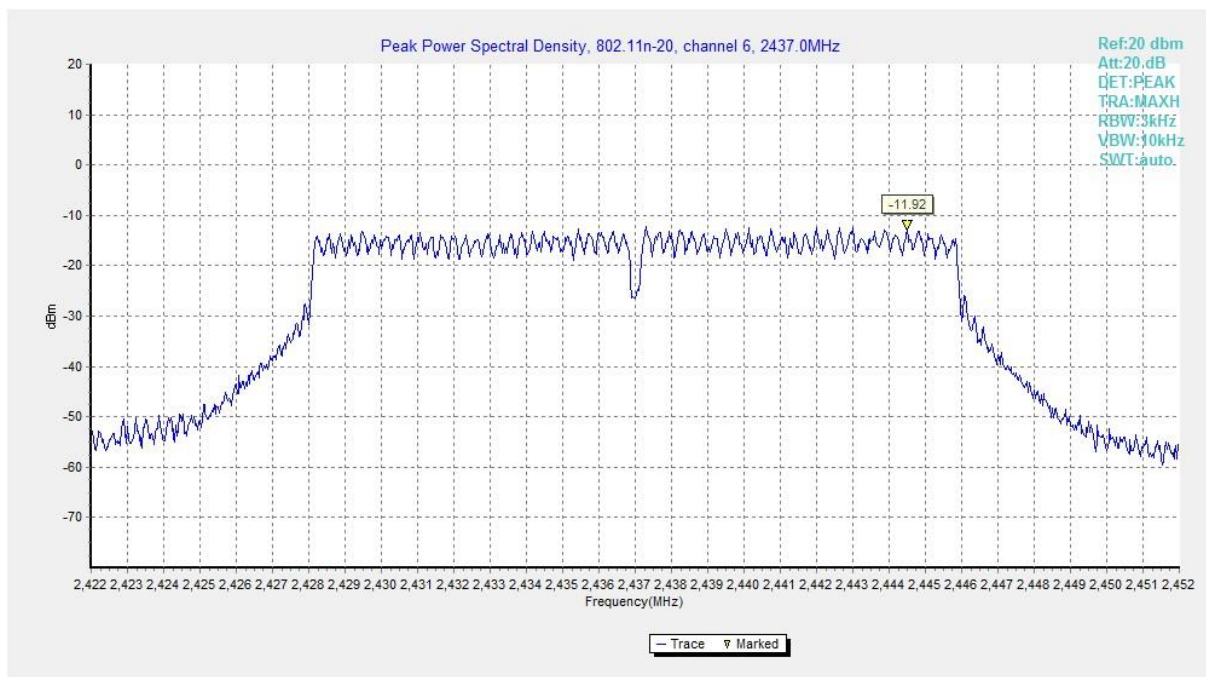

**Fig.8 Power Spectral Density (802.11n HT20, CH 6)**

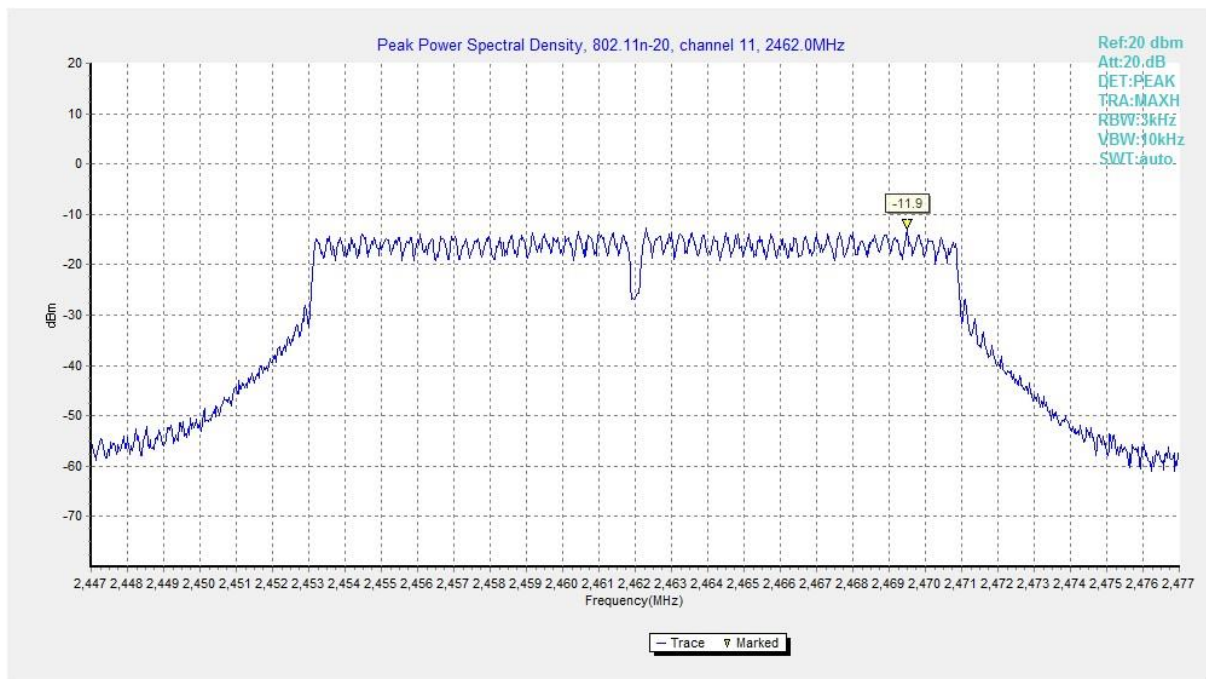


**Fig.9 Power Spectral Density (802.11n HT20, CH 11)**

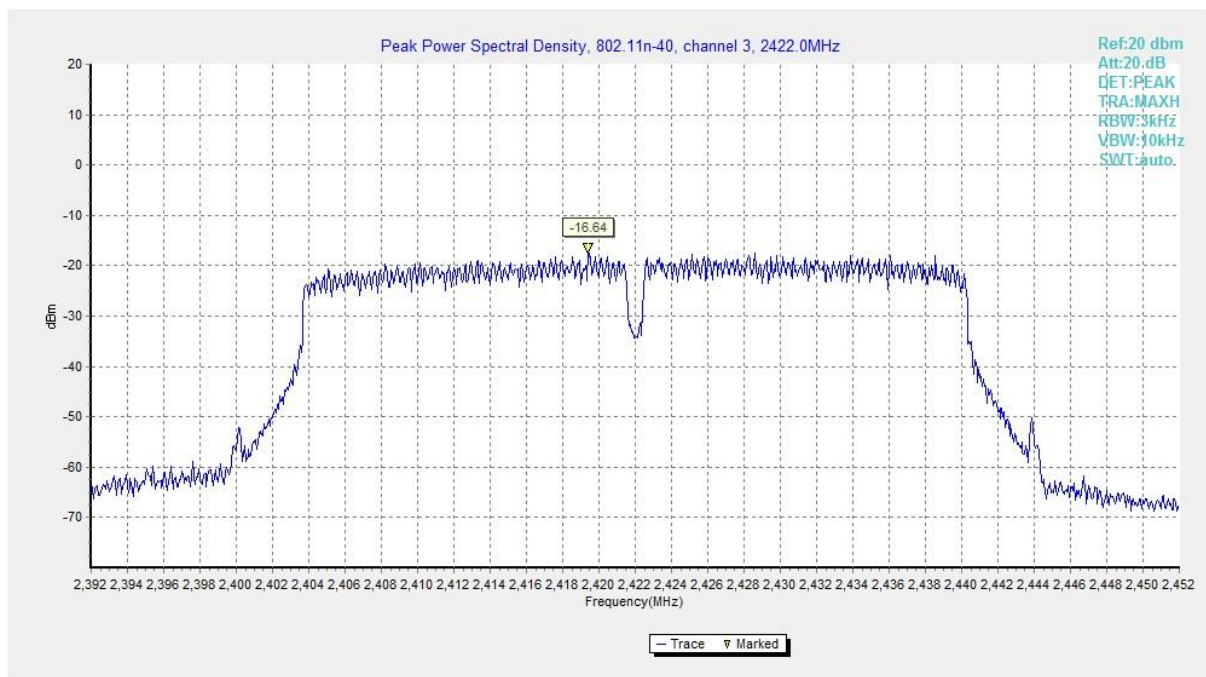


**Fig.10 Power Spectral Density (802.11n HT40, CH 3)**



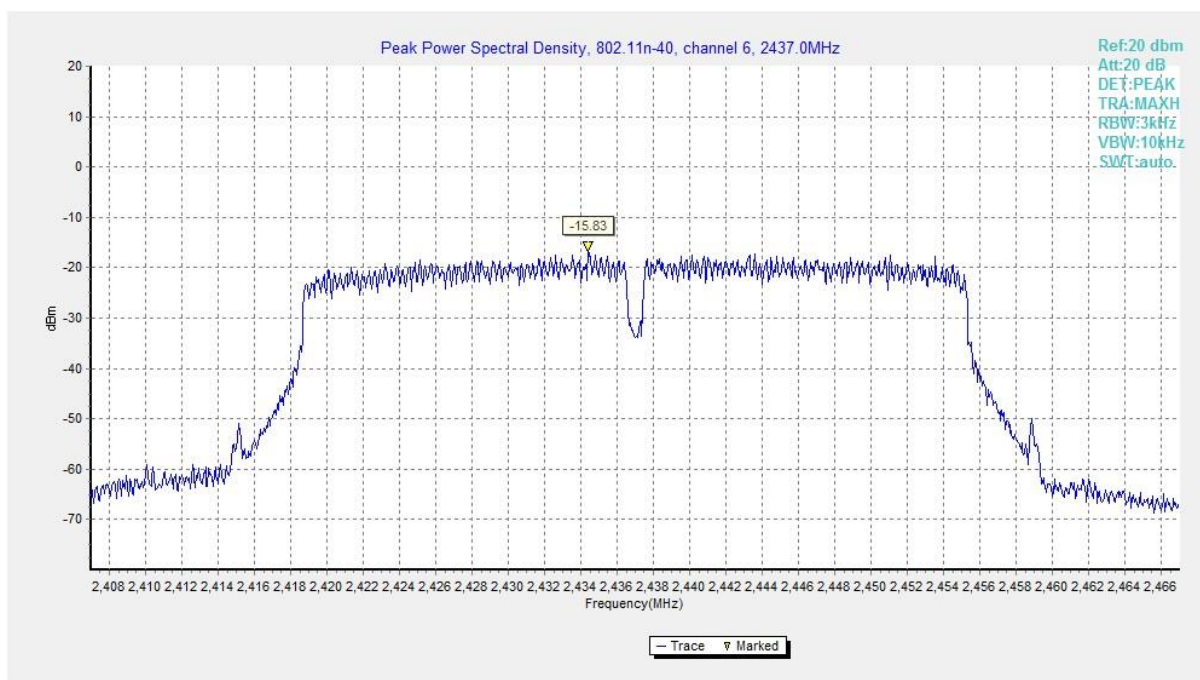

**Fig.11 Power Spectral Density (802.11n HT40, CH 6)**

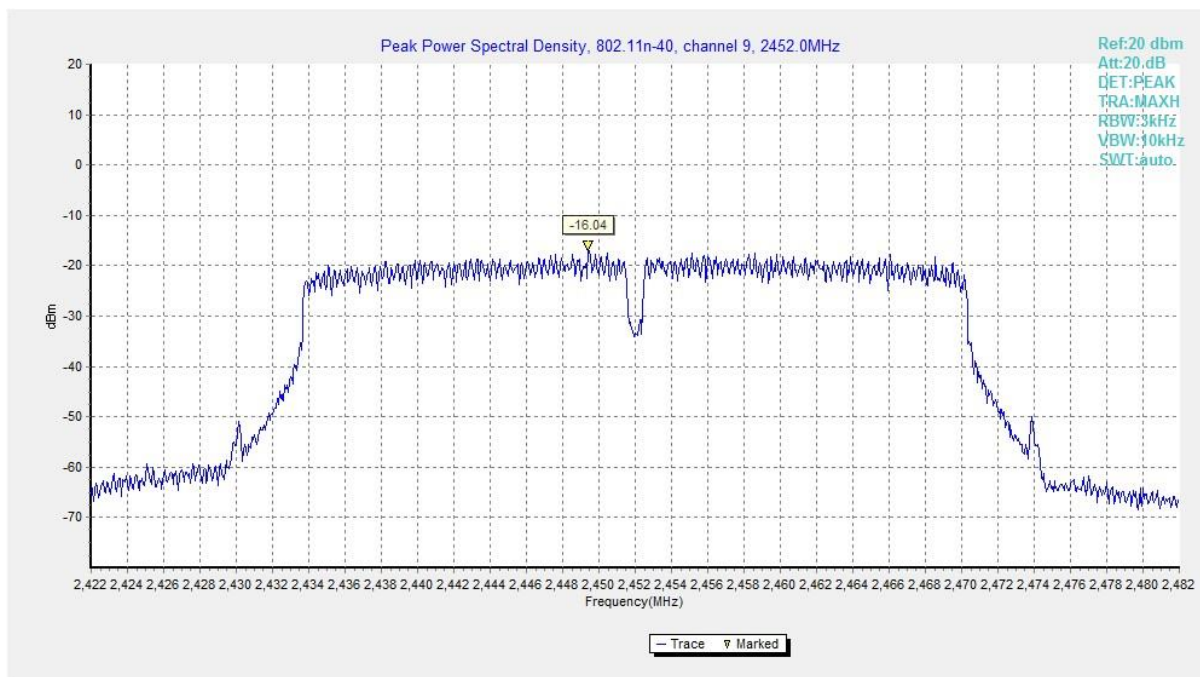

**Fig.12 Power Spectral Density (802.11n HT40, CH 9)**

### A.3 6dB Bandwidth

#### Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15.247 (a)	≥ 500

#### Measurement Result:

Mode	Channel	Frequency (MHz)	Test Results ( kHz)		Conclusion
802.11b	CH 1	2412	Fig.13	10050	<b>P</b>
	CH 6	2437	Fig.14	10500	<b>P</b>
	CH 11	2462	Fig.15	10550	<b>P</b>
802.11g	CH 1	2412	Fig.16	16350	<b>P</b>
	CH 6	2437	Fig.17	16350	<b>P</b>
	CH 11	2462	Fig.18	16350	<b>P</b>
802.11n HT20	CH 1	2412	Fig.19	17550	<b>P</b>
	CH 6	2437	Fig.20	17550	<b>P</b>
	CH 11	2462	Fig.21	17550	<b>P</b>
802.11n HT40	CH 3	2422	Fig.22	35280	<b>P</b>
	CH 6	2437	Fig.23	35280	<b>P</b>
	CH 9	2452	Fig.24	35120	<b>P</b>

See below for test graphs.

**Conclusion: PASS**

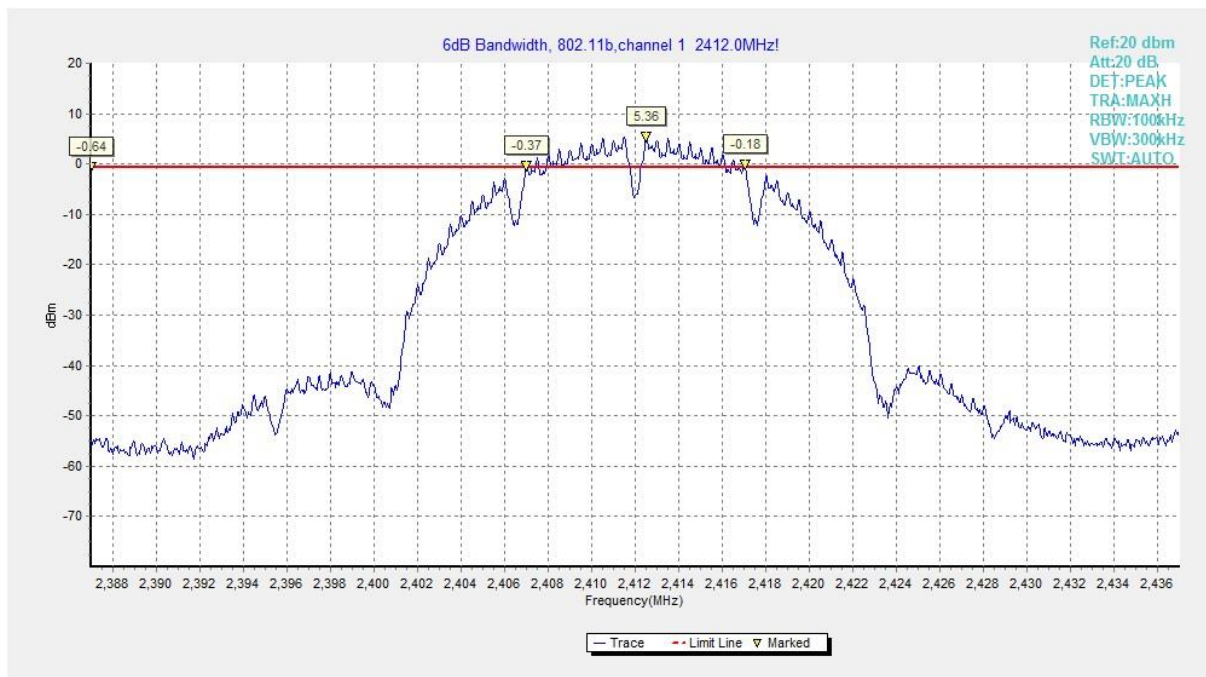


Fig.13 6dB Bandwidth (802.11b, CH 1)



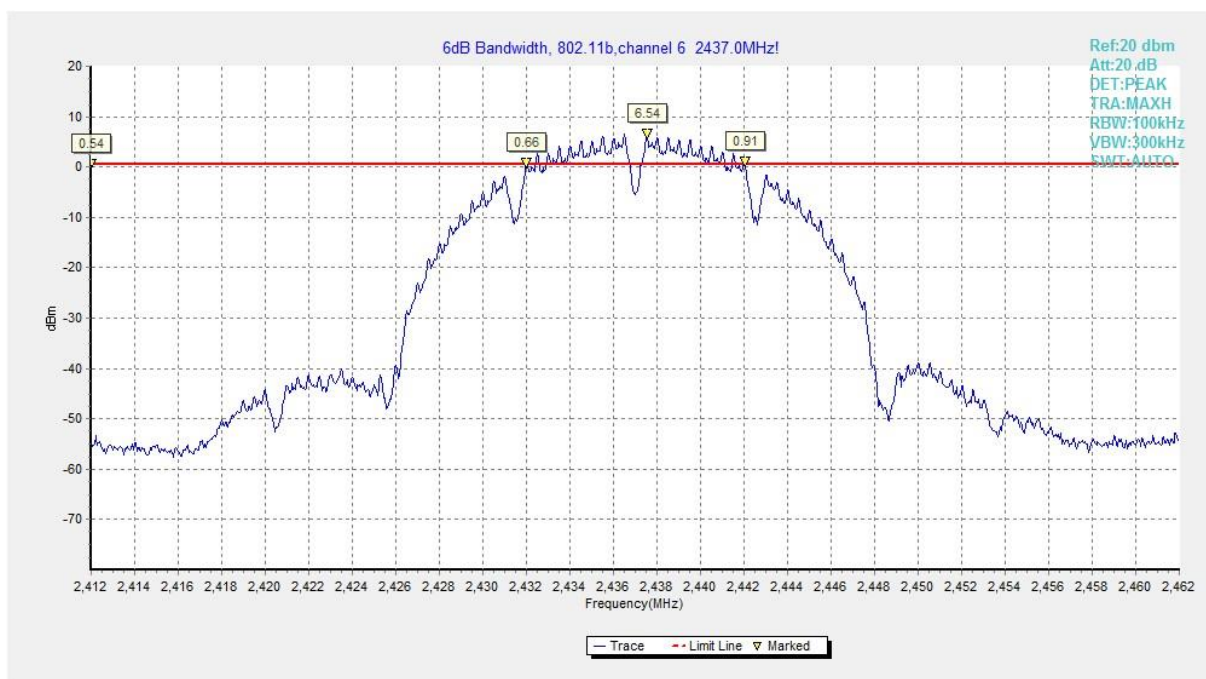


Fig.14 6dB Bandwidth (802.11b, CH 6)

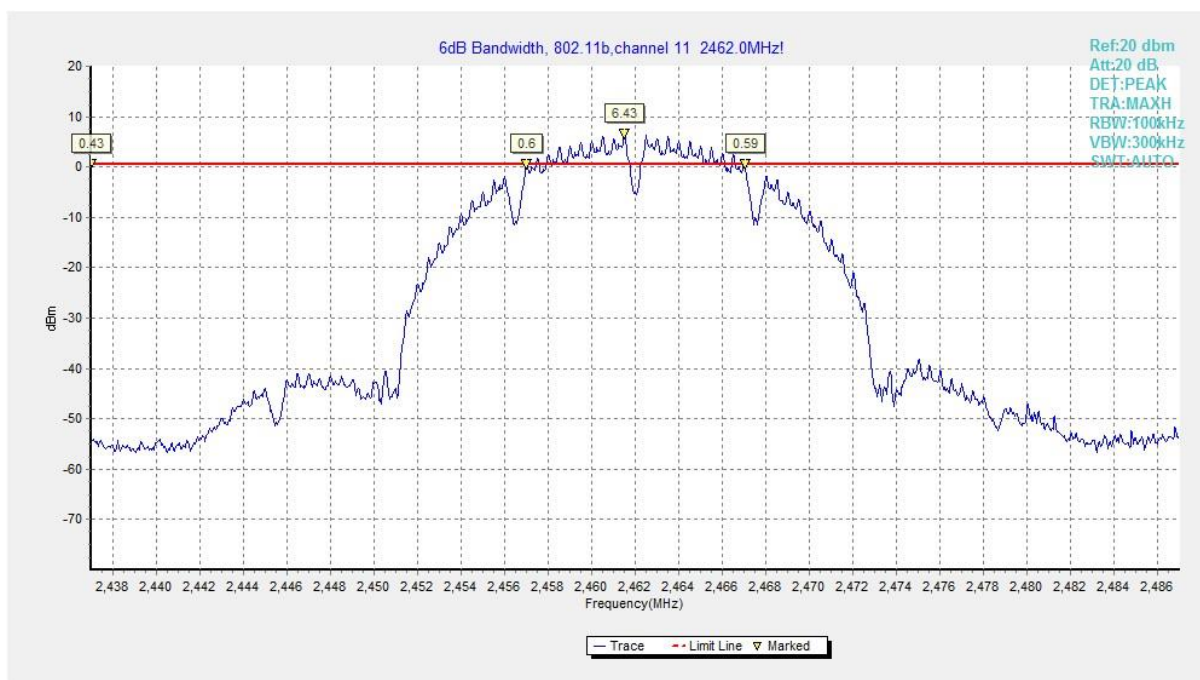

**Fig.15 6dB Bandwidth (802.11b, CH 11)**

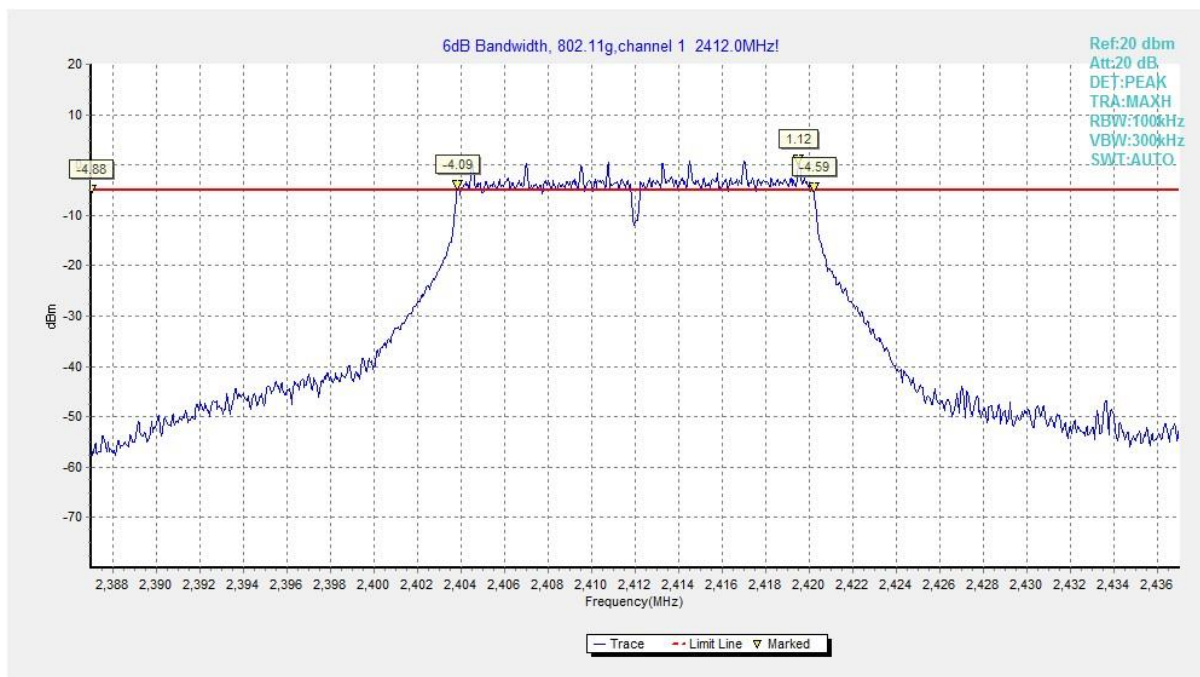

**Fig.16 6dB Bandwidth (802.11g, CH 1)**



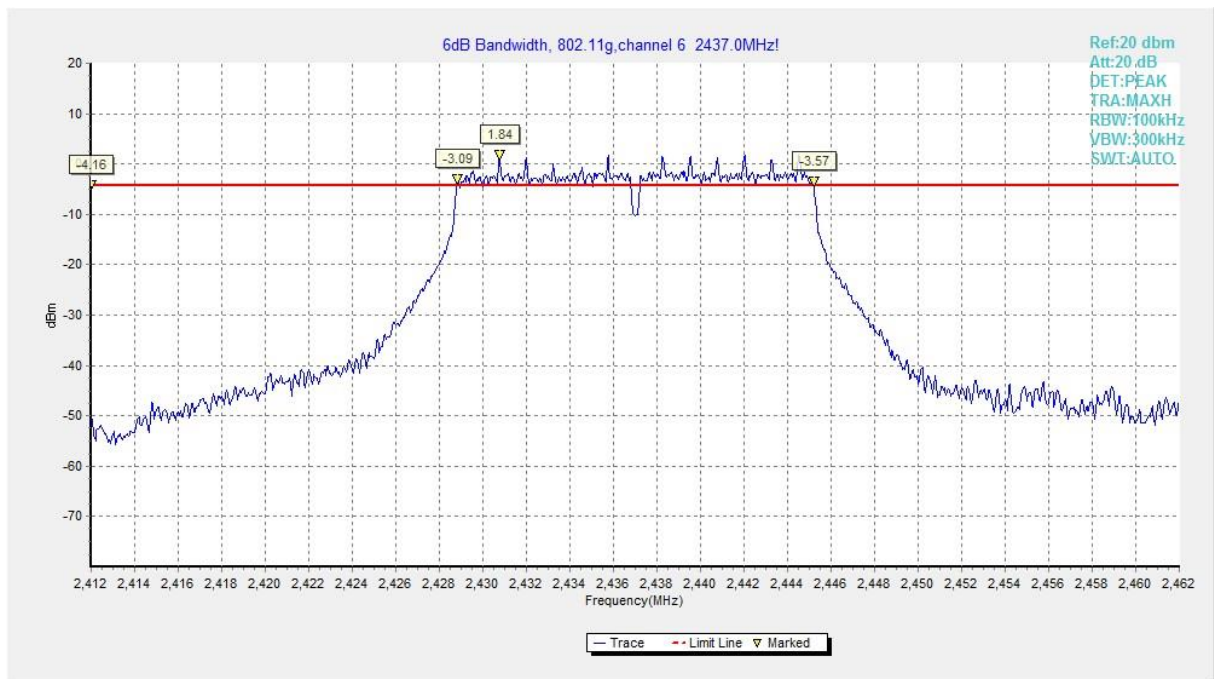


Fig.17 6dB Bandwidth (802.11g, CH 6)

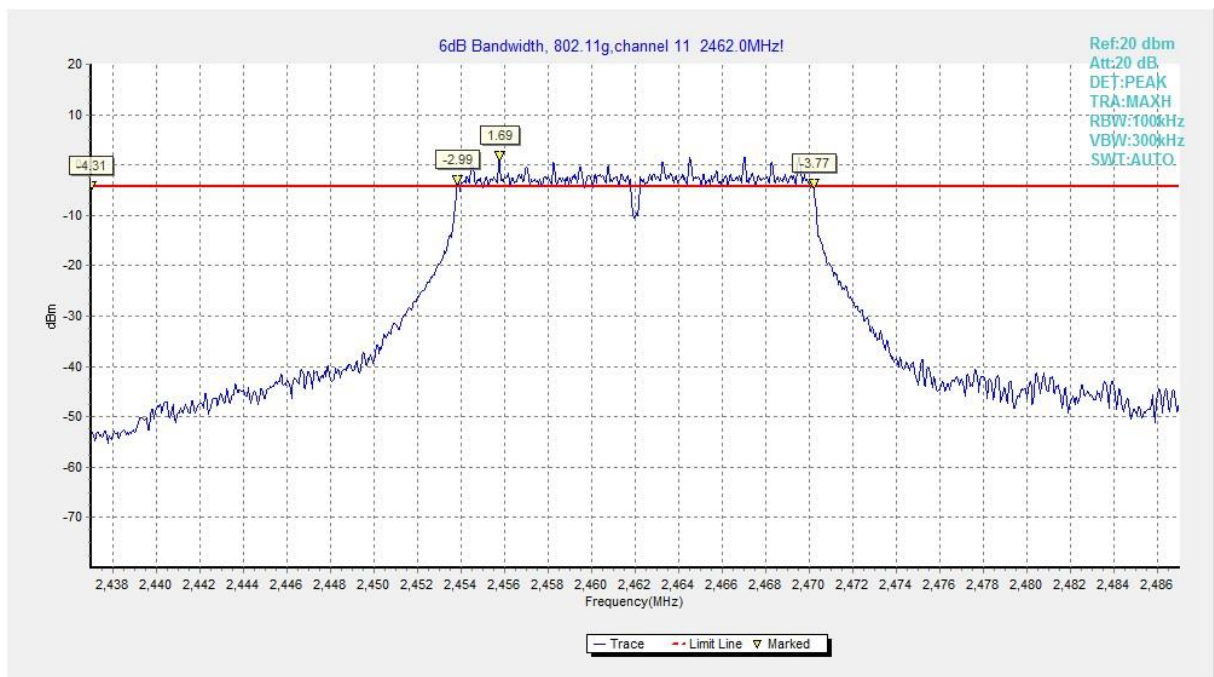


Fig.18 6dB Bandwidth (802.11g, CH 11)



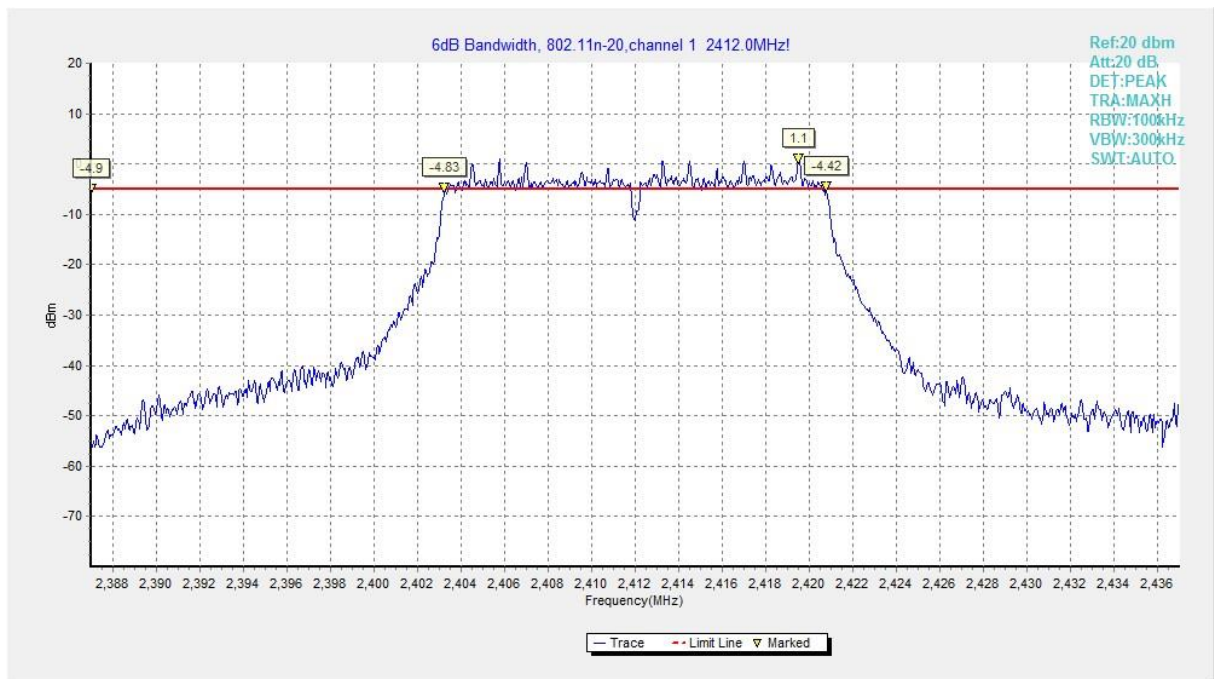


Fig.19 6dB Bandwidth (802.11n HT20, CH 1)

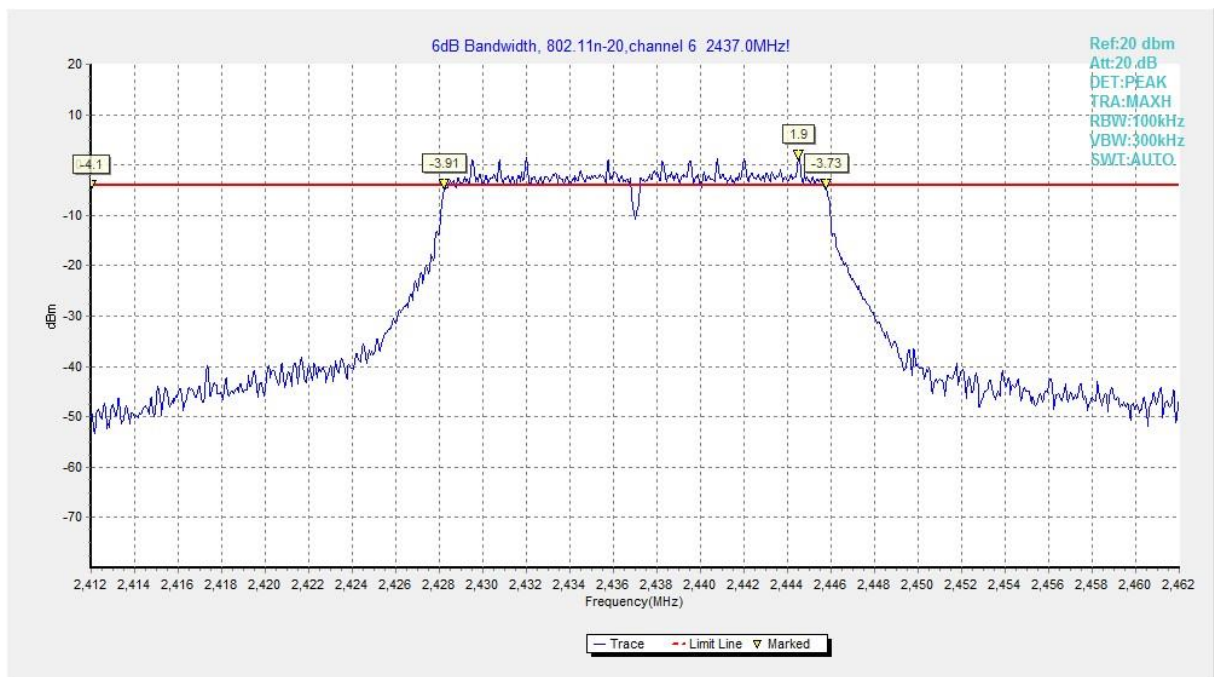


Fig.20 6dB Bandwidth (802.11n HT20, CH 6)

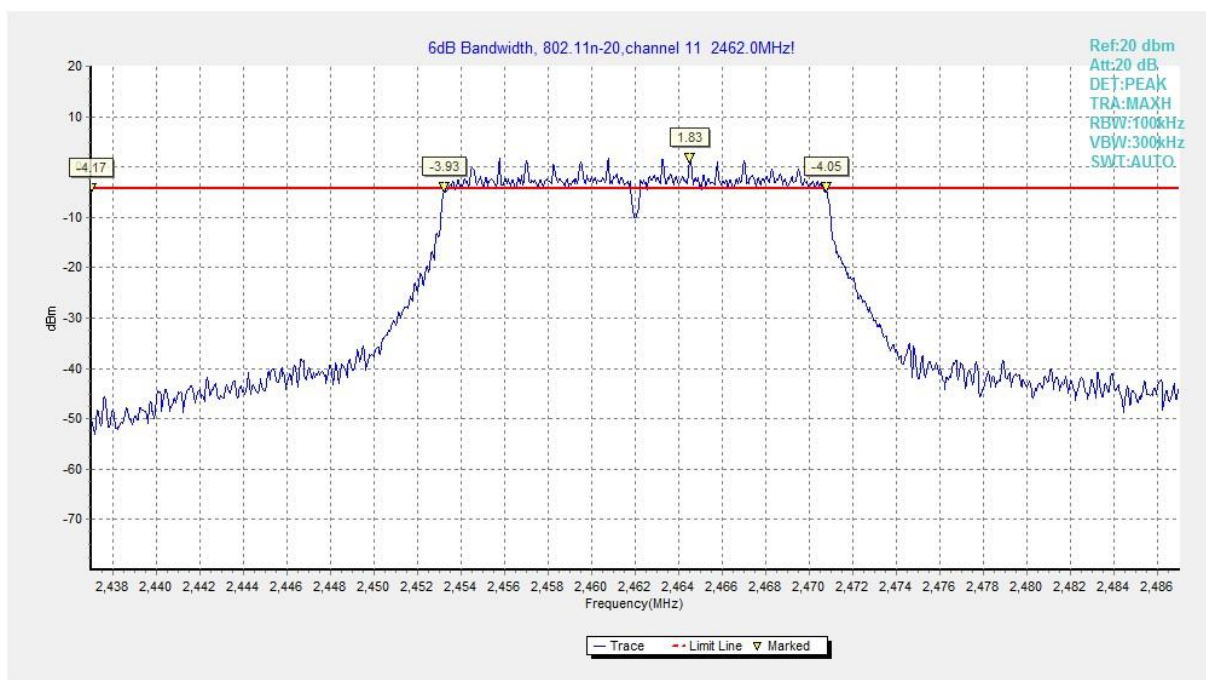


Fig.21 6dB Bandwidth (802.11n HT20, CH 11)



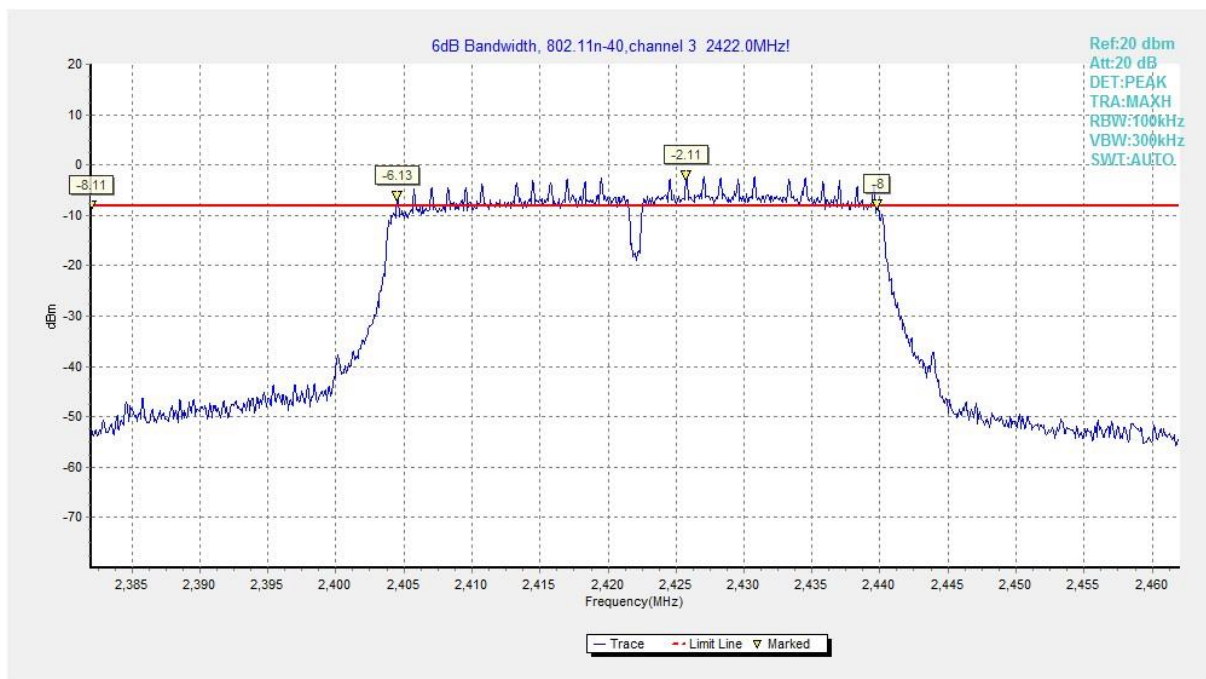


Fig.22 6dB Bandwidth (802.11n HT40, CH 3)

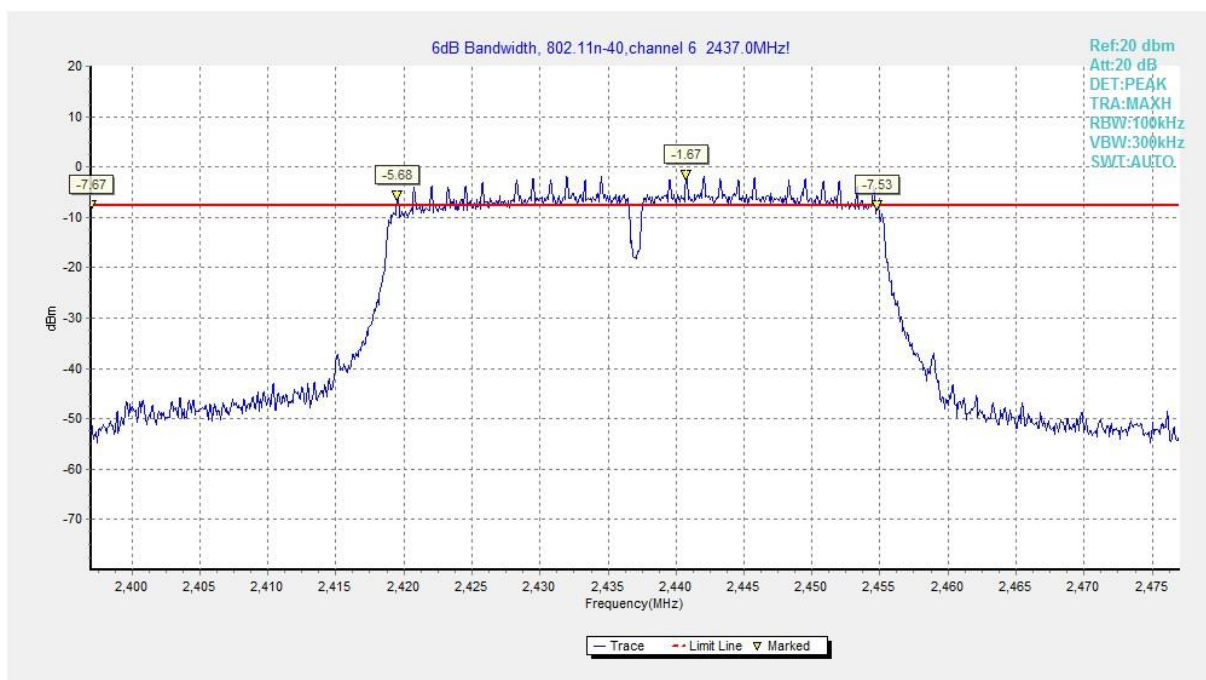

**Fig.23 6dB Bandwidth (802.11n HT40, CH 6)**

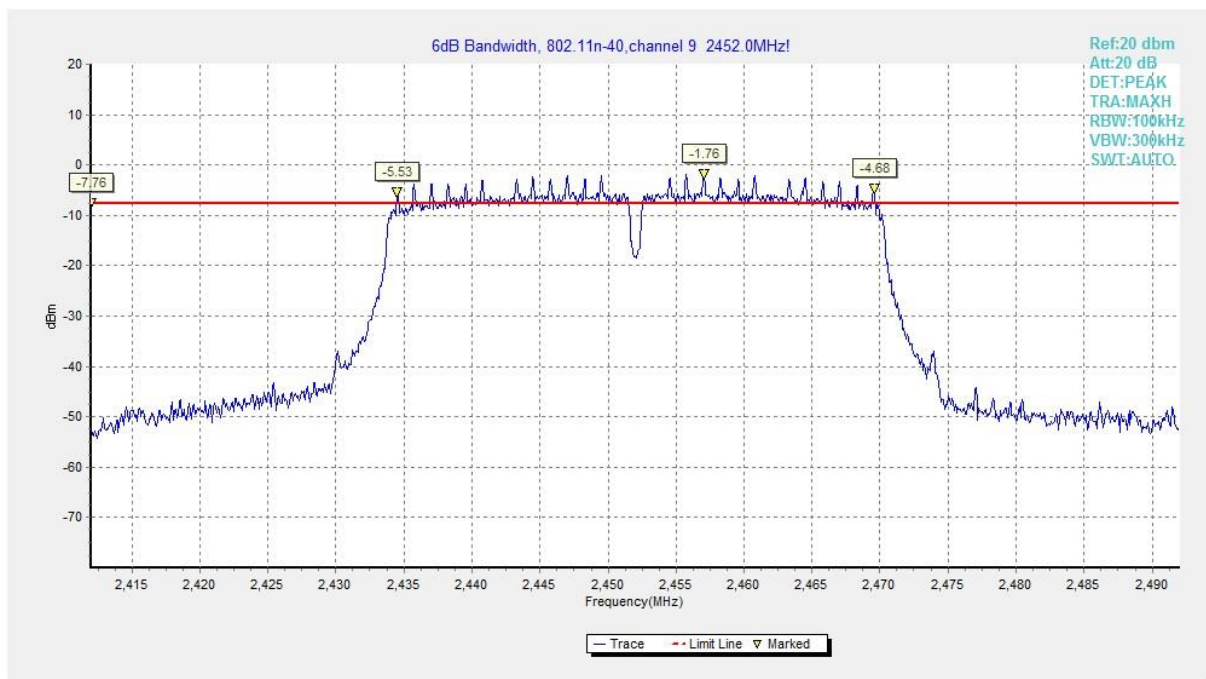

**Fig.24 6dB Bandwidth (802.11n HT40, CH 9)**

## A.4 Band Edges Compliance

### Measurement Limit:


Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	> 20

### Measurement Result:


Mode	Channel	Frequency (MHz)	Test Results (dBc)		Conclusion
802.11b	CH1	2412	Fig.25	48.61	<b>P</b>
	CH11	2462	Fig.26	61.35	<b>P</b>
802.11g	CH1	2412	Fig.27	40.72	<b>P</b>
	CH11	2462	Fig.28	44.76	<b>P</b>
802.11n HT20	CH1	2412	Fig.29	39.50	<b>P</b>
	CH11	2462	Fig.30	45.27	<b>P</b>
802.11n HT40	CH3	2422	Fig.31	38.37	<b>P</b>
	CH9	2452	Fig.32	48.41	<b>P</b>

See below for test graphs.

**Conclusion: PASS**

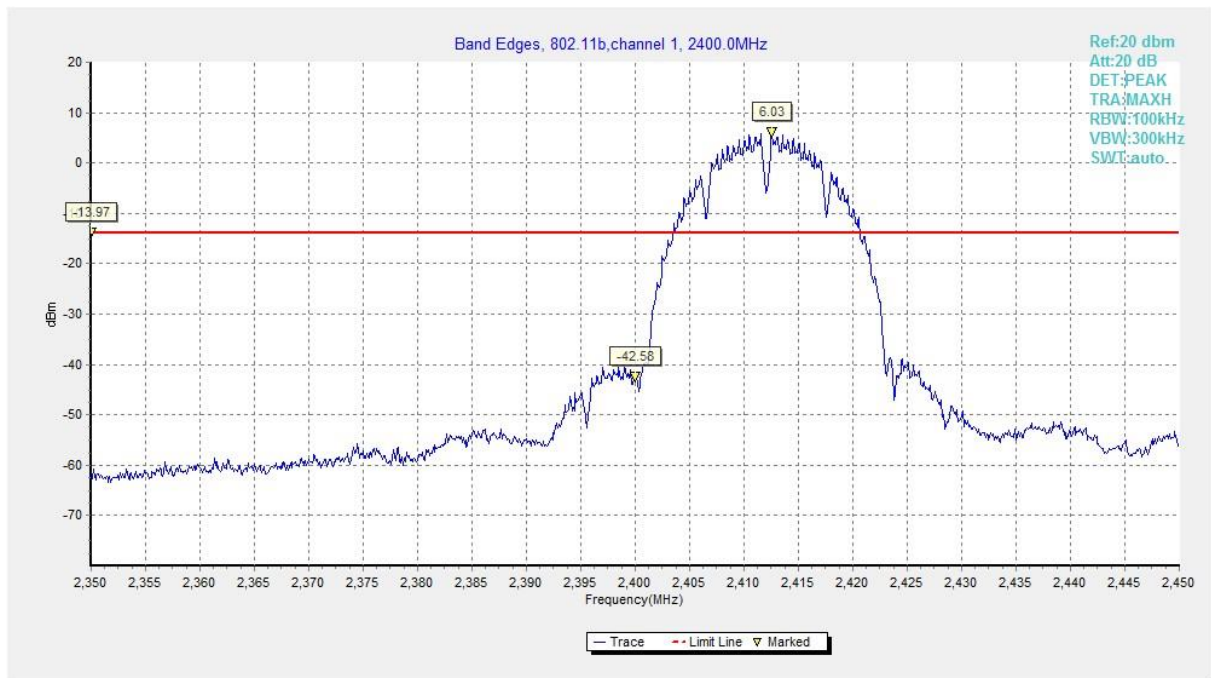


**Fig.25 Band Edges (802.11b, CH 1)**

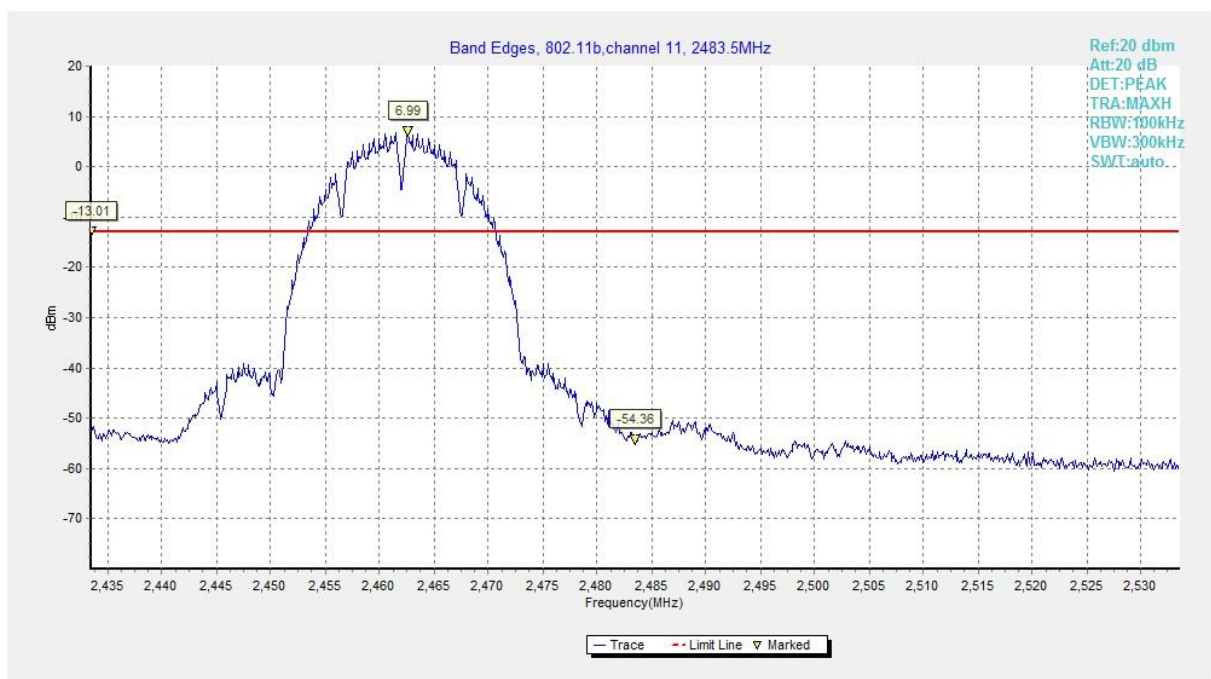


**Fig.26 Band Edges (802.11b, CH 11)**




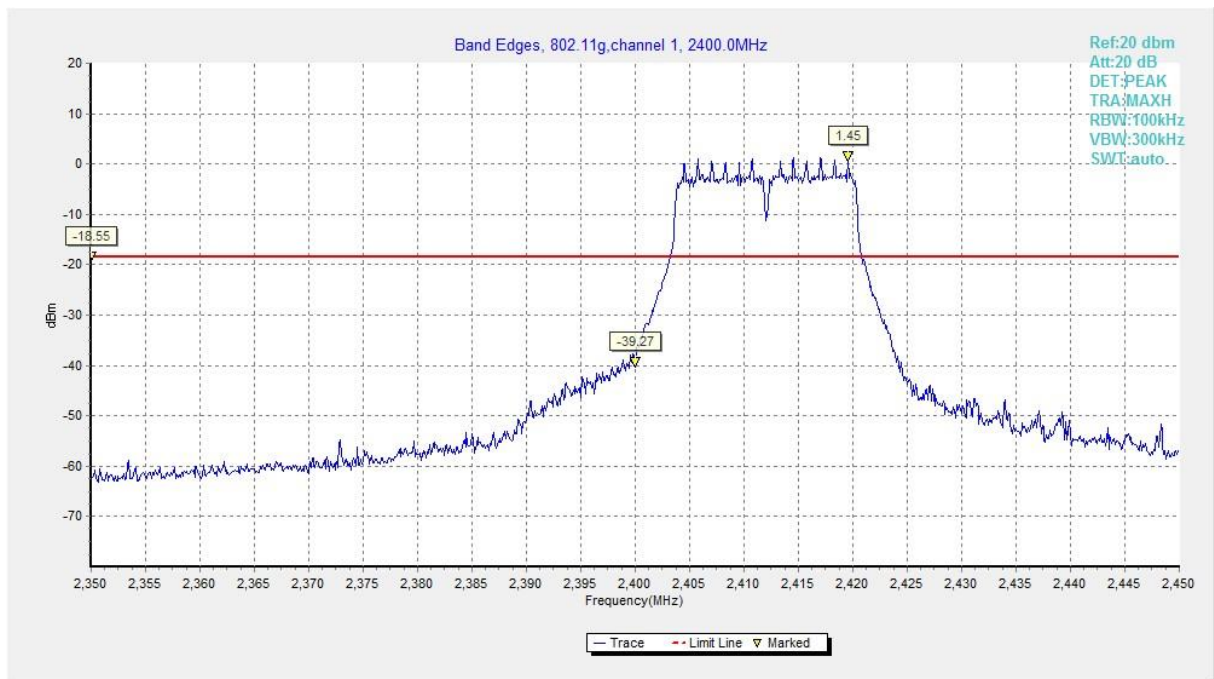


**Fig.27 Band Edges (802.11g, CH 1)**

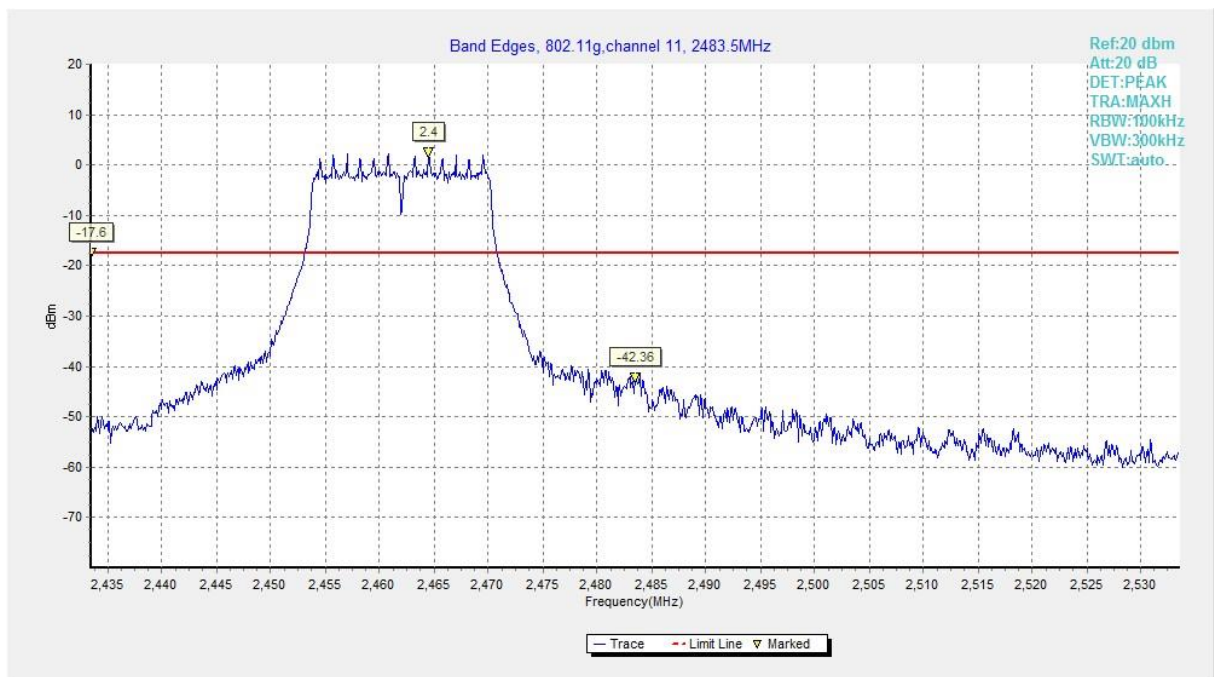


**Fig.28 Band Edges (802.11g, CH 11)**

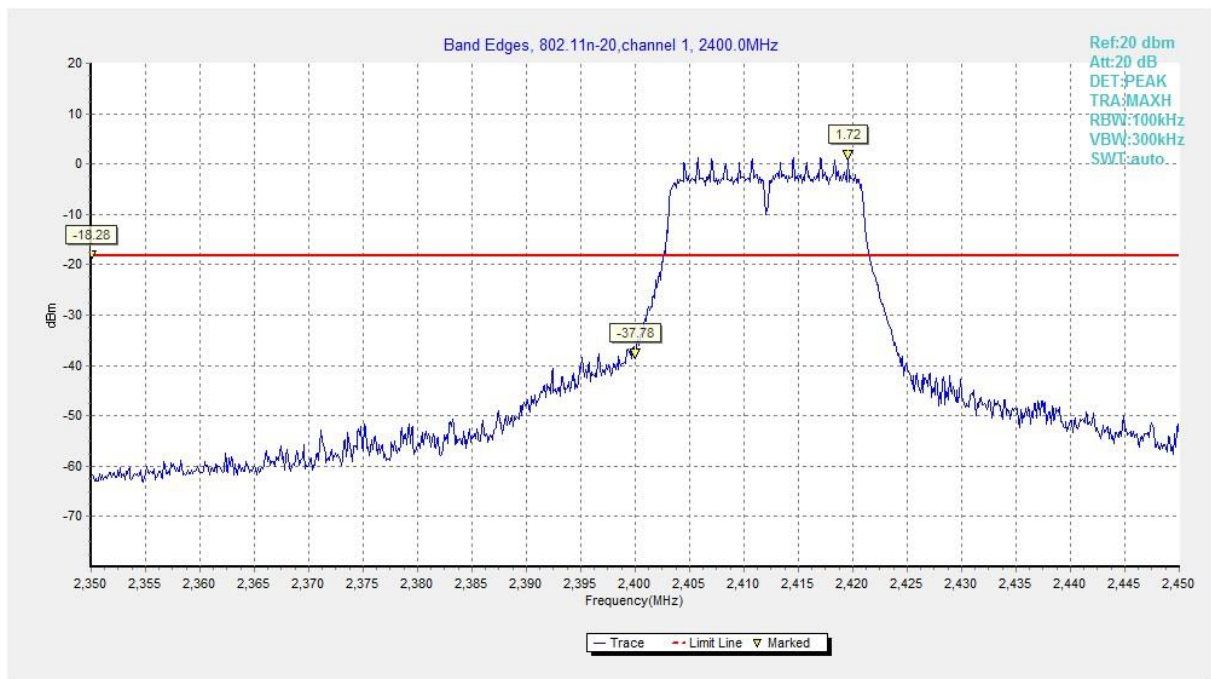


**Fig.29 Band Edges (802.11n HT20, CH 1)**

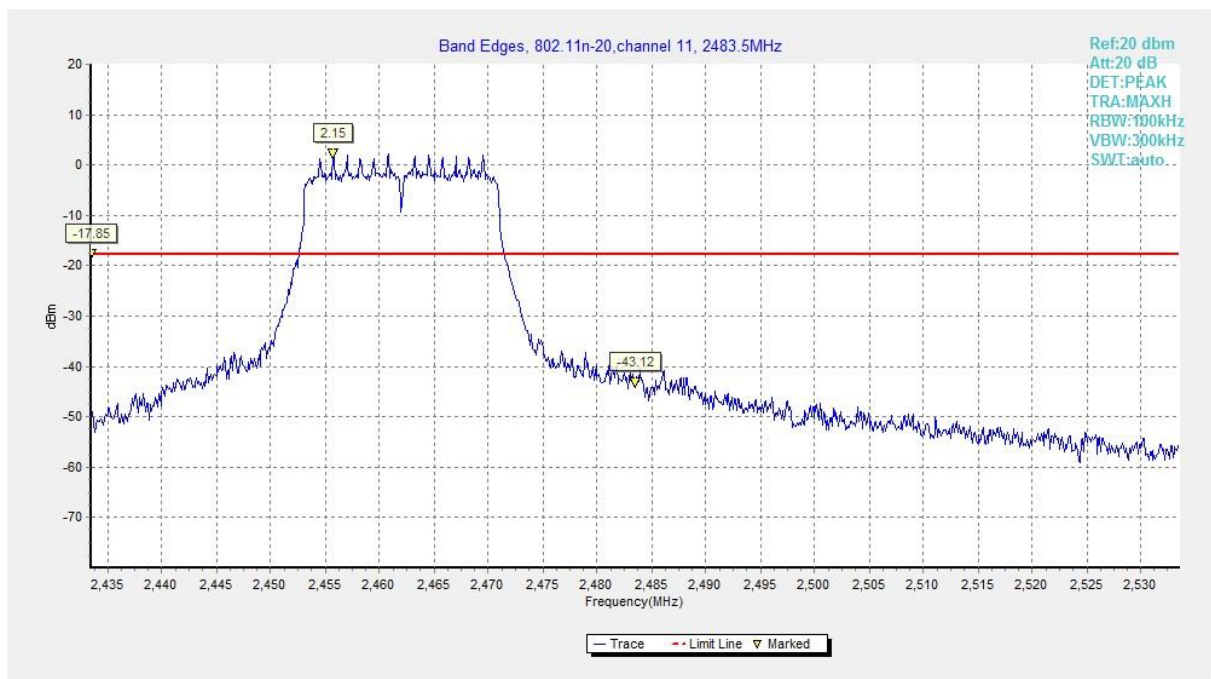

**Fig.30 Band Edges (802.11n HT20, CH 11)**

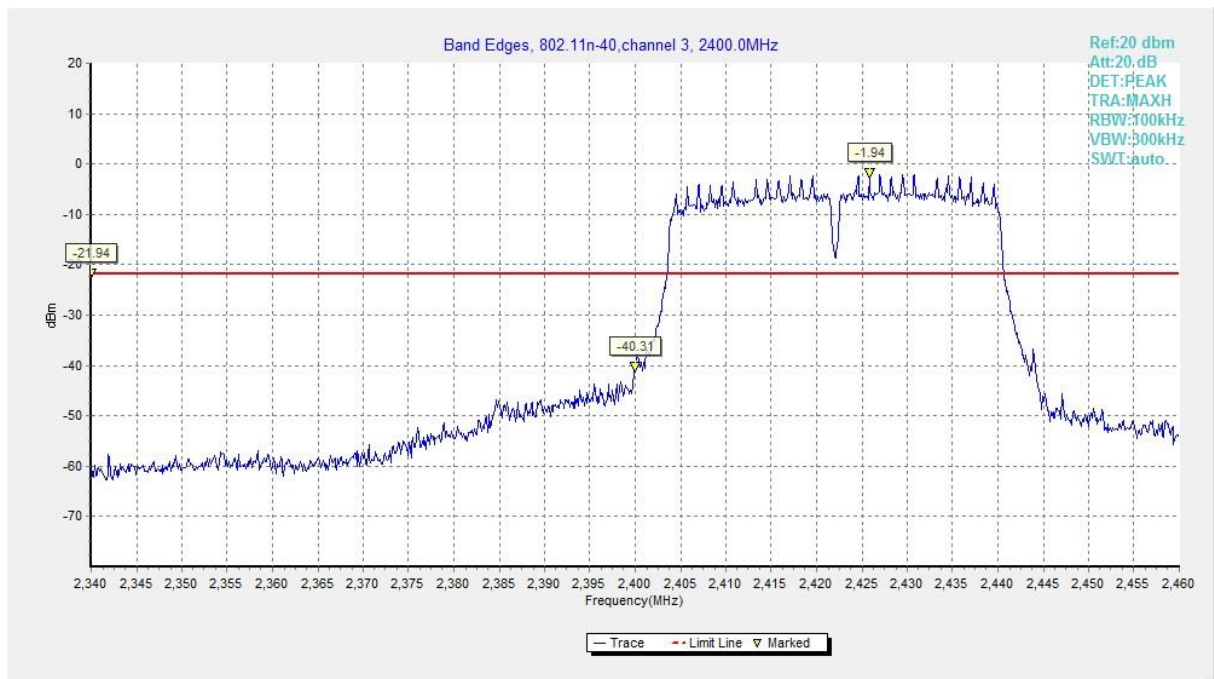

**Fig.31 Band Edges (802.11n HT40, CH 3)**

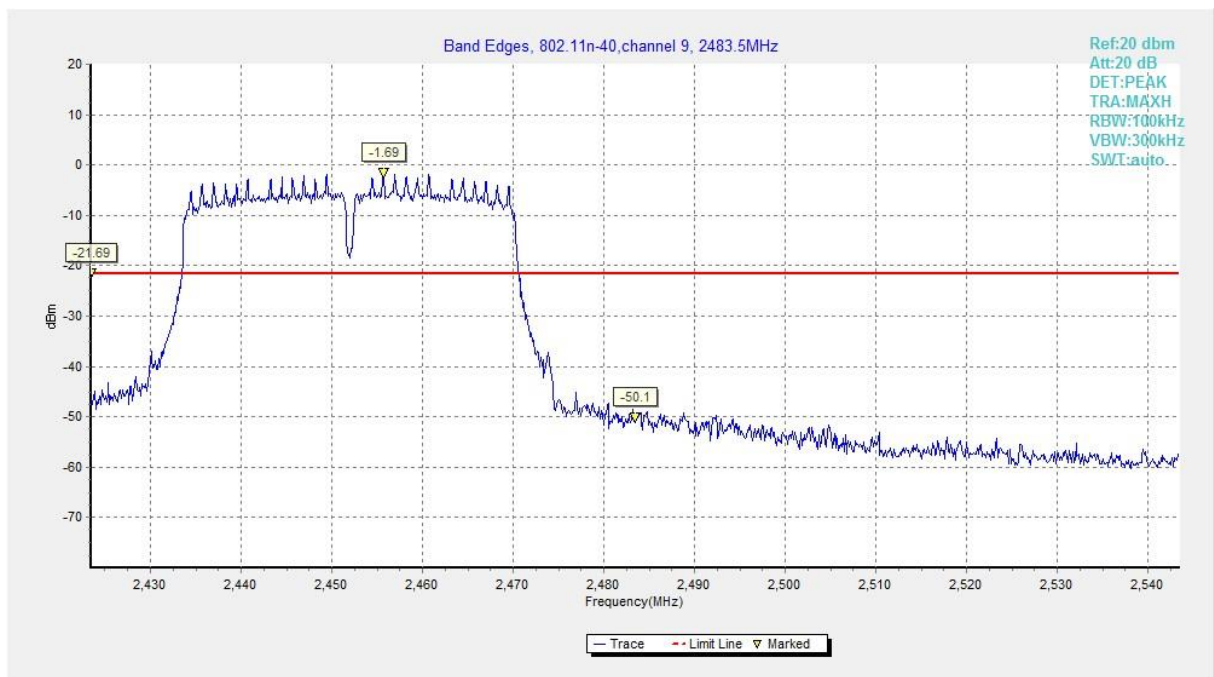

**Fig.32 Band Edges (802.11n HT40, CH 9)**



## A.5 Conducted Emission

### Measurement Limit:


Standard	Limit
FCC 47 CFR Part 15.247 (d)	20dB below peak output power in 100 kHz bandwidth

### Measurement Results:


Mode	Channel	Frequency (MHz)	Frequency Range	Test Results	Conclusion
802.11b	CH 1	2412	30MHz-26GHz	Fig.33	<b>P</b>
	CH 6	2437	30MHz-26GHz	Fig.34	<b>P</b>
	CH 11	2462	30MHz-26GHz	Fig.35	<b>P</b>
802.11g	CH 1	2412	30MHz-26GHz	Fig.36	<b>P</b>
	CH 6	2437	30MHz-26GHz	Fig.37	<b>P</b>
	CH 11	2462	30MHz-26GHz	Fig.38	<b>P</b>
802.11n HT20	CH 1	2412	30MHz-26GHz	Fig.39	<b>P</b>
	CH 6	2437	30MHz-26GHz	Fig.40	<b>P</b>
	CH 11	2462	30MHz-26GHz	Fig.41	<b>P</b>
802.11n HT40	CH 3	2422	30MHz-26GHz	Fig.42	<b>P</b>
	CH 6	2437	30MHz-26GHz	Fig.43	<b>P</b>
	CH 9	2452	30MHz-26GHz	Fig.44	<b>P</b>

See below for test graphs.


**Conclusion: PASS**

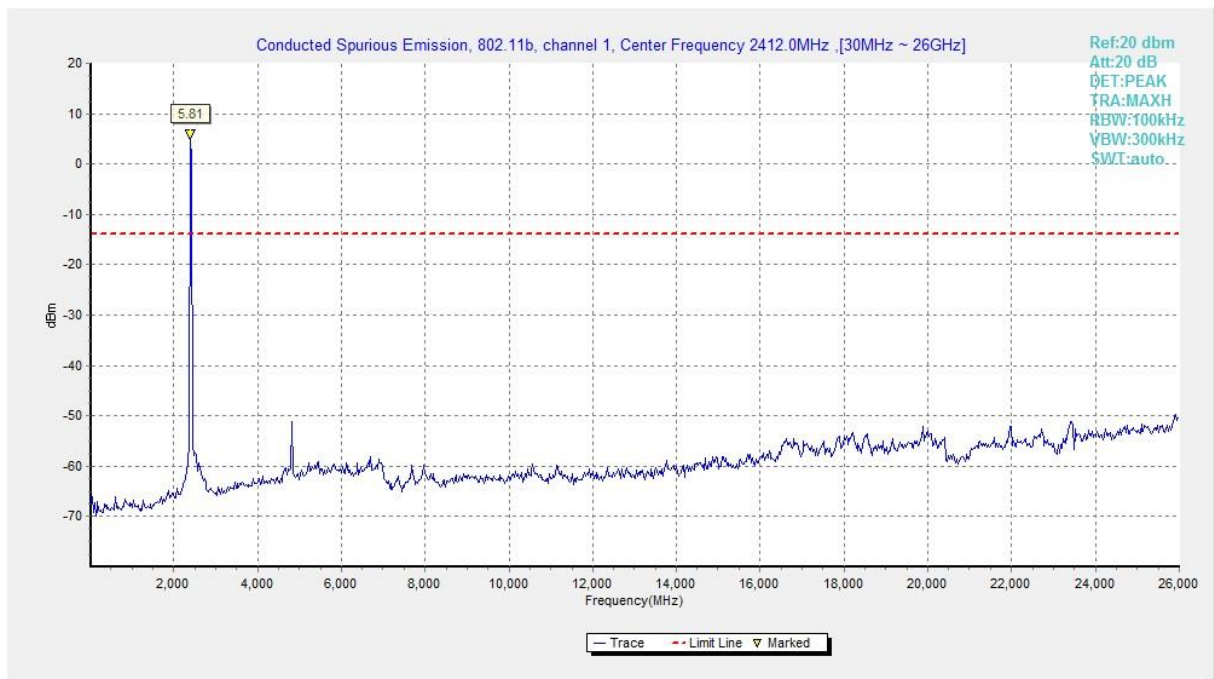


**Fig.33 Conducted Spurious Emission (802.11b, CH1)**

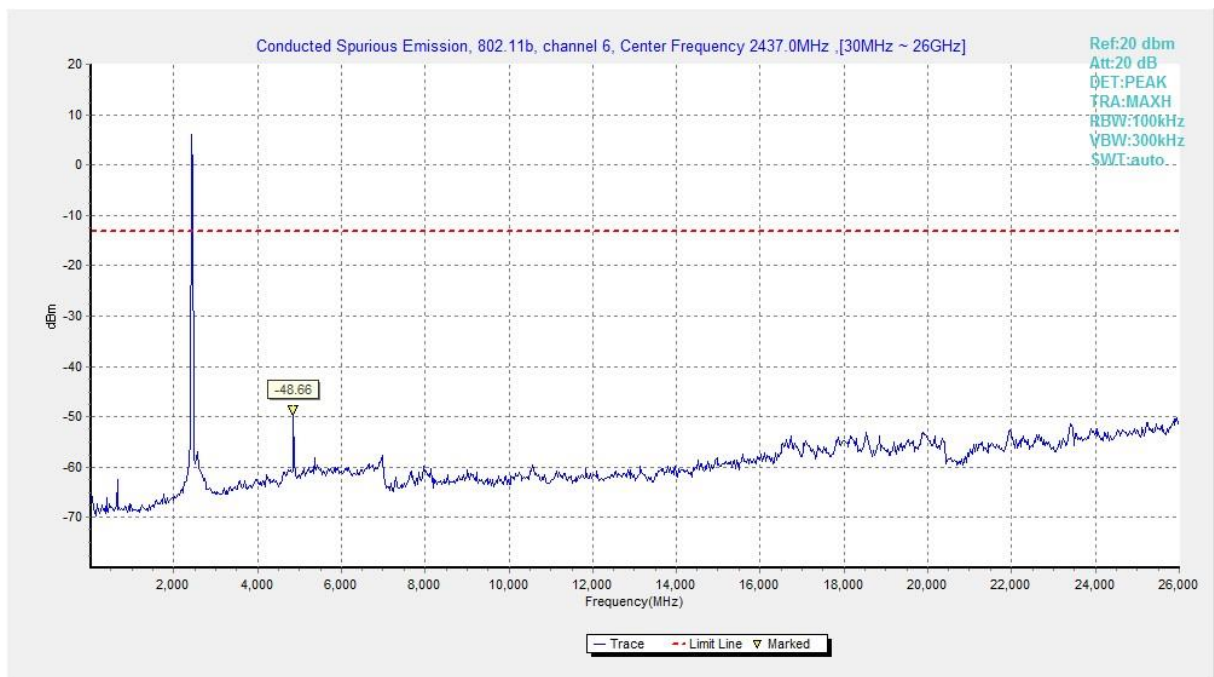


**Fig.34 Conducted Spurious Emission (802.11b, CH6)**

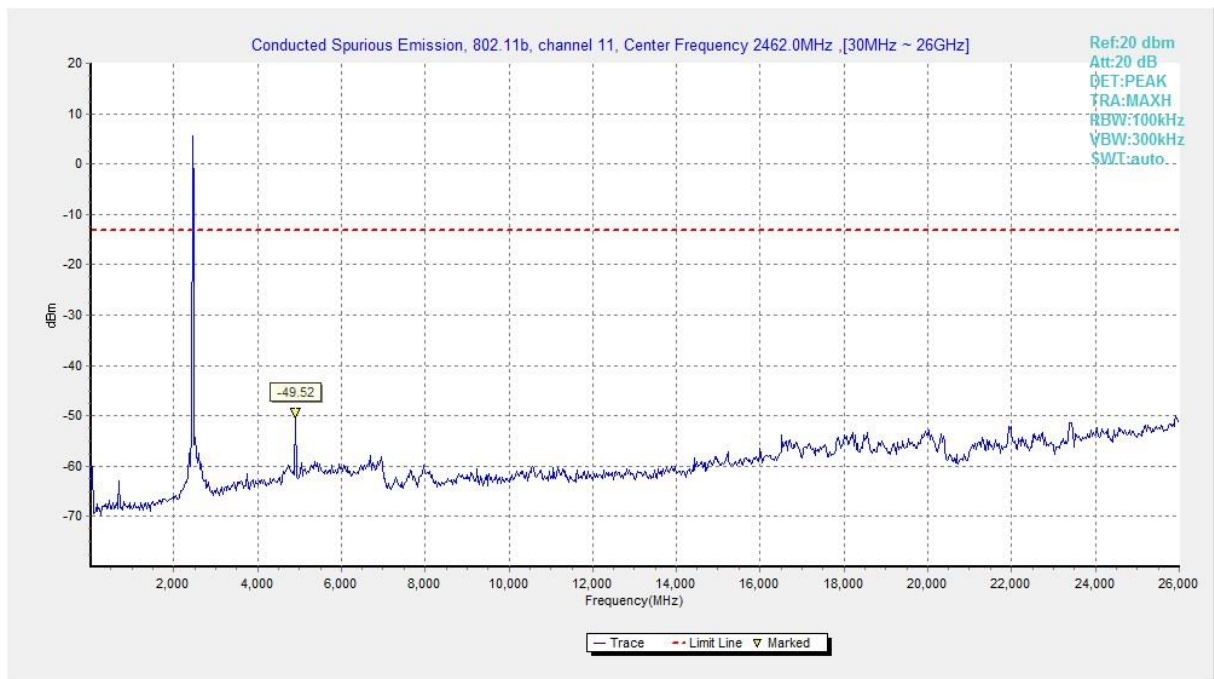


**Fig.35 Conducted Spurious Emission (802.11b, CH11)**

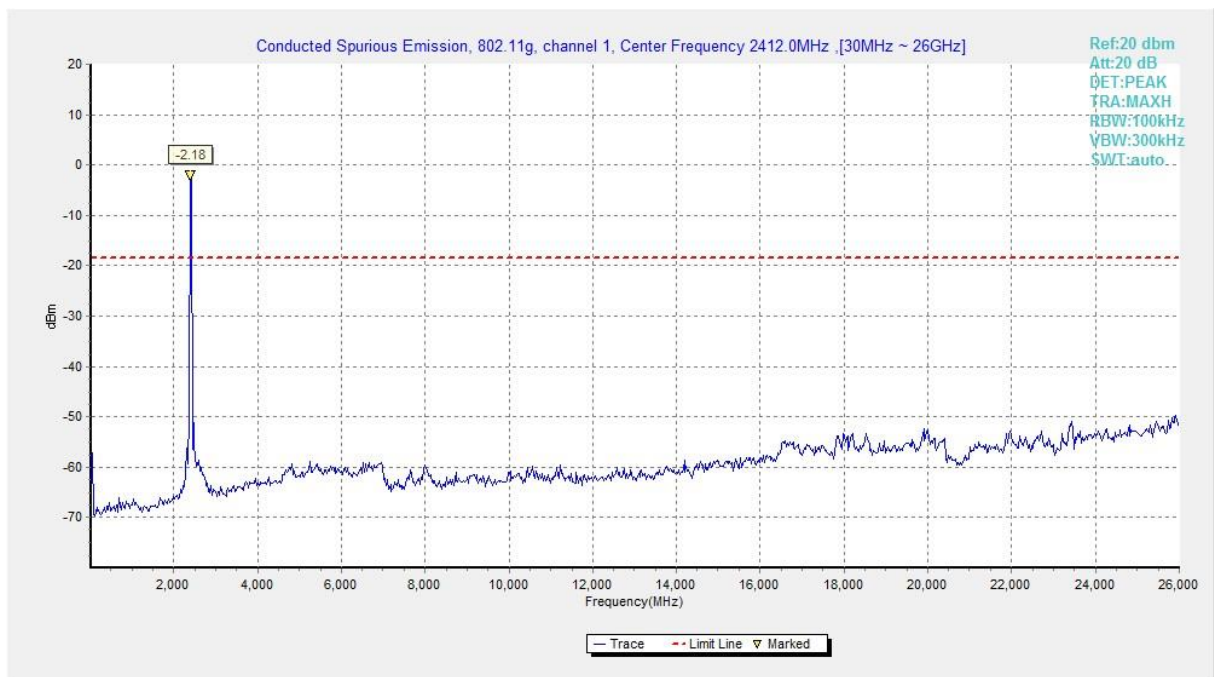


**Fig.36 Conducted Spurious Emission (802.11g, CH1)**

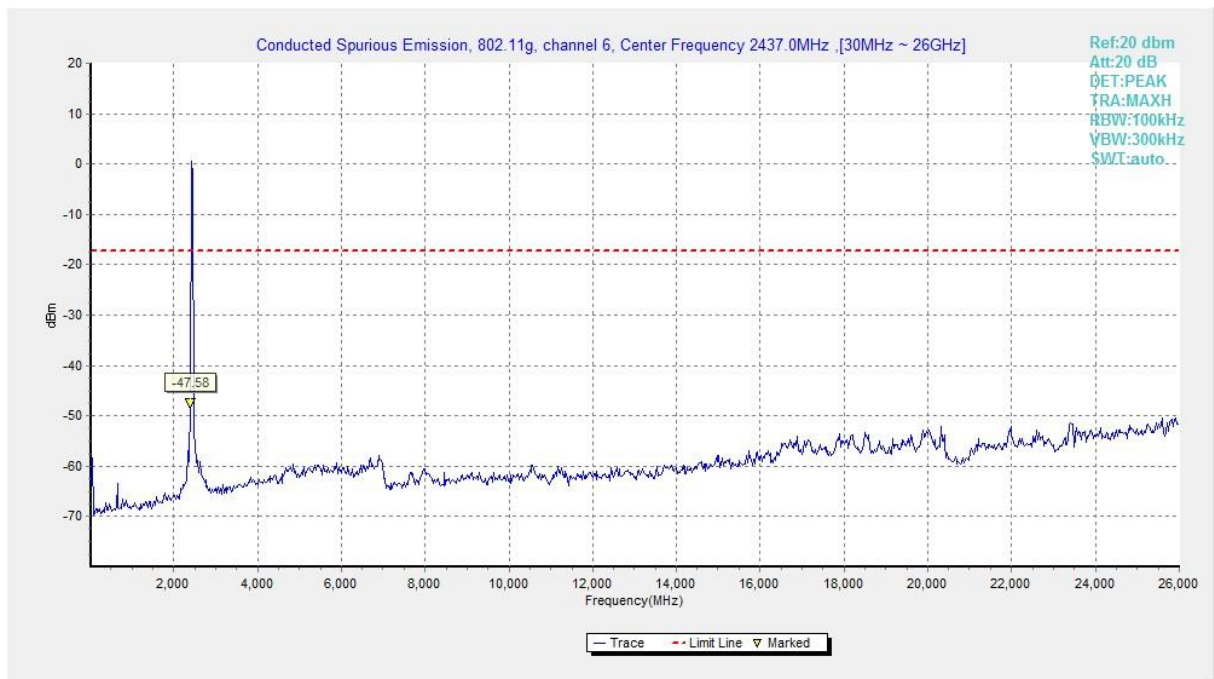


**Fig.37 Conducted Spurious Emission (802.11g, CH6)**

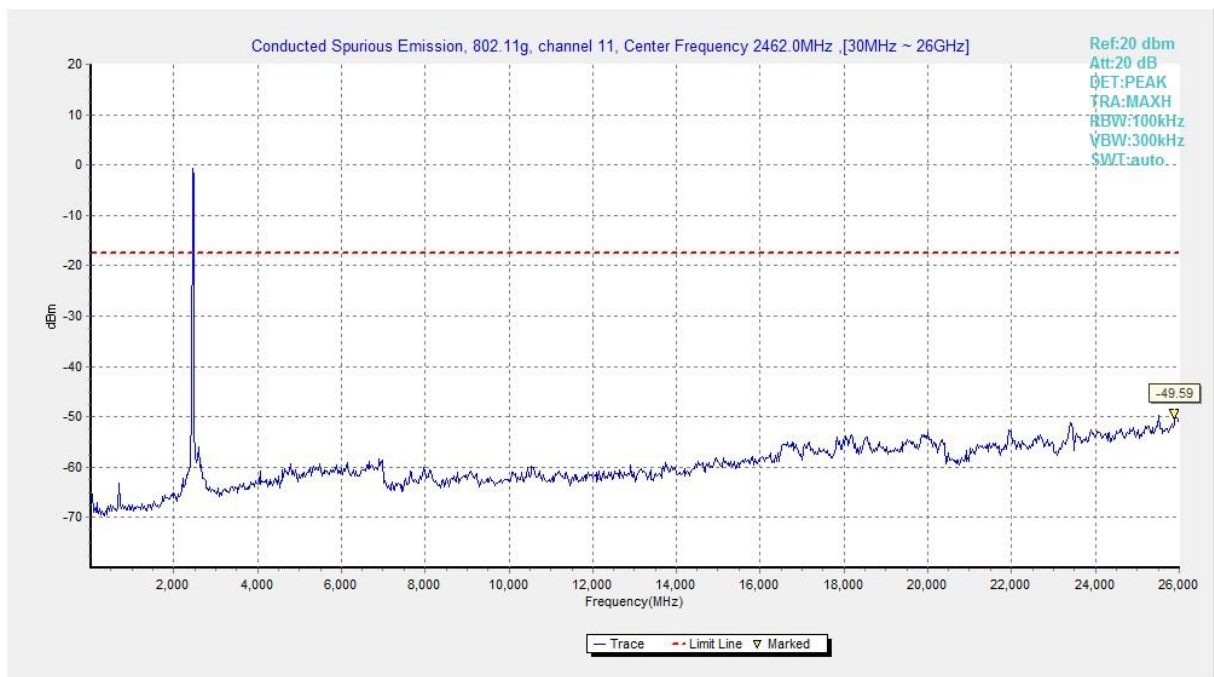

**Fig.38 Conducted Spurious Emission (802.11g, CH11)**

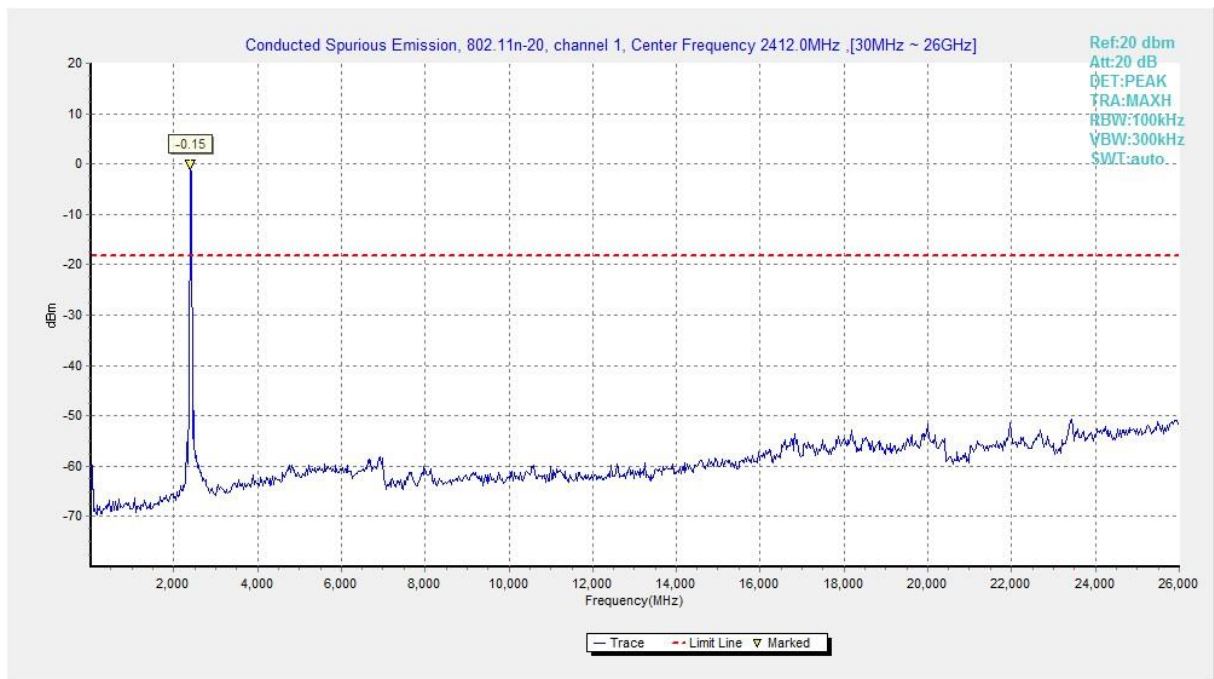


**Fig.39 Conducted Spurious Emission (802.11n HT20, CH1)**

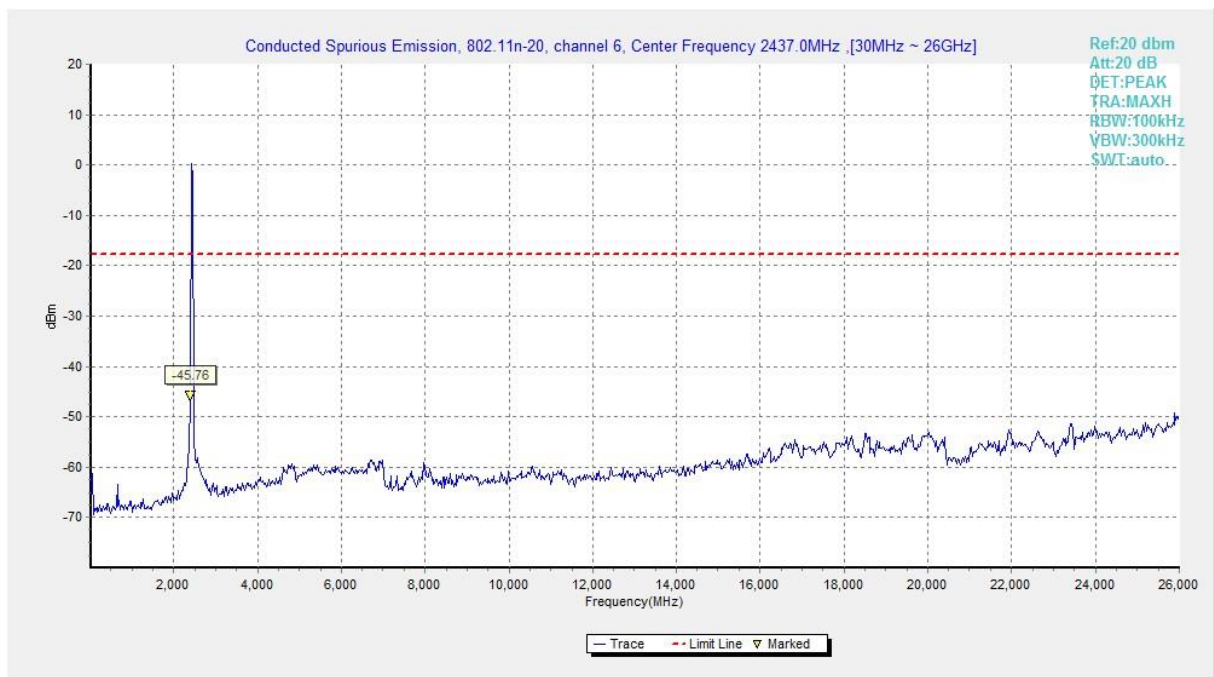


**Fig.40 Conducted Spurious Emission (802.11n HT20, CH6)**




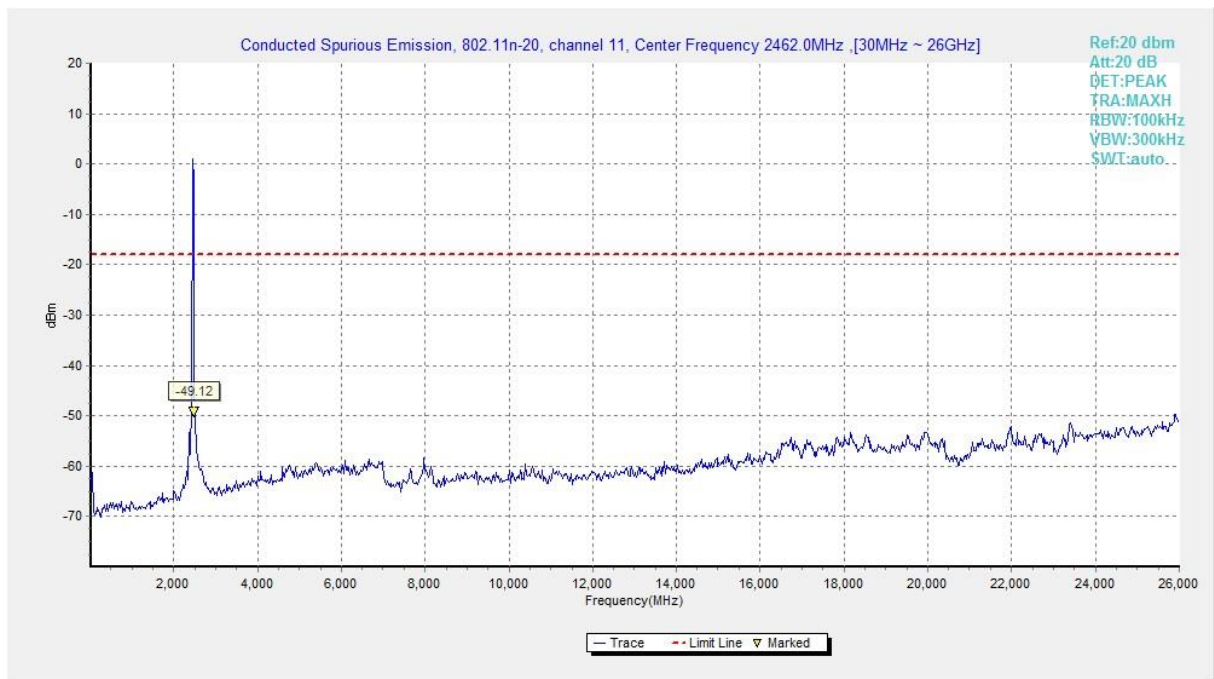


**Fig.41 Conducted Spurious Emission (802.11n HT20, CH11)**

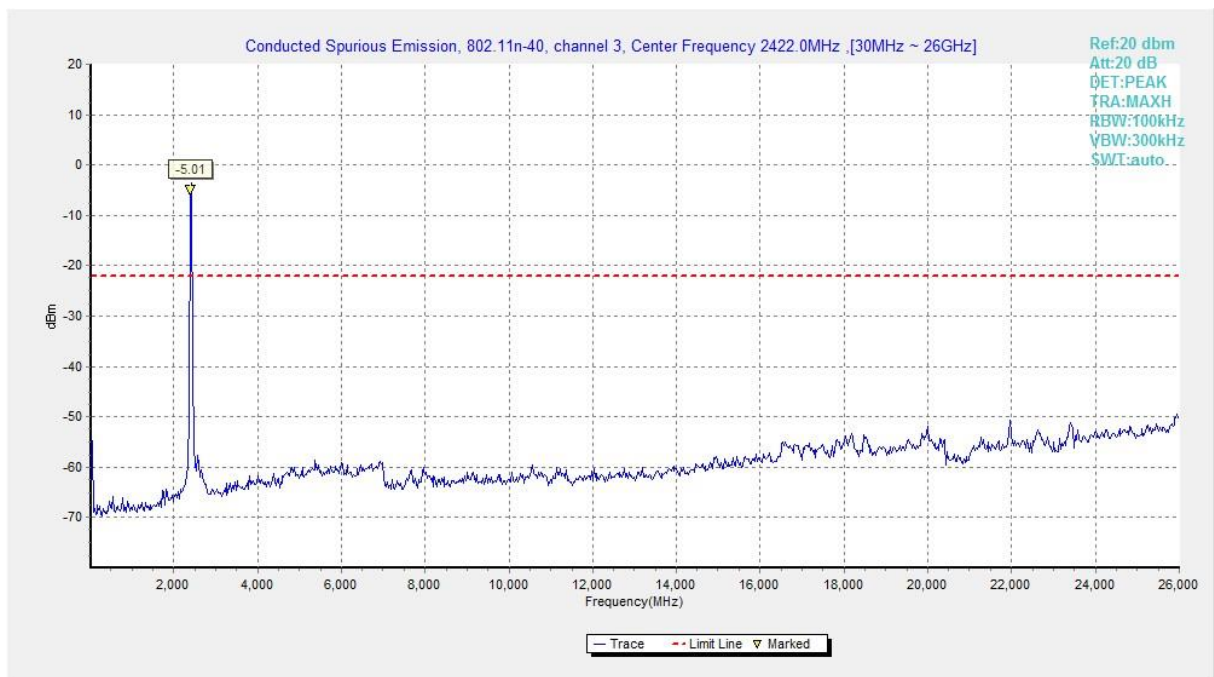

**Fig.42 Conducted Spurious Emission (802.11n HT40, CH3)**

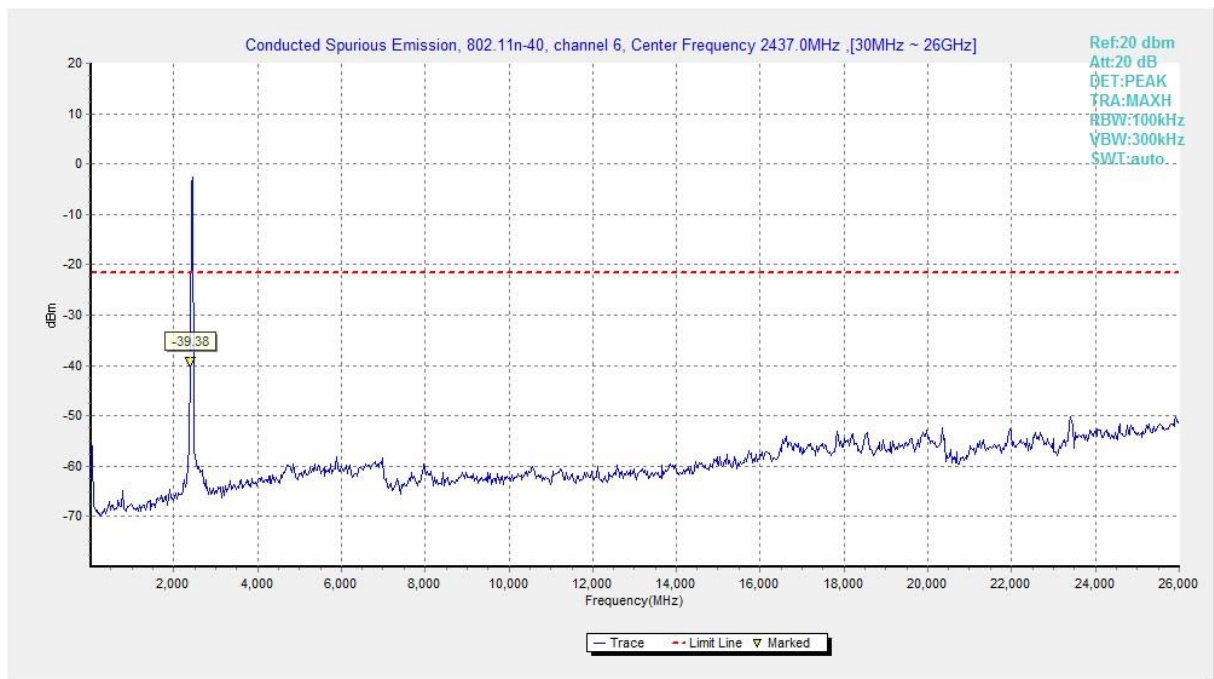

**Fig.43 Conducted Spurious Emission (802.11n HT40, CH6)**

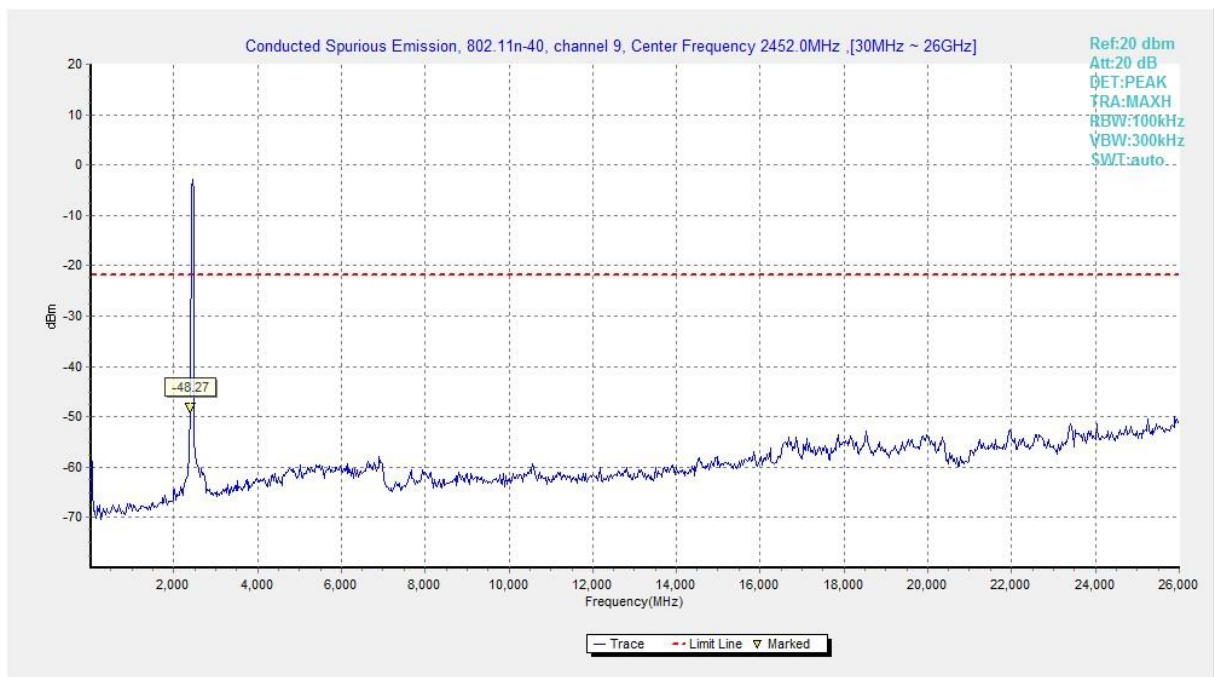

**Fig.44 Conducted Spurious Emission (802.11n HT40, CH9)**

## A.6 Radiated Emission

### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

### Limit in restricted band:

Frequency of emission (MHz)	Field strength( $\mu\text{V}/\text{m}$ )	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

### Test Condition:

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	120kHz/300kHz	5
1000-4000	1MHz/3MHz	15
4000-18000	1MHz/3MHz	40
18000-26500	1MHz/3MHz	20

### Note:

According to the performance evaluation, the radiated emission margin of EUT is over 20dB in the band below 30MHz. Therefore, the measurement starts from 30MHz to tenth harmonic.

The measurement results include the horizontal polarization and vertical polarization measurements.



**Measurement Results:**

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11b	CH 1	1 GHz ~18 GHz	Fig.45	<b>P</b>
	CH 6	1 GHz ~18 GHz	Fig.46	<b>P</b>
	CH 11	1 GHz ~18 GHz	Fig.47	<b>P</b>
	Restricted Band (CH1)	2.38 GHz ~ 2.45 GHz	Fig.48	<b>P</b>
	Restricted Band (CH11)	2.45 GHz ~ 2.5 GHz	Fig.49	<b>P</b>
802.11g	CH 1	1 GHz ~18 GHz	Fig.50	<b>P</b>
	CH 6	1 GHz ~18 GHz	Fig.51	<b>P</b>
	CH 11	1 GHz ~18 GHz	Fig.52	<b>P</b>
	Restricted Band (CH1)	2.38 GHz ~ 2.45 GHz	Fig.53	<b>P</b>
	Restricted Band (CH11)	2.45 GHz ~ 2.5 GHz	Fig.54	<b>P</b>
802.11n HT20	CH 1	1 GHz ~18 GHz	Fig.55	<b>P</b>
	CH 6	1 GHz ~18 GHz	Fig.56	<b>P</b>
	CH 11	1 GHz ~18 GHz	Fig.57	<b>P</b>
	Restricted Band (CH1)	2.38 GHz ~ 2.45 GHz	Fig.58	<b>P</b>
	Restricted Band (CH11)	2.45 GHz ~ 2.5 GHz	Fig.59	<b>P</b>
802.11n HT40	CH 3	1 GHz ~18 GHz	Fig.60	<b>P</b>
	CH 6	1 GHz ~18 GHz	Fig.61	<b>P</b>
	CH 9	1 GHz ~18 GHz	Fig.62	<b>P</b>
	Restricted Band (CH3)	2.38 GHz ~ 2.45 GHz	Fig.63	<b>P</b>
	Restricted Band (CH9)	2.45 GHz ~ 2.5 GHz	Fig.64	<b>P</b>
/	All Channels	9 kHz ~30 MHz	Fig.65	<b>P</b>
		30 MHz ~1 GHz	Fig.66	<b>P</b>
		18 GHz ~26.5 GHz	Fig.67	<b>P</b>

**Worst-Case Result:**

**802.11b CH1 (1-18GHz)**

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol	Corr. (dB)
13954.000000	55.90	74.00	18.10	V	18.1
14668.500000	55.82	74.00	18.18	V	19.0
15577.500000	56.74	74.00	17.26	V	20.8
16291.500000	58.55	74.00	15.45	H	21.9
17050.500000	58.98	74.00	15.02	H	22.6
17861.500000	58.44	74.00	15.56	H	24.3

Frequency (MHz)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol	Corr. (dB)
13962.000000	42.73	54.00	11.27	H	18.1
14559.000000	43.67	54.00	10.33	H	19.0
15577.000000	45.03	54.00	8.97	H	20.8
15658.500000	46.50	54.00	7.50	H	21.3
16618.500000	46.75	54.00	7.25	H	23.0
17700.000000	46.13	54.00	7.87	V	23.7

**802.11g CH1 (1GHz-18GHz)**

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol	Corr. (dB)
13949.000000	55.42	74.00	18.58	V	18.2
14550.000000	56.02	74.00	17.98	H	19.0
15572.500000	57.00	74.00	17.00	H	20.7
15670.500000	58.51	74.00	15.49	V	21.3
16635.000000	59.01	74.00	14.99	V	22.8
17906.500000	58.58	74.00	15.42	H	24.9

Frequency (MHz)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol	Corr. (dB)
13961.500000	42.96	54.00	11.04	V	18.1
14559.000000	43.72	54.00	10.28	V	19.0
15573.000000	45.08	54.00	8.92	V	20.7
15668.000000	46.48	54.00	7.52	V	21.3
16630.000000	46.71	54.00	7.29	V	22.9
17697.000000	46.08	54.00	7.92	V	23.7

**802.11n HT20 CH1 (1GHz-18GHz)**

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol	Corr. (dB)
12810.000000	54.95	74.00	19.05	H	17.8
13467.000000	55.42	74.00	18.58	V	17.8
14554.000000	55.45	74.00	18.55	H	19.0
15660.000000	58.99	74.00	15.01	V	21.3
16608.000000	58.67	74.00	15.33	H	23.1
17847.500000	58.34	74.00	15.66	V	24.1

Frequency (MHz)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol	Corr. (dB)
12433.500000	42.52	54.00	11.48	V	17.9
13379.000000	42.80	54.00	11.20	V	18.0
14559.500000	43.57	54.00	10.43	V	19.0
15671.500000	46.37	54.00	7.63	H	21.3
16621.500000	46.65	54.00	7.35	H	23.0
17700.000000	46.04	54.00	7.96	H	23.7

**802.11n HT40 CH3 (1GHz-18GHz)**

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol	Corr. (dB)
12407.500000	54.96	74.00	19.04	V	17.8
13122.000000	55.17	74.00	18.83	V	18.4
14554.500000	55.77	74.00	18.23	H	19.0
15658.500000	58.16	74.00	15.84	H	21.3
17141.500000	58.43	74.00	15.57	V	21.9
17710.500000	57.85	74.00	16.15	H	23.7

Frequency (MHz)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol	Corr. (dB)
12900.000000	42.70	54.00	11.30	V	18.0
13942.000000	42.82	54.00	11.18	H	18.2
14569.500000	43.61	54.00	10.39	V	19.0
15647.000000	46.60	54.00	7.40	V	21.2
16593.500000	46.54	54.00	7.46	V	23.2
17690.000000	45.91	54.00	8.09	H	23.6

**Note:**


A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss", and Antenna Factor, the gain of the preamplifier, the cable loss.  $P_{Mea}$  is the field strength recorded from the instrument.

The measurement results are obtained as described below:


Result=  $P_{Mea}$  +Cable Loss +Antenna Factor-Gain of the preamplifier.

**See below for test graphs.**


**Conclusion: PASS**

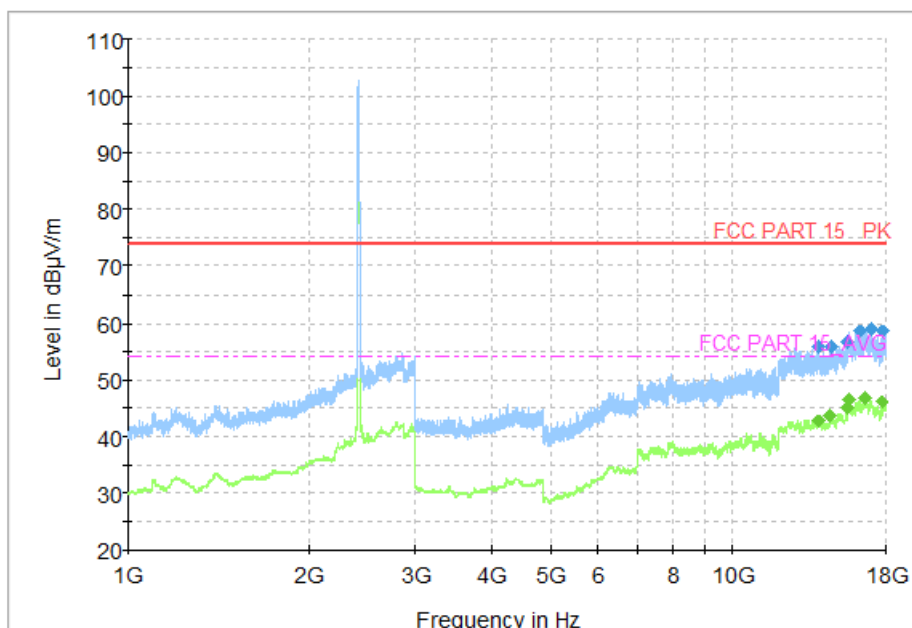


**Fig.45 Radiated Spurious Emission (802.11b, CH1, 1 GHz-18GHz)**

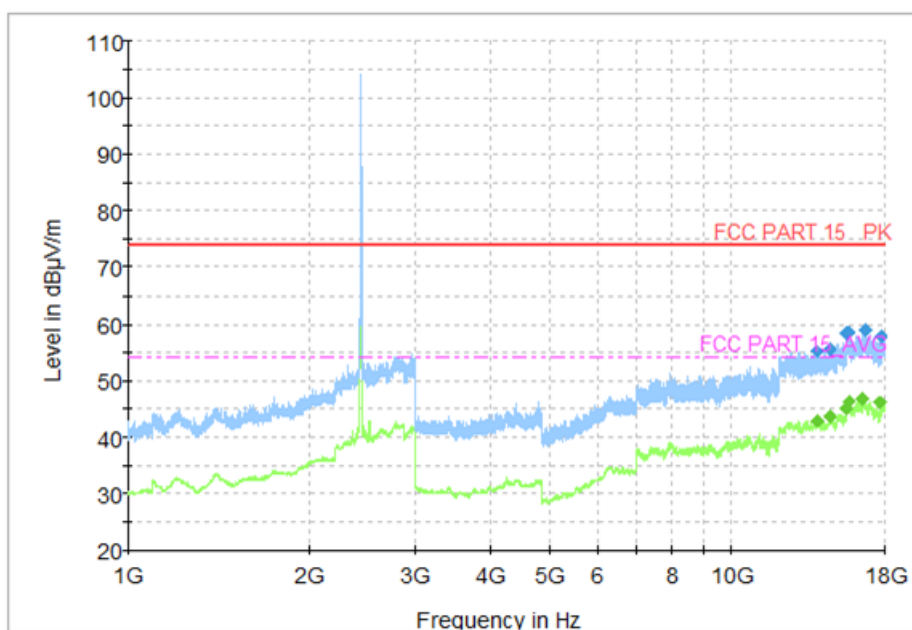

**Fig.46 Radiated Spurious Emission (802.11b, CH6, 1 GHz-18GHz)**

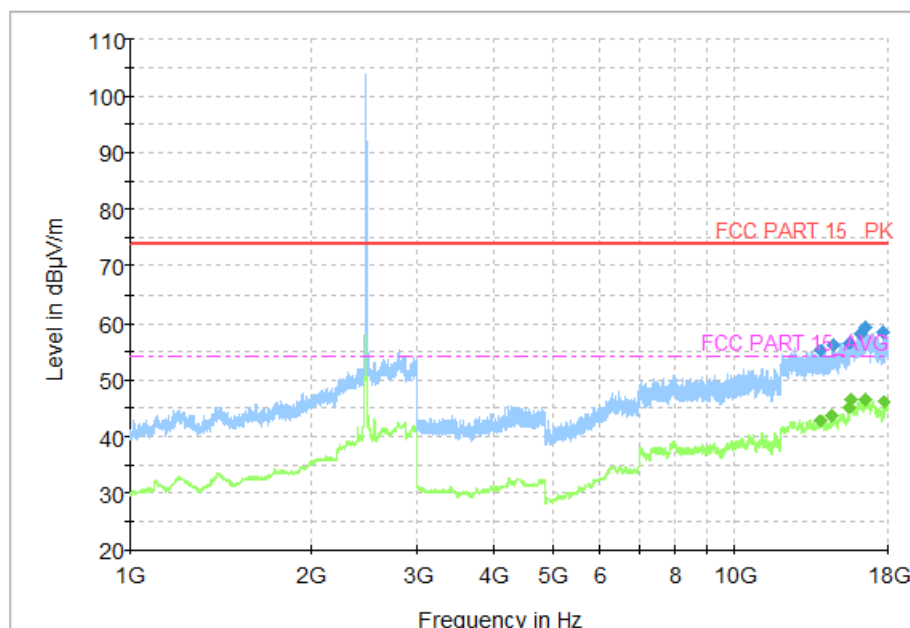


**Fig.47 Radiated Spurious Emission (802.11b, CH11, 1 GHz-18GHz)**

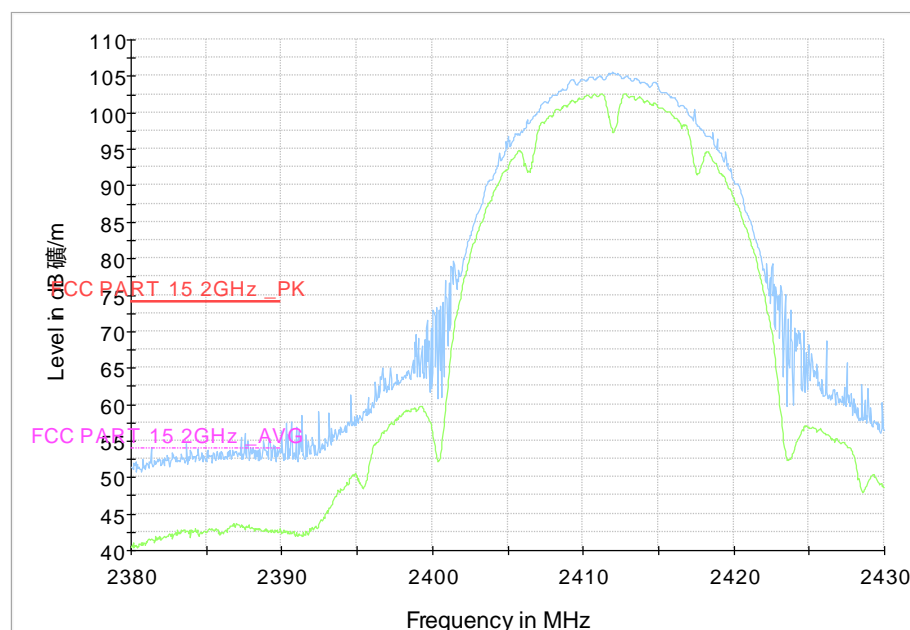

**Fig.48 Radiated Restricted Band (802.11b, CH1, 2.38GHz~2.43GHz)**



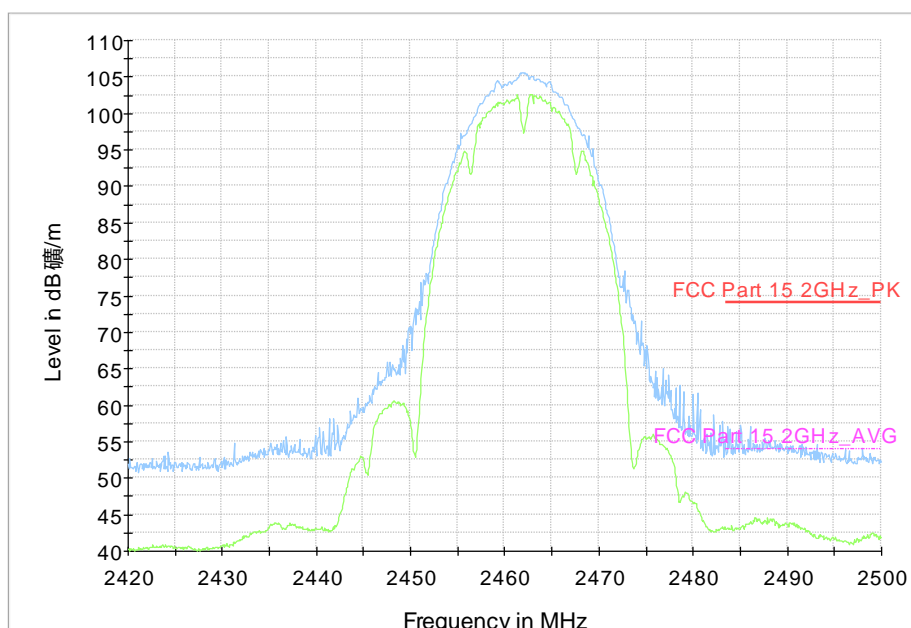


**Fig.49 Radiated Restricted Band (802.11b, CH11, 2.45GHz~2.5GHz)**




**Fig.50 Radiated Spurious Emission (802.11g, CH1, 1 GHz-18 GHz)**




**Fig.51 Radiated Spurious Emission (802.11g, CH6, 1 GHz-18 GHz)**

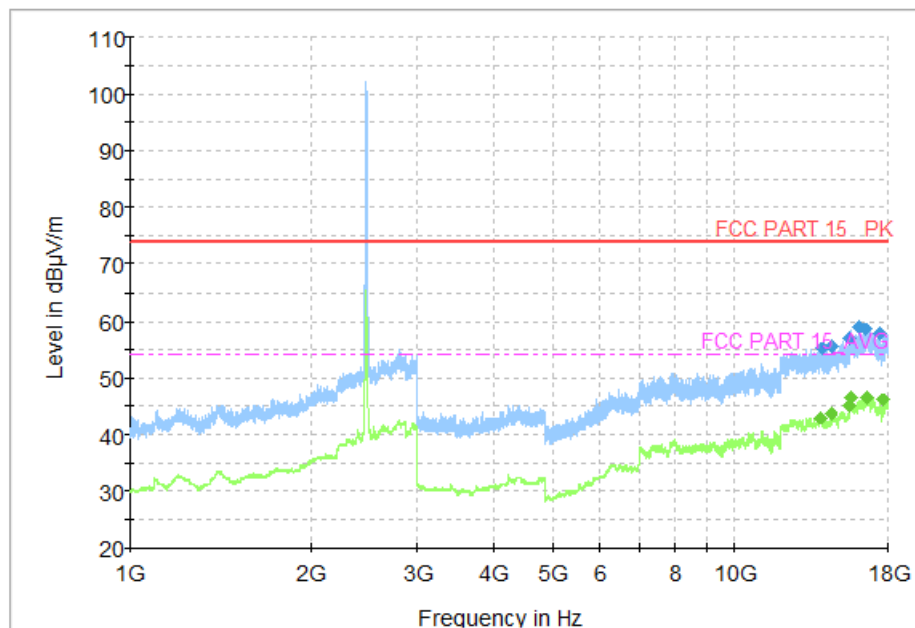


**Fig.52 Radiated Spurious Emission (802.11g, CH11, 1 GHz-18 GHz)**

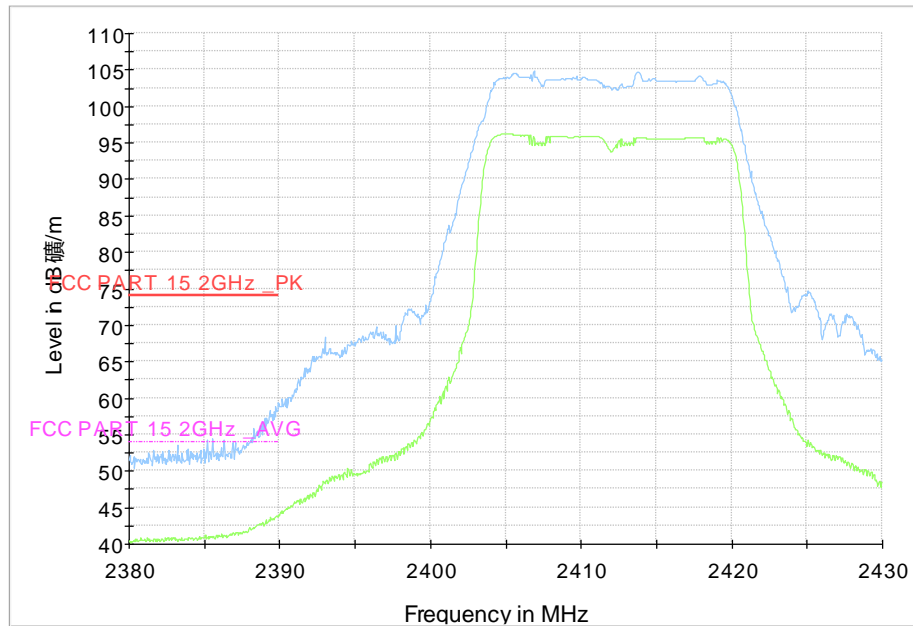


**Fig.53 Radiated Restricted Band (802.11g, CH1, 2.38GHz~2.43GHz)**

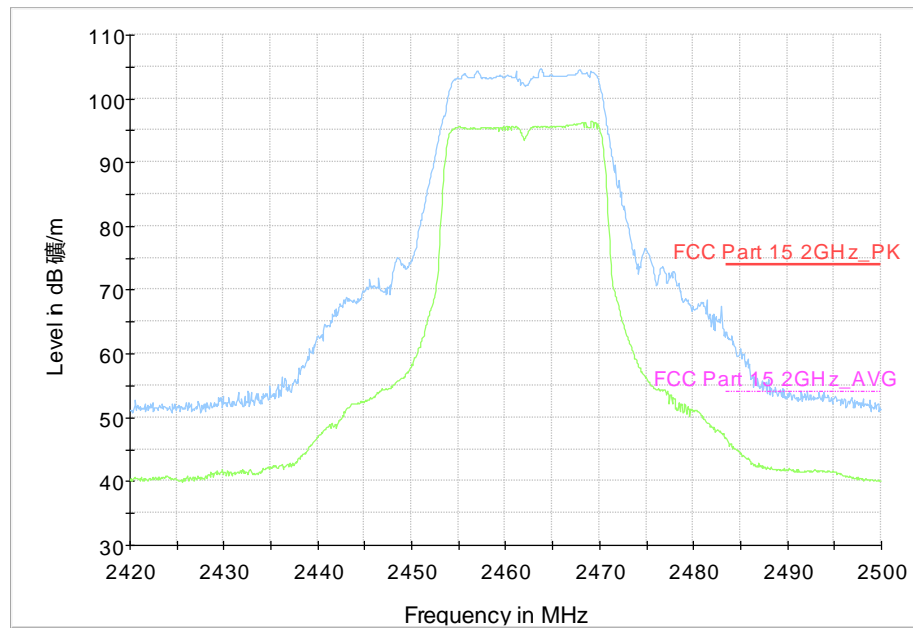


**Fig.54 Radiated Restricted Band (802.11g, CH11, 2.45GHz~2.5GHz)**

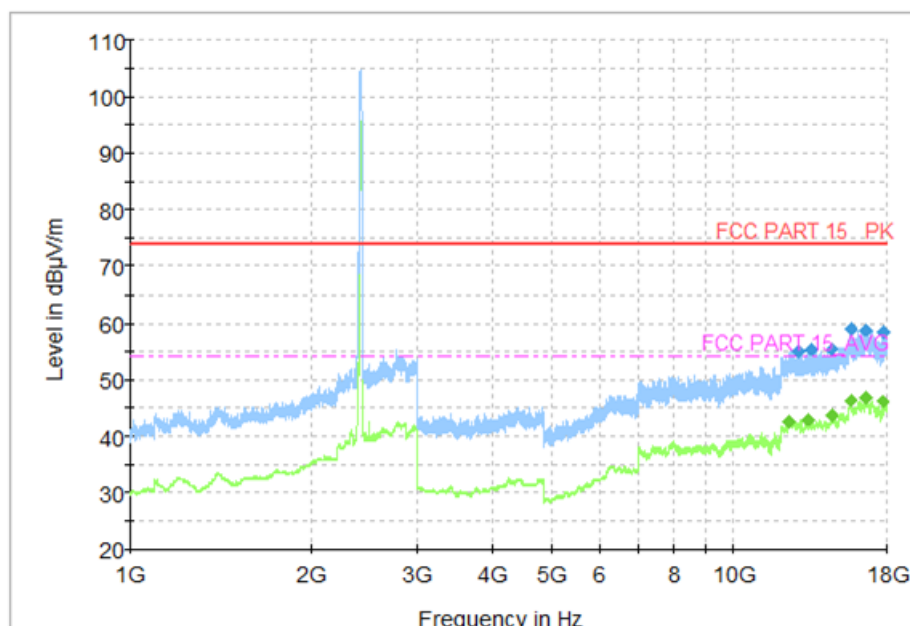


**Fig.55 Radiated Spurious Emission (802.11n HT20, CH1, 1 GHz-18 GHz)**

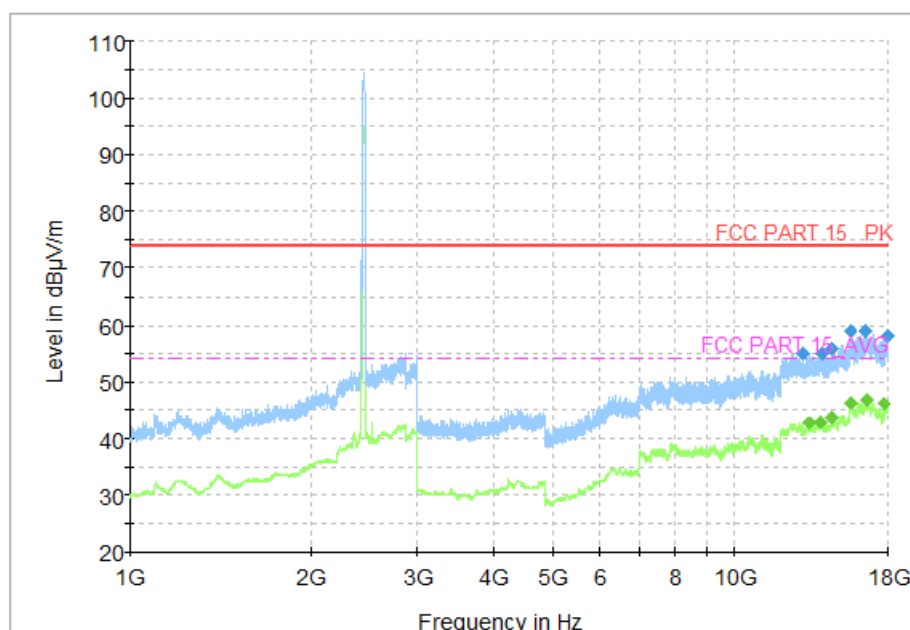


**Fig.56 Radiated Spurious Emission (802.11n HT20, CH6, 1 GHz-18 GHz)**

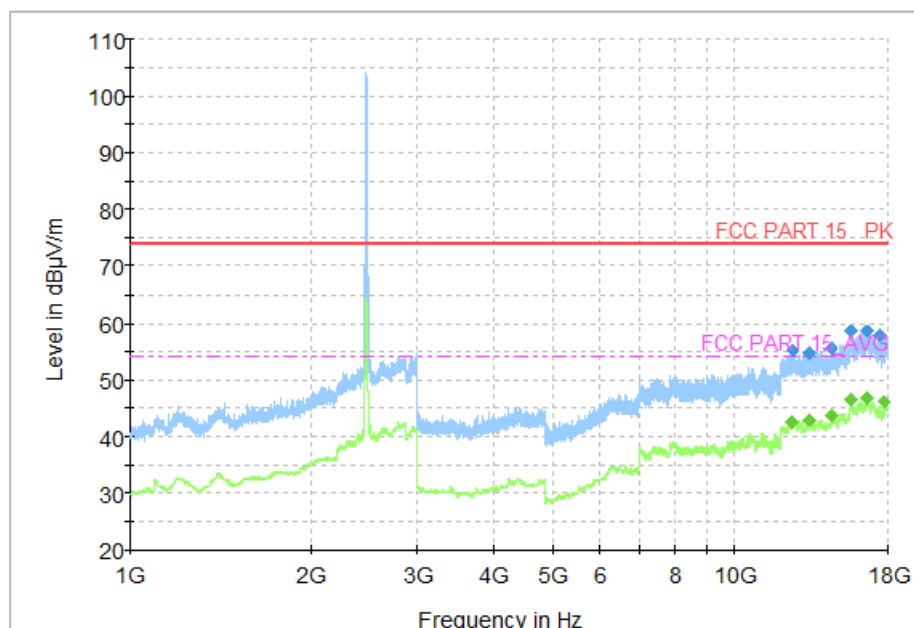


**Fig.57 Radiated Spurious Emission (802.11n HT20, CH11, 1 GHz-18 GHz)**

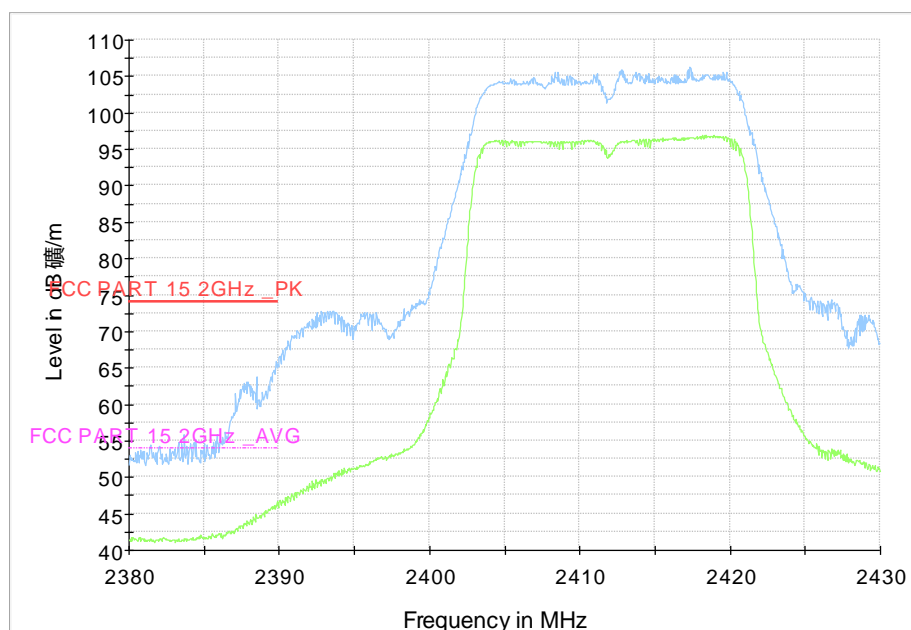

**Fig.58 Radiated Restricted Band (802.11n HT20, CH1, 2.38GHz~2.45GHz)**

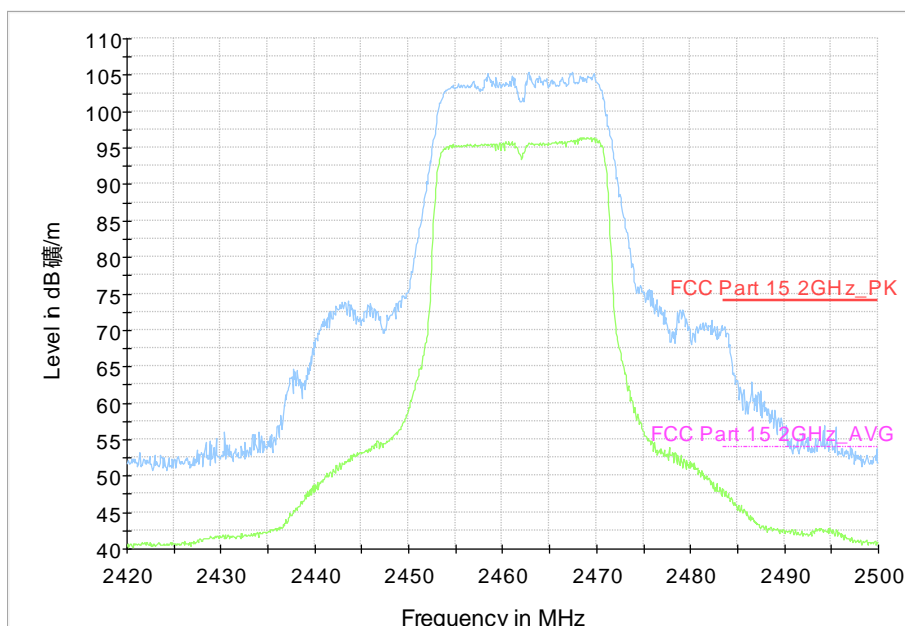


**Fig.59 Radiated Restricted Band (802.11n HT20, CH11, 2.45GHz~2.5GHz)**

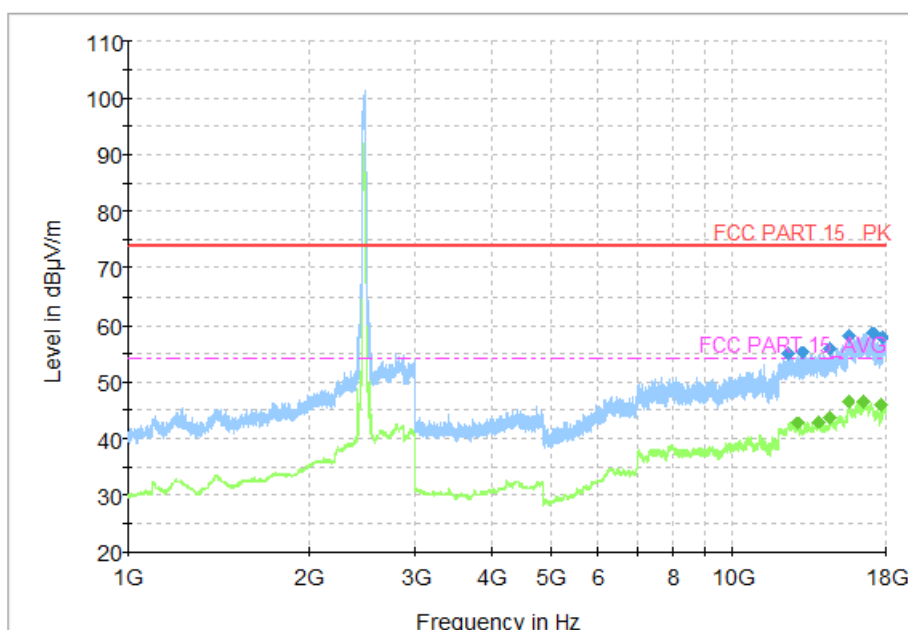


**Fig.60 Radiated Spurious Emission (802.11n HT40, CH3, 1 GHz-18 GHz)**




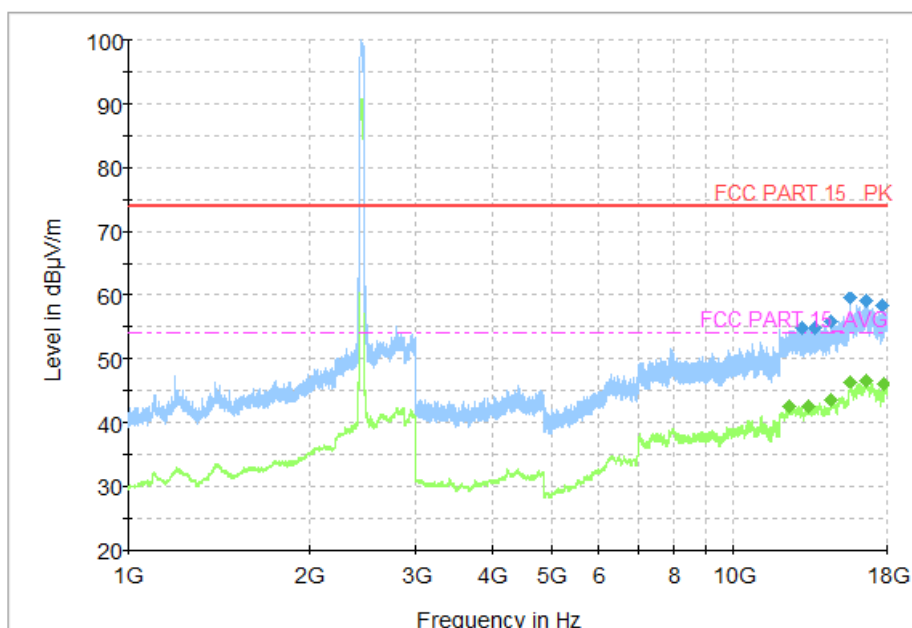


**Fig.61 Radiated Spurious Emission (802.11n HT40, CH6, 1 GHz-18 GHz)**

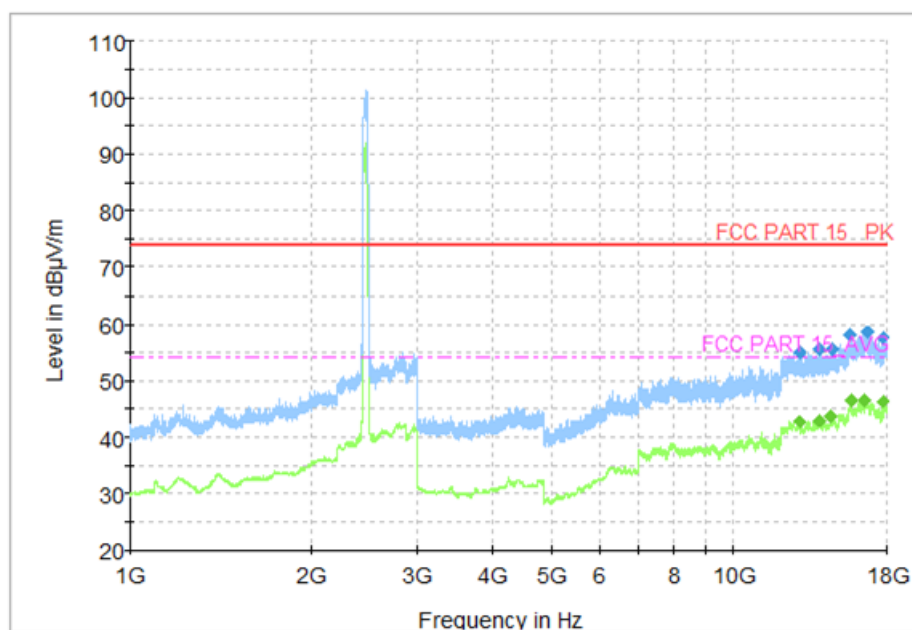


**Fig.62 Radiated Spurious Emission (802.11n HT40, CH9, 1 GHz-18 GHz)**

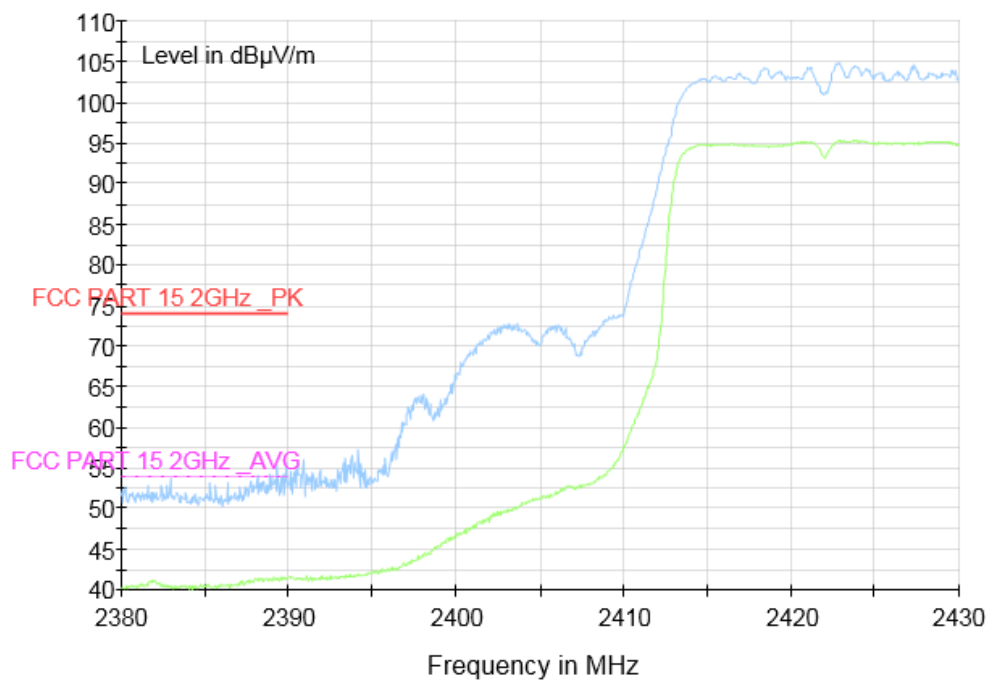


**Fig.63 Radiated Restricted Band (802.11n HT40, CH3, 2.38GHz~2.45GHz)**

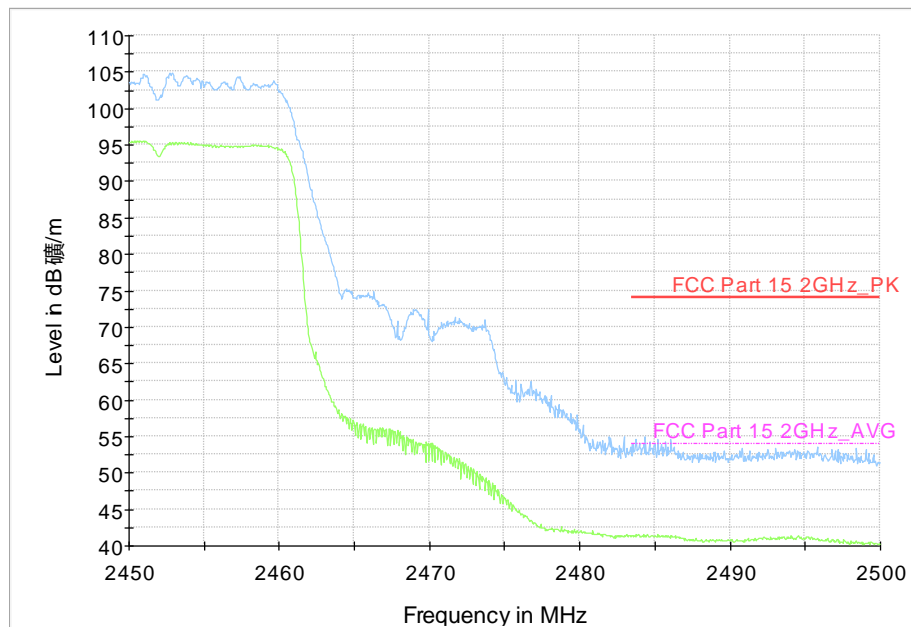


**Fig.64 Radiated Restricted Band (802.11n HT40, CH9, 2.45GHz~2.5GHz)**

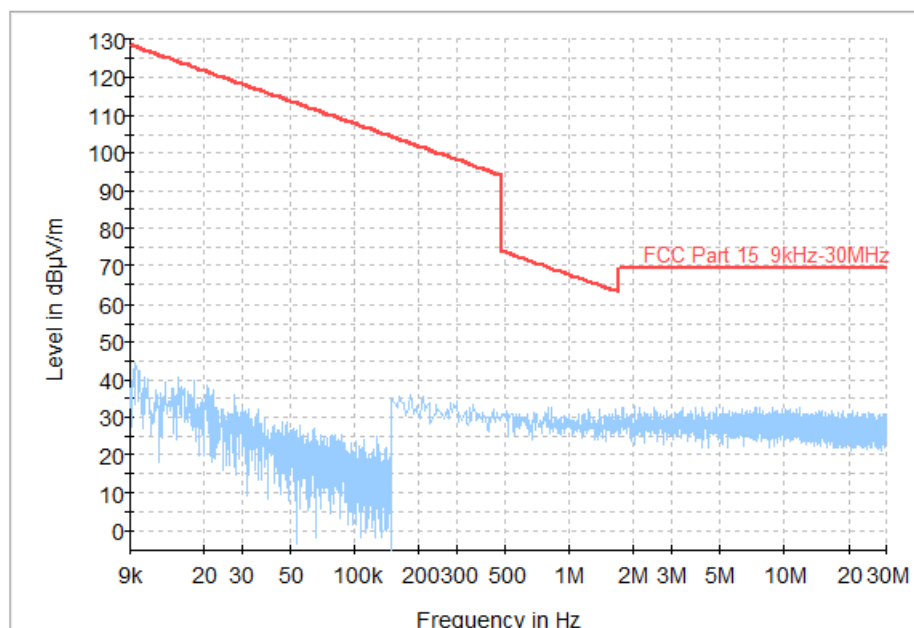

**Fig.65 Radiated Spurious Emission (All Channels, 9KHz-30 MHz)**

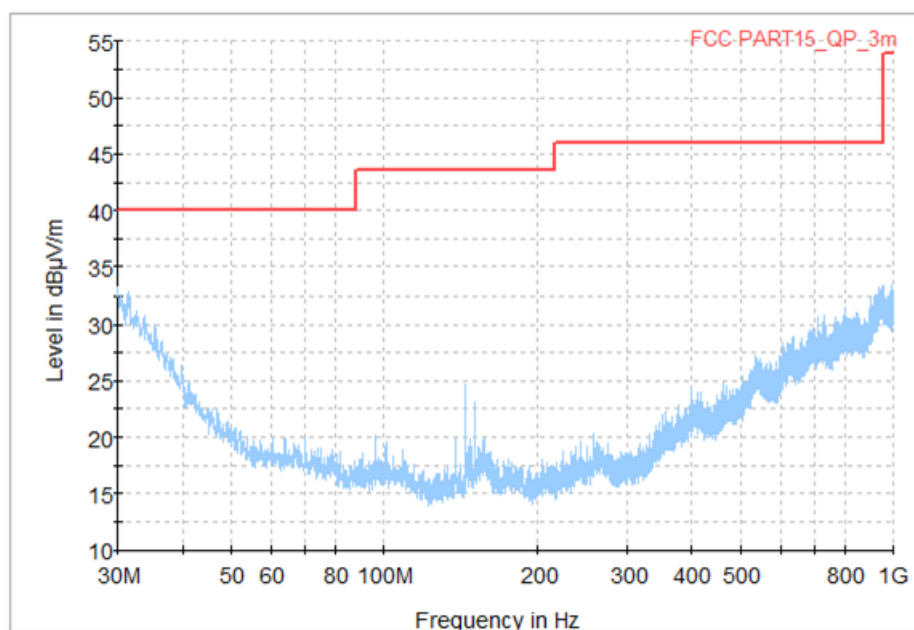

**Fig.66 Radiated Spurious Emission (All Channels, 30MHz-1 GHz)**

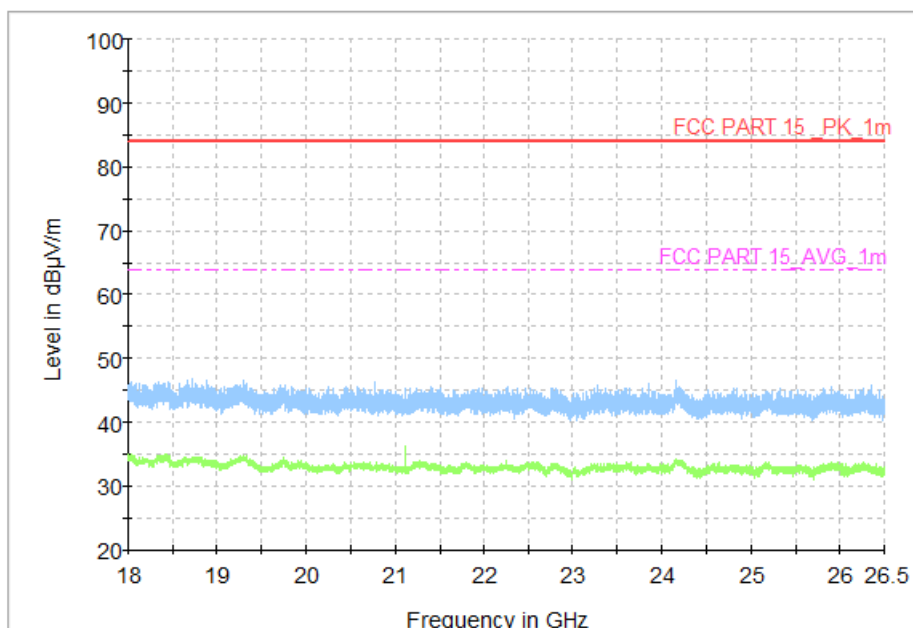

**Fig.67 Radiated Spurious Emission (All Channels, 18 GHz-26.5 GHz)**

## A.7 AC Power line Conducted Emission

### Test Condition:

Voltage (V)	Frequency (Hz)
120	60

### Measurement Result and limit-AE2:

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB $\mu$ V)	Result (dB $\mu$ V)		Conclusion
		Traffic	Idle	
0.15 to 0.5	66 to 56	Fig.68	Fig.69	P
0.5 to 5	56			
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)


Frequency range (MHz)	Average-peak Limit (dB $\mu$ V)	Result (dB $\mu$ V)		Conclusion
		Traffic	Idle	
0.15 to 0.5	56 to 46	Fig 68	Fig 69	P
0.5 to 5	46			
5 to 30	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

**Note:** The measurement results include the L1 and N measurements.

**See below for test graphs.**

**Conclusion: PASS**

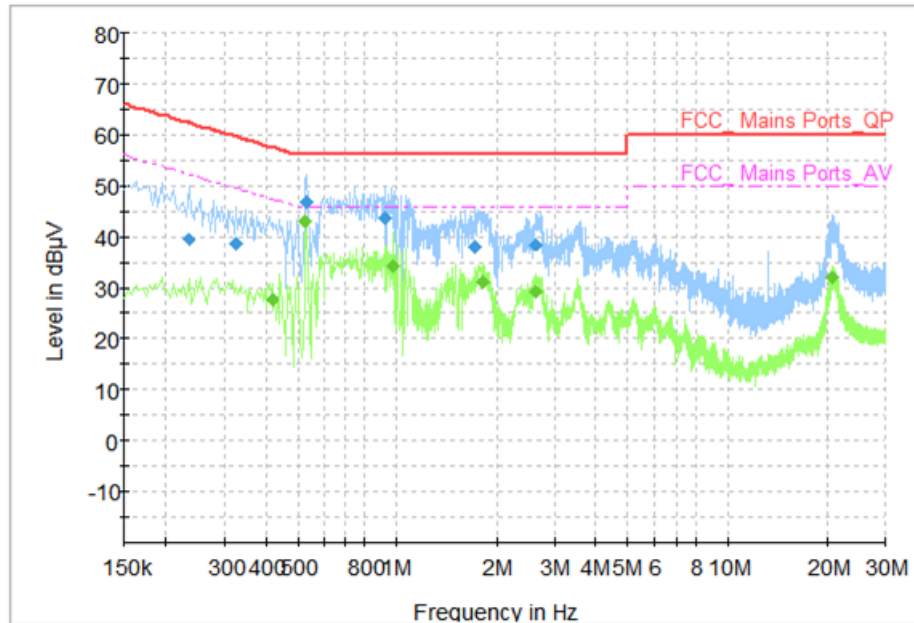

**Fig.68 AC Power line Conducted Emission (Traffic)**


**Measurement Results: Quasi Peak**

Frequency (MHz)	QuasiPeak (dBμV)	Limit (dBμV)	Margin (dB)	Line	Filter	Corr. (dB)
0.234000	39.48	62.31	22.82	N	ON	9.6
0.326000	38.77	59.55	20.78	N	ON	9.6
0.534000	46.86	56.00	9.14	N	ON	9.7
0.918000	43.67	56.00	12.33	N	ON	9.7
1.722000	38.05	56.00	17.95	N	ON	9.7
2.638000	38.54	56.00	17.46	N	ON	9.7

**Measurement Results: Average**

Frequency (MHz)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Filter	Corr. (dB)
0.418000	27.50	47.49	19.99	N	ON	9.7
0.530000	42.89	46.00	3.11	N	ON	9.7
0.974000	34.27	46.00	11.73	N	ON	9.7
1.814000	31.06	46.00	14.94	N	ON	9.7
2.642000	29.00	46.00	17.00	N	ON	9.7
20.738000	31.81	50.00	18.19	N	ON	10.4



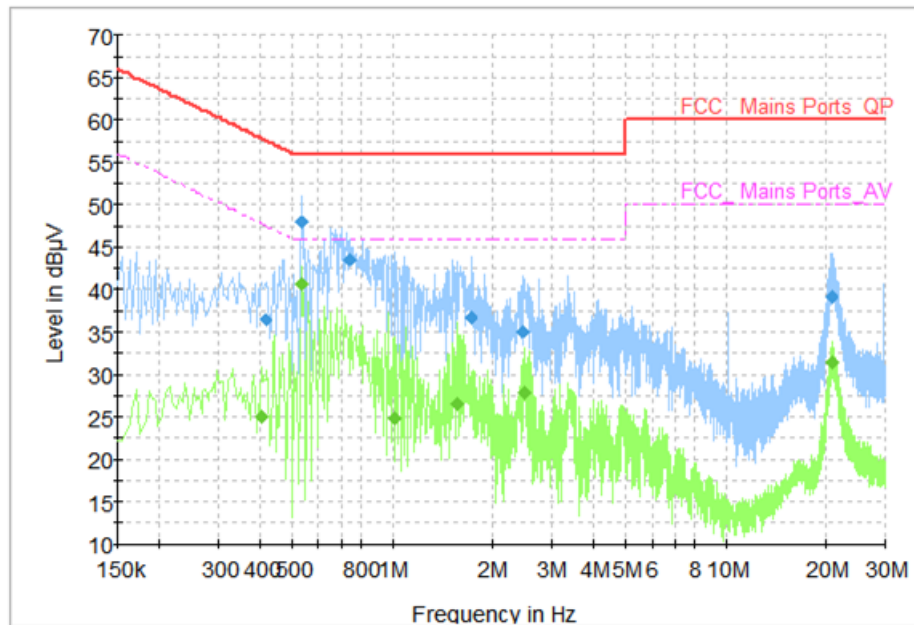

**Fig.69 AC Power line Conducted Emission (Idle)**

**Measurement Results: Quasi Peak**

Frequency (MHz)	Quasi Peak (dBμV)	Limit (dBμV)	Margin (dB)	Line	Filter	Corr. (dB)
0.414000	36.51	57.57	21.05	N	ON	9.7
0.534000	47.98	56.00	8.02	N	ON	9.7
0.746000	43.48	56.00	12.52	N	ON	9.7
1.710000	36.76	56.00	19.24	N	ON	9.7
2.458000	35.03	56.00	20.97	N	ON	9.7
20.690000	39.21	60.00	20.79	N	ON	10.4

**Measurement Results: Average**

Frequency (MHz)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Filter	Corr. (dB)
0.406000	25.03	47.73	22.70	N	ON	9.7
0.534000	40.70	46.00	5.30	N	ON	9.7
1.018000	24.79	46.00	21.21	N	ON	9.7
1.550000	26.47	46.00	19.53	N	ON	9.7
2.498000	27.80	46.00	18.20	N	ON	9.7
20.814000	31.48	50.00	18.52	N	ON	10.4

**Measurement Result and limit-AE3:**

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dBμV)	Result (dBμV)		Conclusion
		Traffic	Idle	
0.16 to 0.5	66 to 56	Fig.70	Fig.71	P
0.5 to 5	56			
5 to 30	60			
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.				


WLAN (Average Limit)

Frequency range (MHz)	Average-peak Limit (dBμV)	Result (dBμV)		Conclusion
		Traffic	Idle	
0.15 to 0.5	56 to 46	Fig 70	Fig 71	P
0.5 to 5	46			
5 to 30	50			
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.				

**Note:** The measurement results include the L1 and N measurements.

**See below for test graphs.**

**Conclusion: PASS**

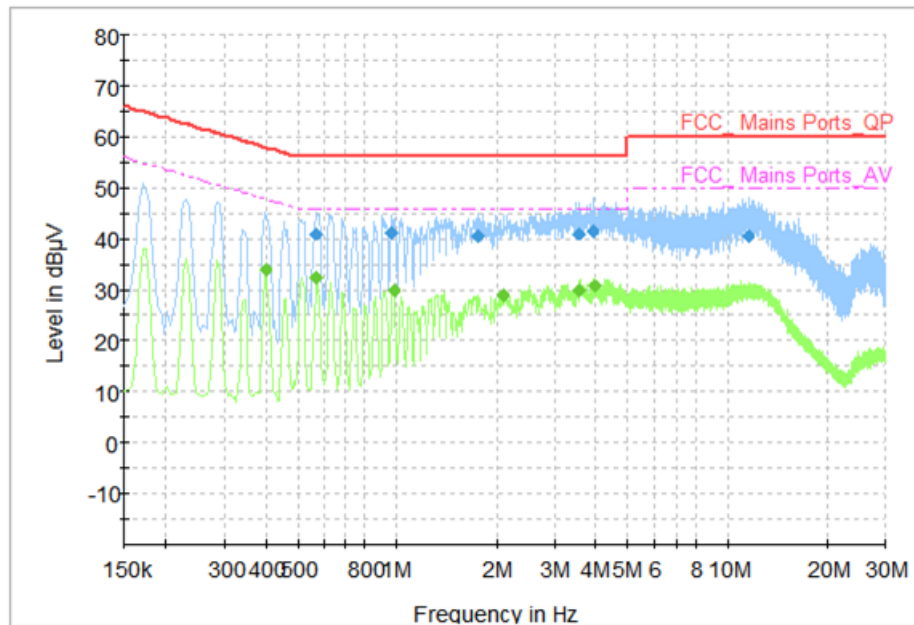


**Fig.70 AC Power line Conducted Emission (Traffic)**

**Measurement Results: Quasi Peak**

Frequency (MHz)	QuasiPeak (dBμV)	Limit (dBμV)	Margin (dB)	Line	Filter	Corr. (dB)
0.566000	40.85	56.00	15.15	L1	ON	9.7
0.966000	41.13	56.00	14.87	L1	ON	9.7
1.762000	40.39	56.00	15.61	L1	ON	9.7
3.554000	40.88	56.00	15.12	N	ON	9.7
3.902000	41.43	56.00	14.57	N	ON	9.7
11.582000	40.43	60.00	19.57	N	ON	9.9

**Measurement Results: Average**

Frequency (MHz)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Filter	Corr. (dB)
0.402000	33.81	47.81	14.00	N	ON	9.6
0.570000	32.28	46.00	13.72	N	ON	9.7
0.978000	29.88	46.00	16.12	L1	ON	9.7
2.098000	28.79	46.00	17.21	L1	ON	9.7
3.554000	29.83	46.00	16.17	N	ON	9.7
3.966000	30.70	46.00	15.30	N	ON	9.7

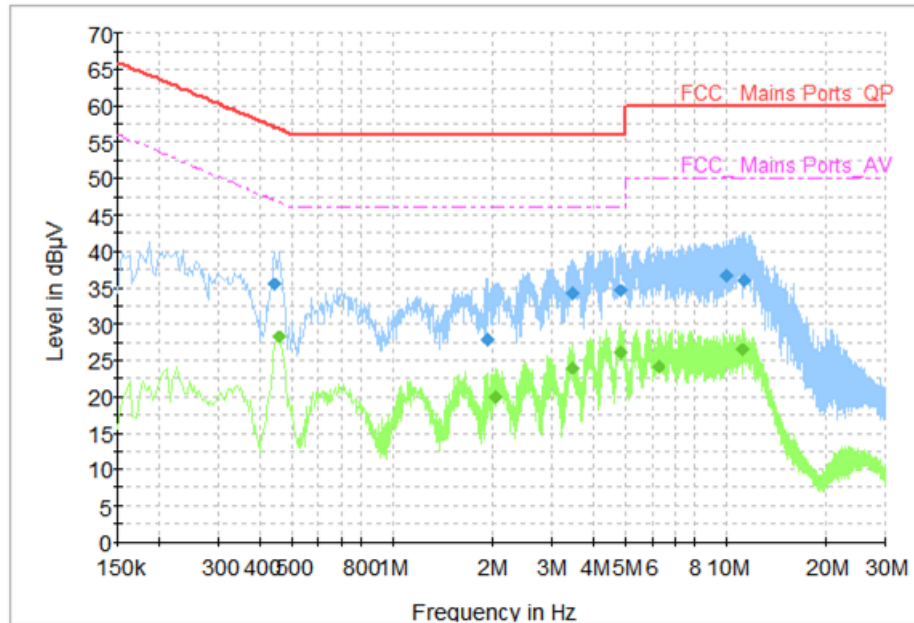

**Fig.71 AC Power line Conducted Emission (Idle)**

**Measurement Results: Quasi Peak**

Frequency (MHz)	Quasi Peak (dBμV)	Limit (dBμV)	Margin (dB)	Line	Filter	Corr. (dB)
0.442000	35.47	57.02	21.55	N	ON	9.7
1.918000	27.81	56.00	28.19	N	ON	9.7
3.462000	34.19	56.00	21.81	N	ON	9.7
4.830000	34.55	56.00	21.45	N	ON	9.7
10.034000	36.65	60.00	23.35	N	ON	9.8
11.282000	36.02	60.00	23.98	N	ON	9.9

**Measurement Results: Average**

Frequency (MHz)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Filter	Corr. (dB)
0.458000	28.16	46.73	18.57	N	ON	9.6
2.022000	20.01	46.00	25.99	N	ON	9.7
3.462000	24.06	46.00	21.94	N	ON	9.7
4.854000	26.17	46.00	19.83	N	ON	9.7
6.246000	24.17	50.00	25.83	N	ON	9.8
11.266000	26.47	50.00	23.53	N	ON	9.9

**\*\*\*END OF REPORT\*\*\***