

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.925-6.425GHz	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	31.944M	19.234M	19M2D1D	22.242M	19.148M
802.11be EHT40_Nss1,(MCS0)_4TX	50.16M	37.921M	37M9D1D	42.372M	37.838M
802.11be EHT80_Nss1,(MCS0)_4TX	87.384M	77.505M	77M5D1D	82.632M	77.243M
802.11be EHT160_Nss1,(MCS0)_4TX	164.736M	156.381M	156MD1D	163.152M	155.988M
802.11be EHT320_Nss1,(MCS0)_4TX	357.984M	316.837M	317MD1D	329.472M	315.052M
6.425-6.525GHz	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	29.304M	19.251M	19M3D1D	24.09M	19.192M
802.11be EHT40_Nss1,(MCS0)_4TX	45.936M	37.94M	37M9D1D	41.58M	37.822M
802.11be EHT80_Nss1,(MCS0)_4TX	111.144M	77.525M	77M5D1D	82.632M	77.344M
802.11be EHT160_Nss1,(MCS0)_4TX	165.12M	156.435M	156MD1D	164.4M	156.38M
802.11be EHT320_Nss1,(MCS0)_4TX	367.488M	317.138M	317MD1D	347.424M	316.623M
6.525-6.875GHz	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	29.106M	19.248M	19M2D1D	22.77M	19.171M
802.11be EHT40_Nss1,(MCS0)_4TX	43.956M	37.9M	37M9D1D	41.316M	37.844M
802.11be EHT80_Nss1,(MCS0)_4TX	91.344M	77.522M	77M5D1D	82.104M	77.315M
802.11be EHT160_Nss1,(MCS0)_4TX	165.792M	156.516M	157MD1D	164.208M	156.279M
6.875-7.125GHz	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	30.3M	19.259M	19M3D1D	22.308M	19.186M
802.11be EHT40_Nss1,(MCS0)_4TX	48.444M	37.916M	37M9D1D	42.108M	37.856M
802.11be EHT80_Nss1,(MCS0)_4TX	86.88M	77.526M	77M5D1D	82.632M	77.356M
802.11be EHT160_Nss1,(MCS0)_4TX	165.12M	156.515M	157MD1D	164.208M	156.212M
802.11be EHT320_Nss1,(MCS0)_4TX	330.528M	316.433M	316MD1D	329.472M	315.238M

Max-N dB = Maximum 26dB down bandwidth
 Max-OBW = Maximum 99% occupied bandwidth;
 Min-N dB = Minimum 26dB down bandwidth
 Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5955MHz	Pass	Inf	25.674M	19.189M	28.776M	19.234M	29.04M	19.189M	31.944M	19.213M
6175MHz	Pass	Inf	22.242M	19.148M	24.882M	19.186M	26.07M	19.184M	29.304M	19.184M
6415MHz	Pass	Inf	24.222M	19.2M	25.938M	19.231M	28.512M	19.183M	26.73M	19.195M
6435MHz	Pass	Inf	26.73M	19.22M	25.542M	19.221M	28.908M	19.227M	25.476M	19.206M
6475MHz	Pass	Inf	26.466M	19.222M	24.882M	19.206M	24.09M	19.192M	26.4M	19.251M
6515MHz	Pass	Inf	25.608M	19.214M	29.304M	19.228M	27.258M	19.237M	28.248M	19.246M
6535MHz	Pass	Inf	26.4M	19.208M	27.06M	19.242M	26.664M	19.213M	29.106M	19.227M
6715MHz	Pass	Inf	25.212M	19.248M	27.918M	19.171M	25.41M	19.197M	25.872M	19.207M
6855MHz	Pass	Inf	25.872M	19.18M	23.562M	19.245M	23.694M	19.212M	22.77M	19.217M
6875MHz Straddle 6.875-7.125GHz	Pass	Inf	28.68M	19.203M	23.4M	19.23M	29.46M	19.235M	30.3M	19.246M
6895MHz	Pass	Inf	22.308M	19.236M	27.588M	19.225M	27.192M	19.224M	28.71M	19.239M
7015MHz	Pass	Inf	27.984M	19.186M	26.73M	19.259M	27.786M	19.22M	26.664M	19.242M
7095MHz	Pass	Inf	28.974M	19.214M	29.106M	19.251M	26.07M	19.239M	26.466M	19.245M
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5965MHz	Pass	Inf	44.088M	37.874M	46.068M	37.858M	47.784M	37.881M	46.86M	37.909M
6165MHz	Pass	Inf	42.372M	37.872M	43.164M	37.877M	42.9M	37.838M	43.56M	37.89M
6405MHz	Pass	Inf	42.372M	37.918M	42.504M	37.868M	50.16M	37.921M	43.296M	37.856M
6445MHz	Pass	Inf	45.936M	37.891M	42.768M	37.883M	42.24M	37.899M	42.108M	37.863M
6485MHz	Pass	Inf	42.372M	37.856M	42.372M	37.866M	42.768M	37.92M	41.58M	37.94M
6525MHz Straddle 6.425-6.525GHz	Pass	Inf	42.78M	37.906M	42.36M	37.918M	43.32M	37.905M	42.18M	37.822M
6565MHz	Pass	Inf	42.636M	37.877M	42.636M	37.859M	42.504M	37.9M	42.636M	37.899M
6725MHz	Pass	Inf	42.504M	37.844M	42.24M	37.855M	43.956M	37.867M	41.316M	37.865M
6845MHz	Pass	Inf	42.768M	37.877M	41.844M	37.897M	42.24M	37.892M	42.768M	37.867M
6885MHz Straddle 6.875-7.125GHz	Pass	Inf	43.68M	37.891M	46.98M	37.899M	42.12M	37.902M	42.3M	37.916M
6925MHz	Pass	Inf	47.388M	37.889M	42.504M	37.906M	46.2M	37.898M	45.144M	37.892M
7005MHz	Pass	Inf	42.108M	37.869M	42.636M	37.9M	42.372M	37.861M	42.504M	37.856M
7085MHz	Pass	Inf	48.444M	37.889M	48.444M	37.914M	44.352M	37.912M	43.296M	37.871M
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	Inf	84.48M	77.339M	86.328M	77.243M	87.384M	77.252M	84.48M	77.363M
6145MHz	Pass	Inf	82.896M	77.505M	84.48M	77.392M	84.216M	77.425M	83.688M	77.374M
6385MHz	Pass	Inf	83.688M	77.437M	83.952M	77.377M	85.272M	77.502M	82.632M	77.406M
6465MHz	Pass	Inf	93.456M	77.525M	111.144M	77.357M	82.632M	77.39M	83.424M	77.454M
6545MHz Straddle 6.425-6.525GHz	Pass	Inf	82.8M	77.429M	84.36M	77.39M	88.44M	77.46M	82.8M	77.344M
6625MHz	Pass	Inf	82.104M	77.411M	83.688M	77.466M	86.856M	77.475M	85.272M	77.408M
6705MHz	Pass	Inf	86.592M	77.487M	83.688M	77.315M	82.632M	77.349M	82.896M	77.442M

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
6785MHz	Pass	Inf	82.896M	77.522M	83.952M	77.437M	91.344M	77.462M	86.064M	77.437M
6865MHz Straddle 6.875-7.125GHz	Pass	Inf	83.04M	77.367M	86.88M	77.426M	84.36M	77.397M	84.36M	77.405M
6945MHz	Pass	Inf	85.272M	77.526M	82.632M	77.439M	84.48M	77.412M	84.216M	77.461M
7025MHz	Pass	Inf	84.48M	77.463M	84.744M	77.387M	84.216M	77.417M	83.952M	77.356M
802.11be EHT160_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	Inf	164.736M	156.263M	163.152M	156.055M	163.68M	155.988M	163.68M	156.1M
6185MHz	Pass	Inf	164.736M	156.224M	164.208M	156.245M	164.736M	156.336M	164.736M	156.145M
6345MHz	Pass	Inf	164.736M	156.307M	163.68M	156.239M	164.736M	156.194M	164.208M	156.381M
6505MHz Straddle 6.425-6.525GHz	Pass	Inf	164.88M	156.435M	164.4M	156.42M	164.64M	156.38M	165.12M	156.415M
6665MHz	Pass	Inf	165.792M	156.279M	164.208M	156.497M	164.736M	156.516M	164.736M	156.458M
6825MHz Straddle 6.875-7.125GHz	Pass	Inf	164.4M	156.416M	164.64M	156.258M	165.12M	156.365M	164.64M	156.32M
6985MHz	Pass	Inf	164.208M	156.291M	164.736M	156.515M	164.736M	156.212M	164.208M	156.332M
802.11be EHT320_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	Inf	330.528M	315.1M	329.472M	315.075M	330.528M	315.661M	331.584M	315.052M
6265MHz	Pass	Inf	330.528M	315.441M	331.584M	315.555M	330.528M	315.818M	330.528M	315.625M
6425MHz Straddle 5.925-6.425GHz	Pass	Inf	332.64M	315.524M	352.704M	316.837M	357.984M	316.556M	357.984M	316.172M
6585MHz Straddle 6.425-6.525GHz	Pass	Inf	359.04M	316.834M	347.424M	316.623M	365.376M	317.138M	367.488M	316.855M
6745MHz Straddle 6.875-7.125GHz	Pass	Inf	330.528M	315.788M	330.528M	315.722M	330.528M	316.384M	330.528M	316.433M
6905MHz Straddle 6.875-7.125GHz	Pass	Inf	329.472M	315.244M	330.528M	315.238M	330.528M	315.691M	330.528M	315.511M



Port X-N dB = 26dB down bandwidth

Port X-OBW = Port X 99% occupied bandwidth

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW



5955MHz

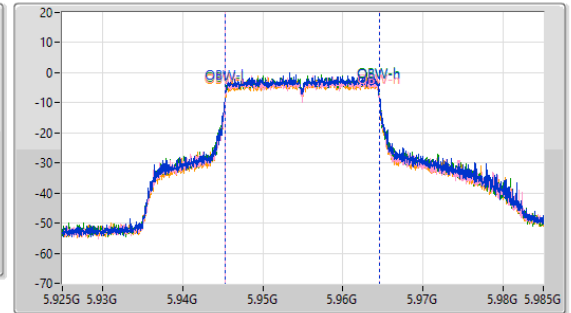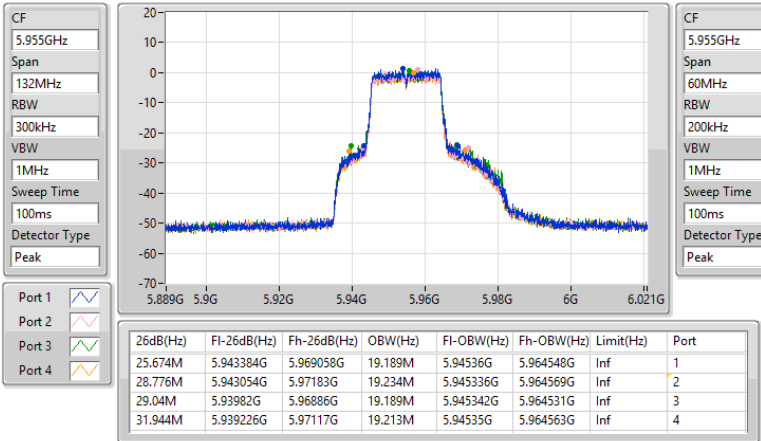

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW



6175MHz

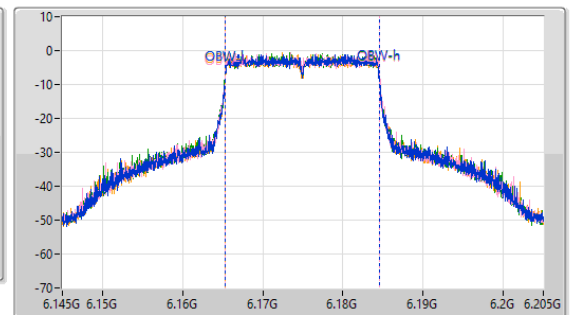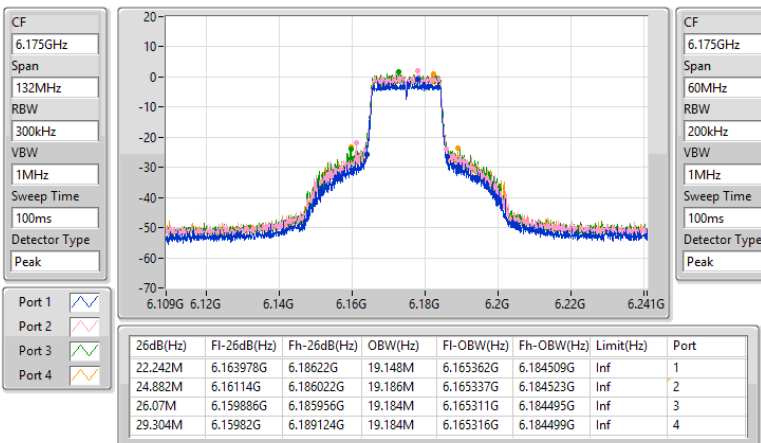

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW



6415MHz

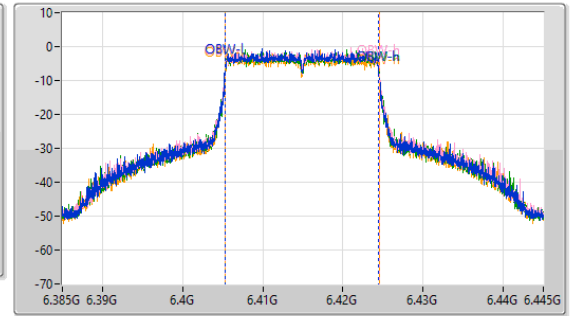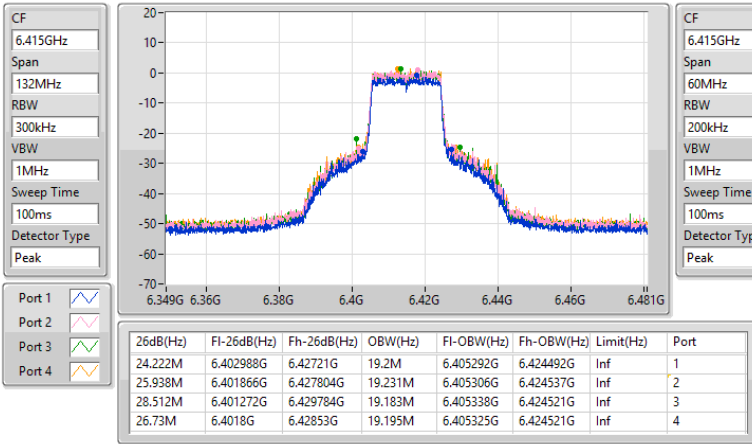

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

6435MHz

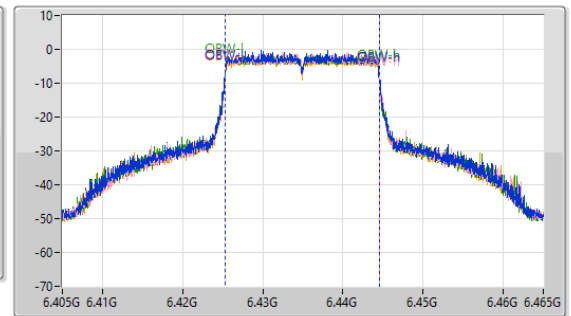
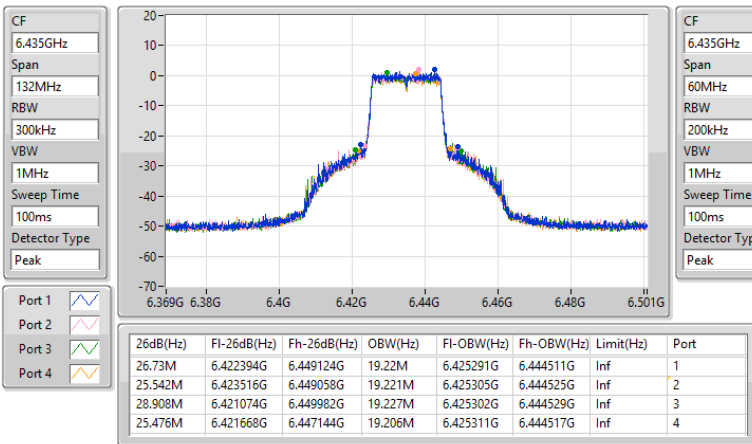




6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW



6475MHz

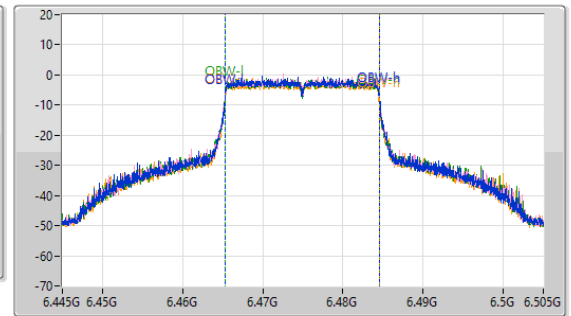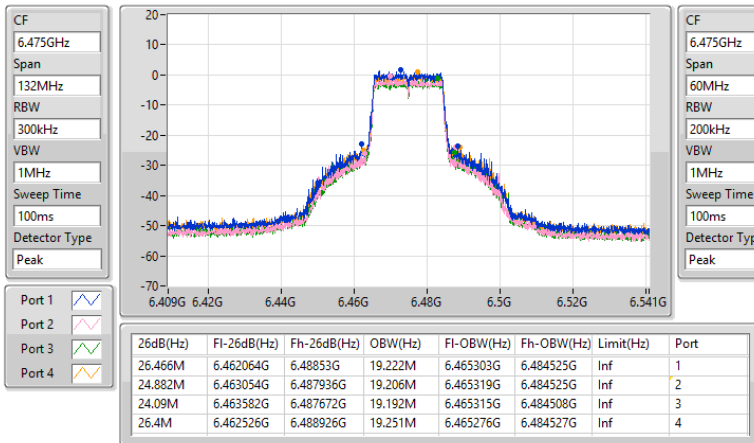

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

6515MHz

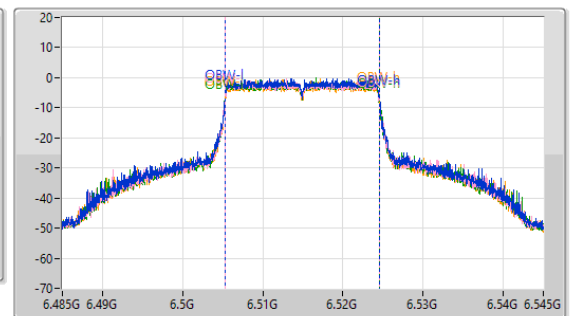
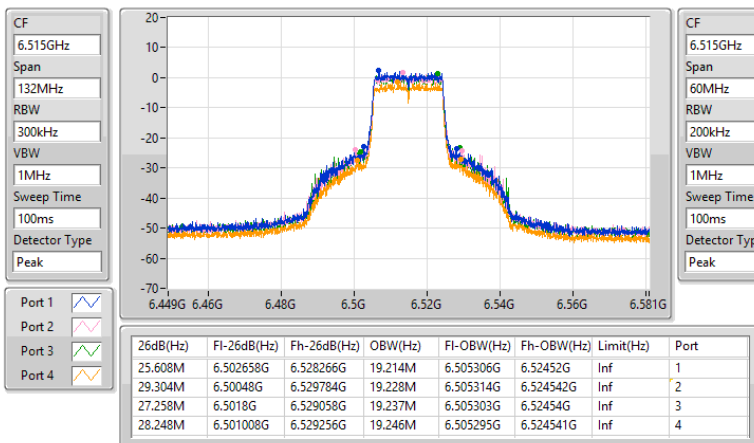




6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW



6535MHz

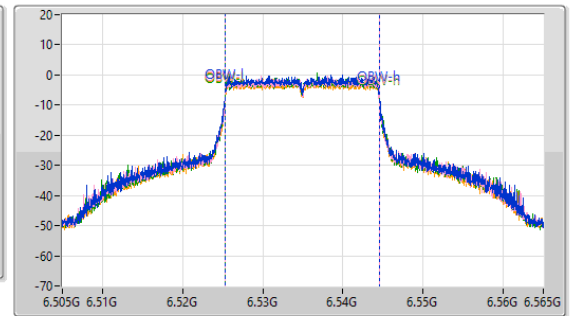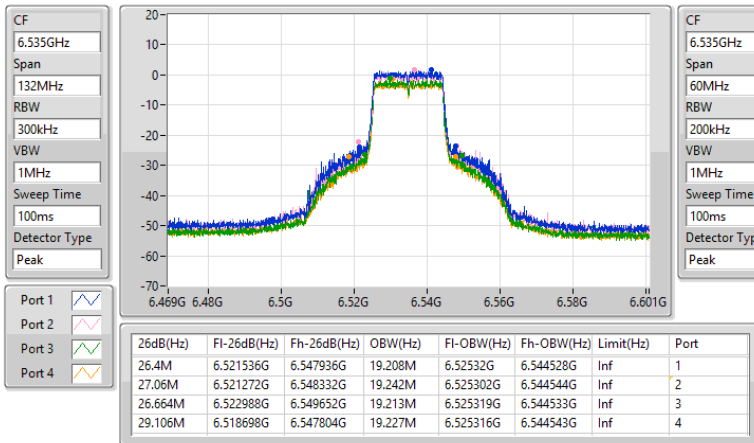

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

6715MHz

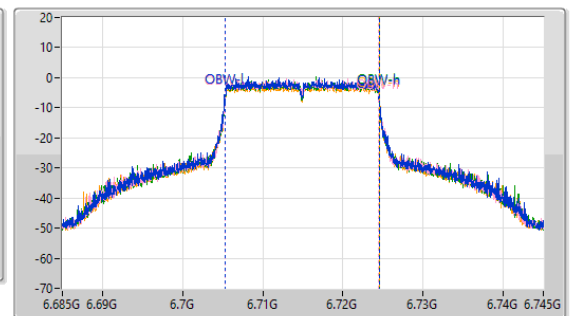
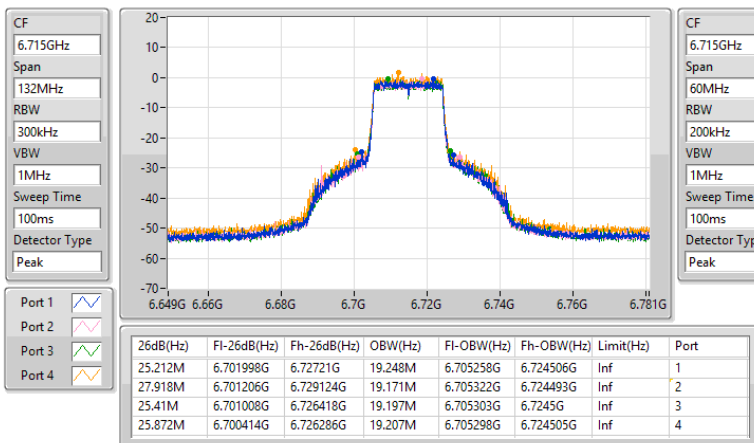




6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW



6855MHz

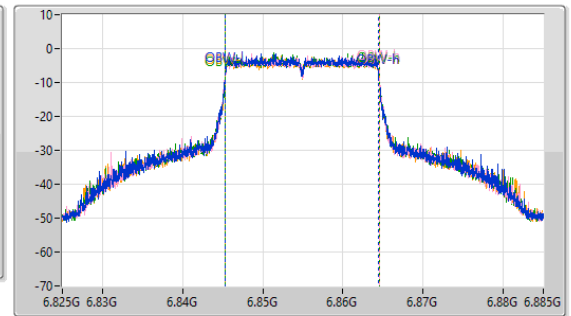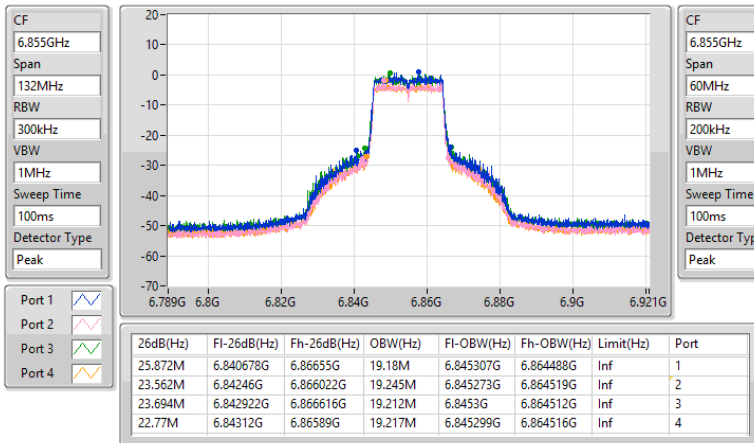

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

6875MHz Straddle 6.875-7.125GHz

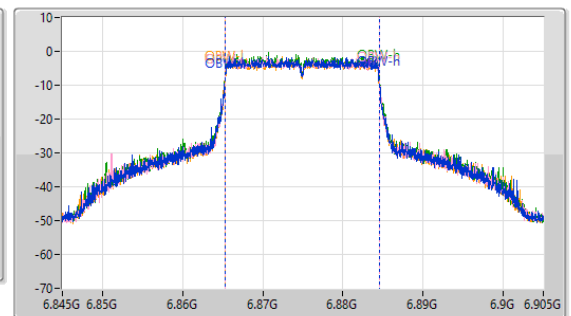
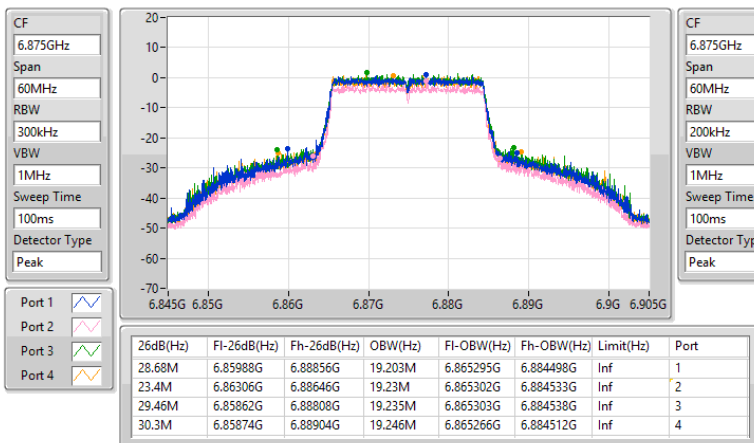




6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW



6895MHz

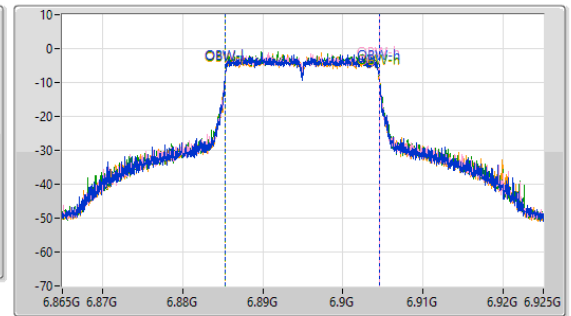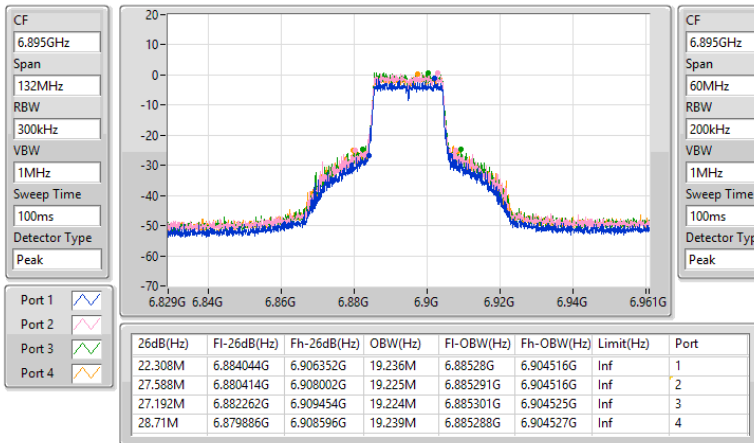

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

7015MHz

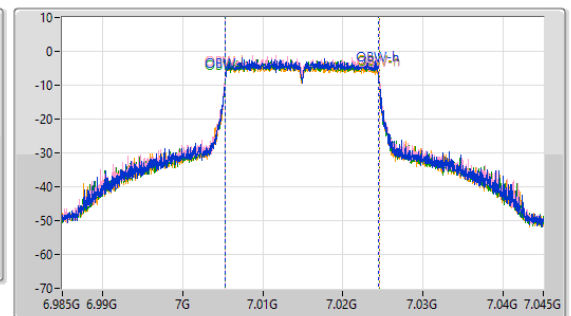
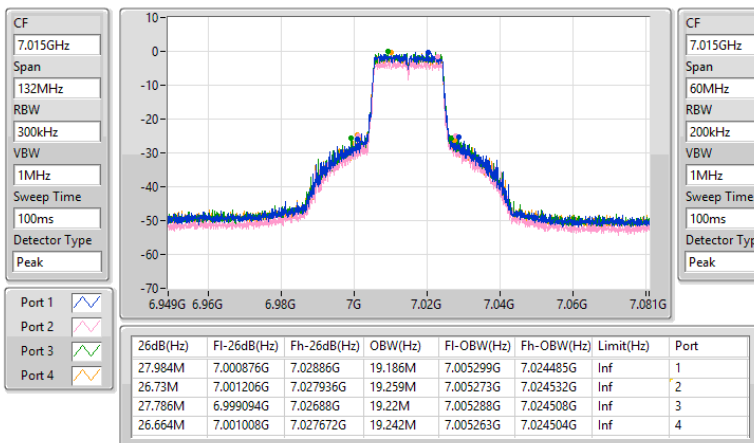




6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW



7095MHz

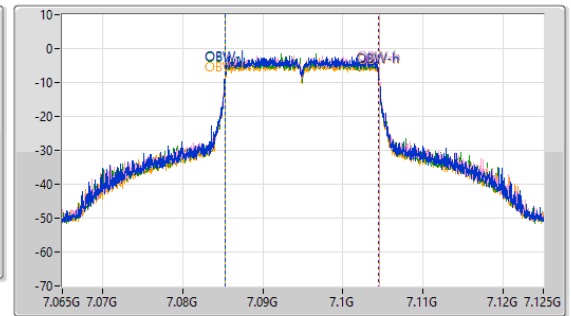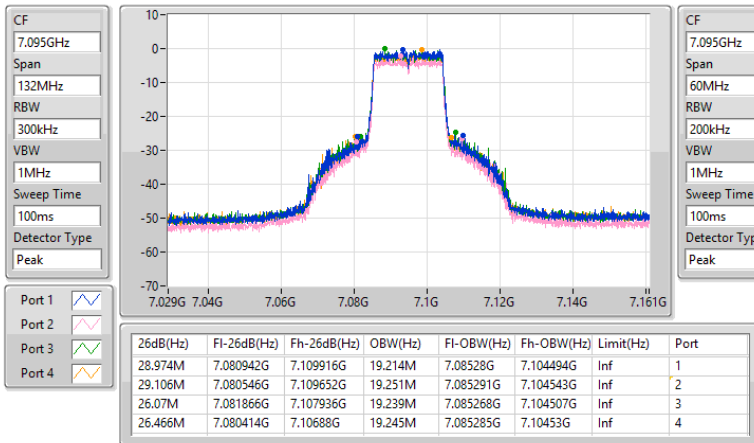

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW



5965MHz

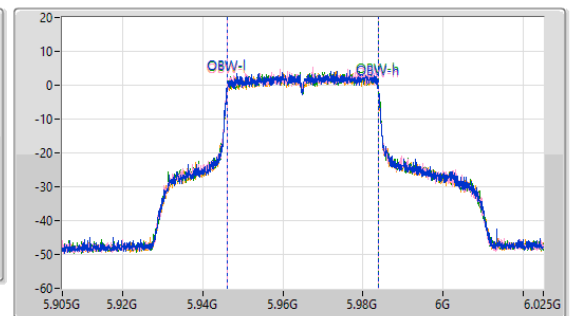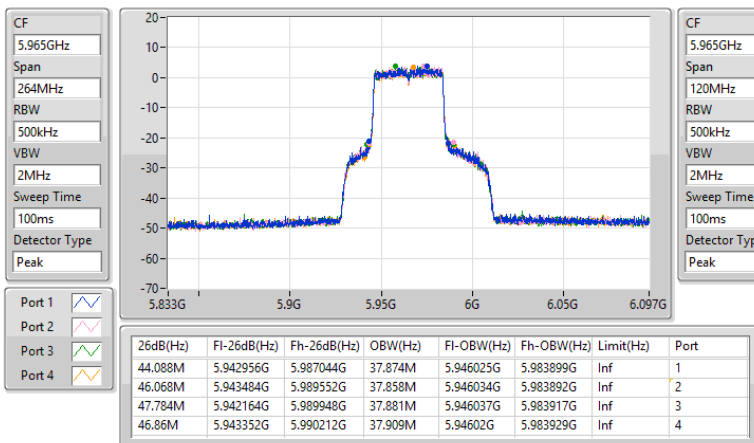

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW



6165MHz

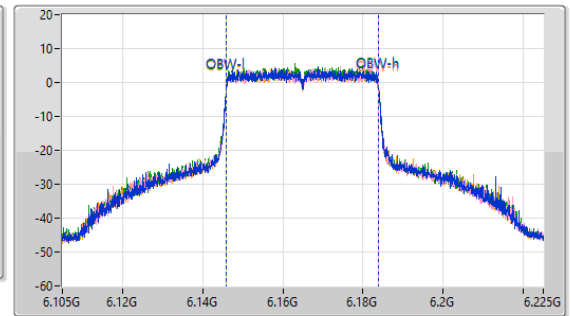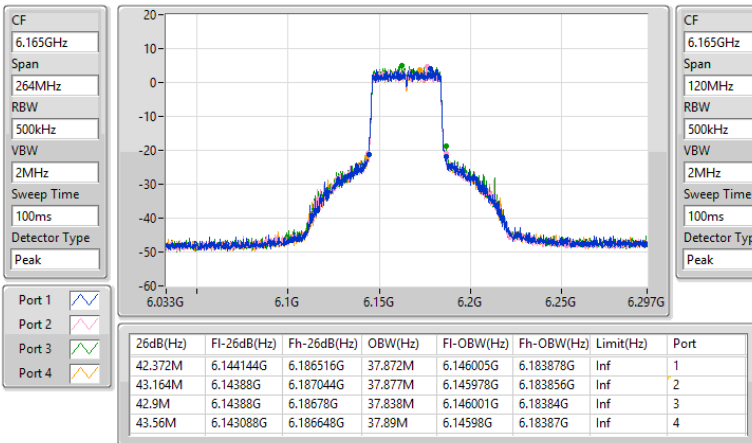

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

6405MHz

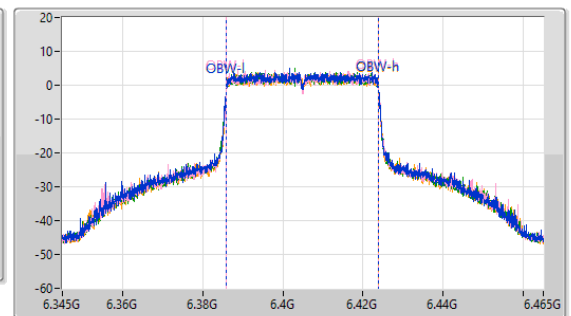
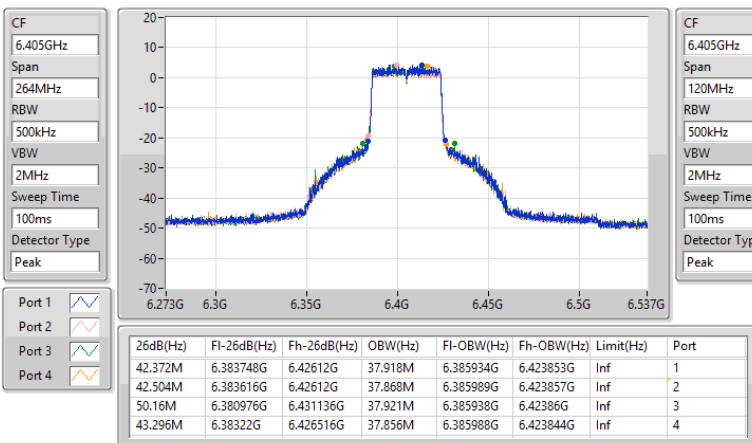




6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW



6445MHz

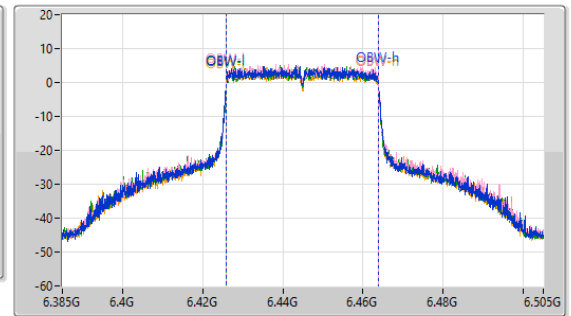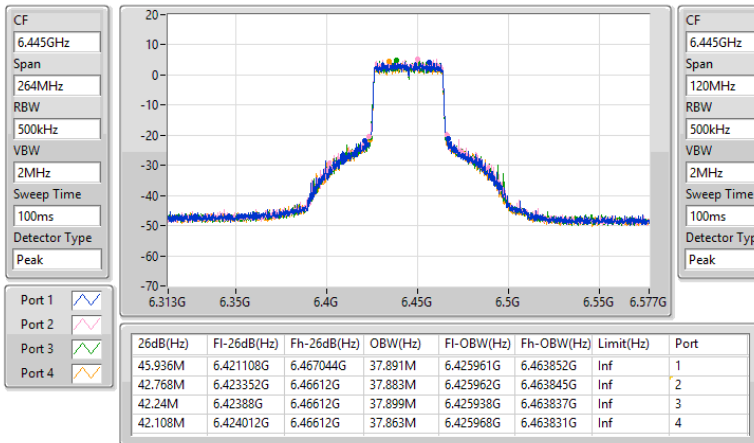

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

6485MHz

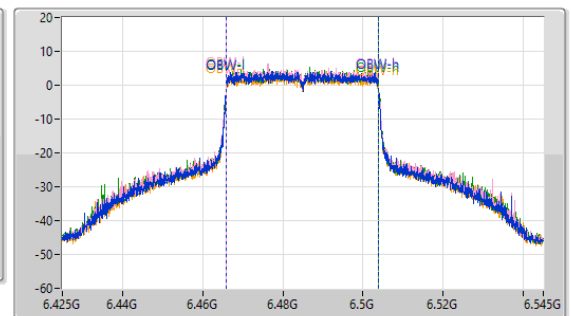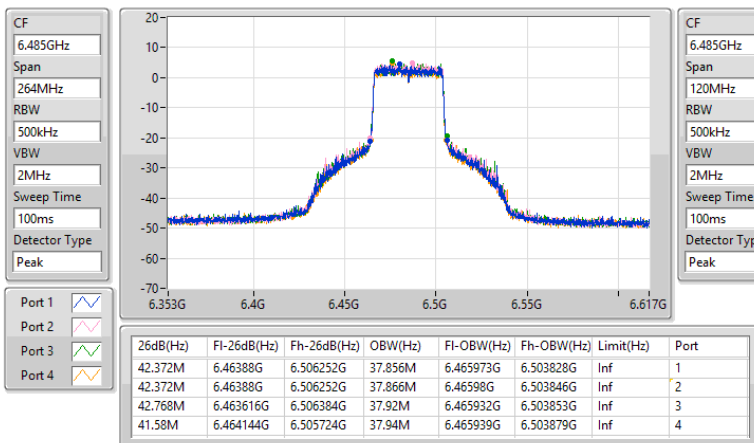




6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW


6525MHz Straddle 6.425-6.525GHz

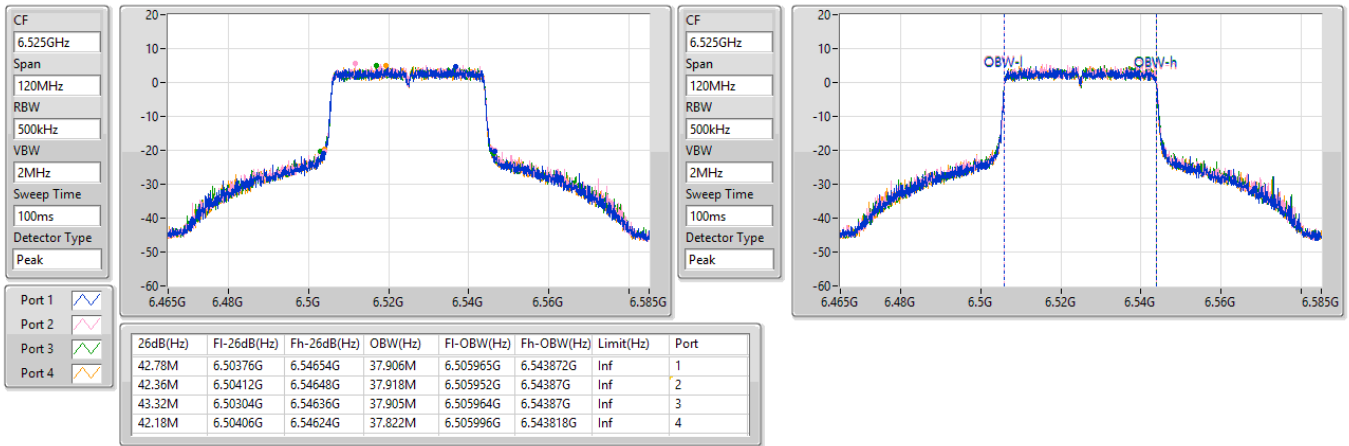

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

6565MHz


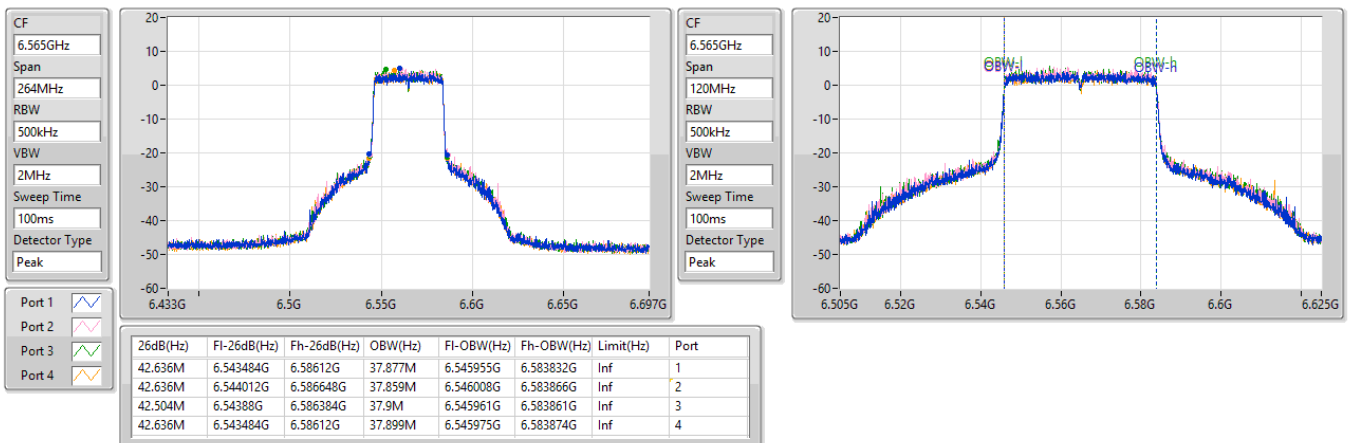




6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW



6725MHz

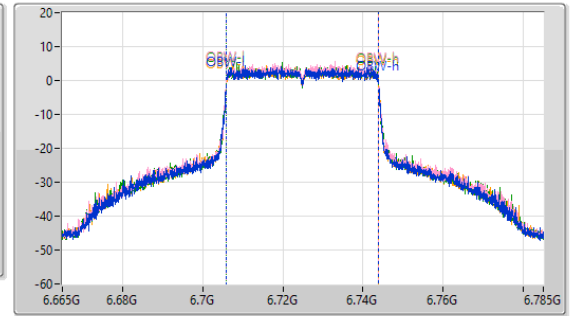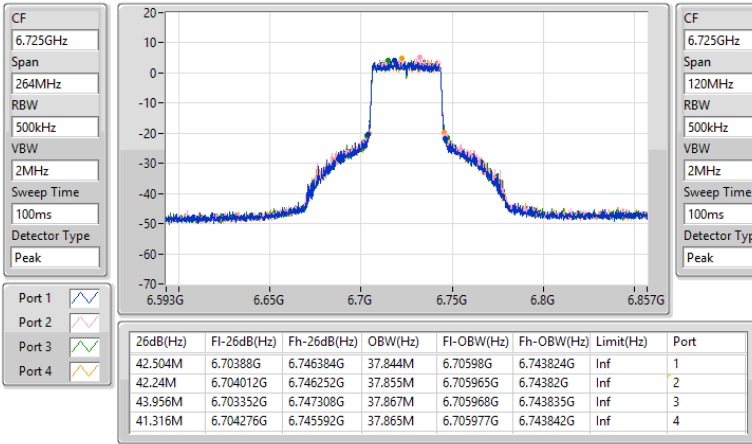

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW



6845MHz

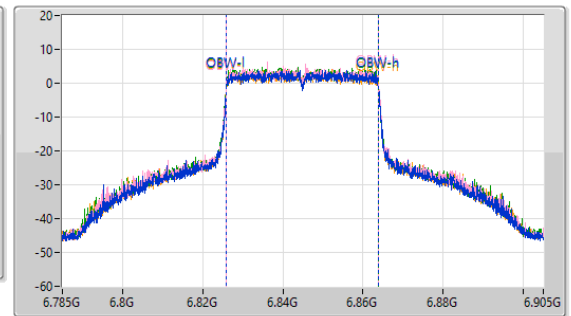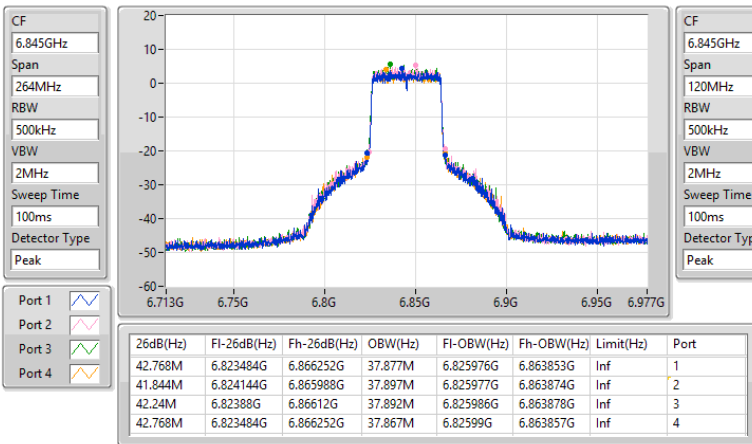

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW



6885MHz Straddle 6.875-7.125GHz

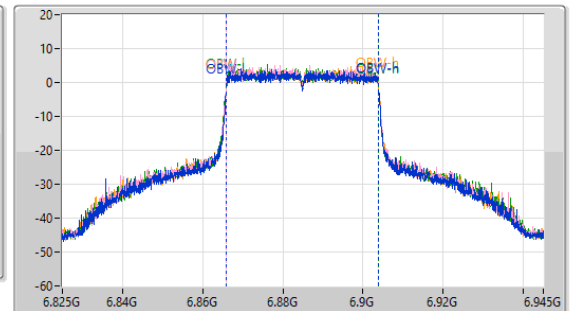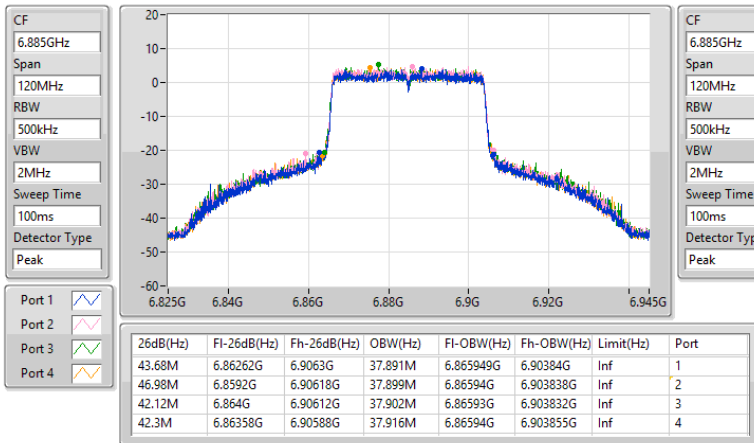

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

6925MHz

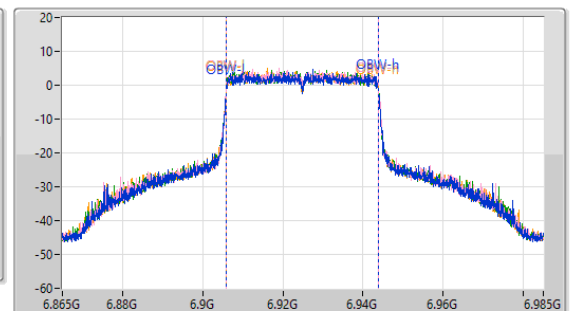
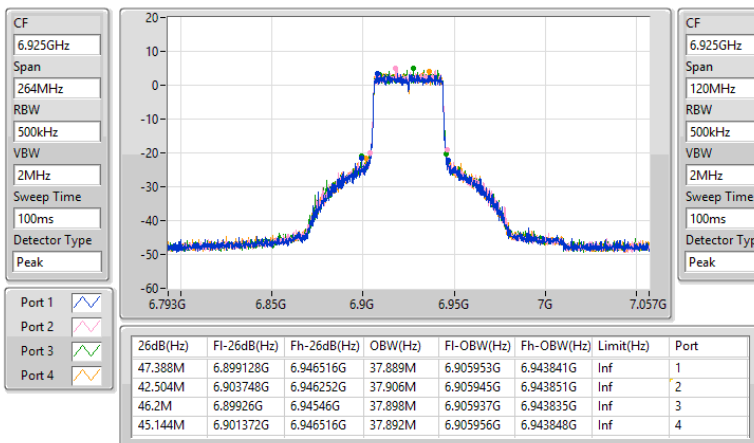




6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW



7005MHz

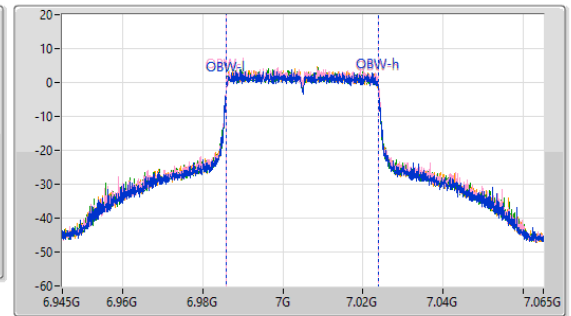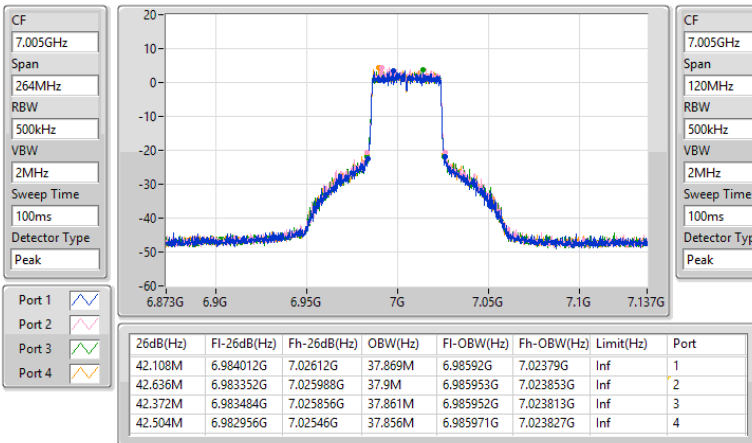

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

7085MHz

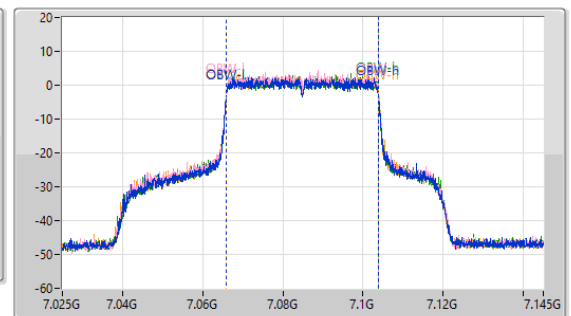
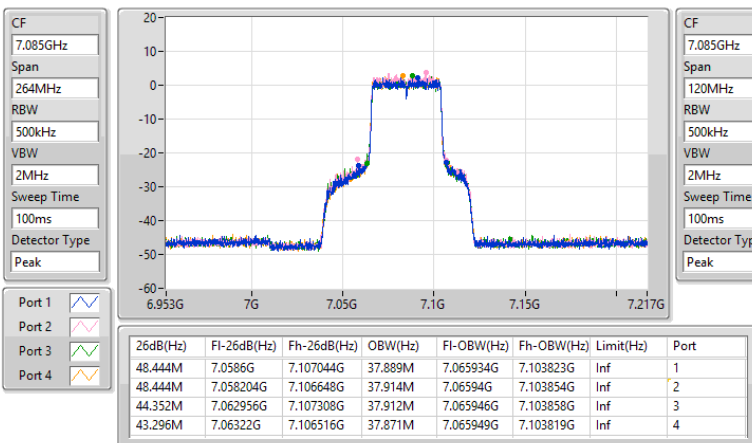




5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW



5985MHz

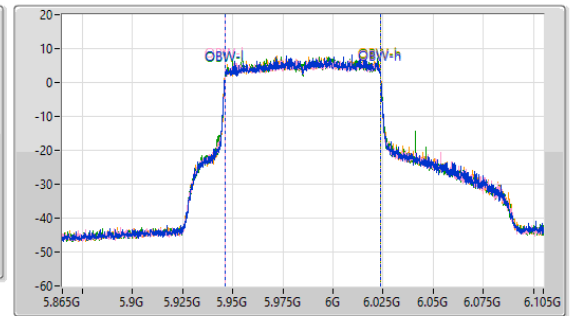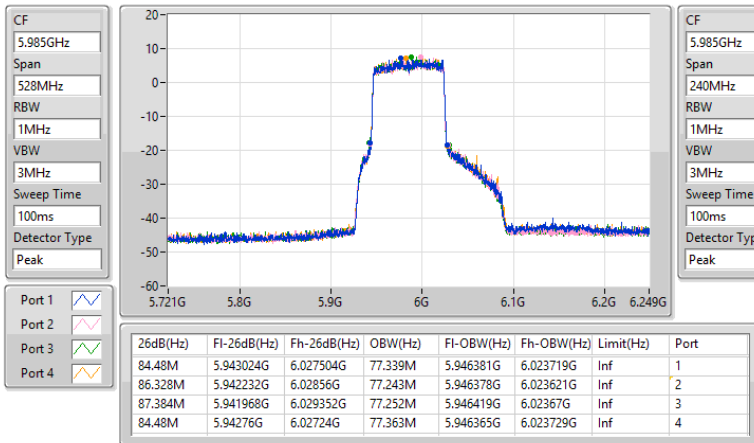

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

6145MHz

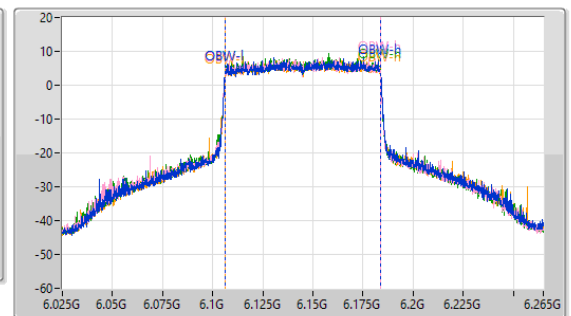
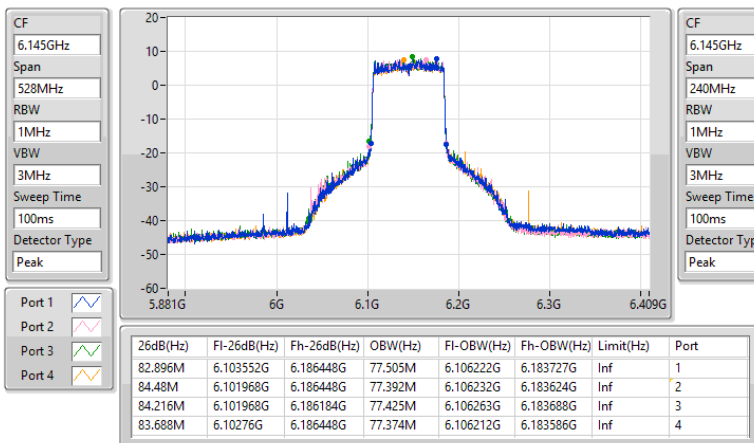




5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW



6385MHz

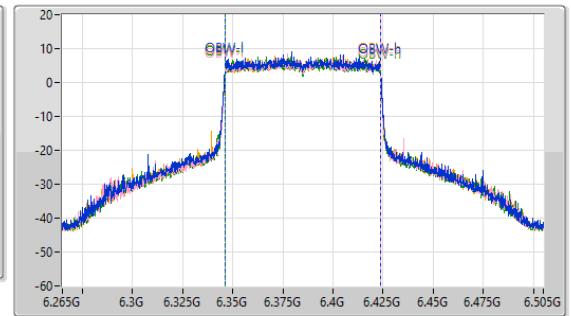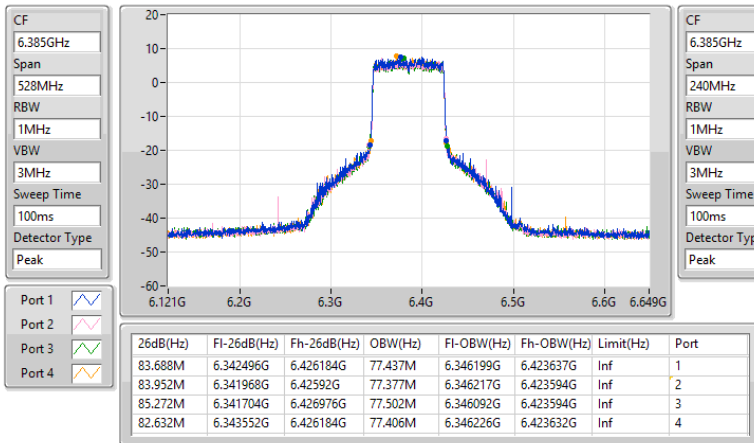

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

6465MHz

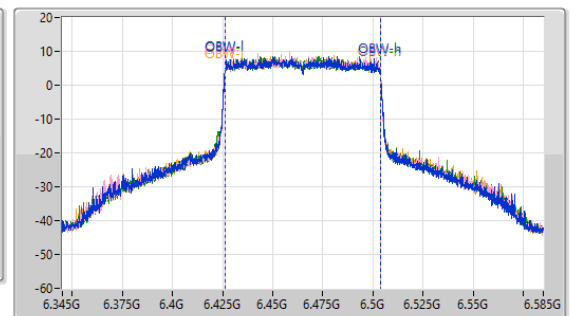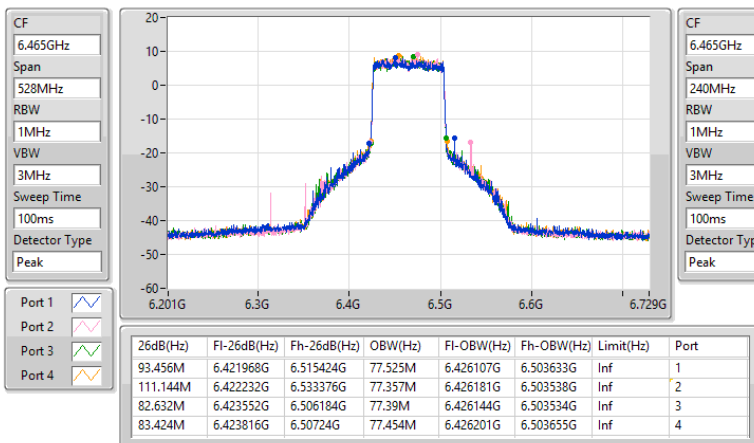




6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW


6545MHz Straddle 6.425-6.525GHz

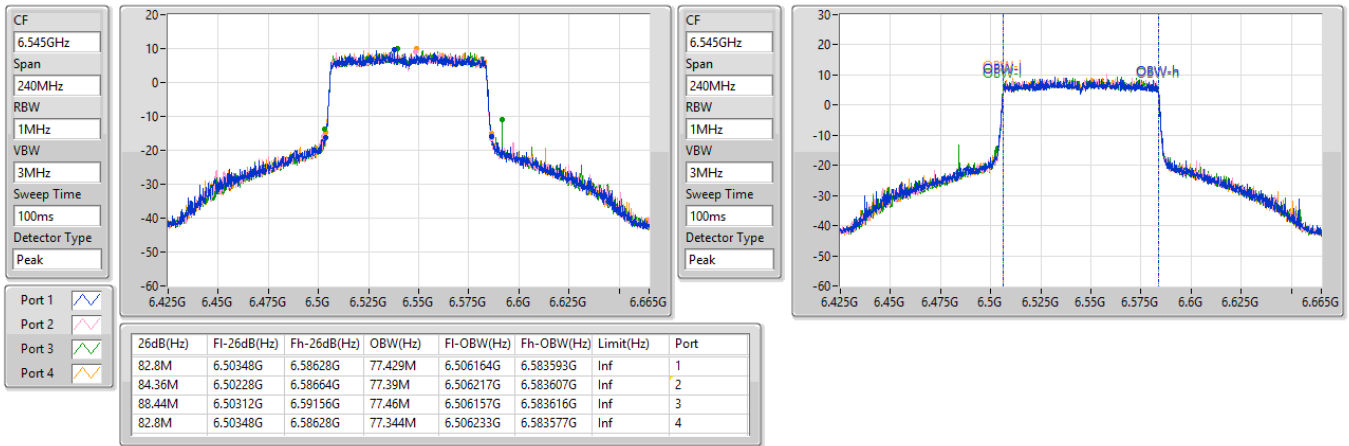

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

6625MHz


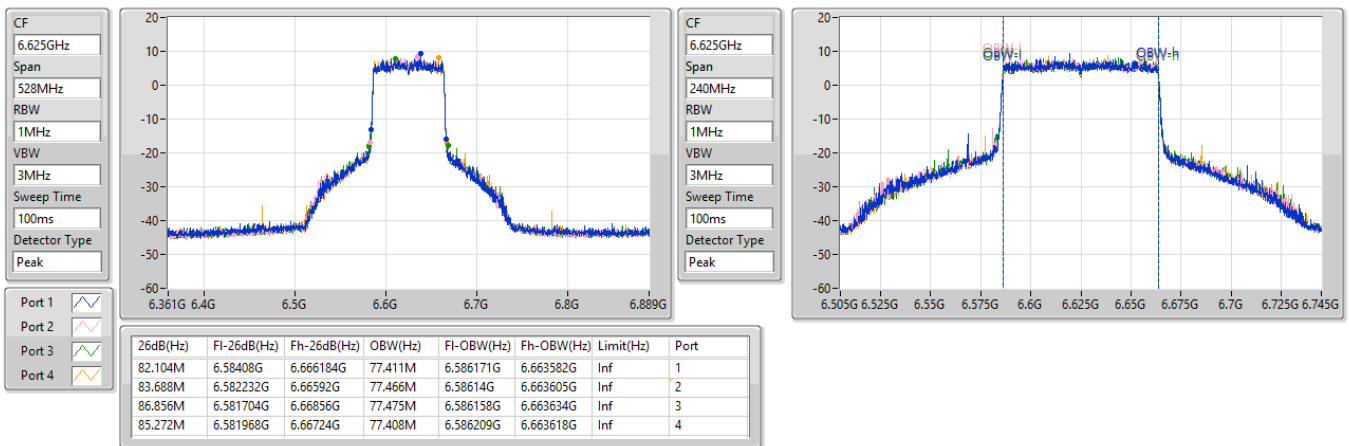




6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW



6705MHz

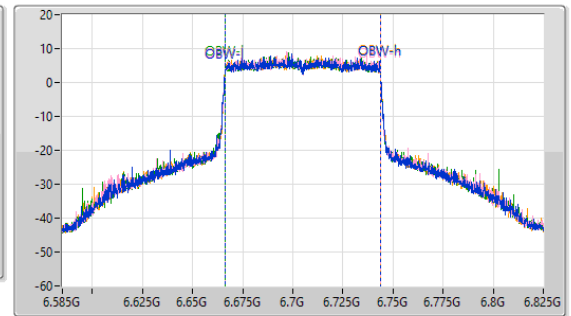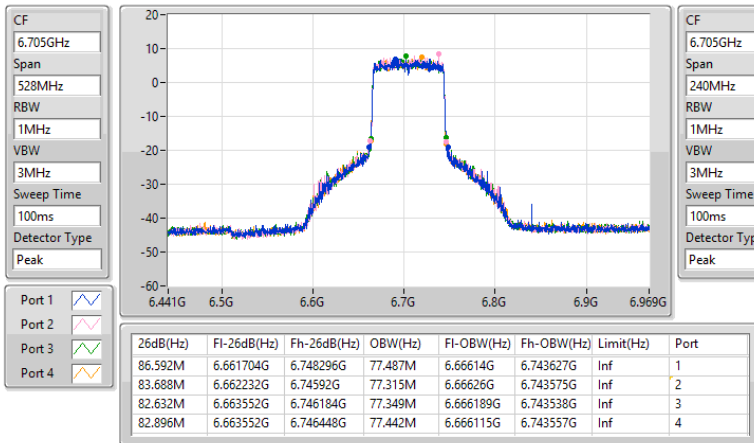

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

6785MHz

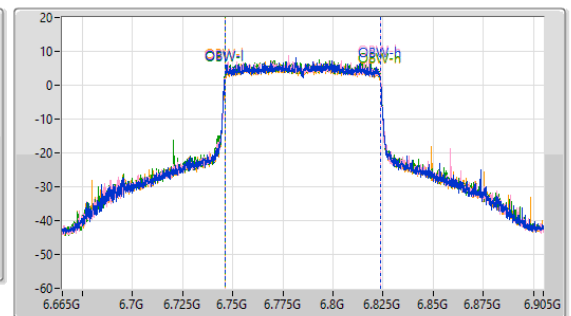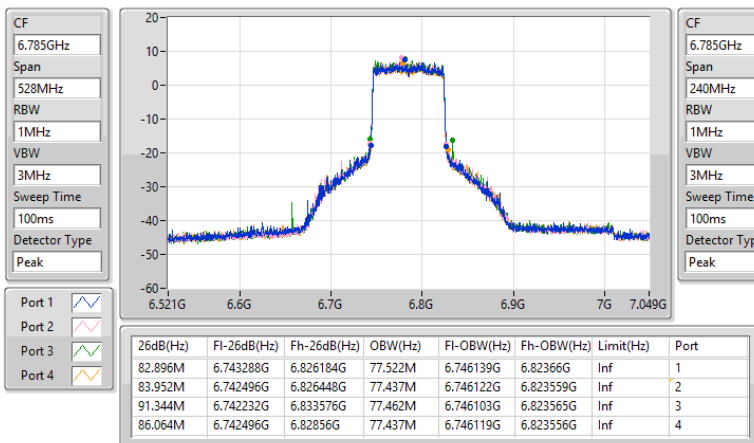




6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW


6865MHz Straddle 6.875-7.125GHz

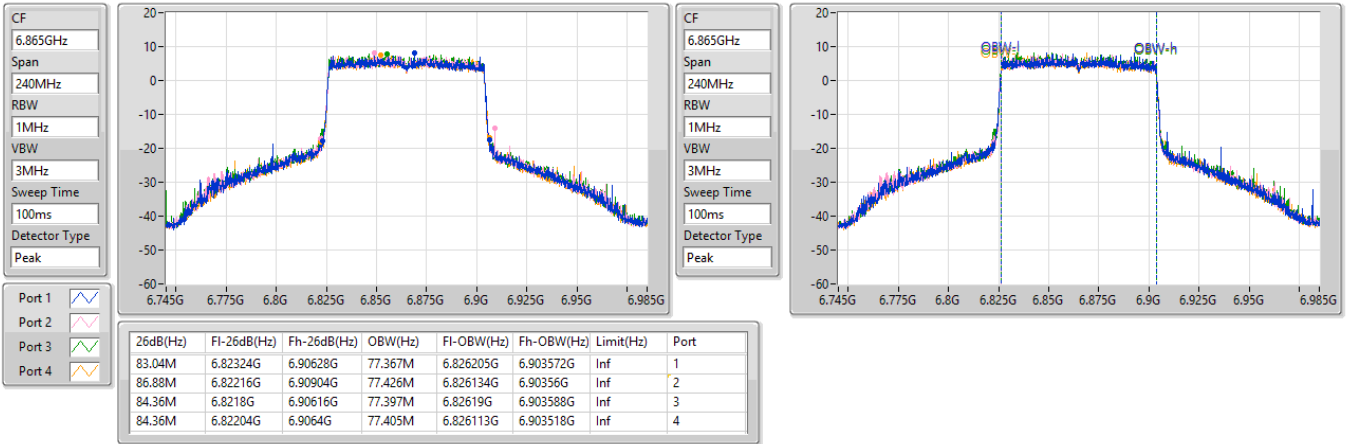

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW



6945MHz

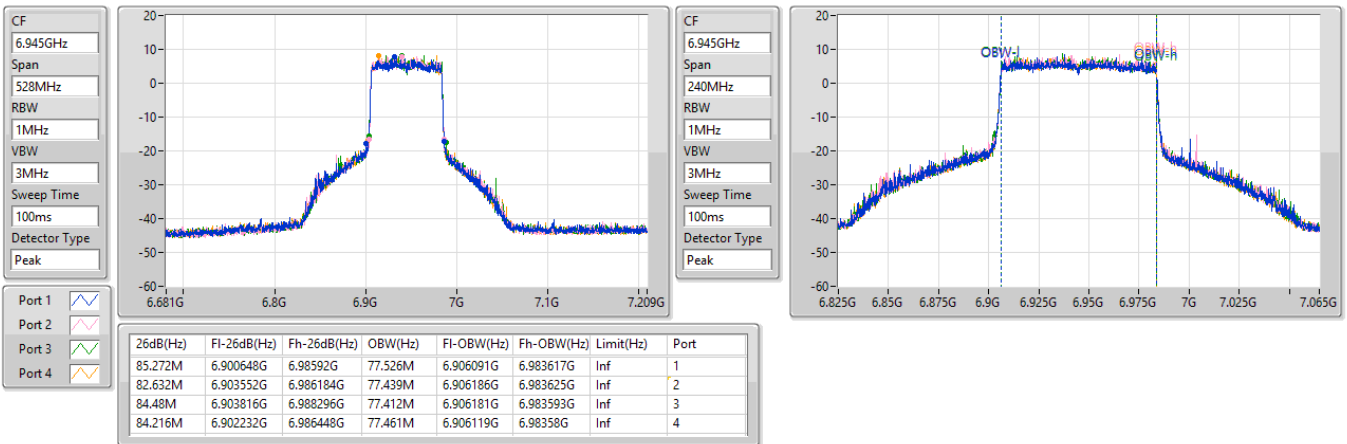

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW



7025MHz

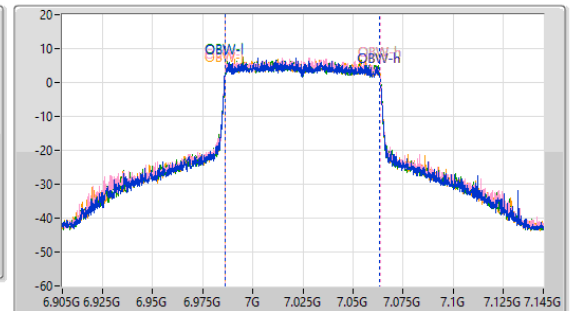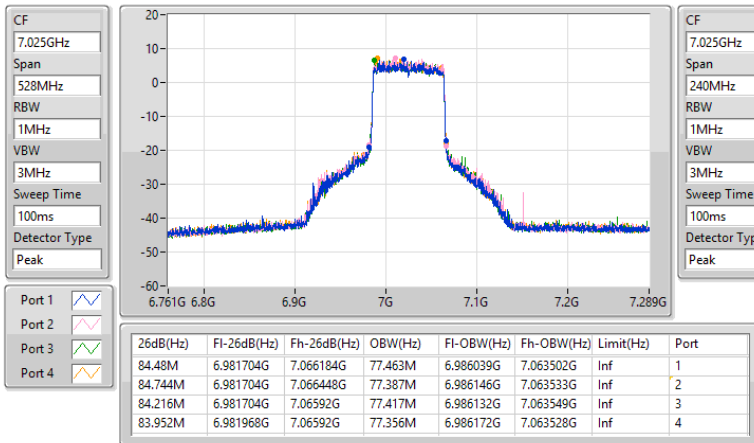

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW

6025MHz

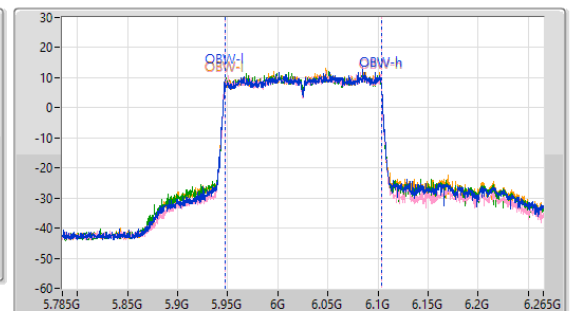
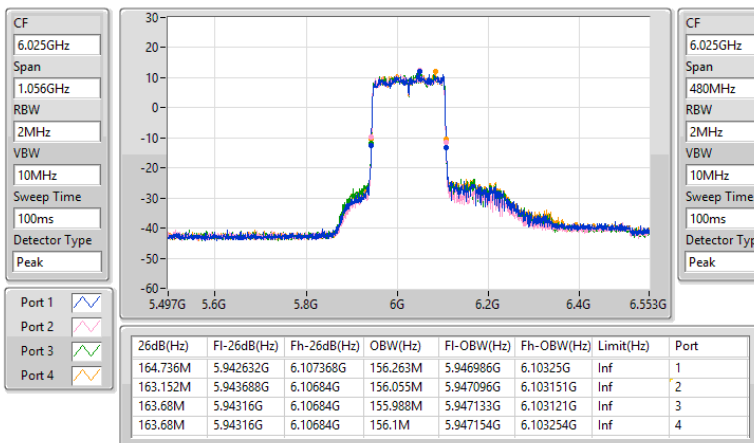




5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW



6185MHz

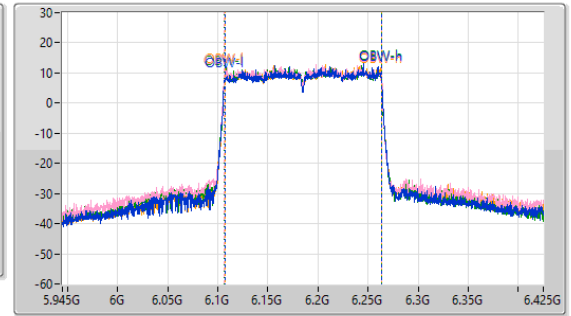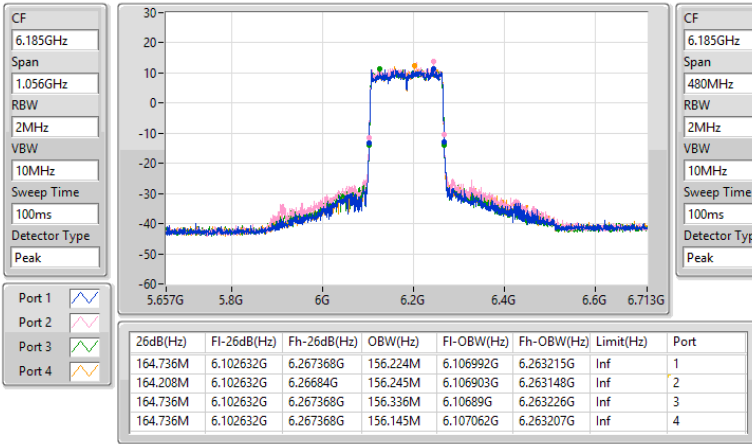

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW


6345MHz

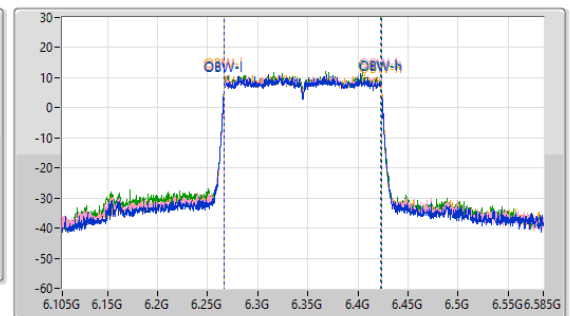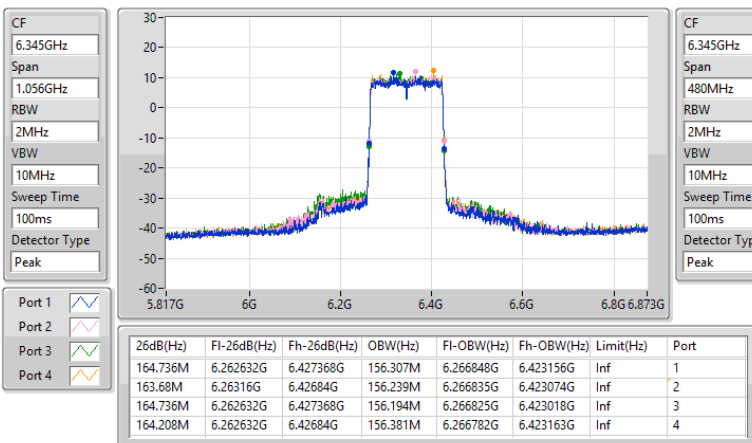

6.425-6.525GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW


6505MHz Straddle 6.425-6.525GHz

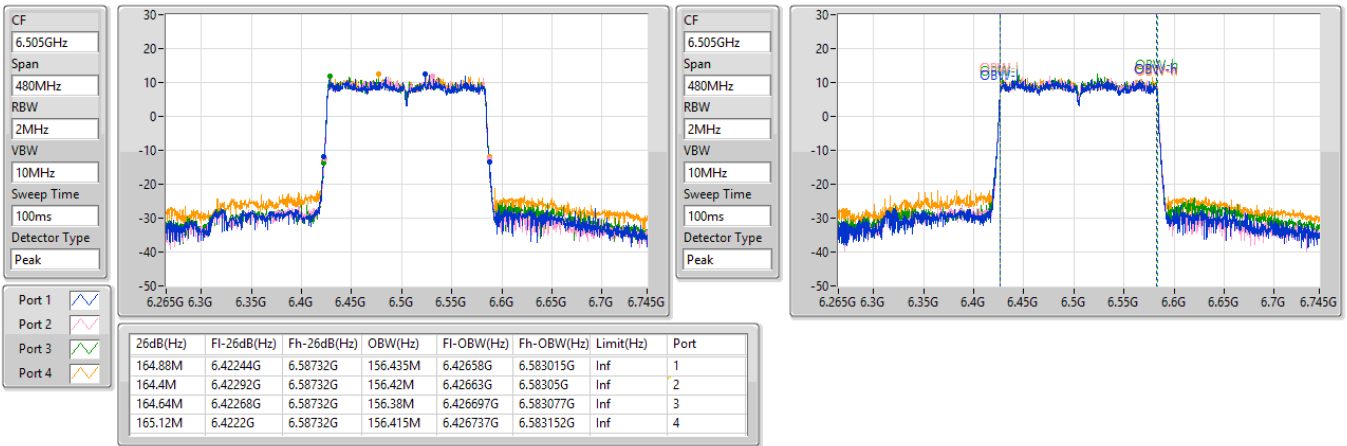

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW

6665MHz

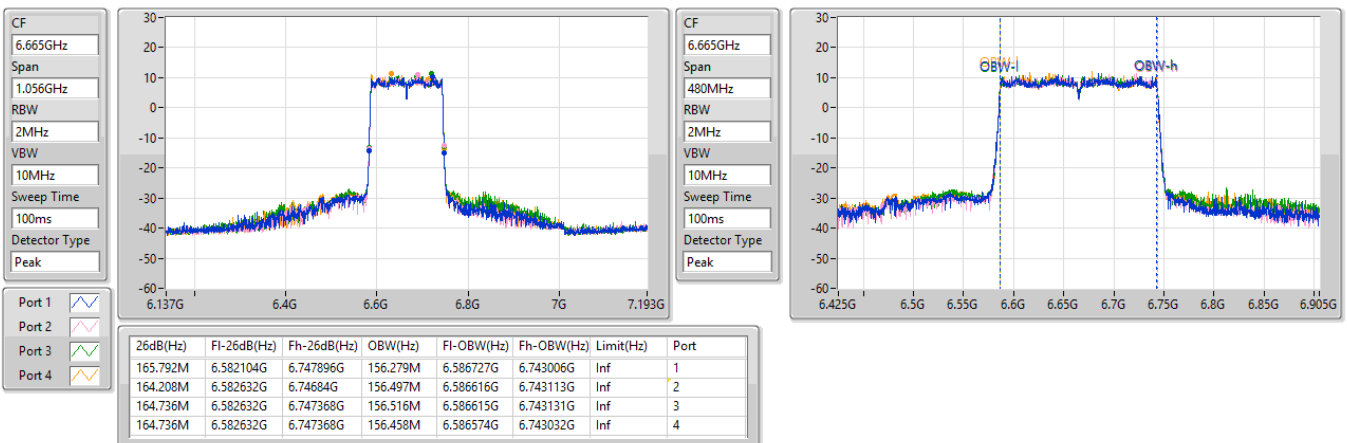




6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW


6825MHz Straddle 6.875-7.125GHz

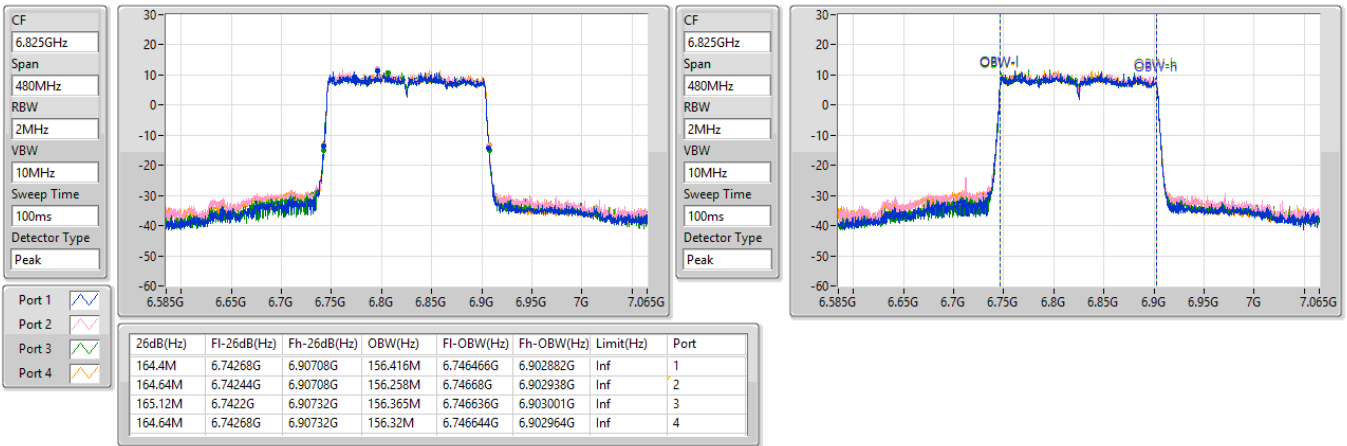

6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW



6985MHz

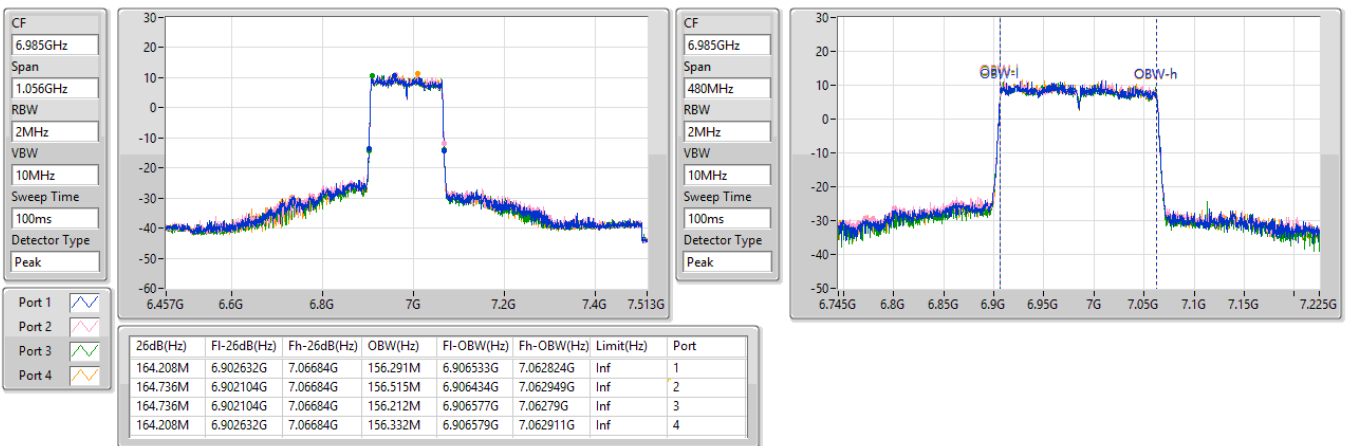

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

EBW



6105MHz

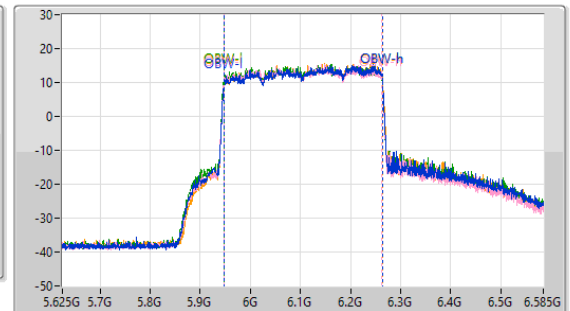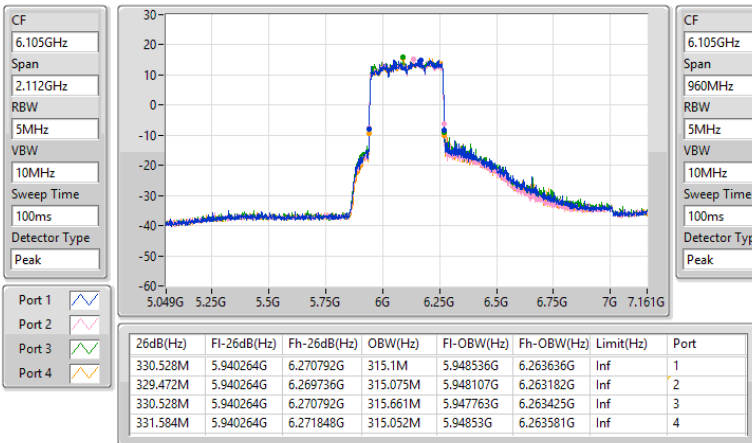

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

EBW


6265MHz

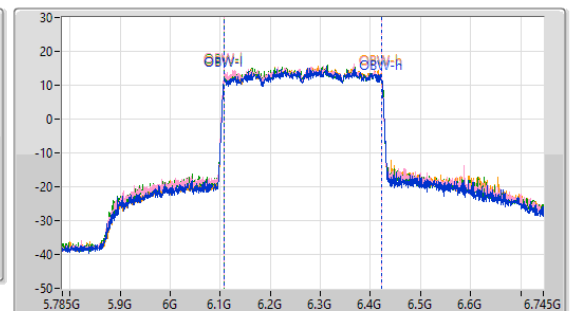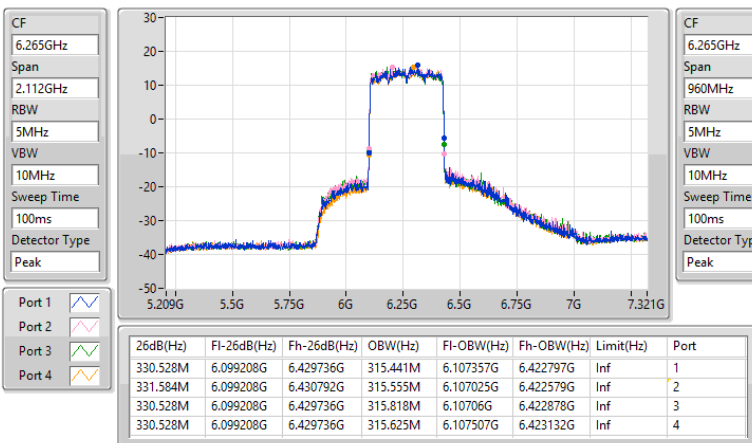

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

EBW


6425MHz Straddle 5.925-6.425GHz

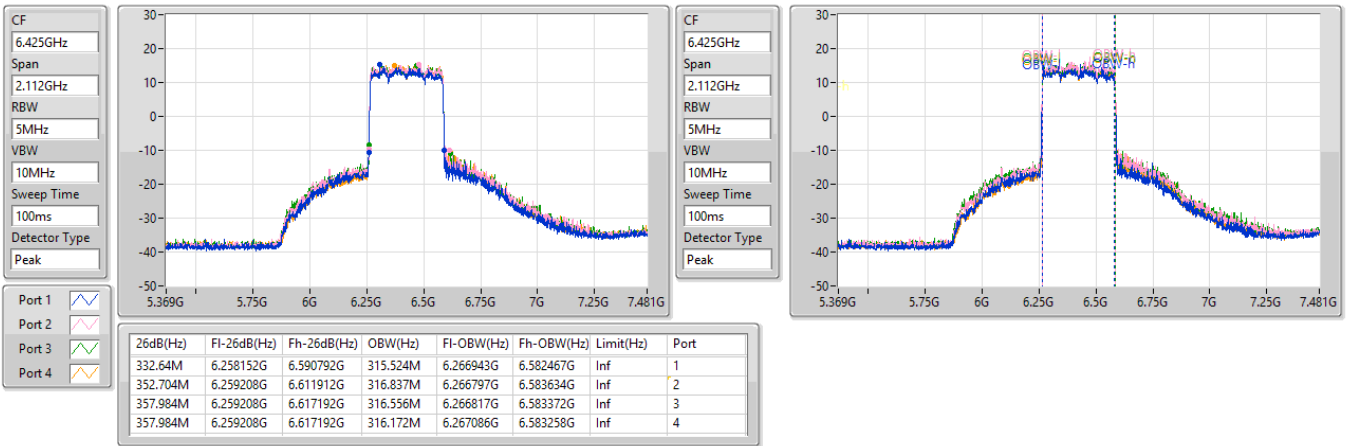

6.425-6.525GHz_802.11be EHT320_Nss1,(MCS0)_4TX

EBW

6585MHz Straddle 6.425-6.525GHz

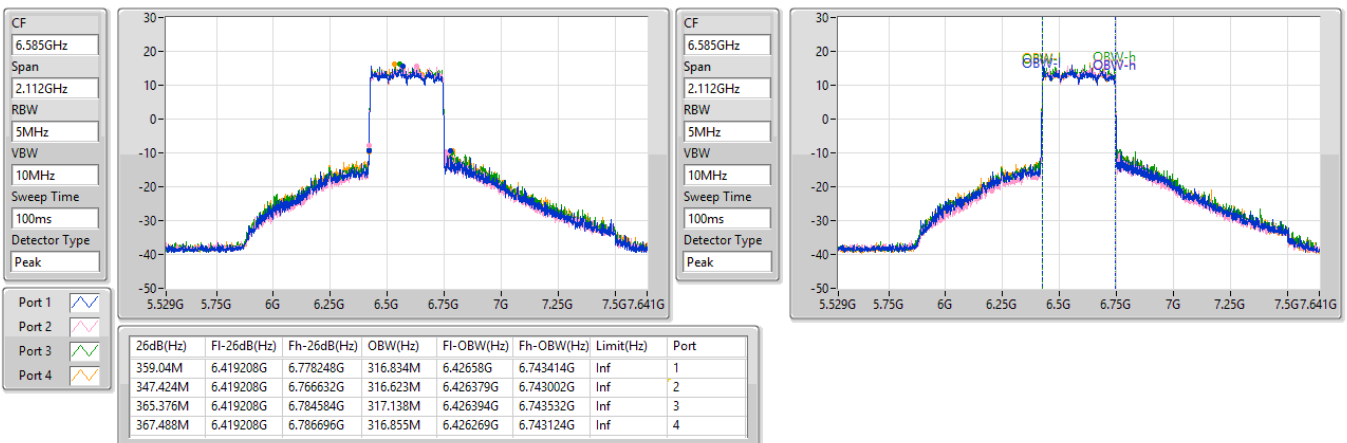




6.875-7.125GHz_802.11be EHT320_Nss1,(MCS0)_4TX

EBW


6745MHz Straddle 6.875-7.125GHz

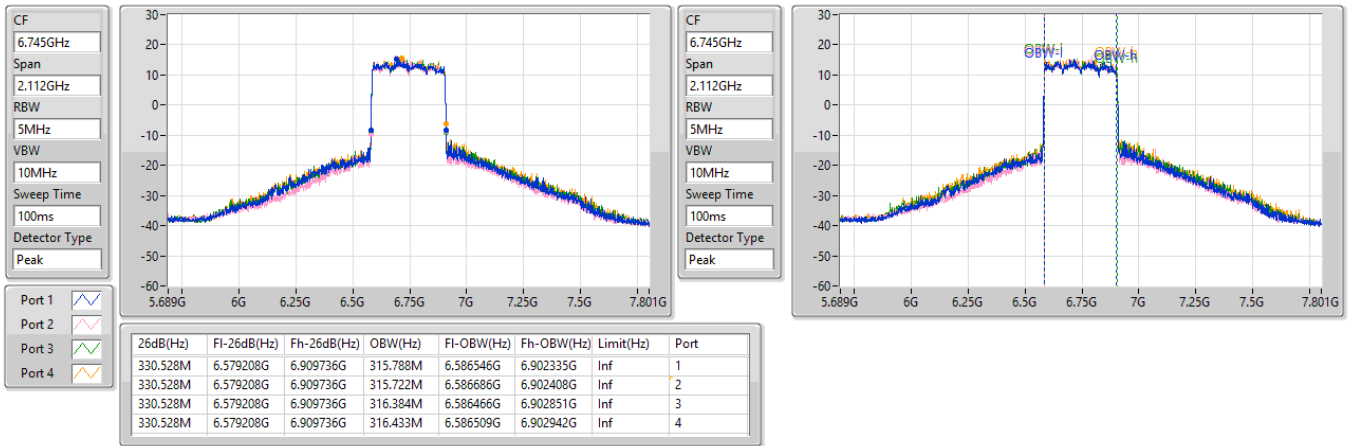

6.875-7.125GHz_802.11be EHT320_Nss1,(MCS0)_4TX

EBW

6905MHz Straddle 6.875-7.125GHz

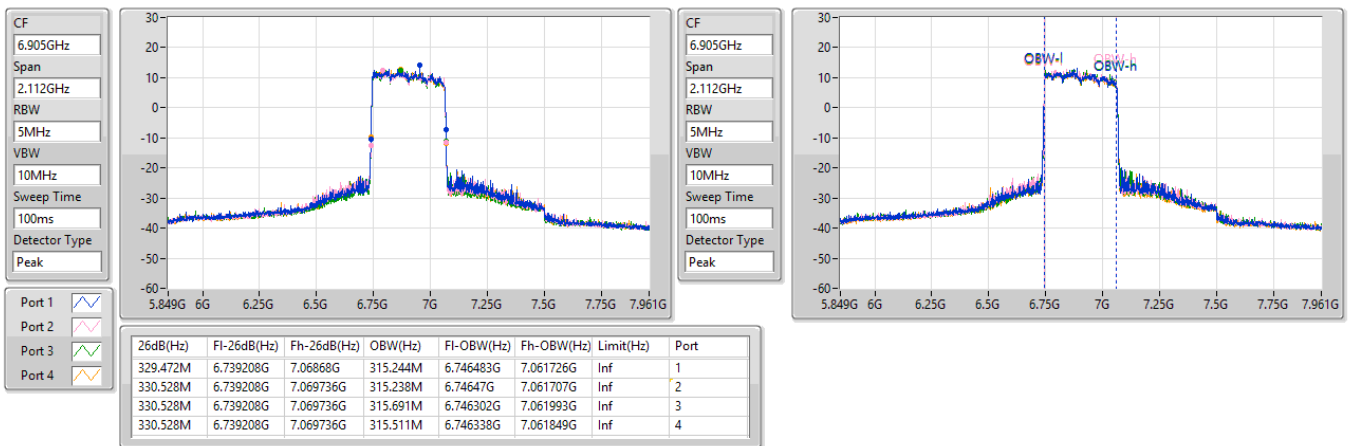



Mode	Freq MHz	CH	Read Level (dBuV)	Path loss (dB/m)	DT Factor (dB)	Final Level (dBuV/m)	EIRP (dBm)	Limit (dBm)	Verdict
be EHT20	5955	1	106.63	1.18	0.04	107.85	12.65	30.00	Pass
be EHT20	6175	45	106.56	1.52	0.04	108.12	12.92	30.00	Pass
be EHT20	6415	93	105.03	2.53	0.04	107.6	12.40	30.00	Pass
be EHT20	6435	97	105.09	2.62	0.04	107.75	12.55	30.00	Pass
be EHT20	6475	105	104.86	2.79	0.04	107.69	12.49	30.00	Pass
be EHT20	6515	113	105.22	2.98	0.04	108.24	13.04	30.00	Pass
be EHT20	6535	117	104.95	3.1	0.04	108.09	12.89	30.00	Pass
be EHT20	6715	153	104.75	3.08	0.04	107.87	12.67	30.00	Pass
be EHT20	6855	181	104.64	3.38	0.04	108.06	12.86	30.00	Pass
be EHT20	6875	185	104.48	3.52	0.04	108.04	12.84	30.00	Pass
be EHT20	6895	189	104.6	3.66	0.04	108.3	13.10	30.00	Pass
be EHT20	7015	213	103.34	4.31	0.04	107.69	12.49	30.00	Pass
be EHT20	7095	229	103.37	4.75	0.04	108.16	12.96	30.00	Pass

Mode	Freq MHz	CH	Read Level (dBuV)	Path loss (dB/m)	DT Factor (dB)	Final Level (dBuV/m)	EIRP (dBm)	Limit (dBm)	Verdict
be EHT40	5965	3	109.58	1.16	0.02	110.76	15.56	30.00	Pass
be EHT40	6165	43	109.44	1.43	0.02	110.89	15.69	30.00	Pass
be EHT40	6405	91	108.61	2.49	0.02	111.12	15.92	30.00	Pass
be EHT40	6445	99	108.12	2.66	0.02	110.8	15.60	30.00	Pass
be EHT40	6485	107	108.12	2.84	0.02	110.98	15.78	30.00	Pass
be EHT40	6525	115	107.8	3.04	0.02	110.86	15.66	30.00	Pass
be EHT40	6565	123	107.84	3.17	0.02	111.03	15.83	30.00	Pass
be EHT40	6725	155	107.67	3.09	0.02	110.78	15.58	30.00	Pass
be EHT40	6845	179	107.45	3.33	0.02	110.8	15.60	30.00	Pass
be EHT40	6885	187	107.48	3.59	0.02	111.09	15.89	30.00	Pass
be EHT40	6925	195	106.91	3.82	0.02	110.75	15.55	30.00	Pass
be EHT40	7005	211	106.49	4.22	0.02	110.73	15.53	30.00	Pass
be EHT40	7085	227	105.79	4.71	0.02	110.52	15.32	30.00	Pass

Note:

$EIRP(dBm) = \text{Final Level}(dBuV/m) - 95.2$

$\text{Final Level}(dBuV/m) = \text{Read Level}(dBuV) + \text{Path Loss}(dB/m) + \text{DT Factor}(dB)$

$\text{Path Loss} = \text{Antenna Factor}(dBuV/m) + \text{Cable Loss}(dB) - \text{Preamp Factor}(dB)$



Mode	Freq MHz	CH	Read Level (dBuV)	Path loss (dB/m)	DT Factor (dB)	Final Level (dBuV/m)	EIRP (dBm)	Limit (dBm)	Verdict
be EHT80	5985	7	112.06	1.13	0.02	113.21	18.01	30.00	Pass
be EHT80	6145	39	112.02	1.29	0.02	113.33	18.13	30.00	Pass
be EHT80	6385	87	111.23	2.37	0.02	113.62	18.42	30.00	Pass
be EHT80	6465	103	110.59	2.75	0.02	113.36	18.16	30.00	Pass
be EHT80	6545	119	110.21	3.16	0.02	113.39	18.19	30.00	Pass
be EHT80	6625	135	110.19	3.17	0.02	113.38	18.18	30.00	Pass
be EHT80	6705	151	110.26	3.08	0.02	113.36	18.16	30.00	Pass
be EHT80	6785	167	110.12	3.17	0.02	113.31	18.11	30.00	Pass
be EHT80	6865	183	109.61	3.45	0.02	113.08	17.88	30.00	Pass
be EHT80	6945	199	109.28	3.92	0.02	113.22	18.02	30.00	Pass
be EHT80	7025	215	108.48	4.38	0.02	112.88	17.68	30.00	Pass

Mode	Freq MHz	CH	Read Level (dBuV)	Path loss (dB/m)	DT Factor (dB)	Final Level (dBuV/m)	EIRP (dBm)	Limit (dBm)	Verdict
be EHT160	6025	15	115.04	1.06	0.08	116.18	20.98	30.00	Pass
be EHT160	6185	47	114.63	1.6	0.08	116.31	21.11	30.00	Pass
be EHT160	6345	79	113.84	2.11	0.08	116.03	20.83	30.00	Pass
be EHT160	6505	111	113.59	2.93	0.08	116.6	21.40	30.00	Pass
be EHT160	6665	143	113.31	3.15	0.08	116.54	21.34	30.00	Pass
be EHT160	6825	175	112.77	3.27	0.08	116.12	20.92	30.00	Pass
be EHT160	6985	207	111.91	4.12	0.08	116.11	20.91	30.00	Pass


Mode	Freq MHz	CH	Read Level (dBuV)	Path loss (dB/m)	DT Factor (dB)	Final Level (dBuV/m)	EIRP (dBm)	Limit (dBm)	Verdict
be EHT320	6105	31	117.24	1.18	0.08	118.5	23.30	30.00	Pass
be EHT320	6265	63	116.79	1.88	0.08	118.75	23.55	30.00	Pass
be EHT320	6425	95	116.04	2.57	0.08	118.69	23.49	30.00	Pass
be EHT320	6585	127	115.48	3.17	0.08	118.73	23.53	30.00	Pass
be EHT320	6745	159	115.49	3.09	0.08	118.66	23.46	30.00	Pass
be EHT320	6905	191	113.12	3.72	0.08	116.92	21.72	30.00	Pass


Note:


EIRP(dBm) = Final Level(dBuV/m) - 95.2


Final Level(dBuV/m) = Read Level (dBuV) + Path Loss(dB/m) + DT Factor(dB)


Path Loss = Antenna Factor(dBuV/m) + Cable Loss(dB) - Preamp Factor(dB)

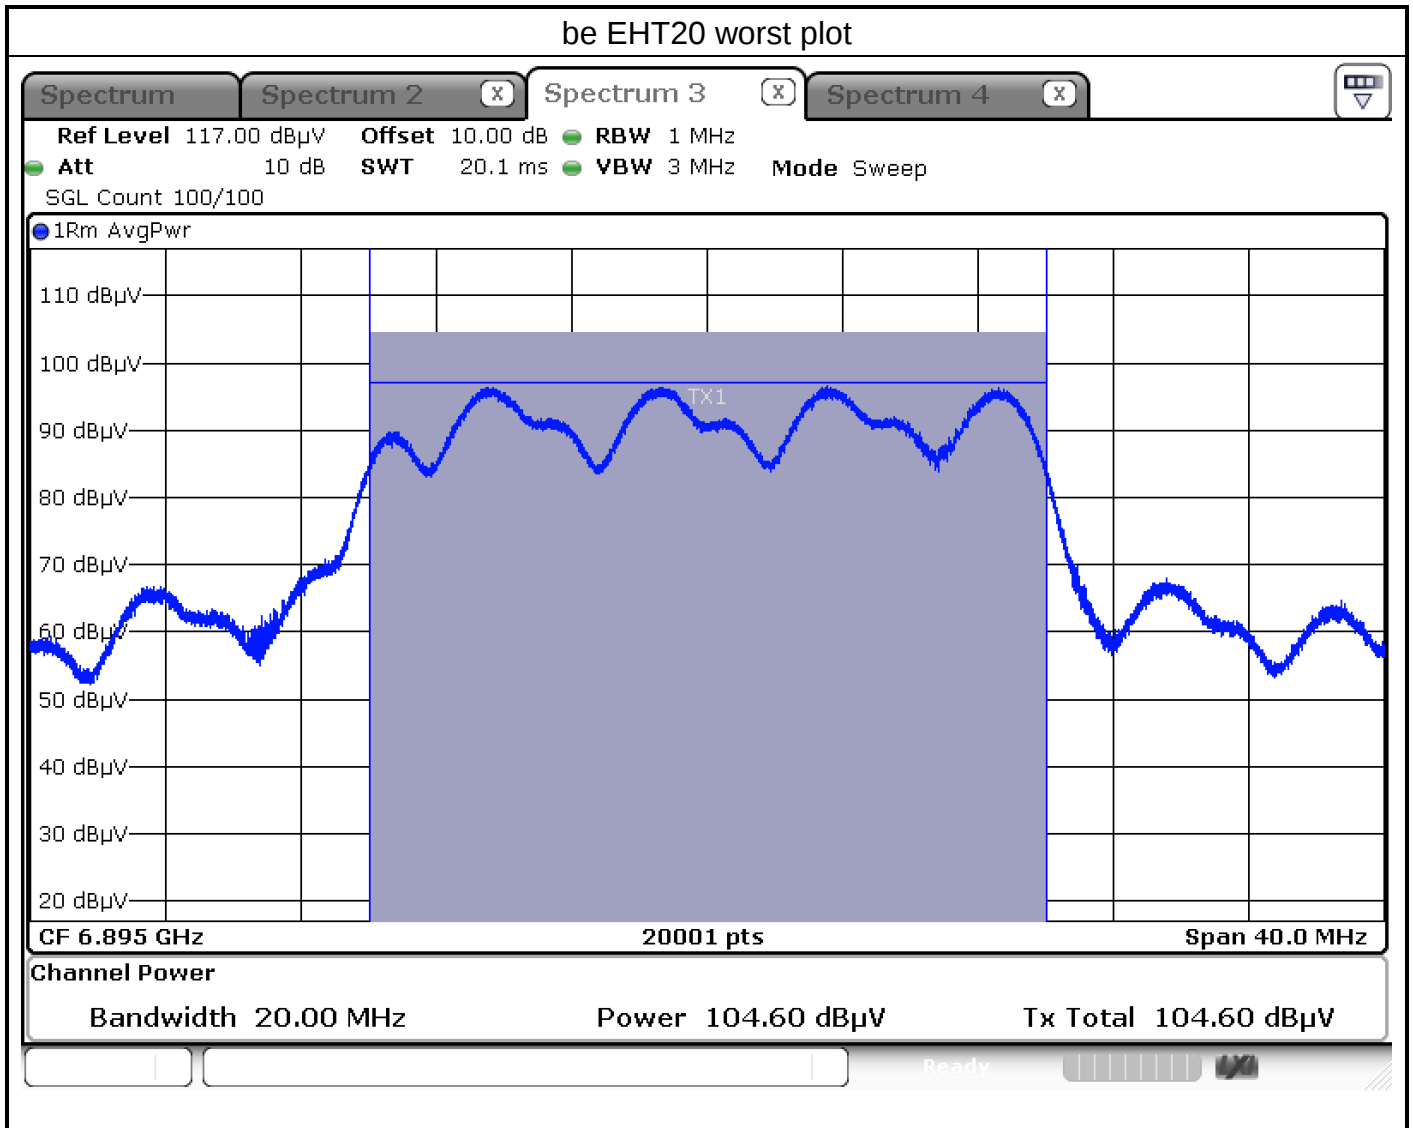

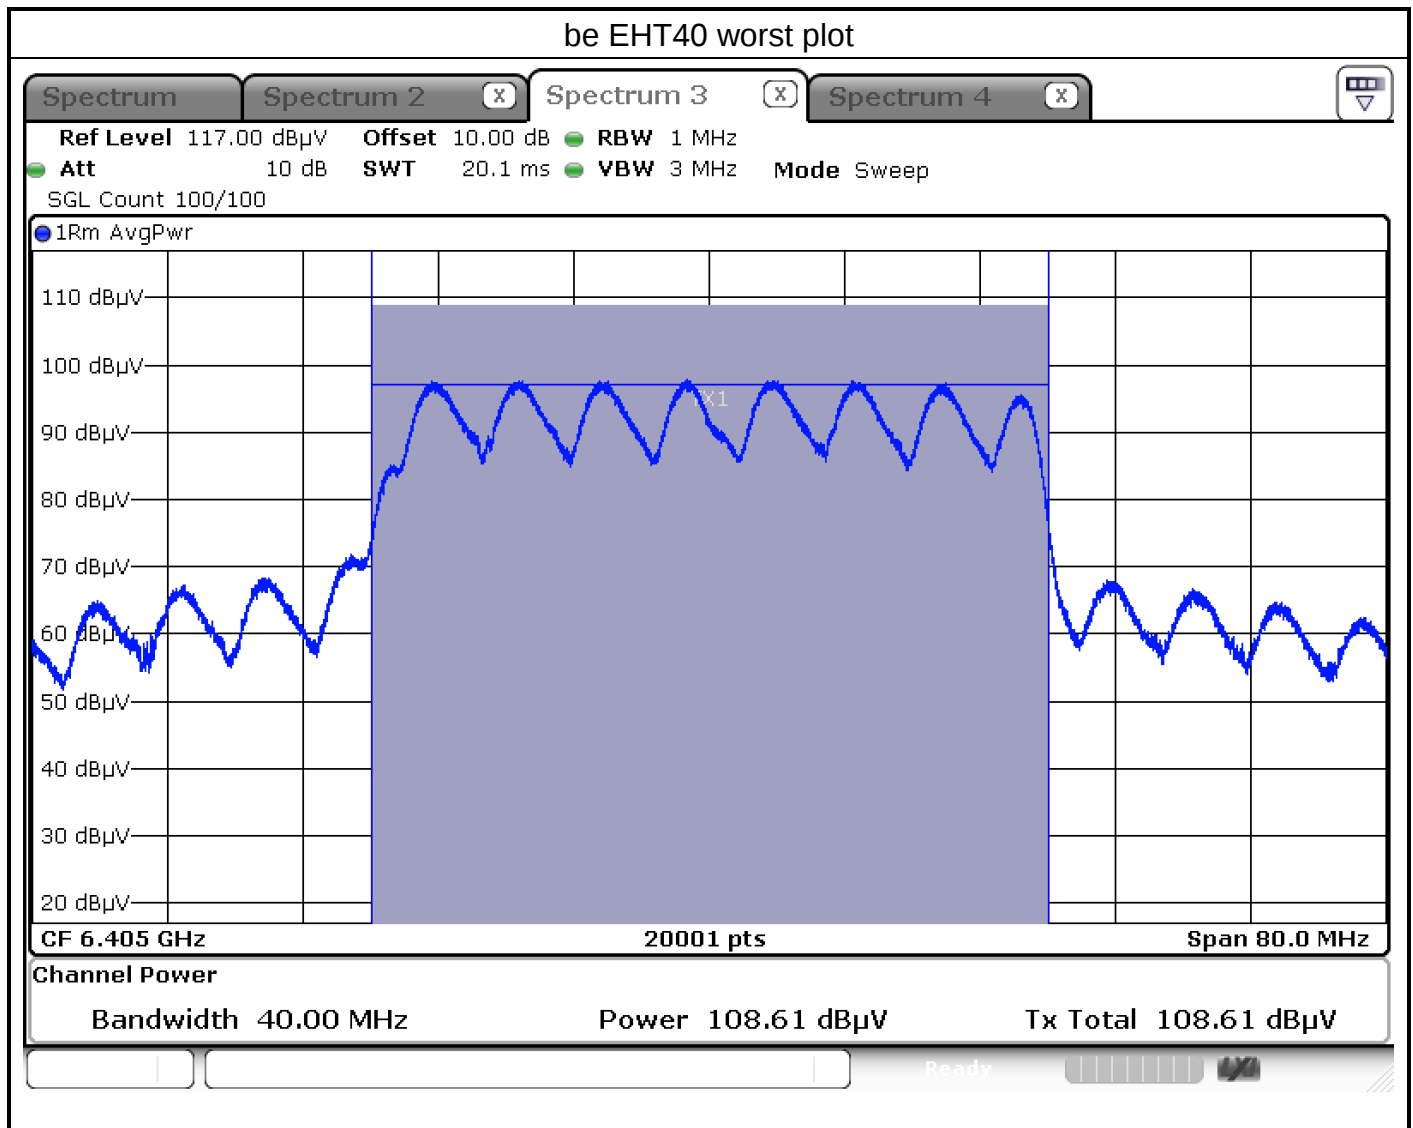

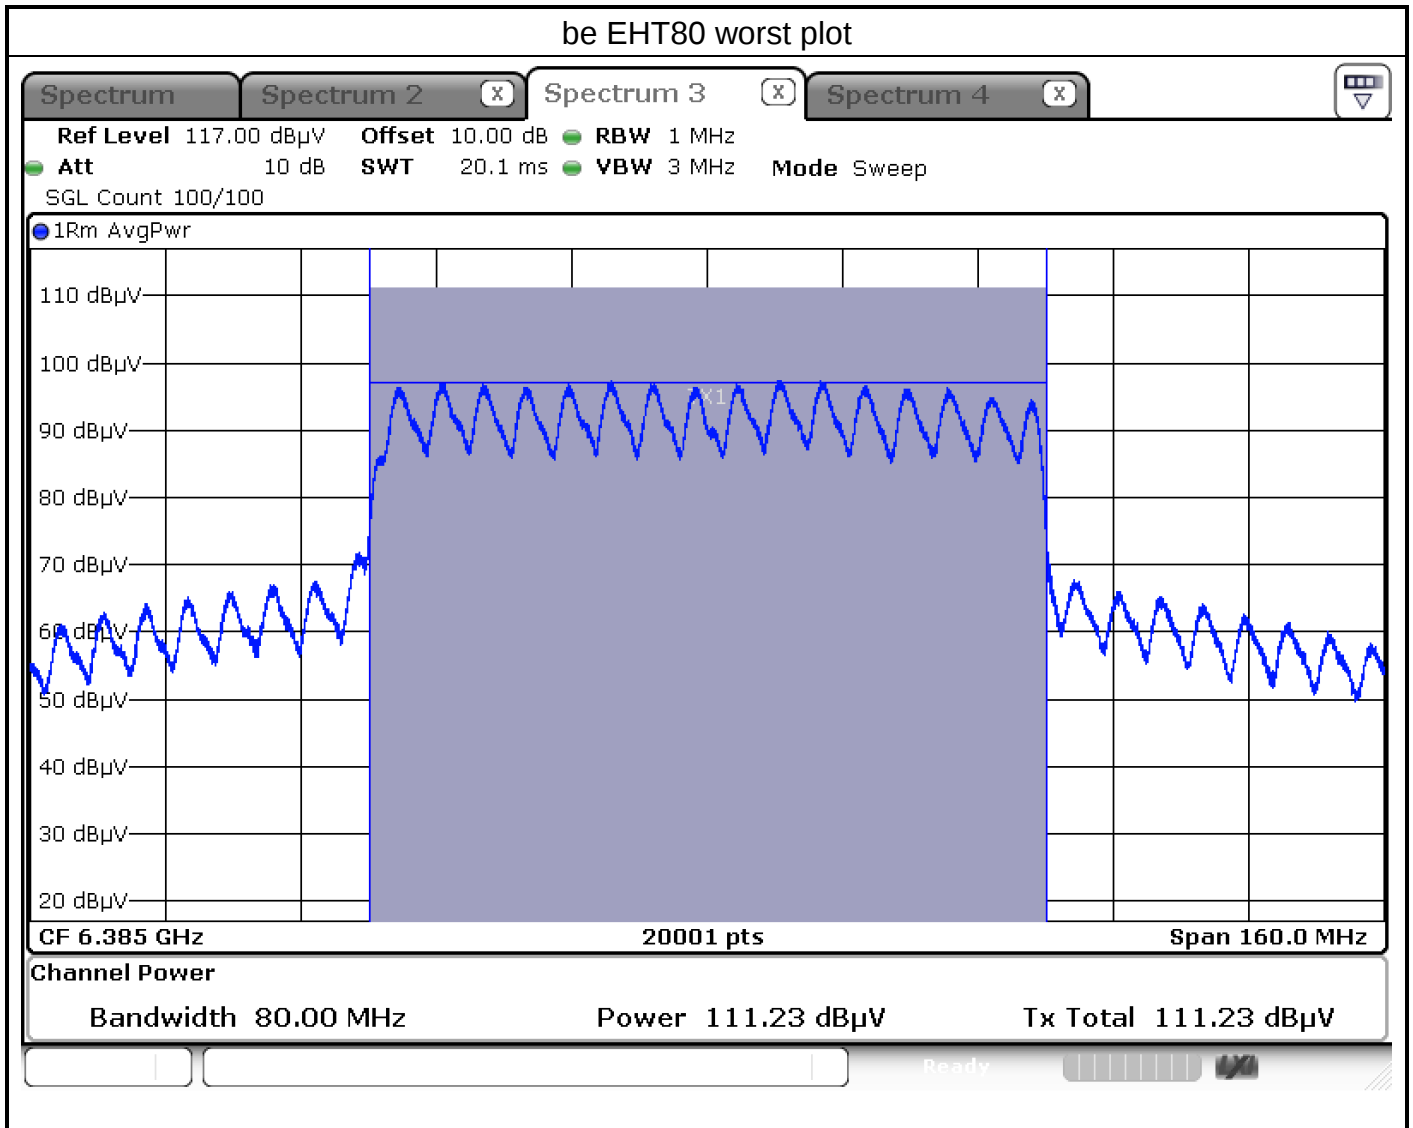

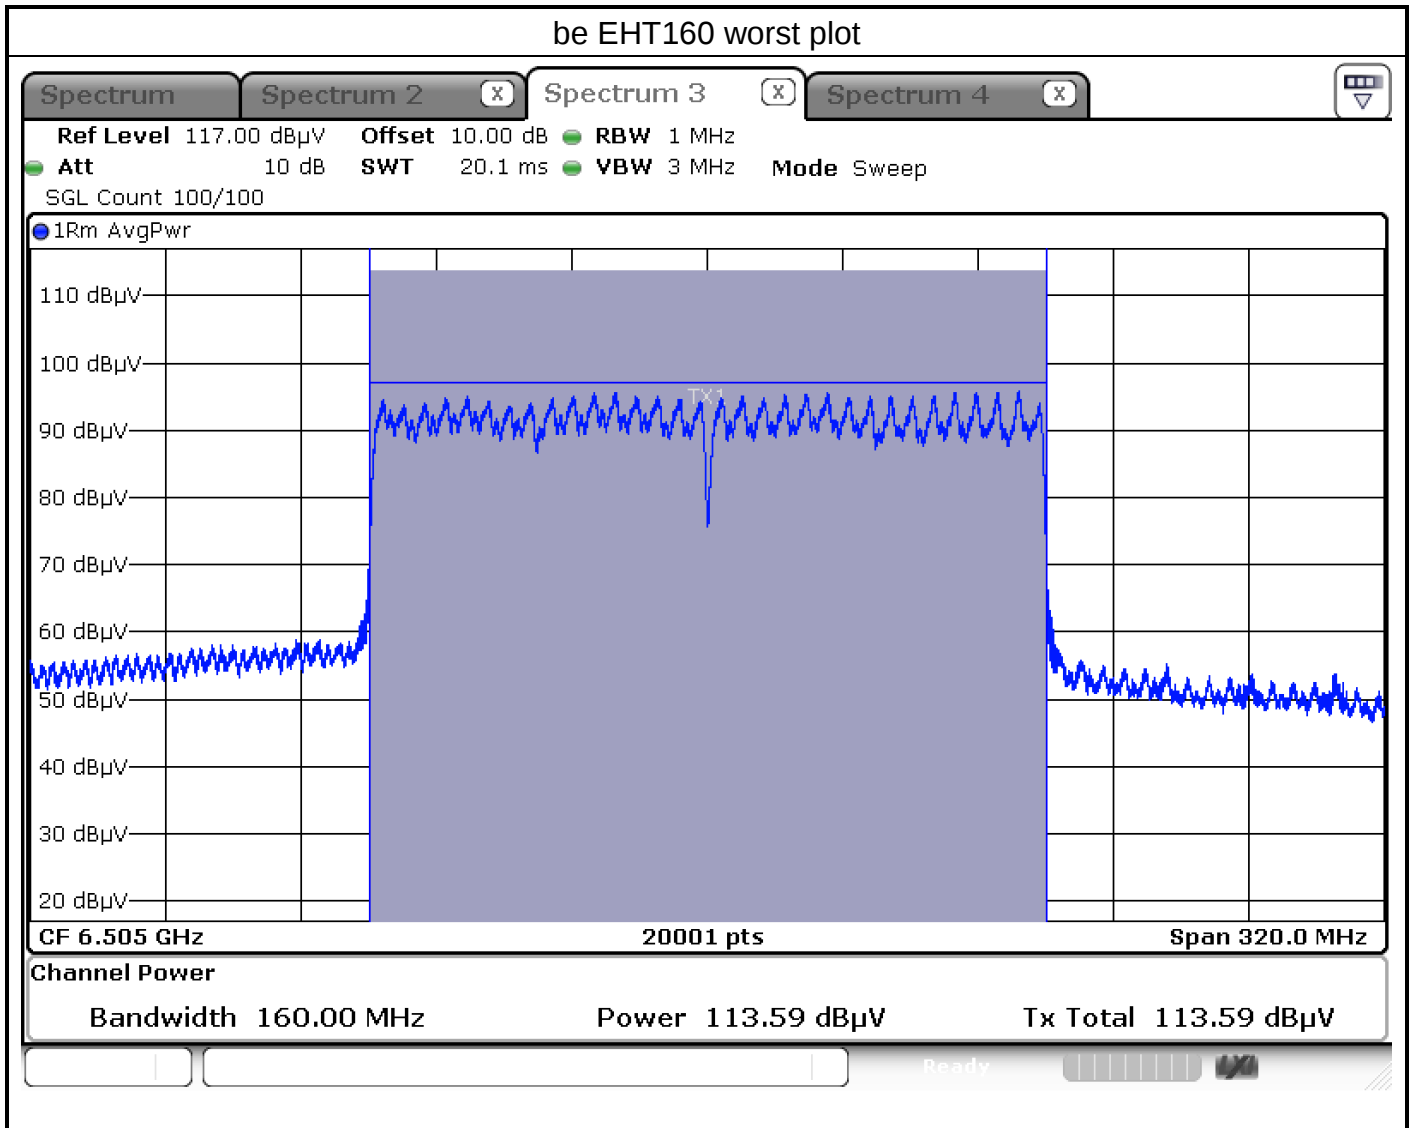

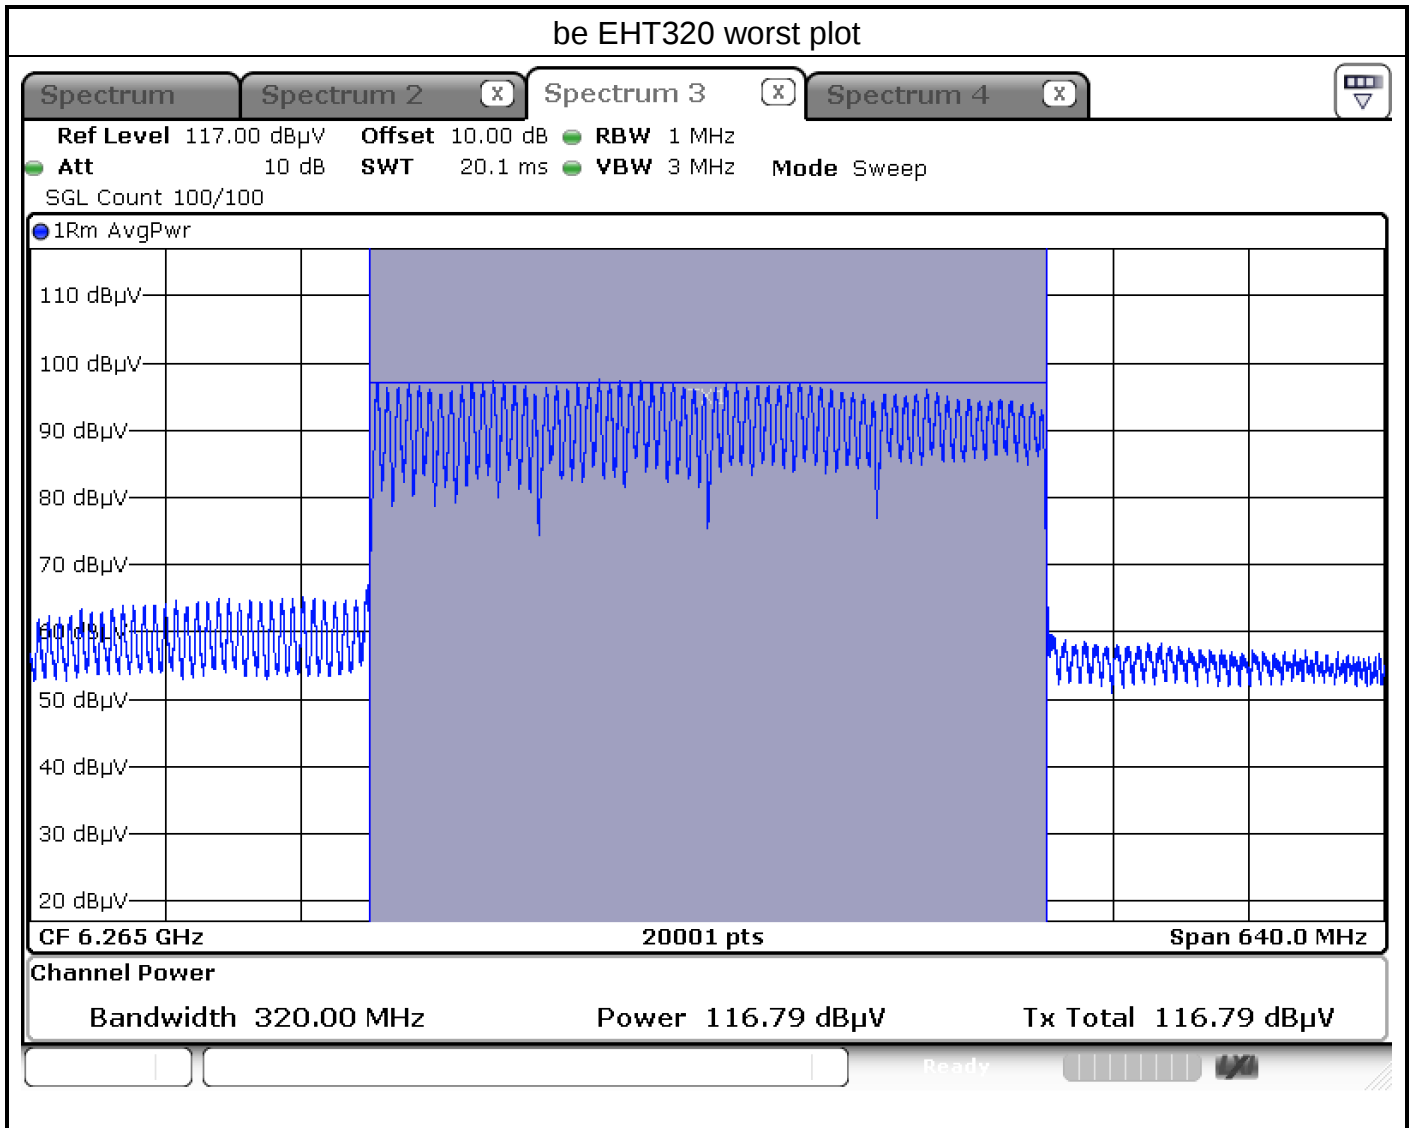



Mode	Freq MHz	Channel	Read Level (dBuV)	Path loss (dB/m)	DT Factor (dB)	Final Level (dBuV/m)	EIRP PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
be EHT20	5955	1	98.56	1.18	0.04	99.78	4.58	5.00	Pass
be EHT20	6175	45	98.52	1.52	0.04	100.08	4.88	5.00	Pass
be EHT20	6415	93	97.26	2.53	0.04	99.83	4.63	5.00	Pass
be EHT20	6435	97	97.05	2.62	0.04	99.71	4.51	5.00	Pass
be EHT20	6475	105	97.06	2.79	0.04	99.89	4.69	5.00	Pass
be EHT20	6515	113	96.86	2.98	0.04	99.88	4.68	5.00	Pass
be EHT20	6535	117	96.81	3.1	0.04	99.95	4.75	5.00	Pass
be EHT20	6715	153	96.84	3.08	0.04	99.96	4.76	5.00	Pass
be EHT20	6855	181	96.49	3.38	0.04	99.91	4.71	5.00	Pass
be EHT20	6875	185	96.49	3.52	0.04	100.05	4.85	5.00	Pass
be EHT20	6895	189	96.31	3.66	0.04	100.01	4.81	5.00	Pass
be EHT20	7015	213	95.43	4.31	0.04	99.78	4.58	5.00	Pass
be EHT20	7095	229	95.3	4.75	0.04	100.09	4.89	5.00	Pass

Mode	Freq MHz	Channel	Read Level (dBuV)	Path loss (dB/m)	DT Factor (dB)	Final Level (dBuV/m)	EIRP PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
be EHT40	5965	3	98.69	1.16	0.02	99.87	4.67	5.00	Pass
be EHT40	6165	43	98.54	1.43	0.02	99.99	4.79	5.00	Pass
be EHT40	6405	91	97.39	2.49	0.02	99.90	4.70	5.00	Pass
be EHT40	6445	99	97.34	2.66	0.02	100.02	4.82	5.00	Pass
be EHT40	6485	107	96.94	2.84	0.02	99.80	4.60	5.00	Pass
be EHT40	6525	115	96.92	3.04	0.02	99.98	4.78	5.00	Pass
be EHT40	6565	123	96.61	3.17	0.02	99.80	4.60	5.00	Pass
be EHT40	6725	155	96.88	3.09	0.02	99.99	4.79	5.00	Pass
be EHT40	6845	179	96.59	3.33	0.02	99.94	4.74	5.00	Pass
be EHT40	6885	187	96.28	3.59	0.02	99.89	4.69	5.00	Pass
be EHT40	6925	195	95.99	3.82	0.02	99.83	4.63	5.00	Pass
be EHT40	7005	211	95.65	4.22	0.02	99.89	4.69	5.00	Pass
be EHT40	7085	227	95.23	4.71	0.02	99.96	4.76	5.00	Pass

Note:
$$\text{EIRP(dBm)} = \text{Final Level(dBuV/m)} - 95.2$$
$$\text{Final Level(dBuV/m)} = \text{Read Level (dBuV)} + \text{Path Loss(dB/m)} + \text{DT Factor(dB)}$$
$$\text{Path Loss} = \text{Antenna Factor(dBuV/m)} + \text{Cable Loss(dB)} - \text{Preamp Factor(dB)}$$





Mode	Freq MHz	Channel	Read Level (dBuV)	Path loss (dB/m)	DT Factor (dB)	Final Level (dBuV/m)	EIRP PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
be EHT80	5985	7	98.77	1.13	0.02	99.92	4.72	5.00	Pass
be EHT80	6145	39	98.51	1.29	0.02	99.82	4.62	5.00	Pass
be EHT80	6385	87	97.38	2.37	0.02	99.77	4.57	5.00	Pass
be EHT80	6465	103	97.03	2.75	0.02	99.80	4.60	5.00	Pass
be EHT80	6545	119	96.73	3.16	0.02	99.91	4.71	5.00	Pass
be EHT80	6625	135	96.54	3.17	0.02	99.73	4.53	5.00	Pass
be EHT80	6705	151	96.67	3.08	0.02	99.77	4.57	5.00	Pass
be EHT80	6785	167	96.64	3.17	0.02	99.83	4.63	5.00	Pass
be EHT80	6865	183	96.42	3.45	0.02	99.89	4.69	5.00	Pass
be EHT80	6945	199	95.96	3.92	0.02	99.90	4.70	5.00	Pass
be EHT80	7025	215	95.43	4.38	0.02	99.83	4.63	5.00	Pass


Mode	Freq MHz	Channel	Read Level (dBuV)	Path loss (dB/m)	DT Factor (dB)	Final Level (dBuV/m)	EIRP PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
be EHT160	6025	15	98.64	1.06	0.08	99.78	4.58	5.00	Pass
be EHT160	6185	47	98.27	1.6	0.08	99.95	4.75	5.00	Pass
be EHT160	6345	79	97.62	2.11	0.08	99.81	4.61	5.00	Pass
be EHT160	6505	111	96.96	2.93	0.08	99.97	4.77	5.00	Pass
be EHT160	6665	143	96.69	3.15	0.08	99.92	4.72	5.00	Pass
be EHT160	6825	175	96.45	3.27	0.08	99.80	4.60	5.00	Pass
be EHT160	6985	207	95.87	4.12	0.08	100.07	4.87	5.00	Pass


Mode	Freq MHz	Channel	Read Level (dBuV)	Path loss (dB/m)	DT Factor (dB)	Final Level (dBuV/m)	EIRP PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
be EHT320	6105	31	98.62	1.18	0.08	99.88	4.68	5.00	Pass
be EHT320	6265	63	97.78	1.88	0.08	99.74	4.54	5.00	Pass
be EHT320	6425	95	97.35	2.57	0.08	100.00	4.80	5.00	Pass
be EHT320	6585	127	96.63	3.17	0.08	99.88	4.68	5.00	Pass
be EHT320	6745	159	96.54	3.09	0.08	99.71	4.51	5.00	Pass
be EHT320	6905	191	94.62	3.72	0.08	98.42	3.22	5.00	Pass


Note:
$$\text{EIRP(dBm)} = \text{Final Level(dBuV/m)} - 95.2$$
$$\text{Final Level(dBuV/m)} = \text{Read Level (dBuV)} + \text{Path Loss(dB/m)} + \text{DT Factor(dB)}$$
$$\text{Path Loss} = \text{Antenna Factor(dBuV/m)} + \text{Cable Loss(dB)} - \text{Preamp Factor(dB)}$$

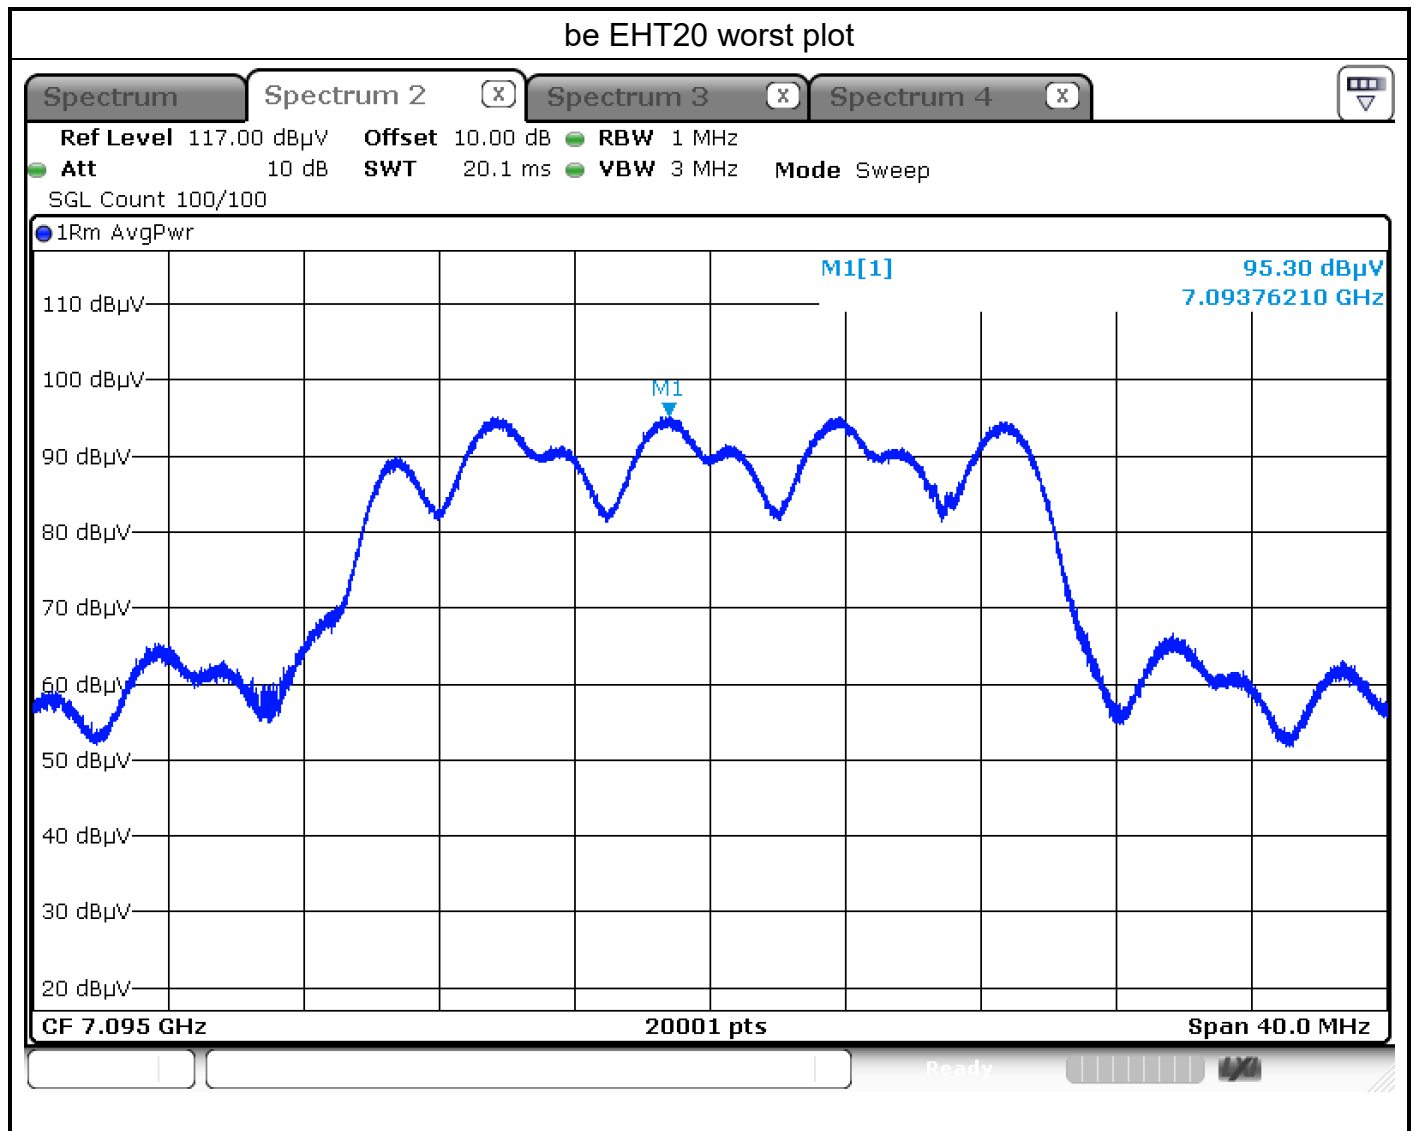

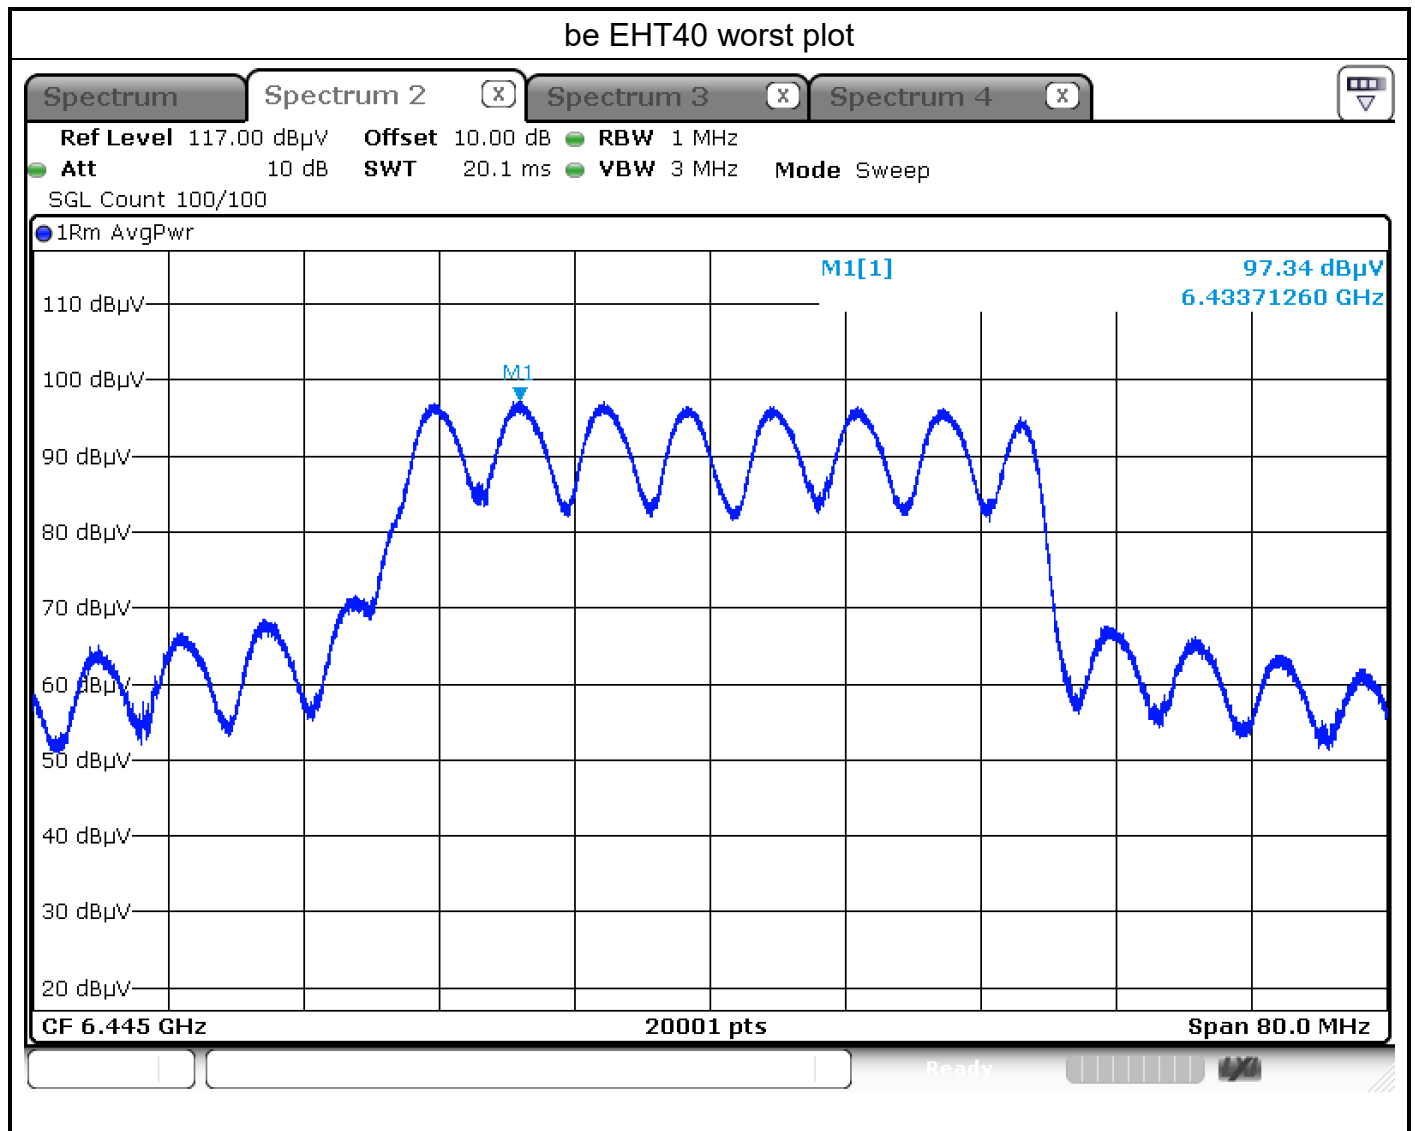

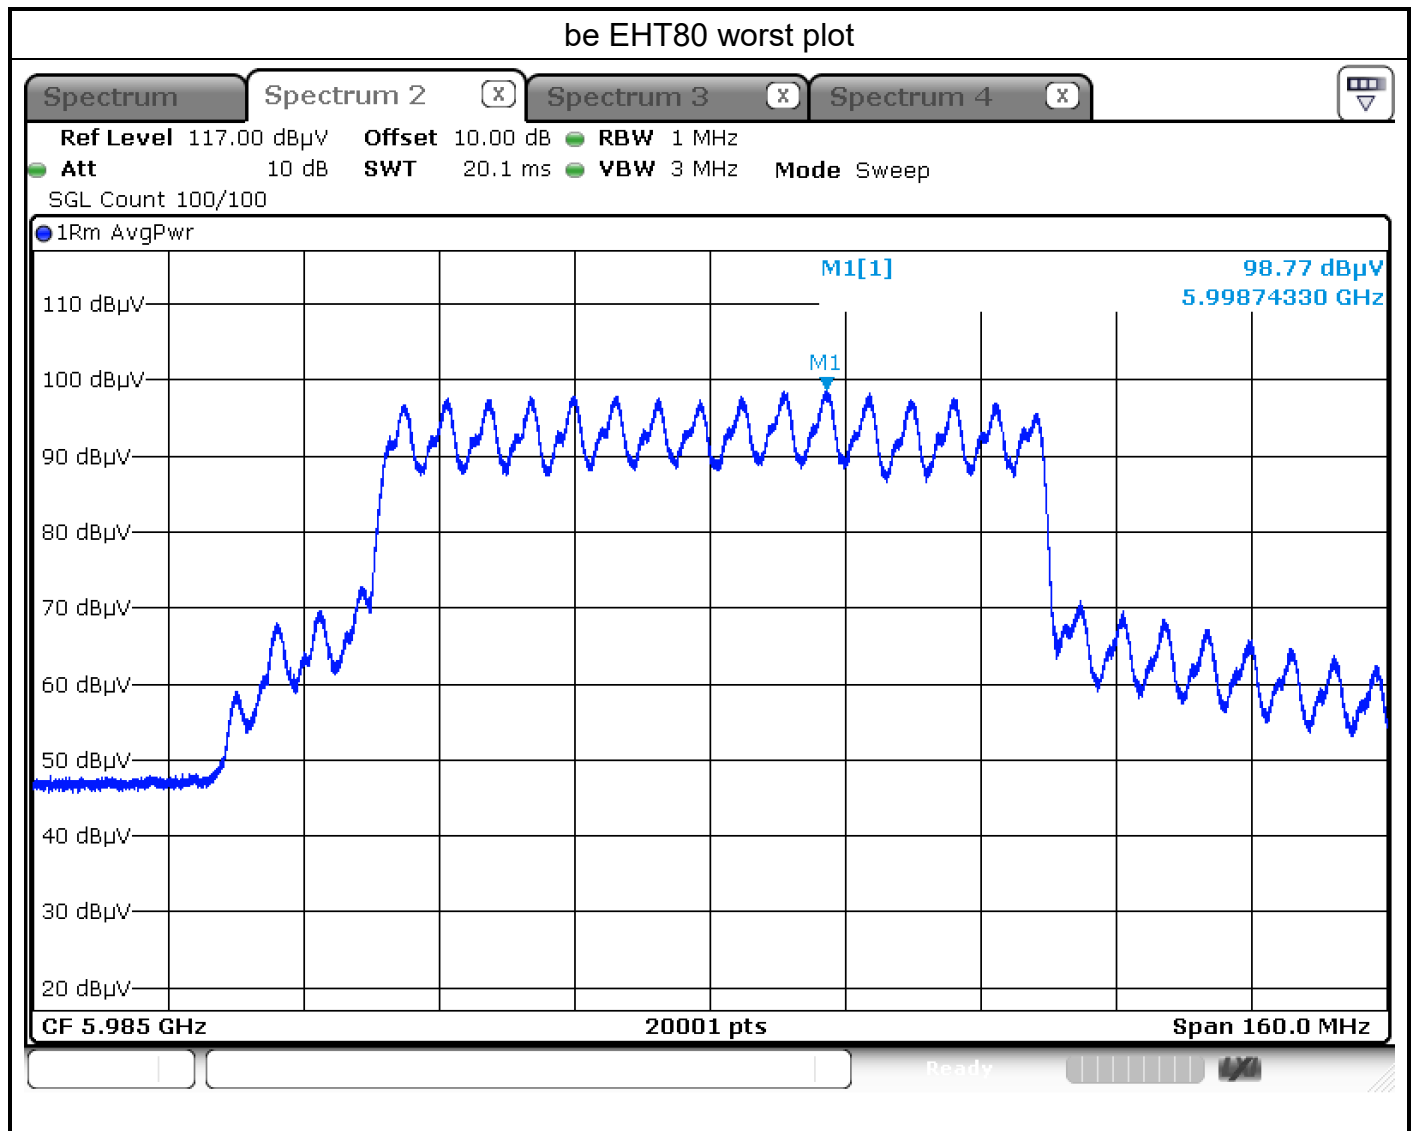


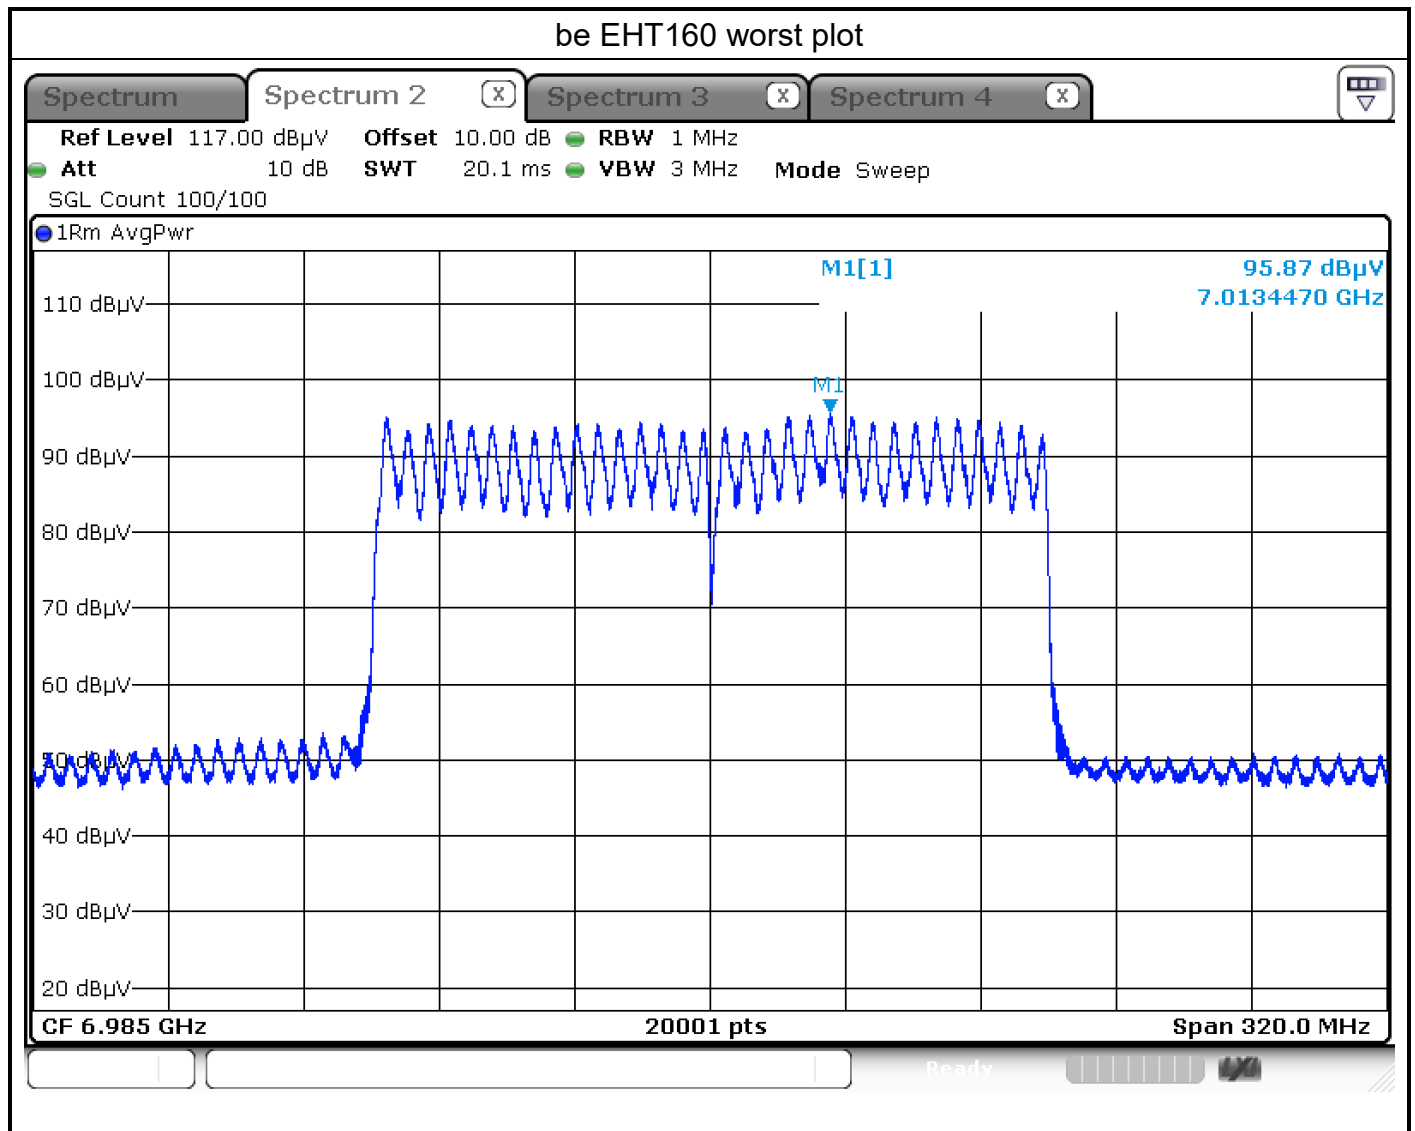

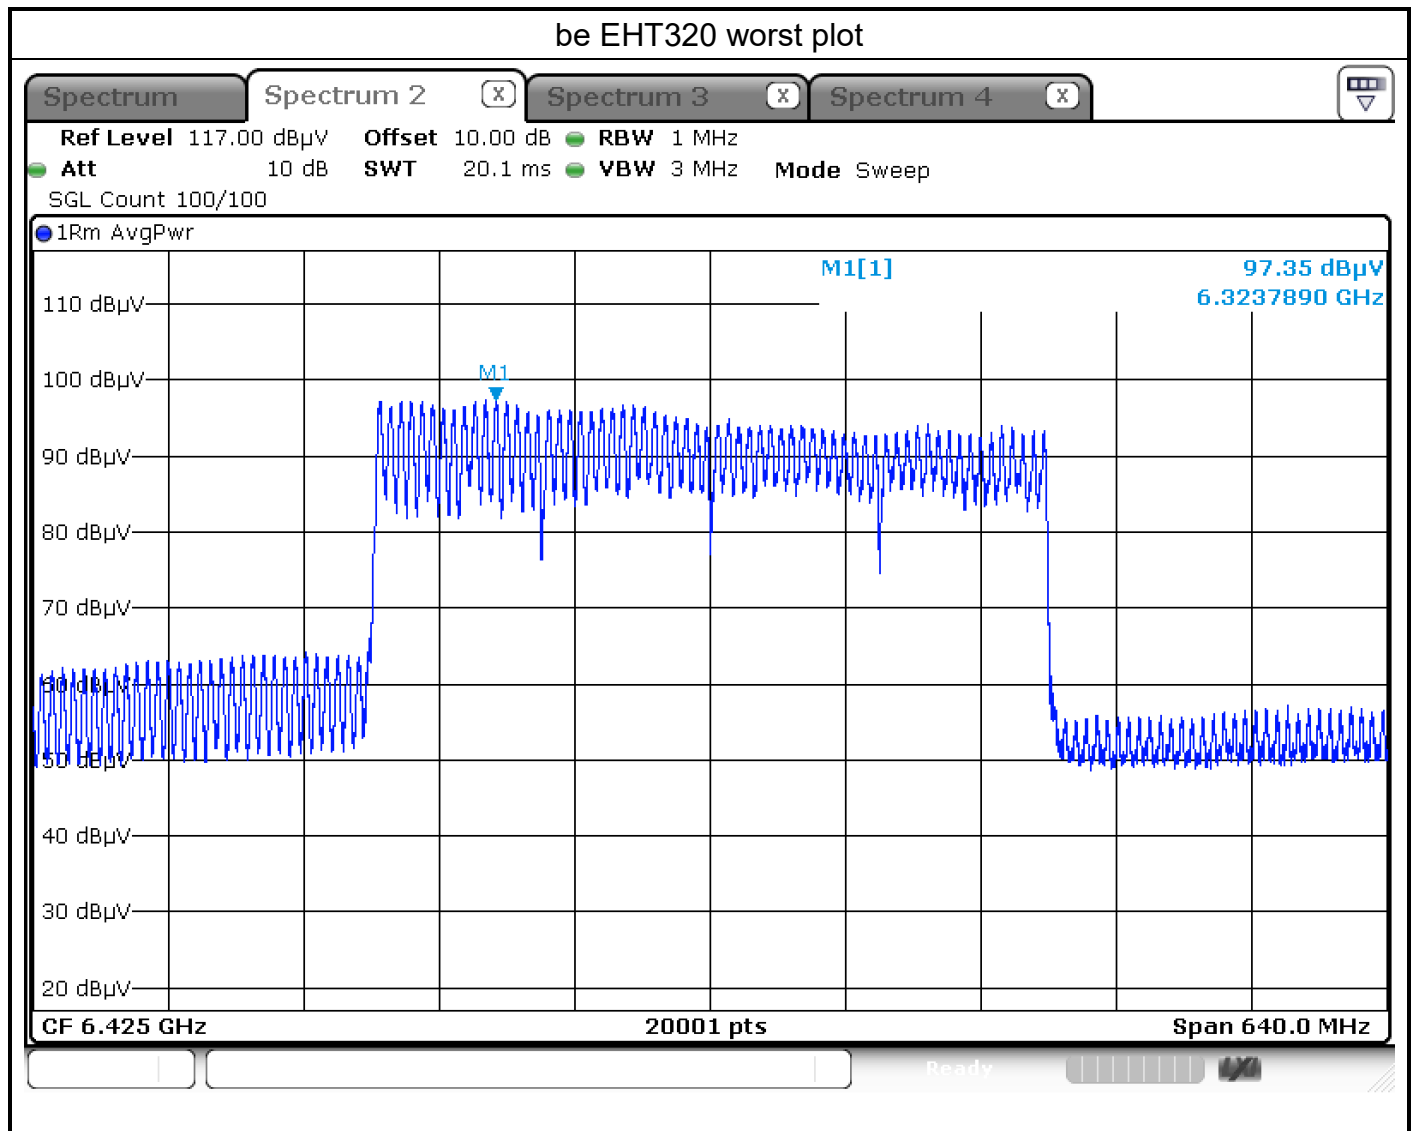





Unwanted Emissions (Below 1GHz)

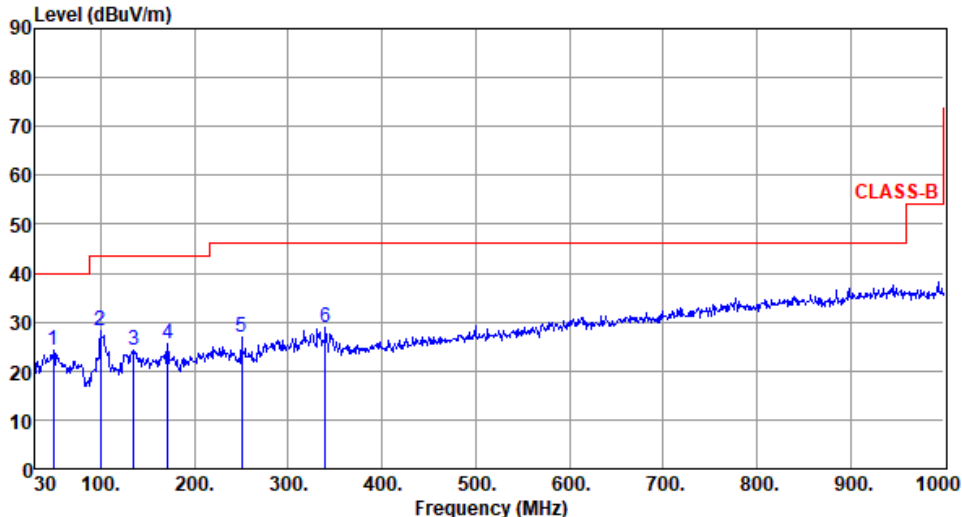Modulation	be EHT320		Test Freq. (MHz)		6265																																																																										
Polarization	Horizontal																																																																														
Test By :Brad Wu			Temperature(°C):23			Humidity(%):66																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>49.40</td><td>24.30</td><td>40.00</td><td>-15.70</td><td>32.18</td><td>-7.88</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>99.84</td><td>28.16</td><td>43.50</td><td>-15.34</td><td>41.42</td><td>-13.26</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>134.76</td><td>24.26</td><td>43.50</td><td>-19.24</td><td>33.87</td><td>-9.61</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>171.62</td><td>25.65</td><td>43.50</td><td>-17.85</td><td>35.00</td><td>-9.35</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>250.19</td><td>26.82</td><td>46.00</td><td>-19.18</td><td>36.77</td><td>-9.95</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>339.43</td><td>28.91</td><td>46.00</td><td>-17.09</td><td>35.97</td><td>-7.06</td><td>Peak</td><td>---</td><td>---</td></tr></tbody></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	49.40	24.30	40.00	-15.70	32.18	-7.88	Peak	---	---	2	99.84	28.16	43.50	-15.34	41.42	-13.26	Peak	---	---	3	134.76	24.26	43.50	-19.24	33.87	-9.61	Peak	---	---	4	171.62	25.65	43.50	-17.85	35.00	-9.35	Peak	---	---	5	250.19	26.82	46.00	-19.18	36.77	-9.95	Peak	---	---	6	339.43	28.91	46.00	-17.09	35.97	-7.06	Peak	---	---
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	49.40	24.30	40.00	-15.70	32.18	-7.88	Peak	---	---																																																																						
2	99.84	28.16	43.50	-15.34	41.42	-13.26	Peak	---	---																																																																						
3	134.76	24.26	43.50	-19.24	33.87	-9.61	Peak	---	---																																																																						
4	171.62	25.65	43.50	-17.85	35.00	-9.35	Peak	---	---																																																																						
5	250.19	26.82	46.00	-19.18	36.77	-9.95	Peak	---	---																																																																						
6	339.43	28.91	46.00	-17.09	35.97	-7.06	Peak	---	---																																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																															

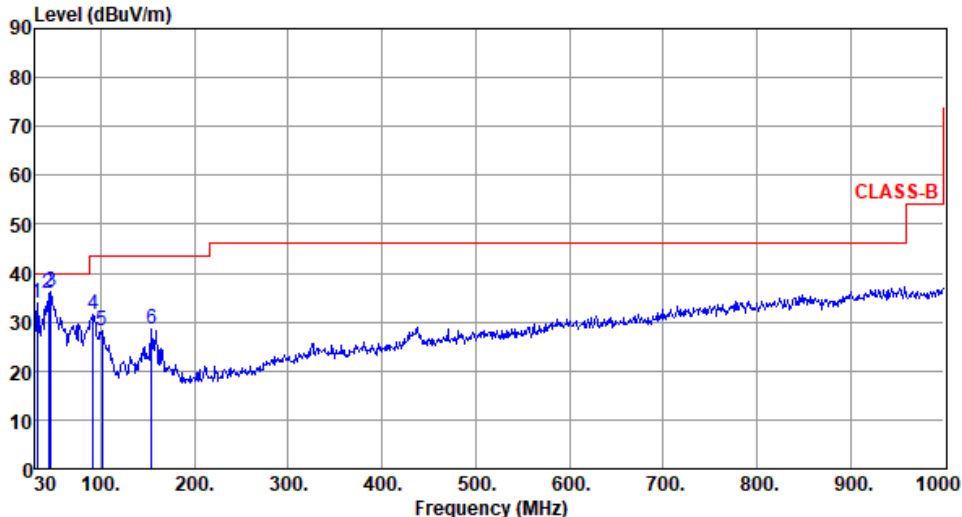


Modulation	be EHT320	Test Freq. (MHz)	6265						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):23 Humidity(%):66									
Level (dBuV/m)  Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	31.94	33.97	40.00	-6.03	43.64	-9.67	Peak	---	---
2	44.55	35.96	40.00	-4.04	44.25	-8.29	Peak	---	---
3	46.49	36.27	40.00	-3.73	44.27	-8.00	Peak	---	---
4	92.08	31.69	43.50	-11.81	46.00	-14.31	Peak	---	---
5	101.78	28.25	43.50	-15.25	41.19	-12.94	Peak	---	---
6	154.16	28.56	43.50	-14.94	37.19	-8.63	Peak	---	---
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.									


Unwanted Emissions (Above 1GHz) for be EHT20

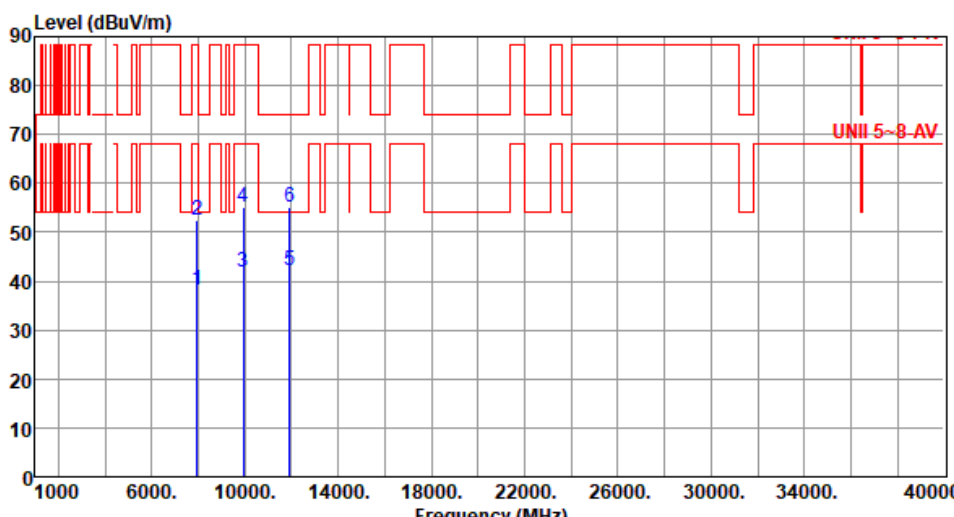Modulation	be EHT20	Test Freq. (MHz)	5955																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7940.00</td><td>38.35</td><td>68.20</td><td>-29.85</td><td>32.89</td><td>5.46</td><td>Average</td><td>100</td><td>123</td></tr><tr><td>2</td><td>7940.00</td><td>52.42</td><td>88.20</td><td>-35.78</td><td>46.96</td><td>5.46</td><td>Peak</td><td>100</td><td>123</td></tr><tr><td>3</td><td>9925.00</td><td>41.95</td><td>68.20</td><td>-26.25</td><td>34.70</td><td>7.25</td><td>Average</td><td>100</td><td>124</td></tr><tr><td>4</td><td>9925.00</td><td>55.10</td><td>88.20</td><td>-33.10</td><td>47.85</td><td>7.25</td><td>Peak</td><td>100</td><td>124</td></tr><tr><td>5</td><td>11910.00</td><td>42.20</td><td>54.00</td><td>-11.80</td><td>36.11</td><td>6.09</td><td>Average</td><td>100</td><td>25</td></tr><tr><td>6</td><td>11910.00</td><td>55.15</td><td>74.00</td><td>-18.85</td><td>49.06</td><td>6.09</td><td>Peak</td><td>100</td><td>25</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7940.00	38.35	68.20	-29.85	32.89	5.46	Average	100	123	2	7940.00	52.42	88.20	-35.78	46.96	5.46	Peak	100	123	3	9925.00	41.95	68.20	-26.25	34.70	7.25	Average	100	124	4	9925.00	55.10	88.20	-33.10	47.85	7.25	Peak	100	124	5	11910.00	42.20	54.00	-11.80	36.11	6.09	Average	100	25	6	11910.00	55.15	74.00	-18.85	49.06	6.09	Peak	100	25
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7940.00	38.35	68.20	-29.85	32.89	5.46	Average	100	123																																																																
2	7940.00	52.42	88.20	-35.78	46.96	5.46	Peak	100	123																																																																
3	9925.00	41.95	68.20	-26.25	34.70	7.25	Average	100	124																																																																
4	9925.00	55.10	88.20	-33.10	47.85	7.25	Peak	100	124																																																																
5	11910.00	42.20	54.00	-11.80	36.11	6.09	Average	100	25																																																																
6	11910.00	55.15	74.00	-18.85	49.06	6.09	Peak	100	25																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

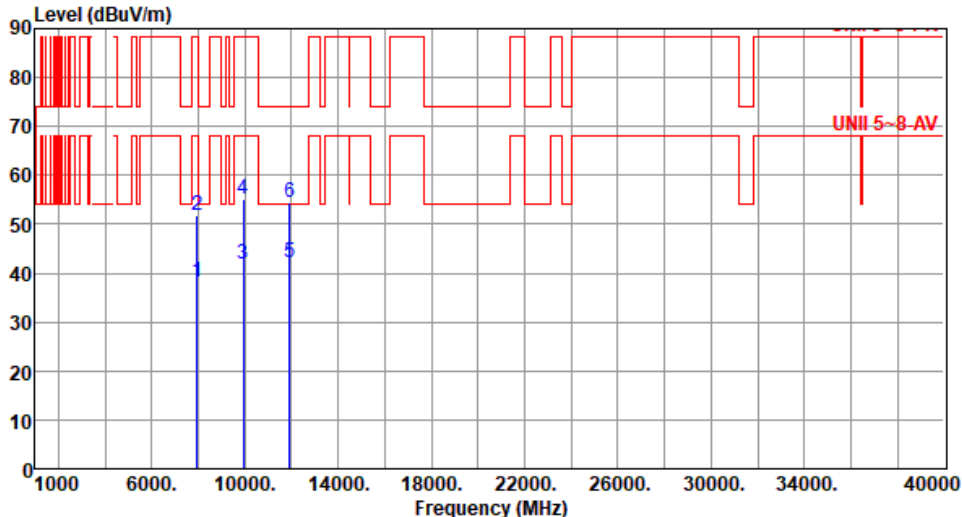


Modulation	be EHT20	Test Freq. (MHz)	5955																																																																																										
Polarization	Vertical																																																																																												
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7940.00</td><td>38.21</td><td>68.20</td><td>-29.99</td><td>32.75</td><td>5.46</td><td>Average</td><td>100</td><td>130</td></tr><tr><td>2</td><td>7940.00</td><td>51.68</td><td>88.20</td><td>-36.52</td><td>46.22</td><td>5.46</td><td>Peak</td><td>100</td><td>130</td></tr><tr><td>3</td><td>9925.00</td><td>41.83</td><td>68.20</td><td>-26.37</td><td>34.58</td><td>7.25</td><td>Average</td><td>100</td><td>227</td></tr><tr><td>4</td><td>9925.00</td><td>55.09</td><td>88.20</td><td>-33.11</td><td>47.84</td><td>7.25</td><td>Peak</td><td>100</td><td>227</td></tr><tr><td>5</td><td>11910.00</td><td>42.23</td><td>54.00</td><td>-11.77</td><td>36.14</td><td>6.09</td><td>Average</td><td>100</td><td>22</td></tr><tr><td>6</td><td>11910.00</td><td>54.45</td><td>74.00</td><td>-19.55</td><td>48.36</td><td>6.09</td><td>Peak</td><td>100</td><td>22</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	7940.00	38.21	68.20	-29.99	32.75	5.46	Average	100	130	2	7940.00	51.68	88.20	-36.52	46.22	5.46	Peak	100	130	3	9925.00	41.83	68.20	-26.37	34.58	7.25	Average	100	227	4	9925.00	55.09	88.20	-33.11	47.84	7.25	Peak	100	227	5	11910.00	42.23	54.00	-11.77	36.14	6.09	Average	100	22	6	11910.00	54.45	74.00	-19.55	48.36	6.09	Peak	100	22
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
		dBuV/m			dBuV			cm	deg																																																																																				
1	7940.00	38.21	68.20	-29.99	32.75	5.46	Average	100	130																																																																																				
2	7940.00	51.68	88.20	-36.52	46.22	5.46	Peak	100	130																																																																																				
3	9925.00	41.83	68.20	-26.37	34.58	7.25	Average	100	227																																																																																				
4	9925.00	55.09	88.20	-33.11	47.84	7.25	Peak	100	227																																																																																				
5	11910.00	42.23	54.00	-11.77	36.14	6.09	Average	100	22																																																																																				
6	11910.00	54.45	74.00	-19.55	48.36	6.09	Peak	100	22																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													

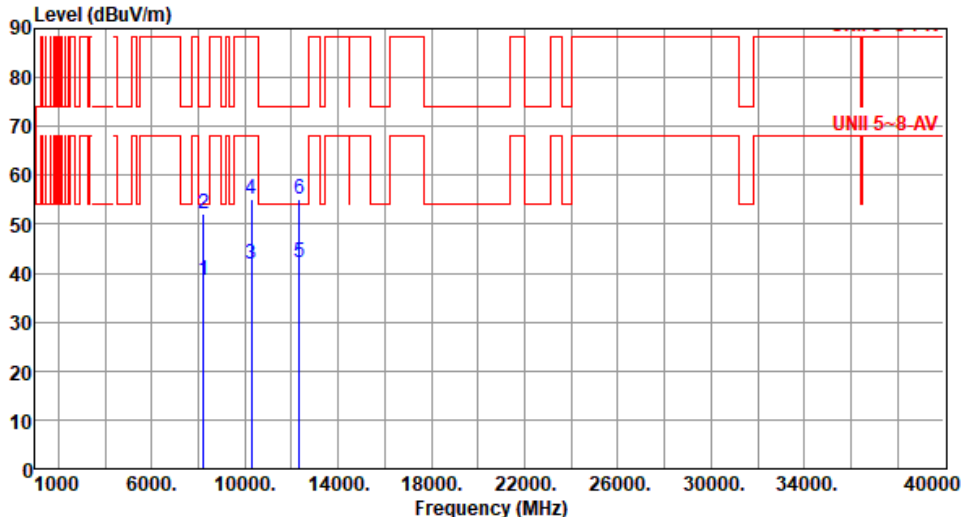


Modulation	be EHT20	Test Freq. (MHz)	6175																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>8233.30</td><td>38.46</td><td>54.00</td><td>-15.54</td><td>33.00</td><td>5.46</td><td>Average</td><td>100</td><td>109</td></tr><tr><td>2</td><td>8233.30</td><td>52.06</td><td>74.00</td><td>-21.94</td><td>46.60</td><td>5.46</td><td>Peak</td><td>100</td><td>109</td></tr><tr><td>3</td><td>10291.60</td><td>41.79</td><td>68.20</td><td>-26.41</td><td>34.62</td><td>7.17</td><td>Average</td><td>100</td><td>225</td></tr><tr><td>4</td><td>10291.60</td><td>55.24</td><td>88.20</td><td>-32.96</td><td>48.07</td><td>7.17</td><td>Peak</td><td>100</td><td>225</td></tr><tr><td>5</td><td>12350.00</td><td>42.25</td><td>54.00</td><td>-11.75</td><td>36.42</td><td>5.83</td><td>Average</td><td>100</td><td>15</td></tr><tr><td>6</td><td>12350.00</td><td>55.16</td><td>74.00</td><td>-18.84</td><td>49.33</td><td>5.83</td><td>Peak</td><td>100</td><td>15</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8233.30	38.46	54.00	-15.54	33.00	5.46	Average	100	109	2	8233.30	52.06	74.00	-21.94	46.60	5.46	Peak	100	109	3	10291.60	41.79	68.20	-26.41	34.62	7.17	Average	100	225	4	10291.60	55.24	88.20	-32.96	48.07	7.17	Peak	100	225	5	12350.00	42.25	54.00	-11.75	36.42	5.83	Average	100	15	6	12350.00	55.16	74.00	-18.84	49.33	5.83	Peak	100	15
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	8233.30	38.46	54.00	-15.54	33.00	5.46	Average	100	109																																																																
2	8233.30	52.06	74.00	-21.94	46.60	5.46	Peak	100	109																																																																
3	10291.60	41.79	68.20	-26.41	34.62	7.17	Average	100	225																																																																
4	10291.60	55.24	88.20	-32.96	48.07	7.17	Peak	100	225																																																																
5	12350.00	42.25	54.00	-11.75	36.42	5.83	Average	100	15																																																																
6	12350.00	55.16	74.00	-18.84	49.33	5.83	Peak	100	15																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

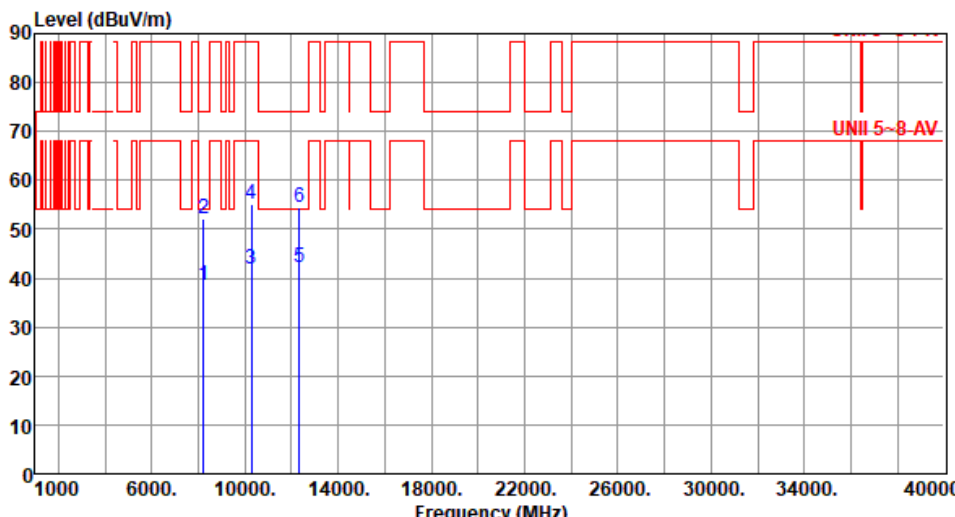


Modulation	be EHT20	Test Freq. (MHz)	6175																																																																																
Polarization	Vertical																																																																																		
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																																			
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>8233.30</td><td>38.56</td><td>54.00</td><td>-15.44</td><td>33.10</td><td>5.46</td><td>Average</td><td>100</td><td>241</td></tr><tr><td>2</td><td>8233.30</td><td>52.30</td><td>74.00</td><td>-21.70</td><td>46.84</td><td>5.46</td><td>Peak</td><td>100</td><td>241</td></tr><tr><td>3</td><td>10291.60</td><td>41.80</td><td>68.20</td><td>-26.40</td><td>34.63</td><td>7.17</td><td>Average</td><td>100</td><td>184</td></tr><tr><td>4</td><td>10291.60</td><td>55.29</td><td>88.20</td><td>-32.91</td><td>48.12</td><td>7.17</td><td>Peak</td><td>100</td><td>184</td></tr><tr><td>5</td><td>12350.00</td><td>42.28</td><td>54.00</td><td>-11.72</td><td>36.45</td><td>5.83</td><td>Average</td><td>100</td><td>17</td></tr><tr><td>6</td><td>12350.00</td><td>54.52</td><td>74.00</td><td>-19.48</td><td>48.69</td><td>5.83</td><td>Peak</td><td>100</td><td>17</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	8233.30	38.56	54.00	-15.44	33.10	5.46	Average	100	241	2	8233.30	52.30	74.00	-21.70	46.84	5.46	Peak	100	241	3	10291.60	41.80	68.20	-26.40	34.63	7.17	Average	100	184	4	10291.60	55.29	88.20	-32.91	48.12	7.17	Peak	100	184	5	12350.00	42.28	54.00	-11.72	36.45	5.83	Average	100	17	6	12350.00	54.52	74.00	-19.48	48.69	5.83	Peak	100	17
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																										
1	8233.30	38.56	54.00	-15.44	33.10	5.46	Average	100	241																																																																										
2	8233.30	52.30	74.00	-21.70	46.84	5.46	Peak	100	241																																																																										
3	10291.60	41.80	68.20	-26.40	34.63	7.17	Average	100	184																																																																										
4	10291.60	55.29	88.20	-32.91	48.12	7.17	Peak	100	184																																																																										
5	12350.00	42.28	54.00	-11.72	36.45	5.83	Average	100	17																																																																										
6	12350.00	54.52	74.00	-19.48	48.69	5.83	Peak	100	17																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																			

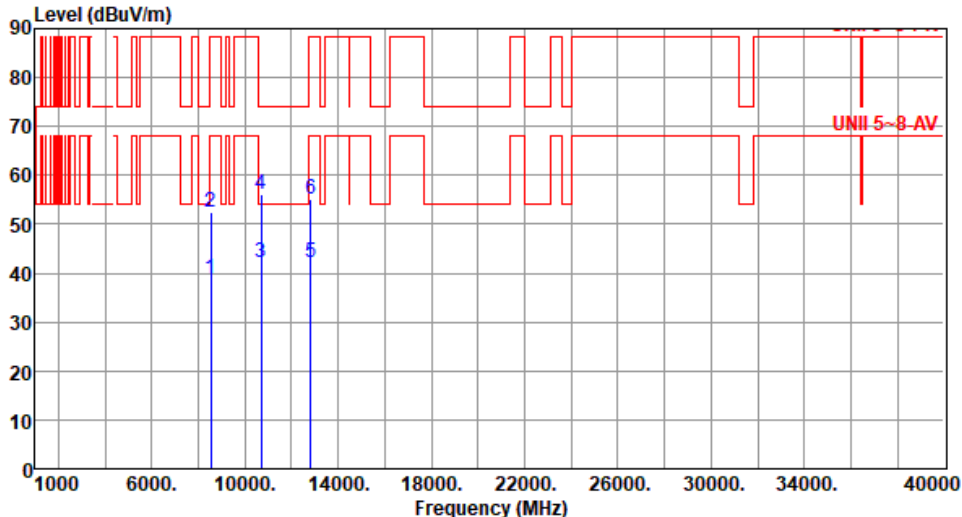


Modulation	be EHT20	Test Freq. (MHz)	6415																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																									
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8553.30</td><td>38.99</td><td>68.20</td><td>-29.21</td><td>33.42</td><td>5.57</td><td>Average</td><td>100</td><td>121</td></tr><tr><td>2</td><td>8553.30</td><td>52.40</td><td>88.20</td><td>-35.80</td><td>46.83</td><td>5.57</td><td>Peak</td><td>100</td><td>121</td></tr><tr><td>3</td><td>10691.60</td><td>42.32</td><td>54.00</td><td>-11.68</td><td>34.89</td><td>7.43</td><td>Average</td><td>100</td><td>223</td></tr><tr><td>4</td><td>10691.60</td><td>56.27</td><td>74.00</td><td>-17.73</td><td>48.84</td><td>7.43</td><td>Peak</td><td>100</td><td>223</td></tr><tr><td>5</td><td>12830.00</td><td>42.29</td><td>68.20</td><td>-25.91</td><td>36.14</td><td>6.15</td><td>Average</td><td>100</td><td>34</td></tr><tr><td>6</td><td>12830.00</td><td>55.24</td><td>88.20</td><td>-32.96</td><td>49.09</td><td>6.15</td><td>Peak</td><td>100</td><td>34</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8553.30	38.99	68.20	-29.21	33.42	5.57	Average	100	121	2	8553.30	52.40	88.20	-35.80	46.83	5.57	Peak	100	121	3	10691.60	42.32	54.00	-11.68	34.89	7.43	Average	100	223	4	10691.60	56.27	74.00	-17.73	48.84	7.43	Peak	100	223	5	12830.00	42.29	68.20	-25.91	36.14	6.15	Average	100	34	6	12830.00	55.24	88.20	-32.96	49.09	6.15	Peak	100	34
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	8553.30	38.99	68.20	-29.21	33.42	5.57	Average	100	121																																																																
2	8553.30	52.40	88.20	-35.80	46.83	5.57	Peak	100	121																																																																
3	10691.60	42.32	54.00	-11.68	34.89	7.43	Average	100	223																																																																
4	10691.60	56.27	74.00	-17.73	48.84	7.43	Peak	100	223																																																																
5	12830.00	42.29	68.20	-25.91	36.14	6.15	Average	100	34																																																																
6	12830.00	55.24	88.20	-32.96	49.09	6.15	Peak	100	34																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

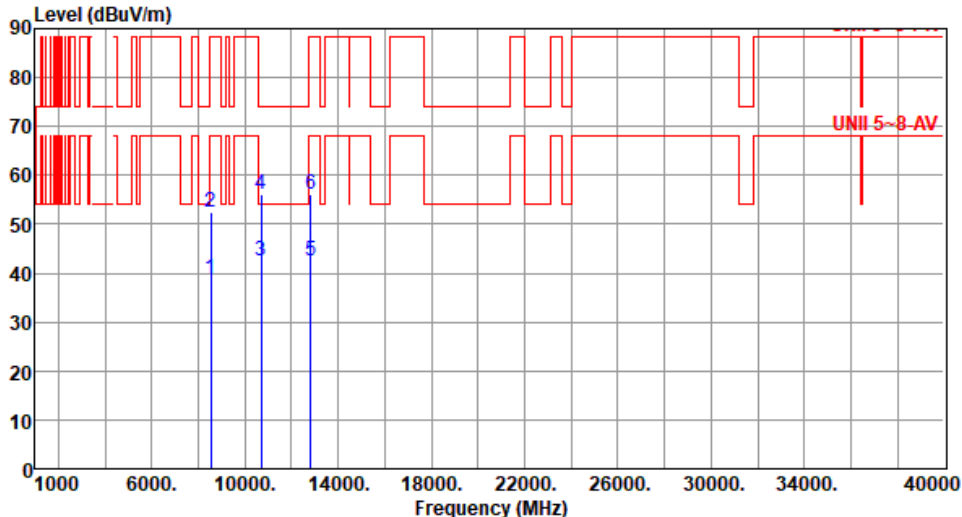


Modulation	be EHT20	Test Freq. (MHz)	6415																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>8553.30</td><td>38.81</td><td>68.20</td><td>-29.39</td><td>33.24</td><td>5.57</td><td>Average</td><td>100</td><td>264</td></tr><tr><td>2</td><td>8553.30</td><td>52.37</td><td>88.20</td><td>-35.83</td><td>46.80</td><td>5.57</td><td>Peak</td><td>100</td><td>264</td></tr><tr><td>3</td><td>10691.60</td><td>42.44</td><td>54.00</td><td>-11.56</td><td>35.01</td><td>7.43</td><td>Average</td><td>100</td><td>177</td></tr><tr><td>4</td><td>10691.60</td><td>55.98</td><td>74.00</td><td>-18.02</td><td>48.55</td><td>7.43</td><td>Peak</td><td>100</td><td>177</td></tr><tr><td>5</td><td>12830.00</td><td>42.65</td><td>68.20</td><td>-25.55</td><td>36.50</td><td>6.15</td><td>Average</td><td>100</td><td>101</td></tr><tr><td>6</td><td>12830.00</td><td>56.21</td><td>88.20</td><td>-31.99</td><td>50.06</td><td>6.15</td><td>Peak</td><td>100</td><td>101</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8553.30	38.81	68.20	-29.39	33.24	5.57	Average	100	264	2	8553.30	52.37	88.20	-35.83	46.80	5.57	Peak	100	264	3	10691.60	42.44	54.00	-11.56	35.01	7.43	Average	100	177	4	10691.60	55.98	74.00	-18.02	48.55	7.43	Peak	100	177	5	12830.00	42.65	68.20	-25.55	36.50	6.15	Average	100	101	6	12830.00	56.21	88.20	-31.99	50.06	6.15	Peak	100	101
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	8553.30	38.81	68.20	-29.39	33.24	5.57	Average	100	264																																																																
2	8553.30	52.37	88.20	-35.83	46.80	5.57	Peak	100	264																																																																
3	10691.60	42.44	54.00	-11.56	35.01	7.43	Average	100	177																																																																
4	10691.60	55.98	74.00	-18.02	48.55	7.43	Peak	100	177																																																																
5	12830.00	42.65	68.20	-25.55	36.50	6.15	Average	100	101																																																																
6	12830.00	56.21	88.20	-31.99	50.06	6.15	Peak	100	101																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

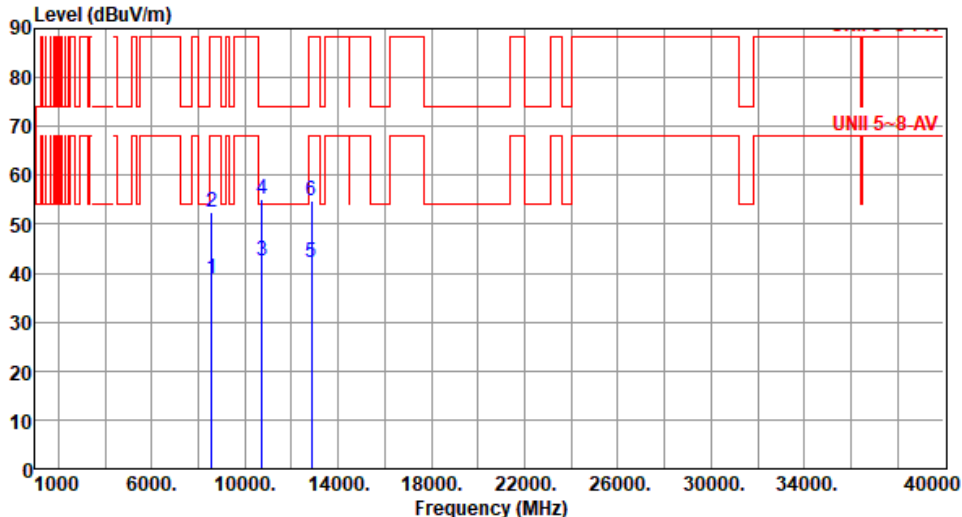


Modulation	be EHT20	Test Freq. (MHz)	6435																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>8580.00</td><td>38.91</td><td>68.20</td><td>-29.29</td><td>33.25</td><td>5.66</td><td>Average</td><td>100</td><td>120</td></tr><tr><td>2</td><td>8580.00</td><td>52.34</td><td>88.20</td><td>-35.86</td><td>46.68</td><td>5.66</td><td>Peak</td><td>100</td><td>120</td></tr><tr><td>3</td><td>10725.00</td><td>42.40</td><td>54.00</td><td>-11.60</td><td>35.02</td><td>7.38</td><td>Average</td><td>100</td><td>233</td></tr><tr><td>4</td><td>10725.00</td><td>55.22</td><td>74.00</td><td>-18.78</td><td>47.84</td><td>7.38</td><td>Peak</td><td>100</td><td>233</td></tr><tr><td>5</td><td>12870.00</td><td>42.25</td><td>68.20</td><td>-25.95</td><td>36.18</td><td>6.07</td><td>Average</td><td>100</td><td>16</td></tr><tr><td>6</td><td>12870.00</td><td>54.81</td><td>88.20</td><td>-33.39</td><td>48.74</td><td>6.07</td><td>Peak</td><td>100</td><td>16</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8580.00	38.91	68.20	-29.29	33.25	5.66	Average	100	120	2	8580.00	52.34	88.20	-35.86	46.68	5.66	Peak	100	120	3	10725.00	42.40	54.00	-11.60	35.02	7.38	Average	100	233	4	10725.00	55.22	74.00	-18.78	47.84	7.38	Peak	100	233	5	12870.00	42.25	68.20	-25.95	36.18	6.07	Average	100	16	6	12870.00	54.81	88.20	-33.39	48.74	6.07	Peak	100	16
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	8580.00	38.91	68.20	-29.29	33.25	5.66	Average	100	120																																																																
2	8580.00	52.34	88.20	-35.86	46.68	5.66	Peak	100	120																																																																
3	10725.00	42.40	54.00	-11.60	35.02	7.38	Average	100	233																																																																
4	10725.00	55.22	74.00	-18.78	47.84	7.38	Peak	100	233																																																																
5	12870.00	42.25	68.20	-25.95	36.18	6.07	Average	100	16																																																																
6	12870.00	54.81	88.20	-33.39	48.74	6.07	Peak	100	16																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

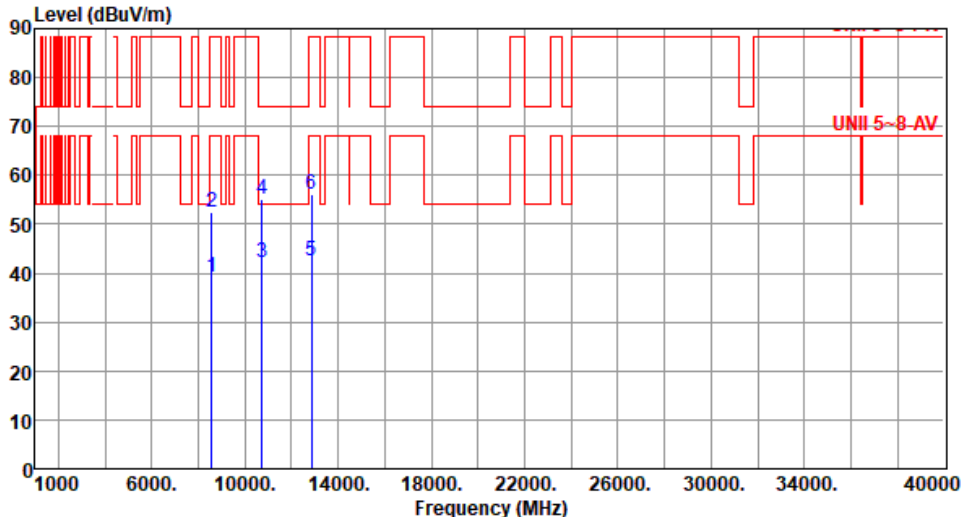

Modulation	be EHT20	Test Freq. (MHz)	6435																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>8580.00</td><td>39.07</td><td>68.20</td><td>-29.13</td><td>33.41</td><td>5.66</td><td>Average</td><td>100</td><td>268</td></tr><tr><td>2</td><td>8580.00</td><td>52.46</td><td>88.20</td><td>-35.74</td><td>46.80</td><td>5.66</td><td>Peak</td><td>100</td><td>268</td></tr><tr><td>3</td><td>10725.00</td><td>42.26</td><td>54.00</td><td>-11.74</td><td>34.88</td><td>7.38</td><td>Average</td><td>100</td><td>164</td></tr><tr><td>4</td><td>10725.00</td><td>55.29</td><td>74.00</td><td>-18.71</td><td>47.91</td><td>7.38</td><td>Peak</td><td>100</td><td>164</td></tr><tr><td>5</td><td>12870.00</td><td>42.62</td><td>68.20</td><td>-25.58</td><td>36.55</td><td>6.07</td><td>Average</td><td>100</td><td>205</td></tr><tr><td>6</td><td>12870.00</td><td>55.97</td><td>88.20</td><td>-32.23</td><td>49.90</td><td>6.07</td><td>Peak</td><td>100</td><td>205</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8580.00	39.07	68.20	-29.13	33.41	5.66	Average	100	268	2	8580.00	52.46	88.20	-35.74	46.80	5.66	Peak	100	268	3	10725.00	42.26	54.00	-11.74	34.88	7.38	Average	100	164	4	10725.00	55.29	74.00	-18.71	47.91	7.38	Peak	100	164	5	12870.00	42.62	68.20	-25.58	36.55	6.07	Average	100	205	6	12870.00	55.97	88.20	-32.23	49.90	6.07	Peak	100	205
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	8580.00	39.07	68.20	-29.13	33.41	5.66	Average	100	268																																																																
2	8580.00	52.46	88.20	-35.74	46.80	5.66	Peak	100	268																																																																
3	10725.00	42.26	54.00	-11.74	34.88	7.38	Average	100	164																																																																
4	10725.00	55.29	74.00	-18.71	47.91	7.38	Peak	100	164																																																																
5	12870.00	42.62	68.20	-25.58	36.55	6.07	Average	100	205																																																																
6	12870.00	55.97	88.20	-32.23	49.90	6.07	Peak	100	205																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

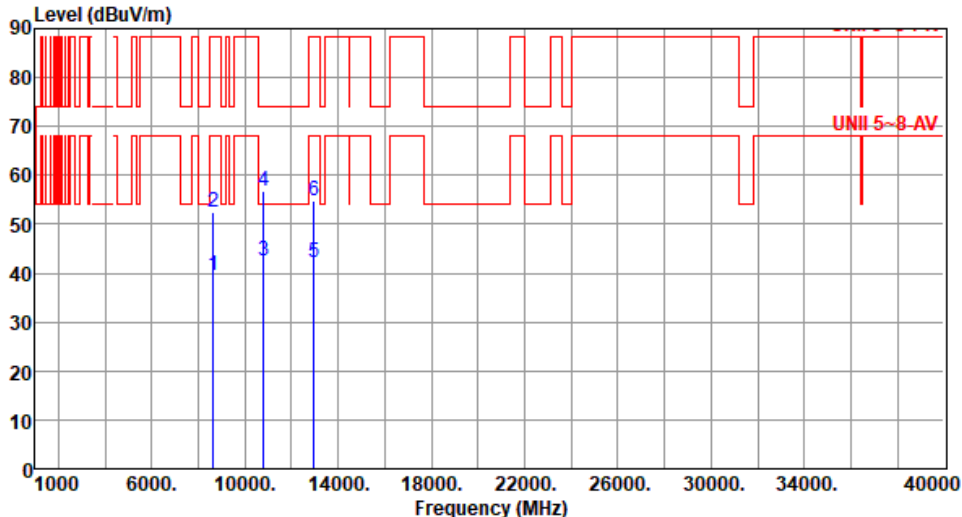

Modulation	be EHT20	Test Freq. (MHz)	6475																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>8633.30</td><td>39.42</td><td>68.20</td><td>-28.78</td><td>33.60</td><td>5.82</td><td>Average</td><td>100</td><td>129</td></tr><tr><td>2</td><td>8633.30</td><td>52.40</td><td>88.20</td><td>-35.80</td><td>46.58</td><td>5.82</td><td>Peak</td><td>100</td><td>129</td></tr><tr><td>3</td><td>10791.60</td><td>42.41</td><td>54.00</td><td>-11.59</td><td>34.98</td><td>7.43</td><td>Average</td><td>100</td><td>234</td></tr><tr><td>4</td><td>10791.60</td><td>56.66</td><td>74.00</td><td>-17.34</td><td>49.23</td><td>7.43</td><td>Peak</td><td>100</td><td>234</td></tr><tr><td>5</td><td>12950.00</td><td>42.32</td><td>68.20</td><td>-25.88</td><td>36.22</td><td>6.10</td><td>Average</td><td>100</td><td>14</td></tr><tr><td>6</td><td>12950.00</td><td>54.84</td><td>88.20</td><td>-33.36</td><td>48.74</td><td>6.10</td><td>Peak</td><td>100</td><td>14</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8633.30	39.42	68.20	-28.78	33.60	5.82	Average	100	129	2	8633.30	52.40	88.20	-35.80	46.58	5.82	Peak	100	129	3	10791.60	42.41	54.00	-11.59	34.98	7.43	Average	100	234	4	10791.60	56.66	74.00	-17.34	49.23	7.43	Peak	100	234	5	12950.00	42.32	68.20	-25.88	36.22	6.10	Average	100	14	6	12950.00	54.84	88.20	-33.36	48.74	6.10	Peak	100	14
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	8633.30	39.42	68.20	-28.78	33.60	5.82	Average	100	129																																																																
2	8633.30	52.40	88.20	-35.80	46.58	5.82	Peak	100	129																																																																
3	10791.60	42.41	54.00	-11.59	34.98	7.43	Average	100	234																																																																
4	10791.60	56.66	74.00	-17.34	49.23	7.43	Peak	100	234																																																																
5	12950.00	42.32	68.20	-25.88	36.22	6.10	Average	100	14																																																																
6	12950.00	54.84	88.20	-33.36	48.74	6.10	Peak	100	14																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	be EHT20	Test Freq. (MHz)	6475																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>8633.30</td><td>39.35</td><td>68.20</td><td>-28.85</td><td>33.53</td><td>5.82</td><td>Average</td><td>100</td><td>268</td></tr><tr><td>2</td><td>8633.30</td><td>52.55</td><td>88.20</td><td>-35.65</td><td>46.73</td><td>5.82</td><td>Peak</td><td>100</td><td>268</td></tr><tr><td>3</td><td>10791.60</td><td>42.54</td><td>54.00</td><td>-11.46</td><td>35.11</td><td>7.43</td><td>Average</td><td>100</td><td>311</td></tr><tr><td>4</td><td>10791.60</td><td>56.69</td><td>74.00</td><td>-17.31</td><td>49.26</td><td>7.43</td><td>Peak</td><td>100</td><td>311</td></tr><tr><td>5</td><td>12950.00</td><td>42.24</td><td>68.20</td><td>-25.96</td><td>36.14</td><td>6.10</td><td>Average</td><td>100</td><td>33</td></tr><tr><td>6</td><td>12950.00</td><td>55.86</td><td>88.20</td><td>-32.34</td><td>49.76</td><td>6.10</td><td>Peak</td><td>100</td><td>33</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8633.30	39.35	68.20	-28.85	33.53	5.82	Average	100	268	2	8633.30	52.55	88.20	-35.65	46.73	5.82	Peak	100	268	3	10791.60	42.54	54.00	-11.46	35.11	7.43	Average	100	311	4	10791.60	56.69	74.00	-17.31	49.26	7.43	Peak	100	311	5	12950.00	42.24	68.20	-25.96	36.14	6.10	Average	100	33	6	12950.00	55.86	88.20	-32.34	49.76	6.10	Peak	100	33
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	8633.30	39.35	68.20	-28.85	33.53	5.82	Average	100	268																																																																
2	8633.30	52.55	88.20	-35.65	46.73	5.82	Peak	100	268																																																																
3	10791.60	42.54	54.00	-11.46	35.11	7.43	Average	100	311																																																																
4	10791.60	56.69	74.00	-17.31	49.26	7.43	Peak	100	311																																																																
5	12950.00	42.24	68.20	-25.96	36.14	6.10	Average	100	33																																																																
6	12950.00	55.86	88.20	-32.34	49.76	6.10	Peak	100	33																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	be EHT20	Test Freq. (MHz)	6515																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																									
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>8686.60</td><td>39.56</td><td>68.20</td><td>-28.64</td><td>33.54</td><td>6.02</td><td>Average</td><td>100</td><td>126</td></tr><tr><td>2</td><td>8686.60</td><td>52.91</td><td>88.20</td><td>-35.29</td><td>46.89</td><td>6.02</td><td>Peak</td><td>100</td><td>126</td></tr><tr><td>3</td><td>10858.30</td><td>42.64</td><td>54.00</td><td>-11.36</td><td>35.10</td><td>7.54</td><td>Average</td><td>100</td><td>241</td></tr><tr><td>4</td><td>10858.30</td><td>56.76</td><td>74.00</td><td>-17.24</td><td>49.22</td><td>7.54</td><td>Peak</td><td>100</td><td>241</td></tr><tr><td>5</td><td>13030.00</td><td>42.36</td><td>68.20</td><td>-25.84</td><td>36.35</td><td>6.01</td><td>Average</td><td>100</td><td>21</td></tr><tr><td>6</td><td>13030.00</td><td>54.91</td><td>88.20</td><td>-33.29</td><td>48.90</td><td>6.01</td><td>Peak</td><td>100</td><td>21</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8686.60	39.56	68.20	-28.64	33.54	6.02	Average	100	126	2	8686.60	52.91	88.20	-35.29	46.89	6.02	Peak	100	126	3	10858.30	42.64	54.00	-11.36	35.10	7.54	Average	100	241	4	10858.30	56.76	74.00	-17.24	49.22	7.54	Peak	100	241	5	13030.00	42.36	68.20	-25.84	36.35	6.01	Average	100	21	6	13030.00	54.91	88.20	-33.29	48.90	6.01	Peak	100	21
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	8686.60	39.56	68.20	-28.64	33.54	6.02	Average	100	126																																																																
2	8686.60	52.91	88.20	-35.29	46.89	6.02	Peak	100	126																																																																
3	10858.30	42.64	54.00	-11.36	35.10	7.54	Average	100	241																																																																
4	10858.30	56.76	74.00	-17.24	49.22	7.54	Peak	100	241																																																																
5	13030.00	42.36	68.20	-25.84	36.35	6.01	Average	100	21																																																																
6	13030.00	54.91	88.20	-33.29	48.90	6.01	Peak	100	21																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

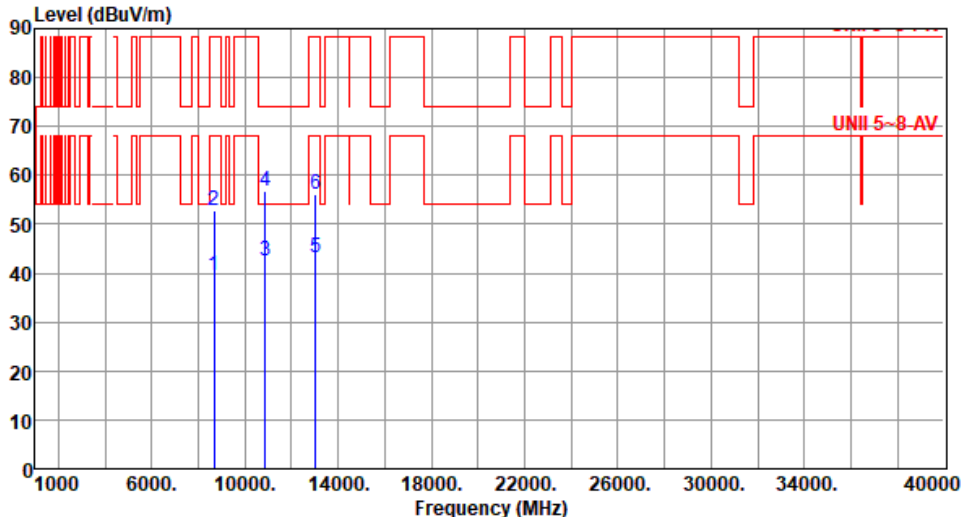


Modulation	be EHT20	Test Freq. (MHz)	6515																																																																																										
Polarization	Vertical																																																																																												
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>8686.60</td><td>39.61</td><td>68.20</td><td>-28.59</td><td>33.59</td><td>6.02</td><td>Average</td><td>100</td><td>334</td></tr><tr><td>2</td><td>8686.60</td><td>52.84</td><td>88.20</td><td>-35.36</td><td>46.82</td><td>6.02</td><td>Peak</td><td>100</td><td>334</td></tr><tr><td>3</td><td>10858.30</td><td>42.66</td><td>54.00</td><td>-11.34</td><td>35.12</td><td>7.54</td><td>Average</td><td>100</td><td>226</td></tr><tr><td>4</td><td>10858.30</td><td>56.76</td><td>74.00</td><td>-17.24</td><td>49.22</td><td>7.54</td><td>Peak</td><td>100</td><td>226</td></tr><tr><td>5</td><td>13030.00</td><td>43.06</td><td>68.20</td><td>-25.14</td><td>37.05</td><td>6.01</td><td>Average</td><td>100</td><td>159</td></tr><tr><td>6</td><td>13030.00</td><td>56.23</td><td>88.20</td><td>-31.97</td><td>50.22</td><td>6.01</td><td>Peak</td><td>100</td><td>159</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	8686.60	39.61	68.20	-28.59	33.59	6.02	Average	100	334	2	8686.60	52.84	88.20	-35.36	46.82	6.02	Peak	100	334	3	10858.30	42.66	54.00	-11.34	35.12	7.54	Average	100	226	4	10858.30	56.76	74.00	-17.24	49.22	7.54	Peak	100	226	5	13030.00	43.06	68.20	-25.14	37.05	6.01	Average	100	159	6	13030.00	56.23	88.20	-31.97	50.22	6.01	Peak	100	159
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
		dBuV/m			dBuV			cm	deg																																																																																				
1	8686.60	39.61	68.20	-28.59	33.59	6.02	Average	100	334																																																																																				
2	8686.60	52.84	88.20	-35.36	46.82	6.02	Peak	100	334																																																																																				
3	10858.30	42.66	54.00	-11.34	35.12	7.54	Average	100	226																																																																																				
4	10858.30	56.76	74.00	-17.24	49.22	7.54	Peak	100	226																																																																																				
5	13030.00	43.06	68.20	-25.14	37.05	6.01	Average	100	159																																																																																				
6	13030.00	56.23	88.20	-31.97	50.22	6.01	Peak	100	159																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													

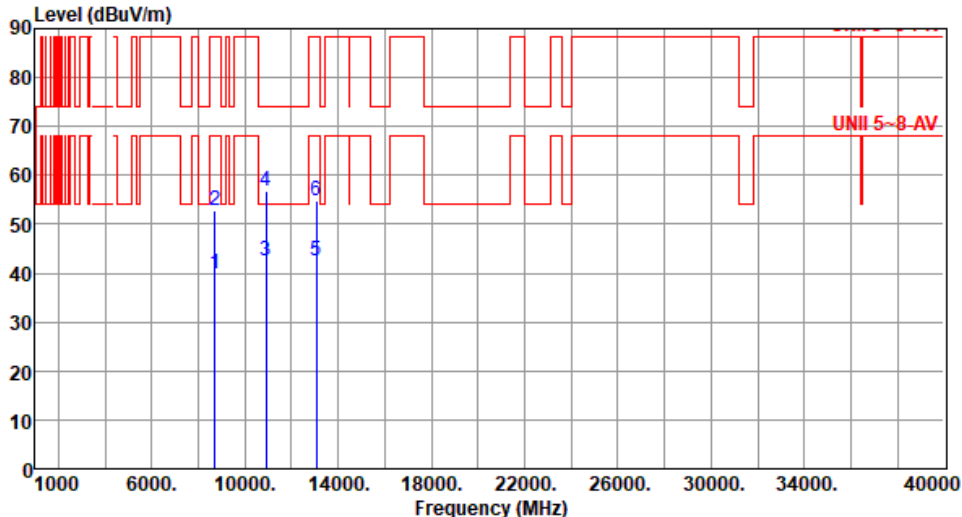


Modulation	be EHT20		Test Freq. (MHz)		6535																																																																																														
Polarization	Horizontal																																																																																																		
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																																																			
Level (dBuV/m)  <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>8713.30</td><td>39.71</td><td>68.20</td><td>-28.49</td><td>33.57</td><td>6.14</td><td>Average</td><td>100</td><td>116</td></tr><tr><td>2</td><td>8713.30</td><td>52.95</td><td>88.20</td><td>-35.25</td><td>46.81</td><td>6.14</td><td>Peak</td><td>100</td><td>116</td></tr><tr><td>3</td><td>10891.60</td><td>42.65</td><td>54.00</td><td>-11.35</td><td>35.07</td><td>7.58</td><td>Average</td><td>100</td><td>240</td></tr><tr><td>4</td><td>10891.60</td><td>56.80</td><td>74.00</td><td>-17.20</td><td>49.22</td><td>7.58</td><td>Peak</td><td>100</td><td>240</td></tr><tr><td>5</td><td>13070.00</td><td>42.41</td><td>68.20</td><td>-25.79</td><td>36.61</td><td>5.80</td><td>Average</td><td>100</td><td>22</td></tr><tr><td>6</td><td>13070.00</td><td>54.96</td><td>88.20</td><td>-33.24</td><td>49.16</td><td>5.80</td><td>Peak</td><td>100</td><td>22</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	8713.30	39.71	68.20	-28.49	33.57	6.14	Average	100	116	2	8713.30	52.95	88.20	-35.25	46.81	6.14	Peak	100	116	3	10891.60	42.65	54.00	-11.35	35.07	7.58	Average	100	240	4	10891.60	56.80	74.00	-17.20	49.22	7.58	Peak	100	240	5	13070.00	42.41	68.20	-25.79	36.61	5.80	Average	100	22	6	13070.00	54.96	88.20	-33.24	49.16	5.80	Peak	100	22
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	8713.30	39.71	68.20	-28.49	33.57	6.14	Average	100	116																																																																																										
2	8713.30	52.95	88.20	-35.25	46.81	6.14	Peak	100	116																																																																																										
3	10891.60	42.65	54.00	-11.35	35.07	7.58	Average	100	240																																																																																										
4	10891.60	56.80	74.00	-17.20	49.22	7.58	Peak	100	240																																																																																										
5	13070.00	42.41	68.20	-25.79	36.61	5.80	Average	100	22																																																																																										
6	13070.00	54.96	88.20	-33.24	49.16	5.80	Peak	100	22																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			

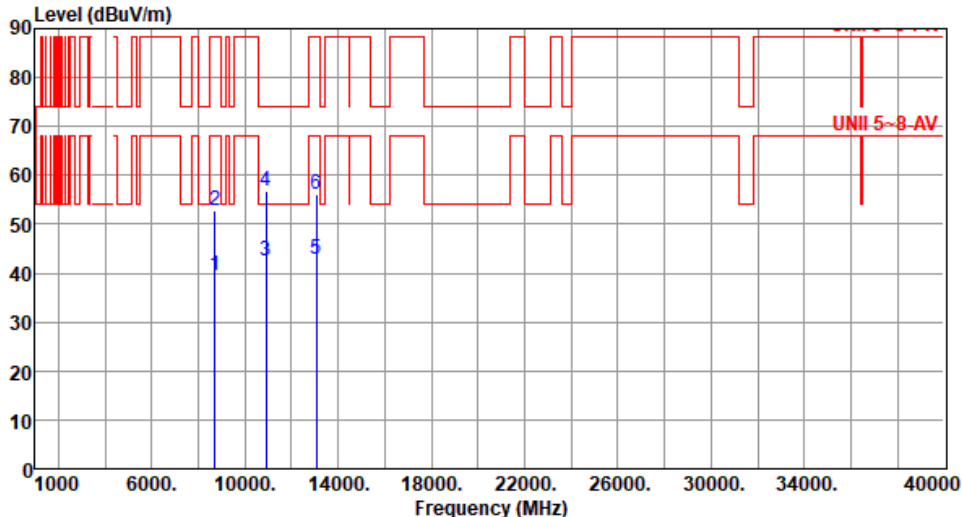


Modulation	be EHT20	Test Freq. (MHz)	6535																																																												
Polarization	Vertical																																																														
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																															
Level (dBuV/m)  Freq. Emission Limit Margin SA Factor Remark ANT Turn level dBuV/m dB reading dB/m High Table MHz dBuV/m dB dBuV cm deg <table><tr><td>1</td><td>8713.30</td><td>39.54</td><td>68.20</td><td>-28.66</td><td>33.40</td><td>6.14</td><td>Average</td><td>100</td><td>226</td></tr><tr><td>2</td><td>8713.30</td><td>52.82</td><td>88.20</td><td>-35.38</td><td>46.68</td><td>6.14</td><td>Peak</td><td>100</td><td>226</td></tr><tr><td>3</td><td>10891.60</td><td>42.66</td><td>54.00</td><td>-11.34</td><td>35.08</td><td>7.58</td><td>Average</td><td>100</td><td>117</td></tr><tr><td>4</td><td>10891.60</td><td>56.89</td><td>74.00</td><td>-17.11</td><td>49.31</td><td>7.58</td><td>Peak</td><td>100</td><td>117</td></tr><tr><td>5</td><td>13070.00</td><td>42.92</td><td>68.20</td><td>-25.28</td><td>37.12</td><td>5.80</td><td>Average</td><td>100</td><td>305</td></tr><tr><td>6</td><td>13070.00</td><td>56.18</td><td>88.20</td><td>-32.02</td><td>50.38</td><td>5.80</td><td>Peak</td><td>100</td><td>305</td></tr></table>				1	8713.30	39.54	68.20	-28.66	33.40	6.14	Average	100	226	2	8713.30	52.82	88.20	-35.38	46.68	6.14	Peak	100	226	3	10891.60	42.66	54.00	-11.34	35.08	7.58	Average	100	117	4	10891.60	56.89	74.00	-17.11	49.31	7.58	Peak	100	117	5	13070.00	42.92	68.20	-25.28	37.12	5.80	Average	100	305	6	13070.00	56.18	88.20	-32.02	50.38	5.80	Peak	100	305
1	8713.30	39.54	68.20	-28.66	33.40	6.14	Average	100	226																																																						
2	8713.30	52.82	88.20	-35.38	46.68	6.14	Peak	100	226																																																						
3	10891.60	42.66	54.00	-11.34	35.08	7.58	Average	100	117																																																						
4	10891.60	56.89	74.00	-17.11	49.31	7.58	Peak	100	117																																																						
5	13070.00	42.92	68.20	-25.28	37.12	5.80	Average	100	305																																																						
6	13070.00	56.18	88.20	-32.02	50.38	5.80	Peak	100	305																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																															

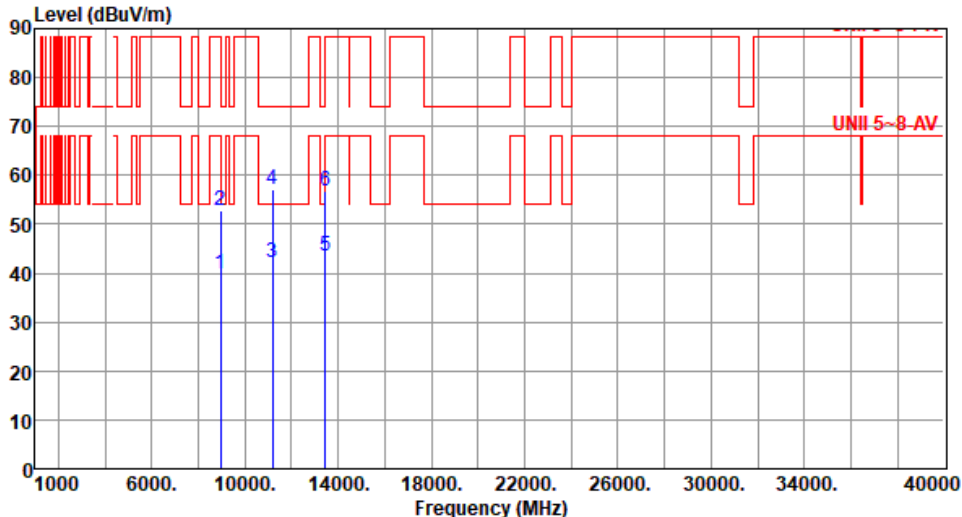


Modulation	be EHT20	Test Freq. (MHz)	6715																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																									
Level (dBuV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>8953.30</td><td>39.79</td><td>68.20</td><td>-28.41</td><td>33.83</td><td>5.96</td><td>Average</td><td>100</td><td>128</td></tr><tr><td>2</td><td>8953.30</td><td>52.74</td><td>88.20</td><td>-35.46</td><td>46.78</td><td>5.96</td><td>Peak</td><td>100</td><td>128</td></tr><tr><td>3</td><td>11191.60</td><td>42.31</td><td>54.00</td><td>-11.69</td><td>35.59</td><td>6.72</td><td>Average</td><td>100</td><td>242</td></tr><tr><td>4</td><td>11191.60</td><td>57.01</td><td>74.00</td><td>-16.99</td><td>50.29</td><td>6.72</td><td>Peak</td><td>100</td><td>242</td></tr><tr><td>5</td><td>13430.00</td><td>43.65</td><td>68.20</td><td>-24.55</td><td>37.70</td><td>5.95</td><td>Average</td><td>100</td><td>45</td></tr><tr><td>6</td><td>13430.00</td><td>56.91</td><td>88.20</td><td>-31.29</td><td>50.96</td><td>5.95</td><td>Peak</td><td>100</td><td>45</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8953.30	39.79	68.20	-28.41	33.83	5.96	Average	100	128	2	8953.30	52.74	88.20	-35.46	46.78	5.96	Peak	100	128	3	11191.60	42.31	54.00	-11.69	35.59	6.72	Average	100	242	4	11191.60	57.01	74.00	-16.99	50.29	6.72	Peak	100	242	5	13430.00	43.65	68.20	-24.55	37.70	5.95	Average	100	45	6	13430.00	56.91	88.20	-31.29	50.96	5.95	Peak	100	45
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	8953.30	39.79	68.20	-28.41	33.83	5.96	Average	100	128																																																																
2	8953.30	52.74	88.20	-35.46	46.78	5.96	Peak	100	128																																																																
3	11191.60	42.31	54.00	-11.69	35.59	6.72	Average	100	242																																																																
4	11191.60	57.01	74.00	-16.99	50.29	6.72	Peak	100	242																																																																
5	13430.00	43.65	68.20	-24.55	37.70	5.95	Average	100	45																																																																
6	13430.00	56.91	88.20	-31.29	50.96	5.95	Peak	100	45																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

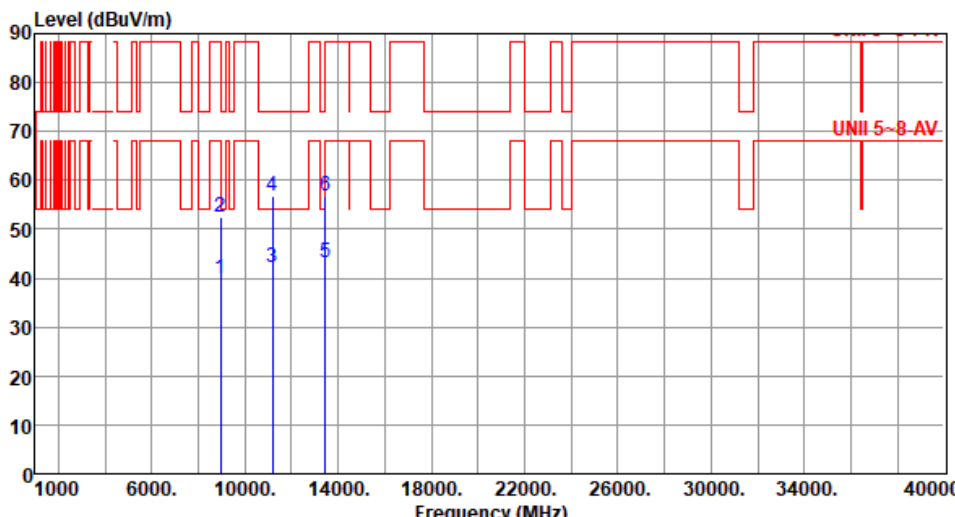

Modulation	be EHT20	Test Freq. (MHz)	6715																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																									
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8953.30</td><td>39.81</td><td>68.20</td><td>-28.39</td><td>33.85</td><td>5.96</td><td>Average</td><td>100</td><td>233</td></tr><tr><td>2</td><td>8953.30</td><td>52.62</td><td>88.20</td><td>-35.58</td><td>46.66</td><td>5.96</td><td>Peak</td><td>100</td><td>233</td></tr><tr><td>3</td><td>11191.60</td><td>42.32</td><td>54.00</td><td>-11.68</td><td>35.60</td><td>6.72</td><td>Average</td><td>100</td><td>130</td></tr><tr><td>4</td><td>11191.60</td><td>56.90</td><td>74.00</td><td>-17.10</td><td>50.18</td><td>6.72</td><td>Peak</td><td>100</td><td>130</td></tr><tr><td>5</td><td>13430.00</td><td>43.32</td><td>68.20</td><td>-24.88</td><td>37.37</td><td>5.95</td><td>Average</td><td>100</td><td>38</td></tr><tr><td>6</td><td>13430.00</td><td>56.94</td><td>88.20</td><td>-31.26</td><td>50.99</td><td>5.95</td><td>Peak</td><td>100</td><td>38</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8953.30	39.81	68.20	-28.39	33.85	5.96	Average	100	233	2	8953.30	52.62	88.20	-35.58	46.66	5.96	Peak	100	233	3	11191.60	42.32	54.00	-11.68	35.60	6.72	Average	100	130	4	11191.60	56.90	74.00	-17.10	50.18	6.72	Peak	100	130	5	13430.00	43.32	68.20	-24.88	37.37	5.95	Average	100	38	6	13430.00	56.94	88.20	-31.26	50.99	5.95	Peak	100	38
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	8953.30	39.81	68.20	-28.39	33.85	5.96	Average	100	233																																																																
2	8953.30	52.62	88.20	-35.58	46.66	5.96	Peak	100	233																																																																
3	11191.60	42.32	54.00	-11.68	35.60	6.72	Average	100	130																																																																
4	11191.60	56.90	74.00	-17.10	50.18	6.72	Peak	100	130																																																																
5	13430.00	43.32	68.20	-24.88	37.37	5.95	Average	100	38																																																																
6	13430.00	56.94	88.20	-31.26	50.99	5.95	Peak	100	38																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

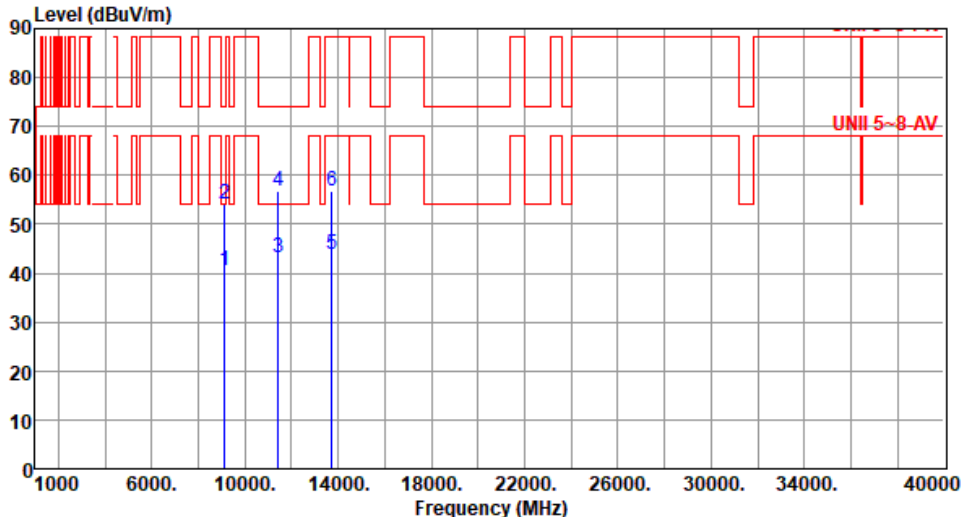

Modulation	be EHT20	Test Freq. (MHz)	6855																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>9140.00</td><td>40.65</td><td>54.00</td><td>-13.35</td><td>34.05</td><td>6.60</td><td>Average</td><td>100</td><td>137</td></tr><tr><td>2</td><td>9140.00</td><td>54.19</td><td>74.00</td><td>-19.81</td><td>47.59</td><td>6.60</td><td>Peak</td><td>100</td><td>137</td></tr><tr><td>3</td><td>11425.00</td><td>43.01</td><td>54.00</td><td>-10.99</td><td>35.83</td><td>7.18</td><td>Average</td><td>100</td><td>240</td></tr><tr><td>4</td><td>11425.00</td><td>56.81</td><td>74.00</td><td>-17.19</td><td>49.63</td><td>7.18</td><td>Peak</td><td>100</td><td>240</td></tr><tr><td>5</td><td>13710.00</td><td>43.72</td><td>68.20</td><td>-24.48</td><td>37.69</td><td>6.03</td><td>Average</td><td>100</td><td>11</td></tr><tr><td>6</td><td>13710.00</td><td>56.95</td><td>88.20</td><td>-31.25</td><td>50.92</td><td>6.03</td><td>Peak</td><td>100</td><td>11</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9140.00	40.65	54.00	-13.35	34.05	6.60	Average	100	137	2	9140.00	54.19	74.00	-19.81	47.59	6.60	Peak	100	137	3	11425.00	43.01	54.00	-10.99	35.83	7.18	Average	100	240	4	11425.00	56.81	74.00	-17.19	49.63	7.18	Peak	100	240	5	13710.00	43.72	68.20	-24.48	37.69	6.03	Average	100	11	6	13710.00	56.95	88.20	-31.25	50.92	6.03	Peak	100	11
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	9140.00	40.65	54.00	-13.35	34.05	6.60	Average	100	137																																																																
2	9140.00	54.19	74.00	-19.81	47.59	6.60	Peak	100	137																																																																
3	11425.00	43.01	54.00	-10.99	35.83	7.18	Average	100	240																																																																
4	11425.00	56.81	74.00	-17.19	49.63	7.18	Peak	100	240																																																																
5	13710.00	43.72	68.20	-24.48	37.69	6.03	Average	100	11																																																																
6	13710.00	56.95	88.20	-31.25	50.92	6.03	Peak	100	11																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT20		Test Freq. (MHz)		6855																																																																										
Polarization	Vertical																																																																														
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																															
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>9140.00</td><td>40.73</td><td>54.00</td><td>-13.27</td><td>34.13</td><td>6.60</td><td>Average</td><td>100</td><td>268</td></tr><tr><td>2</td><td>9140.00</td><td>54.29</td><td>74.00</td><td>-19.71</td><td>47.69</td><td>6.60</td><td>Peak</td><td>100</td><td>268</td></tr><tr><td>3</td><td>11425.00</td><td>42.91</td><td>54.00</td><td>-11.09</td><td>35.73</td><td>7.18</td><td>Average</td><td>100</td><td>184</td></tr><tr><td>4</td><td>11425.00</td><td>57.41</td><td>74.00</td><td>-16.59</td><td>50.23</td><td>7.18</td><td>Peak</td><td>100</td><td>184</td></tr><tr><td>5</td><td>13710.00</td><td>43.77</td><td>68.20</td><td>-24.43</td><td>37.74</td><td>6.03</td><td>Average</td><td>100</td><td>49</td></tr><tr><td>6</td><td>13710.00</td><td>56.74</td><td>88.20</td><td>-31.46</td><td>50.71</td><td>6.03</td><td>Peak</td><td>100</td><td>49</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9140.00	40.73	54.00	-13.27	34.13	6.60	Average	100	268	2	9140.00	54.29	74.00	-19.71	47.69	6.60	Peak	100	268	3	11425.00	42.91	54.00	-11.09	35.73	7.18	Average	100	184	4	11425.00	57.41	74.00	-16.59	50.23	7.18	Peak	100	184	5	13710.00	43.77	68.20	-24.43	37.74	6.03	Average	100	49	6	13710.00	56.74	88.20	-31.46	50.71	6.03	Peak	100	49
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	9140.00	40.73	54.00	-13.27	34.13	6.60	Average	100	268																																																																						
2	9140.00	54.29	74.00	-19.71	47.69	6.60	Peak	100	268																																																																						
3	11425.00	42.91	54.00	-11.09	35.73	7.18	Average	100	184																																																																						
4	11425.00	57.41	74.00	-16.59	50.23	7.18	Peak	100	184																																																																						
5	13710.00	43.77	68.20	-24.43	37.74	6.03	Average	100	49																																																																						
6	13710.00	56.74	88.20	-31.46	50.71	6.03	Peak	100	49																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															




Modulation	be EHT20	Test Freq. (MHz)	6875																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																									
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>9166.60</td><td>40.82</td><td>54.00</td><td>-13.18</td><td>34.13</td><td>6.69</td><td>Average</td><td>100</td><td>132</td></tr><tr><td>2</td><td>9166.60</td><td>54.11</td><td>74.00</td><td>-19.89</td><td>47.42</td><td>6.69</td><td>Peak</td><td>100</td><td>132</td></tr><tr><td>3</td><td>11458.30</td><td>43.03</td><td>54.00</td><td>-10.97</td><td>35.83</td><td>7.20</td><td>Average</td><td>100</td><td>50</td></tr><tr><td>4</td><td>11458.30</td><td>57.42</td><td>74.00</td><td>-16.58</td><td>50.22</td><td>7.20</td><td>Peak</td><td>100</td><td>50</td></tr><tr><td>5</td><td>13750.00</td><td>43.76</td><td>68.20</td><td>-24.44</td><td>37.76</td><td>6.00</td><td>Average</td><td>100</td><td>17</td></tr><tr><td>6</td><td>13750.00</td><td>57.02</td><td>88.20</td><td>-31.18</td><td>51.02</td><td>6.00</td><td>Peak</td><td>100</td><td>17</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9166.60	40.82	54.00	-13.18	34.13	6.69	Average	100	132	2	9166.60	54.11	74.00	-19.89	47.42	6.69	Peak	100	132	3	11458.30	43.03	54.00	-10.97	35.83	7.20	Average	100	50	4	11458.30	57.42	74.00	-16.58	50.22	7.20	Peak	100	50	5	13750.00	43.76	68.20	-24.44	37.76	6.00	Average	100	17	6	13750.00	57.02	88.20	-31.18	51.02	6.00	Peak	100	17
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	9166.60	40.82	54.00	-13.18	34.13	6.69	Average	100	132																																																																
2	9166.60	54.11	74.00	-19.89	47.42	6.69	Peak	100	132																																																																
3	11458.30	43.03	54.00	-10.97	35.83	7.20	Average	100	50																																																																
4	11458.30	57.42	74.00	-16.58	50.22	7.20	Peak	100	50																																																																
5	13750.00	43.76	68.20	-24.44	37.76	6.00	Average	100	17																																																																
6	13750.00	57.02	88.20	-31.18	51.02	6.00	Peak	100	17																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT20	Test Freq. (MHz)	6875																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>9166.60</td><td>40.64</td><td>54.00</td><td>-13.36</td><td>33.95</td><td>6.69</td><td>Average</td><td>100</td><td>266</td></tr><tr><td>2</td><td>9166.60</td><td>54.21</td><td>74.00</td><td>-19.79</td><td>47.52</td><td>6.69</td><td>Peak</td><td>100</td><td>266</td></tr><tr><td>3</td><td>11458.30</td><td>43.02</td><td>54.00</td><td>-10.98</td><td>35.82</td><td>7.20</td><td>Average</td><td>100</td><td>155</td></tr><tr><td>4</td><td>11458.30</td><td>57.56</td><td>74.00</td><td>-16.44</td><td>50.36</td><td>7.20</td><td>Peak</td><td>100</td><td>155</td></tr><tr><td>5</td><td>13750.00</td><td>43.81</td><td>68.20</td><td>-24.39</td><td>37.81</td><td>6.00</td><td>Average</td><td>100</td><td>77</td></tr><tr><td>6</td><td>13750.00</td><td>56.80</td><td>88.20</td><td>-31.40</td><td>50.80</td><td>6.00</td><td>Peak</td><td>100</td><td>77</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9166.60	40.64	54.00	-13.36	33.95	6.69	Average	100	266	2	9166.60	54.21	74.00	-19.79	47.52	6.69	Peak	100	266	3	11458.30	43.02	54.00	-10.98	35.82	7.20	Average	100	155	4	11458.30	57.56	74.00	-16.44	50.36	7.20	Peak	100	155	5	13750.00	43.81	68.20	-24.39	37.81	6.00	Average	100	77	6	13750.00	56.80	88.20	-31.40	50.80	6.00	Peak	100	77
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	9166.60	40.64	54.00	-13.36	33.95	6.69	Average	100	266																																																																
2	9166.60	54.21	74.00	-19.79	47.52	6.69	Peak	100	266																																																																
3	11458.30	43.02	54.00	-10.98	35.82	7.20	Average	100	155																																																																
4	11458.30	57.56	74.00	-16.44	50.36	7.20	Peak	100	155																																																																
5	13750.00	43.81	68.20	-24.39	37.81	6.00	Average	100	77																																																																
6	13750.00	56.80	88.20	-31.40	50.80	6.00	Peak	100	77																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

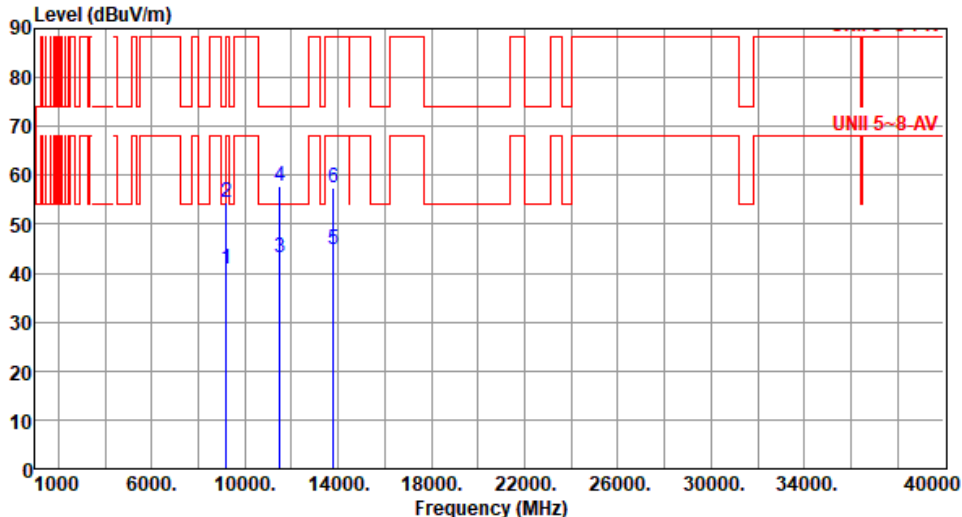


Modulation	be EHT20	Test Freq. (MHz)	6895																																																																																										
Polarization	Horizontal																																																																																												
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>9193.30</td><td>40.76</td><td>54.00</td><td>-13.24</td><td>33.98</td><td>6.78</td><td>Average</td><td>100</td><td>125</td></tr><tr><td>2</td><td>9193.30</td><td>54.33</td><td>74.00</td><td>-19.67</td><td>47.55</td><td>6.78</td><td>Peak</td><td>100</td><td>125</td></tr><tr><td>3</td><td>11491.60</td><td>43.15</td><td>54.00</td><td>-10.85</td><td>35.83</td><td>7.32</td><td>Average</td><td>100</td><td>235</td></tr><tr><td>4</td><td>11491.60</td><td>57.93</td><td>74.00</td><td>-16.07</td><td>50.61</td><td>7.32</td><td>Peak</td><td>100</td><td>235</td></tr><tr><td>5</td><td>13790.00</td><td>44.92</td><td>68.20</td><td>-23.28</td><td>38.70</td><td>6.22</td><td>Average</td><td>100</td><td>13</td></tr><tr><td>6</td><td>13790.00</td><td>57.51</td><td>88.20</td><td>-30.69</td><td>51.29</td><td>6.22</td><td>Peak</td><td>100</td><td>13</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	9193.30	40.76	54.00	-13.24	33.98	6.78	Average	100	125	2	9193.30	54.33	74.00	-19.67	47.55	6.78	Peak	100	125	3	11491.60	43.15	54.00	-10.85	35.83	7.32	Average	100	235	4	11491.60	57.93	74.00	-16.07	50.61	7.32	Peak	100	235	5	13790.00	44.92	68.20	-23.28	38.70	6.22	Average	100	13	6	13790.00	57.51	88.20	-30.69	51.29	6.22	Peak	100	13
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
		dBuV/m			dBuV			cm	deg																																																																																				
1	9193.30	40.76	54.00	-13.24	33.98	6.78	Average	100	125																																																																																				
2	9193.30	54.33	74.00	-19.67	47.55	6.78	Peak	100	125																																																																																				
3	11491.60	43.15	54.00	-10.85	35.83	7.32	Average	100	235																																																																																				
4	11491.60	57.93	74.00	-16.07	50.61	7.32	Peak	100	235																																																																																				
5	13790.00	44.92	68.20	-23.28	38.70	6.22	Average	100	13																																																																																				
6	13790.00	57.51	88.20	-30.69	51.29	6.22	Peak	100	13																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													



Modulation	be EHT20		Test Freq. (MHz)		6895																																																																										
Polarization	Vertical																																																																														
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																															
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>9193.30</td><td>40.77</td><td>54.00</td><td>-13.23</td><td>33.99</td><td>6.78</td><td>Average</td><td>100</td><td>47</td></tr><tr><td>2</td><td>9193.30</td><td>54.47</td><td>74.00</td><td>-19.53</td><td>47.69</td><td>6.78</td><td>Peak</td><td>100</td><td>47</td></tr><tr><td>3</td><td>11491.60</td><td>42.83</td><td>54.00</td><td>-11.17</td><td>35.51</td><td>7.32</td><td>Average</td><td>100</td><td>226</td></tr><tr><td>4</td><td>11491.60</td><td>57.54</td><td>74.00</td><td>-16.46</td><td>50.22</td><td>7.32</td><td>Peak</td><td>100</td><td>226</td></tr><tr><td>5</td><td>13790.00</td><td>44.04</td><td>68.20</td><td>-24.16</td><td>37.82</td><td>6.22</td><td>Average</td><td>100</td><td>304</td></tr><tr><td>6</td><td>13790.00</td><td>57.08</td><td>88.20</td><td>-31.12</td><td>50.86</td><td>6.22</td><td>Peak</td><td>100</td><td>304</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9193.30	40.77	54.00	-13.23	33.99	6.78	Average	100	47	2	9193.30	54.47	74.00	-19.53	47.69	6.78	Peak	100	47	3	11491.60	42.83	54.00	-11.17	35.51	7.32	Average	100	226	4	11491.60	57.54	74.00	-16.46	50.22	7.32	Peak	100	226	5	13790.00	44.04	68.20	-24.16	37.82	6.22	Average	100	304	6	13790.00	57.08	88.20	-31.12	50.86	6.22	Peak	100	304
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	9193.30	40.77	54.00	-13.23	33.99	6.78	Average	100	47																																																																						
2	9193.30	54.47	74.00	-19.53	47.69	6.78	Peak	100	47																																																																						
3	11491.60	42.83	54.00	-11.17	35.51	7.32	Average	100	226																																																																						
4	11491.60	57.54	74.00	-16.46	50.22	7.32	Peak	100	226																																																																						
5	13790.00	44.04	68.20	-24.16	37.82	6.22	Average	100	304																																																																						
6	13790.00	57.08	88.20	-31.12	50.86	6.22	Peak	100	304																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															

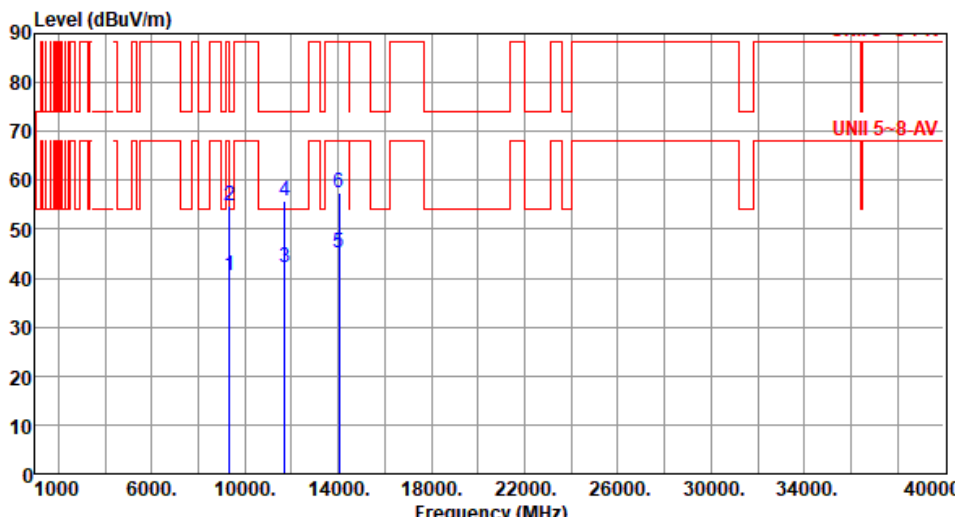


Modulation	be EHT20	Test Freq. (MHz)	7015																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>9353.30</td><td>40.46</td><td>54.00</td><td>-13.54</td><td>33.42</td><td>7.04</td><td>Average</td><td>100</td><td>127</td></tr><tr><td>2</td><td>9353.30</td><td>54.69</td><td>74.00</td><td>-19.31</td><td>47.65</td><td>7.04</td><td>Peak</td><td>100</td><td>127</td></tr><tr><td>3</td><td>11691.60</td><td>42.23</td><td>54.00</td><td>-11.77</td><td>35.77</td><td>6.46</td><td>Average</td><td>100</td><td>238</td></tr><tr><td>4</td><td>11691.60</td><td>55.66</td><td>74.00</td><td>-18.34</td><td>49.20</td><td>6.46</td><td>Peak</td><td>100</td><td>238</td></tr><tr><td>5</td><td>14030.00</td><td>45.06</td><td>68.20</td><td>-23.14</td><td>38.32</td><td>6.74</td><td>Average</td><td>100</td><td>21</td></tr><tr><td>6</td><td>14030.00</td><td>57.58</td><td>88.20</td><td>-30.62</td><td>50.84</td><td>6.74</td><td>Peak</td><td>100</td><td>21</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9353.30	40.46	54.00	-13.54	33.42	7.04	Average	100	127	2	9353.30	54.69	74.00	-19.31	47.65	7.04	Peak	100	127	3	11691.60	42.23	54.00	-11.77	35.77	6.46	Average	100	238	4	11691.60	55.66	74.00	-18.34	49.20	6.46	Peak	100	238	5	14030.00	45.06	68.20	-23.14	38.32	6.74	Average	100	21	6	14030.00	57.58	88.20	-30.62	50.84	6.74	Peak	100	21
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	9353.30	40.46	54.00	-13.54	33.42	7.04	Average	100	127																																																																
2	9353.30	54.69	74.00	-19.31	47.65	7.04	Peak	100	127																																																																
3	11691.60	42.23	54.00	-11.77	35.77	6.46	Average	100	238																																																																
4	11691.60	55.66	74.00	-18.34	49.20	6.46	Peak	100	238																																																																
5	14030.00	45.06	68.20	-23.14	38.32	6.74	Average	100	21																																																																
6	14030.00	57.58	88.20	-30.62	50.84	6.74	Peak	100	21																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									




Modulation	be EHT20	Test Freq. (MHz)	7015																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																									
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>9353.30</td><td>41.33</td><td>54.00</td><td>-12.67</td><td>34.29</td><td>7.04</td><td>Average</td><td>100</td><td>241</td></tr><tr><td>2</td><td>9353.30</td><td>54.73</td><td>74.00</td><td>-19.27</td><td>47.69</td><td>7.04</td><td>Peak</td><td>100</td><td>241</td></tr><tr><td>3</td><td>11691.60</td><td>42.28</td><td>54.00</td><td>-11.72</td><td>35.82</td><td>6.46</td><td>Average</td><td>100</td><td>119</td></tr><tr><td>4</td><td>11691.60</td><td>55.72</td><td>74.00</td><td>-18.28</td><td>49.26</td><td>6.46</td><td>Peak</td><td>100</td><td>119</td></tr><tr><td>5</td><td>14030.00</td><td>45.03</td><td>68.20</td><td>-23.17</td><td>38.29</td><td>6.74</td><td>Average</td><td>100</td><td>44</td></tr><tr><td>6</td><td>14030.00</td><td>58.09</td><td>88.20</td><td>-30.11</td><td>51.35</td><td>6.74</td><td>Peak</td><td>100</td><td>44</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9353.30	41.33	54.00	-12.67	34.29	7.04	Average	100	241	2	9353.30	54.73	74.00	-19.27	47.69	7.04	Peak	100	241	3	11691.60	42.28	54.00	-11.72	35.82	6.46	Average	100	119	4	11691.60	55.72	74.00	-18.28	49.26	6.46	Peak	100	119	5	14030.00	45.03	68.20	-23.17	38.29	6.74	Average	100	44	6	14030.00	58.09	88.20	-30.11	51.35	6.74	Peak	100	44
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	9353.30	41.33	54.00	-12.67	34.29	7.04	Average	100	241																																																																
2	9353.30	54.73	74.00	-19.27	47.69	7.04	Peak	100	241																																																																
3	11691.60	42.28	54.00	-11.72	35.82	6.46	Average	100	119																																																																
4	11691.60	55.72	74.00	-18.28	49.26	6.46	Peak	100	119																																																																
5	14030.00	45.03	68.20	-23.17	38.29	6.74	Average	100	44																																																																
6	14030.00	58.09	88.20	-30.11	51.35	6.74	Peak	100	44																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

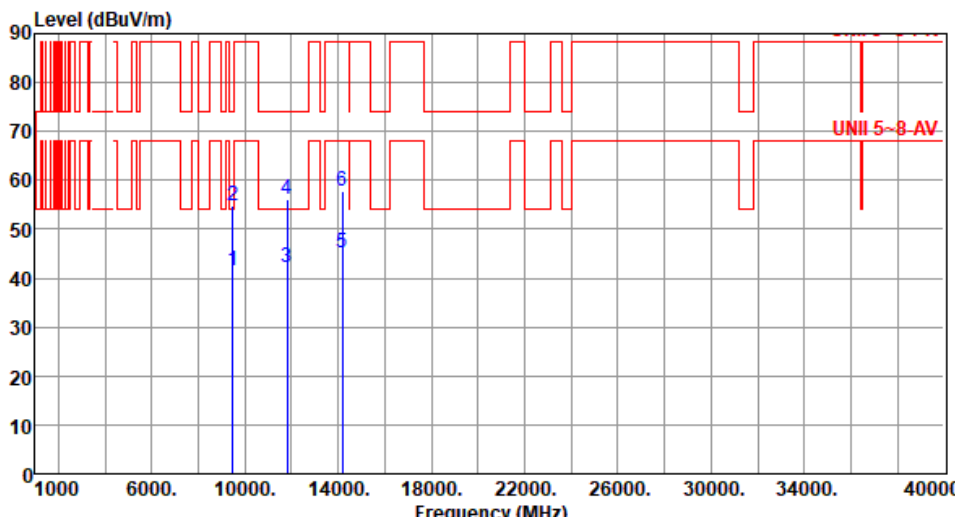


Modulation	be EHT20	Test Freq. (MHz)	7095																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																									
Level (dBuV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>9460.00</td><td>41.46</td><td>54.00</td><td>-12.54</td><td>34.29</td><td>7.17</td><td>Average</td><td>100</td><td>114</td></tr><tr><td>2</td><td>9460.00</td><td>54.86</td><td>74.00</td><td>-19.14</td><td>47.69</td><td>7.17</td><td>Peak</td><td>100</td><td>114</td></tr><tr><td>3</td><td>11825.00</td><td>42.10</td><td>54.00</td><td>-11.90</td><td>35.89</td><td>6.21</td><td>Average</td><td>100</td><td>233</td></tr><tr><td>4</td><td>11825.00</td><td>56.28</td><td>74.00</td><td>-17.72</td><td>50.07</td><td>6.21</td><td>Peak</td><td>100</td><td>233</td></tr><tr><td>5</td><td>14190.00</td><td>45.11</td><td>68.20</td><td>-23.09</td><td>38.21</td><td>6.90</td><td>Average</td><td>100</td><td>33</td></tr><tr><td>6</td><td>14190.00</td><td>57.64</td><td>88.20</td><td>-30.56</td><td>50.74</td><td>6.90</td><td>Peak</td><td>100</td><td>33</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9460.00	41.46	54.00	-12.54	34.29	7.17	Average	100	114	2	9460.00	54.86	74.00	-19.14	47.69	7.17	Peak	100	114	3	11825.00	42.10	54.00	-11.90	35.89	6.21	Average	100	233	4	11825.00	56.28	74.00	-17.72	50.07	6.21	Peak	100	233	5	14190.00	45.11	68.20	-23.09	38.21	6.90	Average	100	33	6	14190.00	57.64	88.20	-30.56	50.74	6.90	Peak	100	33
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	9460.00	41.46	54.00	-12.54	34.29	7.17	Average	100	114																																																																
2	9460.00	54.86	74.00	-19.14	47.69	7.17	Peak	100	114																																																																
3	11825.00	42.10	54.00	-11.90	35.89	6.21	Average	100	233																																																																
4	11825.00	56.28	74.00	-17.72	50.07	6.21	Peak	100	233																																																																
5	14190.00	45.11	68.20	-23.09	38.21	6.90	Average	100	33																																																																
6	14190.00	57.64	88.20	-30.56	50.74	6.90	Peak	100	33																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

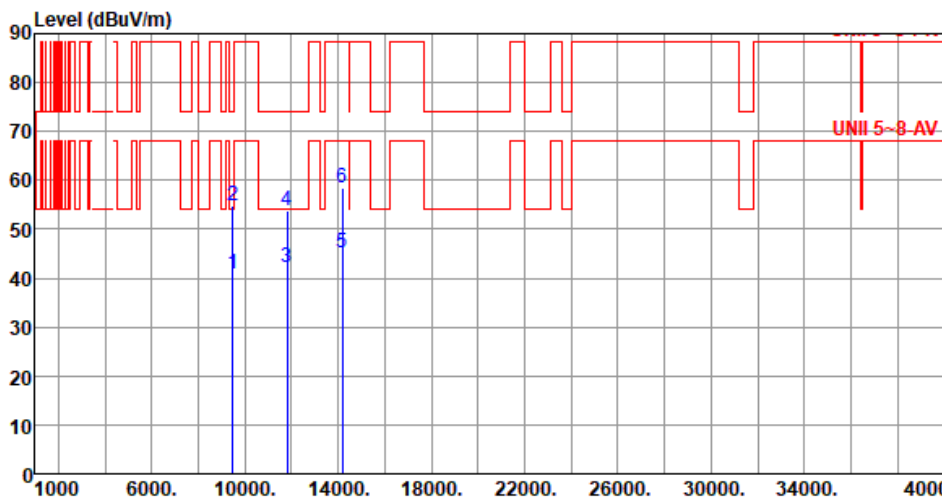


Modulation	be EHT20	Test Freq. (MHz)	7095																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>9460.00</td><td>40.69</td><td>54.00</td><td>-13.31</td><td>33.52</td><td>7.17</td><td>Average</td><td>100</td><td>257</td></tr><tr><td>2</td><td>9460.00</td><td>54.81</td><td>74.00</td><td>-19.19</td><td>47.64</td><td>7.17</td><td>Peak</td><td>100</td><td>257</td></tr><tr><td>3</td><td>11825.00</td><td>42.06</td><td>54.00</td><td>-11.94</td><td>35.85</td><td>6.21</td><td>Average</td><td>100</td><td>109</td></tr><tr><td>4</td><td>11825.00</td><td>53.80</td><td>74.00</td><td>-20.20</td><td>47.59</td><td>6.21</td><td>Peak</td><td>100</td><td>109</td></tr><tr><td>5</td><td>14190.00</td><td>45.24</td><td>68.20</td><td>-22.96</td><td>38.34</td><td>6.90</td><td>Average</td><td>100</td><td>68</td></tr><tr><td>6</td><td>14190.00</td><td>58.49</td><td>88.20</td><td>-29.71</td><td>51.59</td><td>6.90</td><td>Peak</td><td>100</td><td>68</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	9460.00	40.69	54.00	-13.31	33.52	7.17	Average	100	257	2	9460.00	54.81	74.00	-19.19	47.64	7.17	Peak	100	257	3	11825.00	42.06	54.00	-11.94	35.85	6.21	Average	100	109	4	11825.00	53.80	74.00	-20.20	47.59	6.21	Peak	100	109	5	14190.00	45.24	68.20	-22.96	38.34	6.90	Average	100	68	6	14190.00	58.49	88.20	-29.71	51.59	6.90	Peak	100	68
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	9460.00	40.69	54.00	-13.31	33.52	7.17	Average	100	257																																																																
2	9460.00	54.81	74.00	-19.19	47.64	7.17	Peak	100	257																																																																
3	11825.00	42.06	54.00	-11.94	35.85	6.21	Average	100	109																																																																
4	11825.00	53.80	74.00	-20.20	47.59	6.21	Peak	100	109																																																																
5	14190.00	45.24	68.20	-22.96	38.34	6.90	Average	100	68																																																																
6	14190.00	58.49	88.20	-29.71	51.59	6.90	Peak	100	68																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									


Unwanted Emissions (Above 1GHz) for be EHT40

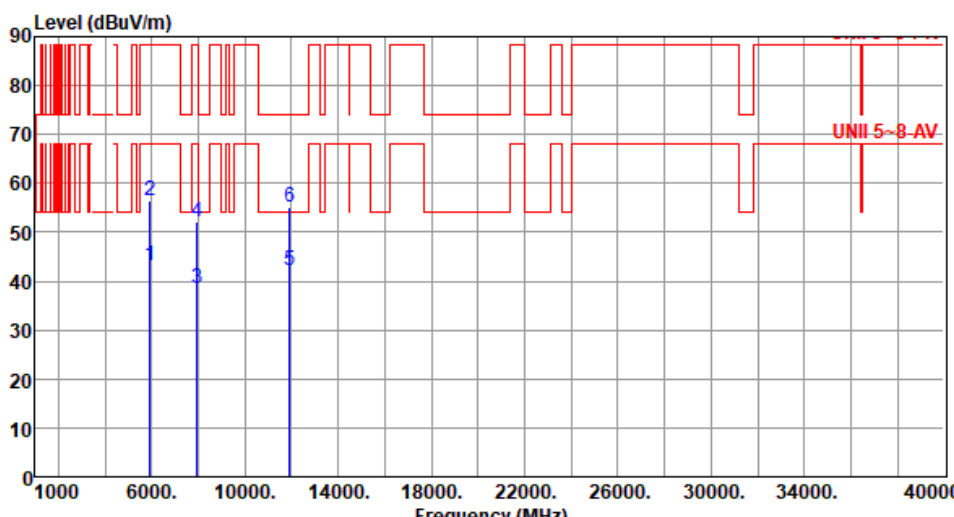Modulation	be EHT40	Test Freq. (MHz)	5965																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5925.00</td><td>43.28</td><td>68.20</td><td>-24.92</td><td>42.15</td><td>1.13</td><td>Average</td><td>164</td><td>243</td></tr><tr><td>2</td><td>5925.00</td><td>56.42</td><td>88.20</td><td>-31.78</td><td>55.29</td><td>1.13</td><td>Peak</td><td>164</td><td>243</td></tr><tr><td>3</td><td>7953.30</td><td>38.46</td><td>68.20</td><td>-29.74</td><td>32.93</td><td>5.53</td><td>Average</td><td>100</td><td>124</td></tr><tr><td>4</td><td>7953.30</td><td>52.25</td><td>88.20</td><td>-35.95</td><td>46.72</td><td>5.53</td><td>Peak</td><td>100</td><td>124</td></tr><tr><td>5</td><td>11930.00</td><td>42.13</td><td>54.00</td><td>-11.87</td><td>36.04</td><td>6.09</td><td>Average</td><td>100</td><td>66</td></tr><tr><td>6</td><td>11930.00</td><td>55.17</td><td>74.00</td><td>-18.83</td><td>49.08</td><td>6.09</td><td>Peak</td><td>100</td><td>66</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	43.28	68.20	-24.92	42.15	1.13	Average	164	243	2	5925.00	56.42	88.20	-31.78	55.29	1.13	Peak	164	243	3	7953.30	38.46	68.20	-29.74	32.93	5.53	Average	100	124	4	7953.30	52.25	88.20	-35.95	46.72	5.53	Peak	100	124	5	11930.00	42.13	54.00	-11.87	36.04	6.09	Average	100	66	6	11930.00	55.17	74.00	-18.83	49.08	6.09	Peak	100	66
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5925.00	43.28	68.20	-24.92	42.15	1.13	Average	164	243																																																																
2	5925.00	56.42	88.20	-31.78	55.29	1.13	Peak	164	243																																																																
3	7953.30	38.46	68.20	-29.74	32.93	5.53	Average	100	124																																																																
4	7953.30	52.25	88.20	-35.95	46.72	5.53	Peak	100	124																																																																
5	11930.00	42.13	54.00	-11.87	36.04	6.09	Average	100	66																																																																
6	11930.00	55.17	74.00	-18.83	49.08	6.09	Peak	100	66																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

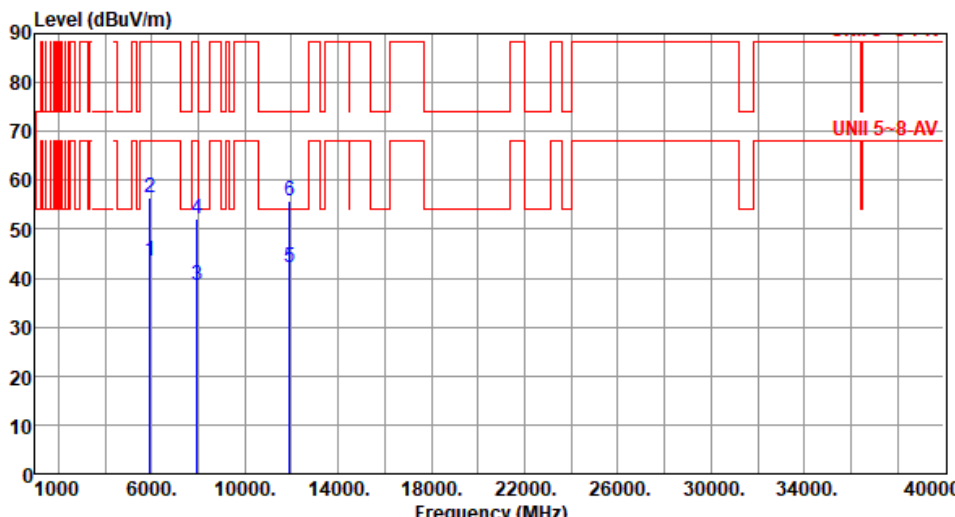


Modulation	be EHT40	Test Freq. (MHz)	5965																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5925.00</td><td>43.42</td><td>68.20</td><td>-24.78</td><td>42.29</td><td>1.13</td><td>Average</td><td>100</td><td>244</td></tr><tr><td>2</td><td>5925.00</td><td>56.53</td><td>88.20</td><td>-31.67</td><td>55.40</td><td>1.13</td><td>Peak</td><td>100</td><td>244</td></tr><tr><td>3</td><td>7953.30</td><td>38.37</td><td>68.20</td><td>-29.83</td><td>32.84</td><td>5.53</td><td>Average</td><td>100</td><td>169</td></tr><tr><td>4</td><td>7953.30</td><td>52.29</td><td>88.20</td><td>-35.91</td><td>46.76</td><td>5.53</td><td>Peak</td><td>100</td><td>169</td></tr><tr><td>5</td><td>11930.00</td><td>42.16</td><td>54.00</td><td>-11.84</td><td>36.07</td><td>6.09</td><td>Average</td><td>100</td><td>271</td></tr><tr><td>6</td><td>11930.00</td><td>55.68</td><td>74.00</td><td>-18.32</td><td>49.59</td><td>6.09</td><td>Peak</td><td>100</td><td>271</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	43.42	68.20	-24.78	42.29	1.13	Average	100	244	2	5925.00	56.53	88.20	-31.67	55.40	1.13	Peak	100	244	3	7953.30	38.37	68.20	-29.83	32.84	5.53	Average	100	169	4	7953.30	52.29	88.20	-35.91	46.76	5.53	Peak	100	169	5	11930.00	42.16	54.00	-11.84	36.07	6.09	Average	100	271	6	11930.00	55.68	74.00	-18.32	49.59	6.09	Peak	100	271
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5925.00	43.42	68.20	-24.78	42.29	1.13	Average	100	244																																																																
2	5925.00	56.53	88.20	-31.67	55.40	1.13	Peak	100	244																																																																
3	7953.30	38.37	68.20	-29.83	32.84	5.53	Average	100	169																																																																
4	7953.30	52.29	88.20	-35.91	46.76	5.53	Peak	100	169																																																																
5	11930.00	42.16	54.00	-11.84	36.07	6.09	Average	100	271																																																																
6	11930.00	55.68	74.00	-18.32	49.59	6.09	Peak	100	271																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

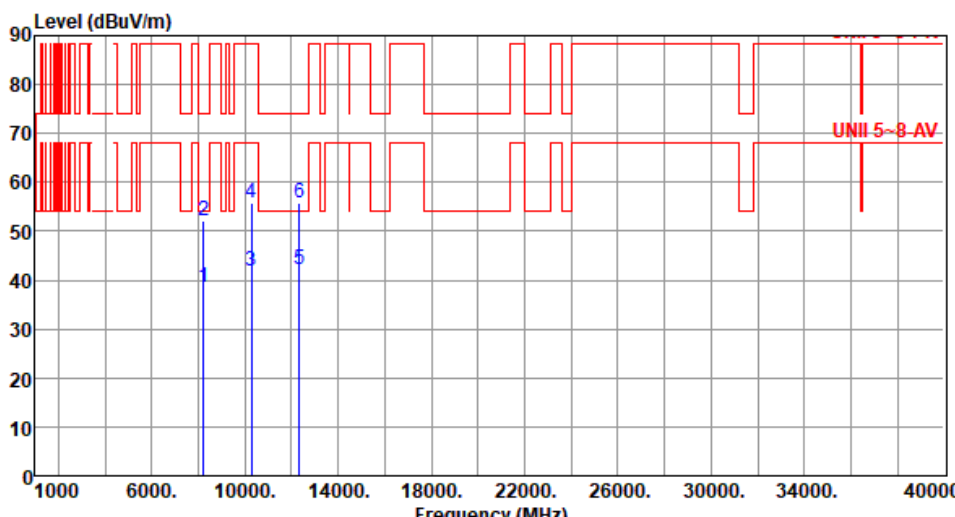

Modulation	be EHT40		Test Freq. (MHz)		6165																																																																																														
Polarization	Horizontal																																																																																																		
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																																																			
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>8220.00</td><td>38.55</td><td>54.00</td><td>-15.45</td><td>33.04</td><td>5.51</td><td>Average</td><td>100</td><td>137</td></tr><tr><td>2</td><td>8220.00</td><td>52.18</td><td>74.00</td><td>-21.82</td><td>46.67</td><td>5.51</td><td>Peak</td><td>100</td><td>137</td></tr><tr><td>3</td><td>10275.00</td><td>41.75</td><td>68.20</td><td>-26.45</td><td>34.60</td><td>7.15</td><td>Average</td><td>100</td><td>225</td></tr><tr><td>4</td><td>10275.00</td><td>55.67</td><td>88.20</td><td>-32.53</td><td>48.52</td><td>7.15</td><td>Peak</td><td>100</td><td>225</td></tr><tr><td>5</td><td>12330.00</td><td>42.11</td><td>54.00</td><td>-11.89</td><td>36.14</td><td>5.97</td><td>Average</td><td>100</td><td>217</td></tr><tr><td>6</td><td>12330.00</td><td>55.68</td><td>74.00</td><td>-18.32</td><td>49.71</td><td>5.97</td><td>Peak</td><td>100</td><td>217</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	8220.00	38.55	54.00	-15.45	33.04	5.51	Average	100	137	2	8220.00	52.18	74.00	-21.82	46.67	5.51	Peak	100	137	3	10275.00	41.75	68.20	-26.45	34.60	7.15	Average	100	225	4	10275.00	55.67	88.20	-32.53	48.52	7.15	Peak	100	225	5	12330.00	42.11	54.00	-11.89	36.14	5.97	Average	100	217	6	12330.00	55.68	74.00	-18.32	49.71	5.97	Peak	100	217
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	8220.00	38.55	54.00	-15.45	33.04	5.51	Average	100	137																																																																																										
2	8220.00	52.18	74.00	-21.82	46.67	5.51	Peak	100	137																																																																																										
3	10275.00	41.75	68.20	-26.45	34.60	7.15	Average	100	225																																																																																										
4	10275.00	55.67	88.20	-32.53	48.52	7.15	Peak	100	225																																																																																										
5	12330.00	42.11	54.00	-11.89	36.14	5.97	Average	100	217																																																																																										
6	12330.00	55.68	74.00	-18.32	49.71	5.97	Peak	100	217																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			

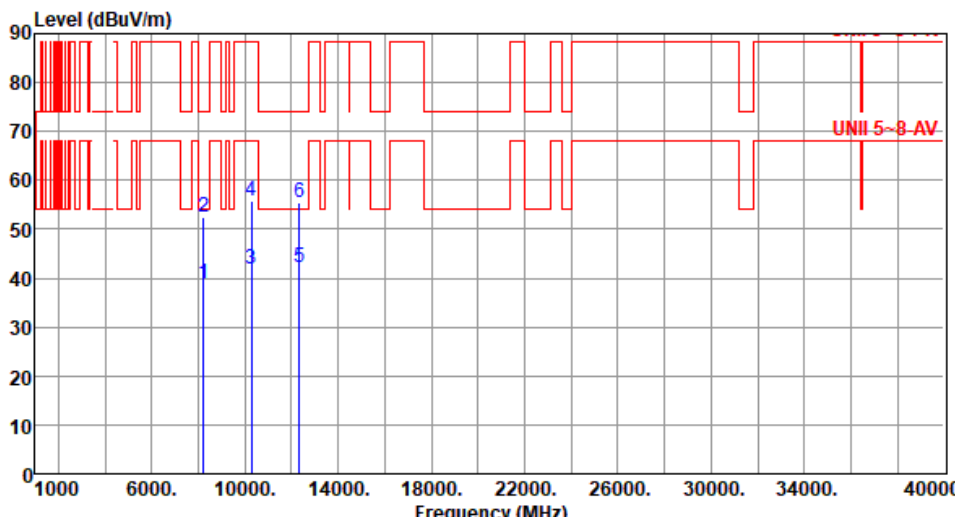

Modulation	be EHT40	Test Freq. (MHz)	6165																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):63																																																																									
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>8220.00</td><td>38.72</td><td>54.00</td><td>-15.28</td><td>33.21</td><td>5.51</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>2</td><td>8220.00</td><td>52.34</td><td>74.00</td><td>-21.66</td><td>46.83</td><td>5.51</td><td>Peak</td><td>100</td><td>251</td></tr><tr><td>3</td><td>10275.00</td><td>41.81</td><td>68.20</td><td>-26.39</td><td>34.66</td><td>7.15</td><td>Average</td><td>100</td><td>109</td></tr><tr><td>4</td><td>10275.00</td><td>55.65</td><td>88.20</td><td>-32.55</td><td>48.50</td><td>7.15</td><td>Peak</td><td>100</td><td>109</td></tr><tr><td>5</td><td>12330.00</td><td>42.07</td><td>54.00</td><td>-11.93</td><td>36.10</td><td>5.97</td><td>Average</td><td>100</td><td>50</td></tr><tr><td>6</td><td>12330.00</td><td>55.56</td><td>74.00</td><td>-18.44</td><td>49.59</td><td>5.97</td><td>Peak</td><td>100</td><td>50</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	8220.00	38.72	54.00	-15.28	33.21	5.51	Average	100	251	2	8220.00	52.34	74.00	-21.66	46.83	5.51	Peak	100	251	3	10275.00	41.81	68.20	-26.39	34.66	7.15	Average	100	109	4	10275.00	55.65	88.20	-32.55	48.50	7.15	Peak	100	109	5	12330.00	42.07	54.00	-11.93	36.10	5.97	Average	100	50	6	12330.00	55.56	74.00	-18.44	49.59	5.97	Peak	100	50
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	8220.00	38.72	54.00	-15.28	33.21	5.51	Average	100	251																																																																
2	8220.00	52.34	74.00	-21.66	46.83	5.51	Peak	100	251																																																																
3	10275.00	41.81	68.20	-26.39	34.66	7.15	Average	100	109																																																																
4	10275.00	55.65	88.20	-32.55	48.50	7.15	Peak	100	109																																																																
5	12330.00	42.07	54.00	-11.93	36.10	5.97	Average	100	50																																																																
6	12330.00	55.56	74.00	-18.44	49.59	5.97	Peak	100	50																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT40	Test Freq. (MHz)	6405						
Polarization	Horizontal								
Test By :Roger Lu Temperature(°C):24 Humidity(%):63									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	8540.00	39.13	68.20	-29.07	33.62	5.51	Average	100	129
2	8540.00	52.09	88.20	-36.11	46.58	5.51	Peak	100	129
3	10675.00	42.40	54.00	-11.60	34.90	7.50	Average	100	225
4	10675.00	56.19	74.00	-17.81	48.69	7.50	Peak	100	225
5	12810.00	42.56	68.20	-25.64	36.44	6.12	Average	100	58
6	12810.00	57.01	88.20	-31.19	50.89	6.12	Peak	100	58
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									