

FCC Test Report

Report No.: AGC01110240519FR02

| FCC ID | : | 2AOKB-A3876L |
|-----------------------|---|-------------------------------|
| APPLICATION PURPOSE | : | Original Equipment |
| PRODUCT DESIGNATION | : | Wireless Headphone |
| BRAND NAME | : | soundcore |
| MODEL NAME | : | A3876L |
| APPLICANT | : | Anker Innovations Limited |
| DATE OF ISSUE | : | May 28, 2024 |
| STANDARD(S) | : | FCC Part 15 Subpart C §15.247 |
| REPORT VERSION | : | V1.0 |







Report Revise Record

| Report Version | Revise Time | Issued Date | Valid Version | Notes | |
|----------------|-------------|--------------|---------------|-----------------|--|
| V1.0 | / | May 28, 2024 | Valid | Initial Release | |



Table of Contents

| 1. General Information | 5 |
|--|----|
| 2. Product Information | |
| 2.1 Product Technical Description | |
| 2.2 Test Frequency List | |
| 2.3 Related Submittal(S) / Grant (S) | 7 |
| 2.4 Test Methodology | 7 |
| 2.5 Receiver Input Bandwidth | 7 |
| 2.6 Equally Average Use of Frequencies And Behaviour | 7 |
| 2.7 Pseudorandom Frequency Hopping Sequence | |
| 2.8 Special Accessories | 9 |
| 2.9 Equipment Modifications | 9 |
| 2.10 Antenna Requirement | 9 |
| 3. Test Environment | |
| 3.1 Address of The Test Laboratory | |
| 3.2 Test Facility | |
| 3.3 Environmental Conditions | 11 |
| 3.4 Measurement Uncertainty | 11 |
| 3.5 List of Equipment Used | |
| 4.System Test Configuration | 14 |
| 4.1 EUT Configuration | 14 |
| 4.2 EUT Exercise | |
| 4.3 Configuration of Tested System | 14 |
| 4.4 Equipment Used in Tested System | 14 |
| 4.5 Summary of Test Results | |
| 5. Description of Test Modes | |
| 6. RF Output Power Measurement | |
| 6.1 Provisions Applicable | |
| 6.2 Measurement Procedure | |
| 6.3 Measurement Setup (Block Diagram of Configuration) | |
| 6.4 Measurement Result | |
| 7. 20dB Bandwidth and 99% Occupied Bandwidth Measurement | |
| 7.1 Provisions Applicable | |
| 7.2 Measurement Procedure | |
| 7.3 Measurement Setup (Block Diagram of Configuration) | |
| 7.4 Measurement Results | |
| 8. Conducted Band Edge and Out-of-Band Emissions | |
| 8.1 Provisions Applicable | |
| 8.2 Measurement Procedure | |
| 8.3 Measurement Setup (Block Diagram of Configuration) | |
| 9.4 Maggurgment Degulta | 20 |



| 9. Radiated Spurious Emission | |
|--|----|
| 9.1 Measurement Limit | |
| 9.2 Measurement Procedure | |
| 9.3 Measurement Setup (Block Diagram of Configuration) | |
| 9.4 Measurement Result | |
| 10. Number of Hopping Frequency Measurement | 61 |
| 10.1 Provisions Applicable | 61 |
| 10.2 Measurement Procedure | 61 |
| 10.3 Measurement Setup (Block Diagram of Configuration) | 61 |
| 10.4 Measurement Result | 61 |
| 11. Time of Occupancy (Dwell Time) Measurement | 63 |
| 11.1 Provisions Applicable | 63 |
| 11.2 Measurement Procedure | 63 |
| 11.3 Measurement Setup (Block Diagram of Configuration) | 63 |
| 11.4 Measurement Result | 63 |
| 12. Frequency Separation Measurement | 67 |
| 12.1 Provisions Applicable | 67 |
| 12.2 Measurement Procedure | |
| 12.3 Measurement Setup (Block Diagram of Configuration) | 67 |
| 12.4 Measurement Result | 67 |
| 13. AC Power Line Conducted Emission Test | |
| 13.1 Measurement Limit | |
| 13.2 Measurement Setup (Block Diagram of Configuration) | |
| 13.3 Preliminary Procedure of Line Conducted Emission Test | 70 |
| 13.4 Final Procedure of Line Conducted Emission Test | 70 |
| 13.5 Measurement Results | 70 |
| Appendix I: Photographs of Test Setup | 71 |
| Appendix II: Photographs of Test EUT | 71 |



1. General Information

| Applicant | Anker Innovations Limited |
|------------------------------|---|
| Address | Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon, HongKong |
| Manufacturer | Anker Innovations Limited |
| Address | Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon, Hongkong |
| Factory | N/A |
| Address | N/A |
| Product Designation | Wireless Headphone |
| Brand Name | soundcore |
| Test Model | A3876L |
| Series Model(s) | N/A |
| Difference Description | N/A |
| Date of receipt of test item | May 17, 2024 |
| Date of Test | May 17, 2024 - May 28, 2024 |
| Deviation from Standard | No any deviation from the test method |
| Condition of Test Sample | Normal |
| Test Result | Pass |
| Test Report Form No | AGCER-FCC-BR_EDR-V1 |

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By Cool Cheng (Project Engineer)

May 28, 2024

Reviewed By

nn

Calvin Liu (Reviewer)

May 28, 2024

Approved By

ax 2h

Max Zhang Authorized Officer

May 28, 2024



2. Product Information

2.1 Product Technical Description

| Frequency Band | 2400MHz-2483.5MHz |
|---------------------------|--|
| Operation Frequency Range | 2402MHz-2480MHz |
| Bluetooth Version | V5.4 |
| Modulation Type | BR 🖂 GFSK, EDR 🖾 π /4-DQPSK, \square 8DPSK |
| Number of channels | 79 Channels |
| Channel Separation | 1 MHz |
| Maximum Transmitter Power | 1.492dBm |
| Hardware Version | V1.5 |
| Software Version | V1.18 |
| Antenna Designation | FPC Antenna |
| Antenna Gain | -4.29dBi |
| Power Supply | DC 3.85V by battery |

2.2 Test Frequency List

| Frequency Band | Channel Number | Frequency | | |
|---|----------------|-----------|--|--|
| | 0 | 2402 MHz | | |
| | 1 | 2403 MHz | | |
| | : | : | | |
| 2400~2483.5MHz | 39 | 2441MHz | | |
| | : | : | | |
| | 77 | 2479 MHz | | |
| | 78 | 2480 MHz | | |
| Note: f = 2402 + 1k MHz, k = 0,, 78 ; "f "is the operating frequency (MHz); "k" is the operating channel. | | | | |



2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: 2AOKB-A3876L, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

2.4 Test Methodology

The tests were performed according to following standards:

| No. | Identity | Document Title | | |
|-----|--|---|--|--|
| 1 | FCC 47 CFR Part 2 | Frequency allocations and radio treaty matters; general rules and regulations | | |
| 2 | 2 FCC 47 CFR Part 15 Radio Frequency Devices | | | |
| 3 | ANSI C63.10-2013 | American National Standard for Testing Unlicensed Wireless Devices | | |
| 4 | KDB 558074 D01 15.247 Meas Guidance v05r02 | Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules | | |

2.5 Receiver Input Bandwidth

The input bandwidth of the receiver is 1.3MHz, in every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally, the type of connection (e.g. single of multi slot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also, the slave of the connection will use these settings. Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

2.6 Equally Average Use of Frequencies and Behaviour.

The generation of the hopping sequence in connection mode depends essentially on two input values:

1. LAP/UAP of the master of the connection.

2. Internal master clock.

The LAP (lower address part) are the 24 LSB's of the 48 BD_ADDRESS. The BD_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP (upper address part) are the 24MSB's of the 48BD_ADDRESS

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For behavior action with other units only offset is used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about one day(23h30).

In most case it is implemented as 28 bits counter. For the deriving of the hopping sequence the entire. LAP (24 bits),4LSB's(4bits) (Input 1) and the 27MSB's of the clock (Input 2) are used. With this input values different mathematical procedures (permutations, additions, XOR-operations) are performed to generate the Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behavior:


The first connection between the two devices is established, a hopping sequence was generated. For Transmitting the wanted data the complete hopping sequence was not used. The connection ended. The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmission is longer (and it Cannot be shorter) than the minimum resolution of the clock(312.5us). The hopping sequence will always differ from the first one.



2.7 Pseudorandom Frequency Hopping Sequence

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: 29 1 = 511 bits
- Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of The PRBS Sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

| 44 | 35 | 78 | 03 | 20 |) 76 | 02 | 19 | | 21 | 64 | 75 |
|----|----|----|----|----|------|-----------|----|---|--------|----|----|
| | | | | | | | | | | | |
| | | | Ιi | | | | | | 1 | | |
| | | | ¦ | | | 1 | | | ÷. | | |
| | | | | L | | <u>'i</u> | | 1 | | | |

Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.



2.8 Special Accessories

Not available for this EUT intended for grant.

2.9 Equipment Modifications

Not available for this EUT intended for grant.

2.10 Antenna Requirement

Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is -4.29dBi.



3. Test Environment

3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories.)

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842(CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



3.3 Environmental Conditions

| | Normal Conditions |
|-------------------------|---------------------|
| Temperature range (°C) | 15 - 35 |
| Relative humidity range | 20 % - 75 % |
| Pressure range (kPa) | 86 - 106 |
| Power supply | DC 3.85V by battery |

3.4 Measurement Uncertainty

The reported uncertainty of measurement y \pm U, where expended uncertainty U is based on a standard

| uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%. | | | | |
|---|----------------------------|--|--|--|
| Item | Measurement Uncertainty | | | |
| Uncertainty of Conducted Emission for AC Port | $U_c = \pm 2.9 \text{ dB}$ | | | |
| Uncertainty of Radiated Emission below 1GHz | $U_c = \pm 3.9 \text{ dB}$ | | | |
| Uncertainty of Radiated Emission above 1GHz | $U_c = \pm 4.9 \text{ dB}$ | | | |
| Uncertainty of total RF power, conducted | $U_c = \pm 0.8 \text{ dB}$ | | | |
| Uncertainty of RF power density, conducted | $U_c = \pm 2.6 \text{ dB}$ | | | |
| Uncertainty of spurious emissions, conducted | $U_c = \pm 2 \%$ | | | |
| Uncertainty of Occupied Channel Bandwidth | U _c = ±2 % | | | |



3.5 List of Equipment Used

| • R | RF Conducted Test System | | | | | | | | |
|-------------|--------------------------|------------------------|--------------|------------|------------|------------------------------|------------------------------|--|--|
| Used | Equipment No. | Test Equipment | Manufacturer | Model No. | Serial No. | Last Cal. Date (YY-MM-DD) | Next Cal. Date (YY-MM-DD) | | |
| \boxtimes | AGC-ER-E036 | Spectrum Analyzer | Agilent | N9020A | MY49100060 | 2023-06-01 | 2024-05-31 | | |
| \boxtimes | AGC-ER-E062 | Power Sensor | Agilent | U2021XA | MY54110007 | 2024-02-01 | 2025-01-31 | | |
| \boxtimes | AGC-ER-E063 | Power Sensor | Agilent | U2021XA | MY54110009 | 2024-02-01 | 2025-01-31 | | |
| \boxtimes | AGC-EM-A152 | 6dB Attenuator | Eeatsheep | LM-XX-6-5W | N/A | 2023-06-09 | 2024-06-08 | | |
| | AGC-ER-E083 | Signal Generator | Agilent | E4421B | US39340815 | 2023-06-01 | 2024-05-31 | | |
| \boxtimes | N/A | RF Connection Cable | N/A | 1# | N/A | Each time | N/A | | |
| | N/A | RF Connection Cable | N/A | 2# | N/A | Each time | N/A | | |

| • F | Radiated Spurious Emission | | | | | | | |
|-------------|----------------------------|----------------------------------|--------------|------------|------------|------------------------------|------------------------------|--|
| Used | Equipment No. | Test Equipment | Manufacturer | Model No. | Serial No. | Last Cal. Date (YY-MM-DD) | Next Cal. Date (YY-MM-DD) | |
| | AGC-EM-E046 | EMI Test Receiver | R&S | ESCI | 10096 | 2024-02-01 | 2025-01-31 | |
| \boxtimes | AGC-EM-E116 | EMI Test Receiver | R&S | ESCI | 100034 | 2023-06-03 | 2024-06-02 | |
| \boxtimes | AGC-EM-E061 | Spectrum Analyzer | Agilent | N9010A | MY53470504 | 2023-06-01 | 2024-05-31 | |
| \boxtimes | AGC-EM-E086 | Loop Antenna | ZHINAN | ZN30900C | 18051 | 2024-03-05 | 2026-03-04 | |
| \boxtimes | AGC-EM-E001 | Wideband Antenna | SCHWARZBECK | VULB9168 | D69250 | 2023-05-11 | 2025-05-10 | |
| \boxtimes | AGC-EM-E029 | Broadband Ridged Horn Antenna | ETS | 3117 | 00034609 | 2024-03-31 | 2025-03-30 | |
| \boxtimes | AGC-EM-E082 | Horn Antenna | SCHWARZBECK | BBHA 9170 | #768 | 2023-09-24 | 2025-09-23 | |
| \square | AGC-EM-E146 | Pre-amplifier | ETS | 3117-PA | 00246148 | 2022-08-04 | 2024-08-03 | |
| \boxtimes | AGC-EM-A119 | 2.4G Filter | SongYi | N/A | N/A | 2023-06-01 | 2024-05-31 | |
| \square | AGC-EM-A138 | 6dB Attenuator | Eeatsheep | LM-XX-6-5W | N/A | 2023-06-09 | 2024-06-08 | |
| | AGC-EM-A139 | 6dB Attenuator | Eeatsheep | LM-XX-6-5W | N/A | 2023-06-09 | 2024-06-08 | |

| • A | AC Power Line Conducted Emission | | | | | | | |
|------|----------------------------------|-------------------|--------------|------------|------------|------------------------------|------------------------------|--|
| Used | Equipment No. | Test Equipment | Manufacturer | Model No. | Serial No. | Last Cal. Date (YY-MM-DD) | Next Cal. Date (YY-MM-DD) | |
| | AGC-EM-E045 | EMI Test Receiver | R&S | ESPI | 101206 | 2023-06-03 | 2024-06-02 | |
| | AGC-EM-A130 | 6dB Attenuator | Eeatsheep | LM-XX-6-5W | DC-6GZ | 2023-06-09 | 2024-06-08 | |
| | AGC-EM-E023 | AMN | R&S | 100086 | ESH2-Z5 | 2023-06-03 | 2024-06-02 | |



| • Te | Test Software | | | | | | | |
|-----------|---------------|---------------------|--------------|----------------------|---------------------|--|--|--|
| Used | Equipment No. | Test Equipment | Manufacturer | Model No. | Version Information | | | |
| | AGC-EM-S001 | CE Test System | R&S | ES-K1 | V1.71 | | | |
| | AGC-EM-S003 | RE Test System | FARA | EZ-EMC | VRA-03A | | | |
| | AGC-ER-S012 | BT/WIFI Test System | Tonscend | JS1120-2 | 2.6 | | | |
| \square | AGC-EM-S011 | RSE Test System | Tonscend | TS+-Ver2.1(JS36-RSE) | 4.0.0.0 | | | |



4.System Test Configuration

4.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT Exercise


1

--

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 Configuration of Tested System

Radiated Emission Configure:



4.4 Equipment Used in Tested System

The following peripheral devices and interface cables were connected during the measurement:

--

☐ Test Accessories Come From The Laboratory

--

| No. | Equipment | Manufacturer | Model No. | Specification Information | Cable | | |
|-----|---|--------------|-----------|---------------------------|-------|--|--|
| 1 | Control Box | | USB-TTL | | | | |
| | Test Accessories Come From The Manufacturer | | | | | | |
| No. | Equipment | Manufacturer | Model No. | Specification Information | Cable | | |

--

--



4.5 Summary of Test Results

| Item | FCC Rules | Description of Test | Result |
|------|----------------------|---|----------------|
| 1 | §15.203&15.247(b)(4) | Antenna Equipment | Pass |
| 2 | §15.247 (b)(1) | RF Output Power | Pass |
| 3 | §15.247 (a)(1) | 20 dB Bandwidth | Pass |
| 4 | §15.247 (d) | Conducted Band Edge and Out-of-Band Emissions | Pass |
| 5 | §15.209 | Radiated Spurious Emission | Pass |
| 6 | §15.247 (a)(1)(iii) | Number of Hopping Frequency | Pass |
| 7 | §15.247 (a)(1)(iii) | Time of Occupancy | Pass |
| 8 | §15.247 (a)(1) | Frequency Separation | Pass |
| 9 | §15.207 | AC Power Line Conducted Emission | Not applicable |

Note: The BT function cannot transmit when charging.



5. Description of Test Modes

| | Summary table of Test Cases | | | | | |
|------------------------------------|--|--|--|--|--|--|
| Test Item | Data Rate / Modulation | | | | | |
| iest nem | Bluetooth – BR_EDR (GFSK/π /4-DQPSK/8DPSK) | | | | | |
| Radiated & Conducted Test Cases | Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps (Battery powered) Mode 2: Bluetooth Tx CH39_2441 MHz_1Mbps (Battery powered) Mode 3: Bluetooth Tx CH78_2480 MHz_1Mbps (Battery powered) Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps (Battery powered) Mode 5: Bluetooth Tx CH39_2441 MHz_2Mbps (Battery powered) Mode 6: Bluetooth Tx CH78_2480 MHz_2Mbps (Battery powered) Mode 6: Bluetooth Tx CH78_2480 MHz_2Mbps (Battery powered) Mode 7: Bluetooth Tx Hopping-1Mbps (Battery powered) Mode 8: Bluetooth Tx Hopping-2Mbps (Battery powered) | | | | | |
| AC Conducted Emission | N/A | | | | | |

Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. The battery is full-charged during the test.
- 3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 4. For Conducted Test method, a temporary antenna connector is provided by the manufacture.

| Software Setting Diagram |
|--------------------------|
|--------------------------|

| FCC Assist 1.0.2.2 | - 🗆 X | |
|--|---|--|
| 帮助(<u>H</u>) | | |
| 串口设置 串 □ 液特率 新指位 移転位 移転位 移転位 移転位 移転位 移転し 移転し 移転し 移転し 移転し 移転し 移転し 移転し | reply data: 04 0E 04 01 01 FC 00 return code: 0x0 配置数据发送成功1 reply data: 04 0E 04 01 01 FC 00 return code: 0x0 配置数据发送成功1 | |
| BR/EDR BLE MODE TX Channel 39 Transmit_Power 10 Packet_Type 2-DH5 Hopping OFF Data_Types Pn9 | | |
| Send configuration | | |
| | 清除日志 | |



6. RF Output Power Measurement

6.1 Provisions Applicable

The maximum out power permissible output power is 1 Watt for all frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels.

The maximum out power permissible output power is 0.125 watts for all other frequency hopping systems in the 2400-2483.5 MHz band.

6.2 Measurement Procedure

⊠For Peak power test:


- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
- 3. RBW > 20 dB bandwidth of the emission being measured.
- 4. VBW \geq RBW.
- 5. Sweep: Auto.
- 6. Detector function: Peak.
- 7. Trace: Max hold.
- 8. Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

For Average power test:

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required


6.3 Measurement Setup (Block Diagram of Configuration)

For Average power test setup

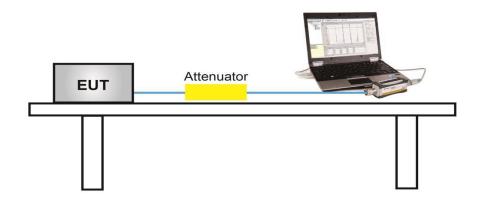



For peak power test setup

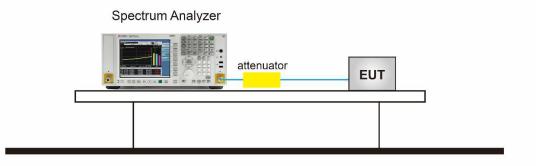

6.4 Measurement Result

| Test Data of Conducted Output Power | | | | | | |
|-------------------------------------|-------------------------|---------------------|-----------------|--------------|--|--|
| Test Mode | Test Frequency (MHz) | Peak Power (dBm) | Limits (dBm) | Pass or Fail | | |
| | 2402 | -0.229 | ≤21 | Pass | | |
| GFSK | 2441 | 0.532 | ≤21 | Pass | | |
| | 2480 | 0.659 | ≤21 | Pass | | |
| | 2402 | 0.602 | ≤21 | Pass | | |
| π /4-DQPSK | 2441 | 1.344 | ≤21 | Pass | | |
| | 2480 | 1.492 | ≤21 | Pass | | |









Test Graphs of Conducted Output Power



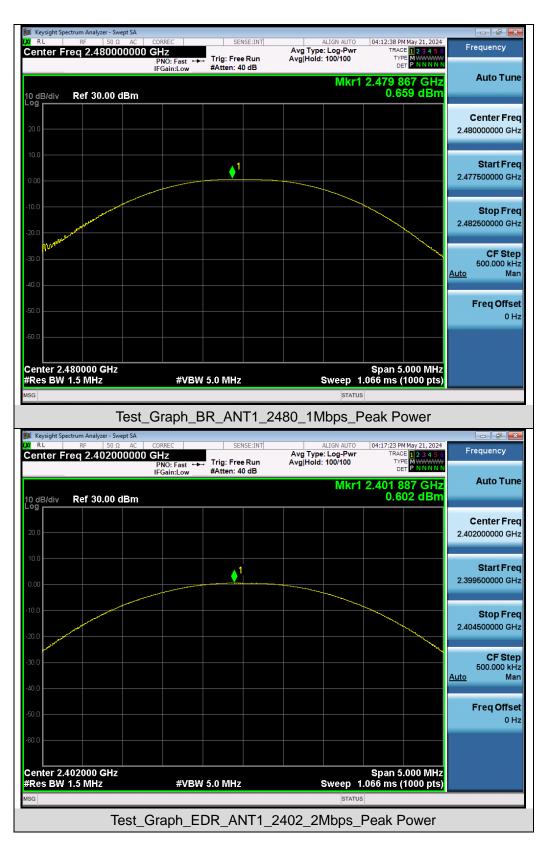



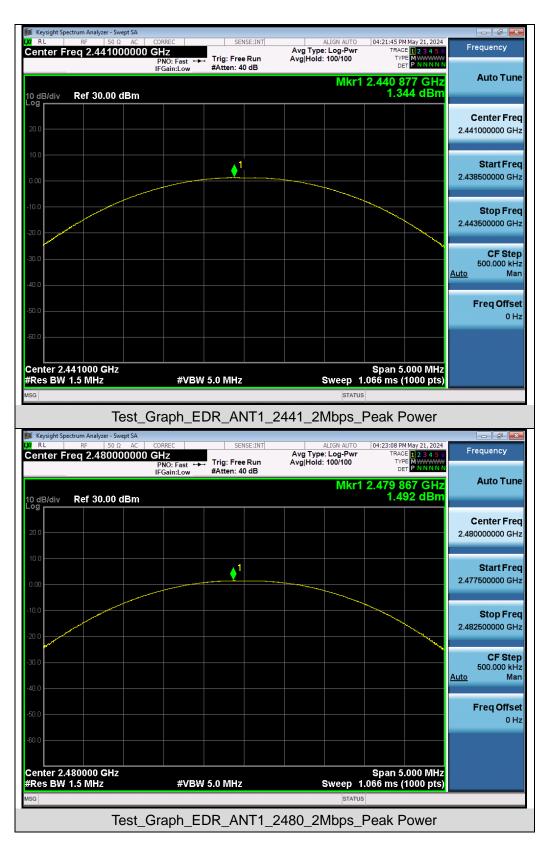



7. 20dB Bandwidth and 99% Occupied Bandwidth Measurement

7.1 Provisions Applicable


There is no corresponding limit requirement for this test item.

7.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 6.9.2 (20dB BW).

- The 20dB bandwidth spectrum analyzer setting reference is as follows:
- 1. Set RBW ≥ 1% to 5% of the 20dB bandwidth
- 2. VBW = Approximately three times RBW
- 3. Span = Approximately 2 to 5 times the 20dB bandwidth, centered on a hopping channel
- 4. Detector = Peak
- 5. Trace mode = Max hold
- 6. Sweep = Auto couple
- 7. Allow the trace to stabilize
- 8. Measure the maximum width of the emission that is constrained by the frequencies associated
- 9. with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20
- 10. dB relative to the maximum level in the fundamental emission.
- The 99% bandwidth spectrum analyzer setting reference is as follows:
- 1. Span = 1.5 times to 5 times the OBW
- 2. Set RBW = 1% to 5% the OBW
- 3. VBW \geq 3 × RBW
- 4. Detector = Peak
- 5. Trace mode = Max hold
- 6. Sweep = Auto couple
- 7. Allow the trace was allowed to stabilize

7.3 Measurement Setup (Block Diagram of Configuration)

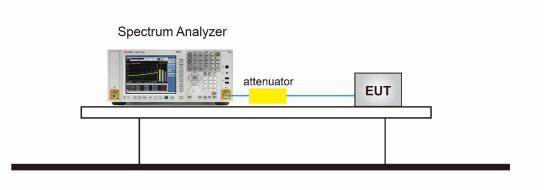




7.4 Measurement Results

| Test Data of Occupied Bandwidth and -20dB Bandwidth | | | | | | | |
|---|-------------------------|---------------------------------|--------------------------|--------|--------------|--|--|
| Test Mode | Test Frequency (MHz) | 99% Occupied Bandwidth (MHz) | -20dB Bandwidth (MHz) | Limits | Pass or Fail | | |
| | 2402 | 0.858 | 0.951 | N/A | Pass | | |
| GFSK | 2441 | 0.854 | 0.949 | N/A | Pass | | |
| | 2480 | 0.855 | 0.950 | N/A | Pass | | |
| | 2402 | 1.168 | 1.306 | N/A | Pass | | |
| π /4-DQPSK | 2441 | 1.169 | 1.279 | N/A | Pass | | |
| | 2480 | 1.170 | 1.278 | N/A | Pass | | |



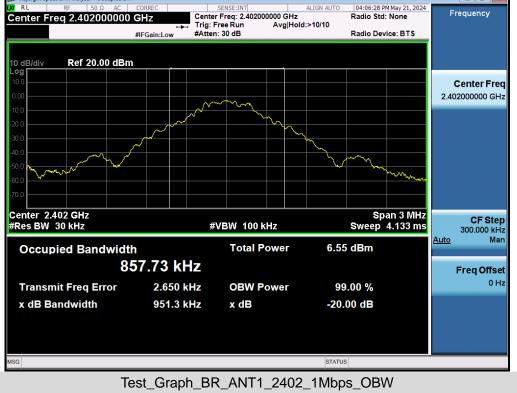












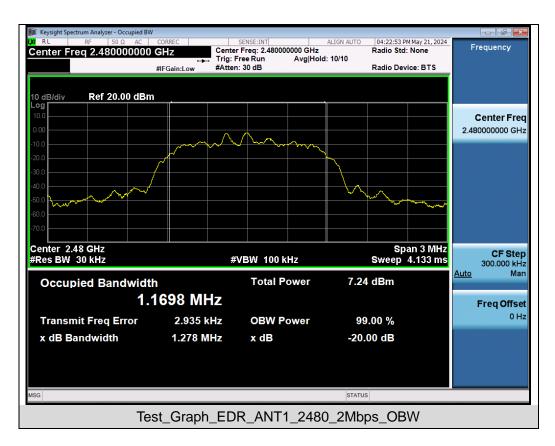



8. Conducted Band Edge and Out-of-Band Emissions

8.1 Provisions Applicable


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

8.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 6.10.4 and 7.8.8:

- Reference level measurement
- 1. Span = Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation.
- 2. RBW = 100kHz
- 3. VBW = 300kHz
- 4. Detector = Peak
- 5. Sweep time = Auto couple
- 6. Trace mode = Max hold
- 7. Allow the trace to stabilize. Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission.
- Emission level measurement
- 1. Span = Wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
- 2. RBW = 100kHz
- 3. VBW = 300kHz
- 4. Detector = Peak
- 5. Sweep time = Auto couple
- 6. Trace mode = Max hold
- 7. Trace was allowed to stabilize
- 8. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this section.

8.3 Measurement Setup (Block Diagram of Configuration)

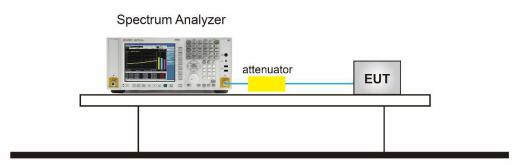



8.4 Measurement Results




Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands








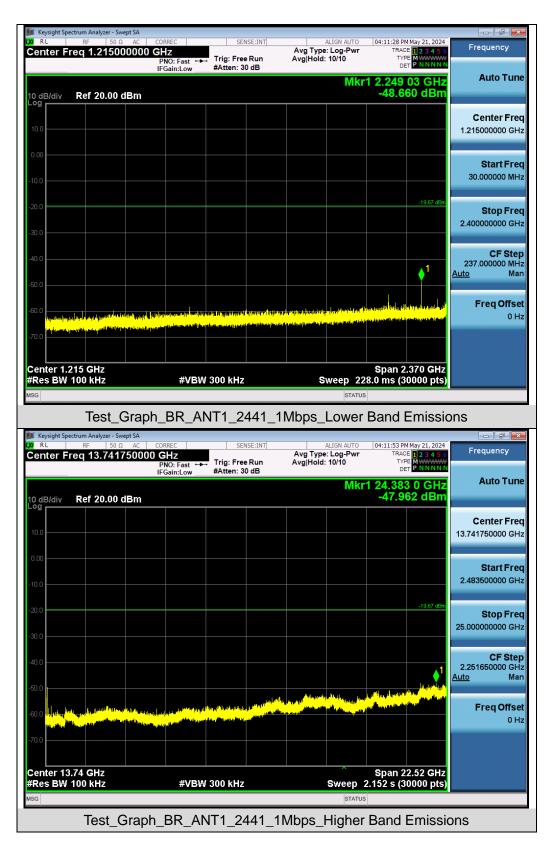









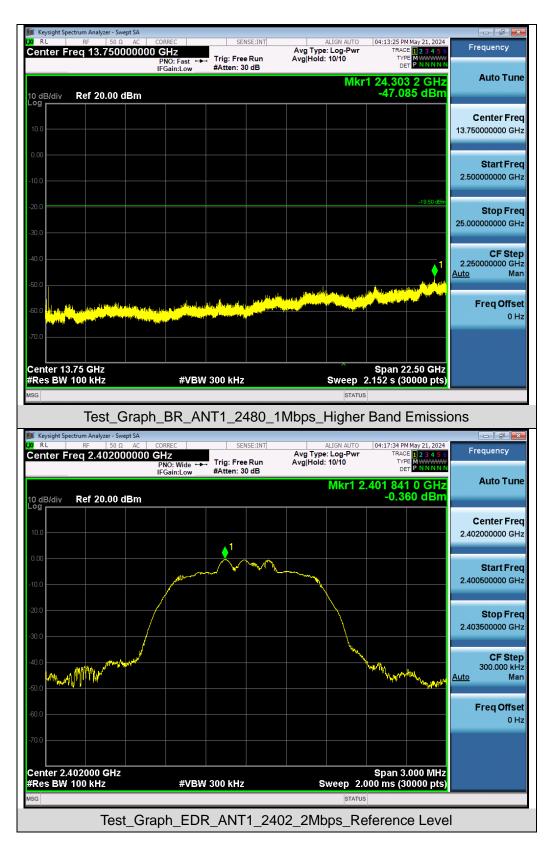




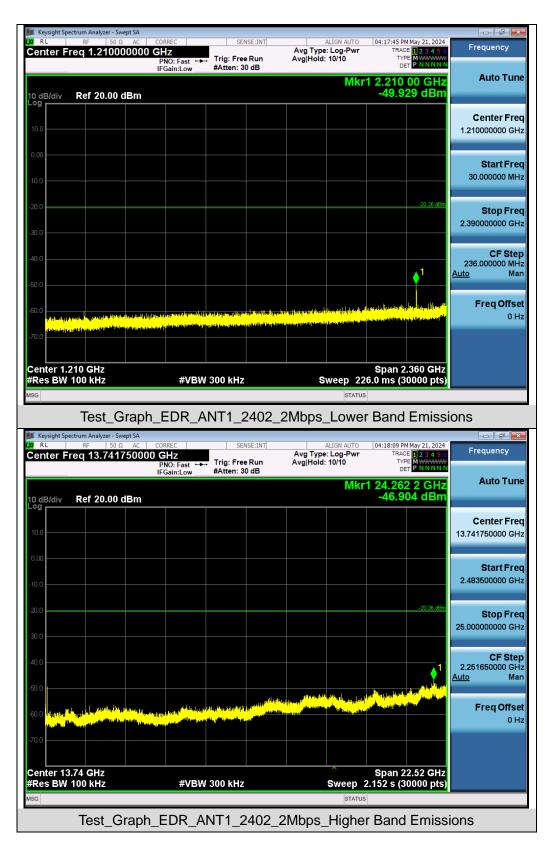




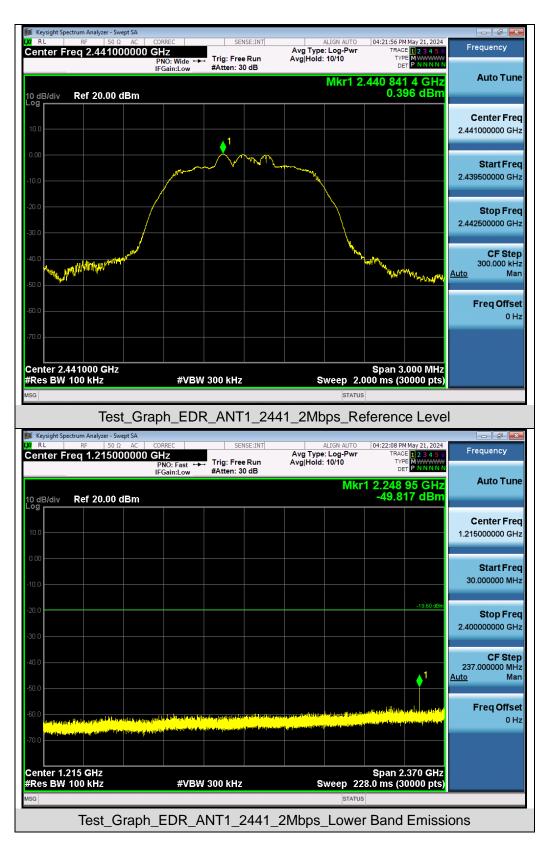




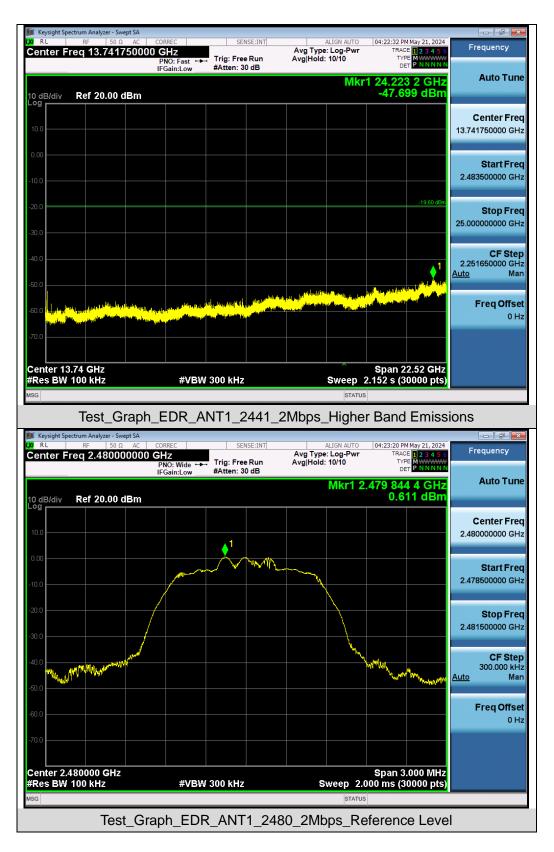



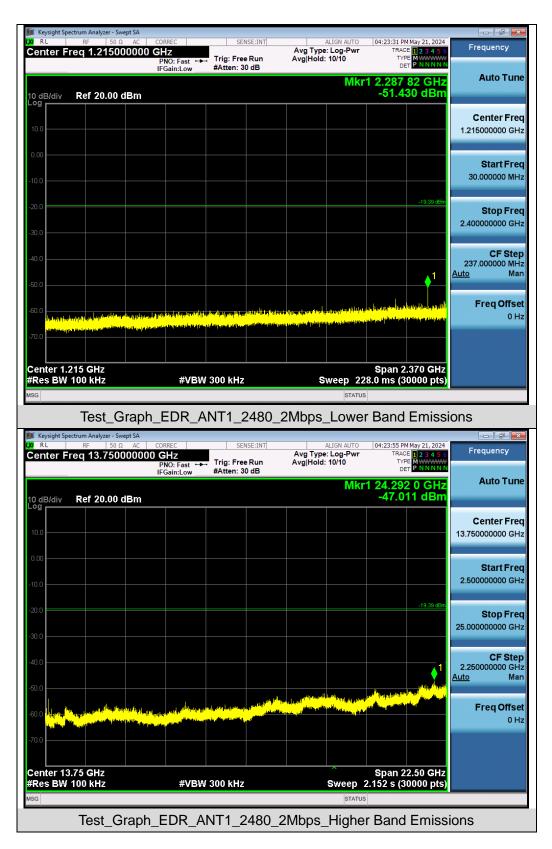




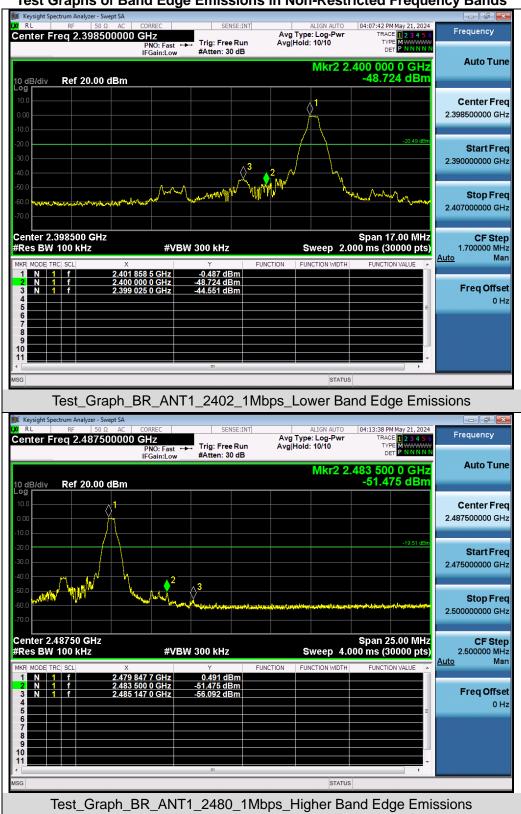

Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands




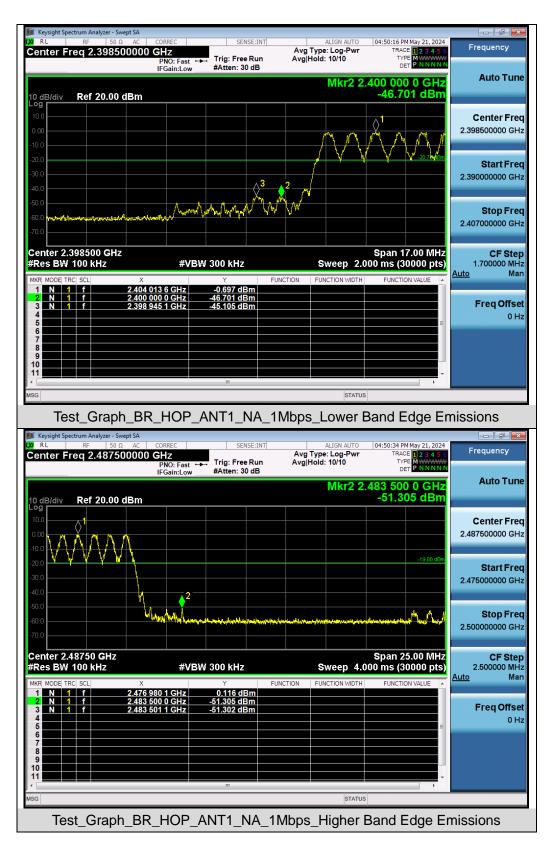







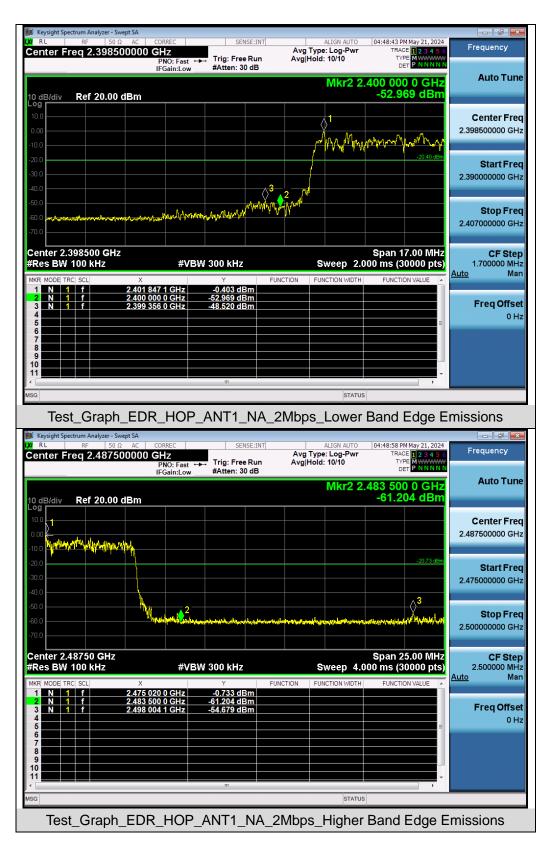



9. Radiated Spurious Emission

9.1 Measurement Limit

15.209 Limit in the below table has to be followed

| Frequencies (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|----------------------|--------------------------------------|----------------------------------|
| 0.009~0.490 | 2400/F(kHz) | 300 |
| 0.490~1.705 | 24000/F(kHz) | 30 |
| 1.705~30.0 | 30 | 30 |
| 30~88 | 100 | 3 |
| 88~216 | 150 | 3 |
| 216~960 | 200 | 3 |
| Above 960 | 500 | 3 |

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

9.2 Measurement Procedure

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection"

Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

| Spectrum Parameter | Setting |
|-----------------------|---|
| Start ~Stop Frequency | 9KHz~150KHz/RB 200Hz for QP |
| Start ~Stop Frequency | 150KHz~30MHz/RB 9KHz for QP |
| Start ~Stop Frequency | 30MHz~1000MHz/RB 120KHz for QP |
| Start ~Stop Frequency | 1GHz~26.5GHz |
| | 1MHz/3MHz for Peak, 1MHz/3MHz for Average |

The following table is the setting of spectrum analyzer and receiver.

| Receiver Parameter | Setting |
|-----------------------|--------------------------------|
| Start ~Stop Frequency | 9KHz~150KHz/RB 200Hz for QP |
| Start ~Stop Frequency | 150KHz~30MHz/RB 9KHz for QP |
| Start ~Stop Frequency | 30MHz~1000MHz/RB 120KHz for QP |



• Quasi-Peak Measurements below 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

Peak Measurements above 1GHz


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize

<u>Average Measurements above 1GHz</u>


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW \geq [3 × RBW]
- 4. Detector = Power averaging (rms)
- 5. Averaging type = power (i.e., rms)
- 6. Sweep time = auto
- 7. Perform a trace average of at least 100 traces.
- 8. The applicable correction factor is [10*log (1 / D)], where D is the duty cycle. The factor had been edited in the "Input Correction" of the Spectrum Analyzer.




9.3 Measurement Setup (Block Diagram of Configuration)

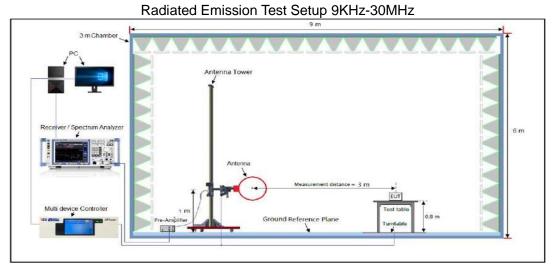

Radiated Emission Test Setup 30MHz-1000MHz

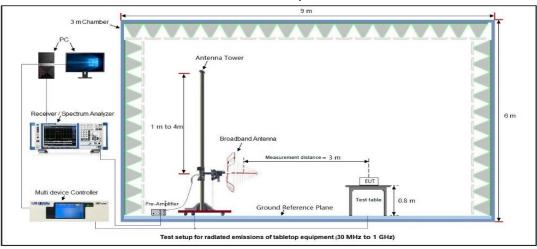

Radiated Emission Test Setup Above 1000MHz

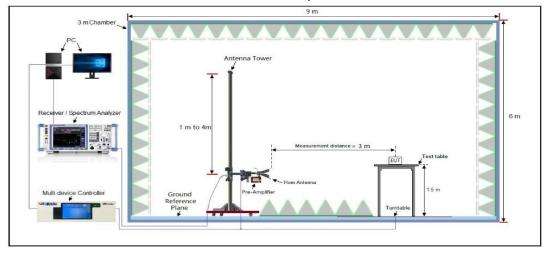

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com



9.4 Measurement Result

Radiated Emission Below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

| | | Rad | iated Emiss | ion Test Re | esults at 3 | 30MHz-1GH | z | |
|-------------|--------|-------------|-------------|--------------------------|-------------|------------------|--------|---------------------|
| EUT Name | Wire | less Headph | ione | | Мос | del Name | | A3876L |
| Temperature | 22.1 | °C | | | Rela | ative Humic | dity | 59.8% |
| Pressure | 960ł | nPa | | | Tes | t Voltage | 1 | DC 3.85V by battery |
| Test Mode | Mod | e 6 | | | Ant | enna Polari | ity | Horizontal |
| 72.0 | dBuV/m | | | | | | | |
| 32 | | | | which you they the which | | 3. Marina Marina | | imit: |
| -8 30.0 | | 50 60 70 | Reading | (мнг) Correct | Measure | 300 400 E- | | 700 1000.000 |
| ١ | No. Mł | . Freq. | Level | Factor | ment | Limit | Over | |
| _ | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector |
| _ | 1 | 45.5348 | 6.98 | 13.51 | 20.49 | 40.00 | -19.51 | |
| _ | 2 | 116.5401 | 5.77 | 16.37 | 22.14 | 43.50 | -21.36 | |
| | 3 | 300.3672 | 7.56 | 16.50 | 24.06 | 46.00 | -21.94 | peak |
| _ | 4 | 446.4141 | 5.90 | 24.88 | 30.78 | 46.00 | -15.22 | - |
| | 5 | 520.8882 | 7.01 | 25.14 | 32.15 | 46.00 | -13.85 | peak |
| _ | 6 * | 896.9965 | 6.86 | 31.42 | 38.28 | 46.00 | -7.72 | peak |
| _ | | | | | | | | |



| | | | | Ra | diate | ed Ei | miss | sion rest r | Results | at 30 |)MHz-′ | 1GH | z | | | | | | |
|------------|-------------------------|---------------------|----------------------------------|--|-------|--|------------------------------------|---|--|--|-------------------------------------|------------------------------|---|---------------------------------------|------------------|------------------------------------|---|---|--|
| EUT Name | | Wirel | ess F | leadp | bhon | е | | | | Mode | el Nam | ne | | ļ | A387 | '6L | | | |
| Temperatur | e | 22.1° | С | | | | | | | Relat | tive Hu | umic | lity | Ę | 59.89 | % | | | |
| Pressure | | 960hPa Test Voltage | | | | | | | | je | D | | | DC 3.85V by batter | | tery | | | |
| Test Mode | | Mode | e 6 | | | | | | | Anter | nna Po | olari | ity | ١ | Verti | cal | | | |
| 72.0 | 0 dBu | V/m | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | mit: argin: | _ | | | |
| | | | | | | | | | | | | | | | | | f | | |
| 32 | wethink | freedoring - Africa | | and the second | Luluy | Mentana de | howward | have between the hard and | Acrobastation | Murana | en articula | 3 | * ~~~ | Marson | | waraad | | | |
| -8 | | 14dra-41/14 | 50 | | 70 84 | 0 | | (MHz) | | 30 | | 400 | 4 | 600 | | | | 1 | |
| -8 | unthiatur ¹⁴ | | 50 | 50 Freq. | 70 BI | | ing | | | 30 Sure- | | 400 | 500 | | | | | 1 | |
| -8 | unthiatur ¹⁴ | 40 | 50 | | 70 BI | o Readi | ing | (MHz) Correct | Mea | 30 sure- ent | 00 4 | 400 | 500 | 600 | 700 | | _ | ı | |
| -8 | unthiatur ¹⁴ | 40 | 50 | Freq. | 70 BI | • Readi | ling el V | (мн₂) Correct Factor | Mea | oo sure- ent √/m | DO 4 | 400 hit | 500 | 600 /er | 700 | 100 | _ |) | |
| -8 | 0.000 No. | 40 Mk. | 50 | Freq. MHz 8721 | 70 84 | o Readi Leve dBu | ling el V 53 | (мн₂) Correct Factor dB | Mea: me dBu\ | o sure- ent √/m 54 | DO 4 | 400 hit | 500 | 600 /er B 46 | 700 Det | 100 | _ |) | |
| -8 | 0.000 No. | 40 Mk. | 50 F 68.4 | Freq. MHz 8721 9318 | 70 84 | eadi Leve dBu | ling el V 53 35 | (MH₂) Correct Factor dB 17.01 | Meas me dBu/ | 30 sure- ent √/m 54 41 | 00 4 Lim dBu\ 40.0 | 400 hit | 500 500 0\ d -9. | 600 /er B 46 | 700 Det | 100 Bector | _ |) | |
| -8 | No. | 40 Mk. | 50 F 68.3 383.9 | Freq. MHz 8721 9318 1963 | 70 8 | eadi Leve dBu 13.5 | ling el v 53 35 57 | (мн₂) Correct Factor dB 17.01 21.56 | Mea: me dBu 30.4 | 30 sure- ent 76 | 00 4 Lim dBu\ 40.0 46.0 | 400 hit 00 00 | 500 500 0\ d -9. -15 -13 | 600 /er B 46 5.59 | 700 Det pe | 100 eector eak eak | _ |) | |
| -8 | 0.000 No. | 40 Mk. | 50 F 68.3 383.9 440. | Freq. MHz 8721 9318 1963 1826 | 70 8 | eadi Leve dBu\ 13.5 8.8 6.6 | ling el 53 35 37 46 | (мнә) Correct Factor dB 17.01 21.56 26.09 | Mea: me dBu 30. 30. 32. | 30 sure- ent 54 41 76 13 | 00 4 Lim 40.0 46.0 46.0 | 400 hit 00 00 00 | 500 500 0 -9. -15 -13 -11 | 600 ver B 46 5.59 5.24 | 700 Det pe | 100 eector eak eak eak | r |) | |

RESULT: Pass

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.



| EUT Name | | N | /ireless Heac | lphone | | Model Nar | ne | A387 | 76L | | |
|-------------------|---|--|--|--|--|--|---|-----------------------------------|--|--|--|
| Temperatur | e | 2 | 2.5℃ | | | Relative H | umidity | 58.3 | % | | |
| Pressure | | 9 | 60hPa | | | Test Volta | ge | DC 3 | DC 3.85V by battery | | |
| Test Mode | | Μ | lode 7 | | | Antenna P | olarity | Horiz | Horizontal | | |
| [uu/\^f | 130 120 110 90 80 70 60 | | | | FCC P | art 15C | | | | | |
| L evel(dBµV/m) | 50 40 30 | Uyy, you at the second | مریک بالاستان می المریک می می المحمد المان می المحمد المان می المریک می المریک می المریک می المحمد المریک می ال مریک می المریک می الم | ۲۰۰۰ (۲۰۰۰ میرون ۲۰۰۰ (۲۰۰۰ میرون) ۲۰۰۰ (۲۰۰۰ میرون ۲۰۰۰ (۲۰۰۰ میرون) | ๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛๛ | nakya manjata kanaga ana mana | WATTY AND THE AND | | | | |
| revel[d | 50 40 30 20 | PK Limit AV Detect | | | 3G 4G Freque | 6G | | | | | |
| Pereofor NC | 50 40 20 10 -10 1G | PK Limit | AV Limit | | 3G 4G | 6G | | Angle [°] | Polarity | | |
| | 50 40 30 20 10 -10 1G | PK Limit AV Detect Freq. | or AV Limit - | - Horizontal PK | 3G 4G Frequer | 6G ncy[Hz] Margin | Height | Angle | Polarity Horizontal | | |
| NG | 50 40 30 20 10 -10 16 | PK Limit * AV Detect Freq. [MHz] | AV Limit | - Horizontal PK Factor [dB] | 3G 4G Freque Limit [dBµ√/m] | 6G ncy[Hz] Margin [dB] | 8G Height [cm] | Angle [°] | - | | |
| N0 | 50 40 30 20 10 -10 16 20 -10 16 | PK Limit * AV Detect Freq. [MHz] 1176.8177 | | - Horizontal PK Factor [dB] -18.06 | 3G 4G Freque Limit [dBµV/m] 74.00 | 6G ncy[Hz] Margin [dB] 40.01 | Height [cm] 150 | Angle [°] 214 | Horizontal | | |
| NG 1 2 | 50 40 30 40 20 10 0 -10 1G 7 7 1 1 3 3 3 3 3 3 3 3 3 3 3 3 3 | PK Limit * AV Detect Freq. [MHz] 1176.8177 1948.6949 | AV Limit | - Horizontal PK Factor [dB] -18.06 -13.83 | 3G 4G Frequer Limit [dBµV/m] 74.00 74.00 | 6G ncy[Hz] Margin [dB] 40.01 35.89 | Height [cm] 150 150 | Angle [°] 214 116 | Horizontal Horizontal | | |
| N0 1 2 3 | 50 40 30 40 20 10 -10 10 -10 10 -10 -10 -10 | PK Limit * AV Detect Freq. [MHz] 1176.8177 1948.6949 3455.0455 | AV Limit – Level [dBµV/m] 33.99 38.11 39.45 | - Horizontal PK Factor [dB] -18.06 -13.83 -10.76 | 3G 4G Freques Limit [dBµ√/m] 74.00 74.00 74.00 | 6G ncy[Hz] Margin [dB] 40.01 35.89 34.55 | 8G Height [cm] 150 150 150 | Angle [°] 214 116 214 | Horizontal Horizontal Horizontal | | |

Radiated Emissions Test Results Above 1GHz



| EUT Nam | ne | V | Vireless Head | phone | | Model Na | me | A387 | 76L | | |
|---------------|--------------------------------------|---|-------------------------|--|---|---|-------------------------------------|--------------------------|---|--|--|
| Tempera | ture | 2 | 2.5 ℃ | | | Relative H | lumidity | 58.3 | % | | |
| Pressure | • | 9 | 60hPa | | | Test Volta | ge | DC 3 | DC 3.85V by batter | | |
| Test Mod | le | N | lode 7 | | | Antenna F | Polarity | Verti | cal | | |
| | 130 | | | | FCC Part | 15C | | | | | |
| | 120 | | | | | | | | | | |
| | 110 100 | | | | | | | | | | |
| | 90 | | | | | | | | | | |
| _ | 80 | | | | | | | | | | |
| Level[dBµV/m] | 70 - | | | | | | | | | | |
| svel[dE | 60 50 | | | | | | | <mark>₩</mark> 5 | 6 | | |
| L | 40 | | 2 | | * ³ | www.www. | - | | And a subscription of the second s | | |
| | 30 м | way wat the state of the state | which have and and many | a the second | ana sasharka ka ka sa na | a ke Alfasa . | | [70]* · | an Abblinds. | | |
| | 20 | | | | | | | | | | |
| | | | | | | | | | | | |
| | 10 | | | | | | | | | | |
| | -10 | | | | | | | | | | |
| | 0 | | 26 | 3G | 4G | 6G | 8G | | 18G | | |
| | -10 | - PK Limit | 2G — AV Limit — Ve | | 4G Frequency | | 8G | | | | |
| | -10 | | | | | | 8G | | 18G | | |
| [| 0 -10 1G | - PK Limit | | | | | 8G Height | Angle | | | |
| [| -10 | PK Limit AV Detector | — AV Limit — Ve | rtical PK | Frequency | (Hz] | | Angle [°] | 18G Polarity | | |
| | 0 -10 1G | PK Limit * AV Detector Freq. | AV Limit Ve | rtical PK Factor | Frequency Limit | (Hz) Margin | Height | _ | | | |
| | 0 -10 1G NO. | PK Limit * AV Detector Freq. [MHz] | AV Limit Ve | Factor [dB] | Frequency Limit [dBµ∨/m] | (Hz) Margin [dB] | Height [cm] | [°] | Polarity | | |
| | 0 -10 1G NO. | PK Limit * AV Detector Freq. [MHz] 1409.741 | AV Limit Ve | Factor [dB] -17.68 | Frequency Limit [dBµV/m] 74.00 | (Hz) Margin [dB] 39.58 | Height [cm] 150 | [°] 273 | Polarity Vertical | | |
| | 0 -10 1G NO. 1 2 | PK Limit AV Detector Freq. [MHz] 1409.741 2013.3013 | AV Limit - Ve | Factor [dB] -17.68 -13.38 | Frequency Limit [dBμV/m] 74.00 74.00 | (Hz) Margin [dB] 39.58 35.22 | Height [cm] 150 150 | [°] 273 342 | Polarity Vertical Vertical | | |
| | 0 -10 16 NO. 1 2 3 | PK Limit AV Detector Freq. [MHz] 1409.741 2013.3013 3361.5362 | AV Limit - Ve | Factor [dB] -17.68 -13.38 -11.01 | Frequency Limit [dBμV/m] 74.00 74.00 74.00 | (Hz) Margin [dB] 39.58 35.22 33.84 | Height [cm] 150 150 150 | [°] 273 342 359 | Polarity Vertical Vertical Vertical | | |

RESULT: Pass



| EUT Nam | e | 1 | Wireless Head | lphone | | Model Na | ne | A387 | 76L |
|---------------|-------------------|--------------------------|---|--|---|--|--|-----------------------|--------------------------|
| Temperat | ture | : | 22.5 ℃ | | | Relative H | lumidity | 58.3 | % |
| Pressure | | ! | 960hPa | | | Test Volta | ge | DC 3 | 3.85V by battery |
| Test Mod | е | | Mode 8 | | | Antenna F | Polarity | Horiz | zontal |
| | 130 | | | | FCC Part | 15C | | | |
| | 120 | | | | | | | | |
| | 110 | | | | | | | | |
| | 100 | | | | | | | | |
| | 90 80 | | | | | | | | |
| [m// | 70 | | | | | | | | |
| Level[dBµV/m] | 60 | | | | | | | | |
| Level | 50 | | | | | | ha an allow of ball a stand of the | 5 .1 .400 Million | |
| | 40 | 1 where we a man | the all mark for the strateging and for give a strateging | we many he was and a share stranger of the | work manager with the property with the | an and the second s | an a | Children and a second | |
| | 30 - 20 | | | | | | | | |
| | 10 | | | | | | | | |
| | 0 | | | | | | | | |
| | -10 1G | | 2G | 3G | 4G | 6G | 8G | | |
| | 10 | | 20 | 50 | Frequenc | | 00 | | 100 |
| _ | | PK Limit AV Detector | — AV Limit — He | orizontal PK | | | | | |
| | NO | Freq. | Level | Factor | Limit | Margin | Height | Angle | Delerity |
| | NO. | [MHz] | [dBµV/m] | [dB] | [dBµV/m] | [dB] | [cm] | [°] | Polarity |
| I | | | | -18.29 | 74.00 | 38.15 | 150 | 91 | Horizontal |
| - | 1 | 1032.303 | 2 35.85 | -10.29 | 11.00 | | | 000 | |
| - | 1 2 | 1032.3032 2106.8102 | | -18.29 | 74.00 | 35.45 | 150 | 292 | Horizontal |
| - | | | 7 38.55 | | | 35.45 33.21 | 150 150 | 292 | Horizontal Horizontal |
| - | 2 | 2106.810 | 7 38.55 5 40.79 | -13.15 | 74.00 | | + | | |
| - | 2 3 | 2106.810 3614.861 | 7 38.55 5 40.79 3 45.56 | -13.15 -10.49 | 74.00 74.00 | 33.21 | 150 | 299 | Horizontal |

Radiated Emissions Test Results for Above 1GHz



| | ame | W | ireless Head | phone | | Model Nar | ne | A387 | 76L | |
|-------|---|--|---|--|--|--|--|--------------------------|--|--|
| empe | rature | 22 | 2.5℃ | | | Relative H | lumidity | 58.3 | % | |
| ressi | ure | 96 | 60hPa | | | Test Volta | ge | DC 3 | DC 3.85V by batter | |
| est M | ode | M | ode 8 | | | Antenna F | Polarity | Verti | cal | |
| | | | | | | | | · | | |
| | 130 | | | | FCC Part 15C | | | | | |
| | 120 | | | | | | | | | |
| | 100 | | | | | | | | | |
| | 90 | | | | | | | | | |
| | 80 70 | | | | | | | | | |
| 3 | 60 | | | | | | | | | |
| ÷ | | | | | | | | | | |
| Leve | 50 | | | | | * ³ | ¥ | 5 | | |
| | 40 | الإيرانية المراجع وروار وروار | د بالدير والمراجعة المراجعة ال | waynen warden the sole of the | âner waaren waar | yhtymenen an | union and the state of the stat | 5 Marine Marine | | |
| | 40 30 | المراجع والمعار | an and a second s | unique, numero de la facta | 2 600-40-000-000-000-000-000-000-000-000-0 | yhtennen an the stand of the st | "Water"mappool | 5 | | |
| | 40 | المراجع والمعار والمحالي والم | and have the part of the and the second s | under and a particular and a second | รักษณะและเหตุสุลาสาร | yndynan an fernan yn | antana tana ang pang kana ang pang pang k | 5 | | |
| | 40 30 | and any space and a stand of the second stand of the second stand of the second stand of the second stand of the | an a | eregen printer of physics of a physics | âwawaan Marana Maran Marana Marana M | ynthynan opertryn fyr ^{gy} farradog | 4.1 | 5 | | |
| | 40 30 20 10 | ۇمۇر _{ىلى} ى ئەتۇرىغان ھەر | 2G | 3G | 2 4 4 6 | 6G | 8G | 5 | 186 | |
| | 40 30 20 10 0 1G | | 26 | | | | | 5 Manual Angle | 18G | |
| | 40 30 | imit — AV Lin | 26 | | 4G | | | 5 | 18G | |
| | 40 30 20 10 0 10 10 10 PKL * AV | | 26 | | 4G | 66 | 86 | Angle | | |
| | 40 30 | Detector | 2G mit — Vertical PK | 36 | 4G Frequency[Hz] | | | Angle | 18G | |
| | 40 30 20 10 0 10 10 10 PKL * AV | Freq. | 2G nit — Vertical PK Level | 3G Factor | 4G Frequency[Hz] | 6G Margin | 8G Height | - | | |
| | 40 30 20 10 0 10 16 PKI * AV NO. | Freq. [MHz] | 2G mit → Vertical PK Level [dBµV/m] | 3G Factor [dB] | 4G Frequency[Hz] Limit [dBµ√/m] | 6G Margin [dB] | 8G Height [cm] | [°] | Polarity | |
| | 40 30 40 20 10 0 -10 1G | Freq. [MHz] 2083.0083 | 2G mit → Vertical PK Level [dBµV/m] 39.52 | 36 Factor [dB] -13.21 | 4G Frequency[Hz] Limit [dBµV/m] 74.00 | 6G Margin [dB] 34.48 | 8G Height [cm] 150 | [°] 324 | Polarity Vertical | |
| | 40 30 20 10 0 1G PKL * AV NO. 1 2 1 2 | Freq. [MHz] 2083.0083 3574.0574 | 2G mit — Vertical PK Level [dBµV/m] 39.52 38.92 | 3G Factor [dB] -13.21 -10.54 | 4G Frequency[Hz] Limit [dBµV/m] 74.00 74.00 | 6G Margin [dB] 34.48 35.08 | 8G Height [cm] 150 150 | [°] 324 165 | Polarity Vertical Vertical | |
| | 40 30 20 10 10 16 PKL * AV NO. 1 2 3 | Freq. [MHz] 2083.0083 3574.0574 6848.5849 | 26 nit Vertical PK Level [dBµV/m] 39.52 38.92 45.85 | 36 Factor [dB] -13.21 -10.54 -3.87 | 4G Frequency[Hz] Limit [dBµV/m] 74.00 74.00 74.00 | 6G Margin [dB] 34.48 35.08 28.15 | 86 Height [cm] 150 150 150 | [°] 324 165 360 | Polarity Vertical Vertical Vertical | |


RESULT: Pass



| UT Nam | ne | | Wireless Headphone | | | | | Мо | del Nar | Model Name | | | A3876L | | |
|---------------|---|---|----------------------------|--|--|--|---|---------|---|------------------------------------|-----------------------------------|--|--|--|--|
| emperat | ture | | 22.5 ℃ | | | | | Re | lative H | umidit | y | 58.3% |) | | |
| ressure | ; | | 960hPa | | | | | Tes | Test Voltage | | | DC 3.85V by batter | | | |
| est Mod | le | | Mode | e 9 | | | | An | Antenna Polarity | | | | Horizontal | | |
| | 130 120 110 100 90 | | | | | | FCC Pa | art 15C | | | | | | | |
| Ē | 80 70 | | | | | | | | | | | | | | |
| Leve[[dBµV/m] | 60 50 40 30 20 10 | Muser when any the | Lpunderssynd | ed wet with the set | ************************************** | where the first frequency being the | mserier to the state of the second | water | No. 19 Martin Street | 1444. | | 1000 1000 1000 1000 1000 1000 1000 100 | | | |
| (Mrdb)]evel | 50 40 30 20 | PK Limit | | alasiana jeuge da kanange 2 G AV Limit — | 3 | 3G contal PK | | | 6G | | G | | 1 | | |
| /v(db)/vy | 50 40 30 20 10 -10 | - PK Limit | | | 3 — Horizo | 3G | 4G | ncy[Hz] | | | G | Angle | Polarity | | |
| (\nfdp)]eve1 | 50 40 20 10 -10 1G | PK Limit AV Detect | or | AV Limit | 3 — Horizo | 3G tontal PK Factor | 4G Frequer Limit | ncy[Hz] | 6G Margin | 8 Hei | G ght n] | Angle | | | |
| Level(dbJVV | 50 40 30 20 -10 -10 1G | PK Limit * AV Detect Freq. [MHz] | or 87 | AV Limit – Level [dBµV/m] | 3 — Horizo | 3G ontal PK Factor [dB] | 4G Frequer Limit [dBµV/m] | ncy[Hz] | 6G Margin [dB] | 8 Heių [cr | G ght n] | Angle [°] | Polarity | | |
| Level(dbJ/V) | 50 40 30 20 10 -10 16 NO. | PK Limit * AV Detect Freq. [MHZ] 1336.633 | or 97 75 | AV Limit Level [dBµV/m] 34.41 | 3 — Horizo | sontal PK Factor [dB] -17.80 | 4G Frequer Limit [dBµV/m] 74.00 | ncy[Hz] | 6G Margin [dB] 39.59 | 8 Heij [cr 15 | ght n] 00 | Angle [°] 63 | Polarity Horizontal | | |
| Level(db)/V | 50 40 30 20 10 -10 16 NO. | PK Limit * AV Detect Freq. [MHz] 1336.633 2174.81 | 97 75 93 | AV Limit Level [dBµV/m] 34.41 38.27 | 3 — Horizo | 30 ontal PK Factor [dB] -17.80 -12.99 | 4G Frequer Limit [dBµV/m 74.00 74.00 | ncy[Hz] | 6G Margin [dB] 39.59 35.73 | 8 Hei [cr 15 15 | ght n] i0 i0 i0 | Angle [°] 63 183 | Polarity Horizontal Horizontal | | |
| Level(db)/V | 50 40 30 20 10 -10 16 NO. 1 2 3 | PK Limit AV Detect Freq. [MHz] 1336.633 2174.817 3592.755 | or 37 25 33 19 | AV Limit Level [dBµV/m] 34.41 38.27 39.74 | 3 — Horizo | 30 ontal PK Factor [dB] -17.80 -12.99 -10.52 | 4G Frequer [dBµV/m] 74.00 74.00 74.00 | ncy[Hz] | 6G Margin [dB] 39.59 35.73 34.26 | 8 Heig [cr 15 15 15 | ght n] i0 i0 i0 i0 | Angle [°] 63 183 316 | Polarity Horizontal Horizontal Horizontal | | |

Radiated Emissions Test Results for Above 1GHz



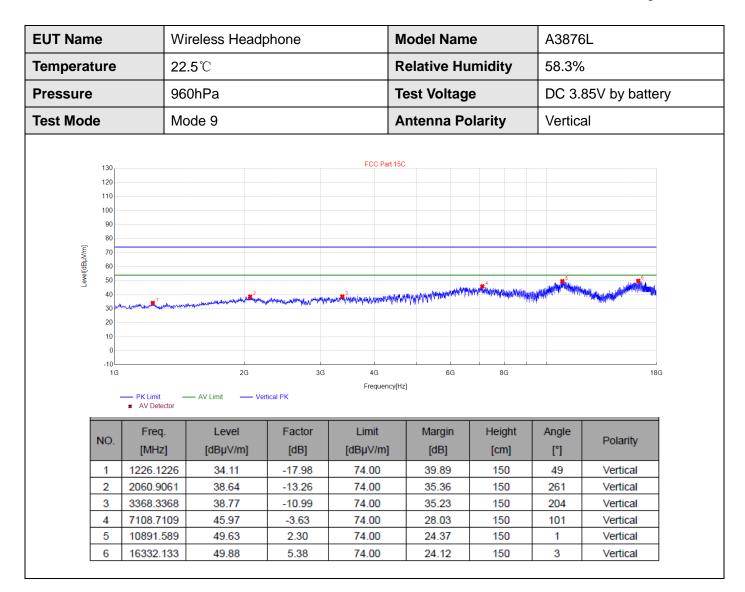

RESULT: Pass

Note:


- 1. The amplitude of other spurious emissions from 18G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit.
- 3. The "Factor" value can be calculated automatically by software of measurement system.




| EUT Name | Wireless Headphone | Model Name | A3876L |
|-------------|--------------------|-------------------|---------------------|
| Temperature | 25.9℃ | Relative Humidity | 53% |
| Pressure | 960hPa | Test Voltage | DC 3.85V by battery |
| Test Mode | Mode 1 | Antenna Polarity | Horizontal |

Band Edge Emission Test Results for Restricted Bands

Test Graph for Peak Measurement

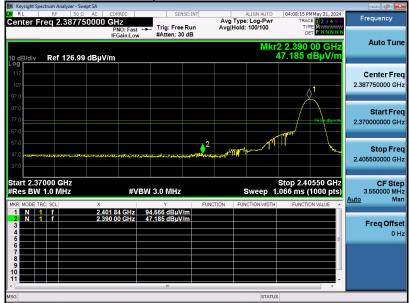

Test Graph for Average Measurement

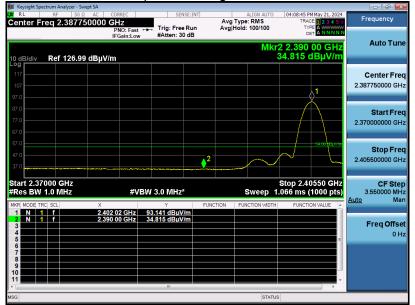

RESULT: Pass



| EUT Name | Wireless Headphone | Model Name | A3876L |
|-------------|--------------------|-------------------|---------------------|
| Temperature | 25.9 ℃ | Relative Humidity | 53% |
| Pressure | 960hPa | Test Voltage | DC 3.85V by battery |
| Test Mode | Mode 1 | Antenna Polarity | Vertical |



Test Graph for Average Measurement




RESULT: Pass



| EUT Name | Wireless Headphone | Model Name | A3876L |
|-------------|--------------------|-------------------|---------------------|
| Temperature | 25.9 ℃ | Relative Humidity | 53% |
| Pressure | 960hPa | Test Voltage | DC 3.85V by battery |
| Test Mode | Mode 3 | Antenna Polarity | Horizontal |




Test Graph for Average Measurement

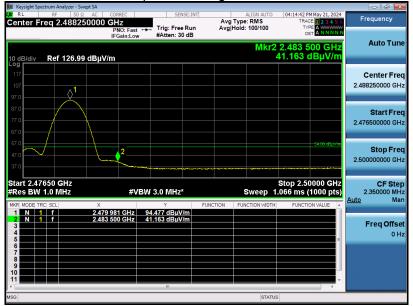


RESULT: Pass



| EUT Name | Wireless Headphone | Model Name | A3876L |
|-------------|--------------------|-------------------|---------------------|
| Temperature | 25.9 ℃ | Relative Humidity | 53% |
| Pressure | 960hPa | Test Voltage | DC 3.85V by battery |
| Test Mode | Mode 3 | Antenna Polarity | Vertical |

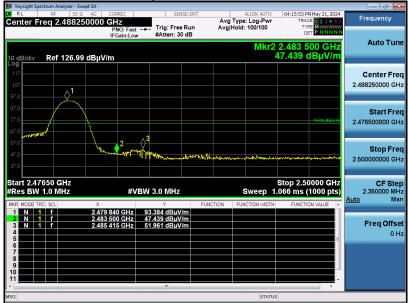

Test Graph for Average Measurement

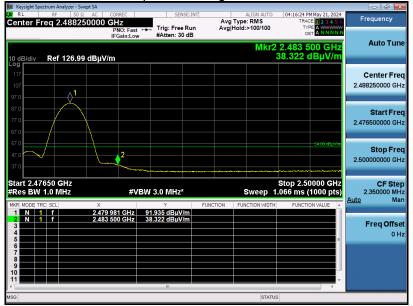

RESULT: Pass




| EUT Name | Wireless Headphone | Model Name | A3876L |
|-------------|--------------------|-------------------|---------------------|
| Temperature | 25.9℃ | Relative Humidity | 53% |
| Pressure | 960hPa | Test Voltage | DC 3.85V by battery |
| Test Mode | Mode 4 | Antenna Polarity | Horizontal |

Band Edge Emission Test Results for Restricted Bands

Test Graph for Peak Measurement




Test Graph for Average Measurement

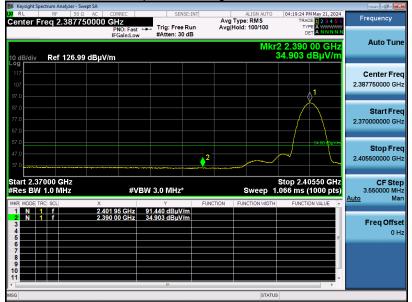


RESULT: Pass



| EUT Name | Wireless Headphone | Model Name | A3876L |
|-------------|--------------------|-------------------|---------------------|
| Temperature | 25.9 ℃ | Relative Humidity | 53% |
| Pressure | 960hPa | Test Voltage | DC 3.85V by battery |
| Test Mode | Mode 4 | Antenna Polarity | Vertical |

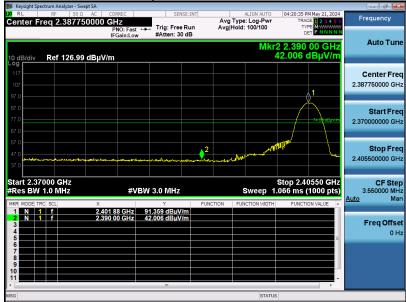

Test Graph for Average Measurement

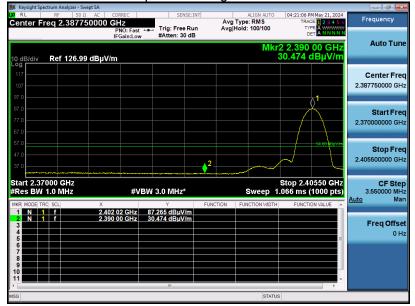


RESULT: Pass




| Band F | dae Emis | sion Test | Results for | r Restricted | Bands |
|--------|----------|------------|-------------|--------------|-------|
| | age Enns | 31011 1030 | nesults io | Restricted | Danas |

| EUT Name | Wireless Headphone | Model Name | A3876L |
|-------------|--------------------|-------------------|---------------------|
| Temperature | 25.9 ℃ | Relative Humidity | 53% |
| Pressure | 960hPa | Test Voltage | DC 3.85V by battery |
| Test Mode | Mode 6 | Antenna Polarity | Horizontal |

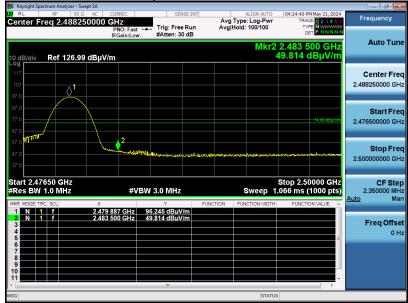

Test Graph for Average Measurement

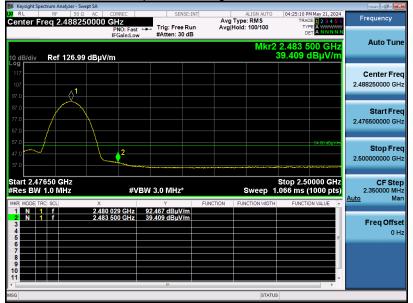


RESULT: Pass




| Band Edge | Emission | Test Results for | or Restricted Bands |
|-----------|----------|------------------|---------------------|
| Bana Eago | | Tool noounto n | |

| EUT Name | Wireless Headphone | Model Name | A3876L |
|-------------|--------------------|-------------------|---------------------|
| Temperature | 25.9 ℃ | Relative Humidity | 53% |
| Pressure | 960hPa | Test Voltage | DC 3.85V by battery |
| Test Mode | Mode 6 | Antenna Polarity | Vertical |

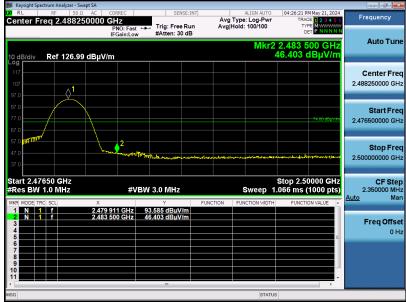

Test Graph for Average Measurement

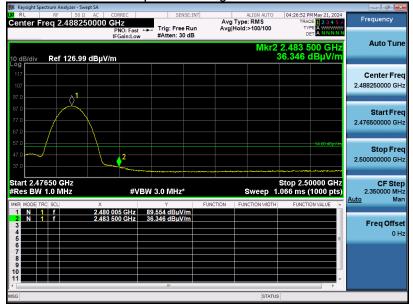

RESULT: Pass

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.



10. Number of Hopping Frequency Measurement

10.1 Provisions Applicable


This frequency hopping system must employ a minimum of 15 hopping channels.

10.2 Measurement Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- 1. Span = The frequency band of operation. Depending on the number of channels the device
- 2. supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- 3. RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- 4. VBW \geq RBW
- 5. Sweep time = Auto couple
- 6. Detector = Peak
- 7. Trace mode = Max hold
- 8. Allow the trace to stabilize

10.3 Measurement Setup (Block Diagram of Configuration)

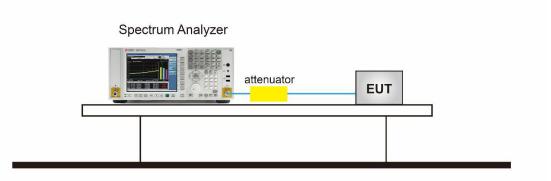

10.4 Measurement Result

| Test Data of Number of Hopping Frequency | | | | |
|---|----|------|------|--|
| Test Mode Number of Hopping Frequency Limits Pass or Fail | | | | |
| π /4-DQPSK Hopping | 79 | >=15 | Pass | |





| 🎉 Keysight Spectrum Analyzer - Swept SA | • | | | | |
|--|-------------------------|-----------------------------------|--|--|--|
| RE RF 50 Ω AC Center Freq 2.4417500 | | SENSE:INT | ALIGN AUTO Avg Type: Log-Pwr | 04:40:38 PM May 21, 2024 TRACE 1 2 3 4 5 6 | Frequency |
| 10 dB/div Ref 30.00 dBm | PNO: Fast IFGain:Low | - Trig: Free Run #Atten: 40 dB | Avg Hold: 100/100 | TYPE MWWWW Det PNNNN 1 2.467 95 GHz 0.635 dBm | Auto Tune |
| 20.0 | | | | | Center Freq 2.441750000 GHz |
| 0.00 MMMMMMM | Mananan | MMMMMMM | MM MM MMMMMMMMMMMMMMMMMMMMMMMMMMMMMMMM | | Start Freq 2.400000000 GHz |
| -10.0 | | | | | Stop Freq 2.483500000 GHz |
| -30.0 | | | | | CF Step 8.350000 MHz <u>Auto</u> Man |
| -50.0 | | | | <u> </u> | Freq Offset 0 Hz |
| Center 2.44175 GHz #Res BW 200 kHz | #VBW | / 620 kHz | Sweep 1 | Span 83.50 MHz .998 ms (1000 pts) | |
| Test_Graph_EDR_HOP_ANT1_NA_2Mbps_Number of Hopping | | | | ping | |

Test Graphs of Number of Hopping Frequency

Note: All mode rates are tested and evaluated, π /4-DQPSK modulated 2DH5 mode is the worst case and documented in the report.



11. Time of Occupancy (Dwell Time) Measurement

11.1 Provisions Applicable


The maximum permissible time of occupancy is 400ms within a period of 400ms multiplied by the number of hopping channels employed.

11.2 Measurement Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- 1. Span = Zero span, centered on a hopping channel.
- 2. RBW shall be \leq channel spacing and where possible RBW should be set >> 1 / T, where T is the expected dwell time per channel.
- 3. VBW \geq RBW
- 4. Sweep time = As necessary to capture the entire dwell time per hopping channel
- 5. Detector = Peak
- 6. Trace mode = Free Run
- 7. Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time. An oscilloscope may be used instead of a spectrum analyzer. The EUT shall show compliance with the appropriate regulatory limit for the number of hopping channels. A plot of the data shall be included in the test report.


11.3 Measurement Setup (Block Diagram of Configuration)

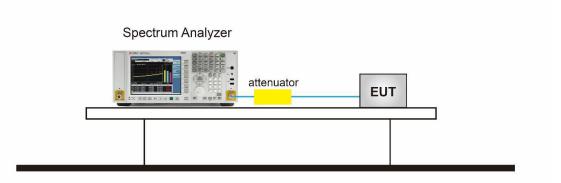

11.4 Measurement Result


| Test Data of Dwell Time | | | | | |
|-------------------------|--------------------------------|--|--------------------|---------------|--------------|
| Channel | Time of Pulse for 2DH5 (ms) | Number of hops in the period specified in the requirements | Dwell Time (ms) | Limit (ms) | Pass or Fail |
| 2402 | 2.892 | 26.0*4 | 300.768 | 400 | Pass |
| 2441 | 2.892 | 27.0*4 | 312.336 | 400 | Pass |
| 2480 | 2.892 | 28.0*4 | 323.904 | 400 | Pass |



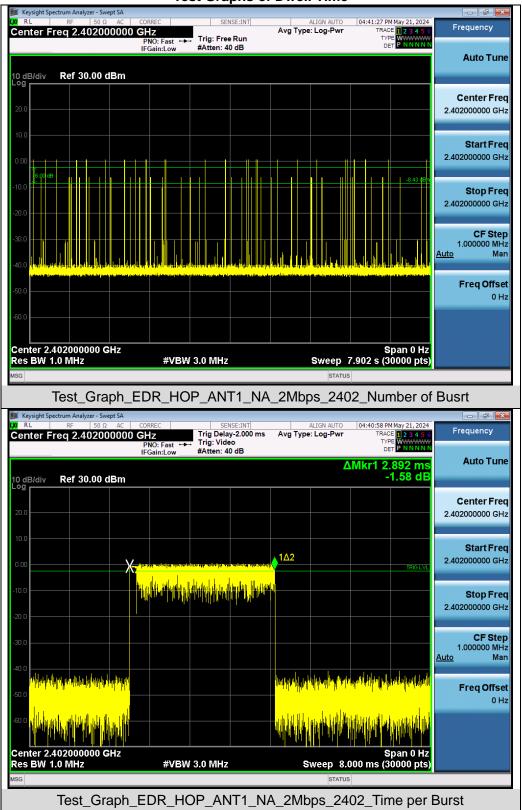


Test Graphs of Dwell Time



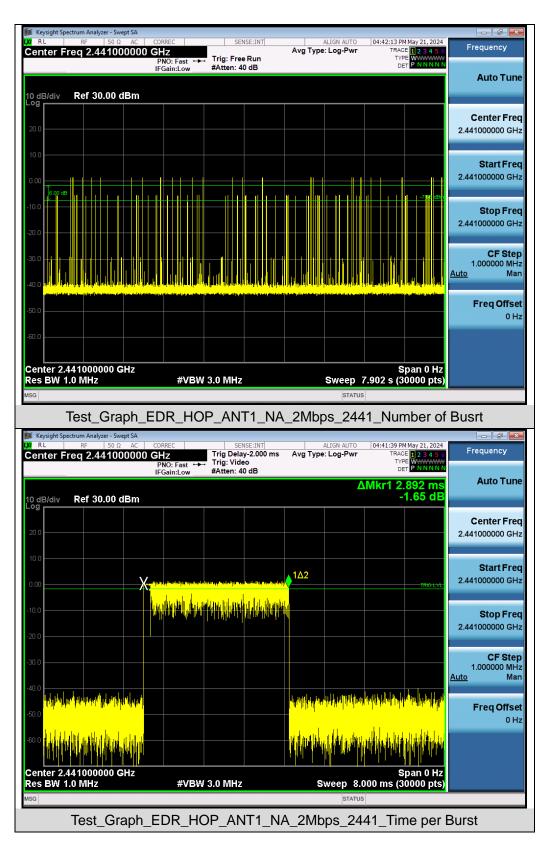



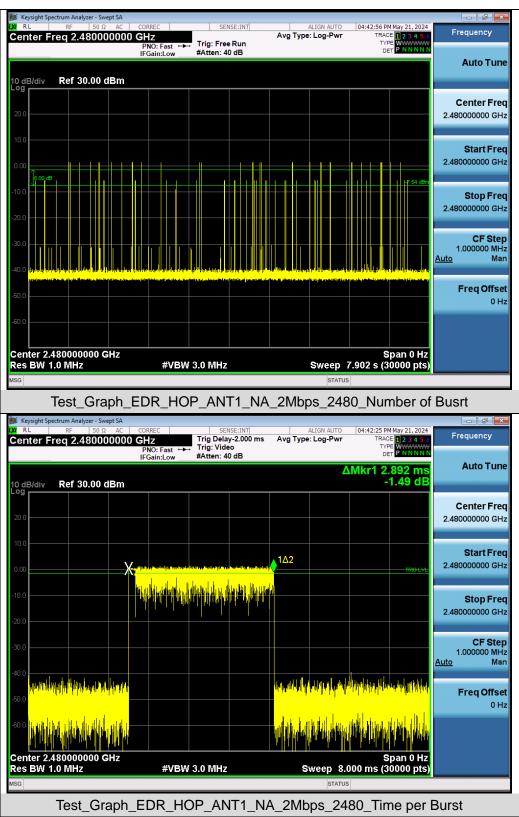

Note: All mode rates are tested and evaluated, π /4-DQPSK modulated 2DH5 mode is the worst case and documented in the report.



12. Frequency Separation Measurement

12.1 Provisions Applicable

When the power is less than 0.125W: The minimum permissible channel separation for this system is 2/3 the value of the 20dB BW.


When the power is less than 1W: The minimum permissible channel separation for this system is 20dB BW.

12.2 Measurement Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- 1. Span: Wide enough to capture the peaks of two adjacent channels.
- 2. RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- 3. Video (or average) bandwidth (VBW) \geq RBW.
- 4. Sweep: Auto.
- 5. Detector function: Peak.
- 6. Trace: Max hold. g) Allow the trace to stabilize.
- 7. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

12.3 Measurement Setup (Block Diagram of Configuration)

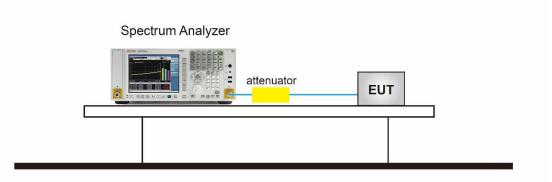

12.4 Measurement Result

| Test Data of Frequency Separation | | | | |
|-----------------------------------|--------------------------|--------------|--------------|--|
| Test Mode | Channel Separation (MHz) | Limits (MHz) | Pass or Fail | |
| π /4-DQPSK | 0.905 | ≥0.852 | Pass | |



| 🎉 Keysight Spectrum Analyzer - S | Swept SA | | | | |
|---|-------------------------|---|--|---|-----------------|
| X RL RF 50 | | SENSE:INT | ALIGN AUTO Avg Type: Log-Pwr | 04:48:11 PM May 21, 2024 TRACE 1 2 3 4 5 6 | Frequency |
| Center Freq 2.4410 | DUUUUU GHZ PNO: Wide | +++ Trig: Free Run | Avg Type: Log-Pwr Avg Hold: 100/100 | TYPE M WWWWW | |
| | IFGain:Low | #Atten: 40 dB | | DET | |
| | | | Mkr2 | 2.439 108 GHz | Auto Tune |
| 10 dB/div Ref 30.00 |) dBm | | | -7.266 dBm | |
| Log | | | | | |
| 20.0 | | | | | Center Freq |
| 10.0 | .1 | | | | 2.441000000 GHz |
| 0.00 | | | | | |
| -10.0 mm | \sim | $\sim \sim $ | man have a flore and | mon my my my | Start Freq |
| -20.0 | | | | | 2.439000000 GHz |
| -30.0 | | | | | 2.43900000 6112 |
| -40.0 | | | | | |
| | | | | | Stop Freq |
| -50.0 | | | | | 2.443000000 GHz |
| -60.0 | | | | | |
| Center 2.441000 GH | 2 | | | Span 4.000 MHz | CF Step |
| #Res BW 30 kHz | | BW 62 kHz | Sweep 4 | .462 ms (1000 pts) | 400.000 kHz |
| MKR MODE TRC SCL | X | | INCTION FUNCTION WIDTH | | <u>Auto</u> Man |
| | 2.440 013 GHz | -4.647 dBm | INCTION FUNCTION WIDTH | FUNCTION VALUE | |
| 2 N 1 f | 2.439 108 GHz | -7.266 dBm | | | Freq Offset |
| 3 4 | | | | | 0 Hz |
| 5 | | | | E | 0112 |
| 6 7 | | | | | |
| 8 | | | | | |
| 9 10 | | | | | |
| 11 | | | | • | |
| | | III | | • | |
| MSG | | | STATU | S | |
| Test Graph EDR HOP ANT1 NA 2Mbps Hopping Separation | | | | | |

Test Graphs of Number of Hopping Frequency

Note: All mode rates are tested and evaluated, π /4-DQPSK modulated 2DH5 mode is the worst case and documented in the report.



13. AC Power Line Conducted Emission Test

13.1 Measurement Limit


| F actorian and | Maximum RF Line Voltage | | |
|-----------------------|-------------------------|----------------|--|
| Frequency | Q.P. (dBµV) | Average (dBµV) | |
| 150kHz~500kHz | 66-56 | 56-46 | |
| 500kHz~5MHz | 56 | 46 | |
| 5MHz~30MHz | 60 | 50 | |

Note:

1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

13.2 Measurement Setup (Block Diagram of Configuration)

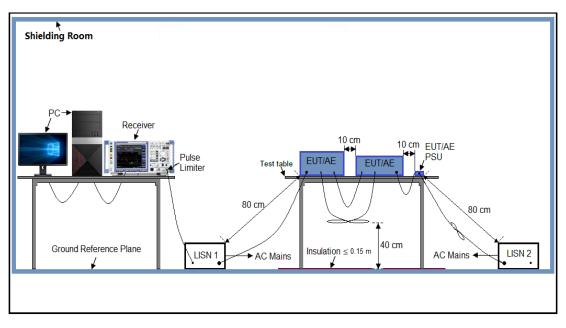



13.3 Preliminary Procedure of Line Conducted Emission Test

- The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

13.4 Final Procedure of Line Conducted Emission Test

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

13.5 Measurement Results

N/A

Note: The BT function cannot transmit when charging



Report No.: AGC01110240519FR02 Page 71 of 71

Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC01110240519AP01

Appendix II: Photographs of Test EUT

Refer to the Report No.: AGC01110240519AP02

-----End of Report-----



Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.