


# TEST REPORT



Applicant	MMD Hong Kong Holding Limited
Address	Unit 1006, 10th Floor, C-Bons International Center, 108 Wai Yip Street, Kwun Tong, Kowloon, Hong Kong

Manufacturer or Supplier	MMD Hong Kong Holding Limited
Address	Unit 1006, 10th Floor, C-Bons International Center, 108 Wai Yip Street, Kwun Tong, Kowloon, Hong Kong
Product	Active Noise Canceling wireless headphones
Brand Name	PHILIPS or 
Models	TAH8507HS
Additional Models & Model Difference	TAH8507
Date of tests	Mar. 15, 2022 ~ Mar. 26, 2022

the tests have been carried out according to the requirements of the following standard:

☒ **FCC Part 15, Subpart C, Section 15.247**

**CONCLUSION: The submitted sample was found to COMPLY with the test requirement**

Tested by Lucas Chen Project Engineer / EMC Department	Approved by Glyn He Assistant Manager / EMC Department
	  Date: May 11, 2022

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <https://www.cps.bureauveritas.com/terms-conditions> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



## TABLE OF CONTENTS

<b>RELEASE CONTROL RECORD .....</b>	<b>3</b>
<b>1 SUMMARY OF TEST RESULTS.....</b>	<b>4</b>
<b>2 MEASUREMENT UNCERTAINTY .....</b>	<b>4</b>
<b>3 GENERAL INFORMATION .....</b>	<b>5</b>
3.1 GENERAL DESCRIPTION OF EUT .....	5
3.2 DESCRIPTION OF TEST MODES .....	6
3.2.1. CONFIGURATION OF SYSTEM UNDER TEST .....	6
3.2.2. TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	6
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS .....	8
3.4 DESCRIPTION OF SUPPORT UNITS .....	8
<b>4 TEST TYPES AND RESULTS.....</b>	<b>9</b>
4.1 RADIATED EMISSION MEASUREMENT .....	9
4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT .....	9
4.1.2 TEST INSTRUMENTS.....	10
4.1.3 TEST PROCEDURES .....	11
4.1.4 DEVIATION FROM TEST STANDARD .....	11
4.1.5 TEST SETUP .....	12
4.1.6 EUT OPERATING CONDITIONS .....	13
4.1.7 TEST RESULTS .....	14
<b>5 PHOTOGRAPHS OF THE TEST CONFIGURATION .....</b>	<b>16</b>
<b>6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB .....</b>	<b>17</b>



**BUREAU**  
**VERITAS**

Test Report No.: RF2203WDG0246-2

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF2203WDG0246-2	Original release	May 11, 2022



## 1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.205 15.209	Transmitter Radiated Emission Below 1GHz	PASS	Meet the requirement of limit.

Note: This report base the FCC ID: 2AR2STAH8506 to Add series models; Replace the built-in microphone with an external pluggable microphone and Change the appearance of product (Enclosure changes). These change content has been re-evaluate the items as above table, and all of others test result are not affected the latest changes, see the original grant report of FCC ID: 2AR2STAH8506 from [FCC OET Authorization Search](#)

## 2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Radiated emissions	9KHz ~ 30MHz	2.16dB
	30MHz ~ 1GMHz	3.47dB
	1GHz ~ 18GHz	4.84dB
	18GHz ~ 40GHz	4.67dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .



### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	Active Noise Canceling wireless headphones
<b>MODELS NO.</b>	TAH8507HS
<b>ADDITIONAL MODEL</b>	TAH8507
<b>FCC ID</b>	2AR2STAH8506
<b>NOMINAL VOLTAGE</b>	DC 5V from USB port input or DC 3.7V from battery
<b>MODULATION TECHNOLOGY</b>	DSSS
<b>MODULATION TYPE</b>	GFSK
<b>OPERATING FREQUENCY</b>	2402 ~ 2480MHz
<b>PEAK OUTPUT POWER</b>	0.16dBm (Max. Measured)
<b>ANTENNA TYPE</b>	FPCB Antenna, -1.0dBi Gain
<b>I/O PORTS</b>	Please see the User Manual
<b>CABLE SUPPLIED</b>	USB cable: 0.5m, detachable, un-shielding Audio cable: 1.2m, detachable, un-shielding
<b>I/O PORTS</b>	Refer to user's manual

**NOTES:**

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
3. Please refer to the EUT photo document (Reference No.: 2203WDG0246) for detailed product photo.
4. Additional models (see above table) are identical with the test model except model number for trading purpose.
5. The Lab. Designation Number: CN1174; Test Firm Registration Number: 749762



### 3.2 DESCRIPTION OF TEST MODES

40 channels are provided for BT-LE GFSK (1, 2 Mbps):

CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

#### 3.2.1. CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photographs of the test configuration for reference.

#### 3.2.2. TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, power supply voltage range and antenna ports. The worst case was found when positioned on X axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report:

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE<1G	RE≥1G	PLC	APCM	
A	√	-	-	-	DC 3.7V from battery

Where **RE<1G**: Radiated Emission below 1GHz      **RE≥1G**: Radiated Emission above 1GHz  
**PLC**: Power Line Conducted Emission      **APCM**: Antenna Port Conducted Measurement

**NOTE:** No need to concern of Conducted Emission due to the EUT is powered by battery.

**RADIATED EMISSION TEST (BELOW 1GHz):**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
BT-LE	0 to 39	39	DTS	GFSK	1

For the test results, only the worst case was shown in test report.

**TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER(POE)	TESTED BY
RE<1G	23.1deg. C,45%RH	DC 3.7V from battery	King



### 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C, Section 15.247**

**KDB558074 D01 15.247 Meas Guidance v05r02**

**ANSI C63.10-2013**

Note: All test items have been performed and recorded as per the above standards.

### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit without any other necessary accessory or support units.



## 4 TEST TYPES AND RESULTS

### 4.1 RADIATED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTES:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



#### 4.1.2 TEST INSTRUMENTS

##### FREQUENCY RANGE BELOW 1GHz

Equipment	Manufacturer	Model No.	Serial No.	Next Cal. Date
EMI Test Receiver (10kHz~7GHz)	Rohde&Schwarz	ESR 7	101961	2023/01/12
Loop Antenna	EMCI	HLA 6121	45745	2023-04-15
Preamplifier	EMCI	EMC001340	980201	2022-04-15
Broadband antenna (25MHz~2500MHz)	Schwarzbeck	VULB 9168	00937	2022/04/15
3m Semi-anechoic Chamber	MAORUI	9m*6m*6m	NSEMC003	2022/04/14
Signal Amplifier (30MHz~1000MHz)	Com-power	PAM-103	18020051	2023/01/14
Attenuator	R&S	TS2GA-6dB	18101101	N/A
Test software	EZ	EZ EMC V1.1.4.2	N/A	N/A

- NOTES:**
1. The test was performed in 966 Chamber.
  2. The calibration interval of the above test instruments is 12 / 24 months(The Antenna and Chamber interval of 24 months, others are 12 months). And the calibrations are traceable to CEPREI/CHINA.



### 4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 1.5 meters (above 1GHz) and 0.8 meters (below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. For below 1GHz was used bilog antenna, and above 1GHz was used horn antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.
- g. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

#### NOTES:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98%) or 10Hz(Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
- 4.All modes of operation were investigated and the worst-case emissions are reported.
- 5.The testing of the EUT was performed on all 3 orthogonal axes; the worst-case test configuration was reported on the file test setup photo.


### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation.




#### 4.1.5 TEST SETUP

##### Below 30MHz test setup

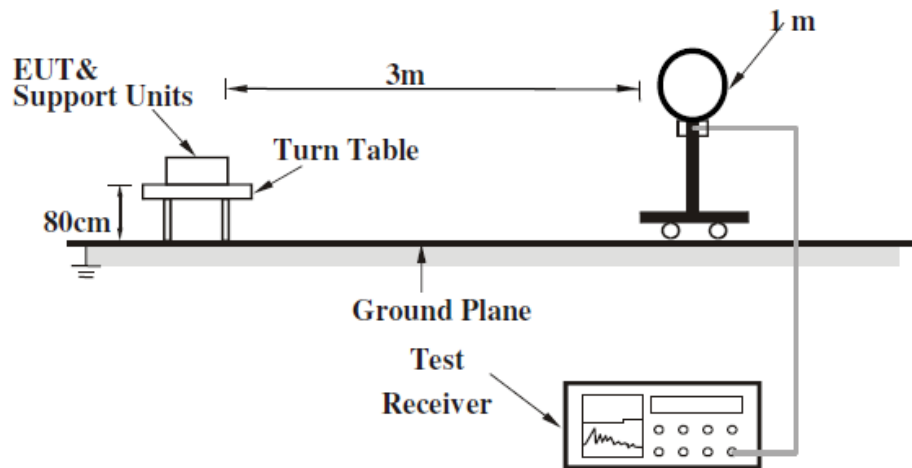


##### Below 1GHz test setup

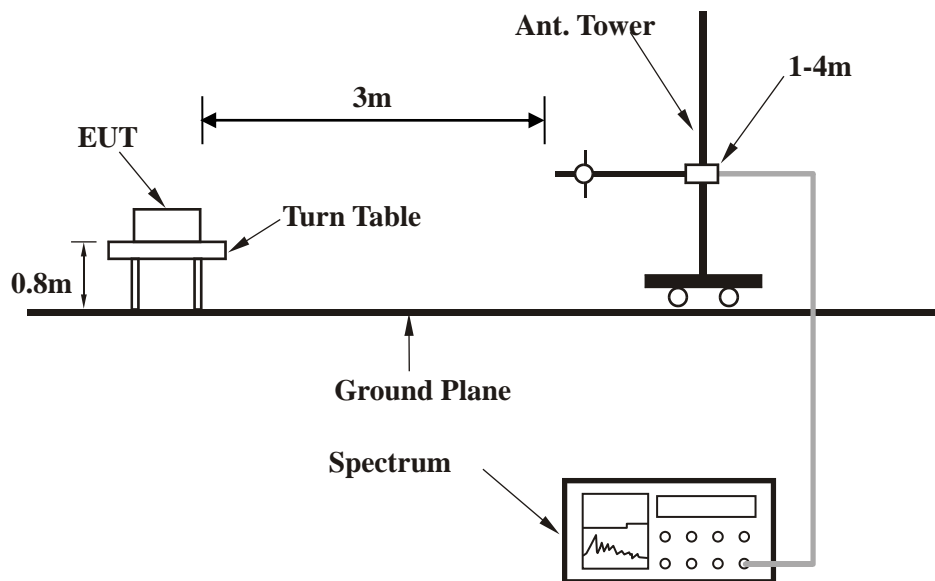

**Note:** For the actual test configuration, please refer to the attached file (Test Setup Photo).



### Above 1GHz test setup

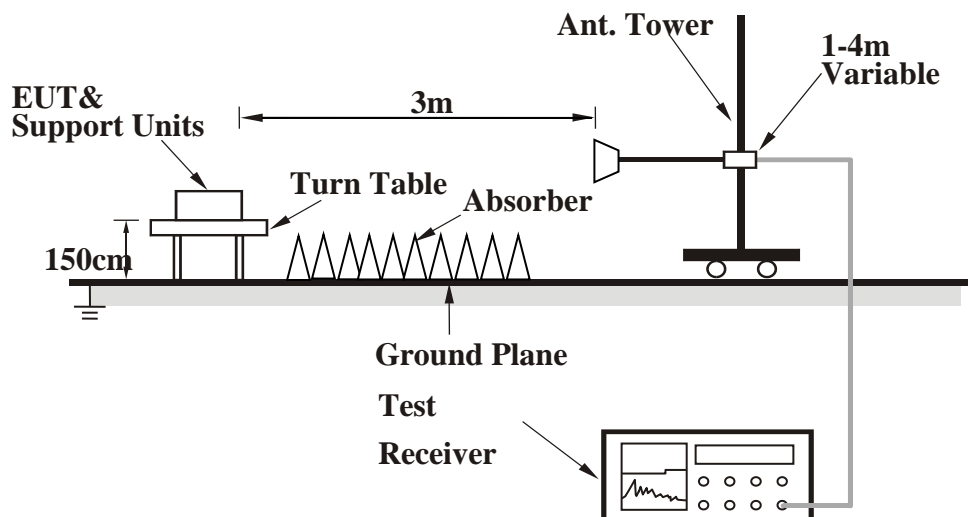

**Note:** For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT OPERATING CONDITIONS

- Set the EUT under full load condition and placed them on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.



## 4.1.7 TEST RESULTS

## BELOW 1GHz WORST-CASE DATA:


## BT-LE GFSK (1Mbps)

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	READING (dBuV)	CORRECTION FACTOR (dB/m)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)
1	49.4087	30.76	-16.80	13.96	40.00	-26.04	200	226
2	64.9869	31.21	-16.97	14.24	40.00	-25.76	200	182
3	74.7934	31.44	-17.36	14.08	40.00	-25.92	300	105
4	166.6385	31.42	-12.77	18.65	43.50	-24.85	200	156
5	282.2702	30.31	-14.57	15.74	46.00	-30.26	300	292
6	350.9722	31.31	-12.73	18.58	46.00	-27.42	200	74

## REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. 9KHz~30MHz have been test and test data more than 20dB margin.
5. Margin value = Emission level – Limit value

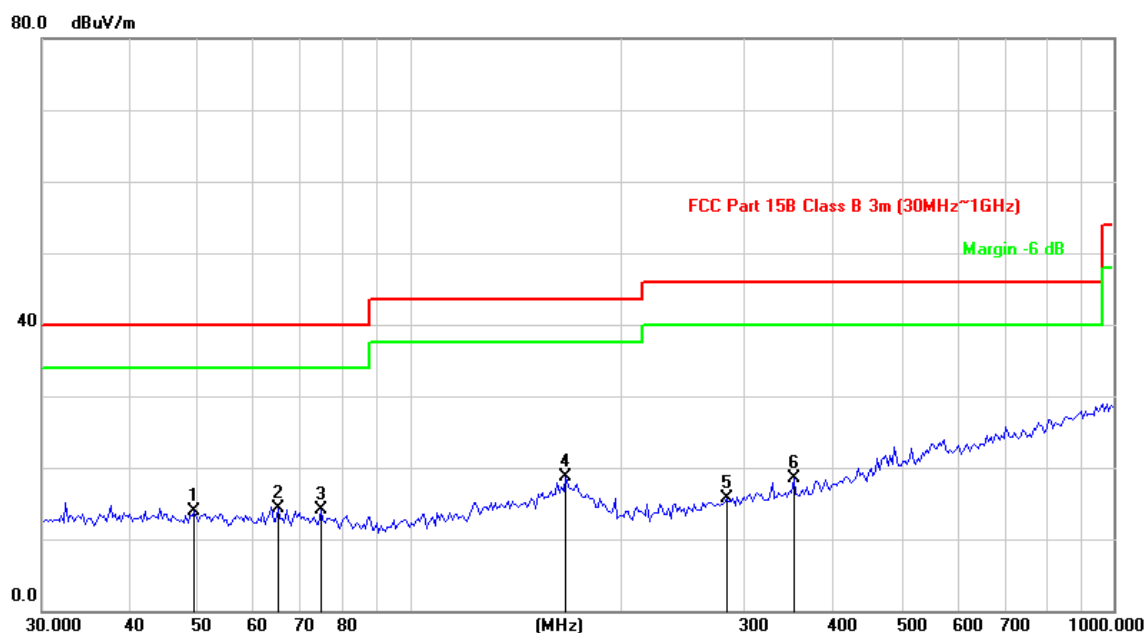




CHANNEL	TX Channel 39	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	READING (dBuV)	CORRECTION FACTOR (dB/m)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)
1	55.2883	34.40	-16.84	17.56	40.00	-22.44	100	182
2	64.5319	31.81	-16.95	14.86	40.00	-25.14	200	245
3	104.0640	31.61	-17.27	14.34	43.50	-29.16	100	299
4	160.8852	31.02	-12.97	18.05	43.50	-25.45	100	115
5	195.8701	33.31	-16.31	17.00	43.50	-26.50	200	182
6	327.1554	30.11	-13.42	16.69	46.00	-29.31	100	322

#### REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. 9KHz~30MHz have been test and test data more than 20dB margin.
5. Margin value = Emission level – Limit value

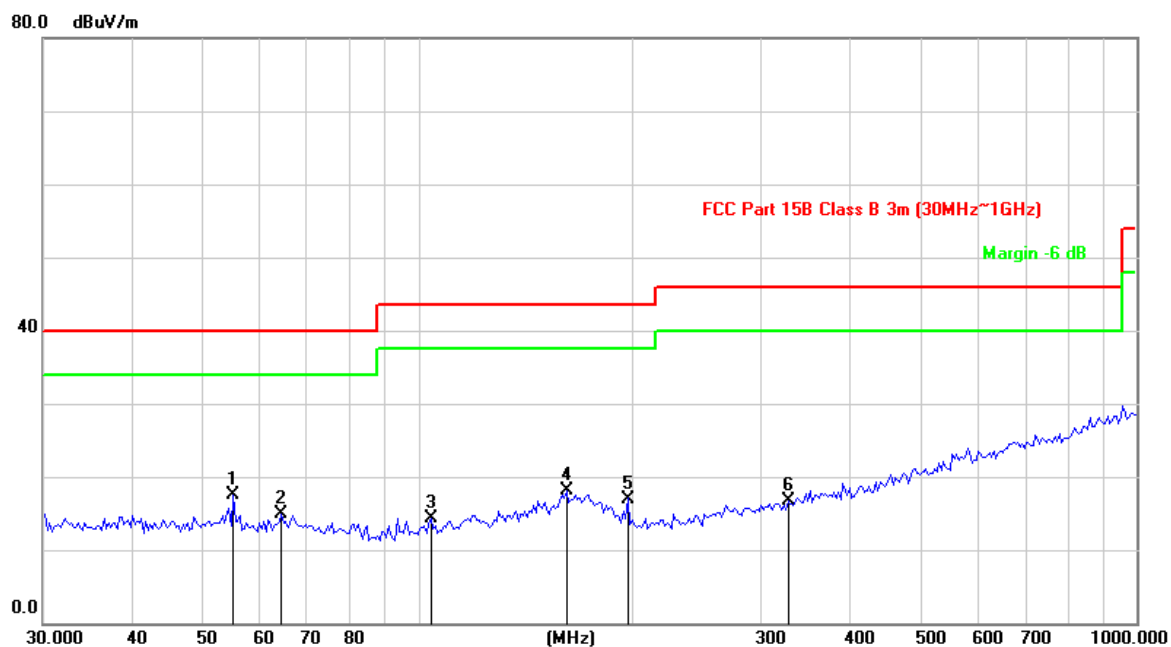



Test Report No.: RF2203WDG0246-2

## 5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



Test Report No.: RF2203WDG0246-2

## 6 APPENDIX A - Modifications recorders for engineering changes to the eut BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---