

APPENDIX B: SYSTEM VERIFICATION

ELEMENT

DUT: Dipole 2450.0 MHz; Type: D2450V2 - SN855

Communication System: UID: 0, CW; Frequency: 2450.0 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2450.0$ MHz; $\text{cond} = 1.84$ S/m; $\text{perm} = 38.6$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 8/13/2024; Ambient Temp: 22.5°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN7499; ConvF:(7.13,7.46,7.69); Calibrated: 2024-01-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1644; Calibrated: 2023-12-07

Phantom: Twin-SAM V8.0; Serial: 1357

Measurement SW: DASY Module SAR V16.2.4.2524

2450.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 11.9 W/kg

SAR(1 g) = 5.29 W/kg; SAR(10 g) = 2.35 W/kg

Deviation (1 g) = 0.95%; Deviation (10 g) = -4.47%

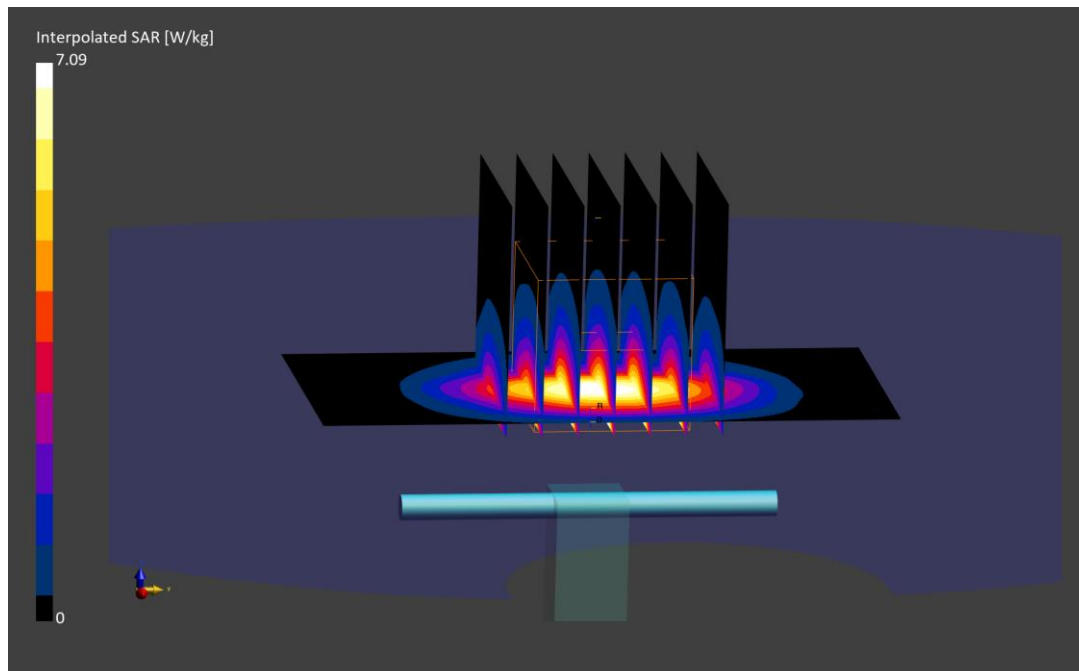

ELEMENT

DUT: Dipole 2450.0 MHz; Type: D2450V2 - SN750

Communication System: UID: 0, CW; Frequency: 2450.0 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2450.0$ MHz; $\text{cond} = 1.86$ S/m; $\text{perm} = 38.8$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 08/19/2024; Ambient Temp: 20.1°C; Tissue Temp: 24.0°C

Probe: EX3DV4 - SN7499; ConvF:(7.13,7.46,7.69); Calibrated: 2024-01-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1644; Calibrated: 2023-12-07

Phantom: Twin-SAM V8.0; Serial: 1357

Measurement SW: DASY Module SAR V16.2.4.2524

2450.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 11.1 W/kg

SAR(1 g) = 5.06 W/kg; SAR(10 g) = 2.28 W/kg

Deviation (1 g) = -3.80%; Deviation (10 g) = -6.94%

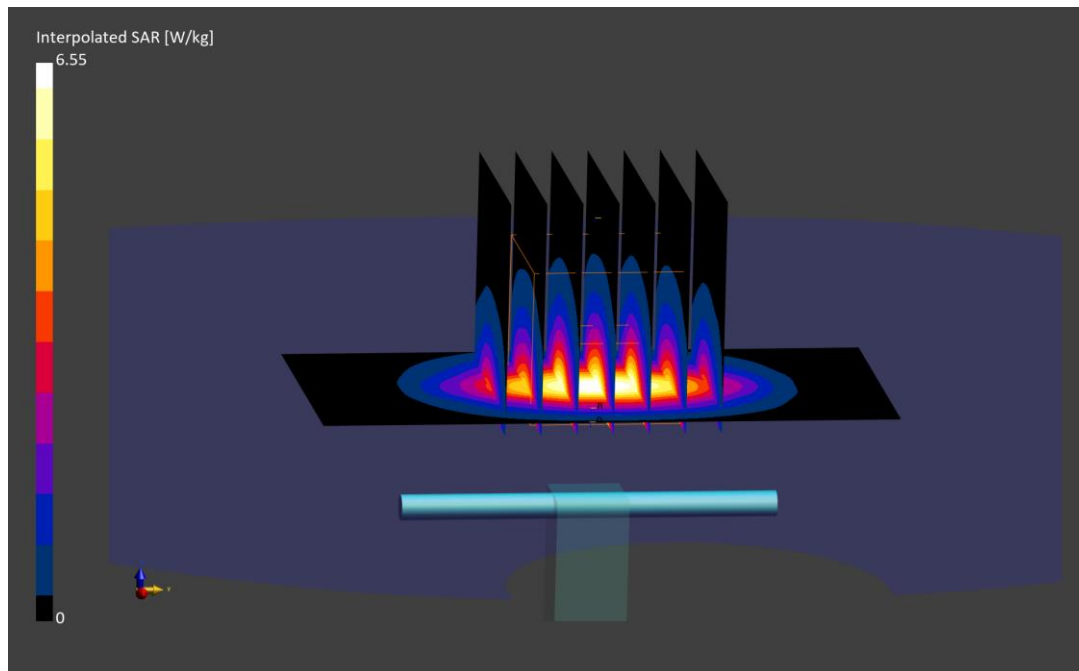

ELEMENT

DUT: Dipole 5250.0 MHz; Type: D5GHzV2 - SN1163

Communication System: UID: 0, CW; Frequency: 5250.0 MHz

Medium: 5200-5800 Head; Medium parameters used:

f = 5250.0 MHz; cond = 4.50 S/m; perm = 35.2; density = 1000 kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 07/24/2024; Ambient Temp: 21.5°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN3746; ConvF:(5.12,5.12,5.12); Calibrated: 2023-10-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1237; Calibrated: 2023-10-18

Phantom: Twin-SAM V8.0; Serial: 2027

Measurement SW: DASY Module SAR V16.2.4.2524

5250.0 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: dx=4.0 mm, dy=4.0 mm, dz=1.4 mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 14.1 W/kg

SAR(1 g) = 3.68 W/kg; SAR(10 g) = 1.05 W/kg

Deviation (1 g) = -7.54%; Deviation (10 g) = -7.08%

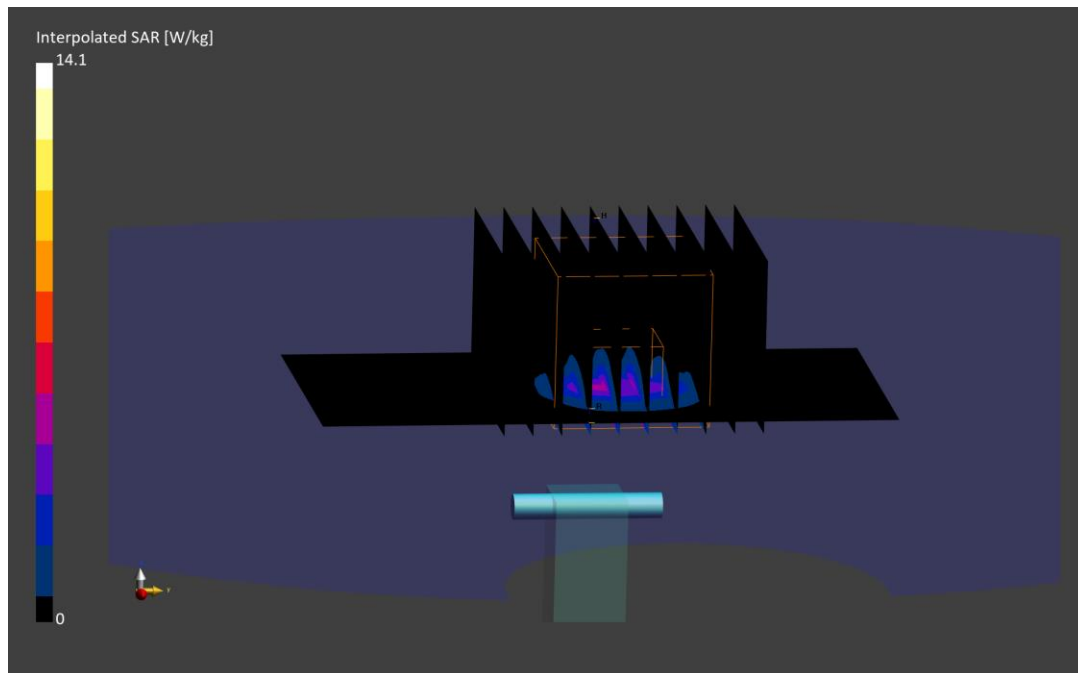

ELEMENT

DUT: Dipole 5250.0 MHz; Type: D5GHzV2 - SN1123

Communication System: UID: 0, CW; Frequency: 5250.0 MHz

Medium: 5200-5800 Head; Medium parameters used:

f = 5250.0 MHz; cond = 4.52 S/m; perm = 36.5; density = 1000 kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 07/29/2024; Ambient Temp: 21.7°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN3746; ConvF:(5.12,5.12,5.12); Calibrated: 2023-10-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1237; Calibrated: 2023-10-18

Phantom: Twin-SAM V8.0; Serial: 2027

Measurement SW: DASY Module SAR V16.2.4.2524

5250.0 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: dx=4.0 mm, dy=4.0 mm, dz=1.4 mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 14.8 W/kg

SAR(1 g) = 3.85 W/kg; SAR(10 g) = 1.09 W/kg

Deviation (1 g) = -3.02%; Deviation (10 g) = -4.39%

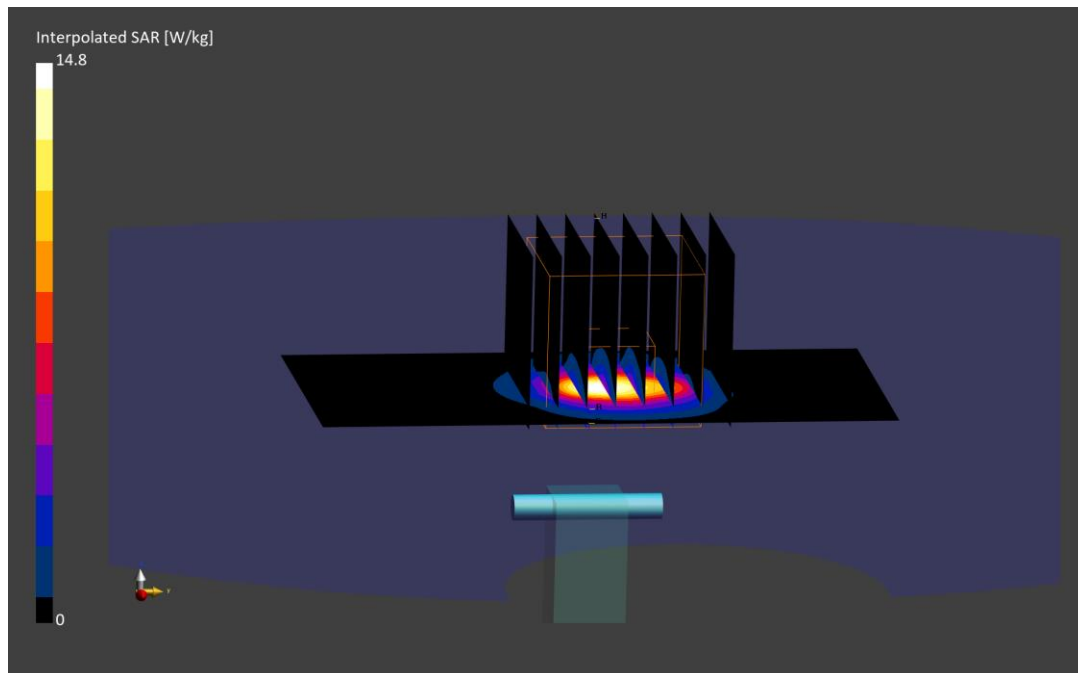

ELEMENT

DUT: Dipole 5600.0 MHz; Type: D5GHzV2 - SN1123

Communication System: UID: 0, CW; Frequency: 5600.0 MHz

Medium: 5200-5800 Head; Medium parameters used:

f = 5600.0 MHz; cond = 4.85 S/m; perm = 34.6; density = 1000 kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 07/24/2024; Ambient Temp: 21.5°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN3746; ConvF:(4.45,4.45,4.45); Calibrated: 2023-10-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1237; Calibrated: 2023-10-18

Phantom: Twin-SAM V8.0; Serial: 2027

Measurement SW: DASY Module SAR V16.2.4.2524

5600.0 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: dx=4.0 mm, dy=4.0 mm, dz=1.4 mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 16.8 W/kg

SAR(1 g) = 3.99 W/kg; SAR(10 g) = 1.11 W/kg

Deviation (1 g) = -3.27%; Deviation (10 g) = -5.93%

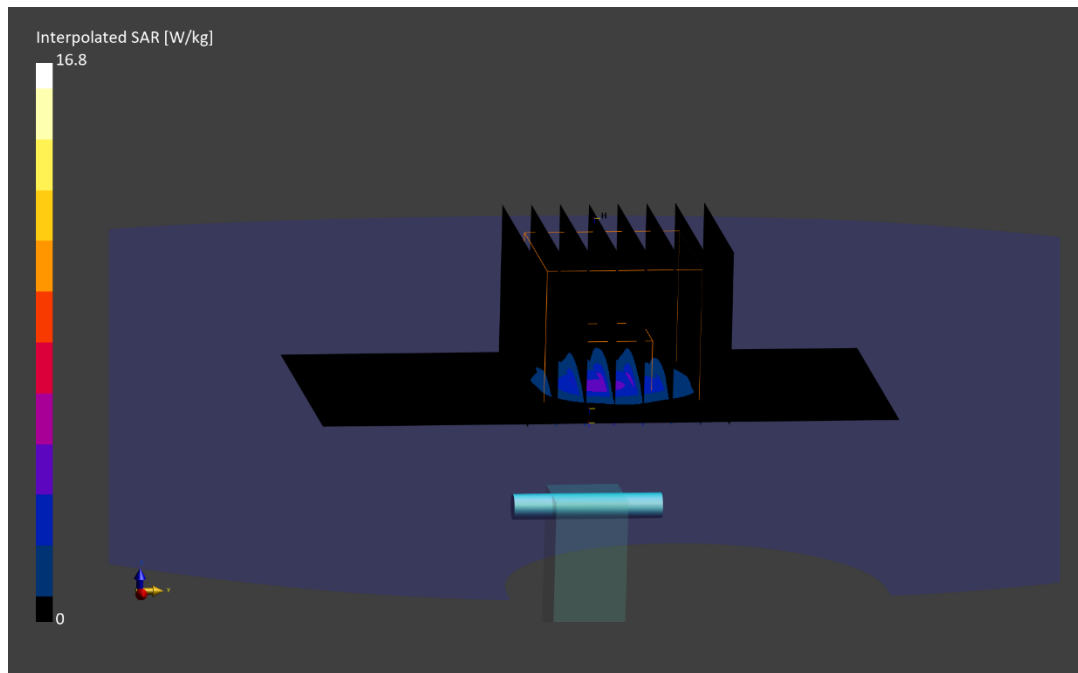

ELEMENT

DUT: Dipole 5600.0 MHz; Type: D5GHzV2 - SN1123

Communication System: UID: 0, CW; Frequency: 5600.0 MHz

Medium: 5200-5800 Head; Medium parameters used:

f = 5600.0 MHz; cond = 4.90 S/m; perm = 36.0; density = 1000 kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 07/29/2024; Ambient Temp: 21.7°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN3746; ConvF:(4.45,4.45,4.45); Calibrated: 2023-10-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1237; Calibrated: 2023-10-18

Phantom: Twin-SAM V8.0; Serial: 2027

Measurement SW: DASY Module SAR V16.2.4.2524

5600.0 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: dx=4.0 mm, dy=4.0 mm, dz=1.4 mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 16.7 W/kg

SAR(1 g) = 3.98 W/kg; SAR(10 g) = 1.11 W/kg

Deviation (1 g) = -3.52%; Deviation (10 g) = -5.93%

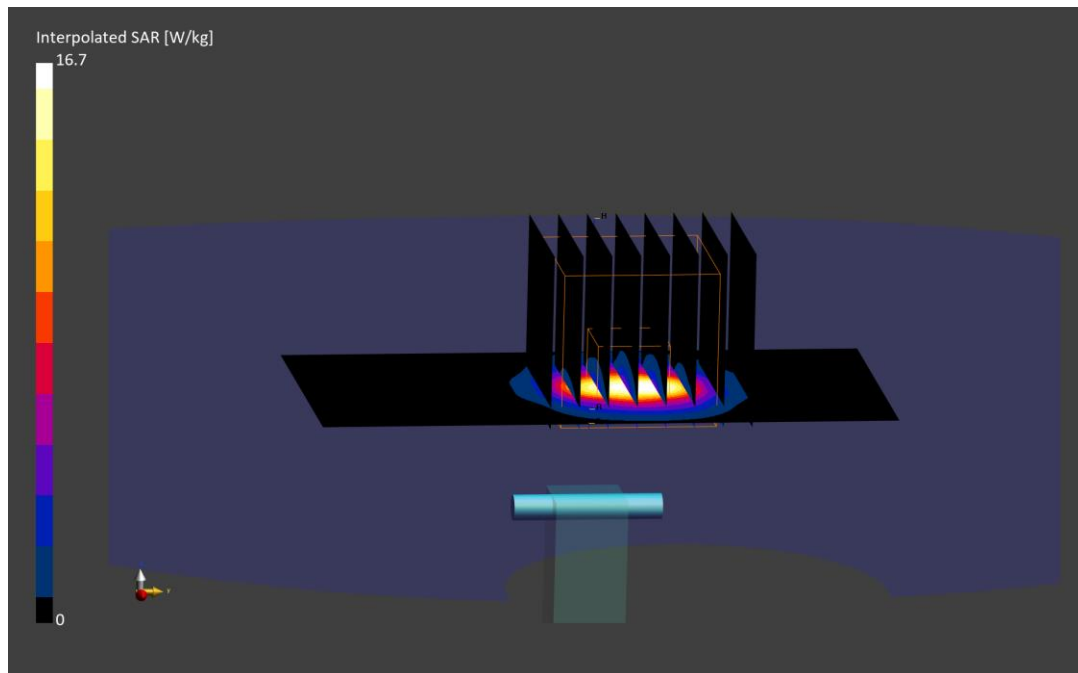

ELEMENT

DUT: Dipole 5750.0 MHz; Type: D5GHzV2 - SN1123

Communication System: UID: 0, CW; Frequency: 5750.0 MHz

Medium: 5200-5800 Head; Medium parameters used:

f = 5750.0 MHz; cond = 5.02 S/m; perm = 34.4; density = 1000 kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 07/24/2024; Ambient Temp: 21.5°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN3746; ConvF:(4.59,4.59,4.59); Calibrated: 2023-10-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1237; Calibrated: 2023-10-18

Phantom: Twin-SAM V8.0; Serial: 2027

Measurement SW: DASY Module SAR V16.2.4.2524

5750.0 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: dx=4.0 mm, dy=4.0 mm, dz=1.4 mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 16.2 W/kg

SAR(1 g) = 3.74 W/kg; SAR(10 g) = 1.05 W/kg

Deviation (1 g) = -5.79%; Deviation (10 g) = -7.08%

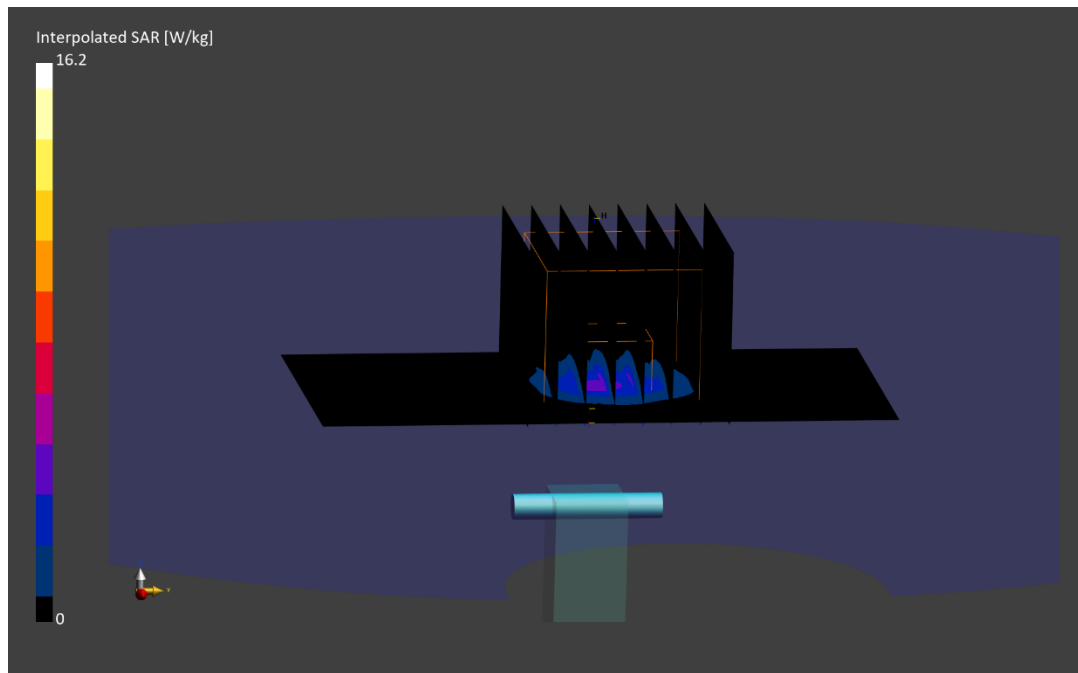

ELEMENT

DUT: Dipole 5750.0 MHz; Type: D5GHzV2 - SN1123

Communication System: UID: 0, CW; Frequency: 5750.0 MHz

Medium: 5200-5800 Head; Medium parameters used:

f = 5750.0 MHz; cond = 5.06 S/m; perm = 35.8; density = 1000 kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 07/29/2024; Ambient Temp: 21.7°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN3746; ConvF:(4.59,4.59,4.59); Calibrated: 2023-10-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1237; Calibrated: 2023-10-18

Phantom: Twin-SAM V8.0; Serial: 2027

Measurement SW: DASY Module SAR V16.2.4.2524

5750.0 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: dx=4.0 mm, dy=4.0 mm, dz=1.4 mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 16.2 W/kg

SAR(1 g) = 3.85 W/kg; SAR(10 g) = 1.10 W/kg

Deviation (1 g) = -3.02%; Deviation (10 g) = -2.65%

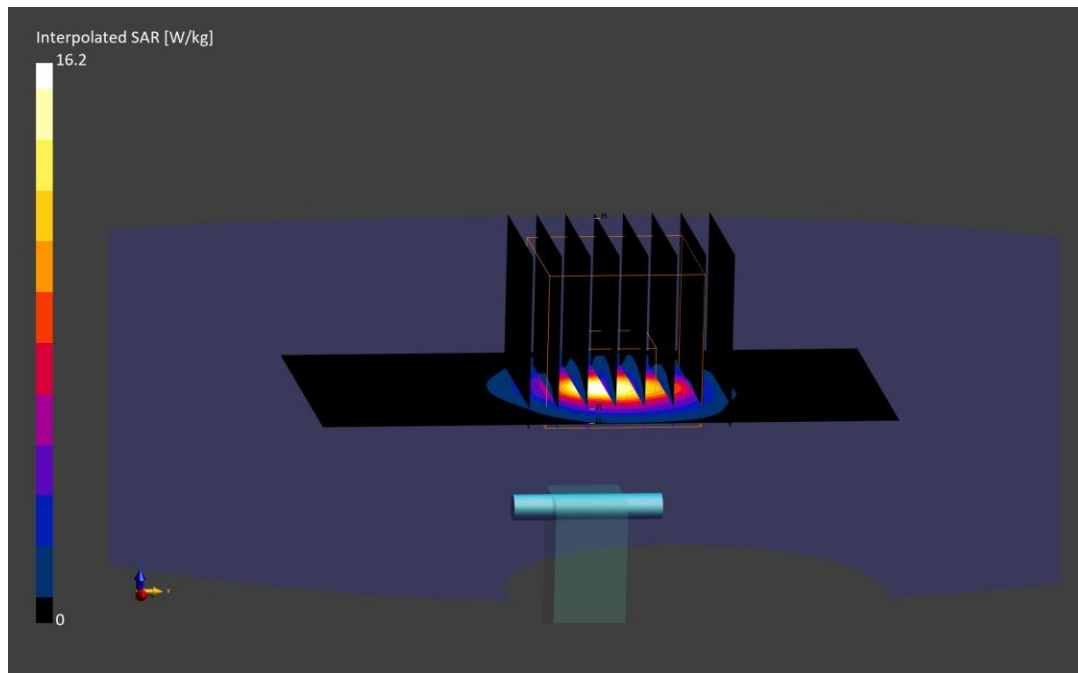

ELEMENT

DUT: Dipole 5850.0 MHz; Type: D5GHzV2 - SN1163

Communication System: UID: 0, CW; Frequency: 5850.0 MHz

Medium: 5200-5800 Head; Medium parameters used:

f = 5850.0 MHz; cond = 5.12 S/m; perm = 34.2; density = 1000 kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 07/24/2024; Ambient Temp: 21.5°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN3746; ConvF:(4.5,4.5,4.5); Calibrated: 2023-10-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1237; Calibrated: 2023-10-18

Phantom: Twin-SAM V8.0; Serial: 2027

Measurement SW: DASY Module SAR V16.2.4.2524

5850.0 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: dx=4.0 mm, dy=4.0 mm, dz=1.4 mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 15.9 W/kg

SAR(1 g) = 3.69 W/kg; SAR(10 g) = 1.03 W/kg

Deviation (1 g) = -6.58%; Deviation (10 g) = -7.21%

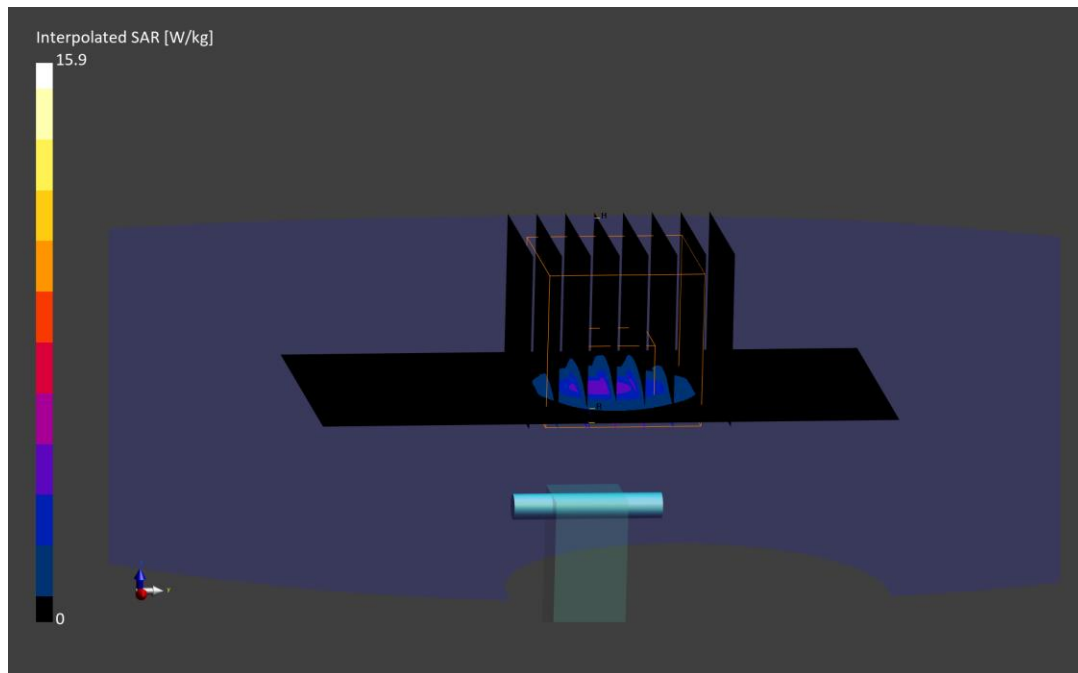

ELEMENT

DUT: Dipole 5850.0 MHz; Type: D5GHzV2 - SN1123

Communication System: UID: 0, CW; Frequency: 5850.0 MHz

Medium: 5200-5800 Head; Medium parameters used:

f = 5850.0 MHz; cond = 5.17 S/m; perm = 35.7; density = 1000 kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 07/29/2024; Ambient Temp: 21.7°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN3746; ConvF:(4.5,4.5,4.5); Calibrated: 2023-10-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1237; Calibrated: 2023-10-18

Phantom: Twin-SAM V8.0; Serial: 2027

Measurement SW: DASY Module SAR V16.2.4.2524

5850.0 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: dx=4.0 mm, dy=4.0 mm, dz=1.4 mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 16.7 W/kg

SAR(1 g) = 3.79 W/kg; SAR(10 g) = 1.06 W/kg

Deviation (1 g) = -5.37%; Deviation (10 g) = -7.02%

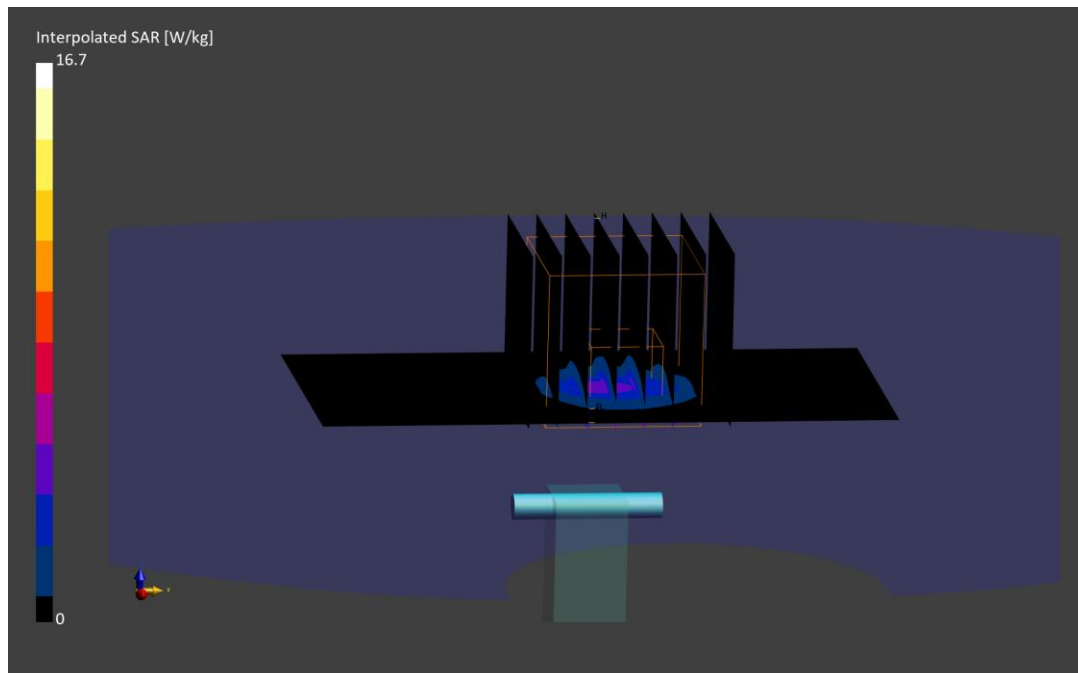

ELEMENT

DUT: Dipole 6500.000 MHz; Type: D6.5GHzV2 - SN1019

Communication System: UID: 0, CW; Frequency: 6500.0 MHz

Medium: 6000 Head; Medium parameters used:

f = 6500.0 MHz; cond = 5.91 S/m; perm = 34.9; density = 1000 kg/m³

Phantom Section: Flat; Space: 5 mm

Test Date: 08/14/2024; Ambient Temp: 21.2°C; Tissue Temp: 20.3°C

Probe: EX3DV4 - SN7420; ConvF:(5.21,5.12,5.28); Calibrated: 2023-10-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1333; Calibrated: 2023-10-18

Phantom: Twin-SAM V4.0; Serial: 1275

Measurement SW: DASY Module SAR V16.2.4.2524

6500.0 MHz System Verification at 14.0 dBm (25 mW)


Area Scan (51.0 x 85.0): Measurement grid: dx=8.5 mm, dy=8.5 mm

Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: dx=3.4 mm, dy=3.4 mm, dz=1.4 mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 44.6 W/kg

SAR(1 g) = 7.32 W/kg; SAR(10 g) = 1.34 W/kg; APD(4 cm²) = 32.8 W/m²

Deviation (1 g) = -0.07%; Deviation (10 g) = -0.92%; Deviation (APD) = -0.61%

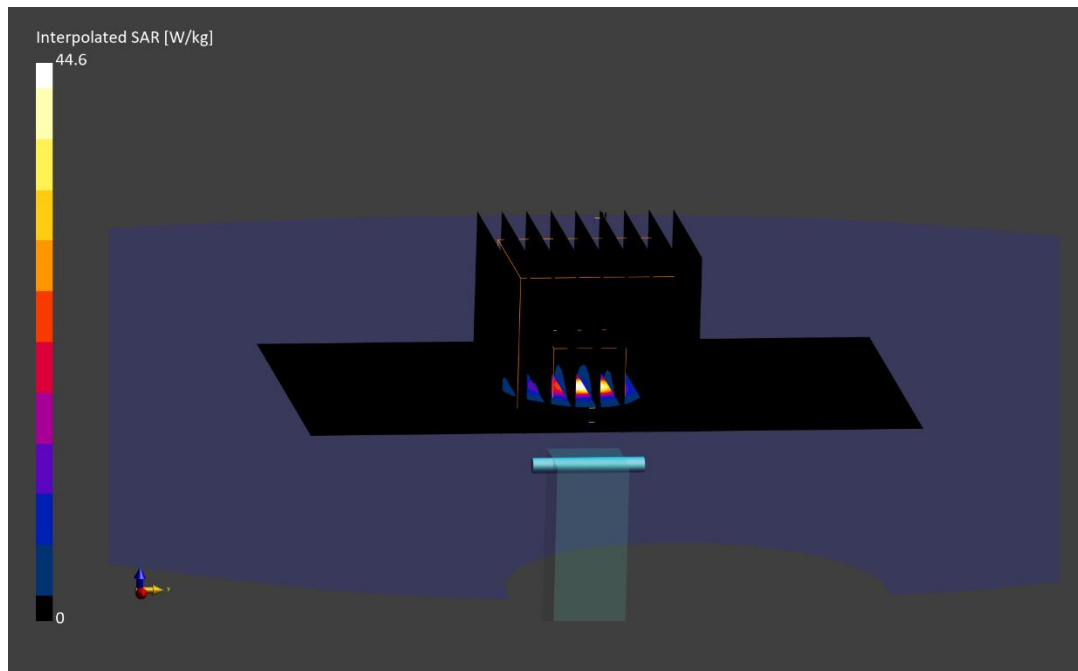

Date: 08/17/2024

Measurement Group

Device Under Test Properties

DUT	Serial Number
10 GHz Verification Source	1006

Exposure Conditions

Phantom Section	Position	Test Distance [mm]	Band	Frequency [MHz]
5G	FRONT	10.00	Validation band	10000.0

Hardware Setup

Probe, Calibration Date	DAE, Calibration Date
EUmmWV4 – SN9487, 04/08/2024	DAE4 – SN1582, 04/09/2024

Software Setup

Software	Software Version
cDASY6 Module mmWave	3.2.0.1840

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	10.0

Measurement Results

Scan Type	5G Scan
Avg. Area [cm²]	4.00
pS _{tot} avg [W/m²]	67.2
pS _n avg [W/m²]	67.1
E _{peak} [V/m]	168
Deviation [dB] pS _{tot}	0.57
Deviation [dB] pS _n	0.60

