


## Appendix D. Radiated Emission Co-location Report

## 1. Results of Radiated Emissions for Co-located


Temperature	26°C	Humidity	68%
Test Engineer	Serway Li	Configurations	2.4G + 5GHz Band 1 + 5GHz Band 4

Horizontal

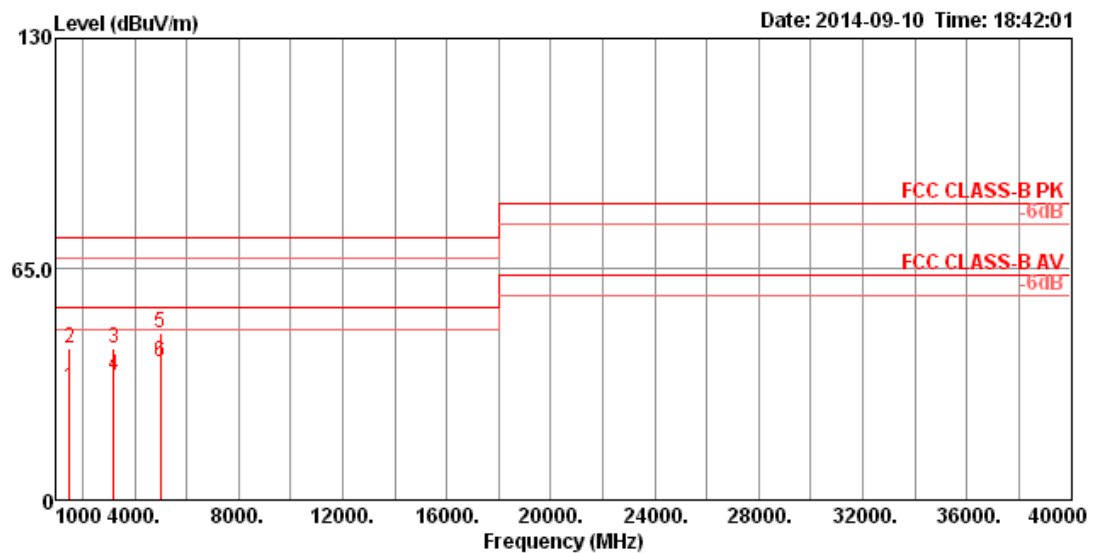

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	1500.01	31.61	54.00	-22.39	40.25	2.84	25.70	37.18	101	77	HORIZONTAL Average
2	1500.14	42.88	74.00	-31.12	51.52	2.84	25.70	37.18	101	77	HORIZONTAL Peak
3	3195.11	42.85	74.00	-31.15	44.54	4.35	29.91	35.95	104	331	HORIZONTAL Peak
4	3199.89	34.86	54.00	-19.14	36.55	4.35	29.91	35.95	104	331	HORIZONTAL Average
5	4999.73	47.10	74.00	-26.90	43.66	5.90	32.90	35.36	100	240	HORIZONTAL Peak
6	5000.04	38.67	54.00	-15.33	35.23	5.90	32.90	35.36	100	240	HORIZONTAL Average

## Vertical

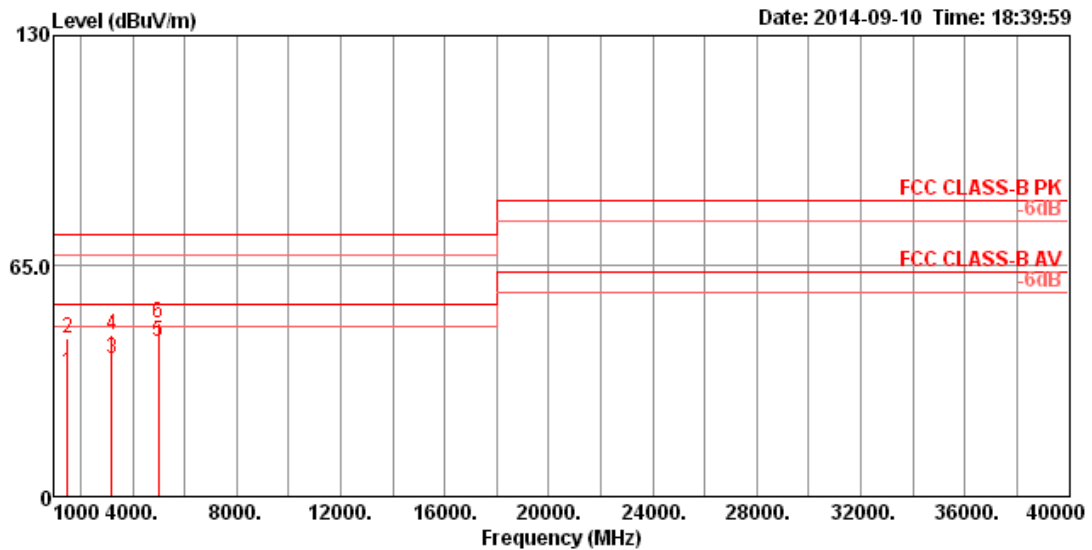

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	1500.12	35.09	54.00	-18.91	43.73	2.84	25.70	37.18	105	90 VERTICAL	Average
2	1500.14	44.70	74.00	-29.30	53.34	2.84	25.70	37.18	105	90 VERTICAL	Peak
3	3199.95	38.69	54.00	-15.31	40.38	4.35	29.91	35.95	100	356 VERTICAL	Average
4	3200.24	45.77	74.00	-28.23	47.46	4.35	29.91	35.95	100	356 VERTICAL	Peak
5	4999.95	43.84	54.00	-10.16	40.40	5.90	32.90	35.36	102	190 VERTICAL	Average
6	5000.05	48.82	74.00	-25.18	45.38	5.90	32.90	35.36	102	190 VERTICAL	Peak