

Page 1 of 78

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C AND RSS 247 REQUIREMENT

OF

FCC Applicant: Huawei Technologies Co., Ltd.

Administration Building, Headquarters of Huawei Technologies Co.,

Ltd., Bantian, Longgang District, Shenzhen, 518129, China

IC Applicant: Huawei Technologies Co., Ltd.

Administration Building, Headquarters of Huawei Technologies Co.,

Ltd., Bantian, Longgang District, Shenzhen, 518129, Chi-

na(Peoples Republic Of)

Product Name: Notebook Computer **Brand Name:** HUAWEI, HONOR

FCC Model No.: VLR-W09, VLR-W19, VLR-W29, VLR-WXXXXX(X Can be 0-9, A-Z,

a-z, blank or symbol "-")

IC Model No.: VLR-W29, VLR-W09, VLR-W19

Model Difference: For the marketing purpose, only different model designations on the

marking plate for different markets. No RF concern.

Report Number: T190315W02-RP3 FCC ID: QISVLR-WX9 IC: 6369A-VLRWX9 FCC Rule Part: §15.247, Cat: DSS

RSS-247 issue 2 Feb 2017 IC Rule Part:

Issue Date: Apr. 02, 2019

Date of Test: Mar. 15, 2019 ~ Mar. 27, 2019

Date of EUT Received: Mar. 15, 2019

Issued by Compliance Certification Services Inc.Wugu Lab.

No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891,

Taiwan. (R.O.C.) service@ccsrf.com

Note: The test Result was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were given in ANSI C63.10: 2013 and compliance standards.

The test results of this report relate only to the tested sample (EUT) identified in this report.

The test Report of full or partial shall not copy. Without written approval of Compliance Certification Services Inc. (Wugu Laboratory).

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices character the Solids within the limits of limits of limits of limits of limits and limits of limi Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page 2 of 78

Tested By:

Henry Chiang / Engineer

Approved By:

Kevin Tsai / Deputy Manager





Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此根告结果僅對測述之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page 3 of 78

Revision History

Report Number	Revision	Description	Effected Page	Issue Date	Revised By
T190315W02-RP3	Rev.00	Initial creation of docu- ment	All	Apr. 02, 2019	Violetta Tang

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/tems and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/tems.e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.







Table of Contents

1	GENERAL INFORMATION	5
2	SYSTEM TEST CONFIGURATION	7
3	SUMMARY OF TEST RESULTS	9
4	DESCRIPTION OF TEST MODES	10
5	MEASUREMENT UNCERTAINTY	12
6	CONDUCTED EMISSION TEST	13
7	PEAK OUTPUT POWER MEASUREMENT	17
8	20dB & 99% BANDWIDTH MEASUREMENT	20
9	CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT	26
10	RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT	31
11	FREQUENCY SEPARATION	64
12	NUMBER OF HOPPING FREQUENCY	66
13	TIME OF OCCUPANCY (DWELL TIME)	69
14	ANTENNA REQUIREMENT	78

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留例天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms=e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





GENERAL INFORMATION

1.1 Product description

Product Name:	Notebook Computer		
Brand Name:	HUAWEI,	HONOR	
FCC Model No.:		, VLR-W19, VLR-W29,VLR-WXXXXX(X Can be a-z, blank or symbol "-")	
IC Model No.:	VLR-W29	, VLR-W09, VLR-W19	
Model Difference:		arketing purpose, only different model designations orking plate for different markets. No RF concern.	
Product SW/HW version:	1809 (OS Build 17763.316) / C3A		
Radio SW/HW version:	Wi-Fi Component: 20 / Wi-Fi Component: 9560		
Test SW Version:	N/A		
RF power setting in TEST SW:	N/A		
		om Rechargeable Li-ion Battery or 5Vdc / 9Vdc / 5Vdc / 20V dc from AC/DC Adapter.	
Power Supply:	Battery:	Model No.: HB4593R1ECW, Supplier: HUAWEI	
	Adapter:	Model No.: HW-200325YYY (Y=0-9, A-Z or blank) Supplier: HUAWEI	

Bluetooth_BR+EDR:

Bluetooth Version:	V4.0 Dual Mode
Channel number:	79 channels
Modulation type:	GFSK + π/4DQPSK + 8DPSK
Transmit Power:	10.64 dBm
Frequency Range:	2.402GHz – 2.480GHz
Dwell Time:	<= 0.4s
Antenna Designation:	PIFA Antenna, Antenna Gain: 0.65dBi

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/tems and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/tems.e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page 6 of 78

1.2 Test Methodology of Applied Standards

Canada RSS-247 issue 2 Feb. 2017

RSS-Gen. issue 5 Apr. 2018

FCC Part 15, Subpart C §15.247

KDB 558074 D01 v05r01 DSS Meas. Guidance

ANSI C63.10:2013

Note: All test items have been performed and record as per the above standards.

1.3 Test Facility

Compliance Certification Services Inc. Wugu Lab. No.11, Wugong 6th Rd.,

Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.) (TAF code 1309)

FCC Designation number: TW1309 Canada Registration number: 2324G

1.4 Special Accessories

There is no special accessory used while test was conducted.

1.5 Equipment Modifications

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices character the Solids within the limits of limits of limits of limits of limits and limits of limi Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page 7 of 78

SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3 Test Procedure

2.3.1 **Conducted Emissions**

The EUT is a placed on a table which is 0.8 m above ground plane. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz. The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50uH/50 ohm of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 Conducted Test (RF)

The active antenna port of the unlicensed wireless device is connected to the spectrum analyzer with attenuator to protect the instrumentation. If a second antenna port is available, it is tested at one operating frequency, with other port(s) appropriately terminated, to verify it has similar output characteristics as the fully tested port.

Radiated Emissions 2.3.3

The EUT is a placed on a turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Document at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page 8 of 78



2.5 Configuration of Tested System

Fig. 2-1 Radiated & Conducted Emission Configuration



Fig.2-2 AC power line Configuration





Table 2-1 Equipment Used in Tested System

Iter	n Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1.	Bluetooth Test Software	N/A	N/A	N/A	N/A	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



SUMMARY OF TEST RESULTS

FCC Rules	IC Rules	Description Of Test	Result
§15.207(a)	RSS-Gen §8.8	AC Power Line Conducted Emission	Compliant
§15.247(b)(1)	RSS-247 §5.4 (2)	Peak Output Power	Compliant
§15.247(a)(1)	RSS-247 §5.1 (1) RSS-Gen §6.7	20dB & 99% Bandwidth	Compliant
§15.247(d)	RSS-247 §5.5	Conducted Band Edge and Spurious Emission	Compliant
§15.247(d)	RSS-247 §5.5 RSS-Gen §8.9 RSS-Gen §8.10	Radiated Band Edge and Spurious Emission	Compliant
§15.247(a)(1)	RSS-247 §5.1 (2)	Frequency Separation	Compliant
§15.247(a)(1)(iii)	RSS-247 §5.1 (4)	Number of hopping frequency	Compliant
§15.247(a)(1)(iii)	RSS-247 §5.1 (4)	Time of Occupancy	Compliant
§15.203 §15.247(b)	RSS- Gen §6.8	Antenna Requirement	Compliant

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此根告结果僅對測述之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page 10 of 78

DESCRIPTION OF TEST MODES

4.1 Operated in 2400 ~ 2483.5MHz Band

79 channels are provided for Bluetooth

ITEM	FREQUENCY	ITEM	FREQUENCY	ITEM	FREQUENCY	ITEM	FREQUENCY
1	2402 MHz	21	2422 MHz	41	2442 MHz	71	2462 MHz
2	2403 MHz	22	2423 MHz	42	2443 MHz	72	2463 MHz
3	2404 MHz	23	2424 MHz	43	2444 MHz	73	2464 MHz
4	2405 MHz	24	2425 MHz	44	2445 MHz	74	2465 MHz
5	2406 MHz	25	2426 MHz	45	2446 MHz	75	2466 MHz
6	2407 MHz	26	2427 MHz	46	2447 MHz	76	2467 MHz
7	2408 MHz	27	2428 MHz	47	2448 MHz	77	2468 MHz
8	2409 MHz	28	2429 MHz	48	2449 MHz	78	2469 MHz
9	2410 MHz	29	2430 MHz	49	2450 MHz	79	2470 MHz
10	2411 MHz	30	2431 MHz	50	2451 MHz	70	2471 MHz
11	2412 MHz	31	2432 MHz	51	2452 MHz	71	2472 MHz
12	2413 MHz	32	2433 MHz	52	2453 MHz	72	2473 MHz
13	2414 MHz	33	2434 MHz	53	2454 MHz	73	2474 MHz
14	2415 MHz	34	2435 MHz	54	2455 MHz	74	2475 MHz
15	2416 MHz	35	2436 MHz	55	2456 MHz	75	2476 MHz
16	2417 MHz	36	2437 MHz	56	2457 MHz	76	2477 MHz
17	2418 MHz	37	2438 MHz	57	2458 MHz	77	2478 MHz
18	2419 MHz	38	2439 MHz	58	2459 MHz	78	2479 MHz
19	2420 MHz	39	2440 MHz	59	2460 MHz	79	2480 MHz
20	2421 MHz	40	2441 MHz	60	2461 MHz		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/tems and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/tems.e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page 11 of 78

4.2 The Worst Test Modes and Channel Details

- The EUT has been tested under operating condition.
- Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.
- Investigation has been done on all the possible configurations for searching the worst case.

AC POWER LINE CONDUCTED EMISSION TEST:

Test Condition	AC Power line conducted emission for line and neutral	
Worst Case	Operation in normal mode	

RADIATED EMISSION TEST:

RADIATED EMISSION TEST (BELOW 1 GHz)						
MODE	AVAILABLE FREQUENCY (MHz)	TESTED FREQUENCY (MHz)	MODULATION	PACKET TYPE		
Bluetooth	2402 to 2480	2402, 2441, 2480	GFSK	DH5		
RADIATED EMISSION TEST (ABOVE 1 GHz)						
Bluetooth	2402 to 2480	2402, 2441, 2480	GFSK	DH5		

Note:


The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for Bluetooth BR+EDR Transmitter for channel Low, Mid and High, the worst case H position was reported.

ANTENNA PORT CONDUCTED MEASUREMENT:

CONDUCTED TEST						
		Peak Output Power,	20dB Band Width			
MODE	AVAILABLE FREQUENCY (MHz)	TESTED FREQUENCY (MHz)	MODULATION	PACKET TYPE		
Bluetooth	2402 to 2480	2402, 2441, 2480	GFSK, π/4-DQPSK, 8-DPSK	DH5		
	Band Edge					
Bluetooth	2402 to 2480	2402, 2441, 2480	GFSK	DH5		
		Frequency S	Separation			
Bluetooth 2402 to 2480 2402, 2441, 2480 GFSK		DH5				
	Number of hopping frequency					
Bluetooth	Bluetooth 2402 to 2480 2402, 2441, 2480 GFSK DH5					
Time of Occupancy (Dwell time)						
Bluetooth 2402 to 2480 2402, 2441, 2480 GFSK, π/4-DQPSK, 8-DPSK DH1/DH3/DH5						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices character the Solids within the limits of limits of limits of limits of limits and limits of limi Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page 12 of 78



MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	+/- 1.2575 dB
Peak Output Power	+/- 1.924 dB
20dB Bandwidth	+/- 147.256 Hz
100 kHz Bandwidth of Frequency Band Edges	+/- 1.924 dB
Frequency Separation	+/- 147.256 Hz
Number of hopping frequency	+/- 147.256 Hz
Time of Occupancy	+/- 147.256 Hz
3M Semi Anechoic Chamber / 30M~200M	+/- 4.12 dB
3M Semi Anechoic Chamber / 200M~1000M	+/- 4.68 dB
3M Semi Anechoic Chamber / 1G~8G	+/- 5.18 dB
3M Semi Anechoic Chamber / 8G~18G	+/- 5.47 dB
3M Semi Anechoic Chamber / 18G~26G	+/- 3.81 dB
3M Semi Anechoic Chamber / 26G~40G	+/- 3.87 dB

Note:

- 1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2. ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report.
- 3. The conformity assessment statement in this report is based solely on the test results, measurement uncertainty is excluded.



CONDUCTED EMISSION TEST

6.1 Standard Applicable

Frequency within 150 kHz to 30MHz shall not exceed the limit table as below.

Frequency range	Limits dB(uV)			
MHz	Quasi-peak	Average		
0.15 to 0.50	66 to 56	56 to 46		
0.50 to 5	56	46		
5 to 30	60	50		

Note

6.2 Measurement Equipment Used

	Conducted Emission Test Site							
EQUIPMENT TYPE	MFR	MODEL	SERIAL	LAST	CAL DUE.			
ITPE		NUMBER	NUMBER	CAL.				
EXA Signal Ana- lyzer	KEYSIGHT	N9010B	MY55460167	08/09/2018	08/08/2019			
CABLE	EMCI	CFD300-NL	CERF	06/29/2018	06/28/2019			
EMI Test Receiver	R&S	ESCI	100064	07/24/2018	07/23/2019			
LISN	SCHWARZB ECK	NSLK 8127	8127-541	01/31/2019	01/30/2020			
Software		EZ-EMC((CCS-3A1-CE)					

6.3 EUT Setup

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI 63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices the ways stated the states with in this case report report in earlier only to the sample (s) let estate and states the state and states report report in earlier only in the sample (s) are retained to 19 or days only. Per part of the property of the states of the property of the states of the property of the states of the property of the pr Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


^{1.} The lower limit shall apply at the transition frequencies

^{2.} The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

Page 14 of 78



6.4 Test SET-UP (Block Diagram of Configuration)

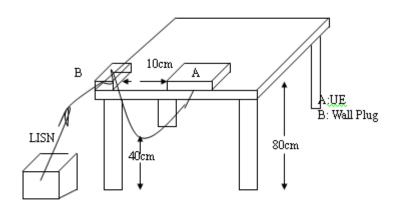

6.5 Measurement Procedure

- 1. The EUT was placed on a table which is 0.8m above ground plan.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.


6.6 Measurement Result

Note: Refer to next page for measurement data and plots.

Note2: The * reveals the worst-case results that closet to the limit.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices character the Solids within the limits of limits of limits of limits of limits and limits of limi Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



26(°C)/62%

Temp.(°C)/Hum.(%):




L1

Line:

AC POWER LINE CONDUCTED EMISSION TEST DATA

Description: Operation Date: 2019/3/26


Test Voltage: AC 120V/60Hz Test By: Henry

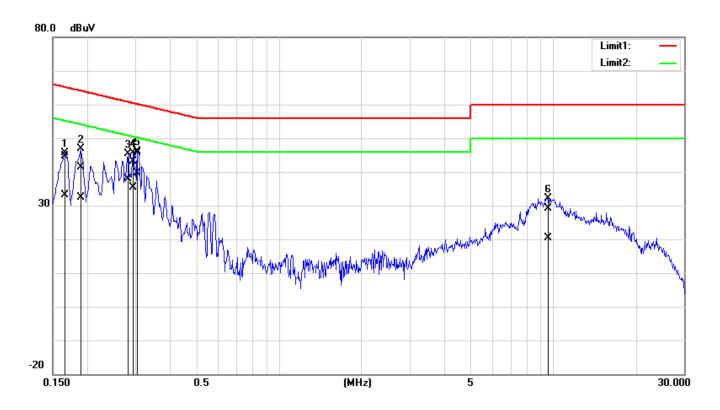

No.	Frequency	QuasiPeak	Average	Correction	QuasiPeak	Average	QuasiPeak	Average	QuasiPeak	Average	Remark
		reading	reading	factor	result	result	limit	limit	margin	margin	
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.1660	44.57	33.08	0.16	44.73	33.24	65.15	55.16	-20.42	-21.92	Pass
2	0.1900	41.23	32.18	0.15	41.38	32.33	64.03	54.04	-22.65	-21.71	Pass
3	0.2819	45.35	37.73	0.15	45.50	37.88	60.76	50.76	-15.26	-12.88	Pass
4	0.2940	43.05	35.15	0.15	43.20	35.30	60.41	50.41	-17.21	-15.11	Pass
5*	0.3060	45.39	39.53	0.16	45.55	39.69	60.08	50.08	-14.53	-10.39	Pass
6	9.5860	28.63	19.93	0.45	29.08	20.38	60.00	50.00	-30.92	-29.62	Pass

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此根告结果僅對測述之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.






Description: Operation Date: 2019/3/26

Temp.(°C)/Hum.(%): **26(°C)/62%** Line: Ν

Test Voltage: AC 120V/60Hz Test By: Henry

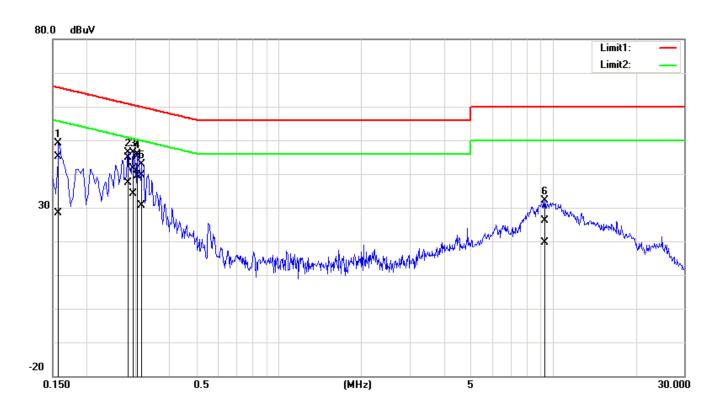

No.	Frequency	QuasiPeak reading	Average reading	Correction factor	QuasiPeak result	Average result	QuasiPeak limit	Average limit	QuasiPeak margin	Average margin	Remark
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.1580	45.08	28.36	0.10	45.18	28.46	65.56	55.57	-20.38	-27.11	Pass
2	0.2819	44.85	37.24	0.10	44.95	37.34	60.76	50.76	-15.81	-13.42	Pass
3	0.2940	41.56	34.12	0.10	41.66	34.22	60.41	50.41	-18.75	-16.19	Pass
4*	0.3060	45.10	39.26	0.11	45.21	39.37	60.08	50.08	-14.87	-10.71	Pass
5	0.3180	39.41	30.46	0.11	39.52	30.57	59.76	49.76	-20.24	-19.19	Pass
6	9.3220	25.86	19.22	0.36	26.22	19.58	60.00	50.00	-33.78	-30.42	Pass

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此根告结果僅對測述之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page 17 of 78



PEAK OUTPUT POWER MEASUREMENT


7.1 Standard Applicable

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, The Limit: 1Watt. For all other frequency hopping systems in the 2400 -2483.5MHz band: The Limit: 0.125 Watts. The power limit for 1Mbps is 1watt, and 2Mbps, 3Mbps and AFH mode are 0.125 watts and the e.i.r.p. shall not exceed 0.5 W if the hop set uses less than 75 hopping channels.

7.2 Measurement Equipment Used

	Conducted Emission Test Site								
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.				
TYPE		NUMBER	NUMBER	CAL.					
Power Meter	Anritsu	ML2496A	1326001	08/03/2018	08/02/2019				
Power Sensor	Anritsu	MA2411B	1315048	08/03/2018	08/02/2019				
Power Sensor	Anritsu	MA2411B	1315049	08/03/2018	08/02/2019				
Attenuator	Marvelous	WATT-218FS-1 0	RF245	02/26/2019	02/25/2020				

7.3 Test Set-up:




7.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013. Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (Max Hold, Detector = Peak, RBW >= 20dB bandwidth)
- 4. Record the max. reading.
- 5. Repeat above procedures until all default test channel is completed.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices character the Solids within the limits of limits of limits of limits of limits and limits of limi Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





7.5 Measurement Result

1M BR mode (Peak):

1M BR mode (Average):

СН	Freq. (MHz)	Peak Output Power (dBm)	Output Power (mW)	Limit (mW)
0	2402	9.84	9.638	1000
39	2441	10.29	10.691	1000
78	2480	10.64	11.588	1000

	Thi Bit mode (/tverage).								
СН	Freq. (MHz)	Max. Output include tune up tolerance Power (dBm)	Output Power (mW)	Limit (mW)					
0	2402	9.76	9.471	1000					
39	2441	10.17	10.408	1000					
78	2480	10.57	11.413	1000					

2M EDR mode (Peak):

2M EDR mode (Average):

СН	Freq. (MHz)	Peak Output Power (dBm)	Output Power (mW)	Limit (mW)
0	2402	8.86	7.691	125
39	2441	8.98	7.907	125
78	2480	9.12	8.166	125

СН	Freq. (MHz)	Max. Avg.Output include tune up	Output Power (mW)	Limit (mW)
		tolerance		
0	2402	6.91	4.913	125
39	2441	6.94	4.947	125
78	2480	6.99	5.005	125

3M EDR mode (Peak):

3M EDR mode (Average):

СН	Freq. (MHz)	Peak Output Power (dBm)	Output Power (mW)	Limit (mW)
0	2402	8.81	7.603	125
39	2441	9.06	8.054	125
78	2480	9.20	8.318	125

СН	Freq. (MHz)	Max. Avg.Output include tune up tolerance	Output Power (mW)	Limit (mW)
0	2402	6.69	4.671	125
39	2441	6.85	4.846	125
78	2480	6.90	4.902	125

NOTE: cable loss as 10.8dB that offsets in the : *Note: Max. Output include tune up tolerance Power measured by using average detector.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此根告结果僅對測試之樣品負責,同時此樣品僅保留仍天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and to does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



1M BR mode EIRP

Channel	Frequency (MHz)	Max. Output include tune up tolerance Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	Limit (mW)
0	2402	9.76	0.65	11.000	4000
39	2441	10.17	0.65	12.089	4000
78	2480	10.57	0.65	13.255	4000

2M EDR mode EIRP

Channel	Frequency (MHz)	Max. Avg.Output include tune up tolerance	Antenna Gain (dBi)	EIRP (mW)	Limit (mW)
0	2402	6.91	0.65	5.707	4000
39	2441	6.94	0.65	5.746	4000
78	2480	6.99	0.65	5.813	4000


3M EDR mode EIRP

Channel	Frequency (MHz)	Max. Avg.Output include tune up tolerance	Antenna Gain (dBi)	EIRP (mW)	Limit (mW)
0	2402	6.69	0.65	5.425	4000
39	2441	6.85	0.65	5.628	4000
78	2480	6.90	0.65	5.694	4000

* Note: EIRP = Average Power + Gain

NOTE: cable loss as 1.1dB that offsets in the spectrum

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留例天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms=e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





20dB & 99% BANDWIDTH MEASUREMENT


8.1 Standard Applicable

For frequency hopping systems operating in the 2400MHz-2483.5 MHz no limit for 20dB band-

8.2 Measurement Equipment Used

Conducted Emission Test Site						
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.	
IIPE		NUMBER				
Spectrum Analyzer	Agilent	N9010A	MY5340025 6	11/21/2018	11/20/2019	
DC Block	PASTERNACK	PE8210	RF29	02/26/2019	02/25/2020	
Attenuator	Marvelous	MVE2213-10	RF80	02/26/2019	02/25/2020	

8.3 Test Set-up



8.4 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013. Measurement Guidelines.
- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set the spectrum analyzer as RBW=10 kHz (1 % of 20 dB Bandwidth.), VBW = 30 kHz, Span= 3MHz, Sweep=auto, Detector = Peak, and Max hold for 20dB Bandwidth test.
- 5. Mark the peak frequency and -20dB (upper and lower) frequency
- 6. Turn on the 99% bandwidth function, max reading.
- 7. Repeat above procedures until all test default channel is completed

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices character the Solids within the limits of limits of limits of limits of limits and limits of limi Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page 21 of 78



8.5 Measurement Result

GFSK

GI SK				
	20 dB	2/3		
СН	BW	BW		
	(MHz)	(MHz)		
Low	0.922	0.61		
Mid	0.923	0.62		
High	0.924	0.62		

m/4-DOPSK

II/4-DQP3K					
	20 dB	2/3			
СН	BW	BW			
	(MHz)	(MHz)			
Low	1.402	0.93			
Mid	1.404	0.94			
High	1.428	0.95			

8-DPSK

	20 dB	2/3 BW	
СН	BW		
	(MHz)	(MHz)	
Low	1.409	0.94	
Mid	1.412	0.94	
High	1.417	0.94	

GFSK

0: 0::	
	99%
СН	Bandwidth
	(MHz)
Low	0.8519
Mid	0.854
High	0.8545


π/4-DQPSK

99%
Bandwidth
(MHz)
1.3400
1.3430
1.3448


8-DPSK

	99%
СН	Bandwidth
	(MHz)
Low	1.3456
Mid	1.3469
High	1.3472


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/tems and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/tems.e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




BW CH-Low (GFSK mode)

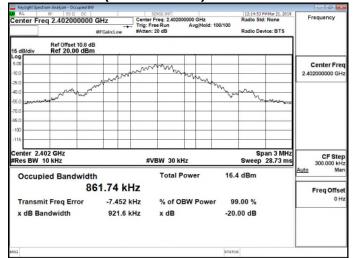


CH-Mid (GFSK mode)




CH-High (GFSK mode)




CH-Low (π/4-DQPSK mode)



CH-Mid (π/4-DQPSK mode)

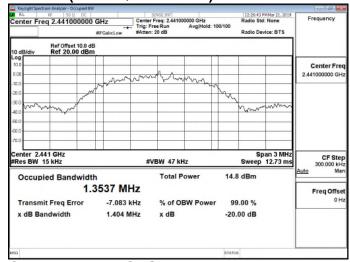

CH-High (π/4-DQPSK mode)




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Page 23 of 78


CH-Low (8-DPSK mode)



CH-Mid (8-DPSK mode)



CH-High (8-DPSK mode)

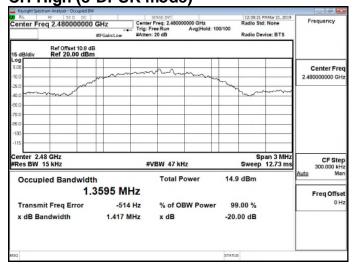

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




99% Bandwidth BW CH-Low (GFSK mode)




CH-Mid (GFSK mode)

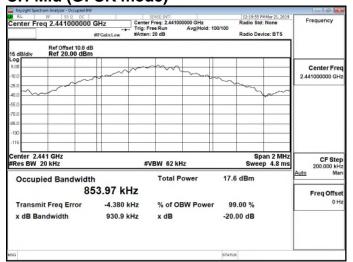


CH-High (GFSK mode)




CH-Low (π/4-DQPSK mode)



CH-Mid (π/4-DQPSK mode)

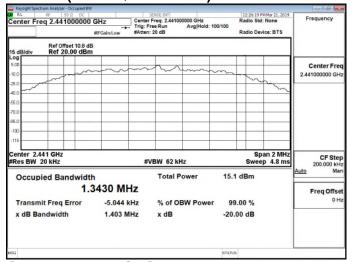

CH-High (π/4-DQPSK mode)




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Page 25 of 78


CH-Low (8-DPSK mode)



CH-Mid (8-DPSK mode)



CH-High (8-DPSK mode)

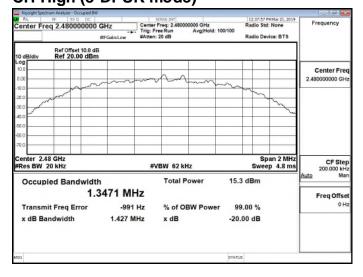

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms_and_conditions.htm and for electronic format ITHIS QUOLUMENTS ISSUED BY THE COMPANY SUDJECT TO ITS GENERAL CONDITIONS of Service printed overleaf, available on request or accessible at www.sgs.com/terms and Conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms.e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Page 26 of 78

CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT


9.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) & RSS-Gen §8.9 limit.

9.2 Measurement Equipment Used

Conducted Emission Test Site						
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.	
Spectrum Analyzer	Agilent	N9010A	MY5340025 6	11/21/2018	11/20/2019	
DC Block	PASTER- NACK	PE8210	RF29	02/26/2019	02/25/2020	
Attenuator	Marvelous	MVE2213-10	RF80	02/26/2019	02/25/2020	

9.3 Test SET-UP



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Document at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



9.4 Measurement Procedure

Conducted Band Edge:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013. Measurement Guidelines.
- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set center frequency of spectrum analyzer = operating frequency.
- 5. Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz, Sweep = auto
- 6. Mark Peak, 2.3999GHz and 2.4836GHz and record the max. level.
- 7. Repeat above procedures until all frequency measured were complete.

Conducted Spurious Emission:

- 1. To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows ANSI C63.10:2013. Measurement Guidelines.
- 3. Set RBW = 100 kHz & VBW = 300 kHz, Detector = Peak, Sweep = Auto
- 4. Allow trace to fully stabilize.
- 5. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- 6. Repeat above procedures until all default test channel measured were complete.

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where	<u> </u>	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

9.5 Measurement Result

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices the ways stated the states with in this case report report in earlier only to the sample (s) let estate and states the state and states report report in earlier only in the sample (s) are retained to 19 or days only. Per part of the property of the states of the property of the states of the property of the states of the property of the pr Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.







Hopping mode BR Band Edge CH-Low

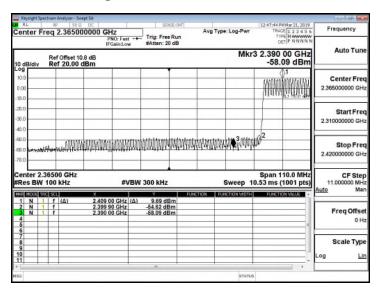


EDR Band Edge CH-Low

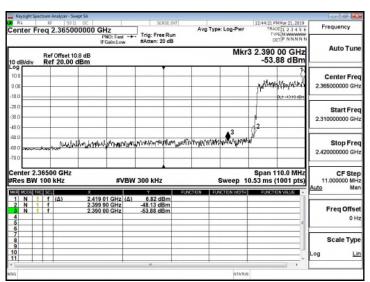

BR Band Edge CH-High

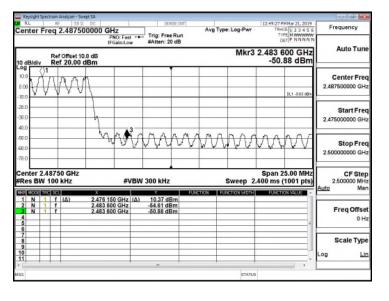

EDR Band Edge CH-High

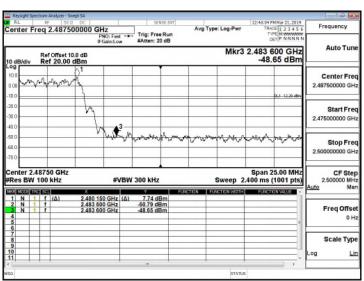


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and for electronic format this occurrient is assued by the Company subject to its General Conditions or Service printed overeies, available on request or accessible at www.sgs.com/tems.e-elocument.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.







Non-Hopping BR Band Edge CH-Low

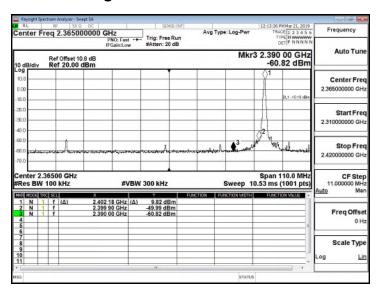


EDR Band Edge CH-Low

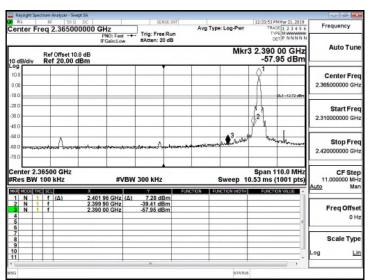

BR Band Edge CH-High

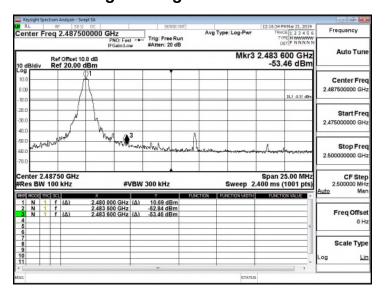

EDR Band Edge CH-High

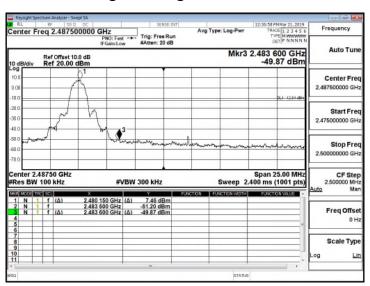


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and for electronic format this occurrient is assued by the Company subject to its General Conditions or Service printed overeies, available on request or accessible at www.sgs.com/tems.e-elocument.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Spurious Emission_GFSK_1M_DH5_2402MHz




Spurious Emission GFSK 1M DH5 2441MHz




Spurious Emission_GFSK_1M_DH5_2480MHz




Spurious Emission_8DPSK_3M_DH5_2402MHz



Spurious Emission 8DPSK 3M DH5 2441MHz




Spurious Emission 8DPSK 3M DH5 2480MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and for electronic format This documents is sisted by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and Conditions for Electronic Documents at www.sgs.com/terms.e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





10 RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT

Standard Applicable 10.1

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, must also comply with the §15.209 & RSS-Gen §8.10 Table 6 limit.

And according to §15.33(a) (1) & RSS-Gen §8.9 Table 4 & 5, for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level $(dB\mu V/m) = 20 \log Emission level (dB\mu V/m)$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Document at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page 32 of 78



10.2 Measurement Equipment Used


	966A Chamber						
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.		
Band Reject Filters	MICRO TRONICS	BRM 50702	120	02/26/2019	02/25/2020		
Bilog Antenna	Sunol Sciences	JB3	A030105	07/13/2018	07/12/2019		
Cable	HUBER SUHNER	SUCOFLEX 104PEA	25157	02/26/2019	02/25/2020		
Cable	HUBER SUHNER	SUCOFLEX 104PEA	20995	02/26/2019	02/25/2020		
Digital Thermo-Hygro Meter	WISEWIND	1206	D07	01/30/2019	01/29/2020		
double Ridged Guide Horn Antenna	ETC	MCTD 1209	DRH13M02003	08/20/2018	08/19/2019		
Loop Antenna	ETS.LINDGREN	6502	148045	10/08/2018	10/07/2019		
Pre-Amplifier	EMEC	EM330	060609	02/26/2019	02/25/2020		
Pre-Amplifier	HP	8449B	3008A00965	02/26/2019	02/25/2020		
PSA Series Spectrum Analyzer	Agilent	E4446A	MY46180323	05/31/2018	05/30/2019		
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R	N.C.R		
Controller	CCS	CC-C-1F	N/A	N.C.R	N.C.R		
Turn Table	CCS	CC-T-1F	N/A	N.C.R	N.C.R		
Software	e3 V6.11-20180413						

NOTE: N.C.R refers to Not Calibrated Required.




10.3 Test SET-UP


(A) Radiated Emission Test Set-UP Frequency Below 30MHz.

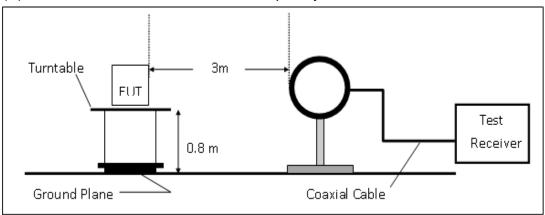

(B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

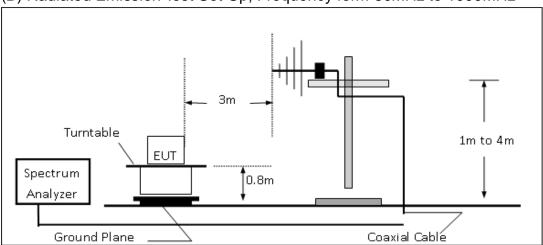


(C) Radiated Emission Test Set-UP Frequency Over 1 GHz

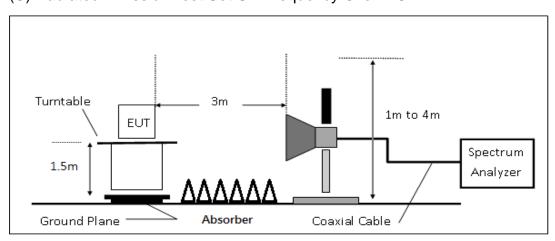

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此根告结果僅對測試之樣品負責,同時此樣品僅保留仍天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and to does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



10.4 Measurement Procedure

Radiated Emission

- 1. The testing follows ANSI C63.10:2013. Measurement Guidelines.
- 2. The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 0.8m for frequency> 1GHz above ground plan.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 5. Set the spectrum analyzer as RBW=120 kHz and VBW=300 kHz for Peak Detector (PK) and Quasi-peak (QP) at frequency below 1 GHz.
- 6. Set the spectrum analyzer as RBW=1 MHz, VBW=3 MHz for Peak Detector at frequency above 1 GHz.
- 7. Set the spectrum analyzer as RBW=1 MHz, VBW=10 Hz (Duty cycle > 98%) or VBW ≥ 1/T (Du-ty cycle < 98%) for Average Detector at frequency above 1 GHz.
- 8. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 9. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 10. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 11. Repeat above procedures until all frequency of the interest measured were complete.



Page 35 of 78

10.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)		
	RA = Reading Amplitude	AG = Amplifier Gain		
	AF = Antenna Factor			

The limit of the emission level is expressed in dBuV/m, which converts 20*log(uV/m)

Actual FS(dB μ V/m) = SPA. Reading level(dB μ V) + Factor(dB)

Factor(dB) = Antenna Factor(dBµV/m) + Cable Loss(dB) - Pre Amplifier Gain(dB)

10.6 Test Results of Radiated Spurious Emissions form 9 KHz to 30 MHz


The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) was not reported.

10.7 **Measurement Result**

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices character the Solids within the limits of limits of limits of limits of limits and limits of limi Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.








Radiated Band Edge Measurement Result: (Hopping Mode)

Operation Band :BT BR Hopping **Test Date** :2019-03-20

Fundamental Frequency :2402 MHz Temp./Humi. :23/66 :BE CH LOW **Operation Mode** Engineer :Jerry


EUT Pol. :H Plan Measurement Antenna Pol. :VERTICAL

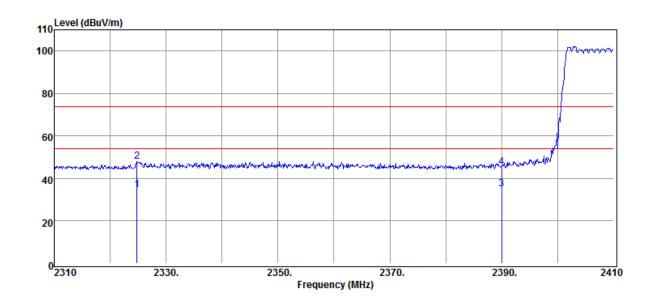

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBμV/m	dB	
2324.80	Average	37.76	-3.27	34.49	54.00	-19.51	
2324.80	Peak	51.17	-3.27	47.90	74.00	-26.10	
2390.00	Average	38.40	-3.33	35.07	54.00	-18.93	
2390.00	Peak	48.80	-3.33	45.47	74.00	-28.53	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此根告结果僅對測述之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.






:BT BR Hopping :2402 MHz :BE CH LOW ·H Plan

Test Date :2019-03-20 Temp./Humi. :23/66


Engineer :Jerry

Measurement Antenna Pol. :HORIZONTAL

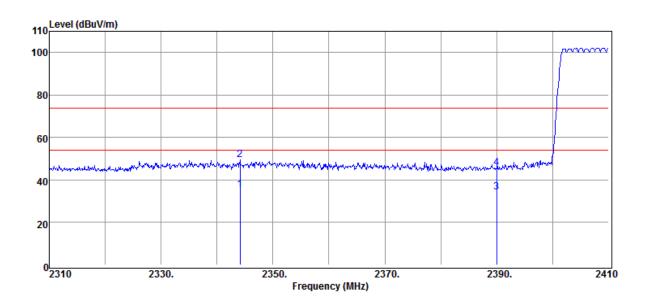

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2344.10	Average	38.77	-3.33	35.44	54.00	-18.56
2344.10	Peak	52.64	-3.33	49.31	74.00	-24.69
2390.00	Average	37.71	-3.33	34.38	54.00	-19.62
2390.00	Peak	48.96	-3.33	45.63	74.00	-28.37


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:BT BR Hopping :2480 MHz :BE CH HIGH ·H Plan

Test Date :2019-03-20 Temp./Humi. :23/66 Engineer :Jerry Measurement Antenna Pol. :VERTICAL

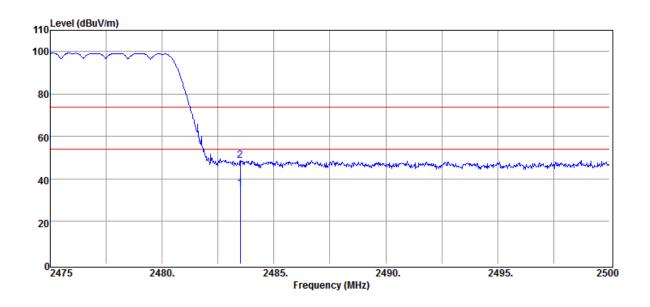

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
 MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dΒμV/m	dB
2483.50	Average	38.29	-2.72	35.57	54.00	-18.43
2483.50	Peak	51.29	-2.72	48.57	74.00	-25.43

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:BT BR Hopping :2480 MHz :BE CH HIGH ·H Plan


Test Date :2019-03-20 Temp./Humi. :23/66 Engineer :Jerry

Measurement Antenna Pol. :HORIZONTAL

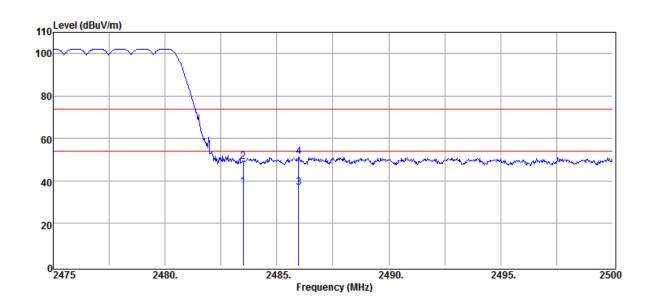

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2483.50	Average	40.20	-2.72	37.48	54.00	-16.52
2483.50	Peak	51.89	-2.72	49.17	74.00	-24.83
2485.98	Average	39.62	-2.71	36.91	54.00	-17.09
2485.98	Peak	53.92	-2.71	51.21	74.00	-22.79


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:BT EDR Hopping :2402 MHz :BE CH LOW ·H Plan

Test Date :2019-03-20 Temp./Humi. :23/66 Engineer :Jerry Measurement Antenna Pol. :VERTICAL

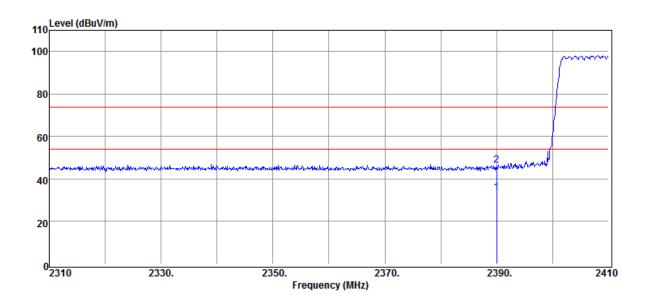

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dΒμV	dB	dΒμV/m	dBµV/m	dB
2390.00	Average	36.90	-3.33	33.57	54.00	-20.43
2390.00	Peak	49.82	-3.33	46.49	74.00	-27.51

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:BT EDR Hopping :2402 MHz :BE CH LOW ·H Plan

Test Date Temp./Humi. Engineer

:2019-03-20


:23/66 :Jerry

Measurement Antenna Pol. :HORIZONTAL

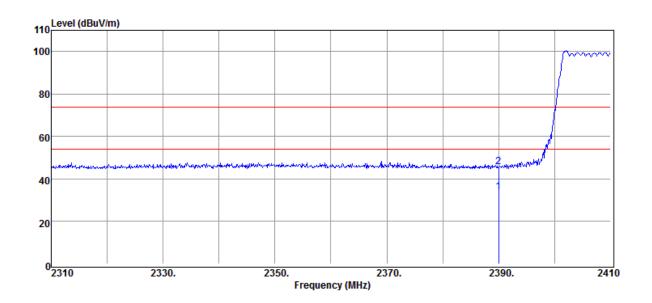

Freq	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2390.0	00 Average	37.25	-3.33	33.92	54.00	-20.08
2390.0	00 Peak	49.04	-3.33	45.71	74.00	-28.29


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:BT EDR Hopping :2480 MHz :BE CH HIGH ·H Plan

Test Date :2019-03-20 Temp./Humi. :23/66 Engineer :Jerry Measurement Antenna Pol. :VERTICAL

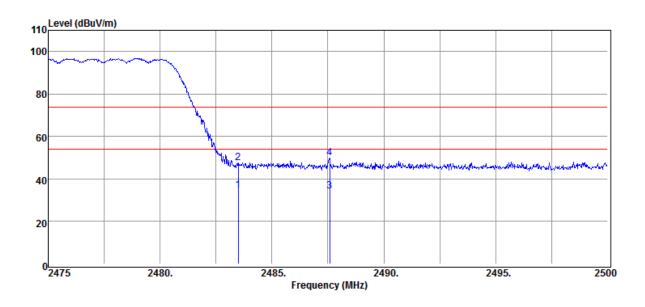

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	37.46	-2.72	34.74	54.00	-19.26
2483.50	Peak	50.20	-2.72	47.48	74.00	-26.52
2487.58	Average	36.94	-2.69	34.25	54.00	-19.75
2487.58	Peak	52.58	-2.69	49.89	74.00	-24.11


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:BT EDR Hopping :2480 MHz :BE CH HIGH ·H Plan

Test Date :2019-03-20 Temp./Humi. :23/66 Engineer :Jerry Measurement Antenna Pol. :HORIZONTAL

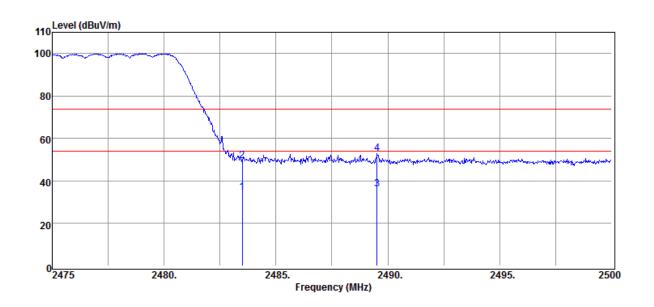

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
2483.50	Average	37.54	-2.72	34.82	54.00	-19.18
2483.50	Peak	52.08	-2.72	49.36	74.00	-24.64
2489.53	Average	38.85	-2.67	36.18	54.00	-17.82
2489.53	Peak	55.57	-2.67	52.90	74.00	-21.10

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






Radiated Emission – Band Edge (Non-Hopping Mode):

Operation Band :BT BR Test Date :2019-03-20


Fundamental Frequency :2402 MHz Temp./Humi. :23/66 :BE CH LOW **Operation Mode** Engineer :Jerry

EUT Pol. ·H Plan :VERTICAL Measurement Antenna Pol.

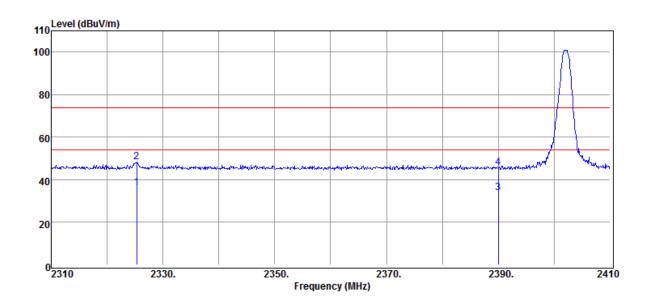

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2325.30	Average	39.59	-3.26	36.33	54.00	-17.67
2325.30	Peak	51.57	-3.26	48.31	74.00	-25.69
2390.00	Average	37.16	-3.33	33.83	54.00	-20.17
2390.00	Peak	48.99	-3.33	45.66	74.00	-28.34

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:BT BR :2402 MHz :BE CH LOW ·H Plan

Test Date :2019-03-20 Temp./Humi. :23/66


Engineer :Jerry

Measurement Antenna Pol. :HORIZONTAL

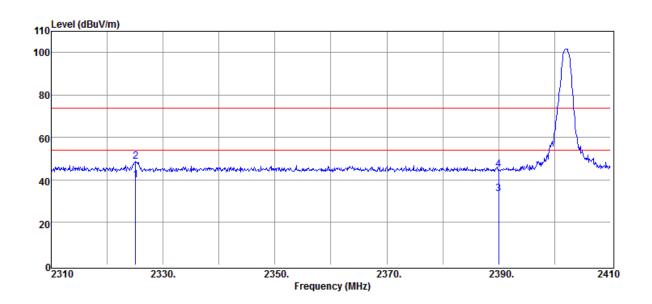

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dΒμV/m	dB
2325.10	Average	43.30	-3.27	40.03	54.00	-13.97
2325.10	Peak	51.96	-3.27	48.69	74.00	-25.31
2390.00	Average	36.76	-3.33	33.43	54.00	-20.57
2390.00	Peak	48.36	-3.33	45.03	74.00	-28.97


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:BT BR :2480 MHz :BE CH HIGH ·H Plan

Test Date :2019-03-20 Temp./Humi. :23/66 Engineer :Jerry Measurement Antenna Pol. :VERTICAL

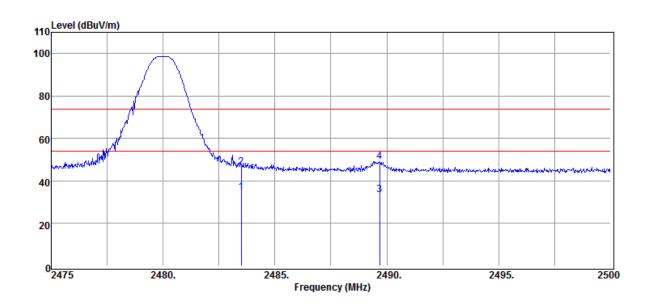

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2483.50	Average	37.31	-2.72	34.59	54.00	-19.41
2483.50	Peak	48.97	-2.72	46.25	74.00	-27.75
2489.68	Average	36.24	-2.67	33.57	54.00	-20.43
2489.68	Peak	51.94	-2.67	49.27	74.00	-24.73

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:BT BR :2480 MHz :BE CH HIGH ·H Plan


Test Date :2019-03-20 Temp./Humi. :23/66 Engineer :Jerry

Measurement Antenna Pol. :HORIZONTAL

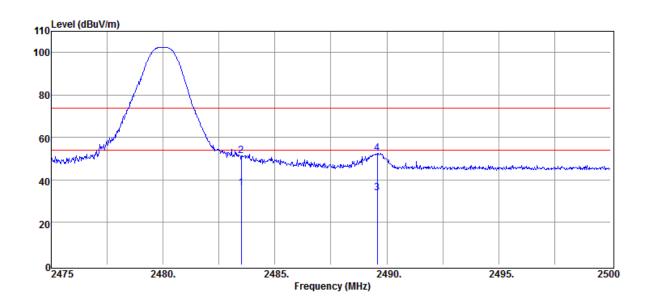

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	39.01	-2.72	36.29	54.00	-17.71
2483.50	Peak	54.22	-2.72	51.50	74.00	-22.50
2489.58	Average	36.51	-2.67	33.84	54.00	-20.16
2489.58	Peak	55.34	-2.67	52.67	74.00	-21.33


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:BT EDR :2402 MHz :BE CH LOW ·H Plan

Test Date :2019-03-20 Temp./Humi. :23/66 Engineer :Jerry Measurement Antenna Pol. :VERTICAL

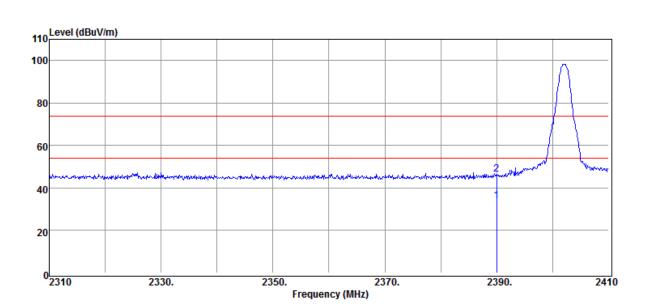

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
2390.00	Average	37.12	-3.33	33.79	54.00	-20.21
2390.00	Peak	49.70	-3.33	46.37	74.00	-27.63

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:BT EDR :2402 MHz :BE CH LOW ·H Plan


Test Date :2019-03-20 Temp./Humi. :23/66 Engineer :Jerry

Measurement Antenna Pol. :HORIZONTAL

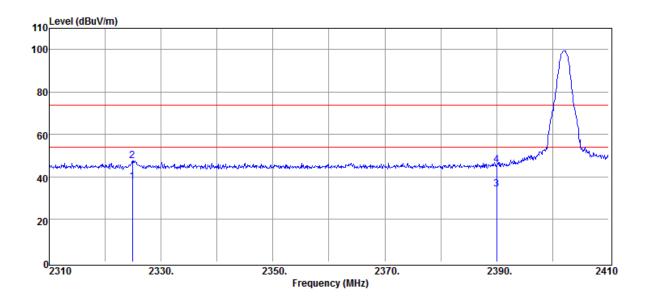

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
2324.90	Average	41.06	-3.27	37.79	54.00	-16.21
2324.90	Peak	50.78	-3.27	47.51	74.00	-26.49
2390.00	Average	37.74	-3.33	34.41	54.00	-19.59
2390.00	Peak	48.83	-3.33	45.50	74.00	-28.50


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:BT EDR :2480 MHz :BE CH HIGH ·H Plan

Test Date :2019-03-20 Temp./Humi. :23/66 Engineer :Jerry Measurement Antenna Pol. :VERTICAL

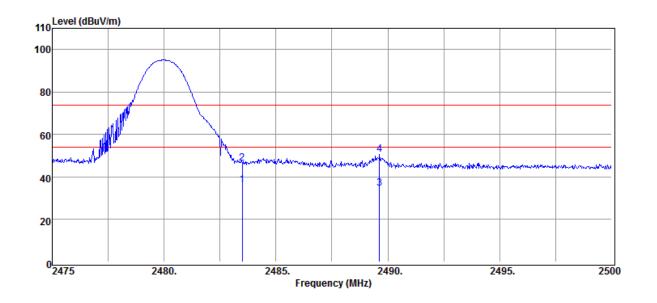

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2483.50	Average	38.95	-2.72	36.23	54.00	-17.77
2483.50	Peak	49.29	-2.72	46.57	74.00	-27.43
2489.63	Average	37.13	-2.67	34.46	54.00	-19.54
2489.63	Peak	53.28	-2.67	50.61	74.00	-23.39

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:BT EDR :2480 MHz :BE CH HIGH ·H Plan


Test Date :2019-03-20 Temp./Humi. :23/66 Engineer :Jerry

Measurement Antenna Pol. :HORIZONTAL

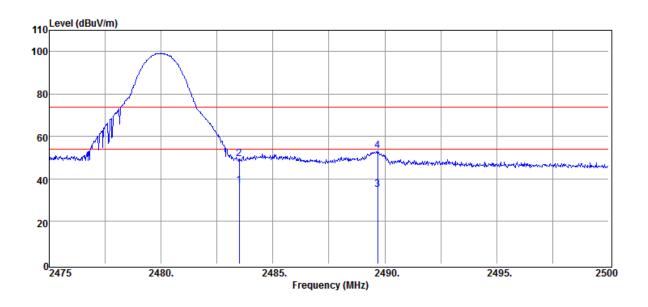

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
2483.50	Average	39.72	-2.72	37.00	54.00	-17.00
2483.50	Peak	52.02	-2.72	49.30	74.00	-24.70
2489.68	Average	37.56	-2.67	34.89	54.00	-19.11
2489.68	Peak	55.95	-2.67	53.28	74.00	-20.72


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






Radiated Spurious Emission Measurement Result: Frequency form 30MHz to 1000MHz

Operation Band :BT BR **Test Date** :2019-03-27 Fundamental Frequency Temp./Humi. :2402 MHz :24/58 Operation Mode :TX CH LOW Engineer :Jerry EUT Pol. :H Plan Measurement Antenna Pol. :VERTICAL

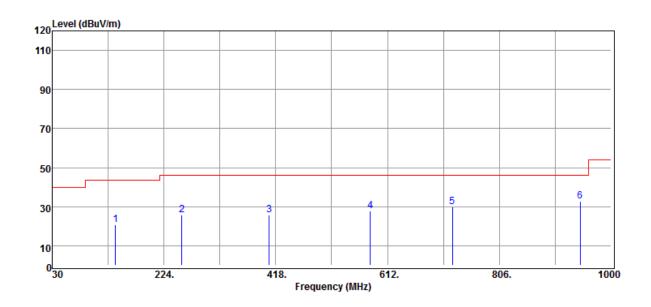

Detector	Spectrum	Factor	Actual	Limit	Margin
Mode	Reading Level		FS	@3m	
PK/QP/AV	dΒμV	dB	dBµV/m	dΒμV/m	dB
Peak	29.78	-9.10	20.68	43.50	-22.82
Peak	35.43	-9.65	25.78	46.00	-20.22
Peak	30.21	-4.56	25.65	46.00	-20.35
Peak	29.40	-1.47	27.93	46.00	-18.07
Peak	28.53	1.49	30.02	46.00	-15.98
Peak	27.58	5.42	33.00	46.00	-13.00
	Mode PK/QP/AV Peak Peak Peak Peak Peak	Mode PK/QP/AV Reading Level dBµV Peak 29.78 Peak 35.43 Peak 30.21 Peak 29.40 Peak 28.53	Mode PK/QP/AV Reading Level dBμV dB Peak 29.78 -9.10 Peak 35.43 -9.65 Peak 30.21 -4.56 Peak 29.40 -1.47 Peak 28.53 1.49	Mode PK/QP/AVReading Level dBμVFS dBμV/mPeak29.78-9.1020.68Peak35.43-9.6525.78Peak30.21-4.5625.65Peak29.40-1.4727.93Peak28.531.4930.02	Mode PK/QP/AV Reading Level dBμV FS dBμV/m @3m dBμV/m Peak 29.78 -9.10 20.68 43.50 Peak 35.43 -9.65 25.78 46.00 Peak 30.21 -4.56 25.65 46.00 Peak 29.40 -1.47 27.93 46.00 Peak 28.53 1.49 30.02 46.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:BT BR :2402 MHz :TX CH LOW ·H Plan

Test Date :2019-03-27 Temp./Humi. :24/58


Engineer :Jerry

Measurement Antenna Pol. :HORIZONTAL

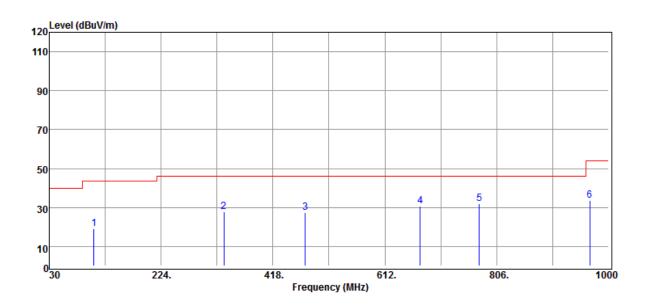

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
MHz	Mode PK/QP/AV	Reading Level dBµV	dB	FS dBµV/m	@3m dBµV/m	dB
107.60	Peak	29.31	-10.12	19.19	43.50	-24.31
332.64	Peak	34.28	-6.40	27.88	46.00	-18.12
474.26	Peak	29.60	-2.19	27.41	46.00	-18.59
673.11	Peak	29.59	1.05	30.64	46.00	-15.36
775.93	Peak	29.41	2.69	32.10	46.00	-13.90
967.02	Peak	27.14	6.36	33.50	54.00	-20.50

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:BT BR :2441 MHz :TX CH MID ·H Plan


Test Date :2019-03-27 Temp./Humi. :24/58

Engineer :Jerry Measurement Antenna Pol. :VERTICAL

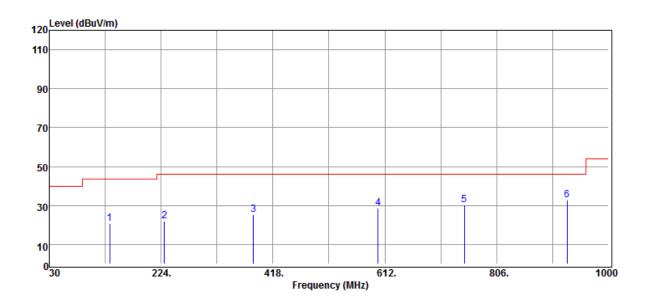

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dΒμV/m	dB
134.76	Peak	29.49	-8.73	20.76	43.50	-22.74
229.82	Peak	32.08	-10.11	21.97	46.00	-24.03
384.05	Peak	30.61	-5.44	25.17	46.00	-20.83
600.36	Peak	29.39	-0.78	28.61	46.00	-17.39
749.74	Peak	27.82	2.51	30.33	46.00	-15.67
928.22	Peak	27.82	4.97	32.79	46.00	-13.21

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:BT BR :2441 MHz :TX CH MID ·H Plan

Test Date :2019-03-27 Temp./Humi. :24/58


Engineer :Jerry

Measurement Antenna Pol. :HORIZONTAL

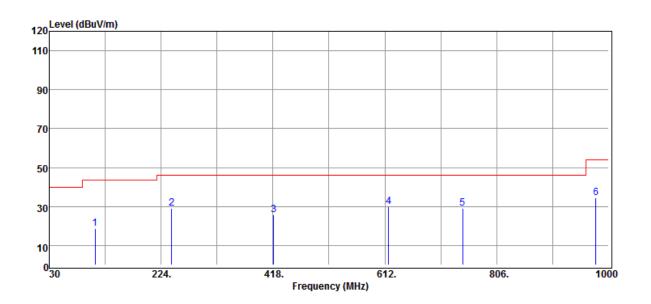

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
109.54	Peak	28.48	-9.62	18.86	43.50	-24.64
242.43	Peak	38.75	-9.67	29.08	46.00	-16.92
418.97	Peak	29.86	-4.24	25.62	46.00	-20.38
618.79	Peak	29.83	0.26	30.09	46.00	-15.91
746.83	Peak	26.56	2.37	28.93	46.00	-17.07
977.69	Peak	27.66	6.63	34.29	54.00	-19.71


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:BT BR :2480 MHz :TX CH HIGH ·H Plan

Test Date :2019-03-27 Temp./Humi. :24/58 Engineer :Jerry Measurement Antenna Pol. :VERTICAL

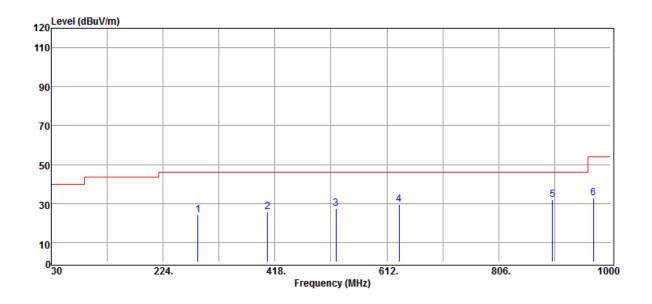

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
284.14	Peak	32.00	-7.74	24.26	46.00	-21.74
405.39	Peak	30.23	-4.56	25.67	46.00	-20.33
523.73	Peak	28.60	-1.33	27.27	46.00	-18.73
633.34	Peak	28.70	0.90	29.60	46.00	-16.40
899.12	Peak	27.26	4.78	32.04	46.00	-13.96
969.93	Peak	26.02	6.65	32.67	54.00	-21.33

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:BT BR :2480 MHz :TX CH HIGH ·H Plan

Test Date :2019-03-27 Temp./Humi. :24/58 Engineer :Jerry

Measurement Antenna Pol. :HORIZONTAL

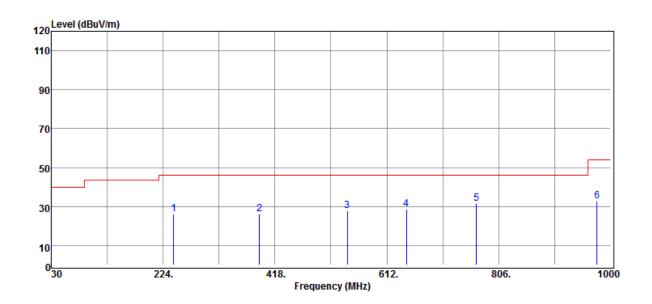

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dΒμV/m	dB
242.43	Peak	35.78	-9.67	26.11	46.00	-19.89
390.84	Peak	31.38	-5.13	26.25	46.00	-19.75
543.13	Peak	29.14	-1.17	27.97	46.00	-18.03
645.95	Peak	27.58	0.93	28.51	46.00	-17.49
767.20	Peak	28.68	2.79	31.47	46.00	-14.53
976.72	Peak	26.09	6.63	32.72	54.00	-21.28

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 58 of 78




Frequency above 1 GHz

Operation Band :BT BR **Test Date** :2019-03-20


Fundamental Frequency Temp./Humi. :2402 MHz :23/65 **Operation Mode** :TX CH LOW Engineer :Jerry

EUT Pol. :H Plan Measurement Antenna Pol. :VERTICAL

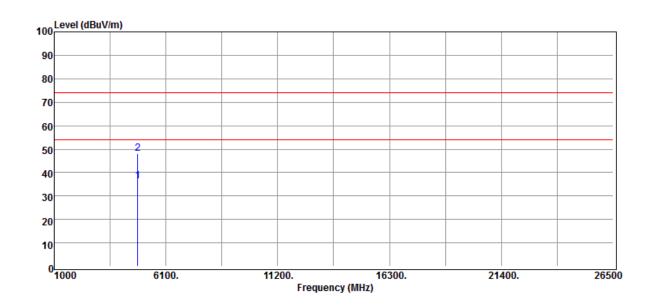

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m	_	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB	
4804.00	Average	33.28	3.11	36.39	54.00	-17.61	
4804.00	Peak	45.02	3.11	48.13	74.00	-25.87	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:BT BR :2402 MHz :TX CH LOW ·H Plan

Test Date :2019-03-20 Temp./Humi. :23/65


Engineer :Jerry

Measurement Antenna Pol. :HORIZONTAL

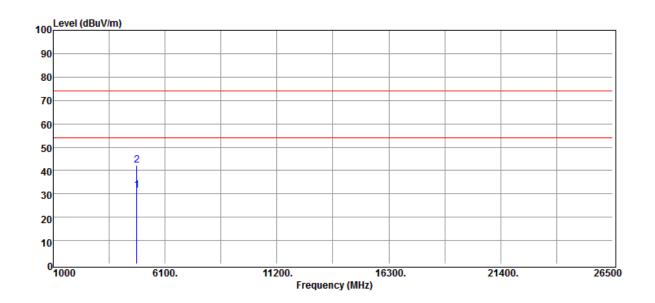

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
4804.00	Average	28.41	3.11	31.52	54.00	-22.48
4804.00	Peak	39.14	3.11	42.25	74.00	-31.75


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






Operation Band :BT BR Fundamental Frequency :2441 MHz **Operation Mode** :TX CH MID EUT Pol. ·H Plan

Test Date :2019-03-20 Temp./Humi. :23/65 Engineer :Jerry Measurement Antenna Pol. :VERTICAL

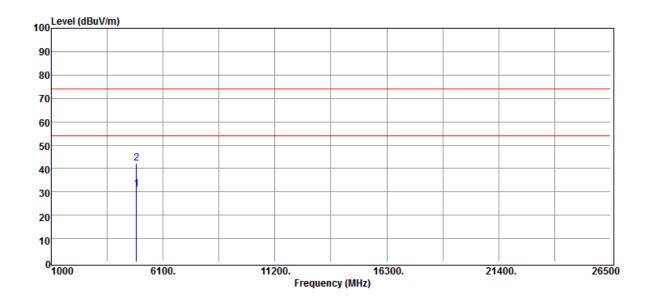

Freq	. Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	_
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4882.	00 Average	27.76	3.46	31.22	54.00	-22.78
4882.	00 Peak	38.90	3.46	42.36	74.00	-31.64

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:BT BR :2441 MHz :TX CH MID ·H Plan

Test Date :2019-03-20 Temp./Humi. :23/65


Engineer :Jerry

Measurement Antenna Pol. :HORIZONTAL

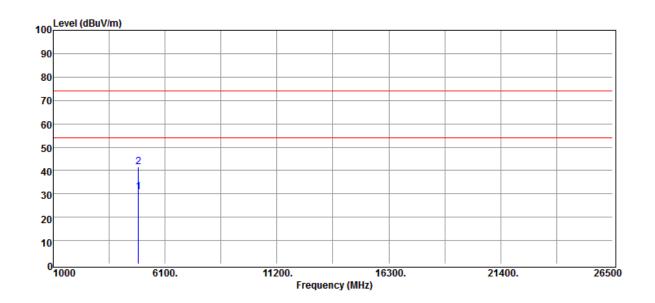

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
 MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
4882.00	Average	27.41	3.46	30.87	54.00	-23.13
4882.00	Peak	37.90	3.46	41.36	74.00	-32.64


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






Operation Band :BT BR Fundamental Frequency :2480 MHz **Operation Mode** :TX CH HIGH EUT Pol. ·H Plan

Test Date :2019-03-20 Temp./Humi. :23/65 Engineer :Jerry Measurement Antenna Pol. :VERTICAL

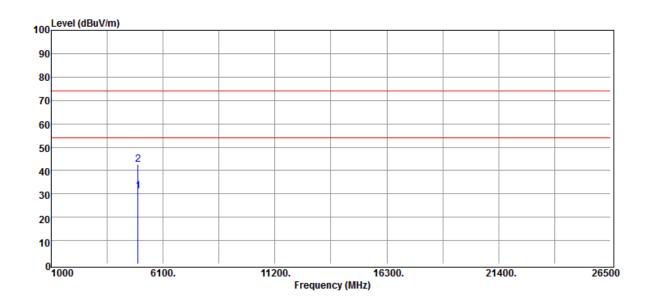

Freq. Detector		Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
4960.00	Average	26.58	4.48	31.06	54.00	-22.94
4960.00	Peak	38.05	4.48	42.53	74.00	-31.47

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:2480 MHz :TX CH HIGH :H Plan

Test Date :2019-03-20

Temp./Humi. :23/65 Engineer :Jerry

Measurement Antenna Pol. :HORIZONTAL

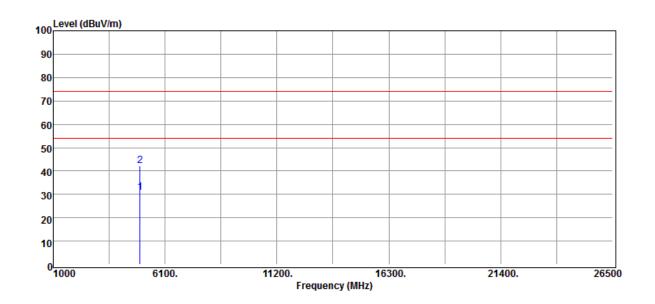

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB	
4960.00	Average	26.31	4.48	30.79	54.00	-23.21	
4960.00	Peak	37.74	4.48	42.22	74.00	-31.78	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



11 FREQUENCY SEPARATION


Standard Applicable 11.1

Frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25 kHz or the 2/3*20dB bandwidth of the hopping channel, whichever is greater.

11.2 **Measurement Equipment Used**

Conducted Emission Test Site								
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.			
Spectrum Analyzer	Agilent	N9010A	MY5340025 6	11/21/2018	11/20/2019			
DC Block	PASTERNACK	PE8210	RF29	02/26/2019	02/25/2020			
Attenuator	Marvelous	MVE2213-10	RF80	02/26/2019	02/25/2020			

Test Set-up 11.3



11.4 **Measurement Procedure**

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013. Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set center frequency of spectrum analyzer = middle of hopping channel.
- 5. Set the spectrum analyzer as RBW, VBW=100 kHz, Adjust Span to 5MHz, Sweep = auto.
- 6. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Offices character the Solids within the limits of limits of limits of limits of limits and limits of limi Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



11.5 Measurement Result

Channel separation (MHz)	Limit	Result
1	>=25 kHz or 2/3 times 20dB bandwidth	PASS

Frequency Separation Test Data

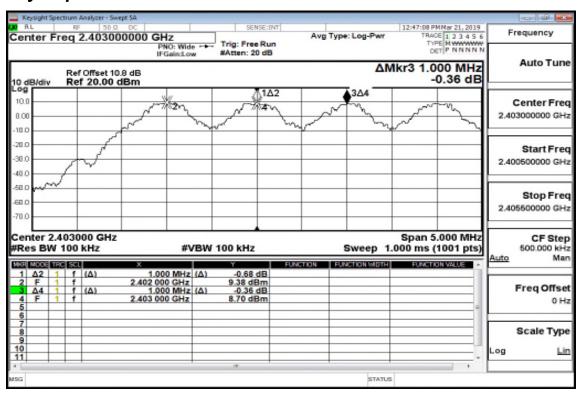

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



12 NUMBER OF HOPPING FREQUENCY


Standard Applicable 12.1

Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

12.2 **Measurement Equipment Used**

Conducted Emission Test Site									
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.				
Spectrum Analyzer	Agilent	N9010A	MY5340025 6	11/21/2018	11/20/2019				
DC Block	PASTERNACK	PE8210	RF29	02/26/2019	02/25/2020				
Attenuator	Marvelous	MVE2213-10	RF80	02/26/2019	02/25/2020				

12.3 Test Set-up



12.4 **Measurement Procedure**

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013. Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set spectrum analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = auto.
- 5. Set the spectrum analyzer as RBW=430 kHz, VBW=1.5MHz., Detector = Peak
- 6. Max hold, view and count how many channel in the band.

12.5 Measurement Result

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices character the Solids within the limits of limits of limits of limits of limits and limits of limi Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Tabular Data of Total Channel Number

	Channel Number	Limit
2.4 GHz – 2.441GHz	40	
2.441 GHz – 2.4835GHz	39	>15
2.4GHz ~2.4835GHz	(40+39) = 79	

Channel Number

2.402GHz - 2.441GHz

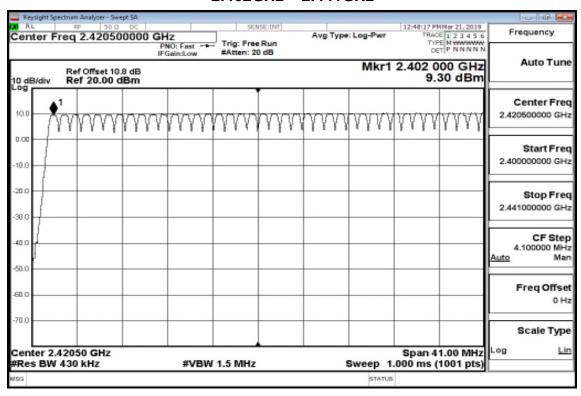


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices cherwise stated the results shown in this test report felier only to the sample(s) tested and sturn sample(s) are retained for 90 days only. Per 15 days only. Per 16 Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



2.441GHz - 2.4835GHz

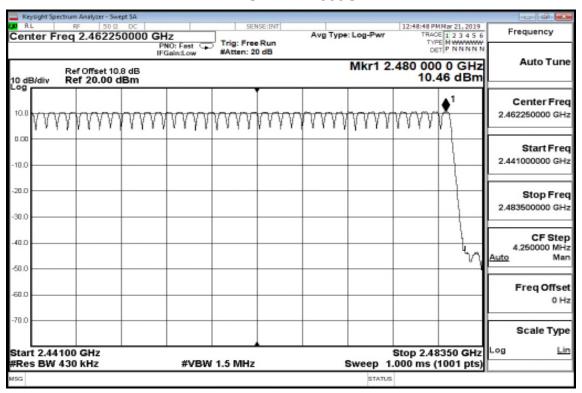

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



13 TIME OF OCCUPANCY (DWELL TIME)


13.1 **Standard Applicable**

Frequency hopping systems operating in the 2400MHz-2483.5MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

Measurement Equipment Used

Conducted Emission Test Site									
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.				
Spectrum Analyzer	Agilent	N9010A	MY5340025 6	11/21/2018	11/20/2019				
DC Block	PASTERNACK	PE8210	RF29	02/26/2019	02/25/2020				
Attenuator	Marvelous	MVE2213-10	RF80	02/26/2019	02/25/2020				

13.3 **Test Set-up**



13.4 Measurement Procedure


- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013. Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set center frequency of spectrum analyzer = operating frequency.
- 5. Set the spectrum analyzer as RBW, VBW=1MHz, 3MHz, Span = 0Hz, Detector = Peak, Adjust Sweep = $2\sim8ms$.
- 6. Repeat above procedures until all frequency of the interest measured were complete.

Formula Deduced: time occupancy of one time slot X Hopping rate / total slot in one channel / total channel that hops X period of working channels.

Where, standard hopping rate is 1600 hops/s, slot in one channel for DH1, DH3, and DH5 is 2, 4, and 6, respectively.

DH1 consists of single time slot of the uplink, and one slot of the downlink Total Slot: 2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





DH3 consists of three time slot of the uplink, and one slot of the downlink. Total Slot: 4 DH5 consists of five time slot of the uplink, and one slot of the downlink. Total Slot: 6

In AFH mode, hopping rate is 800 hop/s with 6 slots in 20 hopping channels with channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 * 20) (S), Hop Over Occupancy Time comes to (800 / 6 / 20)*(0.4 * 20) = 53.33

Note: the result of the complete test default channel at 1Mbps is recorded on the test report, 2Mbps, and 3Mbps only records the measurement result at middle channel that reveals no much deviation.

13.5 Tabular Result of the Measurement

GFSK (1Mbps)

Of OK (TMDP3)					
Channel	PACKET TYPE	Measurement Result (ms)	Limit (ms)	1/T (kHz)	VBW setting (kHz)
	DH1	121.60	400ms	2.63	3.00
0	DH3	260.80	400ms	0.61	1.00
	DH5	307.20	400ms	0.35	1.00
	DH1	123.20	400ms	2.60	3.00
39	DH3	260.80	400ms	0.61	1.00
	DH5	307.20	400ms	0.35	1.00
	DH1	121.60	400ms	2.63	3.00
78	DH3	262.40	400ms	0.61	1.00
	DH5	307.20	400ms	0.00	1.00

π/4 DQPSK (2Mbps)


Channel	PACKET TYPE	Measurement Result (ms)	Limit (ms)	1/T (kHz)	VBW setting (kHz)
	2DH1	124.80	400ms	2.56	3.00
39	2DH3	262.40	400ms	0.61	1.00
30	2DH5	307.20	400ms	0.35	1.00

8-DPSK (3Mbps)

Channel	PACKET TYPE	Measurement Result (ms)	Limit (ms)	1/T (kHz)	VBW setting (kHz)
	3DH1	124.80	400ms	2.56	3.00
39	3DH3	262.40	400ms	0.61	1.00
	3DH5	308.80	400ms	0.35	1.00

A period time = 0.4 (s) * 79 = 31.6 (s)


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





GFSK (1Mbps):

CH Low	DH1 time slot = DH3 time slot = DH5 time slot =	0.380 * 1.630 * 2.880 *	(1600/2/79) * (1600/4/79) * (1600/6/79) *	31.6 = 31.6 = 31.6 =	121.60 (ms) 260.80 (ms) 307.20 (ms)
CH Mid	DH1 time slot = DH3 time slot = DH5 time slot =	0.385 * 1.630 * 2.880 *	(1600/2/79) * (1600/4/79) * (1600/6/79) *	31.6 = 31.6 = 31.6 =	123.20 (ms) 260.80 (ms) 307.20 (ms)
CH High	DH1 time slot = DH3 time slot = DH5 time slot =	0.380 * 1.640 * 2.880 *	(1600/2/79) * (1600/4/79) * (1600/6/79) *	31.6 = 31.6 = 31.6 =	121.60 (ms) 262.40 (ms) 307.20 (ms)
π/4 -DQPS	K (2Mbps):				
CH Mid	2DH1 time slo = 2DH3 time slo = 2DH5 time slo =	0.390 * 1.640 * 2.880 *	(1600/2/79) * (1600/4/79) * (1600/6/79) *	31.6 = 31.6 = 31.6 =	124.80 (ms) 262.40 (ms) 307.20 (ms)
8-DPSK (3	Mbps):				
CH Mid	3DH1 time slo = 3DH3 time slo = 3DH5 time slo =	0.390 * 1.640 * 2.895 *	(1600/2/79) * (1600/4/79) * (1600/6/79) *	31.6 = 31.6 = 31.6 =	124.80 (ms) 262.40 (ms) 308.80 (ms)





GFSK (1Mbps) for AFH Mode								
Hopping Channel	PACKET TYPE	Measurement	Limit					
Number		Result (ms)	(ms)					
20	DH5	153.60	400ms					
π/4 DQPSK (2Mbps) for AFH Mode								
Hopping Channel	PACKET TYPE	Measurement	Limit					
Number	PACKETTIPE	Result (ms)	(ms)					
20	2DH5	153.60	400ms					
8-DPSK (3Mbps) for AFH Mode								
Hopping Channel	DACKET TYPE	Measurement	Limit					
Number	PACKET TYPE	Result (ms)	(ms)					
20	3DH5	154.40	400ms					

GFSK (1Mbps):


DH5 time s =	2.880	(ms)	*	(800/6/20 * 8 =	153.60	(ms)
π/4 -DQPSK (2Mbps						
2DH5 time =	2.880	(ms)	*	(800/6/20 * 8 =	153.60	(ms)
8-DPSK (3Mbps):						
3DH5 time =	2.895	(ms)	*	(800/6/20 * 8 =	154.40	(ms)

13.6 **Measurement Result**


Note: Refer to next page for plots.




Dwell Time_GFSK_1M_DH1_2402MHz

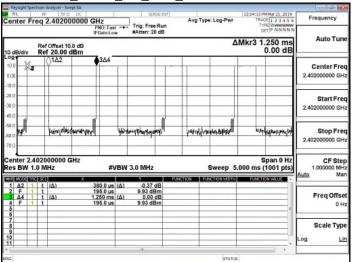


Dwell Time_GFSK_1M_DH1_2441MHz




Dwell Time_GFSK_1M_DH1_ 2480MHz




Dwell Time_GFSK_1M_DH3_2402MHz

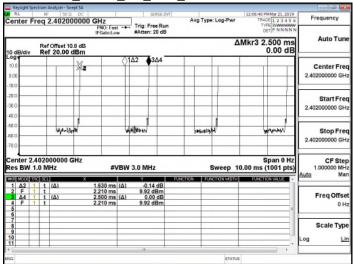


Dwell Time_GFSK_1M_DH3_2441MHz

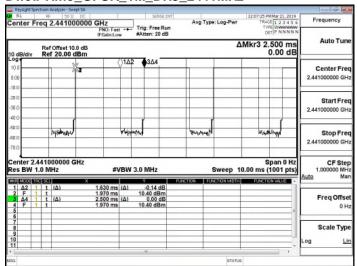

Dwell Time_GFSK_1M_DH3_2480MHz

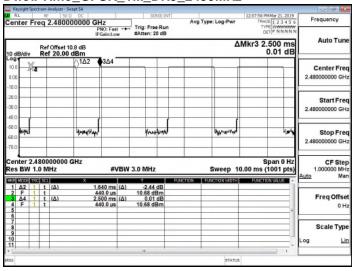


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.







Dwell Time_GFSK_1M_DH5_2402MHz

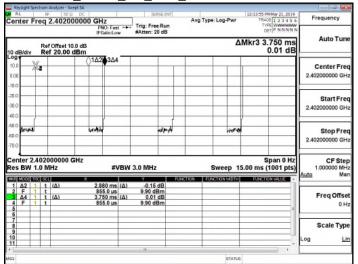


Dwell Time_GFSK_1M_DH5_2441MHz

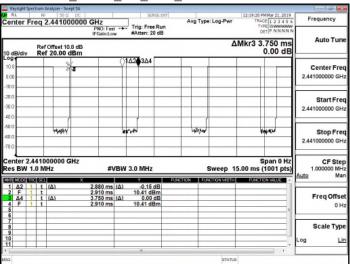


Dwell Time_GFSK_1M_DH5_2480MHz




Dwell Time_π4DQPSK_2M_DH1_2402MHz

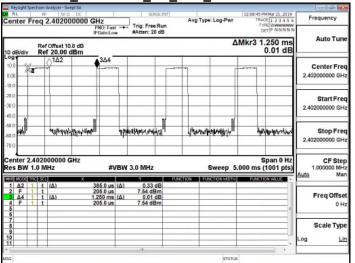


Dwell Time_π4DQPSK_2M_DH1_2441MHz

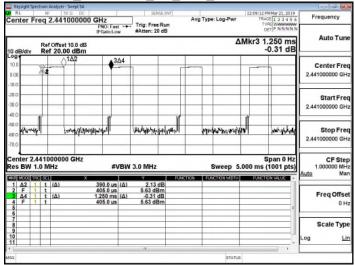

Dwell Time_π4DQPSK_2M_DH1_2480MHz

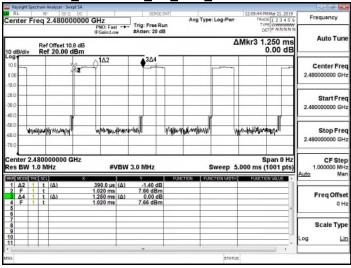


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.







Dwell Time π4DQPSK 2M DH3 2402MHz

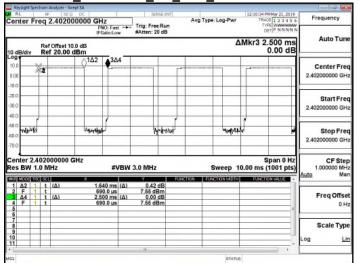


Dwell Time_π4DQPSK_2M_DH3_2441MHz




Dwell Time_π4DQPSK_2M_DH3_2480MHz

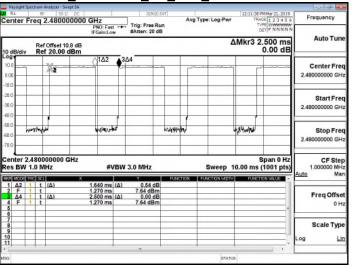


Dwell Time_π4DQPSK_2M_DH5_2402MHz

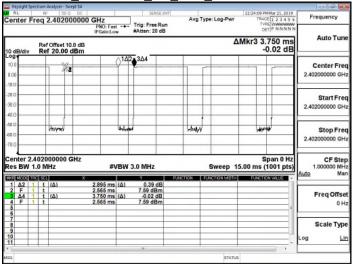

Dwell Time_π4DQPSK_2M_DH5_2441MHz

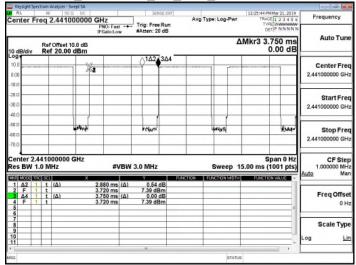


Dwell Time π4DQPSK 2M DH5 2480MHz

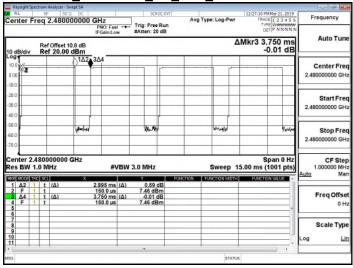


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Dwell Time 8DPSK 3M DH1 2402MHz

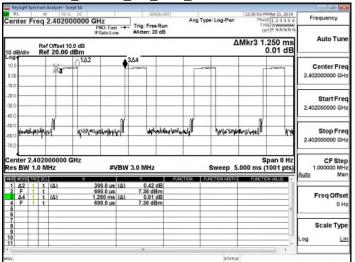


Dwell Time_8DPSK_3M_DH1_2441MHz

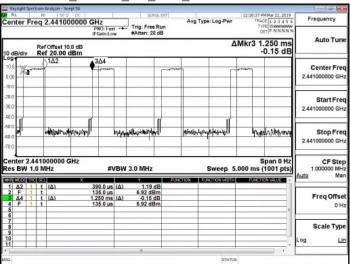


Dwell Time_8DPSK_3M_DH1_2480MHz




Dwell Time_8DPSK_3M_DH3_2402MHz

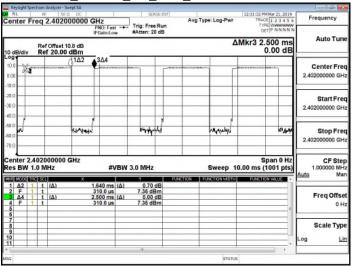

Dwell Time_8DPSK_3M_DH3_2441MHz

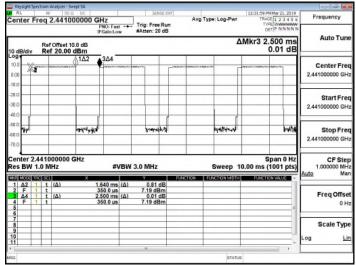

Dwell Time_8DPSK_3M_DH3_2480MHz

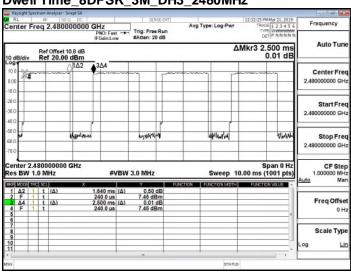


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page 77 of 78


Dwell Time 8DPSK 3M DH5 2402MHz

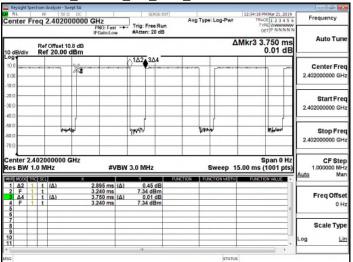

Dwell Time_8DPSK_3M_DH5_2441MHz

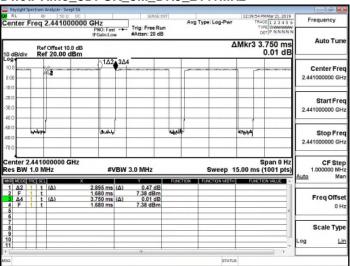

Dwell Time_8DPSK_3M_DH5_2480MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format This accument is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/tems and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/tems.e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: T190315W02-RP3

Page 78 of 78

14 ANTENNA REQUIREMENT

14.1 Standard Applicable

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device. If the transmitting antenna is greater than 6dBi, the power shall be reduced by the same level in

14.2 Antenna Connected Construction

dB comparing to gain minus 6dBi.

The antenna is designed as permanently attached and no consideration of replacement. Please see EUT photo for details.

~ End of Report ~