

承 認 書

SPECIFICATION FOR APPROVAL

客 戶:	
CUSTOMER:	
客 戶 料 號:	
CUST P/N:	
音 澤 料 號:	深槽
FINE P/N:	G43.5*01.0-13.8-0.08*105P-12T-6.8UH-W39.3-L23MM+BJ
產 品 型 號:	
DESC:	Φ43.5MMX1.0MM
日 期:	
DATE:	2023/05/12
版 本:	
Version:	A.0

擬制 PREPARED BY	審核 CHECKED BY	批准 APPROVED BY	客戶承認 CUSTOMER APPROVE

Dongguan Yinze electronic technology Co., LTD

Factory address: 3rd Floor, Building D, No.40 Fulong Education Road, Shipai Town, Dongguan City


Version Change History

[illegible]

SPECIFICATION

產品型號: DESC	深槽 G43.5*1.0-13.8-0.08*105P-12 T*6.8UH-W39.3-L23MM+BJ	版本 Rev: A.0	客戶 CUST: 客戶料号 CUST P/N:	佳宇创
---------------	---	----------------	----------------------------	-----

一、尺寸 DIMENSION:(mm)

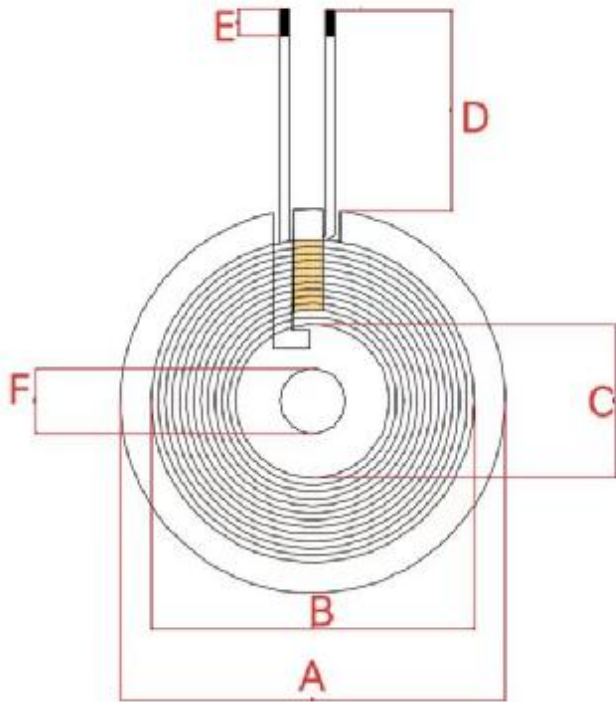

A	43.5±0.5
B	39.3±0.5
C	13.8±0.5
D	23 ±2
E	3±2
F	5.3±0.2
G	
H	
I	
K	

- 注:
- 交叉出线;
 - 线圈贴 43.5 双槽磁片, 磁片尺寸 43.5±0.5mm,, 厚度为 1.0±0.05mm.
 - 磁片背面贴背胶

二、原理图 SCHEMATIC DIAGRAM:

三、绕线参数 Winding Specification:

序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction
1	S	F	丝包线 0.08*105P	12Ts	CCW

四、电气特性 ELECTRICAL CHARACTERISTICS:

温度 TEMPERATURE:25±10°C, 湿度 RELATIVE HUMIDITY:65±20%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND.	S-F	3.8uH ±10%单独线圈	100KHz/1.0V	LCZ METER 1062B
2	IND.	S-F	6.8H ±10%加磁片	100KHz/1.0V	LCZ METER 1062B
3	DCR	S-F	≤55m Ω		LCZ METER 502B