

Page: 1 of 130

SAR TEST REPORT





The following samples were submitted and identified on behalf of the client as:

Equipment Under Test Notebook PC

Brand Name HP

Model No. **TPN-Q225** HP Inc. **Company Name**

Company Address 3390 East Harmony Road, Fort Collins Colorado, USA

80528

IEEE/ANSI C95.1-1992, IEEE 1528-2013, **Standards**

> KDB616217D04v01r02,KDB865664D01v01r04, KDB865664D02v01r02,KDB447498D01v06,

KDB248227D01v02r02

FCC ID B94-AX201D2WRG

Date of Receipt Jun. 05, 2018

Date of Test(s) Jun. 13, 2019 ~ Jun. 17, 2019

Date of Issue Jul. 16, 2019

In the configuration tested, the EUT complied with the standards specified above.

Remarks:

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Taiwan Electronic & Communication Laboratory or testing done by SGS Taiwan Electronic & Communication Laboratory in connection with distribution or use of the product described in this report must be approved by SGS Taiwan Electronic & Communication Laboratory in writing.

Signed on behalf of SGS

Clerk / Annie Chang	Engineer / Jay Tseng	Asst. Manager / John Yeh
Annie Chang	Fory Tseng	John Teh

Date: Jul. 16, 2019

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 2 of 130

Revision History

Report Number	Revision	Description	Issue Date
EN/2019/60002	Rev.00	Initial creation of document	Jul. 16, 2019

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 www.tw.sgs.com



Page: 3 of 130

Contents

1. General Information	4#
1.1 Testing Laboratory	4#
1.2 Details of Applicant	4#
1.3 Description of EUT	5#
1.4 Test Environment	55#
1.5 Operation Description	55#
1.6 Operating modes validation by power measurement	58#
1.7 The SAR Measurement System	65#
1.8 System Components	
1.9 SAR System Verification	69#
1.10 Tissue Simulant Fluid for the Frequency Band	
1.11 Evaluation Procedures	
1.12 Probe Calibration Procedures	
1.13 Test Standards and Limits	77#
2. Summary of Results	79#
2.1 Decision rules	- "
2.2 Summary of Results	
2.3 Reporting statements of conformity	83#
3. Simultaneous Transmission Analysis	84#
3.1 Estimated SAR calculation	85#
3.2 SPLSR evaluation and analysis	85#
4. Instruments List	89#
5. Measurements	90#
6. SAR System Performance Verification	
7. Uncertainty Budget	
Appendixes	
EN201960002 SAR Appendix A Photographs	
EN201960002 SAR Appendix B DAE & Probe Cal. Certificate	
EN201960002 SAR Appendix C Phantom Description & Dipole Cal. Certificate	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-like extent of the law. prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 4 of 130

1. General Information

1.1 Testing Laboratory

SGS Taiwan Ltd. Electronics & Communication Laboratory					
1F, No. 8, Alley 15, Lane 120, Sec. 1, NeiHu Road, Neihu District, Taipei City, 11493, Taiwan.					
Tel +886-2-2299-3279					
Fax	+886-2-2298-0488				
Internet	http://www.tw.sgs.com/				

1.2 Details of Applicant

Company Name	HP Inc.
Company Address	3390 East Harmony Road, Fort Collins Colorado , USA
	80528

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 5 of 130

1.3 Description of EUT

-	1							
Equipment Under Test	Notebook PC							
Brand Name	HP							
Model No.	TPN-Q225							
FCC ID	B94-AX201D2WRG							
Integrated Module	WLAN		lame : In lame : A)2W			
Mode of Operation	⊠WLAN802.11 a/b/g/n/ac/ax(⊠Bluetooth							
Duty Cycle	WLAN802.11 a/b/g/n/ac/ax(20M/40M/80M/1	100%						
,	Bluetooth			100%				
	WLAN802.11 b/g/n/ax(20M)		2412	_	2472			
	WLAN802.11 n/ax(40M)	2422	_	2462				
	WLAN802.11 a/n/ax(20M)/ac/ax(20M) 5.2G		5180	_	5240			
	WLAN802.11n/ax(40M)/ac/ax(40M) 5.2G		5190	_	5230			
	WLAN802.11 ac/ax(80M) 5.20		5210					
	WLAN802.11 ac/ax(160M) 5.2	5250						
TX Frequency Range	WLAN802.11 a/n/ax(20M)/ac/ax(20M) 5.3G		5260	_	5320			
(MHz)	WLAN802.11n/ax(40M)/ac/ax(40M) 5.3G		5270	_	5310			
	WLAN802.11 ac/ax(80M) 5.3G			5290				
	WLAN802.11 a/n/ac/ax(20M)	5.6G	5500	_	5720			
	WLAN802.11 n/ac/ax(40M) 5.6	3G	5510	_	5710			
	WLAN802.11 ac/ax(80M) 5.60	3	5530	_	5690			
	WLAN802.11 ac/ax(160M) 5.6	G		5570				
	WLAN802.11 a/n/ax(20M)/ac/a 5.8G	ax(20M)	5745	_	5825			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-like extent of the law. prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 6 of 130

TX Frequency Range	WLAN802.11n/ax(40M)/ac/ax(40M) 5.8G	5710	_	5795	
(MHz)	WLAN802.11 ac/ax(80M) 5.8G		5775		
	Bluetooth	2402	_	2480	
	WLAN802.11 b/g/n/ax(20M)	1	_	13	
	WLAN802.11 n/ax(40M)	3	_	11	
	WLAN802.11 a/n/ax(20M)/ac/ax(20M)	36	_	48	
	WLAN802.11n/ax(40M)/ac/ax(40M)	38	_	46	
	WLAN802.11 ac/ax(80M) 5.2G		42		
	WLAN802.11 ac/ax(160M) 5.2G		50		
	WLAN802.11 a/n/ax(20M)/ac/ax(20M) 5.3G	52	_	64	
	WLAN802.11n/ax(40M)/ac/ax(40M) 5.3G	54	_	62	
Channel Number (ARFCN)	WLAN802.11 ac/ax(80M) 5.3G		58		
(* ***)	WLAN802.11 a/n/ac/ax(20M) 5.6G	100	_	144	
	WLAN802.11 n/ac/ax(40M) 5.6G	102	_	142	
	WLAN802.11 ac/ax(80M) 5.6G	106	_	138	
	WLAN802.11 ac/ax(160M) 5.6G		144		
	WLAN802.11 a/n/ax(20M)/ac/ax(20M) 5.8G	149	_	165	
	WLAN802.11n/ax(40M)/ac/ax(40M) 5.8G	151	_	159	
	WLAN802.11 ac/ax(80M) 5.8G		155		
	Bluetooth	0		78	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-like extent of the law. prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 7 of 130

Laptop mode (WLAN SISO power)

Laptop mode (WLAN 5100 power)									
Max. SAR (1g) (Unit: W/Kg)									
Antenna	Band	Measured	Reported	Channel	Position				
	WLAN 802.11b	0.17	0.17	10	Bottom side				
	WLAN 802.11n(40M) 5.2G	0.26	0.26	46	Bottom side				
TX2(Chain-B)	WLAN 802.11 n(40M) 5.3G	0.26	0.26	54	Bottom side				
	WLAN 802.11ac(80M) 5.6G	0.36	0.37	138	Bottom side				
	WLAN 802.11 n(40M) 5.8G	0.36	0.36	151	Bottom side				
	WLAN 802.11b	0.17	0.17	6	Bottom side				
	Bluetooth(GFSK)	0.09	0.11	78	Bottom side				
	WLAN 802.11n(40M) 5.2G	0.23	0.23	46	Bottom side				
TX1(Chain-A)	WLAN 802.11 n(40M) 5.3G	0.21	0.21	54	Bottom side				
	WLAN 802.11ac(80M) 5.6G	0.30	0.30	138	Bottom side				
	WLAN 802.11 n(40M) 5.8G	0.35	0.35	151	Bottom side				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 8 of 130

Tablet mode (WLAN SISO power)

Tablet Hode (WEAR GIOC power)									
	Max. SAR (1g) (Unit: W/Kg)								
Antenna	Band	Measured	Reported	Channel	Position				
	WLAN 802.11b	0.92	0.92	1	Bottom side				
	WLAN 802.11 ac(80M) 5.2G	0.99	0.99	42	Bottom side				
TX2(Chain-B)	WLAN 802.11 ac(80M) 5.3G	1.03	1.04	58	Bottom side				
	WLAN 802.11ac(80M) 5.6G	1.13	1.13	106	Bottom side				
	WLAN 802.11 ac(80M) 5.8G	1.16	1.16	155	Bottom side				
	WLAN 802.11b	0.92	0.92	11	Bottom side				
	Bluetooth(GFSK)	0.15	0.19	78	Bottom side				
T)(4(OL : A)	WLAN 802.11ac(160M) 5.2G	0.82	0.82	50	Bottom side				
TX1(Chain-A)	WLAN 802.11 ac(80M) 5.3G	0.84	0.84	58	Bottom side				
	WLAN 802.11ac(160M) 5.6G	1.04	1.05	114	Bottom side				
	WLAN 802.11 ac(80M) 5.8G	1.15	1.15	155	Bottom side				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions for Electronic Documents at www.sgs.com/terms and <a href="https://www.sgs.com/terms and <a href="https://wwww.sgs.com/terms and <a href="https://www.sgs.com/ter Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 9 of 130

Tablet mode (WLAN MIMO power)

Tablet filode (WEAN MIMO power)								
Max. SAR (1g) (Unit: W/Kg)								
Antenna	Band Measured Reported Ch			Channel	Position			
	WLAN 802.11n(20M)	0.45	0.46	6	Bottom side			
	WLAN 802.11 ac(80M) 5.2G	0.43	0.43	42	Bottom side			
TX2(Chain-B)	WLAN 802.11 ac(80M) 5.3G	0.46	0.46	58	Bottom side			
	WLAN 802.11ac(80M) 5.6G	0.43	0.43	58	Bottom side			
	WLAN 802.11 ac(80M) 5.8G	0.56	0.57	155	Bottom side			
	WLAN 802.11n(20M)	0.48	0.49	6	Bottom side			
	Bluetooth(GFSK)	0.15	0.19	78	Bottom side			
T)///Ol : A)	WLAN 802.11 ac(80M) 5.2G	0.41	0.41	42	Bottom side			
TX1(Chain-A)	WLAN 802.11 ac(80M) 5.3G	0.46	0.47	58	Bottom side			
	WLAN 802.11 ac(80M) 5.6G	0.50	0.50	106	Bottom side			
	WLAN 802.11 ac(80M) 5.8G	0.59	0.60	155	Bottom side			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 10 of 130

Antenna Information

WI ΔN

AAFVIA										
Tablet mode										
Vendor		INPAQ								
Antenna			Tx1(PIFA)					Tx2(PIFA)		
Part Number		DQ60PLBLE	318 (WA-P-LI	BLB-02-080)			DQ60PLBLE	318 (WA-P-LI	BLB-02-080)	
Frequency	2402-2480	5151-5250	5250-5350	5470-5725	5725-5850	2402-2480	5151-5250	5250-5350	5470-5725	5725-5850
Gain (dBi)	-2.21	1.00	1.48	2.57	2.87	1.18	-1.76	1.50	2.00	0.75
					Laptop mode)				
Vendor					INP	PAQ				
Antenna			Tx1(PIFA)					Tx2(PIFA)		
Part Number	er DQ60PLBLB18(WA-P-LBLB-02-080) DQ60PLBLB18(WA-P-LBLB-02-080)									
Frequency	2402-2480	5151-5250	5250-5350	5470-5725	5725-5850	2402-2480	5151-5250	5250-5350	5470-5725	5725-5850
Gain (dBi)	1.67	2.68	2.68	2.76	2.55	2.34	2.52	2.90	2.88	2.88

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-like extent of the law. prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 11 of 130

WLAN802.11 a/b/g/n(20M/40M)/ac/ax(20M/40M/80M/160M)

conducted power table:

Antenna	SI	MIMO	
Band	Chain A	Chain B	Chain A+B
WLAN802.11b	V	V	-
WLAN802.11g	V	V	-
WLAN802.11n(20M)	V	V	V
WLAN802.11n(40M)	V	V	V
WLAN802.11ax(20M)	V	V	V
WLAN802.11ax(40M)	V	V	V
WLAN802.11a	V	V	-
WLAN802.11n(20M) 5G	V	V	V
WLAN802.11n(40M) 5G	V	V	V
WLAN802.11ac(20M) 5G	V	V	V
WLAN802.11ac(40M) 5G	V	V	V
WLAN802.11ac(80M) 5G	V	V	V
WLAN802.11ac(160M) 5G	V	V	V
WLAN802.11ax(20M) 5G	V	V	V
WLAN802.11ax(40M) 5G	V	V	V
WLAN802.11ax(80M) 5G	V	V	V
WLAN802.11ax(160M) 5G	V	V	V

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

Member of SGS Group



Page: 12 of 130

Laptop mode (WLAN SISO power)

		TX2(Chain-B)			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		1	2412		20.00	19.93
		2	2417		21.00	20.95
		6	2437		21.00	20.91
	802.11b	10	2457	1Mbps	21.00	20.99
		11	2462		20.00	19.93
		12	2467		19.00	18.94
		13	2472		19.50	19.41
		1	2412		17.25	17.25
		2	2417		19.00	18.94
		6	2437		20.50	20.50
	802.11g	10	2457	6Mbps	19.25	19.17
		11	2462		16.00	15.98
		12	2467		15.50	15.42
2450 MHz		13	2472		13.25	13.20
2430 IVITZ		1	2412		17.25	17.25
		2	2417		19.00	18.91
		6	2437		20.50	20.48
	802.11n20-HT0	10	2457	MCS0	19.25	19.17
		11	2462		16.00	15.96
		12	2467		15.50	15.49
		13	2472		13.25	13.21
		1	2412		17.25	17.20
		2	2417		19.00	18.93
		6	2437		20.50	20.43
	802.11ax20-HE0	10	2457	MCS0	19.25	19.20
		11	2462		16.00	15.98
		12	2467		15.50	15.47
		13	2472		13.25	13.19

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 13 of 130

	TX2(Chain-B)									
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)				
		3	2422		17.00	16.99				
	802.11n40-HT0	5	2432	MCS0	18.00	17.95				
		6	2437		16.50	16.48				
		8	2447		16.00	15.95				
		9	2452		15.00	15.00				
		10	2457		13.00	12.95				
2450 MHz		11	2462		13.50	13.43				
2430 10172		3	2422		17.00	16.95				
		5	2432		18.00	17.93				
		6	2437		16.50	16.44				
	802.11ax40-HE0	8	2447	MCS0	16.00	15.97				
		9	2452		15.00	14.91				
		10	2457		13.00	12.95				
		11	2462		13.50	13.50				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-like extent of the law. prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 1



Page: 14 of 130

		TX2(C	hain-B)			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		36	5180		19.00	18.98
	802.11a	40	5200	6Mbps	20.00	19.92
	002.11a	44	5220	Olvibps	21.00	20.99
		48	5240		21.00	20.98
		36	5180		19.00	18.92
	802.11n20-HT0	40	5200	MCS0	20.00	19.98
	002.111120-1110	44	5220	IVICSU	21.00	20.97
		48	5240		21.00	20.92
		36	5180		19.00	18.91
	802.11ac20-VHT0	40	5200	MCS0	20.00	19.95
	002.11ac20-V1110	44	5220	MCSU	21.00	20.91
		48	5240		21.00	20.92
5.15-5.25 GHz		36	5180		19.00	18.95
0.10-0.20 0112	802.11ax20-HE0	40	5200	MCS0	20.00	20.00
	002.11ax20-11L0	44	5220	MCOU	21.00	20.93
		48	5240		21.00	20.95
	802.11n40-HT0	38	5190	MCS0	19.00	18.98
	002.111140-1110	46	5230	IVICSU	21.00	20.98
	802.11ac40-VHT0	38	5190	MCS0	19.00	18.93
	002.11a040-VIIIU	46	5230	IVICOU	21.00	20.93
	802.11ax40-HE0	38	5190	MCS0	19.00	18.92
	002.11ax40-11E0	46	5230	IVICOU	21.00	20.89
	802.11ac80-VHT0	42	5210	MCS0	19.00	18.94
	802.11ax80-HE0	42	5210	MCS0	19.00	18.93
	802.11ac160-VHT0	50	5250	MCS0	15.25	15.22
	802.11ax160-HE0	50	5250	MCS0	15.25	15.16

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-like extent of the law. prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 1 台灣檢驗科技股份有限公司



Page: 15 of 130

		TX2(C	hain-B)			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		52	5260		21.00	20.99
	802.11a	56	5280	6Mbps	21.00	20.98
	002.11a	60	5300	Olvibps	21.00	20.94
		64	5320		18.50	18.46
		52	5260		21.00	20.92
	802.11n20-HT0	56	5280	MCS0	21.00	20.91
		60	5300	IVIOCO	21.00	20.94
		64	5320		18.50	18.44
		52	5260	MCS0	21.00	20.94
	802.11ac20-VHT0	56	5280		21.00	20.94
	002.11ac20-V1110	60	5300		21.00	20.95
5.25-5.35 GHz		64	5320		18.50	18.49
0.20-0.00 0112		52	5260		21.00	20.91
	802.11ax20-HE0	56	5280	MCS0	21.00	20.94
	002.11ax20-11E0	60	5300	MCSU	21.00	20.91
		64	5320		18.50	18.45
	802.11n40-HT0	54	5270	MCS0	21.00	20.97
	002.1111 4 0-1110	62	5310	MCSU	17.75	17.74
	802.11ac40-VHT0	54	5270	MCS0	21.00	20.87
	002.118040-VHTU	62	5310	IVICSU	17.75	17.70
	802.11ax40-HE0	54	5270	MCS0	21.00	20.93
	002.11ax40-11E0	62	5310	IVICOU	17.75	17.70
	802.11ac80-VHT0	58	5290	MCS0	18.25	18.24
	802.11ax80-HE0	58	5290	MCS0	18.25	18.24

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-like extent of the law. prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 16 of 130

		TX2(C	Chain-B)			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		100	5500		19.50	19.50
		104	5520		21.00	20.91
		116	5580		21.00	20.93
	802.11a	120	5600	6Mbps	21.00	20.92
		136	5680		21.00	20.91
		140	5700		18.00	18.00
		144	5720		21.00	20.93
		100	5500		19.50	19.45
		104	5520		21.00	21.00
		116	5580		21.00	20.92
	802.11n20-HT0	120	5600	MCS0	21.00	20.97
		136	5680		21.00	20.94
		140	5700		18.00	17.98
5600 MHz		144	5720		21.00	20.94
3000 1011 12		100	5500		19.50	19.50
		104	5520		21.00	20.93
		116	5580		21.00	20.96
	802.11ac20-VHT0	120	5600	MCS0	21.00	20.94
		136	5680		21.00	20.92
		140	5700		18.00	17.99
		144	5720		21.00	20.91
		100	5500		19.50	19.43
		104	5520		21.00	20.89
		116	5580		21.00	20.91
	802.11ax20-HE0	120	5600	MCS0	21.00	20.91
		136	5680		21.00	20.93
		140	5700		18.00	17.93
		144	5720		21.00	20.92

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-like extent of the law. prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 17 of 130

		TX2(C	Chain-B)			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		102	5510		18.75	18.74
		110	5550		21.00	20.96
	802.11n40-HT0	118	5590	MCS0	21.00	20.94
		134	5670		19.75	19.74
		142	5710		21.00	20.99
		102	5510		18.75	18.75
		110	5550	MCS0	21.00	20.88
	802.11ac40-VHT0	118	5590		21.00	20.89
		134	5670		19.75	19.70
		142	5710		21.00	20.91
		102	5510		18.75	18.71
5600 MHz		110	5550		21.00	20.87
	802.11ax40-HE0	118	5590	MCS0	21.00	20.85
		134	5670		19.75	19.69
		142	5710		21.00	20.91
		106	5530		19.25	19.24
	802.11ac80-VHT0	122	5610	MCS0	20.25	20.22
		138	5690		21.00	20.93
		106	5530		19.25	19.25
	802.11ax80-HE0	122	5610	MCS0	20.25	20.16
		138	5690		21.00	20.89
	802.11ac160-VHT0	114	5570	MCS0	14.75	14.66
	802.11ax160-HE0	114	5570	MCS0	14.75	14.68

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-like extent of the law. prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 1



Page: 18 of 130

		TX2(0	Chain-B)			
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		149	5745		21.00	20.97
	802.11a	157	5785	6Mbps	21.00	20.94
		165	5825		21.00	20.99
	802.11n20-HT0	149	5745		21.00	20.91
		157	5785	MCS0	21.00	20.94
		165	5825		21.00	20.86
	802.11ac20-VHT0	149	5745	MCS0	21.00	20.91
		157	5785		21.00	20.89
		165	5825		21.00	20.91
5800 MHz		149	5745		21.00	20.91
3000 WII 12	802.11ax20-HE0	157	5785	MCS0	21.00	20.93
		165	5825		21.00	20.95
	802.11n40-HT0	151	5755	MCS0	21.00	20.99
	552.1111 4 0-1110	159	5795	IVICOU	21.00	20.98
	802.11ac40-VHT0	151	5755	MCS0	21.00	20.93
	002.118040-11110	159	5795	IVICOU	21.00	20.92
	802.11ax40-HE0	151	5755	MCS0	21.00	20.89
	002.11ax40-11L0	159	5795	IVICSU	21.00	20.91
	802.11ac80-VHT0	155	5775	MCS0	19.00	18.94
	802.11ax80-HE0	155	5775	MCS0	19.00	18.97

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-like extent of the law. prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 1 台灣檢驗科技股份有限公司



Page: 19 of 130

		T)/4	(Ol ' A.)			
		TX1	(Chain-A)			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		1	2412		19.75	19.72
		2	2417		21.00	20.89
		6	2437		21.00	20.98
	802.11b	10	2457	1Mbps	21.00	20.97
		11	2462		20.00	19.91
		12	2467		19.00	18.91
		13	2472		19.50	19.48
		1	2412		17.25	17.17
		2	2417		19.00	19.00
		6	2437		20.50	20.41
	802.11g	10	2457	6Mbps	19.25	19.25
		11	2462		15.50	15.44
		12	2467		15.50	15.44
2450 MHz		13	2472		13.00	12.97
2430 1011 12		1	2412		17.25	17.23
		2	2417		19.00	18.97
		6	2437		20.50	20.44
	802.11n20-HT0	10	2457	MCS0	19.25	19.20
		11	2462		15.50	15.47
		12	2467		15.50	15.45
		13	2472		13.00	12.95
		1	2412		17.25	17.21
		2	2417		19.00	18.94
		6	2437		20.50	20.42
	802.11ax20-HE0	10	2457	MCS0	19.25	19.20
		11	2462	1	15.50	15.43
		12	2467		15.50	15.50
		13	2472		13.00	12.92

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-like extent of the law. prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 20 of 130

	TX1(Chain-A)									
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)				
		3	2422		17.00	16.99				
		5	2432	MCS0	18.00	17.93				
	802.11n40-HT0	6	2437		16.50	16.50				
		8	2447		16.00	15.96				
		9	2452		15.00	14.92				
		10	2457		13.00	12.98				
2450 MHz		11	2462		13.50	13.44				
2430 1011 12		3	2422		17.00	17.00				
		5	2432		18.00	17.95				
		6	2437		16.50	16.42				
	802.11n40-HE0	8	2447	MCS0	16.00	15.98				
		9	2452		15.00	14.97				
		10	2457		13.00	12.99				
		11	2462		13.50	13.43				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-like extent of the law. prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 21 of 130

		TX1(CI	hain-A)			
		17(1(0)	lain 71)			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		36	5180		19.00	18.99
	000 44-	40	5200	CM Albara	20.50	20.49
	802.11a	44	5220	6Mbps	21.00	20.99
		48	5240		21.00	20.94
		36	5180		19.00	18.82
	802.11n20-HT0	40	5200	MCS0	20.50	20.47
	002.111120-H10	44	5220	IVICSU	21.00	20.85
		48	5240		21.00	20.91
		36	5180		19.00	18.86
	802.11ac20-VHT0	40	5200	MCS0	20.50	20.41
	002.11ac20-V1110	44	5220	IVICOU	21.00	20.94
		48	5240		21.00	20.87
5.15-5.25 GHz		36	5180		19.00	18.93
0.10 0.20 0112	802.11ax20-HE0	40	5200	MCS0	20.50	20.32
	002.11ax20-11L0	44	5220	IVIOOO	21.00	20.92
		48	5240		21.00	20.93
	802.11n40-HT0	38	5190	MCS0	19.00	18.95
	002.111140-1110	46	5230	IVICOU	21.00	20.99
	802.11ac40-VHT0	38	5190	MCS0	19.00	18.95
	002.114040-71110	46	5230	IVIOOO	21.00	20.93
	802.11ax40-HE0	38	5190	MCS0	19.00	18.98
	002.11dX+0-11E0	46	5230	IVIOOO	21.00	20.84
	802.11ac80-VHT0	42	5210	MCS0	18.75	18.58
	802.11ax80-HE0	42	5210	MCS0	18.75	18.58
	802.11ac160-VHT0	50	5250	MCS0	15.75	15.70
	802.11ax160-HE0	50	5250	MCS0	15.75	15.67

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-like extent of the law. prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 22 of 130

		TX1(C	hain-A)			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		52	5260		21.00	20.96
	802.11a	56	5280	6Mbps	21.00	20.94
	002.11a	60	5300	Olvibba	21.00	20.99
		64	5320		18.75	18.68
		52	5260		21.00	20.92
	802.11n20-HT0	56	5280	MCS0	21.00	20.81
	002.111120 1110	60	5300	IVICOU	21.00	20.86
		64	5320		18.75	18.64
		52	5260		21.00	20.92
	802.11ac20-VHT0	56	5280	MCS0	21.00	20.93
	002.118020-11110	60	5300		21.00	20.83
5.25-5.35 GHz		64	5320		18.75	18.62
0.20 0.00 0112		52	5260		21.00	20.91
	802.11ax20-HE0	56	5280	MCS0	21.00	20.86
	002.11ax20-11L0	60	5300	IVICOU	21.00	20.90
		64	5320		18.75	18.60
	802.11n40-HT0	54	5270	MCS0	21.00	20.96
	002.111140-1110	62	5310	MCOU	17.75	17.74
	802.11ac40-VHT0	54	5270	MCS0	21.00	20.94
	002.11a040-VIII0	62	5310	IVICOU	17.75	17.64
	802.11ax40-HE0	54	5270	MCS0	21.00	20.91
	002.11ax+0-11L0	62	5310		17.75	17.62
	802.11ac80-VHT0	58	5290	MCS0	18.25	18.18
	802.11ax80-HE0	58	5290	MCS0	18.25	18.16

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-like extent of the law. prosecuted to the fullest extent of the law.



Page: 23 of 130

		TX1(Chain-A)			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		100	5500		19.50	19.42
		104	5520		21.00	20.92
		116	5580		21.00	20.92
	802.11a	120	5600	6Mbps	21.00	20.93
		136	5680		21.00	20.83
		140	5700		18.50	18.37
		144	5720		21.00	20.94
		100	5500		19.50	19.44
		104	5520		21.00	20.94
		116	5580		21.00	20.92
	802.11n20-HT0	120	5600	MCS0	21.00	20.90
		136	5680		21.00	20.89
		140	5700		18.50	18.32
5600 MHz		144	5720		21.00	20.94
3000 WII 12		100	5500		19.50	19.31
		104	5520		21.00	20.95
		116	5580		21.00	20.93
	802.11ac20-VHT0	120	5600	MCS0	21.00	20.99
		136	5680		21.00	20.89
		140	5700		18.50	18.39
		144	5720		21.00	20.91
		100	5500		19.50	19.45
		104	5520		21.00	20.89
		116	5580		21.00	20.92
	802.11ax20-HE0	120	5600	MCS0	21.00	20.93
		136	5680		21.00	20.84
		140	5700		18.50	18.49
		144	5720		21.00	20.91

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-like extent of the law. prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 24 of 130

		TX1(C	Chain-A)			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		102	5510		18.75	18.74
		110	5550		21.00	20.98
	802.11n40-HT0	118	5590	MCS0	21.00	20.96
		134	5670		19.75	19.72
		142	5710		21.00	20.99
		102	5510		18.75	18.71
		110	5550	MCS0	21.00	20.83
	802.11ac40-VHT0	118	5590		21.00	20.91
		134	5670		19.75	19.58
		142	5710		21.00	20.87
		102	5510		18.75	18.70
5600 MHz		110	5550		21.00	20.95
	802.11ax40-HE0	118	5590	MCS0	21.00	20.87
		134	5670		19.75	19.57
		142	5710		21.00	20.94
		106	5530		19.25	19.23
	802.11ac80-VHT0	122	5610	MCS0	20.25	20.23
		138	5690		21.00	20.99
		106	5530		19.25	19.16
	802.11ax80-HE0	122	5610	MCS0	20.25	20.12
		138	5690		21.00	20.93
	802.11ac160-VHT0	114	5570	MCS0	15.00	14.98
	802.11ax160-HE0	114	5570	MCS0	15.00	14.95

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-like extent of the law. prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 1 台灣檢驗科技股份有限公司



Page: 25 of 130

		TX1(0	Chain-A)			
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		149	5745		21.00	20.99
	802.11a	157	5785	6Mbps	21.00	20.98
		165	5825		21.00	20.97
		149	5745		21.00	20.89
	802.11n20-HT0	157	5785	MCS0	21.00	20.88
		165	5825		21.00	20.84
		149	5745	MCS0	21.00	20.81
	802.11ac20-VHT0	157	5785		21.00	20.91
		165	5825		21.00	20.91
5800 MHz		149	5745		21.00	20.93
3000 1011 12	802.11ax20-HE0	157	5785	MCS0	21.00	20.94
		165	5825		21.00	20.90
	802.11n40-HT0	151	5755	MCS0	21.00	20.99
	002.111140-1110	159	5795	IVICOU	21.00	20.98
	802.11ac40-VHT0	151	5755	MCS0	21.00	20.96
	002.11a040-VH10	159	5795	IVICOU	21.00	20.92
	802.11ax40-HE0	151	5755	MCS0	21.00	20.82
	002.11ax40-FIEU	159	5795	IVICSU	21.00	20.93
	802.11ac80-VHT0	155	5775	MCS0	19.00	18.81
	802.11ax80-HE0	155	5775	MCS0	19.00	19.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-like extent of the law. prosecuted to the fullest extent of the law.



Page: 26 of 130

Tablet mode (WLAN SISO power)

		TX2	(Chain-B)			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		1	2412		18.00	17.99
		6	2437		18.00	17.96
	802.11b	11	2462	1Mbps	18.00	17.86
		12	2467		18.00	17.92
		13	2472		18.00	17.91
		1	2412		17.25	17.09
		2	2417		18.00	17.81
	802.11g	6	2437	6Mbps	18.00	17.93
		10	2457		18.00	17.93
		11	2462		18.00	17.90
		12	2467		15.50	15.50
		13	2472		13.25	13.20
2450 MHz		1	2412		17.25	17.18
2430 1011 12		2	2417		18.00	17.81
		6	2437		18.00	17.91
	802.11n20-HT0	10	2457	MCS0	18.00	17.92
		11	2462		18.00	17.93
		12	2467		15.50	15.38
		13	2472		13.25	13.25
		1	2412		17.25	17.18
		2	2417		18.00	17.85
		6	2437		18.00	17.85
	802.11ax20-HE0	10	2457	MCS0	18.00	17.97
		11	2462	1	18.00	17.86
		12	2467		15.50	15.45
		13	2472		13.25	13.17

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-like extent of the law. prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 27 of 130

		TX2	(Chain-B)			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		3	2422		17.00	17.00
		4	2427		17.00	16.87
	802.11n40-HT0	5	2432	MCS0	18.00	17.93
		6	2437		16.50	16.44
		8	2447		16.00	15.81
		9	2452		15.00	14.95
		10	2457		13.00	12.91
2450 MHz		11	2462		13.50	13.48
2430 1011 12		3	2422		17.00	16.92
		4	2427		17.00	16.94
		5	2432		18.00	17.95
	802.11ax40-HE0	6	2437	MCS0	16.50	16.38
	002.11dX4U-MEU	8	2447	IVICOU	16.00	15.81
		9	2452		15.00	14.88
		10	2457		13.00	12.88
		11	2462		13.50	13.36

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-like extent of the law. prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 28 of 130

		TX2(CI	hain-B)			
Band	Mode	Channel	Frequency	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		36	5180		15.50	15.45
	802.11a	40	5200	6Mbps	15.50	15.41
	002.11a	44	5220	olvibps	15.50	15.46
		48	5240		15.50	15.35
		36	5180		15.50	15.35
	802.11n20-HT0	40	5200	MCS0	15.50	15.37
	002.111120-1110	44	5220	IVICOU	15.50	15.40
		48	5240		15.50	15.43
		36	5180		15.50	15.35
	802.11ac20-VHT0	40	5200	MCS0	15.50	15.45
	002.11ac20-V1110	44	5220	·	15.50	15.38
		48	5240		15.50	15.45
5.15-5.25 GHz		36	5180		15.50	15.41
0.10-0.20 0112	802.11ax20-HE0	40	5200	MCS0	15.50	15.42
	002.11ax20-11L0	44	5220	MCOU	15.50	15.43
		48	5240		15.50	15.31
	802.11n40-HT0	38	5190	MCS0	15.50	15.49
	002.111140-1110	46	5230	IVICOU	15.50	15.48
	802.11ac40-VHT0	38	5190	MCS0	15.50	15.35
	002.11a0 1 0-V1110	46	5230	IVIOOU	15.50	15.48
	802.11ax40-HE0	38	5190	MCS0	15.50	15.37
		46	5230		15.50	15.46
	802.11ac80-VHT0	42	5210	MCS0	15.50	15.49
	802.11ax80-HE0	42	5210	MCS0	15.50	15.44
	802.11ac160-VHT0	50	5250	MCS0	15.25	15.19
	802.11ax160-HE0	50	5250	MCS0	15.25	15.17

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-like extent of the law. prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 1 台灣檢驗科技股份有限公司



Page: 29 of 130

		TX2(C	Chain-B)			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		52	5260		15.5	15.45
	802.11a	56	5280	6Mbpa	15.5	15.35
	002.11a	60	5300	6Mbps	15.5	15.34
		64	5320		15.5	15.36
		52	5260		15.5	15.45
	802.11n20-HT0	56	5280	MCS0	15.5	15.39
	002.111120-1110	60	5300	MCSU	15.5	15.38
		64	5320		15.5	15.42
		52	5260	- MCS0	15.5	15.34
	802.11ac20-VHT0	56	5280		15.5	15.44
	002.11ac20-VH10	60	5300		15.5	15.42
5.25-5.35 GHz		64	5320		15.5	15.45
3.23-3.33 GHZ		52	5260		15.5	15.44
	802.11ax20-HE0	56	5280	MCS0	15.5	15.32
	002.11ax20-HE0	60	5300	MCSU	15.5	15.43
		64	5320		15.5	15.36
	802.11n40-HT0	54	5270	MCS0	15.5	15.47
	002.1111 4 0-Π10	62	5310	MCSU	15.5	15.46
	802.11ac40-VHT0	54	5270	MCS0	15.5	15.33
	002.118040-VH10	62	5310	IVICSU	15.5	15.41
	802.11ax40-HE0	54	5270	MCS0	15.5	15.43
	002.11ax40-ITEU	62	5310	IVICOU	15.5	15.40
	802.11ac80-VHT0	58	5290	MCS0	15.5	15.47
	802.11ax80-HE0	58	5290	MCS0	15.5	15.42

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-like extent of the law. prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 30 of 130

		TX2(C	Chain-B)			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		100	5500		15.5	15.38
		104	5520		15.5	15.41
		116	5580		15.5	15.44
	802.11a	120	5600	6Mbps	15.5	15.35
		136	5680		15.5	15.33
		140	5700		15.5	15.36
		144	5720		15.5	15.34
		100	5500		15.5	15.38
		104	5520		15.5	15.31
		116	5580		15.5	15.44
	802.11n20-HT0	120	5600	MCS0	15.5	15.32
		136	5680		15.5	15.41
		140	5700		15.5	15.45
5600 MHz		144	5720		15.5	15.42
3000 1011 12		100	5500		15.5	15.44
		104	5520		15.5	15.43
		116	5580		15.5	15.36
	802.11ac20-VHT0	120	5600	MCS0	15.5	15.43
		136	5680		15.5	15.44
		140	5700		15.5	15.33
		144	5720		15.5	15.43
		100	5500		15.5	15.34
		104	5520		15.5	15.41
		116	5580		15.5	15.36
	802.11ax20-HE0	120	5600	MCS0	15.5	15.43
		136	5680		15.5	15.31
		140	5700		15.5	15.42
		144	5720		15.5	15.40

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-like extent of the law. prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 31 of 130

		TX2(C	Chain-B)			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		102	5510		15.5	15.46
		110	5550		15.5	15.47
	802.11n40-HT0	118	5590	MCS0	15.5	15.43
		134	5670		15.5	15.49
		142	5710		15.5	15.45
		102	5510		15.5	15.42
	802.11ac40-VHT0	110	5550	MCS0	15.5	15.43
		118	5590		15.5	15.45
		134	5670		15.5	15.43
		142	5710		15.5	15.37
		102	5510		15.5	15.40
5600 MHz		110	5550		15.5	15.46
	802.11ax40-HE0	118	5590	MCS0	15.5	15.43
		134	5670		15.5	15.45
		142	5710		15.5	15.39
		106	5530		15.5	15.49
	802.11ac80-VHT0	122	5610	MCS0	15.5	15.45
		138	5690		15.5	15.47
		106	5530		15.5	15.44
	802.11ax80-HE0	122	5610	MCS0	15.5	15.42
		138	5690		15.5	15.41
	802.11ac160-VHT0	114	5570	MCS0	14.75	14.75
	802.11ax160-HE0	114	5570	MCS0	14.75	14.69

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-like extent of the law. prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 1 台灣檢驗科技股份有限公司



Page: 32 of 130

		TX2(Chain-B)			
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		149	5745		15.5	15.44
	802.11a	157	5785	6Mbps	15.5	15.42
		165	5825		15.5	15.43
	802.11n20-HT0	149	5745		15.5	15.45
		157	5785	MCS0	15.5	15.32
		165	5825		15.5	15.33
	802.11ac20-VHT0	149	5745	MCS0	15.5	15.46
		157	5785		15.5	15.32
		165	5825		15.5	15.39
5800 MHz		149	5745		15.5	15.36
3000 1011 12	802.11ax20-HE0	157	5785	MCS0	15.5	15.37
		165	5825		15.5	15.35
	802.11n40-HT0	151	5755	MCS0	15.5	15.44
	002.111140-1110	159	5795	MCOU	15.5	15.48
	802.11ac40-VHT0	151	5755	MCS0	15.5	15.36
	002.11a040-VH10	159	5795	IVICOU	15.5	15.45
	802.11ax40-HE0	151	5755	MCS0	15.5	15.44
	002.11ax40-11E0	159	5795	IVICSU	15.5	15.44
	802.11ac80-VHT0	155	5775	MCS0	15.5	15.49
	802.11ax80-HE0	155	5775	MCS0	15.5	15.42

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-like extent of the law. prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 1 台灣檢驗科技股份有限公司



Page: 33 of 130

		TX1	(Chain-A)			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		1	2412		18.00	17.98
		6	2437		18.00	17.96
	802.11b	11	2462	1Mbps	18.00	17.99
		12	2467		18.00	17.92
		13	2472		18.00	17.90
		1	2412		17.50	17.33
		2	2417		18.00	17.91
		6	2437		18.00	17.91
	802.11g	10	2457	6Mbps	18.00	17.85
		11	2462		15.50	15.36
		12	2467		15.50	15.36
		13	2472		13.00	13.00
2450 MHz		1	2412		17.50	17.37
2430 1011 12		2	2417		18.00	17.81
		6	2437		18.00	17.97
	802.11n20-HT0	10	2457	MCS0	18.00	17.93
		11	2462		15.50	15.35
		12	2467		15.50	15.40
		13	2472		13.00	12.94
		1	2412		17.50	17.41
		2	2417		18.00	17.94
		6	2437		18.00	17.89
	802.11ax20-HE0	10	2457	MCS0	18.00	17.81
		11	2462		15.50	15.35
		12	2467		15.50	15.38
		13	2472		13.00	12.89

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-like extent of the law. prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 34 of 130

		TX1	(Chain-A)			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		3	2422		17.00	17.00
		4	2427		17.00	16.86
	802.11n40-HT0	5	2432		18.00	17.92
		6	2437	MCS0	16.50	16.35
		8	2447		16.00	15.95
		9	2452		16.00	15.87
		10	2457		13.00	12.98
2450 MHz		11	2462		13.50	13.45
2430 1011 12		3	2422		17.00	16.97
		4	2427		17.00	16.98
		5	2432		18.00	17.90
	802.11n40-HE0	6	2437	MCS0	16.50	16.50
	1002.111140-NEU	8	2447	IVICOU	16.00	15.84
		9	2452		16.00	15.84
		10	2457		13.00	12.91
		11	2462		13.50	13.50

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-like extent of the law. prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 35 of 130

		TX1(C	chain-A)			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		36	5180		15.00	14.85
	802.11a	40	5200	GMbpa	15.00	14.83
	002.11a	44	5220	6Mbps	15.00	14.94
		48	5240		15.00	14.95
		36	5180		15.00	14.94
	802.11n20-HT0	40	5200	MCS0	15.00	14.84
	002.111120-1110	44	5220	IVICSU	15.00	14.87
		48	5240		15.00	14.86
		36	5180		15.00	14.90
	802.11ac20-VHT0	40	5200	MCS0	15.00	14.95
	002.11ac20-V1110	44	5220	IVICOU	15.00	14.87
		48	5240		15.00	14.87
5.15-5.25 GHz		36	5180		15.00	14.92
0.10-0.20 0112	802.11ax20-HE0	40	5200	MCS0	15.00	14.98
	002.11ax20-11L0	44	5220	MCSU	15.00	14.93
		48	5240		15.00	14.91
	802.11n40-HT0	38	5190	MCS0	15.00	14.99
	002.111140-1110	46	5230	IVICOU	15.00	14.98
	802.11ac40-VHT0	38	5190	MCS0	15.00	14.96
	002.11ac40-V1110	46	5230	MCSU	15.00	14.91
	802.11ax40-HE0	38	5190	MCS0	15.00	14.94
	002.11ax40-11E0	46	5230	IVICOU	15.00	14.86
	802.11ac80-VHT0	42	5210	MCS0	15.00	14.97
	802.11ax80-HE0	42	5210	MCS0	15.00	14.94
	802.11ac160-VHT0	50	5250	MCS0	15.00	14.99
	802.11ax160-HE0	50	5250	MCS0	15.00	14.93

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-like extent of the law. prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 1 台灣檢驗科技股份有限公司



Page: 36 of 130

TX1(Chain-A)						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5.25-5.35 GHz	802.11a	52	5260	6Mbps	15.00	14.94
		56	5280		15.00	14.90
		60	5300		15.00	14.88
		64	5320		15.00	14.85
	802.11n20-HT0	52	5260	MCS0	15.00	14.95
		56	5280		15.00	14.81
		60	5300		15.00	14.84
		64	5320		15.00	14.92
	802.11ac20-VHT0	52	5260	MCS0	15.00	14.82
		56	5280		15.00	14.94
		60	5300		15.00	14.94
		64	5320		15.00	14.85
	802.11ax20-HE0	52	5260	MCS0	15.00	14.90
		56	5280		15.00	14.95
		60	5300		15.00	14.92
		64	5320		15.00	14.86
	802.11n40-HT0	54	5270	MCS0	15.00	14.98
		62	5310		15.00	14.99
	802.11ac40-VHT0	54	5270	MCS0	15.00	14.81
		62	5310		15.00	14.84
	802.11ax40-HE0	54	5270	MCS0	15.00	14.89
		62	5310		15.00	14.94
	802.11ac80-VHT0	58	5290	MCS0	15.00	14.99
	802.11ax80-HE0	58	5290	MCS0	15.00	14.92

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-like extent of the law. prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 37 of 130

		TX1(0	Chain-A)			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		100	5500		15.00	14.94
		104	5520		15.00	14.94
		116	5580		15.00	14.83
	802.11a	120	5600	6Mbps	15.00	14.93
		136	5680		15.00	14.82
		140	5700		15.00	14.88
		144	5720		15.00	14.95
		100	5500		15.00	14.86
		104	5520		15.00	14.93
		116	5580		15.00	14.91
	802.11n20-HT0	120	5600	MCS0	15.00	14.86
		136	5680		15.00	14.87
		140	5700		15.00	14.88
5600 MHz		144	5720		15.00	14.92
3000 WII 12		100	5500		15.00	14.86
		104	5520		15.00	14.95
		116	5580		15.00	14.91
	802.11ac20-VHT0	120	5600	MCS0	15.00	14.84
		136	5680		15.00	14.84
		140	5700		15.00	14.85
		144	5720		15.00	14.93
		100	5500		15.00	14.91
		104	5520		15.00	14.81
		116	5580		15.00	14.91
	802.11ax20-HE0	120	5600	MCS0	15.00	14.92
		136	5680		15.00	14.93
		140	5700		15.00	14.94
		144	5720		15.00	14.94

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-like extent of the law. prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 38 of 130

		TX1(C	Chain-A)			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		102	5510		15.00	14.89
		110	5550		15.00	14.83
	802.11n40-HT0	118	5590	MCS0	15.00	14.85
		134	5670		15.00	14.81
		142	5710		15.00	14.88
		102	5510		15.00	14.95
		110	5550		15.00	14.89
	802.11ac40-VHT0	118	5590	MCS0	15.00	14.92
		134	5670		15.00	14.81
		142	5710		15.00	14.92
		102	5510		15.00	14.87
5600 MHz		110	5550		15.00	14.82
	802.11ax40-HE0	118	5590	MCS0	15.00	14.83
		134	5670		15.00	14.94
		142	5710		15.00	14.93
		106	5530		15.00	14.98
	802.11ac80-VHT0	122	5610	MCS0	15.00	14.95
		138	5690		15.00	14.97
		106	5530		15.00	14.89
	802.11ax80-HE0	122	5610	MCS0	15.00	14.95
		138	5690		15.00	14.82
	802.11ac160-VHT0	114	5570	MCS0	15.00	14.95
	802.11ax160-HE0	114	5570	MCS0	15.00	14.93

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-like extent of the law. prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 1 台灣檢驗科技股份有限公司



Page: 39 of 130

TX1(Chain-A)									
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)			
		149	5745		15.00	14.90			
	802.11a	157	5785	6Mbps	15.00	14.84			
		165	5825		15.00	14.93			
		149	5745		15.00	14.87			
	802.11n20-HT0	157	5785	MCS0	15.00	14.82			
		165	5825		15.00	14.94			
	802.11ac20-VHT0	149	5745	MCS0	15.00	14.95			
		157	5785		15.00	14.86			
		165	5825		15.00	14.95			
5800 MHz		149	5745		15.00	14.86			
3000 1011 12	802.11ax20-HE0	157	5785	MCS0	15.00	14.93			
		165	5825		15.00	14.92			
	802.11n40-HT0	151	5755	MCS0	15.00	14.99			
	002.111140-1110	159	5795	IVICOU	15.00	14.98			
	802.11ac40-VHT0	151	5755	MCS0	15.00	14.93			
	002.11a040-VH10	159	5795	IVICOU	15.00	14.82			
	802.11ax40-HE0	151	5755	MCS0	15.00	14.95			
	802.11ax40-HE0	159	5795	IVICSU	15.00	14.85			
	802.11ac80-VHT0	155	5775	MCS0	15.00	14.99			
	802.11ax80-HE0	155	5775	MCS0	15.00	14.91			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-like extent of the law. prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 1



Page: 40 of 130

Tablet mode (WLAN MIMO power)

		TX2(Chain-B)			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		1	2412		11.50	11.32
		2	2417		14.00	13.99
		6	2437		15.00	14.90
	802.11n20-HT0	10	2457	MCS0	14.00	13.99
		11	2462		11.00	10.83
		12	2467		10.50	10.32
		13	2472		8.00	7.92
		1	2412		11.50	11.33
		2	2417		14.00	13.89
		6	2437		15.00	14.86
2450 MHz	802.11ax20-HE0	10	2457	MCS0	14.00	13.93
2400 WII 12		11	2462		11.00	10.84
		12	2467		10.50	10.31
		13	2472		8.00	7.85
		3	2422		11.75	11.73
		4	2427		12.00	11.84
		5	2432		13.00	12.95
	802.11n40-HT0	6	2437	MCS0	12.00	11.99
	502.111170-1110	8	2447	IVICSU	11.25	11.22
		9	2452		10.50	10.32
		10	2457		7.00	6.96
		11	2462		9.00	8.96

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions for Electronic Documents at www.sgs.com/terms and <a href="https://www.sgs.com/terms and <a href="https://wwww.sgs.com/terms and <a href="https://www.sgs.com/ter Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 1 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

Member of SGS Group



Page: 41 of 130

	TX2(Chain-B)									
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)				
		3	2422		11.75	11.61				
		4	2427		12.00	11.89				
		5	2432		13.00	13.00				
2450 MHz	802.11ax40-HE0	6	2437	MCS0	12.00	11.83				
2430 1011 12	002.11ax40-11E0	8	2447	IVICOU	11.25	11.07				
		9	2452		10.50	10.45				
		10	2457		7.00	6.88				
		11	2462		9.00	8.97				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-like extent of the law. prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 42 of 130

		TX2(C	hain-B)			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		36	5180		12.00	11.87
	802.11n20-HT0	40	5200	MCS0	12.00	11.81
	802.11n20-H10	44	5220	MCSU	12.00	11.98
		48	5240		12.00	11.98
	802.11ac20-VHT0	36	5180		12.00	11.84
		40	5200	MCS0	12.00	11.85
		44	5220	MCSU	12.00	11.96
		48	5240		12.00	11.86
		36	5180	MCS0	12.00	11.97
	802.11ax20-HE0	40	5200		12.00	11.91
5.15-5.25 GHz	002.11ax20-11L0	44	5220		12.00	11.89
J. 13-3.23 GHZ		48	5240		12.00	11.82
	802.11n40-HT0	38	5190	MCS0	12.00	11.97
	002.111140-1110	46	5230	MCSU	12.00	11.99
	802.11ac40-VHT0	38	5190	MCS0	12.00	11.85
	002.11ac40-V1110	46	5230	MCSU	12.00	11.81
	802.11ax40-HE0	38	5190	MCS0	12.00	11.86
	002.11ax+0-11L0	46	5230	IVICOU	12.00	11.82
	802.11ac80-VHT0	42	5210	MCS0	12.00	11.97
	802.11ax80-HE0	42	5210	MCS0	12.00	11.95
	802.11ac160-VHT0	50	5250	MCS0	10.25	10.22
	802.11ax160-HE0	50	5250	MCS0	10.25	10.23

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-like extent of the law. prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 43 of 130

		TX2(C	Chain-B)			
		.,,_(e	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		52	5260		12.00	11.92
	802.11n20-HT0	56	5280	MCS0	12.00	11.84
	002.111120-1110	60	5300	IVICSU	12.00	11.96
		64	5320		12.00	11.90
	802.11ac20-VHT0	52	5260	MCS0	12.00	11.95
		56	5280		12.00	11.98
		60	5300	MCSU	12.00	11.94
		64	5320		12.00	12.00
		52	5260		12.00	11.95
5.25-5.35 GHz	802.11ax20-HE0	56	5280	MCS0	12.00	12.00
3.23-3.33 GHZ	002.11ax20-11E0	60	5300	MCSU	12.00	11.97
		64	5320		12.00	11.81
	802.11n40-HT0	54	5270	MCS0	12.00	11.93
	002.1111 4 0-1110	62	5310	IVICSO	12.00	11.98
	802.11ac40-VHT0	54	5270	MCS0	12.00	11.93
	002.11a040-VH10	62	5310	IVICOU	12.00	11.92
	802.11ax40-HE0	54	5270	MCS0	12.00	11.86
		62	5310	IVICOU	12.00	11.95
[802.11ac80-VHT0	58	5290	MCS0	12.00	11.97
	802.11ax80-HE0	58	5290	MCS0	12.00	11.87

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-like extent of the law. prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 44 of 130

		TX2(Chain-B)			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		100	5500		12.00	11.81
		104	5520		12.00	11.87
	802.11n20-HT0	116	5580		12.00	12.00
		120	5600	MCS0	12.00	11.93
		136	5680		12.00	11.99
		140	5700		12.00	11.90
		144	5720		12.00	11.83
		100	5500		12.00	11.95
		104	5520		12.00	11.85
		116	5580		12.00	12.00
5600 MHz	802.11ac20-VHT0	120	5600	MCS0	12.00	12.00
		136	5680		12.00	11.95
		140	5700		12.00	11.85
		144	5720		12.00	11.94
		100	5500		12.00	11.99
		104	5520		12.00	11.87
		116	5580		12.00	11.81
	802.11ax20-HE0	120	5600	MCS0	12.00	11.95
		136	5680		12.00	11.89
		140	5700		12.00	11.83
		144	5720		12.00	11.83

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-like extent of the law. prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 1



Page: 45 of 130

		TX2(C	Chain-B)			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		102	5510		12.00	11.98
		110	5550		12.00	11.99
	802.11n40-HT0	118	5590	MCS0	12.00	11.97
		134	5670		12.00	11.98
		142	5710		12.00	11.92
		102	5510		12.00	11.91
		110	5550		12.00	11.97
	802.11ac40-VHT0	118	5590	MCS0	12.00	11.89
		134	5670	_	12.00	11.99
		142	5710		12.00	11.92
		102	5510		12.00	11.97
5600 MHz		110	5550		12.00	11.99
	802.11ax40-HE0	118	5590	MCS0	12.00	11.98
		134	5670		12.00	11.94
		142	5710		12.00	11.85
		106	5530		12.00	11.99
	802.11ac80-VHT0	122	5610	MCS0	12.00	11.91
		138	5690		12.00	11.94
		106	5530		12.00	11.82
	802.11ax80-HE0	122	5610	MCS0	12.00	11.93
		138	5690		12.00	11.82
[802.11ac160-VHT0	114	5570	MCS0	10.75	10.69
	802.11ax160-HE0	114	5570	MCS0	10.75	10.63

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-like extent of the law. prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 1 台灣檢驗科技股份有限公司



Page: 46 of 130

		TX2(C	Chain-B)			
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		149	5745		12.00	11.96
	802.11n20-HT0	157	5785	MCS0	12.00	11.98
		165	5825		12.00	11.97
	802.11ac20-VHT0	149	5745	MCS0	12.00	11.99
		157	5785		12.00	11.92
		165	5825		12.00	11.83
		149	5745	MCS0	12.00	11.95
	802.11ax20-HE0	157	5785		12.00	11.81
5800 MHz		165	5825		12.00	11.90
	802.11n40-HT0	151	5755	MCS0	12.00	11.94
	002.111140-1110	159	5795	IVICOU	12.00	11.99
	802.11ac40-VHT0	151	5755	MCS0	12.00	11.91
	002.11a040-VH10	159	5795	IVICOU	12.00	11.88
	802.11ax40-HE0	151	5755	MCS0	12.00	11.84
	002.11ax40-NEU	159	5795	INICOU	12.00	11.99
	802.11ac80-VHT0	155	5775	MCS0	12.00	11.96
	802.11ax80-HE0	155	5775	MCS0	12.00	11.85

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-like extent of the law. prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 47 of 130

		TX1	(Chain-A)			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		1	2412		11.50	11.37
		2	2417		14.00	13.98
		6	2437		15.00	14.94
	802.11n20-HT0	10	2457	MCS0	14.00	13.88
		11	2462		11.00	10.94
		12	2467		10.50	10.31
		13	2472		8.00	7.81
		1	2412		11.50	11.46
		2	2417		14.00	14.00
		6	2437		15.00	14.92
2450 MHz	802.11ax20-HE0	10	2457	MCS0	14.00	13.86
2 100 10112		11	2462		11.00	10.91
		12	2467		10.50	10.50
		13	2472		8.00	7.83
		3	2422		11.75	11.64
		4	2427		12.00	11.94
		5	2432		13.00	12.98
	802.11n40-HT0	6	2437	MCS0	12.00	11.92
	332.11110	8	2447	WICSU	11.25	11.17
		9	2452		10.50	10.45
		10	2457		7.00	6.96
		11	2462		9.00	8.87

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-like extent of the law. prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 1



Page: 48 of 130

	TX1(Chain-A)									
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)				
		3	2422		11.75	11.70				
		4	2427		12.00	11.92				
		5	2432		13.00	12.90				
2450 MHz	802.11n40-HE0	6	2437	MCS0	12.00	11.98				
2430 1011 12	802.111140-1160	8	2447	MCSU	11.25	11.18				
		9	2452		10.50	10.32				
		10	2457		7.00	6.84				
		11	2462		9.00	8.92				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-like extent of the law. prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 49 of 130

		TX1(C	hain-A)			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		36	5180		12.00	11.92
	802.11n20-HT0	40	5200	MCS0	12.00	11.84
	002.111120-F110	44	5220	MCSU	12.00	11.89
		48	5240		12.00	11.82
		36	5180		12.00	11.81
	802.11ac20-VHT0	40	5200	MCS0	12.00	11.86
		44	5220	IVICOU	12.00	11.94
		48	5240		12.00	11.84
	802.11ax20-HE0	36	5180	MCS0	12.00	11.85
		40	5200		12.00	11.98
5.15-5.25 GHz	002.11ax20-11L0	44	5220	IVICOU	12.00	11.82
3.13-3.23 GHZ		48	5240		12.00	11.91
	802.11n40-HT0	38	5190	MCS0	12.00	11.99
	002.111140-1110	46	5230	MCSU	12.00	11.96
	802.11ac40-VHT0	38	5190	MCS0	12.00	11.91
	002.11ac40-V1110	46	5230	MCSU	12.00	11.86
	802.11ax40-HE0	38	5190	MCS0	12.00	11.83
	002.11aA+0-11L0	46	5230	IVICOU	12.00	11.84
	802.11ac80-VHT0	42	5210	MCS0	12.00	11.99
	802.11ax80-HE0	42	5210	MCS0	12.00	11.94
	802.11ac160-VHT0	50	5250	MCS0	10.25	10.16
	802.11ax160-HE0	50	5250	MCS0	10.25	10.13

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-like extent of the law. prosecuted to the fullest extent of the law.



Page: 50 of 130

		TX1(C	Chain-A)			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		52	5260		12.00	11.82
	802.11n20-HT0	56	5280	MCS0	12.00	11.81
	002.111120-1110	60	5300	IVICOU	12.00	11.83
		64	5320		12.00	11.82
		52	5260		12.00	11.88
	802.11ac20-VHT0	56	5280	MCS0	12.00	11.86
		60	5300		12.00	11.93
		64	5320		12.00	11.93
		52	5260		12.00	11.92
5.25-5.35 GHz	802.11ax20-HE0	56	5280	MCS0	12.00	11.91
0.20-0.00 0112	002.11ax20-11L0	60	5300	MCSU	12.00	11.87
		64	5320		12.00	11.96
	802.11n40-HT0	54	5270	MCS0	12.00	11.98
	002.111140-F110	62	5310	IVICOU	12.00	11.96
	802.11ac40-VHT0	54	5270	MCS0	12.00	11.90
	002.11a040-VIII0	62	5310	IVICOU	12.00	11.89
	802.11ax40-HE0	54	5270	MCS0	12.00	11.96
	ουΖ. ι ιαχ4υ-ΠΕυ	62	5310	IVICOU	12.00	11.88
ļ	802.11ac80-VHT0	58	5290	MCS0	12.00	11.99
	802.11ax80-HE0	58	5290	MCS0	12.00	11.86

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-like extent of the law. prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 1



Page: 51 of 130

		TX1(C	hain-A)			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		100	5500		12.00	11.85
		104	5520		12.00	11.91
		116	5580		12.00	11.83
	802.11n20-HT0	120	5600	MCS0	12.00	11.83
		136	5680		12.00	11.85
		140	5700		12.00	11.99
		144	5720		12.00	11.97
		100	5500		12.00	11.85
		104	5520		12.00	11.86
		116	5580		12.00	11.81
5600 MHz	802.11ac20-VHT0	120	5600	MCS0	12.00	11.83
		136	5680		12.00	11.98
		140	5700		12.00	11.82
		144	5720		12.00	11.93
		100	5500		12.00	11.90
		104	5520		12.00	11.87
		116	5580		12.00	11.98
	802.11ax20-HE0	120	5600	MCS0	12.00	11.89
		136	5680		12.00	11.81
		140	5700		12.00	11.97
		144	5720		12.00	11.84

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-like extent of the law. prosecuted to the fullest extent of the law.



Page: 52 of 130

		TX1(CI	hain-A)			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		102	5510		12.00	11.94
		110	5550		12.00	11.99
	802.11n40-HT0	118	5590	MCS0	12.00	11.98
		134	5670		12.00	11.97
		142	5710		12.00	11.96
		102	5510		12.00	11.98
		110	5550		12.00	11.96
	802.11ac40-VHT0	118	5590	MCS0	12.00	11.84
		134	5670		12.00	11.96
		142	5710		12.00	11.92
		102	5510		12.00	11.99
5600 MHz		110	5550		12.00	11.82
	802.11ax40-HE0	118	5590	MCS0	12.00	11.84
		134	5670		12.00	11.86
		142	5710		12.00	11.90
		106	5530		12.00	11.97
	802.11ac80-VHT0	122	5610	MCS0	12.00	11.91
		138	5690		12.00	11.92
		106	5530		12.00	11.82
	802.11ax80-HE0	122	5610	MCS0	12.00	11.85
		138	5690		12.00	11.95
	802.11ac160-VHT0	114	5570	MCS0	10.75	10.67
	802.11ax160-HE0	114	5570	MCS0	10.75	10.73

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-like extent of the law. prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

Member of SGS Group



Page: 53 of 130

		TX1(Chain-A)			
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		149	5745		12.00	11.96
	802.11n20-HT0	157	5785	MCS0	12.00	11.98
		165	5825		12.00	11.85
	802.11ac20-VHT0	149	5745		12.00	11.89
		157	5785	MCS0	12.00	11.99
		165	5825		12.00	11.87
		149	5745		12.00	11.87
	802.11ax20-HE0	157	5785	MCS0	12.00	11.86
5800 MHz		165	5825		12.00	11.98
	802.11n40-HT0	151	5755	MCS0	12.00	11.96
	802.111140-1110	159	5795	MCSU	12.00	11.98
	802.11ac40-VHT0	151	5755	MCS0	12.00	11.93
	002.11ac40-V1110	159	5795	MCSU	12.00	11.85
	802.11ax40-HE0	151	5755	MCS0	12.00	11.88
	002.11ax40-11E0	159	5795	IVICOU	12.00	11.93
	802.11ac80-VHT0	155	5775	MCS0	12.00	11.99
	802.11ax80-HE0	155	5775	MCS0	12.00	11.92

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-like extent of the law. prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 54 of 130

Bluetooth conducted nower table:

Diuctoo	tii cona	ucieu po	Wei labie	•				
			1Mbps		2M	bps	3Mbps	
Mode	Channel	Frequency (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
	CH 00	2402		9.22		6.57		6.69
BR/EDR	CH 39	2441	11.00	9.83	7.00	6.99	7.00	6.91
	CH 78	2480		9.90		6.97		6.84

Mode	Channel	Frequency	GF	SK
	Onamic	(MHz)	Max. Rated Avg.Power + Max. Tolerance (dBm)	Average Output Power (dBm)
	CH 00	2402	, ,	6.31
LE	CH 19	2440	7	6.81
	CH 39	2480		6.59

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 55 of 130

1.4 Test Environment

Ambient Temperature: 22±2° C Tissue Simulating Liquid: 22±2° C

1.5 Operation Description

For WLAN, using chipset specific software to control the EUT, and makes it transmit in maximum power. The EUT is set to maximum power level during all tests, and at the beginning of each test the battery is fully charged. EUT was tested as below based on FCC guidance.

WLAN

Laptop mode (power level 1)

SAR is measured with display screen open at 90 degree and bottom side of keyboard touch against the flat phantom.

Tablet mode (power level 2)

SAR is measured with backside and edges touch against the flat phantom.

For WLAN tablet mode, SAR is measured with SISO power and MIMO power separately and respectively (standalone SAR measurements).

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 56 of 130

Note:

- During the SAR testing, the DASY 5 system checks power drift by comparing the e-field strength of one specific location measured at the beginning with that measured at the end of the SAR testing.
- 2. According to KDB447498D01v06, testing of other required channels is not required when the reported 1-g SAR for the highest output channel is ≤ 0.8 W/kg, when the transmission band is \leq 100 MHz.
- 3. According to KDB865664D01v01r04, SAR measurement variability must be assessed for each frequency band. When the original highest measured SAR is ≥ 0.8 W/kg, repeated that measurement once. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is \geq 1.45 W/kg (\sim 10% from the 1-g SAR limit)

802.11b DSSS SAR Test Requirements:

- 4. SAR is measured for 2.4 GHz 802.11b DSSS mode using the highest measured maximum output power channel, when the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 5. When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

802.11g/n OFDM SAR Test Exclusion Requirements:

6. SAR is not required for 802.11g/n since the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Initial Test Configuration:

7. An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 f (886-2) 2298-0488



Page: 57 of 130

the highest maximum output power specified for production units in each standalone and aggregated frequency band.

- 8. SAR is measured using the highest measured maximum output power channel. When the reported SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
- 9. Since the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for subsequent test configuration.
- 10.BT and WLAN TX2 use the same antenna path, but they can't transmit at the same time.
- 11. Based on FCC guidance, general principles of KDB248227D01 can be applied to 802.11ax to determine initial test configuration with 802.11ax being considered as the highest 802.11 mode for the appropriate frequency band.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 58 of 130

1.6 Operating modes validation by power measurement

The device is a convertible laptop computer with predefined single fixed power to each device modes.

For the operating modes validation, the measured conducted output power is monitored qualitatively to identify the triggering characteristics and recorded quantitatively.

DUT operating mode	Lid Angle description	WLAN TX state
Lid Close	0° ≤ Lid angle <10 °	No TX Transmission
Laptop	10° < Lid angle ≤ 190°	Power Level 1
Tablet	190° < Lid angle ≤ 360°	Power Level 2
Book	10° < Lid angle ≤ 360°	Power Level 2

Intel AX201D2W	TX2(C	hain-B)	TX1(C	hain-A)
Wireless technology	Power level 1 (dBm)	Power level 2 (dBm)	Power level 1 (dBm)	Power level 2 (dBm)
WLAN802.11b	21	18	21	18
WLAN802.11g	20.5	18	20.5	18
WLAN802.11n(20M)	20.5	18	20.5	18
WLAN802.11n(40M)	18	18	18	18
WLAN802.11ax(20M)	20.5	18	20.5	18
WLAN802.11ax(40M)	18	18	18	18
WLAN802.11a 5.2GHz	21	15.5	21	15
WLAN802.11n(20M) 5.2GHz	21	15.5	21	15
WLAN802.11n(40M) 5.2GHz	21	15.5	21	15
WLAN802.11ac(20M) 5.2GHz	21	15.5	21	15
WLAN802.11ac(40M) 5.2GHz	21	15.5	21	15
WLAN802.11ac(80M) 5.2GHz	19	15.5	18.75	15
WLAN802.11ac(160M) 5.2GHz	15.25	15.25	15.75	15
WLAN802.11ax(20M) 5.2GHz	21	15.5	21	15
WLAN802.11ax(40M) 5.2GHz	21	15.5	21	15
WLAN802.11ax(80M) 5.2GHz	19	15.5	18.75	15
WLAN802.11ax(160M) 5.2GHz	15.25	15.25	15.75	15
WLAN802.11a 5.3GHz	21	15.5	21	15
WLAN802.11n(20M) 5.3GHz	21	15.5	21	15
WLAN802.11n(40M) 5.3GHz	21	15.5	21	15
WLAN802.11ac(20M) 5.3GHz	21	15.5	21	15
WLAN802.11ac(40M) 5.3GHz	21	15.5	21	15
WLAN802.11ac(80M) 5.3GHz	18.25	15.5	18.25	15
WLAN802.11ax(20M) 5.3GHz	21	15.5	21	15
WLAN802.11ax(40M) 5.3GHz	21	15.5	21	15
WLAN802.11ax(80M) 5.3GHz	18.25	15.5	18.25	15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 59 of 130

Intel AX201D2W	TX2(C	hain-B)	TX1(C	hain-A)
Wireless technology	Power level 1 (dBm)	Power level 2 (dBm)	Power level 1 (dBm)	Power level 2 (dBm)
WLAN802.11a 5.6GHz	21	15.5	21	15
WLAN802.11n(20M) 5.6GHz	21	15.5	21	15
WLAN802.11n(40M) 5.6GHz	21	15.5	21	15
WLAN802.11ac(20M) 5.6GHz	21	15.5	21	15
WLAN802.11ac(40M) 5.6GHz	21	15.5	21	15
WLAN802.11ac(80M) 5.6GHz	21	15.5	21	15
WLAN802.11ac(160M) 5.6GHz	14.75	14.75	15	15
WLAN802.11ax(20M) 5.6GHz	21	15.5	21	15
WLAN802.11ax(40M) 5.6GHz	21	15.5	21	15
WLAN802.11ax(80M) 5.6GHz	21	15.5	21	15
WLAN802.11ax(160M) 5.6GHz	14.75	14.75	15	15
WLAN802.11a 5.8GHz	21	15.5	21	15
WLAN802.11n(20M) 5.8GHz	21	15.5	21	15
WLAN802.11n(40M) 5.8GHz	21	15.5	21	15
WLAN802.11ac(20M) 5.8GHz	21	15.5	21	15
WLAN802.11ac(40M) 5.8GHz	21	15.5	21	15
WLAN802.11ac(80M) 5.8GHz	19	15.5	19	15
WLAN802.11ax(20M) 5.8GHz	21	15.5	21	15
WLAN802.11ax(40M) 5.8GHz	21	15.5	21	15
WLAN802.11ax(80M) 5.8GHz	19	15.5	19	15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-like extent of the law. prosecuted to the fullest extent of the law.



Page: 60 of 130

1.6.1 Results and conclusion

The measured output power versus lid angle is tabulated in the following table, and the triggering verification complies with the device mode / power level declared by the manufacturer.

Operating mode validation by power measurement

Antenna	Operation mode	Lid angle	802.11b	802.11n(40M) 5.2G	802.11ac(80M) 5.2G	802.11n(40M) 5.3G	802.11ac(80M) 5.3G	802.11ac(80M) 5.6G	802.11n(40M) 5.8G	802.11ac(80M) 5.8G
		0°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		1°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		2°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		3°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		4°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
	Lid close	5°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		6°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		7°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		8°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		9°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		10°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		11°	20.93	20.79	18.92	20.84	18.17	20.83	20.91	18.87
		12°	20.88	20.73	18.98	20.86	18.06	20.96	20.84	18.99
		13°	20.97	20.86	19.00	20.98	18.19	20.94	20.93	18.89
		14°	20.82	20.84	18.87	20.91	18.24	20.93	20.95	18.89
		15°	20.94	20.89	18.98	20.92	18.24	20.94	20.84	18.91
		25°	20.86	20.85	18.94	20.83	18.16	20.93	20.88	18.89
		35°	20.96	20.81	18.81	20.86	18.25	20.81	21.00	18.85
TX2(Chain-B)		45°	20.96	20.96	18.83	20.86	18.12	20.95	20.87	18.97
TAZ(GHair-D)		55°	20.91	20.78	18.99	20.87	18.20	20.83	20.85	18.89
		65°	20.94	20.75	18.97	21.00	18.07	20.94	20.82	18.84
		75°	21.00	20.95	18.94	21.00	18.20	20.88	20.83	18.98
		85°	20.94	20.83	18.84	20.96	18.10	20.93	20.88	18.88
		95°	20.92	20.82	18.93	20.94	18.17	20.93	20.96	18.84
	Laptop mode	105°	21.00	20.96	18.85	20.97	18.16	20.99	20.94	18.99
		115°	20.86	20.67	18.93	20.93	18.14	20.91	21.00	18.89
		125°	20.94	20.92	18.89	20.96	18.20	20.81	20.90	18.99
		135°	20.94	20.75	19.00	20.95	18.13	20.90	20.88	18.92
		145°	20.87	20.69	18.98	20.95	18.11	20.94	20.92	18.87
		155°	20.81	20.65	18.99	20.94	18.19	20.99	20.94	19.00
		165°	20.98	20.81	18.92	20.82	18.17	20.90	20.98	18.87
		175°	20.97	20.79	18.81	20.97	18.07	20.83	20.88	19.00
		185°	20.84	20.65	18.94	20.91	18.14	20.90	20.90	18.85
		186°	20.86	20.75	18.85	20.91	18.07	20.93	20.94	18.86
		187°	20.86	20.83	18.87	20.84	18.06	20.93	20.82	18.90
		188°	20.85	20.73	18.95	20.83	18.18	20.87	21.00	18.90
		189°	20.95	20.82	18.82	20.85	18.07	20.94	20.92	18.98
		190°	20.91	20.81	18.91	20.93	18.25	20.88	20.90	18.99

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 f (886-2) 2298-0488



Page: 61 of 130

Antenna	Operation mode	Lid angle	802.11b	802.11n(40M) 5.2G	802.11ac(80M) 5.2G	802.11n(40M) 5.3G	802.11ac(80M) 5.3G	802.11ac(80M) 5.6G	802.11n(40M) 5.8G	802.11ac(80M) 5.8G
		191°	17.81	15.33	15.50	15.44	15.39	15.33	15.48	15.49
		192°	17.87	15.42	15.39	15.47	15.38	15.46	15.39	15.46
		193°	17.93	15.42	15.32	15.31	15.32	15.45	15.40	15.41
		194°	17.84	15.45	15.43	15.45	15.47	15.39	15.32	15.33
		195°	17.95	15.50	15.44	15.47	15.45	15.41	15.49	15.45
		205°	17.81	15.45	15.40	15.48	15.48	15.46	15.46	15.37
		215°	17.92	15.41	15.40	15.48	15.35	15.46	15.40	15.47
		225°	18.00	15.31	15.38	15.43	15.37	15.38	15.44	15.38
		235°	17.85	15.49	15.40	15.48	15.50	15.40	15.47	15.44
		245°	17.82	15.36	15.31	15.48	15.46	15.33	15.43	15.31
		255°	17.85	15.44	15.31	15.43	15.42	15.35	15.36	15.38
	l .	265°	17.90	15.36	15.32	15.50	15.49	15.41	15.34	15.36
	Tablet mode	275°	17.86	15.50	15.50	15.45	15.36	15.41	15.50	15.49
	Tablet mode	285°	17.96	15.40	15.34	15.43	15.38	15.49	15.38	15.46
		295°	17.87	15.36	15.40	15.37	15.43	15.39	15.39	15.34
	l .	305°	17.87	15.47	15.45	15.35	15.42	15.42	15.49	15.50
		315°	17.91	15.34	15.48	15.46	15.43	15.39	15.49	15.33
		325°	17.87	15.35	15.44	15.33	15.49	15.42	15.33	15.49
		335°	17.99	15.45	15.33	15.43	15.46	15.47	15.40	15.31
		345°	17.85	15.33	15.46	15.39	15.48	15.49	15.35	15.47
		355°	17.85	15.37	15.32	15.38	15.40	15.36	15.42	15.48
	j .	356°	17.98	15.47	15.35	15.49	15.38	15.48	15.40	15.42
	j l	357°	17.97	15.37	15.32	15.43	15.49	15.36	15.38	15.35
	l .	358°	17.84	15.35	15.45	15.44	15.41	15.47	15.49	15.42
		359°	17.92	15.38	15.42	15.33	15.40	15.34	15.35	15.31
		360°	17.96	15.33	15.32	15.45	15.43	15.35	15.45	15.40
		11°	17.96	15.50	15.38	15.49	15.48	15.34	15.33	15.38
		12°	17.96	15.48	15.42	15.46	15.50	15.33	15.47	15.39
		13°	17.82	15.40	15.32	15.50	15.47	15.48	15.40	15.50
		14°	17.92	15.33	15.47	15.50	15.38	15.45	15.38	15.47
		15°	17.83	15.47	15.36	15.38	15.32	15.42	15.41	15.32
		25°	17.86	15.42	15.34	15.44	15.48	15.38	15.37	15.39
		35°	17.87	15.36	15.46	15.50	15.31	15.49	15.45	15.42
	l .	45°	17.97	15.46	15.48	15.43	15.44	15.46	15.40	15.48
TX2(Chain-B)	l .	55°	17.94	15.40	15.33	15.31	15.31	15.39	15.34	15.38
	l .	65°	17.96	15.33	15.49	15.31	15.34	15.32	15.34	15.36
		75°	17.98	15.46	15.49	15.47	15.47	15.35	15.34	15.32
		85° 95°	17.89 17.96	15.42 15.41	15.43 15.37	15.32 15.38	15.49 15.38	15.41 15.47	15.38 15.41	15.37 15.37
		105°	17.94	15.32	15.35	15.43	15.40	15.40	15.41	15.32
		115°	17.86	15.49	15.39	15.37	15.42	15.33	15.41	15.36
		125°	17.81	15.39	15.43	15.38	15.50	15.46	15.33	15.36
		135°	17.92	15.38	15.38	15.31	15.44	15.35	15.33	15.48
		145°	17.93	15.45	15.43	15.44	15.31	15.46	15.49	15.44
		155°	17.84	15.44	15.42	15.37	15.31	15.33	15.49	15.32
		165°	17.83	15.38	15.48	15.31	15.36	15.33	15.42	15.42
		175°	17.98	15.35	15.43	15.34	15.36	15.38	15.31	15.37
	Book mode	185°	17.90	15.33	15.35	15.49	15.37	15.41	15.49	15.44
	(vertical)	195°	17.73	15.20	15.48	15.44	15.47	15.42	15.42	15.44
	(*01000)	205°	17.68	15.31	15.48	15.50	15.46	15.40	15.45	15.38
	j	215°	17.83	15.31	15.34	15.35	15.47	15.33	15.48	15.34
	j	225°	17.76	15.30	15.42	15.48	15.33	15.39	15.36	15.43
	j †	235°	17.84	15.44	15.39	15.50	15.45	15.35	15.32	15.46
	i t	245°	17.74	15.26	15.46	15.37	15.36	15.46	15.31	15.49
	j	255°	17.77	15.40	15.35	15.36	15.47	15.49	15.42	15.42
	j	265°	17.82	15.15	15.46	15.33	15.38	15.42	15.47	15.35
	j	275°	17.68	15.42	15.38	15.35	15.40	15.36	15.47	15.36
	i t	285°	17.67	15.26	15.33	15.46	15.50	15.42	15.34	15.48
	i t	295°	17.93	15.44	15.44	15.33	15.39	15.33	15.38	15.43
	i t	305°	17.88	15.34	15.43	15.35	15.45	15.42	15.42	15.45
	i t	315°	17.67	15.38	15.38	15.35	15.42	15.37	15.49	15.46
	i t	325°	17.92	15.28	15.32	15.45	15.44	15.45	15.46	15.33
	i t	335°	17.95	15.24	15.48	15.35	15.32	15.37	15.47	15.31
	j †	345°	17.82	15.42	15.45	15.45	15.35	15.45	15.36	15.36
	j t	355°	17.85	15.33	15.43	15.33	15.48	15.42	15.32	15.38
	j †	356°	17.94	15.18	15.48	15.44	15.45	15.36	15.42	15.39
	j t	357°	17.90	15.35	15.32	15.39	15.45	15.49	15.46	15.42
	j t	358°	17.79	15.19	15.42	15.37	15.41	15.40	15.40	15.37
	j	359°	17.79	15.29	15.47	15.49	15.31	15.42	15.32	15.35
	j	360°	17.96	15.15	15.36	15.45	15.50	15.39	15.43	15.50
		300	17.00	10.10	10.00	10.40	10.00	13.33	10.40	10.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-like extent of the law. prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 1



Page: 62 of 130

Antenna	Operation mode	Lid angle	802.11b	802.11n(40M) 5.2G	802.11ac(80M) 5.2G	802.11n(40M) 5.3G	802.11ac(80M) 5.3G			802.11ac(80M) 5.8G
		360° 359°	17.87 17.71	15.34 15.46	15.38 15.48	15.44 15.43	15.47 15.49	15.32 15.48	15.37 15.34	15.50 15.46
		358°	17.74	15.43	15.42	15.41	15.43	15.43	15.37	15.42
		357° 356°	17.92 17.66	15.31 15.29	15.33 15.33	15.48 15.32	15.49 15.45	15.41 15.37	15.36 15.34	15.44 15.46
		355°	17.81	15.37	15.43	15.37	15.34	15.32	15.34	15.47
		345° 335°	17.67 17.72	15.25 15.37	15.36 15.46	15.42 15.31	15.36 15.46	15.40 15.46	15.45 15.31	15.45 15.40
		325°	17.80	15.28	15.39	15.46	15.33	15.49	15.31	15.47
		315°	17.82	15.41	15.32	15.46	15.42	15.50	15.39	15.41
		305° 295°	17.83 17.69	15.37 15.28	15.41 15.50	15.50 15.48	15.45 15.42	15.39 15.39	15.43 15.40	15.39 15.38
		285°	17.82	15.47	15.31	15.31	15.50	15.50	15.45	15.45
		275° 265°	17.84 17.91	15.17 15.33	15.44 15.49	15.39 15.43	15.49 15.32	15.43 15.42	15.49 15.37	15.50 15.48
		255°	17.68	15.28	15.48	15.36	15.44	15.45	15.34	15.35
		245° 235°	17.83 17.93	15.24 15.27	15.46 15.43	15.49 15.39	15.36 15.47	15.33 15.32	15.44 15.39	15.44 15.48
		225°	17.86	15.28	15.31	15.31	15.49	15.37	15.41	15.38
		215° 205°	17.70 17.86	15.33 15.30	15.37 15.41	15.50 15.34	15.47 15.35	15.42 15.33	15.37 15.38	15.39 15.49
	Book mode	195°	17.92	15.31	15.43	15.35	15.37	15.46	15.44	15.50
	(vertical)	185° 175°	17.97 17.98	15.50 15.39	15.42 15.45	15.46 15.40	15.34 15.42	15.48 15.35	15.50 15.42	15.41 15.34
		165°	17.84	15.33	15.50	15.36	15.31	15.44	15.32	15.46
		155°	17.89	15.49	15.44	15.31	15.39	15.37	15.38	15.42
		145° 135°	17.88 17.96	15.40 15.38	15.31 15.42	15.49 15.47	15.34 15.36	15.32 15.42	15.31 15.34	15.34 15.34
		125°	17.90	15.42	15.39	15.49	15.39	15.50	15.34	15.42
		115° 105°	17.92 17.86	15.37 15.49	15.48 15.31	15.45 15.34	15.37 15.38	15.48 15.41	15.50 15.47	15.37 15.42
		95°	17.90	15.36	15.41	15.49	15.34	15.43	15.48	15.50
		85° 75°	17.90 17.84	15.46 15.47	15.43	15.44 15.35	15.42	15.39	15.49 15.41	15.42
		75° 65°	17.98	15.47 15.50	15.48 15.34	15.35	15.44 15.43	15.31 15.34	15.41	15.42 15.37
		55°	17.90	15.44	15.45	15.32	15.40	15.33	15.42	15.38
		45° 35°	17.98 17.98	15.31 15.49	15.43 15.37	15.45 15.48	15.33 15.31	15.45 15.41	15.47 15.48	15.39 15.45
		25°	17.99	15.42	15.48	15.39	15.42	15.42	15.42	15.32
		15° 14°	17.90 17.97	15.38 15.38	15.39 15.39	15.36 15.34	15.43 15.39	15.42 15.48	15.36 15.37	15.33 15.32
		13°	17.95	15.32	15.31	15.35	15.37	15.47	15.45	15.46
		12°	17.94	15.50	15.48	15.35	15.47	15.50	15.31	15.39
	-	11° 360°	17.84 17.99	15.35 15.16	15.50 15.48	15.48 15.48	15.42 15.39	15.44 15.33	15.34 15.38	15.43 15.34
		359°	17.86	15.38	15.35	15.50	15.38	15.34	15.39	15.36
		358° 357°	17.99 17.99	15.29 15.38	15.45 15.40	15.49 15.31	15.42 15.37	15.48 15.35	15.41 15.32	15.33 15.48
		356°	17.82	15.45	15.36	15.31	15.40	15.48	15.31	15.48
		355° 345°	17.99 17.89	15.33 15.40	15.49 15.48	15.48 15.41	15.44 15.35	15.31 15.48	15.43 15.48	15.31 15.46
		335°	17.96	15.19	15.41	15.34	15.44	15.32	15.38	15.35
		325°	17.97	15.43	15.39	15.46	15.43	15.49	15.33	15.37
TX2(Chain-B)		315° 305°	17.82 17.88	15.30 15.33	15.31 15.47	15.43 15.36	15.50 15.48	15.31 15.42	15.38 15.41	15.39 15.39
		295°	17.83	15.23	15.33	15.36	15.48	15.43	15.34	15.42
	Tablet mode	285° 275°	17.81 17.96	15.38 15.36	15.33 15.45	15.47 15.49	15.43 15.44	15.33 15.37	15.50 15.32	15.33 15.45
		265°	17.83	15.19	15.44	15.35	15.45	15.42	15.49	15.42
		255° 245°	17.92 17.96	15.42 15.20	15.42 15.38	15.39 15.49	15.36 15.39	15.31 15.38	15.49 15.38	15.33 15.33
		235°	17.94	15.25	15.45	15.48	15.31	15.44	15.48	15.36
		225° 215°	17.88 17.93	15.42	15.47	15.42	15.42 15.40	15.37 15.42	15.39 15.32	15.46 15.45
		205°	17.94	15.27 15.34	15.45 15.50	15.44 15.37	15.37	15.50	15.33	15.48
		195°	17.85	15.32	15.41	15.47	15.49	15.49	15.48	15.37
		194° 193°	17.86 17.88	15.23 15.33	15.47 15.35	15.48 15.42	15.43 15.47	15.33 15.37	15.36 15.47	15.44 15.37
		192°	17.82	15.31	15.50	15.40	15.32	15.47	15.43	15.41
		191°	17.81	15.23	15.41	15.36	15.31	15.35	15.49	15.34
		190° 189°	20.91 20.98	20.81 20.76	19.00 18.98	20.81 20.85	18.12 18.11	20.91 20.92	20.92 20.95	18.96 18.88
		188°	20.92	20.9	18.90	20.92	18.22	20.91	20.96	18.91
		187° 186°	20.84 20.97	20.75 20.85	18.91 18.99	20.97 20.85	18.23 18.23	20.89 20.83	20.93 20.95	18.83 18.85
		185°	20.99	20.73	18.99	20.86	18.12	20.94	20.82	18.97
		175° 165°	20.98 20.99	20.89 20.88	18.91 18.87	20.97 20.92	18.21 18.11	20.99 20.99	20.92 20.86	18.85 18.81
		155°	20.85	20.72	18.93	20.85	18.18	20.97	20.98	18.96
		145° 135°	20.86 20.91	20.79 20.99	18.97 18.94	20.81 20.82	18.07 18.24	20.91 20.89	20.91 20.90	18.95 18.81
		125°	20.91	20.77	18.82	20.92	18.20	20.87	20.94	18.92
	Lanton mode	115° 105°	20.82 20.95	20.86 20.86	18.83 18.93	20.92 20.90	18.20 18.08	20.92 20.86	20.96 20.91	18.84 18.87
	Laptop mode	105° 95°	20.95 20.95	20.86 20.78	18.93 18.91	20.90 20.87	18.08 18.17	20.86 20.84	20.91	18.87 18.85
		85°	20.91	20.83	18.91	20.87	18.21	20.92	20.95	18.92
		75° 65°	20.81 20.96	20.78 20.82	18.98 18.86	20.98 20.93	18.09 18.09	20.86 20.90	20.99 20.91	18.94 18.83
		55°	20.99	20.74	18.82	20.92	18.12	20.95	20.85	19.00
		45° 35°	20.86 20.81	20.85 20.83	18.92 18.83	20.81 20.92	18.21 18.20	20.82 21.00	20.83 20.84	18.89 18.94
		25°	20.85	20.67	18.97	20.99	18.12	20.84	20.91	18.89
		15°	20.84	20.76	18.86	20.97	18.06	20.89	20.85	18.92
		14° 13°	20.79 20.99	20.81 20.75	19.00 18.81	20.97 20.86	18.10 18.07	20.98 20.90	20.86 20.97	18.93 18.87
		12°	20.81	20.95	18.95	20.82	18.11	20.86	20.92	18.89
	 	11° 11°	20.88 n/a	20.85 n/a	18.90 n/a	20.92 n/a	18.13 n/a	20.95 n/a	20.85 n/a	18.91 n/a
		10°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		9°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		8° 7°	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a
	Lid close	6°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		5° 4°	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a
		3°	n/a	n/a	n/a	n/a	n/a n/a	n/a	n/a	n/a
		2°	n/a	n/a	n/a	n/a		n/a	n/a	n/a

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-like extent of the law. prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 1 台灣檢驗科技股份有限公司



Page: 63 of 130

Antenna	Operation mode	Lid angle	802.11b	802.11n(40M) 5.2G	802.11ac(160M) 5.2G	802.11n(40M) 5.3G	802.11ac(80M) 5.3G	802.11ac(80M) 5.6G	802.11ac(160M) 5.6G	802.11n(40M) 5.8G	802.11ac(80M) 5.8G
		0°	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a
		2°	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a
		3°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
	Lid close	4° 5°	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a
	Lid close	6°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		7°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		8° 9°	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a
		10°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		11° 12°	20.98	20.83	15.74	20.95	18.19	20.82	14.85	20.86	18.82
		12°	20.91 21.00	20.98 20.98	15.58 15.63	20.90 20.89	18.07 18.12	20.93 20.93	14.84 14.82	20.89 20.92	18.83 18.87
		14°	20.89	20.95	15.72	20.96	18.21	20.91	14.91	20.82	18.89
		15° 25°	20.89 20.81	20.85	15.60 15.75	20.99 20.85	18.15 18.23	20.99	14.91 14.93	20.87 20.93	18.92 18.89
		35°	20.93	20.92 20.86	15.73	20.94	18.18	20.87 20.90	14.91	20.93	18.88
		45°	20.84	20.99	15.57	20.87	18.06	20.95	15.00	20.81	18.87
		55° 65°	20.93 20.81	20.89 20.97	15.56 15.74	20.87 20.87	18.20 18.13	20.90 20.96	14.88 14.81	20.99 20.91	18.99 18.93
		75°	20.88	20.99	15.69	20.89	18.24	20.85	14.91	20.81	18.94
		85° 95°	20.86 20.88	20.82 20.99	15.72 15.56	20.96 20.86	18.09 18.16	20.83 20.98	14.92 15.00	20.85 21.00	18.92 18.97
	Laptop mode	105°	20.82	20.99	15.61	20.98	18.15	20.84	14.89	20.95	19.00
		115°	20.86	20.85	15.60	20.81	18.08	20.88	14.86	20.93	19.00
		125° 135°	20.86 20.90	20.83 20.93	15.75 15.73	20.98 20.82	18.09 18.09	20.99 20.81	14.93 14.84	20.86 20.84	18.96 18.91
		145°	20.82	20.93	15.64	20.86	18.11	20.96	14.83	20.95	18.93
	l	155°	20.87	20.93	15.65	20.95	18.11	20.91	14.95	20.95	18.99
	l	165° 175°	20.89 20.93	20.95 20.91	15.73 15.69	20.93 20.89	18.08 18.06	20.98 20.86	14.96 14.97	20.97 20.81	18.85 18.84
]	185°	20.86	20.95	15.64	20.97	18.18	20.85	14.89	20.84	18.89
	1	186°	20.81	20.84	15.75	20.91	18.13	20.99	14.82	20.88	18.92
	1	187° 188°	20.85 20.91	20.88 20.98	15.63 15.74	20.99 20.90	18.09 18.10	20.86 20.86	14.83 14.84	20.82 20.89	18.93 18.87
]	189°	20.85	20.82	15.74	20.83	18.17	20.86	14.83	20.92	18.88
	 	190° 191°	20.86 17.82	20.94 14.99	15.68 14.91	20.92 14.91	18.06 14.97	20.88 14.97	14.92 14.87	20.85 14.86	18.94 14.94
]	191°	18.00	14.82	14.98	14.91	14.88	14.97	14.88	14.92	14.94
]	193°	17.84	14.91	14.86	14.82	14.93	14.85	14.94	14.91	14.96
		194° 195°	17.94 17.99	14.94 14.96	14.81 14.94	14.90 14.93	14.83 14.81	14.84 14.95	14.96 14.97	14.90 14.93	14.89 14.81
		205°	17.99	14.88	14.94	14.84	14.91	14.95	14.97	14.95	14.96
		215*	17.84	14.87	14.85	14.94	14.85	14.95	14.95	14.91	14.97
		225° 235°	17.89 17.84	14.89 14.96	14.92 14.82	14.84 14.93	14.92 14.84	14.91 14.81	14.90 14.96	14.94 14.86	14.94 15.00
	Tablet mode	245°	17.89	14.90	14.88	14.93	14.84	14.84	14.95	14.86	14.97
		255° 265°	17.97 17.94	14.86 15.00	14.81 14.94	14.93 14.86	14.85 14.85	14.86 14.84	14.93 14.82	14.85 14.86	14.92 14.85
		275°	17.87	14.95	14.93	14.99	14.95	14.83	14.92	14.92	14.85
		285°	17.92	14.88	14.94	14.95	14.84	14.92	14.96	14.95	14.91
		295° 305°	17.81 17.93	14.95 14.84	14.89 14.97	14.95 14.88	15.00 14.92	14.97 14.95	14.89 14.89	14.90 14.84	14.91 14.88
TX1(Chain-A)		315°	17.96	14.98	14.99	14.82	14.87	14.87	14.81	14.96	14.82
		325° 335°	17.93 17.97	14.81 14.90	14.93	14.84	14.92 14.85	14.92	14.88 14.88	14.81	14.97
		345°	17.97	14.90	14.86 15.00	14.89 14.94	14.85	14.83 14.85	14.88	14.94 14.87	14.88 14.94
		355°	17.87	14.94	14.87	14.89	14.89	14.96	14.96	14.97	14.96
		356° 357°	17.85 17.97	14.99 14.89	14.82 14.91	14.87 14.86	14.94 14.90	14.92 14.89	14.86 14.89	14.86 14.97	14.85 14.83
		358°	17.91	14.91	15.00	14.82	14.96	14.90	14.95	14.99	14.92
		359°	17.90	14.94	14.96	14.93	15.00	14.87	14.82	14.94	14.96
		360° 11°	17.97 17.92	14.81 14.89	14.85 14.87	14.98 14.93	14.93 14.81	14.97 14.87	14.87 14.9	14.90 14.91	14.88 14.88
		12°	17.84	14.95	14.88	14.81	14.88	14.84	14.89	14.94	14.94
		13° 14°	17.99 17.87	14.86 14.81	14.81 14.88	14.88 14.96	14.93 14.99	14.84 14.91	14.96 14.83	14.88 14.90	14.81 14.82
		15°	17.88	14.86	14.82	14.93	14.89	14.94	14.85	14.89	14.86
	1	25°	17.87	14.94	14.93	14.85	14.90	14.96	14.87	14.88	14.91
	l	35° 45°	17.96 17.85	14.94 14.82	15.00 14.93	14.92 14.88	14.91 14.99	14.87 14.91	14.95 14.81	14.84 14.89	14.99 14.84
	l	55°	17.99	14.89	14.94	14.88	14.96	14.92	14.86	14.97	14.84
]	65° 75°	17.90 17.93	14.85 14.86	14.83 14.89	14.82 14.99	14.84 14.85	14.97 14.94	14.88 15.00	14.85 14.85	14.81 14.92
]	85°	17.86	14.94	14.85	14.91	14.94	14.94	14.89	14.88	14.85
	1	95° 105°	17.84	14.88	14.95 14.83	14.89 14.95	14.81	14.88	15.00 14.89	14.93	14.96 14.83
	l	105°	17.96 17.97	14.89 14.90	14.83	14.95 14.90	14.89 15.00	14.89 14.95	14.89	14.85 14.95	14.83 14.85
	l	125°	17.82	14.89	14.94	14.93	14.88	14.81	14.82	14.84	14.97
]	135° 145°	17.91 17.96	14.94 14.83	14.93 14.83	14.99 14.82	15.00 14.93	14.87 14.86	14.83 14.91	14.99 14.99	14.84 14.99
	1	155°	17.90	15.00	14.84	14.91	14.88	14.91	15.00	14.99	15.00
]	165°	17.83	14.99	15.00	14.99	14.99	14.86	14.86	14.81	14.89
	Book mode	175° 185°	17.98 17.99	14.85 14.84	14.81 14.90	14.82 14.97	14.94 14.92	14.99 14.98	14.98 14.89	14.88 14.88	14.99 14.81
	(vertical)	195°	17.85	14.90	14.82	14.92	14.84	14.94	14.93	14.96	15.00
	l	205° 215°	17.84 17.85	14.90 14.88	14.85 14.98	14.92 14.98	14.95 14.96	14.99 15.00	14.97 14.86	14.82 14.89	14.88 14.82
	l	215°	17.89	14.88	14.95	14.98	14.99	14.96	14.96	14.94	14.93
	l	235°	17.81	14.89	14.86	14.88	14.96	14.87	14.90	14.81	14.91
	1	245° 255°	17.83 18.00	14.99 14.94	14.88 14.81	14.88 14.98	14.93 15.00	14.98 15.00	14.93 14.99	14.88 14.94	14.81 15.00
	l	265°	17.92	14.82	14.85	14.96	14.95	14.99	14.86	14.93	14.90
	1	275°	17.98	14.99	14.91	14.93	14.89	14.91	14.98	14.82	15.00
	l	285° 295°	18.00 17.89	14.98 14.97	14.85 14.98	14.95 14.91	14.88 14.93	14.87 14.83	14.87 14.98	14.87 14.90	14.97 14.87
	l	305°	17.85	14.90	14.98	14.81	14.83	14.93	14.90	14.97	14.98
	l	315°	18.00	14.98	14.85	14.82	14.83	14.90	14.97	14.89	14.83
	l	325° 335°	17.88 17.89	14.82 14.84	14.86 15.00	14.89 14.94	14.89 14.82	14.81 14.85	14.88	14.84 14.99	14.86 14.81
	l	345°	17.92	14.84	14.92	14.97	14.95	14.84	14.94	14.94	14.82
	l	355°	17.82	14.88	14.88	14.83	14.84	14.95	14.83	14.98	14.92
	1	356° 357°	17.81 17.88	14.89 14.86	14.97 14.93	14.88 14.97	14.94 14.90	14.89 14.91	14.92 14.82	14.83 15.00	14.89 14.95
	l	358°	17.82	14.88	14.96	14.83	14.87	14.89	14.93	14.81	14.81
	l	359°	17.86	14.85	14.96	14.87	14.91	14.85	14.96	14.93	14.89
		360°	17.94	14.94	14.86	14.91	14.99	15.00	14.82	15.00	14.93

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-like extent of the law. prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 64 of 130

Antenna	Operation mode	Lid angle	802.11b	802.11n(40M) 5.2G		802.11n(40M) 5.3G		802.11ac(80M) 5.6G		802.11n(40M) 5.8G	802.11ac(80M)
		360° 359°	17.85 17.99	14.87 14.99	14.97 14.81	14.90 14.87	14.96 14.93	14.92 14.82	14.84 14.84	14.90 14.85	14.96 14.86
		358°	17.86	14.90	14.93	14.84	14.94	14.87	14.96	14.97	14.98
		357°	17.85	14.86	14.89	14.81	14.99	14.93	14.89	14.89	14.99
		356° 355°	17.83 17.95	14.94 14.98	14.90 14.89	14.93 14.83	15.00 14.85	14.82 15.00	14.88 14.92	14.88 14.88	14.82 14.88
		345°	17.92	14.92	14.83	14.89	14.84	14.87	14.86	14.88	14.92
		335°	17.96	14.85	14.86	14.98	14.96	14.82	14.93	14.99	14.98
		325° 315°	17.81 17.96	14.97 14.82	14.90 14.86	14.91 14.87	14.87 14.92	14.87 14.83	14.90 14.97	14.81 14.81	14.82 14.82
		305°	17.99	14.95	14.91	14.95	14.96	14.85	14.81	14.96	14.85
		295°	17.98	14.96	14.86	14.98	14.90	14.98	14.92	14.99	14.89
		285°	17.96	15.00 14.88	15.00	14.95	14.88	14.83 14.81	14.83 14.89	14.91	14.83
		275° 265°	17.90 17.88	14.88	14.93 14.86	14.98 14.91	14.89 14.95	14.83	14.89	14.82 14.89	14.86 14.98
		255°	17.85	14.96	14.83	14.94	14.92	15.00	14.84	14.91	14.99
		245°	17.97	14.90	14.88	14.85	14.91	14.85	14.88	14.86	14.97
		235°	17.91 17.85	14.86 14.98	14.88 14.85	14.88 14.96	14.93 14.91	14.91 14.85	14.85 14.90	14.88 14.82	14.90 14.89
		225° 215°	17.98	14.88	15.00	14.94	14.97	14.94	14.90	14.95	14.89
		205°	17.99	15.00	14.91	14.93	14.86	14.88	14.81	14.96	14.86
	Book mode (vertical)	195°	17.92	14.94	14.96	14.90	14.89	14.99	15.00	14.87	14.88
	(vertical)	185° 175°	17.93 17.93	14.82 14.89	14.86 14.86	15.00 14.82	14.92 14.81	14.92 14.86	14.82 14.82	14.93 14.92	14.84 14.92
		165°	17.96	14.85	14.82	14.94	14.86	14.94	14.99	14.97	14.81
		155°	17.82	14.82	15.00	14.97	14.93	14.83	14.98	14.86	14.99
		145° 135°	17.93 18.00	14.85 14.98	14.89 14.96	14.98 14.89	14.83 14.84	14.97 15.00	14.93 14.94	14.92 14.95	14.90 14.97
		125°	17.88	14.84	14.98	14.99	15.00	14.92	14.87	14.88	14.95
	1	115°	17.90	14.87	14.87	14.99	14.93	14.82	14.82	14.85	14.83
	1	105°	17.88	14.91	14.87	14.90	14.81	14.85	14.87	14.94	14.89
	I	95° 85°	17.95 17.81	14.88 14.93	14.90 14.90	14.92 14.90	14.96 14.82	14.82 14.81	14.96 14.89	14.86 14.89	14.83 14.98
	1	75°	17.93	14.94	14.90	14.83	14.83	14.95	14.97	14.83	14.92
	ĺ	65°	17.87	14.91	14.81	14.81	14.97	14.90	14.86	14.96	14.97
	1	55° 45°	17.92 17.90	14.97 14.99	14.86 14.81	14.92 14.86	14.95 14.97	14.95 14.90	14.83 14.81	14.81 14.98	14.88 14.83
	I	45°	17.88	14.85	14.85	14.97	14.90	14.86	14.84	14.84	14.88
	I	25°	17.85	14.95	14.99	14.95	14.84	14.91	14.93	14.97	14.92
	1	15°	17.94	14.95	14.92	14.94	14.91	14.84	14.98	14.81	14.90
	ĺ	14° 13°	17.85 17.85	14.97 14.83	14.84 14.93	14.92 14.90	14.85 14.91	14.96 14.85	14.94 14.94	14.83 14.93	14.89 14.82
	1	12°	17.95	14.97	14.92	14.82	14.87	14.84	14.97	14.94	14.85
		11°	17.89	14.97	14.85	14.96	14.81	14.92	14.89	14.98	14.87
		360°	17.86 17.89	14.81 14.97	14.91 14.88	14.96 14.87	14.93 14.90	14.96 14.88	14.92 14.92	14.92 14.88	14.94 14.82
		359° 358°	17.89	14.97	14.88	14.87	14.90	14.88	14.92	14.88	14.82
		357°	17.95	15.00	14.97	14.82	14.94	14.96	14.90	14.92	14.85
		356°	17.83	14.85	14.96	14.91	14.89	14.81	14.98	14.94	14.86
		355° 345°	18.00 17.91	14.92 14.91	15.00 14.99	14.82 14.91	14.93 14.94	14.84 15.00	14.94 14.87	14.88 14.96	15.00 14.81
		335°	17.82	14.92	14.85	14.95	14.90	14.87	14.95	14.85	14.99
		325°	17.87	14.83	14.85	14.81	14.92	14.93	14.88	14.86	14.85
1(Chain-A)		315° 305°	17.96 17.89	14.87 14.88	14.97 14.99	15.00 14.89	14.94 14.99	14.96 14.84	14.95 14.82	14.82 14.92	14.92 14.93
		295°	17.81	14.99	14.93	14.94	14.82	14.95	14.82	14.95	14.98
	Tablet mode	285°	17.99	14.94	14.86	14.90	14.92	14.85	14.94	14.90	14.90
	Tubict mode	275°	17.92	14.98	14.86	14.90	14.99	14.97	14.98	14.88	14.85
		265° 255°	17.98 17.92	14.88 14.93	14.97 14.82	14.83 14.86	14.90 14.96	15.00 14.93	15.00 14.93	14.84 14.84	14.94 14.82
		245°	17.88	14.87	14.84	14.89	14.92	14.84	14.98	14.94	14.88
		235°	17.84	14.88	14.95	14.89	14.99	14.88	14.97	14.92	14.95
		225° 215°	17.82 17.90	14.95 14.87	14.81 14.90	14.81 14.84	14.95 15.00	14.90 14.88	14.86 14.86	14.83 14.99	14.88 14.83
		205°	17.90	14.96	14.94	14.86	14.88	14.82	14.97	14.92	14.83
		195°	17.95	15.00	14.89	14.88	14.95	14.98	14.81	14.84	14.82
		194° 193°	17.91 17.88	14.83	14.94	14.84	14.87	14.90	14.96	14.81	14.92
		193°	17.88	14.96 14.97	14.84 14.93	14.87 14.93	14.86 14.82	14.91 15.00	14.90 14.91	15.00 14.99	14.99 14.98
		191°	17.82	14.86	14.90	14.91	14.92	14.91	14.87	14.87	14.90
		190°	20.96	20.98	15.75	20.97	18.17	20.99	14.97	20.93	19.00
	1	189° 188°	20.85 20.90	20.91 20.94	15.59 15.62	20.87	18.19 18.12	20.97	14.87 14.90	20.96 20.81	18.95 18.83
	1	187°	20.98	20.88	15.67	20.92	18.24	21.00	14.86	20.97	18.87
	1	186°	20.85	20.85	15.59	20.84	18.06	20.93	14.92	20.86	19.00
	ĺ	185° 175°	20.90 20.91	20.87 20.97	15.57 15.66	20.91 20.86	18.06 18.25	20.91 20.93	14.86 14.95	20.82 20.96	18.96 18.94
	1	165°	20.85	21.00	15.75	20.86	18.16	20.93	14.83	20.89	18.94
	ĺ	155°	20.99	20.86	15.64	20.85	18.17	20.91	14.90	20.93	18.87
	I	145°	20.86	20.83	15.59	20.84	18.21	20.94	14.95	20.91	18.96
	1	135° 125°	20.82 20.81	21.00 20.83	15.58 15.60	20.91 20.96	18.18 18.15	20.90 20.81	14.90 14.84	20.99 20.97	18.81 18.93
	1	115°	20.91	20.92	15.62	20.99	18.15	20.97	14.96	20.92	18.93
	Laptop mode	105°	20.85	20.82	15.66	20.90	18.17	20.92	14.93	20.99	18.91
	I	95° 85°	20.98 20.87	20.94 20.93	15.70 15.66	20.95 20.82	18.17 18.15	20.89 20.93	14.88 14.82	20.97 20.96	18.88 18.91
	1	75°	20.90	20.94	15.61	20.99	18.22	20.92	14.99	20.81	18.83
	1	65°	21.00	20.84	15.57	20.84	18.18	20.84	15.00	20.83	18.99
	I	55° 45°	20.91	20.88	15.73 15.57	20.85	18.10 18.06	20.82	14.86 14.99	20.96	18.85 18.88
	1	45°	20.82 21.00	20.91 20.95	15.61	20.93 20.95	18.12	20.92 20.92	14.96	20.91 20.93	18.88
	1	25°	20.98	20.82	15.64	20.99	18.25	20.83	14.81	21.00	18.93
	I	15°	20.99	20.85	15.75	20.97	18.21	20.98	14.96	20.90	18.98
	1	14° 13°	20.91	20.96 20.96	15.66 15.75	20.84	18.08 18.06	20.99	14.87 14.94	20.94 21.00	18.97 18.82
	1	12°	20.89	20.89	15.72	21.00	18.24	21.00	14.99	20.99	18.88
		11°	20.99	20.98	15.58	20.82	18.22	20.93	14.95	20.83	18.93
		11°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
	I	10° 9°	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a
	I	8°	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a
		7°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
	Lid close	6° 5°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
	I	5° 4°	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a	n/a n/a
	I	3°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		2°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-like extent of the law. prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 1 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

Member of SGS Group



Page: 65 of 130

1.7 The SAR Measurement System

A block diagram of the SAR measurement System is given in Fig. a. This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (SPEAG DASY 5 professional system). The model EX3DV4 field probe is used to determine the internal electric fields. The SAR can be obtained from the equation SAR= σ ($|Ei|^2$)/ ρ where σ and ρ are the conductivity and mass density of the tissue-simulant.

The DASY 5 system for performing compliance tests consists of the following items:

- 1. A standard high precision 6-axis robot (Staubli RX family) with controller, teach pendant and software. An arm extension is for accommodating the data acquisition electronics (DAE).
- 2. A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage intissue simulating liquid. The probe is equipped with an optical surface detector system.
- 3. A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

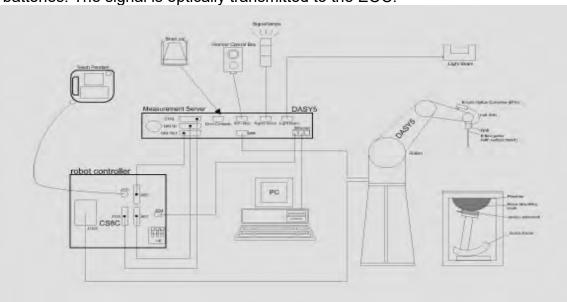


Fig. a The block diagram of SAR system

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 66 of 130

- 4. The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- 5. The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- 6. A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- 7. A computer operating Windows 7.
- 8. DASY 5 software.
- 9. Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- 10. Tissue simulating liquid mixed according to the given recipes.
- 11. Validation dipole kits allowing to validate the proper functioning of the system.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 67 of 130

1.8 System Components

EX3DV4 E-Field Probe

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to					
Calibration	organic solvents, e.g., DGBE) Basic Broad Band Calibration in air Conversion Factors (CF) for HSL 2450/5200/5300/5600/5800 MHz Additional CF for other liquids and frequencies upon request					
Frequency	10 MHz to > 6 GHz					
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)					
Dynamic	10 μW/g to > 100 mW/g					
Range	Linearity: ± 0.2 dB (noise: typically < 1 μW/g)					
Dimensions	Tip diameter: 2.5 mm					
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-like extent of the law. prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 68 of 130

PHANTOM

FILANTOW	
Model	ELI
Construction	The ELI phantom is used for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.
Shell Thickness	2 ± 0.2 mm
Filling Volume	Approx. 30 liters
Dimensions	Major axis: 600 mm Minor axis: 400 mm

DEVICE HOLDER

		
Construction	The device holder (Supporter) for Notebook is made by POM (polyoxymethylene resin) , which is non-metal and non-conductive. The height can be adjusted to fit varies kind of notebooks.	TO TO
		Device Holder

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full-like extent of the law. prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 69 of 130

1.9 SAR System Verification

The microwave circuit arrangement for system verification is sketched in Fig. b. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within +/- 10% from the target SAR values. These tests were done at 2450/5200/5300/5600/5800 MHz. The tests were conducted on the same days as the measurement of the DUT. The obtained results from the system accuracy verification are displayed in the table 1 (SAR values are normalized to 1W forward power delivered to the dipole). During the tests, the liquid depth above the ear reference points was \geq 15 cm \pm 5 mm (frequency \leq 3 GHz) or \geq 10 cm \pm 5 mm (frequency > 3 G Hz) in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

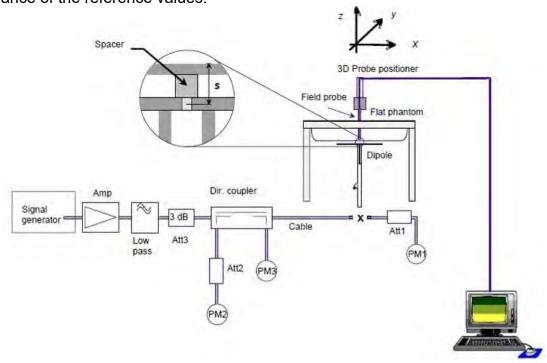


Fig. b The block diagram of system verification

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,併報先結果做學訓練之樣是台書,同時什樣是僅保留的主。太報先未經太公司書而許可,不可部份複製。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 70 of 130

Validation Kit	S/N		uency Hz)	1W Target SAR-1g (mW/g)	pin=250mW Measured SAR-1g (mW/g)	Measured SAR-1g normalized to 1W (mW/g)	Deviation (%)	Measured Date
D2450V2	727	2450	2450 Head 53 13.60 49.6		-6.42%	Jun. 13, 2019		
Validation Kit	S/N		uency Hz)	1W Target SAR-1g (mW/g)	Pin=100mW Measured SAR-1g (mW/g)	Measured SAR-1g normalized to 1W (mW/g)	Deviation (%)	Measured Date
		5200	Head	79.2	8.15	81.5	2.90%	Jun. 14, 2019
D5GHzV2	1023	5300	Head	82.6	7.95	79.5	-3.75%	Jun. 15, 2019
D30112V2	1023	5600 H		85.7	8.22	82.2	-4.08%	Jun. 16, 2019
		5800	Head	80.4	7.78	77.8	-3.23%	Jun. 17, 2019

Table 1. Results of system verification

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions for Electronic Documents at www.sgs.com/terms and <a href="https://www.sgs.com/terms and <a href="https://wwww.sgs.com/terms and <a href="https://www.sgs.com/ter Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 71 of 130

1.10 Tissue Simulant Fluid for the Frequency Band

The dielectric properties for this Head-simulant fluid were measured by using the Agilent Model 85070E Dielectric Probe (rates frequency band 200 MHz to 20 GHz) in conjunction with Network Analyzer.

All dielectric parameters of tissue simulates were measured within 24 hours of SAR measurements. The measured conductivity and permittivity are all within \pm 5% of the target values.

The depth of the tissue simulant in the flat section of the phantom was ≥ 15 cm ± 5 mm (Frequency $\le 3G$) or ≥ 10 cm ± 5 mm (Frequency $\ge 3G$) during all tests. (Fig. 2)

Tissue Type	Measurement Date	Measured Frequency (MHz)	Target Dielectric Constant, εr	Target Conductivity , σ (S/m)	Measured Dielectric Constant, εr	Measured Conductivity , σ (S/m)	% dev εr	% dev σ
		2402	39.285	1.757	37.869	1.819	-3.61%	3.51%
		2412	39.268	1.766	37.806	1.836	-3.72%	3.95%
		2417	39.259	1.771	37.783	1.839	-3.76%	3.84%
		2437	39.223	1.788	37.753	1.864	-3.75%	4.25%
	Jun, 13. 2019	2441	39.216	1.792	37.719	1.865	-3.82%	4.07%
	Juli, 13. 2019	2442	39.214	1.793	37.716	1.867	-3.82%	4.13%
		2450	39.200	1.800	37.678	1.877	-3.88%	4.28%
		2457	39.191	1.808	37.654	1.888	-3.92%	4.42%
		2462	39.185	1.813	37.648	1.893	-3.92%	4.41%
		2480	39.162	1.827	37.606	1.912	-3.97%	4.67%
	Jun, 14. 2019	5190	35.997	4.645	35.822	4.668	-0.49%	0.50%
		5200	35.986	4.655	35.714	4.673	-0.76%	0.39%
		5210	35.974	4.665	35.601	4.694	-1.04%	0.62%
Head		5230	35.860	4.768	35.511	4.743	-0.97%	-0.52%
		5250	35.929	4.706	35.508	4.762	-1.17%	1.19%
		5270	35.906	4.727	35.506	4.798	-1.11%	1.51%
	Jun, 15. 2019	5290	35.883	4.747	35.503	4.801	-1.06%	1.14%
	Juli, 15. 2019	5300	35.871	4.758	35.426	4.808	-1.24%	1.05%
		5310	35.860	4.768	35.321	4.813	-1.50%	0.95%
		5530	35.609	4.993	34.654	4.925	-2.68%	-1.36%
	Jun. 16. 2019	5570	35.563	5.034	34.520	4.986	-2.93%	-0.95%
	Juli, 16. 2019	5600	35.529	5.065	34.502	4.993	-2.89%	-1.42%
		5610	35.517	5.075	34.486	5.102	-2.90%	0.53%
		5690	35.426	5.157	34.386	5.331	-2.94%	3.37%
	Jun, 17. 2019	5755	35.351	5.224	34.218	5.421	-3.21%	3.77%
	Juli, 17. 2019	5775	35.329	5.244	33.919	5.443	-3.99%	3.79%
		5800	35.300	5.270	33.904	5.453	-3.95%	3.47%

Table 2. Dielectric Parameters of Tissue Simulant Fluid

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,併報生结果僅對測試之樣具色書,同時什樣具僅保留的主。大報生主經太公司書面許可,不可無份複制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 72 of 130

The composition of the body tissue simulating liquid:

_		,		Ingre	dient			T ()
Frequency (MHz)	Mode	DGMBE	Water	Salt	Preventol D-7	Cellulose	Sugar	Total amount
2450	Head	550ml	450ml	-	_	_	-	1.0L(Kg)

Simulating Liquids for 5 GHz, Manufactured by SPEAG:

Ingredients	Water	Esters, Emulsifiers, Inhibitors	Sodium and Salt
(% by weight)	60-80	20-40	0-1.5

Table 3. Recipes for Tissue Simulating Liquid

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 www.tw.sgs.com



Page: 73 of 130

1.11 Evaluation Procedures

The entire evaluation of the spatial peak values is performed within the Post-processing engine (SEMCAD). The system always gives the maximum values for the 1 g and 10 g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- 1. The extraction of the measured data (grid and values) from the Zoom Scan.
- 2. The calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- 3. The generation of a high-resolution mesh within the measured volume
- 4. The interpolation of all measured values from the measurement grid to the high-resolution grid
- 5. The extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- 6. The calculation of the averaged SAR within masses of 1g and 10g.

The probe is calibrated at the center of the dipole sensors that is located 1 to 2.7mm away from the probe tip. During measurements, the probe stops shortly above the phantom surface, depending on the probe and the surface detecting system. Both distances are included as parameters in the probe configuration file. The software always knows exactly how far away the measured point is from the surface. As the probe cannot directly measure at the surface, the values between the deepest measured point and the surface must be extrapolated. The angle between the probe axis and the surface normal line is less than 30 degree.

In the Area Scan, the gradient of the interpolation function is evaluated to find all the extreme of the SAR distribution. The uncertainty on the locations of the extreme is less than 1/20 of the grid size. Only local maximum within -2 dB of the global maximum are searched and passed for the Cube Scan measurement. In the Cube Scan, the interpolation function is used to extrapolate the Peak SAR from the lowest measurement points to the inner phantom surface (the extrapolation distance). The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5mm.

The maximum search is automatically performed after each area scan measurement. It is based on splines in two or three dimensions. The procedure can find the maximum for most SAR distributions even with relatively large grid spacing. After the area scanning measurement, the probe is automatically moved to a position at the interpolated maximum. The following scan can directly use this position for reference, e.g., for a finer resolution grid or the cube evaluations. The 1g and 10g peak evaluations are only available for the predefined cube 7x7x7 scans. The routines are verified and optimized for the grid dimensions used in these cube measurements.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 f (886-2) 2298-0488



Page: 74 of 130

The measured volume of 30x30x30mm contains about 30g of tissue.

The first procedure is an extrapolation (incl. Boundary correction) to get the points between the lowest measured plane and the surface. The next step uses 3D interpolation to get all points within the measured volume. In the last step, a 1g cube is placed numerically into the volume and its averaged SAR is calculated. This cube is the moved around until the highest averaged SAR is found. If the highest SAR is found at the edge of the measured volume, the system will issue a warning: higher SAR values might be found outside of the measured volume. In that case the cube measurement can be repeated, using the new interpolated maximum as the center.

1.12 Probe Calibration Procedures

For the calibration of E-field probes in lossy liquids, an electric field with an accurately known field strength must be produced within the measured liquid. For standardization purposes it would be desirable if all measurements which are necessary to assess the correct field strength would be traceable to standardized measurement procedures. In the following two different calibration techniques are summarized:

1.12.1 Transfer Calibration with Temperature Probes

In lossy liquids the specific absorption rate (SAR) is related both to the electric field (E) and the temperature gradient ($\delta T / \delta t$) in the liquid.

$$SAR = \frac{\sigma}{\rho} |E|^2 = c \frac{\delta T}{\delta t}$$

whereby σ is the conductivity, ρ the density and c the heat capacity of the liquid.

Hence, the electric field in lossy liquid can be measured indirectly by measuring the temperature gradient in the liquid. Non-disturbing temperature probes (optical probes or thermistor probes with resistive lines) with high spatial resolution (<1-2 mm) and fast reaction time (<1 s) are available and can be easily calibrated with high precision [1]. The setup and the exciting source have no influence on the calibration; only the relative positioning uncertainties of the standard temperature probe and the E-field probe to be calibrated must be considered. However, several problems limit the available accuracy of probe calibrations with temperature probes:

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,併報生结果僅對測試之樣具色書,同時什樣具僅保留的主。大報生主經太公司書面許可,不可無份複制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 75 of 130

- 1. The temperature gradient is not directly measurable but must be evaluated from temperature measurements at different time steps. Special precaution is necessary to avoid measurement errors caused by temperature gradients due to energy equalizing effects or convection currents in the liquid. Such effects cannot be completely avoided, as the measured field itself destroys the thermal equilibrium in the liquid. With a careful setup these errors can be kept small.
- 2. The measured volume around the temperature probe is not well defined. It is difficult to calculate the energy transfer from a surrounding gradient temperature field into the probe. These effects must be considered, since temperature probes are calibrated in liquid with homogeneous temperatures. There is no traceable standard for temperature rise measurements.
- 3. The calibration depends on the assessment of the specific density, the heat capacity and the conductivity of the medium. While the specific density and heat capacity can be measured accurately with standardized procedures (~ 2% for c; much better for ρ), there is no standard for the measurement of the conductivity. Depending on the method and liquid, the error can well exceed $\pm 5\%$.
- 4. Temperature rise measurements are not very sensitive and therefore are often performed at a higher power level than the E-field measurements. The nonlinearities in the system (e.g., power measurements, different components, etc.) must be considered.

Considering these problems, the possible accuracy of the calibration of E-field probes with temperature gradient measurements in a carefully designed setup is about $\pm 10\%$ (RSS) [2]. Recently, a setup which is a combination of the waveguide techniques and the thermal measurements was presented in [3]. The estimated uncertainty of the setup is $\pm 5\%$ (RSS) when the same liquid is used for the calibration and for actual measurements and ± 7 -9% (RSS) when not, which is in good agreement with the estimates given in [2].

1.12.2 Calibration with Analytical Fields

In this method a technical setup is used in which the field can be calculated analytically from measurements of other physical magnitudes (e.g., input power). This corresponds to the standard field method for probe calibration in air; however, there is no standard defined for fields in lossy liquids.

When using calculated fields in lossy liquids for probe calibration, several points must be considered in the assessment of the uncertainty:

- 1. The setup must enable accurate determination of the incident power.
- 2. The accuracy of the calculated field strength will depend on the

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,併報生结果僅對測試之樣具色書,同時什樣具僅保留的主。大報生主經太公司書面許可,不可無份複制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 76 of 130

assessment of the dielectric parameters of the liquid.

3. Due to the small wavelength in liquids with high permittivity, even small setups might be above the resonant cutoff frequencies. The field distribution in the setup must be carefully checked for conformity with the theoretical field distribution.

References

- 1. N. Kuster, Q. Balzano, and J.C. Lin, Eds., *Mobile Communications Safety*, Chapman & Hall, London, 1997.
- K. Meier, M. Burkhardt, T. Schmid, and N. Kuster, \Broadband calibration of E-field probes in lossy media", *IEEE Transactions on Microwave Theory and Techniques*, vol. 44, no. 10, pp. 1954{1962, Oct. 1996.
- 3. K. Jokela, P. Hyysalo, and L. Puranen, \Calibration of specific absorption rate (SAR) probes in waveguide at 900 MHz", *IEEE Transactions on Instrumentation and Measurements*, vol. 47, no. 2, pp. 432{438, Apr. 1998.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,此都坐廷里僅對測試之樣是負責,同時此樣是僅保留的子。太報坐去經太公司事而許可,不可執於複制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 77 of 130

1.13 Test Standards and Limits

According to FCC 47CFR §2.1093(d) The limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate ("SAR") in Section 4.2 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz," ANSI/IEEE C95.1, By the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017. These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in "Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields," NCRP Report No. 86, Section 17.4.5. Copyright NCRP, 1986, Bethesda, Maryland 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards. The criteria to be used are specified in paragraphs (d)(1) and (d)(2) of this section and shall apply for portable devices transmitting in the frequency range from 100 kHz to 6 GHz. Portable devices that transmit at frequencies above 6 GHz are to be evaluated in terms of the MPE limits specified in § 1.1310 of this chapter. Measurements and calculations to demonstrate compliance with MPE field strength or power density limits for devices operating above 6 GHz should be made at a minimum distance of 5 cm from the radiating source.

- Limits for Occupational/Controlled exposure: 0.4 W/kg as averaged over the 1. whole-body and spatial peak SAR not exceeding 8 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 20 W/kg, as averaged over an 10 grams of tissue (defined as a tissue volume in the shape of a cube).
- 2. Occupational/Controlled limits apply when persons are exposed as a consequence of their employment provided these persons are fully aware of and exercise control over their exposure. Awareness of exposure can be accomplished by use of warning labels or by specific training or education through appropriate means, such as an RF safety program in a work environment.
- 3. Limits for General Population/Uncontrolled exposure: 0.08 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 1.6 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd.



Page: 78 of 130

spatial peak SAR shall not exceed 4 W/kg, as averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube). General Population/Uncontrolled limits apply when the general public may be exposed, or when persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or do not exercise control over their exposure. Warning labels placed on consumer devices such as cellular telephones will not be sufficient reason to allow these devices to be evaluated subject to limits for occupational/controlled exposure in paragraph (d)(1) of this section. (Table 4.)

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR (Brain)	1.60 W/Kg	8.00 W/Kg
Spatial Average SAR (Whole Body)	0.08 W/Kg	0.40 W/Kg
Spatial Peak SAR (Hands/Feet/Ankle/Wrist)	4.00 W/Kg	20.00 W/Kg

Table 4. RF exposure limits

Notes:

- 1. Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.
- 2. Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,件据华廷用属影测建文样具色素,同时件样具属型网内主。大规华主领大公司事面连可,不可可以通剩。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 79 of 130

2. Summary of Results

2.1 Decision rules

Reported measurement data comply with IEEE 1528-2013:

Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.2 Summary of Results

Laptop mode (WLAN SISO power)

	(-,							
Antenna	Mode	Mode Position		СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged SAR over 1g (W/kg)		Plot page
			(mm)		,	Tolerance (dBm)	(dBm)		Measured	Reported	page
	WLAN 802.11b	Bottom side	0	10	2457	21.00	20.99	100.23%	0.174	0.174	90
	WLAN 802.11n(40M) 5.2G	Bottom side	0	46	5230	21.00	20.98	100.46%	0.262	0.263	91
TX2(Chain-B)	WLAN 802.11n(40M) 5.3G	Bottom side	0	54	5270	21.00	20.97	100.69%	0.262	0.264	92
v	WLAN 802.11ac(80M) 5.6G	Bottom side	0	138	5690	21.00	20.93	101.62%	0.364	0.370	93
	WLAN 802.11n(40M) 5.8G	Bottom side	0	151	5755	21.00	20.99	100.23%	0.355	0.356	94

Antenna	Mode	Position	Distance (mm)	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged S (W/		Plot page
			` ′		(Tolerance (dBm)	(dBm)		Measured	Reported	page
	WLAN 802.11b	Bottom side	0	6	2437	21.00	20.99	100.23%	0.171	0.171	95
	Bluetooth (GFSK)	Bottom side	0	78	2480	11.00	9.90	128.82%	0.086	0.111	96
TV1(Choin A)	WLAN 802.11n(40M) 5.2G	Bottom side	0	46	5230	21.00	20.99	100.23%	0.233	0.234	97
TX1(Chain-A)	WLAN 802.11n(40M) 5.3G	Bottom side	0	54	5270	21.00	20.96	100.93%	0.206	0.208	98
	WLAN 802.11ac(80M) 5.6G	Bottom side	0	138	5690	21.00	20.99	100.23%	0.299	0.300	99
	WLAN 802.11n(40M) 5.8G	Bottom side	0	151	5755	21.00	20.99	100.23%	0.345	0.346	100

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有铅明,件据华廷国佛教训献之样具色者,同时件撰具届保留的子。大器华主领太公司事而许可,不可部份推制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 80 of 130

Tablet mode (WLAN SISO power)

Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged S (W/		Plot page
			()		(Tolerance (dBm)	(dBm)		Measured	Reported	F9-
		Back side	0	1	2412	18.00	17.99	100.23%	0.349	0.350	-
		Top side	0	1	2412	18.00	17.99	100.23%	0.041	0.041	-
		Bottom side	0	1	2412	18.00	17.99	100.23%	0.918	0.920	101
	WLAN 802.11b	Bottom side*	0	1	2412	18.00	17.99	100.23%	0.914	0.916	-
		Bottom side	0	6	2437	18.00	17.96	100.93%	0.903	0.911	-
		Right side	0	1	2412	18.00	17.99	100.23%	0.039	0.039	-
		Left side	0	1	2412	18.00	17.99	100.23%	0.081	0.081	-
		Back side	0	42	5210	15.50	15.49	100.23%	0.617	0.618	-
	WLAN 802.11ac(80M) 5.2G	Top side	0	42	5210	15.50	15.49	100.23%	0.037	0.037	-
		Bottom side	0	42	5210	15.50	15.49	100.23%	0.989	0.991	102
		Bottom side*	0	42	5210	15.50	15.49	100.23%	0.985	0.987	-
		Right side	0	42	5210	15.50	15.49	100.23%	0.036	0.036	-
		Left side	0	42	5210	15.50	15.49	100.23%	0.068	0.068	-
	WLAN 802.11ac(80M) 5.3G	Back side	0	58	5290	15.50	15.47	100.69%	0.632	0.636	-
		Top side	0	58	5290	15.50	15.47	100.69%	0.039	0.039	-
		Bottom side	0	58	5290	15.50	15.47	100.69%	1.030	1.037	103
X2(Chain-B)		Bottom side*	0	58	5290	15.50	15.47	100.69%	1.010	1.017	-
		Right side	0	58	5290	15.50	15.47	100.69%	0.038	0.038	-
		Left side	0	58	5290	15.50	15.47	100.69%	0.071	0.071	-
		Back side	0	106	5530	15.50	15.49	100.23%	0.673	0.675	-
		Top side	0	106	5530	15.50	15.49	100.23%	0.044	0.044	-
		Bottom side	0	106	5530	15.50	15.49	100.23%	1.130	1.133	104
	WLAN 802.11ac(80M) 5.6G	Bottom side*	0	106	5530	15.50	15.49	100.23%	1.100	1.103	-
		Bottom side	0	138	5690	15.50	15.47	100.69%	1.040	1.047	-
		Right side	0	106	5530	15.50	15.49	100.23%	0.042	0.042	-
		Left side	0	106	5530	15.50	15.49	100.23%	0.084	0.084	-
		Back side	0	155	5775	15.50	15.49	100.23%	0.682	0.684	-
		Top side	0	155	5775	15.50	15.49	100.23%	0.045	0.045	-
		Bottom side	0	155	5775	15.50	15.49	100.23%	1.160	1.163	105
	WLAN 802.11ac(80M) 5.8G	Bottom side	0	155	5775	15.50	15.49	100.23%	1.140	1.143	-
		Right side	0	155	5775	15.50	15.49	100.23%	0.040	0.040	-
		Left side	0	155	5775	15.50	15.49	100.23%	0.077	0.077	-

^{* -} repeated at the highest SAR measurement according to the KDB 865664 D01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 81 of 130

Antenna	Mode	Position	Distance (mm)	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged S (W/	AR over 1g	Plot page
			()		(Tolerance (dBm)	(dBm)		Measured	Reported	F-9-
		Back side	0	11	2462	18.00	17.99	100.23%	0.456	0.457	-
		Top side	0	11	2462	18.00	17.99	100.23%	0.053	0.053	-
		Bottom side	0	1	2412	18.00	17.98	100.46%	0.918	0.922	1
	WLAN 802.11b	Bottom side	0	11	2462	18.00	17.99	100.23%	0.921	0.923	106
		Bottom side*	0	11	2462	18.00	17.99	100.23%	0.919	0.921	1
		Right side	0	11	2462	18.00	17.99	100.23%	0.087	0.087	•
		Left side	0	11	2462	18.00	17.99	100.23%	0.041	0.041	1
		Back side	0	78	2480	11.00	9.90	128.82%	0.113	0.146	
		Top side	0	78	2480	11.00	9.90	128.82%	0.011	0.014	-
	Bluetooth (GFSK)	Bottom side	0	78	2480	11.00	9.90	128.82%	0.148	0.191	107
		Right side	0	78	2480	11.00	9.90	128.82%	0.005	0.006	-
		Left side	0	78	2480	11.00	9.90	128.82%	0.011	0.014	-
		Back side	0	50	5250	15.00	14.99	100.23%	0.593	0.594	-
		Top side	0	50	5250	15.00	14.99	100.23%	0.046	0.046	-
	WLAN 802.11ac(160M) 5.2G	Bottom side	0	50	5250	15.00	14.99	100.23%	0.821	0.823	108
	WEAN 802.11ac(100W) 5.29	Bottom side*	0	50	5250	15.00	14.99	100.23%	0.819	0.821	-
		Right side	0	50	5250	15.00	14.99	100.23%	0.075	0.075	-
TX1(Chain-A)		Left side	0	50	5250	15.00	14.99	100.23%	0.039	0.039	-
TAT(Chain-A)		Back side	0	58	5290	15.00	14.99	100.23%	0.624	0.625	-
		Top side	0	58	5290	15.00	14.99	100.23%	0.051	0.051	-
	WLAN 802.11ac(80M) 5.3G	Bottom side	0	58	5290	15.00	14.99	100.23%	0.841	0.843	109
	WLAIN 602. I Tac(60IVI) 5.3G	Bottom side*	0	58	5290	15.00	14.99	100.23%	0.839	0.841	-
		Right side	0	58	5290	15.00	14.99	100.23%	0.078	0.078	-
		Left side	0	58	5290	15.00	14.99	100.23%	0.043	0.043	-
		Back side	0	114	5570	15.00	14.95	101.16%	0.843	0.853	-
		Top side	0	114	5570	15.00	14.95	101.16%	0.058	0.059	-
	WLAN 802.11ac(160M) 5.6G	Bottom side	0	114	5570	15.00	14.95	101.16%	1.040	1.052	110
	WLAN 602. ITAC(TOUN) 5.0G	Bottom side*	0	114	5570	15.00	14.95	101.16%	1.020	1.032	-
		Right side	0	114	5570	15.00	14.95	101.16%	0.089	0.090	-
		Left side	0	114	5570	15.00	14.95	101.16%	0.045	0.046	-
		Back side	0	155	5775	15.00	14.99	100.23%	0.866	0.868	-
		Top side	0	155	5775	15.00	14.99	100.23%	0.064	0.064	-
	WI AN 902 11cc/90M\ 5 02	Bottom side	0	155	5775	15.00	14.99	100.23%	1.150	1.153	111
	WLAN 802.11ac(80M) 5.8G	Bottom side*	0	155	5775	15.00	14.99	100.23%	1.130	1.133	-
		Right side	0	155	5775	15.00	14.99	100.23%	0.101	0.101	-
		Left side	0	155	5775	15.00	14.99	100.23%	0.048	0.048	-

^{* -} repeated at the highest SAR measurement according to the KDB 865664 D01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 www.tw.sgs.com



Page: 82 of 130

Tablet mode (WLAN MIMO power)

Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged S (W/		Plot page
			()		()	Tolerance (dBm)	(dBm)		Measured	Reported	
		Back side	0	6	2437	15.00	14.90	102.33%	0.196	0.201	-
		Top side	0	6	2437	15.00	14.90	102.33%	0.030	0.031	-
	WLAN 802.11n(20M)	Bottom side	0	6	2437	15.00	14.90	102.33%	0.450	0.460	112
		Right side	0	6	2437	15.00	14.90	102.33%	0.025	0.026	-
		Left side	0	6	2437	15.00	14.90	102.33%	0.049	0.050	-
		Back side	0	42	5210	12.00	11.97	100.69%	0.243	0.245	-
	WLAN 802.11ac(80M) 5.2G	Top side	0	42	5210	12.00	11.97	100.69%	0.016	0.016	-
		Bottom side	0	42	5210	12.00	11.97	100.69%	0.430	0.433	113
		Right side	0	42	5210	12.00	11.97	100.69%	0.014	0.014	-
		Left side	0	42	5210	12.00	11.97	100.69%	0.028	0.028	-
	WLAN 802.11ac(80M) 5.3G	Back side	0	58	5290	12.00	11.99	100.23%	0.267	0.268	-
		Top side	0	58	5290	12.00	11.99	100.23%	0.018	0.018	-
TX2(Chain-B)		Bottom side	0	58	5290	12.00	11.99	100.23%	0.459	0.460	114
		Right side	0	58	5290	12.00	11.99	100.23%	0.016	0.016	-
		Left side	0	58	5290	12.00	11.99	100.23%	0.031	0.031	-
		Back side	0	106	5530	12.00	11.99	100.23%	0.386	0.387	-
		Top side	0	106	5530	12.00	11.99	100.23%	0.023	0.023	-
	WLAN 802.11ac(80M) 5.6G	Bottom side	0	106	5530	12.00	11.99	100.23%	0.427	0.428	115
		Right side	0	106	5530	12.00	11.99	100.23%	0.021	0.021	
		Left side	0	106	5530	12.00	11.99	100.23%	0.038	0.038	-
		Back side	0	155	5775	12.00	11.96	100.93%	0.292	0.295	-
		Top side	0	155	5775	12.00	11.96	100.93%	0.021	0.021	-
	WLAN 802.11ac(80M) 5.8G	Bottom side	0	155	5775	12.00	11.96	100.93%	0.560	0.565	116
		Right side	0	155	5775	12.00	11.96	100.93%	0.019	0.019	-
	_	Left side	0	155	5775	12.00	11.96	100.93%	0.036	0.036	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 83 of 130

Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Scaling	Averaged S (W/		Plot page
						, ,	,		Measured	Reported	
		Back side	0	6	2437	15.00	14.88	102.80%	0.230	0.236	-
		Top side	0	6	2437	15.00	14.88	102.80%	0.015	0.015	-
	WLAN 802.11n(20M)	Bottom side	0	6	2437	15.00	14.88	102.80%	0.477	0.490	117
		Right side	0	6	2437	15.00	14.88	102.80%	0.019	0.020	-
		Left side	0	6	2437	15.00	14.88	102.80%	0.041	0.042	-
		Back side	0	78	2480	11.00	9.90	128.82%	0.113	0.146	-
	Bluetooth (GFSK)	Top side	0	78	2480	11.00	9.90	128.82%	0.011	0.014	-
		Bottom side	0	78	2480	11.00	9.90	128.82%	0.148	0.191	118
		Right side	0	78	2480	11.00	9.90	128.82%	0.005	0.006	-
		Left side	0	78	2480	11.00	9.90	128.82%	0.011	0.014	-
	WLAN 802.11ac(80M) 5.2G	Back side	0	42	5210	12.00	11.99	100.23%	0.286	0.287	-
		Top side	0	42	5210	12.00	11.99	100.23%	0.017	0.017	-
		Bottom side	0	42	5210	12.00	11.99	100.23%	0.407	0.408	119
		Right side	0	42	5210	12.00	11.99	100.23%	0.016	0.016	-
TV4/QL : A)		Left side	0	42	5210	12.00	11.99	100.23%	0.037	0.037	-
TX1(Chain-A)		Back side	0	58	5290	12.00	11.99	100.23%	0.321	0.322	-
		Top side	0	58	5290	12.00	11.99	100.23%	0.023	0.023	-
	WLAN 802.11ac(80M) 5.3G	Bottom side	0	58	5290	12.00	11.99	100.23%	0.464	0.465	120
		Right side	0	58	5290	12.00	11.99	100.23%	0.021	0.021	-
		Left side	0	58	5290	12.00	11.99	100.23%	0.042	0.042	-
		Back side	0	106	5530	12.00	11.97	100.69%	0.367	0.370	-
		Top side	0	106	5530	12.00	11.97	100.69%	0.025	0.025	-
	WLAN 802.11ac(80M) 5.6G	Bottom side	0	106	5530	12.00	11.97	100.69%	0.498	0.501	121
		Right side	0	106	5530	12.00	11.97	100.69%	0.024	0.024	-
		Left side	0	106	5530	12.00	11.97	100.69%	0.044	0.044	-
		Back side	0	155	5775	12.00	11.99	100.23%	0.448	0.449	-
		Top side	0	155	5775	12.00	11.99	100.23%	0.031	0.031	-
	WLAN 802.11ac(80M) 5.8G	Bottom side	0	155	5775	12.00	11.99	100.23%	0.593	0.594	122
		Right side	0	155	5775	12.00	11.99	100.23%	0.029	0.029	-
		Left side	0	155	5775	12.00	11.99	100.23%	0.047	0.047	-

Note:

Scaling =
$$\frac{\text{reported SAR}}{\text{measured SAR}} = \frac{\text{F2(mW)}}{\text{F1(mW)}} = 10^{\left(\frac{P_0 - P_1}{10}\right)(\text{dBm})}$$

Reported SAR = measured SAR * (scaling)

Where P2 is maximum specified power, P1 is measured conducted power

2.3 Reporting statements of conformity

The conformity statement in this report is based solely on the test results, measurement uncertainty is excluded.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 84 of 130

3. Simultaneous Transmission Analysis

Simultaneous Transmission Scenarios:

NO.	Simultaneous Transmit Configurations	Laptop	Tablet
1	2.4GHz WLAN TX2 + BT TX1	YES	YES
2	2.4GHz WLAN TX2 + TX1 (MIMO)	YES	YES
3	5GHz WLAN TX2 + BT TX1	YES	YES
4	5GHz WLAN TX2 + TX1 (MIMO)	YES	YES

Note

- 1) BT and WLAN Tx1 share the same antenna path.
- 2) BT can transmit with WLAN Tx2 simultaneously.
- 3) For laptop mode, WLAN SAR is measured with SISO power, and maximum output power in MIMO mode is far less than the maximum output power in SISO mode, hence, the simultaneous transmission evaluation for MIMO is calculated by WLAN SISO results and this can be the conservative evaluation.
- 4) For tablet mode, WLAN SAR is measured with SISO power and MIMO power separately and respectively, also, the maximum output power in MIMO mode is far less than the maximum output power in SISO mode, and the simultaneous transmission evaluation for MIMO is calculated by WLAN MIMO results (standalone results).

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 1

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Page: 85 of 130

3.1 Estimated SAR calculation

According to KDB447498 D01v06 - When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

Estimated SAR =
$$\frac{\text{Max.tune up power (mW)}}{\text{Min.test separation distance(mm)}} \times \frac{\sqrt{f(GHz)}}{7.5}$$

If the minimum test separation distance is < 5mm, a distance of 5mm is used for estimated SAR calculation. When the test separation distance is >50mm, the 0.4W/kg is used for SAR-1q.

3.2 SPLSR evaluation and analysis

Per KDB447498D01, when the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR sum to peak location separation ratio(SPLSR).

The simultaneous transmitting antennas in each operating mode and exposure condition combination must be considered one pair at a time to determine the SAR to peak location separation ratio to qualify for test exclusion.

The ratio is determined by (SAR1 + SAR2)^1.5/Ri, rounded to two decimal digits, and must be ≤ 0.04 for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion.

SAR1 and SAR2 are the highest reported or estimated SAR for each antenna in the pair, and Ri is the separation distance between the peak SAR locations for the antenna pair in mm.

When standalone test exclusion applies, SAR is estimated; the peak location is assumed to be at the feed-point or geometric center of the antenna.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd.



Page: 86 of 130

Laptop mode (WLAN SISO power)

2.4 GHz WLAN MIMO

No.	Conditions	Position	Max. WLAN Tx2	Max. WLAN TX1	SAR Sum	SPLSR
1	2.4 GHz WLAN TX2 + WLAN TX1	Bottom side	0.174	0.172	0.346	ΣSAR<1.6, Not required

5 GHz WLAN MIMO

No.	Conditions	Position	Max. WLAN Tx2	Max. WLAN TX1	SAR Sum	SPLSR
2	5 GHz WLAN TX2 + WLAN TX1	Bottom side	0.370	0.346	0.716	ΣSAR<1.6, Not required

BT+ 2.4GHz WLAN TX2

No.	Conditions	Position	Max. WLAN Tx2	ВТ	SAR Sum	SPLSR
3	2.4 GHz WLAN TX2 + BT	Bottom side	0.174	0.111	0.285	ΣSAR<1.6, Not required

BT+ 5GHz WLAN TX2

No.	Conditions	Position	Max. WLAN TX2	ВТ	SAR Sum	SPLSR
4	5 GHz WLAN TX2 + BT	Bottom side	0.370	0.111	0.481	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 87 of 130

Tablet mode (WLAN SISO power)

BT+ 2 4GHz WI AN TX2

<u> </u>	ZHOHZ WEAR IXZ					
No.	Conditions	Position	Max. WLAN Tx2	ВТ	SAR Sum	SPLSR
1	2.4 GHz WLAN TX2 + BT	Back side	0.350	0.146	0.496	ΣSAR<1.6, Not required
		Top side	0.041	0.014	0.055	ΣSAR<1.6, Not required
		Bottom side	0.920	0.191	1.111	ΣSAR<1.6, Not required
		Right side	0.039	0.006	0.045	ΣSAR<1.6, Not required
		Left side	0.081	0.011	0.092	ΣSAR<1.6, Not required

BT+5GHz WLAN TX2

<u>=-</u>	1. OCH WEAR IAE						
No.	Conditions	Position	Max. WLAN TX2	ВТ	SAR Sum	SPLSR	
2	5 GHz WLAN TX2 + BT	Back side	0.675	0.146	0.821	ΣSAR<1.6, Not required	
		Top side	0.045	0.014	0.059	ΣSAR<1.6, Not required	
		Bottom side	1.163	0.191	1.354	ΣSAR<1.6, Not required	
		Right side	0.042	0.006	0.048	ΣSAR<1.6, Not required	
		Left side	0.084	0.011	0.095	ΣSAR<1.6, Not required	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 88 of 130

Tablet mode (WLAN MIMO power)

2 4 GHz WI AN MIMO

<u> </u>	2.4 GHZ WEAR MINO						
No.	Conditions	Position	Max. WLAN TX2	Max. WLAN TX1	SAR Sum	SPLSR	
1	2.4 GHz WLAN TX2 + WLAN TX1	Back side	0.201	0.236	0.437	ΣSAR<1.6, Not required	
		Top side	0.030	0.016	0.046	ΣSAR<1.6, Not required	
		Bottom side	0.460	0.490	0.950	ΣSAR<1.6, Not required	
		Right side	0.026	0.02	0.046	ΣSAR<1.6, Not required	
		Left side	0.050	0.042	0.092	ΣSAR<1.6, Not required	

5 GHz WI AN MIMO

<u> </u>	OHE WEAR MINO						
No.	Conditions	Position	Max. WLAN TX2	Max. WLAN TX1	SAR Sum	SPLSR	
2	5 GHz WLAN TX2 + WLAN TX1	Back side	0.387	0.449	0.836	Analyzed as below	
		Top side	0.023	0.031	0.054	ΣSAR<1.6, Not required	
		Bottom side	0.565	0.594	1.159	ΣSAR<1.6, Not required	
		Right side	0.021	0.029	0.050	ΣSAR<1.6, Not required	
		Left side	0.038	0.047	0.085	ΣSAR<1.6, Not required	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 89 of 130

4. Instruments List

Manufacturer	Device	Туре	Serial number	Date of last calibration	Date of next calibration
SPEAG	Dosimetric E-Field Probe	EX3DV4	3938	Oct.24,2018	Oct.23,2019
00540	System Validation	D2450V2	727	Apr.24,2019	Apr.23,2020
SPEAG	Dipole	D5GHzV2	1023	Jan.30,2019	Jan.29,2020
SPEAG	Data acquisition Electronics	DAE4	1260	Nov.30,2018	Nov.29,2019
SPEAG	Software	DASY 52 V52.10.2	N/A	Calibration not required	Calibration not required
SPEAG	Phantom	ELI	N/A	Calibration not required	Calibration not required
Agilent	Network Analyzer	E5071C	MY46107530	Feb.23,2019	Feb.22,2020
Agilent	Dielectric Probe Kit	85070E	MY44300677	Calibration not required	Calibration not required
A sell see t	Dual-directional coupler	772D	MY52180142	Jul.04,2018	Jul.03,2019
Agilent		778D	MY52180302	Jul.05,2018	Jul.04,2019
Agilent	RF Signal Generator	N5181A	MY52180142	Jul.04,2018	Jul.03,2019
Agilent	Power Meter	ML2496A	1326001	Aug.09,2018	Aug.02,2019
A m.!! 4	Power Sensor	MA2411B	1315048	Aug.09,2018	Aug.02,2019
Agilent			1315049	Aug.09,2018	Aug.02,2019
TECPEL	Digital thermometer	DTM-303A	TP131515	Jul.17,2018	Jul.16,2019

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 90 of 130

5. Measurements

Date: 2019/6/13

WLAN 802.11b Body-worn Bottom side CH 10 Tx2 0mm

Communication System: WLAN 2.45G; Frequency: 2457 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2457 MHz; $\sigma = 1.888$ S/m; $\varepsilon_r = 37.654$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 21.7°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(7.17, 7.17, 7.17);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1260; Calibrated: 2018/11/30

Phantom: ELI

DASY52 52.10.2(1495); SEMCAD X 14.6.12(7463)

Area Scan (61x111x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.244 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.747 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.292 W/kg

SAR(1 g) = 0.174 W/kg; SAR(10 g) = 0.103 W/kg

Maximum value of SAR (measured) = 0.236 W/kg

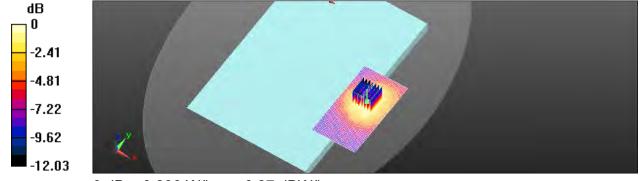

0 dB = 0.236 W/kg = -6.27 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 91 of 130

Date: 2019/6/14

WLAN 802.11n(40M) 5.2G_Body-worn_Bottom side_CH 46_Tx2_0mm

Communication System: WLAN 5G; Frequency: 5230 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5230 MHz; $\sigma = 4.743 \text{ S/m}$; $\varepsilon_r = 35.511$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.5°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(5, 5, 5);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1260; Calibrated: 2018/11/30

Phantom: ELI

DASY52 52.10.2(1495); SEMCAD X 14.6.12(7463)

Area Scan (71x141x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.477 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.176 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.923 W/kg

SAR(1 g) = 0.262 W/kg; SAR(10 g) = 0.135 W/kg

Maximum value of SAR (measured) = 0.442 W/kg

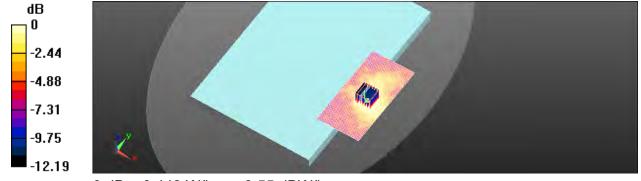

0 dB = 0.442 W/kg = -3.55 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,此報告結果僅對測試之緣品負責,同時此樣品僅保留00天。木報告表經太公司書面許可,不可部份複製。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 92 of 130

Date: 2019/6/15

WLAN 802.11n(40M) 5.3G_Body-worn_Bottom side_CH 54_Tx2_0mm

Communication System: WLAN 5G; Frequency: 5270 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5270 MHz; $\sigma = 4.798 \text{ S/m}$; $\varepsilon_r = 35.506$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 21.6°C; Liquid temperature: 22.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(5, 5, 5);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1260; Calibrated: 2018/11/30

Phantom: ELI

DASY52 52.10.2(1495); SEMCAD X 14.6.12(7463)

Area Scan (61x141x1): Interpolated grid: dx=10 mm, dy=10 mm


Maximum value of SAR (interpolated) = 0.426 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.134 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.878 W/kg

SAR(1 g) = 0.262 W/kg; SAR(10 g) = 0.134 W/kg Maximum value of SAR (measured) = 0.433 W/kg

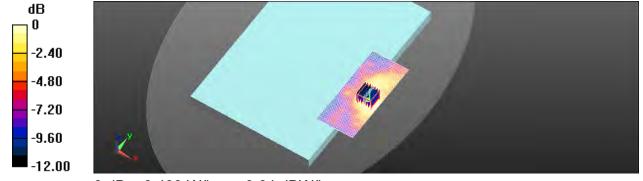

0 dB = 0.433 W/kg = -3.64 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,此報告結果僅對測計之樣品負責,同時此樣品僅保留00天。木類告表經太公司書面許可,不可部份複製。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 93 of 130

Date: 2019/6/16

WLAN 802.11ac(80M) 5.6G_Body-worn_Bottom side_CH 138_Tx2_0mm

Communication System: WLAN 5G; Frequency: 5690 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5690 MHz; $\sigma = 5.331 \text{ S/m}$; $\varepsilon_r = 34.386$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 21.7°C; Liquid temperature: 22.2°C

DASY5 Configuration:

- Probe: EX3DV4 SN3938;ConvF(4.76, 4.76, 4.76);Calibrated: 2018/10/24
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2018/11/30
- Phantom: ELI
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7463)

Area Scan (61x141x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.623 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.891 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 0.364 W/kg; SAR(10 g) = 0.164 W/kg

Maximum value of SAR (measured) = 0.656 W/kg

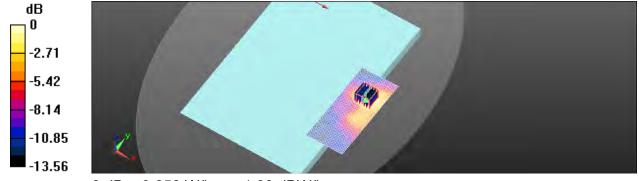

0 dB = 0.656 W/kg = -1.83 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非兄有论明,此据华结里做影测过之缘是台書,同時什樣是做保留00千。木都华未领木公司事而纯可,不可部份複测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 94 of 130

Date: 2019/6/17

WLAN 802.11n(40M) 5.8G_Body-worn_Bottom side_CH 151_Tx2_0mm

Communication System: WLAN 5G; Frequency: 5755 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5755 MHz; $\sigma = 5.421 \text{ S/m}$; $\varepsilon_r = 34.218$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.0°C; Liquid temperature: 21.5°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(4.76, 4.76, 4.76);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1260; Calibrated: 2018/11/30

Phantom: ELI

DASY52 52.10.2(1495); SEMCAD X 14.6.12(7463)

Area Scan (61x141x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.633 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.742 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.355 W/kg; SAR(10 g) = 0.161 W/kg

Maximum value of SAR (measured) = 0.639 W/kg

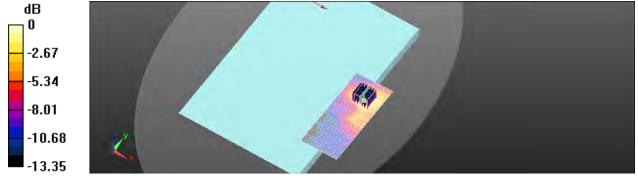

0 dB = 0.639 W/kg = -1.94 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非兄有论明,此据华结里做影测过之缘是台書,同時什樣是做保留00千。木都华未领木公司事而纯可,不可部份複测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 95 of 130

Date: 2019/6/13

WLAN 802.11b_Body-worn_Bottom side_CH 6_Tx1_0mm

Communication System: WLAN 2.45G; Frequency: 2437 MHz; Duty Cycle: 1:1 Medium parameters used: f = 2437 MHz; $\sigma = 1.864 \text{ S/m}$; $\varepsilon_r = 37.753$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 SN3938;ConvF(7.17, 7.17, 7.17);Calibrated: 2018/10/24
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2018/11/30
- Phantom: ELI
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7463)

Area Scan (61x111x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.236 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.861 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.290 W/kg

SAR(1 g) = 0.171 W/kg; SAR(10 g) = 0.101 W/kg

Maximum value of SAR (measured) = 0.229 W/kg

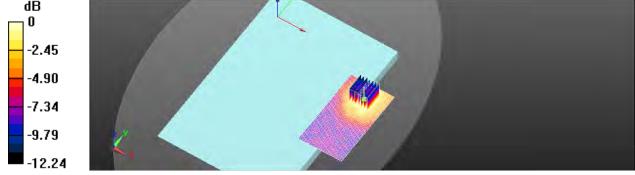

0 dB = 0.229 W/kg = -6.40 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 96 of 130

Date: 2019/6/13

Bluetooth_Body_Bottom side_CH 78_Tx1_0mm

Communication System: Bluetooth; Frequency: 2480 MHz

Medium parameters used: f = 2480 MHz; $\sigma = 1.912 \text{ S/m}$; $\varepsilon_r = 37.606$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 21.7°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(7.17, 7.17, 7.17);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1260; Calibrated: 2018/11/30

Phantom: ELI

DASY52 52.10.2(1495); SEMCAD X 14.6.12(7463)


Area Scan (101x121x1): Interpolated grid: dx=12 mm, dy=12 mm Maximum value of SAR (interpolated) = 0.176 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.356 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.122 W/kg

SAR(1 g) = 0.086 W/kg; SAR(10 g) = 0.059 W/kgMaximum value of SAR (measured) = 0.110 W/kg

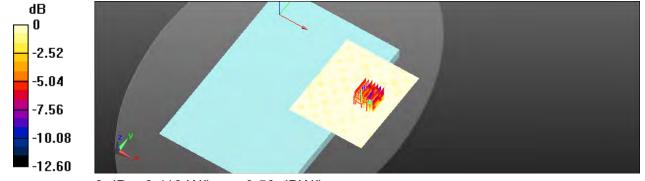

0 dB = 0.110 W/kg = -9.59 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 97 of 130

Date: 2019/6/14

WLAN 802.11n(40M) 5.2G_Body-worn_Bottom side_CH 46_Tx1_0mm

Communication System: WLAN 5G; Frequency: 5230 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5230 MHz; $\sigma = 4.743 \text{ S/m}$; $\varepsilon_r = 35.511$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.5°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(5, 5, 5);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1260; Calibrated: 2018/11/30

Phantom: ELI

DASY52 52.10.2(1495); SEMCAD X 14.6.12(7463)

Area Scan (81x151x1): Interpolated grid: dx=10 mm, dy=10 mm


Maximum value of SAR (interpolated) = 0.416 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.523 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.820 W/kg

SAR(1 g) = 0.233 W/kg; SAR(10 g) = 0.105 W/kg Maximum value of SAR (measured) = 0.413 W/kg

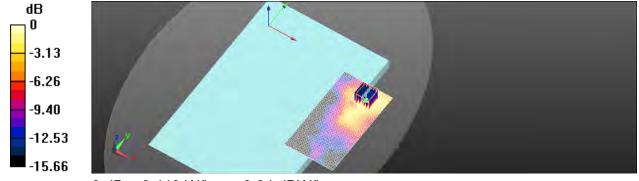

0 dB = 0.413 W/kg = -3.84 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,此報告結果僅對測試之緣品負責,同時此樣品僅保留00天。木報告表經太公司書面許可,不可部份複製。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 98 of 130

Date: 2019/6/15

WLAN 802.11n(40M) 5.3G_Body-worn_Bottom side_CH 54_Tx1_0mm

Communication System: WLAN 5G; Frequency: 5270 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5270 MHz; $\sigma = 4.798 \text{ S/m}$; $\varepsilon_r = 35.506$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 21.6°C; Liquid temperature: 22.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(5, 5, 5);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1260; Calibrated: 2018/11/30

Phantom: ELI

DASY52 52.10.2(1495); SEMCAD X 14.6.12(7463)

Area Scan (81x151x1): Interpolated grid: dx=10 mm, dy=10 mm


Maximum value of SAR (interpolated) = 0.370 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.722 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.725 W/kg

SAR(1 g) = 0.206 W/kg; SAR(10 g) = 0.093 W/kg Maximum value of SAR (measured) = 0.358 W/kg

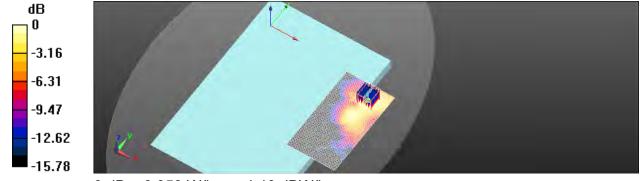

0 dB = 0.358 W/kg = -4.46 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,此報告結果僅對測計之樣品負責,同時此樣品僅保留00天。木類告表經太公司書面許可,不可部份複製。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⁹⁰天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format format documents of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 99 of 130

Date: 2019/6/16

WLAN 802.11ac(80M) 5.6G_Body-worn_Bottom side_CH 138_Tx1_0mm

Communication System: WLAN 5G; Frequency: 5690 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5690 MHz; $\sigma = 5.331 \text{ S/m}$; $\varepsilon_r = 34.386$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 21.7°C; Liquid temperature: 22.2°C

DASY5 Configuration:


- Probe: EX3DV4 SN3938;ConvF(4.76, 4.76, 4.76);Calibrated: 2018/10/24
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1260; Calibrated: 2018/11/30
- Phantom: ELI
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7463)

Area Scan (81x151x1): Interpolated grid: dx=10 mm, dy=10 mm Maximum value of SAR (interpolated) = 0.559 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 2.149 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.299 W/kg; SAR(10 g) = 0.123 W/kgMaximum value of SAR (measured) = 0.551 W/kg

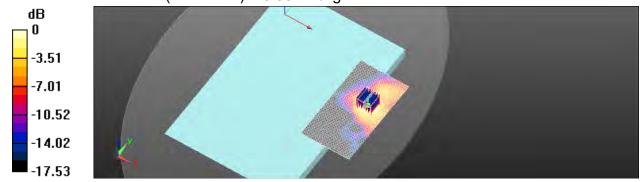

0 dB = 0.551 W/kg = -2.59 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 100 of 130

Date: 2019/6/17

WLAN 802.11n(40M) 5.8G_Body-worn_Bottom side_CH 151_Tx1_0mm

Communication System: WLAN 5G; Frequency: 5755 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5755 MHz; $\sigma = 5.421 \text{ S/m}$; $\varepsilon_r = 34.218$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.0°C; Liquid temperature: 21.5°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(4.76, 4.76, 4.76);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1260; Calibrated: 2018/11/30

Phantom: ELI

DASY52 52.10.2(1495); SEMCAD X 14.6.12(7463)

Area Scan (81x151x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.653 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.727 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 0.345 W/kg; SAR(10 g) = 0.139 W/kg

Maximum value of SAR (measured) = 0.643 W/kg

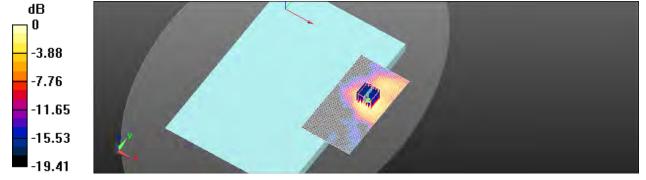

0 dB = 0.643 W/kg = -1.92 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,此報告結果僅對測試之緣品負責,同時此樣品僅保留00天。木報告表經太公司書面許可,不可部份複製。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sg.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sg.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 101 of 130

Date: 2019/6/13

WLAN 802.11b_Body-worn_Bottom side_CH 1_Tx2_0mm

Communication System: WLAN 2.45G; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2412 MHz; σ = 1.836 S/m; ε_r = 37.806; ρ = 1000 kg/m³

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 21.7°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(7.17, 7.17, 7.17);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1260; Calibrated: 2018/11/30

Phantom: ELI

DASY52 52.10.2(1495); SEMCAD X 14.6.12(7463)

Area Scan (51x121x1): Interpolated grid: dx=12 mm, dy=12 mm


Maximum value of SAR (interpolated) = 1.49 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.136 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 2.81 W/kg

SAR(1 g) = 0.918 W/kg; SAR(10 g) = 0.400 W/kg Maximum value of SAR (measured) = 1.57 W/kg

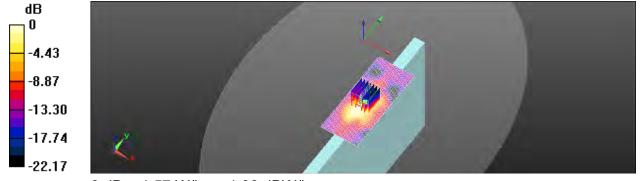

0 dB = 1.57 W/kg = 1.96 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非兄有论明,此据华结里做影测过之缘是台書,同時什樣是做保留00千。木都华未领木公司事而纯可,不可部份複测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 102 of 130

Date: 2019/6/14

WLAN 802.11ac(80M) 5.2G_Body-worn_Bottom side_CH 42_Tx2_0mm

Communication System: WLAN 5G; Frequency: 5210 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5210 MHz; $\sigma = 4.694 \text{ S/m}$; $\varepsilon_r = 35.601$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.5°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(5, 5, 5);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1260; Calibrated: 2018/11/30

Phantom: ELI

DASY52 52.10.2(1495); SEMCAD X 14.6.12(7463)

Area Scan (61x141x1): Interpolated grid: dx=10 mm, dy=10 mm


Maximum value of SAR (interpolated) = 2.14 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.841 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 4.55 W/kg

SAR(1 g) = 0.989 W/kg; SAR(10 g) = 0.273 W/kg Maximum value of SAR (measured) = 2.16 W/kg

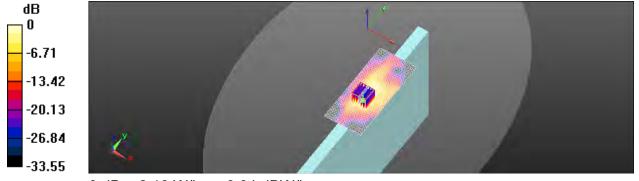

0 dB = 2.16 W/kg = 3.34 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,此報告結果僅對測試之緣品負責,同時此樣品僅保留00天。木報告表經太公司書面許可,不可部份複製。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⁹⁰天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format format documents of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 103 of 130

Date: 2019/6/15

WLAN 802.11ac(80M) 5.3G_Body-worn_Bottom side_CH 58_Tx2_0mm

Communication System: WLAN 5G; Frequency: 5290 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5290 MHz; $\sigma = 4.801 \text{ S/m}$; $\varepsilon_r = 35.503$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 21.6°C; Liquid temperature: 22.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(5, 5, 5);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1260; Calibrated: 2018/11/30

Phantom: ELI

DASY52 52.10.2(1495); SEMCAD X 14.6.12(7463)

Area Scan (61x141x1): Interpolated grid: dx=10 mm, dy=10 mm


Maximum value of SAR (interpolated) = 2.24 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.064 V/m: Power Drift = 0.03 dB

Peak SAR (extrapolated) = 4.87 W/kg

SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.286 W/kgMaximum value of SAR (measured) = 2.30 W/kg

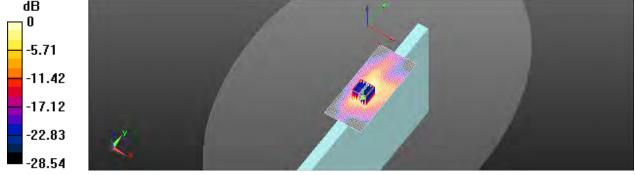

0 dB = 2.30 W/kg = 3.62 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 104 of 130

Date: 2019/6/16

WLAN 802.11ac(80M) 5.6G_Body-worn_Bottom side_CH 106_Tx2_0mm

Communication System: WLAN 5G; Frequency: 5530 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5530 MHz; $\sigma = 4.925 \text{ S/m}$; $\varepsilon_r = 34.654$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 21.7°C; Liquid temperature: 22.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(4.65, 4.65, 4.65);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1260; Calibrated: 2018/11/30

Phantom: ELI

DASY52 52.10.2(1495); SEMCAD X 14.6.12(7463)

Area Scan (61x141x1): Interpolated grid: dx=10 mm, dy=10 mm


Maximum value of SAR (interpolated) = 2.09 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.098 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 5.51 W/kg

SAR(1 g) = 1.13 W/kg; SAR(10 g) = 0.300 W/kg Maximum value of SAR (measured) = 2.35 W/kg

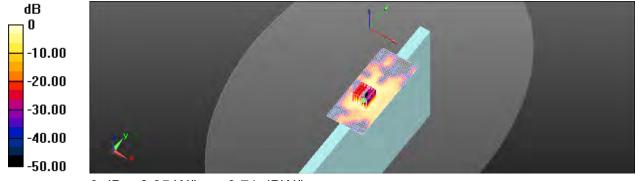

0 dB = 2.35 W/kg = 3.71 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非兄有论明,此据华结里做影测过之缘是台書,同時什樣是做保留00千。木都华未领木公司事而纯可,不可部份複测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 105 of 130

Date: 2019/6/17

WLAN 802.11ac(80M) 5.8G_Body-worn_Bottom side_CH 155_Tx2_0mm

Communication System: WLAN 5G; Frequency: 5775 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5775 MHz; $\sigma = 5.443 \text{ S/m}$; $\varepsilon_r = 33.919$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.0°C; Liquid temperature: 21.5°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(4.76, 4.76, 4.76);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1260; Calibrated: 2018/11/30

Phantom: ELI

DASY52 52.10.2(1495); SEMCAD X 14.6.12(7463)

Area Scan (61x141x1): Interpolated grid: dx=10 mm, dy=10 mm


Maximum value of SAR (interpolated) = 2.68 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.817 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 6.02 W/kg

SAR(1 g) = 1.16 W/kg; SAR(10 g) = 0.303 W/kgMaximum value of SAR (measured) = 2.69 W/kg

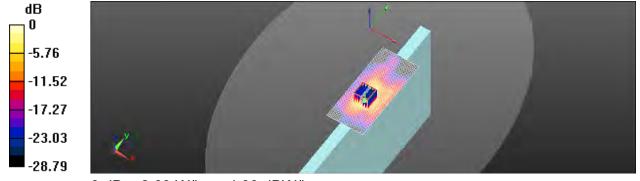

0 dB = 2.69 W/kg = 4.30 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 106 of 130

Date: 2019/6/13

WLAN 802.11b_Body-worn_Bottom side_CH 11_Tx1_0mm

Communication System: WLAN 2.45G; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2462 MHz; $\sigma = 1.893 \text{ S/m}$; $\varepsilon_r = 37.648$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 21.7°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(7.17, 7.17, 7.17);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1260; Calibrated: 2018/11/30

Phantom: ELI

DASY52 52.10.2(1495); SEMCAD X 14.6.12(7463)

Area Scan (51x121x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 1.90 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.566 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 2.15 W/kg

SAR(1 g) = 0.921 W/kg; SAR(10 g) = 0.387 W/kg

Maximum value of SAR (measured) = 1.43 W/kg


Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.566 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 2.31 W/kg

SAR(1 q) = 0.692 W/kq; SAR(10 q) = 0.328 W/kq

Maximum value of SAR (measured) = 1.24 W/kg

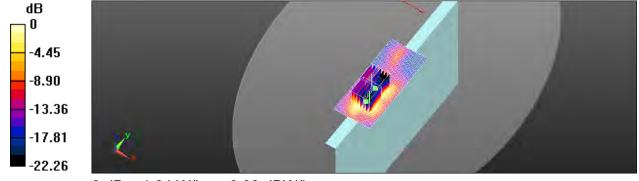

0 dB = 1.24 W/kg = 0.93 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 107 of 130

Date: 2019/6/13

Bluetooth_Body_Bottom side_CH 78_Tx1_0mm

Communication System: Bluetooth; Frequency: 2480 MHz

Medium parameters used: f = 2480 MHz; $\sigma = 1.912 \text{ S/m}$; $\varepsilon_r = 37.606$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 21.7°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(7.17, 7.17, 7.17);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1260; Calibrated: 2018/11/30

Phantom: ELI

DASY52 52.10.2(1495); SEMCAD X 14.6.12(7463)

Area Scan (51x111x1): Interpolated grid: dx=12 mm, dy=12 mm


Maximum value of SAR (interpolated) = 0.294 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.692 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.359 W/kg

SAR(1 g) = 0.148 W/kg; SAR(10 g) = 0.079 W/kg Maximum value of SAR (measured) = 0.231 W/kg

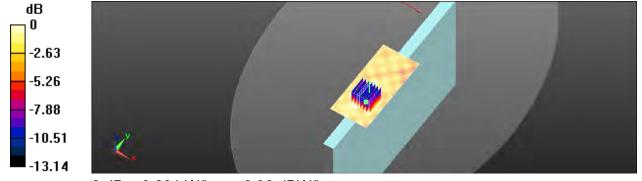

0 dB = 0.231 W/kg = -6.36 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,此報告結果僅對測試之緣品負責,同時此樣品僅保留00天。木報告表經太公司書面許可,不可部份複製。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 108 of 130

Date: 2019/6/14

WLAN 802.11ac(160M) 5.2G_Body-worn_Bottom side_CH 50_Tx1_0mm

Communication System: WLAN 5G; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5250 MHz; $\sigma = 4.762 \text{ S/m}$; $\varepsilon_r = 35.508$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.5°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(5, 5, 5);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1260; Calibrated: 2018/11/30

Phantom: ELI

DASY52 52.10.2(1495); SEMCAD X 14.6.12(7463)

Area Scan (61x141x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.93 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.327 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 6.88 W/kg

SAR(1 g) = 0.821 W/kg; SAR(10 g) = 0.278 W/kg

Zoom Scan (7x7x12)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.327 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 4.16 W/kg

SAR(1 g) = 0.745 W/kg; SAR(10 g) = 0.259 W/kg Maximum value of SAR (measured) = 1.53 W/kg



0 dB = 1.53 W/kg = 1.85 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,此報告結果僅對測試之緣品負責,同時此樣品僅保留00天。木報告表經太公司書面許可,不可部份複製。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 109 of 130

Date: 2019/6/15

WLAN 802.11ac(80M) 5.3G Body-worn Bottom side CH 58 Tx1 0mm

Communication System: WLAN 5G; Frequency: 5290 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5290 MHz; $\sigma = 4.801 \text{ S/m}$; $\varepsilon_r = 35.503$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 21.6°C; Liquid temperature: 22.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(5, 5, 5);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1260; Calibrated: 2018/11/30

Phantom: ELI

DASY52 52.10.2(1495); SEMCAD X 14.6.12(7463)

Area Scan (61x141x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.93 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.774 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 5.10 W/kg

SAR(1 g) = 0.841 W/kg; SAR(10 g) = 0.309 W/kg

Maximum value of SAR (measured) = 1.69 W/kg


Zoom Scan (7x7x12)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.774 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 2.99 W/kg

SAR(1 q) = 0.695 W/kq; SAR(10 q) = 0.263 W/kq

Maximum value of SAR (measured) = 1.45 W/kg

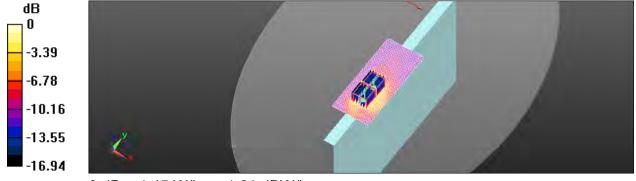

0 dB = 1.45 W/kg = 1.61 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 110 of 130

Date: 2019/6/16

WLAN 802.11ac(160M) 5.6G_Body-worn_Bottom side_CH 114_Tx1_0mm

Communication System: WLAN 5G; Frequency: 5570 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5570 MHz; $\sigma = 4.986 \text{ S/m}$; $\varepsilon_r = 34.52$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 21.7°C; Liquid temperature: 22.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(4.65, 4.65, 4.65);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1260; Calibrated: 2018/11/30

Phantom: ELI

DASY52 52.10.2(1495); SEMCAD X 14.6.12(7463)

Area Scan (61x141x1): Interpolated grid: dx=10 mm, dy=10 mm


Maximum value of SAR (interpolated) = 2.37 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.528 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 6.10 W/kg

SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.349 W/kgMaximum value of SAR (measured) = 2.21 W/kg

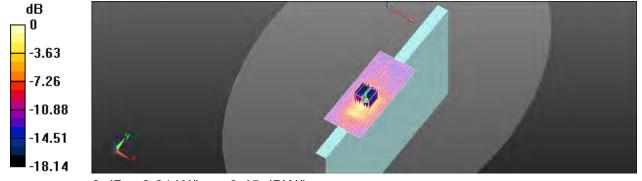

0 dB = 2.21 W/kg = 3.45 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 111 of 130

Date: 2019/6/17

WLAN 802.11ac(80M) 5.8G_Body-worn_Bottom side_CH 155_Tx1_0mm

Communication System: WLAN 5G; Frequency: 5775 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5775 MHz; $\sigma = 5.443 \text{ S/m}$; $\varepsilon_r = 33.919$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.0°C; Liquid temperature: 21.5°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(4.76, 4.76, 4.76);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1260; Calibrated: 2018/11/30

Phantom: ELI

DASY52 52.10.2(1495); SEMCAD X 14.6.12(7463)

Area Scan (61x141x1): Interpolated grid: dx=10 mm, dy=10 mm


Maximum value of SAR (interpolated) = 2.17 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.512 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 5.78 W/kg

SAR(1 g) = 1.15 W/kg; SAR(10 g) = 0.361 W/kg Maximum value of SAR (measured) = 2.46 W/kg

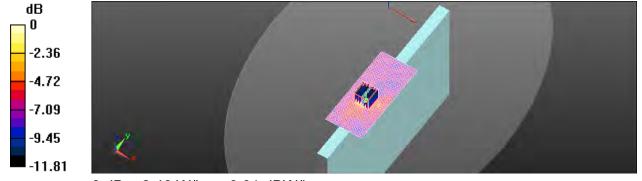

0 dB = 2.46 W/kg = 3.91 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,此報告結果僅對測試之緣品負責,同時此樣品僅保留00天。木報告表經太公司書面許可,不可部份複製。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⁹⁰天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_and_conditions.htm and for electronic format format documents of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 112 of 130

Date: 2019/6/13

WLAN 802.11n(20M)_Body-worn_Bottom side_CH 6_Tx2_0mm

Communication System: WLAN 2.45G; Frequency: 2437 MHz

Medium parameters used: f = 2437 MHz; $\sigma = 1.864 \text{ S/m}$; $\varepsilon_r = 37.753$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 21.7°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(7.17, 7.17, 7.17);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1260; Calibrated: 2018/11/30

Phantom: ELI

DASY52 52.10.2(1495); SEMCAD X 14.6.12(7463)

Area Scan (51x121x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.756 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.526 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.450 W/kg; SAR(10 g) = 0.200 W/kg

Maximum value of SAR (measured) = 0.758 W/kg


Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.526 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 2.45 W/kg

SAR(1 q) = 0.366 W/kq; SAR(10 q) = 0.154 W/kq

Maximum value of SAR (measured) = 0.684 W/kg

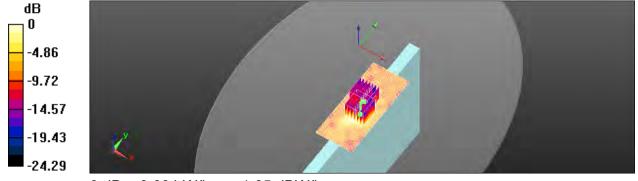

0 dB = 0.684 W/kg = -1.65 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 113 of 130

Date: 2019/6/14

WLAN 802.11ac(80M) 5.2G_Body-worn_Bottom side_CH 42_ Tx2_0mm

Communication System: WLAN 5G; Frequency: 5210 MHz

Medium parameters used: f = 5210 MHz; $\sigma = 4.694 \text{ S/m}$; $\varepsilon_r = 35.601$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.5°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(5, 5, 5);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1260; Calibrated: 2018/11/30

Phantom: ELI

DASY52 52.10.2(1495); SEMCAD X 14.6.12(7463)

Area Scan (61x141x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.05 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm. dv=4mm. dz=2mm

Reference Value = 2.112 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.81 W/kg

SAR(1 g) = 0.430 W/kg; SAR(10 g) = 0.118 W/kg

Maximum value of SAR (measured) = 1.00 W/kg


Zoom Scan (7x7x12)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.112 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.40 W/kg

SAR(1 q) = 0.357 W/kq; SAR(10 q) = 0.117 W/kq

Maximum value of SAR (measured) = 0.777 W/kg

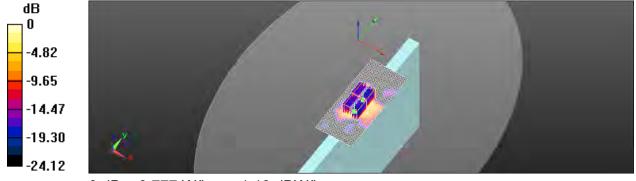

0 dB = 0.777 W/kg = -1.10 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 114 of 130

Date: 2019/6/15

WLAN 802.11ac(80M) 5.3G_Body-worn_Bottom side_CH 58_ Tx2_0mm

Communication System: WLAN 5G; Frequency: 5290 MHz

Medium parameters used: f = 5290 MHz; $\sigma = 4.801 \text{ S/m}$; $\varepsilon_r = 35.503$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 21.6°C; Liquid temperature: 22.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(5, 5, 5);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1260; Calibrated: 2018/11/30

Phantom: ELI

DASY52 52.10.2(1495); SEMCAD X 14.6.12(7463)

Area Scan (61x141x1): Interpolated grid: dx=10 mm, dy=10 mm


Maximum value of SAR (interpolated) = 1.13 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.244 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 2.03 W/kg

SAR(1 g) = 0.459 W/kg; SAR(10 g) = 0.129 W/kg Maximum value of SAR (measured) = 1.03 W/kg

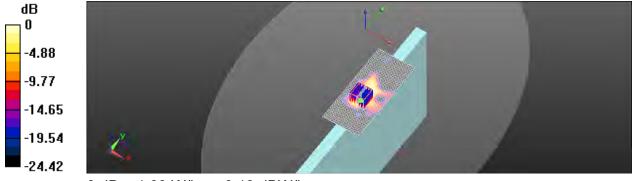

0 dB = 1.03 W/kg = 0.13 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非兄有论明,此据华结里做影测过之缘是台書,同時什樣是做保留00千。木都华未领木公司事而纯可,不可部份複测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 115 of 130

Date: 2019/6/16

WLAN 802.11ac(80M) 5.6G_Body-worn_Bottom side_CH 106_ Tx2_0mm

Communication System: WLAN 5G; Frequency: 5530 MHz

Medium parameters used: f = 5530 MHz; $\sigma = 4.925 \text{ S/m}$; $\varepsilon_r = 34.654$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 21.7°C; Liquid temperature: 22.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(4.65, 4.65, 4.65);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1260; Calibrated: 2018/11/30

Phantom: ELI

DASY52 52.10.2(1495); SEMCAD X 14.6.12(7463)

Area Scan (61x141x1): Interpolated grid: dx=10 mm, dy=10 mm


Maximum value of SAR (interpolated) = 1.13 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.232 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.79 W/kg

SAR(1 g) = 0.427 W/kg; SAR(10 g) = 0.105 W/kgMaximum value of SAR (measured) = 1.15 W/kg

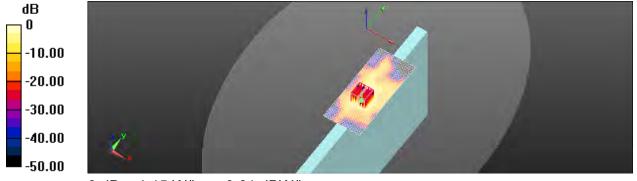

0 dB = 1.15 W/kg = 0.61 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 f (886-2) 2298-0488



Page: 116 of 130

Date: 2019/6/17

WLAN 802.11ac(80M) 5.8G_Body-worn_Bottom side_CH 155_ Tx2_0mm

Communication System: WLAN 5G; Frequency: 5775 MHz

Medium parameters used: f = 5775 MHz; $\sigma = 5.443 \text{ S/m}$; $\varepsilon_r = 33.919$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.0°C; Liquid temperature: 21.5°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(4.76, 4.76, 4.76);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1260; Calibrated: 2018/11/30

Phantom: ELI

DASY52 52.10.2(1495); SEMCAD X 14.6.12(7463)

Area Scan (61x141x1): Interpolated grid: dx=10 mm, dy=10 mm


Maximum value of SAR (interpolated) = 1.28 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.867 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 2.96 W/kg

SAR(1 g) = 0.560 W/kg; SAR(10 g) = 0.142 W/kg Maximum value of SAR (measured) = 1.28 W/kg

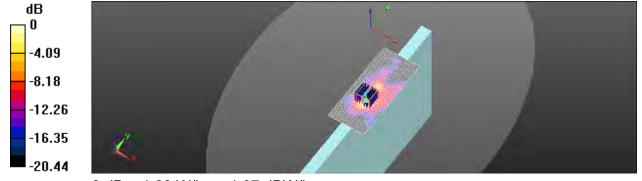

0 dB = 1.28 W/kg = 1.07 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,併報告結果僅聚的計畫,同時什樣品僅保留的天。木報告未經木公司書面許可,不可部份複製。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 117 of 130

Date: 2019/6/13

WLAN 802.11n(20M)_Body-worn_Bottom side_CH 6_Tx1_0mm

Communication System: WLAN 2.45G; Frequency: 2437 MHz

Medium parameters used: f = 2437 MHz; $\sigma = 1.864 \text{ S/m}$; $\varepsilon_r = 37.753$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 21.7°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(7.17, 7.17, 7.17);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1260; Calibrated: 2018/11/30

Phantom: ELI

DASY52 52.10.2(1495); SEMCAD X 14.6.12(7463)

Area Scan (51x121x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.752 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.155 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.477 W/kg; SAR(10 g) = 0.204 W/kg

Maximum value of SAR (measured) = 0.827 W/kg

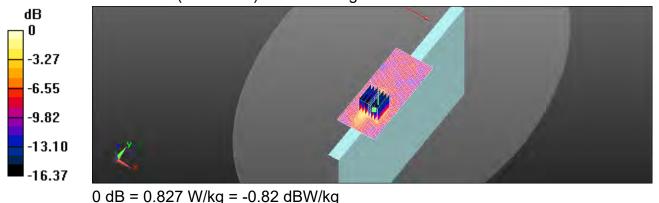

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非兄有论明,此据华结里做影测过之缘是台書,同時什樣是做保留00千。木都华未领木公司事而纯可,不可部份複测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 118 of 130

Date: 2019/6/13

Bluetooth Body Bottom side CH 78 Tx1 0mm

Communication System: Bluetooth; Frequency: 2480 MHz

Medium parameters used: f = 2480 MHz; $\sigma = 1.912 \text{ S/m}$; $\varepsilon_r = 37.606$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 21.7°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(7.17, 7.17, 7.17);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1260; Calibrated: 2018/11/30

Phantom: ELI

DASY52 52.10.2(1495); SEMCAD X 14.6.12(7463)

Area Scan (51x111x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.294 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.892 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.359 W/kg

SAR(1 g) = 0.148 W/kg; SAR(10 g) = 0.079 W/kg

Maximum value of SAR (measured) = 0.231 W/kg

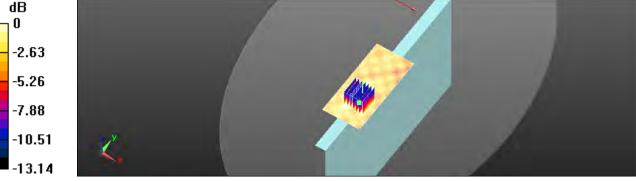

0 dB = 0.231 W/kg = -6.36 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 119 of 130

Date: 2019/6/14

WLAN 802.11ac(80M) 5.2G Body-worn Bottom side CH 42 Tx1 0mm

Communication System: WLAN 5G; Frequency: 5210 MHz

Medium parameters used: f = 5210 MHz; $\sigma = 4.694 \text{ S/m}$; $\varepsilon_r = 35.601$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.5°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(5, 5, 5);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1260; Calibrated: 2018/11/30

Phantom: ELI

DASY52 52.10.2(1495); SEMCAD X 14.6.12(7463)

Area Scan (61x141x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.843 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.115 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 2.06 W/kg

SAR(1 g) = 0.407 W/kg; SAR(10 g) = 0.121 W/kg

Maximum value of SAR (measured) = 0.847 W/kg


Zoom Scan (7x7x12)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.115 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.82 W/kg

SAR(1 g) = 0.399 W/kg; SAR(10 g) = 0.131 W/kg

Maximum value of SAR (measured) = 0.809 W/kg

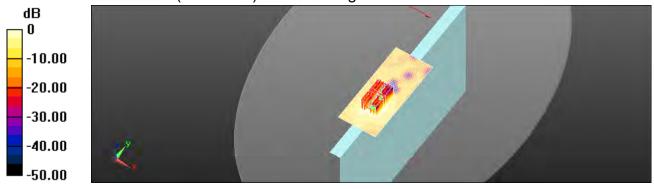

0 dB = 0.809 W/kg = -0.92 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 120 of 130

Date: 2019/6/15

WLAN 802.11ac(80M) 5.3G Body-worn Bottom side CH 58 Tx1 0mm

Communication System: WLAN 5G; Frequency: 5290 MHz

Medium parameters used: f = 5290 MHz; $\sigma = 4.801 \text{ S/m}$; $\varepsilon_r = 35.503$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 21.6°C; Liquid temperature: 22.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(5, 5, 5);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1260; Calibrated: 2018/11/30

Phantom: ELI

DASY52 52.10.2(1495); SEMCAD X 14.6.12(7463)

Area Scan (61x141x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.06 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.983 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.94 W/kg

SAR(1 g) = 0.464 W/kg; SAR(10 g) = 0.141 W/kg

Maximum value of SAR (measured) = 0.984 W/kg


Zoom Scan (7x7x12)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.983 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.84 W/kg

SAR(1 g) = 0.373 W/kg; SAR(10 g) = 0.130 W/kg

Maximum value of SAR (measured) = 0.821 W/kg

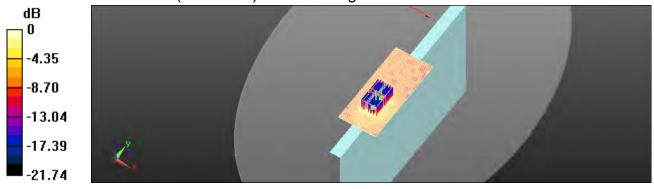

0 dB = 0.821 W/kg = -0.86 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 121 of 130

Date: 2019/6/16

WLAN 802.11ac(80M) 5.6G_Body-worn_Bottom side_CH 106_ Tx1_0mm

Communication System: WLAN 5G; Frequency: 5530 MHz

Medium parameters used: f = 5530 MHz; $\sigma = 4.925 \text{ S/m}$; $\varepsilon_r = 34.654$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 21.5°C; Liquid temperature: 21.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(4.65, 4.65, 4.65);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1260; Calibrated: 2018/11/30

Phantom: ELI

DASY52 52.10.2(1495); SEMCAD X 14.6.12(7463)

Area Scan (61x141x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.17 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.243 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 2.19 W/kg

SAR(1 g) = 0.498 W/kg; SAR(10 g) = 0.148 W/kg

Maximum value of SAR (measured) = 1.07 W/kg

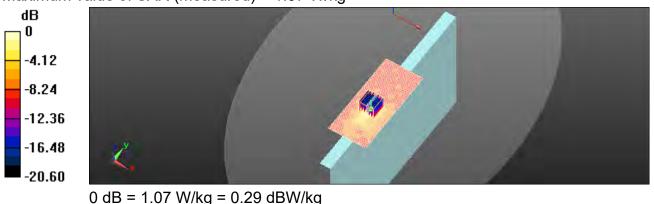

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,件報告結果僅享到關於了樣品負責,同時什樣品僅是留何天。木報告未經木公司惠面許可,不可部份複製。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 122 of 130

Date: 2019/6/17

WLAN 802.11ac(80M) 5.8G_Body-worn_Bottom side_CH 155_ Tx1_0mm

Communication System: WLAN 5G; Frequency: 5775 MHz

Medium parameters used: f = 5775 MHz; $\sigma = 5.443 \text{ S/m}$; $\varepsilon_r = 33.919$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.0°C; Liquid temperature: 21.5°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(4.76, 4.76, 4.76);Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1260; Calibrated: 2018/11/30

Phantom: ELI

DASY52 52.10.2(1495); SEMCAD X 14.6.12(7463)

Area Scan (61x141x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.34 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.310 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 3.78 W/kg

SAR(1 g) = 0.593 W/kg; SAR(10 g) = 0.168 W/kg

Maximum value of SAR (measured) = 1.21 W/kg

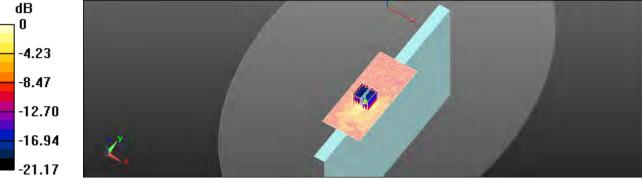

0 dB = 1.21 W/kg = 0.83 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,件超华结甲属影测建文样具色素,同既件样具属星网的子。太超华主领太公司隶而统可,不可如公指制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 123 of 130

6. SAR System Performance Verification

Date: 2019/6/13

Dipole 2450 MHz SN:727

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2450 MHz; $\sigma = 1.877 \text{ S/m}$; $\epsilon_r = 37.678$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 21.7°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938; ConvF(7.17, 7.17, 7.17); Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1260; Calibrated: 2018/11/30

Phantom: ELI

DASY52 52.10.2(1495); SEMCAD X 14.6.12(7463)


Pin=250mW/Area Scan (71x91x1): Interpolated grid: dx=12 mm, dy=12 mm Maximum value of SAR (interpolated) = 21.6 W/kg

Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 107.6 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 28.6 W/kg

SAR(1 g) = 13.6 W/kg; SAR(10 g) = 6.28 W/kgMaximum value of SAR (measured) = 20.8 W/kg

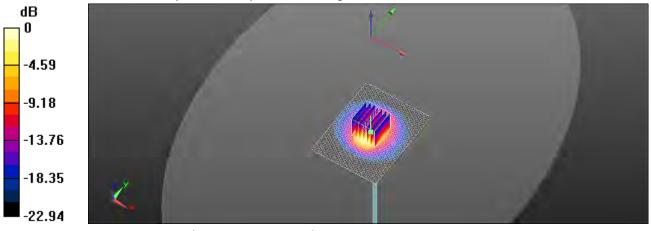

0 dB = 20.8 W/kg = 13.18 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 124 of 130

Date: 2019/6/14

Dipole 5200 MHz_SN:1023

Communication System: CW; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5200 MHz; $\sigma = 4.673 \text{ S/m}$; $\varepsilon_r = 35.714$; $\rho = 1200 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.5°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938; ConvF(5, 5, 5); Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1260; Calibrated: 2018/11/30

Phantom: ELI

DASY52 52.10.2(1495); SEMCAD X 14.6.12(7463)

Pin=100mW/Area Scan (51x51x1): Interpolated grid: dx=10 mm, dy=10 mm Maximum value of SAR (interpolated) = 15.7 W/kg


Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 63.14 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 34.2 W/kg

SAR(1 g) = 8.15 W/kg; SAR(10 g) = 2.41 W/kg

Maximum value of SAR (measured) = 16.1 W/kg

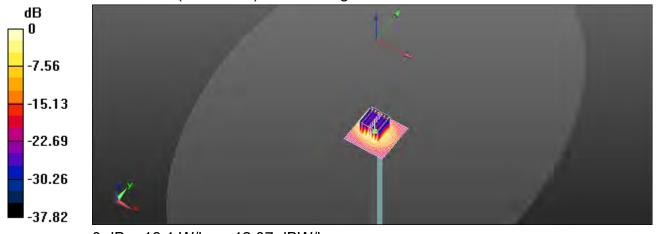

0 dB = 16.1 W/kg = 12.07 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,此報告結果僅對測試之緣品負責,同時此樣品僅保留00天。木報告表經太公司書面許可,不可部份複製。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 125 of 130

Date: 2019/6/15

Dipole 5300 MHz SN:1023

Communication System: CW; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5300 MHz; $\sigma = 4.808 \text{ S/m}$; $\varepsilon_r = 35.426$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 21.6°C; Liquid temperature: 22.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938;ConvF(5, 5, 5);Calibrated: 2018/10/24

• Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1260; Calibrated: 2018/11/30

Phantom: ELI

DASY52 52.10.2(1495); SEMCAD X 14.6.12(7463)

Pin=100mW, d=10mm/Area Scan (71x91x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 17.3 W/kg

Pin=100mW, d=10mm/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 62.23 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 27.1 W/kg

SAR(1 g) = 7.95 W/kg; SAR(10 g) = 2.44 W/kg

Maximum value of SAR (measured) = 15.9 W/kg

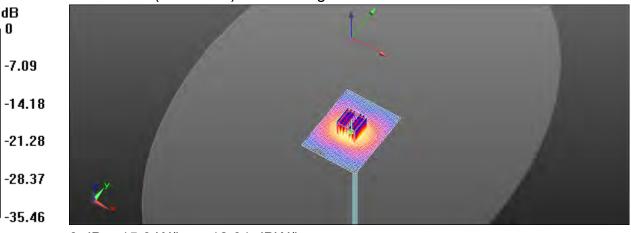

0 dB = 15.9 W/kg = 12.01 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,併報先結果做學訓練之樣具色書,同時什樣具僅保留的主。太報先未經太公司書而許可,不可部份複製。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 126 of 130

Date: 2019/6/16

Dipole 5600 MHz_SN:1023

Communication System: CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5600 MHz; $\sigma = 4.993 \text{ S/m}$; $\varepsilon_r = 34.502$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 21.7°C; Liquid temperature: 22.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938; ConvF(4.65, 4.65, 4.65); Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1260; Calibrated: 2018/11/30

Phantom: ELI

DASY52 52.10.2(1495); SEMCAD X 14.6.12(7463)

Pin=100mW/Area Scan (61x71x1): Interpolated grid: dx=10 mm, dy=10 mm Maximum value of SAR (interpolated) = 18.4 W/kg


Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 65.11 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 35.5 W/kg

SAR(1 g) = 8.22 W/kg; SAR(10 g) = 2.32 W/kg

Maximum value of SAR (measured) = 17.5 W/kg

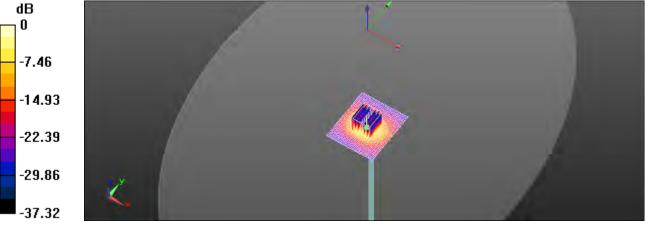

0 dB = 17.5 W/kg = 12.43 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,併報先結果做學訓練之樣具色書,同時什樣具僅保留的主。太報先未經太公司書而許可,不可部份複製。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 127 of 130

Date: 2019/6/17

Dipole 5800 MHz SN:1023

Communication System: CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5800 MHz; $\sigma = 5.453 \text{ S/m}$; $\varepsilon_r = 33.904$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.0°C; Liquid temperature: 21.5°C

DASY5 Configuration:

Probe: EX3DV4 - SN3938; ConvF(4.76, 4.76, 4.76); Calibrated: 2018/10/24

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1260; Calibrated: 2018/11/30

Phantom: ELI

DASY52 52.10.2(1495); SEMCAD X 14.6.12(7463)

Pin=100mW/Area Scan (61x91x1): Interpolated grid: dx=10 mm, dy=10 mm Maximum value of SAR (interpolated) = 16.8 W/kg


Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm,

dz=2mm

Reference Value = 58.69 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 39.1 W/kg

SAR(1 g) = 7.78 W/kg; SAR(10 g) = 2.19 W/kgMaximum value of SAR (measured) = 16.8 W/kg

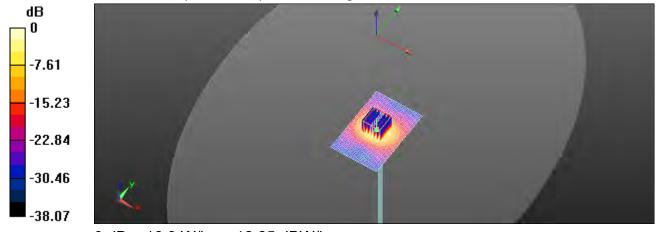

0 dB = 16.8 W/kg = 12.25 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The

Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sas.com

SGS Taiwan Ltd.



Page: 128 of 130

7. Uncertainty Budget

Measurement Uncertainty evaluation template for DUT SAR test (3-6G)

A	С	D	е		f	g	h=c * f / e	i=c * g / e	k
Source of Uncertainty	Tolerance/ Uncertainty	Probabilit y	Div	Div Value	ci (1g)	ci (10g)	Standard uncertainty	Standard uncertainty	vi, or Vef
Measurement system									
Probe calibration	6.55%	N	1	1	1	1	6.55%	6.55%	∞
Isotropy , Axial	3.50%	R	√3	1.732	1	1	2.02%	2.02%	∞
Isotropy, Hemispherical	9.60%	R	√3	1.732	1	1	5.54%	5.54%	∞
Modulation Response	2.40%	R	√3	1.732	1	1	1.40%	1.40%	∞
Boundary Effect	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Linearity	4.70%	R	√3	1.732	1	1	2.71%	2.71%	∞
Detection Limits	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Readout Electronics	0.30%	N	1	1	1	1	0.30%	0.30%	∞
Response time	0.80%	R	√3	1.732	1	1	0.46%	0.46%	∞
Integration Time	2.60%	R	√3	1.732	1	1	1.50%	1.50%	∞
Measurement drift (class A evaluation)	1.75%	R	√3	1.732	1	1	1.01%	1.01%	∞
RF ambient condition - noise	3.00%	R	√3	1.732	1	1	1.73%	1.73%	∞
RF ambient conditions - reflections	3.00%	R	√3	1.732	1	1	1.73%	1.73%	∞
Probe positioner Mechanical restrictions	0.40%	R	√3	1.732	1	1	0.23%	0.23%	∞
Probe Positioning with respect to phantom	2.90%	R	√3	1.732	1	1	1.67%	1.67%	∞
Post-processing	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Max SAR Eval	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Test Sample related									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	N	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	√3	1.732	1	1	2.89%	2.89%	∞
Phantom and Setup									
Phantom Uncertainty	4.00%	R	√3	1.732	1	1	2.31%	2.31%	∞
Liquid permittivity (mea.)	3.99%	N	1	1	0.64	0.43	2.55%	1.72%	М
Liquid Conductivity (mea.)	3.79%	N	1	1	0.6	0.49	2.27%	1.86%	М
Combined standard uncertainty		RSS					12.20%	11.98%	
Expant uncertainty (95% confidence							24.41%	23.95%	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 129 of 130

Measurement Uncertainty evaluation template for DUT SAR test (0.3-3G)

А	С	D	е		f	g	h=c * f / e	i=c * g / e	k
Source of Uncertainty	Tolerance/ Uncertainty	Probabilit y	Div	Div Value	ci (1g)	ci (10g)	Standard uncertainty	Standard uncertainty	vi, or Veff
Measurement system									
Probe calibration	6.00%	N	1	1	1	1	6.00%	6.00%	∞
Isotropy , Axial	3.50%	R	√3	1.732	1	1	2.02%	2.02%	∞
Isotropy, Hemispherical	9.60%	R	√3	1.732	1	1	5.54%	5.54%	∞
Modulation Response	2.40%	R	√3	1.732	1	1	1.40%	1.40%	∞
Boundary Effect	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Linearity	4.70%	R	√3	1.732	1	1	2.71%	2.71%	∞
Detection Limits	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Readout Electronics	0.30%	Ν	1	1	1	1	0.30%	0.30%	∞
Response time	0.80%	R	√3	1.732	1	1	0.46%	0.46%	∞
Integration Time	2.60%	R	√3	1.732	1	1	1.50%	1.50%	∞
Measurement drift (class A evaluation)	1.75%	R	√3	1.732	1	1	1.01%	1.01%	∞
RF ambient condition - noise	3.00%	R	√3	1.732	1	1	1.73%	1.73%	∞
RF ambient conditions - reflections	3.00%	R	√3	1.732	1	1	1.73%	1.73%	∞
Probe positioner Mechanical restrictions	0.40%	R	√3	1.732	1	1	0.23%	0.23%	∞
Probe Positioning with respect to phantom	2.90%	R	√3	1.732	1	1	1.67%	1.67%	∞
Post-processing	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Max SAR Eval	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Test Sample related									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	N	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	√3	1.732	1	1	2.89%	2.89%	∞
Phantom and Setup									
Phantom Uncertainty	4.00%	R	√3	1.732	1	1	2.31%	2.31%	∞
Liquid permittivity (mea.)	3.97%	N	1	1	0.64	0.43	2.54%	1.71%	М
Liquid Conductivity (mea.)	4.67%	N	1	1	0.6	0.49	2.80%	2.29%	М
Combined standard uncertainty		RSS					12.03%	11.76%	
Expant uncertainty (95% confidence							24.06%	23.52%	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 130 of 130

Appendixes

Refer to separated files for the following appendixes.

EN201960002 SAR_Appendix A Photographs EN201960002 SAR_Appendix B DAE & Probe Cal. Certificate EN201960002 SAR_Appendix C Phantom Description & Dipole Cal. Certificate

- End of report -

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號