

FCC Test Report

Report No.: RF191009E01

FCC ID: PBLMLC21AAM

Test Model: MLC21AAM

Received Date: Oct. 09, 2019

Test Date: Oct. 25 to Nov. 19, 2019

Issued Date: Jan. 20, 2020

Applicant: AMIT Wireless Inc.

Address: No.28, Lane 31 , Sec. 1 , Huandong Rd. , Sinshih District , Tainan City
74146 , Taiwan

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

**FCC Registration /
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information.....	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	9
3.2.1 Test Mode Applicability and Tested Channel Detail	10
3.3 Duty Cycle of Test Signal	12
3.4 Description of Support Units	13
3.4.1 Configuration of System under Test	13
3.5 General Description of Applied Standards	13
4 Test Types and Results	15
4.1 Radiated Emission and Bandedge Measurement.....	15
4.1.1 Limits of Radiated Emission and Bandedge Measurement	15
4.1.2 Test Instruments	16
4.1.3 Test Procedures.....	18
4.1.4 Deviation from Test Standard	19
4.1.5 Test Setup.....	19
4.1.6 EUT Operating Conditions.....	20
4.1.7 Test Results	21
4.2 Conducted Emission Measurement	35
4.2.1 Limits of Conducted Emission Measurement	35
4.2.2 Test Instruments	35
4.2.3 Test Procedures.....	36
4.2.4 Deviation from Test Standard	36
4.2.5 Test Setup.....	36
4.2.6 EUT Operating Conditions.....	36
4.2.7 Test Results	37
4.3 6dB Bandwidth Measurement	39
4.3.1 Limits of 6dB Bandwidth Measurement	39
4.3.2 Test Setup.....	39
4.3.3 Test Instruments	39
4.3.4 Test Procedure	39
4.3.5 Deviation from Test Standard	39
4.3.6 EUT Operating Conditions.....	39
4.3.7 Test Result.....	40
4.4 Conducted Output Power Measurement.....	42
4.4.1 Limits of Conducted Output Power Measurement	42
4.4.2 Test Setup.....	42
4.4.3 Test Instruments	42
4.4.4 Test Procedures.....	42
4.4.5 Deviation from Test Standard	42
4.4.6 EUT Operating Conditions.....	42
4.4.7 Test Results	43
4.5 Power Spectral Density Measurement.....	45
4.5.1 Limits of Power Spectral Density Measurement	45
4.5.2 Test Setup.....	45
4.5.3 Test Instruments	45
4.5.4 Test Procedure	45
4.5.5 Deviation from Test Standard	45
4.5.6 EUT Operating Condition	45

4.5.7 Test Results	46
4.6 Conducted Out of Band Emission Measurement	48
4.6.1 Limits of Conducted Out of Band Emission Measurement.....	48
4.6.2 Test Setup.....	48
4.6.3 Test Instruments	48
4.6.4 Test Procedure	48
4.6.5 Deviation from Test Standard	48
4.6.6 EUT Operating Condition	48
4.6.7 Test Results	48
5 Pictures of Test Arrangements.....	55
Appendix – Information of the Testing Laboratories	56

Release Control Record

Issue No.	Description	Date Issued
RF191009E01	Original release.	Jan. 20, 2020

1 Certificate of Conformity

Product: Wifi module

Brand: AMIT

Test Model: MLC21AAM

Sample Status: MASS-PRODUCTION

Applicant: AMIT Wireless Inc.

Test Date: Oct. 25 to Nov. 19, 2019

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :



Date:

Jan. 20, 2020

Claire Kuan / Specialist

Approved by :



Date:

Jan. 20, 2020

Clark Lin / Technical Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -7.04 dB, 0.38438MHz
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -0.1dB at 4874.00MHz
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is R-SMA not a standard connector.

Note:

Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions	-	3.1 dB
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.8 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.0 dB
	30MHz ~ 1GHz	4.8 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	5.0 dB
	6GHz ~ 18GHz	5.0 dB
	18GHz ~ 40GHz	5.3 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Wifi module
Brand	AMIT
Test Model	MLC21AAM
Status of EUT	MASS-PRODUCTION
Power Supply Rating	3.3Vdc from host equipment
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode only
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: up to 11Mbps 802.11a/g: up to 54Mbps 802.11n: up to 300Mbps 802.11ac: up to 866.7Mbps
Operating Frequency	2.4GHz: 2.412 ~ 2.462 GHz 5GHz: 5.18~ 5.24 GHz, 5.745 ~ 5.825 GHz
Number of Channel	2.4GHz: 802.11b, 802.11g, 802.11n (HT20): 11 802.11n (HT40): 7 5GHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 9 802.11n (HT40), 802.11ac (VHT40): 4 802.11ac (VHT80): 2
Output Power	2.412 ~ 2.462GHz: 793.482 mW 5.18 ~ 5.24GHz: 58.956 mW 5.745 ~ 5.825GHz: 134.125 mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	NA
Data Cable Supplied	NA

Note:

1. 2.4GHz & 5GHz technology can't transmit at same time.
2. The antennas provided to the EUT, please refer to the following table:

Ant. No.	Chain No.	Antenna Gain (dBi)	Frequency Range (GHz)	Antenna Type	Connector Type
1	Chain 0	3	2.4~2.4835	Dipole	R-SMA
		5	5.15~5.85		
2	Chain 1	3	2.4~2.4835	Dipole	R-SMA
		5	5.15~5.85		

3. The EUT incorporates a MIMO function.

2.4GHz Band		
MODULATION MODE	TX & RX CONFIGURATION	
802.11b	1TX Diversity	1RX Diversity
802.11g	1TX Diversity	1RX Diversity
802.11n (HT20)	2TX	2RX
802.11n (HT40)	2TX	2RX
5GHz Band		
MODULATION MODE	TX & RX CONFIGURATION	
802.11a	1TX Diversity	1RX Diversity
802.11n (HT20)	2TX	2RX
802.11n (HT40)	2TX	2RX
802.11ac VHT20	2TX	2RX
802.11ac VHT40	2TX	2RX
802.11ac VHT80	2TX	2RX

4. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g, 802.11n (HT20):

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40):

Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE $\geq$ 1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

RE $\geq$ 1G: Radiated Emission above 1GHz & Bandedge Measurement

RE<1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11n (HT20)	1 to 11	6	OFDM	BPSK	6.5

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11n (HT20)	1 to 11	6	OFDM	BPSK	6.5

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (System)	TESTED BY
RE≥1G	22deg. C, 72%RH	120Vac, 60Hz	Jeff Lee
RE<1G	23deg. C, 63%RH	120Vac, 60Hz	Nelson Teng
PLC	24deg. C, 75%RH	120Vac, 60Hz	Andy Ho
APCM	25deg. C, 60%RH	120Vac, 60Hz	Jyunchun Lin

3.3 Duty Cycle of Test Signal

If duty cycle of test signal is $\geq 98\%$, duty factor is not required.


If duty cycle of test signal is $< 98\%$, duty factor shall be considered.

802.11b: Duty cycle = $8.682 \text{ ms} / 8.855 \text{ ms} = 0.98$

802.11g: Duty cycle = $1.44 \text{ ms} / 1.538 \text{ ms} = 0.936$, Duty factor = $10 * \log (1/\text{Duty cycle}) = 0.29$

802.11n (HT20): Duty cycle = $1.347 \text{ ms} / 1.43 \text{ ms} = 0.942$, Duty factor = $10 * \log (1/\text{Duty cycle}) = 0.26$

802.11n (HT40): Duty cycle = $0.668 \text{ ms} / 0.774 \text{ ms} = 0.863$, Duty factor = $10 * \log (1/\text{Duty cycle}) = 0.64$

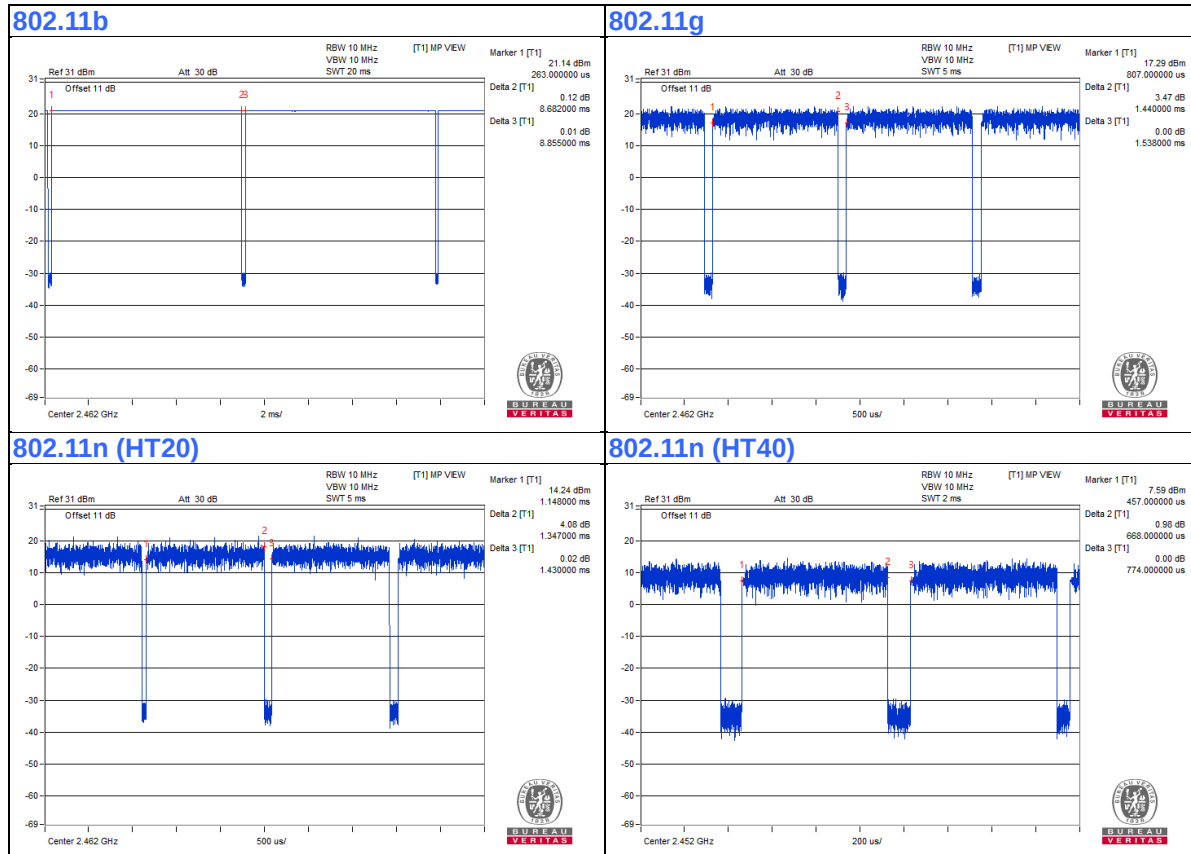


3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Test Tool	AMIT Wireless Inc.	NA	NA	NA	Supplied by client
B.	Adapter	Powertron Electronics	PA1024-120IB200	NA	NA	Supplied by client

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC Cable	1	1.3	No	0	Supplied by client

3.4.1 Configuration of System under Test

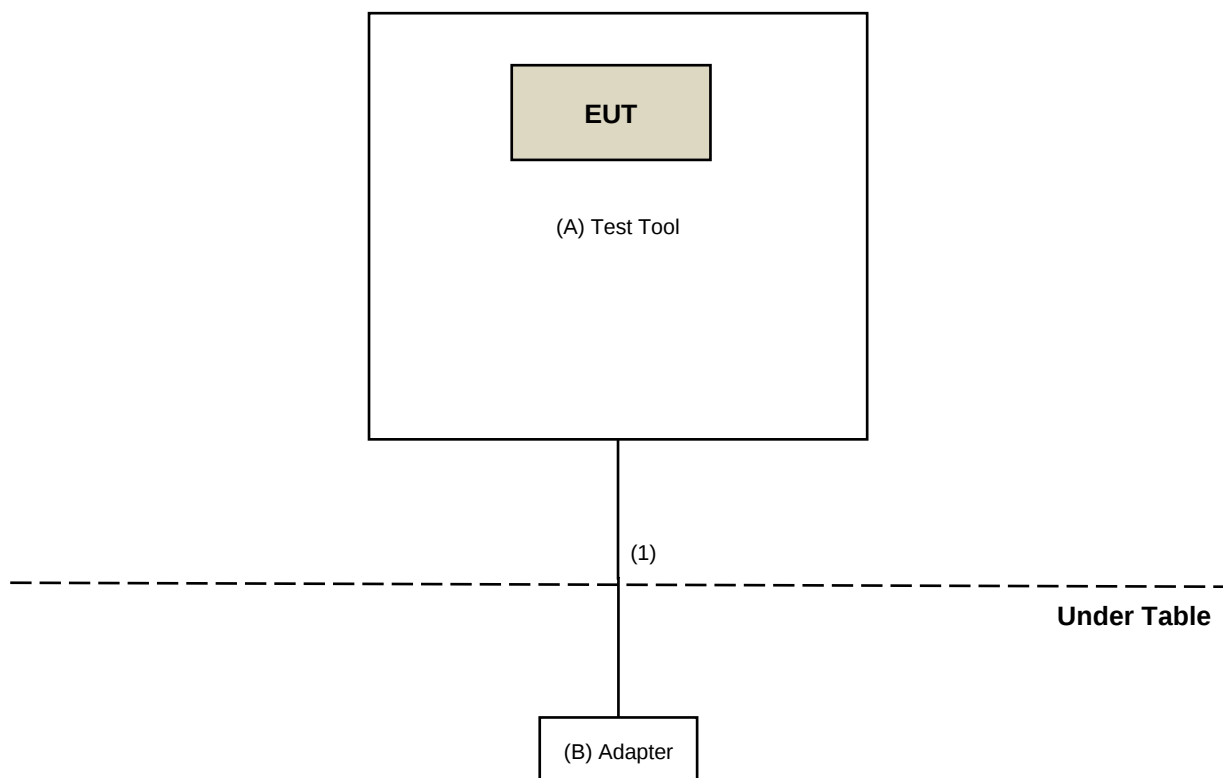

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)
KDB 558074 D01 15.247 Meas Guidance v05r02
KDB 662911 D01 Multiple Transmitter Output v02r01
ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

For radiated emission test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver ESR7 R&S	ESR7	102026	Apr. 24, 2019	Apr. 23, 2020
Spectrum Analyzer Keysight	N9030B	MY57141948	May 25, 2019	May 24, 2020
Pre-Amplifier EMCI	EMC001340	980142	May 30, 2019	May 29, 2020
Loop Antenna Electro-Metrics	EM-6879	264	Jan. 22, 2019	Jan. 21, 2020
RF Cable	NA	LOOPCAB-001	Jan. 14, 2019	Jan. 13, 2020
RF Cable	NA	LOOPCAB-002	Jan. 14, 2019	Jan. 13, 2020
Pre-Amplifier EMCI	EMC330N	980538	Apr. 30, 2019	Apr. 29, 2020
Trilog Broadband Antenna SCHWARZBECK	VULB9168	9168-0842	Nov. 21, 2018	Nov. 20, 2019
RF Cable	8D	966-5-1	May 03, 2019	May 02, 2020
RF Cable	8D	966-5-2	May 03, 2019	May 02, 2020
RF Cable	8D	966-5-3	May 03, 2019	May 02, 2020
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-ATT5-02	Jan. 28, 2019	Jan. 27, 2020
Horn_Antenna SCHWARZBECK	BBHA 9120D	9120D-1819	Nov. 25, 2018	Nov. 24, 2019
Pre-Amplifier EMCI	EMC12630SE	980509	May 03, 2019	May 02, 2020
RF Cable EMCI	EMC104-SM-SM-1500	180503	May 03, 2019	May 02, 2020
RF Cable EMCI	EMC104-SM-SM-2000	180501	May 03, 2019	May 02, 2020
RF Cable EMCI	EMC104-SM-SM-6000	180505	May 03, 2019	May 02, 2020
Pre-Amplifier EMCI	EMC184045SE	980387	Jan. 28, 2019	Jan. 27, 2020
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 25, 2018	Nov. 24, 2019
RF Cable	EMC102-KM-KM-1200	160924	Jan. 28, 2019	Jan. 27, 2020
RF Cable	EMC102-KM-KM-1200	160925	Jan. 28, 2019	Jan. 27, 2020
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 5.
3. Loop antenna was used for all emissions below 30 MHz.
4. Tested Date: Oct. 25, 2019

For other test ietms:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer R&S	FSV40	100964	June 04, 2019	June 03, 2020
Power meter Anritsu	ML2495A	1014008	May 13, 2019	May 12, 2020
Power sensor Anritsu	MA2411B	0917122	May 13, 2019	May 12, 2020
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 15, 2019	Apr. 14, 2020

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 5.
3. Loop antenna was used for all emissions below 30 MHz.
4. Tested Date: Nov. 19, 2019

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

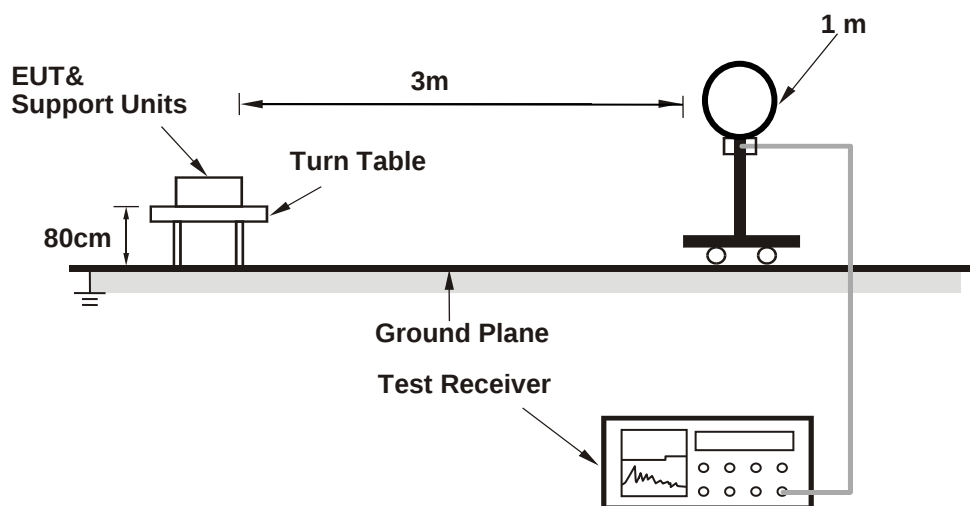

For Radiated emission 30MHz to 1GHz

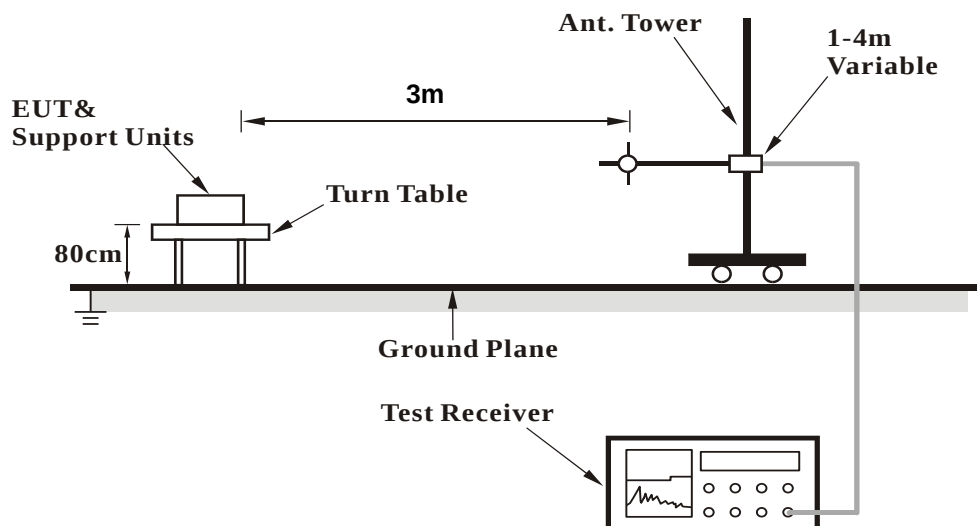

For Radiated emission above 1GHz

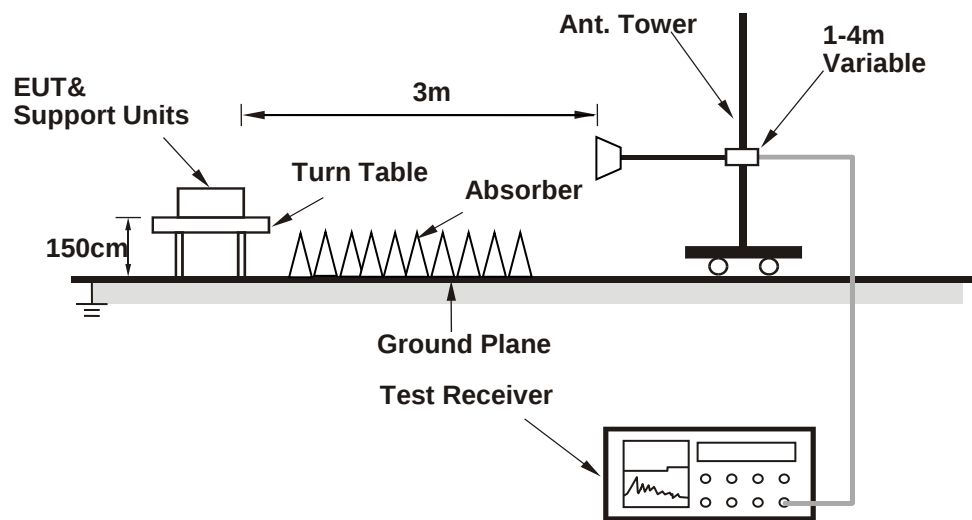

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Placed the EUT on the testing table.
- Controlling software (MT7662 QA V1.0.3.2) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results

Above 1GHz Data :

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2389.26	56.1 PK	74.0	-17.9	1.50 H	16	59.2	-3.1
2	2389.26	43.2 AV	54.0	-10.8	1.50 H	16	46.3	-3.1
3	*2412.00	97.1 PK			1.50 H	16	100.2	-3.1
4	*2412.00	94.6 AV			1.50 H	16	97.7	-3.1
5	4824.00	49.7 PK	74.0	-24.3	1.26 H	197	48.5	1.2
6	4824.00	47.8 AV	54.0	-6.2	1.26 H	197	46.6	1.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2389.26	64.4 PK	74.0	-9.6	1.58 V	161	67.5	-3.1
2	2389.26	52.5 AV	54.0	-1.5	1.58 V	161	55.6	-3.1
3	*2412.00	109.8 PK			1.58 V	161	112.9	-3.1
4	*2412.00	107.4 AV			1.58 V	161	110.5	-3.1
5	4824.00	54.8 PK	74.0	-19.2	1.05 V	224	53.6	1.2
6	4824.00	53.6 AV	54.0	-0.4	1.05 V	224	52.4	1.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	97.2 PK			1.52 H	17	100.3	-3.1
2	*2437.00	94.7 AV			1.52 H	17	97.8	-3.1
3	4874.00	49.5 PK	74.0	-24.5	1.25 H	212	48.3	1.2
4	4874.00	47.5 AV	54.0	-6.5	1.25 H	212	46.3	1.2
5	7311.00	46.2 PK	74.0	-27.8	1.32 H	244	39.0	7.2
6	7311.00	38.3 AV	54.0	-15.7	1.32 H	244	31.1	7.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	110.4 PK			1.51 V	156	113.5	-3.1
2	*2437.00	108.1 AV			1.51 V	156	111.2	-3.1
3	4874.00	55.1 PK	74.0	-18.9	1.10 V	234	53.9	1.2
4	4874.00	53.9 AV	54.0	-0.1	1.10 V	234	52.7	1.2
5	7311.00	52.7 PK	74.0	-21.3	1.78 V	141	45.5	7.2
6	7311.00	45.2 AV	54.0	-8.8	1.78 V	141	38.0	7.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	97.3 PK			1.48 H	11	100.4	-3.1
2	*2462.00	94.9 AV			1.48 H	11	98.0	-3.1
3	2487.74	55.9 PK	74.0	-18.1	1.48 H	11	59.0	-3.1
4	2487.74	42.9 AV	54.0	-11.1	1.48 H	11	46.0	-3.1
5	4924.00	50.1 PK	74.0	-23.9	1.19 H	196	48.8	1.3
6	4924.00	47.9 AV	54.0	-6.1	1.19 H	196	46.6	1.3
7	7386.00	46.4 PK	74.0	-27.6	1.27 H	254	39.1	7.3
8	7386.00	38.4 AV	54.0	-15.6	1.27 H	254	31.1	7.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	110.2 PK			1.56 V	162	113.3	-3.1
2	*2462.00	107.7 AV			1.56 V	162	110.8	-3.1
3	2487.74	67.4 PK	74.0	-6.6	1.56 V	162	70.5	-3.1
4	2487.74	51.8 AV	54.0	-2.2	1.56 V	162	54.9	-3.1
5	4924.00	55.1 PK	74.0	-18.9	1.07 V	232	53.8	1.3
6	4924.00	53.7 AV	54.0	-0.3	1.07 V	232	52.4	1.3
7	7386.00	52.9 PK	74.0	-21.1	1.83 V	125	45.6	7.3
8	7386.00	45.6 AV	54.0	-8.4	1.83 V	125	38.3	7.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.0 PK	74.0	-17.0	2.10 H	182	60.1	-3.1
2	2390.00	44.6 AV	54.0	-9.4	2.10 H	182	47.7	-3.1
3	*2412.00	96.8 PK			2.10 H	182	99.9	-3.1
4	*2412.00	87.7 AV			2.10 H	182	90.8	-3.1
5	4824.00	47.1 PK	74.0	-26.9	2.21 H	97	45.9	1.2
6	4824.00	38.4 AV	54.0	-15.6	2.21 H	97	37.2	1.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.3 PK	74.0	-6.7	1.50 V	162	70.4	-3.1
2	2390.00	53.6 AV	54.0	-0.4	1.50 V	162	56.7	-3.1
3	*2412.00	110.4 PK			1.50 V	162	113.5	-3.1
4	*2412.00	101.4 AV			1.50 V	162	104.5	-3.1
5	4824.00	55.0 PK	74.0	-19.0	1.78 V	195	53.8	1.2
6	4824.00	48.3 AV	54.0	-5.7	1.78 V	195	47.1	1.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.7 PK	74.0	-17.3	2.08 H	190	59.8	-3.1
2	2390.00	43.9 AV	54.0	-10.1	2.08 H	190	47.0	-3.1
3	*2437.00	103.0 PK			2.08 H	190	106.1	-3.1
4	*2437.00	93.8 AV			2.08 H	190	96.9	-3.1
5	2483.50	55.6 PK	74.0	-18.4	2.08 H	190	58.7	-3.1
6	2483.50	43.2 AV	54.0	-10.8	2.08 H	190	46.3	-3.1
7	4874.00	46.6 PK	74.0	-27.4	2.18 H	109	45.4	1.2
8	4874.00	38.1 AV	54.0	-15.9	2.18 H	109	36.9	1.2
9	7311.00	46.1 PK	74.0	-27.9	1.75 H	125	38.9	7.2
10	7311.00	35.9 AV	54.0	-18.1	1.75 H	125	28.7	7.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	63.3 PK	74.0	-10.7	1.36 V	194	66.4	-3.1
2	2390.00	49.6 AV	54.0	-4.4	1.36 V	194	52.7	-3.1
3	*2437.00	115.1 PK			1.36 V	194	118.2	-3.1
4	*2437.00	106.0 AV			1.36 V	194	109.1	-3.1
5	2483.50	65.1 PK	74.0	-8.9	1.36 V	194	68.2	-3.1
6	2483.50	49.8 AV	54.0	-4.2	1.36 V	194	52.9	-3.1
7	4874.00	54.7 PK	74.0	-19.3	1.83 V	205	53.5	1.2
8	4874.00	48.1 AV	54.0	-5.9	1.83 V	205	46.9	1.2
9	7311.00	46.1 PK	74.0	-27.9	1.77 V	132	38.9	7.2
10	7311.00	36.0 AV	54.0	-18.0	1.77 V	132	28.8	7.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	96.9 PK			2.12 H	189	100.0	-3.1
2	*2462.00	87.9 AV			2.12 H	189	91.0	-3.1
3	2483.50	56.6 PK	74.0	-17.4	2.12 H	189	59.7	-3.1
4	2483.50	44.3 AV	54.0	-9.7	2.12 H	189	47.4	-3.1
5	4924.00	47.0 PK	74.0	-27.0	2.23 H	118	45.7	1.3
6	4924.00	38.3 AV	54.0	-15.7	2.23 H	118	37.0	1.3
7	7386.00	46.0 PK	74.0	-28.0	1.76 H	116	38.7	7.3
8	7386.00	35.9 AV	54.0	-18.1	1.76 H	116	28.6	7.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	111.1 PK			1.46 V	162	114.2	-3.1
2	*2462.00	101.9 AV			1.46 V	162	105.0	-3.1
3	2483.50	70.5 PK	74.0	-3.5	1.46 V	162	73.6	-3.1
4	2483.50	53.6 AV	54.0	-0.4	1.46 V	162	56.7	-3.1
5	4924.00	55.4 PK	74.0	-18.6	1.78 V	206	54.1	1.3
6	4924.00	48.8 AV	54.0	-5.2	1.78 V	206	47.5	1.3
7	7386.00	46.4 PK	74.0	-27.6	1.76 V	122	39.1	7.3
8	7386.00	36.1 AV	54.0	-17.9	1.76 V	122	28.8	7.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

802.11n (HT20)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.2 PK	74.0	-16.8	1.93 H	292	60.3	-3.1
2	2390.00	44.2 AV	54.0	-9.8	1.93 H	292	47.3	-3.1
3	*2412.00	100.4 PK			1.93 H	292	103.5	-3.1
4	*2412.00	90.9 AV			1.93 H	292	94.0	-3.1
5	4824.00	46.8 PK	74.0	-27.2	2.18 H	114	45.6	1.2
6	4824.00	38.4 AV	54.0	-15.6	2.18 H	114	37.2	1.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	70.1 PK	74.0	-3.9	1.58 V	161	73.2	-3.1
2	2390.00	53.7 AV	54.0	-0.3	1.58 V	161	56.8	-3.1
3	*2412.00	111.0 PK			1.58 V	161	114.1	-3.1
4	*2412.00	102.1 AV			1.58 V	161	105.2	-3.1
5	4824.00	55.0 PK	74.0	-19.0	1.82 V	221	53.8	1.2
6	4824.00	48.1 AV	54.0	-5.9	1.82 V	221	46.9	1.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.7 PK	74.0	-16.3	1.96 H	293	60.8	-3.1
2	2390.00	44.4 AV	54.0	-9.6	1.96 H	293	47.5	-3.1
3	*2437.00	100.7 PK			1.96 H	293	103.8	-3.1
4	*2437.00	90.9 AV			1.96 H	293	94.0	-3.1
5	2483.50	57.1 PK	74.0	-16.9	1.96 H	293	60.2	-3.1
6	2483.50	44.2 AV	54.0	-9.8	1.96 H	293	47.3	-3.1
7	4874.00	46.5 PK	74.0	-27.5	2.21 H	122	45.3	1.2
8	4874.00	37.8 AV	54.0	-16.2	2.21 H	122	36.6	1.2
9	7311.00	46.3 PK	74.0	-27.7	1.76 H	135	39.1	7.2
10	7311.00	35.9 AV	54.0	-18.1	1.76 H	135	28.7	7.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.1 PK	74.0	-5.9	1.79 V	342	71.2	-3.1
2	2390.00	53.3 AV	54.0	-0.7	1.79 V	342	56.4	-3.1
3	*2437.00	114.5 PK			1.79 V	342	117.6	-3.1
4	*2437.00	105.2 AV			1.79 V	342	108.3	-3.1
5	2483.50	69.1 PK	74.0	-4.9	1.79 V	342	72.2	-3.1
6	2483.50	53.4 AV	54.0	-0.6	1.79 V	342	56.5	-3.1
7	4874.00	55.1 PK	74.0	-18.9	1.84 V	210	53.9	1.2
8	4874.00	48.5 AV	54.0	-5.5	1.84 V	210	47.3	1.2
9	7311.00	46.6 PK	74.0	-27.4	1.73 V	126	39.4	7.2
10	7311.00	36.3 AV	54.0	-17.7	1.73 V	126	29.1	7.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	100.3 PK			1.92 H	291	103.4	-3.1
2	*2462.00	91.0 AV			1.92 H	291	94.1	-3.1
3	2483.50	57.0 PK	74.0	-17.0	1.92 H	291	60.1	-3.1
4	2483.50	44.3 AV	54.0	-9.7	1.92 H	291	47.4	-3.1
5	4924.00	46.4 PK	74.0	-27.6	2.16 H	116	45.1	1.3
6	4924.00	37.8 AV	54.0	-16.2	2.16 H	116	36.5	1.3
7	7386.00	45.6 PK	74.0	-28.4	1.73 H	137	38.3	7.3
8	7386.00	35.6 AV	54.0	-18.4	1.73 H	137	28.3	7.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	111.5 PK			1.54 V	34	114.6	-3.1
2	*2462.00	102.4 AV			1.54 V	34	105.5	-3.1
3	2483.50	71.9 PK	74.0	-2.1	1.54 V	34	75.0	-3.1
4	2483.50	53.8 AV	54.0	-0.2	1.54 V	34	56.9	-3.1
5	4924.00	55.4 PK	74.0	-18.6	1.84 V	214	54.1	1.3
6	4924.00	48.6 AV	54.0	-5.4	1.84 V	214	47.3	1.3
7	7386.00	47.3 PK	74.0	-26.7	1.71 V	111	40.0	7.3
8	7386.00	36.7 AV	54.0	-17.3	1.71 V	111	29.4	7.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

802.11n (HT40)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.2 PK	74.0	-16.8	1.93 H	290	60.3	-3.1
2	2390.00	44.8 AV	54.0	-9.2	1.93 H	290	47.9	-3.1
3	*2422.00	98.0 PK			1.95 H	299	101.1	-3.1
4	*2422.00	87.1 AV			1.95 H	299	90.2	-3.1
5	4844.00	46.6 PK	74.0	-27.4	2.19 H	101	45.4	1.2
6	4844.00	38.1 AV	54.0	-15.9	2.19 H	101	36.9	1.2
7	7266.00	46.3 PK	74.0	-27.7	1.73 H	124	39.2	7.1
8	7266.00	36.3 AV	54.0	-17.7	1.73 H	124	29.2	7.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.2 PK	74.0	-5.8	1.27 V	8	71.3	-3.1
2	2390.00	53.6 AV	54.0	-0.4	1.27 V	8	56.7	-3.1
3	*2422.00	103.6 PK			1.27 V	8	106.7	-3.1
4	*2422.00	95.6 AV			1.27 V	8	98.7	-3.1
5	4844.00	55.5 PK	74.0	-18.5	1.78 V	208	54.3	1.2
6	4844.00	48.9 AV	54.0	-5.1	1.78 V	208	47.7	1.2
7	7266.00	46.2 PK	74.0	-27.8	1.77 V	139	39.1	7.1
8	7266.00	36.0 AV	54.0	-18.0	1.77 V	139	28.9	7.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.3 PK	74.0	-16.7	2.01 H	297	60.4	-3.1
2	2390.00	44.0 AV	54.0	-10.0	2.01 H	297	47.1	-3.1
3	*2437.00	99.8 PK			2.01 H	297	102.9	-3.1
4	*2437.00	89.9 AV			2.01 H	297	93.0	-3.1
5	2483.50	57.5 PK	74.0	-16.5	2.01 H	297	60.6	-3.1
6	2483.50	44.4 AV	54.0	-9.6	2.01 H	297	47.5	-3.1
7	4874.00	46.0 PK	74.0	-28.0	2.20 H	120	44.8	1.2
8	4874.00	37.6 AV	54.0	-16.4	2.20 H	120	36.4	1.2
9	7311.00	45.8 PK	74.0	-28.2	1.71 H	124	38.6	7.2
10	7311.00	35.5 AV	54.0	-18.5	1.71 H	124	28.3	7.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.3 PK	74.0	-6.7	1.13 V	214	70.4	-3.1
2	2390.00	53.3 AV	54.0	-0.7	1.13 V	214	56.4	-3.1
3	*2437.00	108.4 PK			1.13 V	214	111.5	-3.1
4	*2437.00	99.5 AV			1.13 V	214	102.6	-3.1
5	2483.50	65.1 PK	74.0	-8.9	1.13 V	214	68.2	-3.1
6	2483.50	49.6 AV	54.0	-4.4	1.13 V	214	52.7	-3.1
7	4874.00	53.7 PK	74.0	-20.3	1.84 V	206	52.5	1.2
8	4874.00	45.0 AV	54.0	-9.0	1.84 V	206	43.8	1.2
9	7311.00	47.0 PK	74.0	-27.0	1.70 V	118	39.8	7.2
10	7311.00	36.6 AV	54.0	-17.4	1.70 V	118	29.4	7.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	97.9 PK			1.90 H	294	101.0	-3.1
2	*2452.00	86.7 AV			1.90 H	294	89.8	-3.1
3	2483.50	57.3 PK	74.0	-16.7	1.90 H	294	60.4	-3.1
4	2483.50	44.8 AV	54.0	-9.2	1.90 H	294	47.9	-3.1
5	4904.00	46.9 PK	74.0	-27.1	2.13 H	95	45.6	1.3
6	4904.00	38.3 AV	54.0	-15.7	2.13 H	95	37.0	1.3
7	7356.00	46.0 PK	74.0	-28.0	1.75 H	126	38.8	7.2
8	7356.00	35.8 AV	54.0	-18.2	1.75 H	126	28.6	7.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	104.7 PK			1.25 V	126	107.8	-3.1
2	*2452.00	96.3 AV			1.25 V	126	99.4	-3.1
3	2483.50	67.2 PK	74.0	-6.8	1.25 V	126	70.3	-3.1
4	2483.50	53.7 AV	54.0	-0.3	1.25 V	126	56.8	-3.1
5	4904.00	54.8 PK	74.0	-19.2	1.84 V	226	53.5	1.3
6	4904.00	48.2 AV	54.0	-5.8	1.84 V	226	46.9	1.3
7	7356.00	46.6 PK	74.0	-27.4	1.72 V	139	39.4	7.2
8	7356.00	36.2 AV	54.0	-17.8	1.72 V	139	29.0	7.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Below 1GHz Data:


802.11n (HT20)

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	34.22	25.3 QP	40.0	-14.7	2.00 H	202	39.2	-13.9
2	77.68	22.0 QP	40.0	-18.0	1.45 H	1	39.2	-17.2
3	124.97	32.2 QP	43.5	-11.3	1.45 H	280	46.8	-14.6
4	249.96	31.0 QP	46.0	-15.0	1.00 H	125	44.9	-13.9
5	374.95	29.1 QP	46.0	-16.9	1.00 H	138	39.6	-10.5
6	497.81	26.7 QP	46.0	-19.3	2.00 H	142	34.5	-7.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

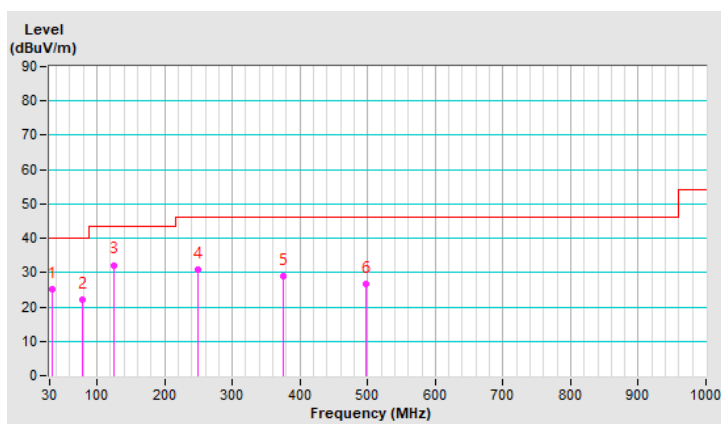


CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	35.38	32.8 QP	40.0	-7.2	1.00 V	67	46.9	-14.1
2	51.97	36.2 QP	40.0	-3.8	1.00 V	190	49.3	-13.1
3	64.39	31.6 QP	40.0	-8.4	1.00 V	49	46.0	-14.4
4	124.97	28.2 QP	43.5	-15.3	2.00 V	1	42.8	-14.6
5	191.76	26.6 QP	43.5	-16.9	2.00 V	153	42.0	-15.4
6	362.78	29.0 QP	46.0	-17.0	1.00 V	164	39.9	-10.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

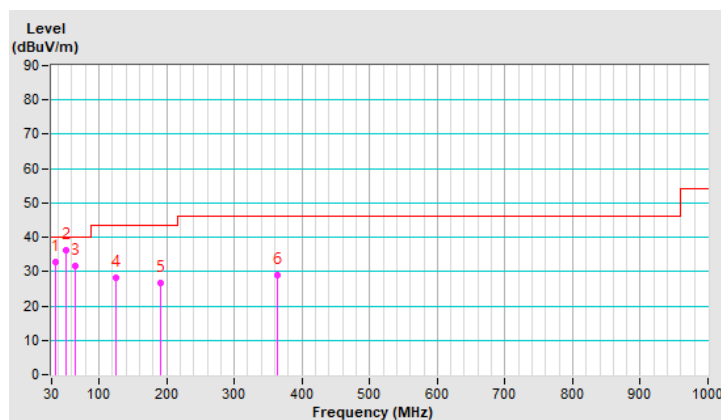

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Oct. 23, 2019	Oct. 22, 2020
Line-Impedance Stabilization Network (for EUT) R&S	ESH3-Z5	848773/004	Oct. 23, 2019	Oct. 22, 2020
Line-Impedance Stabilization Network (for Peripheral) R&S	ESH3-Z5	835239/001	Mar. 17, 2019	Mar. 16, 2020
50 ohms Terminator	N/A	3	Oct. 23, 2019	Oct. 22, 2020
RF Cable	5D-FB	COCCAB-001	Sep. 27, 2019	Sep. 26, 2020
Fixed attenuator EMCI	STI02-2200-10	003	Mar. 14, 2019	Mar. 13, 2020
Software BVADT	BVADT_Cond_V7.3.7.4	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Conduction 1.
3. Tested Date: Oct. 25, 2019

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

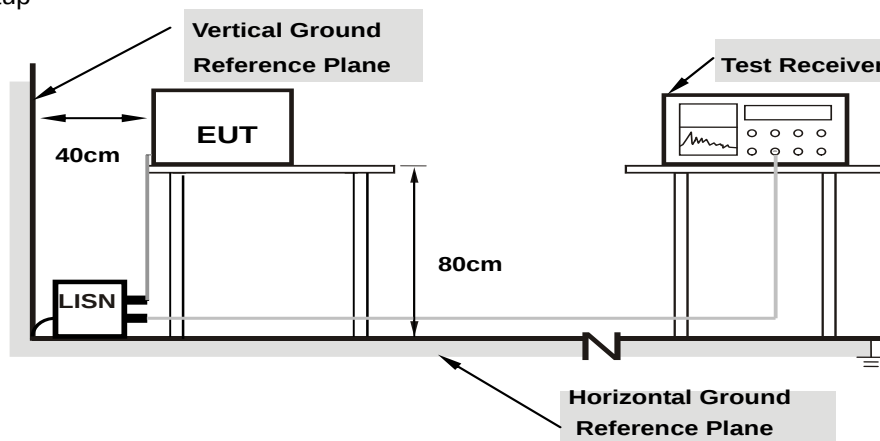

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.01	35.00	20.59	45.01	30.60	66.00	56.00	-20.99	-25.40
2	0.16953	10.01	32.85	18.59	42.86	28.60	64.98	54.98	-22.12	-26.38
3	0.38438	10.02	27.95	24.78	37.97	34.80	58.18	48.18	-20.21	-13.38
4	1.06641	10.07	17.53	11.35	27.60	21.42	56.00	46.00	-28.40	-24.58
5	4.99219	10.35	17.81	10.26	28.16	20.61	56.00	46.00	-27.84	-25.39
6	13.22266	10.91	9.73	4.80	20.64	15.71	60.00	50.00	-39.36	-34.29

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

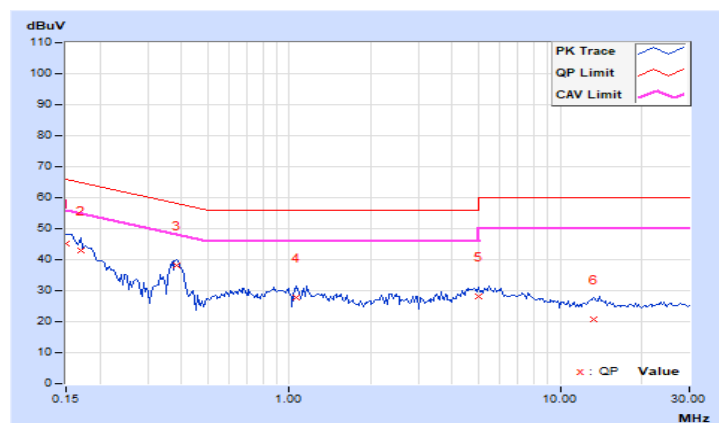


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	-----------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.99	34.72	22.30	44.71	32.29	66.00	56.00	-21.29	-23.71
2	0.18125	9.99	30.71	21.06	40.70	31.05	64.43	54.43	-23.73	-23.38
3	0.38438	10.01	33.85	31.13	43.86	41.14	58.18	48.18	-14.32	-7.04
4	0.88828	10.04	15.94	9.02	25.98	19.06	56.00	46.00	-30.02	-26.94
5	2.39063	10.14	11.55	2.00	21.69	12.14	56.00	46.00	-34.31	-33.86
6	4.85547	10.27	11.63	4.08	21.90	14.35	56.00	46.00	-34.10	-31.65

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

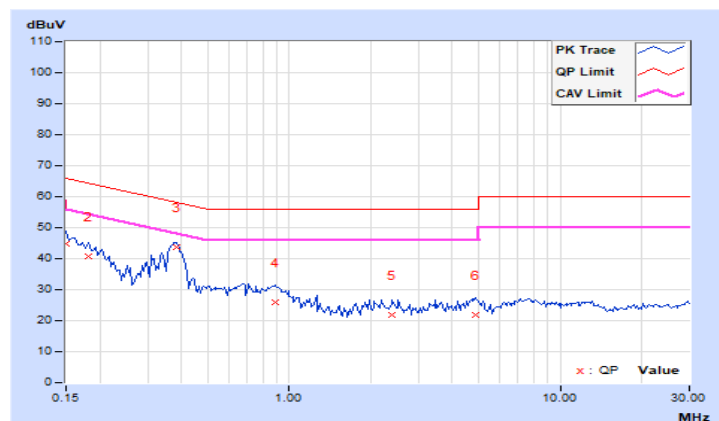


4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	10.11	0.5	Pass
6	2437	10.12	0.5	Pass
11	2462	10.12	0.5	Pass

802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	16.33	0.5	Pass
6	2437	15.67	0.5	Pass
11	2462	16.33	0.5	Pass

802.11n (HT20)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	16.49	16.42	0.5	Pass
6	2437	16.42	16.13	0.5	Pass
11	2462	16.47	16.97	0.5	Pass

802.11n (HT40)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
3	2422	35.44	35.46	0.5	Pass
6	2437	35.45	35.43	0.5	Pass
9	2452	35.40	35.42	0.5	Pass

Spectrum Plot of Worst Value


802.11b / CH1

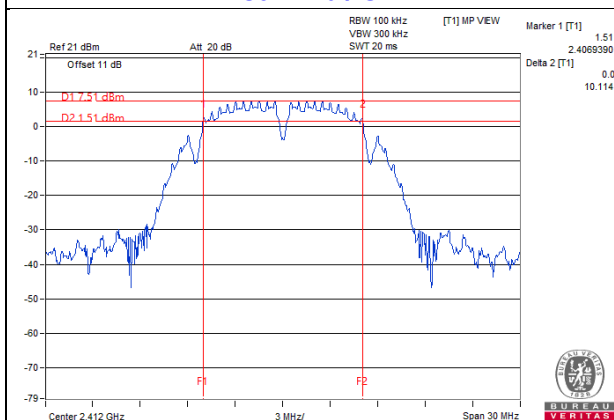


802.11g / CH6

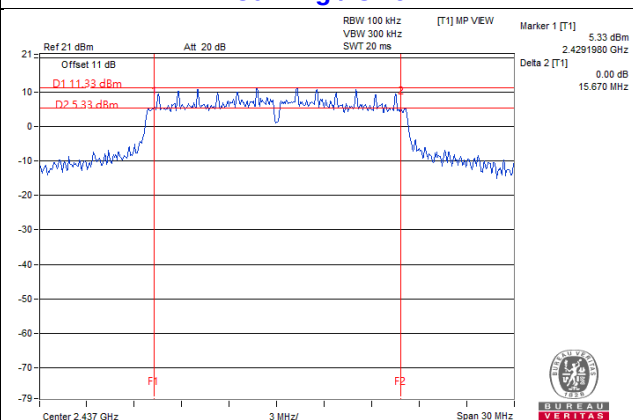

802.11n (HT20) / Chain 1 : CH6

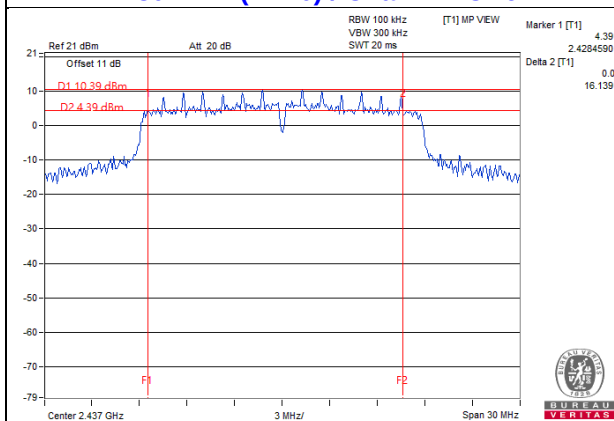

802.11n (HT40) / Chain 0 : CH9

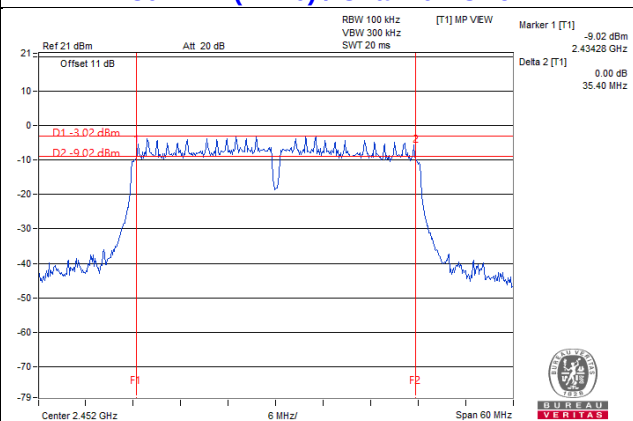

4.4 Conducted Output Power Measurement

4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $NANT \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any NANT;

Array Gain = $5 \log(NANT/NSS)$ dB or 3 dB, whichever is less for 20-MHz channel widths with $NANT \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(NANT/NSS)$ dB.

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value..

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

4.4.7 Test Results

FOR PEAK POWER

802.11b

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass/Fail
1	2412	199.067	22.99	30	Pass
6	2437	215.774	23.34	30	Pass
11	2462	213.304	23.29	30	Pass

802.11g

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass/Fail
1	2412	316.228	25.00	30	Pass
6	2437	419.759	26.23	30	Pass
11	2462	348.337	25.42	30	Pass

802.11n (HT20)

Chan.	Freq. (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	23.71	24.32	505.359	27.04	30	Pass
6	2437	25.96	26.01	793.482	29.00	30	Pass
11	2462	23.88	23.95	492.656	26.93	30	Pass

802.11n (HT40)

Chan.	Freq. (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	20.20	20.34	212.856	23.28	30	Pass
6	2437	24.12	23.55	484.69	26.85	30	Pass
9	2452	20.59	20.32	222.198	23.47	30	Pass

FOR AVERAGE POWER

802.11b

Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)
1	2412	93.756	19.72
6	2437	103.514	20.15
11	2462	101.158	20.05

802.11g

Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)
1	2412	55.976	17.48
6	2437	191.426	22.82
11	2462	58.749	17.69

802.11n (HT20)

Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)
		Chain 0	Chain 1		
1	2412	15.22	15.31	67.229	18.28
6	2437	22.19	21.85	318.686	25.03
11	2462	14.67	14.84	59.788	17.77

802.11n (HT40)


Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)
		Chain 0	Chain 1		
3	2422	12.37	11.93	32.854	15.17
6	2437	15.79	15.22	71.197	18.52
9	2452	12.22	12.08	32.816	15.16

4.5 Power Spectral Density Measurement

4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm in any 3 kHz.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq 3 \times \text{RBW}$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6.

4.5.7 Test Results

802.11b

Channel	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
1	2412	-7.95	8	Pass
6	2437	-7.16	8	Pass
11	2462	-7.35	8	Pass

802.11g

Channel	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
1	2412	-10.46	8	Pass
6	2437	-5.25	8	Pass
11	2462	-10.77	8	Pass

802.11n (HT20)

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-13.82	3.01	-10.81	7.99	Pass
	6	2437	-6.07	3.01	-3.06	7.99	Pass
	11	2462	-13.27	3.01	-10.26	7.99	Pass
1	1	2412	-13.48	3.01	-10.47	7.99	Pass
	6	2437	-5.08	3.01	-2.07	7.99	Pass
	11	2462	-13.31	3.01	-10.30	7.99	Pass

Note: 1. Directional gain = $3\text{dBi} + 10\log(2) = 6.01\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8-(6.01-6) = 7.99\text{dBm}$.


802.11n (HT40)

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	3	2422	-18.29	3.01	-15.28	7.99	Pass
	6	2437	-15.04	3.01	-12.03	7.99	Pass
	9	2452	-19.07	3.01	-16.06	7.99	Pass
1	3	2422	-19.24	3.01	-16.23	7.99	Pass
	6	2437	-15.77	3.01	-12.76	7.99	Pass
	9	2452	-18.62	3.01	-15.61	7.99	Pass


Note: 1. Directional gain = $3\text{dBi} + 10\log(2) = 6.01\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8-(6.01-6) = 7.99\text{dBm}$.

Spectrum Plot of Worst Value


802.11b / CH6

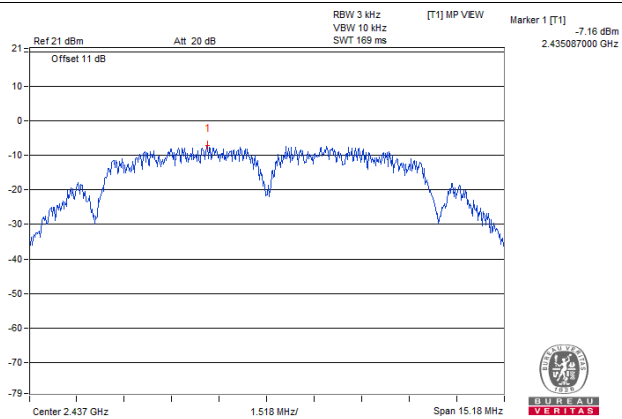


802.11g / CH6

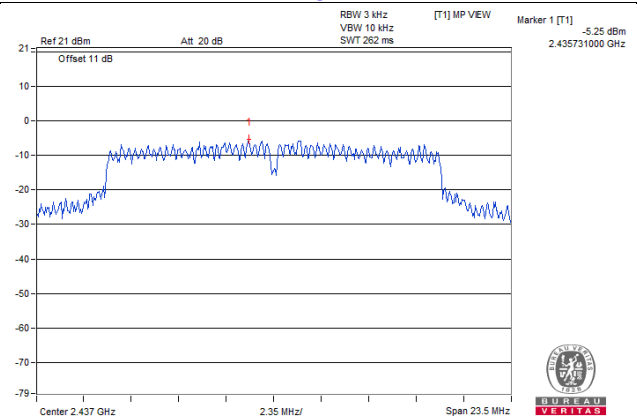

802.11n (HT20) / Chain 1 : CH6

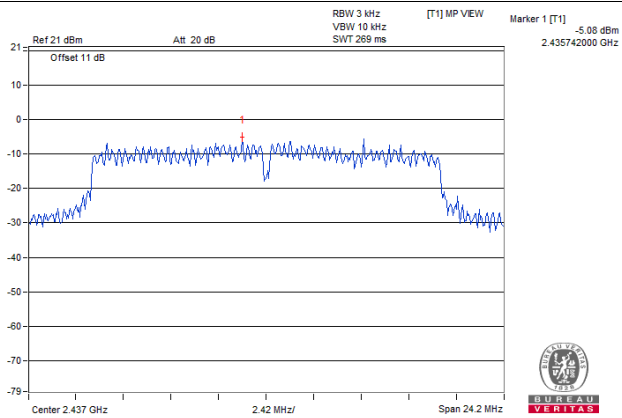

802.11n (HT40) / Chain 0 : CH6

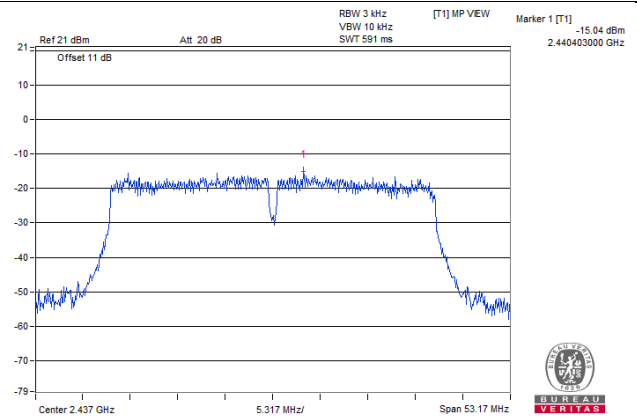


4.6 Conducted Out of Band Emission Measurement

4.6.1 Limits of Conducted Out of Band Emission Measurement

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 Test Setup

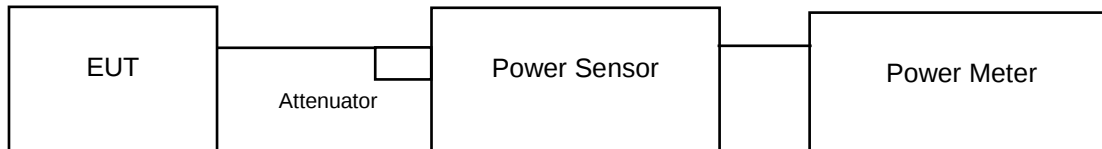

4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition



Same as Item 4.3.6.

4.6.7 Test Results



The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

802.11b



CH 1

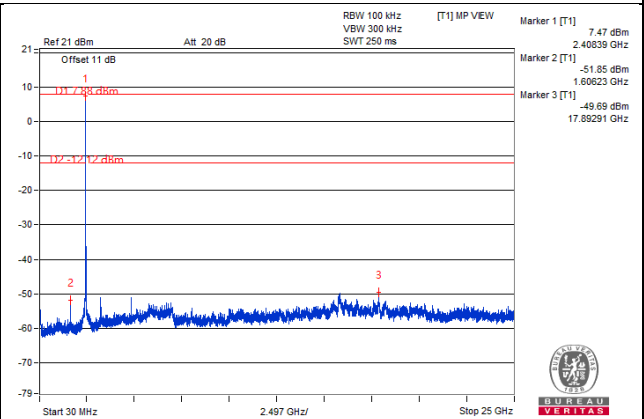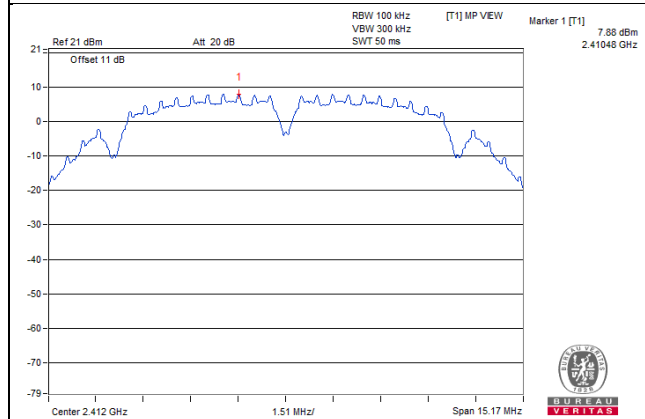


CH 6

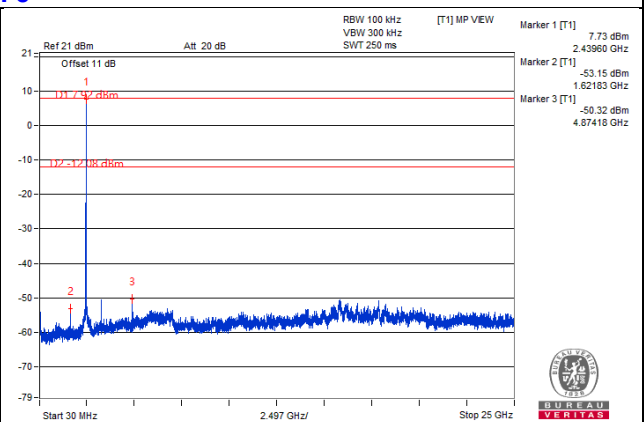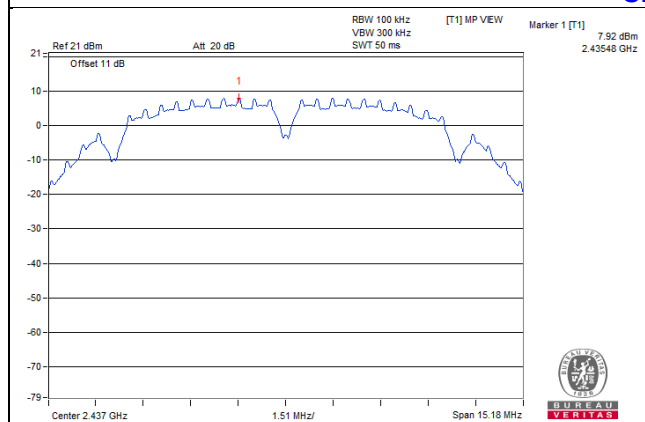


CH 11

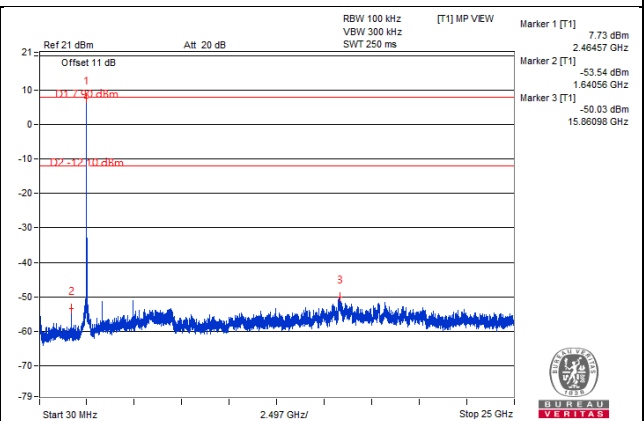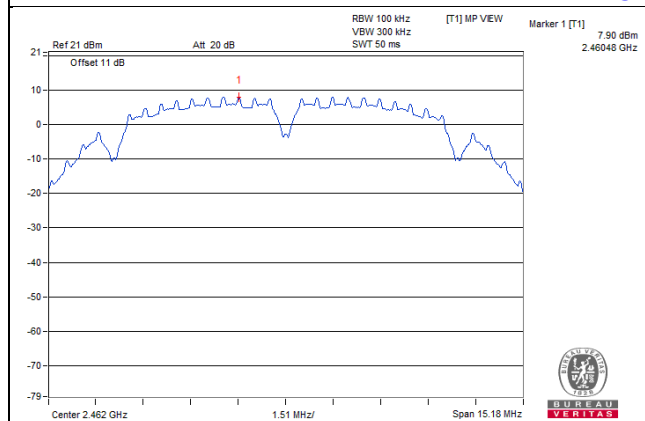

CH 1 Band edge



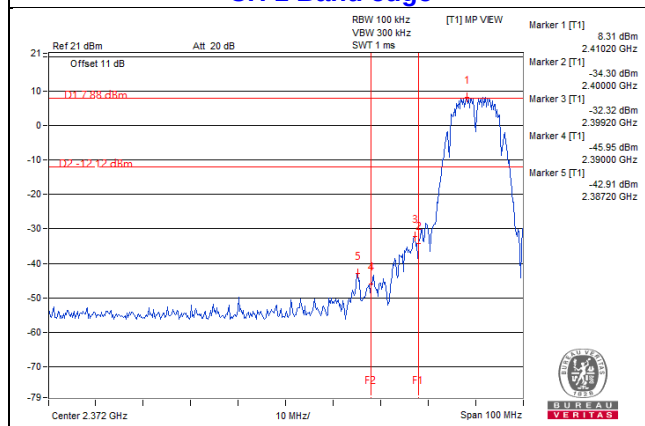


CH 11 Band edge



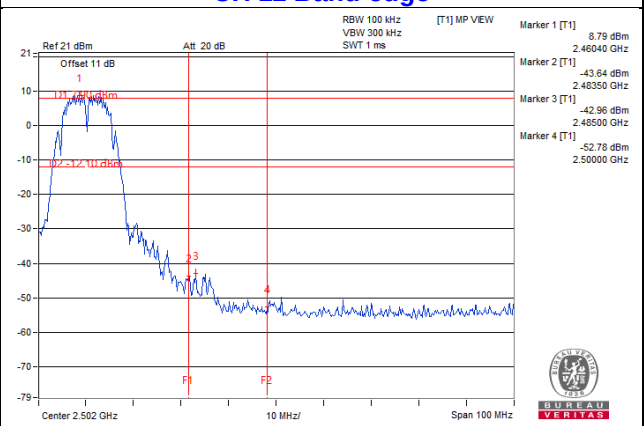


802.11g




CH 1

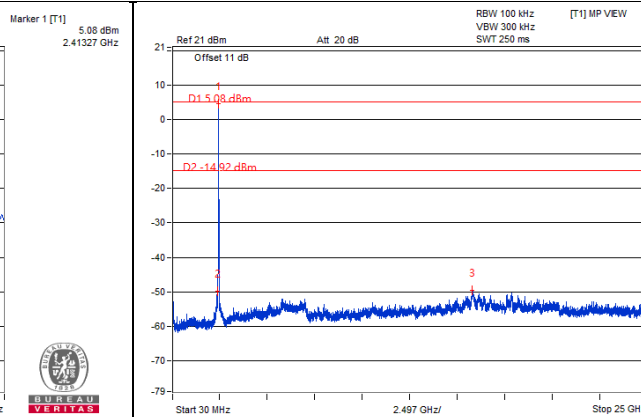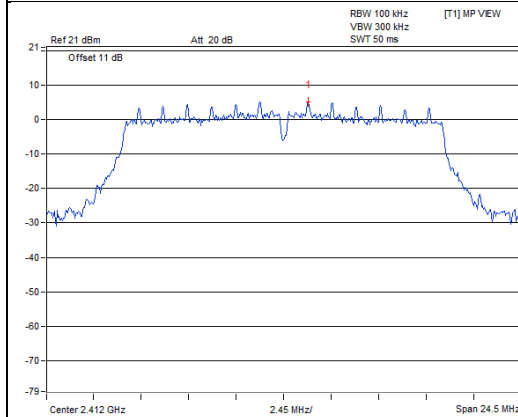




CH 6

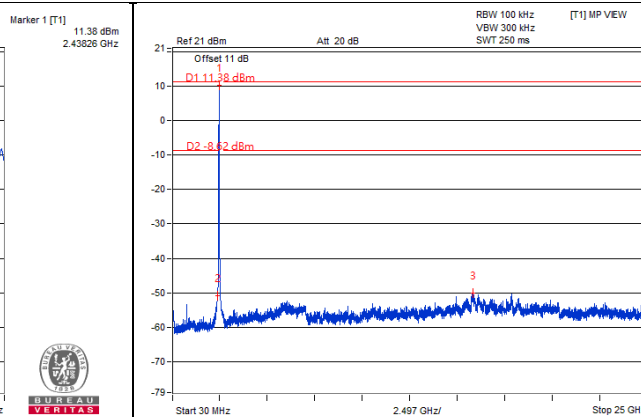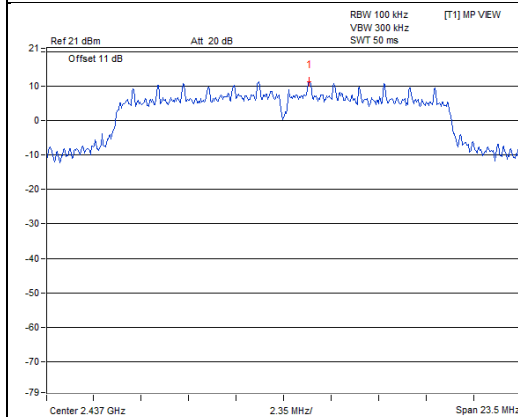




CH 11

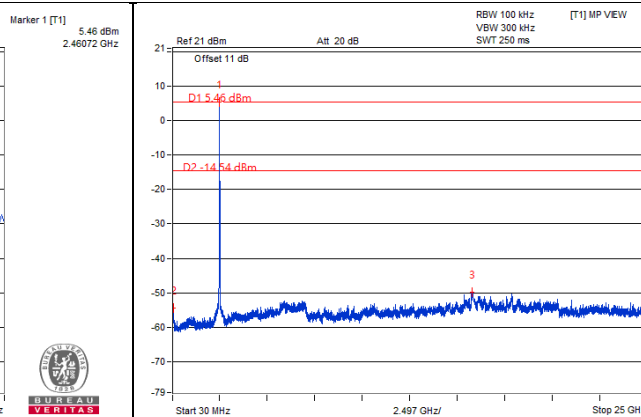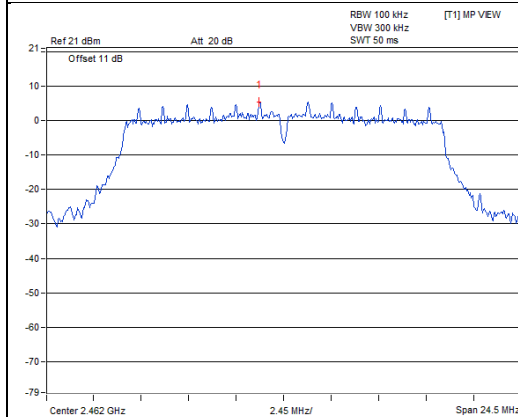

CH 1 Band edge

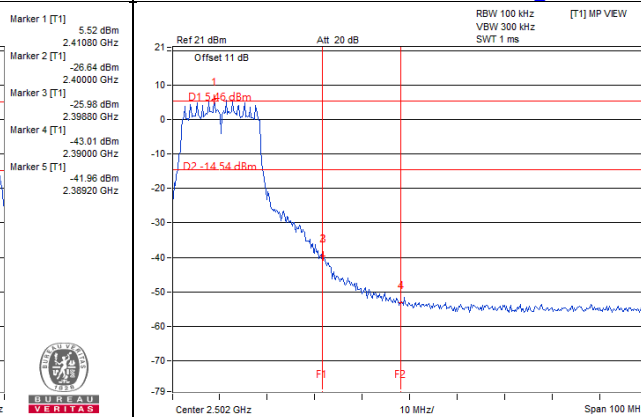
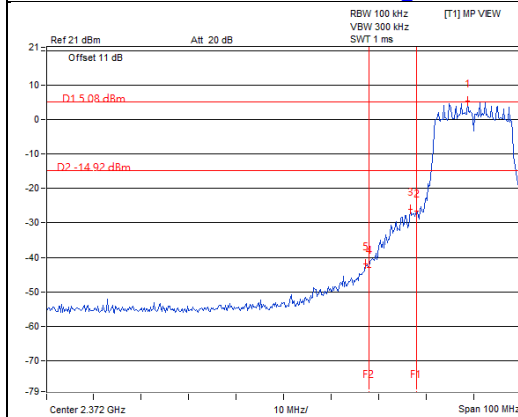


CH 11 Band edge

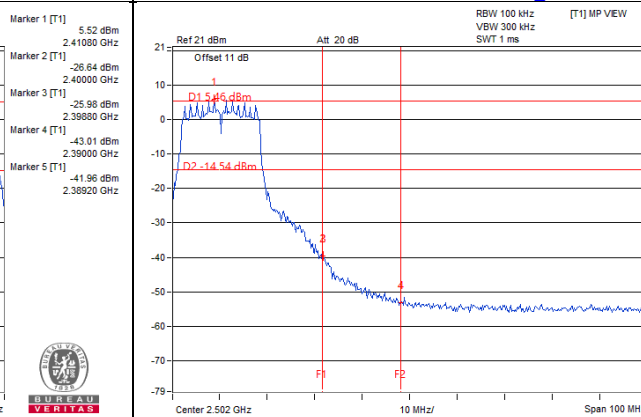
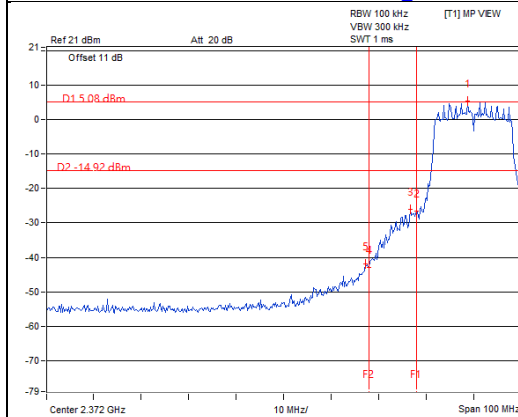


802.11n (HT20)_CHAIN 0



CH 1

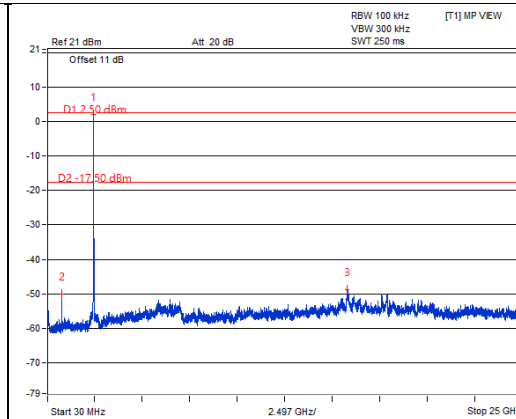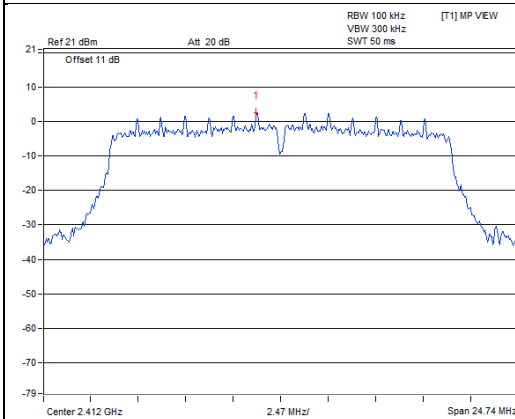


CH 6

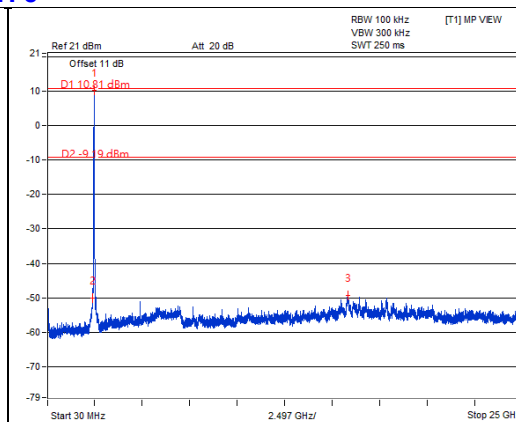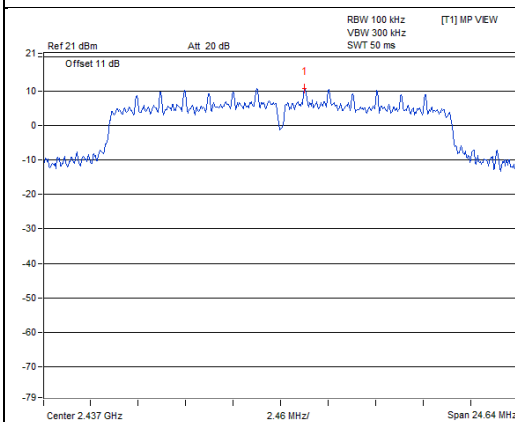


CH 11

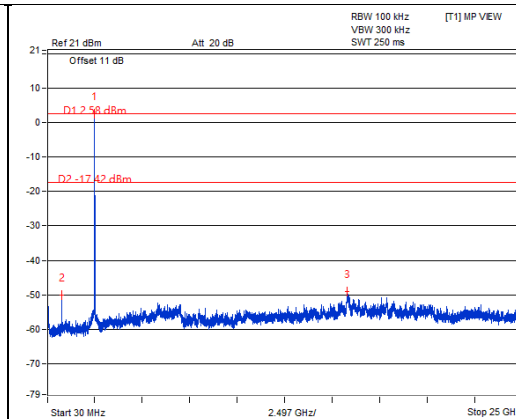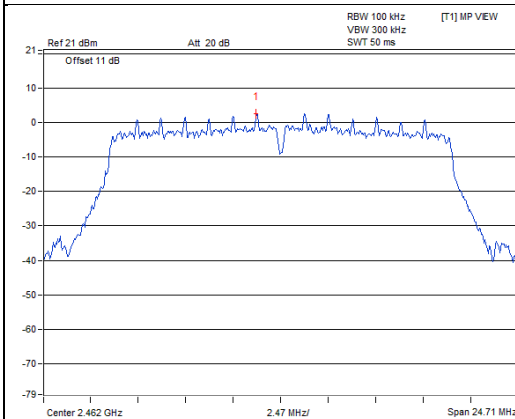

CH 1 Band edge


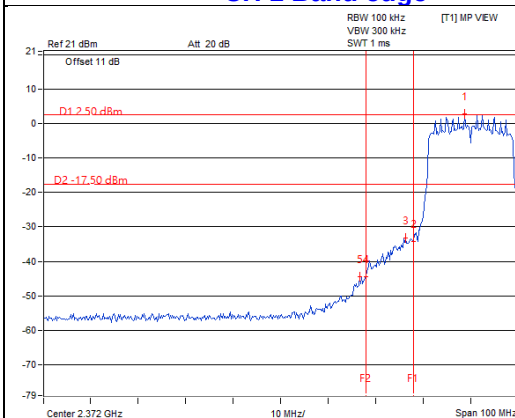


CH 11 Band edge


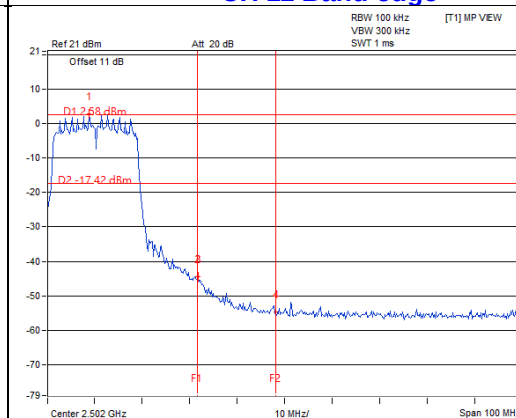


802.11n (HT20)_CHAIN 1



CH 1

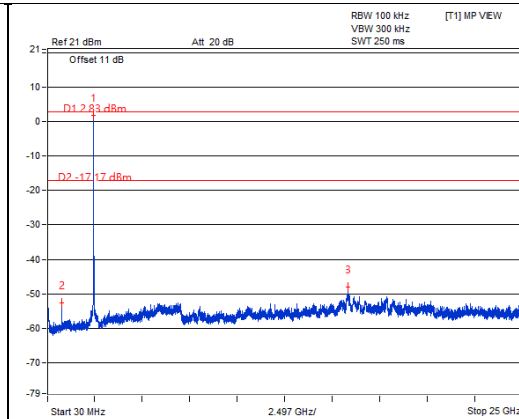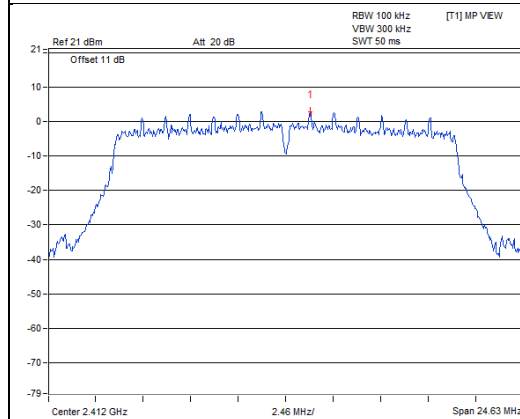


CH 6

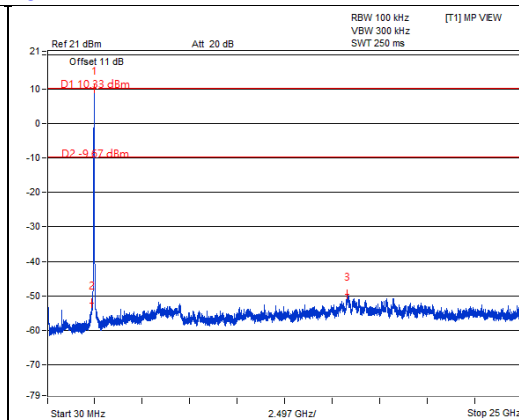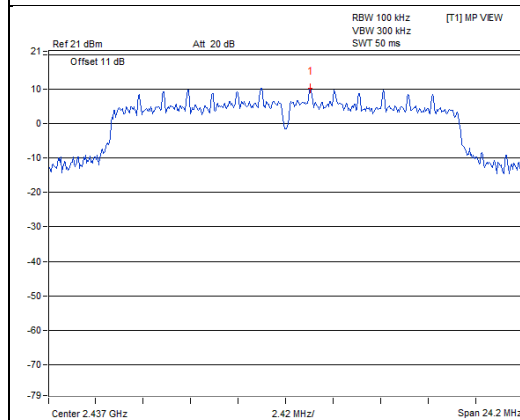


CH 11

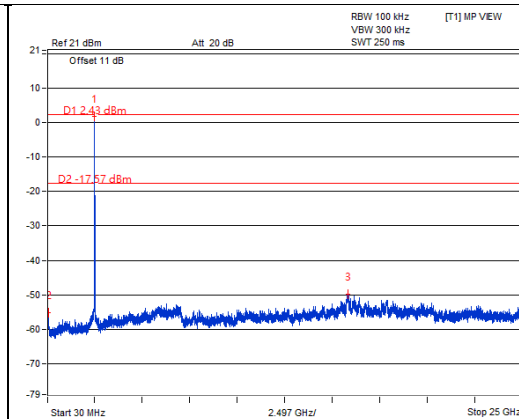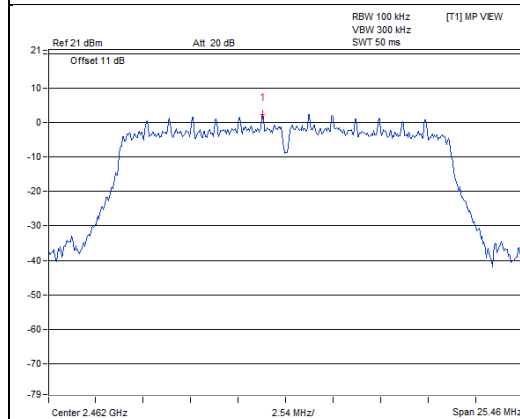

CH 1 Band edge


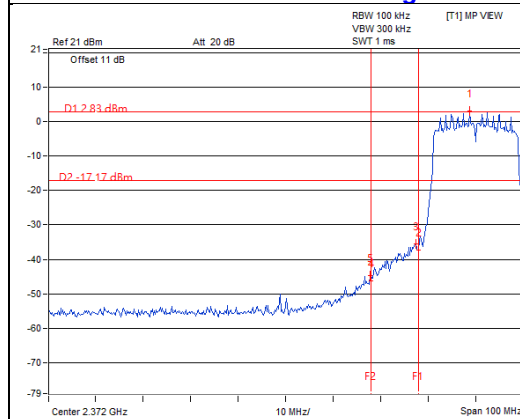


CH 11 Band edge


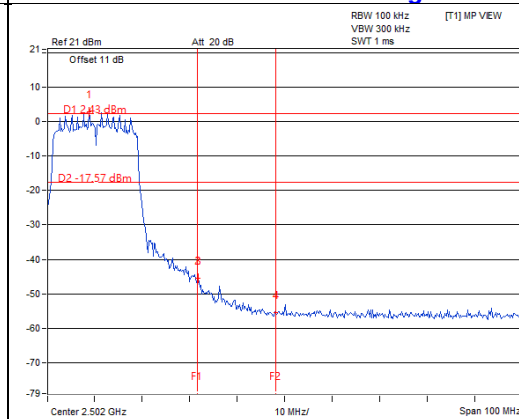


802.11n (HT40)_Chain 0



CH 3

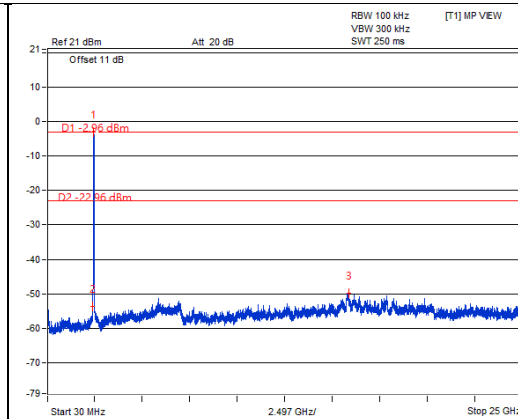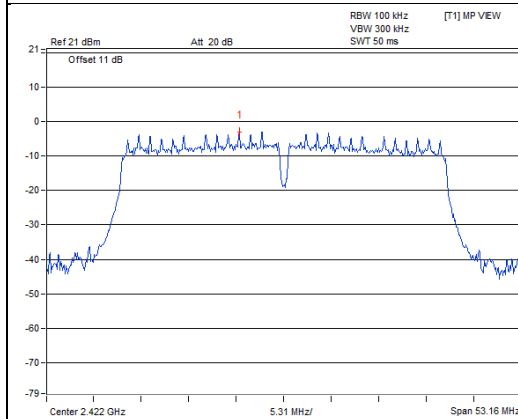


CH 6

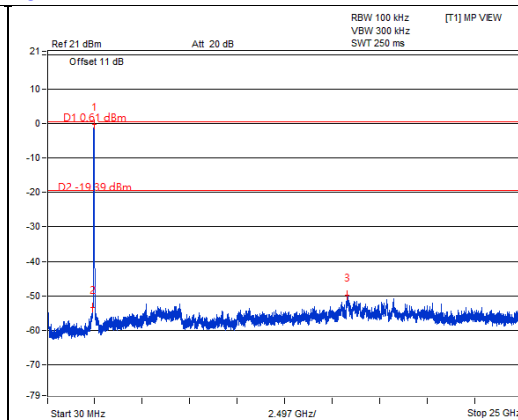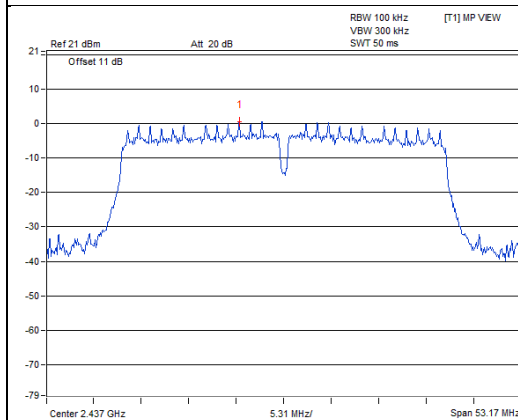


CH 9

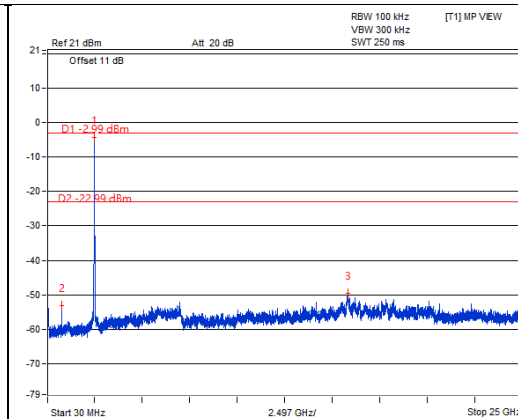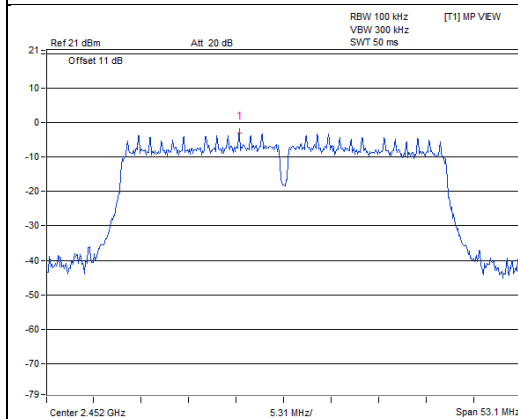

CH 3 Band edge

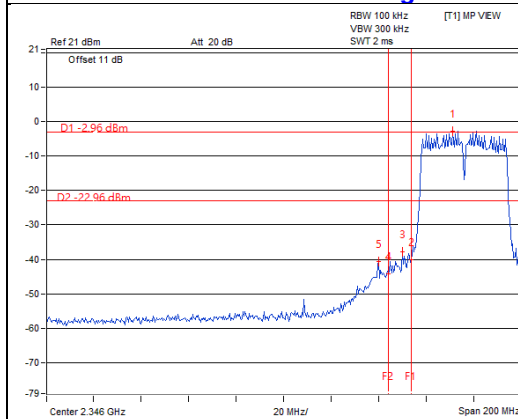


CH 9 Band edge

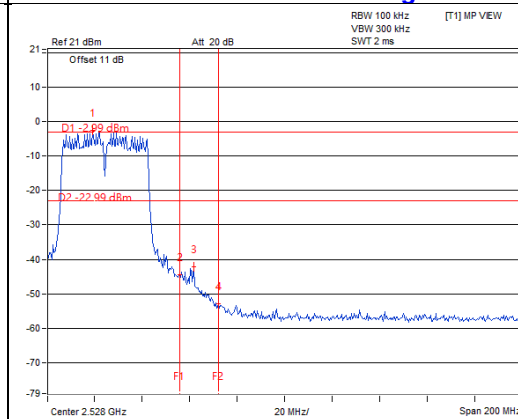


802.11n (HT40)_Chain 1


CH 3

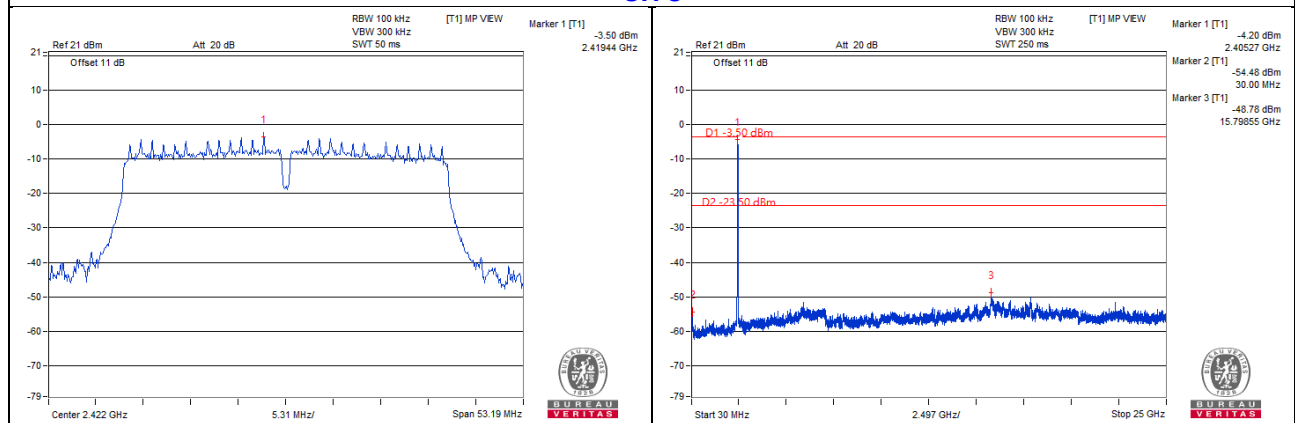


CH 6

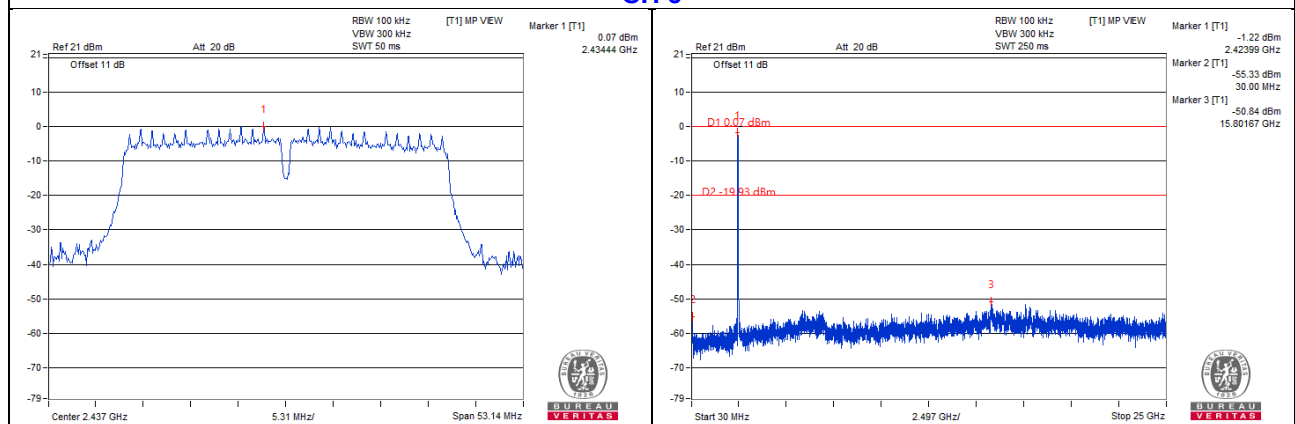


CH 9

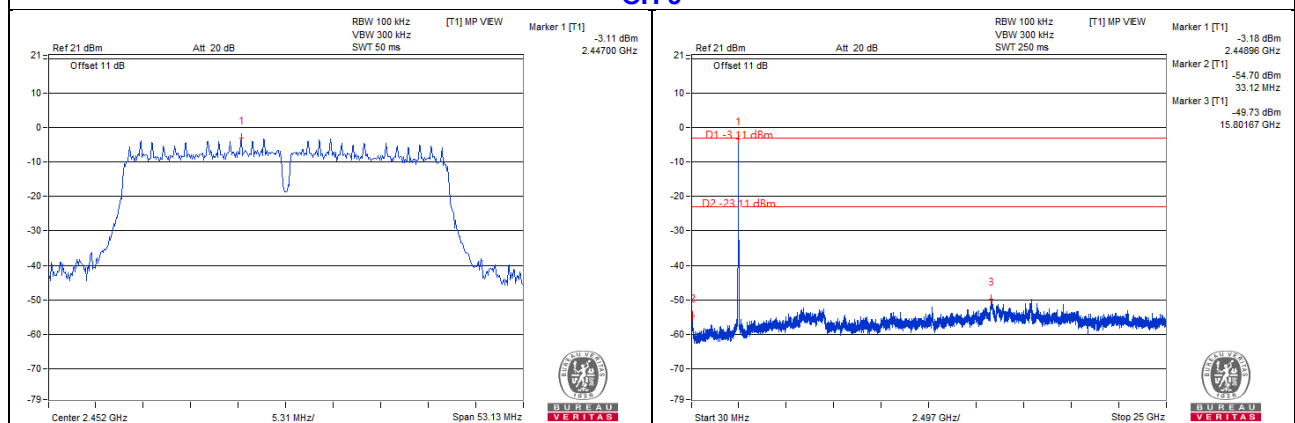

CH 3 Band edge

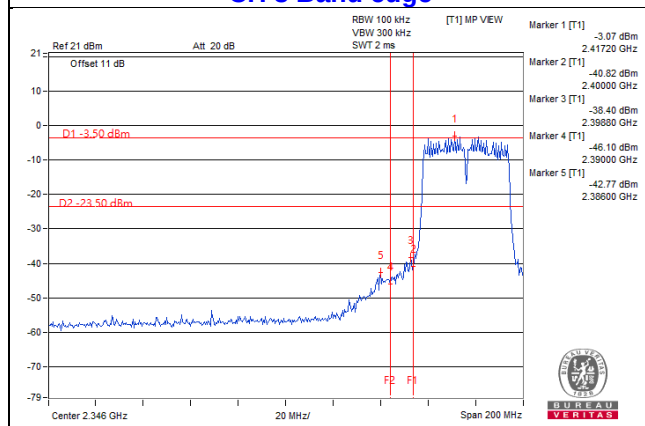

CH 9 Band edge

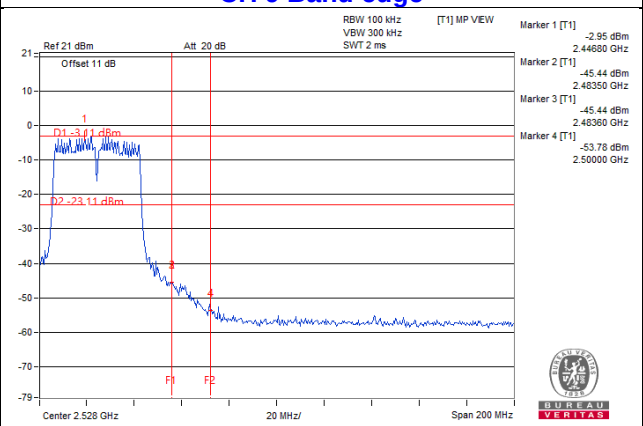

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---