

FCC 47 CFR PART 15 SUBPART C

Product Type : treVolo Bluetooth Speaker
Applicant : BenQ Corporation
Address : 16 Jihu Road, Neihu, Taipei 114, Taiwan
Trade Name : BenQ
Model Number : PABREEZE
Test Specification : FCC 47 CFR PART 15 SUBPART C: Oct., 2013
Canada RSS-210 ISSUE 8: Dec., 2010
Canada RSS-Gen ISSUE 3: Dec., 2010
ANSI C63.4:2009
Receive Date : Aug. 25, 2014
Test Period : Aug. 26~Sep 01, 2014
Issue Date : Nov. 05, 2014

Issue by

A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade City,
Taoyuan County 334, Taiwan R.O.C.
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Note: This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.



Revision History

Rev.	Issue Date	Revisions	Revised By
00	Nov. 05, 2014	Initial Issue	

Verification of Compliance

Issued Date:11/05/2014

Product Type : treVolo Bluetooth Speaker
Applicant : BenQ Corporation
Address : 16 Jihu Road, Neihu, Taipei 114, Taiwan
Trade Name : BenQ
Model Number : PABREEZE
FCC ID : JVPPABREEZE
EUT Rated Voltage : DC 12V, 2A
Test Voltage : 120 Vac / 60 Hz
Applicable Standard : FCC 47 CFR PART 15 SUBPART C: Oct., 2013
Canada RSS-210 ISSUE 8: Dec., 2010
Canada RSS-Gen ISSUE 3: Dec., 2010
ANSI C63.4:2009
Test Result : Complied
Performing Lab. : A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade City,
Taoyuan County 334, Taiwan R.O.C.
Tel : +886-3-2710188 / Fax : +886-3-2710190

Taiwan Accreditation Foundation accreditation number: 1330
<http://www.atl-lab.com.tw/e-index.htm>

The above equipment was tested by A Test Lab Techno Corp. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2009 and the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247 .

The test results of this report relate only to the tested sample identified in this report.

Approved By : Fly Lu Reviewed By : Eric Ou Yang
(Manager) (Fly Lu) (Testing Engineer) (Eric Ou Yang)

TABLE OF CONTENTS

1	General Information.....	6
1.1.	Summary of Test Result	6
1.2.	Measurement Uncertainty	6
2	EUT Description	7
3	Test Methodology	8
3.1.	Mode of Operation	8
3.2.	EUT Exercise Software	8
3.3.	Configuration of Test System Details	9
3.4.	Test Site Environment	9
4	Maximum Conducted Output Power Measurement	10
4.1.	Limit.....	10
4.2.	Test Setup	10
4.3.	Test Instruments	10
4.4.	Test Procedure	10
4.5.	Test Result	11
5	Conducted Emission Measurement.....	13
5.1.	Limit.....	13
5.2.	Test Instruments	13
5.3.	Test Setup	13
5.4.	Test Procedure	14
5.5.	Test Result	15
6	Radiated Interference Measurement.....	17
6.1.	Limit.....	17
6.2.	Test Instruments	17
6.3.	Setup	18
6.4.	Test Procedure	19
6.5.	Test Result	20
7	20dB RF Bandwidth and 99 % Occupied Bandwidth Measurement.....	25
7.1.	Limit.....	25
7.2.	Test Setup	25
7.3.	Test Instruments	25
7.4.	Test Procedure	25
7.5.	Test Result	27
7.6.	Test Graphs	28

8	Carrier Frequency Separation Measurement.....	32
8.1.	Limit.....	32
8.2.	Test Setup	32
8.3.	Test Instruments	32
8.4.	Test Procedure	32
8.5.	Test Result	33
8.6.	Test Graphs	34
9	Number of Hopping Measurement	36
9.1.	Limit.....	36
9.2.	Test Setup	36
9.3.	Test Instruments	36
9.4.	Test Procedure	36
9.5.	Test Result	37
9.6.	Test Graphs	38
10	Time of Occupancy (Dwell Time) Measurement	40
10.1.	Limit.....	40
10.2.	Test Setup	40
10.3.	Test Instruments	40
10.4.	Test Procedure	40
10.5.	Test Result	41
10.6.	Test Graphs	43
11	Out of Band Conducted Emissions Measurement	45
11.1.	Limit.....	45
11.2.	Test Setup	45
11.3.	Test Instruments	45
11.4.	Test Procedure	45
11.5.	Test Graphs	46
12	Band Edges Measurement	50
12.1.	Limit.....	50
12.2.	Test Setup	50
12.3.	Test Instruments	50
12.4.	Test Procedure	51
12.5.	Test Result	52
13	Antenna Measurement	55
13.1.	Limit.....	55
13.2.	Antenna Connector Construction	55

1 General Information

1.1. Summary of Test Result

Standard		Item	Result	Remark
15.247	RSS-GEN			
15.207	7.2.2	AC Power Conducted Emission	PASS	-----
-----	6	Receiver Radiated Emissions	PASS	-----
Standard		Item	Result	Remark
15.247	RSS-210			
15.247(b)(1)	A8.4 (2)	Max. Output Power	PASS	-----
15.247(d)	A8.5	Transmitter Radiated Emissions	PASS	-----
15.247(a)(1)	A8.1 (1)	20dB RF Bandwidth	PASS	-----
15.247(a)(1)	A8.1 (2)	Carrier Frequency Separation	PASS	-----
15.247(a)(1)(iii)	A8.1 (4)	Number of Hopping	PASS	-----
15.247(a)(1)(iii)	A8.1 (4)	Time of Occupancy (Dwell Time)	PASS	-----
15.247(d)	A8.5	Out of Band Conducted Spurious Emission	PASS	-----
15.247(d)	A8.5	Band Edge Measurement	PASS	-----
-	A8.5	Occupied Bandwidth Measurement	PASS	-----
15.203	-	Antenna Requirement	PASS	-----

The test results of this report relate only to the tested sample(s) identified in this report. Manufacturer or whom it may concern should recognize the pass or fail of the test result.

1.2. Measurement Uncertainty

Test Item	Frequency Range		Uncertainty (dB)
Conducted Emission	9kHz ~ 30MHz		± 2.02
Radiated Emission	30MHz ~ 1000MHz	Horizontal	± 3.98
		Vertical	± 3.62
	1000MHz ~ 18000MHz	Horizontal	± 3.11
		Vertical	± 3.07
	18000MHz ~ 40000MHz	Horizontal	± 3.66
		Vertical	± 3.54

2 EUT Description

Product	treVolo Bluetooth Speaker				
Trade Name	BenQ				
Model Number	PABREEZE				
Applicant	BenQ Corporation 16 Jihu Road, Neihsu, Taipei 114, Taiwan				
Manufacturer (1)	Qisda (Suzhou) Co., Ltd. No. 169, Zhujiang Road, New District, Suzhou, Jiangsu 215129, P.R. China				
Manufacturer (2)	Qisda Mexicana S.A. De C.V.. Calzada Venustiano Carranza, No. 88 Col. Plutarco Elias Calles 21376 Mexocali, B.C. Mexico C.P Mexico				
Manufacturer (3)	Qisda Optronics (Suzhou) Co., Ltd. No.169, Zhujiang Road, New District, Suzhou, Jiangsu 215129, P.R. China				
Manufacturer (4)	Qisda Corporation 157, Shan-Ying Road, Gueishan, Taoyuan 333, Taiwan				
FCC ID	JVPPABREEZE				
Frequency Range	2402 ~ 2480 MHz				
Modulation Type	GFSK for 1Mbps				
	$\pi/4$ -DQPSK for 2Mbps				
	8DPSK for 3Mbps				
Antenna Type	PCB Substrate Antenna				
Antenna Gain	4.13 dBi				
RF Output Power (Conducted)	GFSK for 1Mbps	6.44	dBm /	0.0044	W
	$\pi/4$ -DQPSK for 2Mbps	6.84	dBm /	0.0048	W
	8DPSK for 3Mbps	6.55	dBm /	0.0045	W
99 % Occupied Bandwidth	GFSK: 0.879MHz				
	$\pi/4$ -DQPSK: 1.395MHz				
Emission Designator	GFSK: 879KF1D				
	$\pi/4$ -DQPSK: 1M40G1D				

3 Test Methodology

3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Normal Operation Mode
Mode 2: GFSK Link Mode
Mode 3: $\pi/4$ -DQPSK Link Mode
Mode 4: 8DPSK Link Mode
Mode 5: Receiver Mode

Description of Test Modes

Preliminary tests were performed in different modulation to find the worst case. The modulation has shown the worst-case in section 6.5. Investigation has been done on all the possible configurations for searching the worst cases.

Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:


	Product	Manufacturer	Model Number	Serial Number	Power Cord
1.	Bluetooth Tester	R & S	CBT	100350	NA

3.2. EUT Exercise Software


1	Setup the EUT and Bluetooth Tester (CBT) as shown on 3.3.
2	Turn on the power of all equipment.
3	EUT run test program.
4	Open Bluetooth function link to CBT.

3.3. Configuration of Test System Details

Conducted Emissions

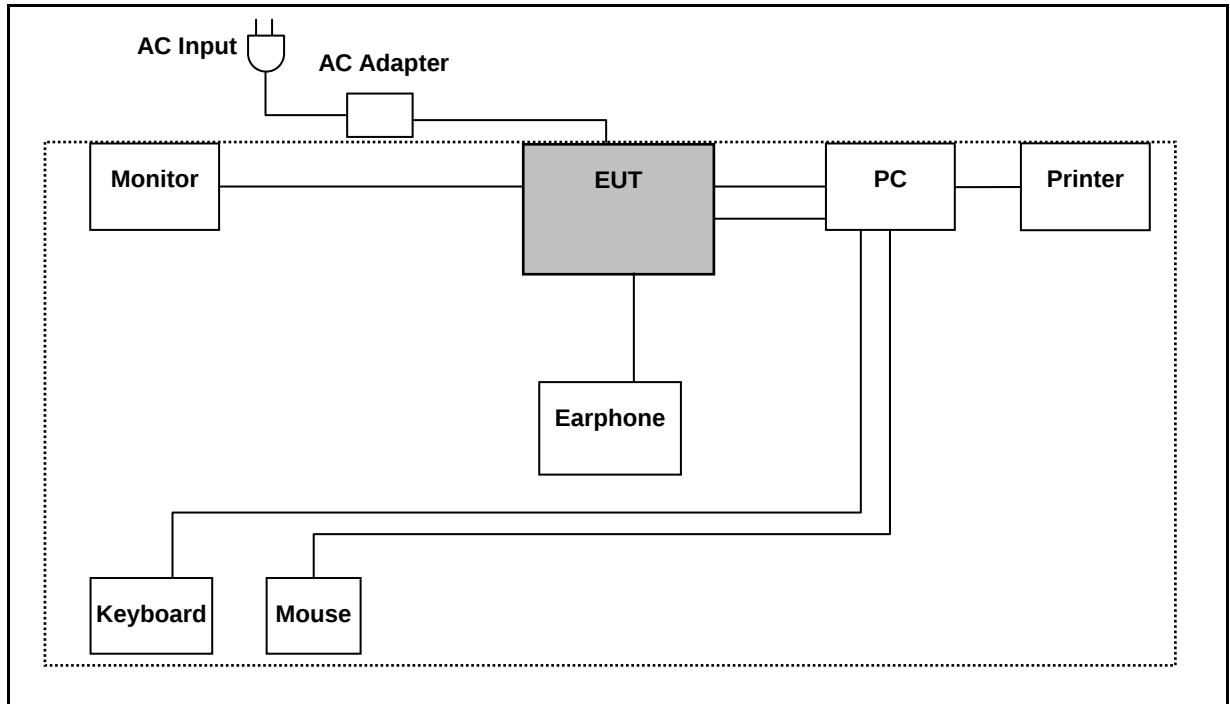

Radiated Emissions

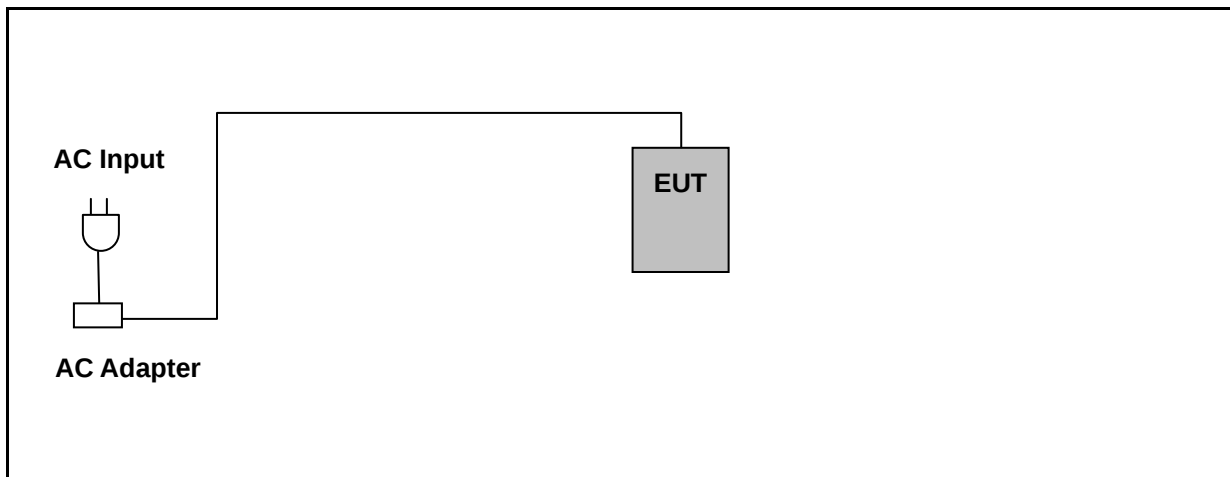

3.4. Test Site Environment


Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	26
Humidity (%RH)	25-75	60
Barometric pressure (mbar)	860-1060	950

4 Maximum Conducted Output Power Measurement

4.1. Limit

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels < 0.125 watt.

4.2. Test Setup

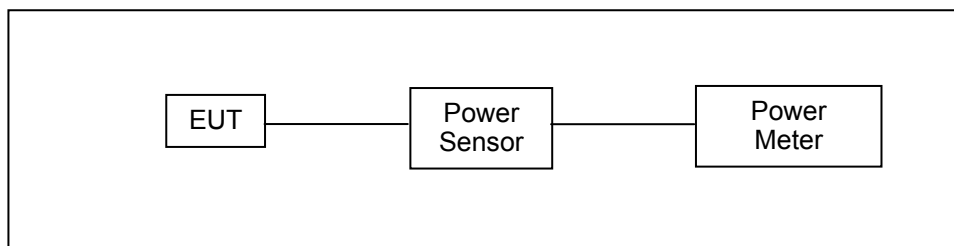

4.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Single Channel PK Power Sensor	Agilent	N1911A	MY45101619	12/21/2013	(1)
Wideband Power Meter	Agilent	N1921A	MY45241957	12/21/2013	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

4.4. Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor. The maximum peak output power shall not exceed 1 watt.

Use a direct connection between the antenna port of transmitter and the power sensor, for prevent the power sensor input attenuation 40-50 dB. Set the RBW Bandwidth of the emission or use a channel power meter mode. For antennas with gains of 6 dBi or less, maximum allowed transmitter output is 1 watt (+30 dBm). For antennas with gains greater than 6 dBi, transmitter output level must be decreased by an amount equal to (GAIN - 6)/3 dBm. The antenna port of the EUT was connected to the input of a power sensor. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals.

4.5. Test Result

Model Number	PABREEZE					
Test Item	Maximum Conducted Output Power					
Test Mode	Mode 3: GFSK Link Mode					
Date of Test	08/27/2014			Test Site	TE02	
Frequency (MHz)	Packet Type	Average Power		Peak Power		Limit (W)
		(dBm)	(W)	(dBm)	(W)	
2402	DH1	5.76	0.0038	6.24	0.0042	< 0.125
	DH3	5.77	0.0038	6.25	0.0042	< 0.125
	DH5	5.79	0.0038	6.26	0.0042	< 0.125
2441	DH1	5.84	0.0038	6.43	0.0044	< 0.125
	DH3	5.82	0.0038	6.38	0.0043	< 0.125
	DH5	5.85	0.0038	6.44	0.0044	< 0.125
2480	DH1	5.58	0.0036	6.31	0.0043	< 0.125
	DH3	5.60	0.0036	6.28	0.0042	< 0.125
	DH5	5.65	0.0037	6.32	0.0043	< 0.125

Model Number	PABREEZE					
Test Item	Maximum Conducted Output Power					
Test Mode	Mode 4: $\pi/4$ -DQPSK Mode					
Date of Test	08/27/2014			Test Site	TE02	
Frequency (MHz)	Packet Type	Average Power		Peak Power		Limit (W)
		(dBm)	(W)	(dBm)	(W)	
2402	DH1	5.96	0.0039	6.53	0.0045	< 0.125
	DH3	5.97	0.0040	6.55	0.0045	< 0.125
	DH5	5.98	0.0040	6.58	0.0045	< 0.125
2441	DH1	5.94	0.0039	6.62	0.0046	< 0.125
	DH3	5.95	0.0039	6.58	0.0045	< 0.125
	DH5	5.96	0.0039	6.68	0.0047	< 0.125
2480	DH1	5.96	0.0039	6.83	0.0048	< 0.125
	DH3	5.95	0.0039	6.81	0.0048	< 0.125
	DH5	5.99	0.0040	6.84	0.0048	< 0.125

Model Number	PABREEZE					
Test Item	Maximum Conducted Output Power					
Test Mode	Mode 5: 8DPSK Link Mode					
Date of Test	08/27/2014			Test Site	TE02	
Frequency (MHz)	Packet Type	Average Power		Peak Power		Limit (W)
		(dBm)	(W)	(dBm)	(W)	
2402	DH1	5.81	0.0038	6.29	0.0043	< 0.125
	DH3	5.80	0.0038	6.21	0.0042	< 0.125
	DH5	5.84	0.0038	6.33	0.0043	< 0.125
2441	DH1	5.91	0.0039	6.53	0.0045	< 0.125
	DH3	5.90	0.0039	6.49	0.0045	< 0.125
	DH5	5.96	0.0039	6.55	0.0045	< 0.125
2480	DH1	5.67	0.0037	6.35	0.0043	< 0.125
	DH3	5.68	0.0037	6.39	0.0044	< 0.125
	DH5	5.72	0.0037	6.51	0.0045	< 0.125

5 Conducted Emission Measurement

5.1. Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50


5.2. Test Instruments

Describe	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Test Receiver	R&S	ESCI	100367	06/12/2014	(1)
LISN	R&S	ENV216	101040	03/07/2014	(1)
LISN	R&S	ENV216	101041	03/07/2014	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

5.3. Test Setup

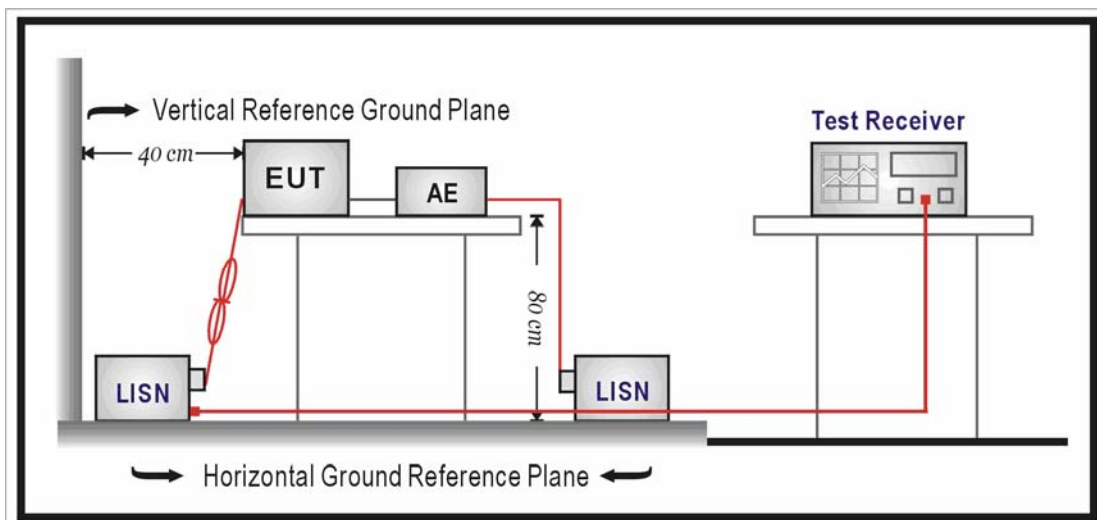

5.4. Test Procedure


The power line conducted emission measurements were performed in a shielded enclosure. The EUT was assembled on a wooden table which is 80 centimeters high, was placed 40 centimeters from the back wall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and EMCO Model 3162/2 SH Line Impedance Stabilization Networks (LISN). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPR quasi-peak detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150 KHz to 30 MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 4.1.

5.5. Test Result

Standard:	FCC Part 15C	Line:	L1
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	PABREEZE	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 1	Date:	08/29/2014
		Test By:	Eric Ou Yang
Description:			

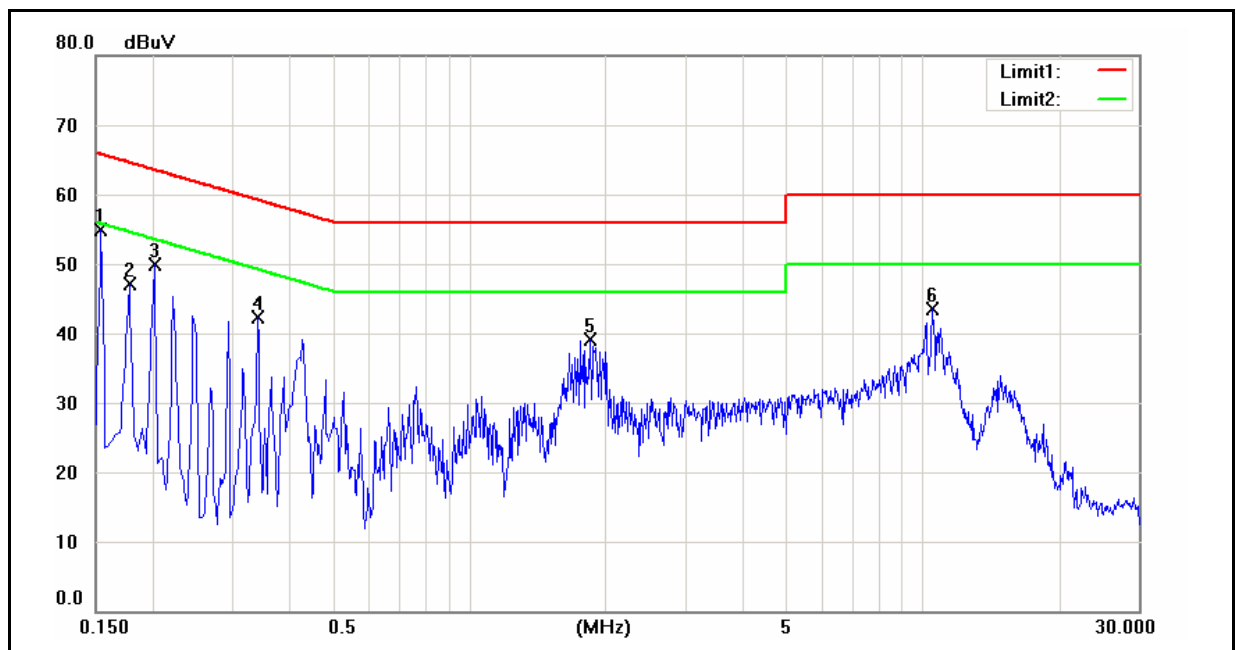


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1540	37.53	16.85	9.60	47.13	26.45	65.78	55.78	-18.65	-29.33	Pass
2	0.1780	34.92	15.09	9.60	44.52	24.69	64.58	54.58	-20.06	-29.89	Pass
3	0.2020	31.67	12.66	9.60	41.27	22.26	63.53	53.53	-22.26	-31.27	Pass
4	0.3420	20.60	8.87	9.61	30.21	18.48	59.15	49.15	-28.94	-30.67	Pass
5	1.8500	26.44	16.89	9.68	36.12	26.57	56.00	46.00	-19.88	-19.43	Pass
6	10.5300	25.68	18.13	9.97	35.65	28.10	60.00	50.00	-24.35	-21.90	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15C	Line:	N
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	PABREEZE	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 1	Date:	08/29/2014
		Test By:	Eric Ou Yang
Description:			

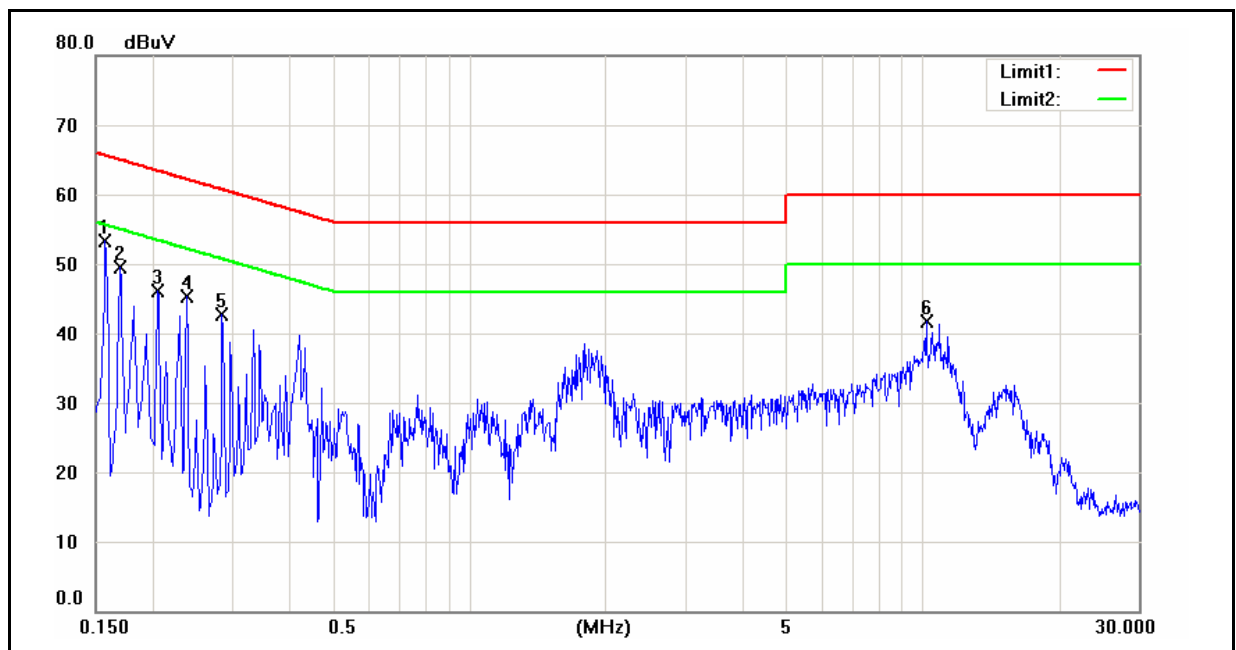

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1580	37.31	16.86	9.60	46.91	26.46	65.57	55.57	-18.66	-29.11	Pass
2	0.1700	34.32	14.23	9.60	43.92	23.83	64.96	54.96	-21.04	-31.13	Pass
3	0.2060	31.96	12.04	9.60	41.56	21.64	63.37	53.37	-21.81	-31.73	Pass
4	0.2380	27.54	9.03	9.60	37.14	18.63	62.17	52.17	-25.03	-33.54	Pass
5	0.2860	25.08	6.42	9.61	34.69	16.03	60.64	50.64	-25.95	-34.61	Pass
6	10.2100	23.49	16.08	9.97	33.46	26.05	60.00	50.00	-26.54	-23.95	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

6 Radiated Interference Measurement

6.1. Limit

According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$ at meter)	Measurement Distance (meters)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 - 88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

6.2. Test Instruments


3 Meter Chamber (966-A)					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
RF Pre-selector	Agilent	N9039A	MY46520256	01/10/2014	(1)
Spectrum Analyzer	Agilent	E4446A	MY46180578	01/10/2014	(1)
Pre Amplifier	Agilent	8449B	3008A02237	02/21/2014	(1)
Pre Amplifier	Agilent	8447D	2944A10961	02/21/2014	(1)
Broadband Antenna (30MHz~1GHz)	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	9163-270	07/22/2014	(1)
Horn Antenna (1~18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	06/11/2014	(1)
Horn Antenna (18~40GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9170	9170-320	06/13/2014	(1)
Loop Antenna	COM-POWER CORPORATION	AL-130	121014	08/14/2012	(3)
Test Site	ATL	TE01	888001	08/28/2014	(1)

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.


NOTE: N.C.R. = No Calibration Request.

6.3. Setup

Below 1GHz

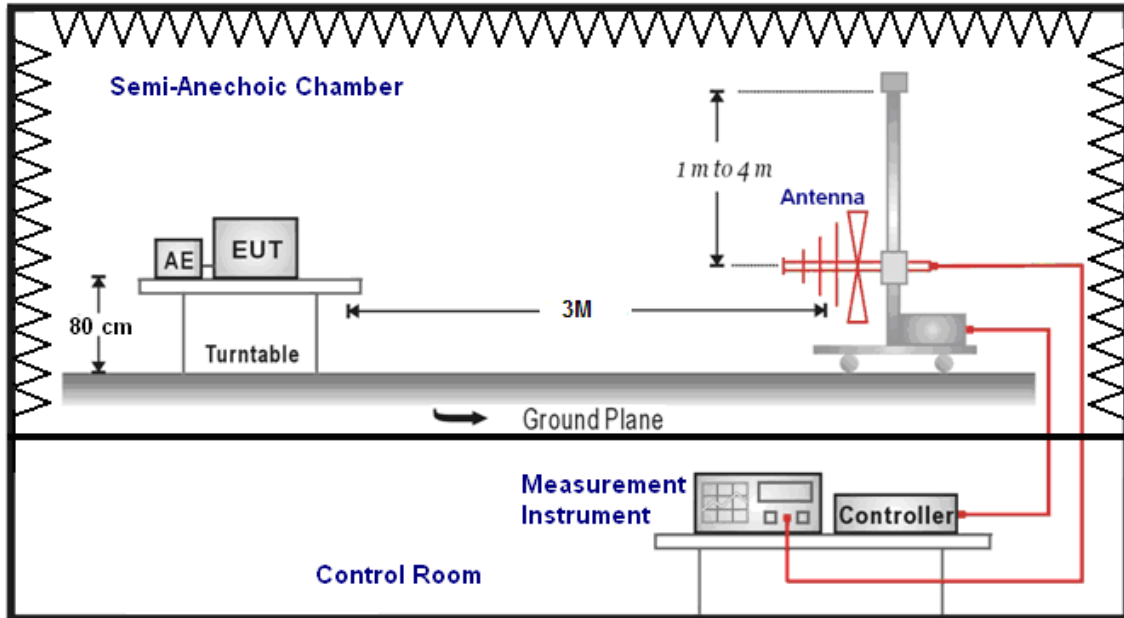

Above 1GHz

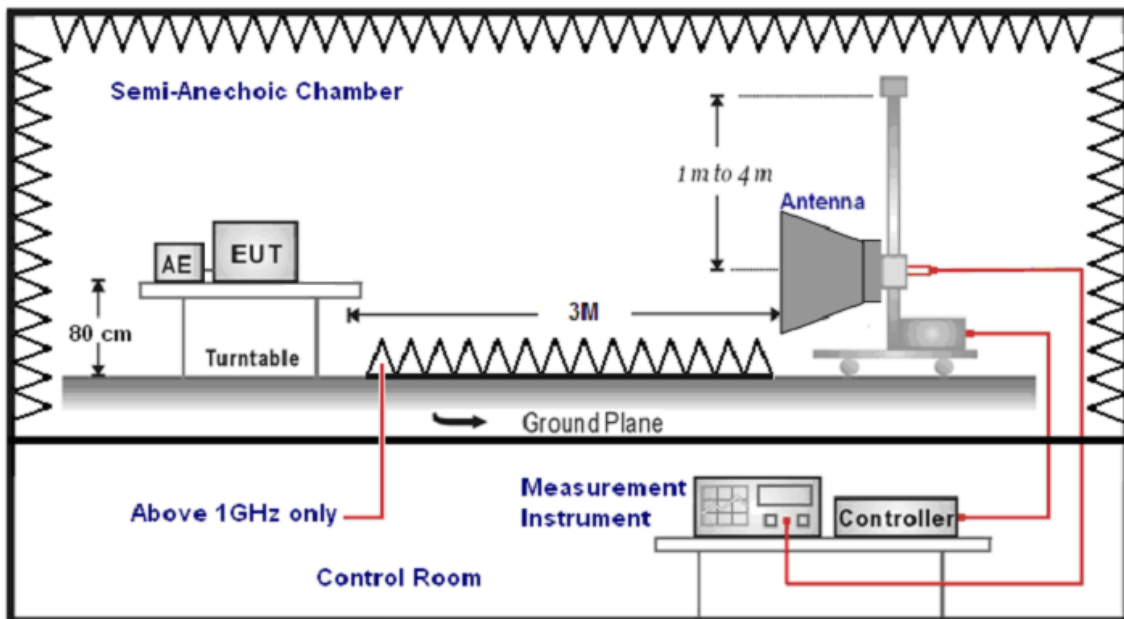

6.4. Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna (model VULB9163) at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna (model BBHA9120D&9170) was used in frequencies 1 – 26.5 GHz at a distance of 1 meter. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20dB/decade).

For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts per meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

$$(1) \text{ Amplitude (dBuV/m) = FI (dBuV) + AF (dBuV) + CL (dBuV) - Gain (dB)}$$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

$$(2) \text{ Actual Amplitude (dBuV/m) = Amplitude (dBuV) - Dis(dB)}$$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

6.5. Test Result

Below 1GHz

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		PABREEZE		Temp.(℃)/Hum.(%RH):		26(℃)/60%RH	
Mode:		Mode 1		Date:		08/26/2014	
				Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
199.5000	47.75	-14.37	33.38	43.50	-10.12	QP	H
300.5000	48.01	-10.22	37.79	46.00	-8.21	QP	H
399.0000	41.05	-8.22	32.83	46.00	-13.17	QP	H
540.0000	35.89	-5.62	30.27	46.00	-15.73	QP	H
799.0000	34.35	-0.27	34.08	46.00	-11.92	QP	H
934.0000	29.38	2.51	31.89	46.00	-14.11	QP	H
199.0000	50.75	-14.37	36.38	43.50	-7.12	QP	V
299.0000	43.92	-10.26	33.66	46.00	-12.34	QP	V
399.0000	47.49	-8.22	39.27	46.00	-6.73	QP	V
558.5000	41.62	-5.25	36.37	46.00	-9.63	QP	V
660.0000	31.11	-3.10	28.01	46.00	-17.99	QP	V
799.5000	33.80	-0.25	33.55	46.00	-12.45	QP	V

Note: No emission found between lowest internal used/generated frequencies to 30MHz (9 kHz~30MHz).

Above 1GHz

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PABREEZE			Temp.(℃)/Hum.(%RH):	26(℃)/60%RH		
Mode:	Mode 2			Date:	08/26/2014		
Frequency:	2402 MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3023.000	37.27	-0.14	37.13	74.00	-36.87	peak	H
4804.000	42.90	4.98	47.88	74.00	-26.12	peak	H
6726.000	33.54	10.10	43.64	74.00	-30.36	peak	H
3023.000	37.24	-0.14	37.10	74.00	-36.90	peak	V
4804.000	42.27	4.98	47.25	74.00	-26.75	peak	V
6698.000	32.85	10.03	42.88	74.00	-31.12	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PABREEZE			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 2			Date:	08/26/2014		
Frequency:	2441 MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3030.000	36.54	-0.11	36.43	74.00	-37.57	peak	H
4882.000	42.68	5.17	47.85	74.00	-26.15	peak	H
6698.000	33.67	10.03	43.70	74.00	-30.30	peak	H
3030.000	36.75	-0.11	36.64	74.00	-37.36	peak	V
4882.000	42.95	5.17	48.12	74.00	-25.88	peak	V
6691.000	33.79	10.01	43.80	74.00	-30.20	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PABREEZE			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 2			Date:	08/26/2014		
Frequency:	2480 MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3051.000	36.98	-0.06	36.92	74.00	-37.08	peak	H
4960.000	41.46	5.38	46.84	74.00	-27.16	peak	H
6691.000	32.98	10.01	42.99	74.00	-31.01	peak	H
3058.000	37.08	-0.04	37.04	74.00	-36.96	peak	V
4960.000	42.43	5.38	47.81	74.00	-26.19	peak	V
6719.000	33.60	10.09	43.69	74.00	-30.31	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PABREEZE			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 3			Date:	08/26/2014		
Frequency:	2402 MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3051.000	37.57	-0.06	37.51	74.00	-36.49	peak	H
4619.000	35.14	4.51	39.65	74.00	-34.35	peak	H
6698.000	35.53	10.03	45.56	74.00	-28.44	peak	H
3051.000	36.97	-0.06	36.91	74.00	-37.09	peak	V
4570.000	35.65	4.38	40.03	74.00	-33.97	peak	V
6663.000	34.12	9.94	44.06	74.00	-29.94	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PABREEZE			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 3			Date:	08/26/2014		
Frequency:	2441 MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3037.000	35.48	-0.10	35.38	74.00	-38.62	peak	H
4633.000	33.28	4.54	37.82	74.00	-36.18	peak	H
6705.000	32.77	10.05	42.82	74.00	-31.18	peak	H
3037.000	37.72	-0.10	37.62	74.00	-36.38	peak	V
4591.000	33.79	4.43	38.22	74.00	-35.78	peak	V
6775.000	32.91	10.25	43.16	74.00	-30.84	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PABREEZE			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 3			Date:	08/26/2014		
Frequency:	2480 MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3037.000	37.84	-0.10	37.74	74.00	-36.26	peak	H
4619.000	36.33	4.51	40.84	74.00	-33.16	peak	H
6670.000	33.98	9.95	43.93	74.00	-30.07	peak	H
3051.000	36.42	-0.06	36.36	74.00	-37.64	peak	V
4577.000	34.73	4.39	39.12	74.00	-34.88	peak	V
6670.000	33.53	9.95	43.48	74.00	-30.52	peak	V


Standard:		RSS-Gen		Test Distance:		3m		
Test item:		Radiated Emission		Power:		AC 120V/60Hz		
Model Number:		PABREEZE		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH		
Mode:		Mode 5		Date:		08/26/2014		
Frequency:		2441 MHz		Test By:		Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Peak Limit (dBuV/m)	AVG. Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3051.000	37.32	-0.06	37.26	74.00	54.00	-36.74	peak	H
4619.000	33.70	4.51	38.21	74.00	54.00	-35.79	peak	H
6698.000	34.10	10.03	44.13	74.00	54.00	-29.87	peak	H
3051.000	36.97	-0.06	36.91	74.00	54.00	-37.09	peak	V
4563.000	34.00	4.36	38.36	74.00	54.00	-35.64	peak	V
6698.000	33.95	10.03	43.98	54.00	54.00	-30.02	peak	V

7 20dB RF Bandwidth and 99 % Occupied Bandwidth Measurement

7.1. Limit

N/A

7.2. Test Setup

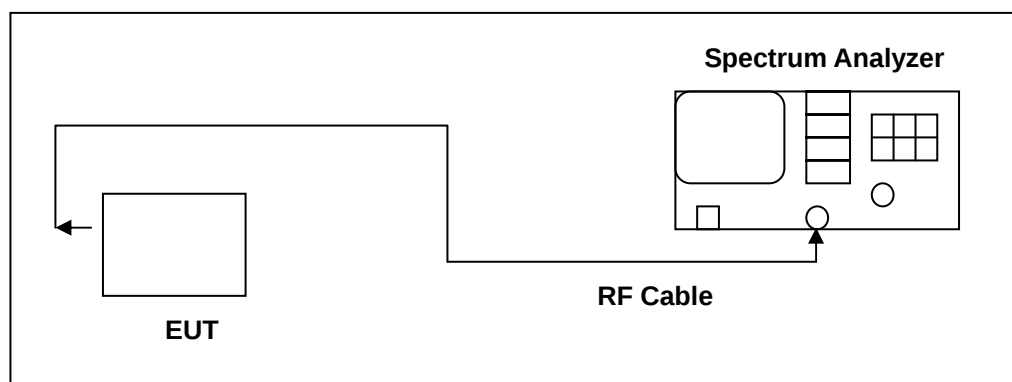

7.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/18/2013	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

7.4. Test Procedure

20dB RF Bandwidth

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth frequency hopping function of the EUT was enabled. The spectrum analyzer used the following settings:

1. Span = approx. 2 to 3 times the 20dB bandwidth, centered on a hopping frequency
2. RBW $\geq$ 1% of the 20dB span
3. VBW $\geq$ RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold

The trace was allowed to stabilize. The EUT was transmitting at its maximum data rate. The marker-to-peak function was used to set the marker to the peak of the emission. The marker-delta function was used to measure 20dB down one side of the emission. The marker-delta function and marker was moved to the other side of the emission until it was even with the reference marker. The marker-delta reading at this point was the 20dB bandwidth of the emission.

99 % Occupied Bandwidth

The transmitter shall be operated at its maximum carrier power measured under normal test conditions.

The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.

The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%.

The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual.

The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded.




7.5. Test Result




Model Number	PABREEZE		
Test Item	20dB RF Bandwidth and 99 % Occupied Bandwidth		
Test Mode	Mode 2: GFSK Link Mode		
Date of Test	08/27/2014	Test Site	TE02
Frequency (MHz)	20dB RF Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit (MHz)
2402	0.943	0.879	-----
2441	0.938	0.865	-----
2480	0.941	0.869	-----

Model Number	PABREEZE		
Test Item	20dB RF Bandwidth and 99 % Occupied Bandwidth		
Test Mode	Mode 3: $\pi/4$ -DQPSK Link Mode		
Date of Test	08/27/2014	Test Site	TE02
Frequency (MHz)	20dB RF Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit (MHz)
2402	1.299	1.345	-----
2441	1.304	1.395	-----
2480	1.286	1.329	-----

7.6. Test Graphs



20dB RF Bandwidth

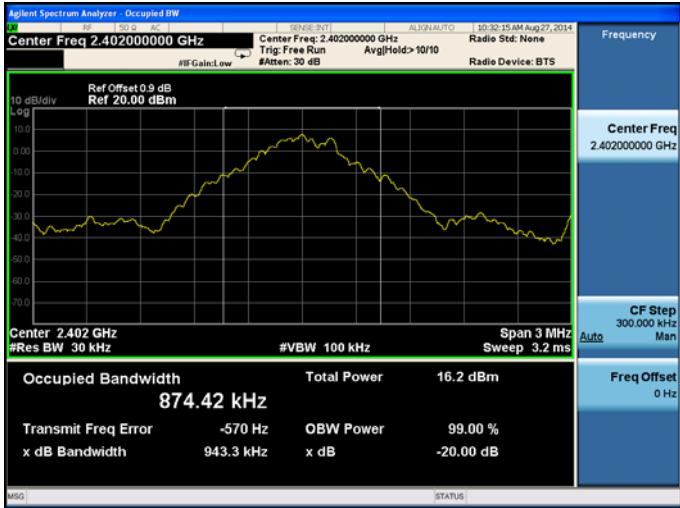
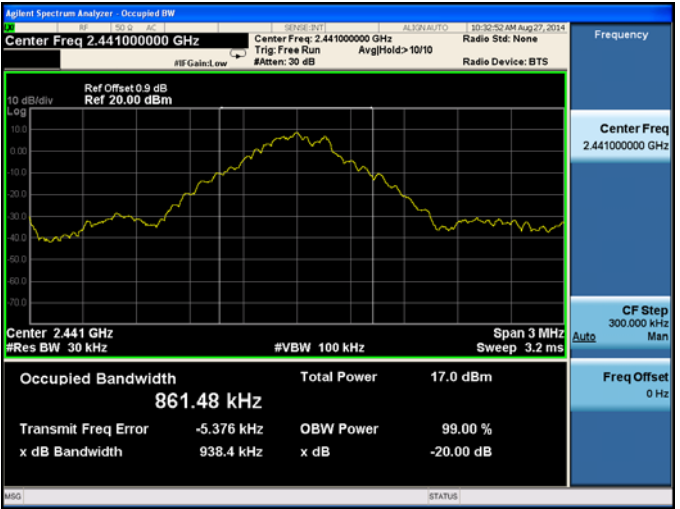
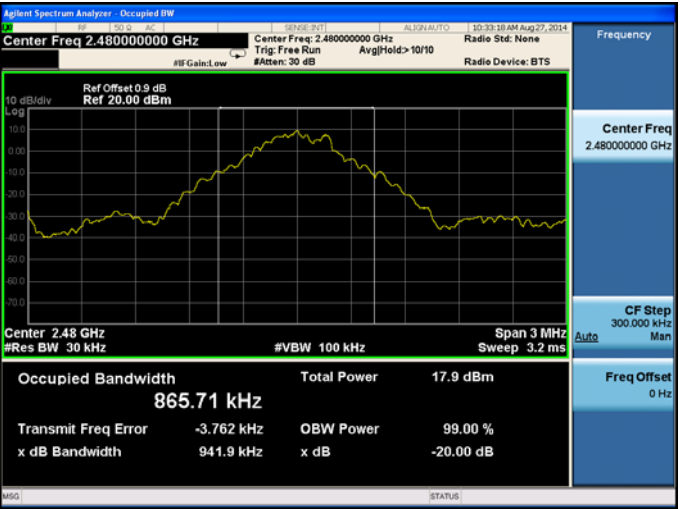
Mode 2: GFSK Link Mode	
2402	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.402000000 GHz Ref Offset 0.9 dB Ref 20.00 dBm Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 874.42 kHz Total Power 16.2 dBm Transmit Freq Error -570 Hz OBW Power 99.00 % x dB Bandwidth 943.3 kHz x dB -20.00 dB Frequency Center Freq 2.402000000 GHz CF Step 300.000 kHz Man Freq Offset 0 Hz
2441	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.441000000 GHz Ref Offset 0.9 dB Ref 20.00 dBm Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 861.48 kHz Total Power 17.0 dBm Transmit Freq Error -5.376 kHz OBW Power 99.00 % x dB Bandwidth 938.4 kHz x dB -20.00 dB Frequency Center Freq 2.441000000 GHz CF Step 300.000 kHz Man Freq Offset 0 Hz
2480	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.480000000 GHz Ref Offset 0.9 dB Ref 20.00 dBm Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 865.71 kHz Total Power 17.9 dBm Transmit Freq Error -3.762 kHz OBW Power 99.00 % x dB Bandwidth 941.9 kHz x dB -20.00 dB Frequency Center Freq 2.480000000 GHz CF Step 300.000 kHz Man Freq Offset 0 Hz

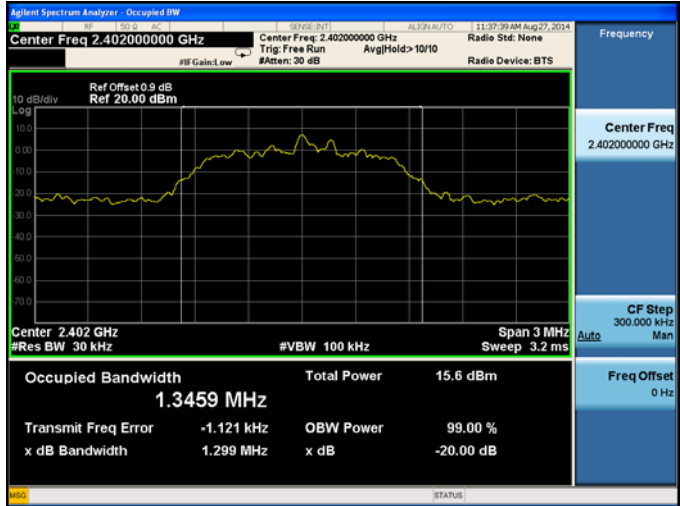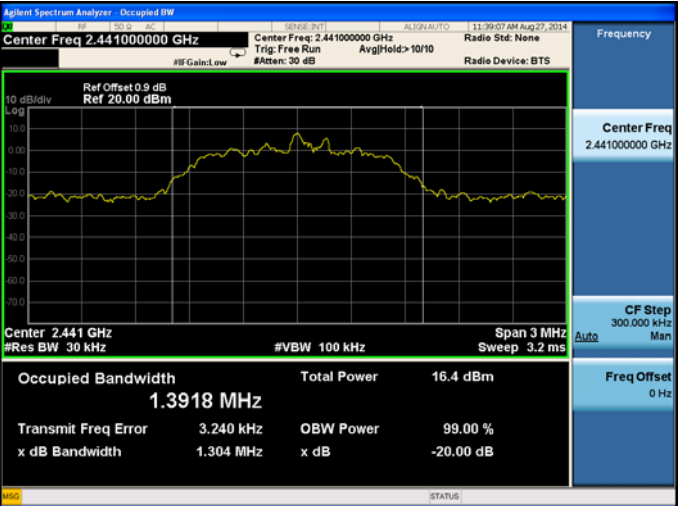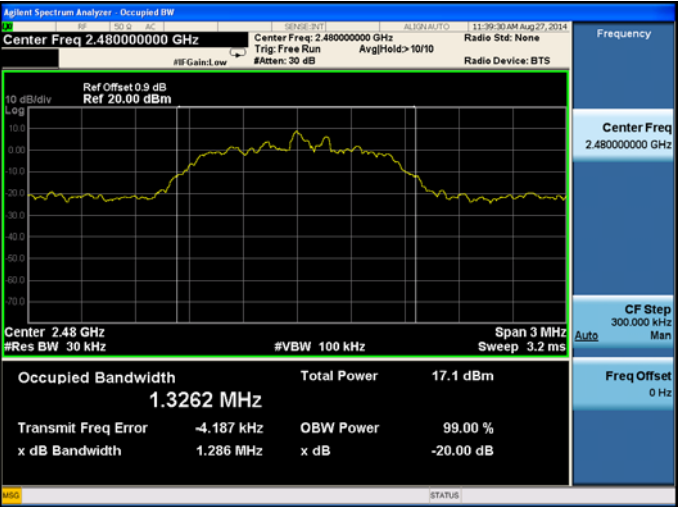Mode 3: $\pi/4$ -DQPSK Link Mode	
2402	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.40200000 GHz Ref Offset 0.9 dB Ref 20.00 dBm Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 1.3459 MHz Total Power 15.6 dBm Transmit Freq Error -1.121 kHz OBW Power 99.00 % x dB Bandwidth 1.299 MHz x dB -20.00 dB Frequency Center Freq 2.40200000 GHz CF Step 300.000 kHz Man Freq Offset 0 Hz
2441	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.44100000 GHz Ref Offset 0.9 dB Ref 20.00 dBm Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 1.3918 MHz Total Power 16.4 dBm Transmit Freq Error 3.240 kHz OBW Power 99.00 % x dB Bandwidth 1.304 MHz x dB -20.00 dB Frequency Center Freq 2.44100000 GHz CF Step 300.000 kHz Man Freq Offset 0 Hz
2480	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.48000000 GHz Ref Offset 0.9 dB Ref 20.00 dBm Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 1.3262 MHz Total Power 17.1 dBm Transmit Freq Error -4.187 kHz OBW Power 99.00 % x dB Bandwidth 1.286 MHz x dB -20.00 dB Frequency Center Freq 2.48000000 GHz CF Step 300.000 kHz Man Freq Offset 0 Hz



99 % Occupied Bandwidth

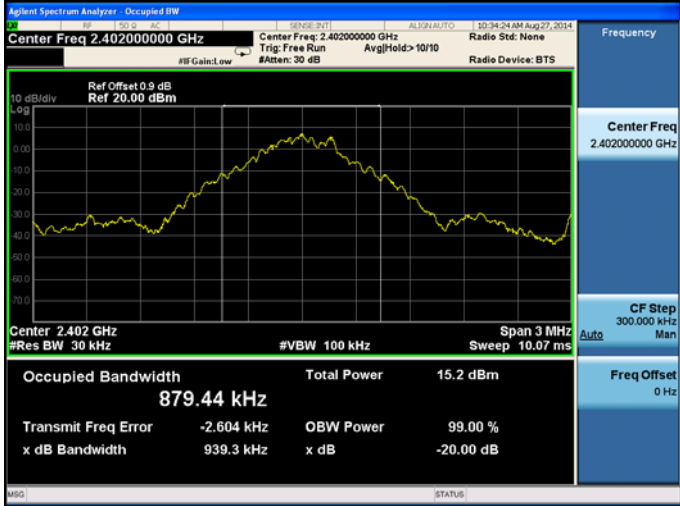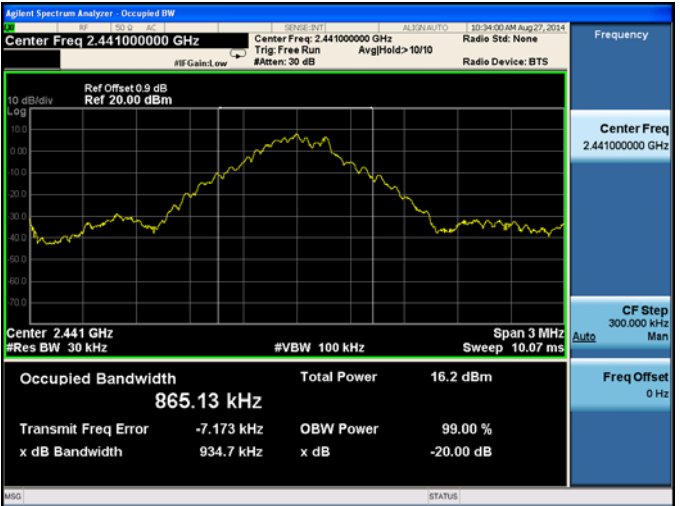Mode 2: GFSK Link Mode	
2402	
2441	
2480	

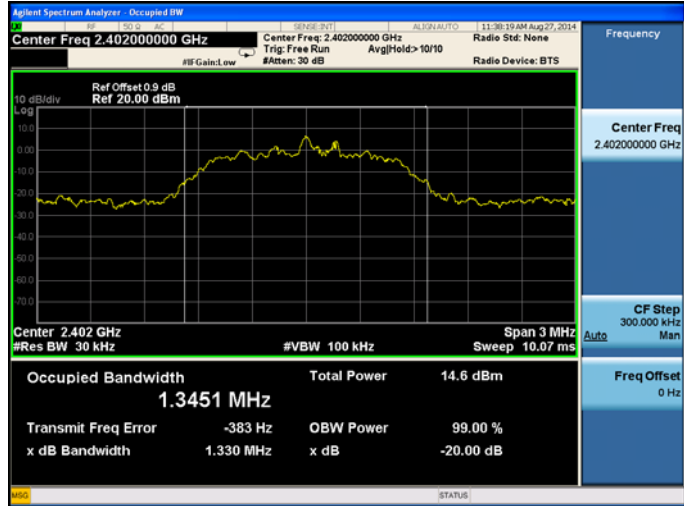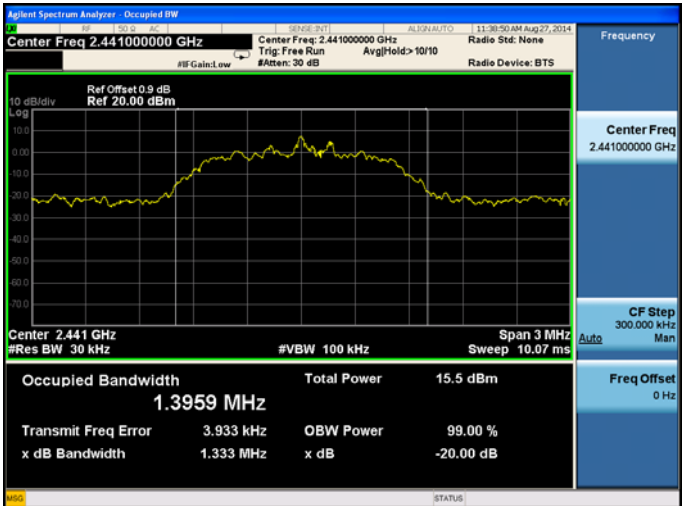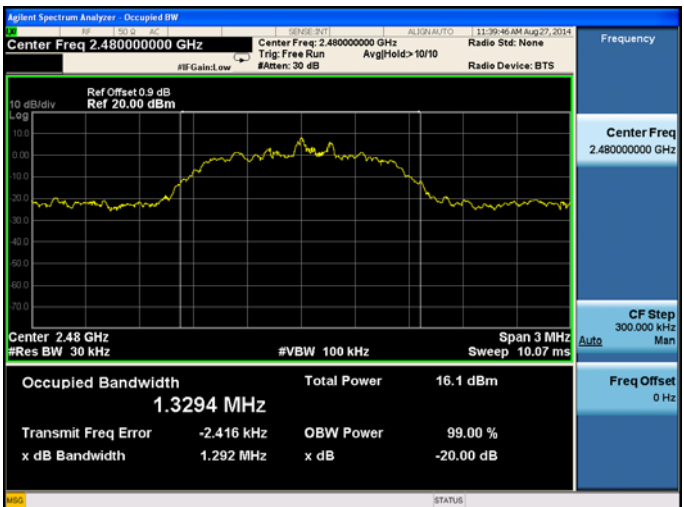
Mode 3: $\pi/4$ -DQPSK Link Mode	
2402	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.402000000 GHz Ref Offset 0.9 dB Ref 20.00 dBm Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 10.07 ms Occupied Bandwidth 1.3451 MHz Total Power 14.6 dBm Transmit Freq Error -383 Hz OBW Power 99.00 % x dB Bandwidth 1.330 MHz x dB -20.00 dB Frequency Center Freq 2.402000000 GHz CF Step 300.000 kHz Man Freq Offset 0 Hz
2441	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.441000000 GHz Ref Offset 0.9 dB Ref 20.00 dBm Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 10.07 ms Occupied Bandwidth 1.3959 MHz Total Power 15.5 dBm Transmit Freq Error 3.933 kHz OBW Power 99.00 % x dB Bandwidth 1.333 MHz x dB -20.00 dB Frequency Center Freq 2.441000000 GHz CF Step 300.000 kHz Man Freq Offset 0 Hz
2480	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.480000000 GHz Ref Offset 0.9 dB Ref 20.00 dBm Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 10.07 ms Occupied Bandwidth 1.3294 MHz Total Power 16.1 dBm Transmit Freq Error -2.416 kHz OBW Power 99.00 % x dB Bandwidth 1.292 MHz x dB -20.00 dB Frequency Center Freq 2.480000000 GHz CF Step 300.000 kHz Man Freq Offset 0 Hz

8 Carrier Frequency Separation Measurement

8.1. Limit

Title 47 of the CFR, Part 15 Subpart (c) 15.247(a)(1) requires the measurement of the bandwidth of the transmission between the -20 dB points on the transmitted spectrum. The results of this test determine the limits for channel spacing. The channel spacing shall be a minimum of 25 kHz or the 20 dB bandwidth, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel.

8.2. Test Setup

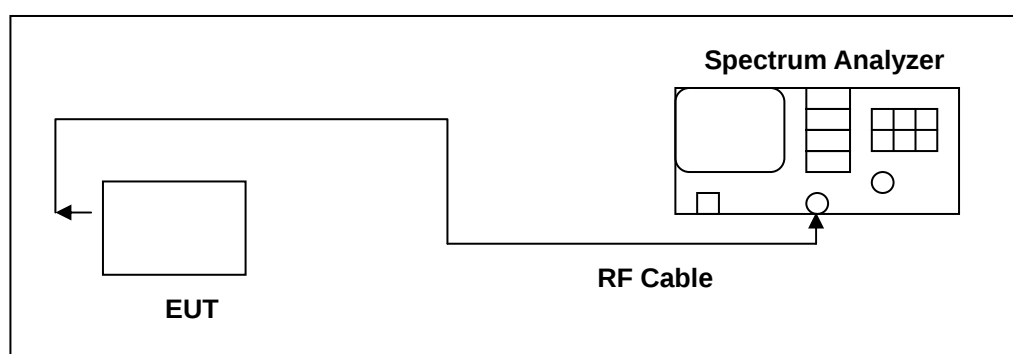

8.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/18/2013	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

8.4. Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth transmitter of the V6 had its hopping function enabled. The following spectrum analyzer settings were used:

1. Span = wide enough to capture the peaks of two adjacent channels
2. Resolution (or IF) Bandwidth (RBW) $\geq$ 1% of the span
3. Video (or Average) Bandwidth (VBW) $\geq$ RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold

The trace was allowed to stabilize. The marker-delta function was used to determine the separation between the peaks of the adjacent channels.




8.5. Test Result

Model Number	PABREEZE		
Test Item	Carrier Frequency Separation		
Test Mode	Mode 2: GFSK Link Mode		
Date of Test	08/27/2014	Test Site	TE02
Frequency (MHz)	Measurement (MHz)	Limit (MHz)	
2402	1	> 0.628	
2441	1	> 0.625	
2480	1	> 0.627	

Model Number	PABREEZE		
Test Item	Carrier Frequency Separation		
Test Mode	Mode 3: $\pi/4$ -DQPSK Link Mode		
Date of Test	08/27/2014	Test Site	TE02
Frequency (MHz)	Measurement (MHz)	Limit (MHz)	
2402	1	> 0.866	
2441	1	> 0.869	
2480	1	> 0.857	

8.6. Test Graphs

Mode 2: GFSK Link Mode																																					
2402	Agilent Spectrum Analyzer - Sweep SA Center Freq 2.403000000 GHz Ref Offset 0.9 dB Ref 20.00 dBm Mkr3 2.403 999 GHz 7.666 dBm Center 2.403000 GHz #Res BW 30 kHz #VBW 100 kHz Span 3.000 MHz Sweep 3.200 ms (1001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.401 999 GHz</td><td>7.613 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.402 999 GHz</td><td>7.543 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.403 999 GHz</td><td>7.666 dBm</td><td></td><td></td><td></td></tr></table> Frequency Auto Tune Center Freq 2.403000000 GHz Start Freq 2.401500000 GHz Stop Freq 2.404500000 GHz CF Step 300.000 kHz Man Freq Offset 0 Hz	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.401 999 GHz	7.613 dBm				2	N	1	f	2.402 999 GHz	7.543 dBm				3	N	1	f	2.403 999 GHz	7.666 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	f	2.401 999 GHz	7.613 dBm																																
2	N	1	f	2.402 999 GHz	7.543 dBm																																
3	N	1	f	2.403 999 GHz	7.666 dBm																																
2440	Agilent Spectrum Analyzer - Sweep SA Center Freq 2.441000000 GHz Ref Offset 0.9 dB Ref 20.00 dBm Mkr3 2.441 999 GHz 8.548 dBm Center 2.441000 GHz #Res BW 30 kHz #VBW 100 kHz Span 3.000 MHz Sweep 3.200 ms (1001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.439 999 GHz</td><td>8.351 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.440 999 GHz</td><td>8.447 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.441 999 GHz</td><td>8.548 dBm</td><td></td><td></td><td></td></tr></table> Frequency Auto Tune Center Freq 2.441000000 GHz Start Freq 2.439500000 GHz Stop Freq 2.442500000 GHz CF Step 300.000 kHz Man Freq Offset 0 Hz	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.439 999 GHz	8.351 dBm				2	N	1	f	2.440 999 GHz	8.447 dBm				3	N	1	f	2.441 999 GHz	8.548 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	f	2.439 999 GHz	8.351 dBm																																
2	N	1	f	2.440 999 GHz	8.447 dBm																																
3	N	1	f	2.441 999 GHz	8.548 dBm																																
2480	Agilent Spectrum Analyzer - Sweep SA Center Freq 2.479000000 GHz Ref Offset 0.9 dB Ref 20.00 dBm Mkr3 2.480 000 GHz 9.361 dBm Center 2.479000 GHz #Res BW 30 kHz #VBW 100 kHz Span 3.000 MHz Sweep 3.200 ms (1001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.478 000 GHz</td><td>9.339 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.479 000 GHz</td><td>9.381 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.480 000 GHz</td><td>9.361 dBm</td><td></td><td></td><td></td></tr></table> Frequency Auto Tune Center Freq 2.479000000 GHz Start Freq 2.477500000 GHz Stop Freq 2.480500000 GHz CF Step 300.000 kHz Man Freq Offset 0 Hz	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.478 000 GHz	9.339 dBm				2	N	1	f	2.479 000 GHz	9.381 dBm				3	N	1	f	2.480 000 GHz	9.361 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	f	2.478 000 GHz	9.339 dBm																																
2	N	1	f	2.479 000 GHz	9.381 dBm																																
3	N	1	f	2.480 000 GHz	9.361 dBm																																

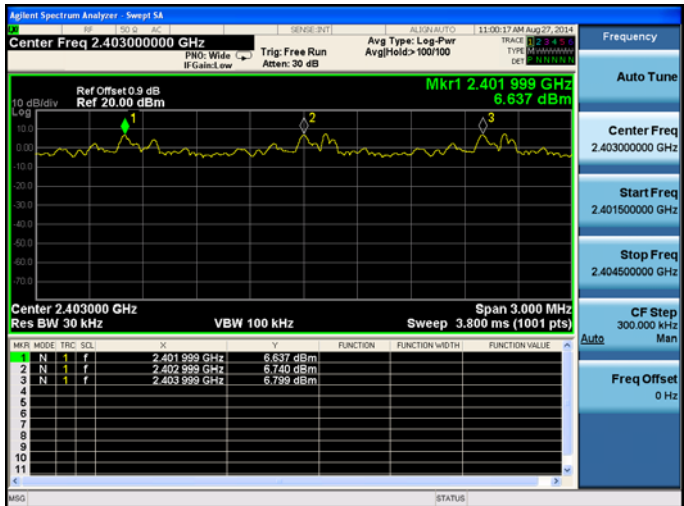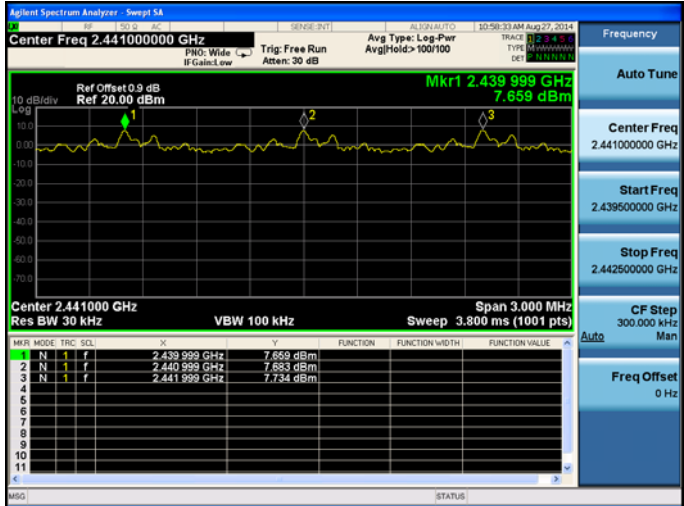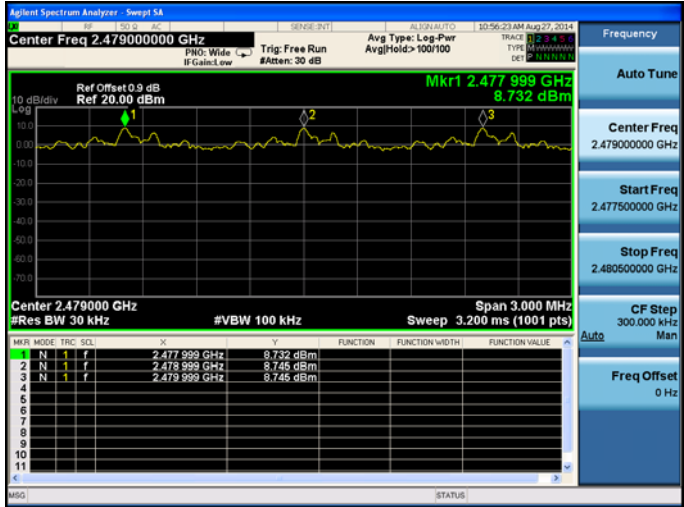
Mode 3: $\pi/4$ -DQPSK Link Mode																																					
2402	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.40300000 GHz Ref Offset 0.9 dB Ref 20.00 dBm Mkr1 2.401999 GHz 6.637 dBm Center 2.403000 GHz Res BW 30 kHz VBW 100 kHz Span 3.000 MHz Sweep 3.800 ms (1001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRIG</th><th>SOL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.401999 GHz</td><td>6.637 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.402999 GHz</td><td>6.740 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.403999 GHz</td><td>6.799 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.401999 GHz	6.637 dBm				2	N	1	f	2.402999 GHz	6.740 dBm				3	N	1	f	2.403999 GHz	6.799 dBm			
MNR	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	f	2.401999 GHz	6.637 dBm																																
2	N	1	f	2.402999 GHz	6.740 dBm																																
3	N	1	f	2.403999 GHz	6.799 dBm																																
2441	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.44100000 GHz Ref Offset 0.9 dB Ref 20.00 dBm Mkr1 2.439999 GHz 7.659 dBm Center 2.441000 GHz Res BW 30 kHz VBW 100 kHz Span 3.000 MHz Sweep 3.800 ms (1001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRIG</th><th>SOL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.439999 GHz</td><td>7.659 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.440999 GHz</td><td>7.683 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.441999 GHz</td><td>7.734 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.439999 GHz	7.659 dBm				2	N	1	f	2.440999 GHz	7.683 dBm				3	N	1	f	2.441999 GHz	7.734 dBm			
MNR	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	f	2.439999 GHz	7.659 dBm																																
2	N	1	f	2.440999 GHz	7.683 dBm																																
3	N	1	f	2.441999 GHz	7.734 dBm																																
2480	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.47900000 GHz Ref Offset 0.9 dB Ref 20.00 dBm Mkr1 2.477999 GHz 8.732 dBm Center 2.479000 GHz Res BW 30 kHz VBW 100 kHz Span 3.000 MHz Sweep 3.200 ms (1001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRIG</th><th>SOL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.477999 GHz</td><td>8.732 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.478999 GHz</td><td>8.745 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.479999 GHz</td><td>8.746 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.477999 GHz	8.732 dBm				2	N	1	f	2.478999 GHz	8.745 dBm				3	N	1	f	2.479999 GHz	8.746 dBm			
MNR	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	f	2.477999 GHz	8.732 dBm																																
2	N	1	f	2.478999 GHz	8.745 dBm																																
3	N	1	f	2.479999 GHz	8.746 dBm																																

9 Number of Hopping Measurement

9.1. Limit

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

9.2. Test Setup

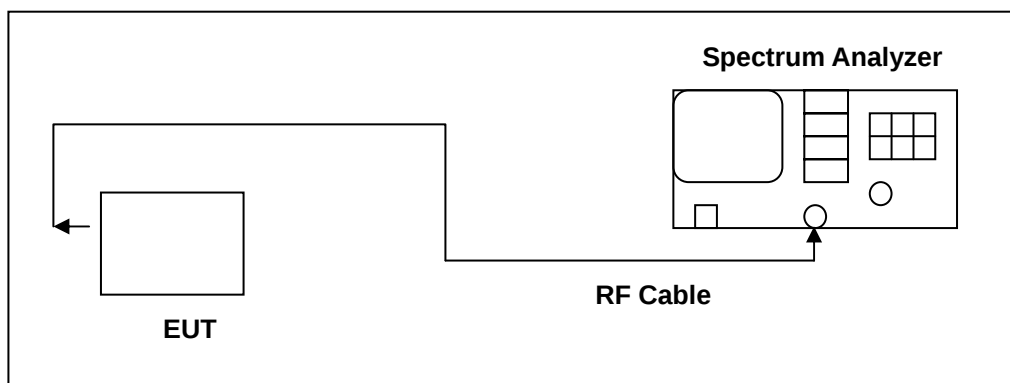

9.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/18/2013	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

9.4. Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth frequency hopping function of the EUT was enabled. The spectrum analyzer used the following settings:

1. Span = the frequency band of operation
2. RBW $\geq$ 1% of the span
3. VBW $\geq$ RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold


The trace was allowed to stabilize.

9.5. Test Result

Model Number	PABREEZE		
Test Item	Number of Hopping		
Test Mode	Mode 2: GFSK Link Mode		
Date of Test	08/27/2014	Test Site	TE02
Frequency Range (MHz)	Measurement (ch)		Limit (ch)
2402 - 2480	79		> 15


Model Number	PABREEZE		
Test Item	Number of Hopping		
Test Mode	Mode 3: $\pi/4$ -DQPSK Link Mode		
Date of Test	08/27/2014	Test Site	TE02
Frequency Range (MHz)	Measurement (ch)		Limit (ch)
2402 - 2480	79		> 15

9.6. Test Graphs

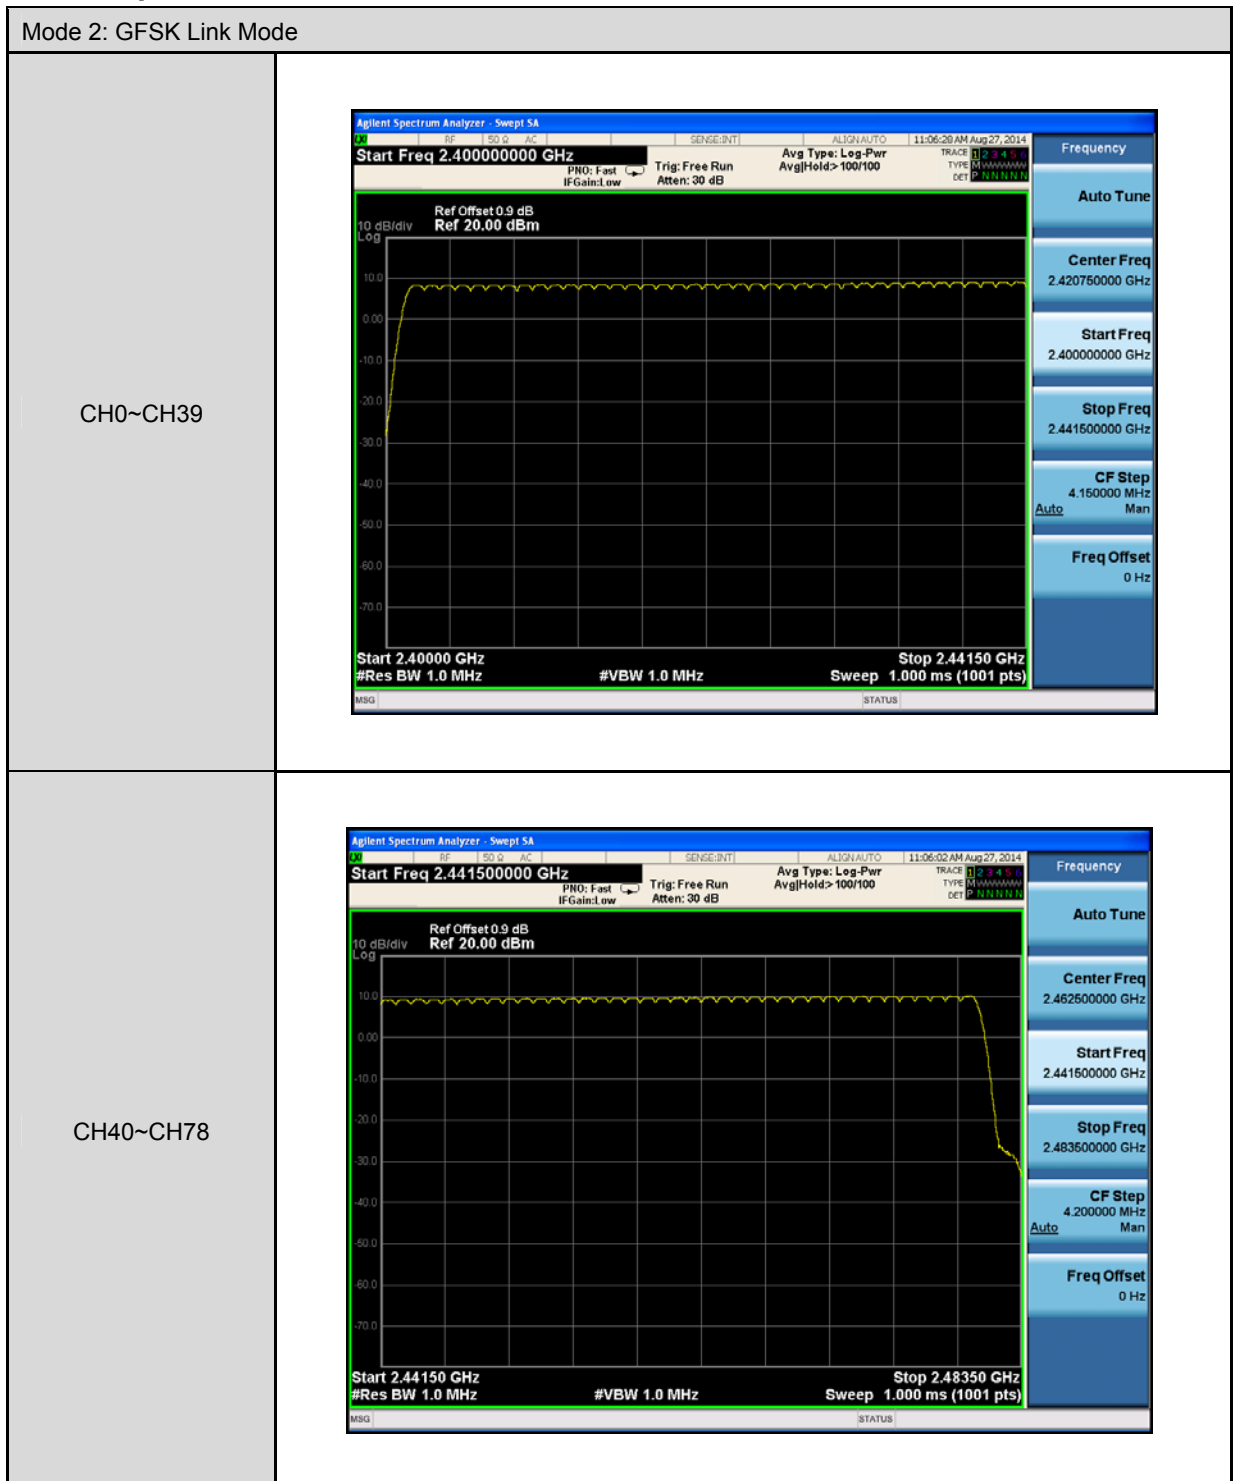


Mode 3: $\pi/4$ -DQPSK Link Mode

CH0~CH39

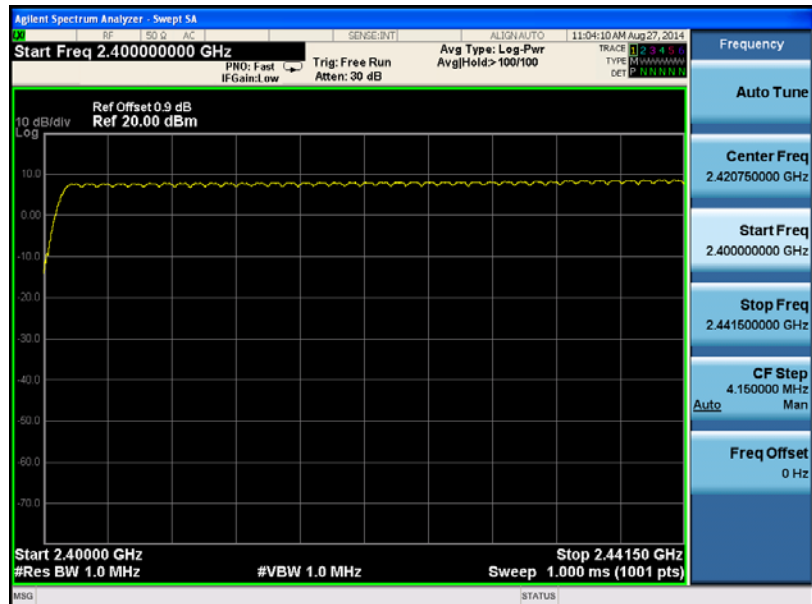

CH40~CH78

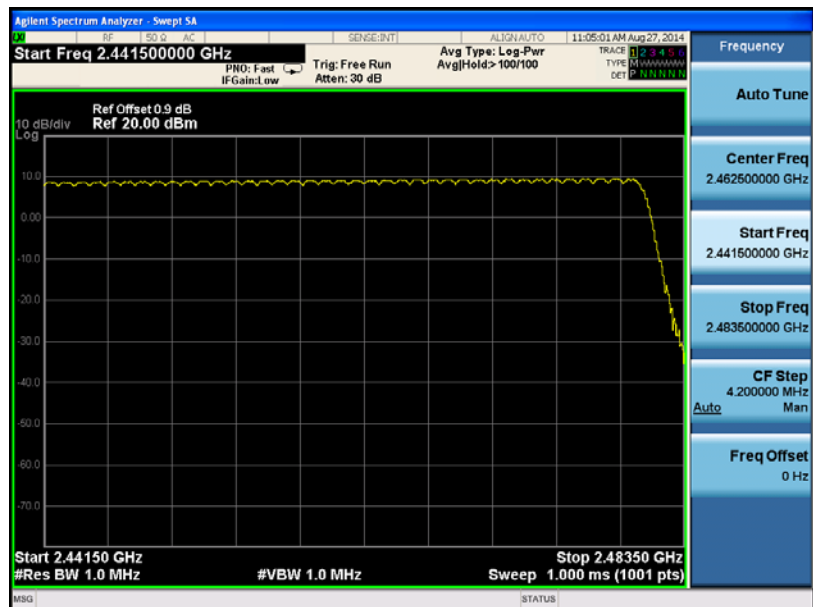


10 Time of Occupancy (Dwell Time) Measurement

10.1. Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

10.2. Test Setup

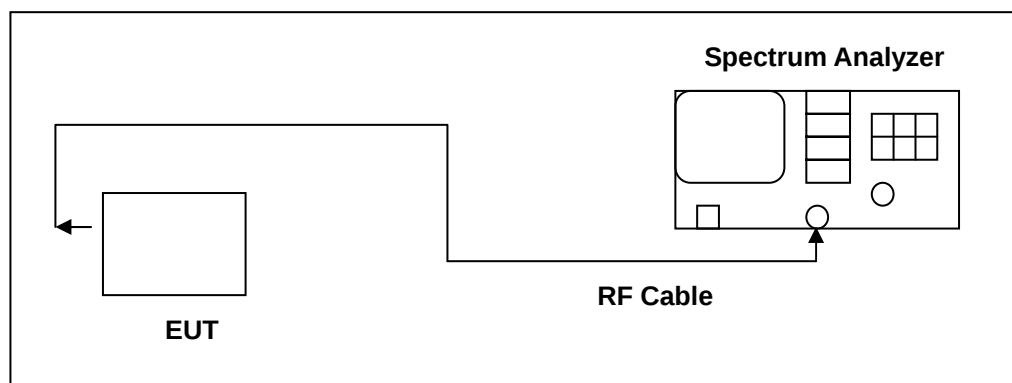

10.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/18/2013	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

10.4. Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth hopping function of the EUT was enabled. The following spectrum analyzer settings were used:

1. Span = zero span, centered on a hopping channel
2. RBW = 1 MHz
3. VBW $\geq$ RBW
4. Sweep = as necessary to capture the entire dwell time per hopping channel
5. Detector function = peak
6. Trace = max hold

The marker-delta function was used to determine the dwell time.




**10.5. Test Result**


Model Number	PABREEZE		
Test Item	Time of Occupancy (Dwell Time)		
Test Mode	Mode 2: GFSK Link Mode		
Date of Test	08/27/2014	Test Site	TE02
DH1			
Cycle Calculate	79CH * 0.4 = 31.6 (sec)		
The EUT Hopping Number per Sec	1600 times/sec		
Each Channel Dwell Times per Sec	800/79CH = 10.13(times/sec)		
Each Channel Dwell Times (1)	0.450 ms (sec)		
Each Channel Dwell Times on Cycle(2)	31.6 * 10.13 = 320.108(times)		
Dwell Times on Cycle (1) * (2)	144.0486 ms (sec)		
LIMIT(msec)	< = 400		
DH3			
Cycle Calculate	79CH * 0.4 = 31.6 (sec)		
The EUT Hopping Number per Sec	1600 times/sec		
Each Channel Dwell Times per Sec	400/79CH = 5.1(times/sec)		
Each Channel Dwell Times (1)	1.700 ms (sec)		
Each Channel Dwell Times on Cycle(2)	31.6 * 5.1 = 161.16(times)		
Dwell Times on Cycle (1) * (2)	273.9720 ms (sec)		
LIMIT(msec)	< = 400		
DH5			
Cycle Calculate	79CH * 0.4 = 31.6 (sec)		
The EUT Hopping Number per Sec	1600 times/sec		
Each Channel Dwell Times per Sec	266.7/79CH = 3.37(times/sec)		
Each Channel Dwell Times (1)	2.950 ms (sec)		
Each Channel Dwell Times on Cycle(2)	31.6 * 3.37 = 106.492(times)		
Dwell Times on Cycle (1) * (2)	314.1514 ms (sec)		
LIMIT(msec)	< = 400		



Model Number	PABREEZE		
Test Item	Time of Occupancy (Dwell Time)		
Test Mode	Mode 3: $\pi/4$ -DQPSK Link Mode		
Date of Test	08/27/2014	Test Site	TE02
2DH1			
Cycle Calculate	79CH * 0.4 = 31.6 (sec)		
The EUT Hopping Number per Sec	1600 times/sec		
Each Channel Dwell Times per Sec	800/79CH = 10.13(times/sec)		
Each Channel Dwell Times (1)	0.460 ms (sec)		
Each Channel Dwell Times on Cycle(2)	31.6 * 10.13 = 320.108(times)		
Dwell Times on Cycle (1) * (2)	147.2497 ms (sec)		
LIMIT(msec)	< = 400		
2DH3			
Cycle Calculate	79CH * 0.4 = 31.6 (sec)		
The EUT Hopping Number per Sec	1600 times/sec		
Each Channel Dwell Times per Sec	400/79CH = 5.1(times/sec)		
Each Channel Dwell Times (1)	1.720 ms (sec)		
Each Channel Dwell Times on Cycle(2)	31.6 * 5.1 = 161.16(times)		
Dwell Times on Cycle (1) * (2)	277.1952 ms (sec)		
LIMIT(msec)	< = 400		
2DH5			
Cycle Calculate	79CH * 0.4 = 31.6 (sec)		
The EUT Hopping Number per Sec	1600 times/sec		
Each Channel Dwell Times per Sec	266.7/79CH = 3.37(times/sec)		
Each Channel Dwell Times (1)	2.960 ms (sec)		
Each Channel Dwell Times on Cycle(2)	31.6 * 3.37 = 106.492(times)		
Dwell Times on Cycle (1) * (2)	315.2163 ms (sec)		
LIMIT(msec)	< = 400		

10.6. Test Graphs

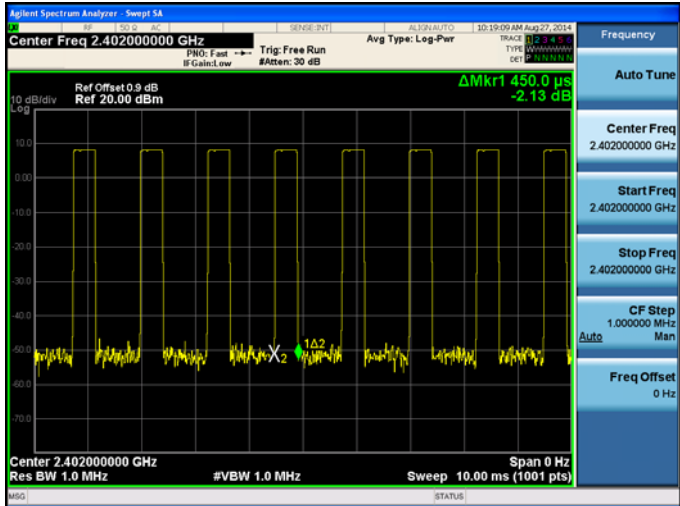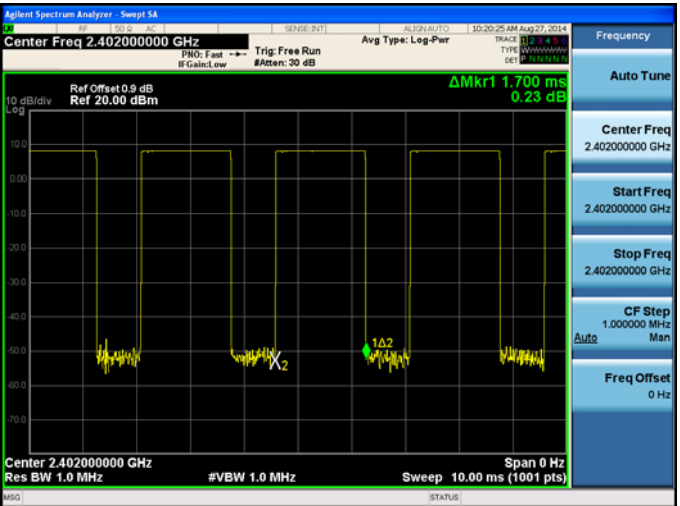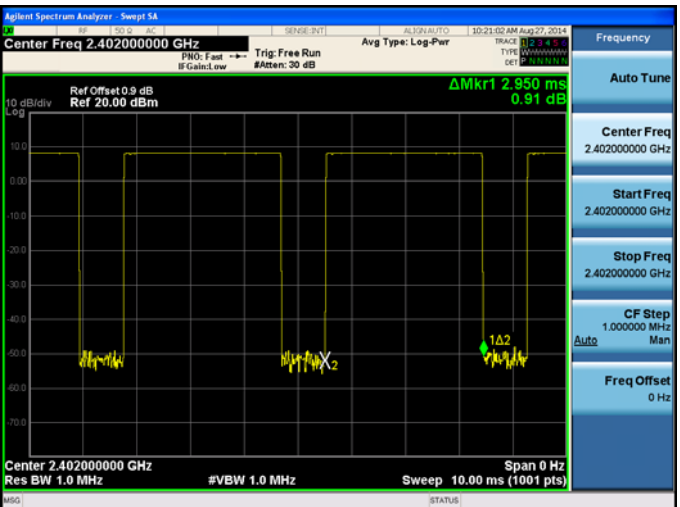Mode 2: GFSK Link Mode	
DH1	
DH3	
DH5	

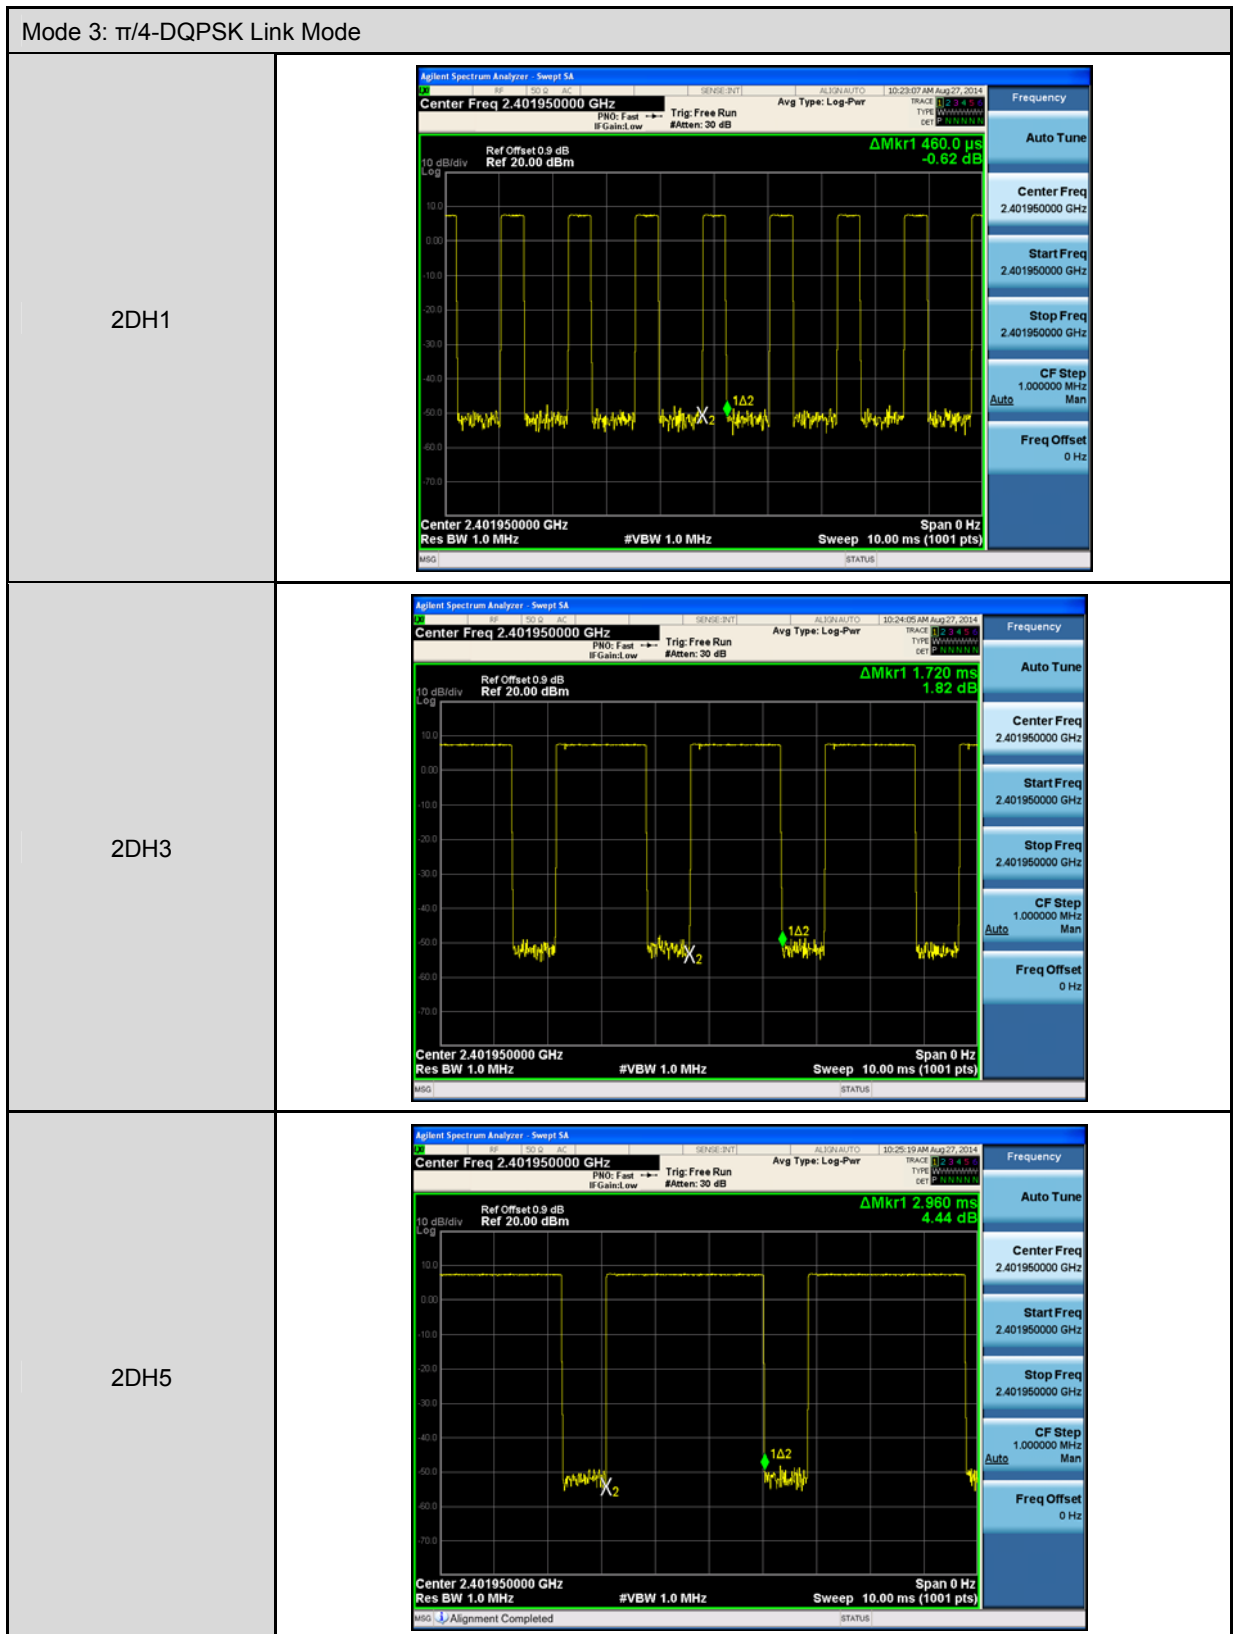


11 Out of Band Conducted Emissions Measurement

11.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

11.2. Test Setup

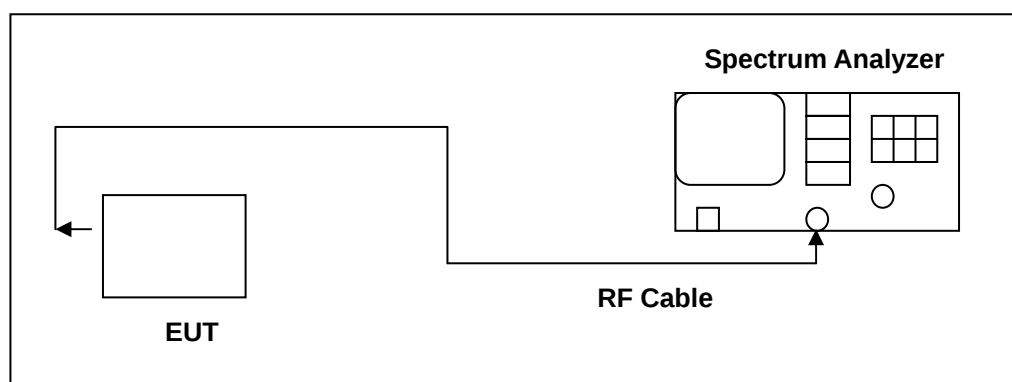

11.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/18/2013	(1)
Spectrum Analyzer	Agilent	E4408B	MY45107753	07/24/2014	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

11.4. Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function. All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band. The test was performed at 3 channels (Channel 0, 39, 78)

11.5. Test Graphs

Mode 2: GFSK Link Mode																																																																																																													
2402	Agilent Spectrum Analyzer - Swept SA Start Freq 30.000000 MHz Ref Offset 0.9 dB Ref 20.00 dBm 10 dB/div Log 10.0 0.00 -10.0 -20.0 -30.0 -40.0 -50.0 -60.0 -70.0 2.402 GHz 7.969 dBm 2 12.021 GHz -36.357 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (1001 pts) <table><tr><th>Mkr</th><th>Mode</th><th>TRC</th><th>SQL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.402 GHz</td><td>7.969 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>12.021 GHz</td><td>-36.357 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>4</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> Frequency Auto Tune Center Freq 13.265000000 GHz Start Freq 30.000000 MHz Stop Freq 26.500000000 GHz CF Step 2.647000000 GHz Auto Man Freq Offset 0 Hz	Mkr	Mode	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 GHz	7.969 dBm				2	N	1	f	12.021 GHz	-36.357 dBm				3									4									5									6									7									8									9									10									11								
Mkr	Mode	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.402 GHz	7.969 dBm																																																																																																								
2	N	1	f	12.021 GHz	-36.357 dBm																																																																																																								
3																																																																																																													
4																																																																																																													
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
2441	Agilent Spectrum Analyzer - Swept SA Start Freq 30.000000 MHz Ref Offset 0.9 dB Ref 20.00 dBm 10 dB/div Log 10.0 0.00 -10.0 -20.0 -30.0 -40.0 -50.0 -60.0 -70.0 2.441 GHz 8.396 dBm 2 12.206 GHz -39.272 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (1001 pts) <table><tr><th>Mkr</th><th>Mode</th><th>TRC</th><th>SQL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.441 GHz</td><td>8.396 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>12.206 GHz</td><td>-39.272 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>4</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> Frequency Auto Tune Center Freq 13.265000000 GHz Start Freq 30.000000 MHz Stop Freq 26.500000000 GHz CF Step 2.647000000 GHz Auto Man Freq Offset 0 Hz	Mkr	Mode	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.441 GHz	8.396 dBm				2	N	1	f	12.206 GHz	-39.272 dBm				3									4									5									6									7									8									9									10									11								
Mkr	Mode	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.441 GHz	8.396 dBm																																																																																																								
2	N	1	f	12.206 GHz	-39.272 dBm																																																																																																								
3																																																																																																													
4																																																																																																													
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
2480	Agilent Spectrum Analyzer - Swept SA Start Freq 30.000000 MHz Ref Offset 0.9 dB Ref 20.00 dBm 10 dB/div Log 10.0 0.00 -10.0 -20.0 -30.0 -40.0 -50.0 -60.0 -70.0 2.480 GHz 9.751 dBm 2 7.442 GHz -47.523 dBm 3 12.391 GHz -46.186 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (1001 pts) <table><tr><th>Mkr</th><th>Mode</th><th>TRC</th><th>SQL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.480 GHz</td><td>9.751 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>7.442 GHz</td><td>-47.523 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>12.391 GHz</td><td>-46.186 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> Frequency Auto Tune Center Freq 13.265000000 GHz Start Freq 30.000000 MHz Stop Freq 26.500000000 GHz CF Step 2.647000000 GHz Auto Man Freq Offset 0 Hz	Mkr	Mode	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 GHz	9.751 dBm				2	N	1	f	7.442 GHz	-47.523 dBm				3	N	1	f	12.391 GHz	-46.186 dBm				4									5									6									7									8									9									10									11								
Mkr	Mode	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.480 GHz	9.751 dBm																																																																																																								
2	N	1	f	7.442 GHz	-47.523 dBm																																																																																																								
3	N	1	f	12.391 GHz	-46.186 dBm																																																																																																								
4																																																																																																													
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													

Mode 2: GFSK Link Mode _ Un-hopping

2402




2480



Mode 2: GFSK Link Mode _ Hopping

2402 ~ 2480

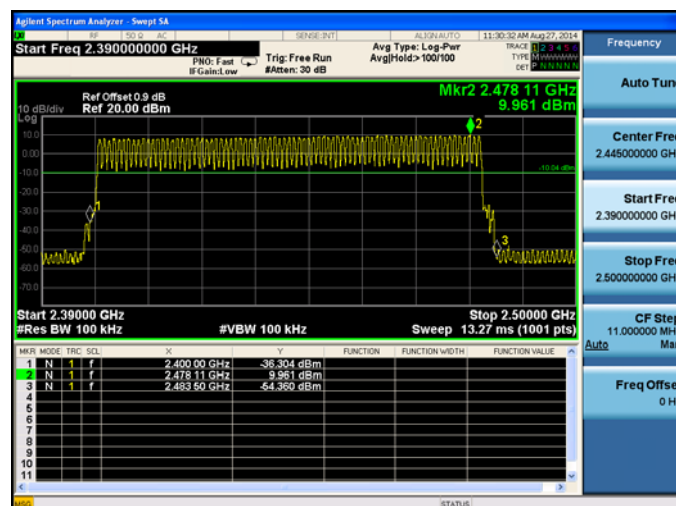

Mode 3: $\pi/4$ -DQPSK Link Mode	
2402	
2441	
2480	

Mode 3: $\pi/4$ -DQPSK Link Mode _ Un-hopping

2402



2480



Mode 3: $\pi/4$ -DQPSK Link Mode _ Hopping

2402 ~ 2480




12 Band Edges Measurement

12.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

12.2. Test Setup

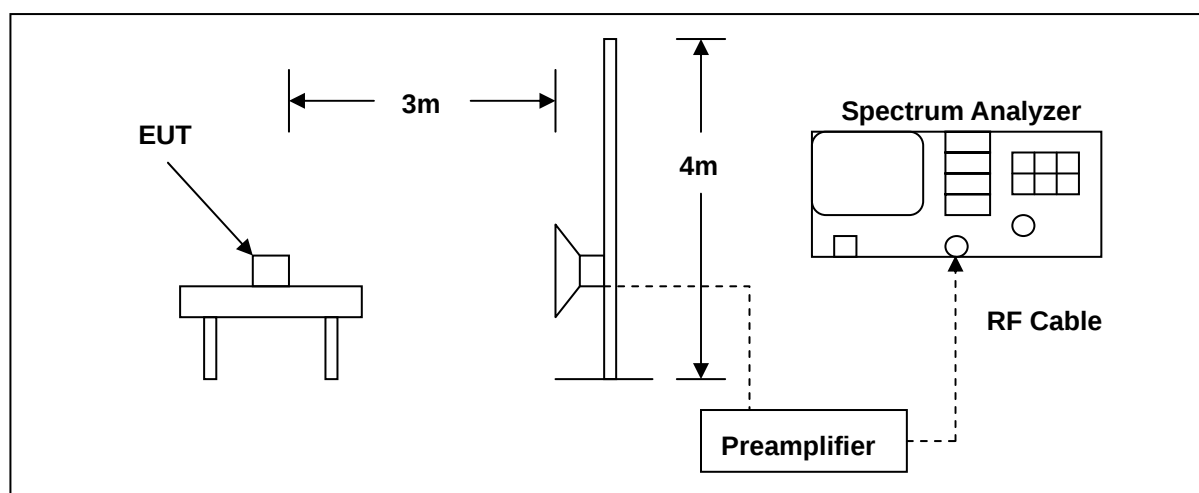

12.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4408B	MY45107753	07/24/2014	(1)
Pre Amplifier	Agilent	8449B	3008A02237	02/21/2014	(1)
Horn Antenna	SCHWARZBECK MESS-ELEKTRONIK	9120D	9120D-550	06/11/2014	(1)
Test Site	ATL	TE01	888001	08/28/2014	(1)

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

12.4. Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The emissions on the harmonics frequencies, the limits, and the margin of compliance are presented. These tests were made when the transmitter was in full radiated power. The additional test was performed to show compliance with the requirement at the band-edge frequency 2483.5 MHz and up to 2500 MHz and at 2390.0 MHz.

The transmitter was configured with the worst case antenna and setup to transmit at the highest channel. Then the field strength was measured at 2483.5 MHz.

The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel. Then the field strength was measured at 2390.0 MHz. These tests were performed at 4 different bit rates.

For measurements the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

12.5. Test Result

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		PABREEZE		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		Mode 2		Date:		08/27/2014	
Frequency:		2402 MHz		Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2354.770	44.95	-2.10	42.85	74.00	-31.15	peak	H
2390.000	37.98	-1.94	36.04	74.00	-37.96	peak	H
2349.050	44.32	-2.12	42.20	74.00	-31.80	peak	V
2390.000	41.07	-1.94	39.13	74.00	-34.87	peak	V

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		PABREEZE		Temp.(℃)/Hum.(%RH):		26(℃)/60%RH	
Mode:		Mode 2		Date:		08/27/2014	
Frequency:		2480 MHz		Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2483.500	55.91	-1.52	54.39	74.00	-19.61	peak	H
2483.500	40.88	-1.52	39.36	54.00	-14.64	AVG	H
2483.600	54.57	-1.52	53.05	74.00	-20.95	peak	H
2483.600	39.78	-1.52	38.26	54.00	-15.74	AVG	H
2483.500	55.51	-1.52	53.99	74.00	-20.01	peak	V
2483.500	40.72	-1.52	39.20	54.00	-14.80	AVG	V
2483.620	53.51	-1.52	51.99	74.00	-22.01	peak	V
2483.620	39.29	-1.52	37.77	54.00	-16.23	AVG	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PABREEZE	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	08/27/2014
Frequency:	2402 MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2348.830	42.21	-2.12	40.09	74.00	-33.91	peak	H
2390.000	39.25	-1.94	37.31	74.00	-36.69	peak	H
2342.450	42.90	-2.16	40.74	74.00	-33.26	peak	V
2390.000	39.87	-1.94	37.93	74.00	-36.07	peak	V

Standard:	FCC Part 15C		Test Distance:	3m			
Test item:	Radiated Emission		Power:	AC 120V/60Hz			
Model Number:	PABREEZE		Temp.(°C)/Hum.(%RH):	26(°C)/60%RH			
Mode:	Mode 3		Date:	08/27/2014			
Frequency:	2480 MHz		Test By:	Eric Ou Yang			
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2483.500	65.88	-1.52	64.36	74.00	-9.64	peak	H
2483.500	40.87	-1.52	39.35	54.00	-14.65	AVG	H
2483.760	66.79	-1.52	65.27	74.00	-8.73	peak	H
2483.760	39.18	-1.52	37.66	54.00	-16.34	AVG	H
2483.500	66.30	-1.52	64.78	74.00	-9.22	peak	V
2483.500	41.01	-1.52	39.49	54.00	-14.51	AVG	V
2483.620	66.89	-1.52	65.37	74.00	-8.63	peak	V
2483.620	40.17	-1.52	38.65	54.00	-15.35	AVG	V

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		PABREEZE		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		Hopping		Date:		08/27/2014	
				Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2316.080	45.93	-2.28	43.65	74.00	-30.35	peak	H
2390.000	37.70	-1.94	35.76	74.00	-38.24	peak	H
2483.500	51.48	-1.52	49.96	74.00	-24.04	peak	H
2488.790	42.50	-1.49	41.01	74.00	-32.99	peak	H
2345.340	41.80	-2.15	39.65	74.00	-34.35	peak	V
2390.000	41.68	-1.94	39.74	74.00	-34.26	peak	V
2483.500	39.87	-1.52	38.35	74.00	-35.65	peak	V
2488.980	41.74	-1.49	40.25	74.00	-33.75	peak	V

13 Antenna Measurement

13.1. Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b)(4), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

13.2. Antenna Connector Construction

The antenna used in this product is PCB Substrate Antenna. And the maximum Gain of this antenna is only 4.13 dBi.