


GENERAL TOLERANCE					
	G	H	J	K	L
~ 8	±0.1	±0.1	±0.2	±0.2	±0.4
8up ~ 25	±0.15	±0.15	±0.3	±0.3	±0.6
25up ~ 80	±0.2	±0.25	±0.4	±0.5	±0.8
80up ~ 250	±0.3	±0.4	±0.6	±0.8	±1.2
250over	±0.6	±0.8	±1.0	±1.5	±2.0

DO NOT SCALE DRAWING

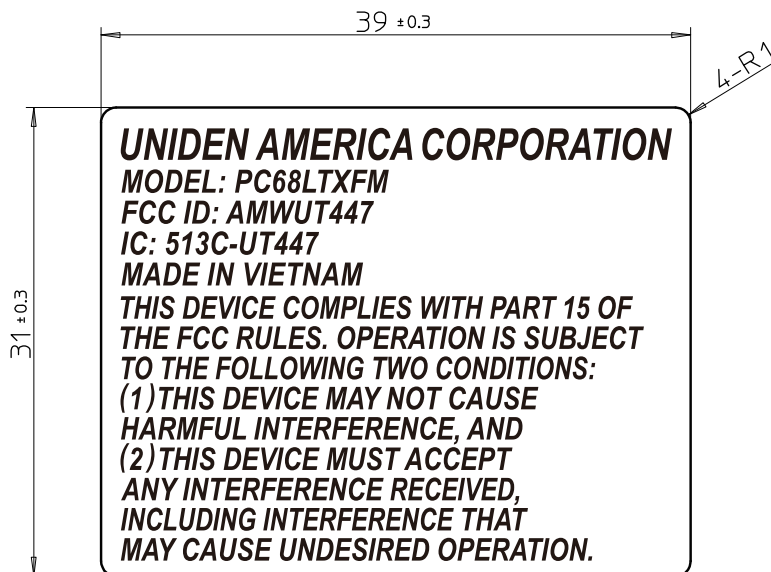

CAUTION :
MATERIAL MUST BE MET DIRECTIVE 94/62/EC AS FOLLOWS :
THE FOLLOWING SUBSTANCE TOTAL CONTENTS SHOULD BE LESS THAN 100ppm
(1) Cadmium and Cadmium Compounds
(2) Hexavalent Chromium Compounds
(3) Lead and Lead Compounds
(4) Mercury and Mercury Compounds
MATERIAL MUST BE MET DIRECTIVE 2002/95/EC(RoHS) AS FOLLOWS
THE FOLLOWING SUBSTANCE EACH CONTENT SHOULD BE LESS THAN 1000ppm
(5) Polybrominated Biphenyls(PBBs)
(6) Polybrominated Diphenyl ethers(PBDEs)
At the time of parts approval request you have to prove and gurantee
that the material comply with the above requirement by attaching SAMPLE and
'GREEN PROCUREMENT BASIC INFORMATION SURVEY (CHEMICAL SUBSTANCES) TABLE'
When material is changed after parts approval, it is necessary to do some thing again.

NOTE

1. MATERIAL : POLYESTER TACK FORM(MATT) SILVER t=0.05
UL RECOGNIZED COMPONENT UNDER THE CATEGORY OF
MARKING AND LABELING SYSTEMS (PGDQ2)
2. PRINT COLOR : BLACK (LETTERS)
SILVER (BACKGROUND)
3. ARTWORK : D37999
4. LAMINATE : POLYPROPYLENE(MATT) or PET(MATT) CLEAR t=0.025mm
5. ADHESIVE STRENGTH : MORE THAN 1000g/25mm² (180° PEEL OFF TEST)



					CAUTION: Approval sample must be submitted for Uniden(ENG) approval. Using any materials in this drawing before Uniden(ENG) approval is prohibited.			
REV.MARK	CONTENS	REVISED	CHECKED	APPV'D	APPROVED BY	CHECKED BY	DESIGNED BY	DRAWN BY
DRAWING ISSUE STAMP		ENG'G. DIM. REQMT. FOR UNIDEN IQC INSP		YES NO	EBASHI Jan.16'25		KURIH Jan.16'25	KURIH Jan.16'25
		ANGLE 	UNITS mm	TOLERANCE 	SCALE 2:1	MODEL UT447Z		
		MOLD CAVITIES pcs		TOOL CODE	PARTS NAME LABEL TA			
ISSUE DATE :				BASIC MODEL	BASIC PARTS CODE		PARTS CODE PLT112523ZZ	