




# Test Report # 319351 B

<b>Equipment Under Test:</b>	Allegion AD 900 MHz Module v3
<b>Requirement(s):</b>	FCC 2.1091, FCC 1.1307, RSS-102
<b>Test Date(s):</b>	October 13 <sup>th</sup> – 27 <sup>th</sup> , 2021
<b>Prepared for:</b>	Allegion Attn: Brian Telljohann 11819 North Pennsylvania Street Carmel, Indiana 40632

<b>Report Issued by:</b> Zach Wilson, EMC Engineer	
Signature: 	Date: 2/14/2022
<b>Report Reviewed by:</b> Adam Alger, Laboratory Manager	
Signature: 	Date: 2/14/2022
<b>Report Constructed by:</b> Zach Wilson, EMC Engineer	
Signature: 	Date: 2/14/2022

*This test report may not be reproduced, except in full, without approval of Laird Connectivity LLC.*

## CONTENTS

Contents .....	2
Laird Connectivity Test Services in Review .....	3
1 Test Report Summary .....	4
2 Client Information .....	5
2.1 Equipment Under Test (EUT) Information .....	5
2.2 Product Description .....	5
2.3 Modifications Incorporated for Compliance.....	5
2.4 Deviations and Exclusions from Test Specifications .....	5
2.5 Programming Information .....	5
2.6 Antennas .....	6
3 References .....	7
4 Uncertainty Summary .....	8
5 Test Data .....	9
5.1 Antenna Port Conducted Emissions.....	9
6 Exclusion Calculation.....	12
6.1 Highest Power Test Cases .....	<b>Error! Bookmark not defined.</b>
6.2 FCC .....	12
6.3 ISED Canada .....	13
7 Revision History .....	14

## Laird Connectivity Test Services in Review

The Laird Connectivity LLC laboratory located at W66 N220 Commerce Court Cedarburg, Wisconsin, 53012 USA is recognized through the following organizations:



### **A2LA – American Association for Laboratory Accreditation**

*Accreditation based on ISO/IEC 17025:2017 with Electrical (EMC) Scope*

*A2LA Certificate Number: 1255.01*

*Scope of accreditation includes all test methods listed herein unless otherwise noted*



### **Federal Communications Commission (FCC) – USA**

*Accredited Test Firm Registration Number: 953492*

*Recognition of two 3 meter Semi-Anechoic Chambers*



### **Innovation, Science and Economic Development Canada**

*Accredited U.S. Identification Number: US0218*

*Recognition of two 3 meter Semi-Anechoic Chambers*

Company: Allegion	Page 3 of 14	Name: Allegion AD 900 MHz Module v3
Report: TR319354 B		Model: COMAD400V3
Job: C-3419		Serial: Engineering Sample

## 1 TEST REPORT SUMMARY

During **October 13<sup>th</sup>-27<sup>th</sup>, 2021** the Equipment Under Test (EUT), **Allegion AD 900 MHz Module v3**, as provided by **Allegion** was tested to the following requirements of the **Federal Communications Commission** and **Innovation, Science and Economic Development Canada**:

Requirement	Description	Specification	Method	Result
FCC Part 1.1307, 2.1091	RF Exposure and equipment authorization requirements	Reported	FCC KDB 447498	Reported
ISED Canada RSS-102	Radio Frequency Radiation Exposure Evaluation	Reported	RSS-102 Section 2.5.2	Reported

### Notice:

The results relate only to the item tested as configured and described in this report. Any additional configurations, modes of operation, or modifications made to the equipment under test after the specified test date(s) are at the decision of the client and may not apply to the data seen in this test report.

The decision rule for Pass / Fail assessment to the specification or standard listed in this test report has been agreed upon by the client and laboratory to be as follows:

Measurement Type	Rule
Emissions – Amplitude	1 dB below specified limit
Emissions – Frequency	1% less than the specification
Immunity	Tested at specified level

## 2 CLIENT INFORMATION

<b>Company Name</b>	Allegion
<b>Contact Person</b>	Brian Telljohann
<b>Address</b>	11819 North Pennsylvania Street Carmel, Indiana 46032

### 2.1 Equipment Under Test (EUT) Information

*The following information has been supplied by the client*

<b>Product Name</b>	Allegion AD 900 MHz Module v3
<b>Model Number</b>	COMAD400V3
<b>Serial Number</b>	Engineering Sample
<b>FCC ID</b>	XPB-COMAD400V3
<b>IC ID</b>	8053B-COMAD400V3

### 2.2 Product Description

The EUT is a 900 MHz radio module used in door locks. The EUT is powered at 5VDC.

### 2.3 Modifications Incorporated for Compliance

None noted at time of test

### 2.4 Deviations and Exclusions from Test Specifications

None noted at time of test

### 2.5 Programming Information

The radio was programmed using Ingersoll Rand Test Tool, version 1.4d.

- Channels 1-10 (906 MHz, Low), (914 MHz, Mid), (924 MHz, High)
- Power Setting: 11
- Data Rate: BPSK-40
- Data Pattern: Pseudo Random

## 2.6 Antennas

- PCB Trace Antenna
  - 5.7 dBi maximum gain @ 870-960 MHz
- MA-CC60-60
  - Dual beam antenna, 3.5 dBi maximum gain @ 870-960 MHz
- MA-CL677-15
  - Multi band directional panel antenna, 8.5 dBi maximum gain @ 870-960 MHz
- MA-CL92-5
  - Quasi-Omni panel antenna, 4.5 dBi maximum gain @ 870-960 MHz
- MA-CM36-15
  - Multi-band omni directional antenna, 2.0 dBi maximum gain @ 870-960 MHz

### 3 REFERENCES

Publication	Edition	Date	AMD 1
eCFR	-	2021	-
RSS-102	5	2015	2021
KDB 447498 D04	01	2021	-

## 4 UNCERTAINTY SUMMARY

Using the guidance of the following publications the calculated measurement uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level, using a coverage factor of  $k = 2$ .

References	Version / Date
CISPR 16-4-1	Ed. 2 (2009-02)
CISPR 16-4-2	Ed. 2 (2011-06)
CISPR 32	Ed. 1 (2012-01)
ANSI C63.23	2012
A2LA P103	February 4, 2016
A2LA P103c	August 10, 2015
ETSI TR 100-028	V1.3.1 (2001-03)

Measurement Type	Configuration	Uncertainty $\pm$
Radiated Emissions	Biconical Antenna	5.0 dB
Radiated Emissions	Log Periodic Antenna	5.3 dB
Radiated Emissions	Horn Antenna	4.7 dB
AC Line Conducted Emissions	Artificial Mains Network	3.4 dB
Telecom Conducted Emissions	Asymmetric Artificial Network	4.9 dB
Disturbance Power Emissions	Absorbing Clamp	4.1 dB
Radiated Immunity	3 Volts/meter	2.2 dB
Conducted Immunity	CDN/EM/BCI	2.4/3.5/3.4 dB
EFT Burst/Surge	Peak pulse voltage	164 volts
ESD Immunity	15 kV level	1377 Volts

Parameter	ETSI U.C. $\pm$	U.C. $\pm$
Radio Frequency, from F0	$1 \times 10^{-7}$	$0.55 \times 10^{-7}$
Occupied Channel Bandwidth	5 %	2 %
RF conducted Power (Power Meter)	1.5 dB	1.2 dB
RF conducted emissions (Spectrum Analyzer)	3.0 dB	1.7 dB
All emissions, radiated	6.0 dB	5.3 dB
Temperature	1° C	0.65° C
Humidity	5 %	2.9 %
Supply voltages	3 %	1 %




## 5 TEST DATA

### 5.1 Antenna Port Conducted Emissions

<b>Description of Measurement</b>	<p>The direct measurement of emissions at the antenna port of the EUT is achieved by use of a RF connection to a spectrum analyzer or power meter.</p> <p>The cable and attenuator factors are loaded into the analyzer or power meter allowing for direct measurement readings without the need for further corrections.</p>
<b>Example Calculations</b>	<p>Measurement (dBm) + Cable factor (dB) + External Attenuator (dB) = Corrected Reading (dBm)</p> <p>Margin (dB) = Limit (dBm) – Corrected Reading (dBm)</p>

#### Block Diagram

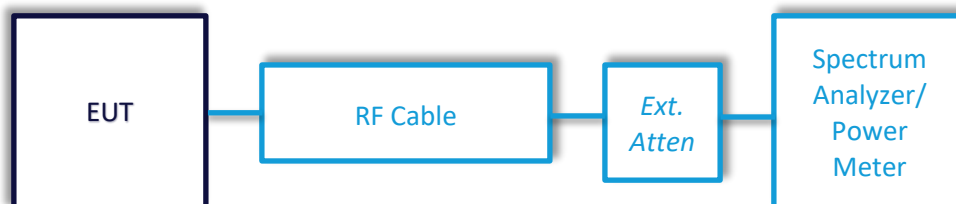

### 5.1.1 Average Output Power

<b>Operator</b>	Anthony Smith	<b>QA</b>	Zach Wilson
<b>Temperature</b>	23.8°C, 24.0°C	<b>R.H. %</b>	56.8%, 50.1%
<b>Test Date</b>	10/13/2021, 10/14/2021	<b>Location</b>	Conducted RF Bench
<b>Requirement</b>	FCC 15.247, RSS-247	<b>Method</b>	ANSI C63.10 §11.9.2.2.2 AVGSA-1

**Limits: 1W or 30dBm**

#### Test Parameters

<b>Frequency</b>	906 MHz, 914 MHz, 924 MHz	<b>Setup</b>	Conducted
<b>RBW</b>	9 kHz	<b>VBW</b>	30 kHz
<b>Detector(s)</b>	RMS	<b>Mode</b>	Trace averaging over 100 traces

#### Instrumentation

Asset #	Description	Manufacturer	Model #	Serial #	Date	Due Date	Status
AA 960144	Cable	Gore	EKD01D010720	5800373	2/3/2021	2/3/2022	Active Verification
EE 960085	Analyzer - EMI Receiver	Agilent	N9038A	MY51210148	4/20/2021	4/20/2022	Active Calibration


#### EUT Parameters

<b>Input Power</b>	5VDC	<b>Mode</b>	Modulated Transmit
<b>Frequency</b>	906-924 MHz	<b>Channel</b>	1, 5, 10


## Data Table

Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)	Margin (dB)
1	906.0	19.9	30.0	10.1
5	914.0	20.0	30.0	10.0
10	924.0	20.1	30.0	9.9


## Plots

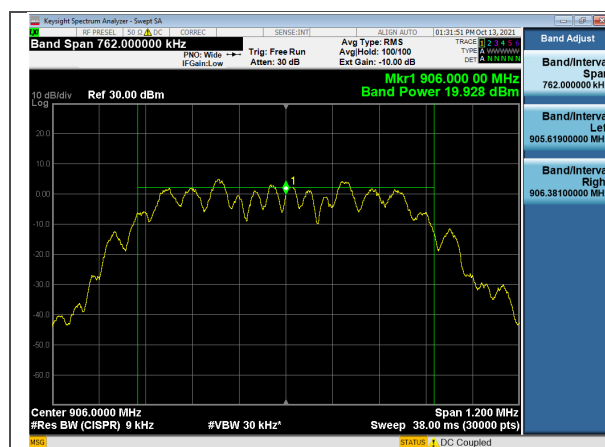

Average Output Power, Channel 1

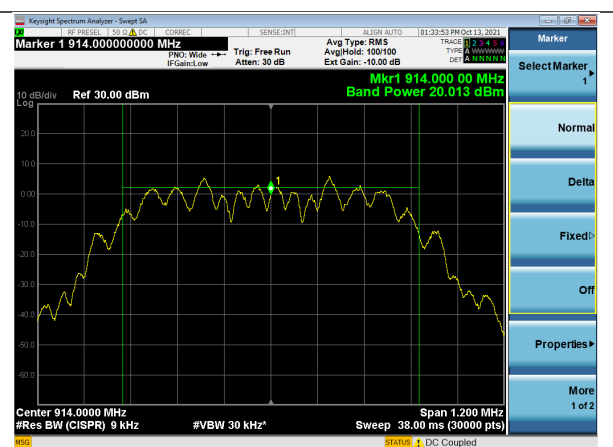

Average Output Power, Channel 5

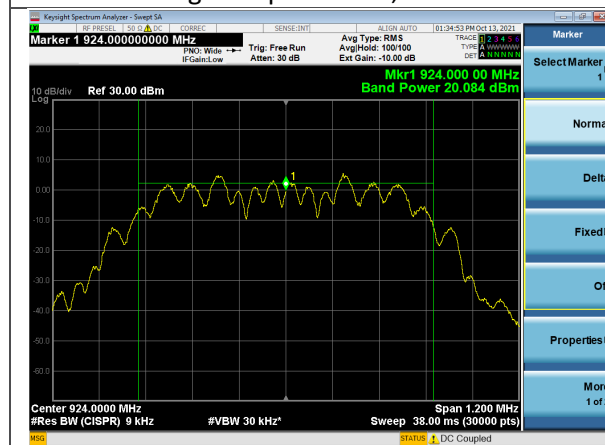

Average Output Power, Channel 10

## 6 EXCLUSION CALCULATION

### 6.1 FCC

**Worst Case Output Power (conducted)** = 20.1 dBm at 924 MHz

**Tune-Up Tolerance** = 2.0 dB

**Peak Antenna Gain** = 8.5 dBi

**EUT ERP** = 22.1 dBm + 8.5 dBi = 30.6 dBm = 1149 mW

**Distance to User** = d = 20 cm

Formulas per KDB 447498 D04 v01:

$$P_{th} \text{ (mW)} = ERP_{20 \text{ cm}} \text{ (mW)} = \begin{cases} 2040f & 0.3 \text{ GHz} \leq f < 1.5 \text{ GHz} \\ 3060 & 1.5 \text{ GHz} \leq f \leq 6 \text{ GHz} \end{cases} \quad (\text{B. 1})$$

$$ERP_{20 \text{ cm}} \text{ (mW)} = 2040 * 0.924 = 1885 \text{ mW}$$

$$x = -\log_{10} \left( \frac{60}{ERP_{20 \text{ cm}} \sqrt{f}} \right)$$

$$x = -\log_{10}(60/1885 * \sqrt{0.924}) = \mathbf{1.48}$$

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}} (d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases} \quad (\text{B. 2})$$

$$P_{th} \text{ (mW)} = 1885(20/20)^x = \mathbf{1885 \text{ mW}}$$

### Result

The EUT's 900 MHz radio complies with the FCC SAR-based Exemption power thresholds at a 20cm separation distance as the EUT ERP of **1149 mW** is lower than the Power Threshold of **1885 mW**.

## 6.2 ISED Canada

### Per Section 2.5.2:

Maximum EIRP Limit =

$$1.31 \times 10^{-2} (924^{0.6834}) W = 1.393 W$$

### Result

The EUT's 900 MHz radio meets ISED's MPE Exemption limit at 20 cm as the maximum **1.149 W EIRP** is less than **1.393 W**.

## 7 REVISION HISTORY

Version	Date	Notes	Person
0	2/14/2022	Initial Draft	Zach Wilson

**END OF REPORT**