




Test Mode : ITX 11a CH100 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

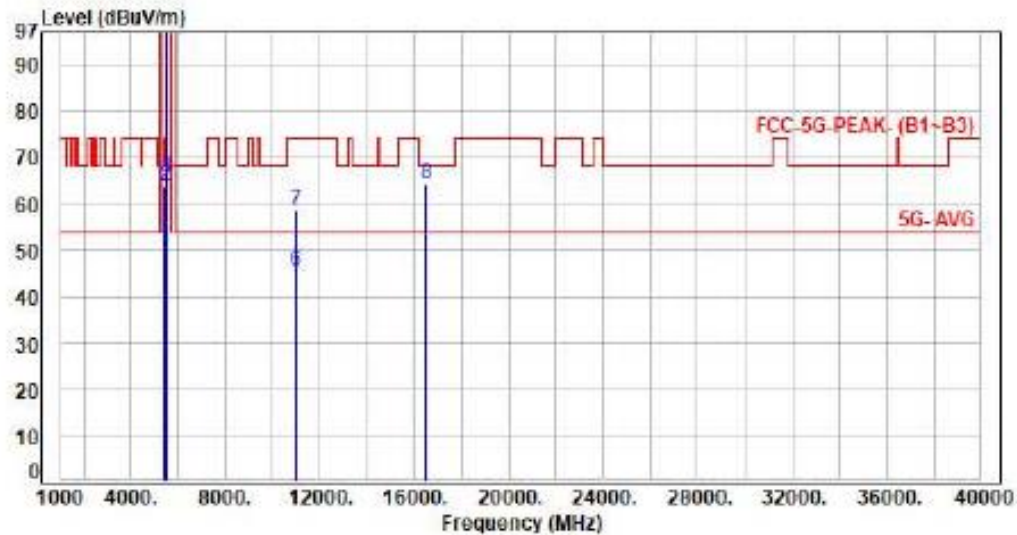

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.99	50.54	54.00	-3.46	Average	100	345	P
2	5460.00	7.55	56.12	63.67	74.00	-10.33	Peak	100	345	P
3	5470.00	7.58	58.17	65.75	68.20	-2.45	Peak	100	345	P
4	5500.00	7.68	88.33	96.01	200.00	-103.99	Average	100	345	P
5	5500.00	7.68	98.67	106.35	200.00	-93.65	Peak	100	345	P
6	11000.00	16.20	29.23	45.43	54.00	-8.57	Average	100	187	P
7	11000.00	16.20	42.45	58.65	74.00	-15.35	Peak	100	187	P
8	16500.00	18.92	45.13	64.05	68.20	-4.15	Peak	100	195	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : ITX 11a CH128 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

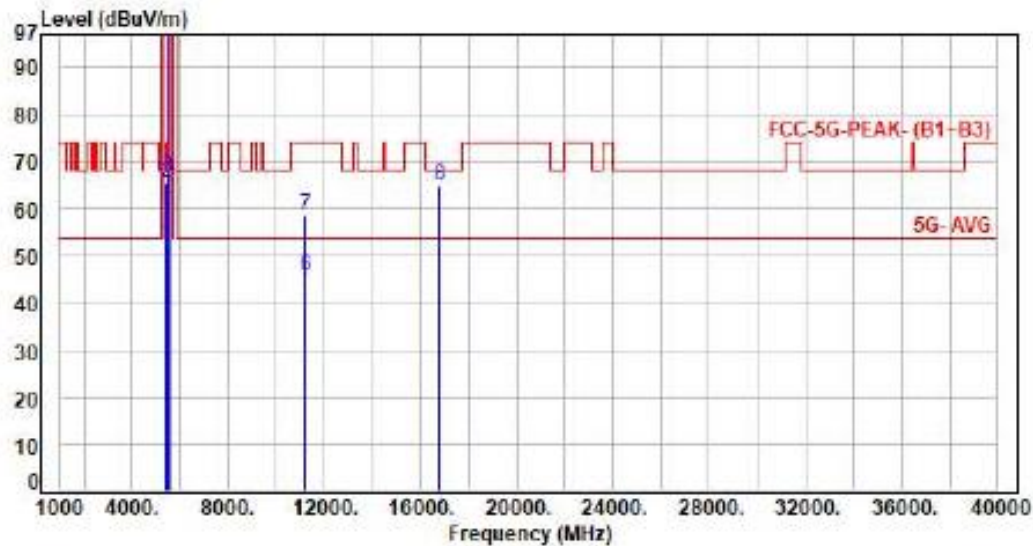

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	44.95	52.50	54.00	-1.50	Average	190	334	P
2	5460.00	7.55	57.92	65.47	74.00	-8.53	Peak	190	334	P
3	5470.00	7.58	59.06	66.64	68.20	-1.56	Peak	190	334	P
4	5600.00	7.51	96.10	103.61	200.00	-96.39	Average	190	334	P
5	5600.00	7.51	106.17	113.68	200.00	-86.32	Peak	190	334	P
6	11200.00	16.28	29.38	45.66	54.00	-8.34	Average	100	185	P
7	11200.00	16.28	42.34	58.62	74.00	-15.38	Peak	100	185	P
8	16800.00	20.60	44.14	64.74	68.20	-3.46	Peak	100	194	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH120 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

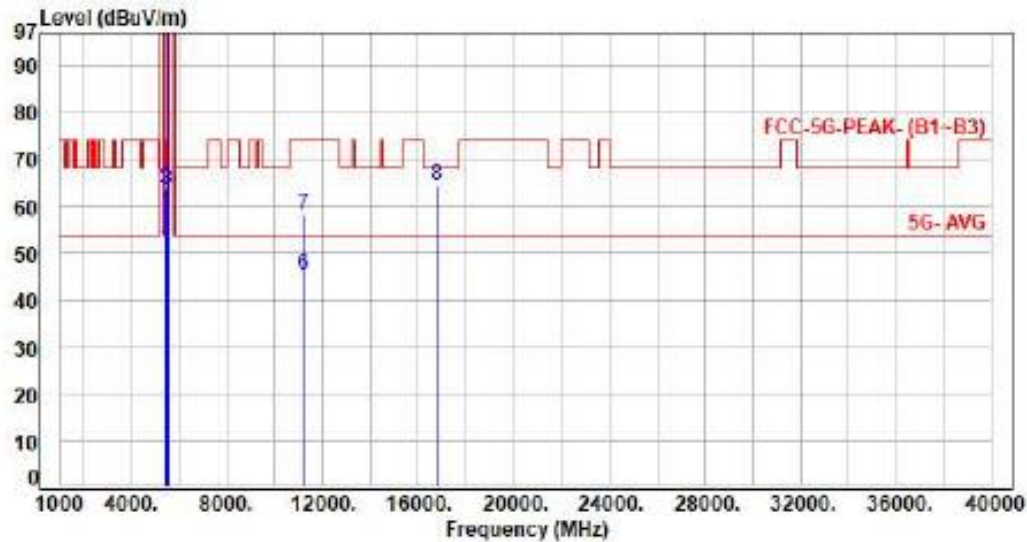

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	43.36	50.91	54.00	-3.09	Average	100	357	P
2	5460.00	7.55	56.29	63.84	74.00	-10.16	Peak	100	357	P
3	5470.00	7.58	55.90	63.48	68.20	-4.72	Peak	100	357	P
4	5600.00	7.51	93.10	100.61	200.00	-99.39	Average	100	357	P
5	5600.00	7.51	103.14	110.65	200.00	-89.35	Peak	100	357	P
6	11200.00	16.28	29.25	45.53	54.00	-8.47	Average	100	164	P
7	11200.00	16.28	42.06	58.34	74.00	-15.66	Peak	100	164	P
8	16800.00	20.60	44.05	64.65	68.20	-3.55	Peak	100	214	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH140 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

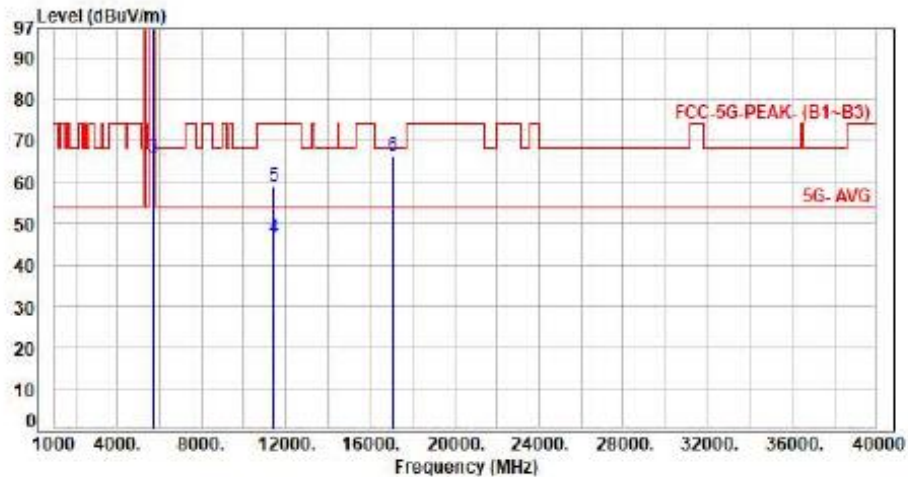


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5700.00	7.43	92.08	99.51	200.00	-100.49	Average	204	100	P
2	5700.00	7.43	102.71	110.14	200.00	-89.86	Peak	204	100	P
3	5725.00	7.43	58.42	65.85	68.20	-2.35	Peak	204	100	P
4	11400.00	16.35	29.94	46.29	54.00	-7.71	Average	100	187	P
5	11400.00	16.35	42.00	59.15	74.00	-14.85	Peak	100	187	P
6	17100.00	21.91	44.42	66.33	68.20	-1.87	Peak	100	174	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : ITX 11a CH140 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

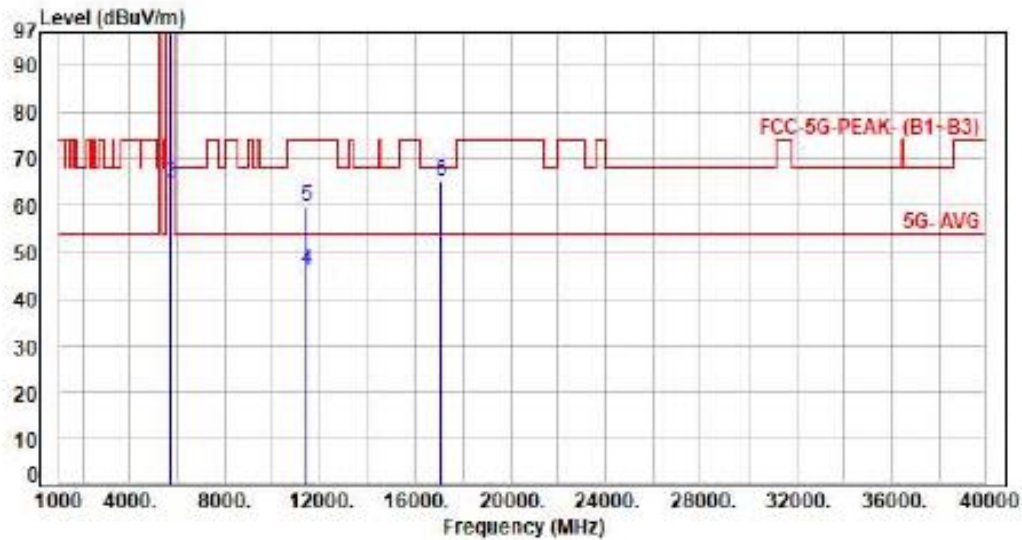

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5700.00	7.43	89.38	96.81	200.00	-103.19	Average	100	313	P
2	5700.00	7.43	99.77	107.20	200.00	-92.80	Peak	100	313	P
3	5725.00	7.43	57.34	64.77	68.20	-3.43	Peak	100	313	P
4	11400.00	16.35	29.77	46.12	54.00	-7.88	Average	100	20	P
5	11400.00	16.35	43.52	59.87	74.00	-14.13	Peak	100	20	P
6	17100.00	21.91	43.37	65.28	68.20	-2.92	Peak	100	221	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH149 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

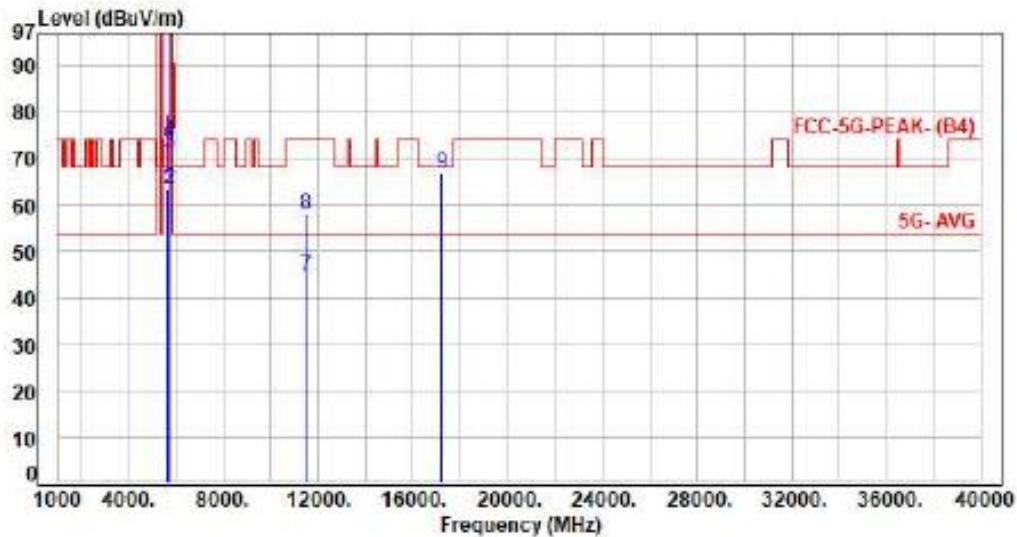

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	55.87	63.38	68.20	-4.82	Peak	178	330	P
2	5700.00	7.43	56.15	63.58	105.20	-41.62	Peak	178	330	P
3	5720.00	7.43	63.89	71.32	110.80	-39.48	Peak	178	330	P
4	5725.00	7.43	66.24	73.67	122.20	-48.53	Peak	178	330	P
5	5745.00	7.44	92.28	99.72	200.00	-100.28	Average	178	330	P
6	5745.00	7.44	102.77	110.21	200.00	-89.79	Peak	178	330	P
7	11490.00	16.52	27.95	44.47	54.00	-9.53	Average	100	188	P
8	11490.00	16.52	41.49	58.01	74.00	-15.99	Peak	100	188	P
9	17235.00	22.43	44.21	66.64	68.20	-1.56	Peak	100	174	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH149 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

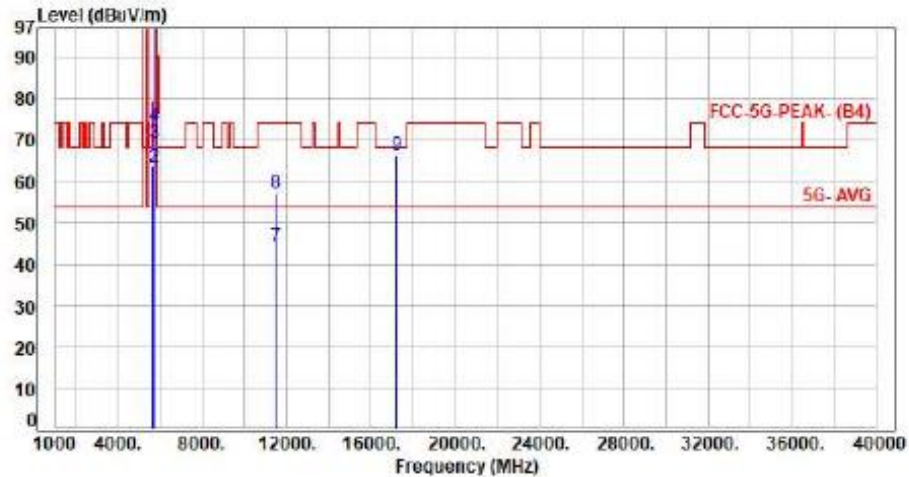

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	56.20	63.71	68.20	-4.49	Peak	120	344	P
2	5700.00	7.43	55.84	63.27	105.20	-41.93	Peak	120	344	P
3	5720.00	7.43	62.03	69.46	110.80	-41.34	Peak	120	344	P
4	5725.00	7.43	66.03	73.46	122.20	-48.74	Peak	120	344	P
5	5745.00	7.44	91.03	98.47	200.00	-101.53	Average	120	344	P
6	5745.00	7.44	101.60	109.04	200.00	-90.96	Peak	120	344	P
7	11490.00	16.52	27.82	44.34	54.00	-9.66	Average	100	146	P
8	11490.00	16.52	40.49	57.01	74.00	-16.99	Peak	100	146	P
9	17235.00	22.43	44.13	66.56	68.20	-1.64	Peak	100	195	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH157 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

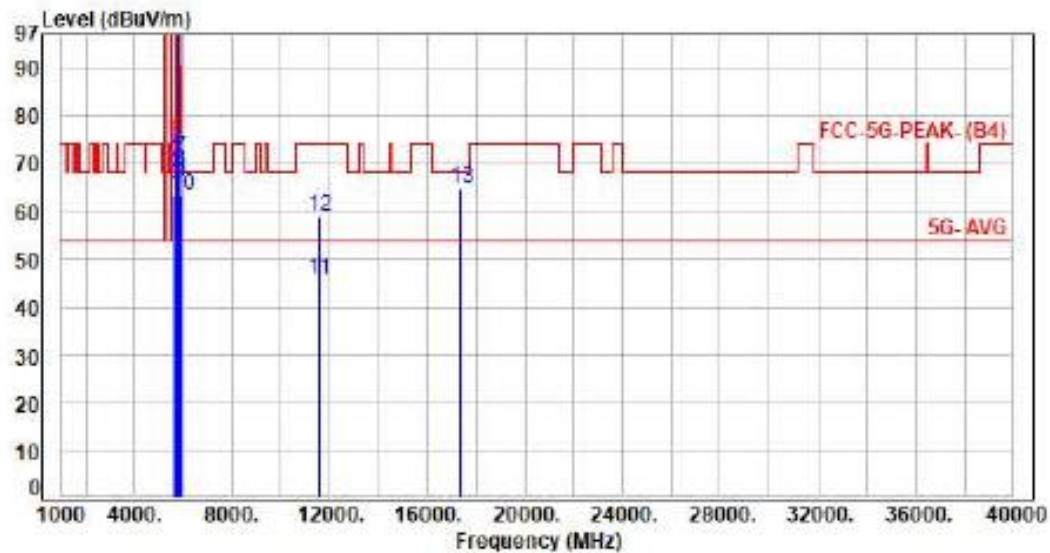

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	55.82	63.33	68.20	-4.87	Peak	177	204	P
2	5700.00	7.43	60.95	68.38	105.20	-36.82	Peak	177	204	P
3	5720.00	7.43	63.17	70.60	110.00	-40.20	Peak	177	204	P
4	5725.00	7.43	64.95	72.38	122.20	-49.82	Peak	177	204	P
5	5785.00	7.45	94.07	101.52	200.00	-98.48	Average	177	204	P
6	5785.00	7.45	103.47	110.92	200.00	-89.08	Peak	177	204	P
7	5850.00	7.47	63.83	71.30	122.20	-50.90	Peak	177	204	P
8	5855.00	7.49	61.15	68.64	110.00	-42.16	Peak	177	204	P
9	5875.00	7.57	58.62	66.19	105.20	-39.01	Peak	177	204	P
10	5925.00	7.73	55.88	63.61	68.20	-4.59	Peak	177	204	P
11	11570.00	16.76	28.90	45.66	54.00	-8.34	Average	100	188	P
12	11570.00	16.76	42.09	58.85	74.00	-15.15	Peak	100	188	P
13	17355.00	23.20	41.85	65.05	68.20	-3.15	Peak	100	164	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH157 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

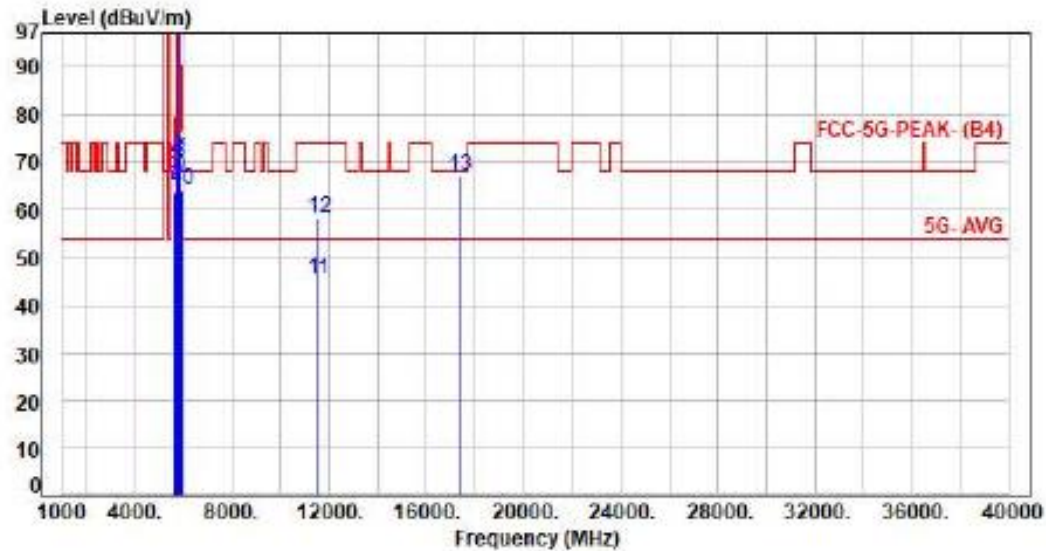

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.51	56.13	63.64	68.20	-4.56	Peak	122	360	P
2	5700.00	7.43	57.82	65.25	105.20	-39.95	Peak	122	360	P
3	5720.00	7.43	61.84	69.27	110.80	-41.53	Peak	122	360	P
4	5725.00	7.43	63.02	70.45	122.20	-51.75	Peak	122	360	P
5	5785.00	7.45	93.73	101.18	200.00	-98.82	Average	122	360	P
6	5785.00	7.45	104.38	111.83	200.00	-88.17	Peak	122	360	P
7	5850.00	7.47	63.33	70.80	122.20	-51.40	Peak	122	360	P
8	5855.00	7.49	62.44	69.93	110.80	-40.87	Peak	122	360	P
9	5875.00	7.57	59.05	66.62	105.20	-38.58	Peak	122	360	P
10	5925.00	7.73	56.41	64.14	68.20	-4.06	Peak	122	360	P
11	11570.00	16.76	28.70	45.46	54.00	-8.54	Average	100	299	P
12	11570.00	16.76	41.38	58.14	74.00	-15.86	Peak	100	299	P
13	17355.00	23.20	43.80	67.00	68.20	-1.20	Peak	100	248	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : ITX 11a CH165 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

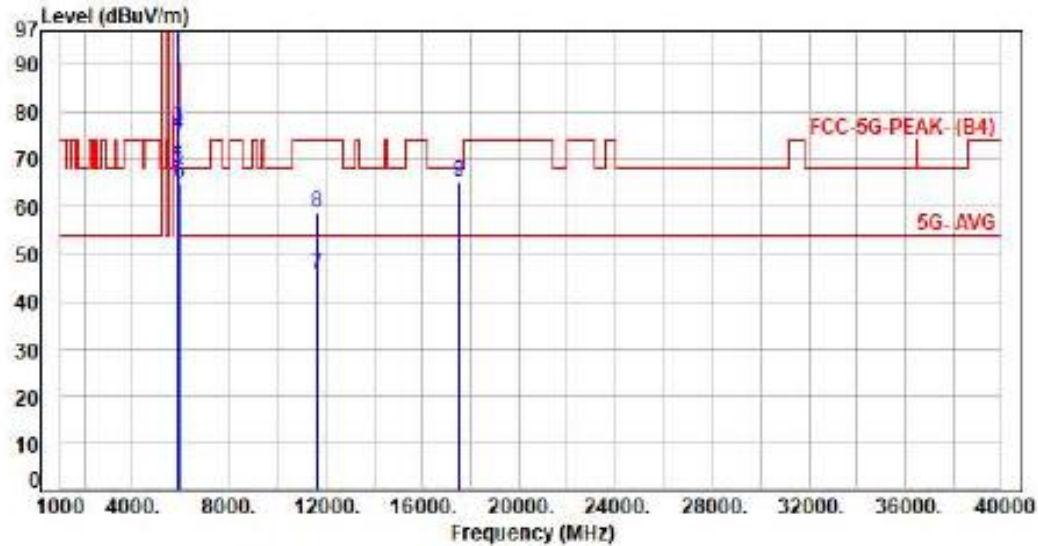

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.46	93.11	100.57	200.00	-99.43	Average	140	208	P
2	5825.00	7.46	103.10	110.56	200.00	-89.44	Peak	140	208	P
3	5850.00	7.47	69.22	76.69	122.20	-45.51	Peak	140	208	P
4	5855.00	7.49	67.81	75.30	110.80	-35.50	Peak	140	208	P
5	5875.00	7.57	60.77	68.34	105.20	-36.86	Peak	140	208	P
6	5925.00	7.73	57.05	64.78	68.20	-3.42	Peak	140	208	P
7	11650.00	16.91	28.73	45.64	54.00	-8.36	Average	100	114	P
8	11650.00	16.91	41.87	58.78	74.00	-15.22	Peak	100	114	P
9	17475.00	23.91	41.33	65.24	68.20	-2.96	Peak	100	194	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH165 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

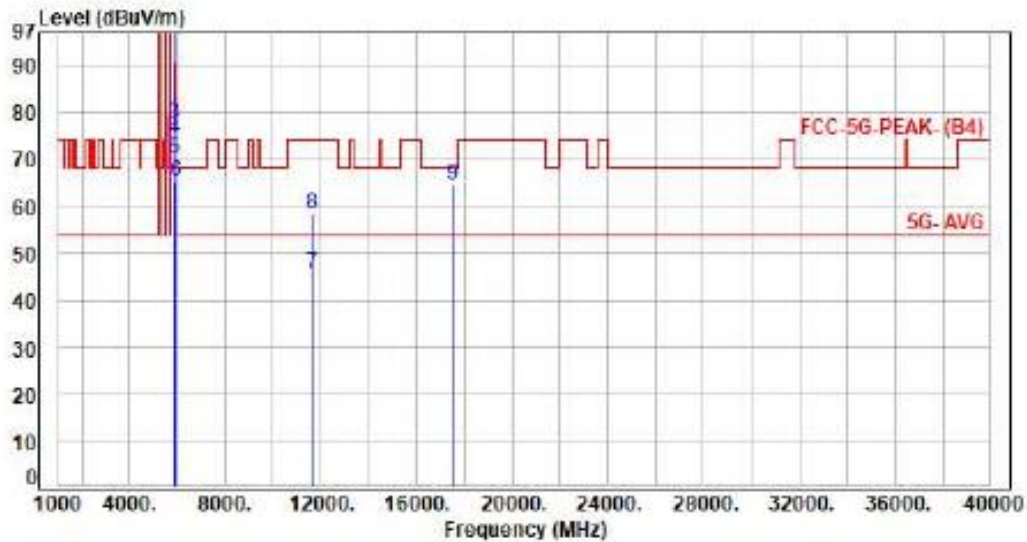

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.46	92.87	100.33	200.00	-99.67	Average	110	0	P
2	5825.00	7.46	102.99	110.45	200.00	-89.55	Peak	110	0	P
3	5850.00	7.47	70.32	77.79	122.20	-44.41	Peak	110	0	P
4	5855.00	7.49	67.09	74.58	110.80	-36.22	Peak	110	0	P
5	5875.00	7.57	62.64	70.21	105.20	-34.99	Peak	110	0	P
6	5925.00	7.73	57.37	65.10	68.20	-3.10	Peak	110	0	P
7	11650.00	16.91	28.73	45.64	54.00	-8.36	Average	100	155	P
8	11650.00	16.91	41.53	58.44	74.00	-15.56	Peak	100	155	P
9	17475.00	23.91	40.49	64.40	68.20	-3.80	Peak	100	192	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH144 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

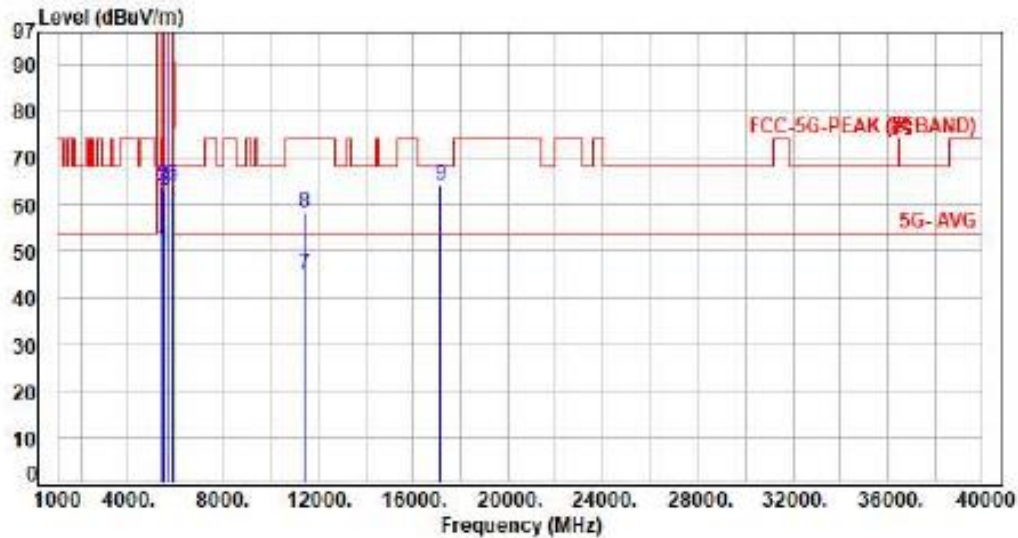

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	43.00	50.55	54.00	-3.45	Average	170	205	P
2	5460.00	7.55	56.35	63.90	74.00	-10.10	Peak	170	205	P
3	5470.00	7.58	55.54	63.12	68.20	-5.08	Peak	170	205	P
4	5720.00	7.43	95.34	102.77	200.00	-97.23	Average	170	205	P
5	5720.00	7.43	105.65	113.08	200.00	-86.92	Peak	170	205	P
6	5850.00	7.47	56.04	64.51	68.20	-3.69	Peak	170	205	P
7	11440.00	16.43	28.68	45.11	54.00	-8.89	Average	100	255	P
8	11440.00	16.43	41.71	58.14	74.00	-15.86	Peak	100	255	P
9	17160.00	22.17	42.09	64.26	68.20	-3.94	Peak	100	119	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH144 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

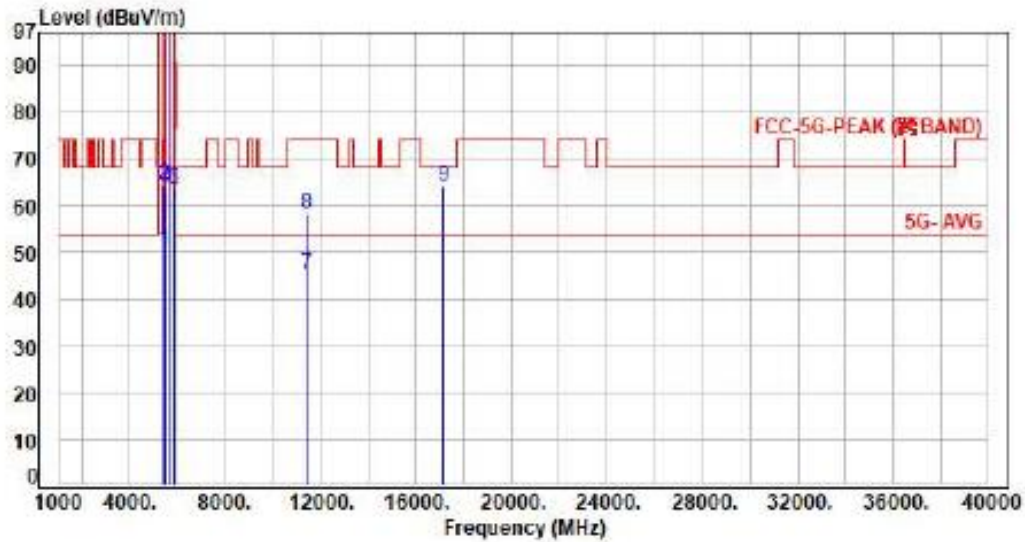

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	42.92	50.47	54.00	-3.53	Average	147	0	P
2	5460.00	7.55	56.99	64.54	74.00	-9.46	Peak	147	0	P
3	5470.00	7.58	56.12	63.70	68.20	-4.50	Peak	147	0	P
4	5720.00	7.43	93.11	100.54	200.00	-99.46	Average	147	0	P
5	5720.00	7.43	103.19	110.62	200.00	-89.38	Peak	147	0	P
6	5850.00	7.47	55.97	63.44	68.20	-4.76	Peak	147	0	P
7	11440.00	16.43	28.83	45.26	54.00	-8.74	Average	100	164	P
8	11440.00	16.43	41.72	58.15	74.00	-15.85	Peak	100	164	P
9	17160.00	22.17	42.15	64.32	68.20	-3.88	Peak	100	221	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH36 NSS1 MCS8
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

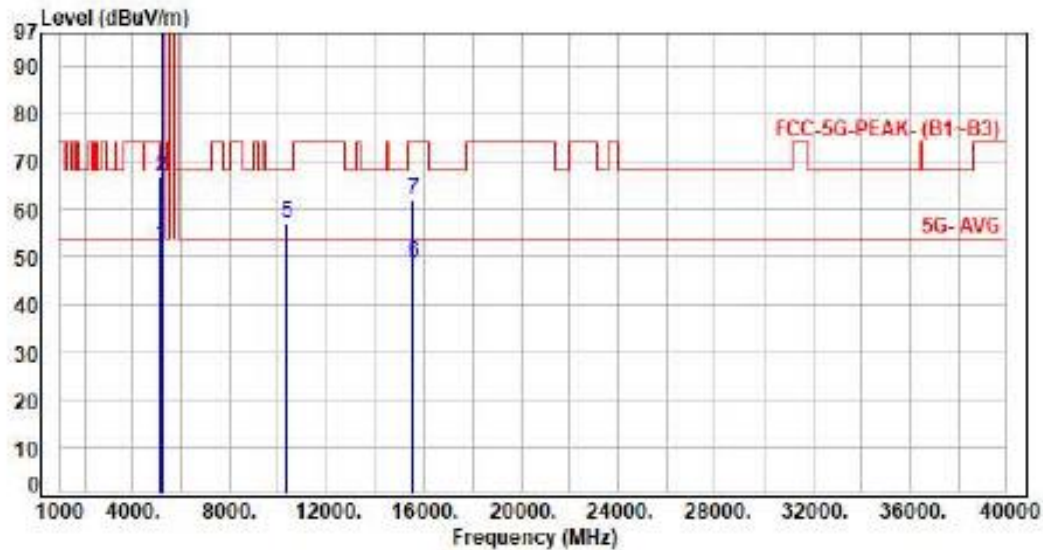

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	45.66	52.35	54.00	-1.65	Average	100	308	P
2	5150.00	6.69	68.06	66.75	74.00	-7.25	Peak	100	308	P
3	5180.00	6.79	92.57	99.36	200.00	-100.64	Average	100	308	P
4	5180.00	6.79	106.74	113.53	200.00	-86.47	Peak	100	308	P
5	10360.00	14.86	42.32	57.18	68.20	-11.02	Peak	100	192	P
6	15540.00	18.46	30.29	48.75	54.00	-5.25	Average	100	234	P
7	15540.00	18.46	43.36	61.82	74.00	-12.18	Peak	100	234	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH36 NSS1 MCS8
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

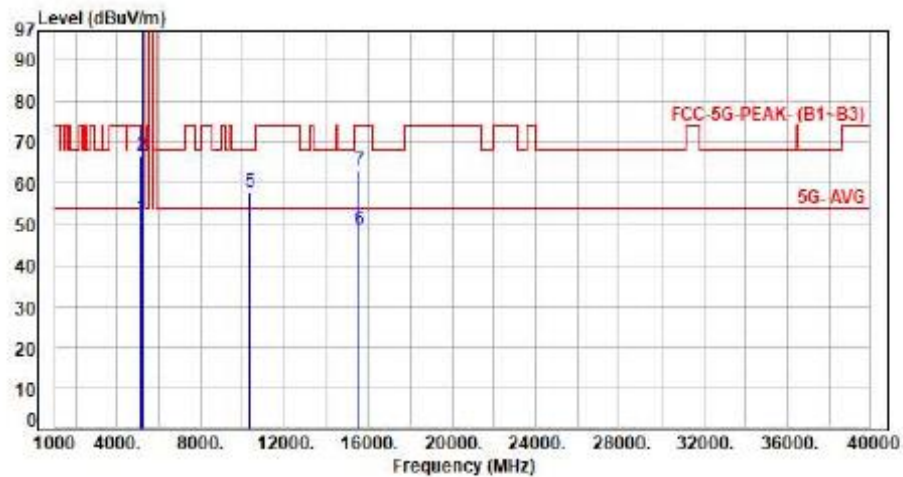

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	44.79	51.48	54.00	-2.52	Average	101	1	P
2	5150.00	6.69	59.96	66.65	74.00	-7.35	Peak	101	1	P
3	5180.00	6.79	88.89	95.68	200.00	-104.32	Average	101	1	P
4	5180.00	6.79	102.63	109.42	200.00	-90.58	Peak	101	1	P
5	10360.00	14.86	43.14	58.00	68.20	-10.20	Peak	100	146	P
6	15540.00	18.46	30.25	48.71	54.00	-5.29	Average	100	187	P
7	15540.00	18.46	44.56	63.02	74.00	-10.98	Peak	100	187	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH40 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

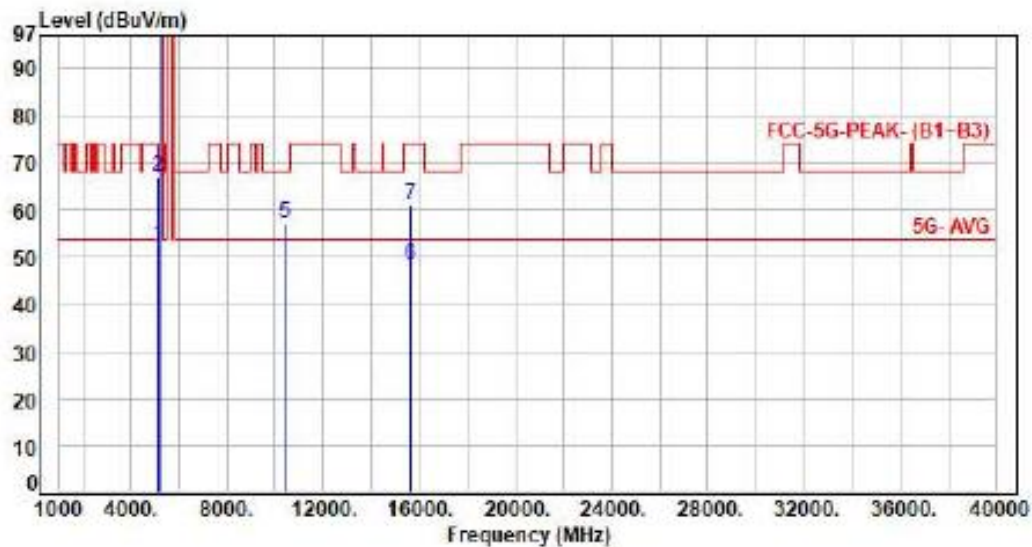

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	45.62	52.31	54.00	-1.69	Average	183	351	P
2	5150.00	6.69	60.57	67.26	74.00	-6.74	Peak	183	351	P
3	5200.00	6.86	94.48	101.34	200.00	-98.66	Average	183	351	P
4	5200.00	6.86	107.58	114.44	200.00	-85.56	Peak	183	351	P
5	10400.00	14.77	42.22	56.99	68.20	-11.21	Peak	100	193	P
6	15600.00	18.20	29.97	48.17	54.00	-5.83	Average	100	225	P
7	15600.00	18.20	43.09	61.29	74.00	-12.71	Peak	100	225	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH40 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

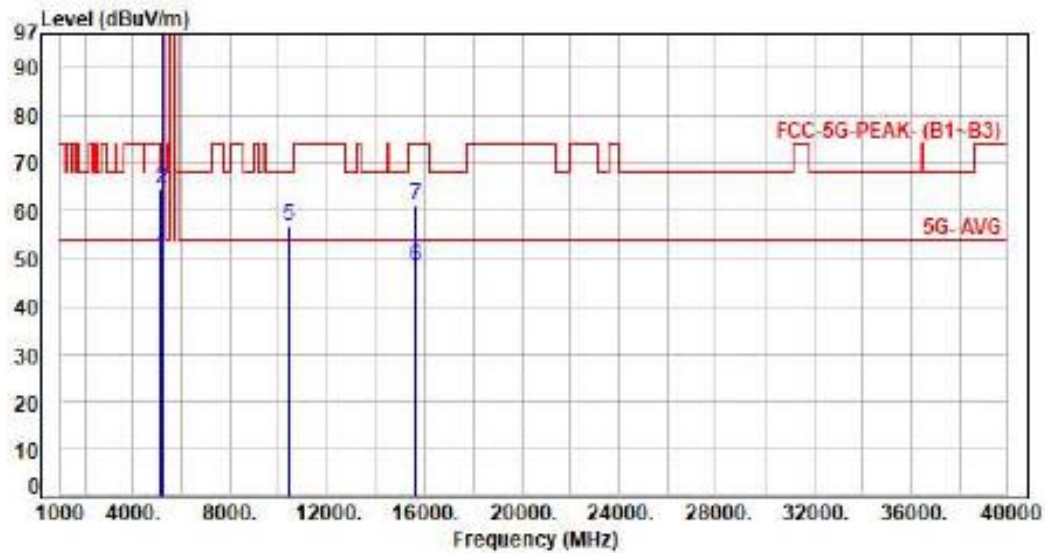

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	44.19	50.88	54.00	-3.12	Average	100	1	P
2	5150.00	6.69	57.97	64.66	74.00	-9.34	Peak	100	1	P
3	5200.00	6.86	88.62	95.48	200.00	-104.52	Average	100	1	P
4	5200.00	6.86	102.34	109.20	200.00	-90.80	Peak	100	1	P
5	10400.00	14.77	41.91	56.68	68.20	-11.52	Peak	100	195	P
6	15600.00	18.20	30.01	48.21	54.00	-5.79	Average	100	229	P
7	15600.00	18.20	43.05	61.25	74.00	-12.75	Peak	100	229	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH48 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

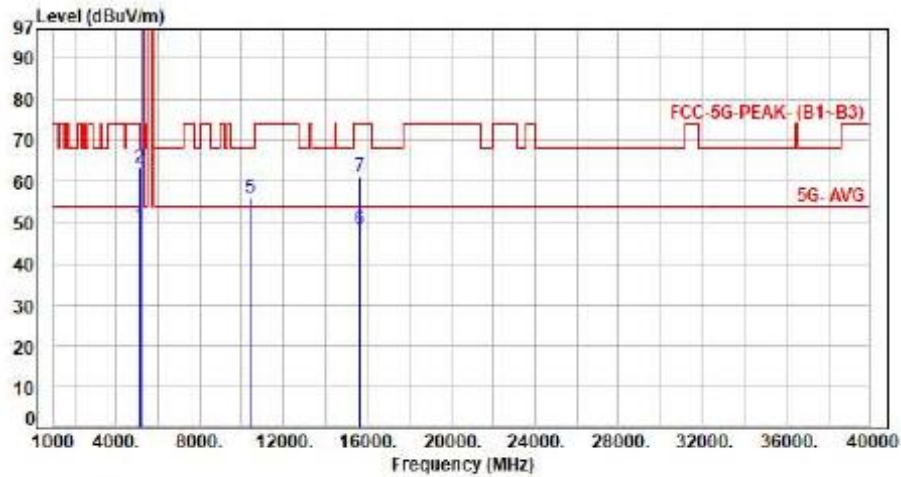

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	42.68	49.37	54.00	-4.63	Average	226	334	P
2	5150.00	6.69	56.67	63.36	74.00	-10.64	Peak	226	334	P
3	5240.00	6.91	93.13	100.04	200.00	-99.96	Average	226	334	P
4	5240.00	6.91	106.77	113.68	200.00	-86.32	Peak	226	334	P
5	10400.00	14.77	41.16	55.93	68.20	-12.27	Peak	100	114	P
6	15600.00	18.20	30.08	48.28	54.00	-5.72	Average	100	228	P
7	15600.00	18.20	43.12	61.32	74.00	-12.68	Peak	100	228	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH48 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

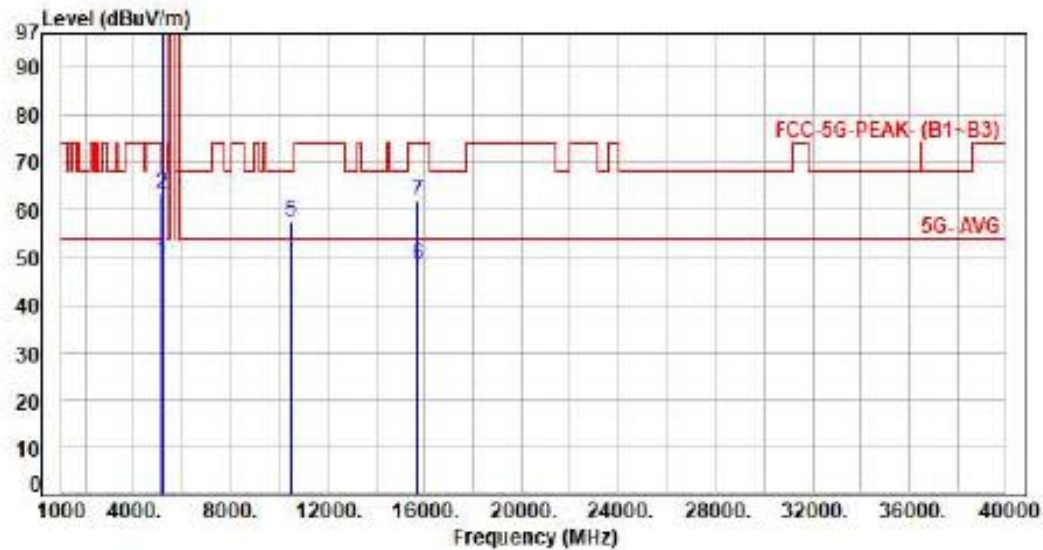

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	42.69	49.38	54.00	-4.62	Average	100	331	P
2	5150.00	6.69	56.57	63.26	74.00	-10.74	Peak	100	331	P
3	5240.00	6.91	88.67	95.58	200.00	-104.42	Average	100	331	P
4	5240.00	6.91	102.10	109.01	200.00	-90.99	Peak	100	331	P
5	10480.00	14.94	42.74	57.68	68.20	-10.52	Peak	100	195	P
6	15720.00	17.80	30.54	48.34	54.00	-5.66	Average	100	166	P
7	15720.00	17.80	44.26	62.06	74.00	-11.94	Peak	100	166	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH38 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

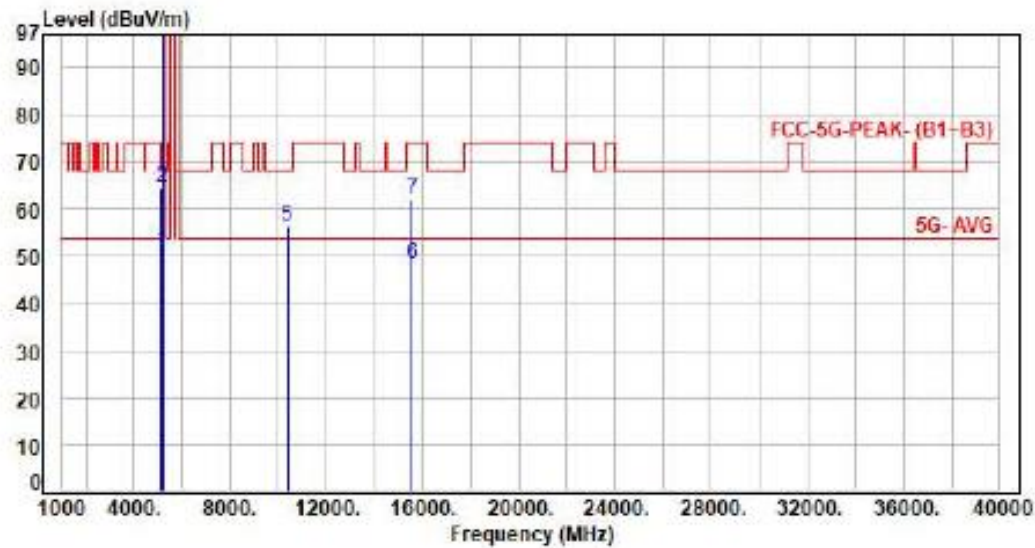

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	44.37	51.06	54.00	-2.94	Average	152	335	P
2	5150.00	6.69	57.81	64.50	74.00	-9.50	Peak	152	335	P
3	5190.00	6.82	89.02	95.84	200.00	-104.16	Average	152	335	P
4	5190.00	6.82	103.25	110.07	200.00	-89.93	Peak	152	335	P
5	10380.00	14.82	41.62	56.44	68.20	-11.76	Peak	100	221	P
6	15570.00	18.33	30.17	48.50	54.00	-5.50	Average	100	199	P
7	15570.00	18.33	43.51	61.84	74.00	-12.16	Peak	100	199	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH38 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

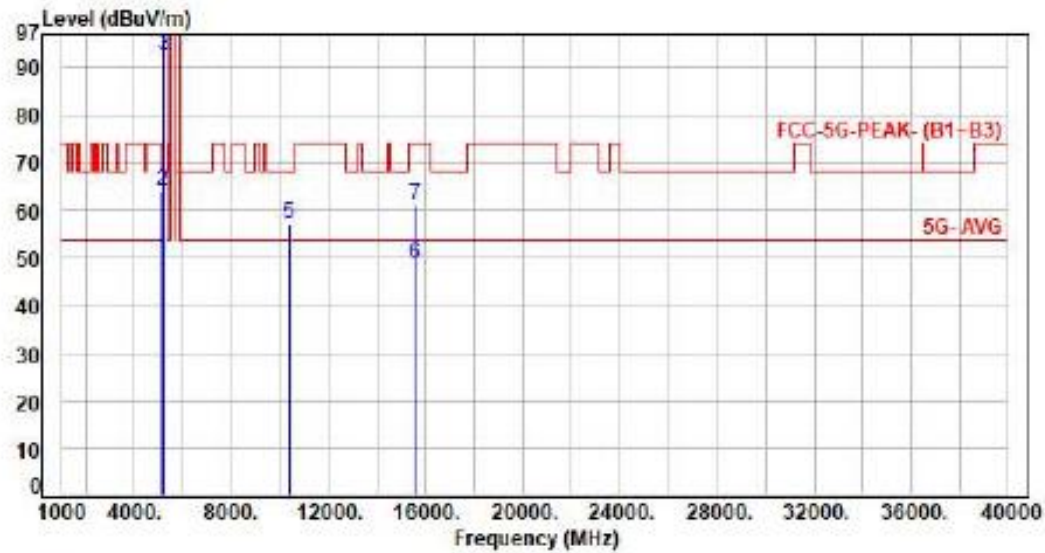

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	43.47	50.16	54.00	-3.84	Average	100	1	P
2	5150.00	6.69	57.42	64.11	74.00	-9.89	Peak	100	1	P
3	5190.00	6.82	85.83	92.65	200.00	-107.35	Average	100	1	P
4	5190.00	6.82	97.71	104.53	200.00	-95.47	Peak	100	1	P
5	10380.00	14.82	42.25	57.07	68.20	-11.13	Peak	100	117	P
6	15570.00	18.33	30.28	48.61	54.00	-5.39	Average	100	196	P
7	15570.00	18.33	42.79	61.12	74.00	-12.88	Peak	100	196	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH46 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

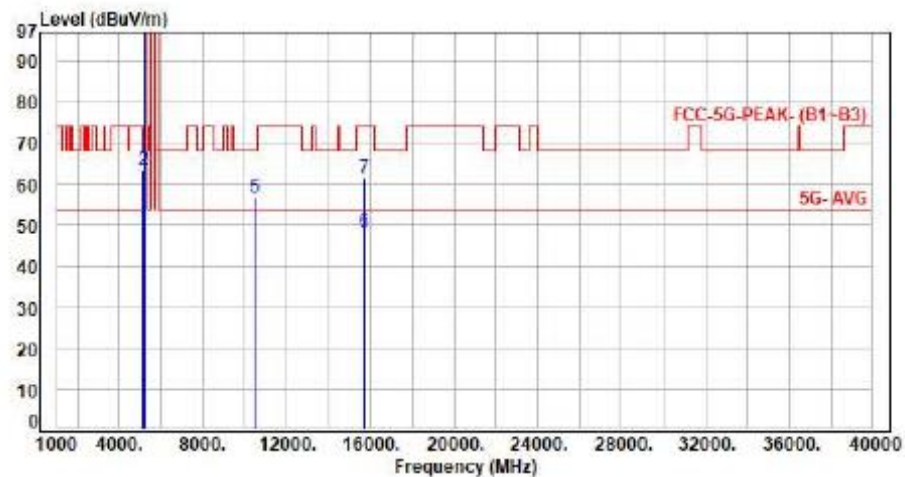

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	43.41	50.10	54.00	-3.90	Average	242	335	P
2	5150.00	6.69	56.67	63.36	74.00	-10.64	Peak	242	335	P
3	5230.00	6.90	91.49	98.39	200.00	-101.61	Average	242	335	P
4	5230.00	6.90	105.20	112.10	200.00	-87.90	Peak	242	335	P
5	10460.00	14.87	41.80	56.67	68.20	-11.53	Peak	100	135	P
6	15690.00	17.88	30.40	48.28	54.00	-5.72	Average	100	224	P
7	15690.00	17.88	43.84	61.72	74.00	-12.28	Peak	100	224	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH46 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

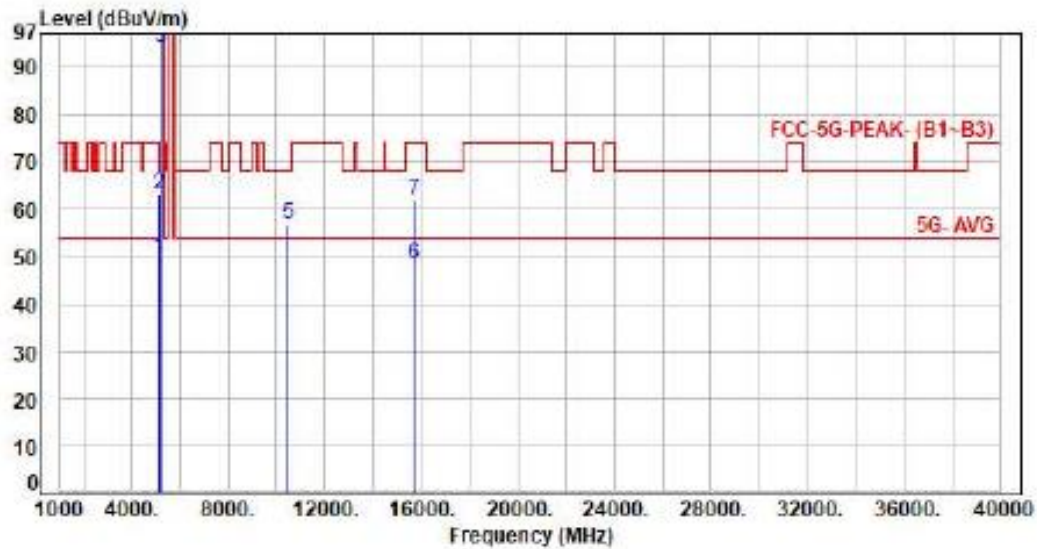

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	43.06	49.75	54.00	-4.25	Average	100	0	P
2	5150.00	6.69	56.21	62.90	74.00	-11.10	Peak	100	0	P
3	5230.00	6.90	87.08	93.98	200.00	-106.02	Average	100	0	P
4	5230.00	6.90	101.00	107.90	200.00	-92.10	Peak	100	0	P
5	10460.00	14.87	42.04	56.91	68.20	-11.29	Peak	100	225	P
6	15690.00	17.88	30.50	48.38	54.00	-5.62	Average	100	165	P
7	15690.00	17.88	44.23	62.11	74.00	-11.89	Peak	100	165	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH42 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

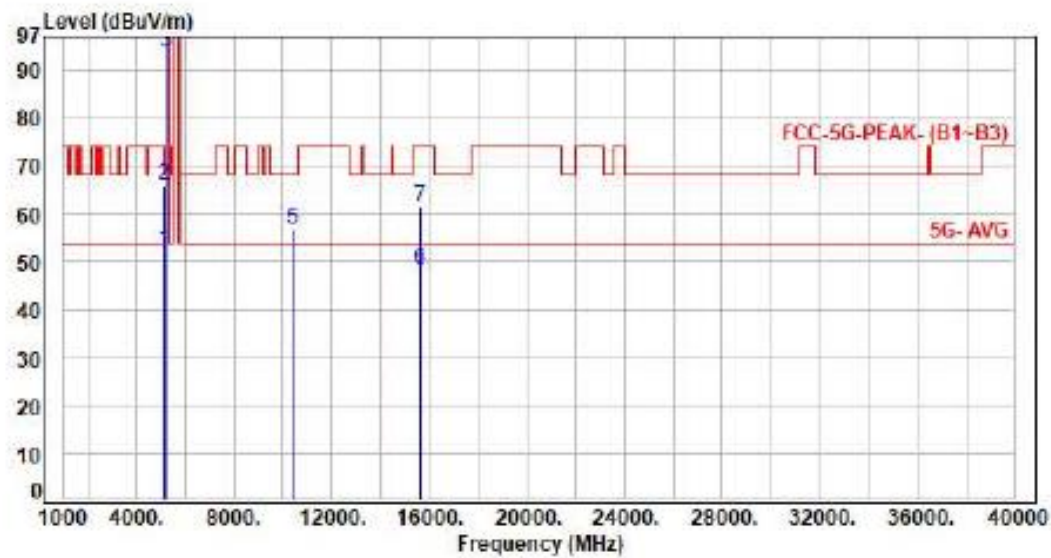

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	45.73	52.42	54.00	-1.58	Average	230	335	P
2	5150.00	6.69	59.22	65.91	74.00	-8.09	Peak	230	335	P
3	5210.00	6.87	86.75	93.62	200.00	-106.38	Average	230	335	P
4	5210.00	6.87	100.41	107.28	200.00	-92.72	Peak	230	335	P
5	10420.00	14.79	42.18	56.97	68.20	-11.23	Peak	100	199	P
6	15630.00	18.06	30.15	48.21	54.00	-5.79	Average	100	231	P
7	15630.00	18.06	43.64	61.70	74.00	-12.30	Peak	100	231	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH42 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

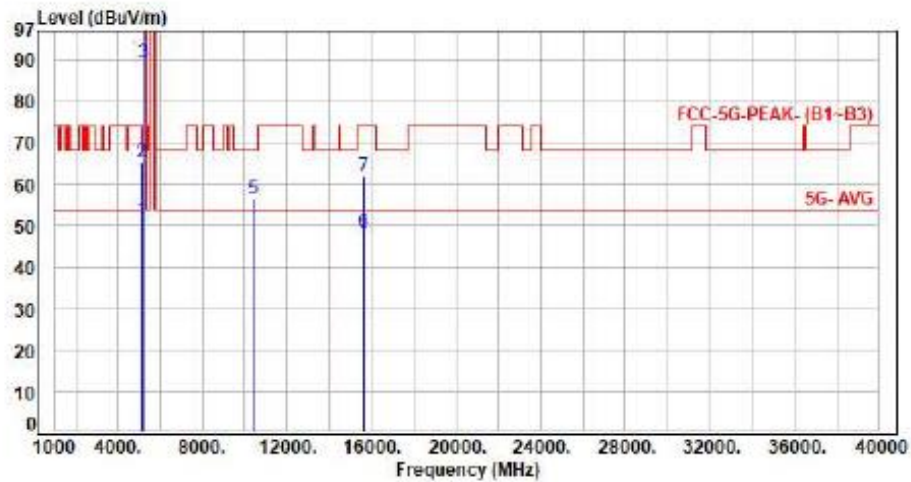


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	44.58	51.27	54.00	-2.73	Average	100	360	P
2	5150.00	6.69	58.72	65.41	74.00	-8.59	Peak	100	360	P
3	5210.00	6.87	82.48	89.35	200.00	-110.65	Average	100	360	P
4	5210.00	6.87	96.04	102.91	200.00	-97.09	Peak	100	360	P
5	10420.00	14.79	41.78	56.57	68.20	-11.63	Peak	100	231	P
6	15630.00	18.06	30.23	48.29	54.00	-5.71	Average	100	188	P
7	15630.00	18.06	43.77	61.83	74.00	-12.17	Peak	100	188	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH52 NSS1 MCS8
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

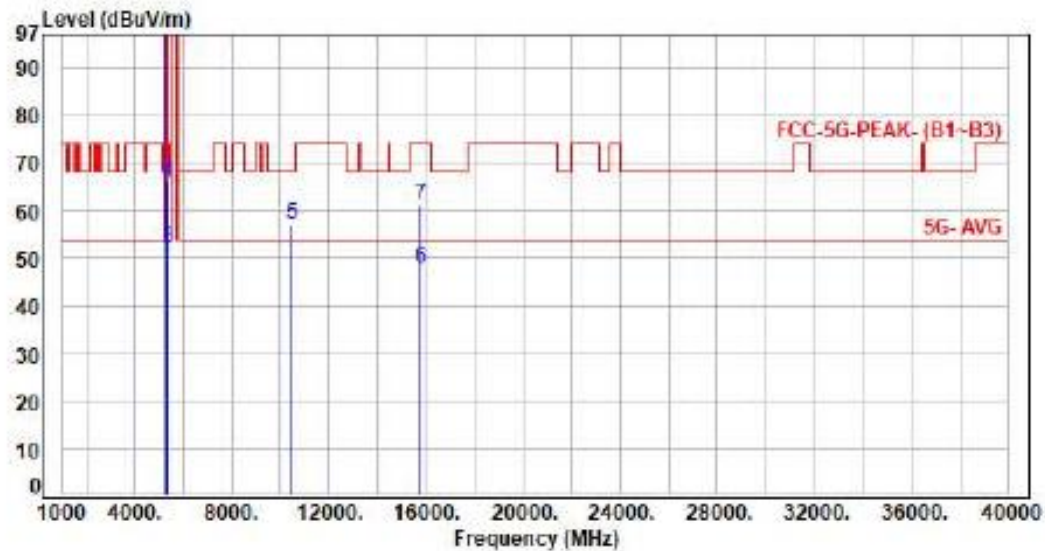

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5260.00	6.99	92.64	99.63	200.00	-100.37	Average	100	334	P
2	5260.00	6.99	105.72	112.71	200.00	-87.29	Peak	100	334	P
3	5350.00	7.27	44.88	52.15	54.00	-1.85	Average	100	334	P
4	5350.00	7.27	58.74	66.01	74.00	-7.99	Peak	100	334	P
5	10520.00	15.08	42.04	57.12	68.20	-11.08	Peak	100	174	P
6	15780.00	17.59	30.53	48.12	54.00	-5.88	Average	100	166	P
7	15780.00	17.59	43.60	61.19	74.00	-12.81	Peak	100	166	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH52 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

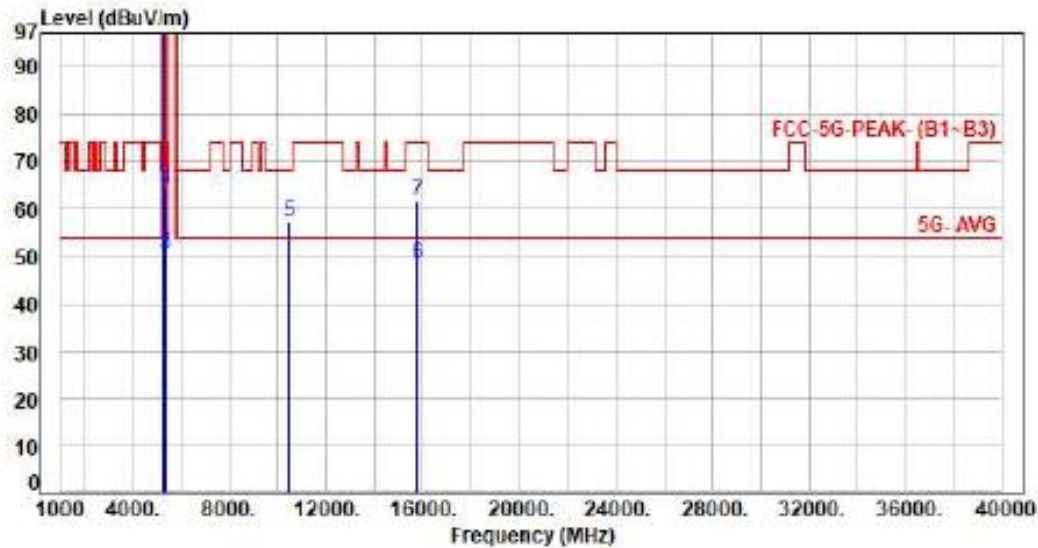

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5260.00	6.99	88.71	95.70	200.00	-104.30	Average	100	318	P
2	5260.00	6.99	102.10	109.09	200.00	-90.91	Peak	100	318	P
3	5350.00	7.27	43.29	50.56	54.00	-3.44	Average	100	318	P
4	5350.00	7.27	56.77	64.04	74.00	-9.96	Peak	100	318	P
5	10520.00	15.08	42.21	57.29	68.20	-10.91	Peak	100	295	P
6	15780.00	17.59	30.56	48.15	54.00	-5.85	Average	100	131	P
7	15780.00	17.59	43.97	61.56	74.00	-12.44	Peak	100	131	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH60 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

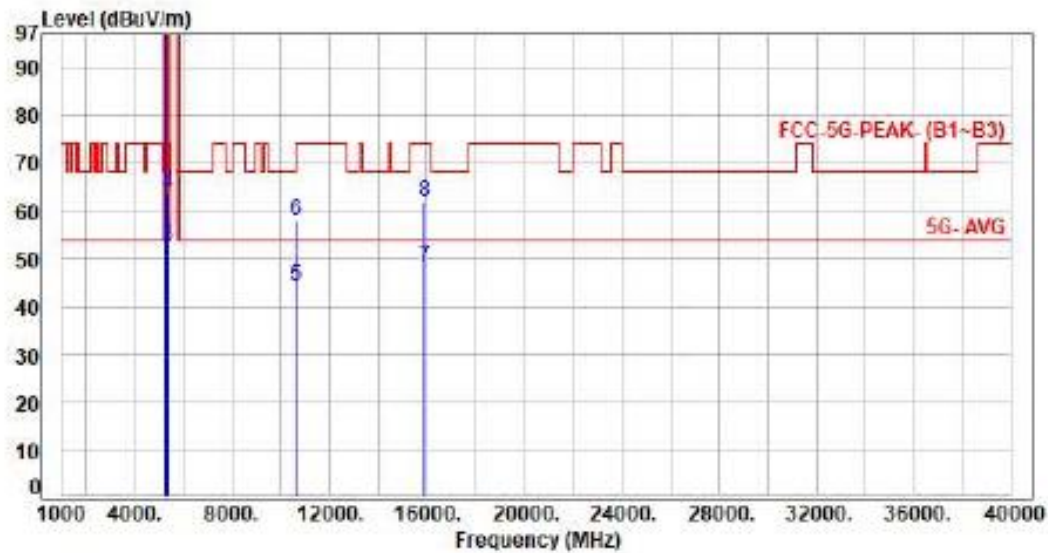

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5300.00	7.20	93.46	100.66	200.00	-99.34	Average	100	328	P
2	5300.00	7.20	106.23	113.43	200.00	-86.57	Peak	100	328	P
3	5350.00	7.27	45.29	52.56	54.00	-1.44	Average	100	328	P
4	5350.00	7.27	56.72	63.99	74.00	-10.01	Peak	100	328	P
5	10600.00	15.29	29.04	44.33	54.00	-9.67	Average	100	163	P
6	10600.00	15.29	42.65	57.94	74.00	-16.06	Peak	100	163	P
7	15900.00	17.45	30.88	48.33	54.00	-5.67	Average	100	176	P
8	15900.00	17.45	44.45	61.90	74.00	-12.10	Peak	100	176	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH60 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

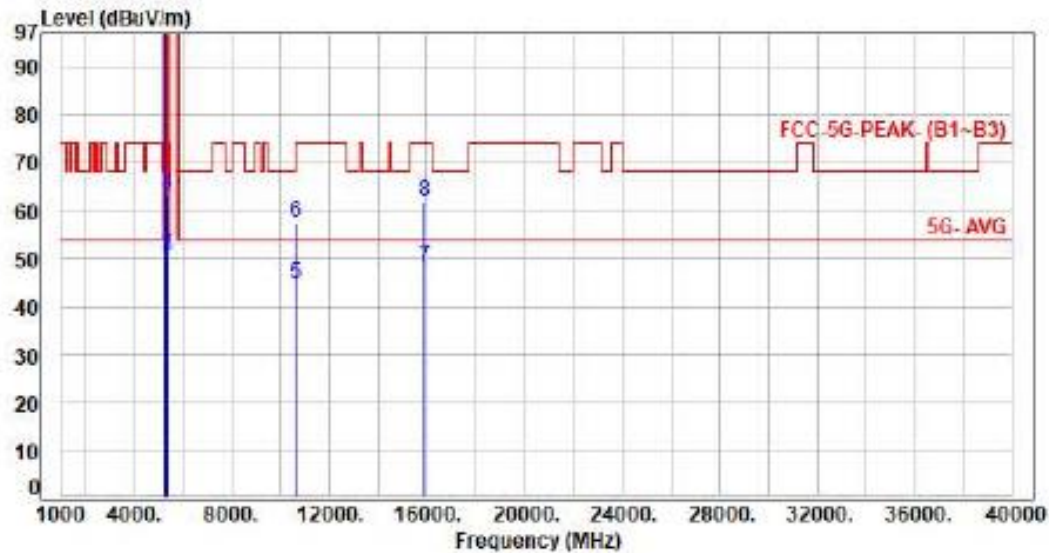

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5300.00	7.20	89.59	96.79	200.00	-103.21	Average	100	318	P
2	5300.00	7.20	102.09	109.29	200.00	-90.71	Peak	100	318	P
3	5350.00	7.27	43.36	50.63	54.00	-3.37	Average	100	318	P
4	5350.00	7.27	56.28	63.55	74.00	-10.45	Peak	100	318	P
5	10600.00	15.29	29.44	44.73	54.00	-9.27	Average	100	226	P
6	10600.00	15.29	42.41	57.70	74.00	-16.30	Peak	100	226	P
7	15900.00	17.45	30.91	48.36	54.00	-5.64	Average	100	153	P
8	15900.00	17.45	44.62	62.07	74.00	-11.93	Peak	100	153	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH64 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

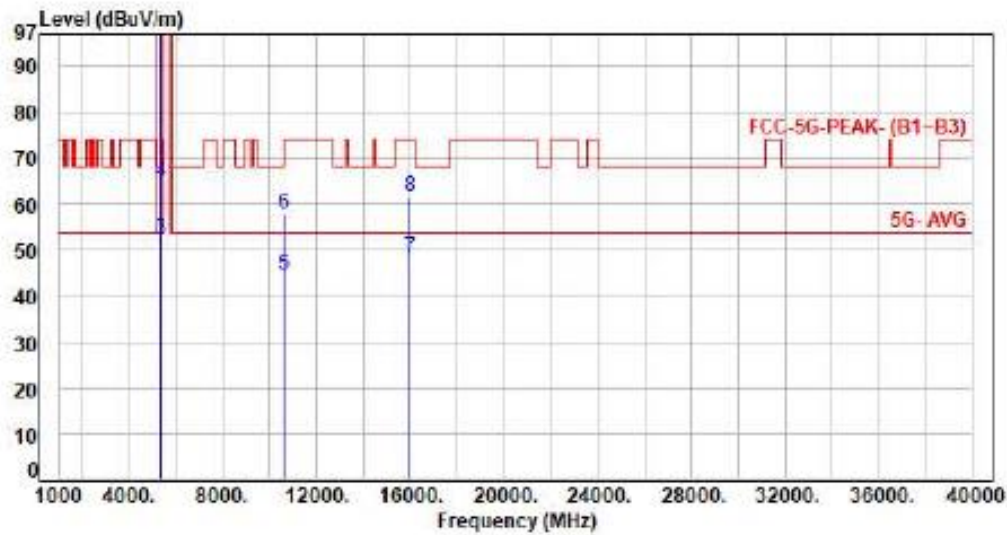

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5320.00	7.23	91.29	98.52	200.00	-101.48	Average	100	308	P
2	5320.00	7.23	105.56	112.79	200.00	-87.21	Peak	100	308	P
3	5350.00	7.27	44.94	52.21	54.00	-1.79	Average	100	308	P
4	5350.00	7.27	57.60	64.87	74.00	-9.13	Peak	100	308	P
5	10640.00	15.44	29.15	44.59	54.00	-9.41	Average	100	113	P
6	10640.00	15.44	42.31	57.75	74.00	-16.25	Peak	100	113	P
7	15960.00	17.45	31.00	48.45	54.00	-5.55	Average	100	152	P
8	15960.00	17.45	44.32	61.77	74.00	-12.23	Peak	100	152	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH64 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

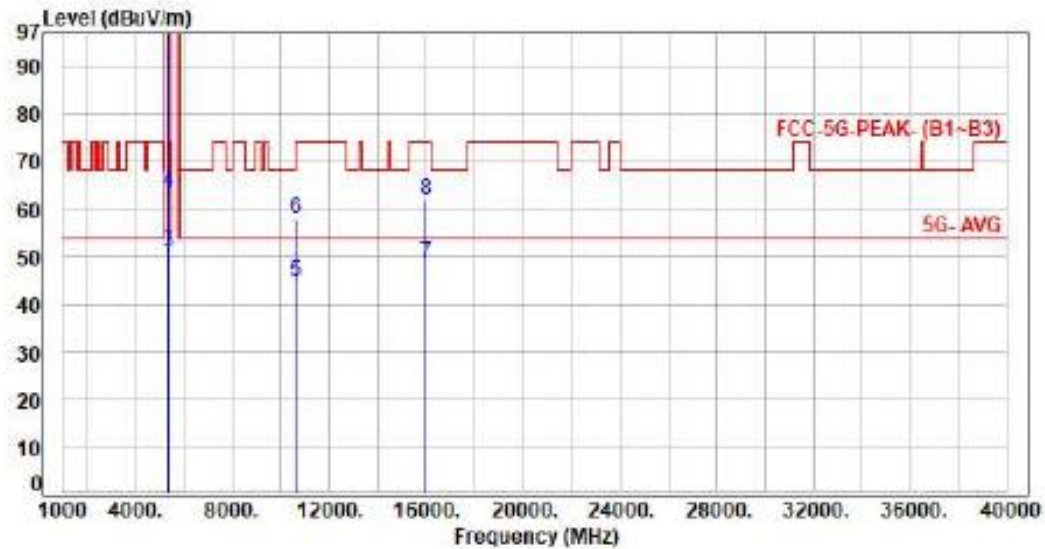

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5320.00	7.23	89.55	96.78	200.00	-103.22	Average	100	328	P
2	5320.00	7.23	102.13	109.36	200.00	-90.64	Peak	100	328	P
3	5350.00	7.27	43.79	51.06	54.00	-2.94	Average	100	328	P
4	5350.00	7.27	56.04	63.31	74.00	-10.69	Peak	100	328	P
5	10640.00	15.44	29.02	44.46	54.00	-9.54	Average	100	232	P
6	10640.00	15.44	42.53	57.97	74.00	-16.03	Peak	100	232	P
7	15960.00	17.45	31.08	48.53	54.00	-5.47	Average	100	185	P
8	15960.00	17.45	44.52	61.97	74.00	-12.03	Peak	100	185	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH54 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

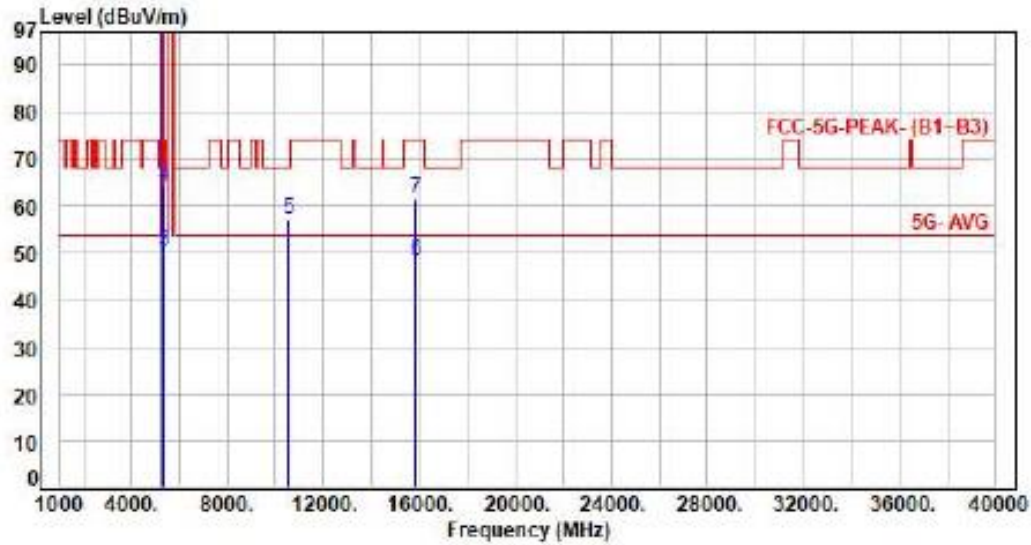

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5270.00	7.04	90.05	97.09	200.00	-102.91	Average	100	330	P
2	5270.00	7.04	102.64	109.68	200.00	-90.32	Peak	100	330	P
3	5350.00	7.27	43.28	50.55	54.00	-3.45	Average	100	330	P
4	5350.00	7.27	56.95	64.22	74.00	-9.78	Peak	100	330	P
5	10540.00	15.17	42.16	57.33	68.20	-10.87	Peak	100	312	P
6	15810.00	17.49	30.88	48.37	54.00	-5.63	Average	100	225	P
7	15810.00	17.49	44.07	61.56	74.00	-12.44	Peak	100	225	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH54 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

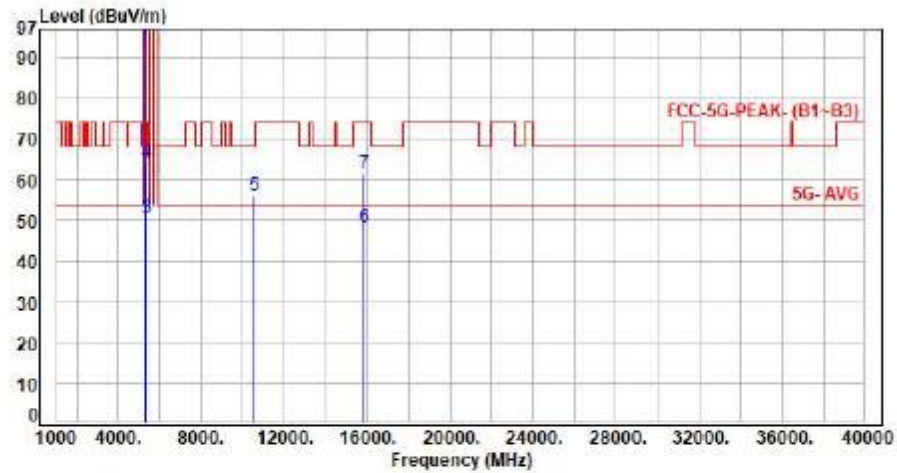


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5270.00	7.04	87.14	94.18	200.00	-105.82	Average	100	359	P
2	5270.00	7.04	99.67	106.71	200.00	-93.29	Peak	100	359	P
3	5350.00	7.27	43.20	50.47	54.00	-3.53	Average	100	359	P
4	5350.00	7.27	56.97	64.24	74.00	-9.76	Peak	100	359	P
5	10540.00	15.17	41.03	56.20	68.20	-12.00	Peak	100	251	P
6	15810.00	17.49	30.91	48.40	54.00	-5.60	Average	100	227	P
7	15810.00	17.49	44.10	61.59	74.00	-12.41	Peak	100	227	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH62 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

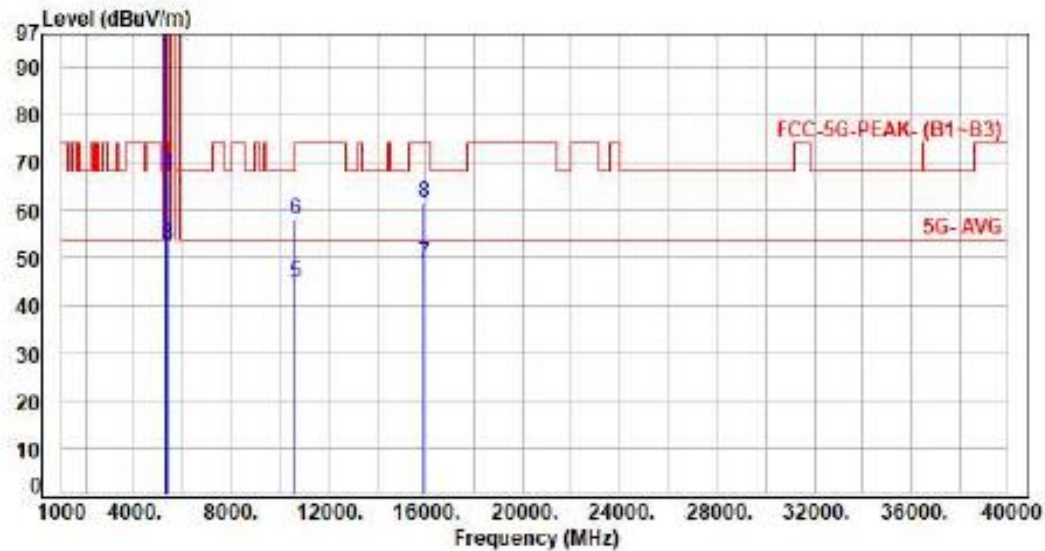

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5310.00	7.22	88.05	95.27	200.00	-104.73	Average	100	308	P
2	5310.00	7.22	100.42	107.64	200.00	-92.36	Peak	100	308	P
3	5350.00	7.27	45.60	52.87	54.00	-1.13	Average	100	308	P
4	5350.00	7.27	60.30	67.57	74.00	-6.43	Peak	100	308	P
5	10620.00	15.37	29.40	44.77	54.00	-9.23	Average	100	221	P
6	10620.00	15.37	42.65	58.02	74.00	-15.98	Peak	100	221	P
7	15930.00	17.44	31.08	48.52	54.00	-5.48	Average	100	114	P
8	15930.00	17.44	44.32	61.76	74.00	-12.24	Peak	100	114	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11x40 CH62 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

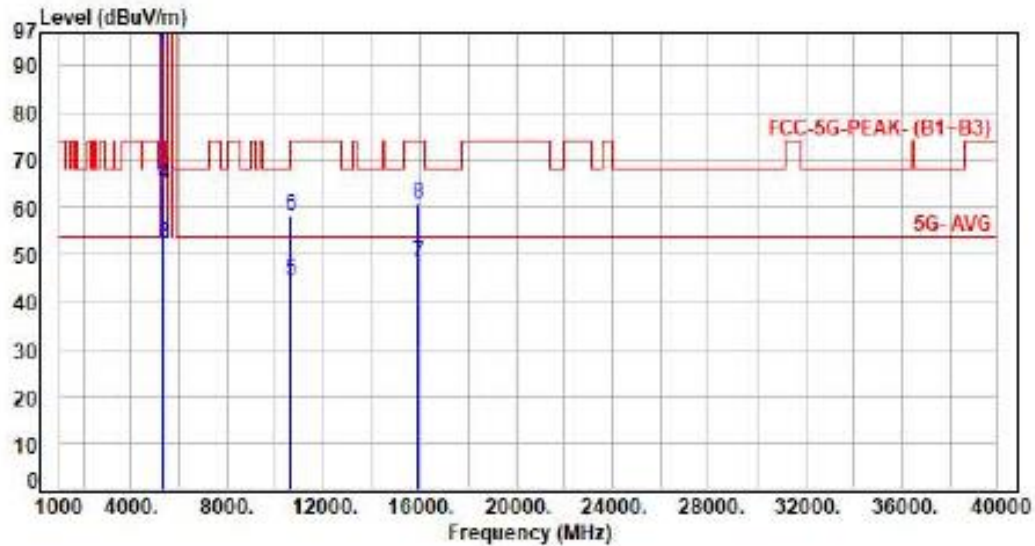

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5310.00	7.22	85.83	93.05	200.00	-106.95	Average	100	330	P
2	5310.00	7.22	97.36	104.58	200.00	-95.42	Peak	100	330	P
3	5350.00	7.27	44.95	52.22	54.00	-1.78	Average	100	330	P
4	5350.00	7.27	57.73	65.00	74.00	-9.00	Peak	100	330	P
5	10620.00	15.37	29.24	44.61	54.00	-9.39	Average	100	118	P
6	10620.00	15.37	42.92	58.29	74.00	-15.71	Peak	100	118	P
7	15930.00	17.44	30.99	48.43	54.00	-5.57	Average	100	162	P
8	15930.00	17.44	43.56	61.00	74.00	-13.00	Peak	100	162	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH58 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

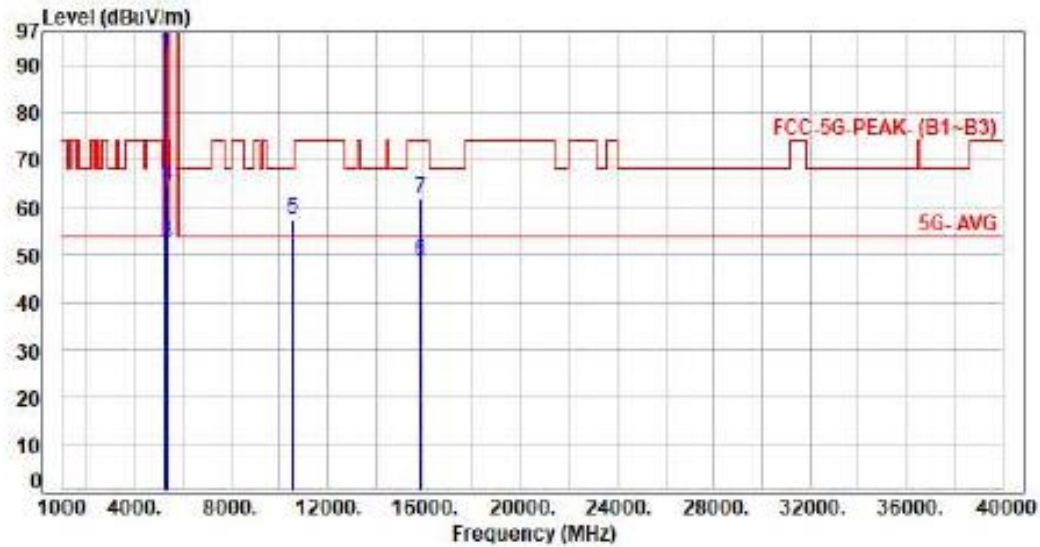

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5290.00	7.15	85.33	92.48	200.00	-107.52	Average	100	304	P
2	5290.00	7.15	98.97	106.12	200.00	-93.88	Peak	100	304	P
3	5350.00	7.27	45.25	52.52	54.00	-1.48	Average	100	304	P
4	5350.00	7.27	57.34	64.61	74.00	-9.39	Peak	100	304	P
5	10580.00	15.25	42.43	57.68	68.20	-10.52	Peak	100	199	P
6	15870.00	17.47	31.26	48.73	54.00	-5.27	Average	100	221	P
7	15870.00	17.47	44.57	62.04	74.00	-11.96	Peak	100	221	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH58 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

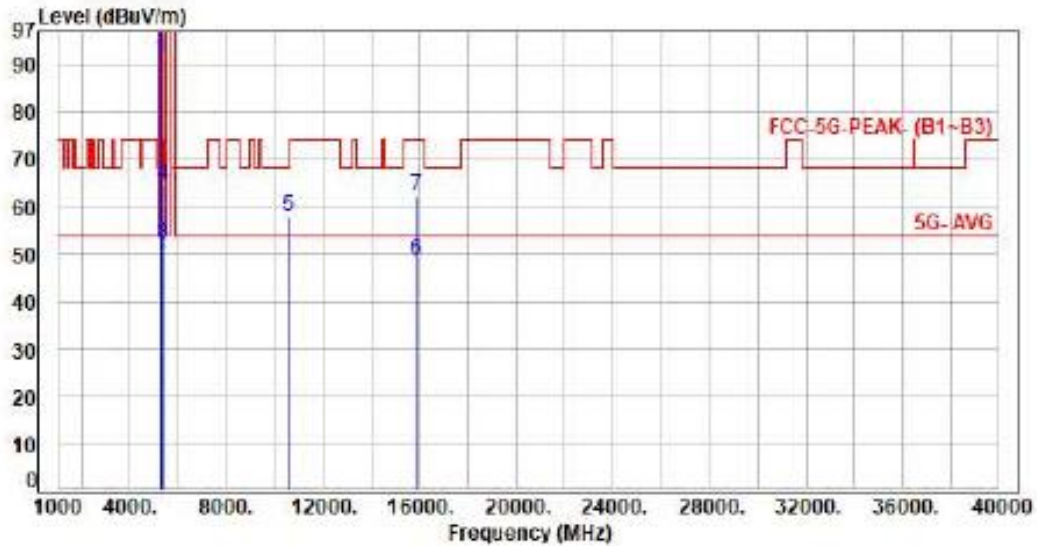

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5290.00	7.15	83.78	90.93	200.00	-109.07	Average	100	330	P
2	5290.00	7.15	95.56	102.71	200.00	-97.29	Peak	100	330	P
3	5350.00	7.27	44.56	51.83	54.00	-2.17	Average	100	330	P
4	5350.00	7.27	57.23	64.50	74.00	-9.50	Peak	100	330	P
5	10580.00	15.25	42.78	58.03	68.20	-10.17	Peak	100	229	P
6	15870.00	17.47	31.26	48.73	54.00	-5.27	Average	100	116	P
7	15870.00	17.47	44.77	62.24	74.00	-11.76	Peak	100	116	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH50 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

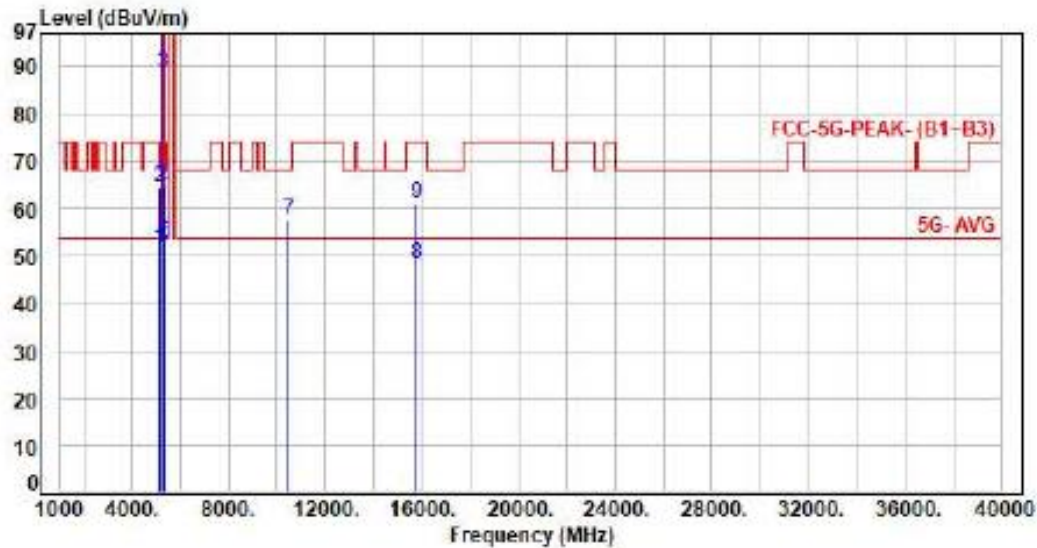

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	44.80	51.49	54.00	-2.51	Average	100	307	P
2	5150.00	6.69	57.84	64.53	74.00	-9.47	Peak	100	307	P
3	5250.00	6.92	81.61	88.53	200.00	-111.47	Average	100	307	P
4	5250.00	6.92	92.65	99.57	200.00	-100.43	Peak	100	307	P
5	5350.00	7.27	45.48	52.75	54.00	-1.25	Average	100	307	P
6	5350.00	7.27	57.51	64.78	74.00	-9.22	Peak	100	307	P
7	10500.00	15.01	42.42	57.43	68.20	-10.77	Peak	100	221	P
8	15750.00	17.72	30.49	48.21	54.00	-5.79	Average	100	311	P
9	15750.00	17.72	43.35	61.07	74.00	-12.93	Peak	100	311	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH50 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

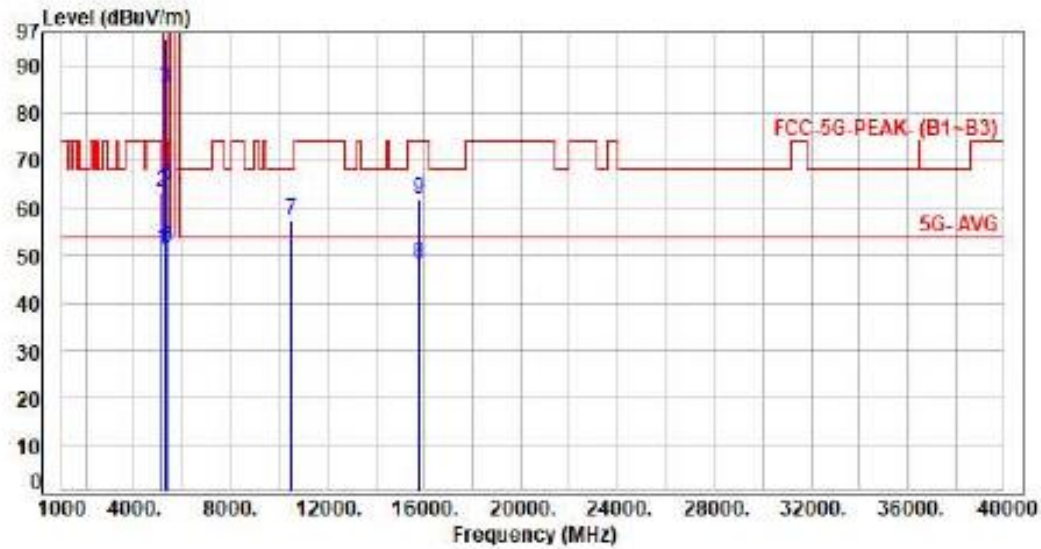

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	6.69	44.47	51.16	54.00	-2.84	Average	100	360	P
2	5150.00	6.69	56.70	63.39	74.00	-10.61	Peak	100	360	P
3	5250.00	6.92	78.22	85.14	200.00	-114.86	Average	100	360	P
4	5150.00	6.92	88.65	95.57	200.00	-104.43	Peak	100	360	P
5	5350.00	7.27	44.28	51.55	54.00	-2.45	Average	100	360	P
6	5350.00	7.27	57.53	64.80	74.00	-9.20	Peak	100	360	P
7	10500.00	15.01	42.39	57.40	68.20	-10.80	Peak	100	147	P
8	15750.00	17.72	30.49	48.21	54.00	-5.79	Average	100	227	P
9	15750.00	17.72	44.41	62.13	74.00	-11.87	Peak	100	227	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11x20 CH108 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

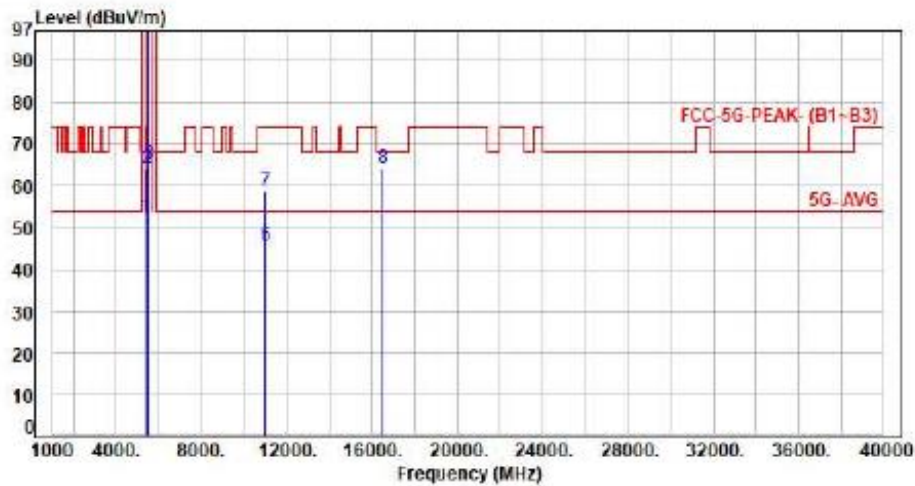

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	45.34	52.89	54.00	-1.11	Average	204	208	P
2	5460.00	7.55	56.80	64.35	74.00	-9.65	Peak	204	208	P
3	5470.00	7.58	57.68	65.26	68.20	-2.94	Peak	204	208	P
4	5500.00	7.68	92.62	100.30	200.00	-99.70	Average	204	208	P
5	5500.00	7.68	106.68	114.36	200.00	-85.64	Peak	204	208	P
6	11000.00	16.20	29.36	45.56	54.00	-8.44	Average	100	195	P
7	11000.00	16.20	42.39	58.59	74.00	-15.41	Peak	100	195	P
8	16500.00	18.92	45.43	64.35	68.20	-3.85	Peak	100	166	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH100 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

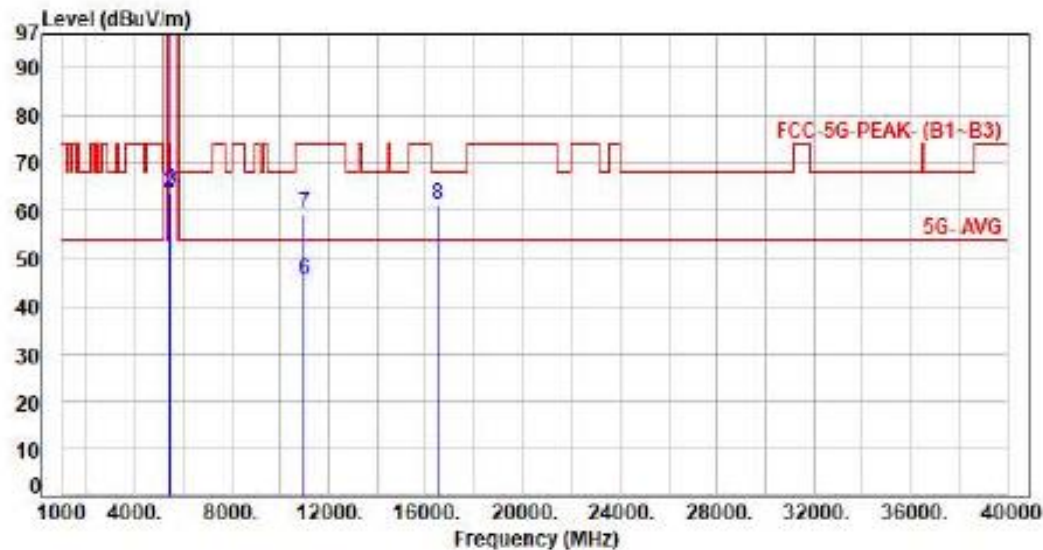

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.55	43.47	51.02	54.00	-2.98	Average	100	355	P
2	5460.00	7.55	56.27	63.82	74.00	-10.18	Peak	100	355	P
3	5470.00	7.58	56.59	64.17	68.20	-4.03	Peak	100	355	P
4	5500.00	7.68	91.63	99.31	200.00	-100.69	Average	100	355	P
5	5500.00	7.68	104.85	112.53	200.00	-87.47	Peak	100	355	P
6	11000.00	16.20	29.28	45.48	54.00	-8.52	Average	100	241	P
7	11000.00	16.20	43.25	59.45	74.00	-14.55	Peak	100	241	P
8	16500.00	18.92	42.36	61.28	68.20	-6.92	Peak	100	146	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor