


C260 (LEXUS) Tune Up Procedure

List of Equipment

- Equipment List
 - CDMA MS Test Set: HP E8285A
 - Spectrum Analyzer: Agilent E4402B
 - Power Supply: Agilent E3631A; 0 ~ 6V, 5A
 - PC with RS232 port or USB port
 - One RS232 cable specific for handset earphone jack or one USB cable
- Software
 - RF Tool, Magnify

Test Set Up Diagram

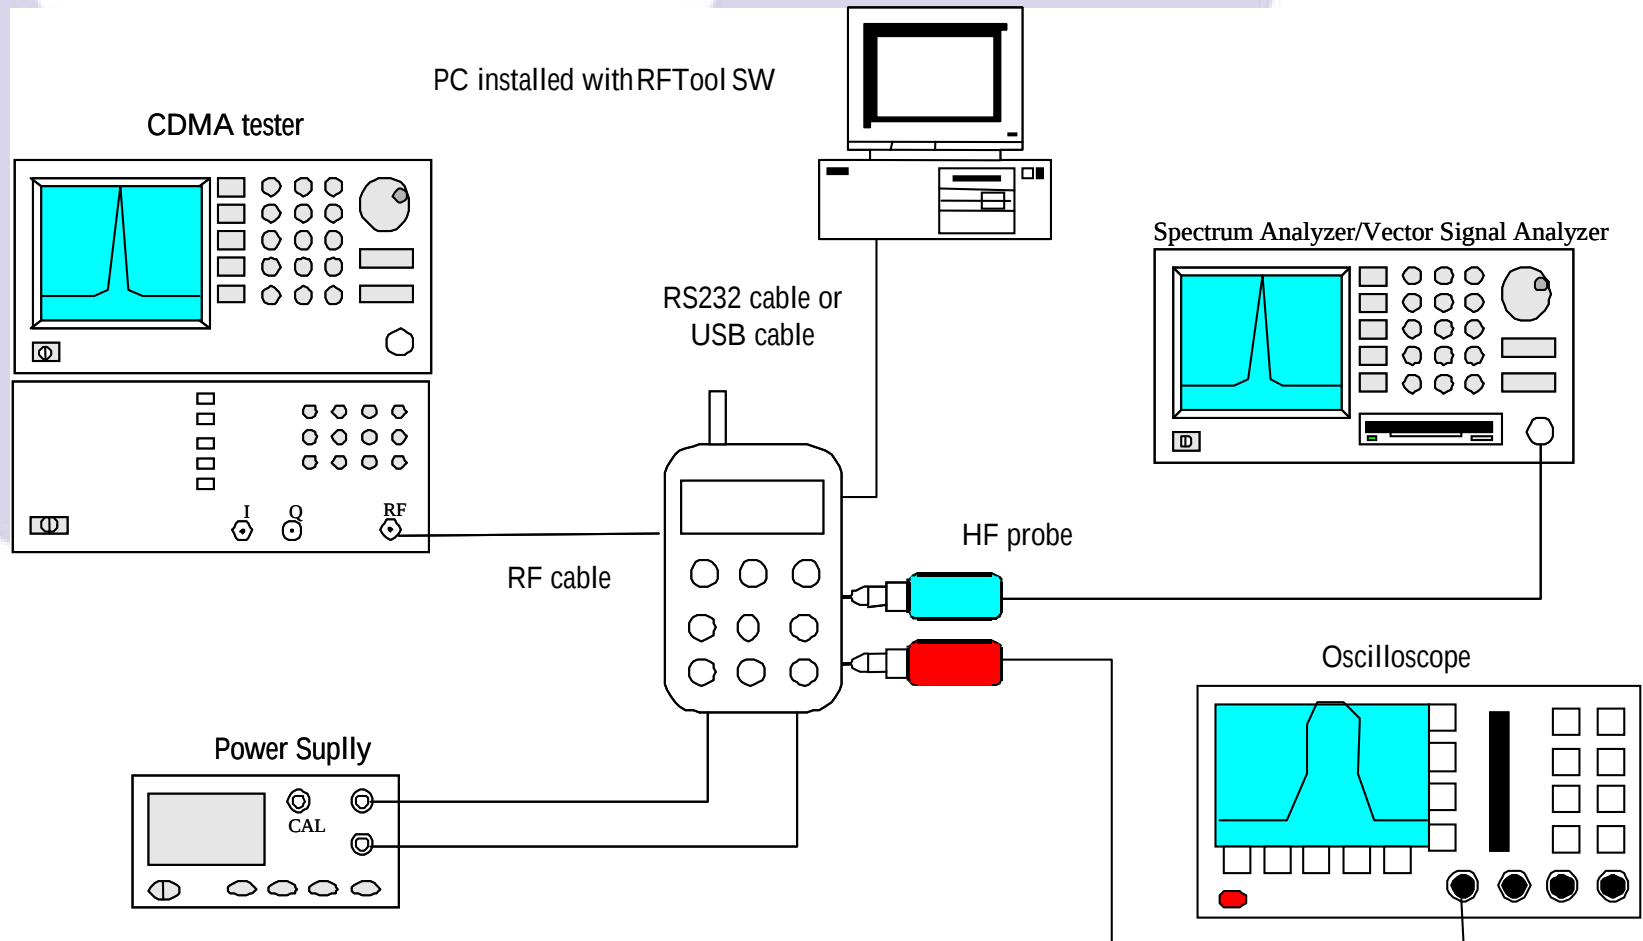

Test Mode Setup Method

Channel Selection and Tx Power Level Control

1. Enter SAR menu: ***#727#**
2. Change =>
Mode: **CDMA**
Band: **PCS**
3. Ch: **25**(1851.25 MHz), **600**(1880 MHz), **1175**(1908.75 MHz)
4. Tx Power Level Control: **HDET**
 - a) Please refer the HDET value corresponding to Tx power level
 - b) Wait about 2 minutes until power stable

Test Mode Setup Method

- Each HDET value will be corresponding to a Tx power level, for example:

Handset: LPR3#32

HDET_Ch25: 138 (Tx power = 25 dBm)

HDET_Ch600: 126 (Tx power = 25 dBm)

HDET_Ch1175: 130 (Tx power = 25 dBm)