

# FCC Test Report

Report No.: AGC11758240607FR01A

FCC ID	:	2A482-30MINI
APPLICATION PURPOSE	:	Class II Permissive Change
PRODUCT DESIGNATION	:	Baseus Portable Wireless Speaker
BRAND NAME	:	baseus
MODEL NAME	:	Baseus AeQur 30 Mini
APPLICANT	:	Shenzhen Baseus Technology Co., Ltd.
DATE OF ISSUE	:	Nov. 07, 2024
STANDARD(S)	:	FCC Part 15 Subpart C §15.247
<b>REPORT VERSION</b>	:	V1.0







# **Report Revise Record**

Report Version	Revise Time	Issued Date	Valid Version	Notes	
V1.0	/	Nov. 07, 2024	Valid	Initial Release	

Note: The original test report AGC11758240607FR01 (dated Jul. 01, 2024 and tested from Jun. 20, 2024 to Jul. 01, 2024) was modified on Nov. 07, 2024, including the following changes and additions:

- The charging circuit has been optimized and Changed hardware version of device; it will not impact RF parameter evaluation, only electromagnetic compatibility evaluation.

For the above described change the following tests was considered to be necessary:

Clause	Testing
§15.209	Radiated Spurious Emission
§15.207	AC Power Line Conducted Emission



## **Table of Contents**

1. General Information	4
2. Product Information	5
2.1 Product Technical Description	5
2.2 Test Frequency List	5
2.3 Related Submittal(S) / Grant (S)	6
2.4 Test Methodology	6
2.5 Receiver Input Bandwidth	6
2.6 Equally Average Use of Frequencies and Behaviour	6
2.7 Pseudorandom Frequency Hopping Sequence	7
2.8 Special Accessories	8
2.9 Equipment Modifications	8
2.10 Antenna Requirement	8
3. Test Environment	9
3.1 Address of The Test Laboratory	9
3.2 Test Facility	9
3.3 Environmental Conditions	
3.4 Measurement Uncertainty	
3.5 List of Equipment Used	11
4. System Test Configuration	12
4.1 EUT Configuration	12
4.2 EUT Exercise	
4.3 Configuration of Tested System	12
4.4 Equipment Used in Tested System	
4.5 Summary of Test Results	13
5. Description of Test Modes	14
6. Radiated Spurious Emission	15
6.1 Measurement Limit	15
6.2 Measurement Procedure	
6.3 Measurement Setup (Block Diagram of Configuration)	
6.4 Measurement Result	19
7. AC Power Line Conducted Emission Test	24
7.1 Measurement Limit	24
7.2 Measurement Setup (Block Diagram of Configuration)	24
7.3 Preliminary Procedure of Line Conducted Emission Test	25
7.4 Final Procedure of Line Conducted Emission Test	25
7.5 Measurement Results	25
Appendix I: Photographs of Test Setup	
Appendix II: Photographs of Test EUT	



# 1. General Information

Applicant	Shenzhen Baseus Technology Co., Ltd.
Address	2nd Floor, Building B, Baseus Intelligence Park, No.2008, Xuegang Rd, Gangtou Community, Bantian Street, Longgang District, Shenzhen, China
Manufacturer	Shenzhen Baseus Technology Co., Ltd.
Address	2nd Floor, Building B, Baseus Intelligence Park, No.2008, Xuegang Rd, Gangtou Community, Bantian Street, Longgang District, Shenzhen, China
Factory	N/A
Address	N/A
Product Designation	Baseus Portable Wireless Speaker
Brand Name	baseus
Test Model	Baseus AeQur 30 Mini
Series Model(s)	N/A
Difference Description	N/A
Date of receipt of test item	Oct. 29, 2024
Date of Test	Oct. 29, 2024 to Nov. 07, 2024
Deviation from Standard	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Test Report Form No	AGCER-FCC-BR_EDR-V1

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By

**Reviewed By** 

Jack Gui

(Project Engineer)

Nov. 07, 2024

Calvin Liu (Reviewer)

Nov. 07, 2024

Approved By

Zrang

Max Zhang (Authorized Officer)

Nov. 07, 2024



# 2. Product Information

# 2.1 Product Technical Description

Frequency Band	2400MHz-2483.5MHz
Operation Frequency Range	2402MHz-2480MHz
Bluetooth Version	V5.3
Modulation Type	BR 🖾 GFSK, EDR 🖾 $\pi$ /4-DQPSK, 🖾 8DPSK
Number of channels	79 Channels
Channel Separation	1 MHz
Maximum Transmitter Power	-0.077dBm
Hardware Version	SP299B_AC6965E_V5.0
Software Version	V1.0
Antenna Designation	Ceramic Antenna
Antenna Gain	1.82dBi
Power Supply	DC 3.7V by battery or DC 5V by adapter

## 2.2 Test Frequency List

Frequency Band	Channel Number	Frequency			
	0	2402 MHz			
	1	2403 MHz			
	:	:			
2400~2483.5MHz	39	2441MHz			
	:	:			
	77	2479 MHz			
	78	2480 MHz			
Note: f = 2402 + 1k MHz, k = 0,, 78 ; "f "is the operating frequency (MHz); "k" is the operating channel.					



# 2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: **2A482-30MINI**, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

## 2.4 Test Methodology

The tests were performed according to following standards:

No.	Identity	tity Document Title				
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations				
2	FCC 47 CFR Part 15	Radio Frequency Devices				
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices				
4	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules				

## 2.5 Receiver Input Bandwidth

The input bandwidth of the receiver is 1.3MHz, in every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally, the type of connection (e.g. single of multi slot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also, the slave of the connection will use these settings. Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

## 2.6 Equally Average Use of Frequencies and Behaviour.

The generation of the hopping sequence in connection mode depends essentially on two input values:

1. LAP/UAP of the master of the connection.

2. Internal master clock.

The LAP (lower address part) are the 24 LSB's of the 48 BD\_ADDRESS. The BD\_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP (upper address part) are the 24MSB's of the 48BD\_ADDRESS

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For behavior action with other units only offset is used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about one day(23h30).

In most case it is implemented as 28 bits counter. For the deriving of the hopping sequence the entire. LAP (24 bits),4LSB's(4bits) (Input 1) and the 27MSB's of the clock (Input 2) are used. With this input values different mathematical procedures (permutations, additions, XOR-operations) are performed to generate the Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behavior:


The first connection between the two devices is established, a hopping sequence was generated. For Transmitting the wanted data the complete hopping sequence was not used. The connection ended. The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmission is longer (and it Cannot be shorter) than the minimum resolution of the clock(312.5us). The hopping sequence will always differ from the first one.



## 2.7 Pseudorandom Frequency Hopping Sequence

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: 29 1 = 511 bits
- Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of The PRBS Sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

4	4	35	78	03	 20	76	02	19		 21	64	75
Γ				ľ	 	l	1			 		
				l i	-		-			1		
				;	1	;	-			i		
L					 _i		i		1	 ¦		

Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.



## 2.8 Special Accessories

Not available for this EUT intended for grant.

## **2.9 Equipment Modifications**

Not available for this EUT intended for grant.

## 2.10 Antenna Requirement

## Standard Requirement

## 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

## 15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

#### EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is 1.82dBi.



# 3. Test Environment

## 3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

## 3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

## CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories.)

## A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

## FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

## IC-Registration No.: 24842(CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



## **3.3 Environmental Conditions**

	Normal Conditions
Temperature range (°C)	15 - 35
Relative humidity range	20 % - 75 %
Pressure range (kPa)	86 - 106
Power supply	DC 3.7V

## **3.4 Measurement Uncertainty**

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty		
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$		
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$		
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$		
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$		
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$		
Uncertainty of spurious emissions, conducted	$U_c = \pm 2 \%$		
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$		



## 3.5 List of Equipment Used

● F	Radiated Spurious Emission								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)		
$\square$	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2024-02-01	2025-01-31		
	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2024-05-24	2025-05-23		
$\boxtimes$	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2024-05-28	2025-05-27		
$\square$	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04		
$\boxtimes$	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10		
$\square$	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2024-03-31	2025-03-30		
$\boxtimes$	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23		
$\square$	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2024-07-24	2026-07-23		
$\square$	AGC-EM-A119	2.4GHz Filter	SongYi	N/A	N/A	2024-05-23	2025-05-22		
$\square$	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08		
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08		

• A	AC Power Line Conducted Emission									
Used	sed Leduinment No. L. lest Eduinment L. Manufacturer L. Model No. L. Serial No. L.						Next Cal. Date (YY-MM-DD)			
$\boxtimes$	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2024-05-28	2025-05-27			
$\boxtimes$	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ	2023-06-09	2025-06-08			
	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2024-05-28	2025-05-27			

• Tes	Test Software								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information				
	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71				
$\boxtimes$	AGC-EM-S003	RE Test System	FARA	EZ-EMC	V.RA-03A				
	AGC-EM-S004	RE Test System	Tonscend	TS <sup>+</sup> Ver2.1(JS32-RE)	4.0.0.0				



# 4. System Test Configuration

## 4.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

# 4.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

# 4.3 Configuration of Tested System

Radiated Emission Configure:



Conducted Emission Configure:

EUT	AE

# 4.4 Equipment Used in Tested System

The following peripheral devices and interface cables were connected during the measurement: Test Accessories Come From The Laboratory

No	Equipment	Manufacturer	Model No.	Specification Information	Cable
1	Adapter	HUAWEI	HW-200440C0 0	Input(AC): 100V-240V 50/60Hz 2.4A Output(DC): USB-C(5V/3A;9V/3A;10V/4A;11V/6A;12V/3A;15V/3 A;20V4.4A) USB-A(5V/2A;10V/4A;11V/6A;20V/4.4A)	

Test Accessories Come From The Manufacturer

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1					



## 4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.209	Radiated Spurious Emission	Pass
2	§15.207	AC Power Line Conducted Emission	Pass



# 5. Description of Test Modes

	Summary table of Test Cases
Test Item	Data Rate / Modulation
iest nem	Bluetooth – BR_EDR (GFSK/π /4-DQPSK/8DPSK)
Radiated & Conducted Test Cases	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps (Battery powered or AC/DC adapter) Mode 2: Bluetooth Tx CH39_2441 MHz_1Mbps (Battery powered or AC/DC adapter) Mode 3: Bluetooth Tx CH78_2480 MHz_1Mbps (Battery powered or AC/DC adapter) Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps (Battery powered or AC/DC adapter) Mode 5: Bluetooth Tx CH39_2441 MHz_2Mbps (Battery powered or AC/DC adapter) Mode 6: Bluetooth Tx CH39_2441 MHz_2Mbps (Battery powered or AC/DC adapter) Mode 6: Bluetooth Tx CH78_2480 MHz_2Mbps (Battery powered or AC/DC adapter) Mode 7: Bluetooth Tx CH00_2402 MHz_3Mbps (Battery powered or AC/DC adapter) Mode 8: Bluetooth Tx CH39_2441 MHz_3Mbps (Battery powered or AC/DC adapter) Mode 9: Bluetooth Tx CH39_2441 MHz_3Mbps (Battery powered or AC/DC adapter) Mode 9: Bluetooth Tx CH78_2480 MHz_3Mbps (Battery powered or AC/DC adapter) Mode 10: Bluetooth Tx Hopping-1Mbps (Battery powered or AC/DC adapter) Mode11: Bluetooth Tx Hopping-2Mbps (Battery powered or AC/DC adapter) Mode12: Bluetooth Tx Hopping-3Mbps (Battery powered or AC/DC adapter)
AC Conducted Emission	Mode 1: Bluetooth Link + Battery + USB Cable (Charging from AC Adapter)
Note:	

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. The battery is full-charged during the test.
- 3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 4. For Conducted Test method, a temporary antenna connector is provided by the manufacture.
  - Software Setting Diagram

串口设置	配置数据发送成功!	
	▼ reply data: 04 0E 04 01 01 FC 00	
	return code: 0x0	
波特室 115200	10000000000000000000000000000000000000	
数据位 8	reply data: 04 0E 04 01 01 FC 00	
校验位 None	return code: 0x0	
	配置数据发送成功!	
	reply data: 04 0E 04 01 01 FC 00	
流控 NoFlow •	return code: 0x0	
关闭	配置数据发送成功!	
	reply data: 04 0E 04 01 01 FC 00	
BR/EDR BLE	return code: 0x0 配置数据发送成功!	
MODE TX		
Channel 78 🗸	配置数据发送成功!	
Transmit_Power 10 -		
Packet_Type 1-DH5		
Hopping ON	配置数据发送成功!	
	reply data: 04 0E 04 01 01 FC 00	
Data_Types Pn9 🗸	return code: 0x0	
	配置数据发送成功!	
Send configuration	reply data: 04 0E 04 01 01 FC 00	
	return code: 0x0 配置数据发送成功!	
	配直数据发送成切! reply data: 04 0E 04 01 01 FC 00	
	return code: 0x0	
	配置数据发送成功!	
	清除曰志	



# 6. Radiated Spurious Emission

## 6.1 Measurement Limit

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

## 6.2 Measurement Procedure

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection"

Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

Spectrum Parameter	Setting			
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP			
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP			
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP			
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/3MHz for Peak, 1MHz/3MHz for Average			

#### The following table is the setting of spectrum analyzer and receiver.

Receiver Parameter	Setting		
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP		
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP		
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP		



## • Quasi-Peak Measurements below 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

## Peak Measurements above 1GHz


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize

## <u>Average Measurements above 1GHz</u>


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW  $\geq$  [3 × RBW]
- 4. Detector = Power averaging (rms)
- 5. Averaging type = power (i.e., rms)
- 6. Sweep time = auto
- 7. Perform a trace average of at least 100 traces.
- 8. The applicable correction factor is [10\*log (1 / D)], where D is the duty cycle. The factor had been edited in the "Input Correction" of the Spectrum Analyzer.




## 6.3 Measurement Setup (Block Diagram of Configuration)

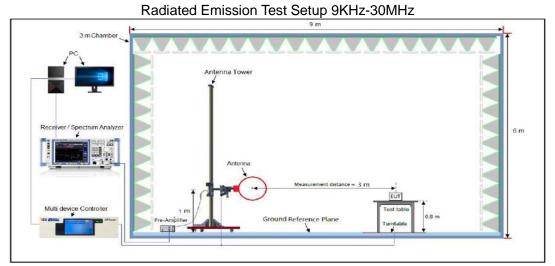

Radiated Emission Test Setup 30MHz-1000MHz

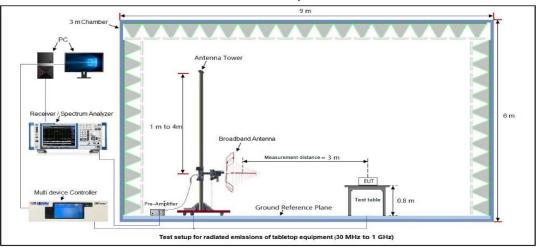

Radiated Emission Test Setup Above 1000MHz

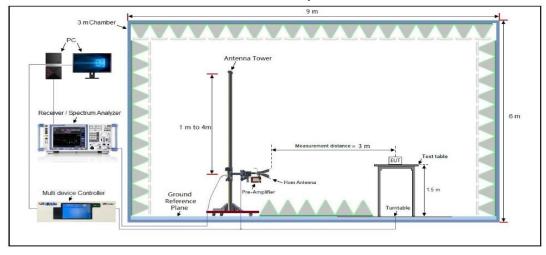



#### **6.4 Measurement Result**

## **Radiated Emission Below 30MHz**

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

			Radia	ted Emiss	ion Test Res	ults at 30MH	z-1GHz				
EUT Na	ame	Bas	eus Portable W	/ireless Sp	eaker	Model Na	ime	Baseus Ae	eQur 30 Mini		
Tempe	emperature 23.1 °C				Relative Humic		Humidity	56.2%			
Pressu	ure	960	hPa			Test Volta	age	Normal Vo	ltage		
Test M	ode	Мос	le 9			Antenna	Polarity	Horizontal			
	72.0	dBuV/π	1								
	32       34       3         32       3       3										
	-8 30.00	)0 4	0 50 60 70	80	(MHz)	300	400 500 60	0 700 1000.0	00		
Final D	ata List										
NO.	Freq [MHz		Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity		
1	97.798	- 32	32.61	15.86	43.50	10.89	100	130	Horizontal		
2	300.36	72	31.98	16.50	46.00	14.02	100	215	Horizontal		
3	312.17	92	33.02	16.50	46.00	12.98	100	147	Horizontal		
4	324.45	60	33.94	16.63	46.00	12.06	100	169	Horizontal		
5	455.90	57	35.23	24.54	46.00	10.77	100	85	Horizontal		
6	900.14	73	36.90	31.78	46.00	9.1	100	120	Horizontal		



		Radia	ted Emiss	ion Test Resu	Ilts at 30MHz	z-1GHz		
EUT Name	Bas	eus Portable W	ireless Sp	eaker	Model Na	me	Baseus Ae	Qur 30 Mini
Temperature	23.1	1℃			Relative H	lumidity	56.2%	
Pressure	960	hPa			Test Volta	ige	Normal Vo	ltage
Test Mode	Мос	de 9			Antenna I	Polarity	Vertical	
72.0	dBu∀/m	n						
							Limit: — Margin: —	
-8 30.0		40 50 60 70	80	(MHz)	300	400 500 60	5 5 0 700 1000.00	10
Final Data List		Level	Factor	Limit	Margin	Height	Angle	Polarity
1 81.78	-	[dBµV/m] 35.35	[dB] 16.66	[dBµV/m] 40.00	[dB] 4.65	[cm] 100	[°] 79	Vertical
2 98.83		37.76	14.36	40.00	5.74	100	143	Vertical
3 158.66	-	35.43	14.30	43.50	8.07	100	210	Vertical
4 455.90		35.24	25.38	43.50	10.76	100	86	Vertical
4 455.90 5 709.18		34.86	25.30	46.00	11.14	100	125	Vertical
6 952.09		34.00	30.52	46.00	8.93	100	125	Vertical
0 332.03	551	57.07	JU.JZ	40.00	0.30	100	150	venucal

## **RESULT: Pass**

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin= Limit-Level.

2. All test modes had been pre-tested. The mode 9 is the worst case and recorded in the report.



EUT Name	Baseus Speaker	Portable	Wireless	Mode	I Name		Baseus	AeQur 30 Mini
Temperature	<b>23.1</b> ℃			Relat	ive Humidity		56.2%	
Pressure	960hPa			Test \	Voltage		Normal	Voltage
Test Mode	Mode 7			Anter	nna Polarity		Horizor	ntal
Frequency	Meter Reading	Factor	Emission	n Level	Limits	Ν	<i>l</i> argin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV	/m)	(dBµV/m)		(dB)	value Type
4804.000	47.25	0.08	47.3	3	74	-	26.67	peak
4804.000	36.54	0.08	36.6	2	54	-	17.38	AVG
7206.000	42.51	2.21	44.7	2	74	-	29.28	peak
7206.000	33.26	2.21	35.4	7	54	-	18.53	AVG
Remark:								l
i tornanta								
	nna Factor + Cab	le Loss – Pre	-amplifier.					
Factor = Anter	Baseus	le Loss – Pre Portable	-amplifier. Wireless	Mode	I Name		Baseus	AeQur 30 Mini
Factor = Anter					l Name ive Humidity		Baseus 56.2%	AeQur 30 Mini
Factor = Anter EUT Name Temperature	Baseus Speaker			Relat			56.2%	AeQur 30 Mini Voltage
Factor = Anter EUT Name Temperature Pressure	Baseus Speaker 23.1℃			Relat	ive Humidity		56.2%	Voltage
Factor = Anter EUT Name Temperature Pressure Test Mode	Baseus Speaker 23.1 °C 960hPa Mode 7	Portable	Wireless	Relat Test V Anter	ive Humidity /oltage nna Polarity		56.2% Normal Vertical	Voltage
Factor = Anter	Baseus Speaker 23.1℃ 960hPa Mode 7 Meter Reading	Portable	Wireless	Relat Test V Anter	ive Humidity Voltage nna Polarity Limits		56.2% Normal Vertical	Voltage
Factor = Anter         EUT Name         Temperature         Pressure         Test Mode         Frequency         (MHz)	Baseus Speaker 23.1℃ 960hPa Mode 7 Meter Reading (dBµV)	Portable Factor (dB)	Emission (dBµV/	Relat Test V Anter	ive Humidity Voltage nna Polarity Limits (dBµV/m)		56.2% Normal Vertical /argin (dB)	Voltage Value Type
Factor = Anter         EUT Name         Temperature         Pressure         Test Mode         Frequency         (MHz)         4804.000	Baseus         Speaker         23.1 °C         960hPa         Mode 7         Meter Reading         (dBµV)         48.52	Portable Factor (dB) 0.08	Emission (dBµV/ 48.6	Relat Test V Anter	ive Humidity Voltage nna Polarity Limits (dBµV/m) 74		56.2% Normal Vertical Aargin (dB) -25.4	Voltage Value Type peak
Factor = Anter         EUT Name         Temperature         Pressure         Test Mode         Frequency         (MHz)         4804.000         4804.000	Baseus Speaker 23.1℃ 960hPa Mode 7 Meter Reading (dBµV) 48.52 36.41	Portable Factor (dB) 0.08 0.08	Wireless Emission (dBµV 48.6 36.4	Relat Test V Anter	ive Humidity Voltage nna Polarity Limits (dBµV/m) 74 54	-	56.2% Normal Vertical /argin (dB) -25.4 17.51	Voltage Value Type peak AVG
Factor = Anter         EUT Name         Temperature         Pressure         Test Mode         Frequency         (MHz)         4804.000         4804.000         7206.000	Baseus Speaker           23.1 °C           960hPa           Mode 7           Meter Reading           (dBµV)           48.52           36.41           42.15	Portable Factor (dB) 0.08 0.08 2.21	Wireless Emission (dBµV/ 48.6 36.4 44.3	Relat Test V Anter Level //m) 5 9 6	ive Humidity Voltage nna Polarity Limits (dBµV/m) 74 54 74	-	56.2% Normal Vertical //argin (dB) -25.4 17.51 29.64	Voltage Value Type peak AVG peak
Factor = Anter         EUT Name         Temperature         Pressure         Test Mode         Frequency         (MHz)         4804.000         4804.000	Baseus Speaker 23.1℃ 960hPa Mode 7 Meter Reading (dBµV) 48.52 36.41	Portable Factor (dB) 0.08 0.08	Wireless Emission (dBµV 48.6 36.4	Relat Test V Anter Level //m) 5 9 6	ive Humidity Voltage nna Polarity Limits (dBµV/m) 74 54	-	56.2% Normal Vertical /argin (dB) -25.4 17.51	Voltage Value Type peak AVG
Factor = Anter           EUT Name           Temperature           Pressure           Test Mode           Frequency           (MHz)           4804.000           7206.000           7206.000	Baseus Speaker           23.1 °C           960hPa           Mode 7           Meter Reading           (dBµV)           48.52           36.41           42.15	Portable Factor (dB) 0.08 0.08 2.21	Wireless Emission (dBµV/ 48.6 36.4 44.3	Relat Test V Anter Level //m) 5 9 6	ive Humidity Voltage nna Polarity Limits (dBµV/m) 74 54 74	-	56.2% Normal Vertical //argin (dB) -25.4 17.51 29.64	Voltage Value Type peak AVG peak
Factor = Anter         EUT Name         Temperature         Pressure         Test Mode         Frequency         (MHz)         4804.000         4804.000         7206.000         7206.000         Remark:	Baseus Speaker           23.1 °C           960hPa           Mode 7           Meter Reading           (dBµV)           48.52           36.41           42.15	Portable Factor (dB) 0.08 0.08 2.21 2.21	Wireless Emission (dBµV/ 48.6 36.4 44.3 35.7	Relat Test V Anter Level //m) 5 9 6	ive Humidity Voltage nna Polarity Limits (dBµV/m) 74 54 74	-	56.2% Normal Vertical //argin (dB) -25.4 17.51 29.64	Voltage Value Type peak AVG peak

# Radiated Emissions Test Results Above 1GHz

## **RESULT: Pass**



EUT Name		Baseus Speaker	Portable	Wireless	Mode	el Name		Baseus	s AeQur 30	Mini
Temperature		<b>23.1</b> ℃			Relat	tive Humic	dity	56.2%		
Pressure		960hPa			Test	Voltage		Norma	Voltage	
Test Mode		Mode 8			Ante	nna Polar	ity	Horizor	ntal	
Frequen	cy I	Meter Reading	Factor	Emissio	n Level	Limits	I	Margin	Value Typ	
(MHz)		(dBµV)	(dB)	(dBµ∖	//m)	(dBµV/m)	)	(dB)	value i y	Je
4882.00	00	45.21	0.14	45.3	35	74		-28.65	peak	
4882.00	00	38.47	0.14	38.6	61	54		-15.39	AVG	
7323.00	00	40.17	2.36	42.5	53	74		-31.47	peak	
7323.00	0	32.16	2.36	34.5	52	54		-19.48	AVG	
Remark:										
Factor = A	Antenna	Factor + Ca	ble Loss – Pr	e-amplifier.						
EUT Name		Baseus Speaker	Portable	Wireless	Mode	el Name		Baseus	s AeQur 30	Mini
Temperature		<b>23.1</b> ℃			Rela	tive Humic	dity	56.2%		
Pressure		960hPa			Test	Voltage		Norma	Voltage	
Test Mode		Mode 8			Ante	nna Polar	ity	Vertica	l	
					·					1
Frequency	-	Reading	Factor	Emission Lev		Limits	Margi	n ,	Value Type	
(MHz)		dBμV)	(dB)	(dBµV/m)	(	dBµV/m)	(dB)			ļ
4882.000		6.28	0.14	46.42		74	-27.5	-	peak	
4882.000	-	38.51	0.14	38.65		54	-15.3		AVG	
7323.000		2.17	2.36	44.53		74	-29.4		peak	ł
7323.000	3	33.66	2.36	36.02		54	-17.9	8	AVG	
Demerly										
Remark:										
Factor = Anter	nna Fac	tor + Cable L	oss – Pre-ar	nplitter.						J

## **RESULT: Pass**



EUT Name	Baseus Speaker	Portable	Wireless	Mode	Name	Baseus	AeQur 30 Mini	
Temperature	<b>23.1</b> ℃			Relati	ve Humidity	56.2%		
Pressure	960hPa			Test Voltage		Normal	Normal Voltage	
Test Mode	Mode 9			Anten	na Polarity	Horizont	al	
Frequency	Meter Reading	ter Reading Factor Emiss		on Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµ	V/m)	(dBµV/m)	(dB)	value Type	
4960.000	46.14	0.22	46	.36	74	-27.64	peak	
4960.000	37.42	0.22	37	.64	54	-16.36	AVG	
7440.000	41.02	2.64	43	.66	74	-30.34	peak	
7440.000	33.26	2.64	35	5.9	54	-18.1	AVG	
Remark:								
IRemark.								
	nna Faatar I Oak		om plific -					
	nna Factor + Cab	le Loss – Pre-	-amplifier.					
Factor = Ante			-amplifier. Wireless	Model	Name	Baseus	AeQur 30 Mini	
Factor = Ante	Baseus				Name ve Humidity	Baseus / 56.2%	AeQur 30 Mini	
Factor = Ante EUT Name Temperature	Baseus Speaker			Relati			·	
Factor = Ante EUT Name Temperature Pressure	Baseus Speaker 23.1℃			Relati Test V	ve Humidity	56.2%	·	
Factor = Ante EUT Name Temperature Pressure Test Mode	Baseus Speaker 23.1 °C 960hPa Mode 9	Portable	Wireless	Relati Test V Anten	ve Humidity /oltage na Polarity	56.2% Normal Vertical	·	
Factor = Ante	Baseus Speaker 23.1 °C 960hPa Mode 9 Meter Reading	Portable	Wireless	Relati Test V Anten	ve Humidity /oltage na Polarity Limits	56.2% Normal Vertical	·	
Factor = Ante	Baseus Speaker 23.1 °C 960hPa Mode 9 Meter Reading (dBµV)	Portable Factor (dB)	Emissio (dBµ	Relati Test V Anten	ve Humidity /oltage na Polarity Limits (dBµV/m)	56.2% Normal V Vertical Margin (dB)	Voltage Value Type	
Factor = Ante         EUT Name         Temperature         Pressure         Test Mode         Frequency         (MHz)         4960.000	Baseus Speaker 23.1℃ 960hPa Mode 9 Meter Reading (dBµV) 46.14	Portable Factor (dB) 0.22	Emissic (dBµ	Relati Test V Anten	ve Humidity foltage na Polarity Limits (dBµV/m) 74	56.2% Normal V Vertical Margin (dB) -27.64	Voltage Value Type peak	
Factor = Ante         EUT Name         Temperature         Pressure         Test Mode         Frequency         (MHz)         4960.000         4960.000	Baseus Speaker           23.1 ℃           960hPa           Mode 9           Meter Reading           (dBµV)           46.14           37.95	Portable Factor (dB) 0.22 0.22	Emissio (dBµ 46 38	Relati Test V Anten on Level V/m) .36 .17	ve Humidity /oltage na Polarity Limits (dBµV/m) 74 54	56.2% Normal V Vertical Margin (dB) -27.64 -15.83	Voltage Value Type peak AVG	
Factor = Ante           EUT Name           Temperature           Pressure           Test Mode           Frequency           (MHz)           4960.000           7440.000	Baseus Speaker           23.1 °C           960hPa           Mode 9           Meter Reading           (dBµV)           46.14           37.95           42.48	Portable Factor (dB) 0.22 0.22 2.64	Emissio (dBµ 46 38 45	Relati Test V Anten Dn Level V/m) .36 .17 .12	ve Humidity /oltage na Polarity Limits (dBµV/m) 74 54 74	56.2%           Normal V           Vertical           Margin           (dB)           -27.64           -15.83           -28.88	Voltage Value Type peak AVG peak	
Factor = Ante         EUT Name         Temperature         Pressure         Test Mode         Frequency         (MHz)         4960.000         4960.000	Baseus Speaker           23.1 ℃           960hPa           Mode 9           Meter Reading           (dBµV)           46.14           37.95	Portable Factor (dB) 0.22 0.22	Emissio (dBµ 46 38	Relati Test V Anten Dn Level V/m) .36 .17 .12	ve Humidity /oltage na Polarity Limits (dBµV/m) 74 54	56.2% Normal V Vertical Margin (dB) -27.64 -15.83	Voltage Value Type peak AVG	
Factor = Ante           EUT Name           Temperature           Pressure           Test Mode           Frequency           (MHz)           4960.000           7440.000	Baseus Speaker           23.1 °C           960hPa           Mode 9           Meter Reading           (dBµV)           46.14           37.95           42.48	Portable Factor (dB) 0.22 0.22 2.64	Emissio (dBµ 46 38 45	Relati Test V Anten Dn Level V/m) .36 .17 .12	ve Humidity /oltage na Polarity Limits (dBµV/m) 74 54 74	56.2%           Normal V           Vertical           Margin           (dB)           -27.64           -15.83           -28.88	Voltage Value Type peak AVG peak	

## **RESULT: Pass**

Note:

- 1. The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit.
- 3. The "Factor" value can be calculated automatically by software of measurement system.
- 4. All mode rates are tested and evaluated, 8DPSK modulated 3DH5 mode is the worst case and documented in the report.



# 7. AC Power Line Conducted Emission Test

## 7.1 Measurement Limit


Frequency	Maximum RF Line Voltage	Line Voltage
Frequency	Q.P. (dBµV)	Average (dBµV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

## 7.2 Measurement Setup (Block Diagram of Configuration)

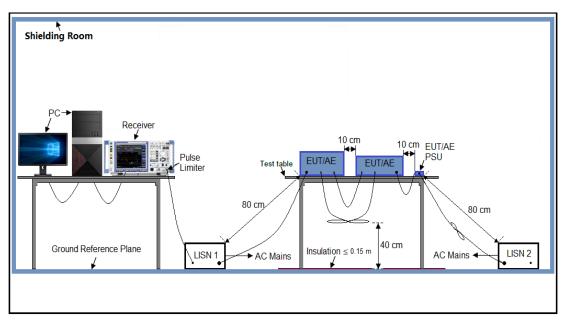



# 7.3 Preliminary Procedure of Line Conducted Emission Test

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

## 7.4 Final Procedure of Line Conducted Emission Test

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

## 7.5 Measurement Results



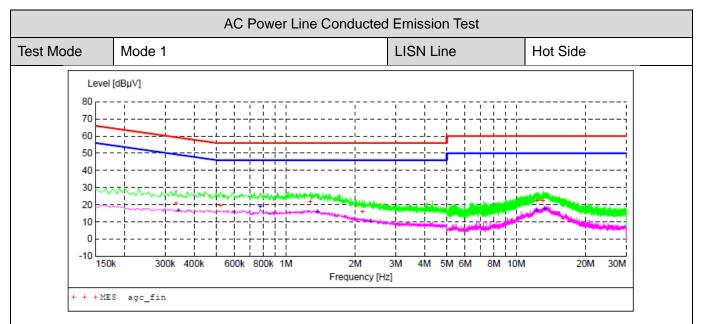

## MEASUREMENT RESULT: "agc\_fin"

2024/10/30 2	3:14					
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.334000 0.522000 1.278000 2.154000 12.346000 13.062000	20.80 19.50 21.50 15.60 21.90 21.90	6.1 6.2 6.2 6.8 6.8	59 56 56 60 60	38.6 36.5 34.5 40.4 38.1 38.1	QP QP	L1 L1 L1 L1 L1 L1

## MEASUREMENT RESULT: "agc\_fin2"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.342000	16.60	6.1	49	32.6	AV	ь1
0.774000	19.10	6.2	46	26.9	AV	L1
1.370000	15.90	6.2	46	30.1	AV	L1
2.330000	10.40	6.3	46	35.6	AV	L1
12.258000	16.70	6.8	50	33.3	AV	L1
13.278000	17.40	6.8	50	32.6	AV	L1

## **RESULT: Pass**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com

 Web: http://www.agccert.com/



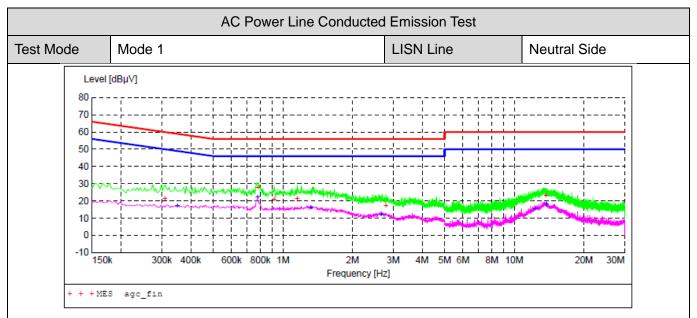

## MEASUREMENT RESULT: "agc\_fin"

2024/10/30	23:17					
Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line
0.310000	21.40	6.1	60	38.6	QP	N
0.782000	27.60	6.2	56	28.4	QP	N
0.918000	20.60	6.2	56	35.4	QP	Ν
1.154000	21.10	6.2	56	34.9	QP	Ν
2.786000	16.90	6.3	56	39.1	QP	Ν
13.726000	23.10	6.8	60	36.9	QP	Ν

## MEASUREMENT RESULT: "agc fin2"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.350000	17.00	6.1	49	32.0	AV	N
0.778000	21.90	6.2	46	24.1	AV	N
1.322000	16.10	6.2	46	29.9	AV	N
2.658000	12.10	6.3	46	33.9	AV	N
12.274000	15.20	6.8	50	34.8	AV	N
13.802000	18.00	6.8	50	32.0	AV	N

## **RESULT: Pass**



Report No.: AGC11758240607FR01A Page 28 of 28

# Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC11758240607AP02A

# Appendix II: Photographs of Test EUT

Refer to the Report No.: AGC11758240607AP03A

-----End of Report-----



# Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.