

FCC §1.1310 - MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE)


(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According with 680106 D01 Wireless Power Transfer v04 clause 3.2

Accordingly, for § 2.1091-Mobile devices, the MPE limits between 100 kHz to 300 kHz are to be considered the same as those at 300 kHz in Table 1 of § 1.1310, that is, 614 V/m and 1.63 A/m, for the electric field and magnetic field, respectively. For § 2.1093-Portable devices below 4 MHz and down to 100 kHz, the MPE limits in § 1.1310 (with the 300 kHz limit applicable all the way down to 100 kHz) can be used for the purpose of equipment authorization in lieu of SAR evaluations.

Block Diagram of Test Setup

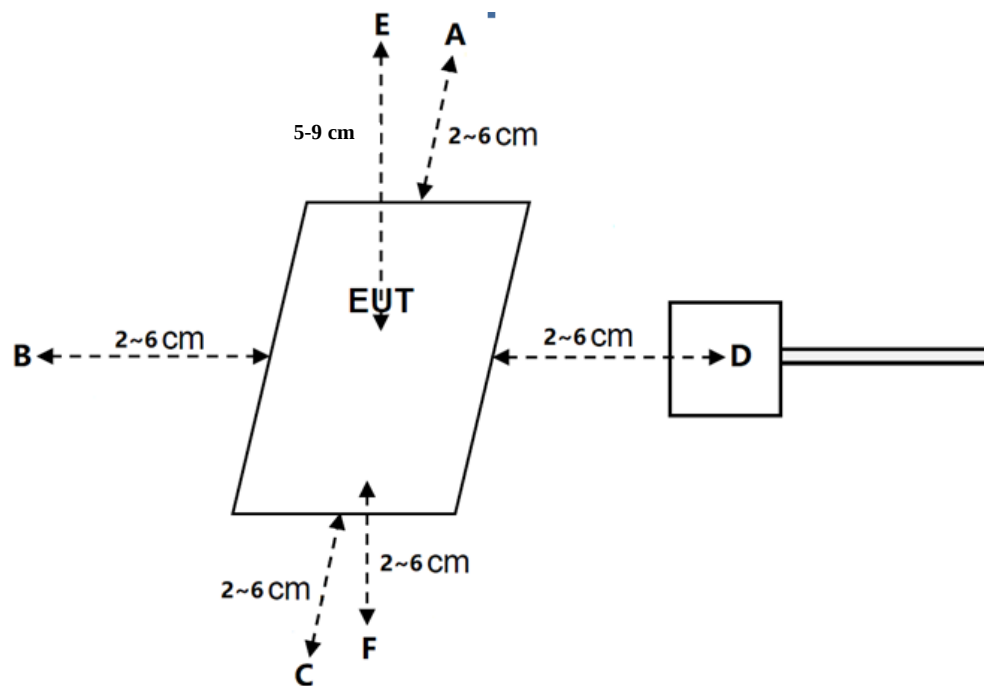

MAGPy Probe Information

The full MAGPy-8H3D+E3D V2 probe consists of eight isotropic H-field subprobes and one isotropic E-field subprobe that are all integrated inside the probe head with a flat tip. Each isotropic H-field subprobe comprises three concentric orthogonal loop coil sensors. The isotropic E-field subprobe is composed of three orthogonal sensors (x and y sensors are dipoles and the sensor measuring the z component is a monopole). In total, the MAGPy-8H3D+E3D V2 probe is thus composed of nine subprobes and 27 single sensors that measure in the time-domain. The flat-tip probe design brings the sensors closer to the tip (e.g., the closest H-field sensors are now 7.5mm from the tip). The probe specifications are provided in Table 2.1.

Parameter	Specs
PROBE DESIGN	
Diameter	60 mm
8 isotropic <i>H</i> -field sensors	concentric loops of 1 cm^2 arranged at the corner of a cube of 22 mm side length
1 isotropic <i>E</i> -field sensor	orthogonal dipole/monopole (arm length: 50 mm)
Measurement center	18.5 mm from the probe tip
Temperature range	0–40 °C
Dimensions	110 × 635 × 35 mm (MAGPy-8H3D+E3D V2 & MAGPy-DAS V2)
<i>H</i>-FIELD SPECIFICATION	
Frequency range	3 kHz–10 MHz
Measurement range	0.1–3200 A/m, 0.12 μT –4 mT
Gradient range	0–80 T/m/T
<i>E</i>-FIELD SPECIFICATION	
Frequency range	3 kHz–10 MHz
Measurement range	0.08–2000 V/m

Table 2.1: MAGPy-8H3D+E3D V2 probe specifications

Test Procedures

- 1) The measuring distance from the center of the probe to the tip of the probe is 1.85cm, so the minimum measurement distance is 1.85cm. To obtain the H-field and E-field at 0cm, perform the following steps.
- 2) Perform H-field and E-field measurements for each all sides of the EUT surface at 2~6cm, along all the principal axes defined with respect to the orientation of the transmitting element (e.g., coil or antenna). Step is 1cm. For top side, the measuring distance is 5~9cm, because the wireless charging load has a thickness.
- 3) The highest emission level was recorded.
- 4) According to the measurement data, the curve is fitted with the measured distance as the horizontal coordinate and the measured H-field or E- field as the vertical coordinate.

- 5) The fitted curve needs to be validated through the probe measurements for the two closest points to the device surface. The difference needs to be less than 30%.
- 6) The H-field or E-field at 0cm is estimated from the fitted curve and compared with limit.

Test Data

Environmental Conditions



Temperature:	26 °C
Relative Humidity:	67 %
ATM Pressure:	101 kPa

The testing was performed by Bamboo Zhan on 2024-05-31.

Test Mode: Transmitting (Wireless charging at Maximum output power)



Test Frequency (kHz)	Measuring Position	Measuring Distance (mm)	H-Field (A/m)	E-Field (V/m)
110-205	A	20	0.53	17.7
		30	0.31	6.75
		40	0.26	4.05
		50	0.13	3.57
		60	0.11	1.96

Curve Fitting

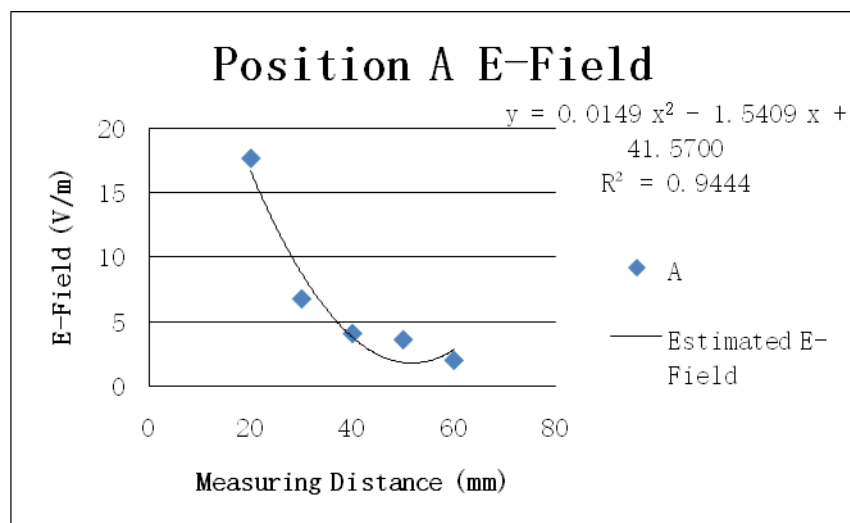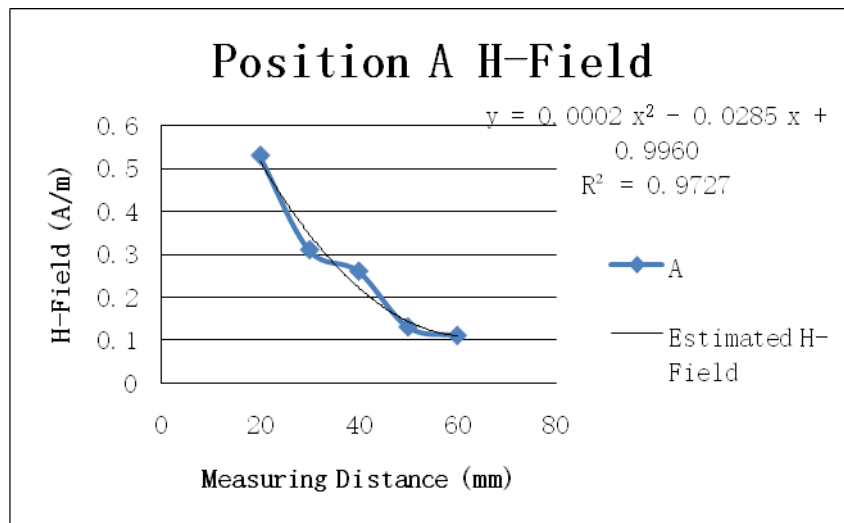



Test Frequency (kHz)	Measuring Position	Measuring Distance (mm)	H-Field (A/m)	E-Field (V/m)
110-205	B	20	0.59	5.66
		30	0.51	4.02
		40	0.39	2.31
		50	0.17	1.85
		60	0.08	1.74

Curve Fitting

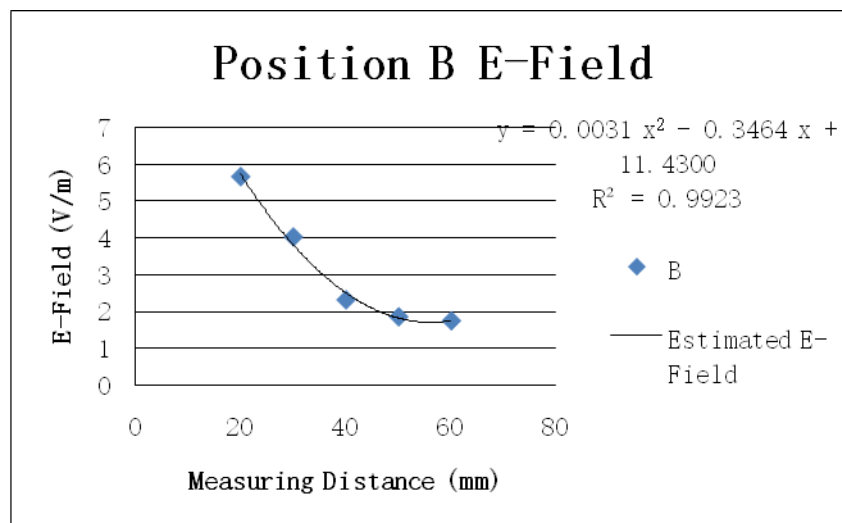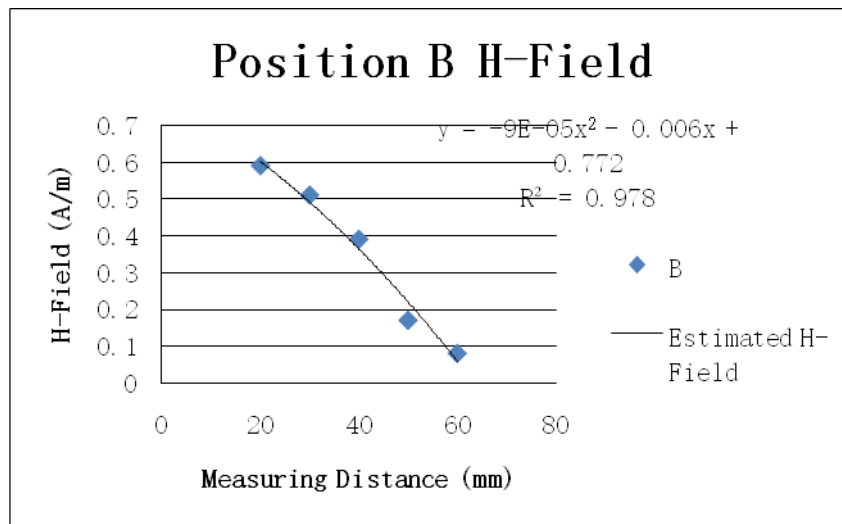



Test Frequency (kHz)	Measuring Position	Measuring Distance (mm)	H-Field (A/m)	E-Field (V/m)
110-205	C	20	0.35	8.72
		30	0.31	6.1
		40	0.17	5.59
		50	0.09	2.41
		60	0.07	1.73

Curve Fitting

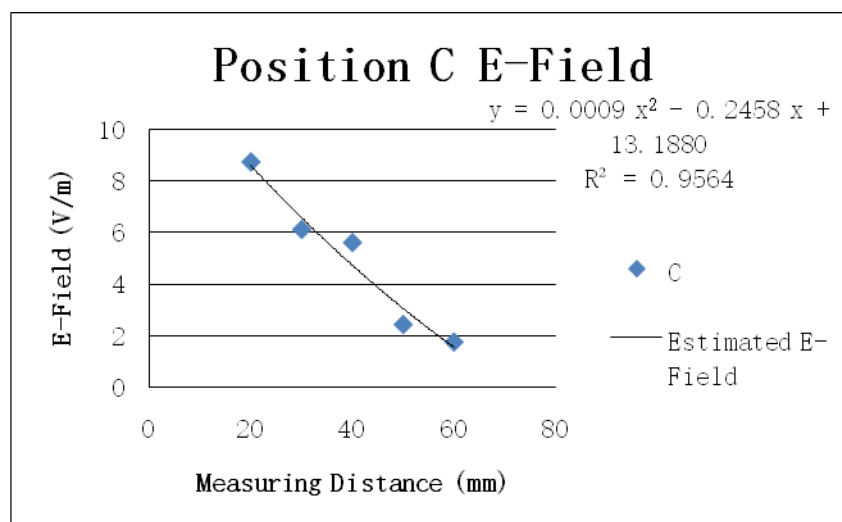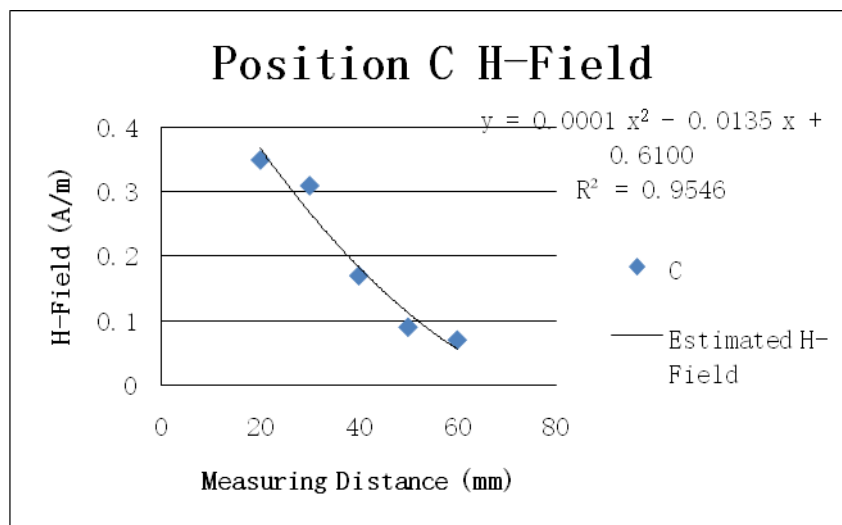



Test Frequency (kHz)	Measuring Position	Measuring Distance (mm)	H-Field (A/m)	E-Field (V/m)
110-205	D	20	0.26	19.2
		30	0.17	11.6
		40	0.11	7.43
		50	0.07	4.25
		60	0.05	3.41

Curve Fitting

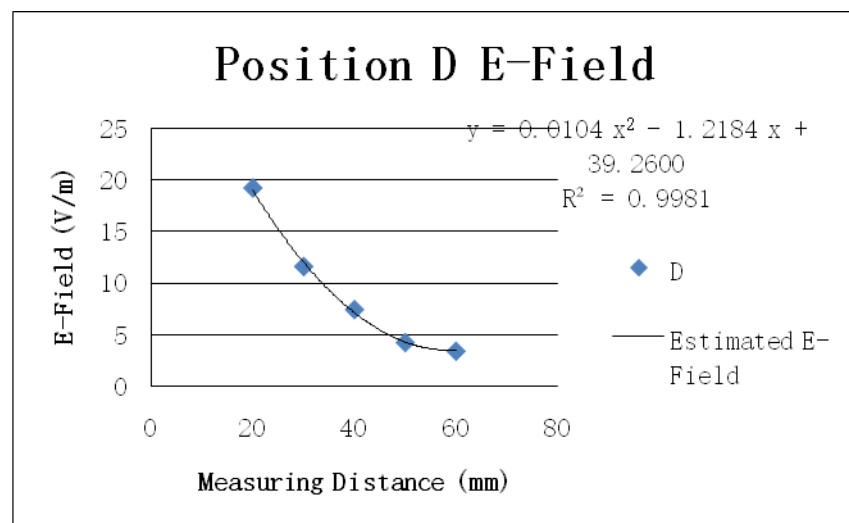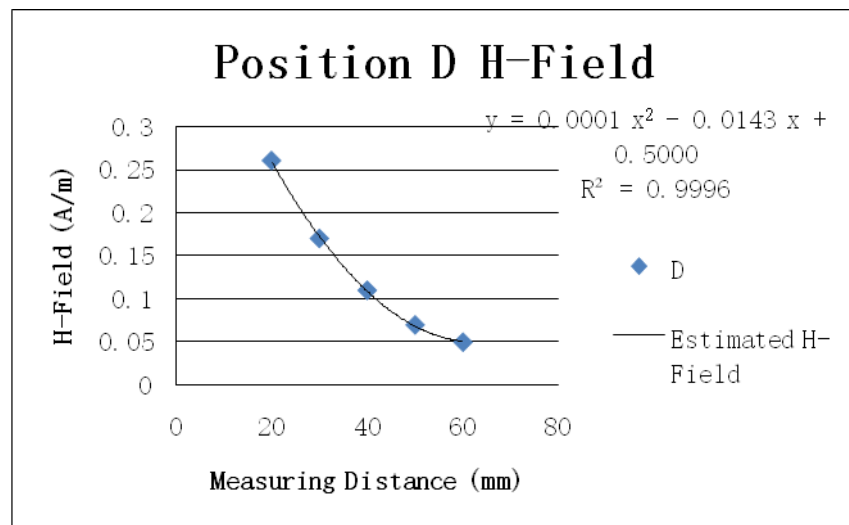



Test Frequency (kHz)	Measuring Position	Measuring Distance (mm)	H-Field (A/m)	E-Field (V/m)
110-205	E	50	0.5	7.67
		60	0.45	6.37
		70	0.3	4.98
		80	0.23	3.76
		90	0.08	1.15

Curve Fitting

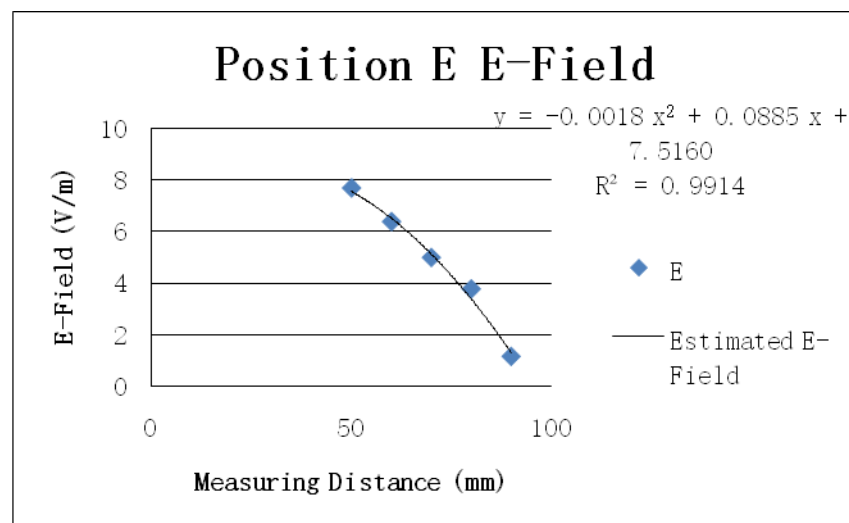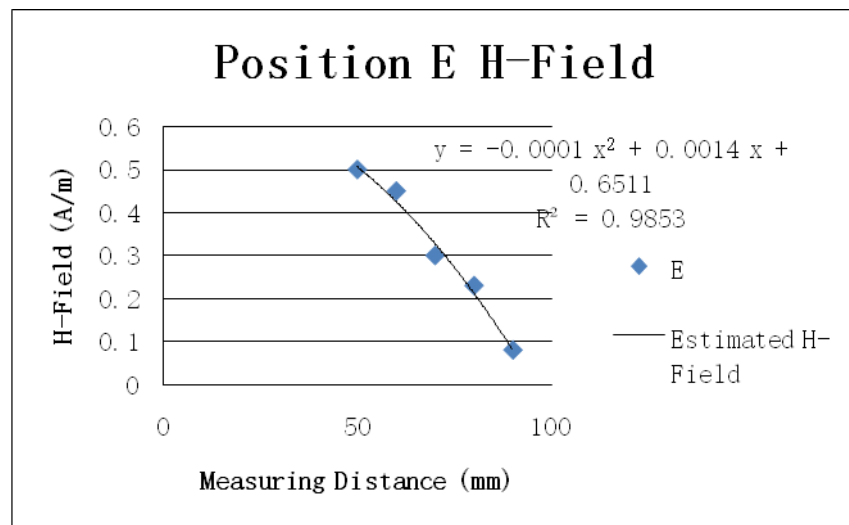

Test Frequency (kHz)	Measuring Position	Measuring Distance (mm)	H-Field (A/m)	E-Field (V/m)
110-205	F	20	0.59	12.5
		30	0.4	7.46
		40	0.27	5.27
		50	0.19	4.35
		60	0.14	2.55

Curve Fitting

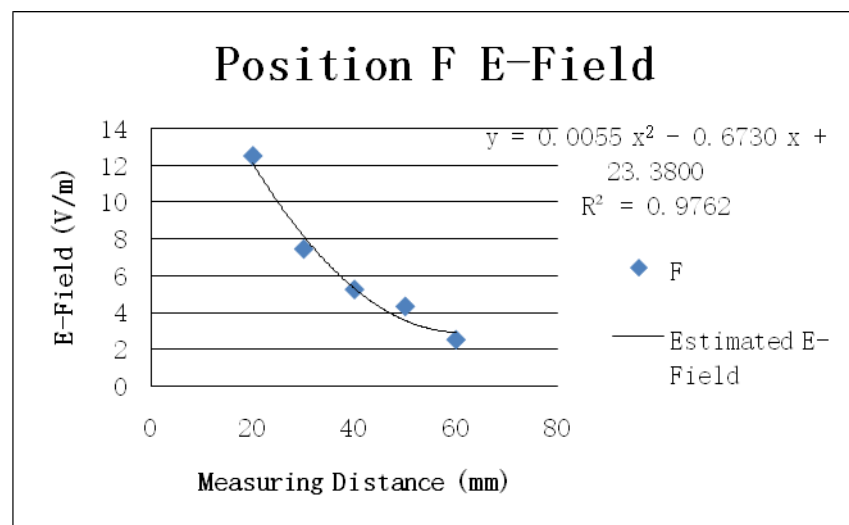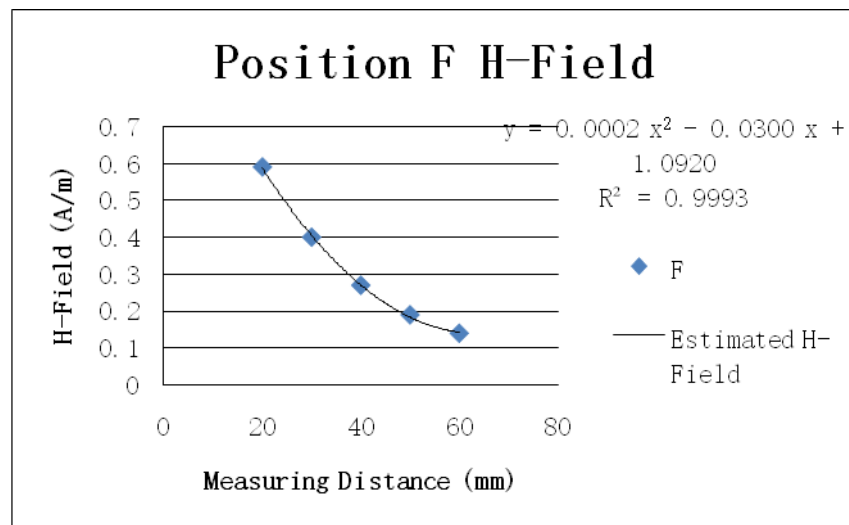

Verify The Fitted Curve

Measuring Position	Measuring Distance (mm)	Estimated H-Field (A/m)	Measured H-Field (A/m)	Agreement Between Estimated and Measured (%)	Limit (%)
A	20	0.51	0.53	-3.77	±30
	30	0.32	0.31	3.23	±30
B	20	0.6	0.59	1.69	±30
	30	0.48	0.51	-5.88	±30
C	20	0.38	0.35	8.57	±30
	30	0.3	0.31	-3.23	±30
D	20	0.25	0.26	-3.85	±30
	30	0.16	0.17	-5.88	±30
E	50	0.47	0.5	-6.00	±30
	60	0.38	0.45	-15.56	±30
F	20	0.57	0.59	-3.39	±30
	30	0.37	0.4	-7.50	±30

Measuring Position	Measuring Distance (mm)	Estimated E-Field (V/m)	Measured E-Field (V/m)	Agreement Between Estimated and Measured (%)	Limit (%)
A	20	16.71	17.7	-5.59	±30
	30	8.75	6.75	29.63	±30
B	20	5.74	5.66	1.41	±30
	30	3.83	4.02	-4.73	±30
C	20	8.63	8.72	-1.03	±30
	30	6.62	6.1	8.52	±30
D	20	19.05	19.2	-0.78	±30
	30	12.07	11.6	4.05	±30
E	50	7.44	7.67	-3.00	±30
	60	6.35	6.37	-0.31	±30
F	20	12.12	12.5	-3.04	±30
	30	8.14	7.46	9.12	±30

Conclusion: The validation is considered sufficient, because within 30% agreement between the estimated model and the (E-Field and H-Field) probe measurements is demonstrated

Test Distance: 0cm(estimated from the fitted curve)**H-Field Strength**

Test Frequency (kHz)	Position A (A/m)	Position B (A/m)	Position C (A/m)	Position D (A/m)	Position E (A/m)	Position F (A/m)	Limit (A/m)
110-205	1.00	0.77	0.61	0.50	0.65	1.09	1.63

E-Field Strength

Test Frequency (kHz)	Position A (V/m)	Position B (V/m)	Position C (V/m)	Position D (V/m)	Position E (V/m)	Position F (V/m)	Limit (V/m)
110-205	41.57	11.43	13.19	39.26	7.52	23.38	614