


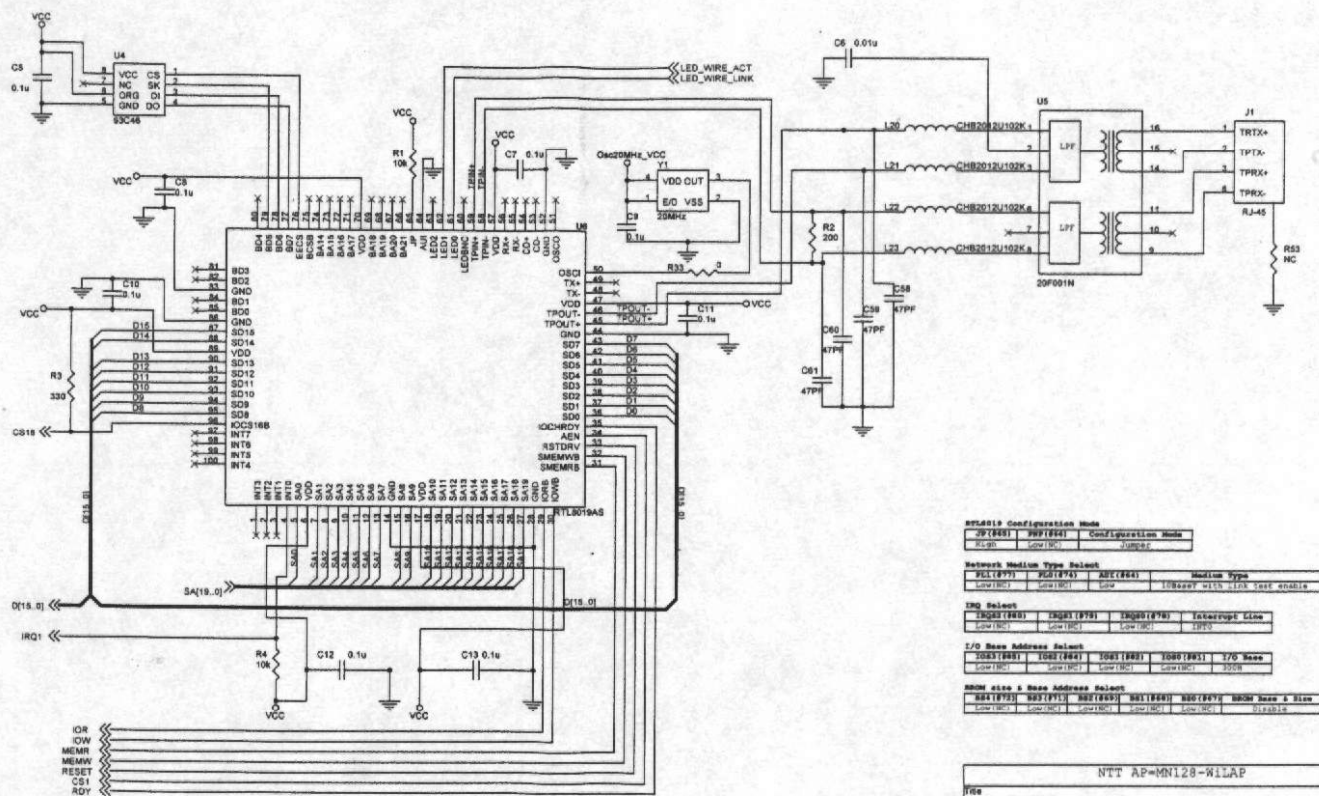

RTL8019 Configuration Mode			
2P (R0)	2P (R0)	Configuration Mode	
0x00	0x00	0x00	0x00

Network Medium Type Select			
0x00 (R0)	0x00 (R0)	0x00 (R0)	Medium Type
Low (R0)	Low (R0)	Low (R0)	10BaseT with 100 test enable

IRQ Select			
0x00 (R0)	0x00 (R0)	0x00 (R0)	Interrupt Line
Low (R0)	Low (R0)	Low (R0)	IRQ0

I/O Base Address Select			
0x00 (R0)	0x00 (R0)	0x00 (R0)	I/O Base
Low (R0)	Low (R0)	Low (R0)	0x00

ROM size & Base Address Select			
0x00 (R0)	0x00 (R0)	0x00 (R0)	ROM Base & Size
Low (R0)	Low (R0)	Low (R0)	0x00

NTI AP-MN128-W1AP			
0x00	ETHERNET Controller		
0x00	Document Number	Rev	YP
0x00	00-RT030-100-4		
0x00	Monday, April 16, 2000	Sheet	2 of 6