

N38 Head ANT4

Date: 12/21/2022

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.938$ S/m; $\epsilon_r = 39.98$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: n38 (0) 2595 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(7.4, 7.4, 7.4)

Area Scan (101x171x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.02 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 19.49 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.77 W/kg

SAR(1 g) = 0.692 W/kg; SAR(10 g) = 0.280 W/kg

Maximum value of SAR (measured) = 1.20 W/kg

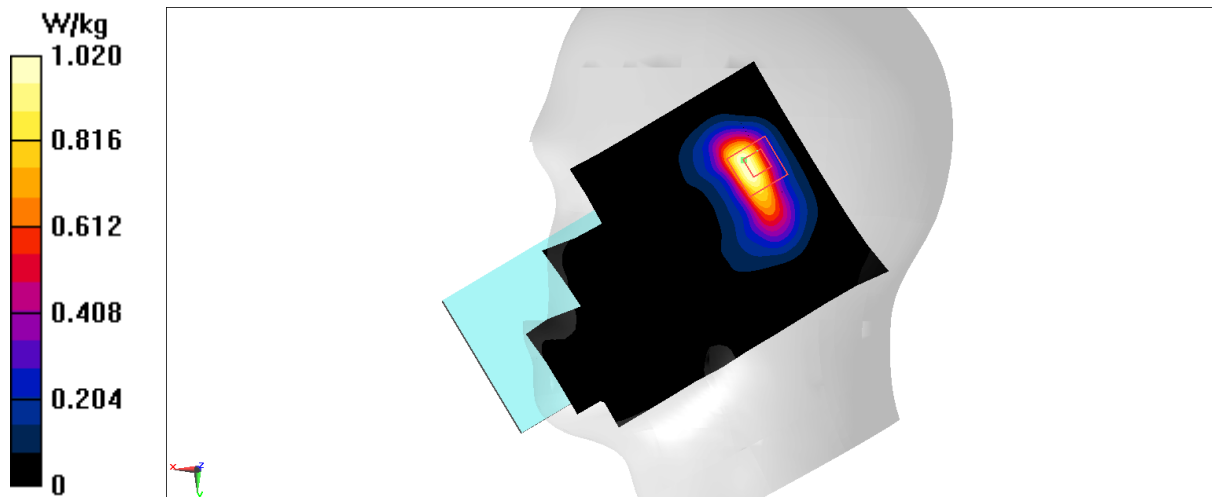

N38 Body 10mm ANT4

Date: 12/21/2022

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.938$ S/m; $\epsilon_r = 39.98$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: n38 (0) 2595 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(7.4, 7.4, 7.4)

Area Scan (101x171x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.127 W/kg



Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.563 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.161 W/kg

SAR(1 g) = 0.069 W/kg; SAR(10 g) = 0.030 W/kg

Maximum value of SAR (measured) = 0.119 W/kg

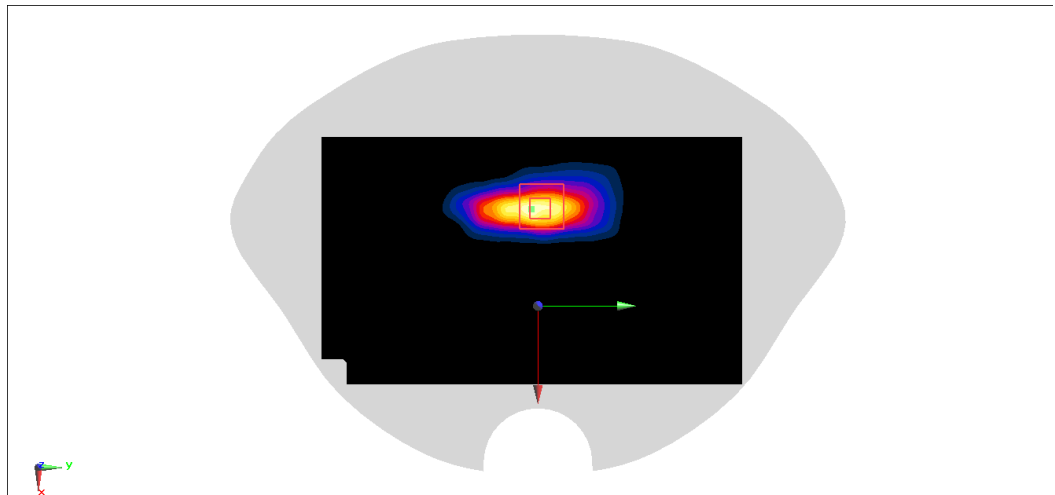

N38 Body 15mm ANT4

Date: 12/21/2022

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.938$ S/m; $\epsilon_r = 39.98$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: n38 (0) 2595 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(7.4, 7.4, 7.4)

Area Scan (101x171x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.143 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.286 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.176 W/kg

SAR(1 g) = 0.092 W/kg; SAR(10 g) = 0.051 W/kg

Maximum value of SAR (measured) = 0.142 W/kg

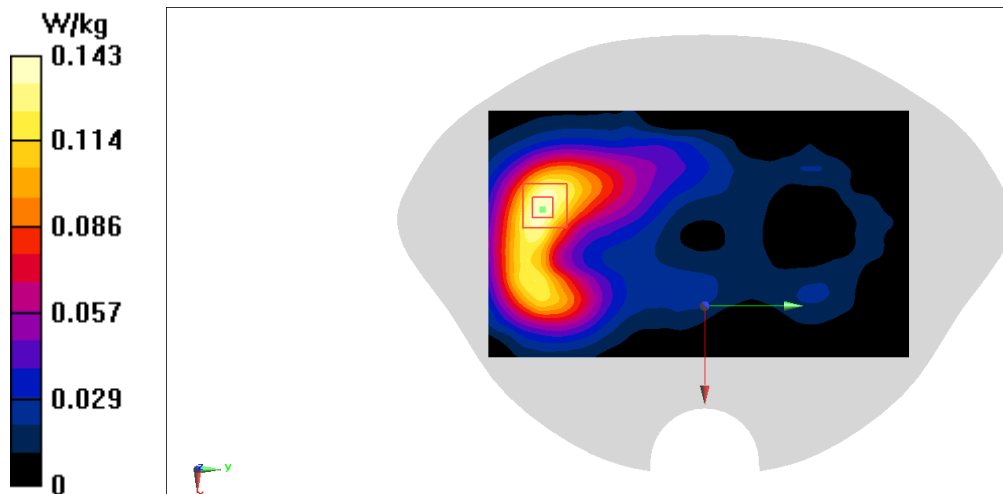

N38 Head ANT1

Date: 12/21/2022

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.938$ S/m; $\epsilon_r = 39.98$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: n38 (0) 2595 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(7.4, 7.4, 7.4)

Area Scan (101x171x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.208 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.286 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.230 W/kg

SAR(1 g) = 0.117 W/kg; SAR(10 g) = 0.057 W/kg

Maximum value of SAR (measured) = 0.184 W/kg

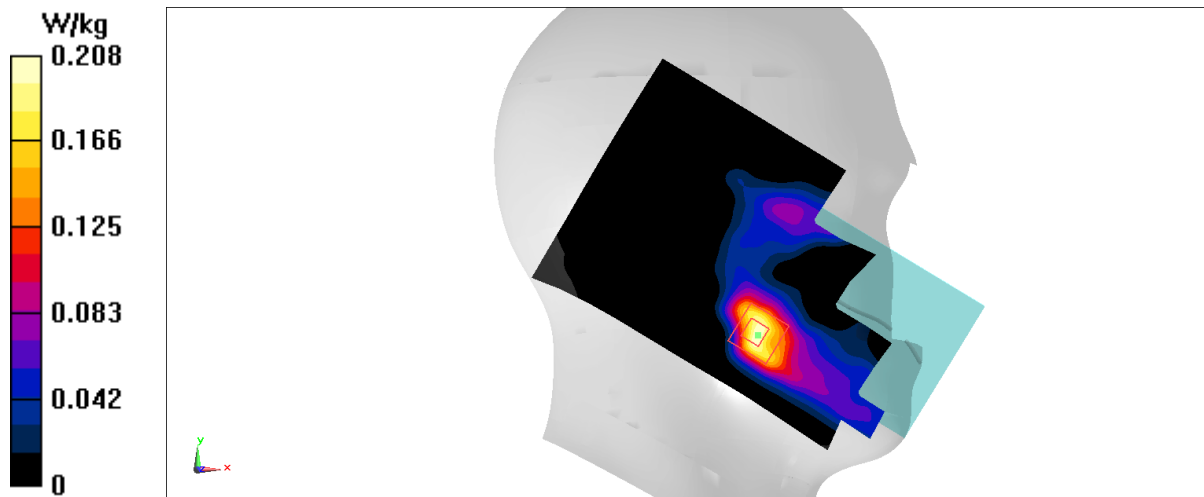

N38 Body 10mm ANT1

Date: 12/21/2022

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 2610$ MHz; $\sigma = 1.95$ S/m; $\epsilon_r = 39.96$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: n38 (0) 2610 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(7.4, 7.4, 7.4)

Area Scan (101x171x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.293 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.757 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.406 W/kg

SAR(1 g) = 0.183 W/kg; SAR(10 g) = 0.082 W/kg

Maximum value of SAR (measured) = 0.281 W/kg

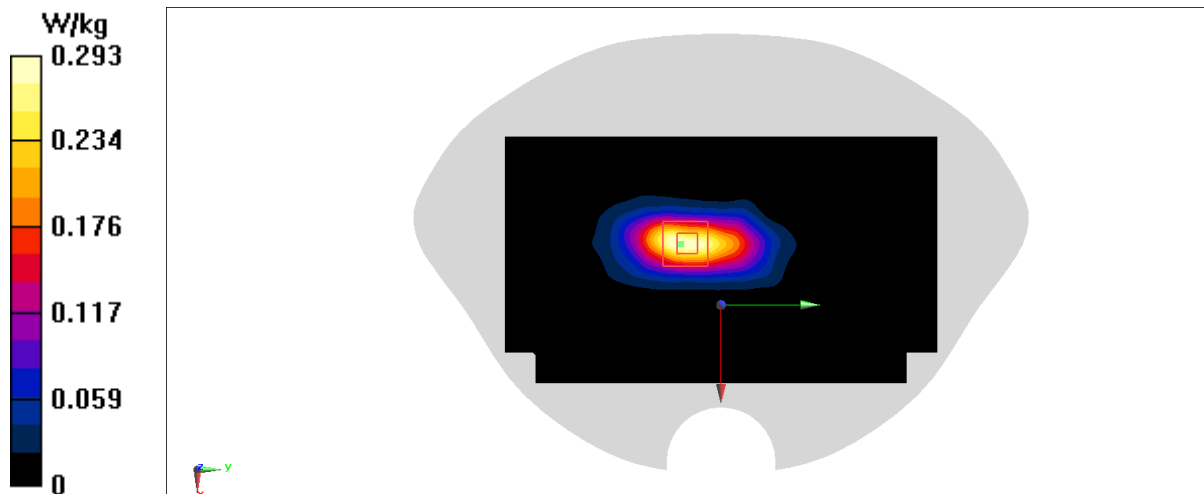

N38 Body 15mm ANT1

Date: 12/21/2022

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.938$ S/m; $\epsilon_r = 39.98$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: n38 (0) 2595 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(7.4, 7.4, 7.4)

Area Scan (101x171x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.273 W/kg



Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.718 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.337 W/kg

SAR(1 g) = 0.172 W/kg; SAR(10 g) = 0.091 W/kg

Maximum value of SAR (measured) = 0.272 W/kg

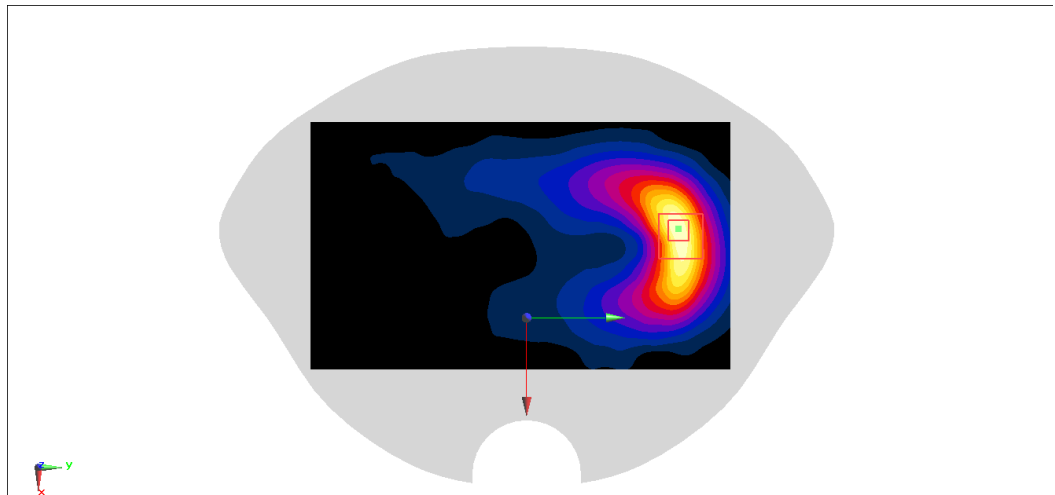

N38 Head ANT2

Date: 12/21/2022

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.938$ S/m; $\epsilon_r = 39.98$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: n38 (0) 2595 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(7.4, 7.4, 7.4)

Area Scan (101x171x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.20 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.113 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.584 W/kg; SAR(10 g) = 0.253 W/kg

Maximum value of SAR (measured) = 1.14 W/kg

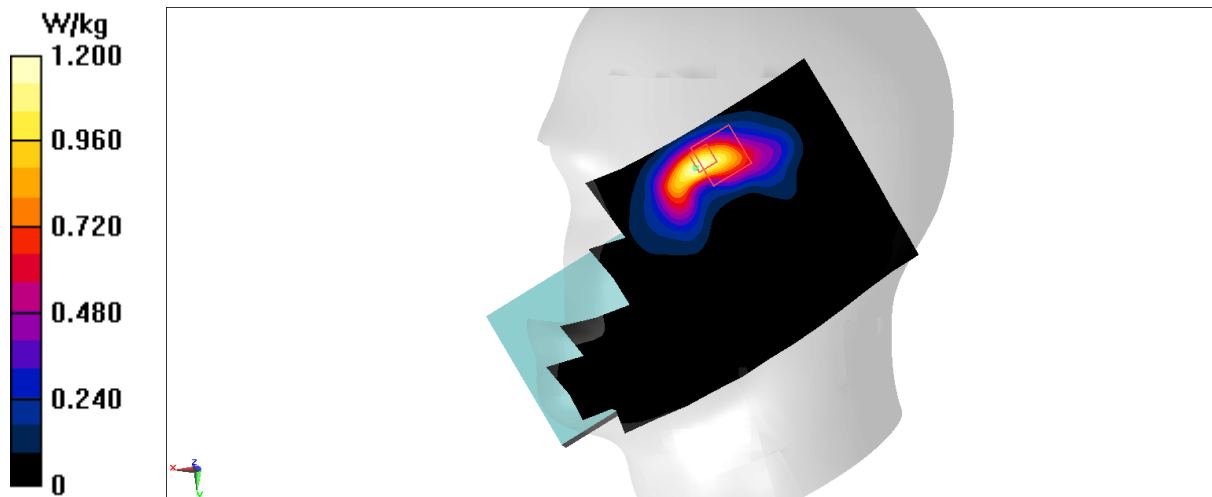

N38 Body 10mm ANT2

Date: 12/21/2022

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.938$ S/m; $\epsilon_r = 39.98$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: n38 (0) 2595 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(7.4, 7.4, 7.4)

Area Scan (101x171x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.197 W/kg



Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.029 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.243 W/kg

SAR(1 g) = 0.108 W/kg; SAR(10 g) = 0.050 W/kg

Maximum value of SAR (measured) = 0.174 W/kg

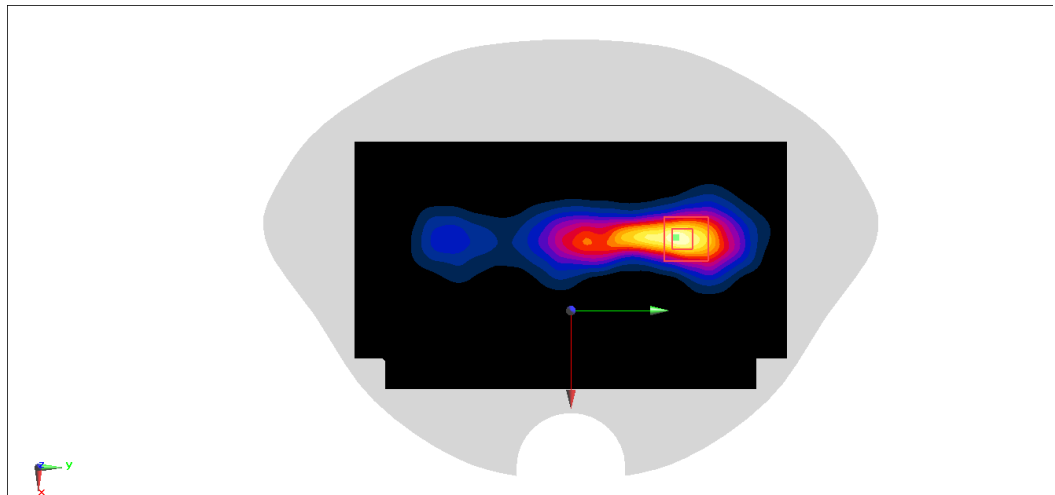

N38 Body 15mm ANT2

Date: 12/21/2022

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.938$ S/m; $\epsilon_r = 39.98$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: n38 (0) 2595 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(7.4, 7.4, 7.4)

Area Scan (101x171x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.201 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.175 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.251 W/kg

SAR(1 g) = 0.132 W/kg; SAR(10 g) = 0.072 W/kg

Maximum value of SAR (measured) = 0.203 W/kg

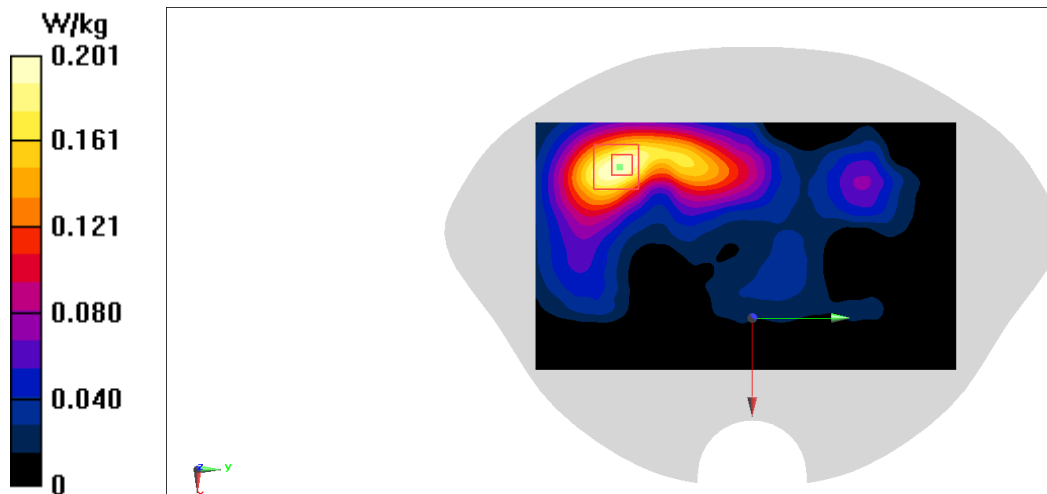

N38 Head ANT8

Date: 12/21/2022

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 2580$ MHz; $\sigma = 1.928$ S/m; $\epsilon_r = 40.01$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: n38 (0) 2580 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(7.4, 7.4, 7.4)

Area Scan (101x171x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.775 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.731 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.947 W/kg

SAR(1 g) = 0.386 W/kg; SAR(10 g) = 0.161 W/kg

Maximum value of SAR (measured) = 0.636 W/kg

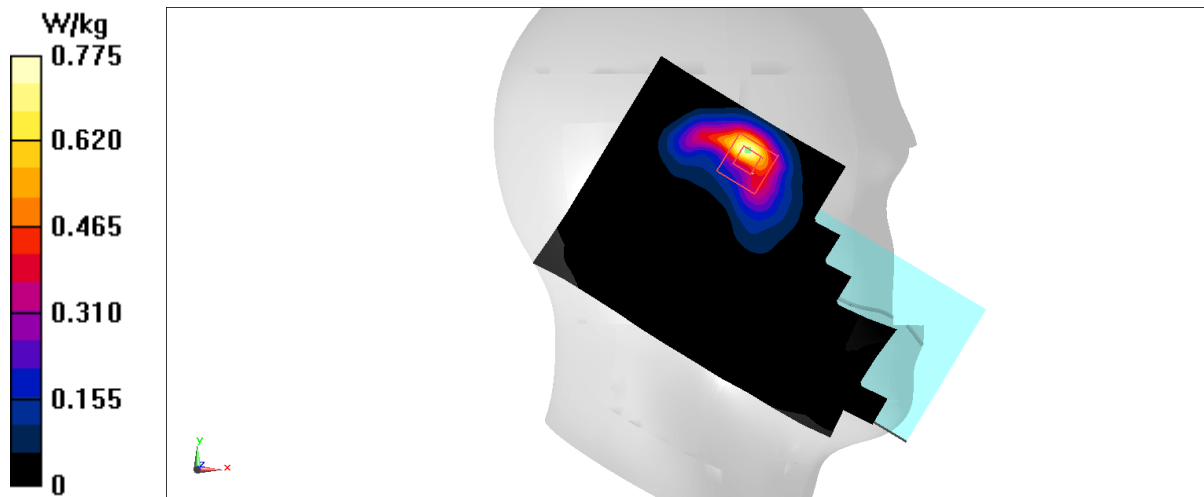

N38 Body 10mm ANT8

Date: 12/21/2022

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 2580$ MHz; $\sigma = 1.928$ S/m; $\epsilon_r = 40.01$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: n38 (0) 2580 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(7.4, 7.4, 7.4)

Area Scan (101x171x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.151 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.313 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.236 W/kg

SAR(1 g) = 0.081 W/kg; SAR(10 g) = 0.030 W/kg

Maximum value of SAR (measured) = 0.125 W/kg

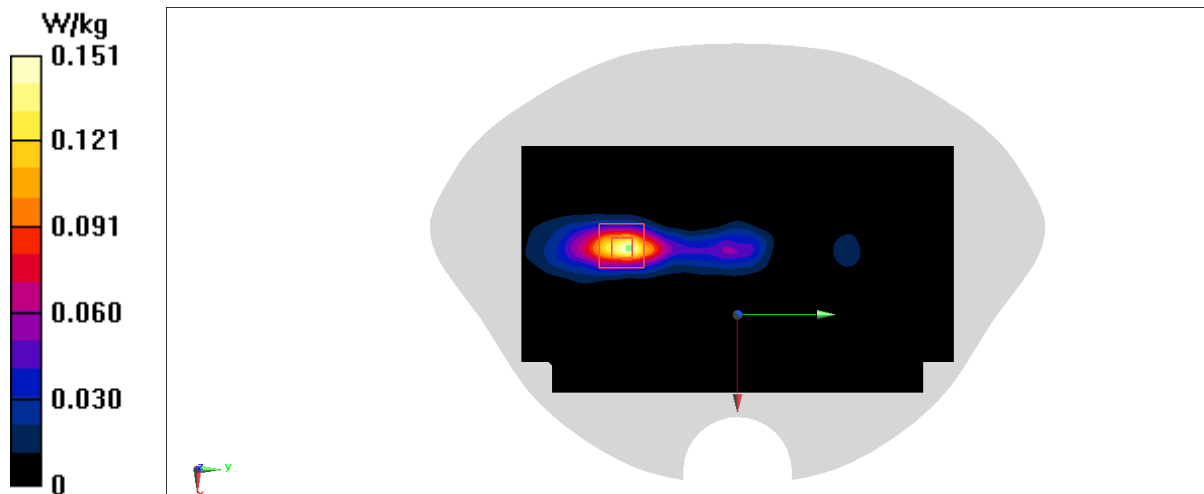

N38 Body 15mm ANT8

Date: 12/21/2022

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 2580$ MHz; $\sigma = 1.928$ S/m; $\epsilon_r = 40.01$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: n38 (0) 2580 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(7.4, 7.4, 7.4)

Area Scan (101x171x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.148 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.916 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.184 W/kg

SAR(1 g) = 0.090 W/kg; SAR(10 g) = 0.046 W/kg

Maximum value of SAR (measured) = 0.146 W/kg

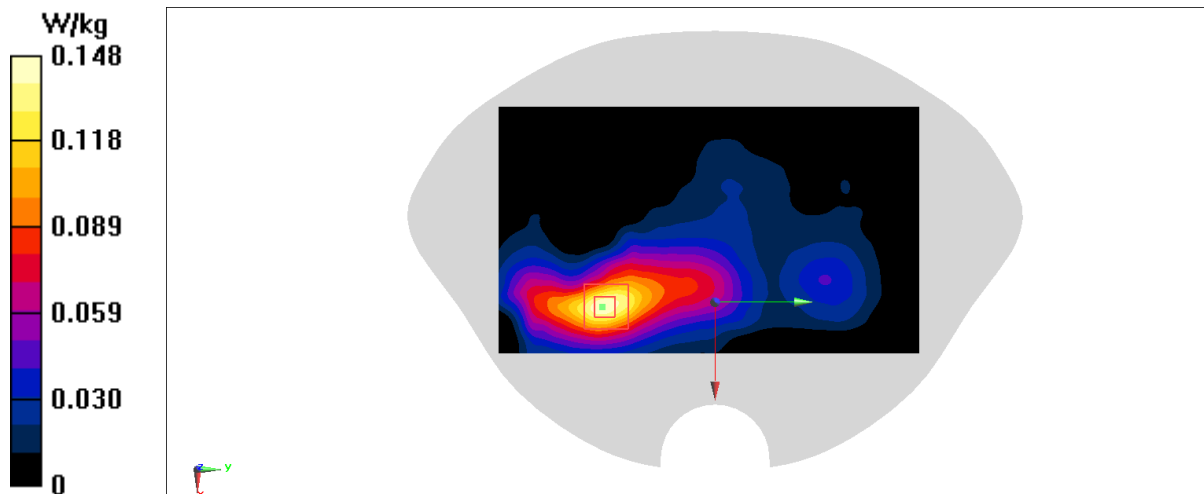

N41 Head ANT4

Date: 12/23/2022

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 2592.99$ MHz; $\sigma = 1.954$ S/m; $\epsilon_r = 40.31$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: 5G N41 (0) 2592.99 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(7.4, 7.4, 7.4)

Area Scan (101x171x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.59 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 16.41 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.87 W/kg

SAR(1 g) = 0.747 W/kg; SAR(10 g) = 0.303 W/kg

Maximum value of SAR (measured) = 1.23 W/kg

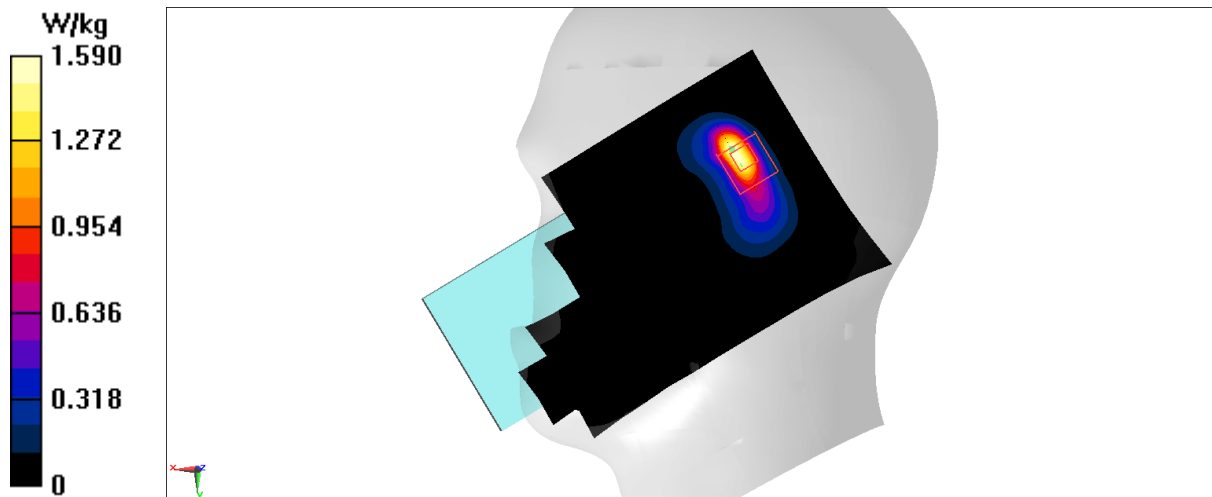

N41 Body 10mm ANT4

Date: 12/23/2022

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 2592.99$ MHz; $\sigma = 1.954$ S/m; $\epsilon_r = 40.31$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: 5G N41 (0) 2592.99 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(7.4, 7.4, 7.4)

Area Scan (101x171x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.138 W/kg



Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.315 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.160 W/kg

SAR(1 g) = 0.066 W/kg; SAR(10 g) = 0.029 W/kg

Maximum value of SAR (measured) = 0.109 W/kg

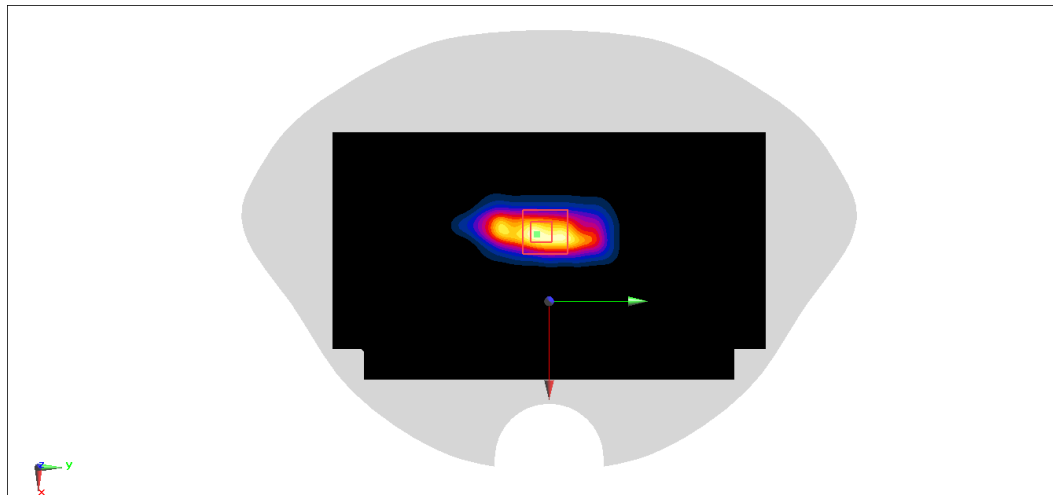

N41 Body 15mm ANT4

Date: 12/23/2022

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 2592.99$ MHz; $\sigma = 1.954$ S/m; $\epsilon_r = 40.31$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: 5G N41 (0) 2592.99 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(7.4, 7.4, 7.4)

Area Scan (101x171x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.148 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.276 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.184 W/kg

SAR(1 g) = 0.091 W/kg; SAR(10 g) = 0.047 W/kg

Maximum value of SAR (measured) = 0.146 W/kg

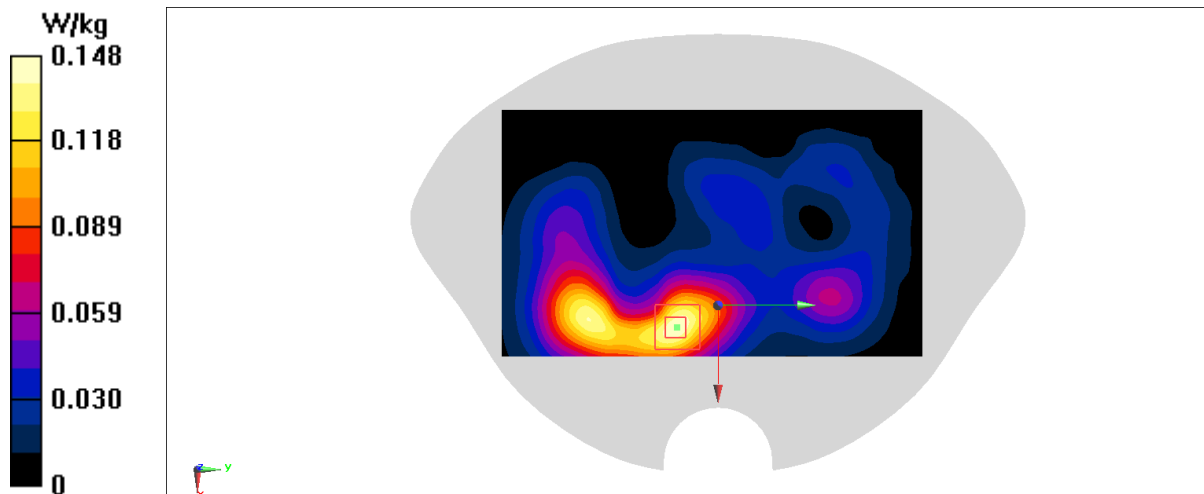

N41 Head ANT1

Date: 12/23/2022

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 2636.49$ MHz; $\sigma = 1.99$ S/m; $\epsilon_r = 40.25$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: LTE Band41 (0) 2636.49 MHz Duty Cycle: 1:1.5787

Probe: EX3DV4 - SN3617 ConvF(7.4, 7.4, 7.4)

Area Scan (101x171x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.215 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.199 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.236 W/kg

SAR(1 g) = 0.121 W/kg; SAR(10 g) = 0.057 W/kg

Maximum value of SAR (measured) = 0.188 W/kg

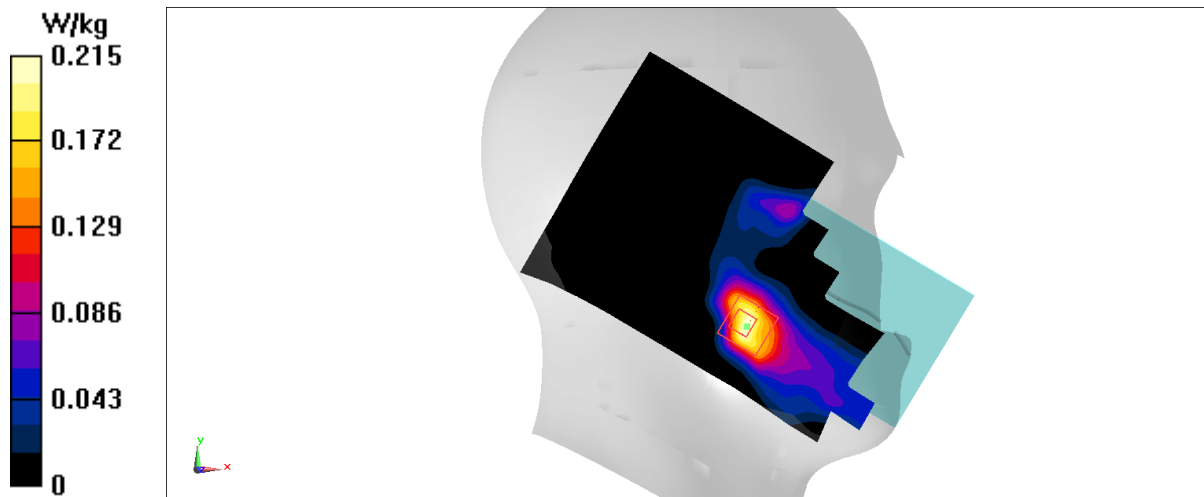

N41 Body 10mm ANT1

Date: 12/23/2022

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 2550$ MHz; $\sigma = 1.919$ S/m; $\epsilon_r = 40.37$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: 5G N41 (0) 2549.49 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(7.55, 7.55, 7.55)

Area Scan (101x171x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.260 W/kg



Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.827 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.366 W/kg

SAR(1 g) = 0.163 W/kg; SAR(10 g) = 0.074 W/kg

Maximum value of SAR (measured) = 0.253 W/kg

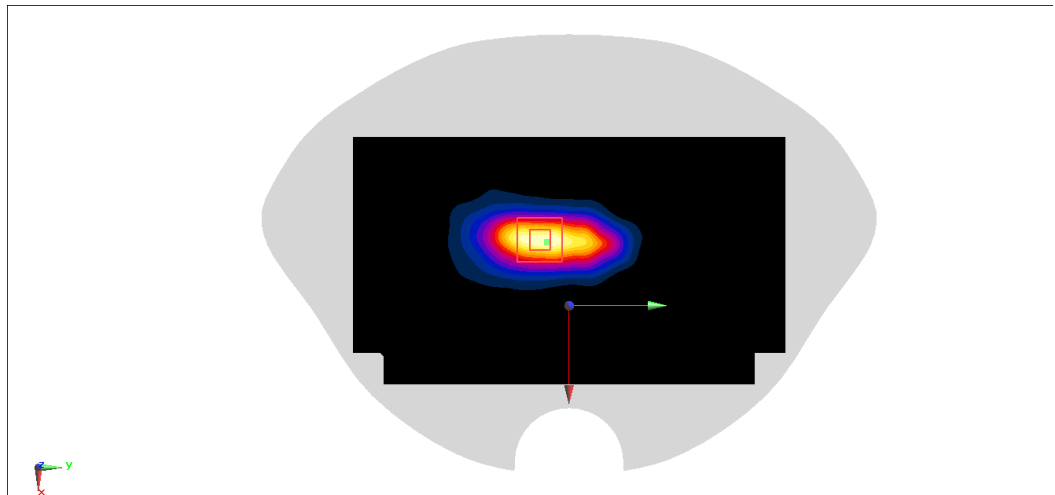

N41 Body 15mm ANT1

Date: 12/23/2022

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 2550$ MHz; $\sigma = 1.919$ S/m; $\epsilon_r = 40.37$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: 5G N41 (0) 2549.49 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(7.55, 7.55, 7.55)

Area Scan (101x171x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.232 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.567 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.287 W/kg

SAR(1 g) = 0.144 W/kg; SAR(10 g) = 0.076 W/kg

Maximum value of SAR (measured) = 0.227 W/kg

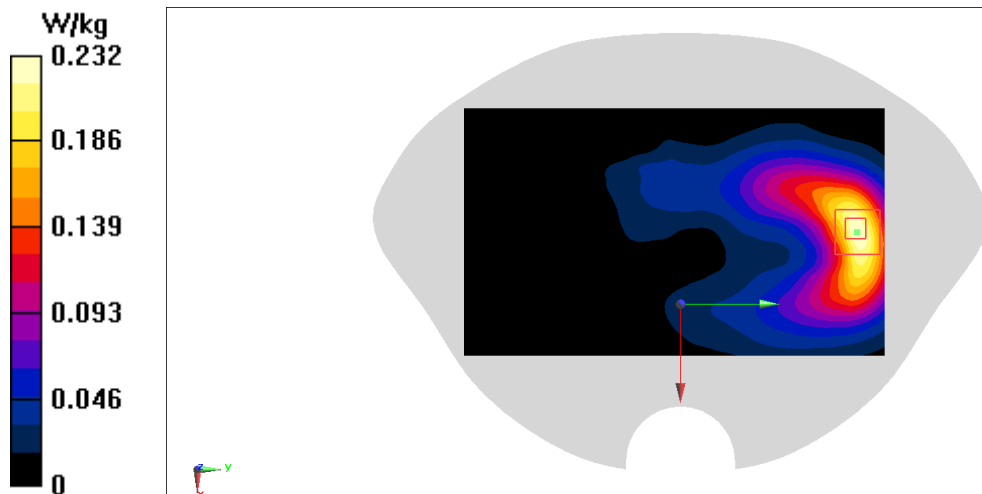

N41 Head ANT2

Date: 12/23/2022

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 2592.99$ MHz; $\sigma = 1.954$ S/m; $\epsilon_r = 40.31$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: 5G N41 (0) 2592.99 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(7.4, 7.4, 7.4)

Area Scan (101x171x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.716 W/kg


Zoom Scan (7x10x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.545 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.973 W/kg

SAR(1 g) = 0.432 W/kg; SAR(10 g) = 0.197 W/kg

Maximum value of SAR (measured) = 0.766 W/kg

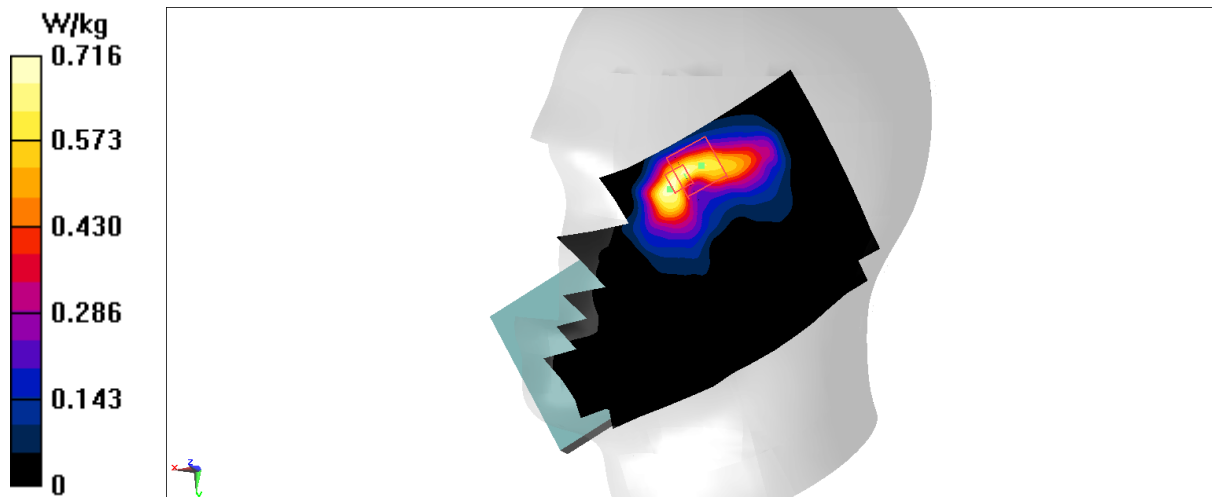

N41 Body 10mm ANT2

Date: 12/23/2022

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 2592.99$ MHz; $\sigma = 1.954$ S/m; $\epsilon_r = 40.31$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: 5G N41 (0) 2592.99 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(7.4, 7.4, 7.4)

Area Scan (51x171x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.179 W/kg



Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.190 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.223 W/kg

SAR(1 g) = 0.110 W/kg; SAR(10 g) = 0.053 W/kg

Maximum value of SAR (measured) = 0.180 W/kg

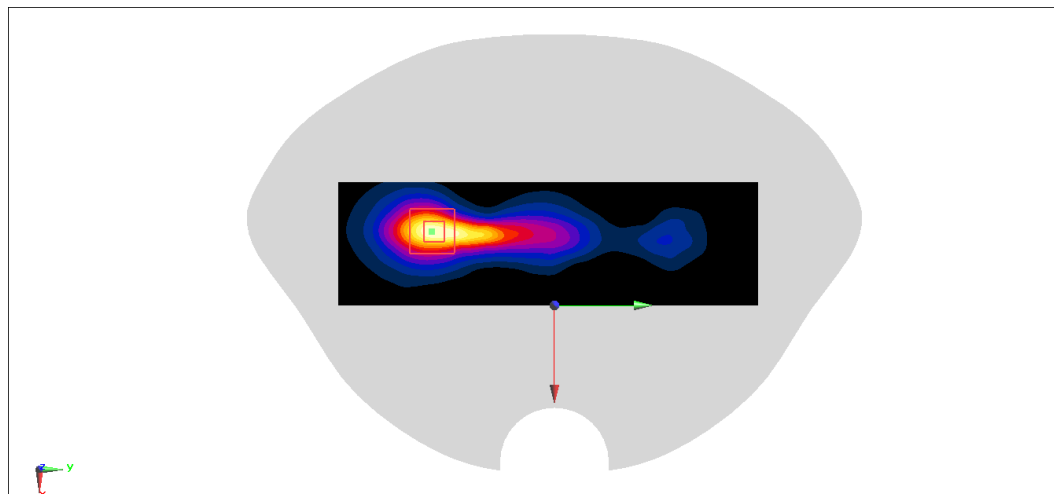

N41 Body 15mm ANT2

Date: 12/23/2022

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 2592.99$ MHz; $\sigma = 1.954$ S/m; $\epsilon_r = 40.31$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: 5G N41 (0) 2592.99 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(7.4, 7.4, 7.4)

Area Scan (101x171x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.203 W/kg



Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.203 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.252 W/kg

SAR(1 g) = 0.133 W/kg; SAR(10 g) = 0.072 W/kg

Maximum value of SAR (measured) = 0.206 W/kg

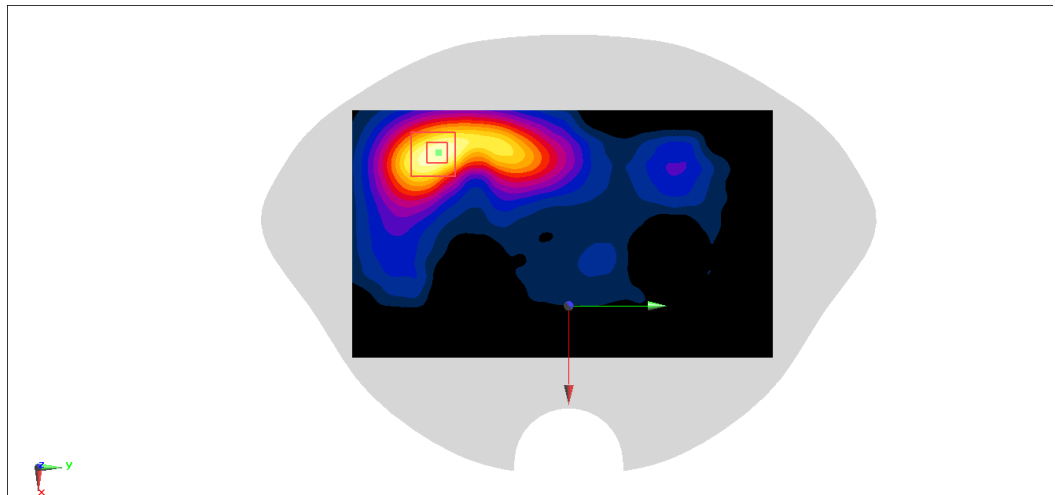

N41 Head ANT8

Date: 12/23/2022

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 2550$ MHz; $\sigma = 1.919$ S/m; $\epsilon_r = 40.37$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: 5G N41 (0) 2549.49 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(7.55, 7.55, 7.55)

Area Scan (101x171x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.06 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.744 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.532 W/kg; SAR(10 g) = 0.222 W/kg

Maximum value of SAR (measured) = 0.887 W/kg

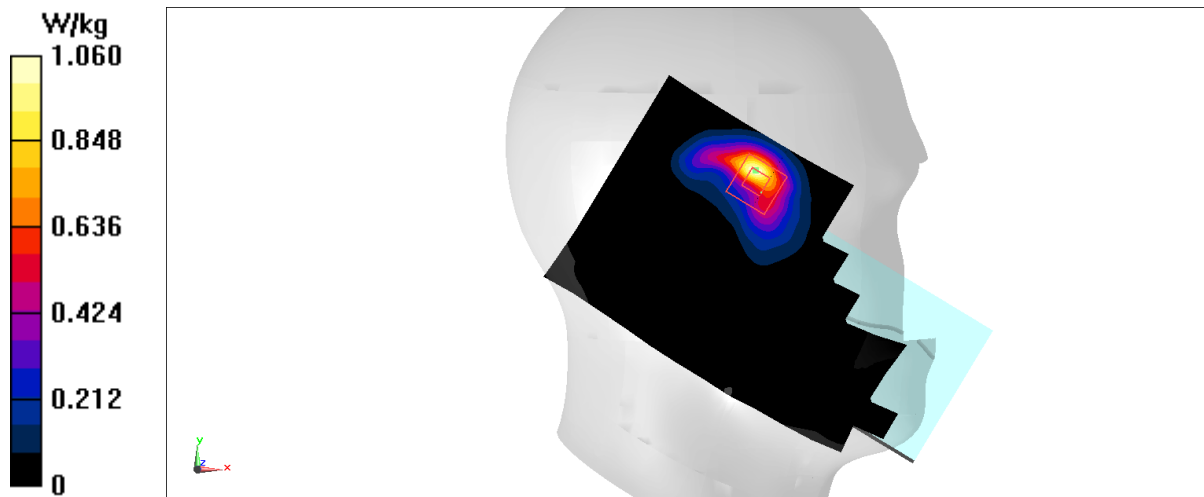

N41 Body 10mm ANT8

Date: 12/23/2022

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 2506.02$ MHz; $\sigma = 1.889$ S/m; $\epsilon_r = 40.43$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: 5G n41 (0) 2506.02 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(7.55, 7.55, 7.55)

Area Scan (71x201x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.126 W/kg



Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.933 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.161 W/kg

SAR(1 g) = 0.074 W/kg; SAR(10 g) = 0.033 W/kg

Maximum value of SAR (measured) = 0.126 W/kg

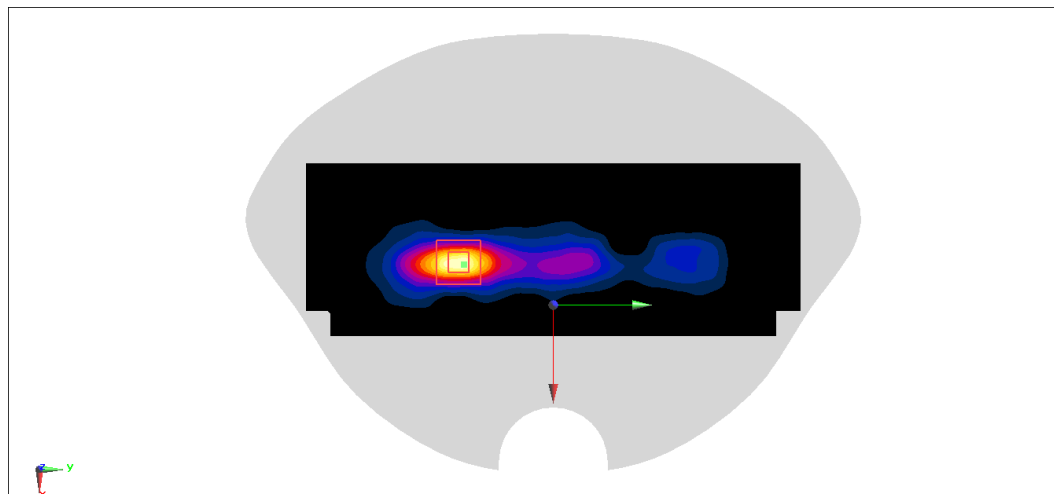

N41 Body 15mm ANT8

Date: 12/23/2022

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 2506.02$ MHz; $\sigma = 1.889$ S/m; $\epsilon_r = 40.43$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: 5G n41 (0) 2506.02 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(7.55, 7.55, 7.55)

Area Scan (101x171x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.211 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.413 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.266 W/kg

SAR(1 g) = 0.134 W/kg; SAR(10 g) = 0.070 W/kg

Maximum value of SAR (measured) = 0.213 W/kg

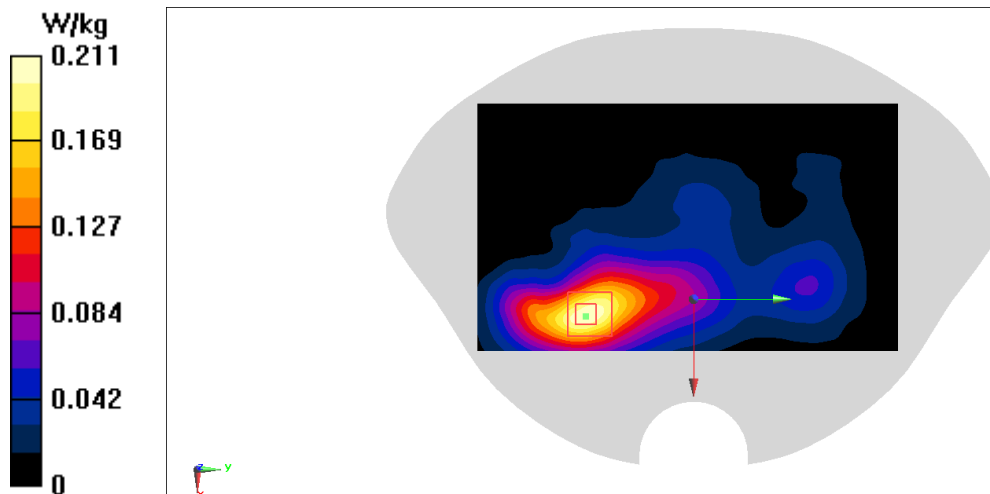

N66 Head ANT4

Date: 12/20/2022

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.344$ S/m; $\epsilon_r = 40.93$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: N66 (0) 1745 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(8.21, 8.21, 8.21)

Area Scan (81x141x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.33 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 20.56 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.57 W/kg

SAR(1 g) = 0.719 W/kg; SAR(10 g) = 0.348 W/kg

Maximum value of SAR (measured) = 1.17 W/kg

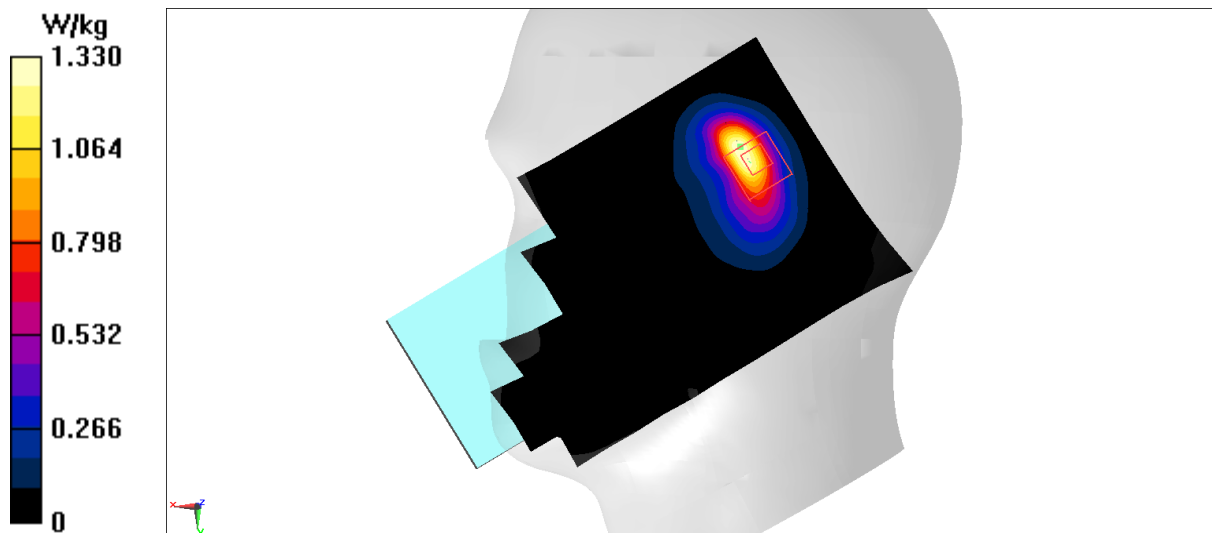

N66 Body 10mm ANT4

Date: 12/20/2022

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.344$ S/m; $\epsilon_r = 40.93$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: N66 (0) 1745 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(8.21, 8.21, 8.21)

Area Scan (81x141x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.145 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.428 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.174 W/kg

SAR(1 g) = 0.087 W/kg; SAR(10 g) = 0.045 W/kg

Maximum value of SAR (measured) = 0.130 W/kg

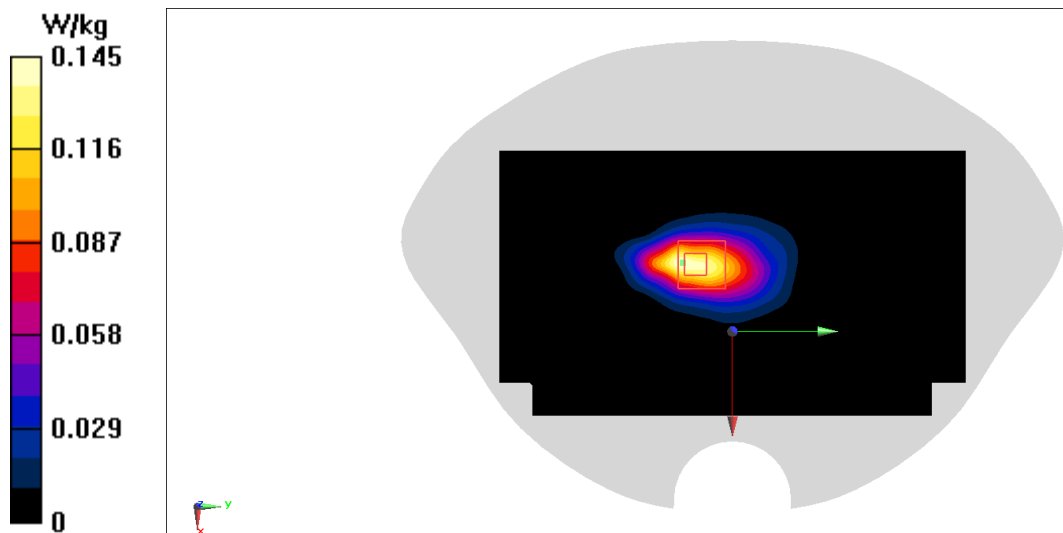

N66 Body 15mm ANT4

Date: 12/20/2022

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.344$ S/m; $\epsilon_r = 40.93$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: N66 (0) 1745 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(8.21, 8.21, 8.21)

Area Scan (81x141x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.115 W/kg



Zoom Scan (7x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.144 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.142 W/kg

SAR(1 g) = 0.079 W/kg; SAR(10 g) = 0.044 W/kg

Maximum value of SAR (measured) = 0.114 W/kg

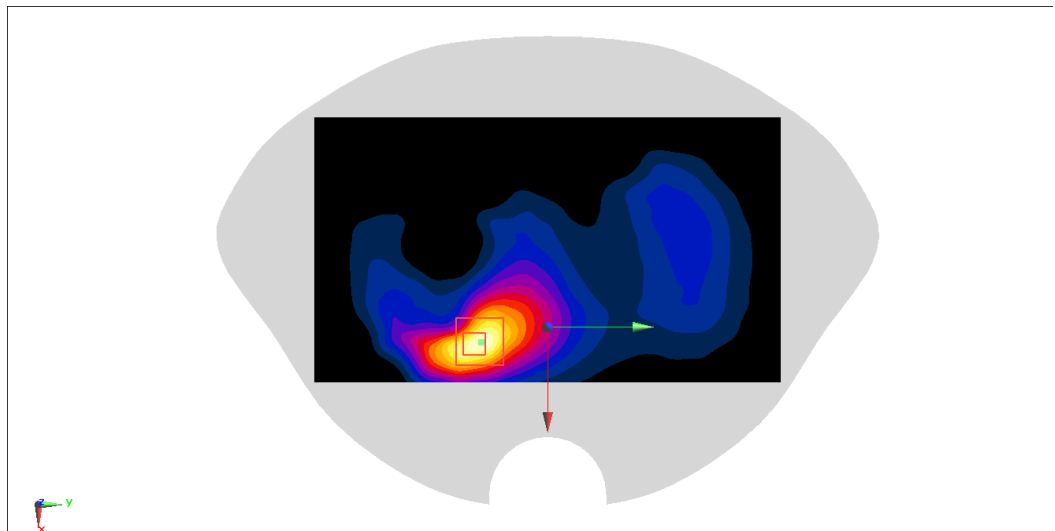

N66 Head ANT1

Date: 12/20/2022

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 1712.5$ MHz; $\sigma = 1.326$ S/m; $\epsilon_r = 40.95$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: N66 (0) 1712.5 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(8.21, 8.21, 8.21)

Area Scan (81x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.406 W/kg



Zoom Scan (5x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.504 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.459 W/kg

SAR(1 g) = 0.289 W/kg; SAR(10 g) = 0.185 W/kg

Maximum value of SAR (measured) = 0.395 W/kg

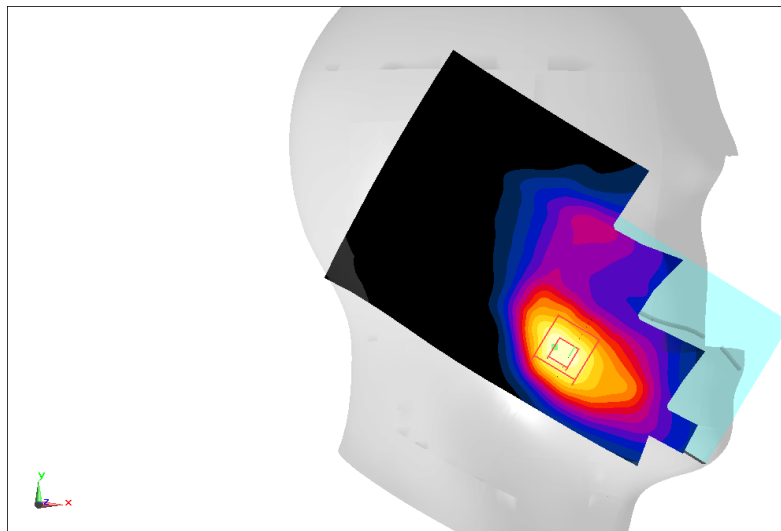

N66 Body 10mm ANT1

Date: 12/20/2022

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 1712.5$ MHz; $\sigma = 1.326$ S/m; $\epsilon_r = 40.95$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: N66 (0) 1712.5 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(8.21, 8.21, 8.21)

Area Scan (81x141x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.334 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 9.672 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.426 W/kg

SAR(1 g) = 0.219 W/kg; SAR(10 g) = 0.117 W/kg

Maximum value of SAR (measured) = 0.324 W/kg

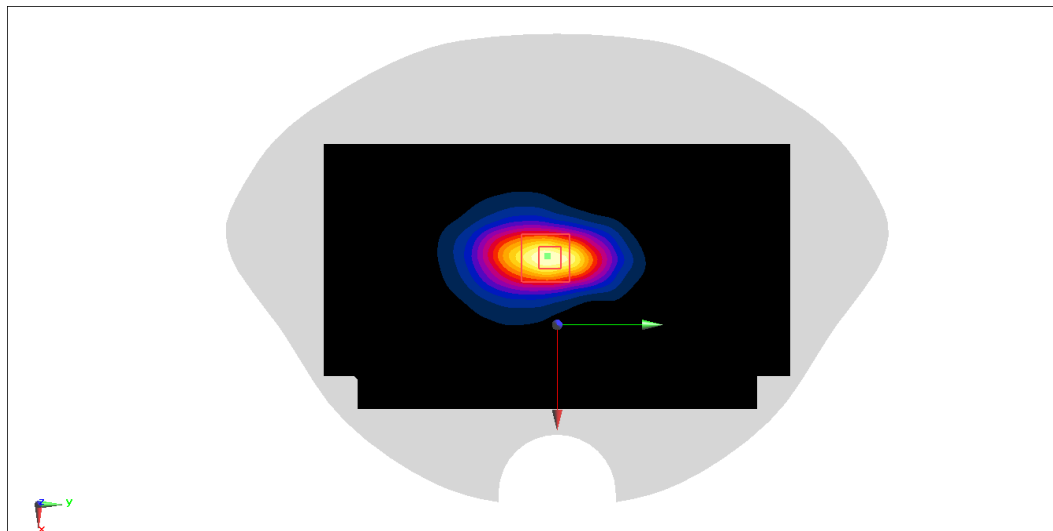

N66 Body 15mm ANT1

Date: 12/20/2022

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 1712.5$ MHz; $\sigma = 1.326$ S/m; $\epsilon_r = 40.95$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: N66 (0) 1712.5 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(8.21, 8.21, 8.21)

Area Scan (81x141x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.324 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 7.155 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.381 W/kg

SAR(1 g) = 0.234 W/kg; SAR(10 g) = 0.145 W/kg

Maximum value of SAR (measured) = 0.321 W/kg

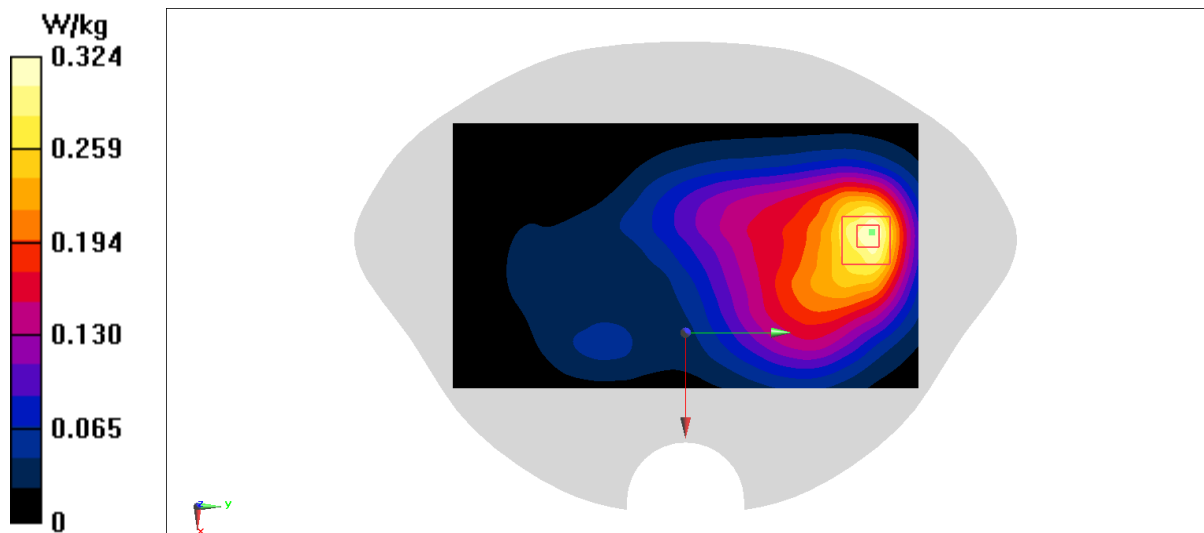

N66 Head ANT2

Date: 12/20/2022

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 1777.5$ MHz; $\sigma = 1.368$ S/m; $\epsilon_r = 40.87$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: 5G NR (0) 1777.5 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(8.21, 8.21, 8.21)

Area Scan (81x141x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.941 W/kg


Zoom Scan (6x7x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.233 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.20 W/kg

SAR(1 g) = 0.629 W/kg; SAR(10 g) = 0.325 W/kg

Maximum value of SAR (measured) = 0.972 W/kg

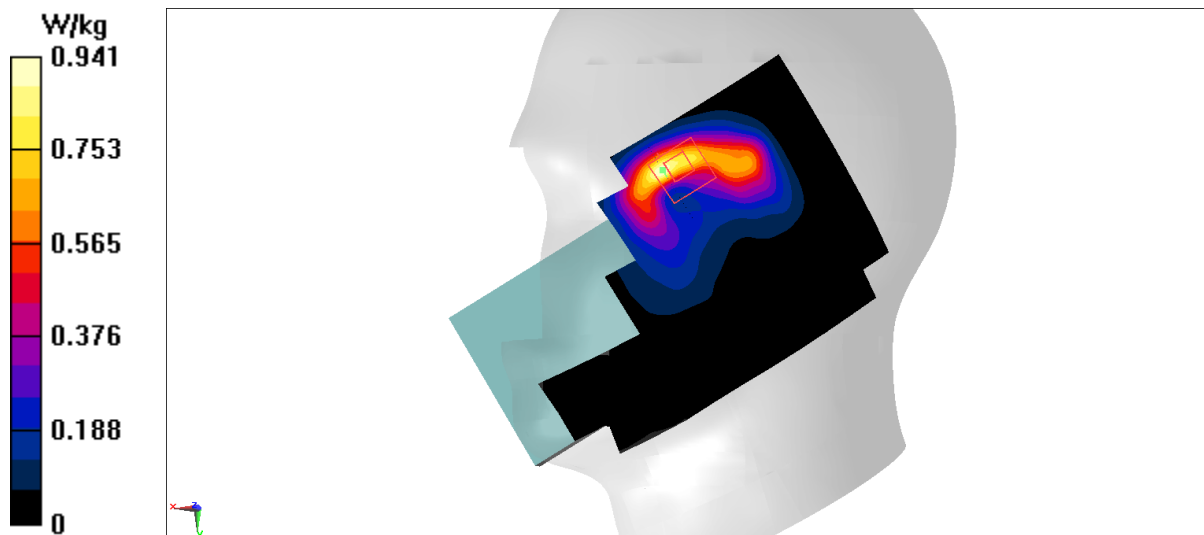

N66 Body 10mm ANT2

Date: 12/20/2022

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 1777.5$ MHz; $\sigma = 1.368$ S/m; $\epsilon_r = 40.87$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: 5G NR (0) 1777.5 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(8.21, 8.21, 8.21)

Area Scan (81x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.185 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.742 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.251 W/kg

SAR(1 g) = 0.122 W/kg; SAR(10 g) = 0.059 W/kg

Maximum value of SAR (measured) = 0.186 W/kg

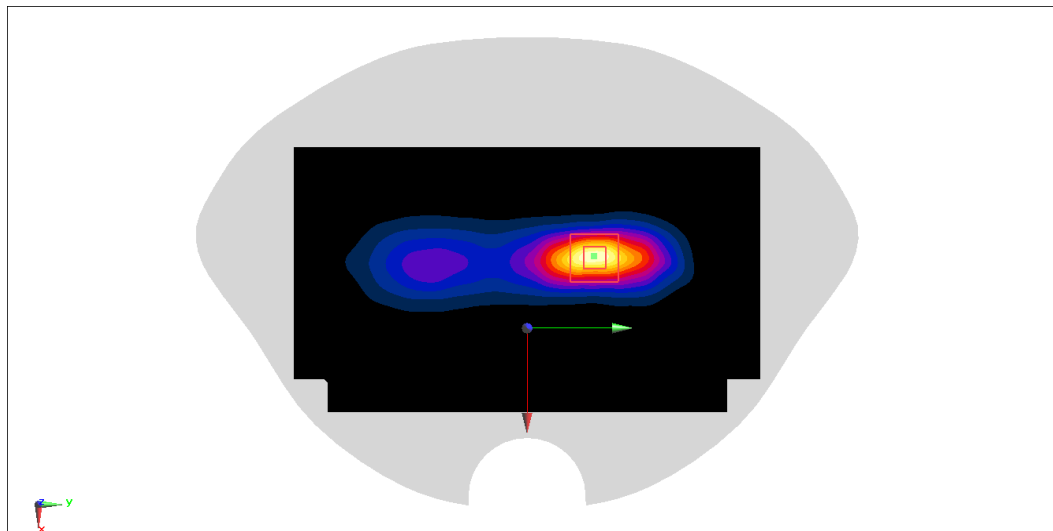

N66 Body 15mm ANT2

Date: 12/20/2022

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.344$ S/m; $\epsilon_r = 40.93$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: 5G N66 (0) 1745 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(8.21, 8.21, 8.21)

Area Scan (81x141x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.279 W/kg



Zoom Scan (7x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.111 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.331 W/kg

SAR(1 g) = 0.191 W/kg; SAR(10 g) = 0.111 W/kg

Maximum value of SAR (measured) = 0.279 W/kg

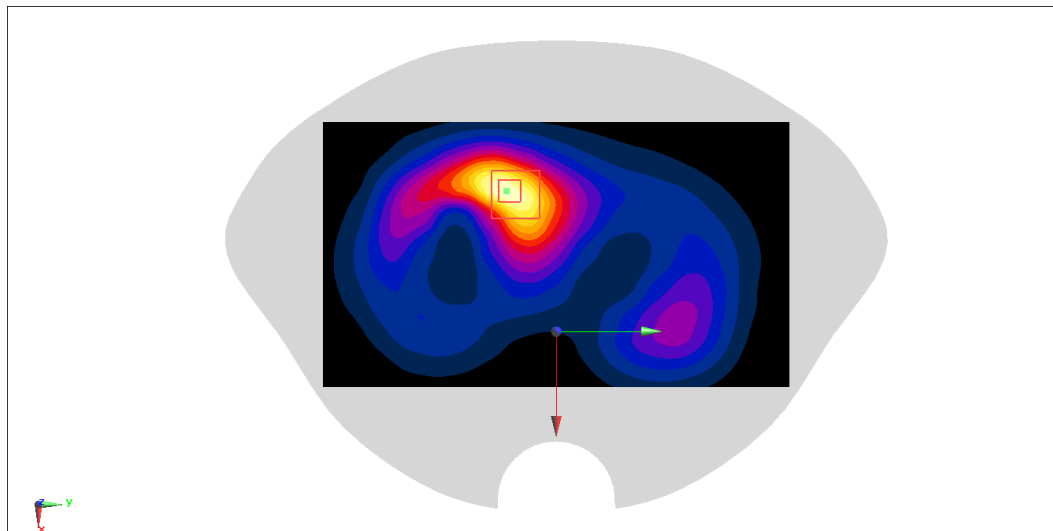

N66 Head ANT8

Date: 12/20/2022

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.344$ S/m; $\epsilon_r = 40.93$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: N66 (0) 1745 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(8.21, 8.21, 8.21)

Area Scan (81x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.24 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 7.850 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.661 W/kg; SAR(10 g) = 0.307 W/kg

Maximum value of SAR (measured) = 1.12 W/kg

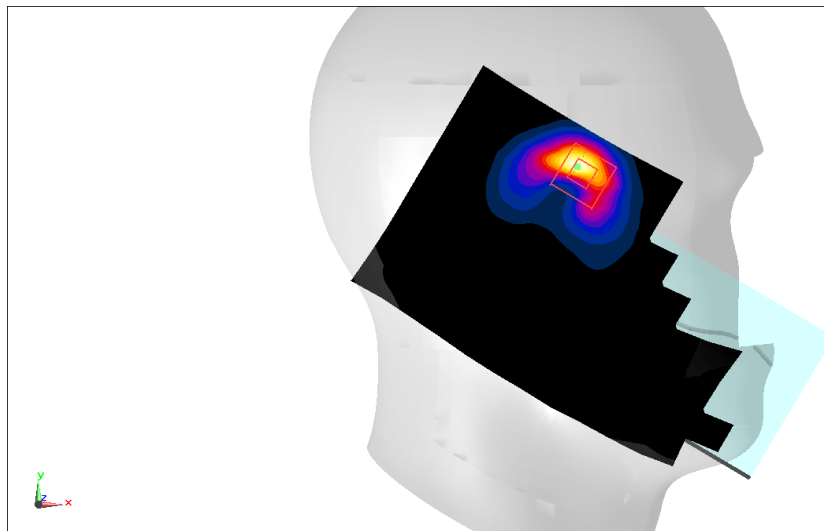

N66 Body 10mm ANT8

Date: 12/20/2022

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.344$ S/m; $\epsilon_r = 40.93$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: N66 (0) 1745 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(8.21, 8.21, 8.21)

Area Scan (81x141x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.244 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 2.886 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.212 W/kg

SAR(1 g) = 0.097 W/kg; SAR(10 g) = 0.045 W/kg

Maximum value of SAR (measured) = 0.140 W/kg

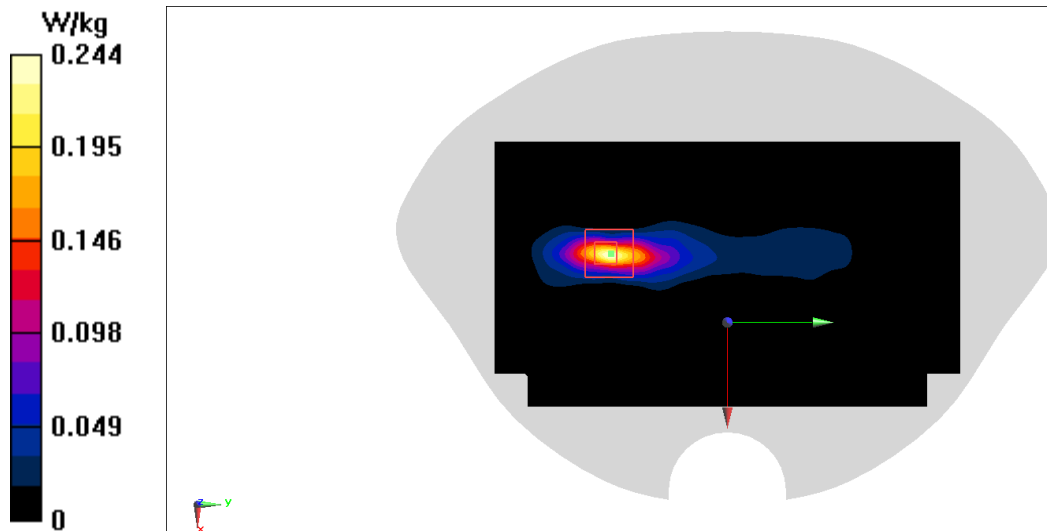

N66 Body 15mm ANT8

Date: 12/20/2022

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.344$ S/m; $\epsilon_r = 40.93$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: N66 (0) 1745 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(8.21, 8.21, 8.21)

Area Scan (81x141x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.190 W/kg



Zoom Scan (7x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.344 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.234 W/kg

SAR(1 g) = 0.132 W/kg; SAR(10 g) = 0.073 W/kg

Maximum value of SAR (measured) = 0.191 W/kg

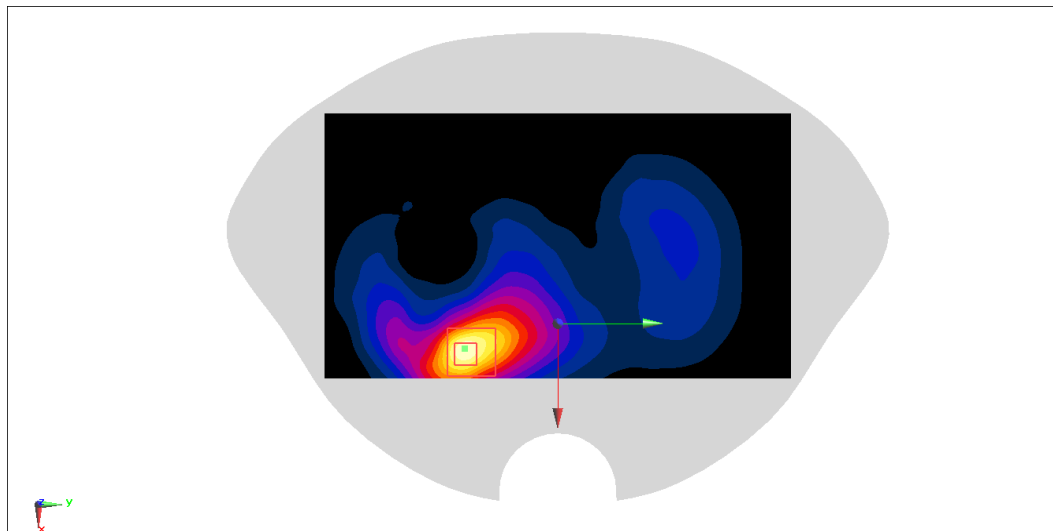

N78 Head ANT4

Date: 1/3/2023

Electronics: DAE4 Sn1331

Medium: H650-7000M

Medium parameters used: $f = 3500.01$ MHz; $\sigma = 2.837$ S/m; $\epsilon_r = 38.94$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: 5G NR (0) 3500.01 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7548 ConvF(6.61, 6.61, 6.61)

Area Scan (121x211x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.72 W/kg


Zoom Scan (9x9x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 16.23 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 2.82 W/kg

SAR(1 g) = 0.767 W/kg; SAR(10 g) = 0.243 W/kg

Maximum value of SAR (measured) = 1.79 W/kg

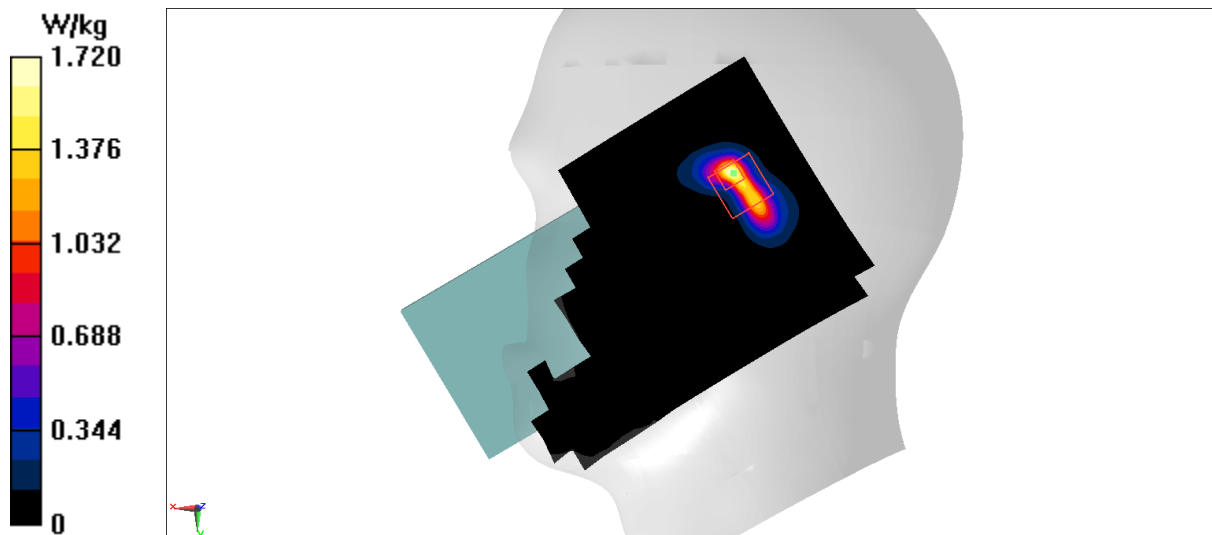

N78 Body 10mm ANT4

Date: 1/3/2023

Electronics: DAE4 Sn1331

Medium: H650-7000M

Medium parameters used: $f = 3500.01$ MHz; $\sigma = 2.837$ S/m; $\epsilon_r = 38.94$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: 5G NR (0) 3500.01 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7548 ConvF(6.61, 6.61, 6.61)

Area Scan (121x211x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.200 W/kg


Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 2.578 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.393 W/kg

SAR(1 g) = 0.104 W/kg; SAR(10 g) = 0.032 W/kg

Maximum value of SAR (measured) = 0.170 W/kg

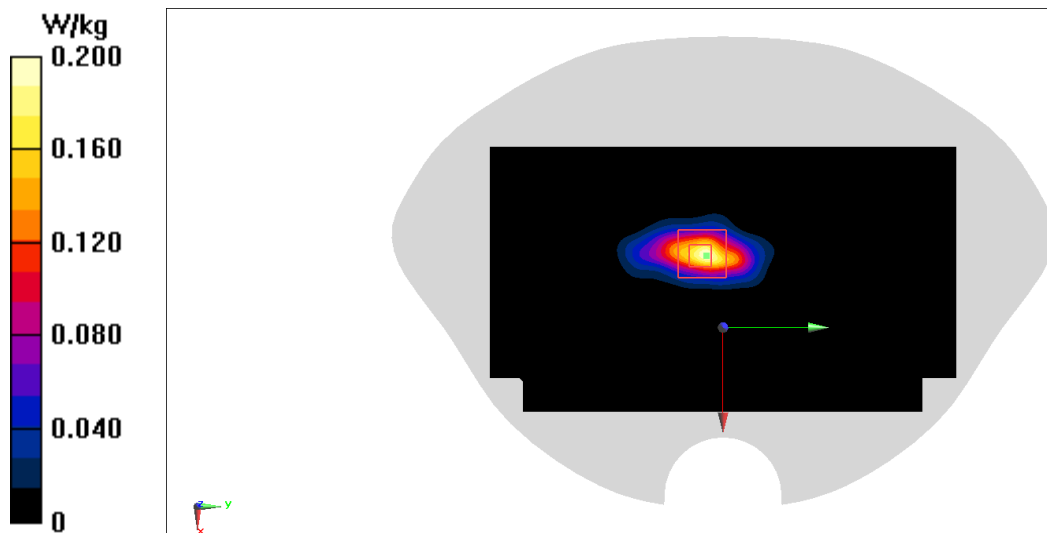

N78 Body 15mm ANT4

Date: 1/3/2023

Electronics: DAE4 Sn1331

Medium: H650-7000M

Medium parameters used: $f = 3500.01$ MHz; $\sigma = 2.837$ S/m; $\epsilon_r = 38.94$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: 5G NR (0) 3500.01 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7548 ConvF(6.61, 6.61, 6.61)

Area Scan (121x211x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.165 W/kg


Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 0.6190 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.219 W/kg

SAR(1 g) = 0.091 W/kg; SAR(10 g) = 0.040 W/kg

Maximum value of SAR (measured) = 0.162 W/kg

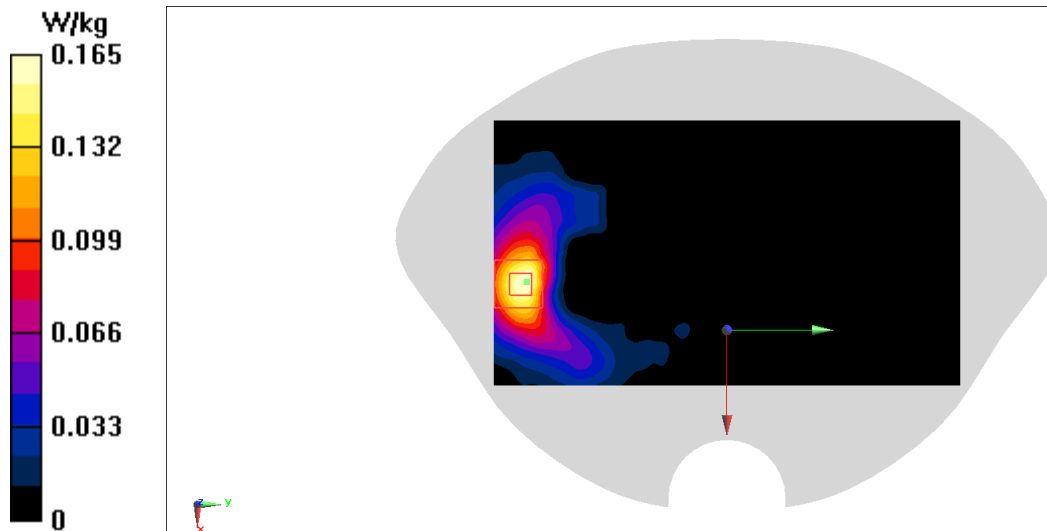

N78 Head ANT6

Date: 1/10/2023

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 3500.01$ MHz; $\sigma = 2.919$ S/m; $\epsilon_r = 38.59$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G N78 (0) Frequency: 3500.01 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(6.85, 6.85, 6.85)

Area Scan (121x211x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.19 W/kg



Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 11.19 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 1.68 W/kg

SAR(1 g) = 0.571 W/kg; SAR(10 g) = 0.201 W/kg

Maximum value of SAR (measured) = 1.22 W/kg

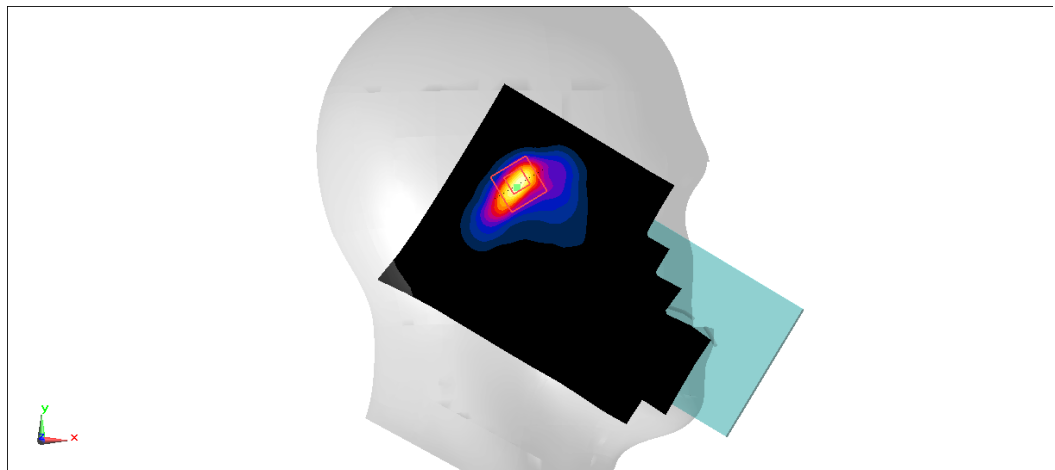

N78 Body 10mm ANT6

Date: 1/10/2023

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 3500.01$ MHz; $\sigma = 2.919$ S/m; $\epsilon_r = 38.59$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G N78 (0) Frequency: 3500.01 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(6.85, 6.85, 6.85)

Area Scan (121x211x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.192 W/kg



Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 3.946 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.188 W/kg

SAR(1 g) = 0.066 W/kg; SAR(10 g) = 0.024 W/kg

Maximum value of SAR (measured) = 0.126 W/kg

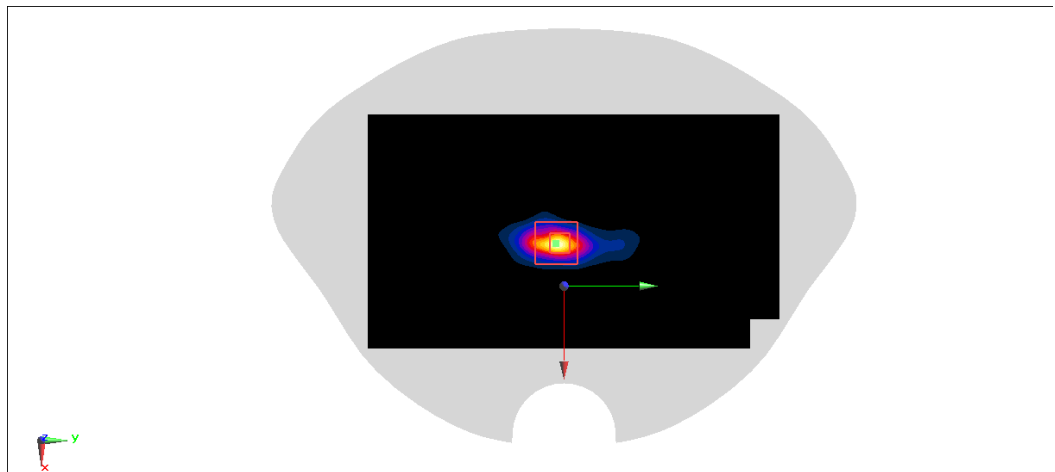

N78 Body 15mm ANT6

Date: 1/10/2023

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 3500.01$ MHz; $\sigma = 2.919$ S/m; $\epsilon_r = 38.59$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G N78 (0) Frequency: 3500.01 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(6.85, 6.85, 6.85)

Area Scan (121x211x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.165 W/kg



Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 1.323 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.211 W/kg

SAR(1 g) = 0.072 W/kg; SAR(10 g) = 0.029 W/kg

Maximum value of SAR (measured) = 0.132 W/kg

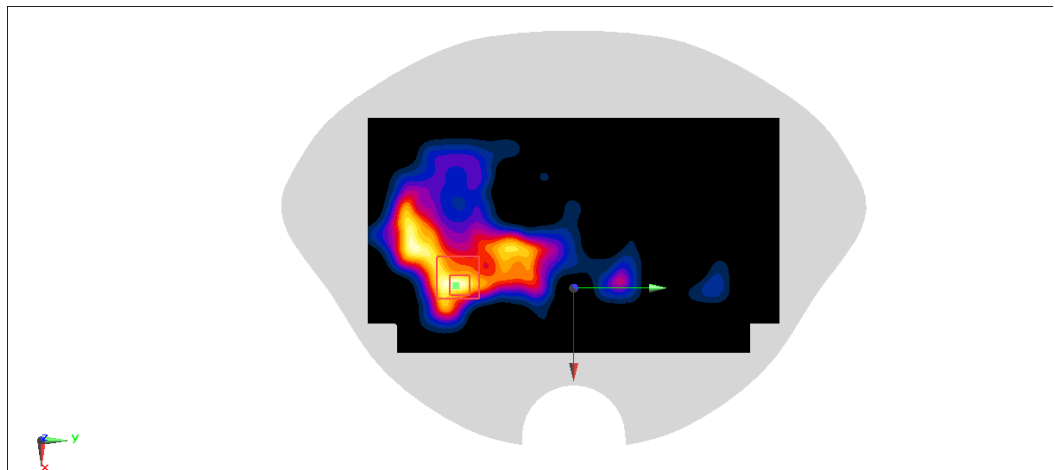

N78 Head ANT2

Date: 1/3/2023

Electronics: DAE4 Sn1331

Medium: H650-7000M

Medium parameters used: $f = 3460.02$ MHz; $\sigma = 2.802$ S/m; $\epsilon_r = 39.01$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: 5G N78 (0) 3460.02 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7548 ConvF(6.61, 6.61, 6.61)

Area Scan (121x211x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.980 W/kg


Zoom Scan (9x9x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 0 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.481 W/kg; SAR(10 g) = 0.187 W/kg

Maximum value of SAR (measured) = 0.969 W/kg

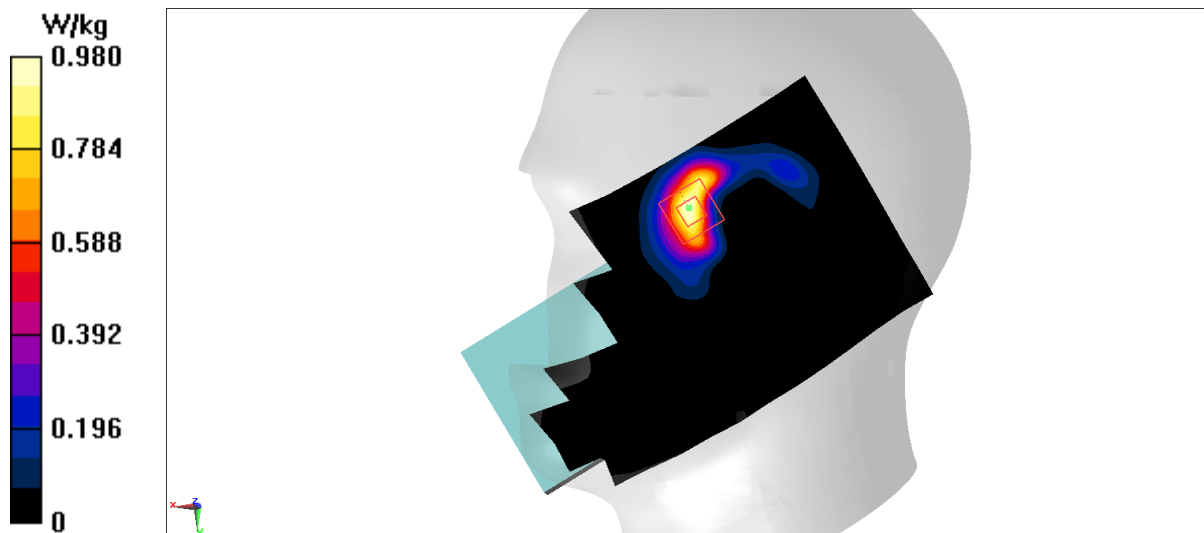

N78 Body 10mm ANT2

Date: 1/3/2023

Electronics: DAE4 Sn1331

Medium: H650-7000M

Medium parameters used: $f = 3460.02$ MHz; $\sigma = 2.802$ S/m; $\epsilon_r = 39.01$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: 5G N78 (0) 3460.02 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7548 ConvF(6.61, 6.61, 6.61)

Area Scan (121x211x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.191 W/kg



Zoom Scan (9x9x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 2.563 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.339 W/kg

SAR(1 g) = 0.054 W/kg; SAR(10 g) = 0.019 W/kg

Maximum value of SAR (measured) = 0.0868 W/kg

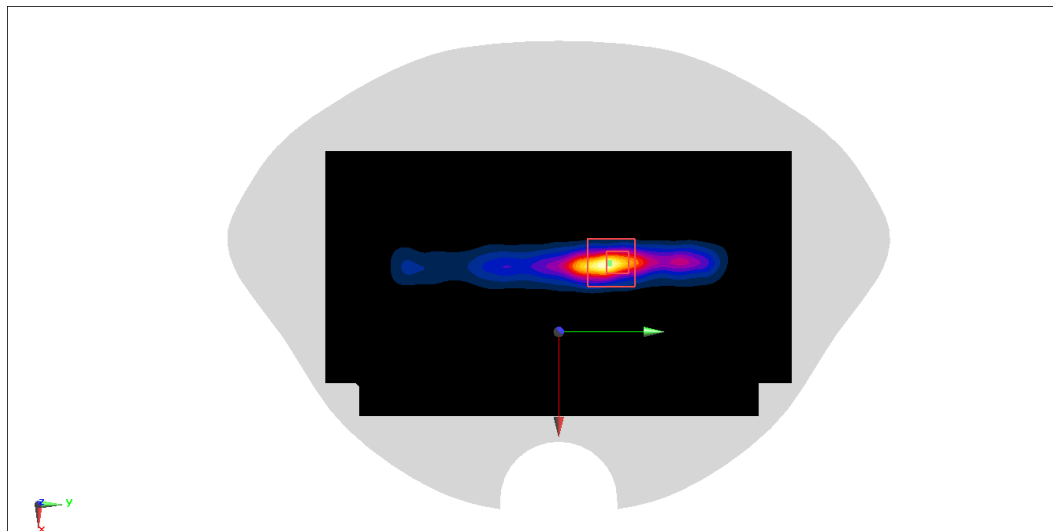

N78 Body 15mm ANT2

Date: 1/3/2023

Electronics: DAE4 Sn1331

Medium: H650-7000M

Medium parameters used: $f = 3460.02$ MHz; $\sigma = 2.802$ S/m; $\epsilon_r = 39.01$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: 5G N78 (0) 3460.02 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7548 ConvF(6.61, 6.61, 6.61)

Area Scan (121x211x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.0932 W/kg



Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 2.707 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.121 W/kg

SAR(1 g) = 0.047 W/kg; SAR(10 g) = 0.020 W/kg

Maximum value of SAR (measured) = 0.0866 W/kg

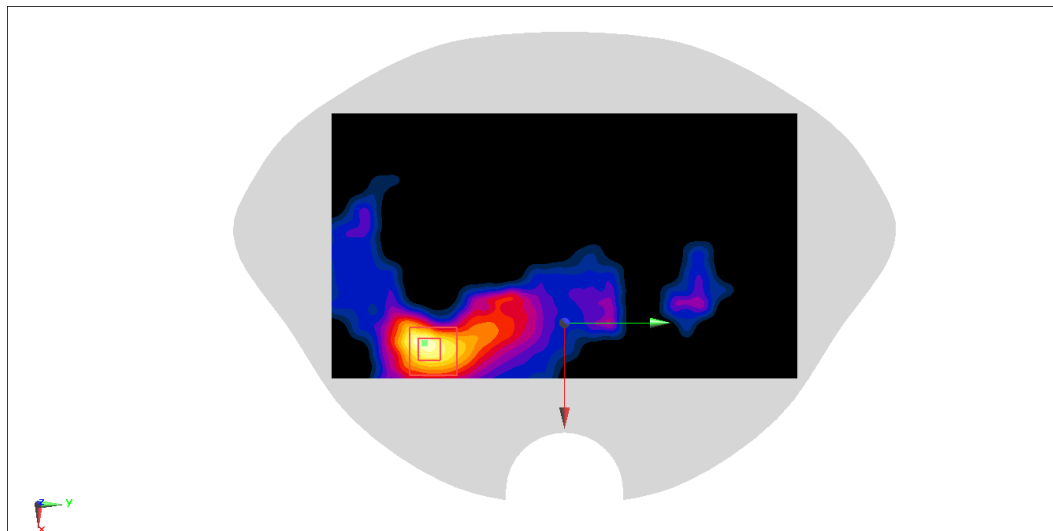

N78 Head ANT7

Date: 1/10/2023

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 3460.02$ MHz; $\sigma = 2.883$ S/m; $\epsilon_r = 38.66$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G N78 (0) Frequency: 3460.02 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(6.85, 6.85, 6.85)

Area Scan (121x211x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.49 W/kg



Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 5.071 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.94 W/kg

SAR(1 g) = 0.644 W/kg; SAR(10 g) = 0.262 W/kg

Maximum value of SAR (measured) = 1.46 W/kg

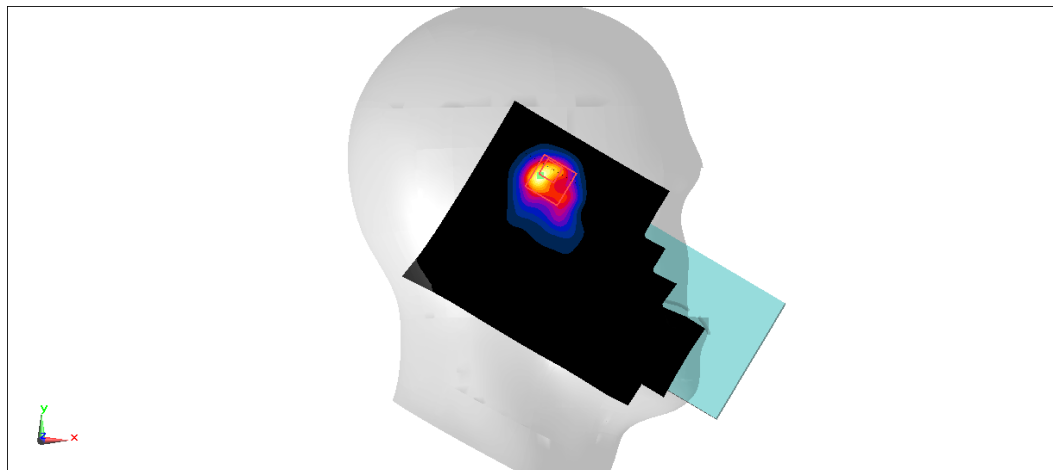

N78 Body 10mm ANT7

Date: 1/10/2023

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 3500.01$ MHz; $\sigma = 2.919$ S/m; $\epsilon_r = 38.59$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G n78 (0) Frequency: 3500.1 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(6.85, 6.85, 6.85)

Area Scan (121x211x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.0996 W/kg



Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 2.117 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.236 W/kg

SAR(1 g) = 0.056 W/kg; SAR(10 g) = 0.021 W/kg

Maximum value of SAR (measured) = 0.109 W/kg

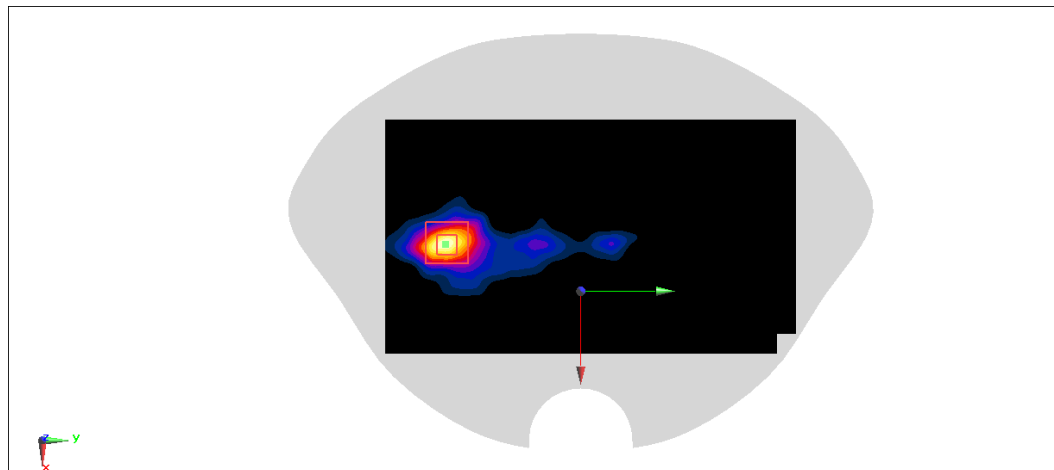

N78 Body 15mm ANT7

Date: 1/10/2023

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 3500.01$ MHz; $\sigma = 2.919$ S/m; $\epsilon_r = 38.59$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, 5G n78 (0) Frequency: 3500.1 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(6.85, 6.85, 6.85)

Area Scan (121x211x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.186 W/kg



Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 0 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.263 W/kg

SAR(1 g) = 0.103 W/kg; SAR(10 g) = 0.047 W/kg

Maximum value of SAR (measured) = 0.188 W/kg

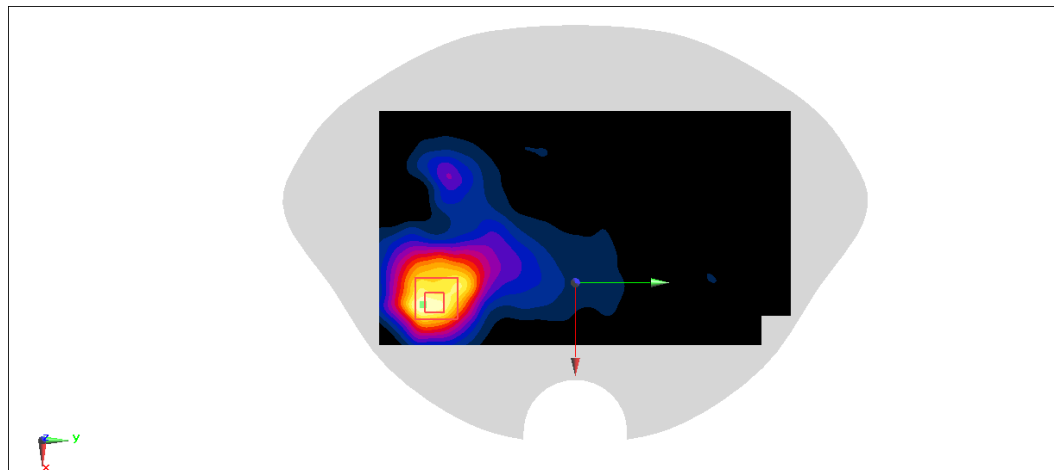

WIFI2.4G Head ANT6

Date: 1/7/2023

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.864$ S/m; $\epsilon_r = 40.71$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, WIFI 2450 (0) Frequency: 2462 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(7.55, 7.55, 7.55)

Area Scan (101x171x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.993 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.361 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.420 W/kg; SAR(10 g) = 0.158 W/kg

Maximum value of SAR (measured) = 0.818 W/kg

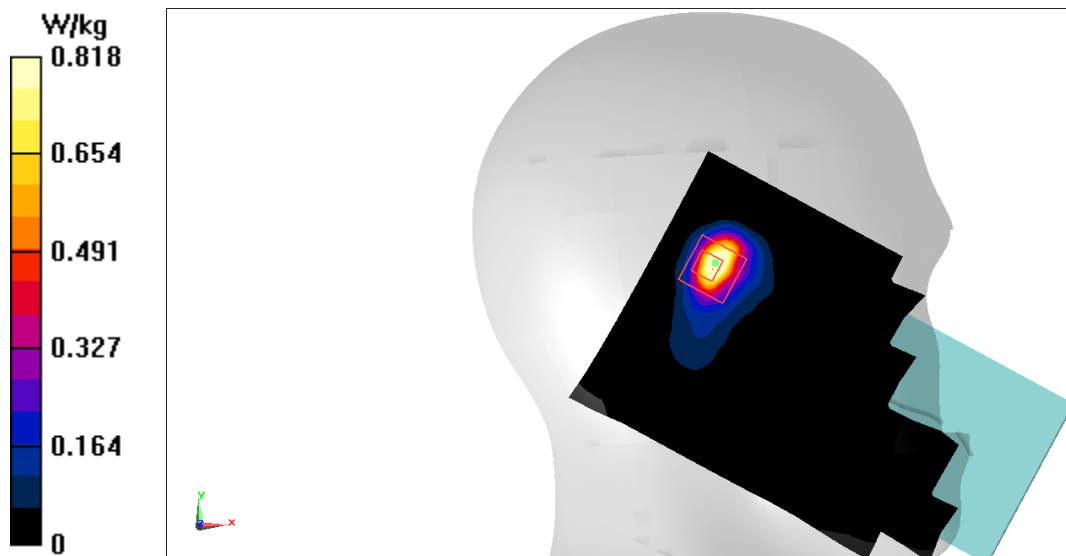

WIFI2.4G Body 10mm ANT6

Date: 1/7/2023

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.864$ S/m; $\epsilon_r = 40.71$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, WIFI 2450 (0) Frequency: 2462 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(7.55, 7.55, 7.55)

Area Scan (51x121x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.109 W/kg



Zoom Scan (7x8x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.860 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.152 W/kg

SAR(1 g) = 0.063 W/kg; SAR(10 g) = 0.026 W/kg

Maximum value of SAR (measured) = 0.114 W/kg

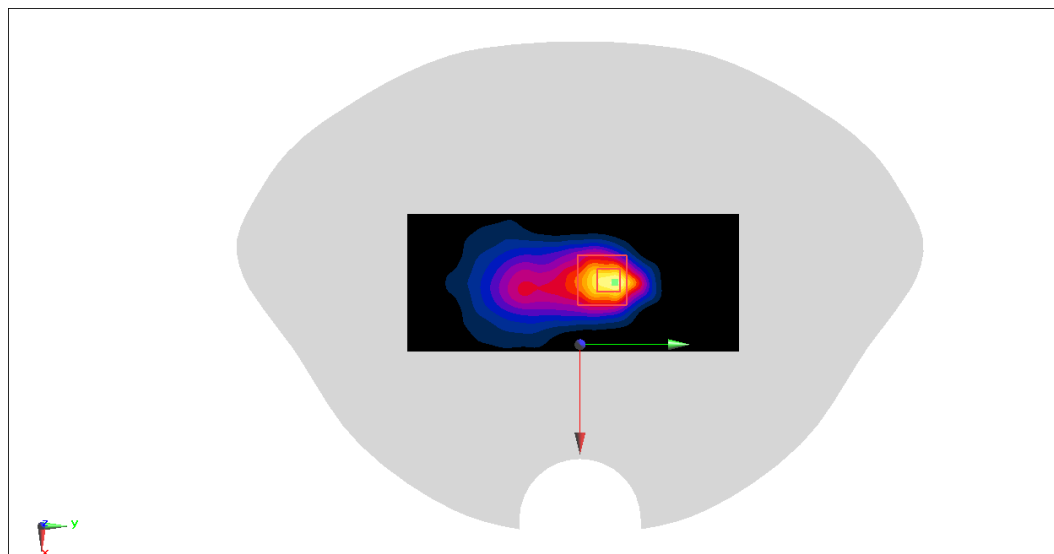

WIFI2.4G Body 15mm ANT6

Date: 1/7/2023

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.864$ S/m; $\epsilon_r = 40.71$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, WIFI 2450 (0) Frequency: 2462 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(7.55, 7.55, 7.55)

Area Scan (101x171x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.0629 W/kg


Zoom Scan (11x9x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.181 W/kg

SAR(1 g) = 0.039 W/kg; SAR(10 g) = 0.019 W/kg

Maximum value of SAR (measured) = 0.0645 W/kg

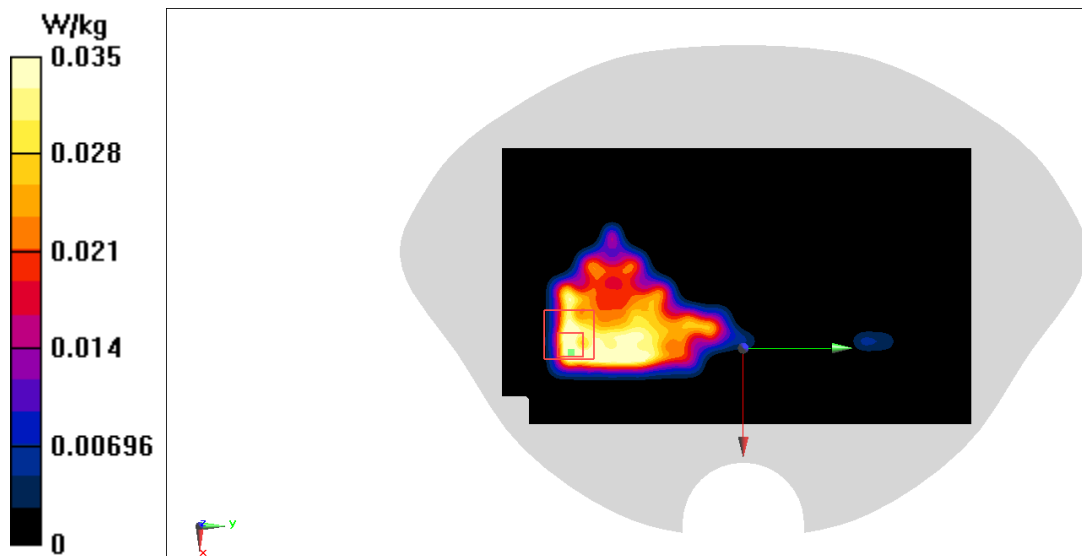

WIFI2.4G Head ANT8

Date: 1/7/2023

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.864$ S/m; $\epsilon_r = 40.71$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, WIFI 2450 (0) Frequency: 2462 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(7.55, 7.55, 7.55)

Area Scan (101x171x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.403 W/kg



Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.651 W/kg

SAR(1 g) = 0.262 W/kg; SAR(10 g) = 0.108 W/kg

Maximum value of SAR (measured) = 0.467 W/kg

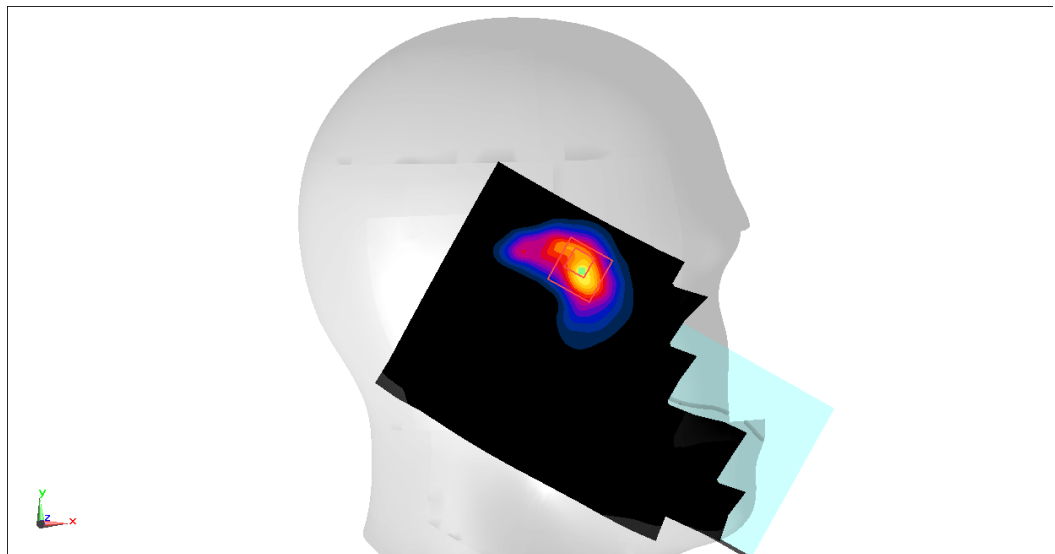

WIFI2.4G Body 10mm ANT8

Date: 1/7/2023

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.864$ S/m; $\epsilon_r = 40.71$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, WIFI 2450 (0) Frequency: 2462 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(7.55, 7.55, 7.55)

Area Scan (101x171x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.245 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.361 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.300 W/kg

SAR(1 g) = 0.134 W/kg; SAR(10 g) = 0.057 W/kg

Maximum value of SAR (measured) = 0.238 W/kg

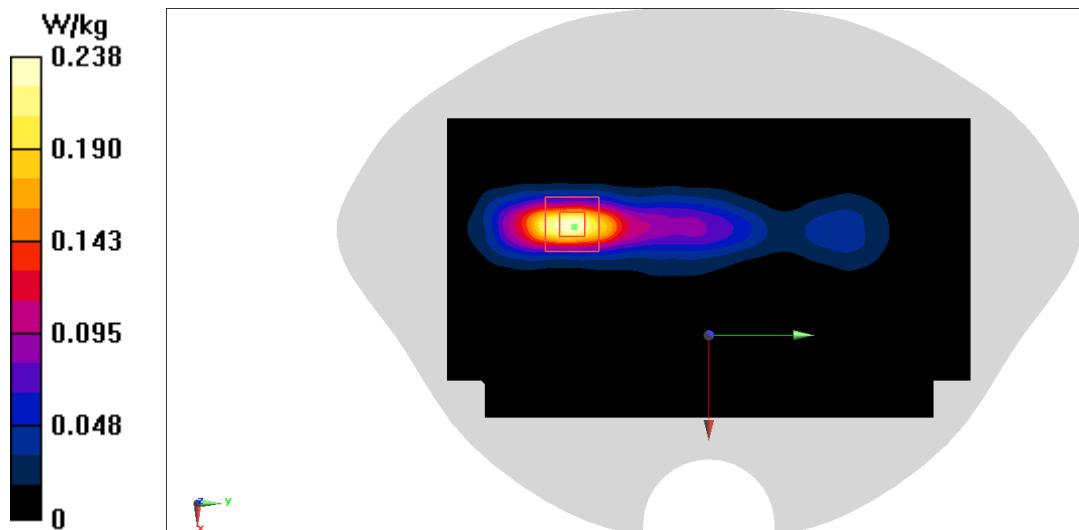

WIFI2.4G Body 15mm ANT8

Date: 1/7/2023

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.864$ S/m; $\epsilon_r = 40.71$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, WIFI 2450 (0) Frequency: 2462 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(7.55, 7.55, 7.55)

Area Scan (101x171x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.104 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.398 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.138 W/kg

SAR(1 g) = 0.064 W/kg; SAR(10 g) = 0.031 W/kg

Maximum value of SAR (measured) = 0.109 W/kg

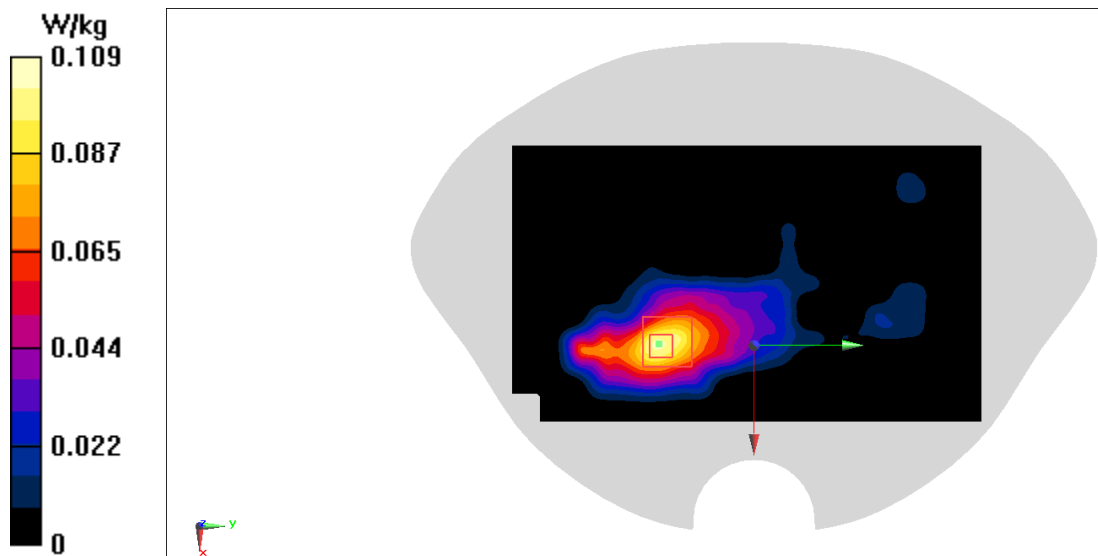

WIFI5G Head ANT6

Date: 1/9/2023

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 5250$ MHz; $\sigma = 4.505$ S/m; $\epsilon_r = 36.12$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, WLAN5G_11ac 160M (0) Frequency: 5250 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(5.53, 5.53, 5.53)

Area Scan (121x211x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.548 W/kg


Zoom Scan (9x9x8)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 2.664 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.656 W/kg

SAR(1 g) = 0.121 W/kg; SAR(10 g) = 0.030 W/kg

Maximum value of SAR (measured) = 0.411 W/kg

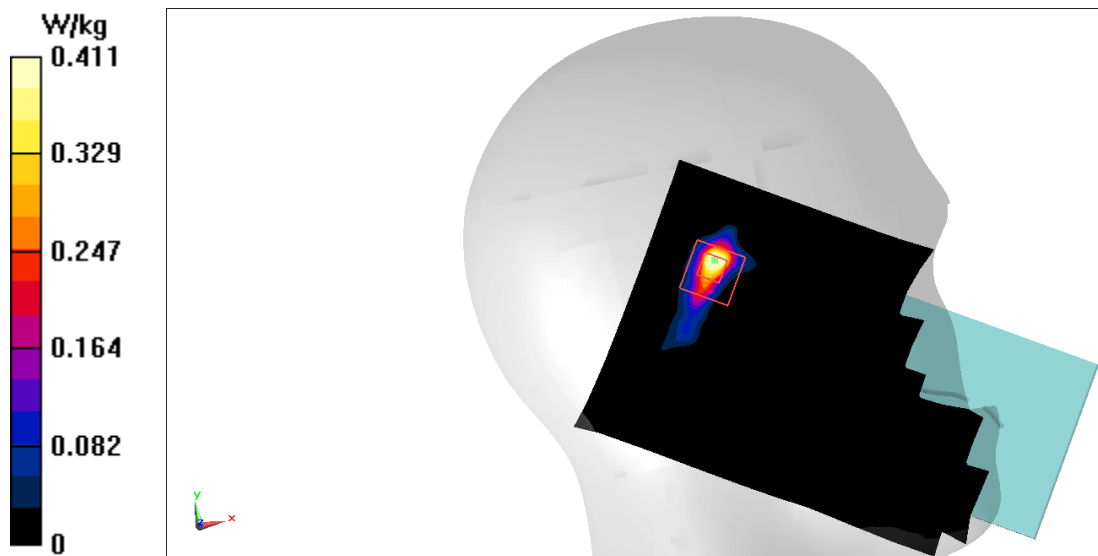

WIFI5G Body 10mm ANT6

Date: 1/9/2023

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 5570$ MHz; $\sigma = 4.861$ S/m; $\epsilon_r = 35.59$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, WLAN5G_11ac 160M (0) Frequency: 5570 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(5.11, 5.11, 5.11)

Area Scan (121x211x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.519 W/kg


Zoom Scan (9x9x8)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 0 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.732 W/kg

SAR(1 g) = 0.157 W/kg; SAR(10 g) = 0.042 W/kg

Maximum value of SAR (measured) = 0.437 W/kg

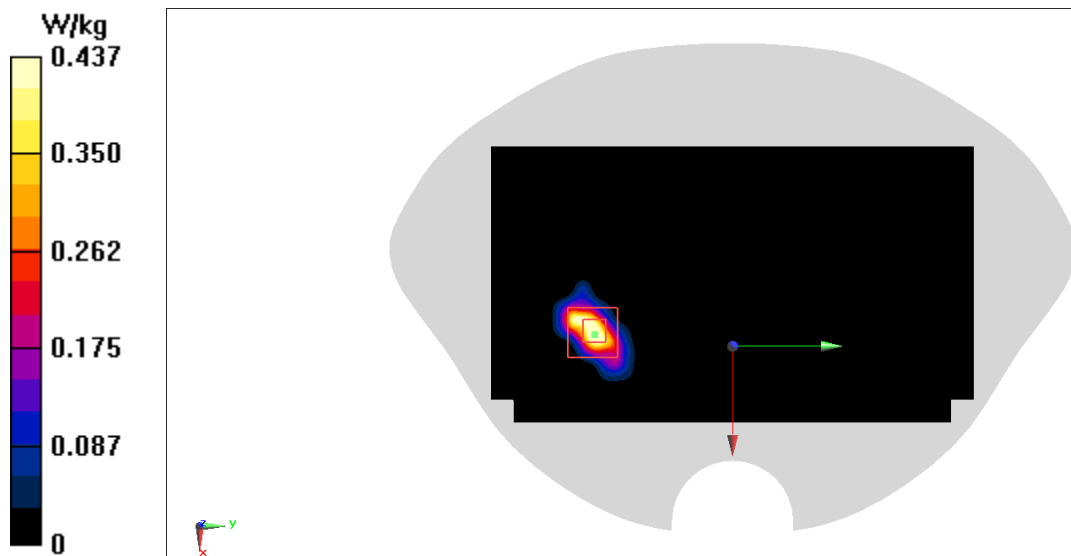

WIFI5G Body 15mm ANT6

Date: 1/9/2023

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 5570$ MHz; $\sigma = 4.861$ S/m; $\epsilon_r = 35.59$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, WLAN5G_11ac 160M (0) Frequency: 5570 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(5.11, 5.11, 5.11)

Area Scan (121x211x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.492 W/kg



Zoom Scan (9x9x8)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 0 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.816 W/kg

SAR(1 g) = 0.188 W/kg; SAR(10 g) = 0.060 W/kg

Maximum value of SAR (measured) = 0.494 W/kg

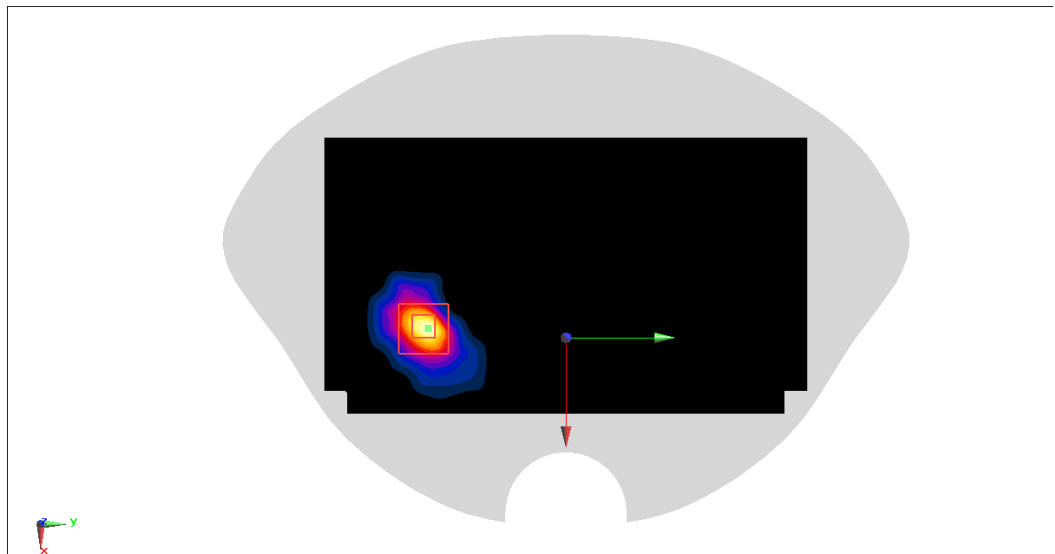

WIFI5G Head ANT7

Date: 1/8/2023

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 5210$ MHz; $\sigma = 4.549$ S/m; $\epsilon_r = 36.91$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, WLAN 11a (0) Frequency: 5210 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(5.53, 5.53, 5.53)

Area Scan (121x211x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.0978 W/kg


Zoom Scan (8x8x8)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 0 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.368 W/kg

SAR(1 g) = 0.082 W/kg; SAR(10 g) = 0.011 W/kg

Maximum value of SAR (measured) = 0.113 W/kg

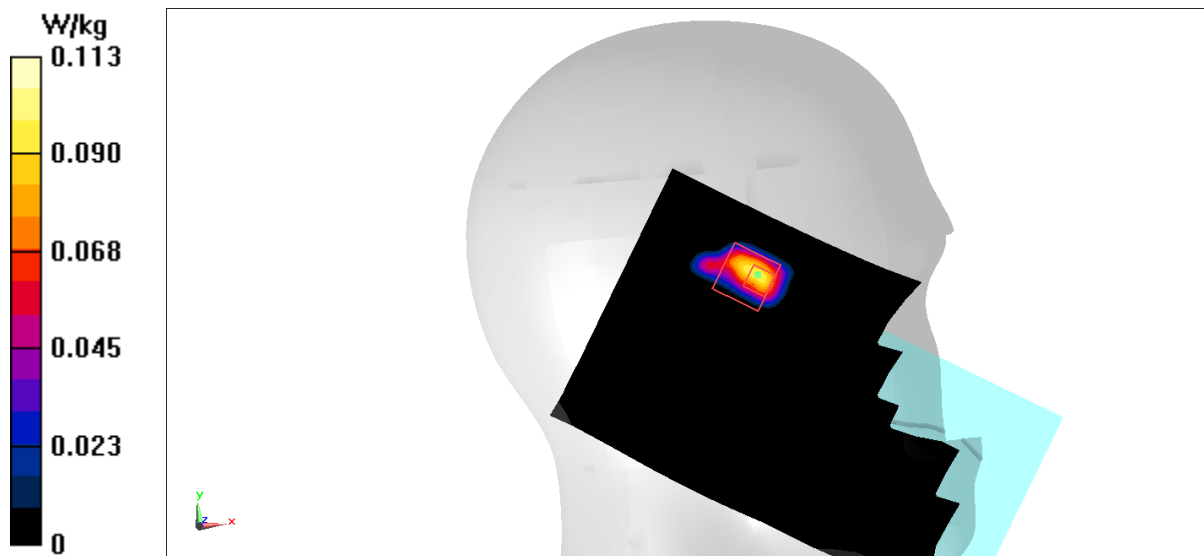

WIFI5G Body 10mm ANT7

Date: 1/8/2023

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.184$ S/m; $\epsilon_r = 36$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, WLAN 11a (0) Frequency: 5775 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(5.2, 5.2, 5.2)

Area Scan (61x211x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.105 W/kg



Zoom Scan (9x9x8)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 0 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.298 W/kg

SAR(1 g) = 0.036 W/kg; SAR(10 g) = 0.011 W/kg

Maximum value of SAR (measured) = 0.120 W/kg

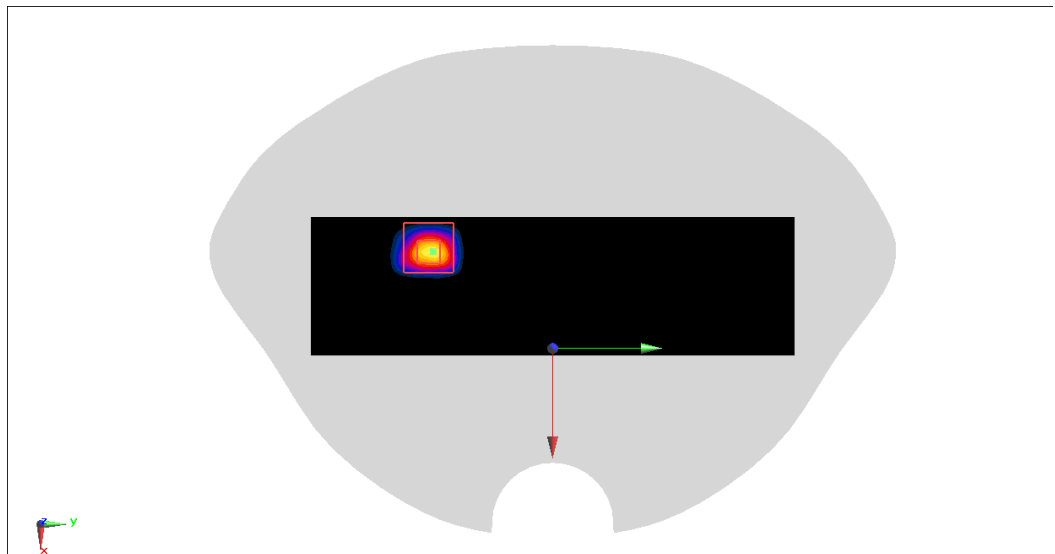

WIFI5G Body 15mm ANT7

Date: 1/8/2023

Electronics: DAE4 Sn1588

Medium: H700-6000M

Medium parameters used: $f = 5570$ MHz; $\sigma = 4.958$ S/m; $\epsilon_r = 36.3$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, WLAN5G_11ac 160M (0) Frequency: 5570 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3617 ConvF(5.11, 5.11, 5.11)

Area Scan (121x211x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.387 W/kg



Zoom Scan (8x8x8)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 0 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.613 W/kg

SAR(1 g) = 0.103 W/kg; SAR(10 g) = 0.035 W/kg

Maximum value of SAR (measured) = 0.301 W/kg

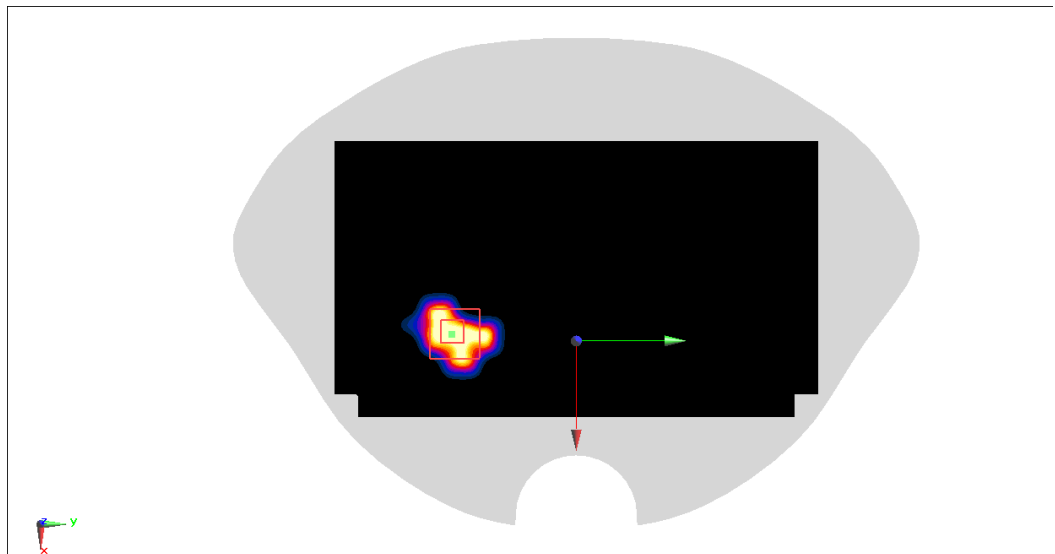

BT Head ANT6

Date: 1/30/2023

Electronics: DAE4 Sn1331

Medium: H700-7000M

Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.832$ S/m; $\epsilon_r = 40.37$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, BT (0) Frequency: 2441 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7548 ConvF(7.32, 7.32, 7.32)

Area Scan (101x171x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.23 W/kg



Zoom Scan (9x8x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 10.08 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.548 W/kg; SAR(10 g) = 0.230 W/kg

Maximum value of SAR (measured) = 1.08 W/kg

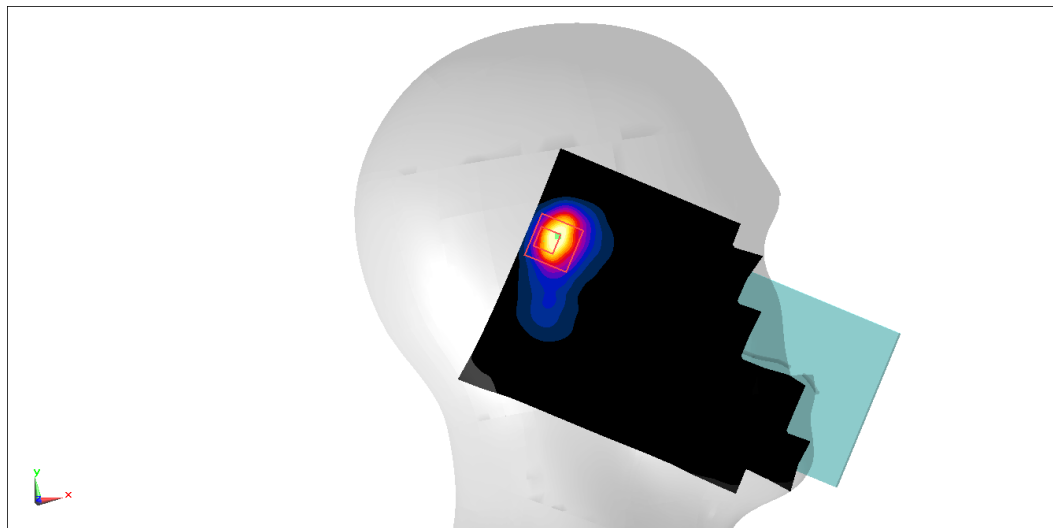

BT Body 10mm ANT6

Date: 1/30/2023

Electronics: DAE4 Sn1331

Medium: H700-7000M

Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.832$ S/m; $\epsilon_r = 40.37$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, BT (0) Frequency: 2441 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7548 ConvF(7.32, 7.32, 7.32)

Area Scan (101x171x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.248 W/kg


Zoom Scan (9x8x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0.6830 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.200 W/kg

SAR(1 g) = 0.096 W/kg; SAR(10 g) = 0.047 W/kg

Maximum value of SAR (measured) = 0.155 W/kg

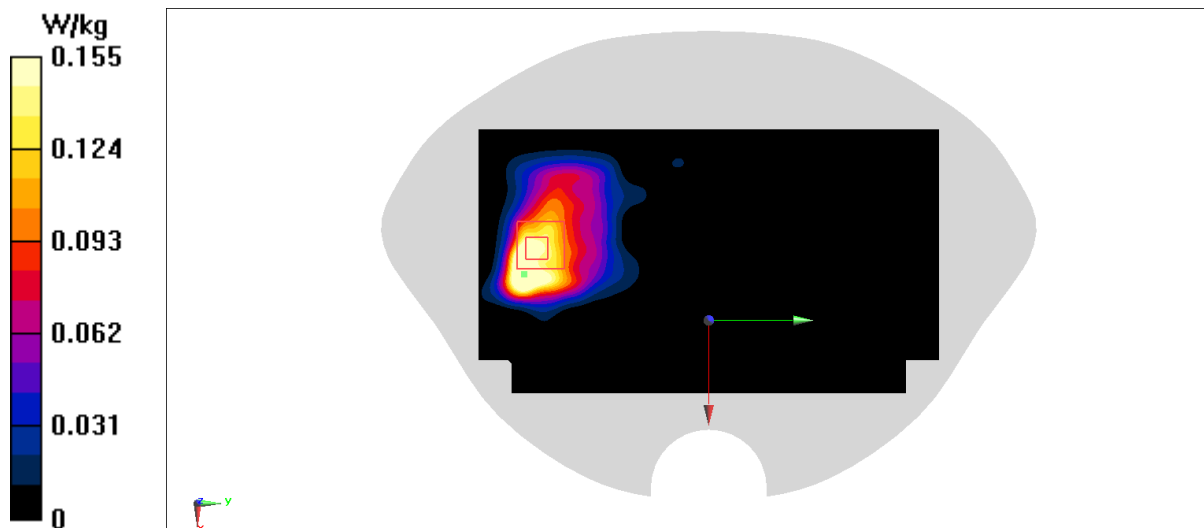

BT Head ANT8

Date: 1/30/2023

Electronics: DAE4 Sn1331

Medium: H700-7000M

Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.832$ S/m; $\epsilon_r = 40.37$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, BT (0) Frequency: 2441 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7548 ConvF(7.32, 7.32, 7.32)

Area Scan (101x171x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.381 W/kg



Zoom Scan (9x8x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.468 W/kg

SAR(1 g) = 0.197 W/kg; SAR(10 g) = 0.081 W/kg

Maximum value of SAR (measured) = 0.380 W/kg

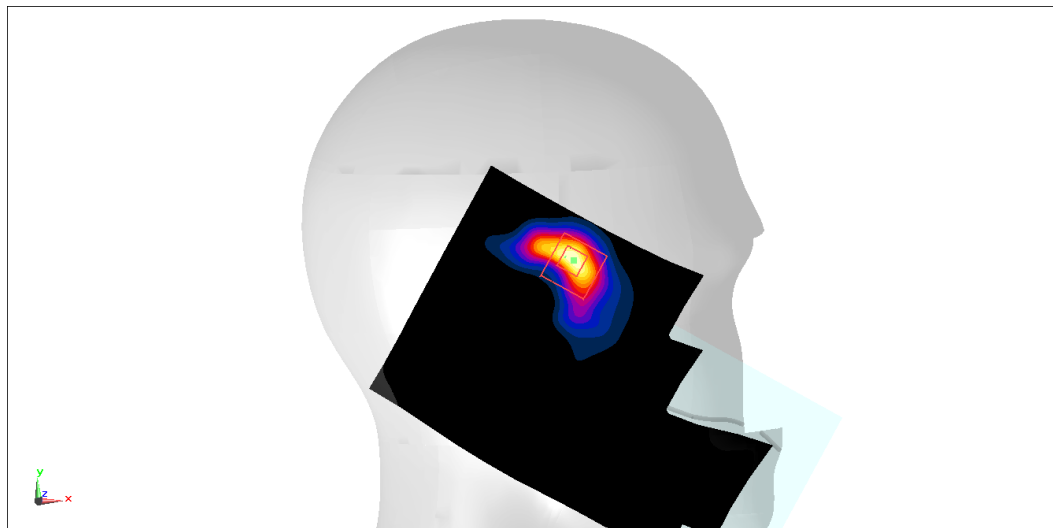

BT Body 10mm ANT8

Date: 1/30/2023

Electronics: DAE4 Sn1331

Medium: H700-7000M

Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.832$ S/m; $\epsilon_r = 40.37$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, BT (0) Frequency: 2441 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7548 ConvF(7.32, 7.32, 7.32)

Area Scan (101x171x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.117 W/kg



Zoom Scan (9x8x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 2.622 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.152 W/kg


SAR(1 g) = 0.072 W/kg; SAR(10 g) = 0.032 W/kg

Maximum value of SAR (measured) = 0.122 W/kg

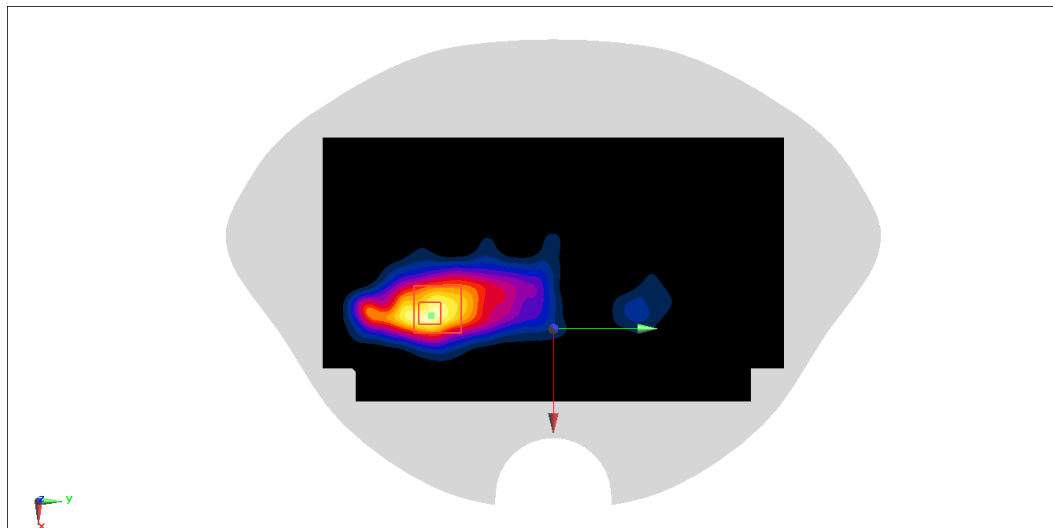


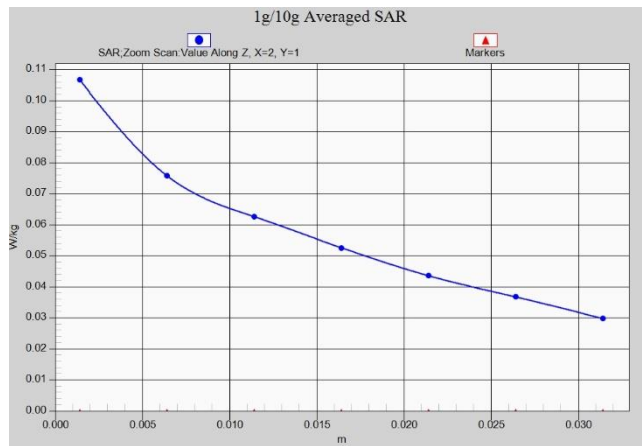


GSM850 Head ANT0

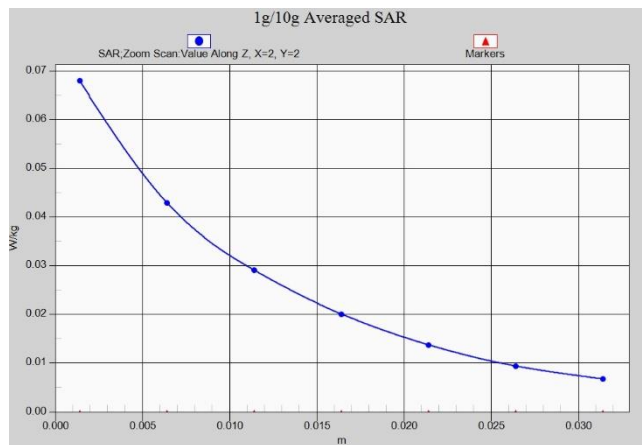


GSM850 Body 10mm ANT0

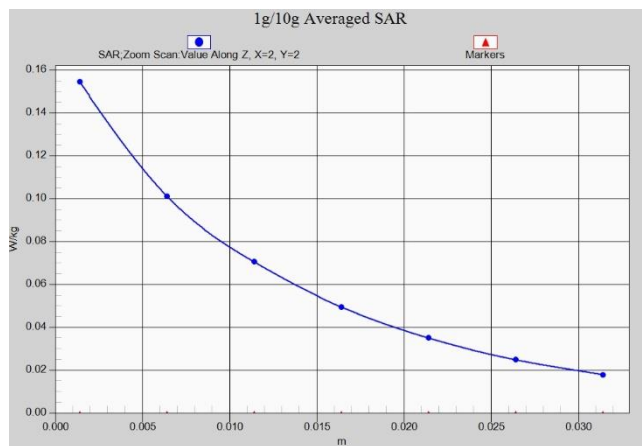


GSM850 Body 15mm ANT0

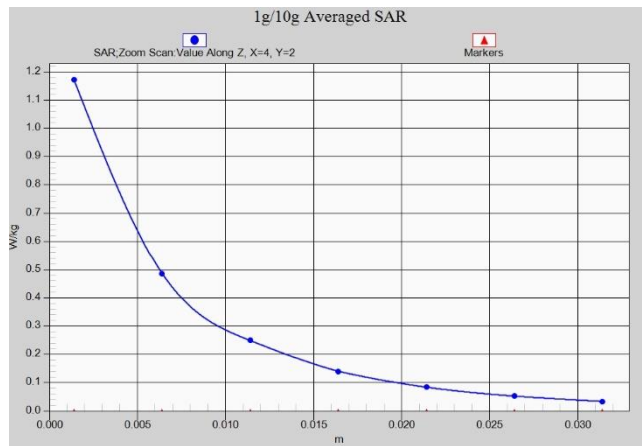


GSM850 Head ANT3

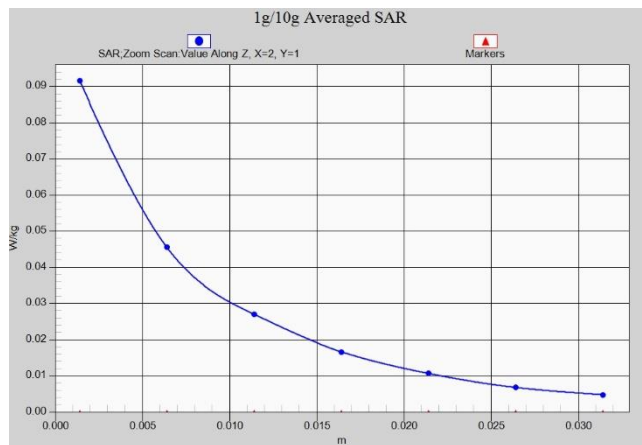


GSM850 Body 10mm ANT3

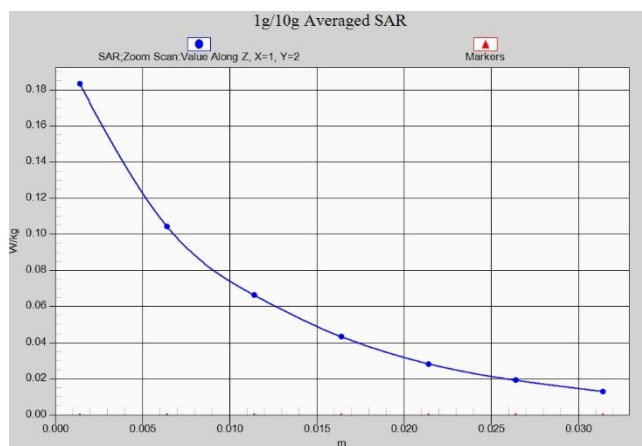


GSM850 Body 15mm ANT3

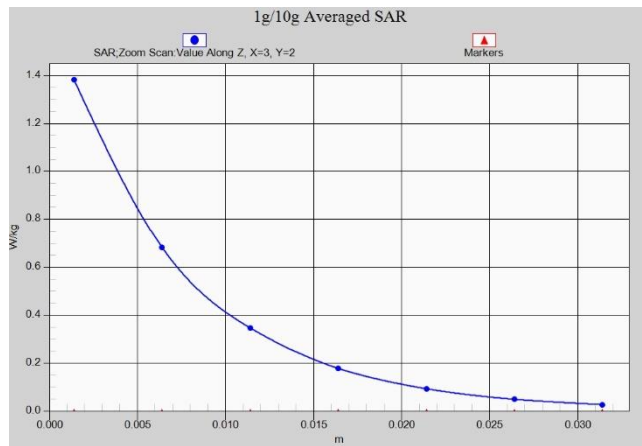


GSM1900 Head ANT4

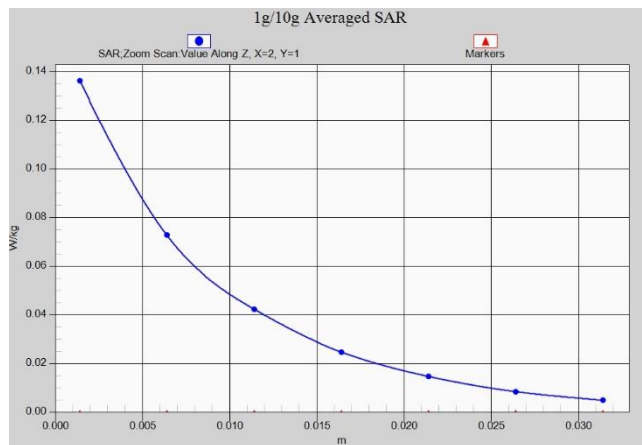


GSM1900 Body 10mm ANT4

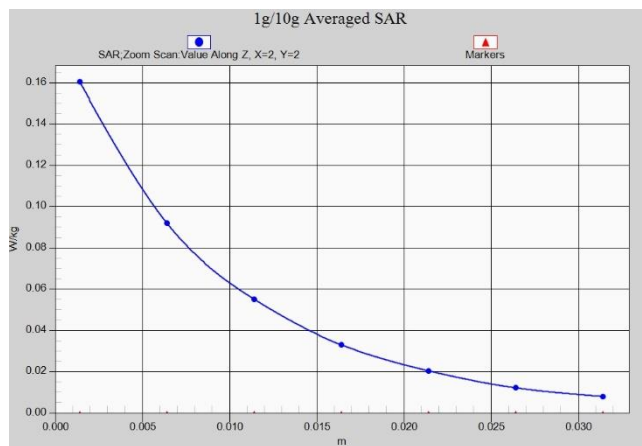


GSM1900 Body 15mm ANT4

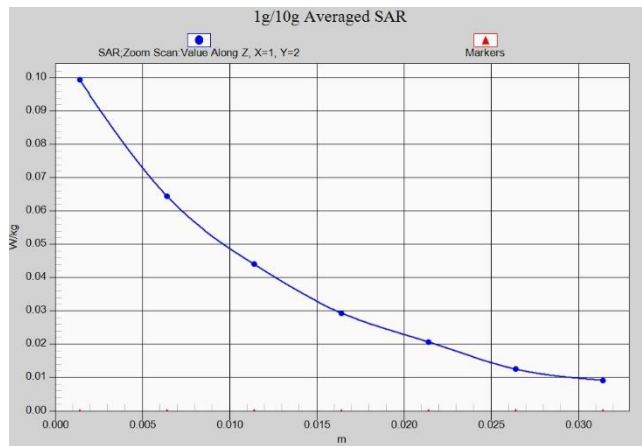


GSM1900 Head ANT1

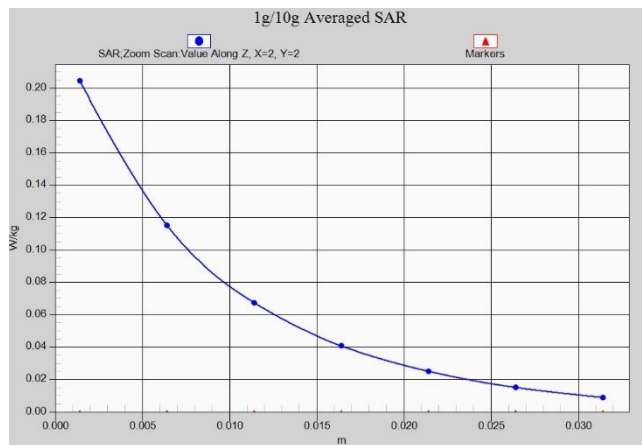


GSM1900 Body 10mm ANT1

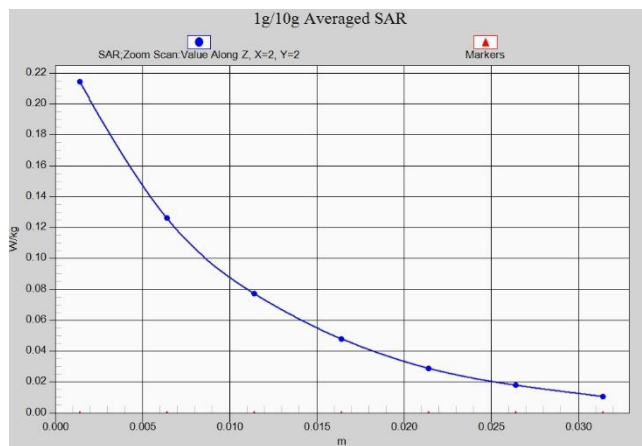


GSM1900 Body 15mm ANT1

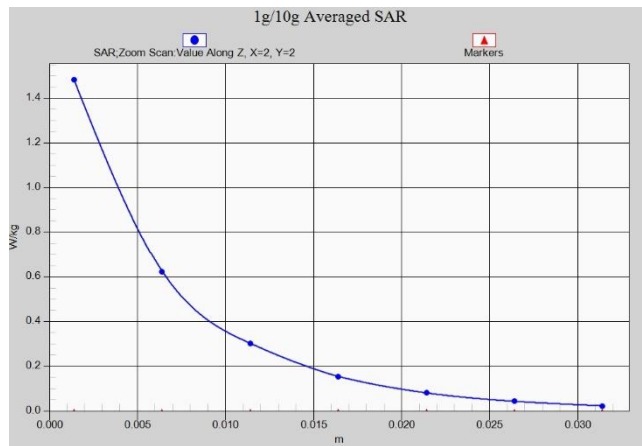


WCDMA1900 Head ANT4

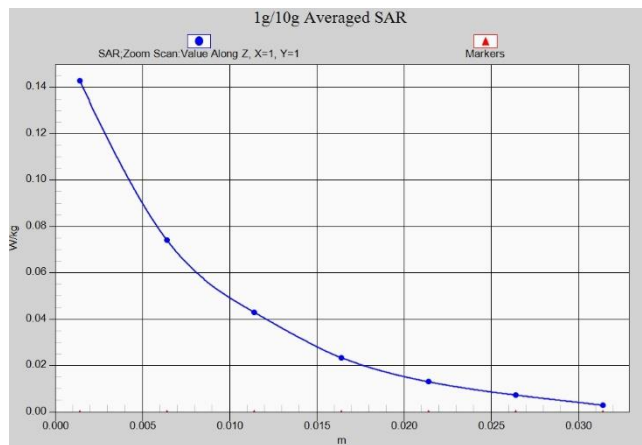


WCDMA1900 Body 10mm ANT4

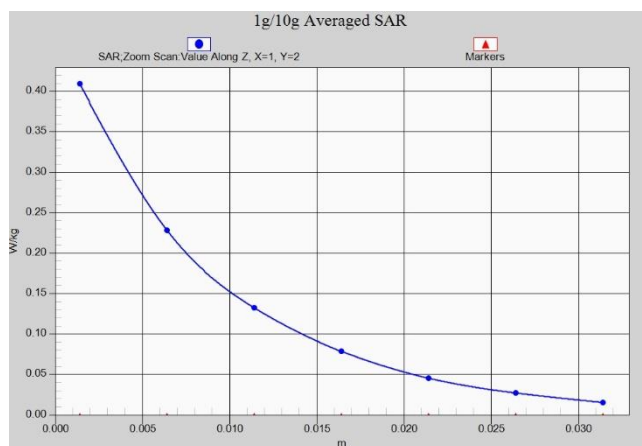


WCDMA1900 Body 15mm ANT4

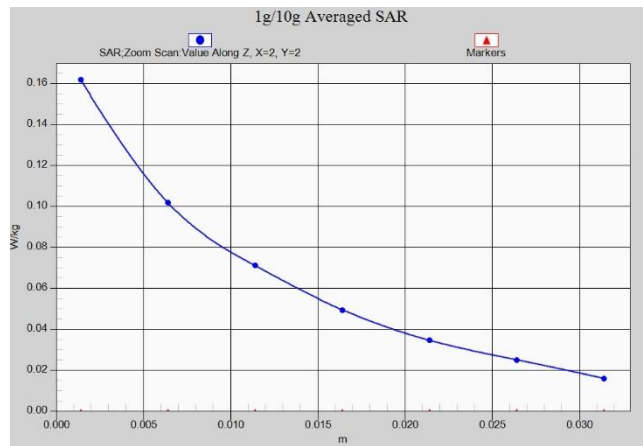


WCDMA1900 Head ANT1

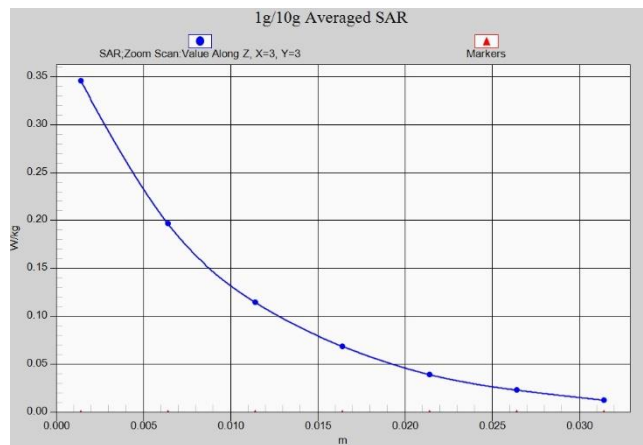


WCDMA1900 Body 10mm ANT1

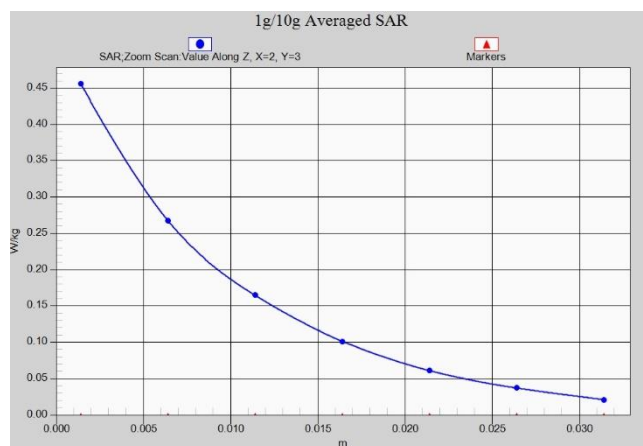


WCDMA1900 Body 15mm ANT1

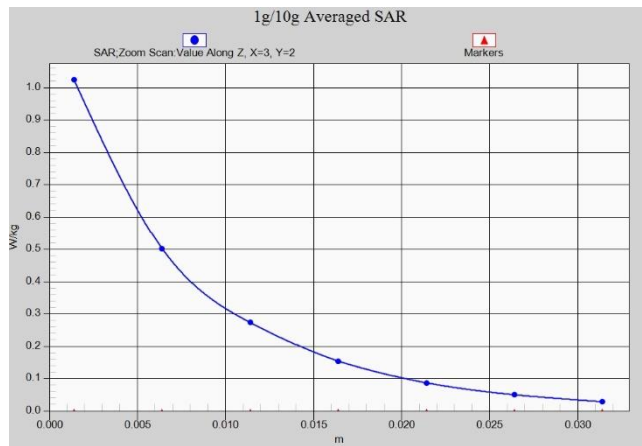


WCDMA1700 Head ANT4

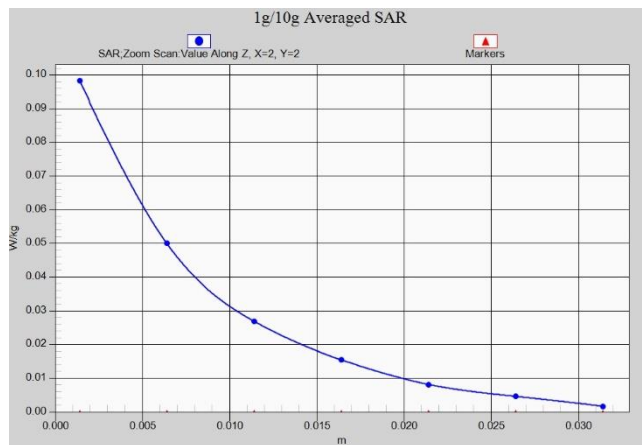


WCDMA1700 Body 10mm ANT4

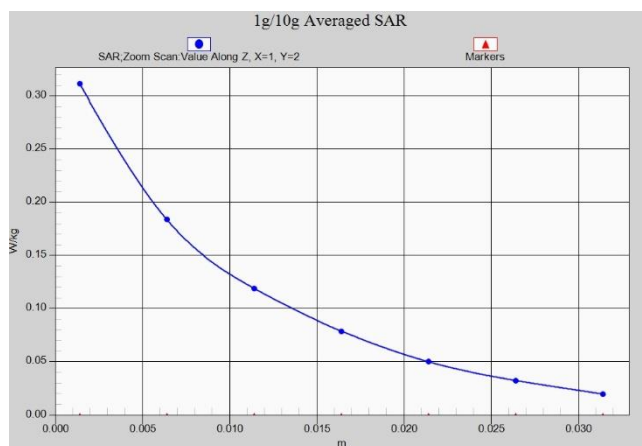


WCDMA1700 Body 15mm ANT4

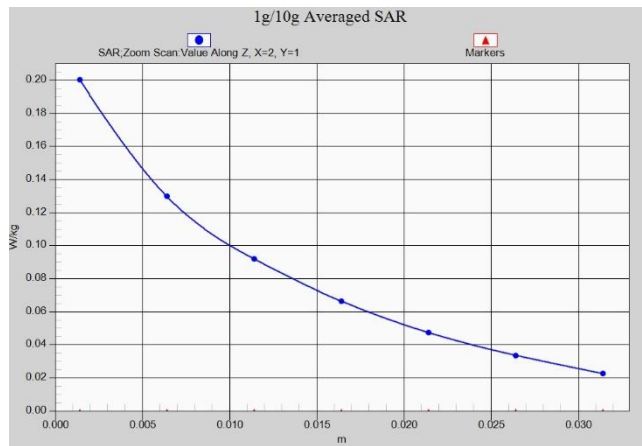


WCDMA1700 Head ANT1

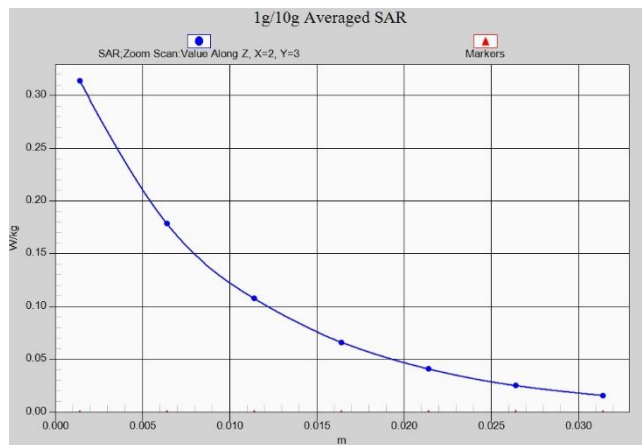


WCDMA1700 Body 10mm ANT1

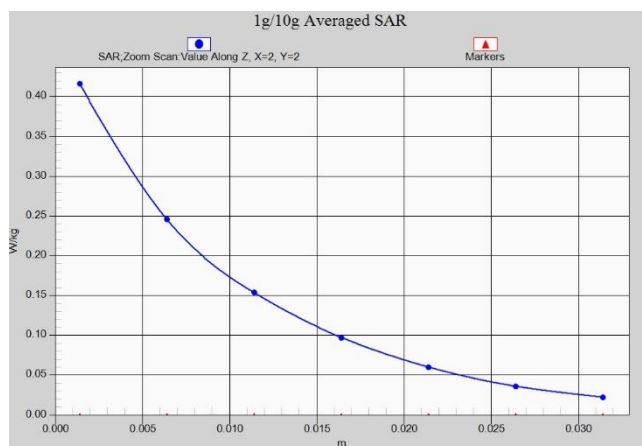


WCDMA1700 Body 15mm ANT1

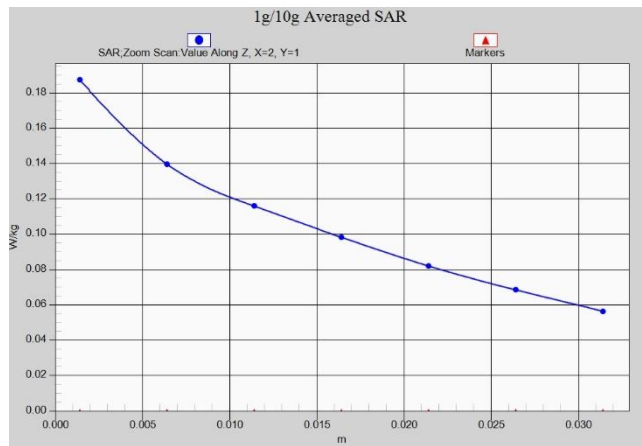


WCDMA850 Head ANT0

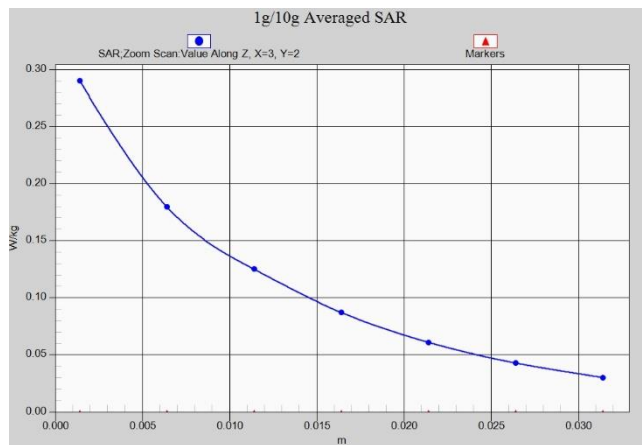


WCDMA850 Body 10mm ANT0

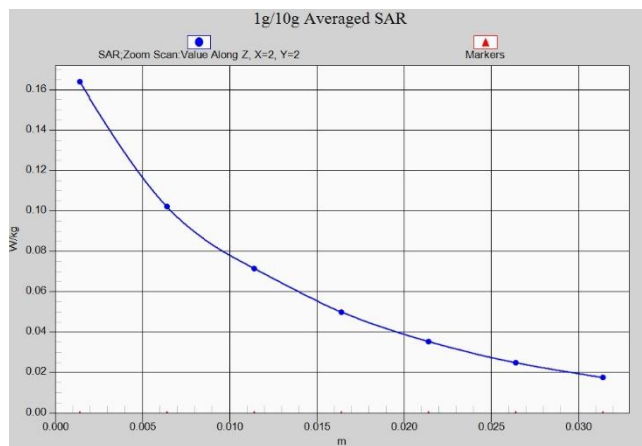


WCDMA850 Body 15mm ANT0

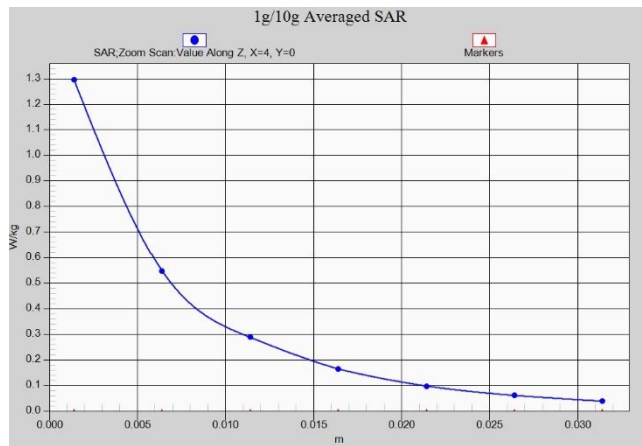


WCDMA850 Head ANT3

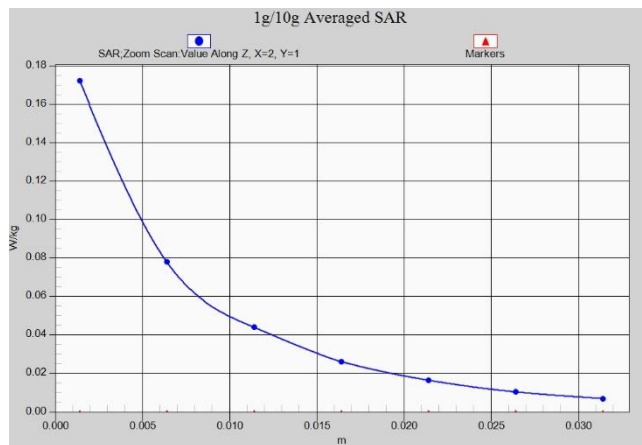


WCDMA850 Body 10mm ANT3

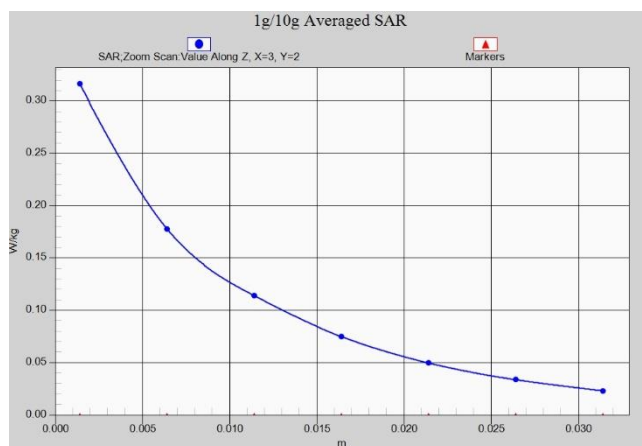


WCDMA850 Body 15mm ANT3

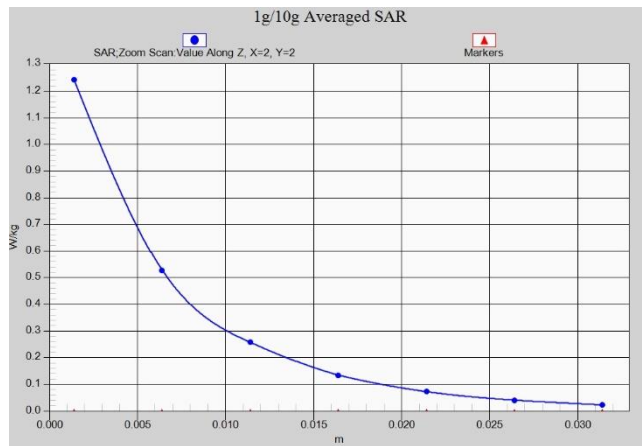


LTE Band2 Head ANT4

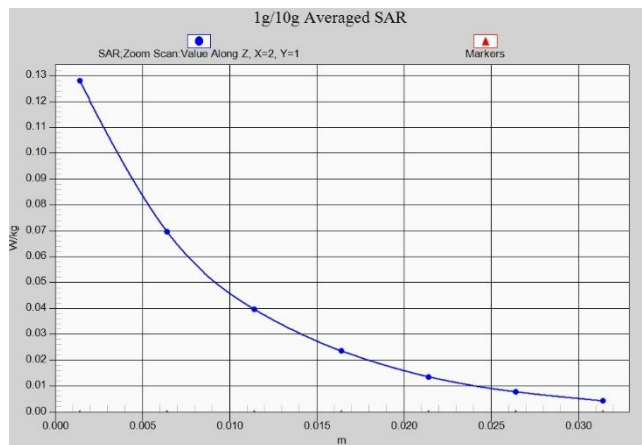


LTE Band2 Body 10mm ANT4

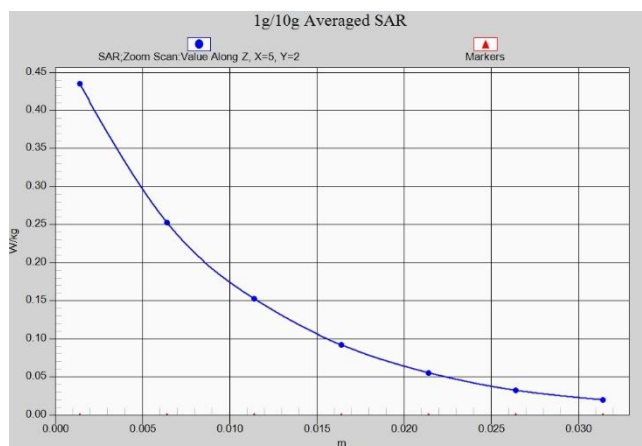


LTE Band2 Body 15mm ANT4

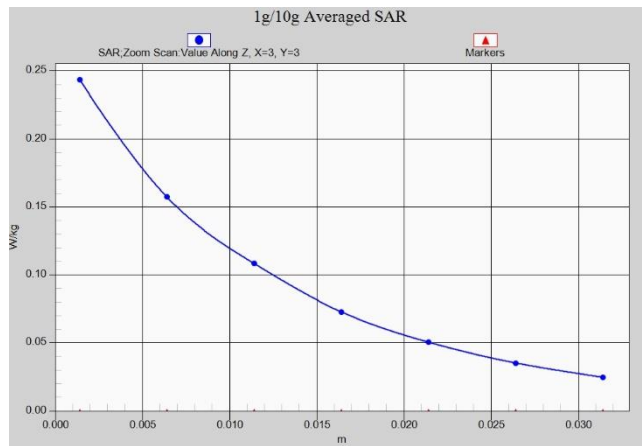


LTE Band2 Head ANT1

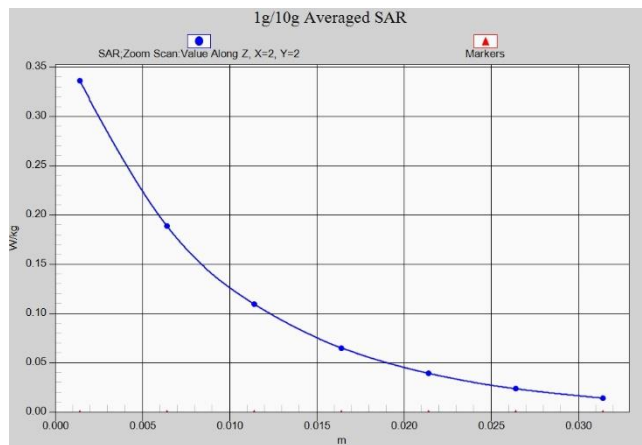


LTE Band2 Body 10mm ANT1

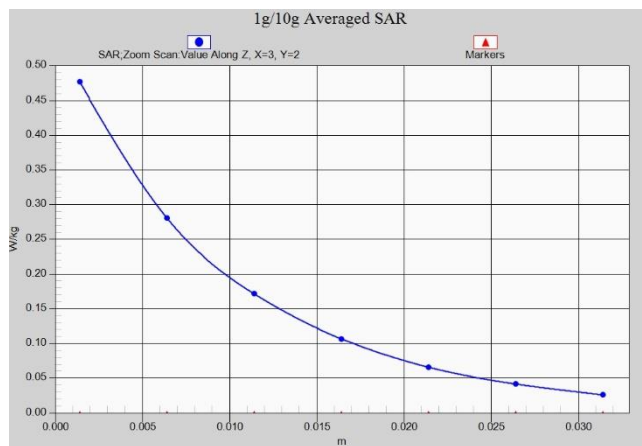


LTE Band2 Body 15mm ANT1

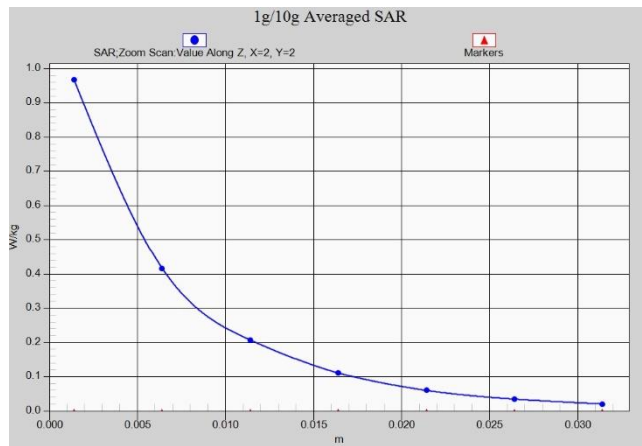


LTE Band4 Head ANT4

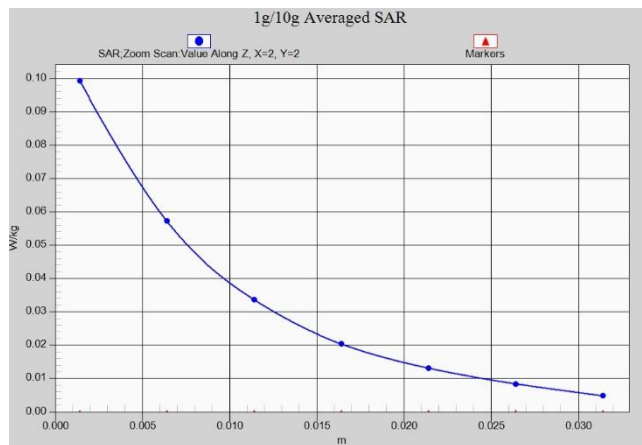


LTE Band4 Body 10mm ANT4

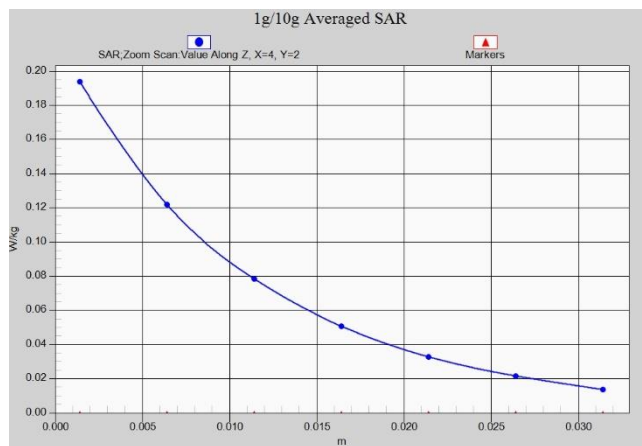


LTE Band4 Body 15mm ANT4

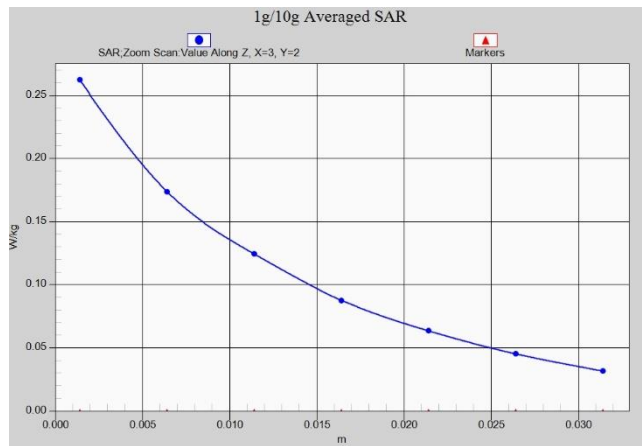


LTE Band4 Head ANT1

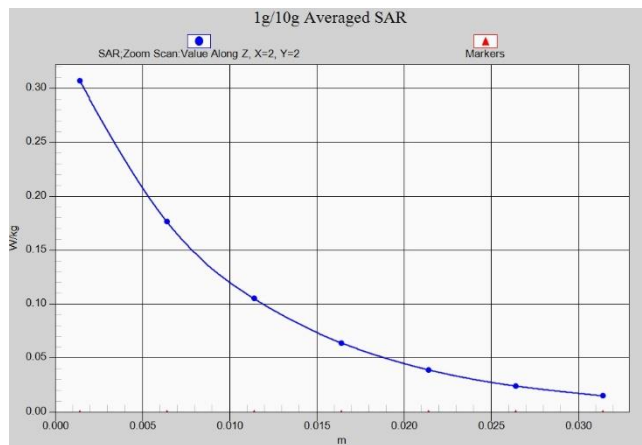


LTE Band4 Body 10mm ANT1

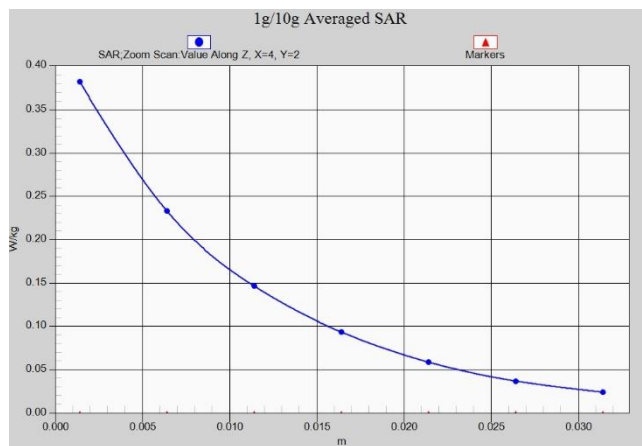


LTE Band4 Body 15mm ANT1

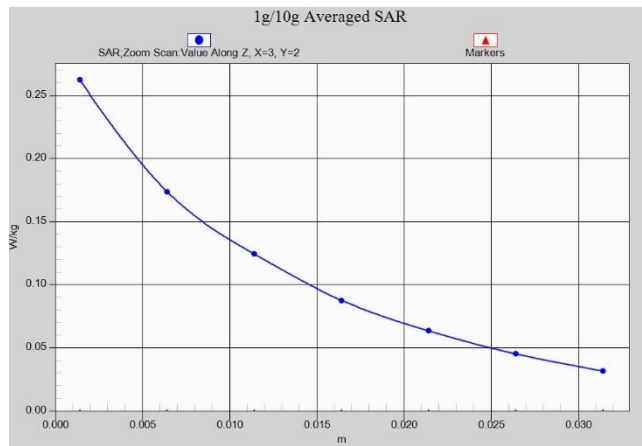


LTE Band4 Head ANT1

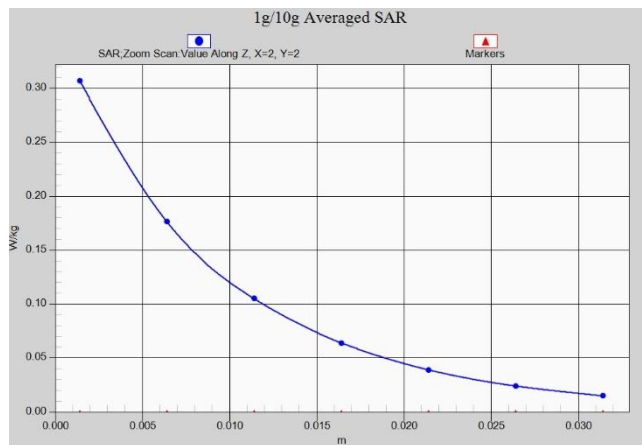


LTE Band4 Body 10mm ANT1

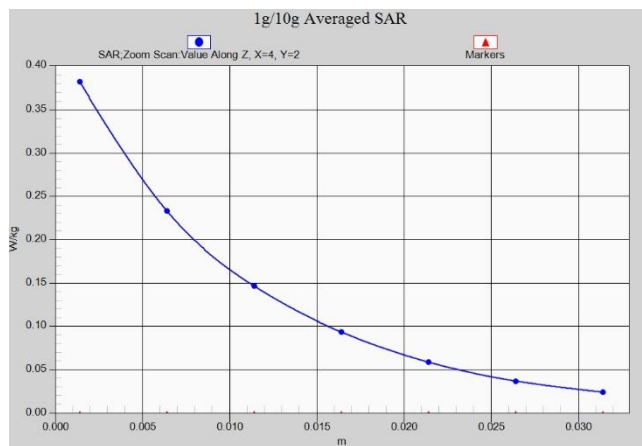


LTE Band4 Body 15mm ANT1

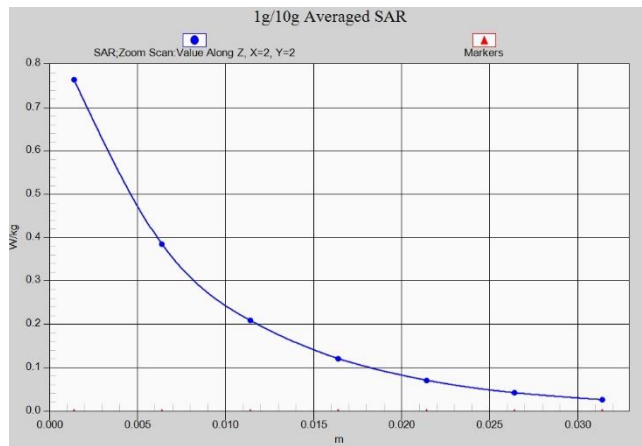


LTE Band4 Head ANT2

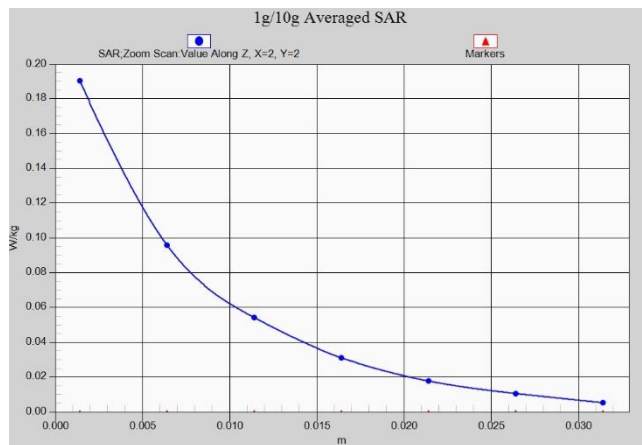


LTE Band4 Body 10mm ANT2

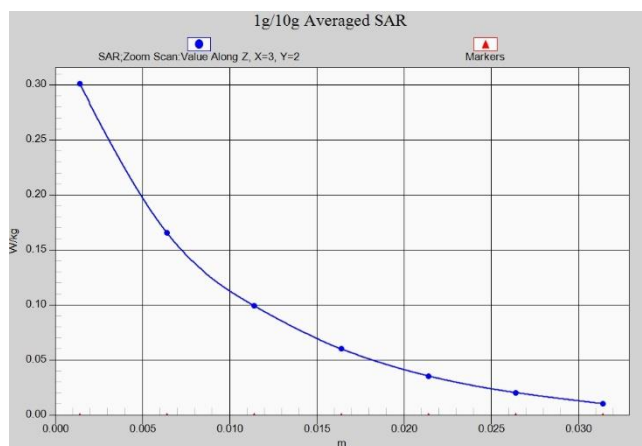


LTE Band4 Body 15mm ANT2

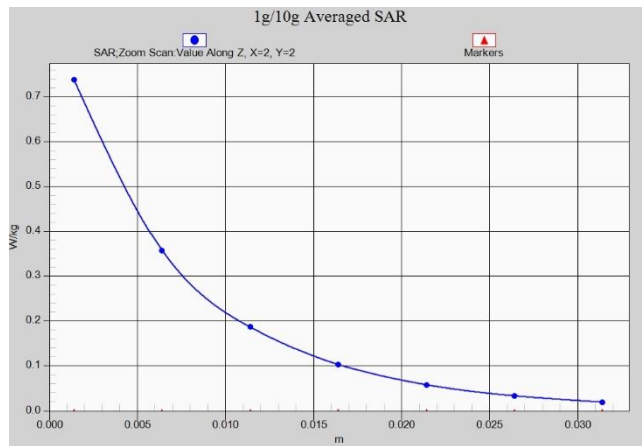


LTE Band4 Head ANT8

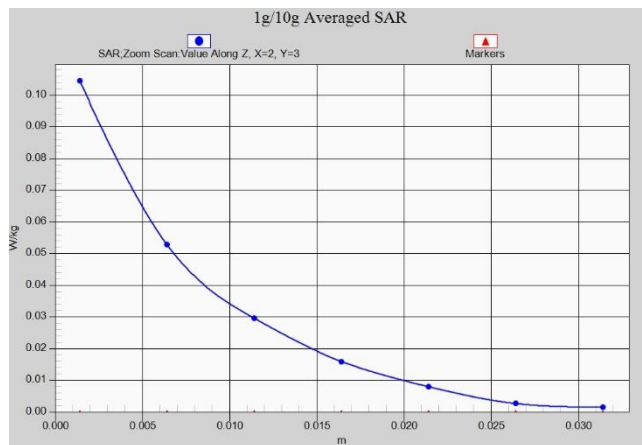


LTE Band4 Body 10mm ANT8

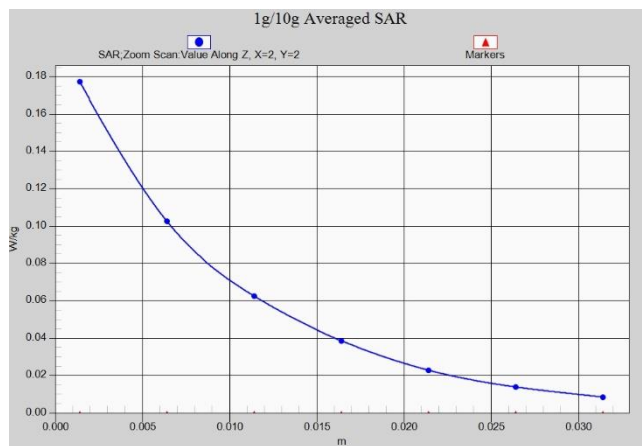


LTE Band4 Body 15mm ANT8

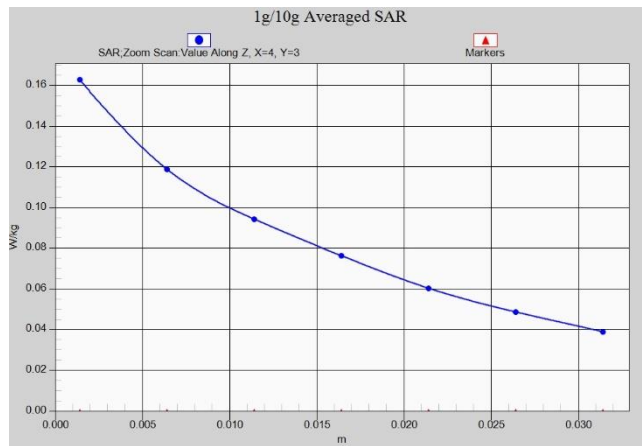


LTE Band5 Head ANT0

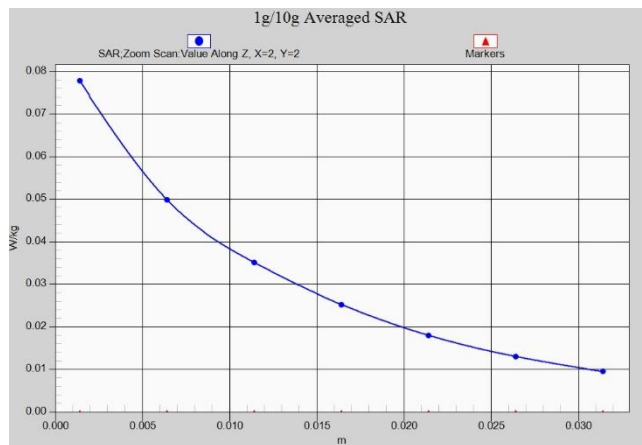


LTE Band5 Body 10mm ANT0

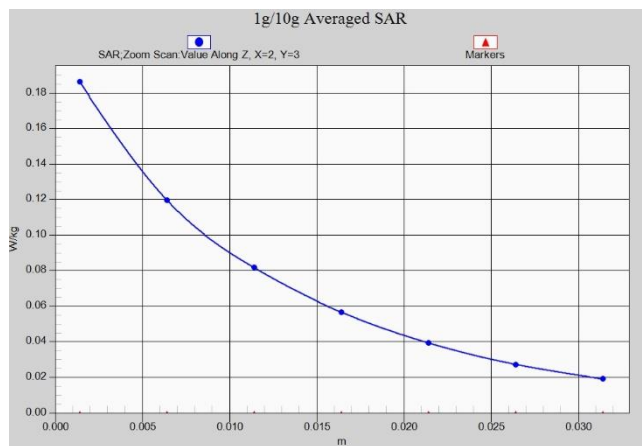


LTE Band5 Body 15mm ANT0

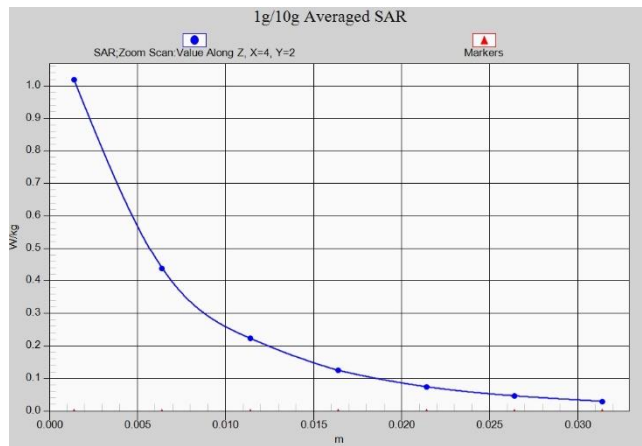


LTE Band5 Head ANT3

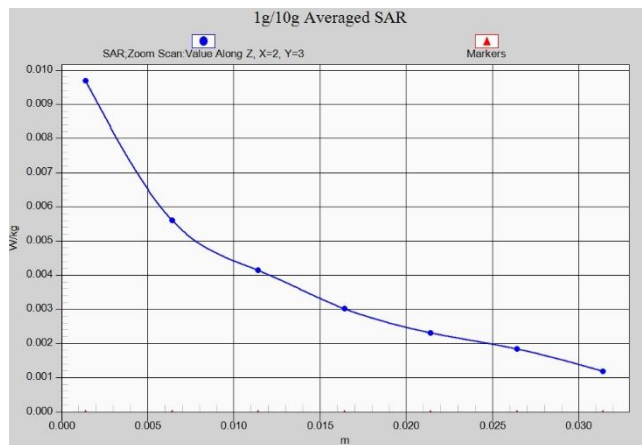


LTE Band5 Body 10mm ANT3

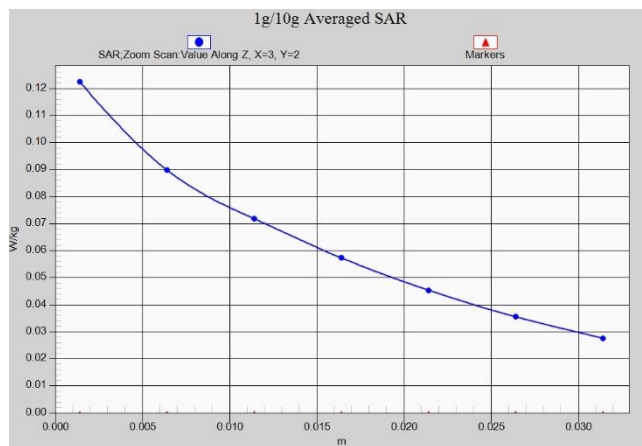


LTE Band5 Body 15mm ANT3

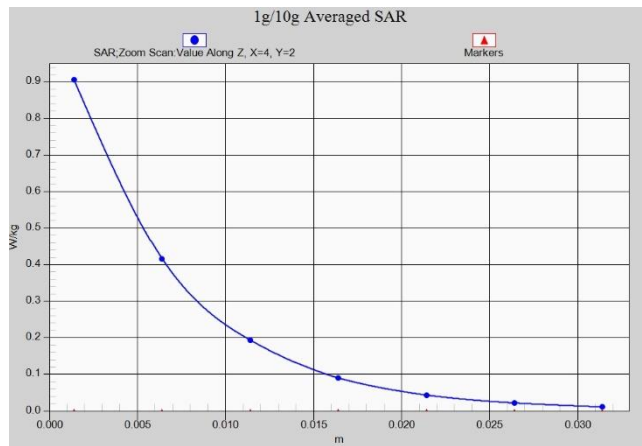


LTE Band7 Head ANT4

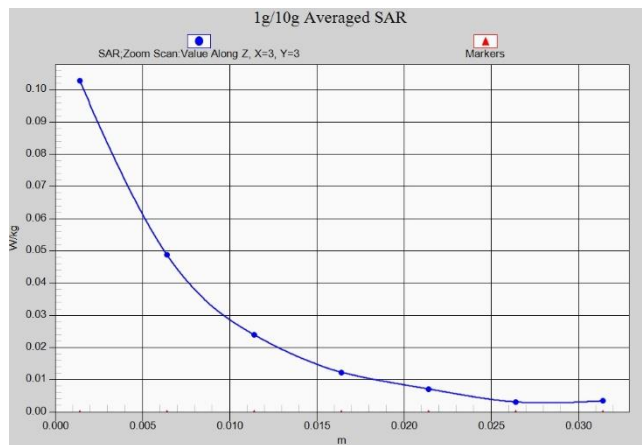


LTE Band7 Body 10mm ANT4

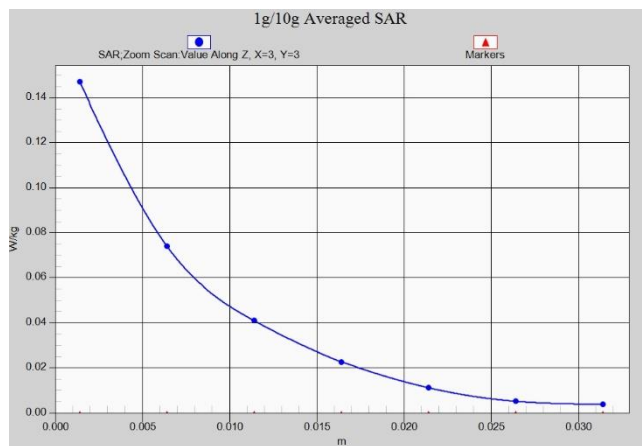


LTE Band7 Body 15mm ANT4

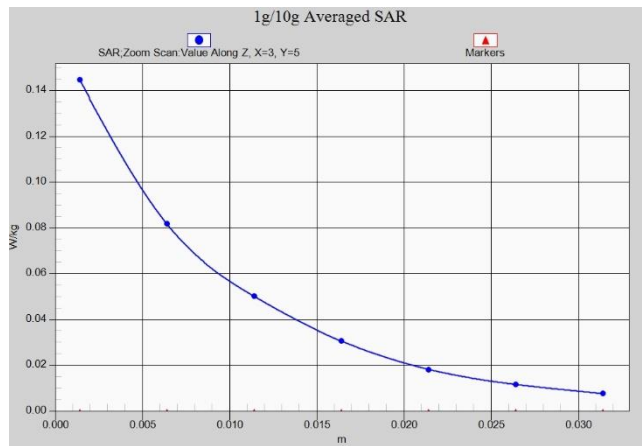


LTE Band7 Head ANT1

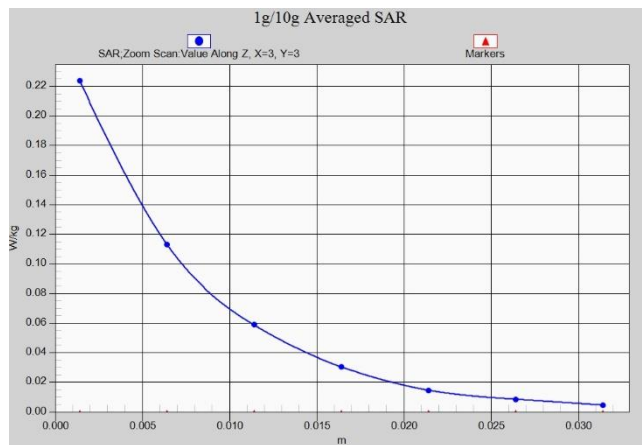


LTE Band7 Body 10mm ANT1

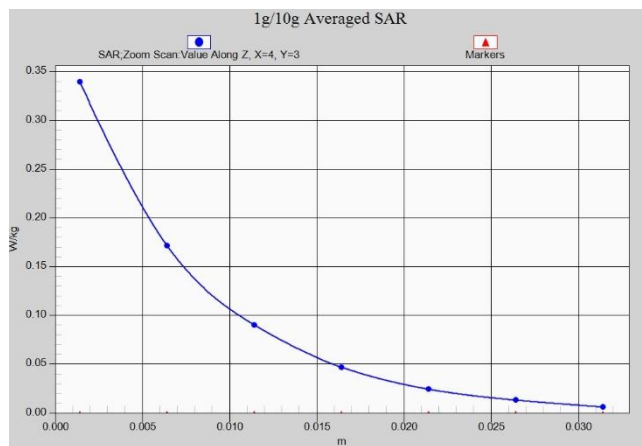


LTE Band7 Body 15mm ANT1

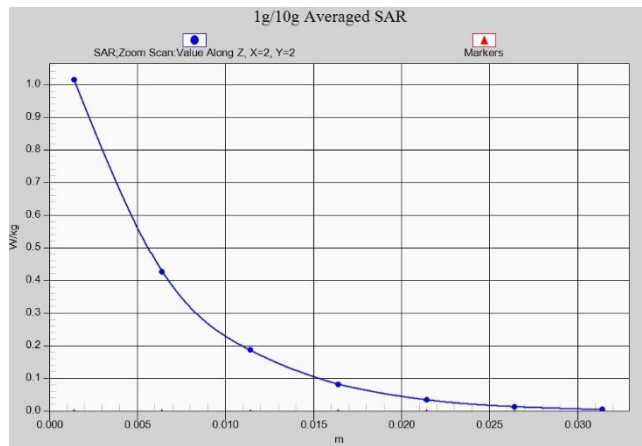


LTE Band7 Head ANT2

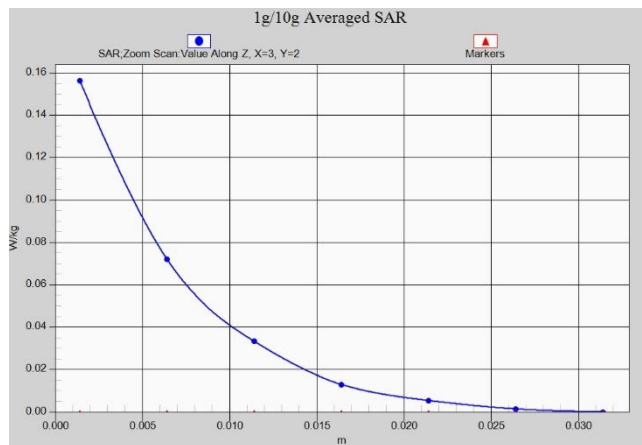


LTE Band7 Body 10mm ANT2

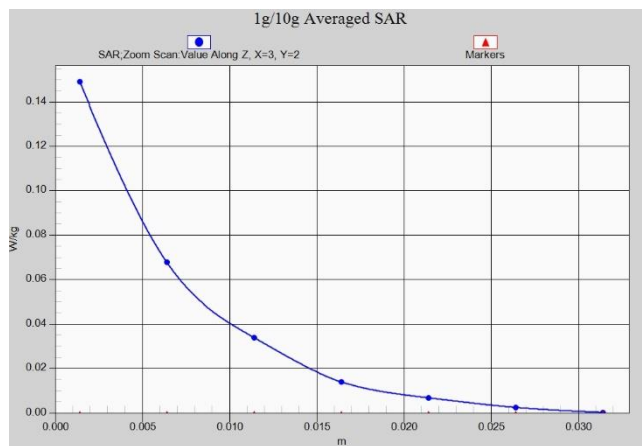


LTE Band7 Body 15mm ANT2

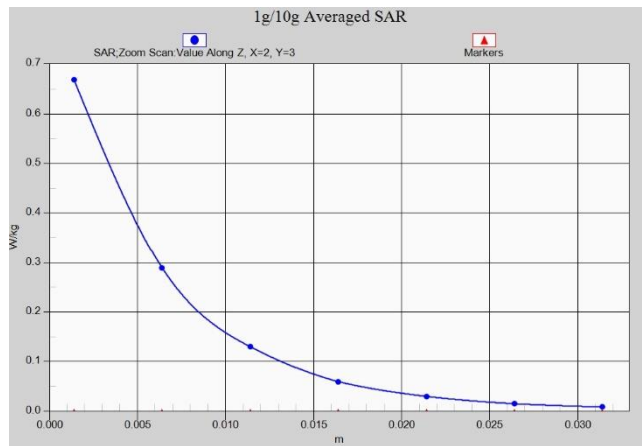


LTE Band7 Head ANT8

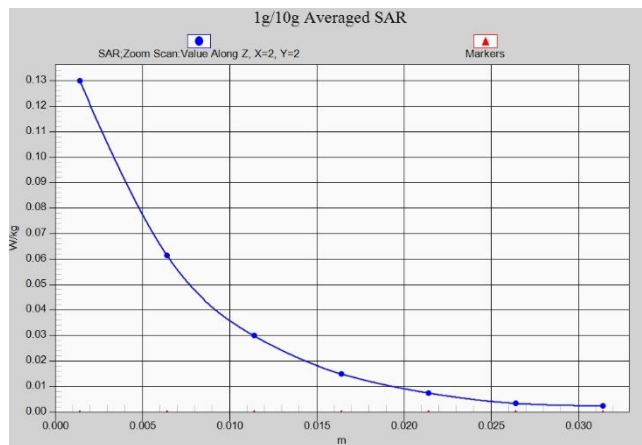


LTE Band7 Body 10mm ANT8

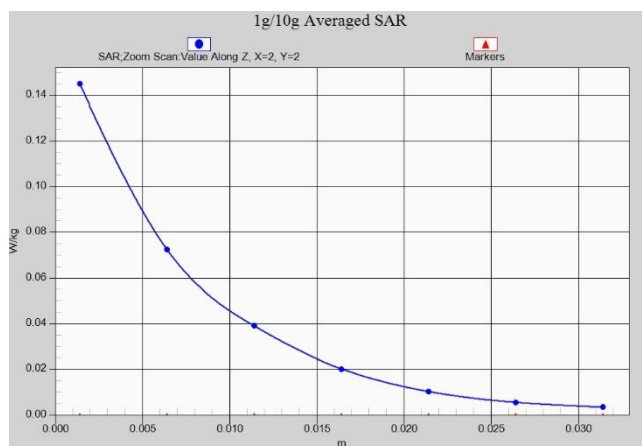


LTE Band7 Body 15mm ANT8

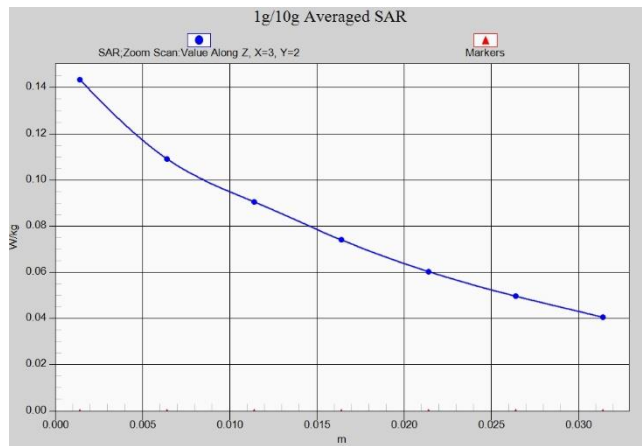


LTE Band12 Head ANT0

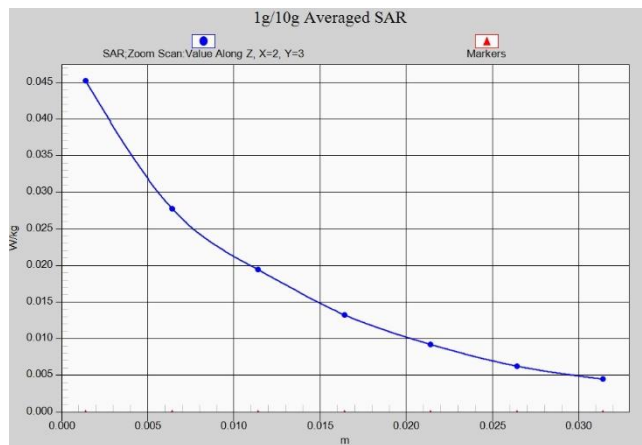


LTE Band12 Body 10mm ANT0

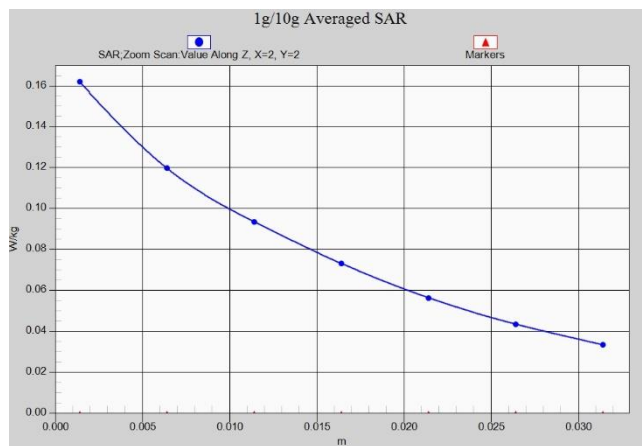


LTE Band12 Body 15mm ANT0

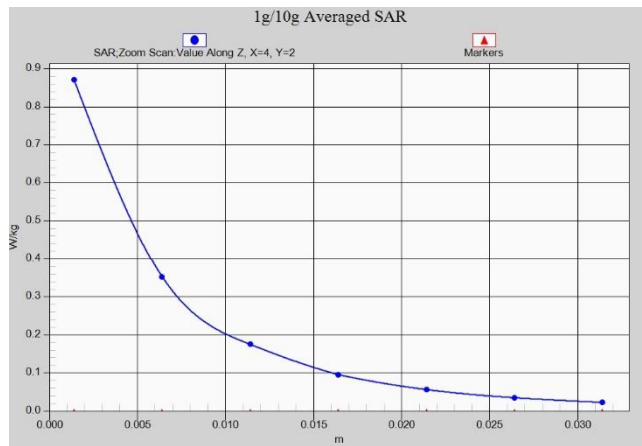


LTE Band12 Head ANT3

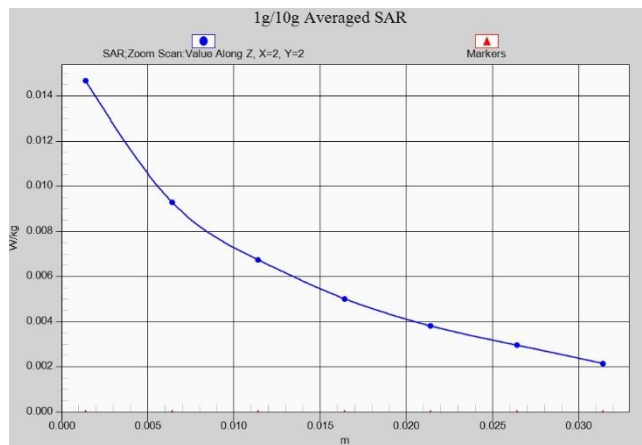


LTE Band12 Body 10mm ANT3

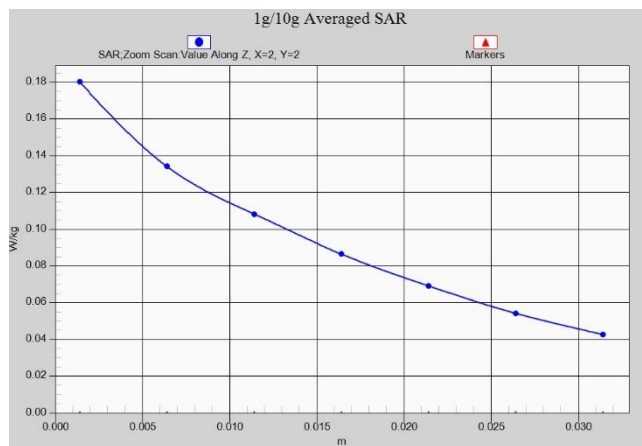


LTE Band12 Body 15mm ANT3

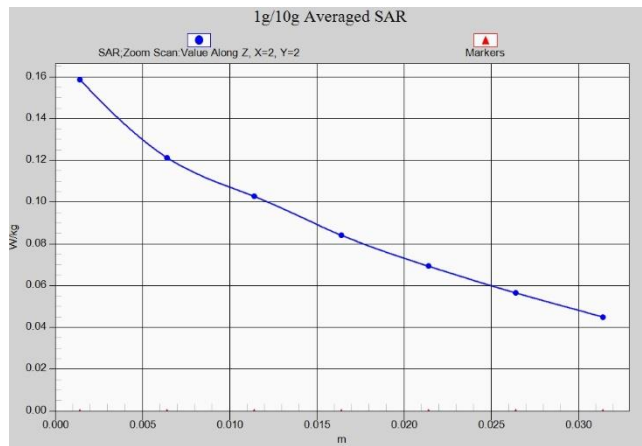


LTE Band13 Head ANT0

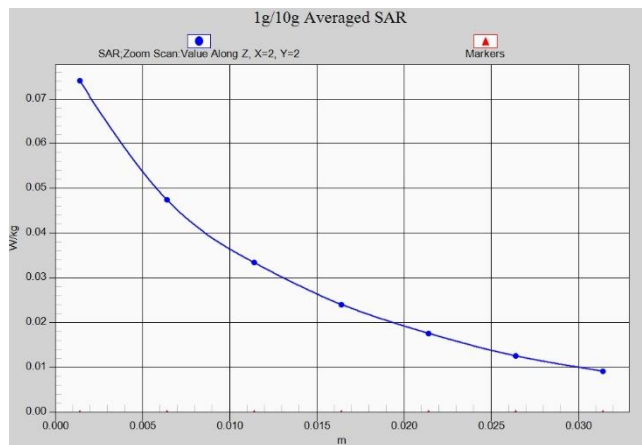


LTE Band13 Body 10mm ANT0

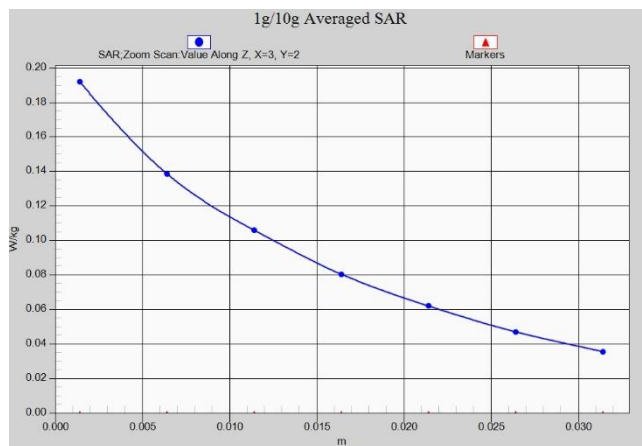


LTE Band13 Body 15mm ANT0

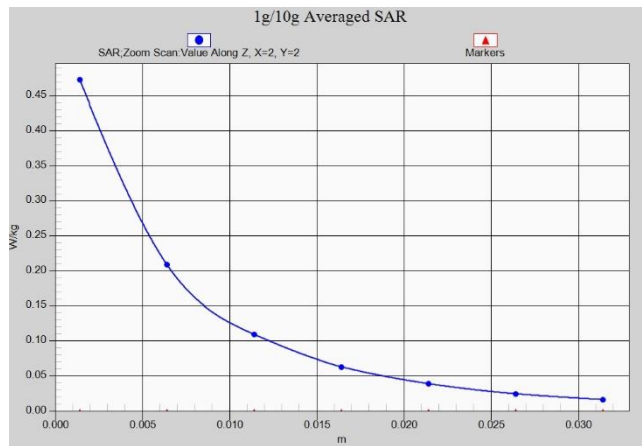


LTE Band13 Head ANT3

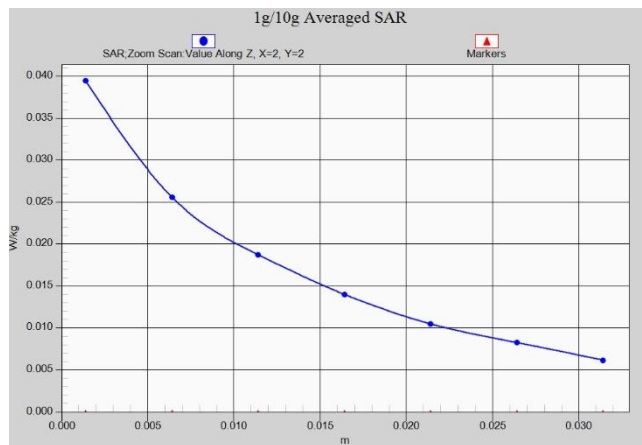


LTE Band13 Body 10mm ANT3

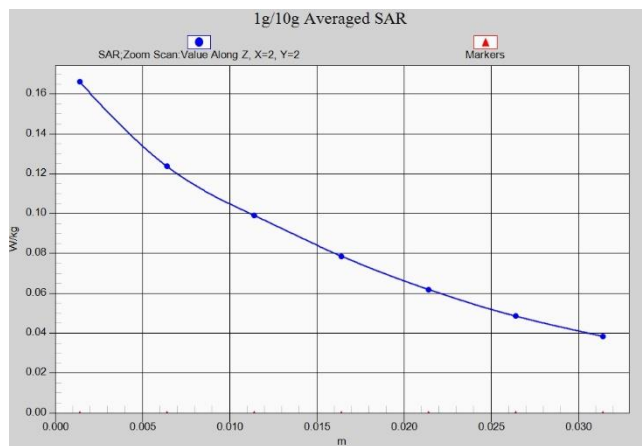


LTE Band13 Body 15mm ANT3

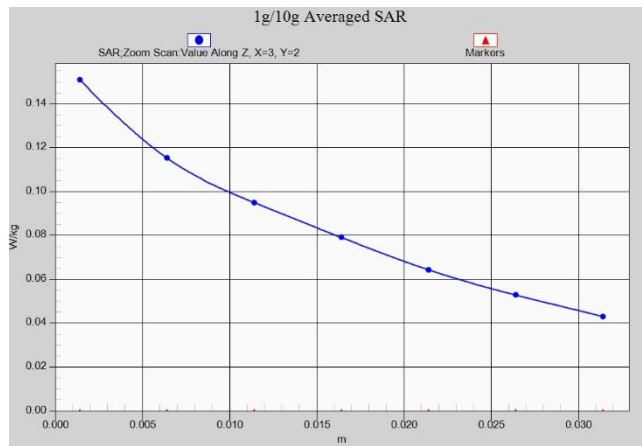


LTE Band17 Head ANT0

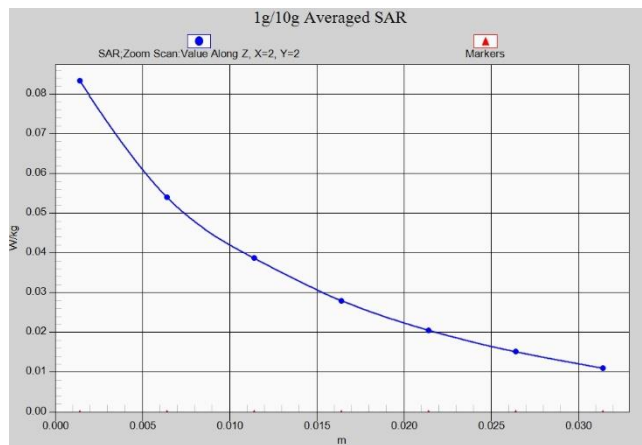


LTE Band17 Body 10mm ANT0

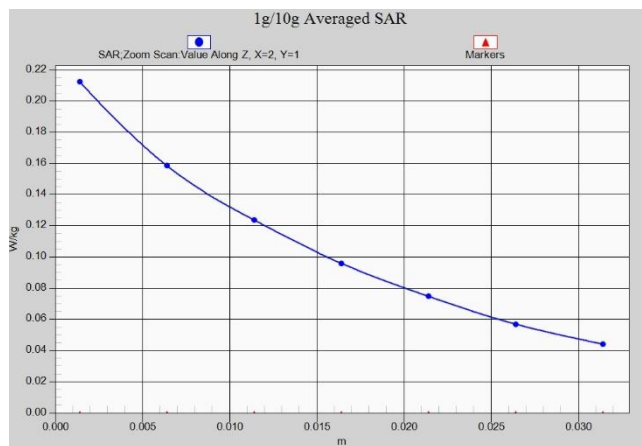


LTE Band17 Body 15mm ANT0

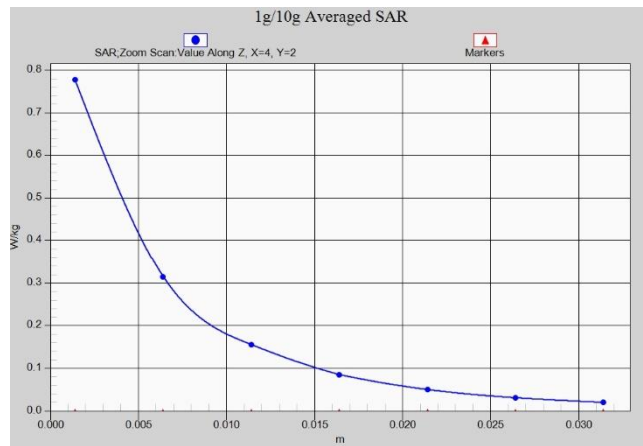


LTE Band17 Head ANT3

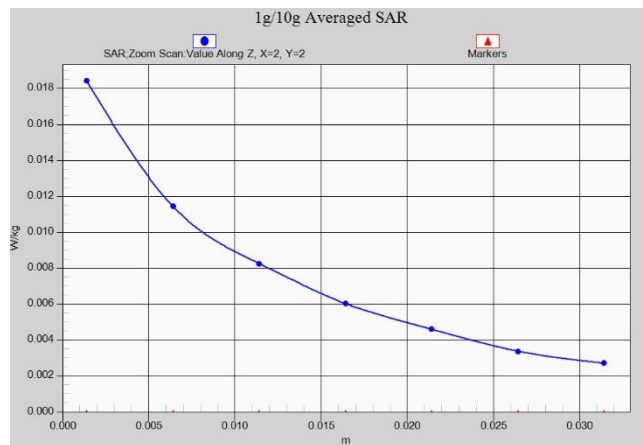


LTE Band17 Body 10mm ANT3

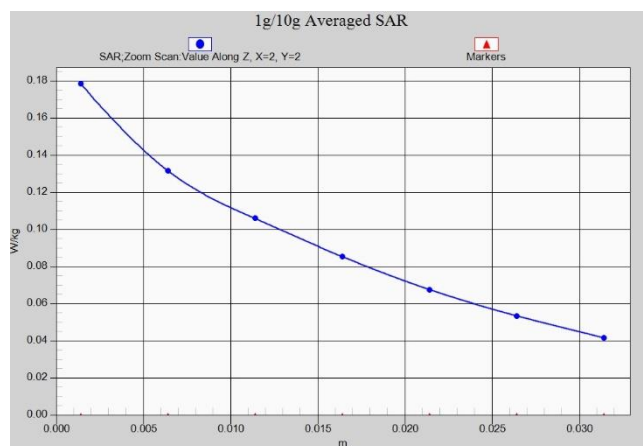


LTE Band17 Body 15mm ANT3

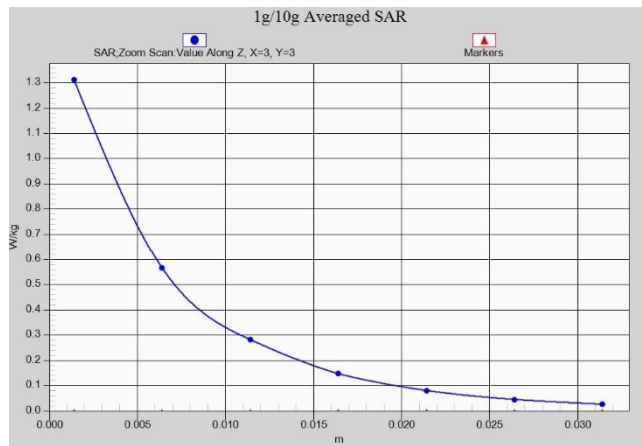

LTE Band25 Head ANT4

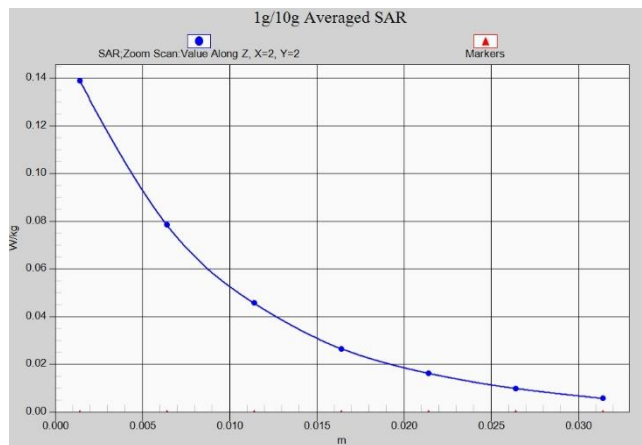

LTE Band25 Body 10mm ANT4

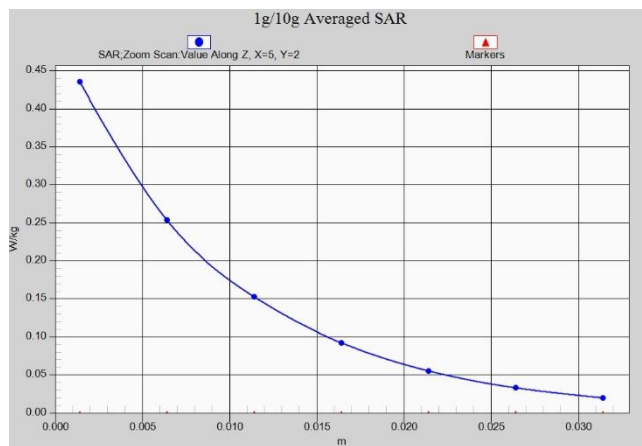

LTE Band25 Body 15mm ANT4