



element

CINCH Systems

RF-SHK-433-CLR

FCC 15.231:2020

Low Power Radio

Report: CINC0052.3 Rev. 1, Issue Date: June 15, 2020



NVLAP LAB CODE: 200881-0



This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government. This Report shall not be reproduced, except in full without written approval of the laboratory.

CERTIFICATE OF TEST

Last Date of Test: June 1, 2020

CINCH Systems

EUT: RF-SHK-433-CLR

Radio Equipment Testing

Standards

Specification	Method
FCC 15.231:2020	ANSI C63.10:2013

Results

Method Clause	Test Description	Applied	Results	Comments
6.2	Powerline Conducted Emissions (Transmitter)	No	N/A	Not required for a battery powered EUT.
6.5, 6.6	Field Strength of Fundamental	Yes	Pass	
6.5, 6.6	Spurious Radiated Emissions	Yes	Pass	
6.9.2	Occupied Bandwidth	Yes	Pass	
7.5	Duty Cycle	Yes	N/A	

Deviations From Test Standards

None

Approved By:



Eric Brandon, Department Manager

Product compliance is the responsibility of the client; therefore, the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test. This report reflects only those tests from the referenced standards shown in the certificate of test. It does not include inspection or verification of labels, identification, marking or user information. As indicated in the Statement of Work sent with the quotation, Element's standard process is to always use the latest published version of the test methods even when earlier versions are cited in the test specification. Issuance of a purchase order was de facto acceptance of this approach. Otherwise, the client would have advised Element in writing of the specific version of the test methods they wanted applied to the subject testing.

REVISION HISTORY

Revision Number	Description	Date (yyyy-mm-dd)	Page Number
01	The calculation is missing the 100 ms divisor and so incomplete/inaccurate. Also the DCCF listed as “-19.3 dB” is inaccurate and should be “-20.7 dB”.	2020-06-15	12, 13, 15, 16, 17, 21, 22, 23, and 24

ACCREDITATIONS AND AUTHORIZATIONS



United States

FCC - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

A2LA - Accredited by A2LA to ISO / IEC 17065 as a product certifier. This allows Element to certify transmitters to FCC and IC specifications.

NVLAP - Each laboratory is accredited by NVLAP to ISO 17025

Canada

ISED - Recognized by Innovation, Science and Economic Development Canada as a Certification Body (CB) and as a CAB for the acceptance of test data.

European Union

European Commission – Within Element, we have a EU Notified Body validated for the EMCD and RED Directives.

Australia/New Zealand

ACMA - Recognized by ACMA as a CAB for the acceptance of test data.

Korea

MSIT / RRA - Recognized by KCC's RRA as a CAB for the acceptance of test data.

Japan

VCCI - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

Taiwan

BSMI – Recognized by BSMI as a CAB for the acceptance of test data.

NCC - Recognized by NCC as a CAB for the acceptance of test data.

Singapore

IDA – Recognized by IDA as a CAB for the acceptance of test data.

Israel

MOC – Recognized by MOC as a CAB for the acceptance of test data.

Hong Kong

OFCA – Recognized by OFCA as a CAB for the acceptance of test data.

Vietnam

MIC – Recognized by MIC as a CAB for the acceptance of test data.

SCOPE

For details on the Scopes of our Accreditations, please visit:

<https://www.nwemc.com/emc-testing-accreditations>

FACILITIES



California Labs OC01-17 41 Tesla Irvine, CA 92618 (949) 861-8918	Minnesota Labs MN01-10 9349 W Broadway Ave. Brooklyn Park, MN 55445 (612)-638-5136	Oregon Labs EV01-12 6775 NE Evergreen Pkwy #400 Hillsboro, OR 97124 (503) 844-4066	Texas Labs TX01-09 3801 E Plano Pkwy Plano, TX 75074 (469) 304-5255	Washington Labs NC01-05 19201 120 th Ave NE Bothell, WA 98011 (425)984-6600
NVLAP				
NVLAP Lab Code: 200676-0	NVLAP Lab Code: 200881-0	NVLAP Lab Code: 200630-0	NVLAP Lab Code:201049-0	NVLAP Lab Code: 200629-0
Innovation, Science and Economic Development Canada				
2834B-1, 2834B-3	2834E-1, 2834E-3	2834D-1	2834G-1	2834F-1
BSMI				
SL2-IN-E-1154R	SL2-IN-E-1152R	SL2-IN-E-1017	SL2-IN-E-1158R	SL2-IN-E-1153R
VCCI				
A-0029	A-0109	A-0108	A-0201	A-0110
Recognized Phase I CAB for ISED, ACMA, BSMI, IDA, KCC/RRR, MIC, MOC, NCC, OFCA				
US0158	US0175	US0017	US0191	US0157



MEASUREMENT UNCERTAINTY



Measurement Uncertainty

When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. Measurement uncertainty is a statistical expression of measurement error qualified by a probability distribution.

A measurement uncertainty estimation has been performed for each test per our internal quality document QM205.4.6. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty (K=2) can be found included as part of the applicable test description page. Our measurement data meets or exceeds the measurement uncertainty requirements of the applicable specification; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for estimating measurement uncertainty are based upon ETSI TR 100 028 (or CISPR 16-4-2 as applicable), and are available upon request.

The following table represents the Measurement Uncertainty (MU) budgets for each of the tests that may be contained in this report.

Test	+ MU	- MU
Frequency Accuracy	0.0007%	-0.0007%
Amplitude Accuracy (dB)	1.2 dB	-1.2 dB
Conducted Power (dB)	1.2 dB	-1.2 dB
Radiated Power via Substitution (dB)	0.7 dB	-0.7 dB
Temperature (degrees C)	0.7°C	-0.7°C
Humidity (% RH)	2.5% RH	-2.5% RH
Voltage (AC)	1.0%	-1.0%
Voltage (DC)	0.7%	-0.7%
Field Strength (dB)	5.2 dB	-5.2 dB
AC Powerline Conducted Emissions (dB)	2.6 dB	-2.6 dB

Test Setup Block Diagrams


Antenna Port Conducted Measurements



Near Field Test Fixture Measurements



Spurious Radiated Emissions

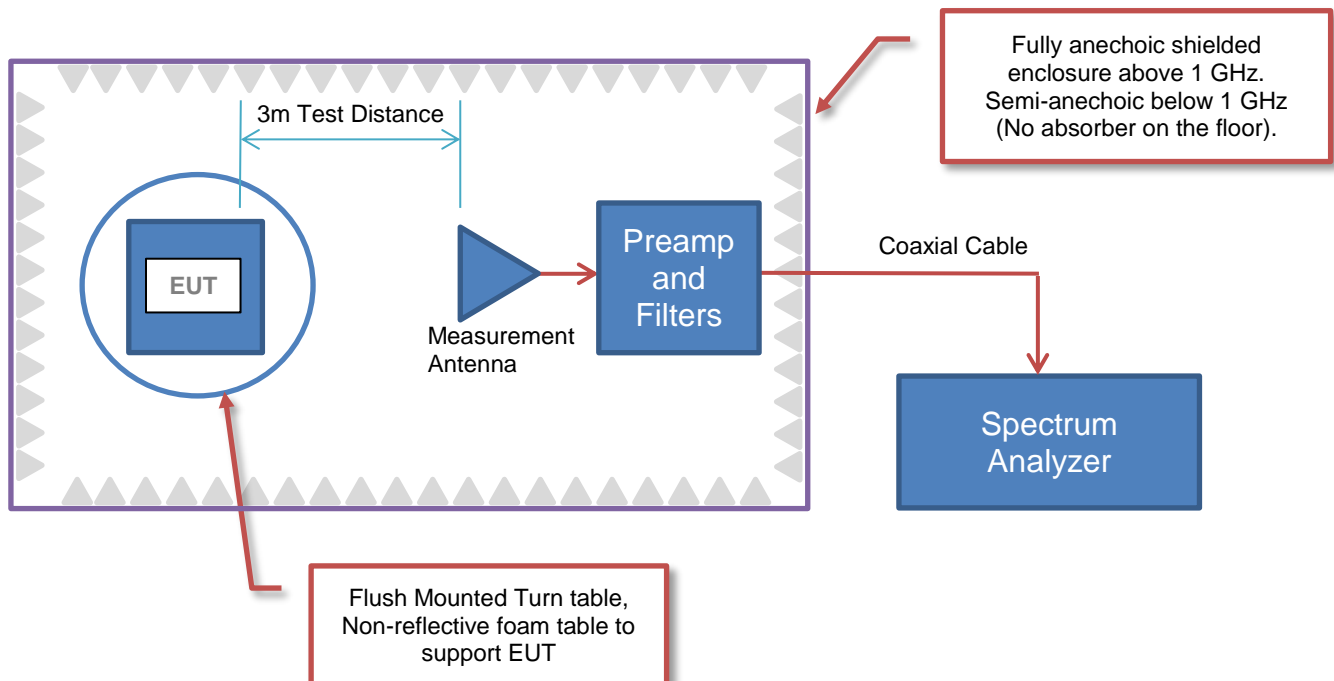

PRODUCT DESCRIPTION



Client and Equipment Under Test (EUT) Information

Company Name:	CINCH Systems
Address:	Suite 300 12075 43rd Street NE
City, State, Zip:	St. Michael, MN 55376
Test Requested By:	Jibril Aga
EUT:	RF-SHK-433-CLR
First Date of Test:	April 13, 2020
Last Date of Test:	June 1, 2020
Receipt Date of Samples:	April 13, 2020
Equipment Design Stage:	Production
Equipment Condition:	No Damage
Purchase Authorization:	Verified

Information Provided by the Party Requesting the Test

Functional Description of the EUT:
Sensors containing periodic radio.
Testing Objective:
To demonstrate compliance to FCC 15.231 specifications.

CONFIGURATIONS



Configuration CINC0052- 2

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Shock Sensor	CINCH Systems	RF-SHK-433-CLR	674434

Configuration CINC0052- 6

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Shock Sensor	CINCH Systems	RF-SHK-433-CLR	966548

Configuration CINC0052- 10

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Shock Sensor	CINCH Systems	RF-SHK-433-CLR	807945

MODIFICATIONS



Equipment Modifications

Item	Date	Test	Modification	Note	Disposition of EUT
1	2020-04-13	Field Strength of Fundamental	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
2	2020-04-13	Spurious Radiated Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
3	2020-04-13	Occupied Bandwidth	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
4	2020-06-01	Duty Cycle	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	Scheduled testing was completed.

FIELD STRENGTH OF FUNDAMENTAL



PSA-ESCI 2020.04.03.0

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

MODES OF OPERATION

Transmitting 433.95 MHz modulated

POWER SETTINGS INVESTIGATED

Battery

CONFIGURATIONS INVESTIGATED

CINC0052 - 6

FREQUENCY RANGE INVESTIGATED

Start Frequency 433 MHz Stop Frequency 435 MHz

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Antenna - Biconilog	ETS Lindgren	3142D	AXO	2019-09-03	24 mo
Cable	ESM Cable Corp.	Bilog Cables	MNH	2019-10-18	12 mo
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFN	2019-12-23	12 mo

MEASUREMENT BANDWIDTHS

Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 - 0.15	1.0	0.2	0.2
0.15 - 30.0	10.0	9.0	9.0
30.0 - 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0

TEST DESCRIPTION

The antennas to be used with the EUT were tested. The EUT was configured for modulated operation at its single transmit frequency. The field strength of the transmit frequency was maximized by rotating the EUT, adjusting the measurement antenna height and polarization, and manipulating the EUT in 3 orthogonal planes (per ANSI C63.10:2013).

To derive average emission measurements, a duty cycle correction factor was utilized:

Duty Cycle = On time/100 milliseconds (or the period, whichever is less)

Where "On time" = $N1L1 + N2L2 + \dots$

Where N1 is the number of type 1 pulses, L1 is length of type 1 pulses, N2 is the number of type 2 pulses, L2 is the length of type 2 pulses, etc.

Therefore, Duty Cycle = $(N1L1 + N2L2 + \dots)/100\text{mS}$ or T, whichever is less. (Where T is the period of the pulse train.)

The measured values for the EUT's pulse train are as follows:

Period = 100 mSec

Pulsewidth of Type 1 Pulse = 0.1003 mSec

Pulsewidth of Type 2 Pulse = 0.2007 mSec

Number of Type 1 Pulses = 54

Number of Type 2 Pulses = 19

Duty Cycle Correction Factor = $20 \log [(54)(0.1003) + (19)(0.2007)/100] = -20.7 \text{ dB}$

The duty cycle correction factor of -20.7 dB was added to the peak readings to mathematically derive the average levels.

FIELD STRENGTH OF FUNDAMENTAL




EmiR5 2019.08.15.1

PSA-ESCI 2020.04.03.0

Work Order:	CINC0052	Date:	2020-04-13	
Project:	None	Temperature:	20.9 °C	
Job Site:	MN05	Humidity:	24.3% RH	
Serial Number:	966548	Barometric Pres.:	1017 mbar	Tested by: Dustin Sparks
EUT:	RF-SHK-433-CLR			
Configuration:	6			
Customer:	CINCH Systems			
Attendees:	Jibril Aga			
EUT Power:	Battery			
Operating Mode:	Transmitting 433.95 MHz modulated			
Deviations:	None			
Comments:	None			

Test Specifications	FCC 15.231:2020	Test Method	ANSI C63.10:2013
---------------------	-----------------	-------------	------------------

Run #	2	Test Distance (m)	3	Antenna Height(s)	1 to 4(m)	Results	Pass
-------	---	-------------------	---	-------------------	-----------	---------	------

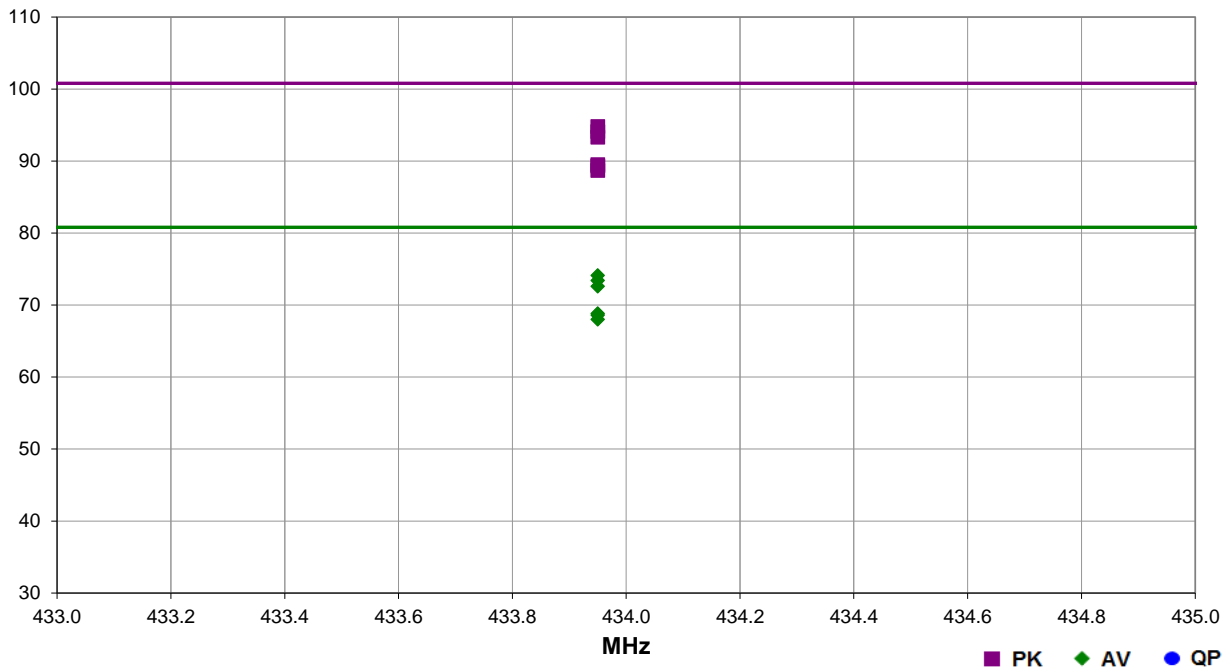

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
433.950	71.0	23.8	1.5	90.0		0.0	Vert	PK	0.0	94.8	100.8	-6.0	EUT on side
433.950	71.0	23.8	1.5	90.0	-20.7	0.0	Vert	AV	0.0	74.1	80.8	-6.7	EUT on side
433.950	70.3	23.8	1.5	225.0		0.0	Vert	PK	0.0	94.1	100.8	-6.7	EUT vertical
433.950	70.3	23.8	1.5	225.0	-20.7	0.0	Vert	AV	0.0	73.4	80.8	-7.4	EUT vertical
433.950	69.5	23.8	1.0	37.1		0.0	Horz	PK	0.0	93.3	100.8	-7.5	EUT horizontal
433.950	69.5	23.8	1.0	37.1	-20.7	0.0	Horz	AV	0.0	72.6	80.8	-8.2	EUT horizontal
433.950	65.7	23.8	1.9	180.0		0.0	Horz	PK	0.0	89.5	100.8	-11.3	EUT on side
433.950	65.5	23.8	1.8	180.0		0.0	Horz	PK	0.0	89.3	100.8	-11.5	EUT vertical
433.950	65.7	23.8	1.9	180.0	-20.7	0.0	Horz	AV	0.0	68.8	80.8	-12.0	EUT on side
433.950	64.9	23.8	1.5	315.0		0.0	Vert	PK	0.0	88.7	100.8	-12.1	EUT horizontal
433.950	65.5	23.8	1.8	180.0	-20.7	0.0	Horz	AV	0.0	68.6	80.8	-12.2	EUT vertical
433.950	64.9	23.8	1.5	315.0	-20.7	0.0	Vert	AV	0.0	68.0	80.8	-12.8	EUT horizontal

SPURIOUS RADIATED EMISSIONS



PSA-ESCI 2020.04.03.0

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

MODES OF OPERATION

Transmitting 433.95 MHz modulated

POWER SETTINGS INVESTIGATED

Battery

CONFIGURATIONS INVESTIGATED

CINC0052 - 6

CINC0052 - 10

FREQUENCY RANGE INVESTIGATED

Start Frequency 30 MHz Stop Frequency 5000 MHz

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Attenuator	Fairview Microwave	SA18E-10	TYA	2019-09-17	12 mo
Filter - Low Pass	Micro-Tronics	LPM50003	LFJ	2019-09-17	12 mo
Amplifier - Pre-Amplifier	Miteq	AMF-3D-00100800-32-13P	AVT	2020-01-17	12 mo
Cable	ESM Cable Corp.	Double Ridge Guide Horn Cables	MNI	2019-09-17	12 mo
Antenna - Double Ridge	ETS-Lindgren	3115	AJQ	2019-01-16	24 mo
Amplifier - Pre-Amplifier	Miteq	AM-1616-1000	AVO	2019-10-18	12 mo
Cable	ESM Cable Corp.	Bilog Cables	MNH	2019-10-18	12 mo
Antenna - Biconilog	ETS Lindgren	3142D	AXO	2019-09-03	24 mo
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFN	2019-12-23	12 mo

MEASUREMENT BANDWIDTHS

Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 - 0.15	1.0	0.2	0.2
0.15 - 30.0	10.0	9.0	9.0
30.0 - 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0

TEST DESCRIPTION

The highest gain antenna of each type to be used with the EUT was tested. The EUT was configured for the required transmit frequency in each operational band and the modes as showed in the data sheets.

For each configuration, the spectrum was scanned throughout the specified range as part of the exploratory investigation of the emissions. These "pre-scans" are not included in the report. Final measurements on individual emissions were then made and included in this test report.

The individual emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antenna in three orthogonal axis, and adjusting the measurement antenna height and polarization (per ANSI C63.10). A preamp and high pass filter (and notch filter) were used for this test in order to provide sufficient measurement sensitivity.

Measurements were made with the required detectors and annotated on the data for each individual point using the following annotation:

QP = Quasi-Peak Detector

PK = Peak Detector

AV = RMS Detector

To derive average emission measurements, a duty cycle correction factor was utilized:

Duty Cycle = On time/100 milliseconds (or the period, whichever is less)

Where "On time" = $N1L1 + N2L2 + \dots$

Where N1 is the number of type 1 pulses, L1 is length of type 1 pulses, N2 is the number of type 2 pulses, L2 is the length of type 2 pulses, etc.

Therefore, Duty Cycle = $(N1L1 + N2L2 + \dots)/100\text{mS}$ or T, whichever is less. Where T is the period of the pulse train.

The measured values for the EUT's pulse train are as follows:

Period = 100 mSec

Pulsewidth of Type 1 Pulse = 0.1003 mSec

Pulsewidth of Type 2 Pulse = 0.2007 mSec

Number of Type 1 Pulses = 54

Number of Type 2 Pulses = 19

Duty Cycle Correction Factor = $20 \log [((54)(0.1003) + (19)(0.2007)/100] = -20.7 \text{ dB}$

The duty cycle correction factor of -20.7 dB was added to the peak readings to mathematically derive the average levels.

SPURIOUS RADIATED EMISSIONS




EmiR5 2019.08.15.1

PSA-ESCI 2020.04.03.0

Work Order:	CINC0052	Date:	2020-04-13	
Project:	None	Temperature:	21.1 °C	
Job Site:	MN05	Humidity:	25.3% RH	
Serial Number:	966548, 807945	Barometric Pres.:	1017 mbar	Tested by: Dustin Sparks
EUT:	RF-SHK-433-CLR			
Configuration:	6, 10			
Customer:	CINCH Systems			
Attendees:	Jibril Aga			
EUT Power:	Battery			
Operating Mode:	Transmitting 433.95 MHz modulated			
Deviations:	None			
Comments:	Configuration 6 (serial number 966548) used for measurements below 1 GHz. Configuration 10 (serial number 807945) used for measurements above 1 GHz.			

Test Specifications	Test Method
FCC 15.231:2020	ANSI C63.10:2013

Run #	12	Test Distance (m)	3	Antenna Height(s)	1 to 4(m)	Results	Pass
--------------	----	--------------------------	---	--------------------------	-----------	----------------	------

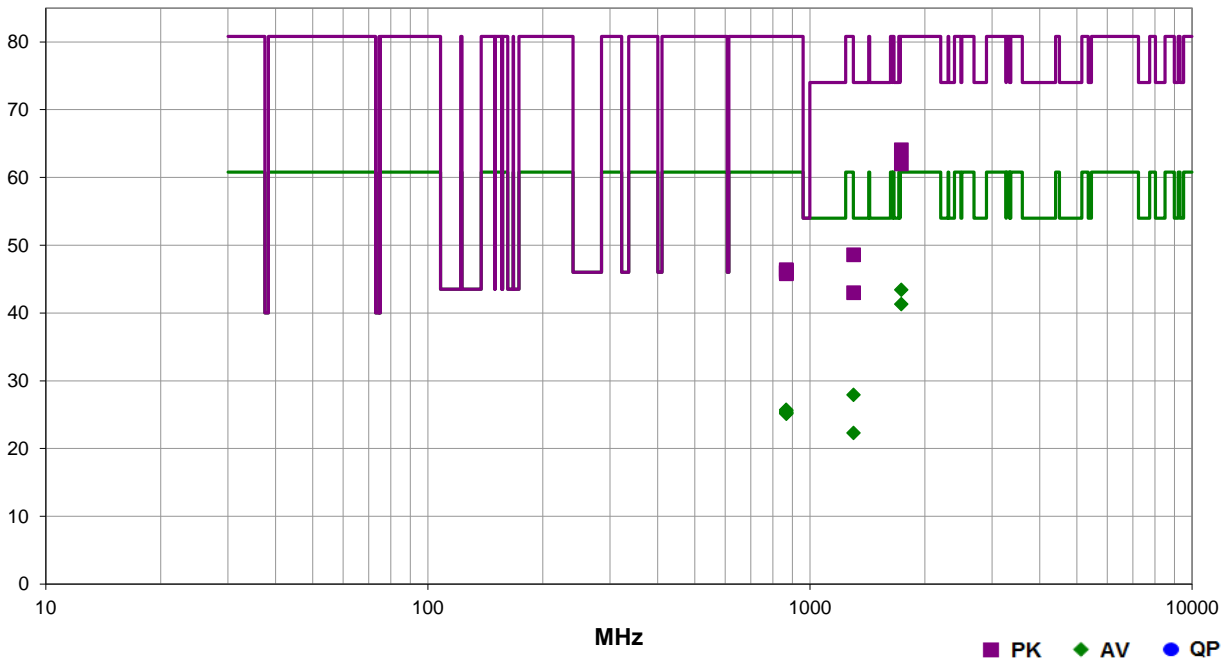

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
1735.550	69.6	-5.5	1.5	54.0		0.0	Vert	PK	0.0	64.1	80.8	-16.7	EUT vertical
1735.550	69.6	-5.5	1.5	54.0	-20.7	0.0	Vert	AV	0.0	43.4	60.8	-17.4	EUT vertical
1735.758	67.5	-5.5	1.5	221.0		0.0	Horz	PK	0.0	62.0	80.8	-18.8	EUT horizontal
1735.758	67.5	-5.5	1.5	221.0	-20.7	0.0	Horz	AV	0.0	41.3	60.8	-19.5	EUT horizontal
1301.850	55.2	-6.6	1.5	222.9		0.0	Vert	PK	0.0	48.6	74.0	-25.4	EUT vertical
1301.850	55.2	-6.6	1.5	222.9	-20.7	0.0	Vert	AV	0.0	27.9	54.0	-26.1	EUT vertical
1301.850	49.6	-6.6	1.5	0.0		0.0	Horz	PK	0.0	43.0	74.0	-31.0	EUT horizontal
1301.850	49.6	-6.6	1.5	0.0	-20.7	0.0	Horz	AV	0.0	22.3	54.0	-31.7	EUT horizontal
867.660	23.8	12.6	2.0	225.0		10.0	Vert	PK	0.0	46.4	80.8	-34.4	EUT vertical
868.330	23.7	12.6	1.0	94.0		10.0	Vert	PK	0.0	46.3	80.8	-34.5	EUT horizontal
867.755	23.5	12.6	1.0	317.9		10.0	Horz	PK	0.0	46.1	80.8	-34.7	EUT horizontal
868.260	23.4	12.6	1.0	270.1		10.0	Horz	PK	0.0	46.0	80.8	-34.8	EUT on side
867.245	23.3	12.6	4.0	45.0		10.0	Vert	PK	0.0	45.9	80.8	-34.9	EUT on side
868.050	23.2	12.6	1.0	315.0		10.0	Horz	PK	0.0	45.8	80.8	-35.0	EUT vertical

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
867.660	23.8	12.6	2.0	225.0	-20.7	10.0	Vert	AV	0.0	25.7	60.8	-35.1	EUT vertical
868.330	23.7	12.6	1.0	94.0	-20.7	10.0	Vert	AV	0.0	25.6	60.8	-35.2	EUT horizontal
867.755	23.5	12.6	1.0	317.9	-20.7	10.0	Horz	AV	0.0	25.4	60.8	-35.4	EUT horizontal
868.260	23.4	12.6	1.0	270.1	-20.7	10.0	Horz	AV	0.0	25.3	60.8	-35.5	EUT on side
867.245	23.3	12.6	4.0	45.0	-20.7	10.0	Vert	AV	0.0	25.2	60.8	-35.6	EUT on side
868.050	23.2	12.6	1.0	315.0	-20.7	10.0	Horz	AV	0.0	25.1	60.8	-35.7	EUT vertical

OCCUPIED BANDWIDTH



XMH 2020.03.25.0

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Cable	ESM Cable Corp.	Bilog Cables	MNH	18-Oct-19	18-Oct-20
Antenna - Biconilog	ETS Lindgren	3142D	AXO	3-Sep-19	3-Sep-21
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFN	23-Dec-19	23-Dec-20

TEST DESCRIPTION

The EUT was transmitting at its maximum data rate.

The 20 dB occupied bandwidth is required to be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. $0.0025 \times 433.950 \text{ MHz} = 1085 \text{ kHz}$

OCCUPIED BANDWIDTH



XMI 2020.03.25.0


EUT: RF-SHK-433-CLR		Work Order: CINC0052	
Serial Number: 966548		Date: 13-Apr-20	
Customer: CINCH Systems		Temperature: 21.1 °C	
Attendees: Jibril Aga		Humidity: 23.9% RH	
Project: None		Barometric Pres.: 1021 mbar	
Tested by: Dustin Sparks		Power: Battery	
		Job Site: MN05	
TEST SPECIFICATIONS			
FCC 15.231:2020		Test Method	
		ANSI C63.10:2013	
COMMENTS			
None			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	6	Signature <i>Dustin Sparks</i>	
		Value (kHz)	Limit (≤ kHz)
433.95 MHz			
Occupied Bandwidth		41.68	1085
			Pass

OCCUPIED BANDWIDTH



XMI 2020.03.25.0

433.95 MHz, Occupied Bandwidth						
				Value (kHz)	Limit (≤ kHz)	Result
				41.68	1085	Pass

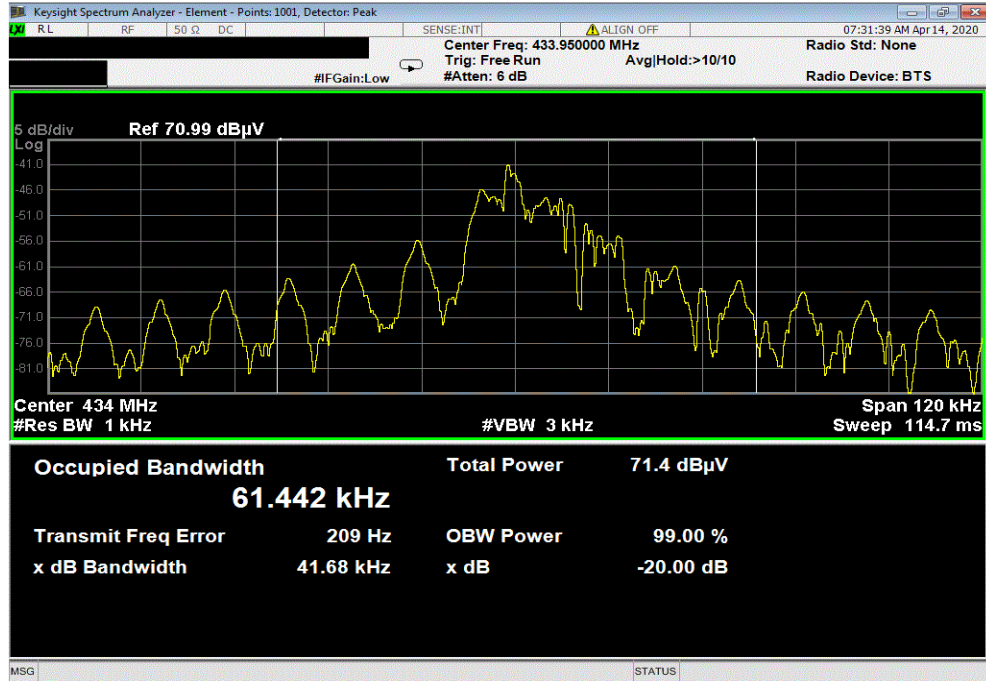

DUTY CYCLE



XMIT 2020.03.25.0

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Cable	ESM Cable Corp.	Bilog Cables	MNH	18-Oct-19	18-Oct-20
Antenna - Biconilog	ETS Lindgren	3142D	AXO	3-Sep-19	3-Sep-21
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFN	23-Dec-19	23-Dec-20

TEST DESCRIPTION

For software controlled or pre-programmed devices, the manufacturer shall declare the duty cycle class or classes for the equipment under test. For manually operated or event dependant devices, with or without software controlled functions, the manufacturer shall declare whether the device once triggered, follows a pre-programmed cycle, or whether the transmission is constant until the trigger is released or manually reset. The manufacturer shall also give a description of the application for the device and include a typical usage pattern. The typical usage pattern as declared by the manufacturer shall be used to determine the duty cycle and hence the duty class.

Where an acknowledgement is required, the additional transmitter on-time shall be included and declared by the manufacturer.

To derive average emission measurements, a duty cycle correction factor was utilized:

Duty Cycle = On time/100 milliseconds (or the period, whichever is less)

Where "On time" = $N1L1 + N2L2 + \dots$

Where N1 is the number of type 1 pulses, L1 is length of type 1 pulses, N2 is the number of type 2 pulses, L2 is the length of type 2 pulses, etc.

Therefore, Duty Cycle = $(N1L1 + N2L2 + \dots)/100\text{mS}$ or T, whichever is less. (Where T is the period of the pulse train.)

The measured values for the EUT's pulse train are as follows:

Period = **100** mSec

Pulsewidth of Type 1 Pulse = **0.1003** mSec

Pulsewidth of Type 2 Pulse = **0.2007** mSec

Number of Type 1 Pulses = **54**

Number of Type 2 Pulses = **19**

Duty Cycle Correction Factor = $20 \log [(54)(0.1003) + (19)(0.2007)/100] = \mathbf{-20.7 \text{ dB}}$

The duty cycle correction factor of **-20.7 dB** was added to the peak readings to mathematically derive the average levels. Peak measurements were made with a resolution bandwidth of 100kHz and a video bandwidth of 300kHz.

DUTY CYCLE




XMR 2020.03.25.0


EUT: RF-SHK-433-CLR		Work Order: CINC0052	
Serial Number: 674434		Date: 1-Jun-20	
Customer: CINCH Systems		Temperature: 23.7 °C	
Attendees: Jibril Aga		Humidity: 50.5% RH	
Project: None		Barometric Pres.: 1021 mbar	
Tested by: Dustin Sparks	Power: Battery	Job Site: MN05	
TEST SPECIFICATIONS		Test Method	
FCC 15.231:2020		ANSI C63.10:2013	
COMMENTS			
None			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	2	Signature <i>Dustin Sparks</i>	
		Type 1 Pulse Width (ms)	Type 1 Pulse Count
		Type 2 Pulse Width (ms)	Type 2 Pulse Count
		On Time in 100 ms	DCCF (dB)
			Result
Sweep Time	10 s	N/A	N/A
	2 s	N/A	N/A
	100 ms	N/A	N/A
	20 ms	0.1003	54
		0.2007	19
		9.23	-20.7
			N/A

DUTY CYCLE

Sweep Time, 10 s						
Type 1 Pulse Width (ms)	Type 1 Pulse Count	Type 2 Pulse Width (ms)	Type 2 Pulse Count	On Time in 100 ms	DCCF (dB)	Result
N/A	N/A	N/A	N/A	N/A	N/A	N/A

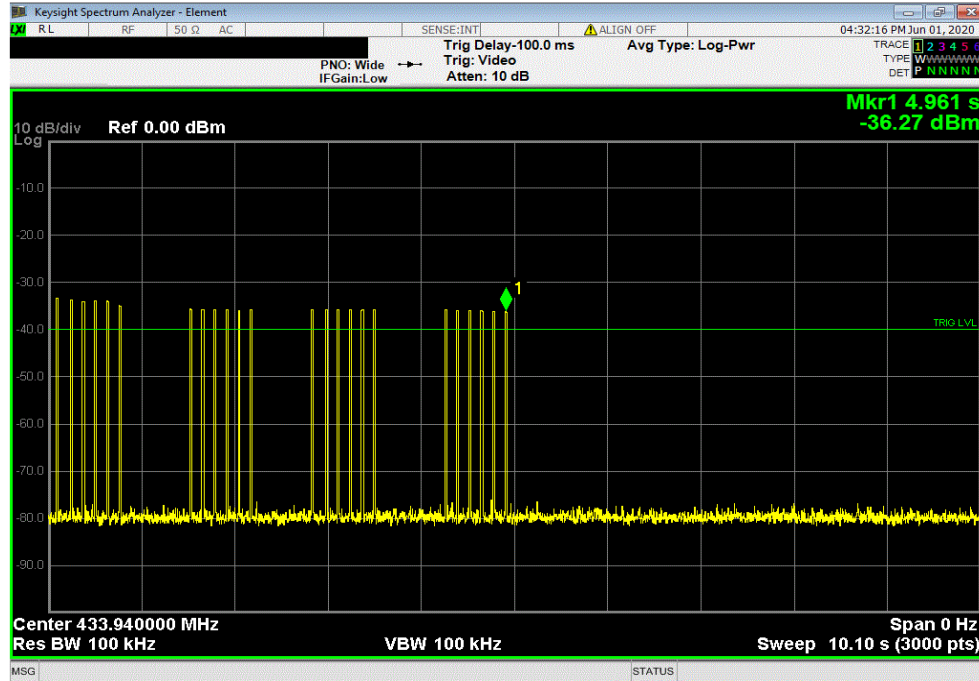

Sweep Time, 2 s						
Type 1 Pulse Width (ms)	Type 1 Pulse Count	Type 2 Pulse Width (ms)	Type 2 Pulse Count	On Time in 100 ms	DCCF (dB)	Result
N/A	N/A	N/A	N/A	N/A	N/A	N/A

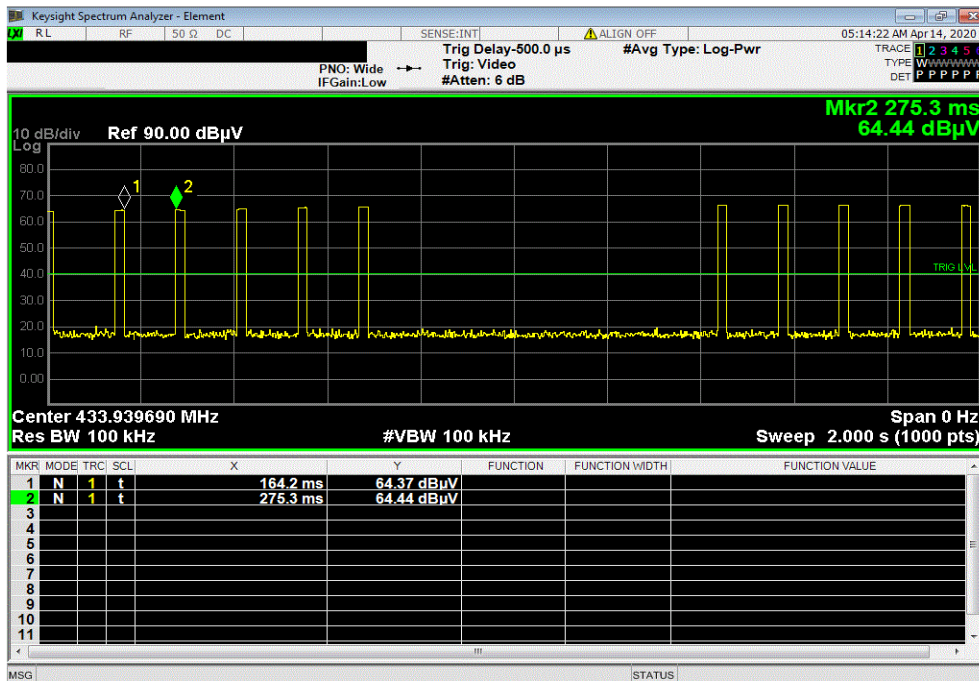


DUTY CYCLE



XMR 2020.03.25.0

Sweep Time, 100 ms						
Type 1 Pulse Width (ms)	Type 1 Pulse Count	Type 2 Pulse Width (ms)	Type 2 Pulse Count	On Time in 100 ms	DCCF (dB)	Result
N/A	N/A	N/A	N/A	N/A	N/A	N/A

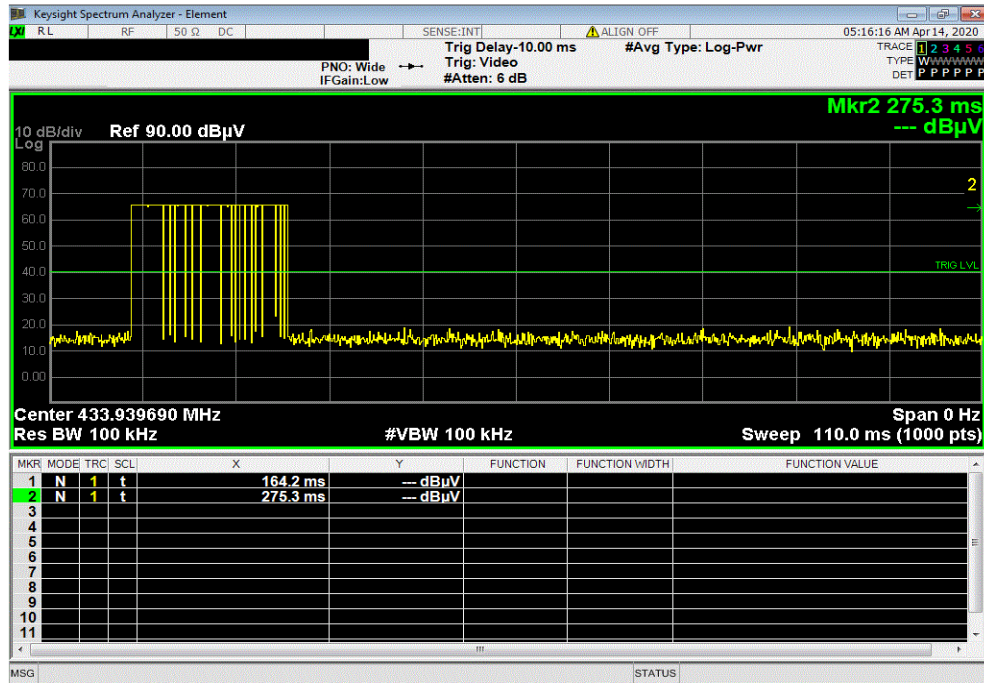

Sweep Time, 20 ms						
Type 1 Pulse Width (ms)	Type 1 Pulse Count	Type 2 Pulse Width (ms)	Type 2 Pulse Count	On Time in 100 ms	DCCF (dB)	Result
0.1003	54	0.2007	19	9.23	-20.7	N/A

