



TEST REPORT

Applicant Name : TECNO MOBILE LIMITED
Address : FLAT 39 8/F BLOCK D WAH LOK INDUSTRIAL CENTRE 31-35
SHAN MEI STREET FOTAN NT Hong Kong
Report Number : SZNS220125-03714E-RF-00A
FCC ID: 2ADYY-GE1-L

Test Standard (s)

FCC PART 15.247

Sample Description

Product Type: Wireless Earphone
Model No.: GE1
Multiple Model(s) No.: N/A
Trade Mark: TECNO
Date Received: 2022/01/25
Date of Test: 2022/03/04~2022/03/06
Report Date: 2022/03/11

Test Result:	Pass*
--------------	-------

* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Approved By:

Black Ding
EMC Engineer

Robert Li
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "★". Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China
Tel: +86 755-26503290 Fax: +86 755-26503396 Web: www.atc-lab.com

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
SPECIAL ACCESSORIES	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
TEST EQUIPMENT LIST	9
FCC§15.247 (I), §1.1307 (B) (1) & §2.1093 – RF EXPOSURE	10
APPLICABLE STANDARD	10
FCC §15.203 – ANTENNA REQUIREMENT	11
APPLICABLE STANDARD	11
ANTENNA CONNECTOR CONSTRUCTION	11
FCC §15.205, §15.209 & §15.247(D) – RADIATED EMISSIONS	12
APPLICABLE STANDARD	12
EUT SETUP	12
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	13
TEST PROCEDURE	13
FACTOR & MARGIN CALCULATION	13
TEST DATA	13
FCC §15.247(A) (1)-CHANNEL SEPARATION TEST	20
APPLICABLE STANDARD	20
TEST PROCEDURE	20
TEST DATA	20
FCC §15.247(A) (1) – 20 DB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH	23
APPLICABLE STANDARD	23
TEST PROCEDURE	23
TEST DATA	24
FCC §15.247(A) (1) (III)-QUANTITY OF HOPPING CHANNEL TEST	30
APPLICABLE STANDARD	30
TEST PROCEDURE	30
TEST DATA	30
FCC §15.247(A) (1) (III) - TIME OF OCCUPANCY (DWELL TIME).....	33
APPLICABLE STANDARD	33
TEST PROCEDURE	33

TEST DATA	33
FCC §15.247(B) (1) - PEAK OUTPUT POWER MEASUREMENT	44
APPLICABLE STANDARD	44
TEST PROCEDURE	44
TEST DATA	44
FCC §15.247(D) - BAND EDGES TESTING.....	50
APPLICABLE STANDARD	50
TEST PROCEDURE	50
TEST DATA	50

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Frequency Range	Bluetooth: 2402~2480MHz
Maximum conducted Peak output power	Bluetooth: 0.62dBm
Modulation Technique	Bluetooth: GFSK, $\pi/4$ -DQPSK, 8DPSK
Antenna Specification*	-1.13 dBi (provided by the applicant)
Voltage Range	DC 3.7V from battery
Sample serial number	SZNS220125-03714E-RF-S3 for RF conducted SZNS220125-03714E-RF-S1 for CE&RE (Assigned by ATC)
Sample/EUT Status	Good condition

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF output power, conducted		0.73dB
Unwanted Emission, conducted		1.6dB
AC Line Conducted emission		2.72dB
Emissions, Radiated	30MHz - 1GHz	4.28dB
	1GHz - 18GHz	4.98dB
	18GHz - 26.5GHz	5.06dB
Temperature		1 °C
Humidity		6%
Supply voltages		0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 429 7.01.

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode.

EUT Exercise Software

“AB153X_Airoh_tool_kit_v2.3.12*” software was used and the power level is 54*. The software and power level was provided by manufacturer.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cable

Cable Description	Length (m)	From Port	To
/	/	/	/

Block Diagram of Test Setup

For radiated emission:

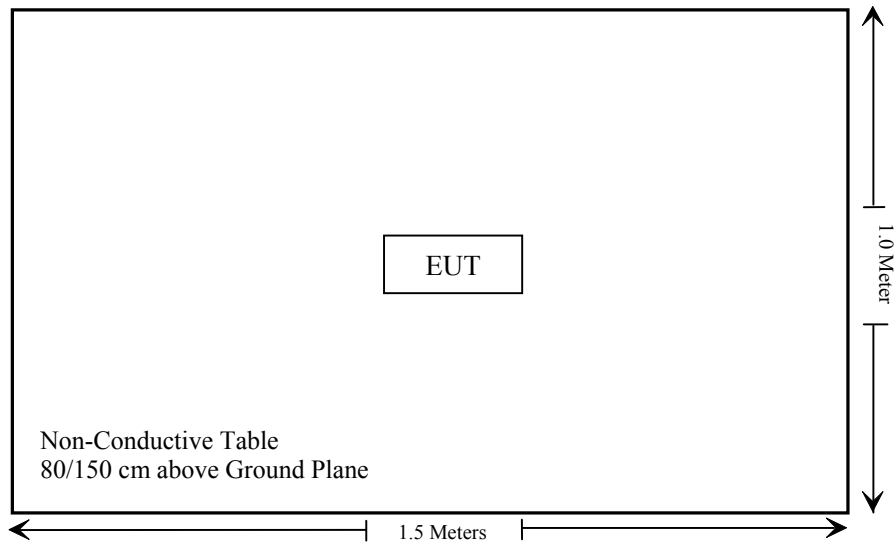

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b) (1) & §2.1093	RF Exposure	Compliant
§15.203	Antenna Requirement	Compliant
§15.207(a)	AC Line Conducted Emissions	Not Applicable
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliant
§15.247(a)(1)	20 dB Emission Bandwidth & 99% Occupied Bandwidth	Compliant
§15.247(a)(1)	Channel Separation Test	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliant
§15.247(b)(1)	Peak Output Power Measurement	Compliant
§15.247(d)	Band edges	Compliant

Note: EUT was powered by battery when use wireless function.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated emission test					
Rohde& Schwarz	Test Receiver	ESR	102725	2021/12/13	2022/12/12
Rohde&Schwarz	Spectrum Analyzer	FSV40	101949	2021/12/13	2022/12/12
SONOMA INSTRUMENT	Amplifier	310 N	186131	2021/11/09	2022/11/08
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2021/11/09	2022/11/08
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2021/11/11	2022/11/10
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2020/01/05	2023/01/04
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2020/01/05	2023/01/04
Unknown	RF Coaxial Cable	No.10	N050	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.11	N1000	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.12	N040	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.13	N300	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.14	N800	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.15	N600	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.16	N650	2021/12/14	2022/12/13
Wainwright	High Pass Filter	WHKX3.6/18 G-10SS	5	2021/12/14	2022/12/13
Radiated Emission Test Software: e3 19821b (V9)					
RF conducted test					
Rohde & Schwarz	Spectrum Analyzer	FSV-40	101495	2021/12/13	2022/12/12
HP	6dB Attenuator	8493B	2708A 04769	2021/12/14	2022/12/13
Unknown	RF Cable	Unknown	Unknown	Each time	/

* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.247 (i), §1.1307 (b) (1) & §2.1093 – RF EXPOSURE

Applicable Standard

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

Measurement Result

For worst case:

Mode	Frequency (MHz)	Max tune-up conducted power (dBm)	Max tune-up conducted power (mW)	Distance (mm)	Calculated value	Threshold (1-g SAR)	SAR Test Exclusion
BT	2402-2480	1.0	1.26	5	0.4	3.0	Yes

Result: Compliant.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one internal antenna, which was permanently attached, and the maximum antenna gain is -1.13dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliant.


FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

Applicable Standard


FCC §15.205; §15.209; §15.247(d)

EUT Setup

Below 1 GHz:

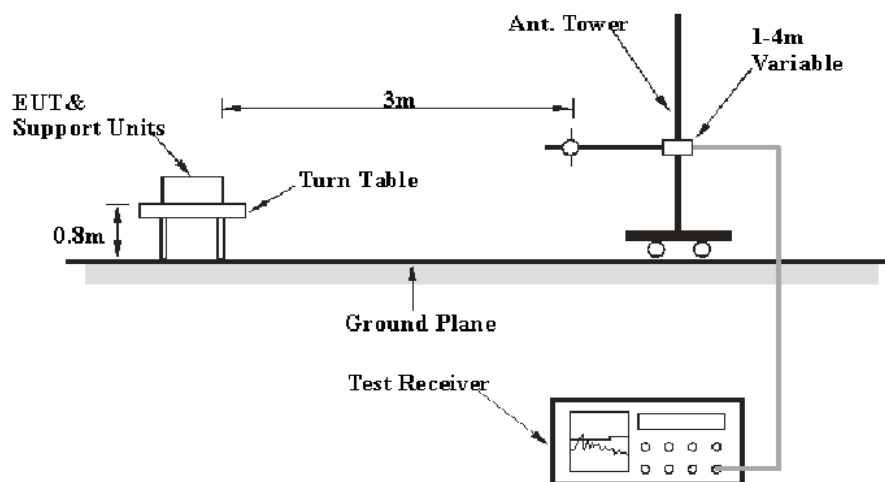

Above 1GHz:

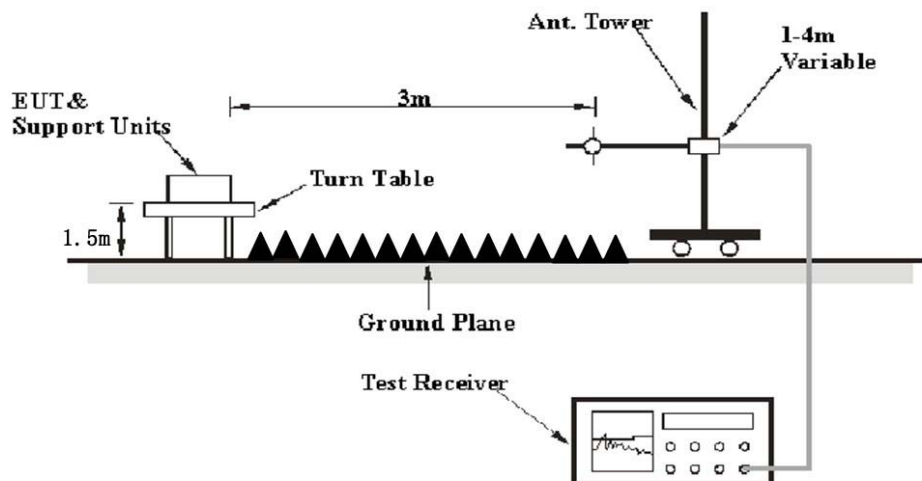

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1 MHz	10 Hz	/	Average

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Factor & Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit/Margin} &= \text{Level / Corrected Amplitude} - \text{Limit} \\ \text{Level / Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

Test Data

Environmental Conditions

Temperature:	20~23 °C
Relative Humidity:	58 %
ATM Pressure:	103.0 kPa


The testing was performed by Chao Mo on 2022-03-05 for below 1 GHz and on 2022-03-06 for above 1 GHz.

EUT operation mode: Transmitting (Pre-scan in the X,Y and Z axes of orientation, the worst case of X orientation was recorded)

30MHz-1GHz: (worst case is 8DPSK Mode, Low channel)

Note: When the test result of peak was less than the limit of QP more than 6dB, just peak value were recorded


Horizontal:

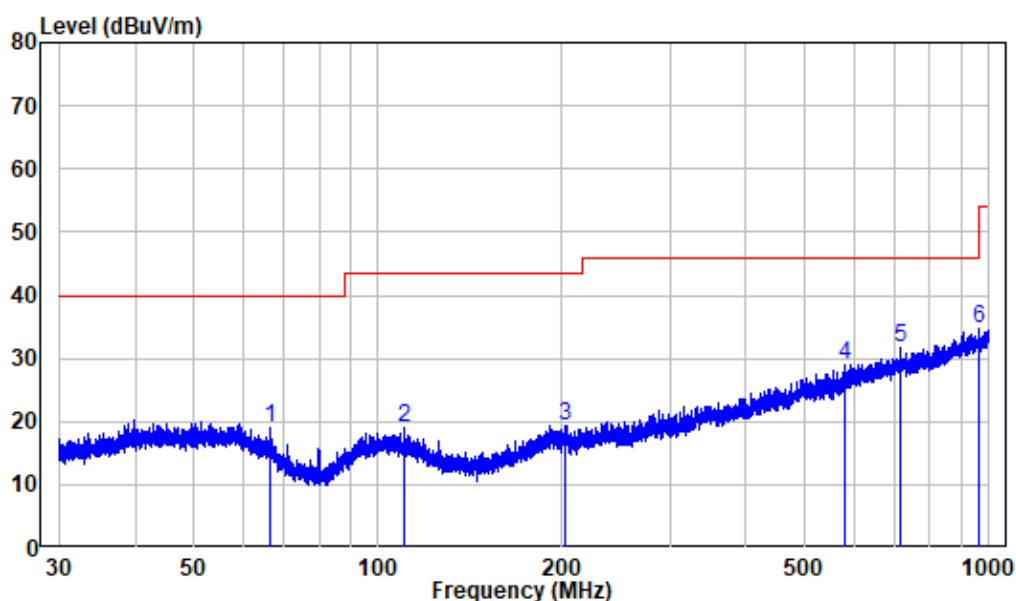

Site : chamber
Condition: 3m HORIZONTAL
Job No. : SZNS220125-03714E-RF
Test Mode: BT Transmission
Note : Left

	Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	66.674	-13.20	32.26	19.06	40.00	-20.94	Peak
2	110.085	-11.97	30.94	18.97	43.50	-24.53	Peak
3	202.189	-11.59	30.93	19.34	43.50	-24.16	Peak
4	580.194	-3.35	32.39	29.04	46.00	-16.96	Peak
5	714.800	-1.32	32.88	31.56	46.00	-14.44	Peak
6	963.428	2.40	32.43	34.83	54.00	-19.17	Peak

Vertical

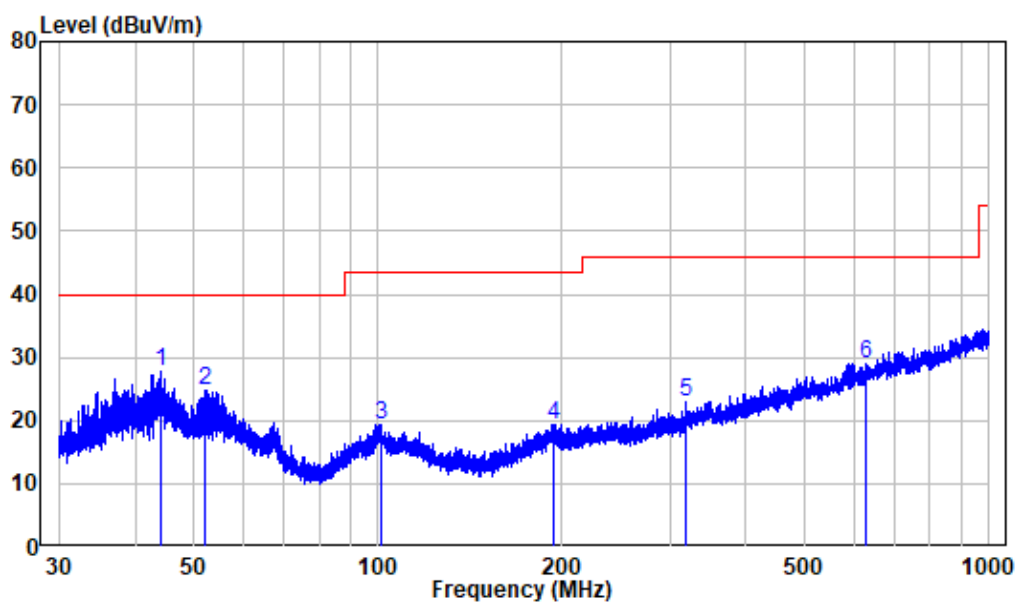

Site : chamber
 Condition: 3m VERTICAL
 Job No. : SZNS220125-03714E-RF
 Test Mode: BT Transmission
 Note : Left

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	44.217	-9.91	37.60	27.69	40.00	-12.31	Peak
2	52.002	-9.97	34.79	24.82	40.00	-15.18	Peak
3	101.422	-11.64	31.02	19.38	43.50	-24.12	Peak
4	193.858	-11.31	30.69	19.38	43.50	-24.12	Peak
5	318.119	-8.56	31.47	22.91	46.00	-23.09	Peak
6	627.549	-2.22	31.17	28.95	46.00	-17.05	Peak

Above 1GHz: (worst case is 8DPSK Mode)

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)				
Low Channel (2402 MHz)									
2310	68.53	PK	20	1	H	-7.24	61.29	74	-12.71
2310	53.58	AV	20	1	H	-7.24	46.34	54	-7.66
2310	68.04	PK	356	1.6	V	-7.24	60.80	74	-13.20
2310	53.64	AV	356	1.6	V	-7.24	46.40	54	-7.60
2390	69.25	PK	145	2.1	H	-7.22	62.03	74	-11.97
2390	54.14	AV	145	2.1	H	-7.22	46.92	54	-7.08
2390	69.52	PK	64	1.3	V	-7.22	62.30	74	-11.70
2390	54.10	AV	64	1.3	V	-7.22	46.88	54	-7.12
4804	57.06	PK	323	1.3	H	-3.51	53.55	74	-20.45
4804	58.04	PK	291	1.5	V	-3.51	54.53	74	-19.47
4804	47.30	AV	291	1.5	V	-3.51	43.79	54	-10.21
7206	54.70	PK	199	2.1	H	2.67	57.37	74	-16.63
7206	43.40	AV	199	2.1	H	2.67	46.07	54	-7.93
7206	56.67	PK	319	1.8	V	2.67	59.34	74	-14.66
7206	47.31	AV	319	1.8	V	2.67	49.98	54	-4.02
Middle Channel									
4882	56.56	PK	272	2.3	H	-3.38	53.18	74	-20.82
4882	57.47	PK	248	2.3	V	-3.38	54.09	74	-19.91
4882	49.69	AV	244	2.3	V	-3.38	46.31	54	-7.69
7323	53.55	PK	295	1.8	H	3.31	56.86	74	-17.14
7323	42.61	AV	295	1.8	H	3.31	45.92	54	-8.08
7323	54.66	PK	183	1.4	V	3.31	57.97	74	-16.03
7323	43.43	AV	244	1.4	V	3.31	46.74	54	-7.26
High Channel									
2483.5	70.77	PK	59	1.7	H	-7.2	63.57	74	-10.43
2483.5	56.49	AV	59	1.7	H	-7.2	49.29	54	-4.71
2483.5	70.72	PK	194	1.4	V	-7.2	63.52	74	-10.48
2483.5	56.36	AV	194	1.4	V	-7.2	49.16	54	-4.84
2500	68.68	PK	141	1.4	H	-7.18	61.5	74	-12.5
2500	55.43	AV	141	1.4	H	-7.18	48.25	54	-5.75
2500	68.98	PK	274	1.9	V	-7.18	61.8	74	-12.2
2500	55.49	AV	274	1.9	V	-7.18	48.31	54	-5.69
4960	55.97	PK	226	1.8	H	-3.01	52.96	74	-21.04
4960	57.09	PK	216	2.3	V	-3.01	54.08	74	-19.92
4960	49.59	AV	216	2.3	V	-3.01	46.58	54	-7.42
7440	54.23	PK	169	2.4	H	3.53	57.76	74	-16.24
7440	43.10	AV	169	2.4	H	3.53	46.63	54	-7.37
7440	54.92	PK	215	1.6	V	3.53	58.45	74	-15.55
7440	44.00	AV	215	1.6	V	3.53	47.53	54	-6.47

Note:



Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading

Margin = Corrected. Amplitude - Limit

The other spurious emission which is in the noise floor level was not recorded.


The test result of peak was less than the limit of average, so just peak value were recorded.

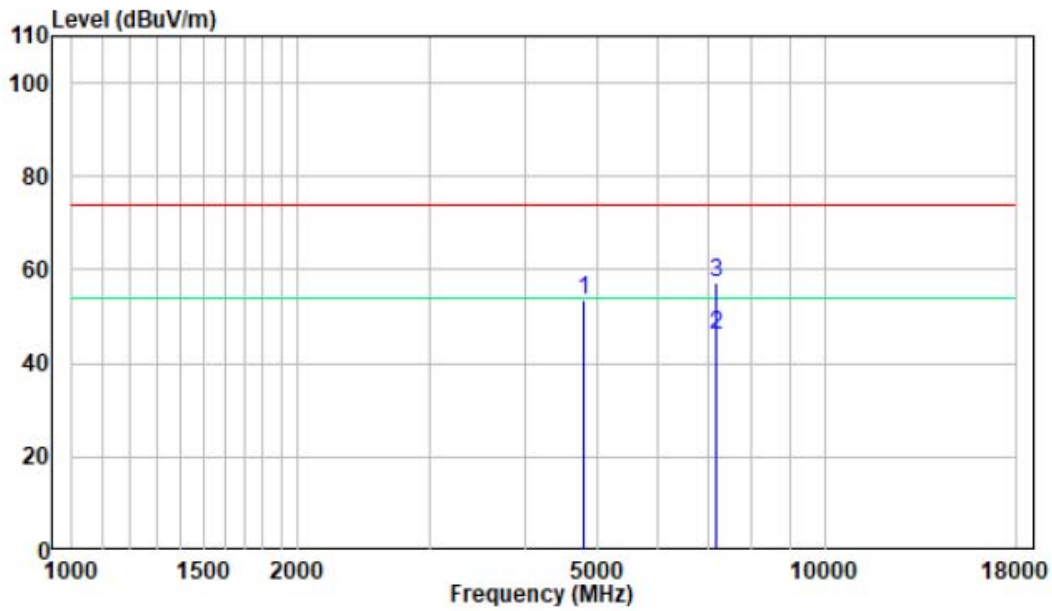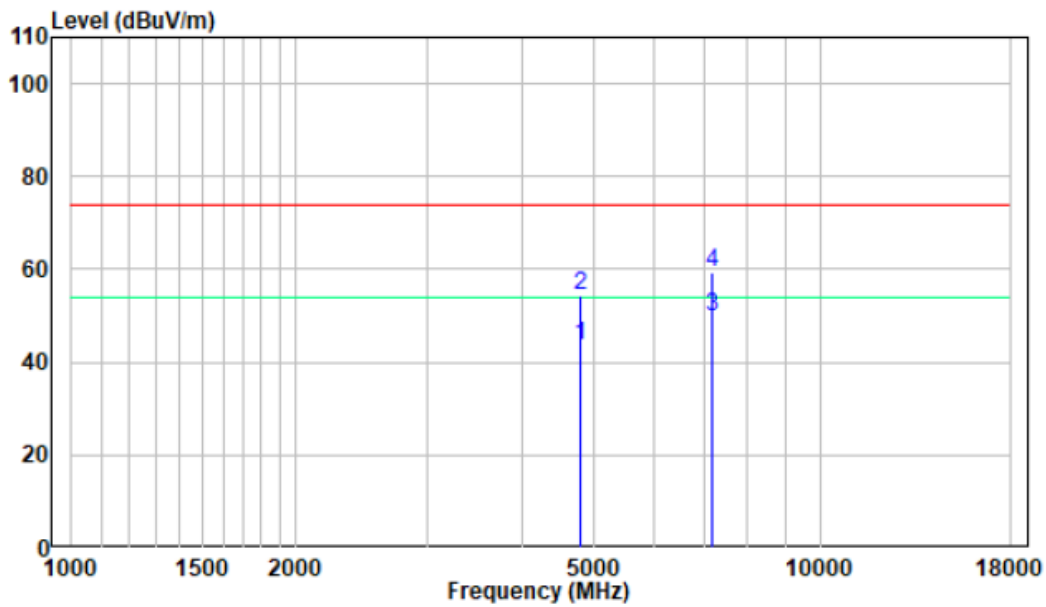1-18GHz**Pre-scan for Low channel****Horizontal:****Vertical:**


18-25GHz

Pre-scan for Low channel

Horizontal:

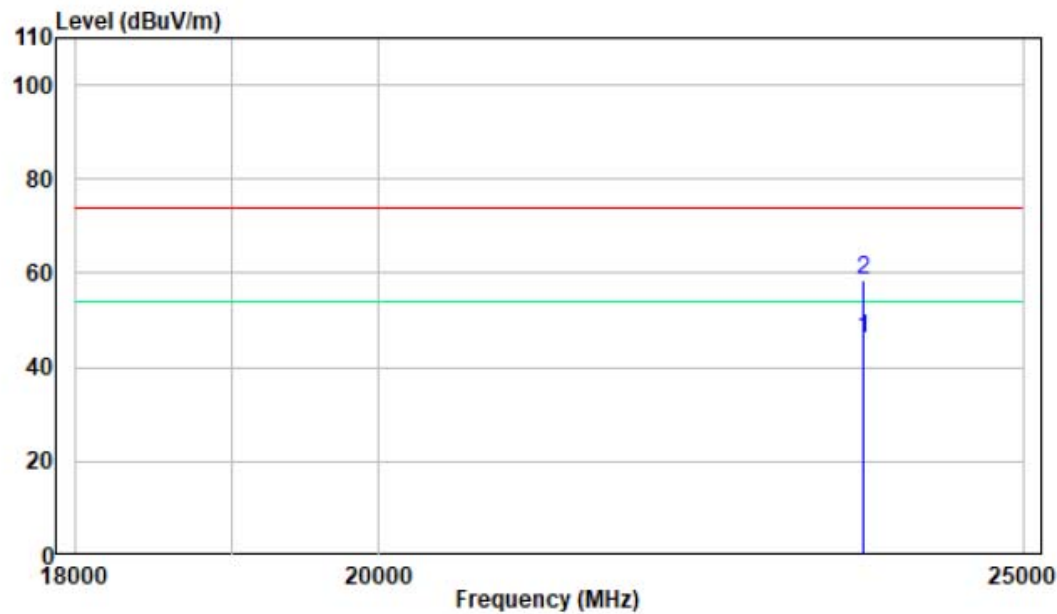

Vertical:

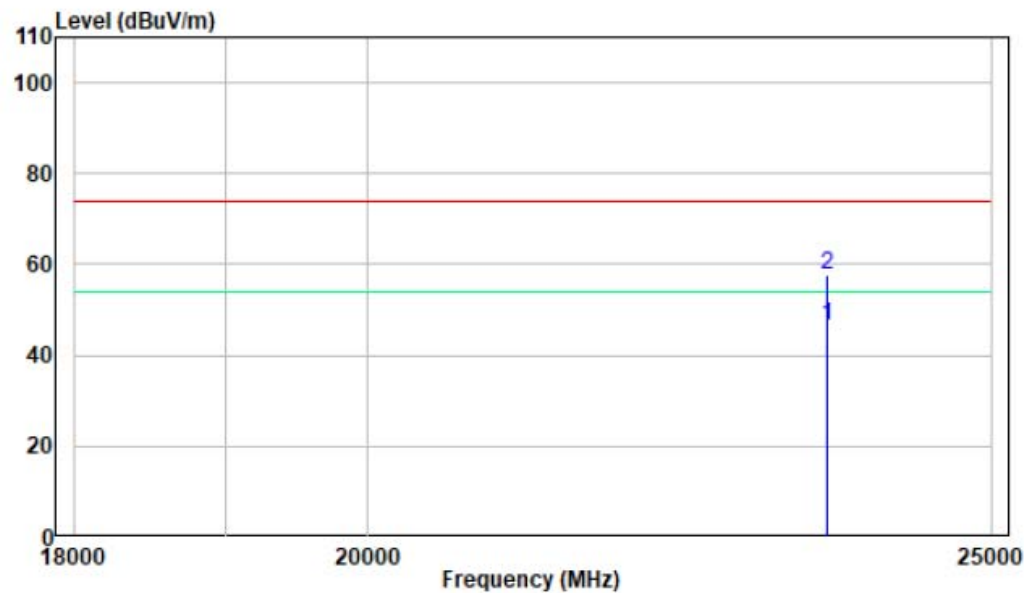


FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.



Test Data

Environmental Conditions

Temperature:	25.7 °C
Relative Humidity:	59 %
ATM Pressure:	101.0 kPa


The testing was performed by Key Pei on 2022-03-04.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots.


Channel	Channel Separation (MHz)	20 dBc BW (MHz)	Two-thirds of the 20 dB bandwidth (MHz)	Channel Separation Limit
BDR(GFSK)				
Hopping	0.999	0.868	0.579	> two-thirds of the 20 dB bandwidth
EDR($\pi/4$-DQPSK)				
Hopping	0.999	1.242	0.828	> two-thirds of the 20 dB bandwidth
EDR(8DPSK)				
Hopping	0.999	1.220	0.813	> two-thirds of the 20 dB bandwidth

DH1_Hop

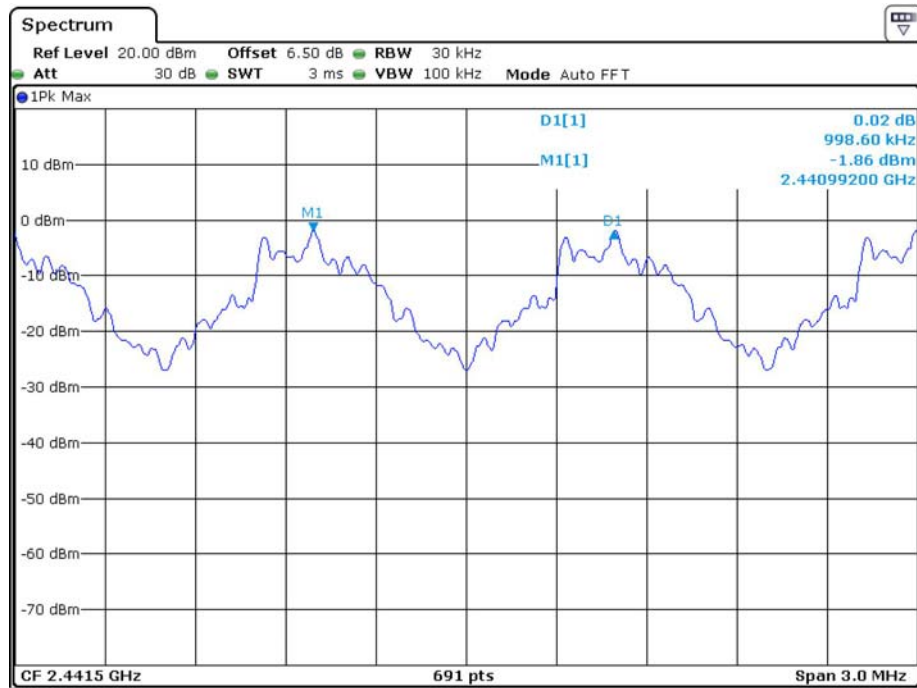


Date: 4.MAR.2022 13:11:12

2DH1_Hop

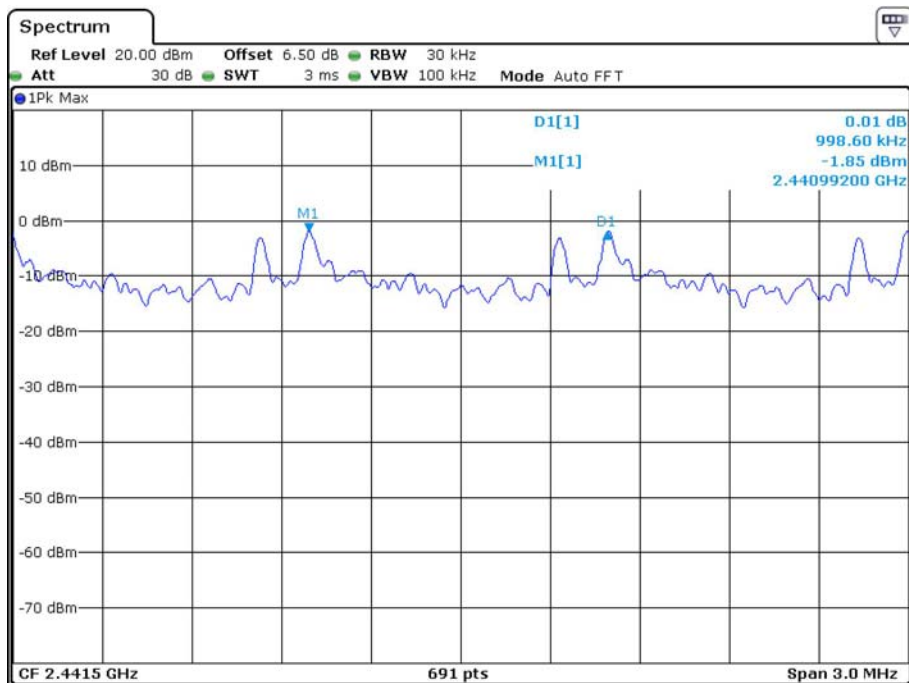

Date: 4.MAR.2022 13:10:34

3DH1_Hop

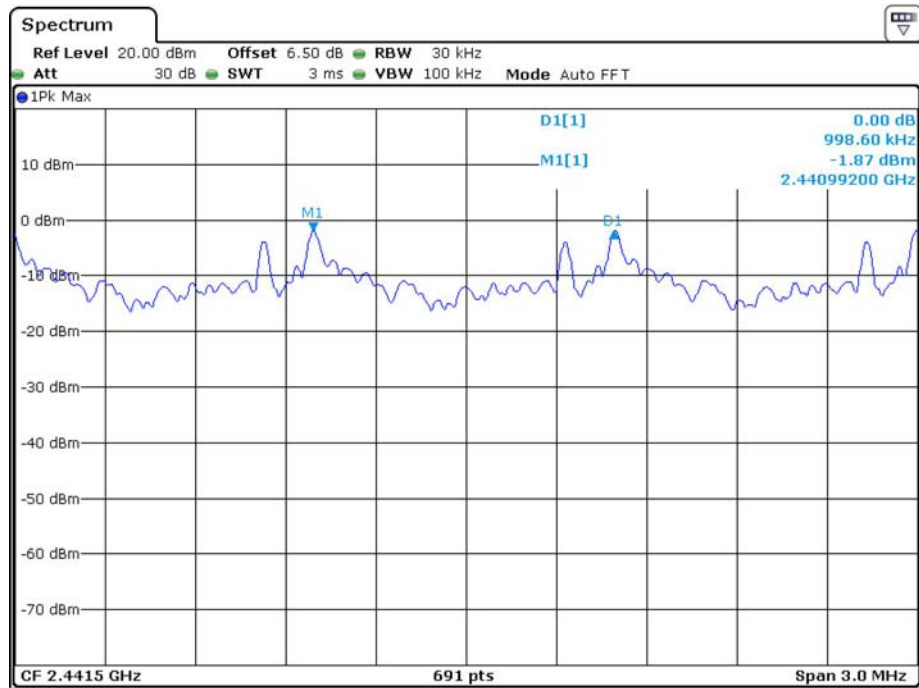

Date: 4.MAR.2022 13:10:00

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


Test Procedure

The following conditions shall be observed for measuring the occupied bandwidth and 20 dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / 20 dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / 20 dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).



Test Data**Environmental Conditions**


Temperature:	25.7 °C
Relative Humidity:	59 %
ATM Pressure:	101.0 kPa

The testing was performed by Key Pei on 2022-03-04.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots.

Mode	Channel	Frequency (MHz)	99% Emission Bandwidth (MHz)	20 dB Emission Bandwidth (MHz)
BDR (GFSK)	Low	2402	0.864	0.847
	Middle	2441	0.860	0.868
	High	2480	0.860	0.868
EDR ($\pi/4$-DQPSK)	Low	2402	1.337	1.242
	Middle	2441	1.281	1.233
	High	2480	1.207	1.229
EDR (8DPSK)	Low	2402	1.372	1.220
	Middle	2441	1.268	1.216
	High	2480	1.198	1.220

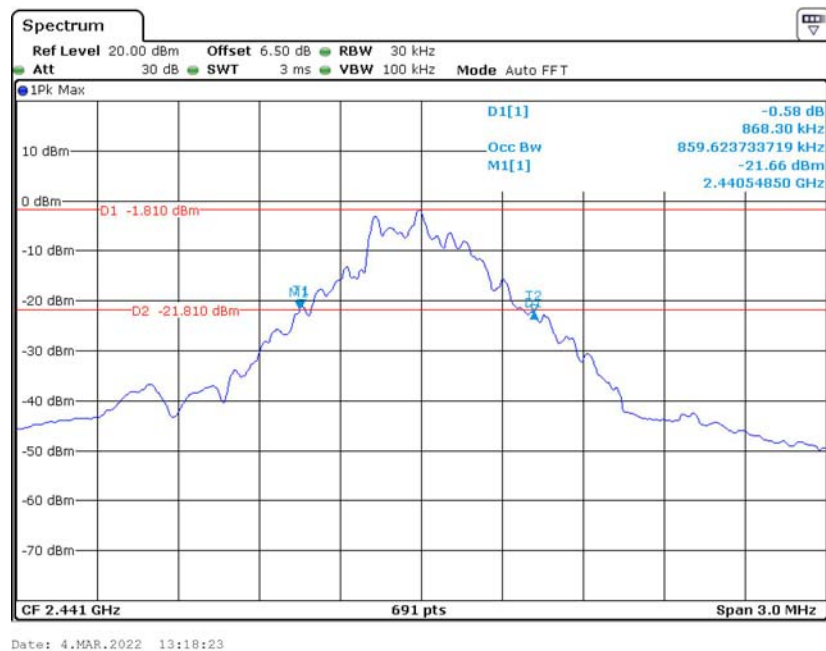
20 dB EMISSION BANDWIDTH&99% Occupied Bandwidth:**DH1_2402MHz****DH1_2441MHz**

DH1_2480MHz

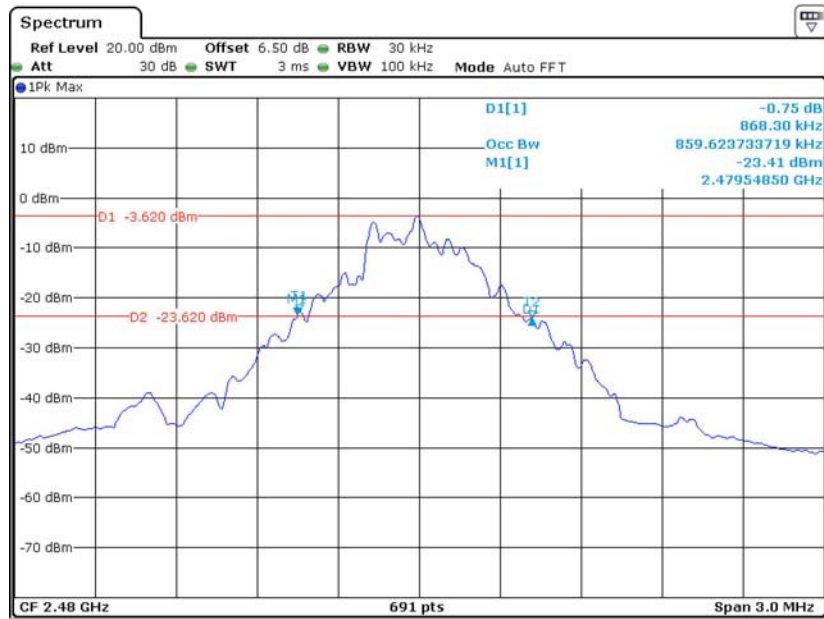


Date: 4.MAR.2022 13:17:43

2DH1_2402MHz

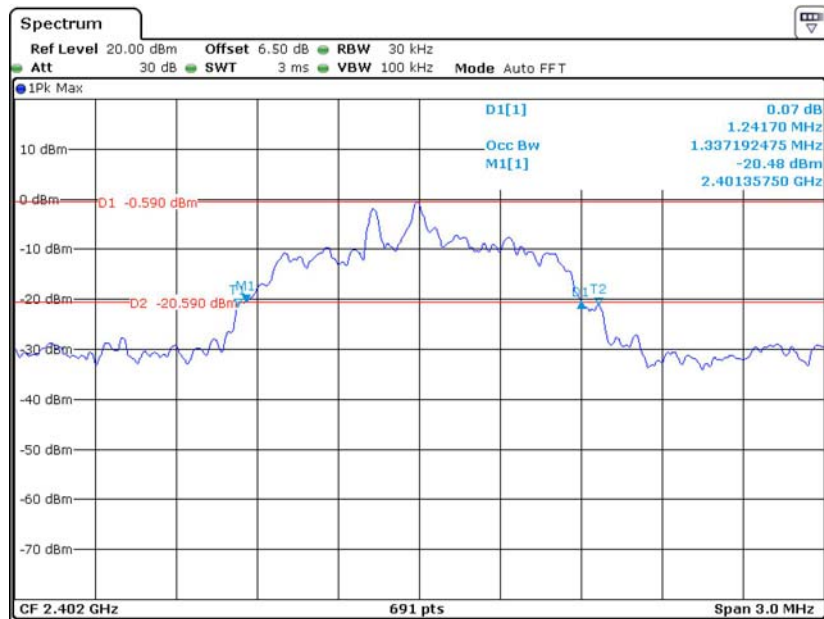


Date: 4.MAR.2022 13:21:39


2DH1_2441MHz

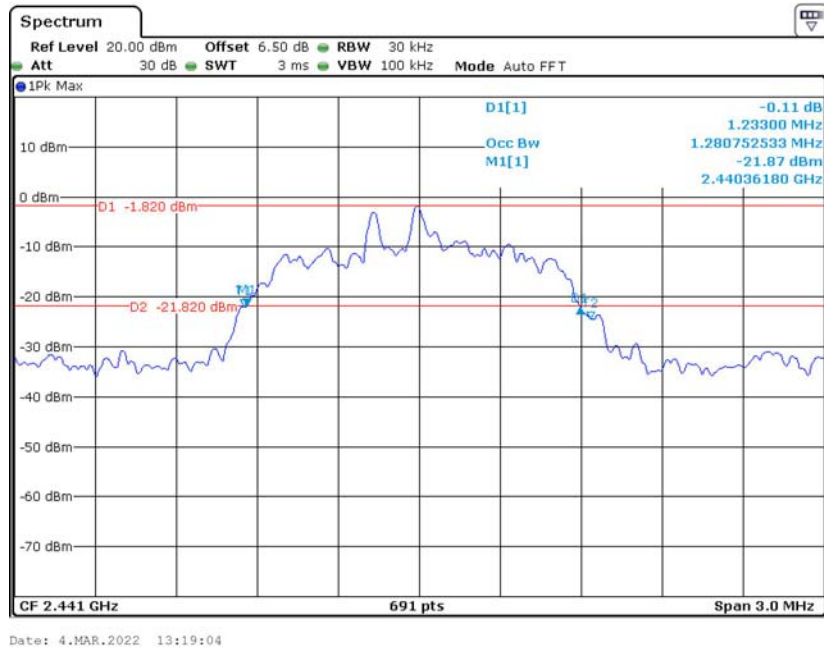

2DH1_2480MHz

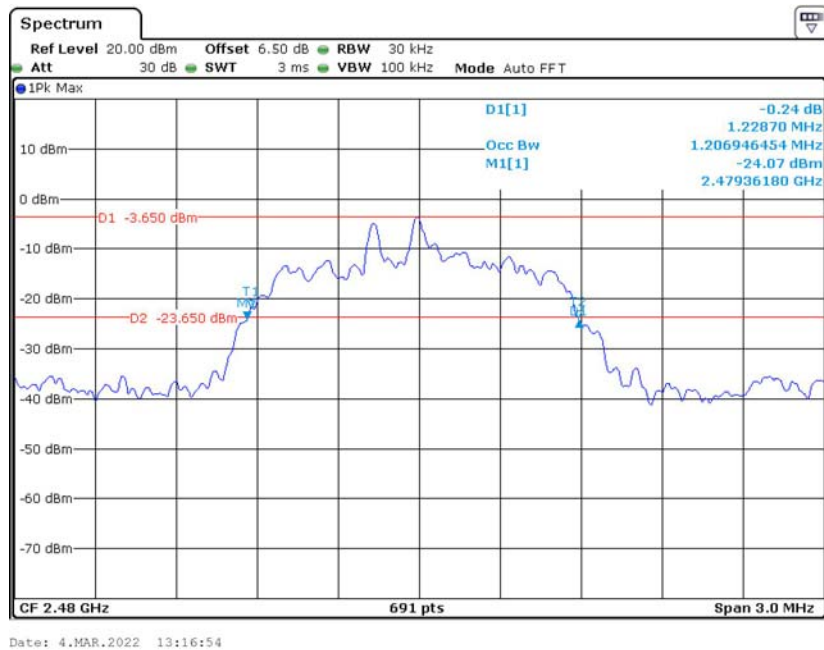


3DH1_2402MHz

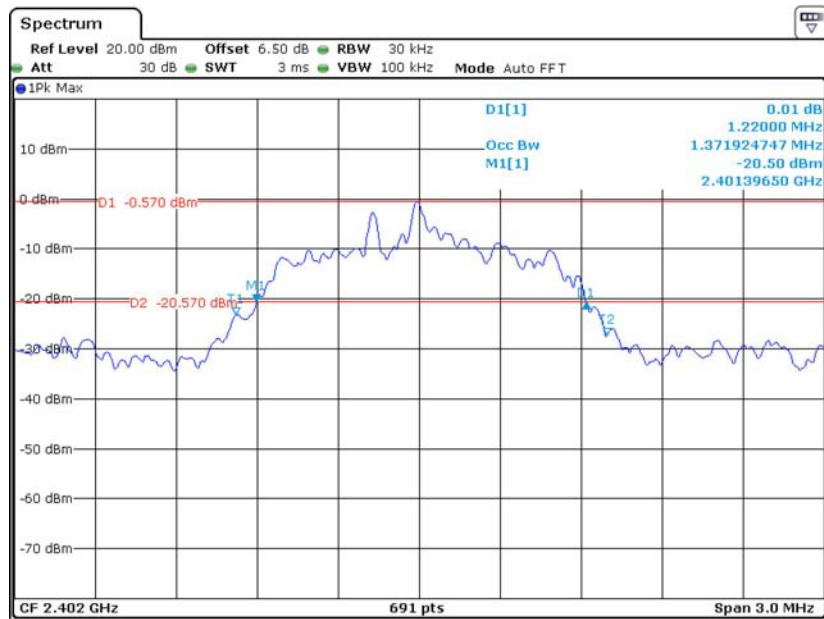


Date: 4.MAR.2022 13:20:54

3DH1_2441MHz

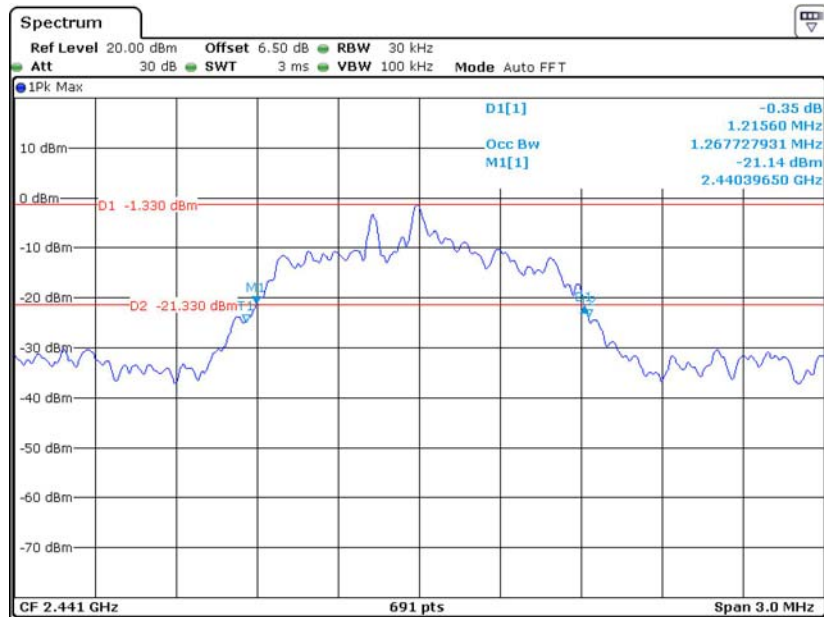

Date: 4.MAR.2022 13:20:07

3DH1_2480MHz

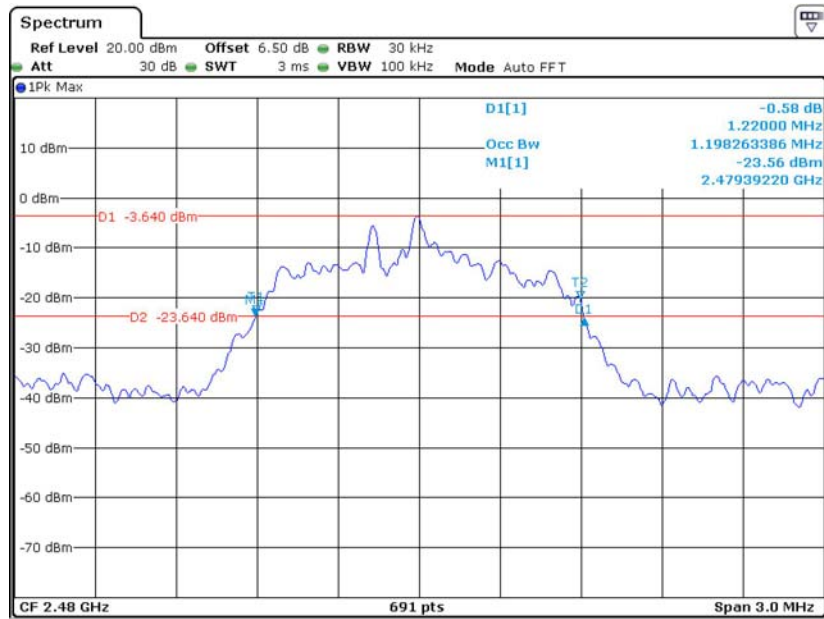

Date: 4.MAR.2022 13:16:10


FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.



Test Data

Environmental Conditions

Temperature:	25.7 °C
Relative Humidity:	59 %
ATM Pressure:	101.0 kPa


The testing was performed by Key Pei on 2022-03-04.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to following table and plots.

Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
BDR (GFSK)	2400-2483.5	79	≥15
EDR (π/4-DQPSK)	2400-2483.5	79	≥15
EDR (8DPSK)	2400-2483.5	79	≥15


DH1_Hop

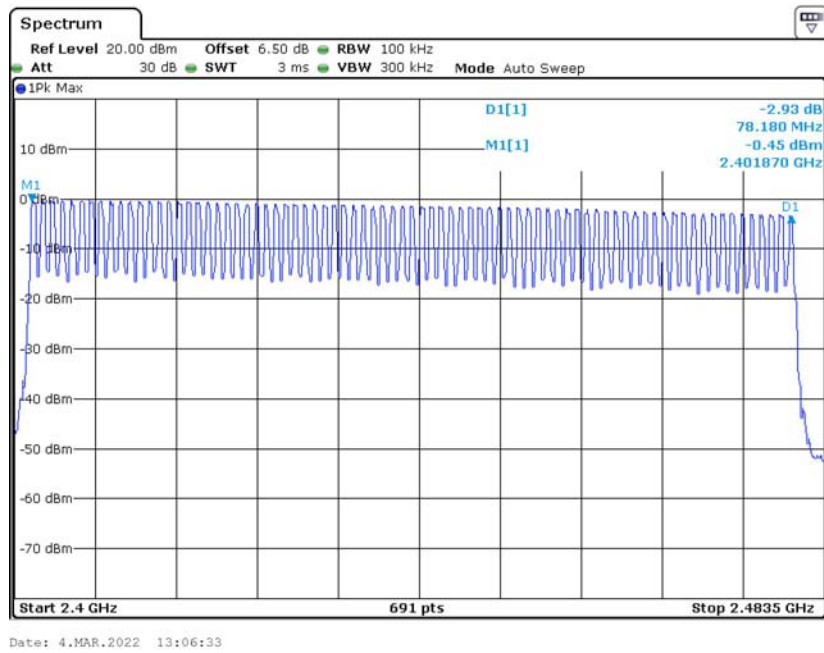

2DH1_Hop

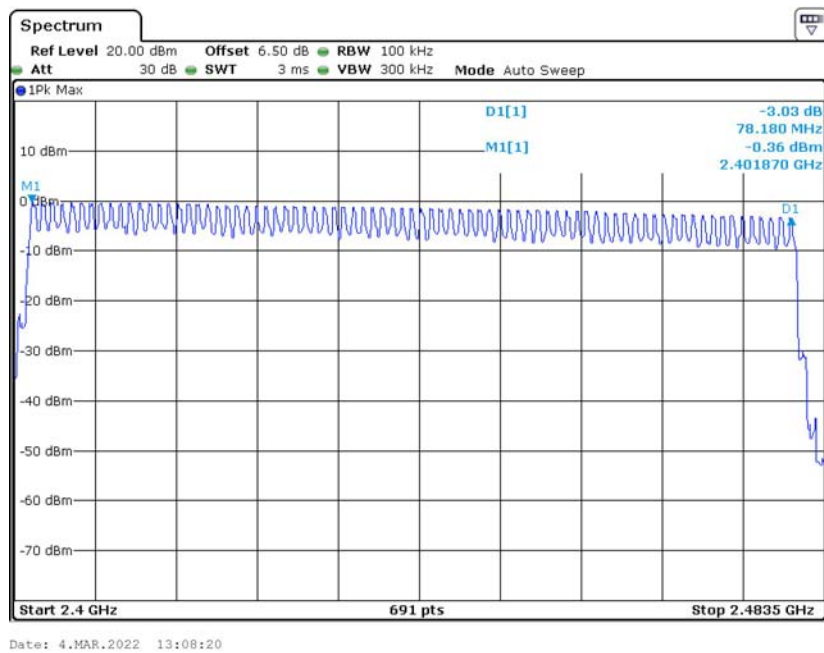

3DH1_Hop

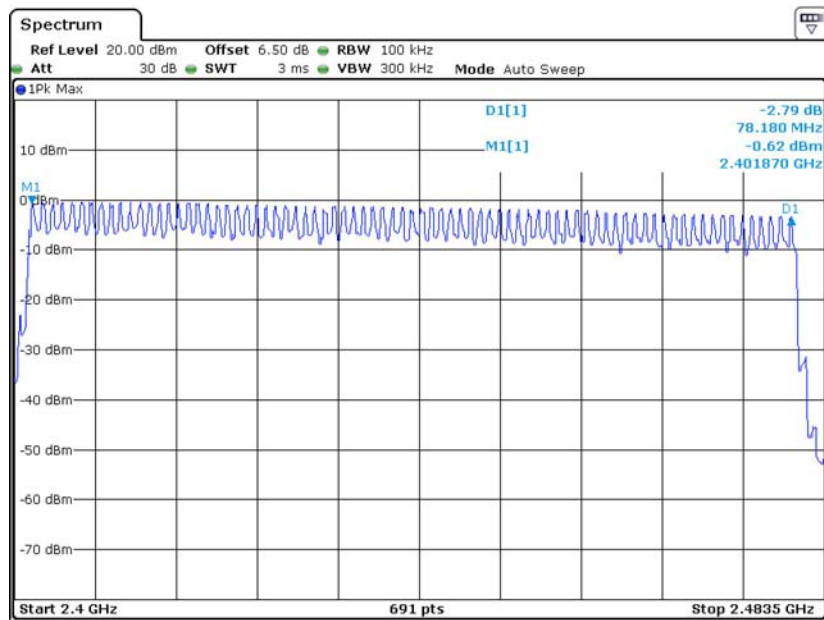


Date: 4.MAR.2022 13:09:19

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

4. The EUT was worked in channel hopping.
5. Set the RBW to: 1MHz.
6. Set the VBW $\geq 3 \times$ RBW.
7. Set the span to 0Hz.
8. Detector = peak.
9. Sweep time = auto couple.
10. Trace mode = max hold.
11. Allow trace to fully stabilize.
12. Recorded the time of single pulses

**Test Data****Environmental Conditions**

Temperature:	25.7 °C
Relative Humidity:	59 %
ATM Pressure:	101.0 kPa

The testing was performed by Key Pei on 2022-03-04.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots.


Test Mode	Channel	Pulse Time [ms]	Total Hops [Num]	Result[s]	Limit[s]	Verdict
DH1	Hop	0.409	320	0.131	≤ 0.4	PASS
DH3	Hop	1.671	160	0.267	≤ 0.4	PASS
DH5	Hop	2.929	100	0.293	≤ 0.4	PASS
2DH1	Hop	0.420	320	0.134	≤ 0.4	PASS
2DH3	Hop	1.674	160	0.268	≤ 0.4	PASS
2DH5	Hop	2.929	100	0.293	≤ 0.4	PASS
3DH1	Hop	0.419	320	0.134	≤ 0.4	PASS
3DH3	Hop	1.675	160	0.268	≤ 0.4	PASS
3DH5	Hop	2.939	100	0.294	≤ 0.4	PASS

Note 1: A period time= $0.4 \times 79 = 31.6$ (S), Result= Pulse Time *Total hops


Note 2: Total hops=Hopping Number in $3.16s \times 10$

Note 3: Hopping Number in $3.16s$ =Total of highest signals in $3.16s$ (Second high signals were other channel)

DH1_Hop

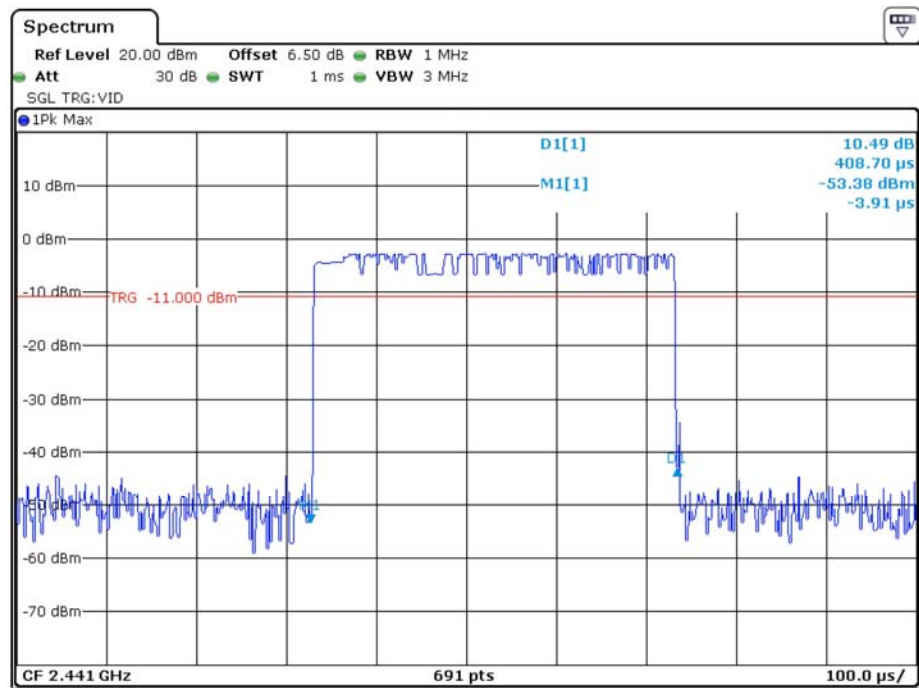


Date: 4.MAR.2022 13:39:22

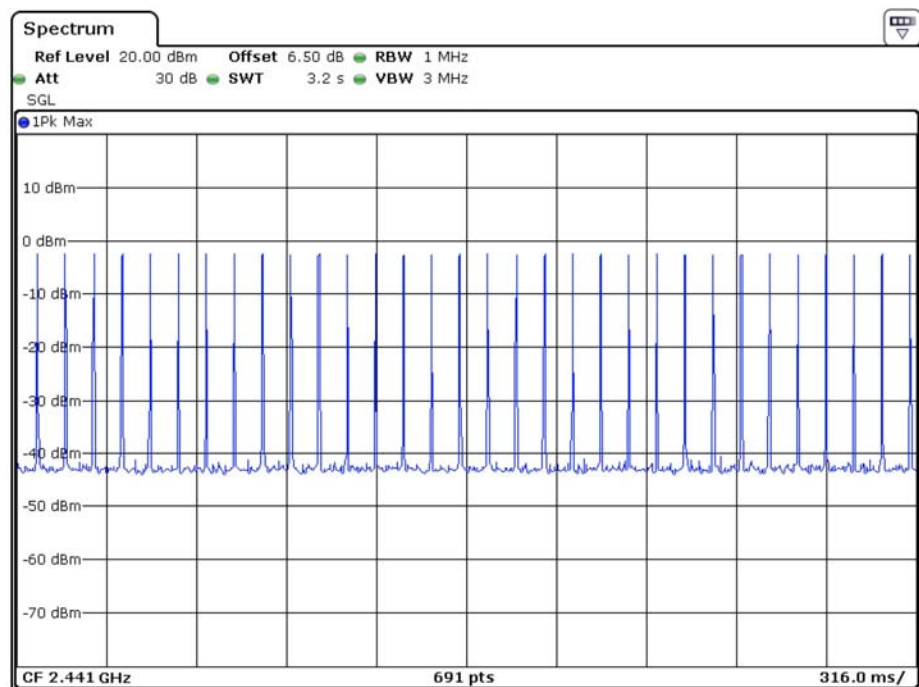


Date: 4.MAR.2022 13:45:50

DH3_Hop

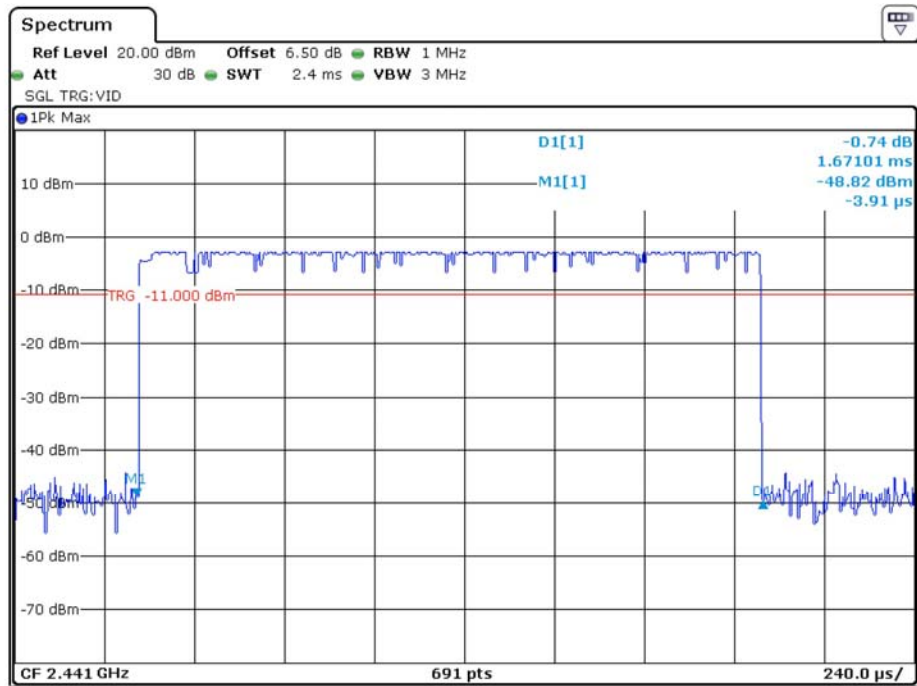


Date: 4.MAR.2022 13:41:20

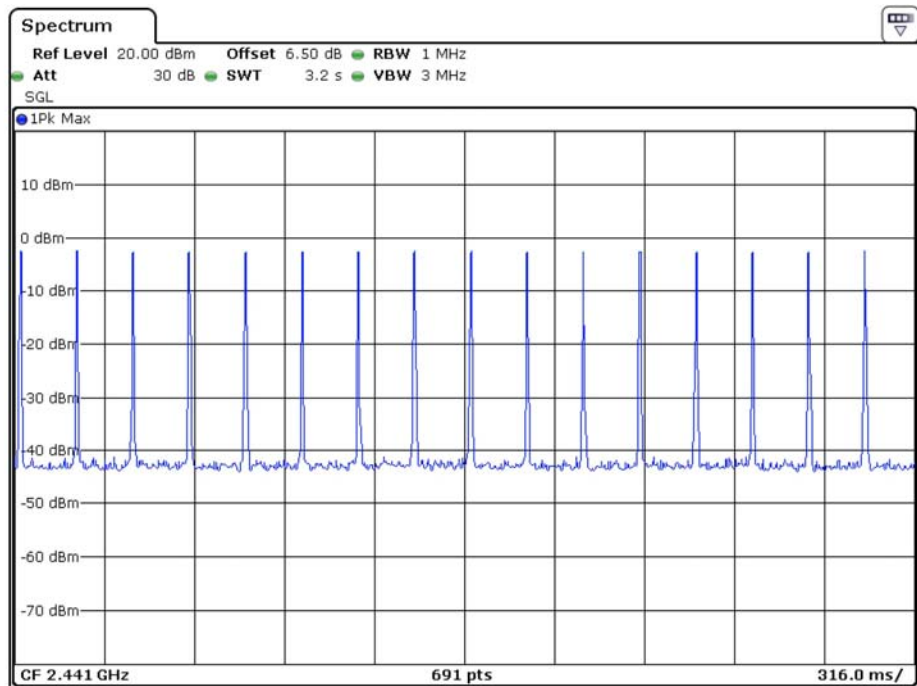


Date: 4.MAR.2022 13:45:36

DH5_Hop

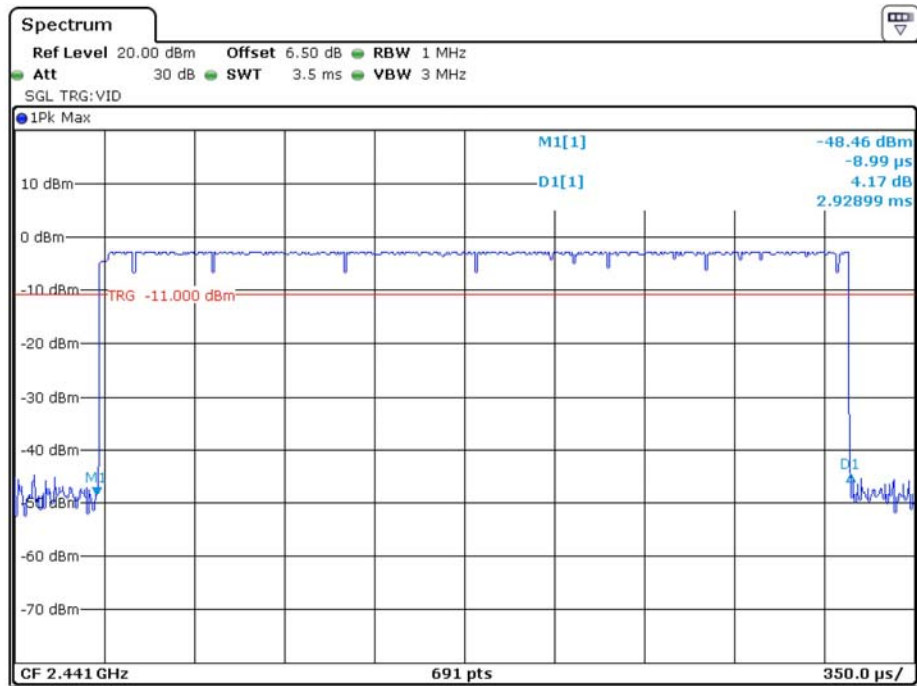


Date: 4.MAR.2022 13:41:56

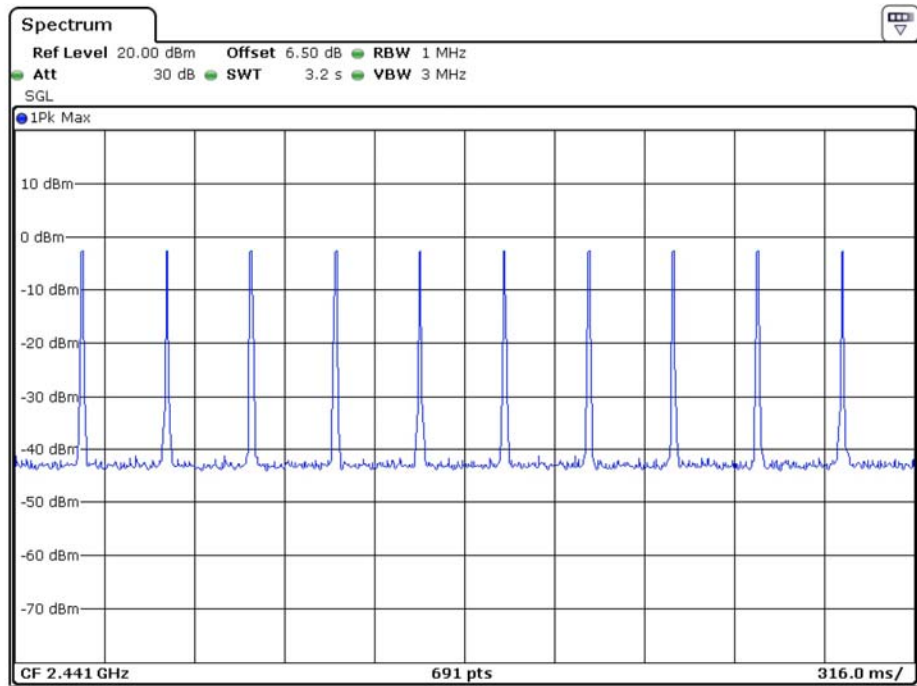


Date: 4.MAR.2022 13:45:25

2DH1_Hop

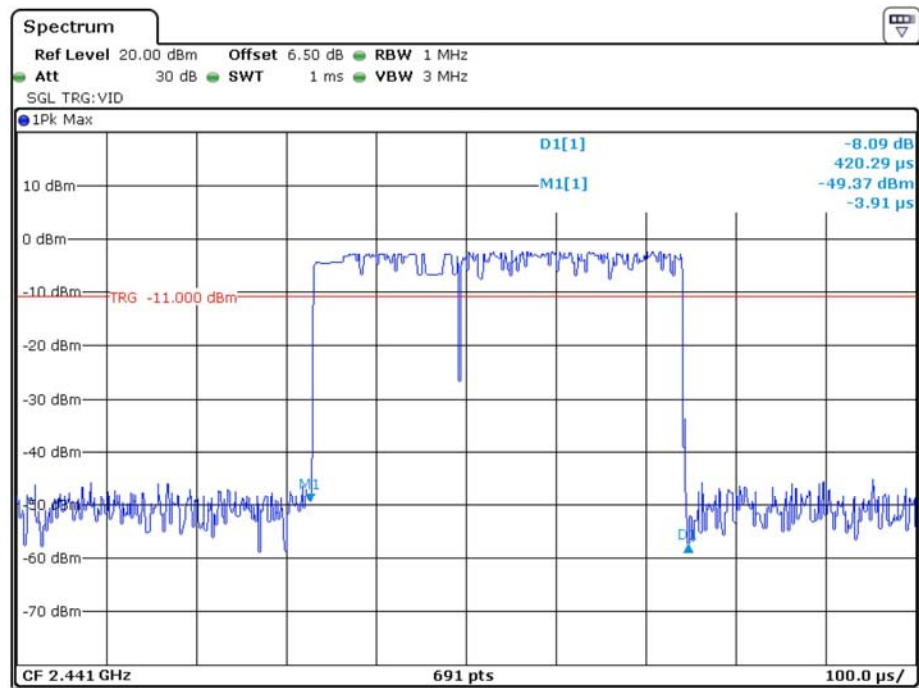


Date: 4.MAR.2022 13:39:52

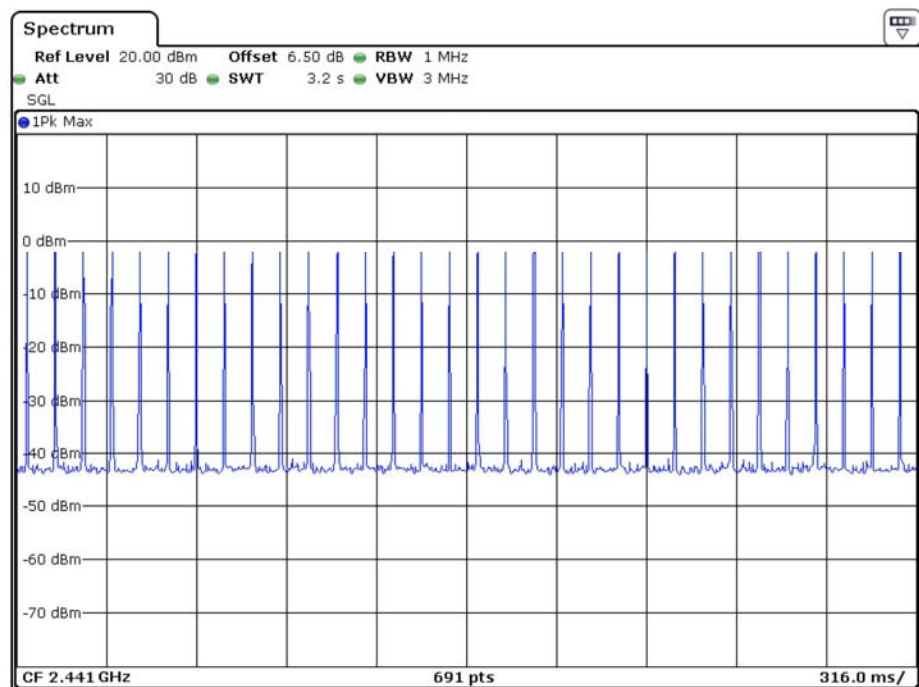


Date: 4.MAR.2022 13:44:29

2DH3_Hop

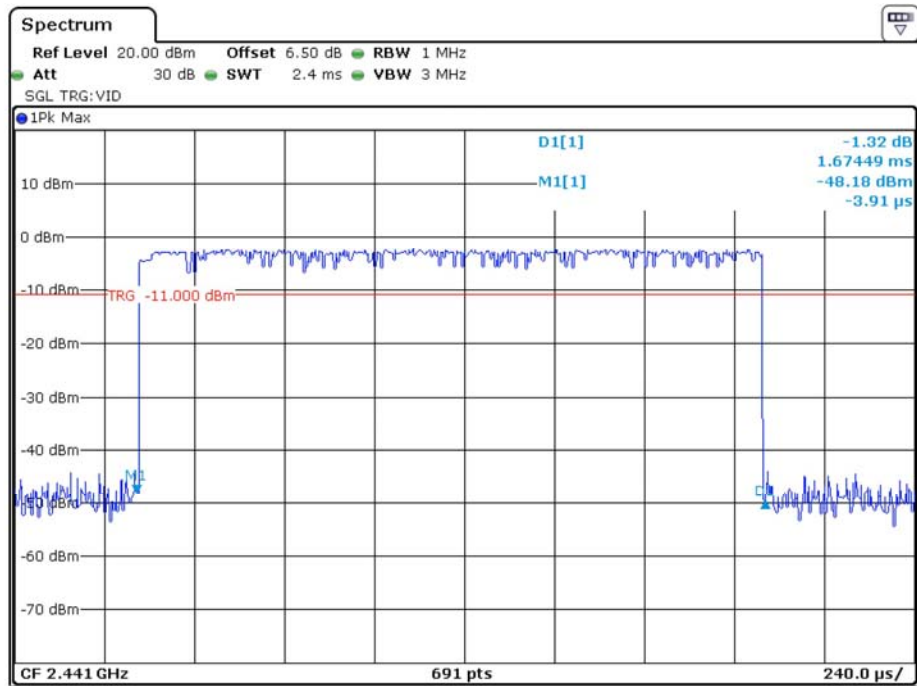


Date: 4.MAR.2022 13:40:58

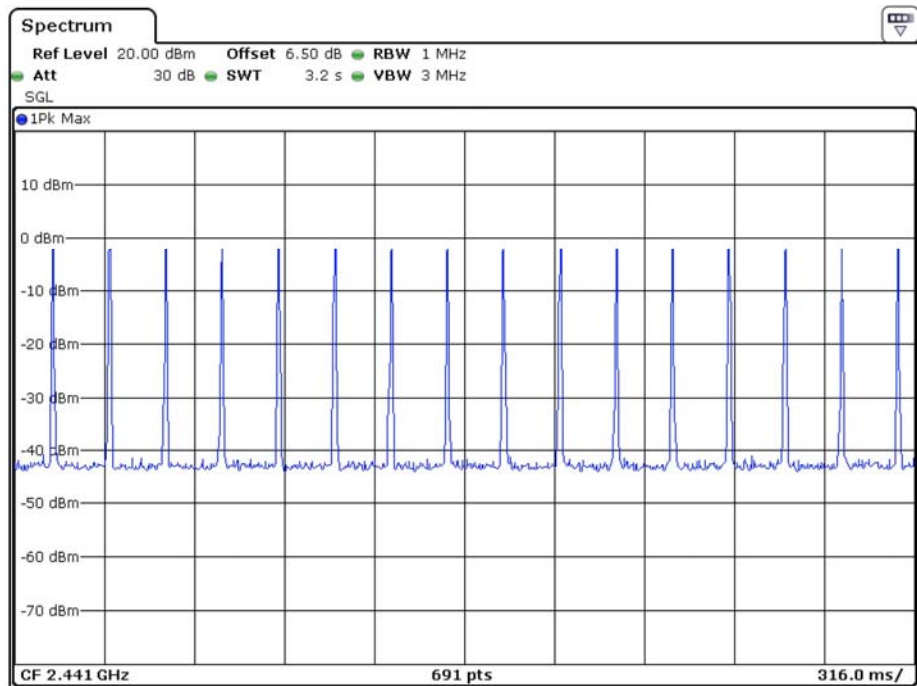


Date: 4.MAR.2022 13:44:54

2DH5_Hop

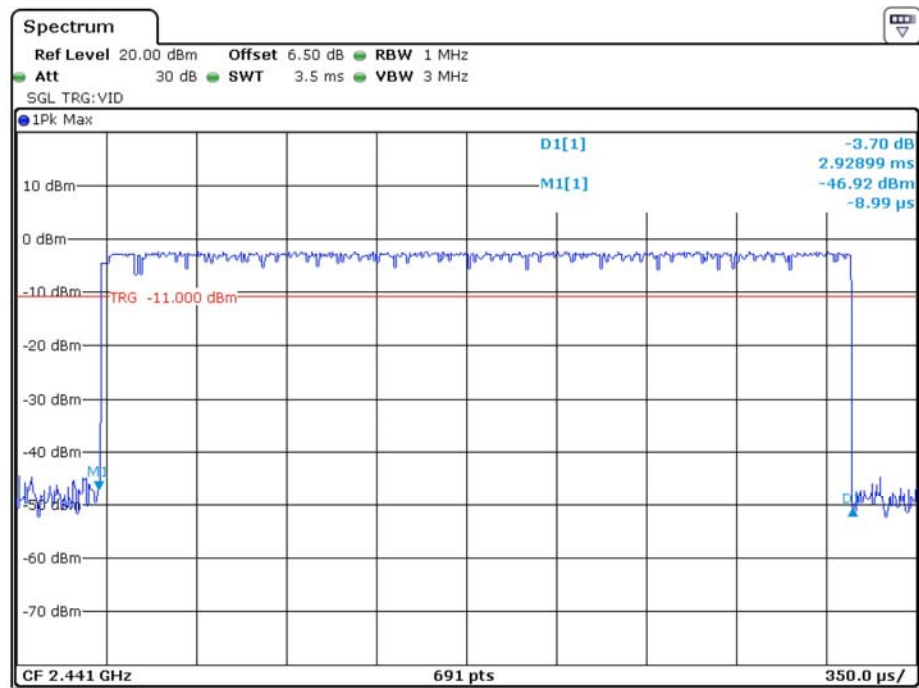


Date: 4.MAR.2022 13:42:24

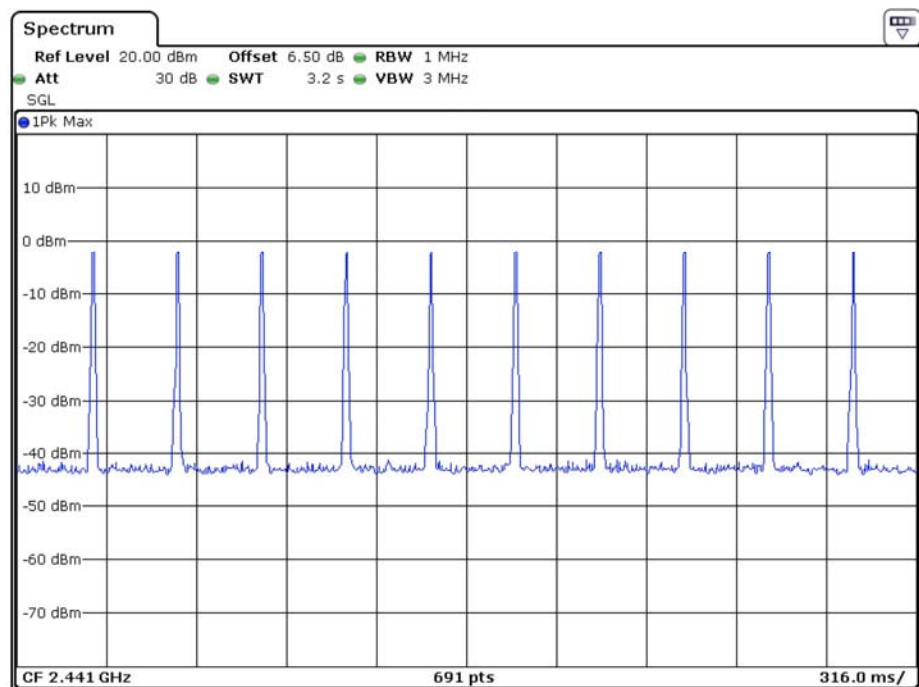


Date: 4.MAR.2022 13:45:11

3DH1_Hop

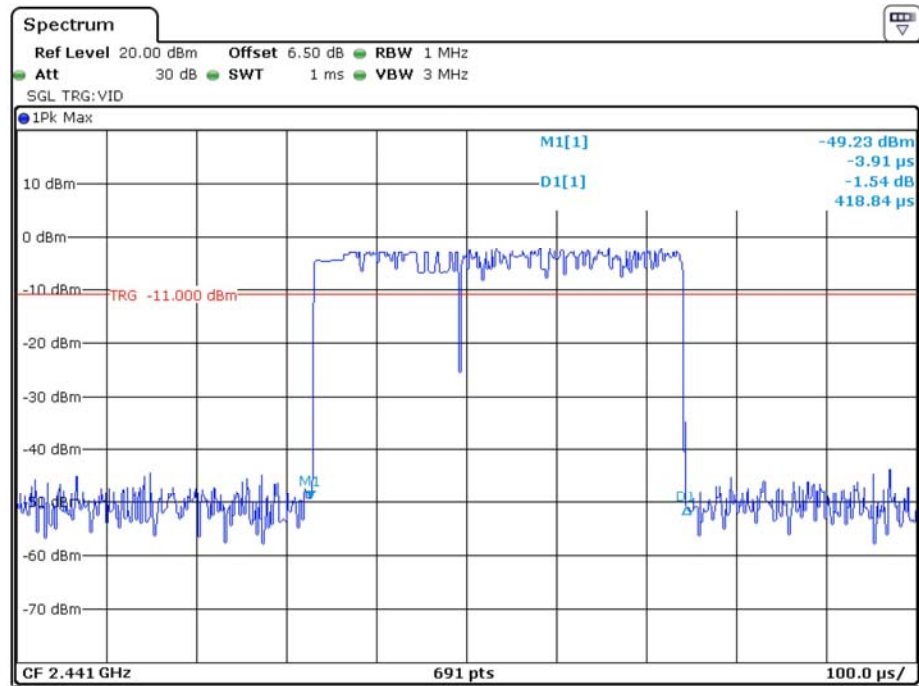


Date: 4.MAR.2022 13:40:11

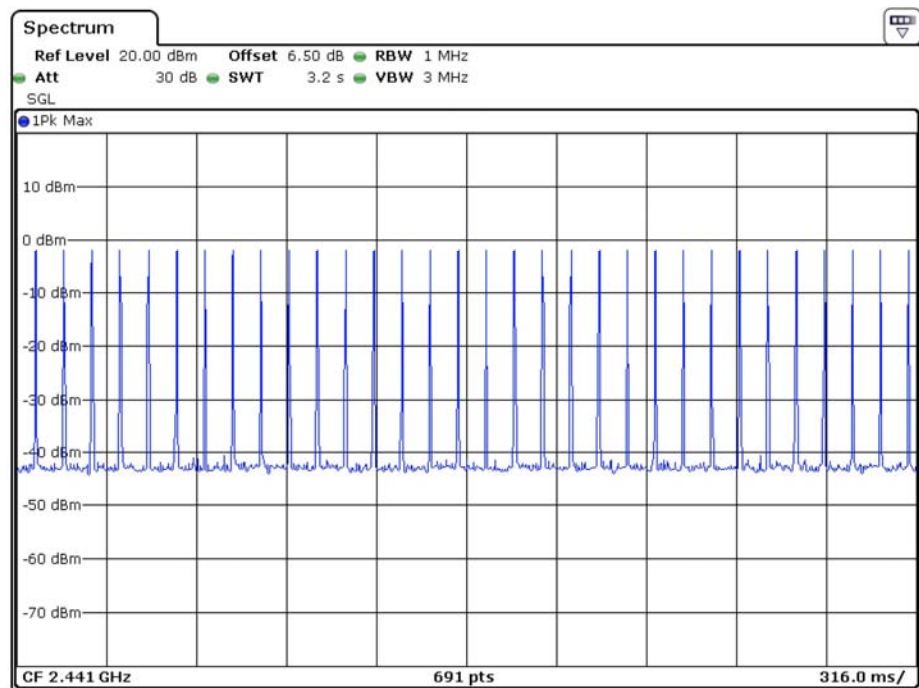


Date: 4.MAR.2022 13:44:13

3DH3_Hop

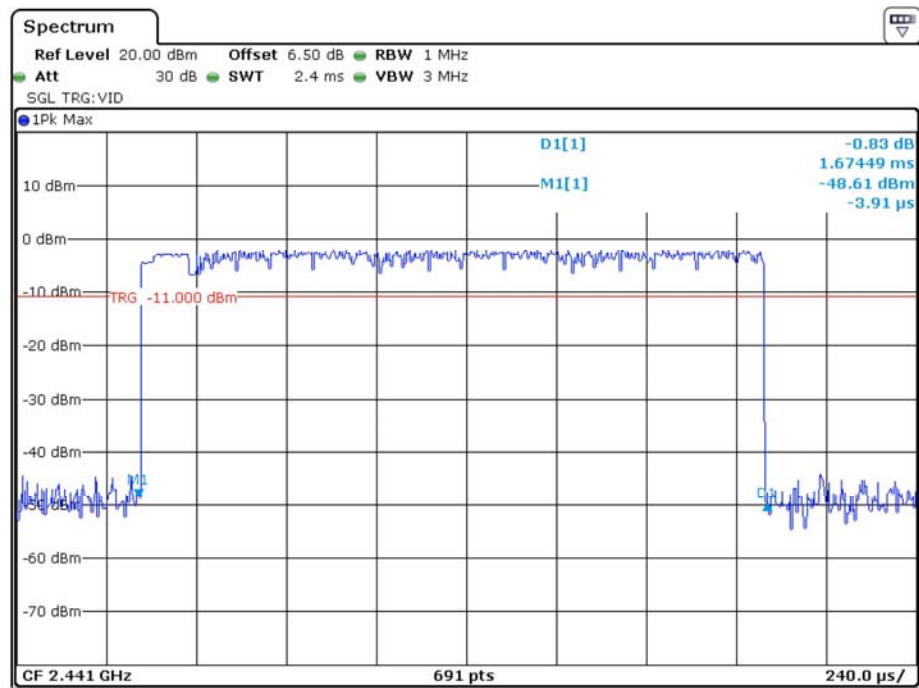


Date: 4.MAR.2022 13:40:42

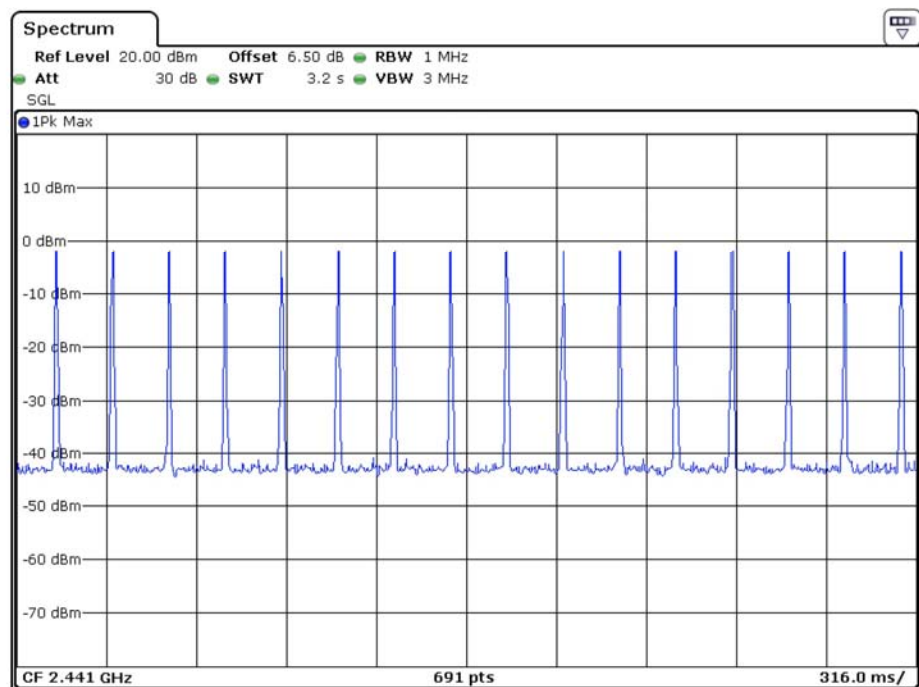


Date: 4.MAR.2022 13:43:32

3DH5_Hop

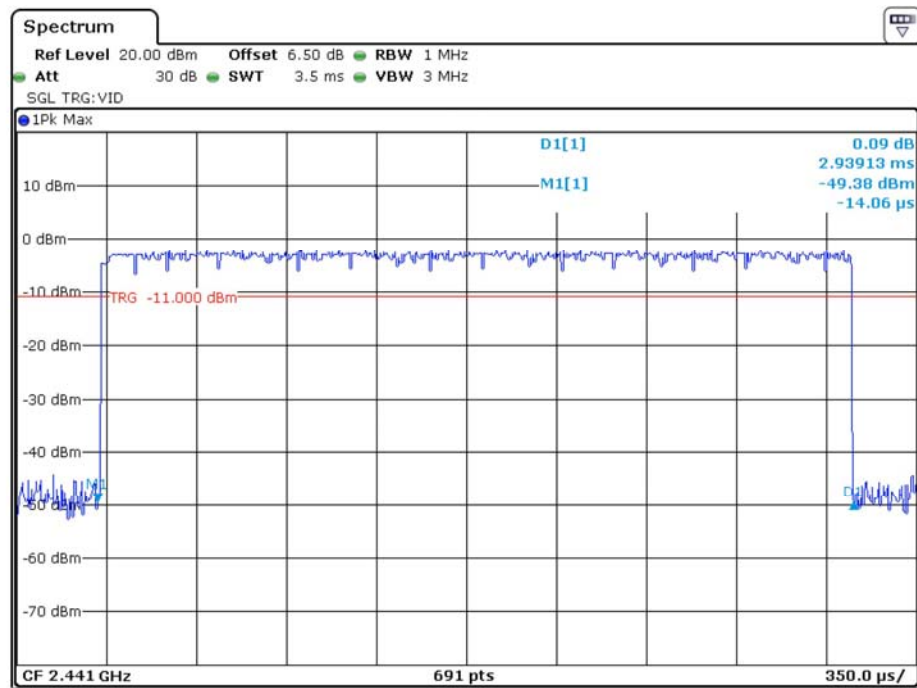

Date: 4.MAR.2022 13:42:44

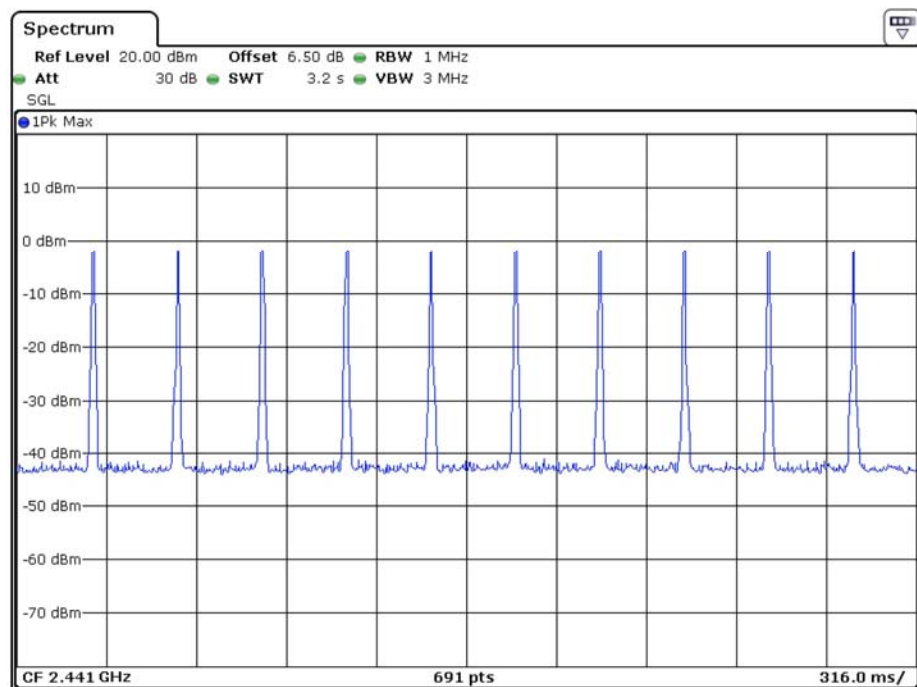

Date: 4.MAR.2022 13:43:58


FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Data

Environmental Conditions

Temperature:	25.7 °C
Relative Humidity:	59 %
ATM Pressure:	101.0 kPa


The testing was performed by Key Pei on 2022-03-04.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to following table and plots.

Mode	Channel	Frequency (MHz)	Peak Output Power	Limit (dBm)
			(dBm)	
BDR (GFSK)	Low	2402	0.26	21
	Middle	2441	-0.84	21
	High	2480	-2.41	21
EDR ($\pi/4$-DQPSK)	Low	2402	0.44	21
	Middle	2441	-0.48	21
	High	2480	-1.88	21
EDR (8DPSK)	Low	2402	0.62	21
	Middle	2441	-0.31	21
	High	2480	-1.60	21


DH1_2402

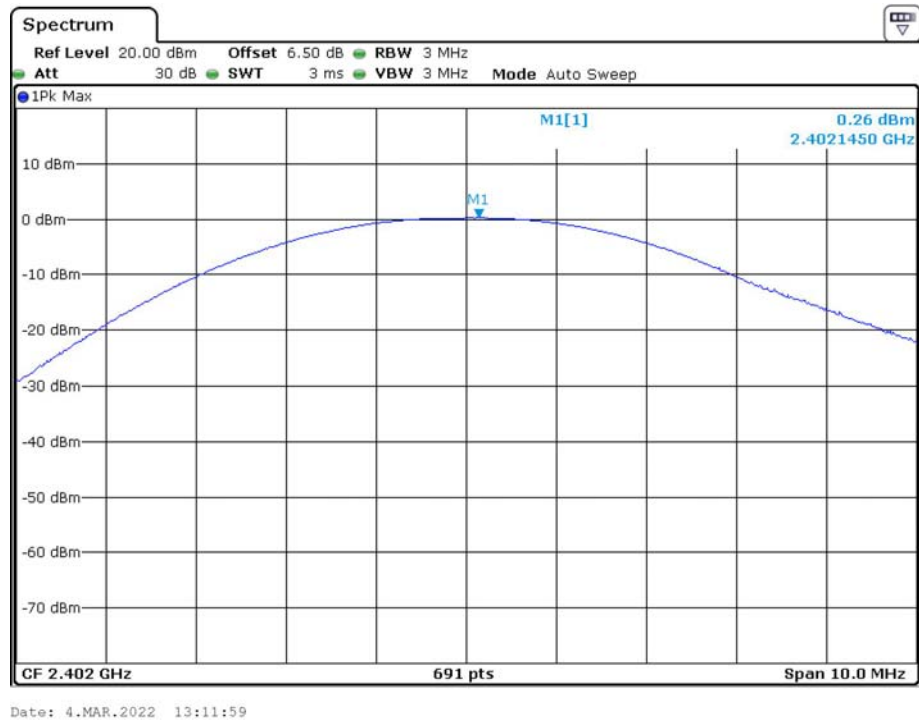

DH1_2441

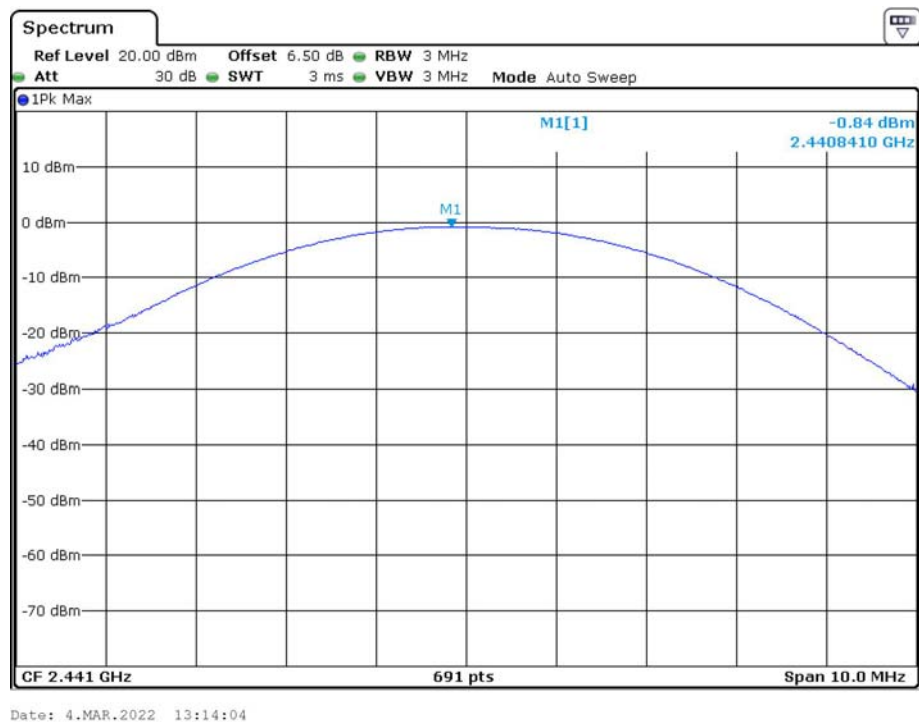


DH1_2480

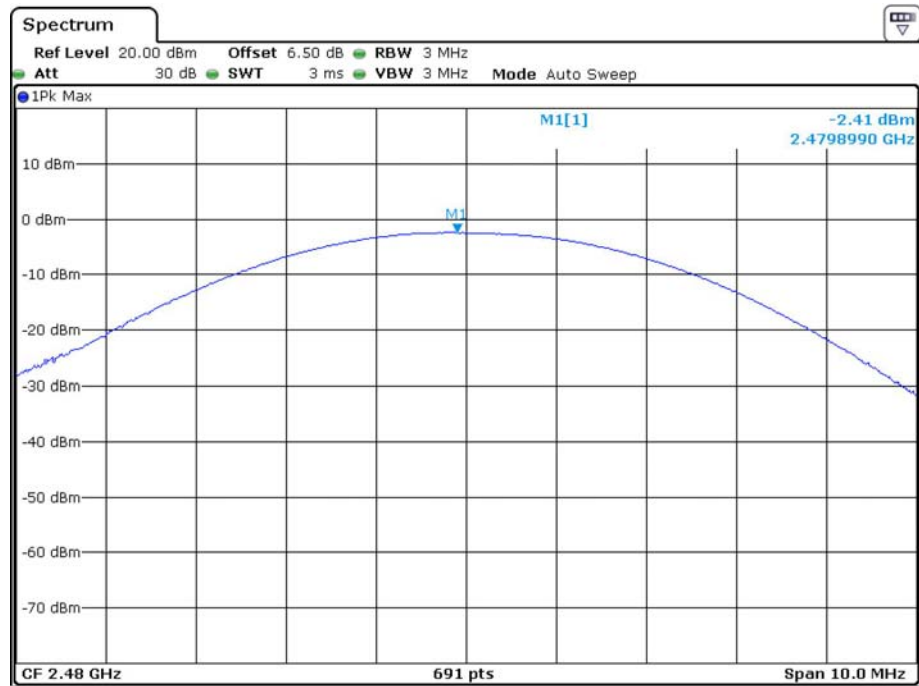


Date: 4.MAR.2022 13:14:30

2DH1_2402

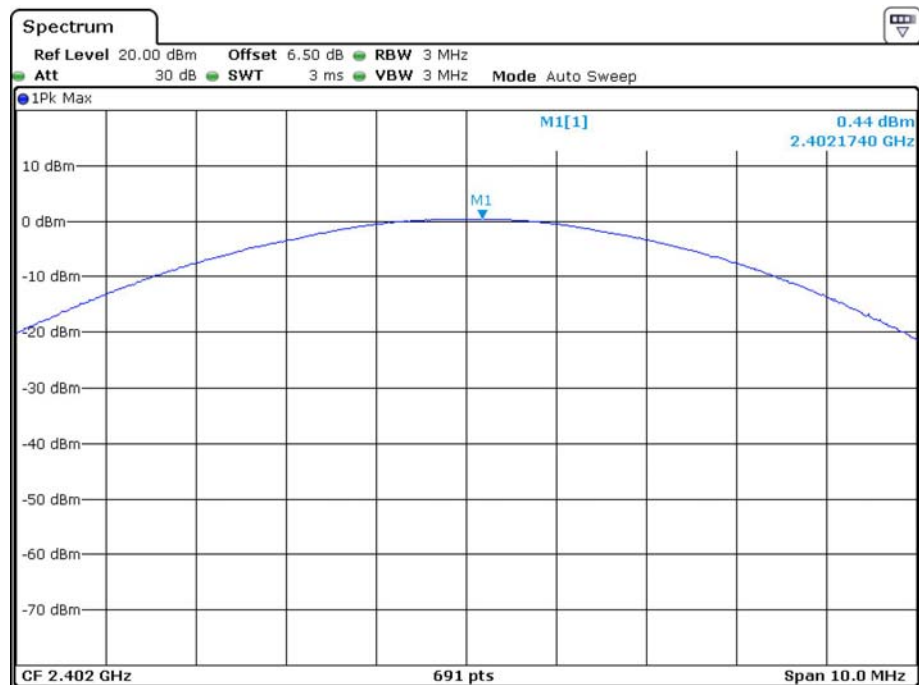


Date: 4.MAR.2022 13:12:43


2DH1_2441

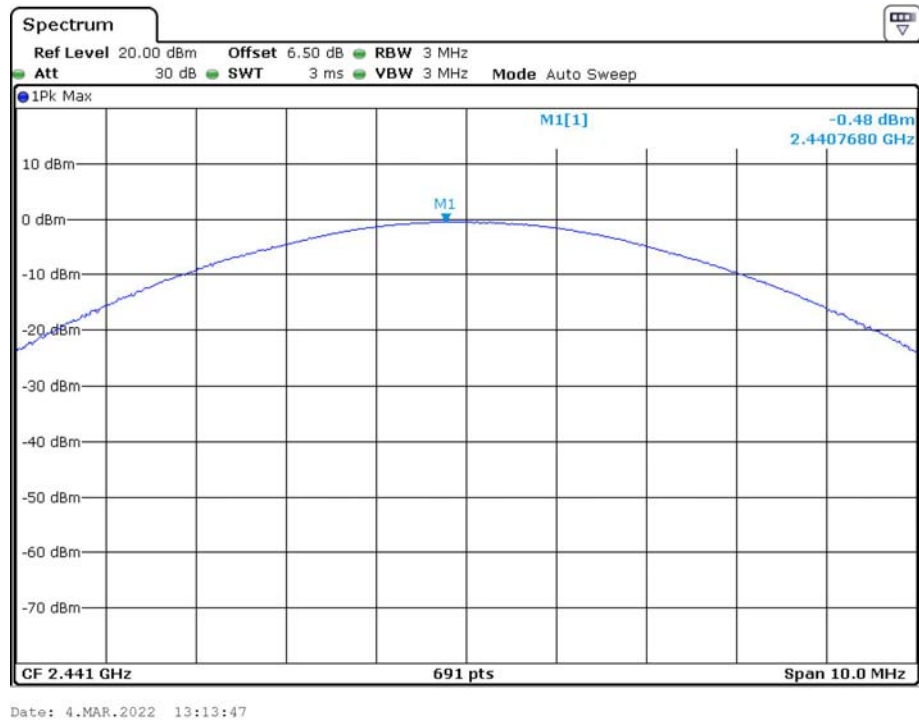

2DH1_2480

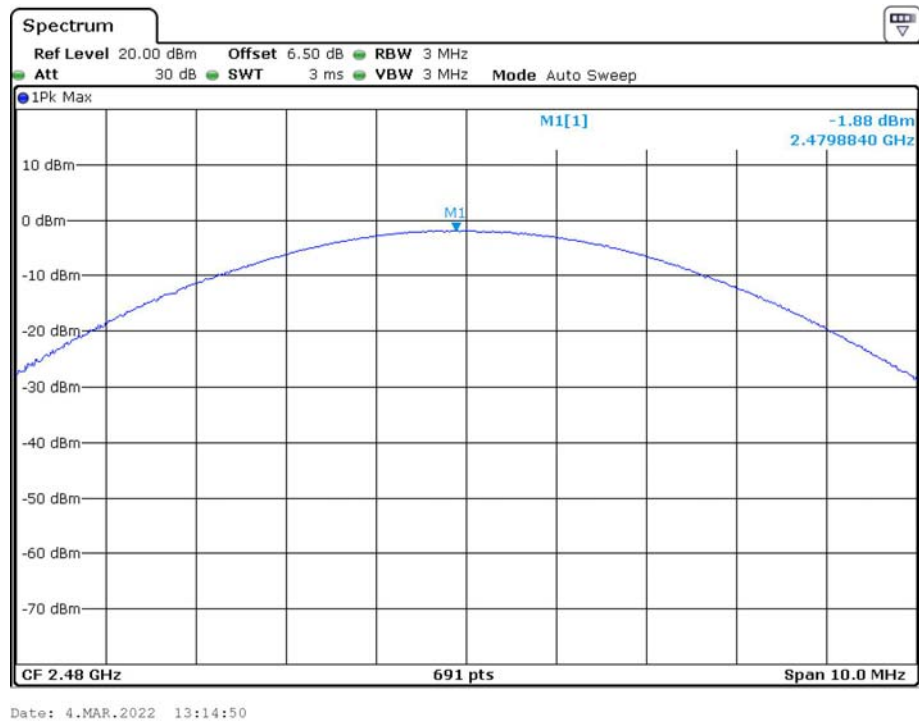


3DH1_2402

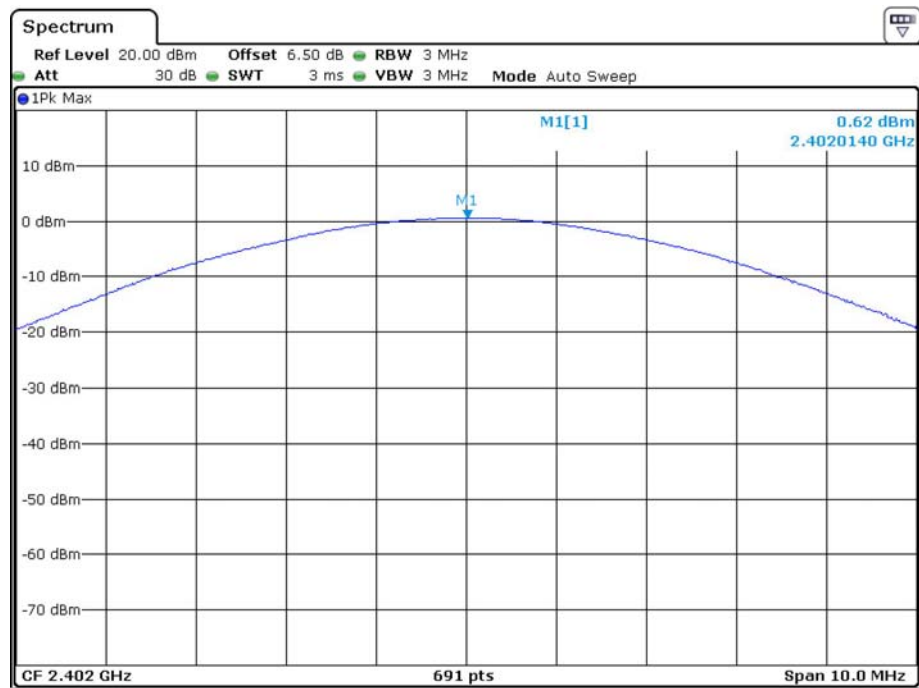


Date: 4.MAR.2022 13:13:05

3DH1_2441

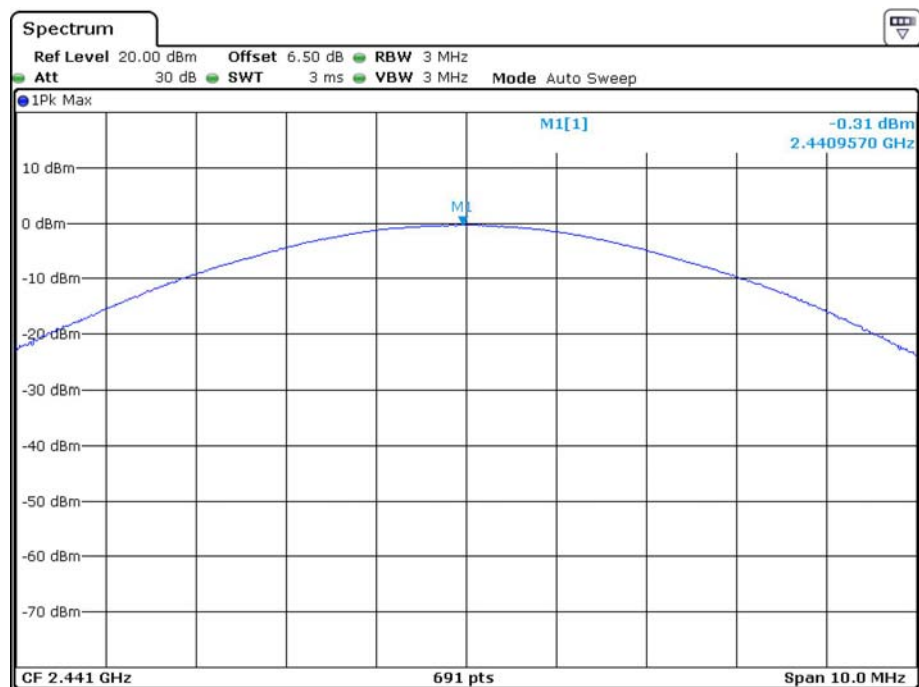

Date: 4.MAR.2022 13:13:30

3DH1_2480

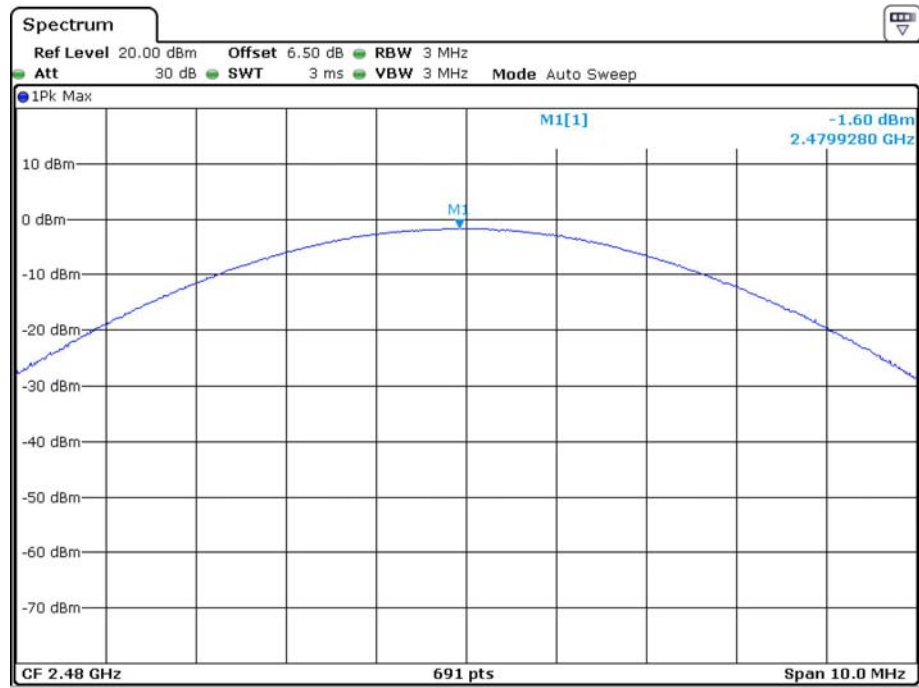

Date: 4.MAR.2022 13:15:12


FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



Test Data



Environmental Conditions

Temperature:	25.7 °C
Relative Humidity:	59 %
ATM Pressure:	101.0 kPa


The testing was performed by Key Pei on 2022-03-04.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to following plots.

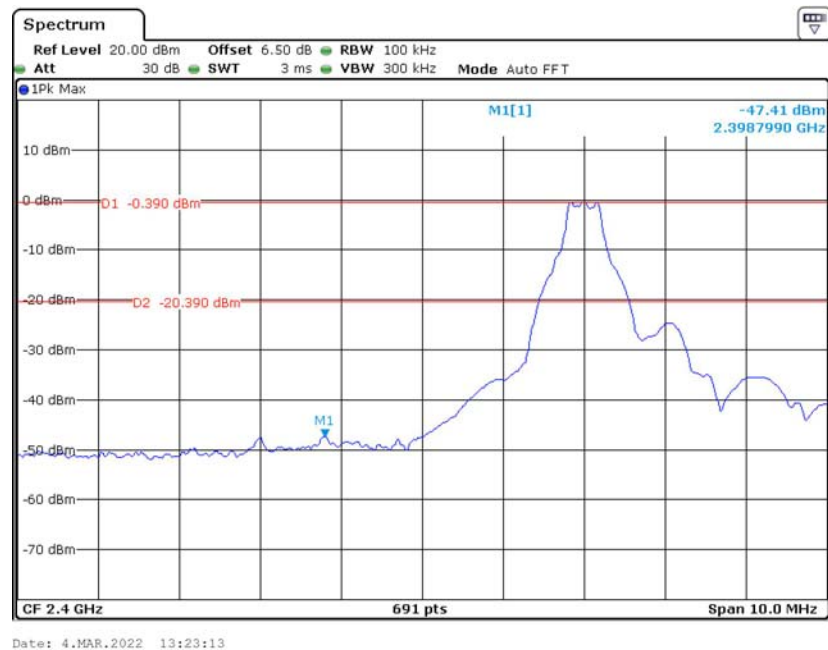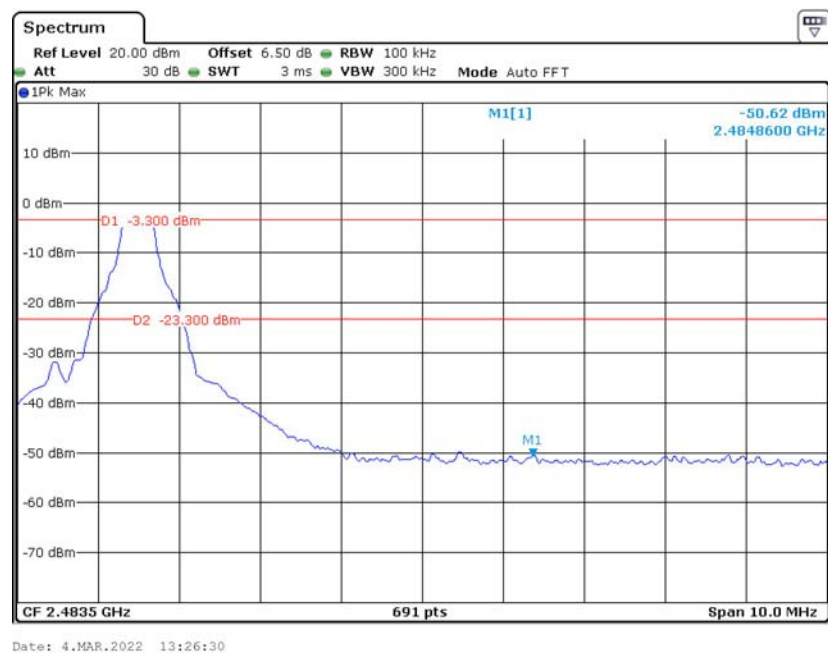Conducted Band Edge Result:**DH1_Low_2402MHz****DH1_High_2480MHz**

DH1_Low_Hop_2402MHz

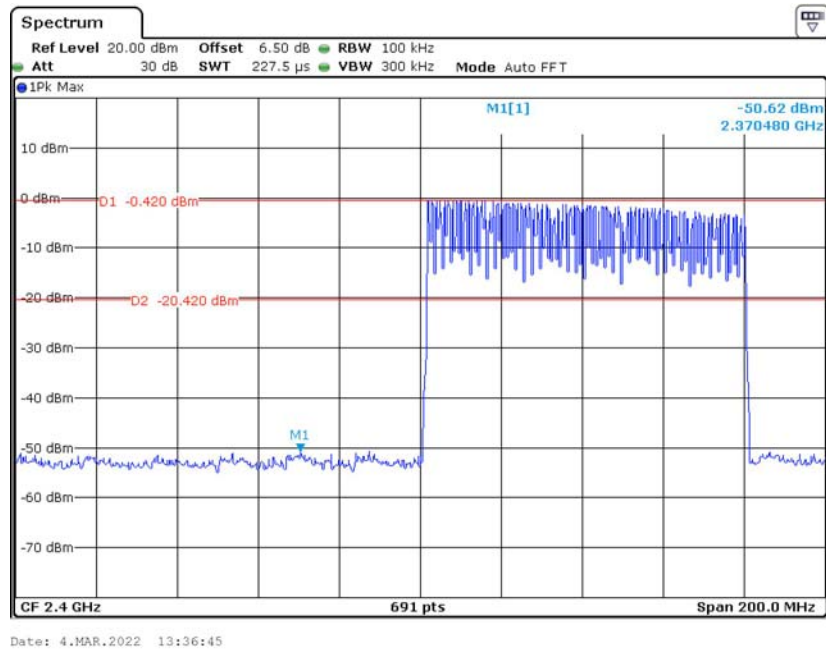

DH1_High_Hop_2480MHz

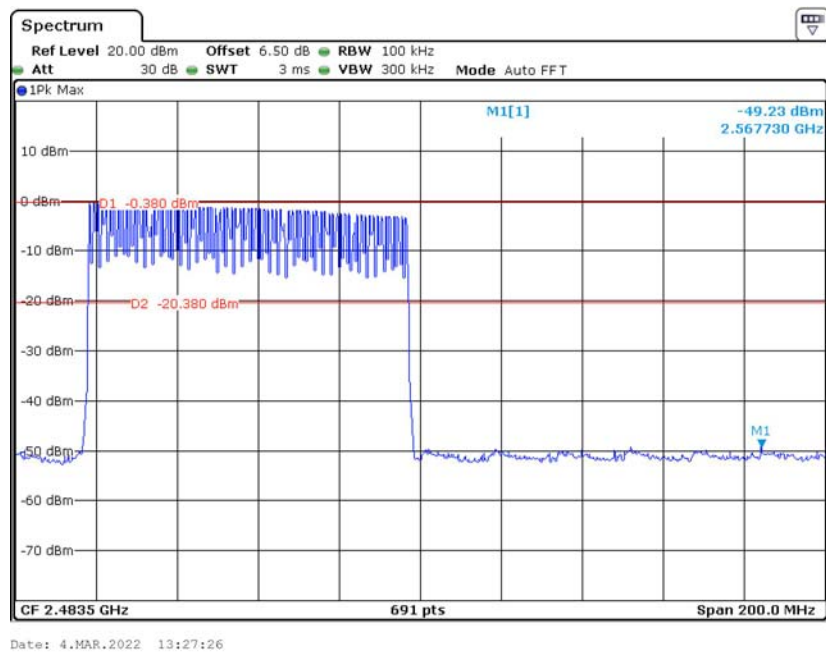

Spectrum

Ref Level 20.00 dBm Offset 6.50 dB RBW 100 kHz
Att 30 dB SWT 3 ms VBW 300 kHz Mode Auto FFT

1Pk Max

The spectrum plot displays a signal trace in blue. The y-axis represents power in dBm, ranging from -70 to 10. The x-axis represents frequency in GHz, ranging from 2.4 to 2.5. A prominent peak is labeled M1[1] at -32.79 dBm and 2.3995080 GHz. Two horizontal red lines are present: D1 at -0.400 dBm and D2 at -20.400 dBm. A small peak is labeled M1 at approximately -35 dBm. The plot is titled '1Pk Max'.

CF 2.4 GHz 691 pts Span 10.0 MHz

Date: 4.MAR.2022 13:23:36

Spectrum

Ref Level 20.00 dBm Offset 6.50 dB RBW 100 kHz
 Att 30 dB SWT 3 ms VBW 300 kHz Mode Auto FFT

1Pk Max

M1[1] -50.27 dBm 2.4837600 GHz

D1 -3.300 dBm


D2 -23.300 dBm

M1


CF 2.4835 GHz 691 pts Span 10.0 MHz

Date: 4.MAR.2022 13:25:56


2DH1_Low_Hop_2402MHz

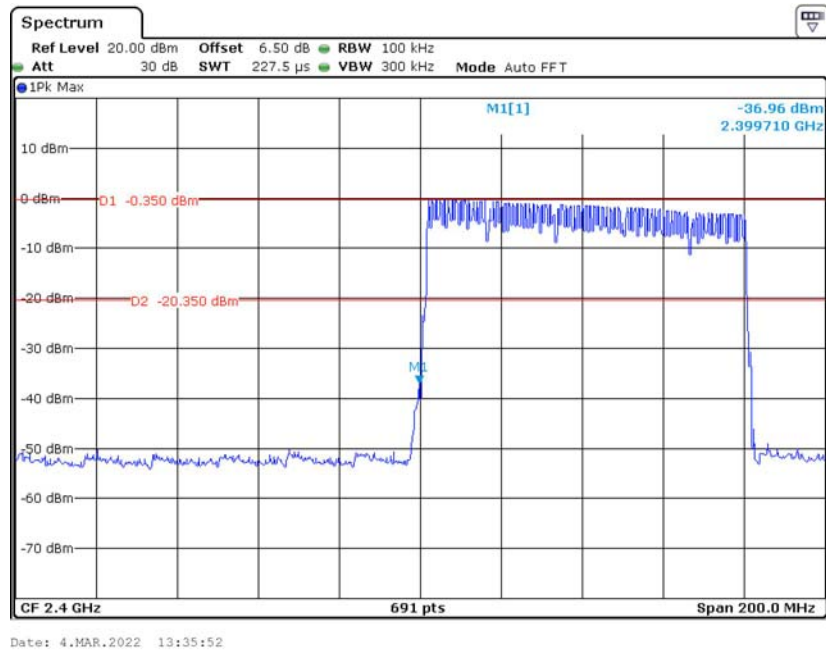

2DH1_High_Hop_2480MHz

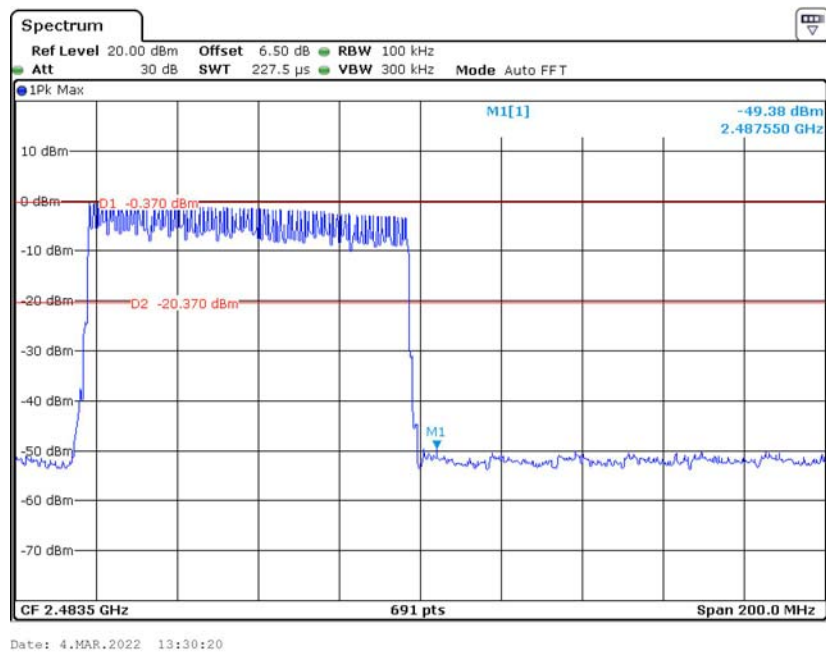


3DH1_Low_2402MHz

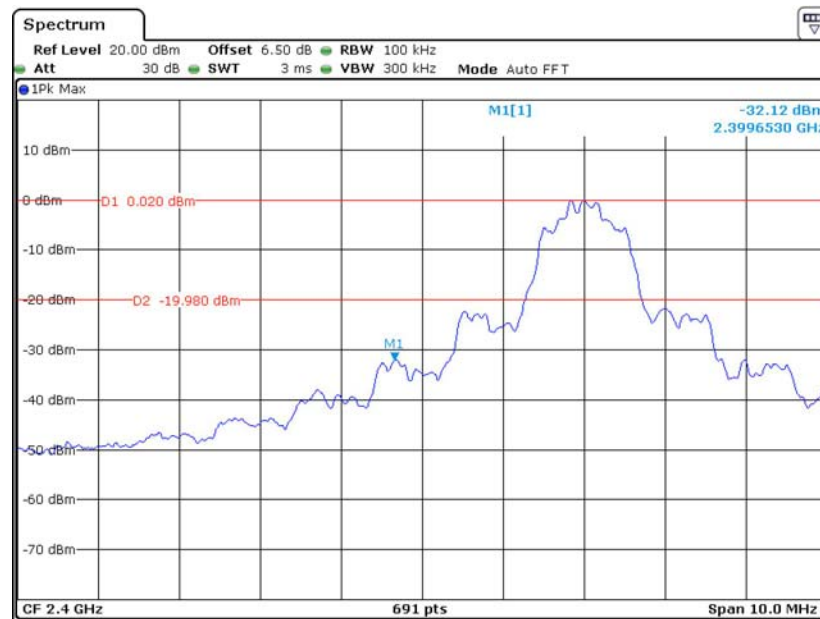


Date: 4.MAR.2022 13:24:12

3DH1_High_2480MHz

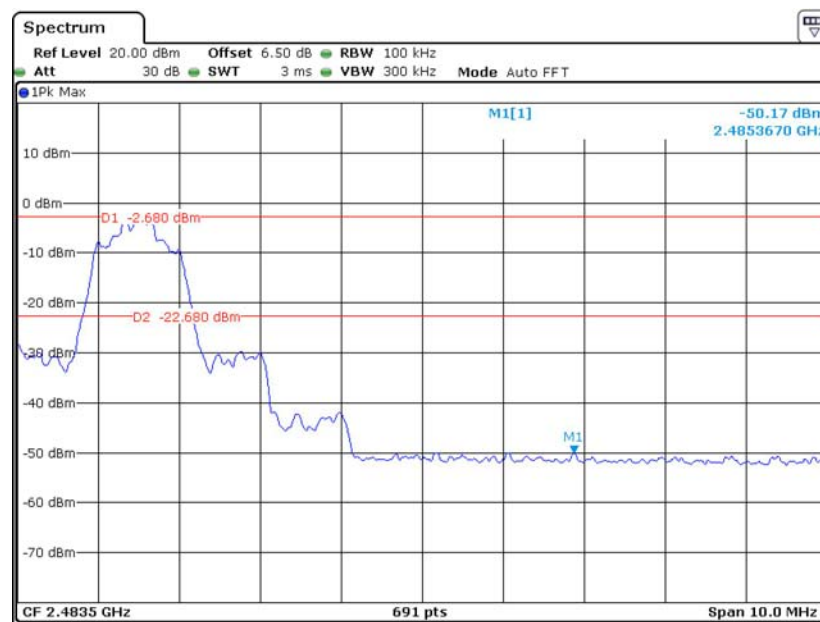


Date: 4.MAR.2022 13:25:18

3DH1_Low_Hop_2402MHz

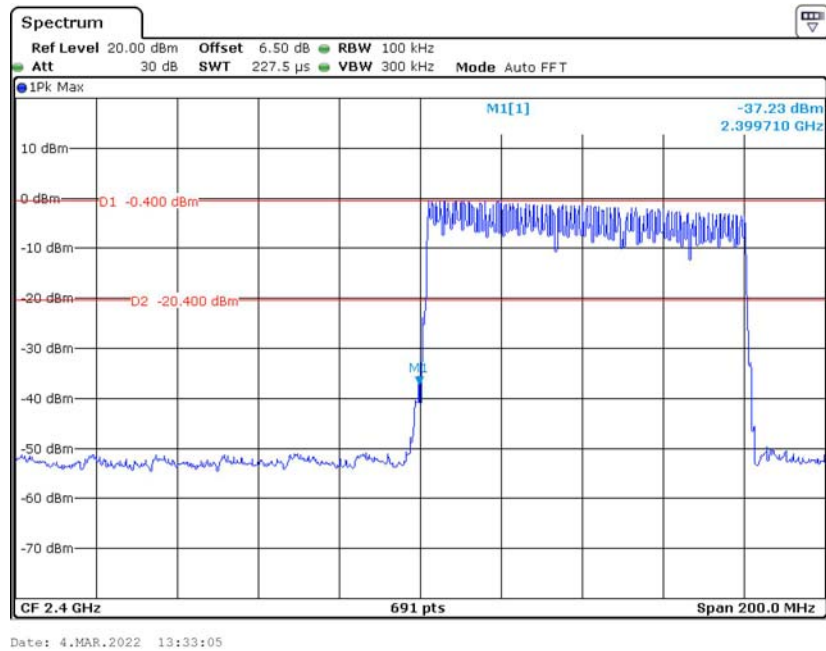

3DH1_High_Hop_2480MHz

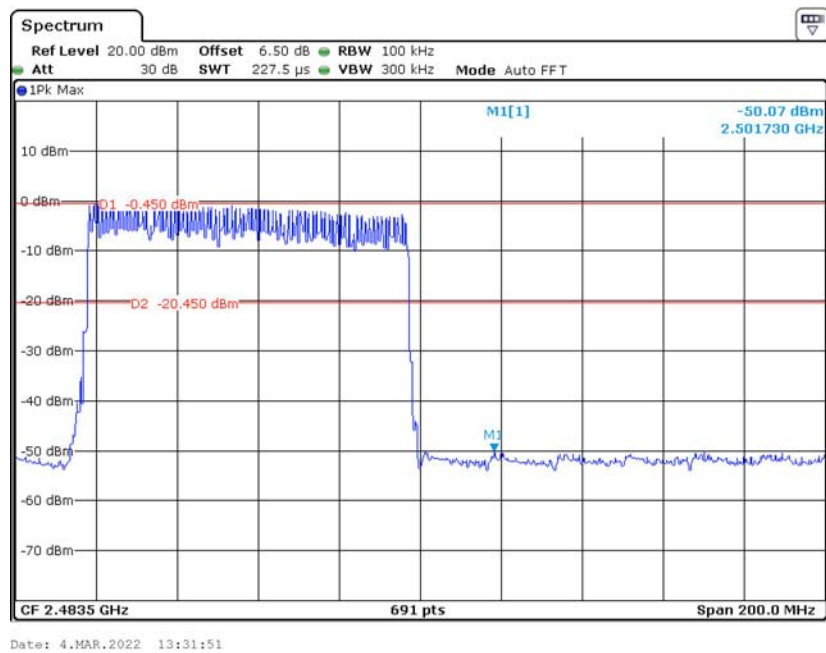

***** END OF REPORT *****