

FCC Test Report

Product Name	Afterglow Fener PS4/PS3 Wireless Dongle
Model No	PL-051-014T
FCC ID.	X5B-PL051014T

Applicant	Performance Designed Products, LLC
Address	14144 Ventura Blvd., Suite 200 Sherman Oaks, CA91423 USA

Date of Receipt	Aug. 25, 2014
Issue Date	Sep. 15, 2014
Report No.	1480539R-RFUSP25V00
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of Quietek Corporation.

Test Report

Issue Date: Sep. 15, 2014

Report No.: 1480539R-RFUSP25V00



Product Name	Afterglow Fener PS4/PS3 Wireless Dongle
Applicant	Performance Designed Products, LLC
Address	14144 Ventura Blvd., Suite 200 Sherman Oaks, CA91423 USA
Manufacturer	Performance Designed Products, LLC
Model No.	PL-051-014T
EUT Rated Voltage	DC 5V (Power by USB)
EUT Test Voltage	AC 120V/60Hz
Trade Name	pdp, Afterglow
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C: 2013 ANSI C63.10: 2009, KDB 558074
Test Result	Complied

Documented By :



(Senior Adm. Specialist / Rita Huang)

Tested By :



(Engineer / Benjamin Pan)

Approved By :



(Director / Vincent Lin)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	5
1.1. EUT Description.....	5
1.2. Operational Description	7
1.3. Tested System Details.....	8
1.4. Configuration of Tested System	8
1.5. EUT Exercise Software	8
1.6. Test Facility	9
2. Conducted Emission.....	10
2.1. Test Equipment.....	10
2.2. Test Setup	10
2.3. Limits	11
2.4. Test Procedure	11
2.5. Uncertainty	11
2.6. Test Result of Conducted Emission.....	12
3. Peak Power Output	14
3.1. Test Equipment.....	14
3.2. Test Setup	14
3.3. Limit	14
3.4. Test Procedure	14
3.5. Test Result of Peak Power Output.....	15
4. Radiated Emission.....	16
4.1. Test Equipment.....	16
4.2. Test Setup	17
4.3. Limits	18
4.4. Test Procedure	18
4.5. Uncertainty	18
4.6. Test Result of Radiated Emission.....	19
5. RF antenna conducted test.....	23
5.1. Test Equipment.....	23
5.2. Test Setup	23
5.3. Limits	23
5.4. Test Procedure	24
5.5. Uncertainty	24
5.6. Test Result of RF antenna conducted test.....	25
6. Band Edge	28
6.1. Test Equipment.....	28
6.2. Test Setup	28
6.3. Limits	29
6.4. Test Procedure	29
6.5. Uncertainty	29
6.6. Test Result of Band Edge	30
7. Occupied Bandwidth.....	34

7.1.	Test Equipment.....	34
7.2.	Test Setup	34
7.3.	Limits	34
7.4.	Test Procedure	34
7.5.	Uncertainty	34
7.6.	Test Result of Occupied Bandwidth	35
8.	Power Density	38
8.1.	Test Equipment.....	38
8.2.	Test Setup	38
8.3.	Limits	38
8.4.	Test Procedure	38
8.5.	Uncertainty	38
8.6.	Test Result of Power Density	39
9.	EMI Reduction Method During Compliance Testing	42
Attachment 1:	EUT Test Photographs	
Attachment 2:	EUT Detailed Photographs	

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	Afterglow Fener PS4/PS3 Wireless Dongle
Trade Name	pdp, Afterglow
Model No.	PL-051-014T
FCC ID.	X5B-PL051014T
Frequency Range	2403.35 – 2479.35MHz
Channel Control	Auto
Channel Separation	2MHz
Antenna Gain	Refer to the table “Antenna List”
Channel Number	39
Type of Modulation	Pi/4 DQPSK
Antenna Type	Printed on PCB
Audio Cable	Shielded, 1.2m
Optical Fiber Cable	Shielded, 1.7m

Antenna List

No.	Manufacturer	Part No.	Peak Gain
1	TATUNG	N/A (TX0) N/A (TX1)	3.22 dBi for 2.4 GHz

Note: The antenna of EUT is conform to FCC 15.203

Center Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 1:	2403.35 MHz	Channel 11:	2423.35 MHz	Channel 21:	2443.35 MHz	Channel 31:	2463.35 MHz
Channel 2:	2405.35 MHz	Channel 12:	2425.35 MHz	Channel 22:	2445.35 MHz	Channel 32:	2465.35 MHz
Channel 3:	2407.35 MHz	Channel 13:	2427.35 MHz	Channel 23:	2447.35 MHz	Channel 33:	2467.35 MHz
Channel 4:	2409.35 MHz	Channel 14:	2429.35 MHz	Channel 24:	2449.35 MHz	Channel 34:	2469.35 MHz
Channel 5:	2411.35 MHz	Channel 15:	2431.35 MHz	Channel 25:	2451.35 MHz	Channel 35:	2471.35 MHz
Channel 6:	2413.35 MHz	Channel 16:	2433.35 MHz	Channel 26:	2453.35 MHz	Channel 36:	2473.35 MHz
Channel 7:	2415.35 MHz	Channel 17:	2435.35 MHz	Channel 27:	2455.35 MHz	Channel 37:	2475.35 MHz
Channel 8:	2417.35 MHz	Channel 18:	2437.35 MHz	Channel 28:	2457.35 MHz	Channel 38:	2477.35 MHz
Channel 9:	2419.35 MHz	Channel 19:	2439.35 MHz	Channel 29:	2459.35 MHz	Channel 39:	2479.35 MHz
Channel 10:	2421.35 MHz	Channel 20:	2441.35 MHz	Channel 30:	2461.35 MHz		

Note:

1. The EUT is an Afterglow Fener PS4/PS3 Wireless Dongle with a built-in 2.4GHz transceiver.
2. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
3. Device contains a diversity function, only worst case is shown in the report.
4. These tests are conducted on a sample for the purpose of demonstrating compliance of 2.4GHz transmitter with Part 15 Subpart C Paragraph 15.247 of spread spectrum devices

Test Mode:	Mode 1: Transmit
------------	------------------


1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model No.	Serial No.	Power Cord
1	Notebook PC	DELL	PP18L	36119001664	Non-Shielded, 0.8m
2	Cambridge SoundWorks	Creative	S80130	AM01303200000941	Non-Shielded, 1.9m

Signal Cable Type	Signal cable Description
A	USB Cable
B	Audio Cable
C	Optical Fiber Cable

1.4. Configuration of Tested System

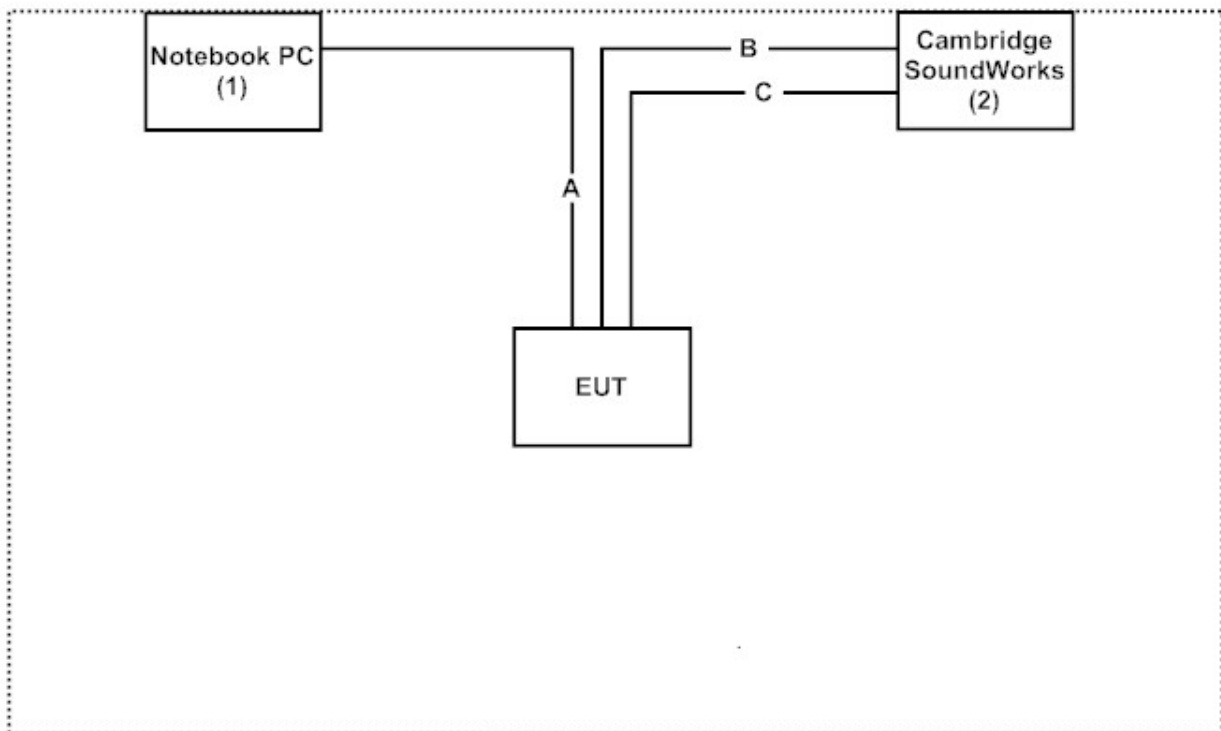

1.5. EUT Exercise Software

- (1) Setup the EUT as shown in Section 1.4.
- (2) Execute "VMI dedbug.exe (v1.1.6.47)" on the Notebook PC.
- (3) Configure the test mode, the test channel, and the data rate.
- (4) Press "OK" to start the continuous Transmit.
- (5) Verify that the EUT works properly.

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

The related certificate for our laboratories about the test site and management system can be downloaded from

Quietek Corporation's Web Site: <http://www.quietek.com/tw/ctg/cts/accreditations.htm>

The address and introduction of Quietek Corporation's laboratories can be founded in our Web site:

<http://www.quietek.com/>

Site Description: File on
Federal Communications Commission
FCC Engineering Laboratory
7435 Oakland Mills Road
Columbia, MD 21046
Registration Number: 92195

Site Name: Quietek Corporation
Site Address: No.5-22, Ruishukeng,
Linkou Dist. New Taipei City 24451,
Taiwan, R.O.C.
TEL: 886-2-8601-3788 / FAX : 886-2-8601-3789
E-Mail : service@quietek.com

FCC Accreditation Number: TW1014

2. Conducted Emission


2.1. Test Equipment

The following test equipment are used during the conducted emission test:

Item	Instrument	Manufacturer	Type No./Serial No	Last Cal.	Remark
1	Test Receiver	R & S	ESCS 30/825442/17	May, 2014	
2	L.I.S.N.	R & S	ESH3-Z5/825016/6	May, 2014	EUT
3	L.I.S.N.	Kyoritsu	KNW-407/8-1420-3	May, 2014	Peripherals
4	Pulse Limiter	R & S	ESH3-Z2	May, 2014	
5	No.1 Shielded Room			N/A	

Note: All instruments are calibrated every one year.

2.2. Test Setup

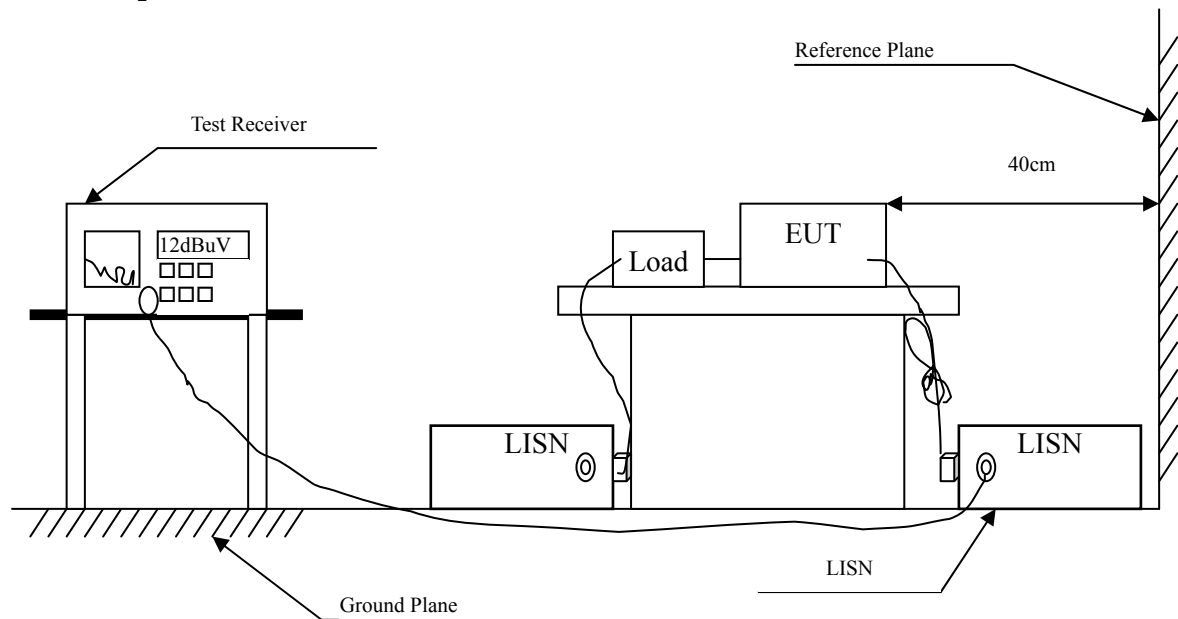

2.3. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBuV) Limit		
Frequency MHz	Limits	
	QP	AVG
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

2.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2009 on conducted measurement.

Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

2.5. Uncertainty

± 2.26 dB

2.6. Test Result of Conducted Emission

Product : Afterglow Fener PS4/PS3 Wireless Dongle
 Test Item : Conducted Emission Test
 Power Line : Line 1
 Test Mode : Mode 1: Transmit (2441.35MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV	Margin dB	Limit dBuV
Line 1					
Quasi-Peak					
0.166	9.657	41.960	51.616	-13.927	65.543
0.181	9.652	40.910	50.562	-14.552	65.114
0.287	9.655	33.710	43.365	-18.721	62.086
0.673	9.676	22.300	31.976	-24.024	56.000
4.279	9.837	21.920	31.757	-24.243	56.000
20.365	10.183	23.010	33.193	-26.807	60.000
Average					
0.166	9.657	21.840	31.496	-24.047	55.543
0.181	9.652	20.610	30.262	-24.852	55.114
0.287	9.655	20.370	30.025	-22.061	52.086
0.673	9.676	6.630	16.306	-29.694	46.000
4.279	9.837	15.740	25.577	-20.423	46.000
20.365	10.183	16.690	26.873	-23.127	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “ ” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : Afterglow Fener PS4/PS3 Wireless Dongle
 Test Item : Conducted Emission Test
 Power Line : Line 2
 Test Mode : Mode 1: Transmit (2441.35MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV	dB	dBuV
Line 2					
Quasi-Peak					
0.170	9.659	42.280	51.939	-13.490	65.429
0.295	9.661	35.690	45.350	-16.507	61.857
0.443	9.664	25.860	35.524	-22.105	57.629
0.591	9.672	25.060	34.732	-21.268	56.000
1.158	9.713	16.190	25.903	-30.097	56.000
3.857	9.827	22.520	32.347	-23.653	56.000
Average					
0.170	9.659	21.660	31.319	-24.110	55.429
0.295	9.661	24.850	34.510	-17.347	51.857
0.443	9.664	13.510	23.174	-24.455	47.629
0.591	9.672	12.680	22.352	-23.648	46.000
1.158	9.713	3.010	12.723	-33.277	46.000
3.857	9.827	15.950	25.777	-20.223	46.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “ ” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor


3. Peak Power Output

3.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Power Meter	Anritsu	ML2495A/6K00003357	May, 2014
X	Power Sensor	Anritsu	MA2411B/0738448	Jun, 2014

Note: 1. All equipments are calibrated every one year.
2. The test instruments marked by “X” are used to measure the final test results.

3.2. Test Setup

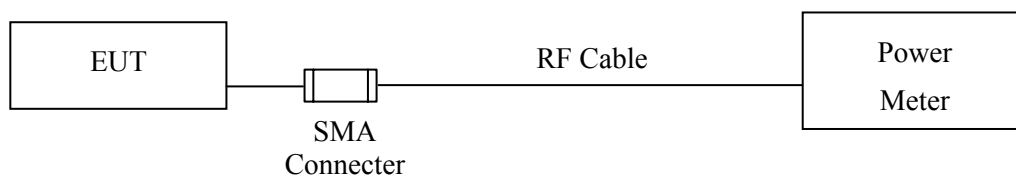

3.3. Limit

The maximum peak power shall be less 1Watt.

3.4. Test Procedure

The EUT was tested according to DTS test procedure of KDB 558074 for compliance to FCC 47CFR 15.247 requirements. The maximum peak conducted output power using KDB 558074 section 9.1.3 PKPM1 Peak power meter method.

3.5. Test Result of Peak Power Output

Product : Afterglow Fener PS4/PS3 Wireless Dongle
 Test Item : Peak Power Output Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit

Signal Path A

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
01	2403.35	4.24	<30dBm	Pass
20	2441.35	4.21	<30dBm	Pass
39	2479.35	3.05	<30dBm	Pass

Signal Path B

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
01	2403.35	4.07	<30dBm	Pass
20	2441.35	3.73	<30dBm	Pass
39	2479.35	2.87	<30dBm	Pass

4. Radiated Emission

4.1. Test Equipment


The following test equipment are used during the radiated emission test:

Test Site		Equipment	Manufacturer	Model No./Serial No.	Last Cal.
☒ Site # 3	X	Loop Antenna	Teseq	HLA6120 / 26739	Jul., 2014
	X	Bilog Antenna	Schaffner Chase	CBL6112B/2673	Sep., 2014
	X	Horn Antenna	Schwarzbeck	BBHA9120D/D305	Sep., 2014
	X	Horn Antenna	Schwarzbeck	BBHA9170/208	Jul., 2014
	X	Pre-Amplifier	QTK	QTK-AMP-03 / 0003	May, 2014
	X	Pre-Amplifier	QTK	AP-180C / CHM_0906076	Sep., 2014
	X	Pre-Amplifier	MITEQ	AMF-4D-180400-45-6P/ 925975	Mar, 2014
	X	Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2014
	X	Test Receiver	R & S	ESCS 30/ 825442/018	Sep., 2014
	X	Coaxial Cable	QuieTek	QTK-CABLE/ CAB5	Feb., 2014
	X	Controller	QuieTek	QTK-CONTROLLER/ CTRL3	N/A
	X	Coaxial Switch	Anritsu	MP59B/6200265729	N/A


- Note:
1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
 2. The test instruments marked with "X" are used to measure the final test results.

4.2. Test Setup

Radiated Emission Below 1GHz

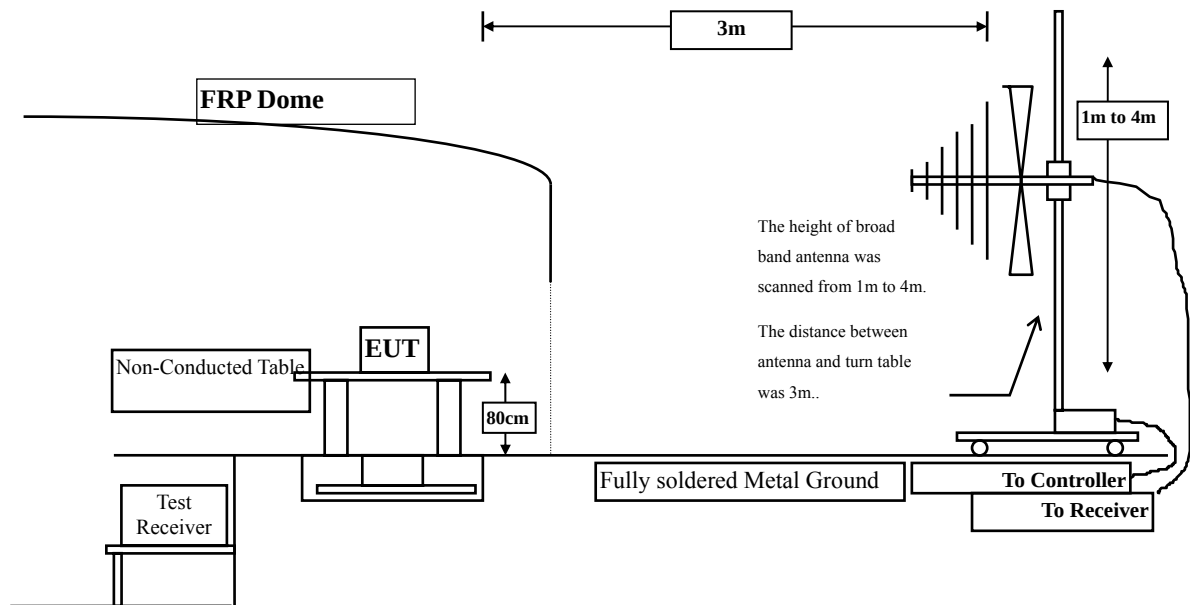

Radiated Emission Above 1GHz

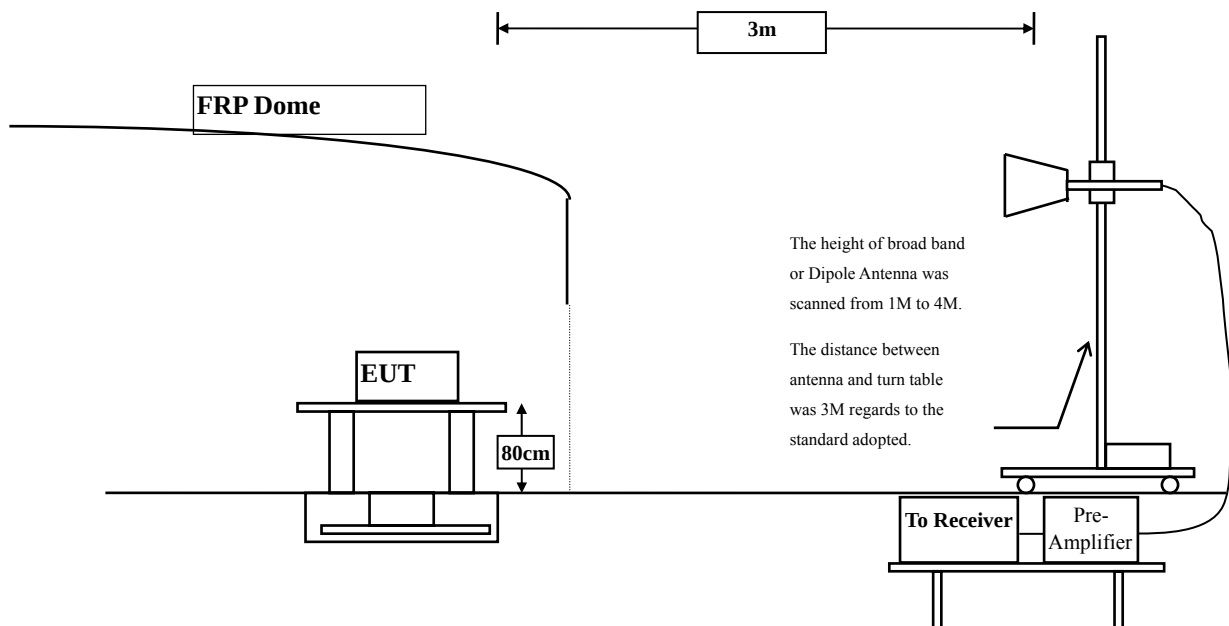

4.3. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209(a) Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remarks: E field strength (dBuV/m) = 20 log E field strength (uV/m)

4.4. Test Procedure

The EUT was setup according to ANSI C63.10, 2009 and tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level.

This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2009 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The worst radiated emission is measured in the Open Area Test Site on the Final Measurement.

The measurement frequency range from 9KHz - 10th Harmonic of fundamental was investigated.

4.5. Uncertainty

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

4.6. Test Result of Radiated Emission

Product : Afterglow Fener PS4/PS3 Wireless Dongle
Test Item : Harmonic Radiated Emission Data
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit (2403.35MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
4806.700	3.331	43.400	46.730	-27.270	74.000
7210.050	10.205	45.930	56.135	-17.865	74.000
9613.400	13.656	38.700	52.356	-21.644	74.000
Average					
Detector:					
7210.050	10.205	37.820	48.025	-5.975	54.000
Vertical					
Peak Detector:					
4806.700	6.623	46.700	53.322	-20.678	74.000
7210.050	11.071	43.320	54.391	-19.609	74.000
9613.400	14.063	37.460	51.523	-22.477	74.000
Average					
Detector:					
7210.050	11.071	34.430	45.501	-8.499	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Afterglow Fener PS4/PS3 Wireless Dongle
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2441.35MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
Peak Detector:					
4882.700	2.999	42.010	45.008	-28.992	74.000
7324.050	11.851	44.680	56.531	-17.469	74.000
9765.400	12.556	37.650	50.206	-23.794	74.000
Average					
Detector:					
7324.050	11.851	37.600	49.451	-4.549	54.000
Vertical					
Peak Detector:					
4882.700	5.706	43.200	48.905	-25.095	74.000
7324.050	12.736	43.370	56.107	-17.893	74.000
9765.400	13.019	38.270	51.289	-22.711	74.000
Average					
Detector:					
7324.050	12.736	33.120	45.857	-8.143	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Afterglow Fener PS4/PS3 Wireless Dongle
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2479.35MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

4958.700	2.764	39.930	42.694	-31.306	74.000
7438.050	12.548	38.480	51.028	-22.972	74.000
9917.400	13.441	38.430	51.872	-22.128	74.000

Average

Detector:

--

Vertical

Peak Detector:

4958.700	2.764	39.930	42.694	-31.306	74.000
7438.050	12.548	38.480	51.028	-22.972	74.000
9917.400	13.441	38.430	51.872	-22.128	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Afterglow Fener PS4/PS3 Wireless Dongle
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2441.35MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
130.880	-7.407	31.192	23.784	-19.716	43.500
251.160	-5.988	39.842	33.854	-12.146	46.000
348.160	-1.320	31.643	30.323	-15.677	46.000
437.400	0.819	26.357	27.176	-18.824	46.000
598.420	3.524	25.433	28.957	-17.043	46.000
825.400	7.346	23.861	31.207	-14.793	46.000
Vertical					
179.380	-0.824	24.358	23.534	-19.966	43.500
379.200	0.881	23.504	24.385	-21.615	46.000
522.760	1.116	22.492	23.608	-22.392	46.000
689.600	2.302	22.914	25.216	-20.784	46.000
807.940	3.361	22.844	26.205	-19.795	46.000
965.080	3.832	23.109	26.941	-27.059	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

5. RF antenna conducted test


5.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2014
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2014
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2014

- Note:
1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
 2. The test instruments marked with “X” are used to measure the final test results.

5.2. Test Setup

RF antenna Conducted Measurement:

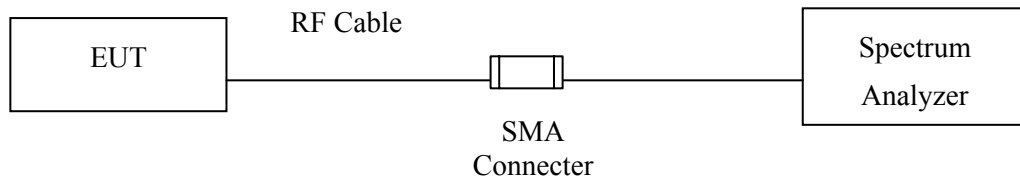

5.3. Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

5.4. Test Procedure

The EUT was tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 100 kHz, Set VBW > RBW, scan up through 10th harmonic.

5.5. Uncertainty


The measurement uncertainty

Conducted is defined as $\pm 1.27\text{dB}$

5.6. Test Result of RF antenna conducted test

Product : Afterglow Fener PS4/PS3 Wireless Dongle
 Test Item : RF antenna conducted test
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit


Channel 01 (2403.35MHz) 30M-25GHz

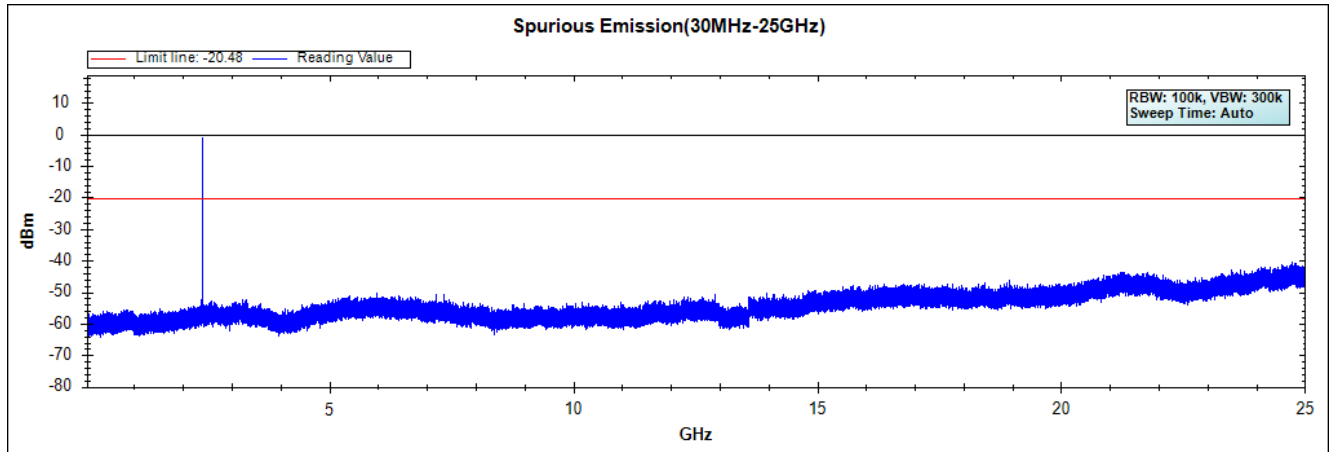

Note: The above test pattern is synthesized by multiple of the frequency range.

Product : Afterglow Fener PS4/PS3 Wireless Dongle
 Test Item : RF antenna conducted test
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit


Channel 20 (2441.35MHz) 30M-25GHz

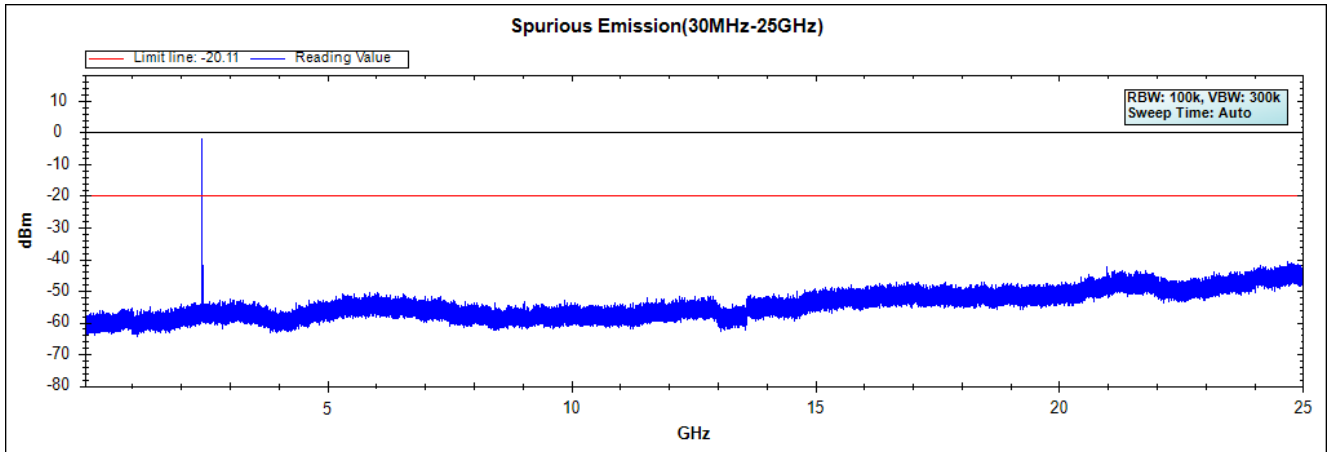

Note: The above test pattern is synthesized by multiple of the frequency range.

Product : Afterglow Fener PS4/PS3 Wireless Dongle
 Test Item : RF antenna conducted test
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit

Channel 39 (2479.35MHz) 30M-25GHz

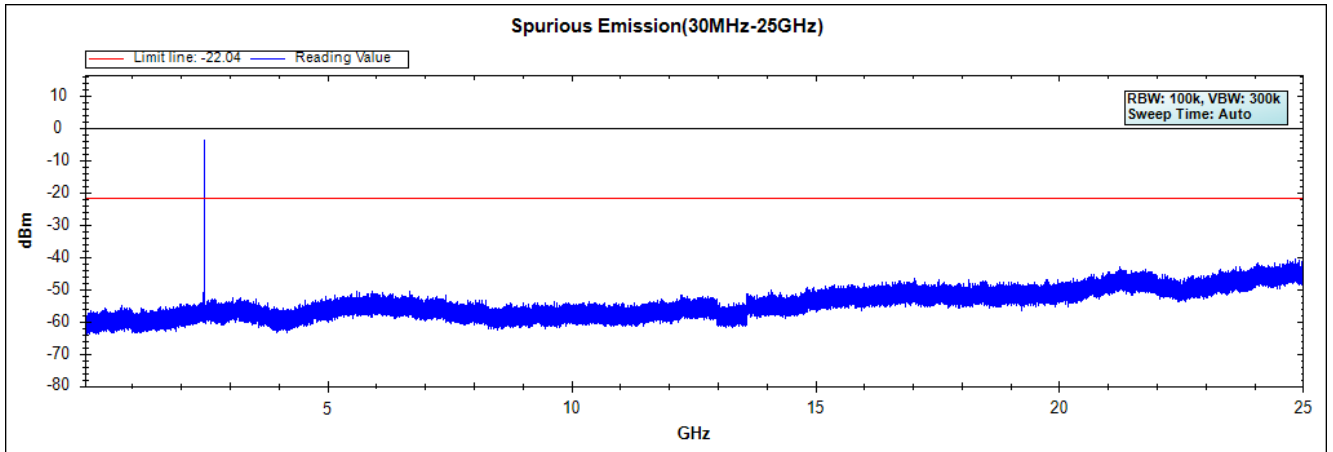

Note: The above test pattern is synthesized by multiple of the frequency range.

6. Band Edge

6.1. Test Equipment

RF Radiated Measurement:


The following test equipments are used during the band edge tests:

Test Site	Equipment		Manufacturer	Model No./Serial No.	Last Cal.
☒Site # 3		Bilog Antenna	Schaffner Chase	CBL6112B/2673	Sep., 2014
	X	Horn Antenna	Schwarzbeck	BBHA9120D/D305	Sep., 2014
		Horn Antenna	Schwarzbeck	BBHA9170/208	Jul., 2014
		Pre-Amplifier	QTK	QTK-AMP-03 / 0003	May, 2014
	X	Pre-Amplifier	QTK	AP-180C / CHM_0906076	Sep., 2014
		Pre-Amplifier	MITEQ	AMF-4D-180400-45-6P/ 925975	Mar, 2014
	X	Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2014
		Test Receiver	R & S	ESCS 30/ 825442/018	Sep., 2014
	X	Coaxial Cable	QuieTek	QTK-CABLE/ CAB5	Feb., 2014
	X	Controller	QuieTek	QTK-CONTROLLER/ CTRL3	N/A
	X	Coaxial Switch	Anritsu	MP59B/6200265729	N/A

- Note:
1. All instruments are calibrated every one year.
 2. The test instruments marked by “X” are used to measure the final test results.

6.2. Test Setup

RF Radiated Measurement:

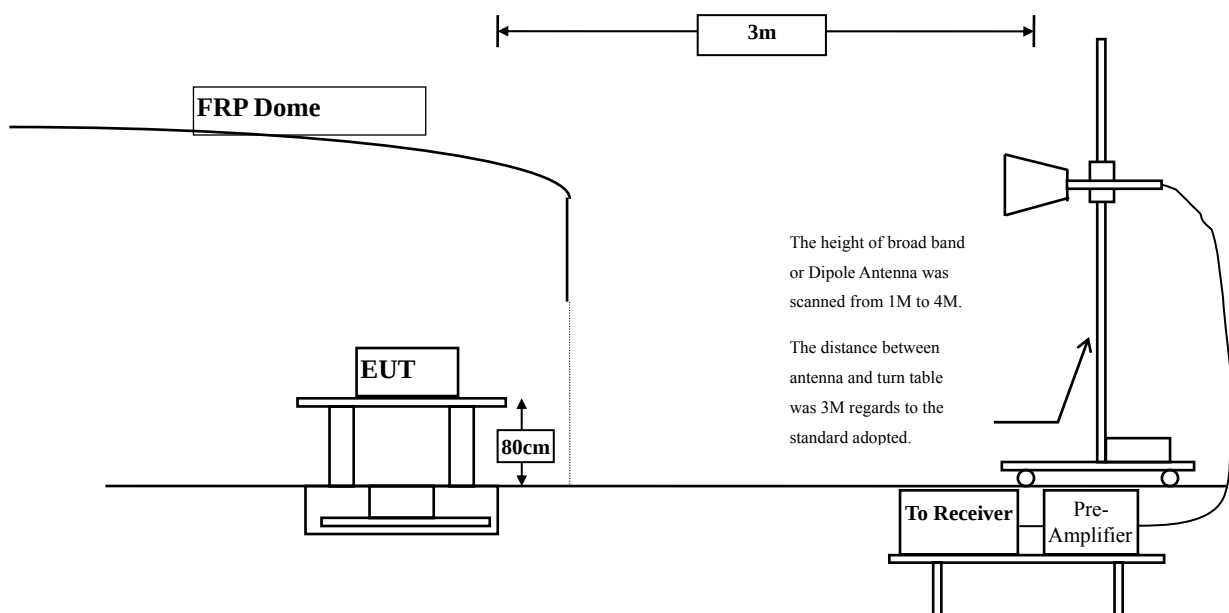

6.3. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

6.4. Test Procedure

The EUT was setup according to ANSI C63.10, 2009 and tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2009 on radiated measurement.

6.5. Uncertainty

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

6.6. Test Result of Band Edge

Product : Afterglow Fener PS4/PS3 Wireless Dongle
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit-

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2390.000	-1.131	50.919	49.788	74.00	54.00	Pass
01 (Peak)	2400.000	-1.084	71.083	70.000	--	--	--
01 (Peak)	2403.600	-1.064	100.797	99.733	--	--	--
01 (Average)	2390.000	-1.131	35.069	33.938	74.00	54.00	Pass
01 (Average)	2400.000	-1.084	61.395	60.312	--	--	--
01 (Average)	2403.400	-1.065	97.542	96.477	--	--	--

Figure Channel 01: Horizontal (Peak)


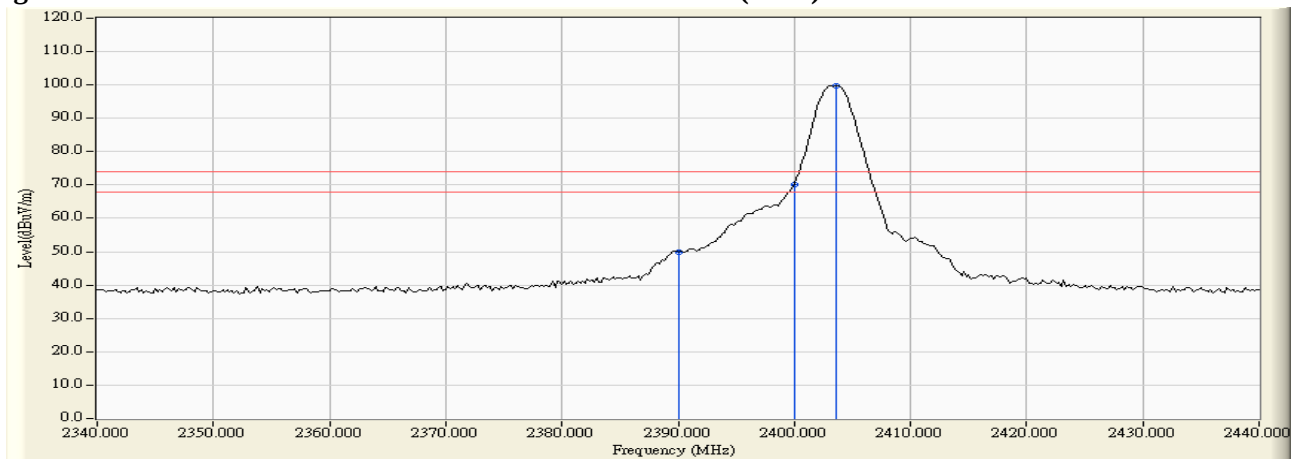


Figure Channel 01: Horizontal (Average)

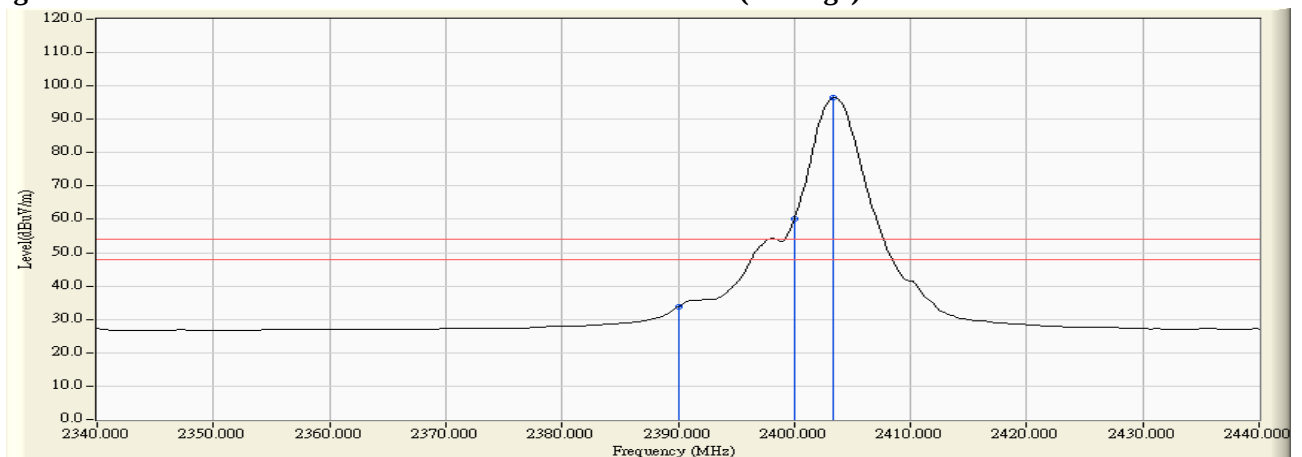

- Note: 1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
 2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
 3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
 4. “ * ”, means this data is the worst emission level.
 5. Measurement Level = Reading Level + Correct Factor.
 6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Afterglow Fener PS4/PS3 Wireless Dongle
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit-

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2390.000	-1.725	48.712	46.987	74.00	54.00	Pass
01 (Peak)	2400.000	-1.733	66.865	65.133	--	--	--
01 (Peak)	2403.800	-1.725	96.686	94.961	--	--	--
01 (Average)	2390.000	-1.725	32.588	30.863	74.00	54.00	Pass
01 (Average)	2400.000	-1.733	57.475	55.743	--	--	--
01 (Average)	2403.400	-1.726	93.522	91.796	--	--	--

Figure Channel 01: Vertical (Peak)


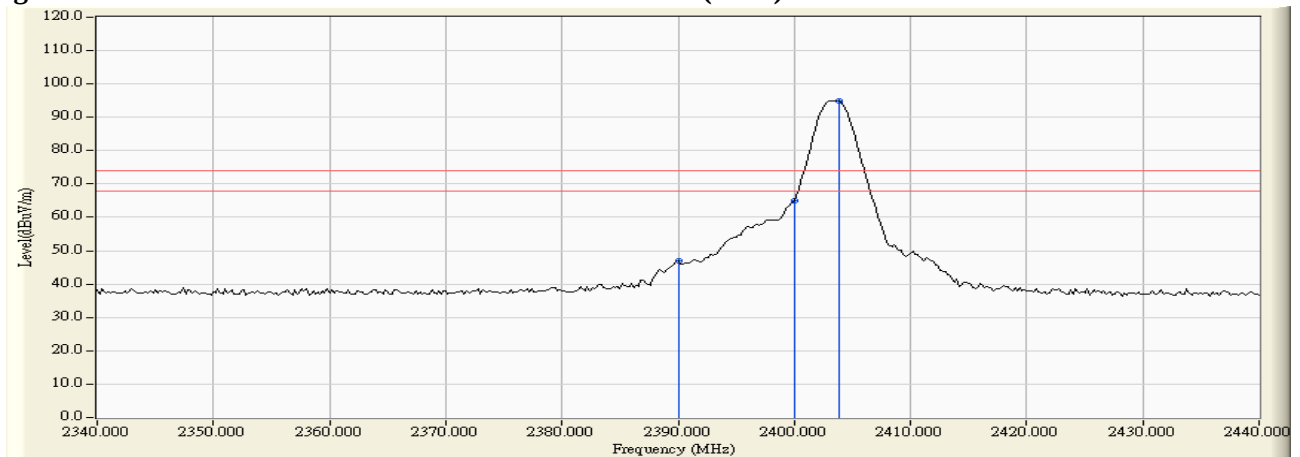


Figure Channel 01: Vertical (Average)

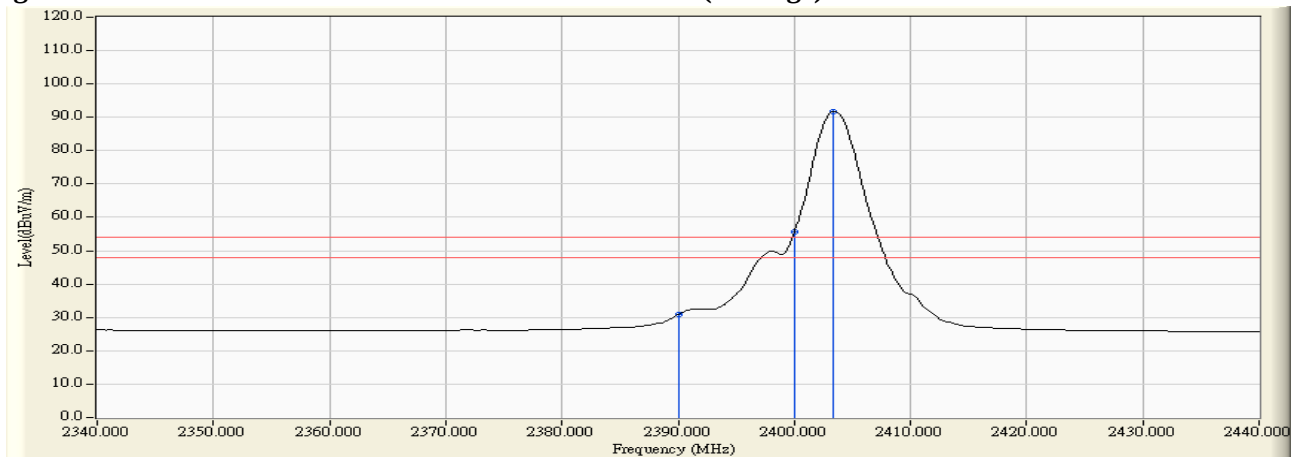

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Afterglow Fener PS4/PS3 Wireless Dongle
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit-

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
39 (Peak)	2479.300	-0.585	97.657	97.072	--	--	--
39 (Peak)	2483.500	-0.558	60.272	59.714	74.00	54.00	Pass
39 (Average)	2479.500	-0.584	94.438	93.854	--	--	--
39 (Average)	2483.500	-0.558	53.322	52.764	74.00	54.00	Pass

Figure Channel 38: Horizontal (Peak)


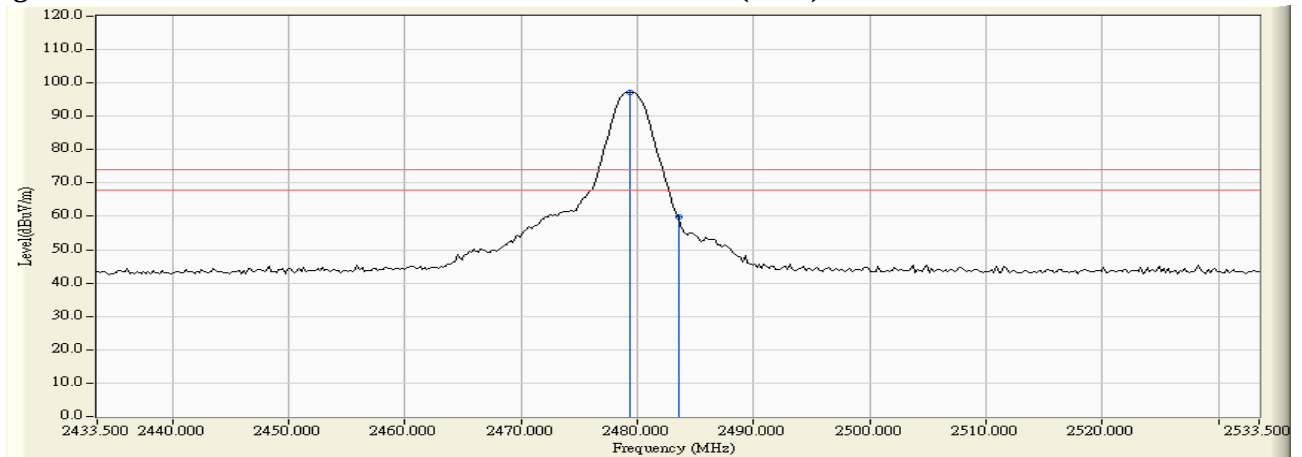


Figure Channel 38: Horizontal (Average)

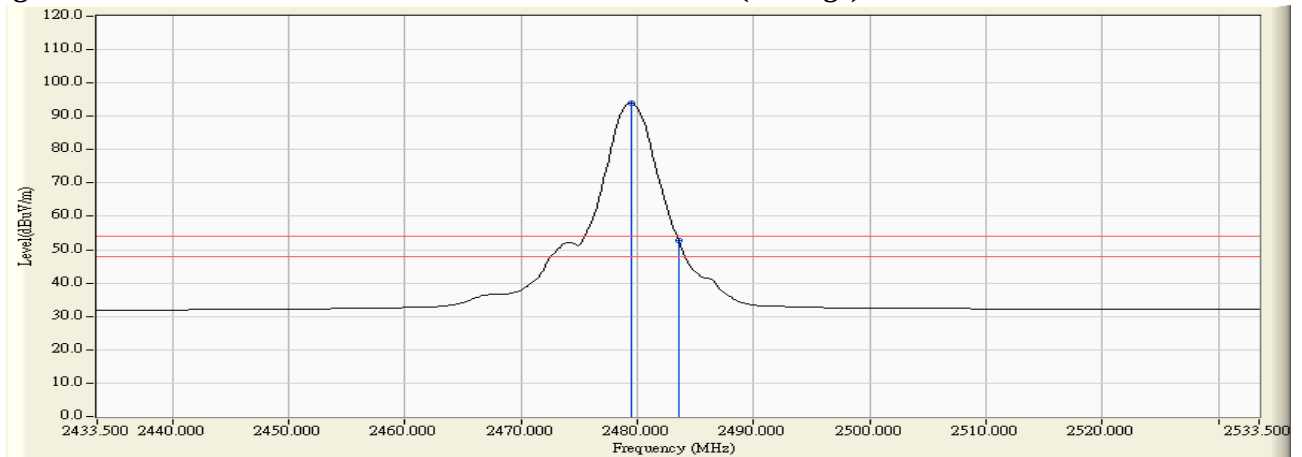

- Note: 1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
 2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
 3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
 4. “ * ”, means this data is the worst emission level.
 5. Measurement Level = Reading Level + Correct Factor.
 6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Afterglow Fener PS4/PS3 Wireless Dongle
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit-

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
39 (Peak)	2479.700	-1.325	93.149	91.823	--	--	--
39 (Peak)	2483.500	-1.305	55.664	54.359	74.00	54.00	Pass
39 (Average)	2479.300	-1.328	90.008	88.680	--	--	--
39 (Average)	2483.500	-1.305	49.030	47.725	74.00	54.00	Pass

Figure Channel 38: Vertical (Peak)


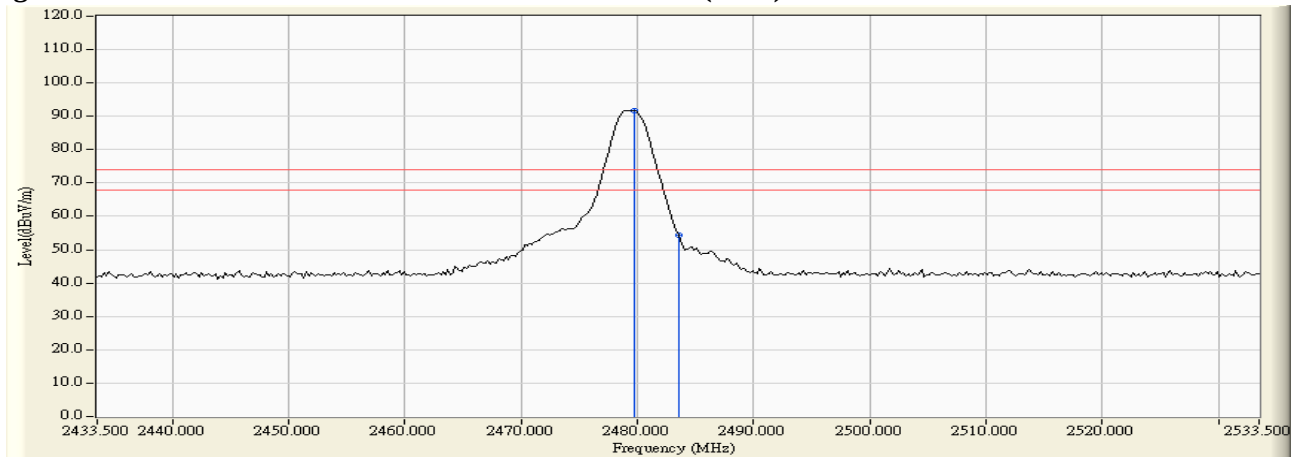


Figure Channel 38: Vertical (Average)

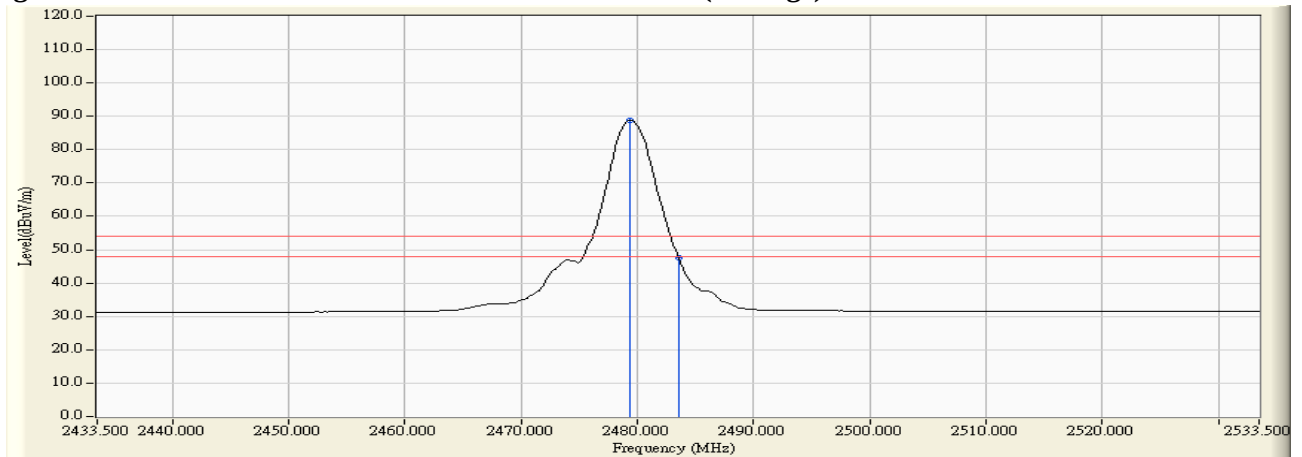

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


7. Occupied Bandwidth

7.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2014
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2014
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2014

Note: 1. All instruments are calibrated every one year.
2. The test instruments marked by "X" are used to measure the final test results.

7.2. Test Setup

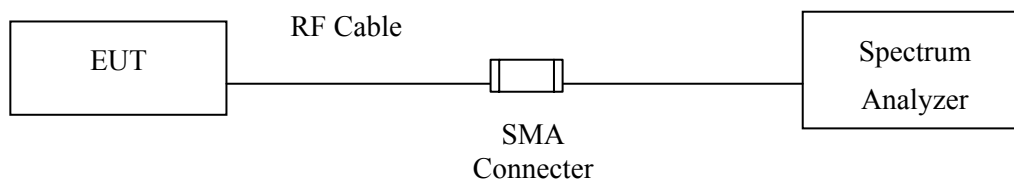

7.3. Limits

The minimum bandwidth shall be at least 500 kHz.

7.4. Test Procedure

The EUT was setup according to ANSI C63.10, 2009; tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 1-5% of the emission bandwidth, $VBW \geq 3 \cdot RBW$

7.5. Uncertainty


$\pm 150\text{Hz}$

7.6. Test Result of Occupied Bandwidth

Product : Afterglow Fener PS4/PS3 Wireless Dongle
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2403.35MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
01	2403.35	1690	>500	Pass


Figure Channel 01:

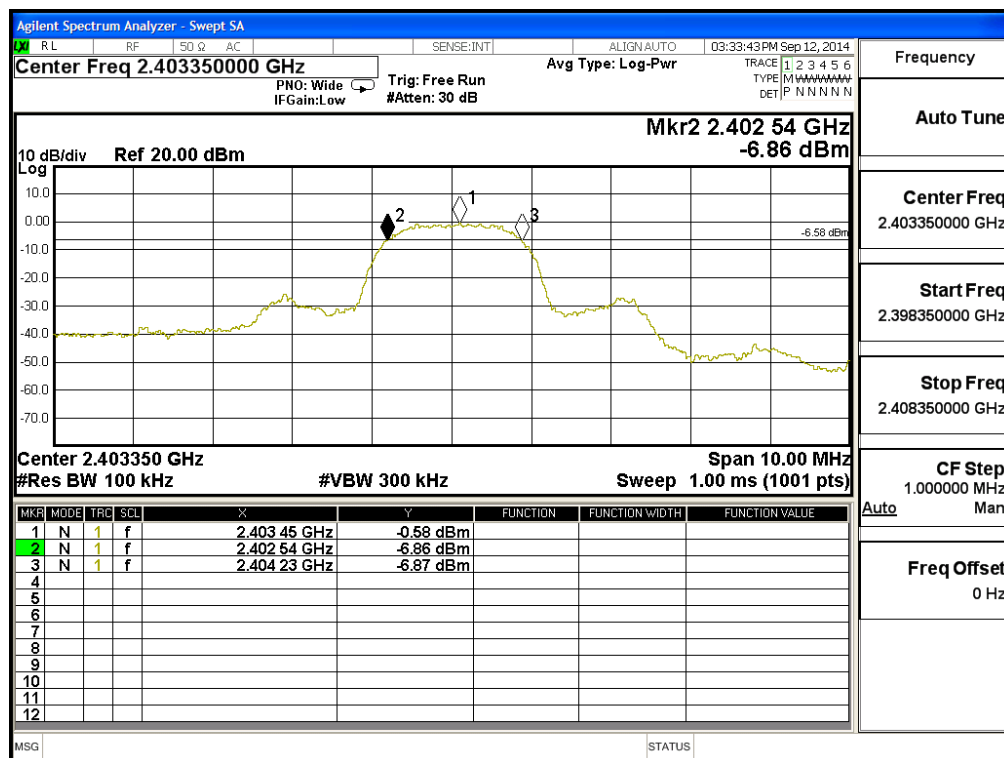

Product : Afterglow Fener PS4/PS3 Wireless Dongle
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2441.35MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
20	2441.35	1630	>500	Pass


Figure Channel 20:

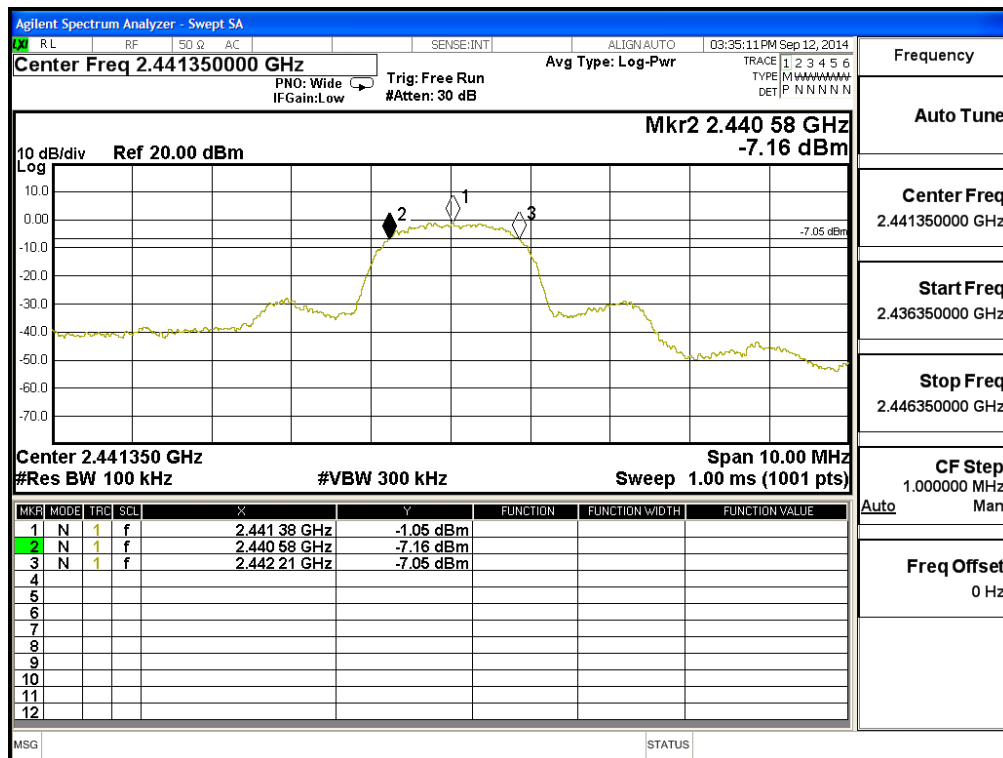

Product : Afterglow Fener PS4/PS3 Wireless Dongle
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2479.35MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
39	2479.35	1670	>500	Pass

Figure Channel 39:

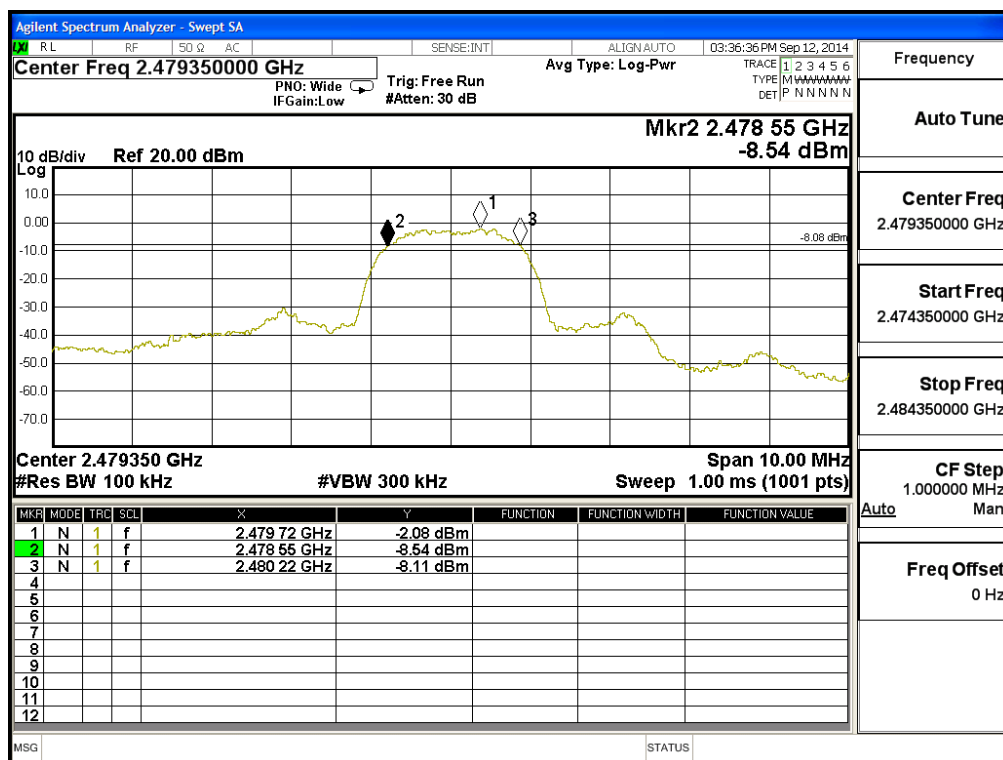

8. Power Density


8.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2014
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2014
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2014

Note: 1. All equipments are calibrated every one year.

1. The test instruments marked by “X” are used to measure the final test results.

8.2. Test Setup

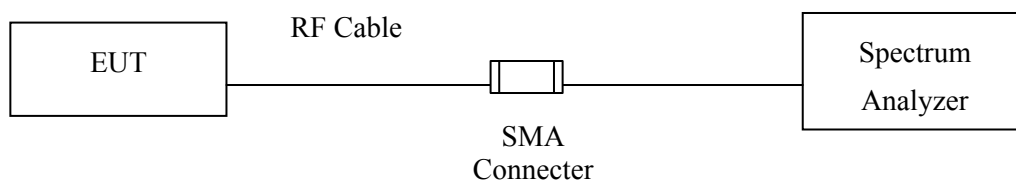

8.3. Limits

The transmitted power density averaged over any 1 second interval shall not be greater +8dBm in any 3kHz bandwidth.

8.4. Test Procedure

The EUT was setup according to ANSI C63.10, 2009; tested according to DTS test procedure of KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

The maximum power spectral density using KDB 558074 section 10.2 PKPSD (peak PSD) method.

8.5. Uncertainty


± 1.27 dB

8.6. Test Result of Power Density

Product : Afterglow Fener PS4/PS3 Wireless Dongle
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit(2403.35MHz)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
01	2403.35	-0.48	< 8dBm	Pass


Figure Channel 01:

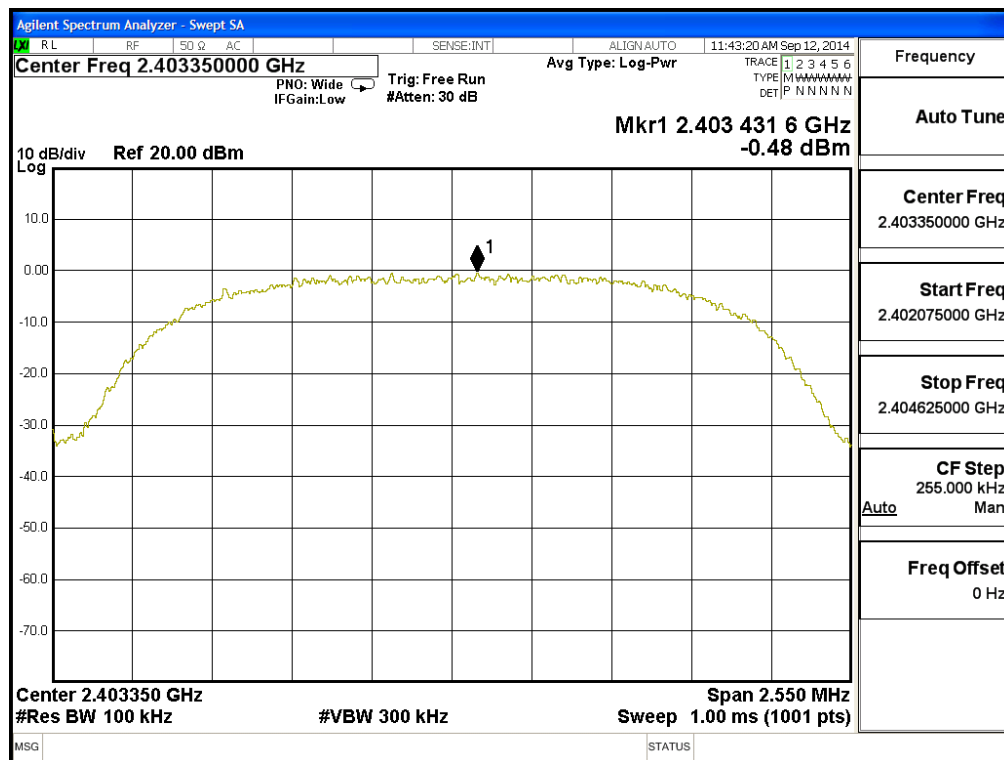

Product : Afterglow Fener PS4/PS3 Wireless Dongle
 Test Item : Power Density Data
 Test Site : No.3OATS
 Test Mode : Mode 1: Transmit (2441.35MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
20	2441.35	-0.11	< 8dBm	Pass


Figure Channel 20:

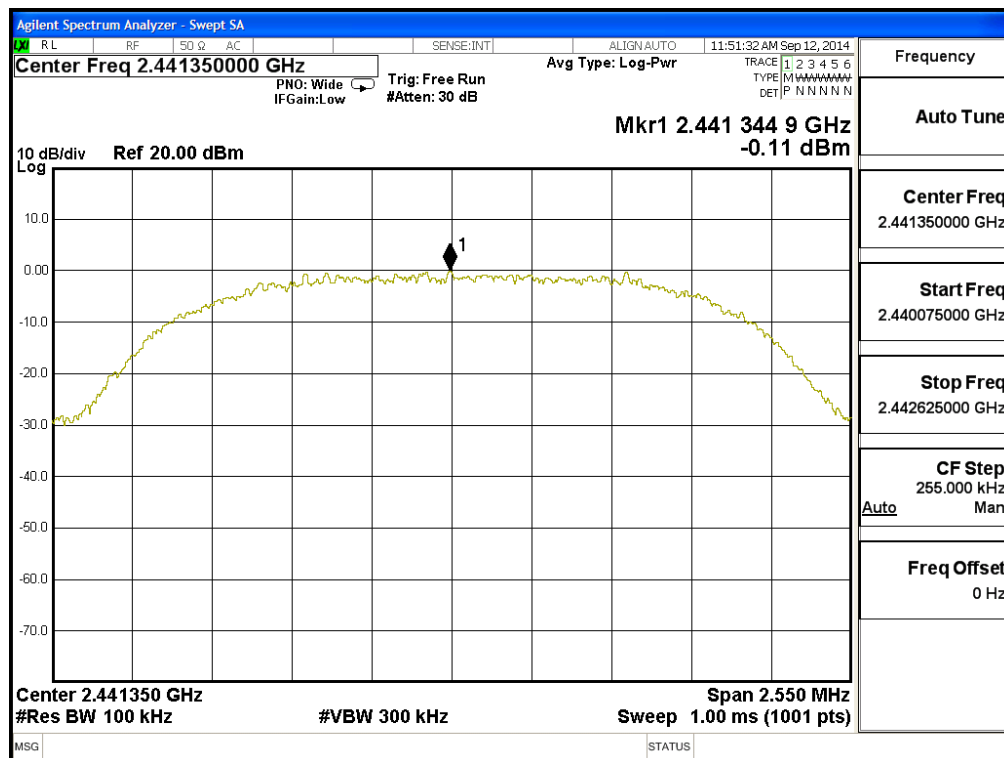

Product : Afterglow Fener PS4/PS3 Wireless Dongle
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2479.35MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
39	2479.35	-2.04	< 8dBm	Pass

Figure Channel 39:

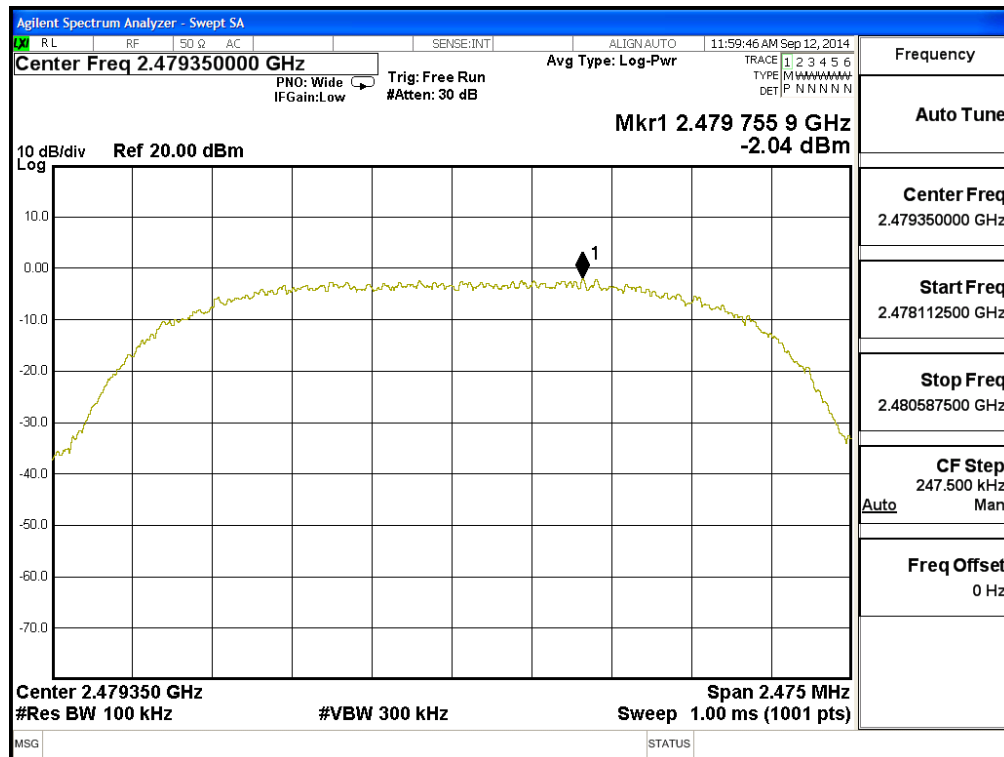

9. EMI Reduction Method During Compliance Testing

No modification was made during testing.

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs