



**Test Graphs of Number of Hopping Frequency** Avg Type: Log-Pwr Avg|Hold:>100/100 Frequency Trig: Free Run #Atten: 40 dB PNO: Fast IFGain:Low **Auto Tune** Mkr1 2.478 15 GHz 5.131 dBm Ref 30.00 dBm Center Freq 2.441750000 GHz Start Freq 2.400000000 GHz Stop Freq 2.483500000 GHz **CF Step** 8.350000 MHz <u>Auto</u> Man Freq Offset Scale Type Center 2.44175 GHz #Res BW 200 kHz Span 83.50 MHz Sweep 1.998 ms (1000 pts) Log **#VBW** 620 kHz Test\_Graph\_BR\_HOP\_ANT1\_NA\_1Mbps\_Number of Hopping

Note: All mode rates are tested and evaluated, GFSK modulated DH5 mode is the worst case and documented in the report



Report No.: AGC14499240502FR01 Page 71 of 83

# 11. Time of Occupancy (Dwell Time) Measurement

## 11.1 Provisions Applicable


The maximum permissible time of occupancy is 400ms within a period of 400ms multiplied by the number of hopping channels employed.

#### 11.2 Measurement Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:


- 1. Span = Zero span, centered on a hopping channel.
- 2. RBW shall be ≤ channel spacing and where possible RBW should be set >> 1 / T, where T is the expected dwell time per channel.
- 3. VBW ≥ RBW
- 4. Sweep time = As necessary to capture the entire dwell time per hopping channel
- 5. Detector = Peak
- 6. Trace mode = Free Run
- 7. Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time. An oscilloscope may be used instead of a spectrum analyzer. The EUT shall show compliance with the appropriate regulatory limit for the number of hopping channels. A plot of the data shall be included in the test report.

## 11.3 Measurement Setup (Block Diagram of Configuration)

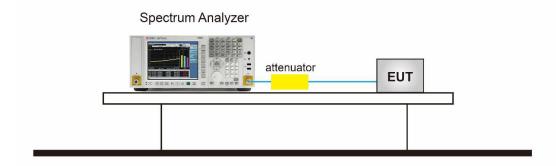


#### 11.4 Measurement Result


Test Data of Dwell Time									
Channel	Time of Pulse for DH5 (ms)	Number of hops in the period specified in the requirements	Dwell Time (ms)	Limit (ms)	Pass or Fail				
2402	2.885	24.0*4	276.960	400	Pass				
2441	2.885	29.0*4	334.660	400	Pass				
2480	2.884	34.0*4	392.224	400	Pass				






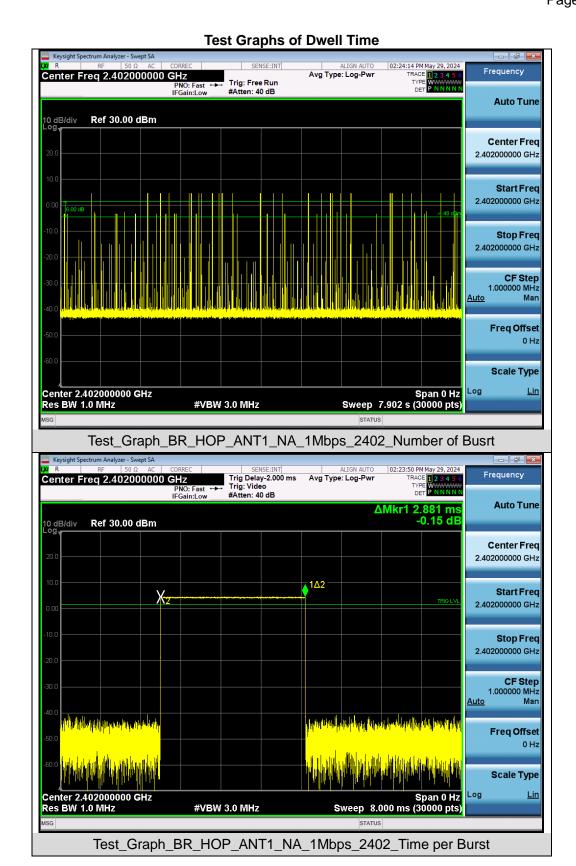



Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/






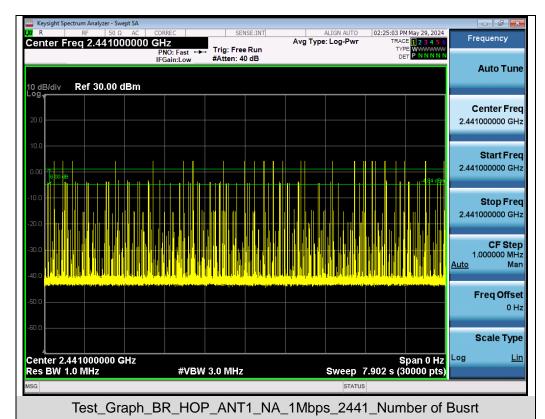

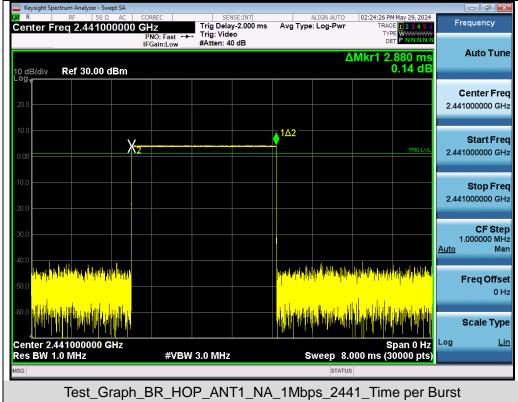





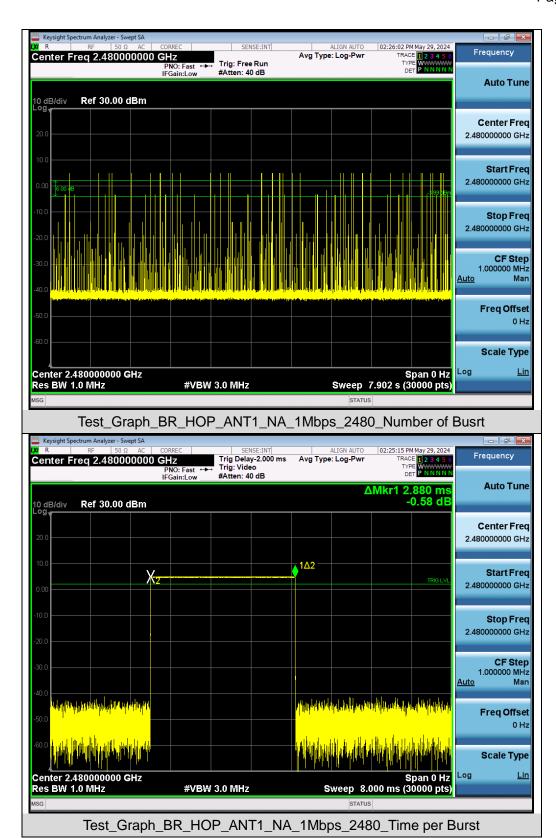

Note: All mode rates are tested and evaluated, GFSK modulated DH5 mode is the worst case and documented in the report.



Report No.: AGC14499240502FR01 Page 75 of 83

12. Frequency Separation Measurement

## 12.1 Provisions Applicable

When the power is less than 0.125W: The minimum permissible channel separation for this system is 2/3 the value of the 20dB BW.


When the power is less than 1W: The minimum permissible channel separation for this system is 20dB BW.

#### 12.2 Measurement Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:


- 1. Span: Wide enough to capture the peaks of two adjacent channels.
- 2. RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- 3. Video (or average) bandwidth (VBW) ≥ RBW.
- 4. Sweep: Auto.
- 5. Detector function: Peak.
- 6. Trace: Max hold. g) Allow the trace to stabilize.
- 7. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

## 12.3 Measurement Setup (Block Diagram of Configuration)

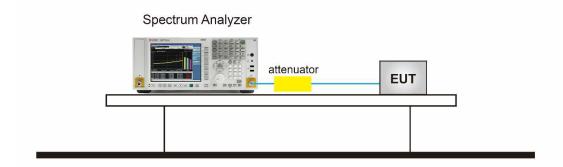


#### 12.4 Measurement Result

Test Data of Frequency Separation								
Test Mode	Channel Separation (MHz)	Limits (MHz)	Pass or Fail					
GFSK	1.041	0.69	Pass					





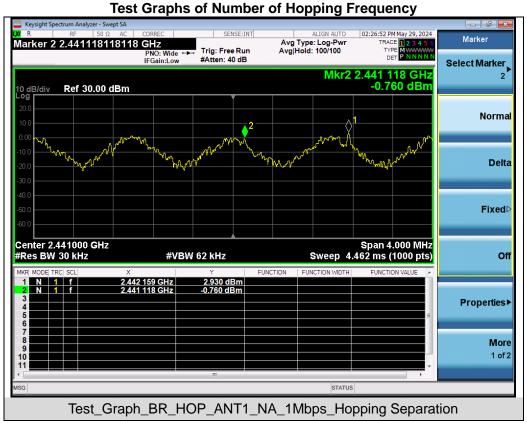

Note: All mode rates are tested and evaluated, GFSK modulated DH5 mode is the worst case and documented in the report.



Report No.: AGC14499240502FR01 Page 77 of 83

## 13. AC Power Line Conducted Emission Test


### 13.1 Measurement Limit

F	Maximum RF Line Voltage				
Frequency	Q.P. (dBμV)	Average (dBμV)			
150kHz~500kHz	66-56	56-46			
500kHz~5MHz	56	46			
5MHz~30MHz	60	50			

## Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

## 13.2 Measurement Setup (Block Diagram of Configuration)

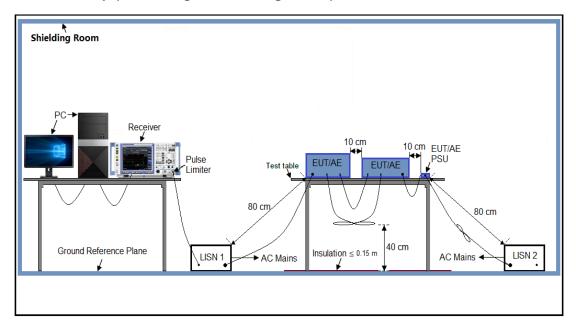



Report No.: AGC14499240502FR01

Page 78 of 83

## 13.3 Preliminary Procedure of Line Conducted Emission Test

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

#### 13.4 Final Procedure of Line Conducted Emission Test

- EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- The test data of the worst case condition(s) was reported on the Summary Data page.

#### 13.5 Measurement Results



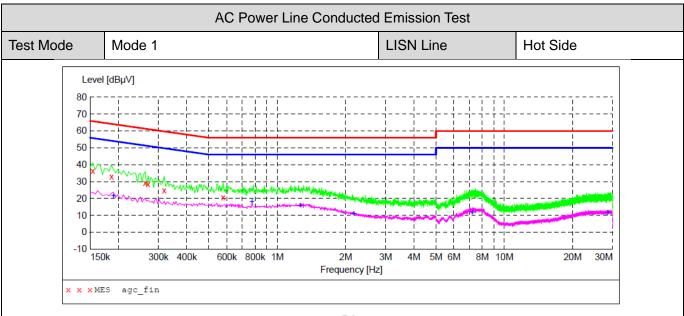


# MEASUREMENT RESULT: "agc\_fin"


2024/6/3 1	5:31					
Frequenc MH	_	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.15400	36.30	6.1	66	29.5	QP	L1
0.18600	00 33.10	6.1	64	31.1	QP	L1
0.26200	00 29.20	6.1	61	32.2	QP	L1
0.27000	00 28.60	6.1	61	32.5	QP	L1
0.31800	00 24.80	6.1	60	35.0	QP	L1
0.57800	0 20.60	6.2	56	35.4	OP	L1


# MEASUREMENT RESULT: "agc fin2"

2024/6/3 15:3	1					
Frequency	Level	Transd	Limit	Margin	Detector	Line
MHz	dΒμV	dB	dΒμV	dB		
0.190000	21.50	6.1	54	32.5	AV	L1
0.774000	18.20	6.2	46	27.8	AV	L1
1.262000	15.90	6.2	46	30.1	AV	L1
2.174000	10.90	6.3	46	35.1	AV	L1
7.254000	11.60	6.5	50	38.4	AV	L1
28.486000	11.50	8.2	50	38.5	AV	L1





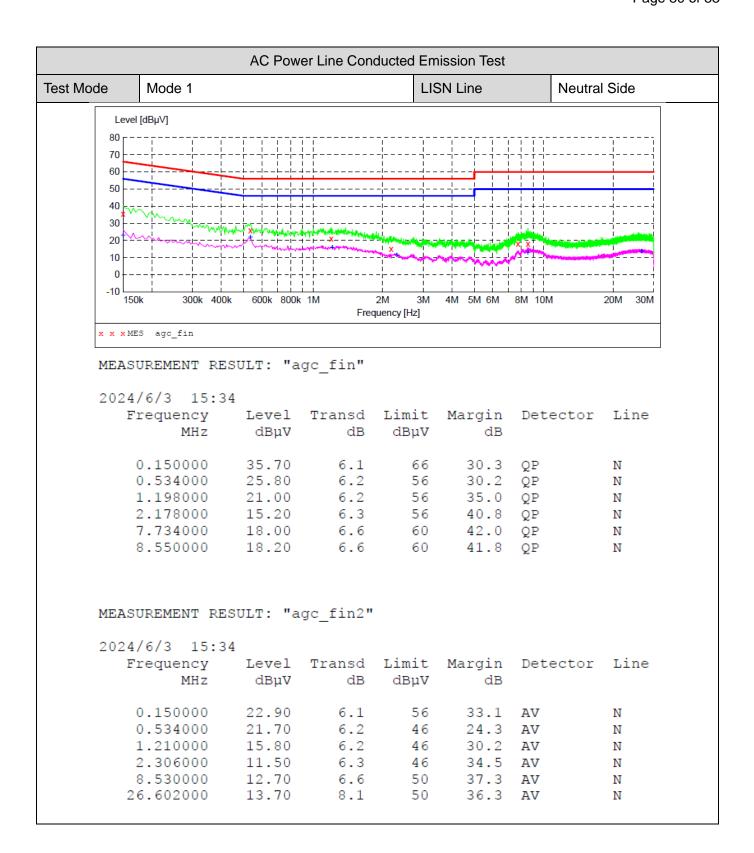





		AC Pow	er Line Con	ducted E	mission Test			
st Mode	Mode 1			L	ISN Line	Hot Si	Hot Side	
Leve	el [dBµV]							
80								
70			i !!		·iiii			
60 50			+ 			1 1 1		
40	X		T     	-	_			
30		i i i i i	i i 					
20	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~		atel alleannesse des grapes	MARINER	a salagaja sejesi	adrikelande ane.	i	
10			I _ L			A CONTRACTOR	الوسو <i>ن حوالة إ</i> كالله الوسون عوالة الم	
0			  -	-  -			AT THE STATE OF TH	
-10 L	0k 300k 400k	600k 800k	1M	2M 3M	4M 5M 6M	8M 10M	20M 30M	
			Freq	uency [Hz]				
x x x M	ES agc_fin							
MEA	SUREMENT	RESILT	: "agc	fin"				
11111		1415011	. age_					
	/6/3 16:38							
F	requency				_	Detector	Line	
	MHz	dBµ∇	dB	dΒμV	dB			
	0.150000	39.40	6.1	66	26.6	QP	L1	
	0.182000	36.80	6.1	64			L1	
	0.194000	46.60	6.1	64			L1	
	0.202000	45.50	6.1	64	18.0	QP	L1	
	0.242000	32.50	6.1	62	29.5	QP	L1	
	0.266000	30.90	6.1	61	30.3	QP	L1	
MEA.	SUREMENT	RESULT	: "agc	fin2"				
			_					
2024	/6/2 16.20	0						
	/6/3 16:38		Transd	T.imi+	Margin	Detector	Line	
	requency	Level			_	Detector	Line	
			Transd dB	Limit dBµV	_	Detector	Line	
F	requency	Level			dB	Detector AV	Line	
F	requency MHz	Level dBµV	dB	dΒμV	dB 32.7	AV		
F	0.310000 0.778000 1.122000	Level dBµV	dB 6.1 6.2 6.2	dBμV 50	dB 32.7 27.3	AV AV	L1	
F	nequency MHz 0.310000 0.778000	Level dBµV 17.30 18.70	dB 6.1 6.2	dΒμV 50 46	dB 32.7 27.3 30.5	AV AV	L1 L1	

6.7

7.1

50

50

43.7

46.1

ΑV

ΑV

L1


L1

6.30


3.90

11.530000

20.230000





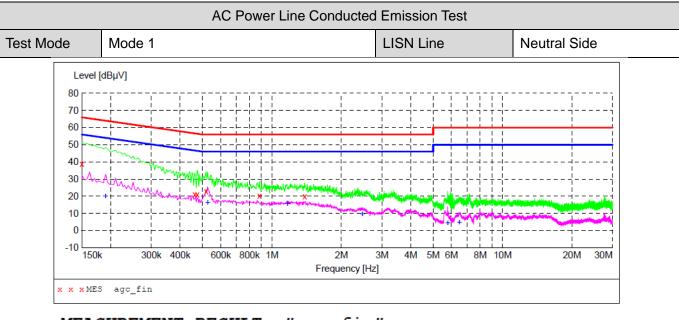

## MEASUREMENT RESULT: "agc fin"

20	024/6/3 16:53	3					
	Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
	0.150000	38.80	6.1	66	27.2	QP	N
	0.462000	21.00	6.1	57	35.7	QP	N
	0.474000	21.20	6.1	56	35.2	QP	N
	0.518000	22.80	6.2	56	33.2	QP	N
	0.882000	20.30	6.2	56	35.7	QP	N
	1.386000	20.00	6.2	56	36.0	QP	N

# MEASUREMENT RESULT: "agc fin2"

2024/6/3 16:53						
Frequency	Level	Transd	Limit	Margin	Detector	Line
MHz	dΒμV	dB	dΒμV	dB		
0.190000	20.00	6.1	54	34.0	AV	N
0.526000	16.40	6.2	46	29.6	AV	N
1.166000	15.50	6.2	46	30.5	AV	N
2.462000	9.70	6.3	46	36.3	AV	N
5.782000	4.40	6.4	50	45.6	AV	N
6.494000	4.80	6.5	50	45.2	AV	N



Report No.: AGC14499240502FR01

Page 83 of 83

**Appendix I: Photographs of Test Setup** 

Refer to the Report No.: AGC14499240502AP02

**Appendix II: Photographs of Test EUT** 

Refer to the Report No.: AGC14499240502AP03

----End of Report----



## Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.