
TEST REPORT FOR BLUETOOTH TESTING

Report No.:SRTC2021-9004(F)-21071903(D)

Product Name: ZTE True Wireless In-Ear Headphone

Product Model: EB64G

Applicant: ZTE Corporation

Manufacturer: ZTE Corporation

Specification: FCC Part 15 Subpart C (2020)

FCC ID:SRQ-EB64G

The State Radio_monitoring_center Testing Center (SRTC)

15th Building, No.30Shixing Street, Shijingshan District,

Beijing, P.R.China

Tel: 86-10-57996183 Fax: 86-10-57996388

CONTENTS

1. GENERAL INFORMATION	2
1.1 NOTES OF THE TEST REPORT	2
1.2 INFORMATION ABOUT THE TESTING LABORATORY	2
1.3 APPLICANT'S DETAILS	2
1.4 MANUFACTURER'S DETAILS	2
1.5 TEST ENVIRONMENT	2
2 DESCRIPTION OF THE DEVICE UNDER TEST	4
2.1 FINAL EQUIPMENT BUILD STATUS	4
2.2 DESCRIPTION OF TEST MODES	5
2.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	5
2.3 DUTY CYCLE OF TEST SIGNAL	7
2.4 EUT OPERATING CONDITIONS	7
2.5 SUPPORT EQUIPMENT	7
3 REFERENCE SPECIFICATION	8
4 KEY TO NOTES AND RESULT CODES	8
5 RESULT SUMMARY	9
6 TEST RESULT	10
6.1 20dB BANDWIDTH	10
6.2 CHANNEL SEPARATION	11
6.3 PEAK TRANSMITTER OUTPUT POWER	12
6.4 DWELL TIME	13
6.5 NUMBER OF HOPPING FREQUENCIES	14
6.6 CONDUCTED OUT OF BAND EMISSION MEASUREMENT	15
6.7 BAND-EDGE MEASUREMENT	16
6.8 SPURIOUS RADIATED EMISSIONS	17
6.9 AC POWER LINE CONDUCTED EMISSION	22
7 MEASUREMENT UNCERTAINTIES	24
8 TEST EQUIPMENTS	25
APPENDIX A – TEST DATA OF CONDUCTED EMISSION	26
APPENDIX B – TEST DATA OF RADIATED EMISSION	45

1. GENERAL INFORMATION

1.1 Notes of the test report

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio_monitoring_center Testing Center (SRTC). The test results relate only to individual items of the samples which have been tested. The certification and accreditation identifiers used in this report shall not be applicable to the tested or calibrated samples thereof. The manufacturer shall not mark the tested samples or items (or a separate part of the item) with the identifiers of certification and accreditation to mislead relevant parties about the tested samples or items.

1.2 Information about the testing laboratory

Company:	The State Radio_monitoring_center Testing Center (SRTC)
Address:	15th Building, No.30 Shixing Street, Shijingshan District, P.R.China
City:	Beijing
Country or Region:	P.R.China
Contacted person:	Liu Jia
Tel:	+86 10 57996183
Fax:	+86 10 57996388
Email:	liujiaf@srtc.org.cn
Registration number	239125

1.3 Applicant's details

Company:	ZTE Corporation
Address:	ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong Province 518057, P. R. China
City:	Shenzhen
Country or Region:	China
Contacted person:	Wenge Wang
Tel:	86-15999501007
Email:	wang.wenge@zte.com.cn

1.4 Manufacturer's details

Company:	ZTE Corporation
Address:	ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong Province 518057, P. R. China
City:	Shenzhen
Country or Region:	China
Contacted person:	Wenge Wang
Tel:	86-15999501007
Email:	wang.wenge@zte.com.cn

1.5 Test Environment

Date of Receipt of test sample at SRTC:	2021-07-19
Testing Start Date:	2021-07-27
Testing End Date:	2021-08-05

Environmental Data:	Temperature (°C)	Humidity (%)
Ambient	25	40

Normal Supply Voltage (V d.c.):	3.8
---------------------------------	-----

2 DESCRIPTION OF THE DEVICE UNDER TEST

2.1 Final Equipment Build Status

Frequency Range	2.402GHz~2.480GHz
Number of Channel	79
Modulation Type	GFSK, π /4DQPSK, 8DPSK
Duplex Mode	TDD
Channel Spacing	1MHz
Data Rate	1Mbps, 2 Mbps, 3 Mbps
Power Supply	Battery
Hardware Version	V2
Software Version	1.0.1.0
IMEI or Sample	#1
Antenna type	Refer to Note1
Antenna connector	Refer to Note1

Antenna requirement (FCC part 15.203)

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

- The antenna(s) of the EUT are permanently attached.
- There are no provisions for connection to an external antenna.

Note1: The antenna provide to the EUT, please refer to the following table:

Brand	Model	Antenna gain	Frequency range(GHz)	Antenna type	Connector Type
N/A	N/A	0.5dBi	2.402GHz~2.480GHz	Ceramic antenna	N/A
Manufacturers ensure that their designs will not be modified by the user or third parties arbitrary antenna parameters and performance. The EUT complies with the requirement of §15.203.					

2.2 Description of Test Modes

79 channels are provided to this EUT:

CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
0	2402	16	2418	32	2434	48	2450	64	2466
1	2403	17	2419	33	2435	49	2451	65	2467
2	2404	18	2420	34	2436	50	2452	66	2468
3	2405	19	2421	35	2437	51	2453	67	2469
4	2406	20	2422	36	2438	52	2454	68	2470
5	2407	21	2423	37	2439	53	2455	69	2471
6	2408	22	2424	38	2440	54	2456	70	2472
7	2409	23	2425	39	2441	55	2457	71	2473
8	2410	24	2426	40	2442	56	2458	72	2474
9	2411	25	2427	41	2443	57	2459	73	2475
10	2412	26	2428	42	2444	58	2460	74	2476
11	2413	27	2429	43	2445	59	2461	75	2477
12	2414	28	2430	44	2446	60	2462	76	2478
13	2415	29	2431	45	2447	61	2463	77	2479
14	2416	30	2432	46	2448	62	2464	78	2480
15	2417	31	2433	47	2449	63	2465		

2.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE $\geq$ 1G	RE<1G	PLC	APCM	-
GFSK, $\pi/4$ DQPSK, 8DPSK	√	√	√	√	-

Where

RE $\geq$ 1G: Radiated Emission above 1GHz

RE<1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

Radiated Emission Test (Above 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 78	39	GFSK, $\pi/4$ DQPSK, 8DPSK	1Mbps, 2 Mbps, 3 Mbps

Radiated Emission Test (Below 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 78	39	GFSK, $\pi/4$ DQPSK, 8DPSK	1Mbps, 2 Mbps, 3 Mbps

Power Line Conducted Emission Test:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 78	39	GFSK, $\pi/4$ DQPSK, 8DPSK	1Mbps, 2 Mbps, 3 Mbps

Antenna Port Conducted Measurement:

This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 78	0, 39, 78	GFSK, $\pi/4$ DQPSK, 8DPSK	1Mbps, 2 Mbps, 3 Mbps

2.3 Duty Cycle of Test Signal

Modulation Type	Duty Cycle	Correction factor(dB)
GFSK(DH5)	97.00%	0.15
$\pi/4$ DQPSK(DH5)	97.00%	0.15
8DPSK(DH5)	97.00%	0.15

2.4 EUT operating conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

2.5 Support Equipment

The following support equipment was used to exercise the DUT during testing:

Equipment:	Battery1
Manufacturer:	JUHEYUAN SCIENCE & TECHNOLOGY CO., LTD.
Model Number:	JHY1054
Equipment:	Battery 2
Manufacturer:	JUHEYUAN SCIENCE & TECHNOLOGY CO., LTD.
Model Number:	JHY902030

3 REFERENCE SPECIFICATION

Specification	Version	Title
FCC part15 Subpart C	2020	Intentional radiators
ANSI C63.10	2013	Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074D01 V05R02r02	April 2, 2019	Guidance for compliance measurements on Digitaltransmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules



4 KEY TO NOTES AND RESULT CODES

Code	Meaning
PASS	Test result shows that the requirements of the relevant specification have been met.
FAIL	Test result shows that the requirements of the relevant specification have not been met.
N/T	Test case is not tested.

5 RESULT SUMMARY

No.	Test case	Reference	Verdict
1	20dB Bandwidth	15.247(a)(1)(iii)	Pass
2	Channel Separation	15.247(a)(1)	Pass
3	Peak Transmitter Output Power	15.247(b)(1)	Pass
4	Dwell Time	15.247(a)(1)(iii)	Pass
5	Number of Hopping Frequencies	15.247(a)(1)(iii)	Pass
6	Conducted out of band emission measurement	15.247(d)	Pass
7	Band-edge	15.247(d)	Pass
8	Spurious Radiated Emissions	15.205/15.209	Pass
9	AC Power line Conducted Emission	15.207	Pass
10	Antenna requirement	15.203	Pass(refer to section 2.1)

Note: The device is designed according to specifications of SIG, So it has a full support to Medium access protocol and fully compliant with the KDB558074 standard. The device is compliant Pseudorandom hopping, Equal hopping frequency, receiver bandwidth synchronize and have same bandwidth with transmitted signal. And the ability to have adaptive hopping when encountering other signals.

This Test Report Is Issued by: Mr. Peng Zhen 	Checked by: Mr. Li Bin 
Tested by: Mr. Wang Hao 	Issued date: 20210807

6 TEST RESULT

6.1 20dB Bandwidth

6.1.1 Ambient condition

Temperature	Relative humidity	Pressure
25°C	40%	101.5kPa

6.1.2 Test limit

FCC Part15.247 (a.1.iii)

The bandwidth at 20dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

6.1.3 Test Procedure Used

ANSI C63.10-2013 – Section 6.9.2

6.1.4 Test settings

1.The signal analyzers' automatic bandwidth measurement capability of the spectrum analyzer was used to perform the 20dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 20$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.

2.RBW = 1 – 5% OBW

3.VBW $\geq 3 \times$ RBW

4.Reference level set to keep signal from exceeding maximum input mixer level for linear operation.


5.Detector = Peak

6.Trace mode = max hold

7.Sweep = auto couple

8.The trace was allowed to stabilize

6.1.5 Test Setup

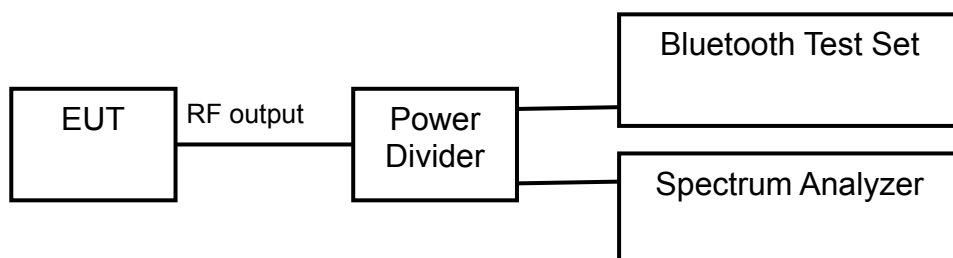

6.1.6 Test result

The test results are shown in Appendix A.

6.2 Channel Separation

6.2.1 Ambient condition

Temperature	Relative humidity	Pressure
25°C	40%	101.5kPa

6.2.2 Test limit

FCC Part15.247 (a)(1)

Measurement is made with EUT operating in hopping mode. The minimum permissible channel separation for this system is 2/3 the value of the 20dB BW.


6.2.3 Test Procedure Used

ANSI C63.10-2013 – Section 7.8.2

6.2.4 Test Settings

1. Span = Wide enough to capture peaks of two adjacent channels
2. RBW = 30% of channel spacing. Adjust as necessary to best identify center of each individual channel
3. VBW $\geq$ RBW
4. Sweep = Auto
5. Detector = Peak
6. Trace mode = max hold
7. The trace was allowed to stabilize.
8. Marker-delta function used to determine separation between peaks of the adjacent channels

6.2.5 Test Setup

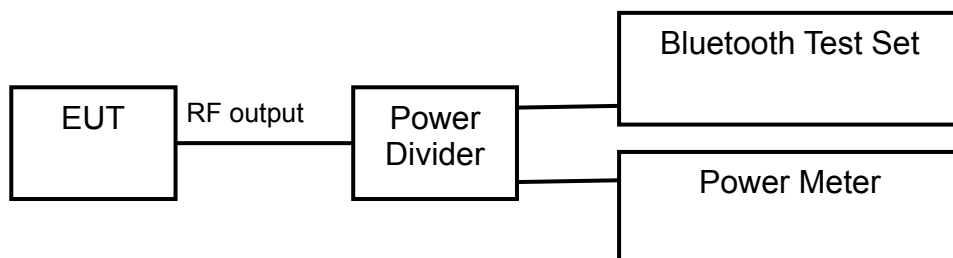

6.2.6 Test result

The test results are shown in Appendix A.

6.3 Peak Transmitter Output Power

6.3.1 Ambient condition

Temperature	Relative humidity	Pressure
25°C	40%	101.5kPa

6.3.2 Test limit

FCC Part15.247(b)(1)

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band:1watt.

Used conversion factor: Limit (dBm) = 10 log (Limit (W)/1mW) →

Modulation type	GFSK	$\pi/4$ DQPSK	8DPSK
Maximum Output Power	30.0dBm	30.0dBm	30.0dBm

For all other frequency hopping systems in the 2400-2483.5 MHz band:0.125 watts.

Used conversion factor: Limit (dBm) = 10 log (Limit (W)/1mW) →

Modulation type	GFSK	$\pi/4$ DQPSK	8DPSK
Maximum Output Power	21.0dBm	21.0dBm	21.0dBm

6.3.3 Test Procedure Used

ANSI C63.10-2013 – Section 7.8.5

ANSI C63.10-2013 – Section 11.9.2.3.2 method AVGPM-G

6.3.4 Test Settings


Peak Power Measurement

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than the occupied bandwidth.

Method AVGPM-G (Average Power Measurement)

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

6.3.5 Test Setup

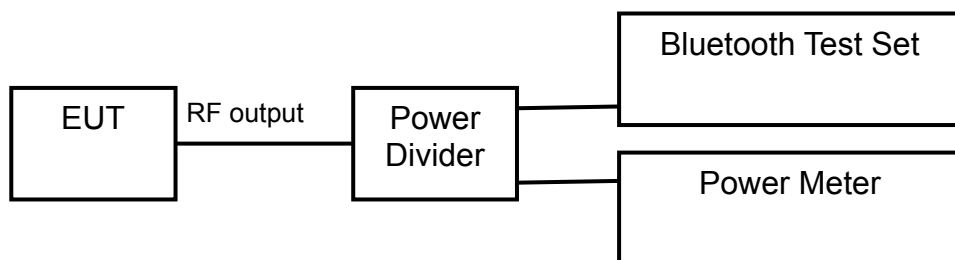

6.3.6 Test result

The test results are shown in Appendix A.

6.4 Dwell Time

6.4.1 Ambient condition

Temperature	Relative humidity	Pressure
25°C	40%	101.5kPa

6.4.2 Test Description

The Equipment under Test (EUT) was set up in a shielded room to perform the dwell time measurements.

The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss.

The time slot length is measured of three different packet types which are available in the Bluetooth technology. Those are DH1, DH3 and DH5 packets. The dwell time is calculated by:

Dwell time = time slot length * hop rate * 31.6/ number of hopping channels with:

- hop rate=1600/2 * 1/s for DH1 packets =800
- hop rate=1600/4 * 1/s for DH3 packets =400
- hop rate=1600/6 * 1/s for DH5 packets =266.67
- Number of hopping channels=79
- 31.6 s=0.4 seconds multiplied by the number of hopping channels=0.4s * 79

6.4.3 Test limit

FCC Part15.247(a)(1)(iii)

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

6.4.4 Test Settings

ANSI C63.10-2013 Section 7.8.4

1. Span = zero span, centered on a hopping channel
2. RBW ≤ channel spacing and >> 1/T, where T is expected dwell time per channel
3. Sweep = as necessary to capture entire dwell time. Second plot may be required to demonstrate two successive hops on a channel
4. Trigger is set with appropriate trigger delay to place pulse near the center of the plot
5. Detector = peak
6. Trace mode = max hold
7. Marker-delta function used to determine transmit time per hop

6.4.5 Test Setup

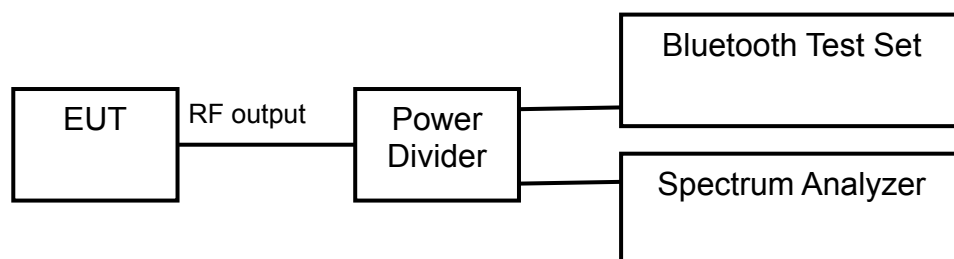

6.4.6 Test result

The test results are shown in Appendix A.

6.5 Number of Hopping Frequencies

6.5.1 Ambient condition

Temperature	Relative humidity	Pressure
25°C	40%	101.5kPa

6.5.2 Test Description

The Equipment under Test (EUT) was set up in a shielded room to perform the number of hopping frequencies measurement. The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss.

6.5.3 Test limit

FCC Part15.247 (a) (1) (iii)


Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

6.5.4 Test Settings

ANSI C63.10-2013 Section 7.8.3

1. Span = frequency of band of operation (divided into two plots)
2. RBW < 30% of channel spacing or 20dB bandwidth, whichever is smaller.
3. VBW ≥ RBW
4. Sweep = auto
5. Detector = peak
6. Trace mode = max hold
7. Trace was allowed to stabilize

6.5.5 Test Setup

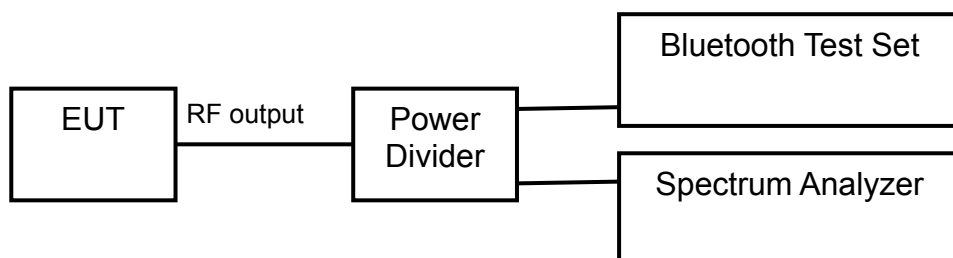

6.5.6 Test result

The test results are shown in Appendix A.

6.6 Conducted out of band emission measurement

6.6.1 Ambient condition

Temperature	Relative humidity	Pressure
25°C	40%	101.5kPa

6.6.2 Test limit

FCC Part15.247 (d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.


6.6.3 Test Procedure Used

ANSI C63.10-2013 – Section 7.8.8

6.6.4 Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 26GHz
2. RBW = 1MHz* (See note below)
3. VBW = 3MHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

6.6.5 Test Setup

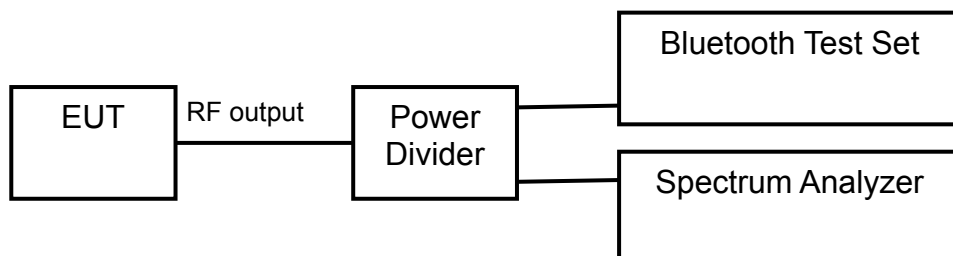

6.6.6 Test result

The test results are shown in Appendix A .

The spectrum plots are attached on the following images. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

6.7 Band-edge measurement

6.7.1 Ambient condition

Temperature	Relative humidity	Pressure
25°C	40%	101.5kPa

6.7.2 Test limit

FCC Part15.247 (d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.


6.7.3 Test Procedure Used

ANSI C63.10-2013 – Section 6.10.4

6.7.4 Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100kHz
4. VBW = 300kHz
5. Detector = Peak
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

6.7.5 Test Setup

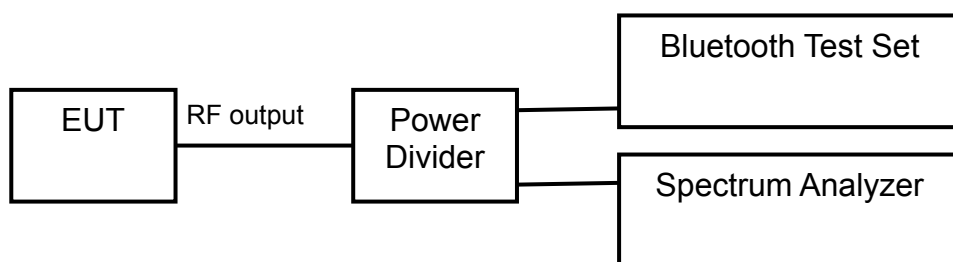

6.7.6 Test result

The test results are shown in Appendix A.

The spectrum plots are attached on the following images. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

6.8 Spurious Radiated Emissions

6.8.1 Ambient condition

Temperature	Relative humidity	Pressure
25°C	40%	101.5kPa

6.8.2 Test Description

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

6.8.3 Test limit

Part15.205, 15.209, 15.247(d)

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in below Table per Section 15.209. The spectrum shall be investigated from the lowest radio frequency signal generated in the device.

Frequency [MHz]	Field strength [$\mu\text{V/m}$]	Measured Distance [meters]
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Radiated Limits

Part15.35(b):

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit

Used conversion factor: $\text{Limit (dB}\mu\text{V/m)} = 20 \log (\text{Limit (}\mu\text{V/m)}/1\mu\text{V/m)}$

Frequency [MHz]	Detector	Unit (dB $\mu\text{V/m}$)
30~88	Quasi-peak	40.0
88~216	Quasi-peak	43.5
216~960	Quasi-peak	46.0
960~1000	Quasi-peak	54.0
1000~5th harmonic of the highest frequency or 40GHz, whichever is lower	Average	54.0
	Peak	74.0

Conversion Radiated limits

6.8.4 Test Procedure Used

KDB 558074 D01 v05r02 – Section 12.2.7

For Radiated emission below 30MHz

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- Both X and Y axes of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Quasi-Peak Detect Function and recorded the reading with Maximum Hold Mode.

NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer complied the following setting:

Frequency	RBW
9-150kHz	200-300Hz
0.15-30MHz	9-10kHz

- Signals below 30MHz are not recorded in the report because they are lower than the limits by more than 20dB.

For Radiated emission above 30MHz

- The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground in chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to quasi-peak detect function and recorded the reading with Maximum Hold Mode when the test frequency is below 1 GHz.
- The test-receiver system was set to peak and average detector and recorded the reading with Maximum Hold Mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Average detection (AV) at frequency above 1GHz. If duty cycle of test signal is < 98%, the duty factor need added to measured value.
4. All modes of operation were investigated and the worst-case emissions are reported.

6.8.5 Test Settings

Average Field Strength Measurements per Section 12.2.7 of KDB 558074 (Part 15.35)

Frequency	Detector
< 1000MHz	Quasi-peak
>1000MHz	Peak and average

Peak Field Strength Measurements per Section 12.2.7 of KDB 558074 (Part 15.35)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW is set depending on measurement frequency, as specified in following table

Frequency	RBW
9-150kHz	200-300Hz
0.15-30MHz	9-10kHz
30-1000MHz	100-120kHz
>1000MHz	1MHz


3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

6.8.6 Test Setup


For Radiated emission below 30MHz

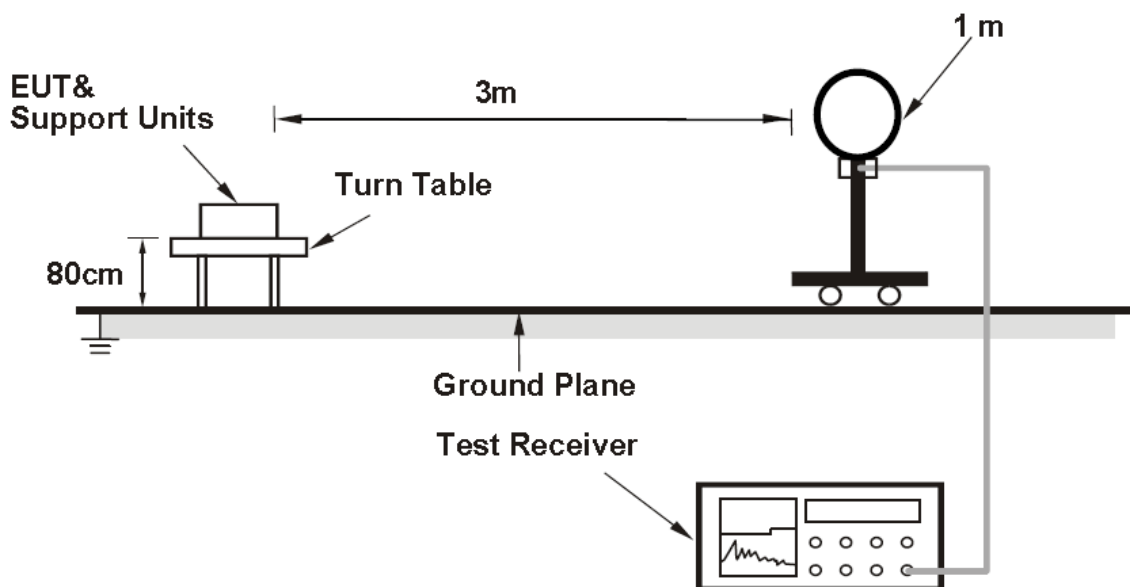

For Radiated emission 30MHz to 1GHz

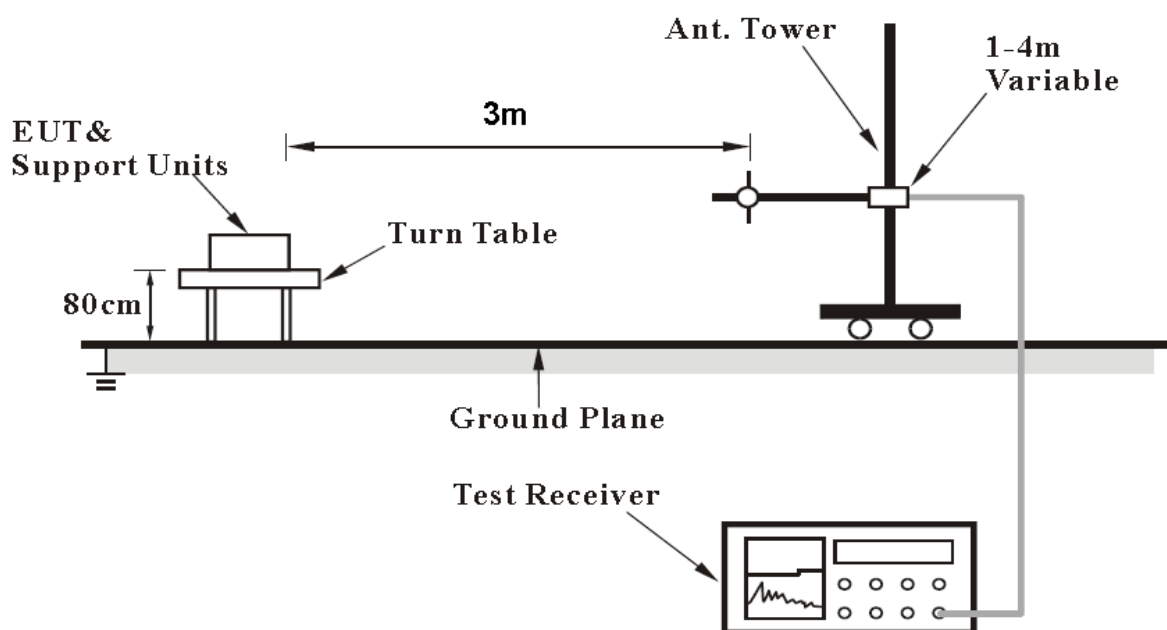

For Radiated emission above 1GHz

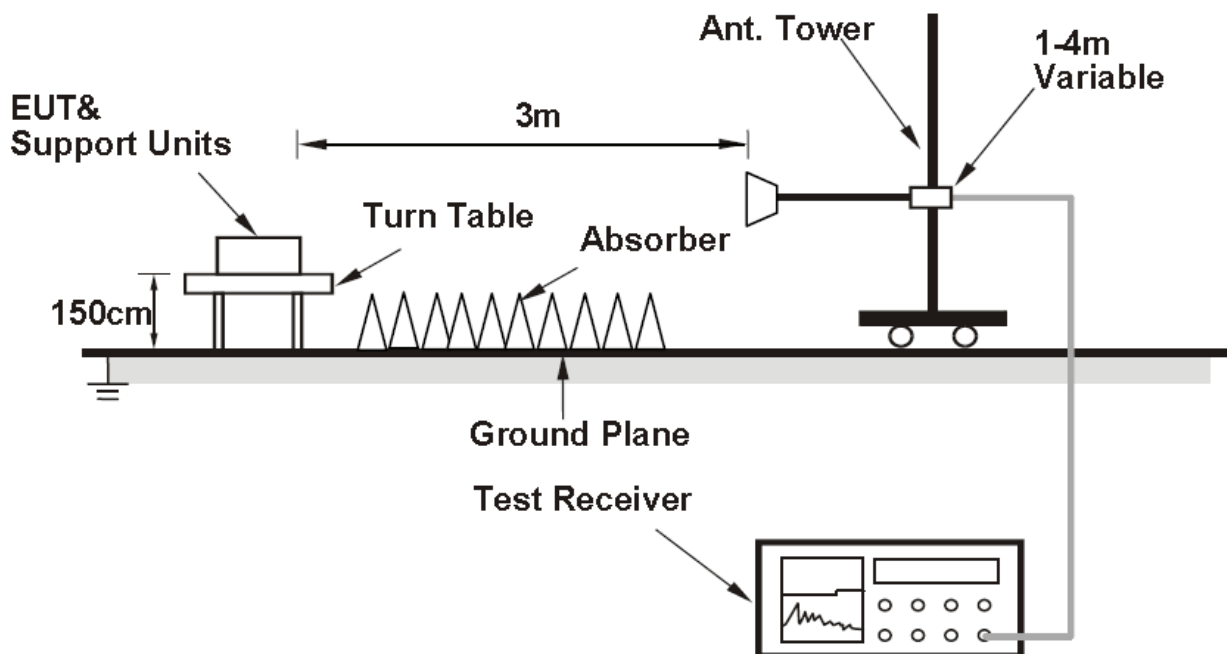

6.8.7 Test result

The test results are shown in Appendix B.

6.9 AC Power line Conducted Emission

6.9.1 Ambient condition

Temperature	Relative humidity	Pressure
25°C	40%	101.5kPa

6.9.2 Test limit

FCC Part15.207

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
0.15-0.5 0.5-5 5-30	Quasi-peak	Average
	66 to 56 *	56 to 46 *
	56	46
	60	50

* Decreases with the logarithm of the frequency.

The measurement is made according to ANSI C63.10-2013

6.9.3 Test Procedures

a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.


b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

The EUT shall test under the power AC120V/60Hz.

6.9.4 Test Setup

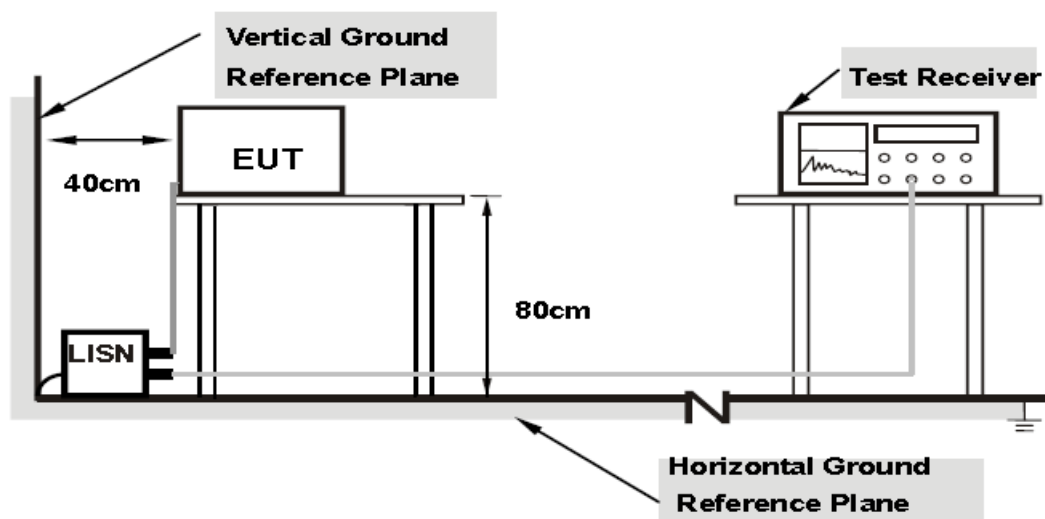

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.9.5 Test result

The test results are shown in Appendix B.

7 MEASUREMENT UNCERTAINTIES

Items	Uncertainty	
20dB Bandwidth	3kHz	
Peak output power	0.67dB	
Transmitter Power Spectral Density	0.75dB	
Band edge compliance	1.20dB	
Conducted Out of band emission measurement	30MHz~1GHz	2.83dB
	1GHz~12.75GHz	2.50dB
	12.75GHz~25GHz	2.75dB
Spurious Radiated Emissions	30MHz~200MHz	4.88dB
	200MHz~1GHz	4.87dB
	1GHz~18GHz	4.58dB
	18GHz~40GHz	4.35dB
AC Power line Conducted Emission	3.92dB	

8 TEST EQUIPMENTS

No.	Name/ Model	Manufacturer	S/N	Cal date	Cal Due date
1.	Spectrum Analyzer FSV	ROHDE&SCHWARZ	101065	2020.08.20	2021.08.19
2.	Bluetooth Test Set MT8852B	Anritsu	1142010	2021.04.13	2022.04.12
3.	Power Divider 6007	Weinschel	6007-GJ-1	2020.08.20	2021.08.19
4.	Power Meter E4416A	Agilent	MY52370013	2021.04.13	2022.04.12
5.	Power Sensor E9327A	Agilent	MY52420006	2021.04.13	2022.04.12
6.	23.18m×16.88m×9.60m Semi-Anechoic Chamber	FRANKONIA	---	----	----
7.	Turn table Diameter:5m	FRANKONIA	----	----	----
8.	Antenna master SAC(MA4.0)	MATURO	----	----	----
9.	9.080m×5.255m×3.525m Shielding room	FRANKONIA	----	----	----
10.	HF 907 Double-Ridged Waveguide Horn Antenna	R&S	100512	2020.08.20	2021.08.19
11.	3160-09 Receive antenna	SCHWARZ-BECK	002058-002	2020.08.20	2021.08.19
12.	ESI 40 EMI test receiver	R&S	100015	2020.08.20	2021.08.19
13.	ESCS30 EMI test receiver	R&S	100029	2020.08.20	2021.08.19
14.	HL562 Receive antenna	R&S	100167	2020.08.20	2021.08.19
15.	ENV216 AMN	R&S	3560.6550.12	2020.08.20	2021.08.19
16.	N9020A Spectrum Analyzer	Agilent	MY48010771	2020.08.20	2021.08.19

APPENDIX A – TEST DATA OF CONDUCTED EMISSION

Offset 9.86dB = Attenuator9.66dB+Temporary antenna connector loss 0.2dB


1 Conducted Power

Modulation type	Conducted Peak Power(dBm)		
	2402MHz	2441MHz	2480MHz
GFSK	7.62	8.43	9.00
$\pi/4$ DQPSK	7.60	8.45	9.00
8DPSK	7.64	8.57	9.10

Modulation type	Conducted Average Power(dBm)		
	2402MHz	2441MHz	2480MHz
GFSK	4.89	5.73	6.35
$\pi/4$ DQPSK	1.69	2.68	3.36
8DPSK	1.68	2.73	3.41

2 Occupied Bandwidth
20dB Bandwidth
Modulation type:GFSK


Carrier frequency (MHz)	20dB Bandwidth(kHz)
2402	918.8
2441	919.6
2480	919.1

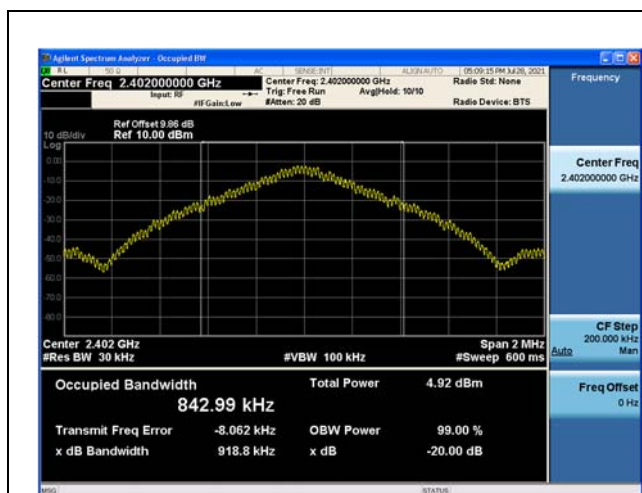

Modulation: GFSK 2402MHz




Modulation: GFSK 2441MHz

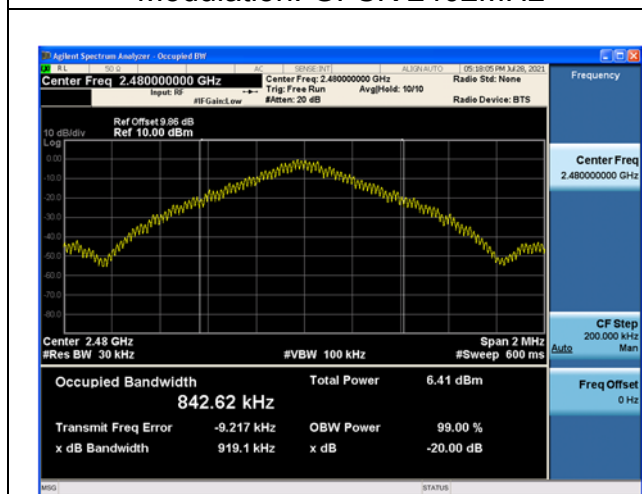


Modulation: GFSK 2480MHz

Modulation type: $\pi/4$ DQPSK


Carrier frequency (MHz)	20dB Bandwidth(kHz)
2402	1324.6
2441	1327.0
2480	1331.8

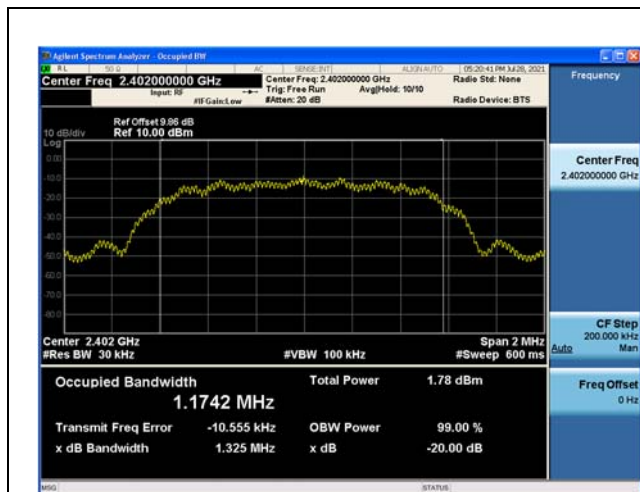

Modulation: $\pi/4$ DQPSK 2402MHz

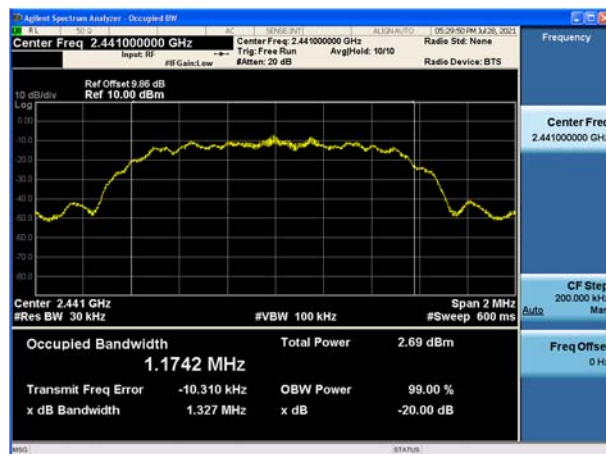


Modulation: $\pi/4$ DQPSK 2441MHz

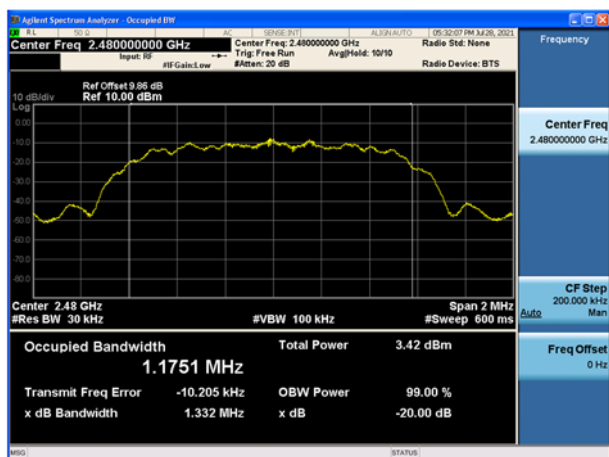


Modulation: $\pi/4$ DQPSK 2480MHz

Modulation type: 8DPSK


Carrier frequency (MHz)	20dB Bandwidth(kHz)
2402	1324.2
2441	1325.2
2480	1336.2

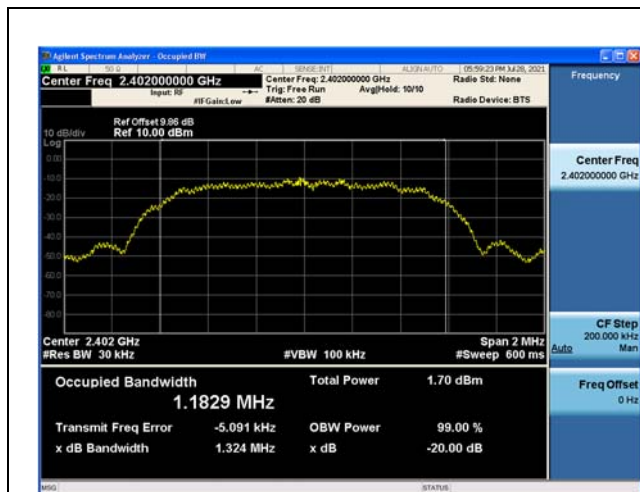

Modulation: 8DPSK 2402MHz

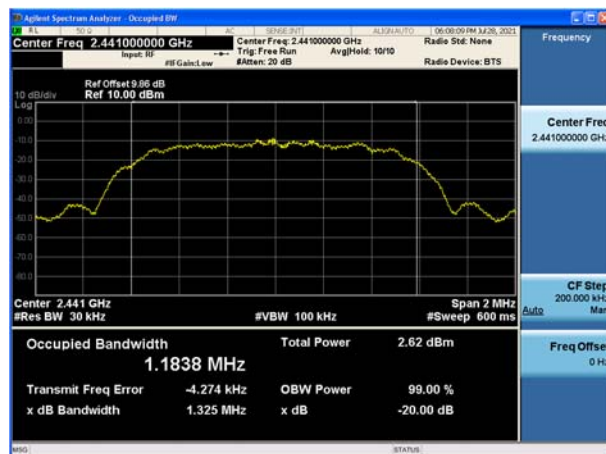

Modulation: 8DPSK 2441MHz

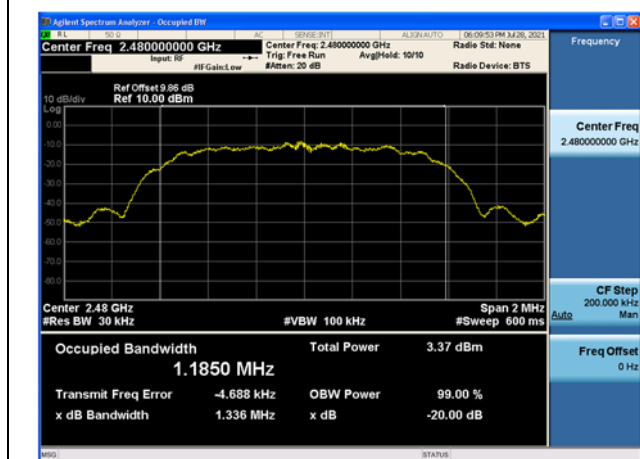


Modulation: 8DPSK 2480MHz

3 Hopping Frequency Separation

Modulation type:GFSK

Channel separation

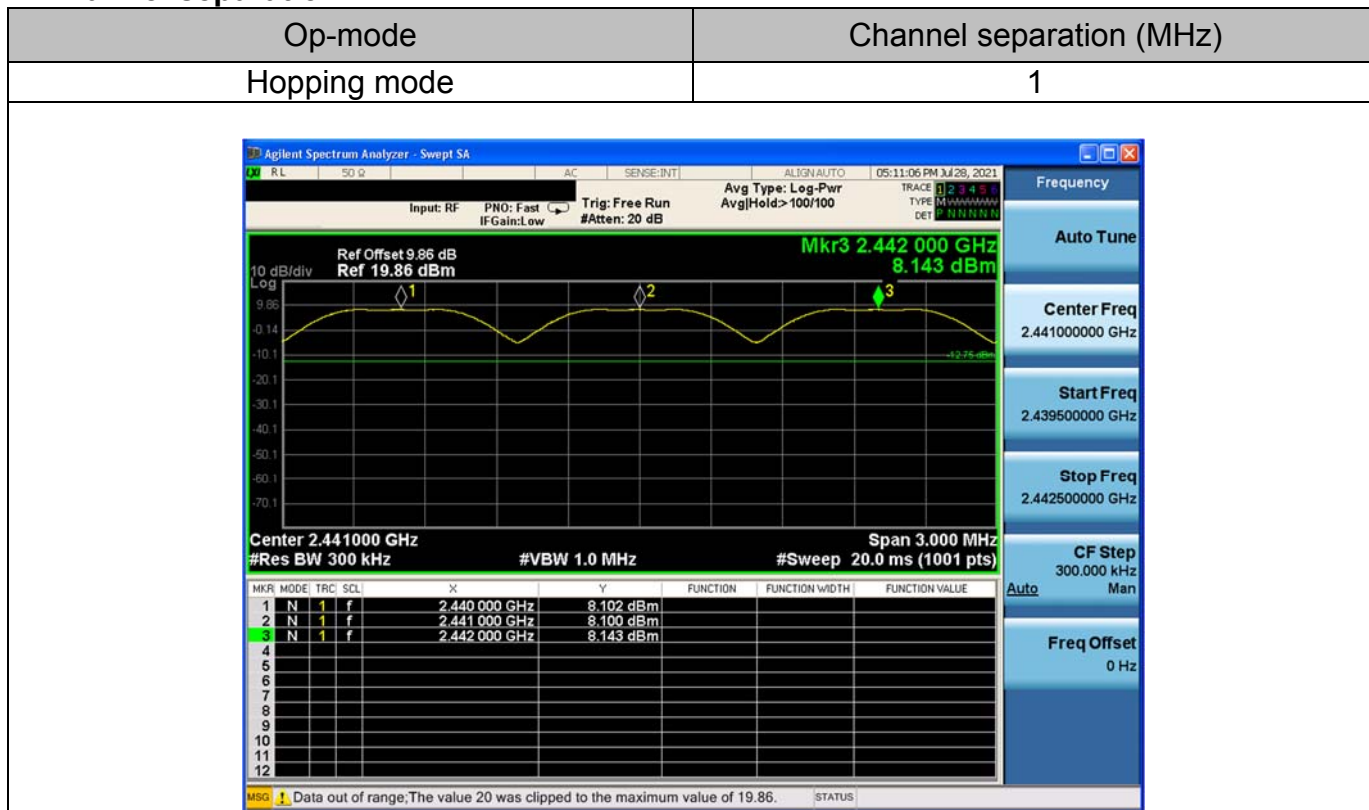

Op-mode	Result
Hopping mode	79

Agilent Spectrum Analyzer - Swept SA

RL 50 Q AC SENSE:INT ALIGN: AUTO 05:14:01 PM Jul 26, 2021

Input: RF PNO: Fast Trg: Free Run Avg Type: Log-Pwr
IF Gain: Low #Atten: 20 dB Avg/Hold: >100/100

TRACE 1 2 3 4 5 6
TYPE MANAAAAA
DET 0 0 0 0 0 0

Ref Offset 9.86 dB
Ref 19.86 dBm

10 dB/div
Log

Start 2.40000 GHz #Res BW 30 kHz #VBW 100 kHz #Sweep 200 ms (10001 pts)
Stop 2.48350 GHz

Frequency

Auto Tune

Center Freq
2.441750000 GHz

Start Freq
2.400000000 GHz

Stop Freq
2.483500000 GHz

CF Step
8.350000 MHz
Auto Man


Freq Offset
0 Hz

MDG Points changed; all traces cleared

STATUS

Modulation type: $\pi/4$ DQPSK

Channel separation

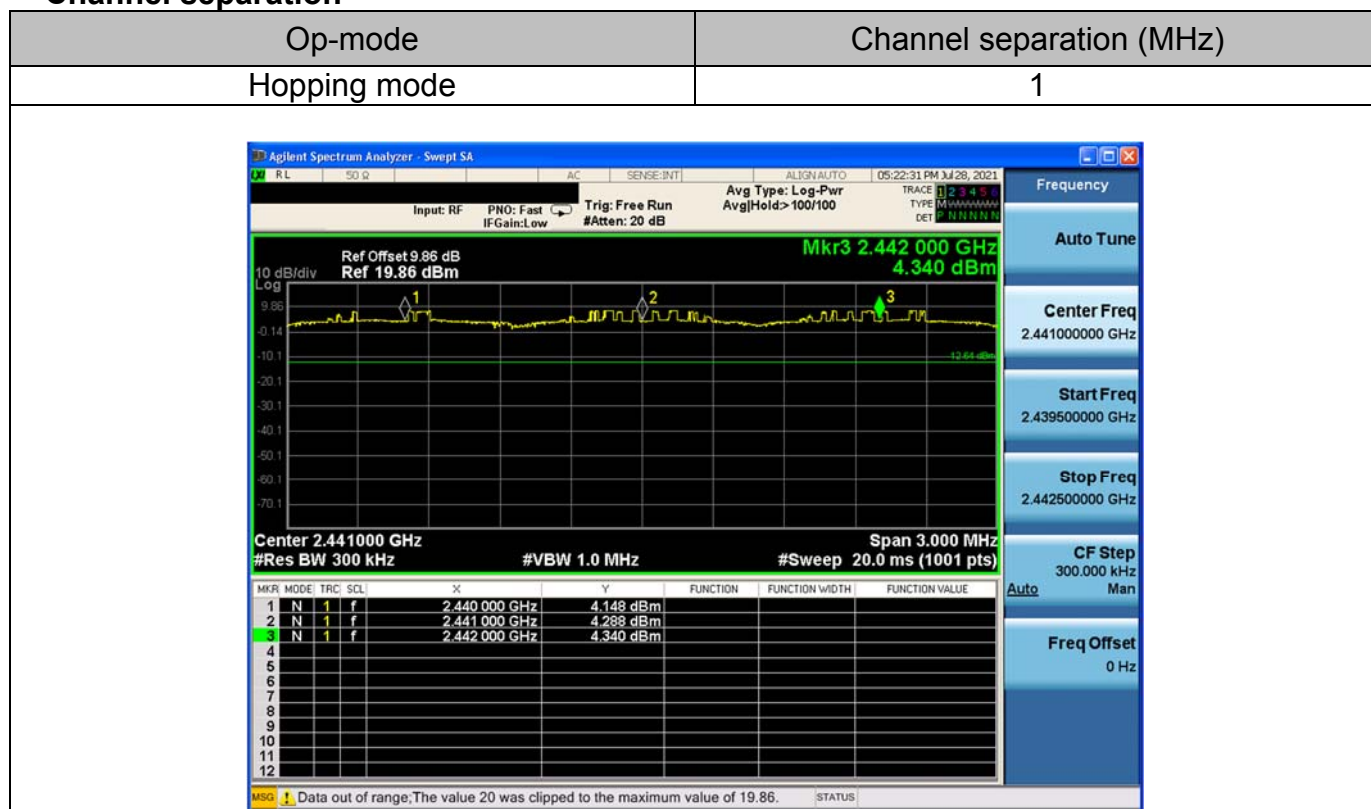


Number of Hopping Frequencies


Op-mode	Result
Hopping mode	79
Agilent Spectrum Analyzer - Swept SA RL 50 Ω AC SENSE:INT ALIGN: AUTO 05:27:12 PM 3/1/20, 2021 Input: RF PNO: Fast IF Gain: Low Trig: Free Run Avg Type: Log-Pwr Avg Hold: >100/100 Ref Offset 9.86 dB Ref 19.86 dBm 10 dB/div Log Start 2.40000 GHz #Res BW 30 kHz #VBW 100 kHz Stop 2.48350 GHz #Sweep 200 ms (10001 pts) MSG: Points changed; all traces cleared STATUS Frequency Auto Tune Center Freq 2.441750000 GHz Start Freq 2.400000000 GHz Stop Freq 2.483500000 GHz CF Step 8.350000 MHz Auto Man Freq Offset 0 Hz	

Modulation type: 8DPSK

Channel separation

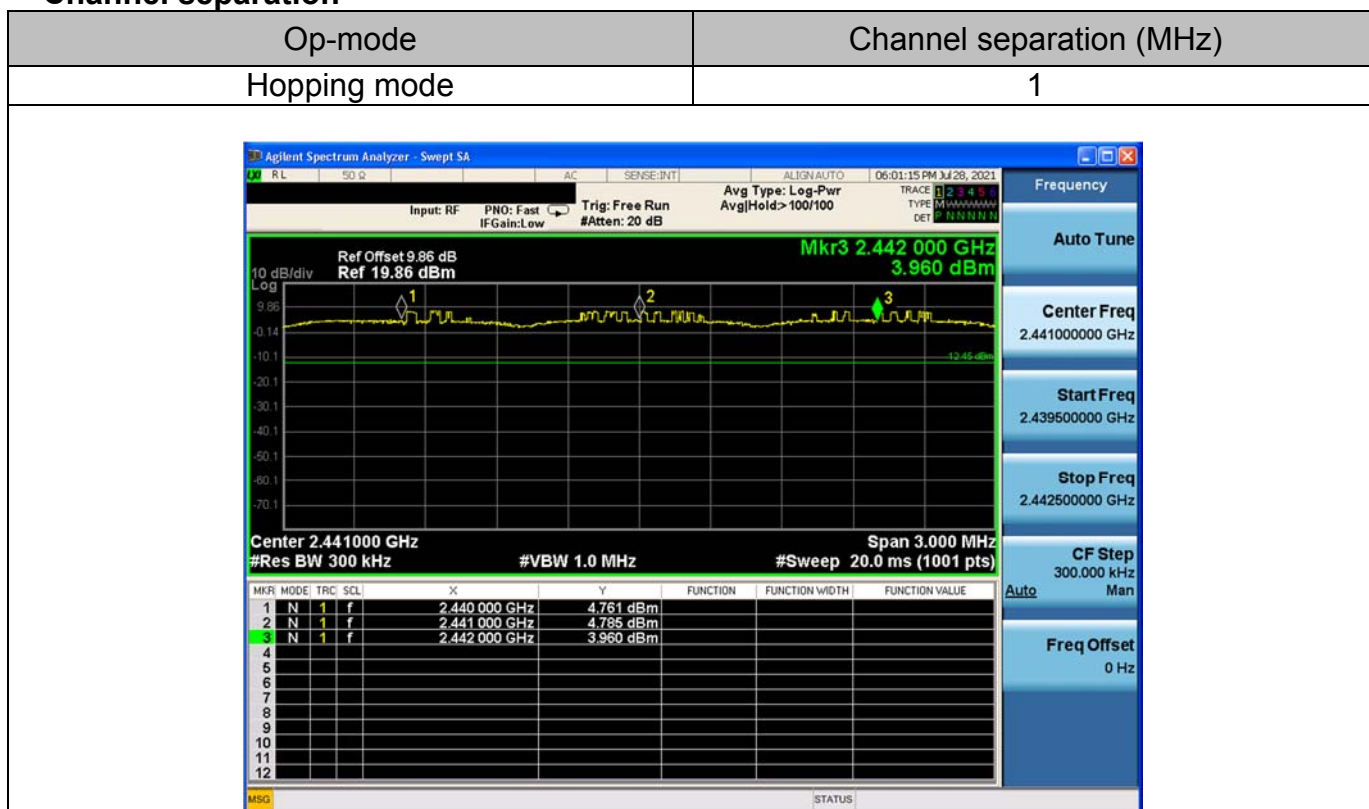




Number of Hopping Frequencies

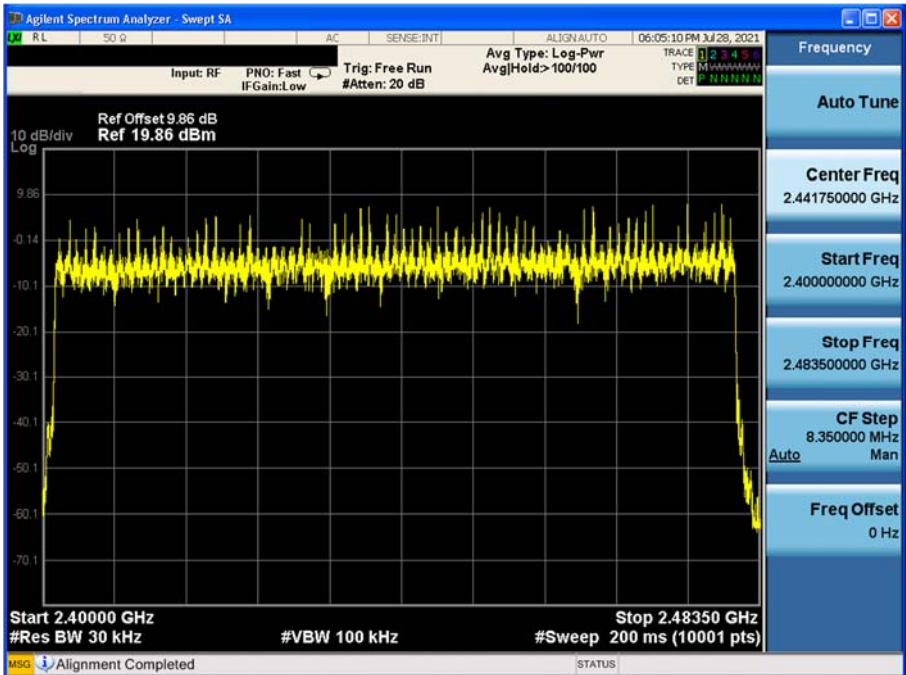Op-mode	Result
Hopping mode	79
	

4 Dwell Time


Modulation type:GFSK

Packet type	Time slot length(μs)	Dwell time	Dwell time(ms)
DH1	396	Time slot length *31.6*1600/2/79	126.7
DH3	1610	Time slot length *31.6*1600/4/79	257.6
DH5	2860	Time slot length *31.6*1600/6/79	305.1

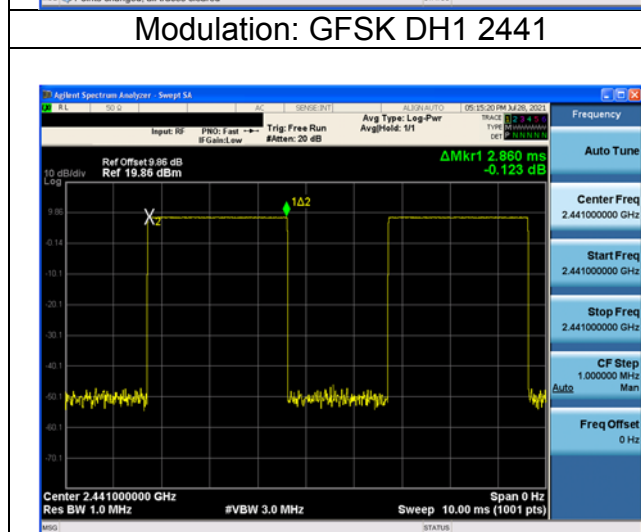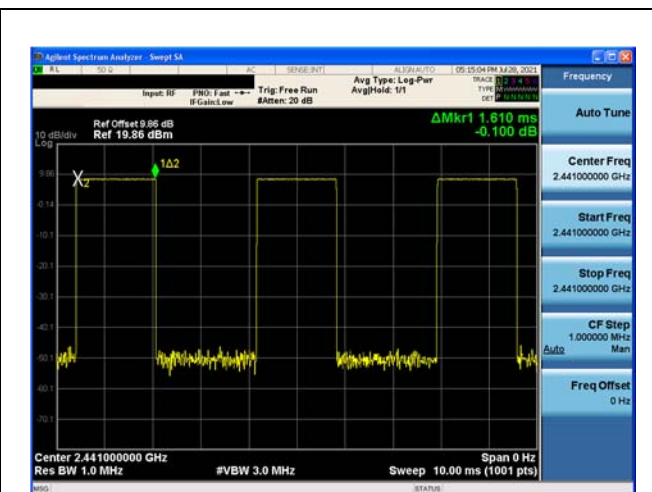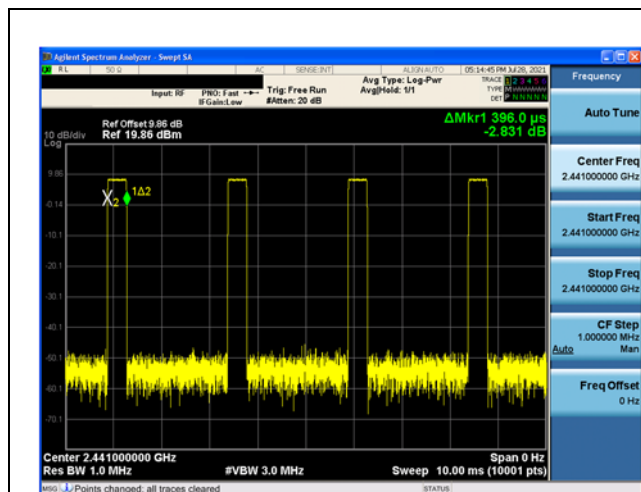


Modulation type: $\pi/4$ DQPSK


Packet type	Time slot length(μ s)	Dwell time	Dwell time(ms)
2DH1	405	Time slot length $*31.6*1600/2/79$	129.2
2DH3	1620	Time slot length $*31.6*1600/4/79$	259.2
2DH5	2870	Time slot length $*31.6*1600/6/79$	306.1

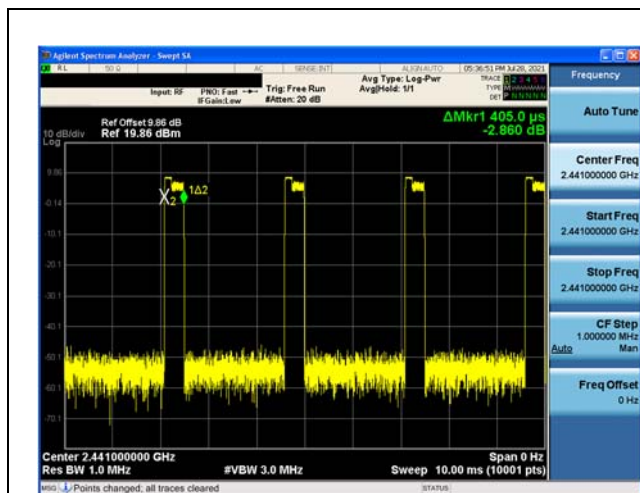

Modulation: $\pi/4$ DQPSK 2DH1 2441

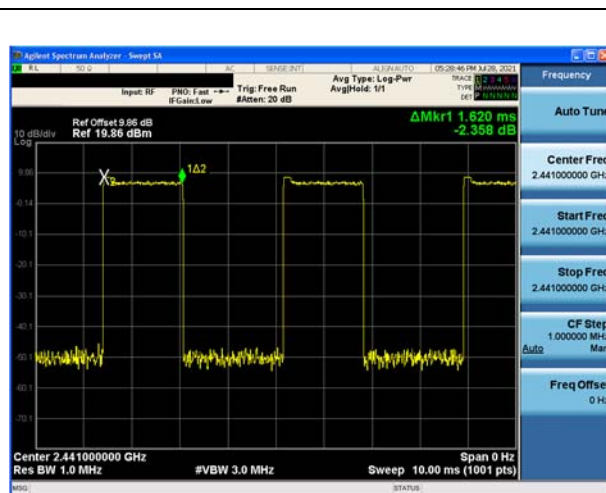


Modulation: $\pi/4$ DQPSK 2DH3 2441

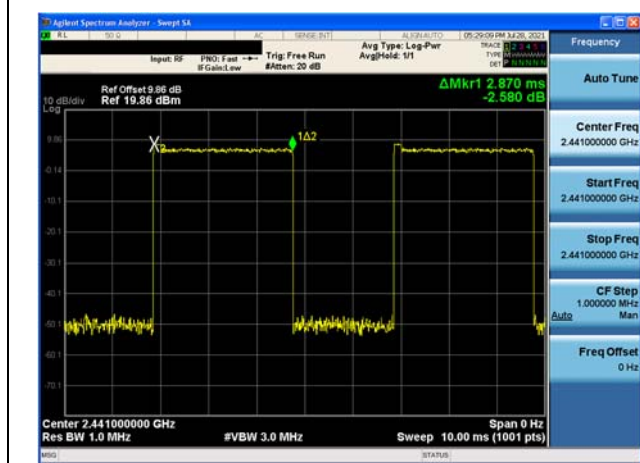


Modulation: $\pi/4$ DQPSK 2DH5 2441

Modulation type: 8DPSK


Packet type	Time slot length(μs)	Dwell time	Dwell time(ms)
3DH1	370	Time slot length $*31.6*1600/2/79$	118.4
3DH3	1620	Time slot length $*31.6*1600/4/79$	259.2
3DH5	2870	Time slot length $*31.6*1600/6/79$	306.1

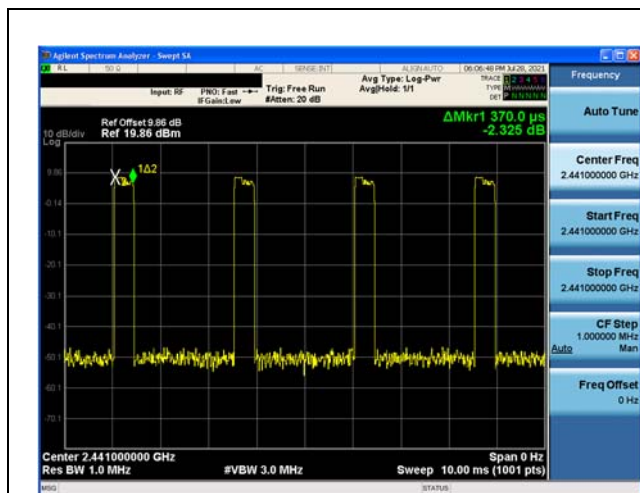

Modulation: 8DPSK 3DH1 2441

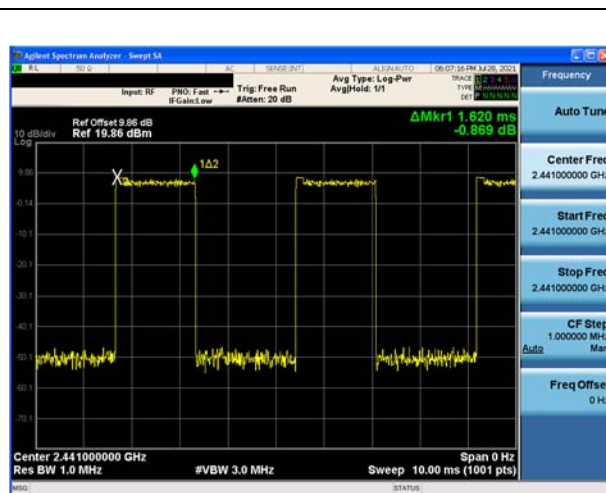


Modulation: 8DPSK 3DH3 2441

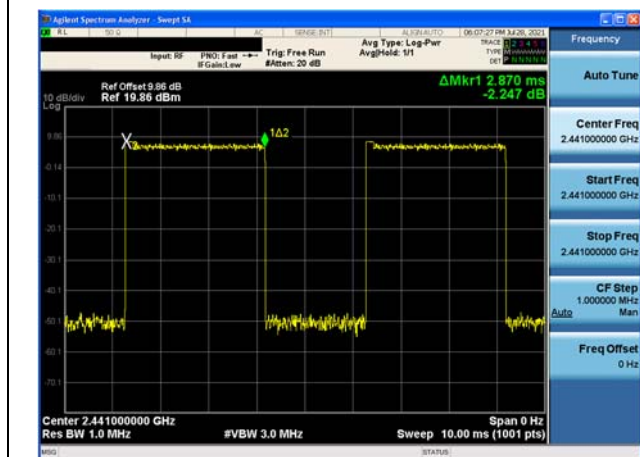


Modulation: 8DPSK 3DH5 2441

5 Conducted Out of band emission measurement


Modulation type: GFSK

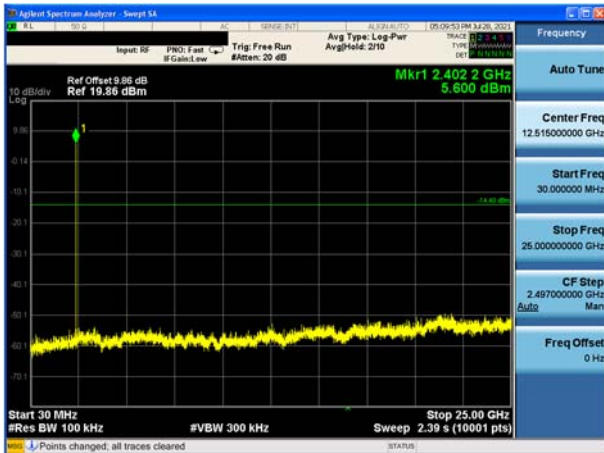

CH0(Hopping off)

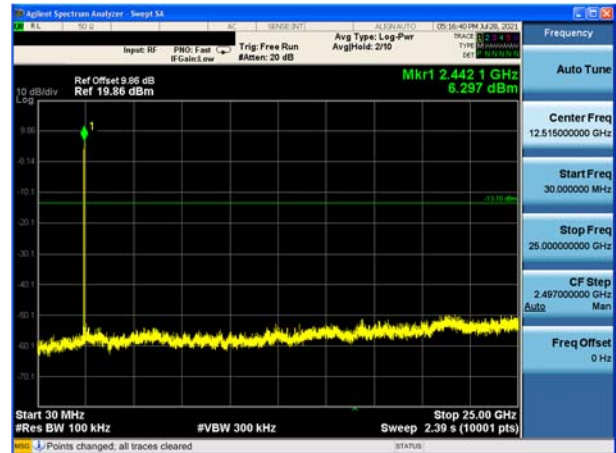


CH39(Hopping off)

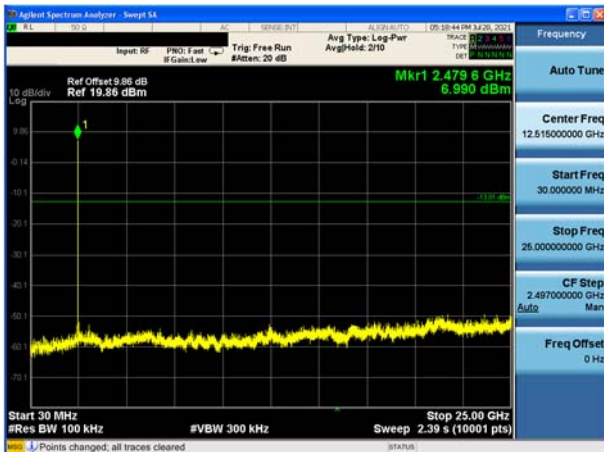


CH78(Hopping off)


Modulation type: $\pi/4$ DQPSK

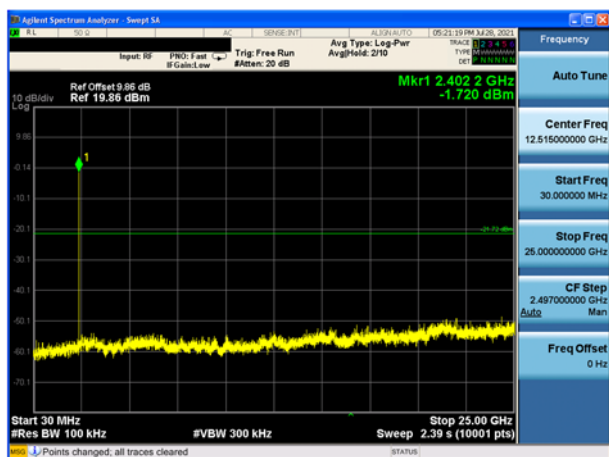

CH0(Hopping off)

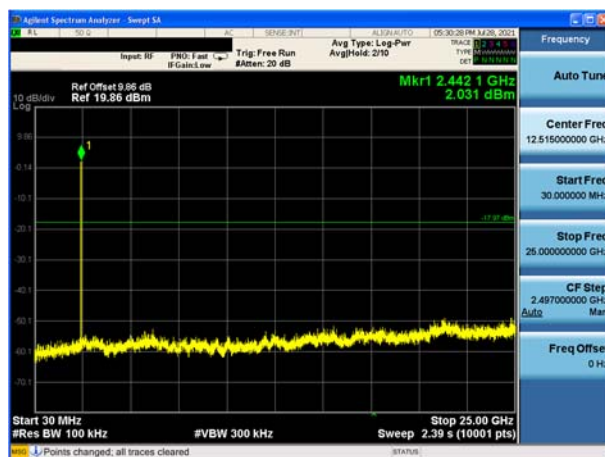


CH39(Hopping off)

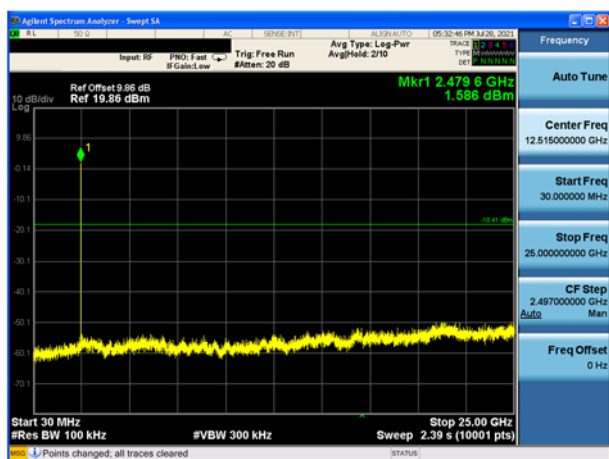


CH78(Hopping off)


Modulation type: 8DPSK

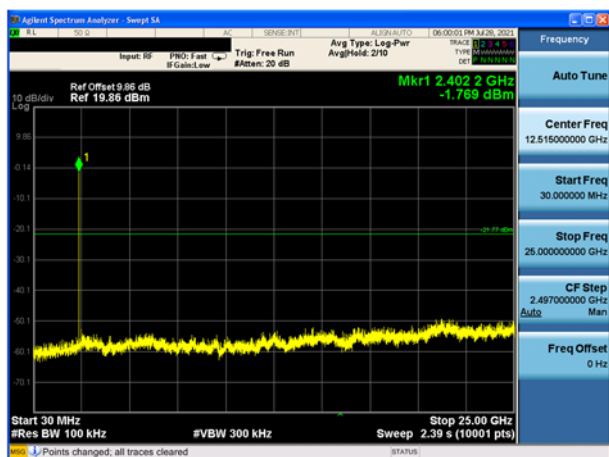

CH0(Hopping off)

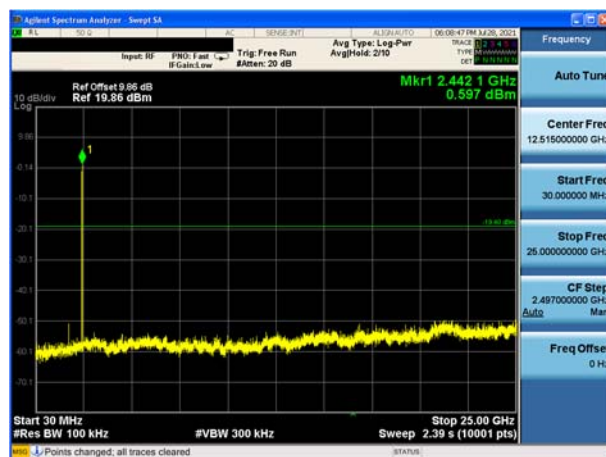


CH39(Hopping off)

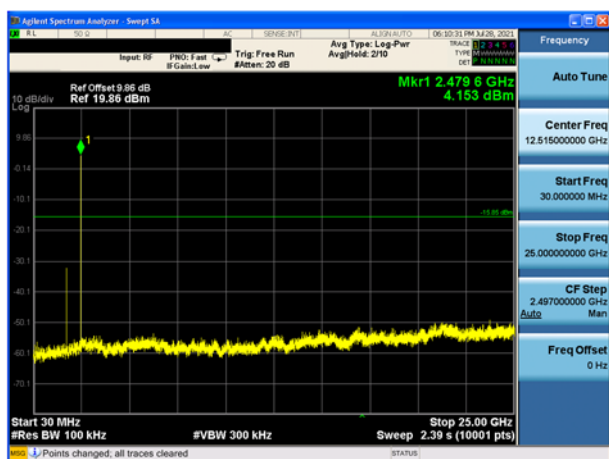

CH78(Hopping off)

6 Band Edge measurement


Modulation type: GFSK

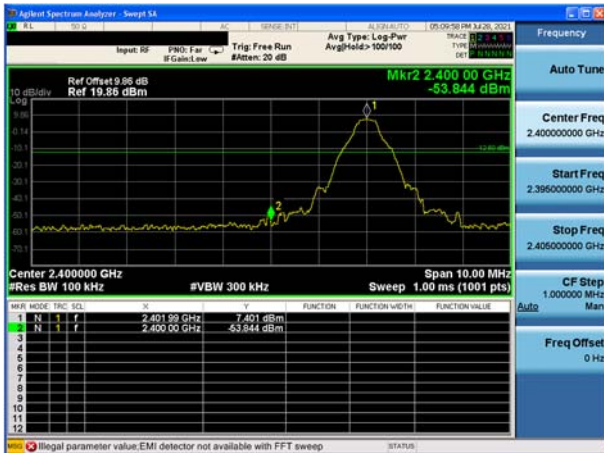

CH0(Hopping off)



CH0(Hopping on)

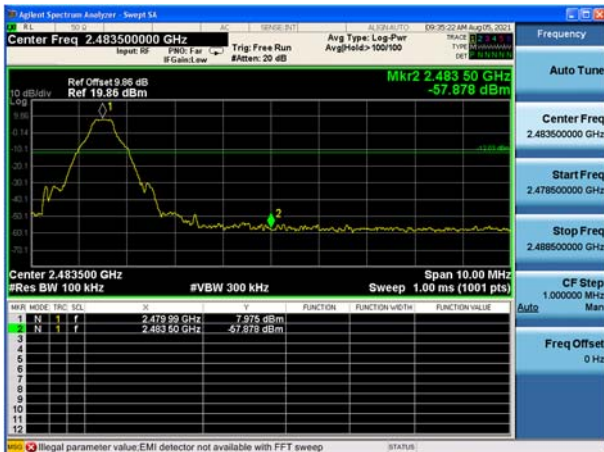


CH78(Hopping off)



CH78(Hopping on)

Modulation type: $\pi/4$ DQPSK

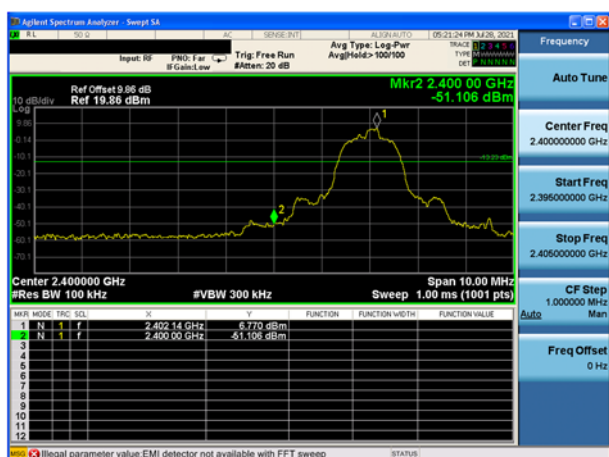

CH0(Hopping off)



CH0(Hopping on)




CH78(Hopping off)



CH78(Hopping on)

Modulation type: 8DPSK

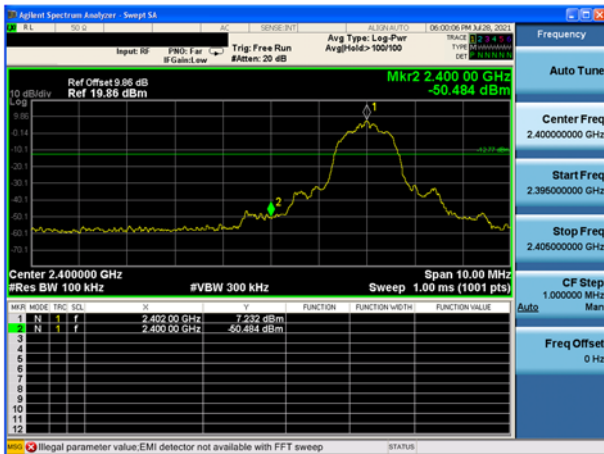

CH0(Hopping off)



CH0(Hopping on)



CH78(Hopping off)



CH78(Hopping on)

APPENDIX B – TEST DATA OF RADIATED EMISSION

Radiated Emission Band Edge

The worst case attitude: The EUT lay down.

The measurement results are obtained as described below:

Measure Level = Reading Level + cable loss + antenna factor

In this report, the Low channel of the Left headphone has been test for the worst case.

Sample calculation: $(87.45\text{dBuV/m}) = (53.45\text{dB}\mu\text{V}) + (8.90\text{ dB}) + (25.10\text{ dB/m})$, the corresponding frequency is 2402MHz.

For Right side headphone:

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: GFSK

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2402	87.45	53.45	N/A	N/A	8.90	25.10
2	2390	42.01	8.01	-31.99	74.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: GFSK

Polarity: Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2402	85.17	51.17	N/A	N/A	8.90	25.10
2	2390	40.16	6.16	-33.84	74.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: GFSK

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2402	86.83	52.83	N/A	N/A	8.90	25.10
2	2390	33.17	-0.83	-20.83	54.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: GFSK

Polarity: Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2402	84.32	50.32	N/A	N/A	8.90	25.10
2	2390	32.47	-1.53	-21.53	54.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: GFSK

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2480	86.76	52.76	N/A	N/A	8.90	25.10
2	2483.5	43.11	9.11	-30.89	74.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: GFSK

Polarity: Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2480	84.14	50.14	N/A	N/A	8.90	25.10
2	2483.5	42.47	8.47	-31.53	74.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: GFSK

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2480	84.93	50.93	N/A	N/A	8.90	25.10
2	2483.5	34.90	0.90	-19.10	54.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: GFSK

Polarity: Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2480	82.33	48.33	N/A	N/A	8.90	25.10
2	2483.5	34.72	0.72	-19.28	54.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: $\pi/4$ DQPSK

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2402	87.35	53.35	N/A	N/A	8.90	25.10
2	2390	43.39	9.39	-30.61	74.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: $\pi/4$ DQPSK

Polarity: Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2402	84.82	50.82	N/A	N/A	8.90	25.10
2	2390	41.84	7.84	-32.16	74.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: $\pi/4$ DQPSK

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2402	85.94	51.94	N/A	N/A	8.90	25.10
2	2390	33.17	-0.83	-20.83	54.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: $\pi/4$ DQPSK

Polarity: Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2402	85.94	51.94	N/A	N/A	8.90	25.10
2	2390	33.17	-0.83	-20.83	54.00	8.90	25.10

1	2402	83.32	49.32	N/A	N/A	8.90	25.10
2	2390	32.08	-1.92	-21.92	54.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: $\pi/4$ DQPSK

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2480	86.19	52.19	N/A	N/A	8.90	25.10
2	2483.5	42.41	8.41	-31.59	74.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: $\pi/4$ DQPSK

Polarity: Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2480	84.07	50.07	N/A	N/A	8.90	25.10
2	2483.5	42.34	8.34	-31.66	74.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: $\pi/4$ DQPSK

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2480	84.79	50.79	N/A	N/A	8.90	25.10
2	2483.5	33.81	-0.19	-20.19	54.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: $\pi/4$ DQPSK

Polarity: Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2480	82.48	48.48	N/A	N/A	8.90	25.10
2	2483.5	32.05	-1.95	-21.95	54.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0
Test Mode: 8DPSK
Polarity: Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2402	87.09	53.09	N/A	N/A	8.90	25.10
2	2390	42.01	8.01	-31.99	74.00	8.90	25.10

Carrier frequency (MHz): 2402
Channel No.:0
Test Mode: 8DPSK
Polarity: Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2402	84.32	50.32	N/A	N/A	8.90	25.10
2	2390	41.25	7.25	-32.75	74.00	8.90	25.10

Carrier frequency (MHz): 2402
Channel No.:0
Test Mode: 8DPSK
Polarity: Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2402	85.70	51.70	N/A	N/A	8.90	25.10
2	2390	33.64	-0.36	-20.36	54.00	8.90	25.10

Carrier frequency (MHz): 2402
Channel No.:0
Test Mode: 8DPSK
Polarity: Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2402	82.78	48.78	N/A	N/A	8.90	25.10
2	2390	32.73	-1.27	-21.27	54.00	8.90	25.10

Carrier frequency (MHz): 2480
Channel No.:78
Test Mode: 8DPSK
Polarity: Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2480	86.61	52.61	N/A	N/A	8.90	25.10
2	2483.5	42.81	8.81	-31.19	74.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: 8DPSK

Polarity: Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2480	83.84	49.84	N/A	N/A	8.90	25.10
2	2483.5	42.17	8.17	-31.83	74.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: 8DPSK

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2480	85.65	51.65	N/A	N/A	8.90	25.10
2	2483.5	34.29	0.29	-19.71	54.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: 8DPSK

Polarity: Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2480	83.21	49.21	N/A	N/A	8.90	25.10
2	2483.5	33.34	-0.66	-20.66	54.00	8.90	25.10

For Left side headphone:

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: GFSK

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
----	-----------------	------------------------	----------------------	-----------------	----------------	-----------------	-----------------------

1	2402	94.43	60.43	N/A	N/A	8.90	25.10
2	2390	43.14	9.14	-30.86	74.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: GFSK

Polarity: Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2402	91.84	57.84	N/A	N/A	8.90	25.10
2	2390	41.56	7.56	-32.44	74.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: GFSK

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2402	93.27	59.27	N/A	N/A	8.90	25.10
2	2390	33.01	-0.99	-20.99	54.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0


Test Mode: GFSK

Polarity: Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2402	90.78	56.78	N/A	N/A	8.90	25.10
2	2390	31.18	-2.82	-22.82	54.00	8.90	25.10

Full Spectrum

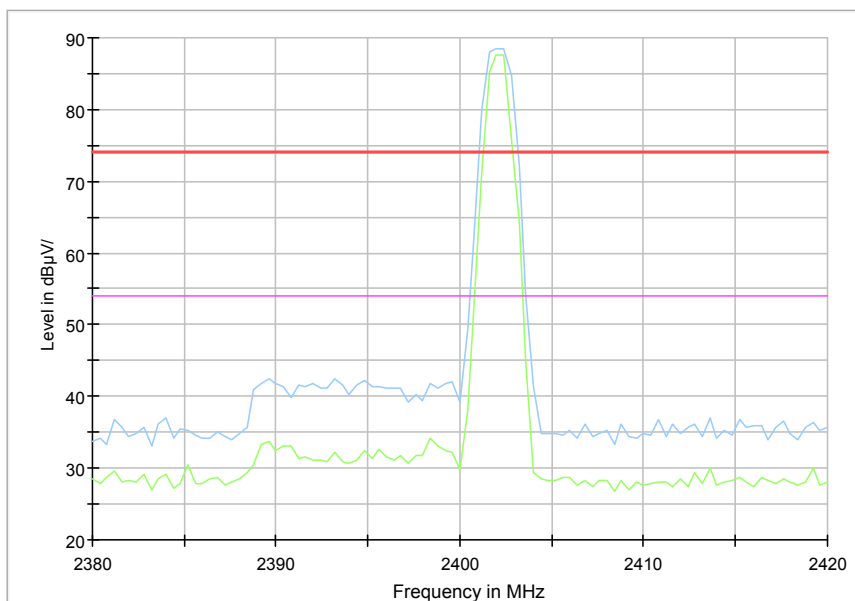

Radiated Emission Band Edge for 2402MHz

Sample Calculations

Determining Spurious Emissions Levels

A “reference path loss” is established and the A_{Rpl} is the attenuation of “reference path loss”, and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{mea}} + A_{Rpl}$$

Sample calculation: $(8.53 \text{ dB}\mu\text{V/m}) = (26.23\text{dB}\mu\text{V}) + (-17.7\text{dB/m})$, the corresponding frequency is 47.945000MHz.

The worst case attitude: The mobile lay down.

For right side headphone:

For GFSK

Channel No.:0

Frequency (MHz)	Result (dBuV/m)	ARpl (dB/m)	Pmea (dBuV)	Polarity	Limit (dBuV/m)
47.945000	8.53	-17.7	26.23	Vertical	40.00
96.057000	14.47	-19.9	34.37	Vertical	43.50
120.016000	22.32	-21.4	43.72	Vertical	43.50
233.166500	15.55	-17.8	33.35	Vertical	46.00
455.975500	28.45	-12.0	40.45	Vertical	46.00
721.270500	18.24	-6.4	24.64	Vertical	46.00

For $\pi/4$ DQPSK

Channel No.:0

Frequency (MHz)	Result (dBuV/m)	ARpl (dB/m)	Pmea (dBuV)	Polarity	Limit (dBuV/m)
51.437000	7.40	-17.7	25.10	Vertical	40.00
95.960000	14.25	-20.0	34.25	Vertical	43.50
119.967500	21.85	-21.4	43.25	Vertical	43.50
233.166500	15.96	-17.8	33.76	Vertical	46.00
455.878500	26.97	-12.0	38.97	Vertical	46.00
940.345000	19.11	-2.8	21.91	Vertical	46.00

For 8DPSK

Channel No.:0

Frequency (MHz)	Result (dBuV/m)	ARpl (dB/m)	Pmea (dBuV)	Polarity	Limit (dBuV/m)
47.993500	10.13	-17.7	27.83	Vertical	40.00
96.299500	12.23	-19.9	32.13	Vertical	43.50
119.967500	22.36	-21.4	43.76	Vertical	43.50
233.166500	15.90	-17.8	33.70	Vertical	46.00
455.830000	26.09	-12.0	38.09	Vertical	46.00
955.816500	19.01	-2.6	21.61	Vertical	46.00

For GFSK

Channel No.:39

Frequency (MHz)	Result (dBuV/m)	ARpl (dB/m)	Pmea (dBuV)	Polarity	Limit (dBuV/m)
51.582500	7.41	-17.7	25.11	Vertical	40.00

96.008500	15.93	-20.0	35.93	Vertical	43.50
120.161500	21.73	-21.4	43.13	Vertical	43.50
232.342000	16.92	-17.9	34.82	Vertical	46.00
456.024000	28.57	-12.0	40.57	Vertical	46.00
706.963000	15.87	-6.9	22.77	Vertical	46.00

For $\pi/4$ DQPSK
Channel No.:39

Frequency (MHz)	Result (dBuV/m)	ARpl (dB/m)	Pmea (dBuV)	Polarity	Limit (dBuV/m)
48.042000	9.42	-17.7	27.12	Vertical	40.00
96.057000	15.16	-19.9	35.06	Vertical	43.50
120.016000	22.85	-21.4	44.25	Vertical	43.50
232.342000	17.01	-17.9	34.91	Vertical	46.00
455.733000	24.46	-12.0	36.46	Vertical	46.00
957.562500	19.15	-2.6	21.75	Vertical	46.00

For 8DPSK
Channel No.:39

Frequency (MHz)	Result (dBuV/m)	ARpl (dB/m)	Pmea (dBuV)	Polarity	Limit (dBuV/m)
47.993500	10.12	-17.7	53.67	Vertical	40.00
95.960000	14.93	-20.0	49.30	Vertical	43.50
119.967500	22.41	-21.4	46.05	Vertical	43.50
232.390500	17.34	-17.9	46.28	Vertical	46.00
456.509000	25.89	-12.0	43.17	Vertical	46.00
726.217500	15.83	-6.2	32.91	Vertical	46.00

For GFSK
Channel No.:78

Frequency (MHz)	Result (dBuV/m)	ARpl (dB/m)	Pmea (dBuV)	Polarity	Limit (dBuV/m)
39.215000	6.56	-18.7	27.82	Vertical	40.00
96.008500	15.92	-20.0	34.93	Vertical	43.50
119.967500	22.33	-21.4	43.81	Vertical	43.50
232.390500	17.36	-17.9	35.24	Vertical	46.00
455.927000	27.74	-12.0	37.89	Vertical	46.00
899.217000	18.35	-3.3	22.03	Vertical	46.00

For $\pi/4$ DQPSK
Channel No.:78

Frequency (MHz)	Result (dBuV/m)	ARpl (dB/m)	Pmea (dBuV)	Polarity	Limit (dBuV/m)
46.053500	7.12	-17.8	24.92	Vertical	40.00
96.008500	15.92	-20.0	35.92	Vertical	43.50
120.016000	22.85	-21.4	44.25	Vertical	43.50
232.342000	17.05	-17.9	34.95	Vertical	46.00
455.975500	28.44	-12.0	40.44	Vertical	46.00

705.265500	15.75	-7.0	22.75	Vertical	46.00
------------	-------	------	-------	----------	-------

For 8DPSK

Channel No.:78

Frequency (MHz)	Result (dBuV/m)	ARpl (dB/m)	Pmea (dBuV)	Polarity	Limit (dBuV/m)
44.598500	7.02	-18.0	25.02	Vertical	40.00
95.960000	14.88	-20.0	34.88	Vertical	43.50
119.967500	22.40	-21.4	43.80	Vertical	43.50
232.390500	17.76	-17.9	35.66	Vertical	46.00
455.975500	28.51	-12.0	40.51	Vertical	46.00
703.277000	15.71	-7.0	22.71	Vertical	46.00


For Left side headphone:

For GFSK


Channel No.:0

Frequency (MHz)	Result (dBuV/m)	ARpl (dB/m)	Pmea (dBuV)	Polarity	Limit (dBuV/m)
51.340000	7.40	-17.7	25.10	Vertical	40.00
95.863000	13.15	-20.0	33.15	Vertical	43.50
119.967500	15.95	-21.4	37.35	Vertical	43.50
280.987500	16.39	-16.6	32.99	Vertical	46.00
455.345000	17.12	-12.0	29.12	Vertical	46.00
832.966000	18.78	-4.5	23.28	Vertical	46.00

Carrier frequency (MHz): 2402
Channel No.:0

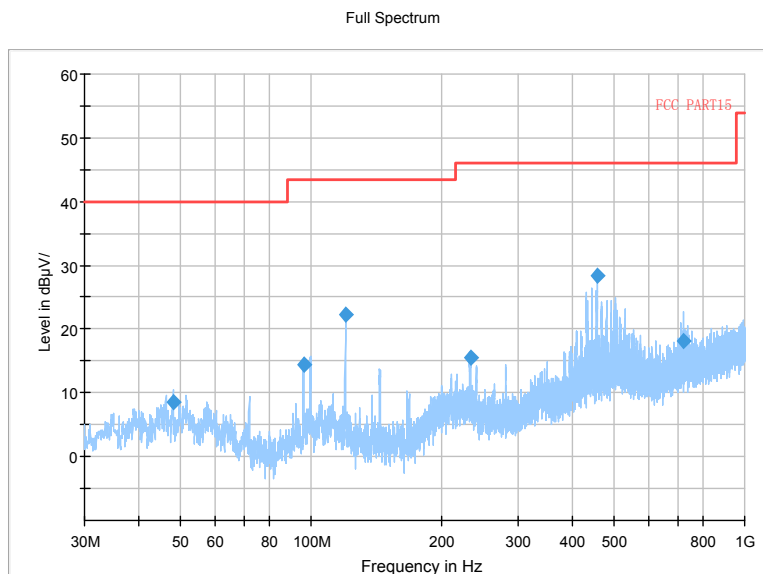


Frequency Range: 30MHz-1000MHz
Detector: QP mode
Modulation type: GFSK

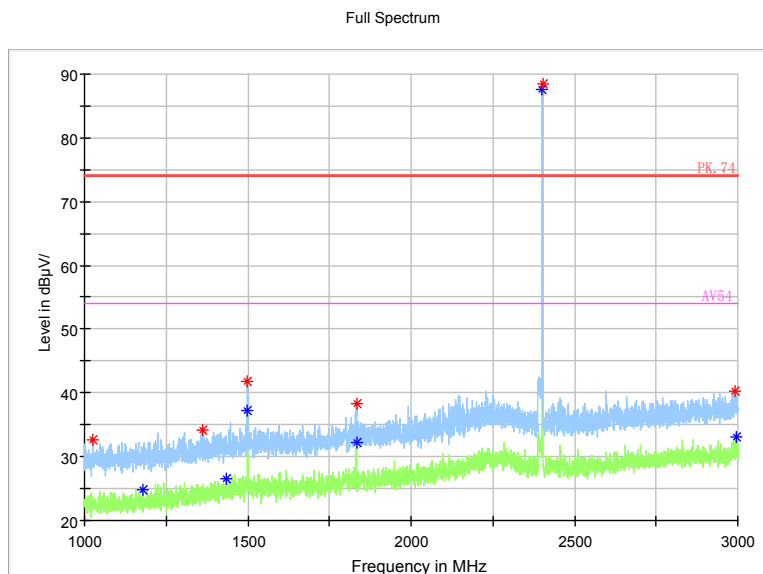


Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: GFSK

Full Spectrum

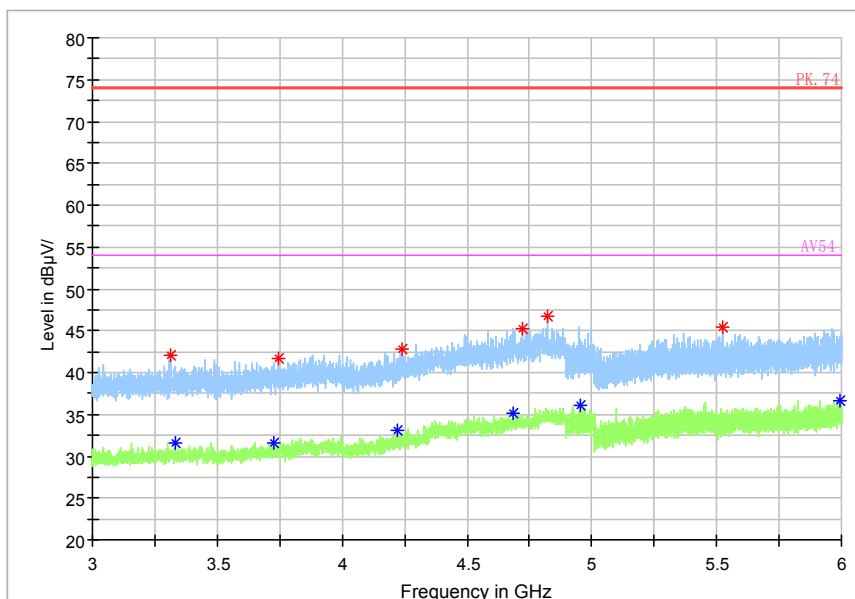


Frequency Range: 3GHz- 6GHz
Detector: Av mode and PK mode
Modulation type: GFSK

Full Spectrum

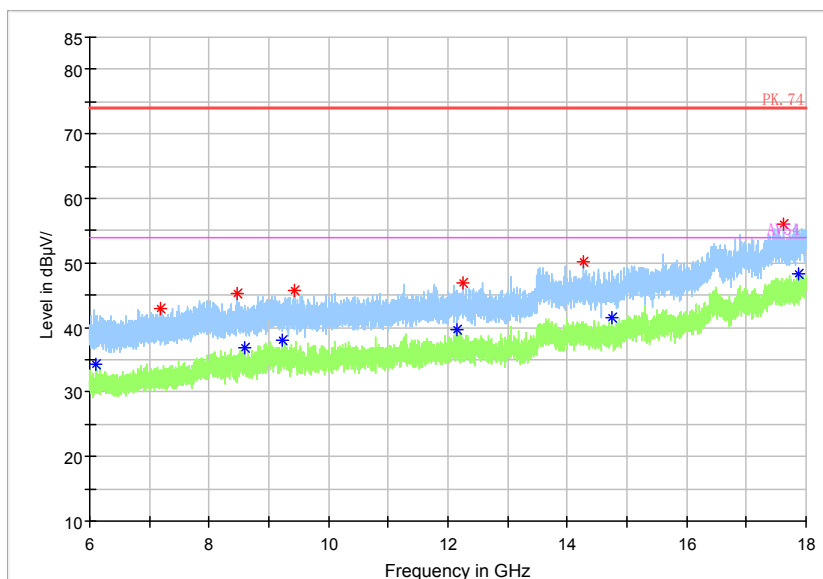


Frequency Range: 6GHz- 18GHz
Detector: Av mode and PK mode
Modulation type: GFSK

Full Spectrum

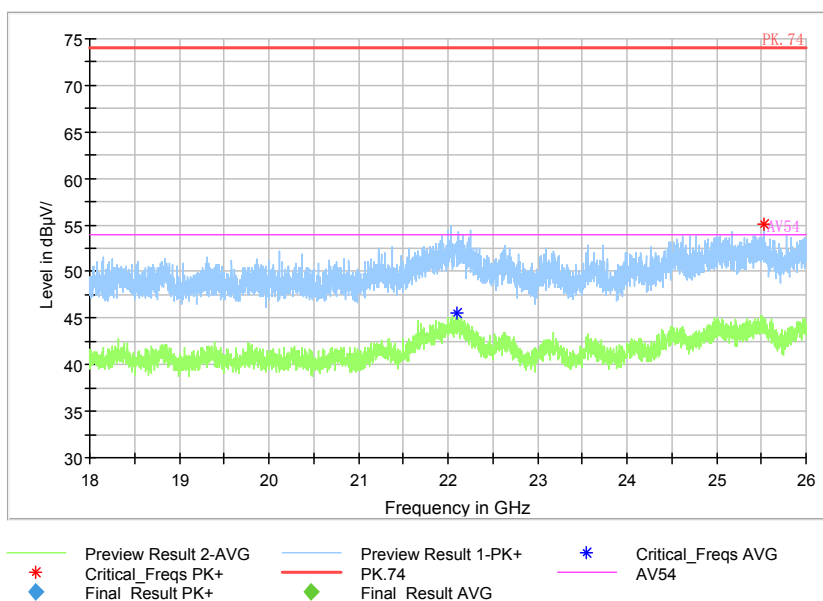


Frequency Range: 18GHz-25GHz
Detector: Av mode and PK mode
Modulation type: GFSK

Full Spectrum

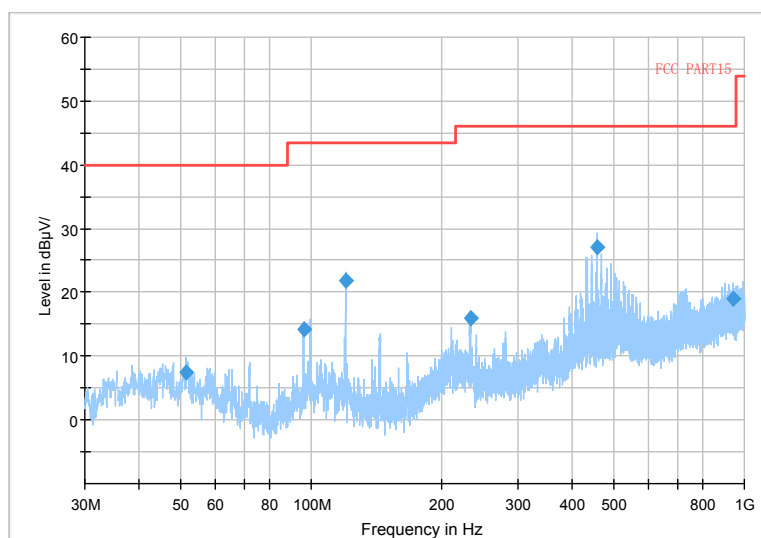


Frequency Range: 30MHz-1000 MHz
Detector: QP mode
Modulation type: $\pi/4$ DQPSK

Full Spectrum

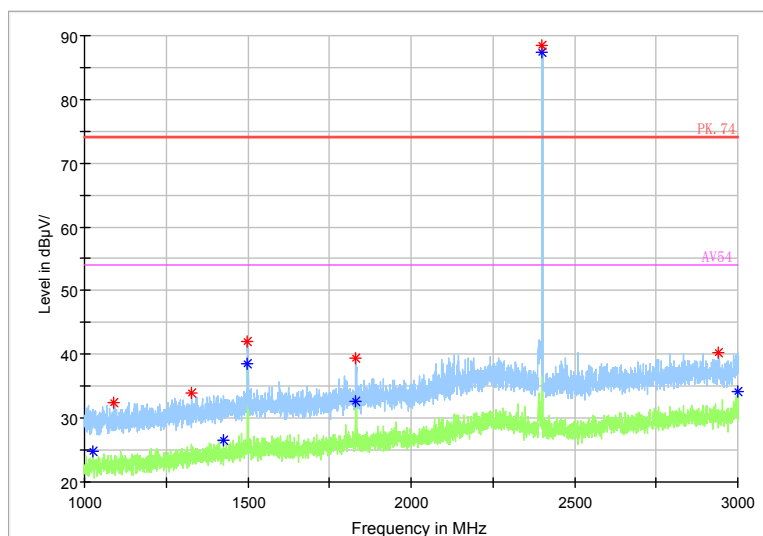


Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: $\pi/4$ DQPSK

Full Spectrum

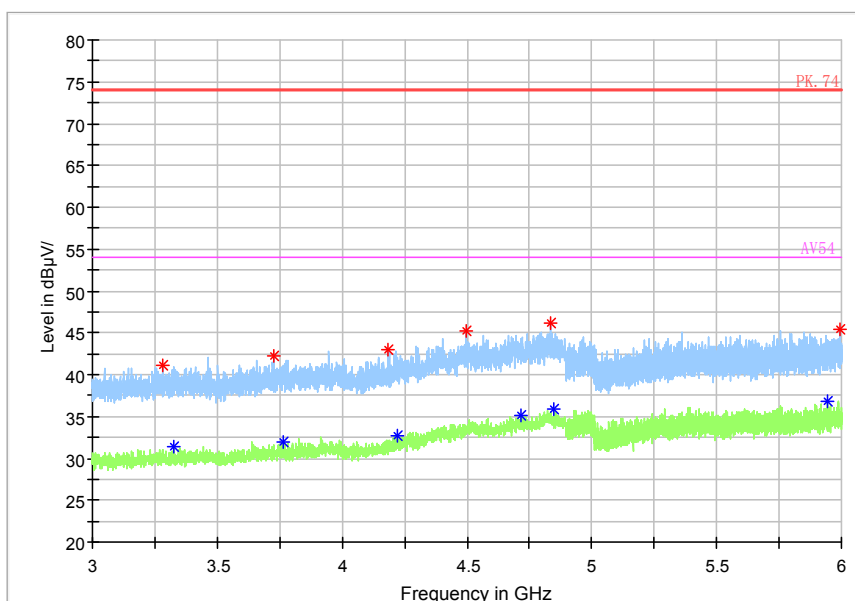


Frequency Range: 3GHz- 6GHz
Detector: Av mode and PK mode
Modulation type: $\pi/4$ DQPSK

Full Spectrum

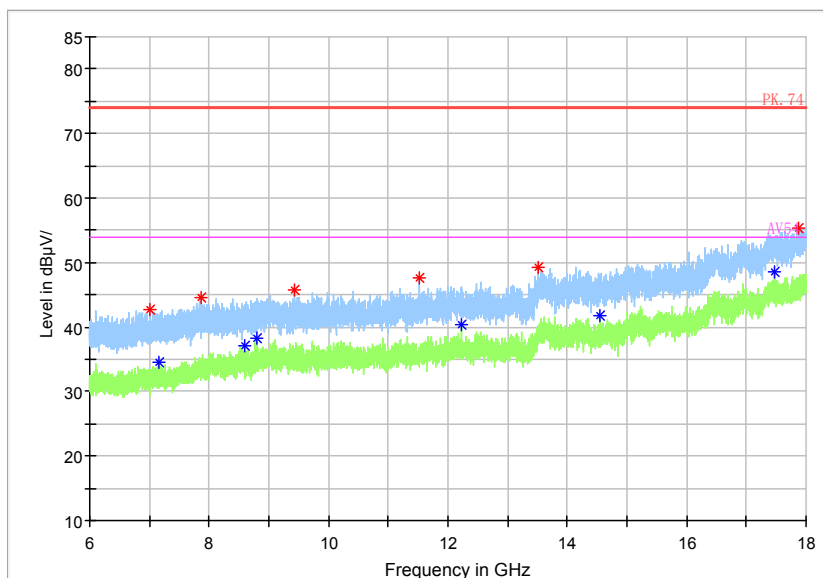

Frequency Range: 6GHz-18GHz
Detector: Av mode and PK mode
Modulation type: $\pi/4$ DQPSK


Full Spectrum

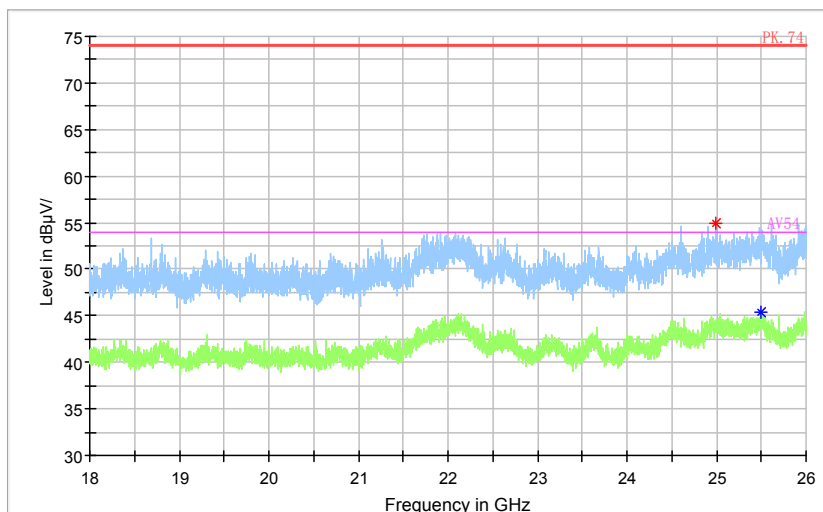

Preview Result 2-AVG Critical_Freqs PK+ Final_Result PK+ Preview Result 1-PK+ PK.74 Final_Result AVG Critical_Freqs AVG AV54


Frequency Range: 18GHz-25GHz
Detector: Av mode and PK mode
Modulation type: $\pi/4$ DQPSK

Full Spectrum

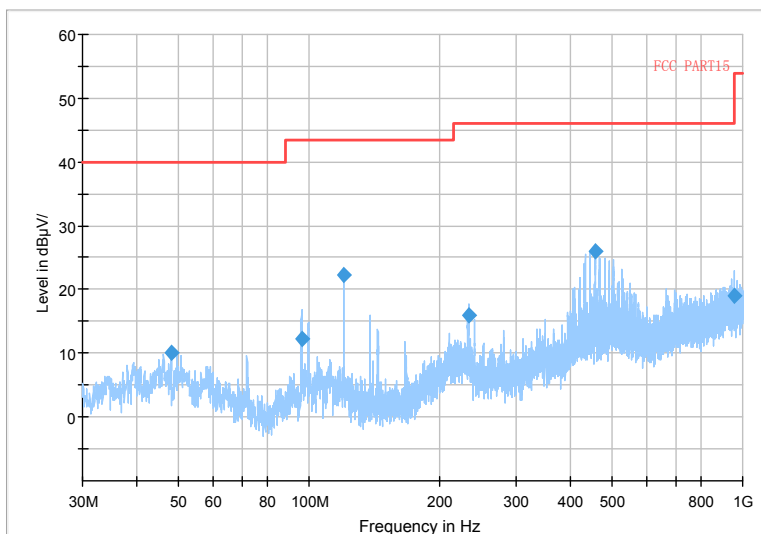


Frequency Range: 30MHz-1000 MHz
Detector: QP mode
Modulation type: 8DPSK

Full Spectrum

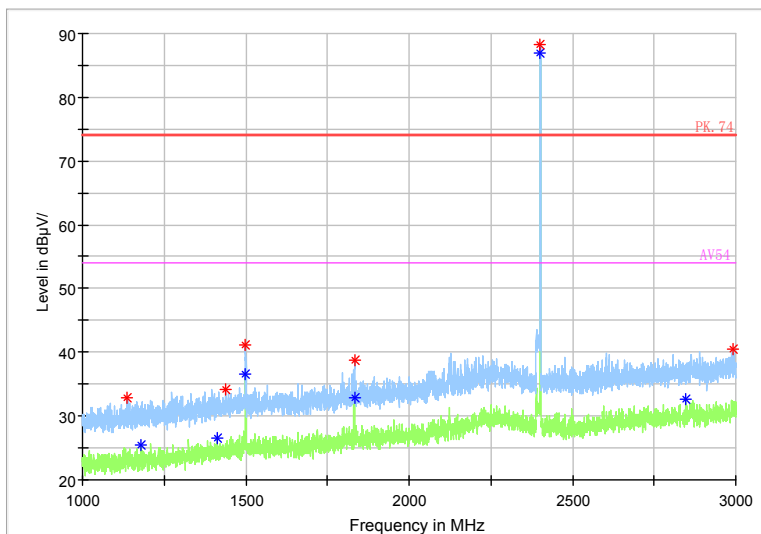


Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: 8DPSK

Full Spectrum

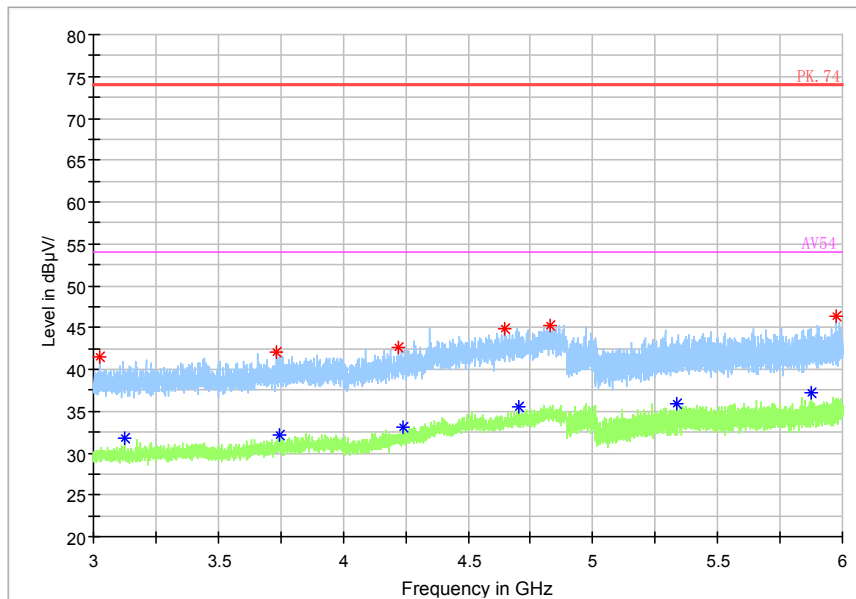


Frequency Range: 3GHz- 6GHz
Detector: Av mode and PK mode
Modulation type: 8DPSK

Full Spectrum

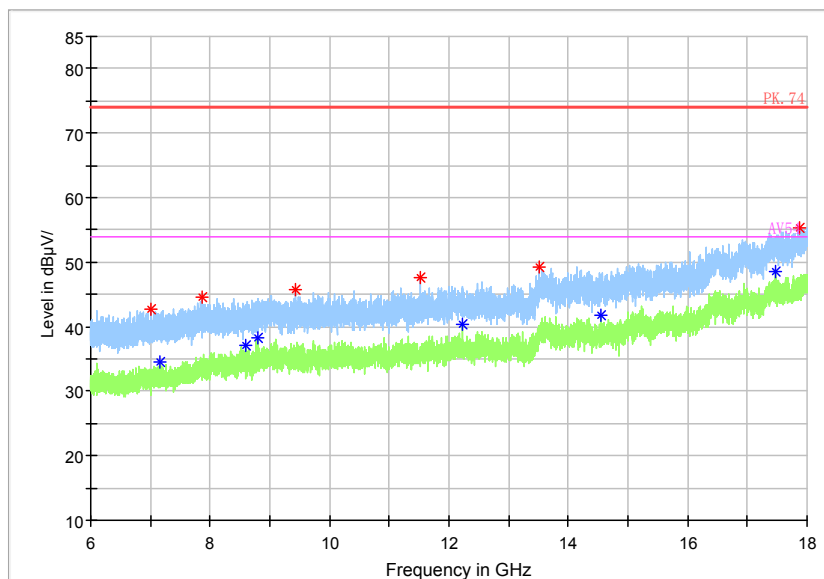

Frequency Range: 6GHz-18GHz
Detector: Av mode and PK mode
Modulation type: 8DPSK


Full Spectrum

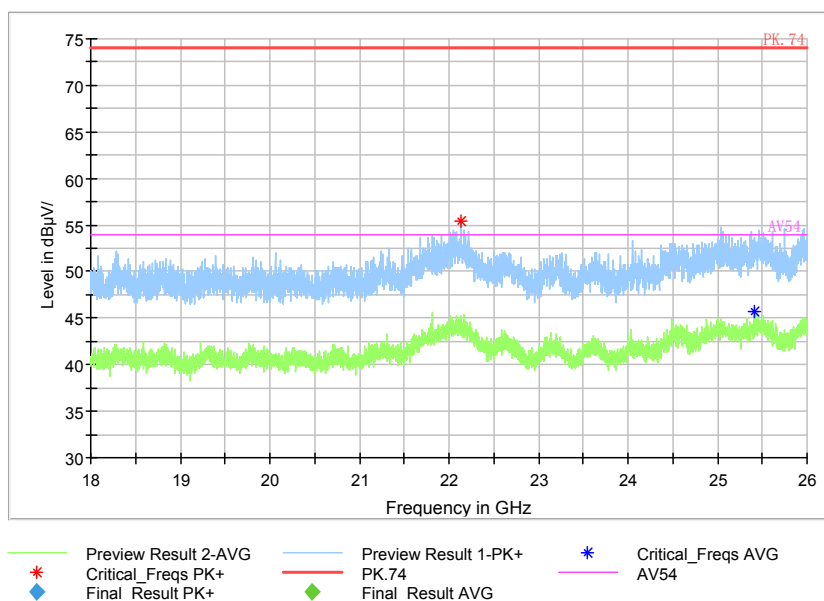

Frequency Range: 18GHz-25GHz
Detector: Av mode and PK mode
Modulation type: 8DPSK


Carrier frequency (MHz): 2441
Channel No.:39

Full Spectrum

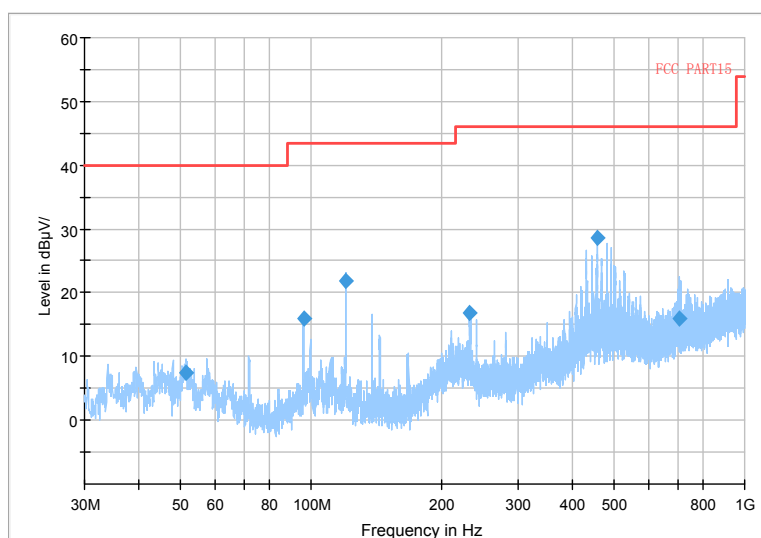


Frequency Range: 30MHz-1000MHz
Detector: QP mode
Modulation type: GFSK

Full Spectrum

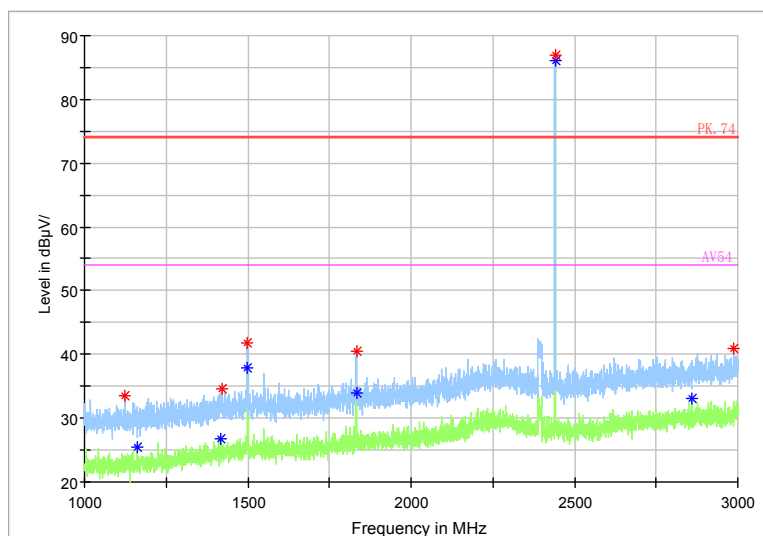


Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: GFSK

Full Spectrum

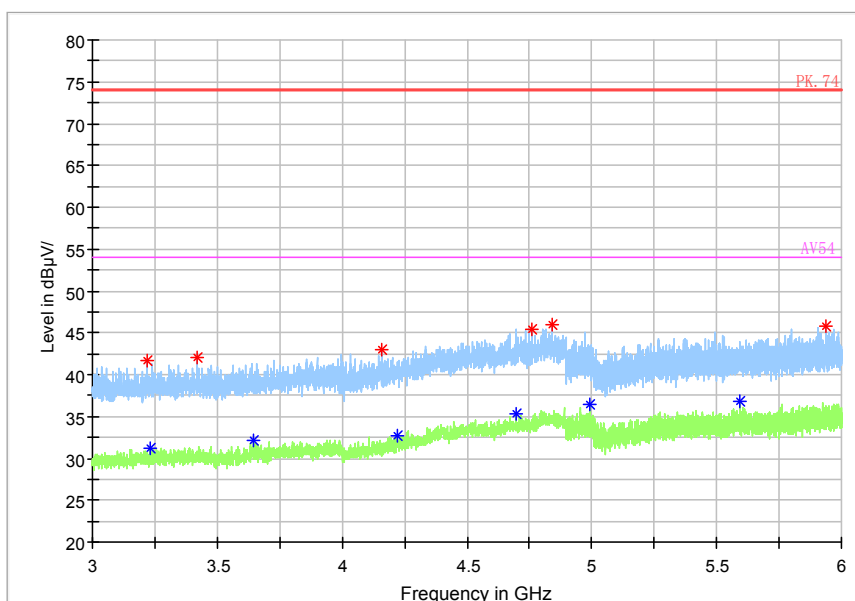


Frequency Range: 3GHz- 6GHz
Detector: Av mode and PK mode
Modulation type: GFSK

Full Spectrum

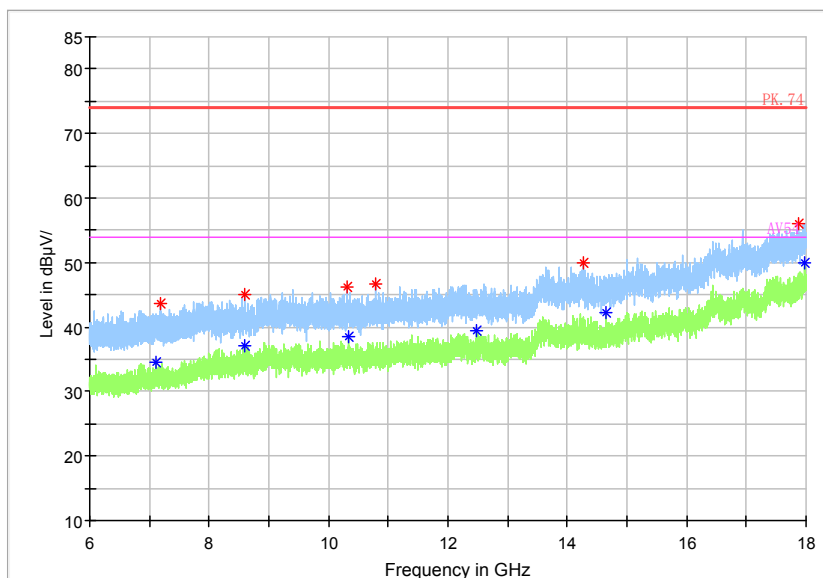


Frequency Range: 3GHz- 18GHz
Detector: Av mode and PK mode
Modulation type: GFSK

Full Spectrum

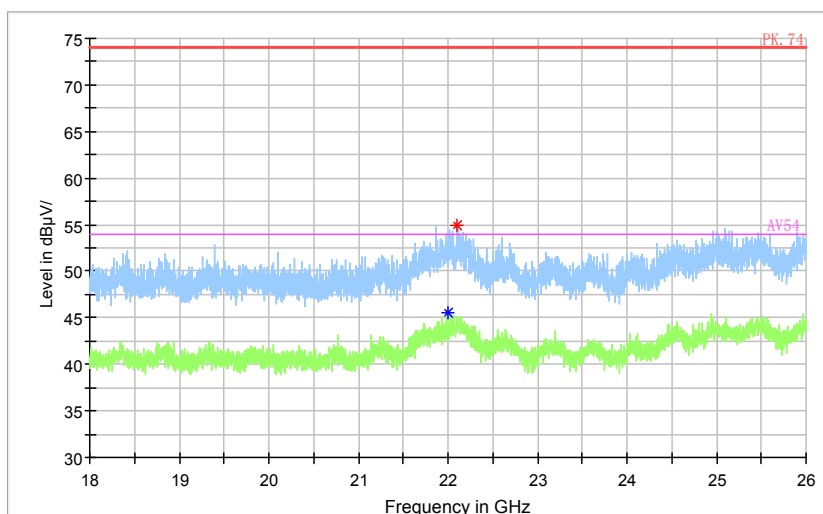


— Preview Result 2-AVG — Preview Result 1-PK+ * Critical_Freqs AVG
* Critical_Freqs PK+ — PK.74 — AV54
♦ Final_Result PK+ ♦ Final_Result AVG

Frequency Range: 18GHz-25GHz
Detector: Av mode and PK mode
Modulation type: GFSK

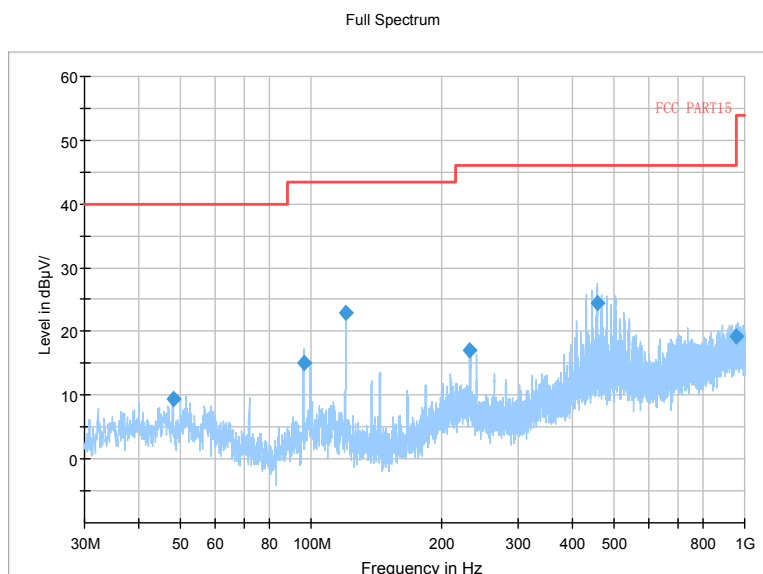


Frequency Range: 30MHz-1000 MHz
Detector: QP mode
Modulation type: $\pi/4$ DQPSK

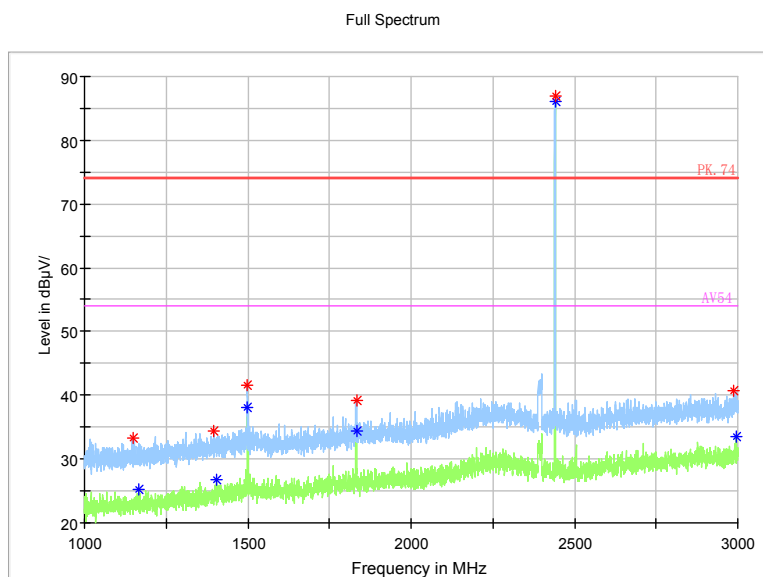


Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: $\pi/4$ DQPSK

Full Spectrum

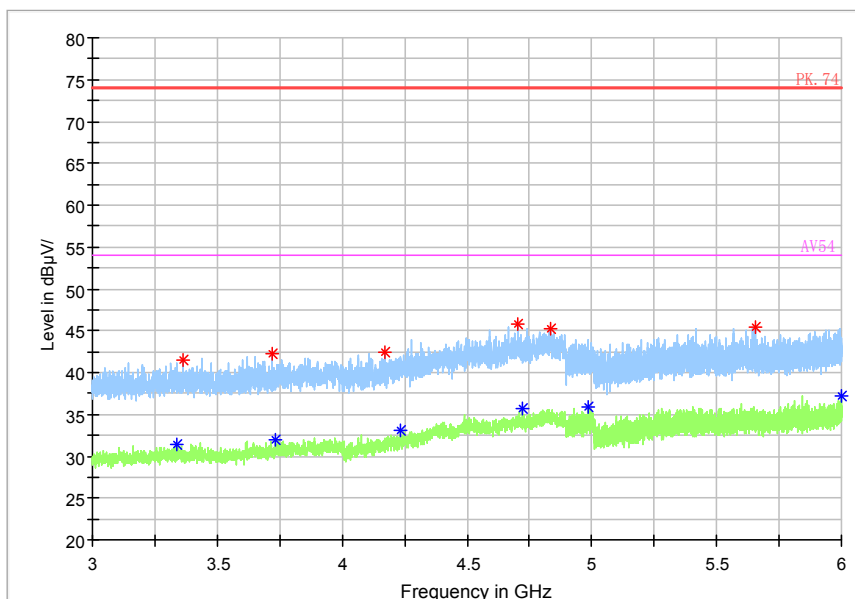


Frequency Range: 3GHz- 6GHz
Detector: Av mode and PK mode
Modulation type: $\pi/4$ DQPSK

Full Spectrum

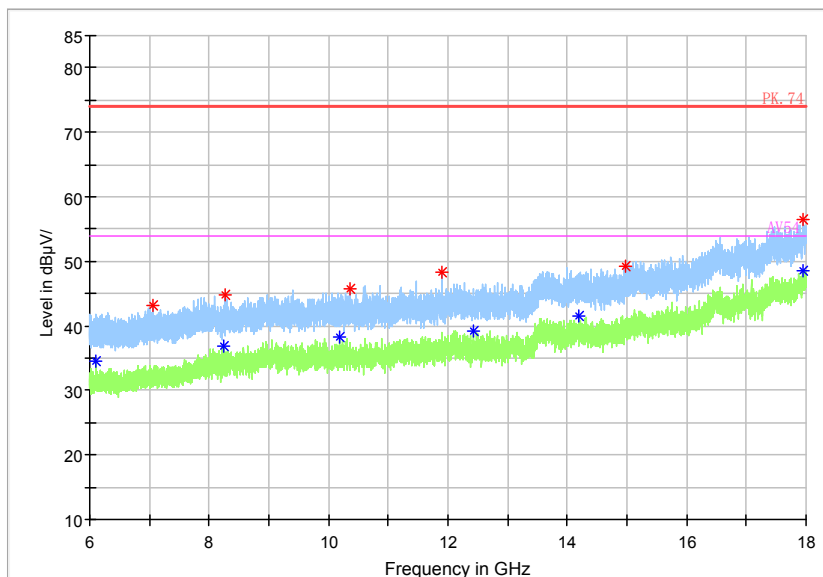


Frequency Range: 6GHz-18GHz
Detector: Av mode and PK mode
Modulation type: $\pi/4$ DQPSK

Full Spectrum

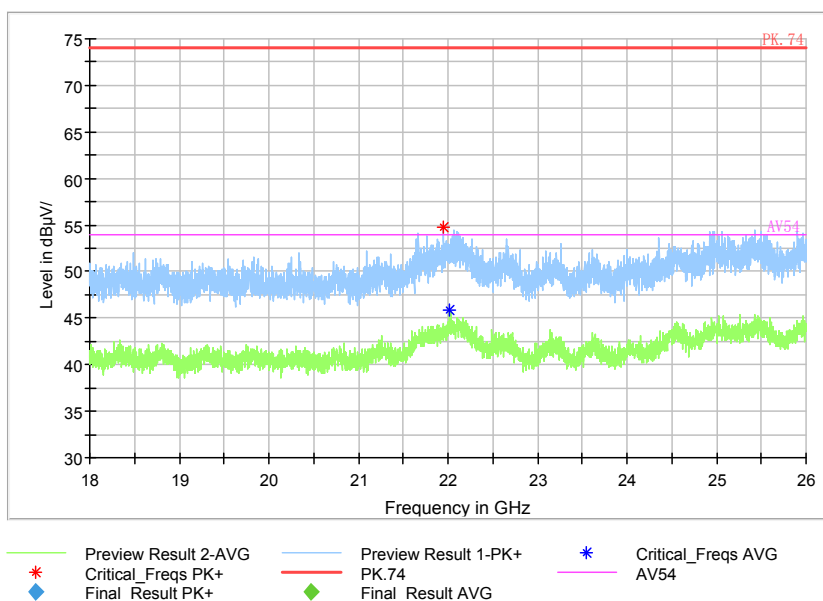


Frequency Range: 18GHz-25GHz
Detector: Av mode and PK mode
Modulation type: $\pi/4$ DQPSK

Full Spectrum

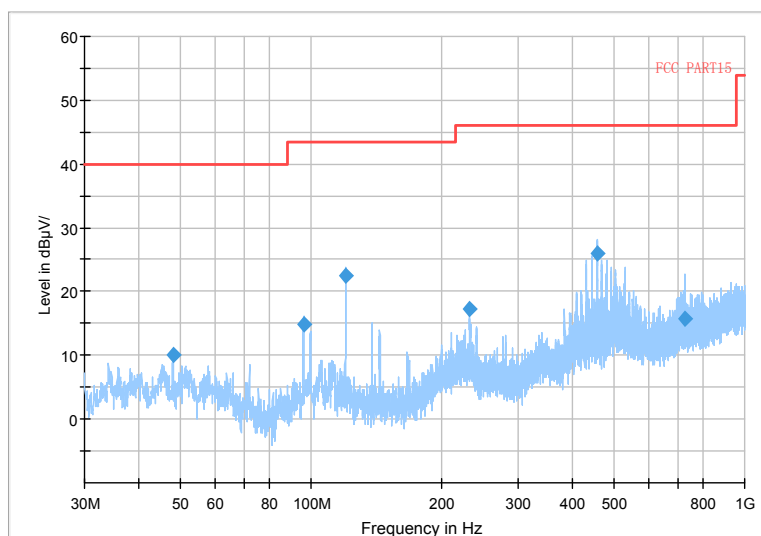


Frequency Range: 30MHz-1000 MHz
Detector: QP mode
Modulation type: 8DPSK

Full Spectrum

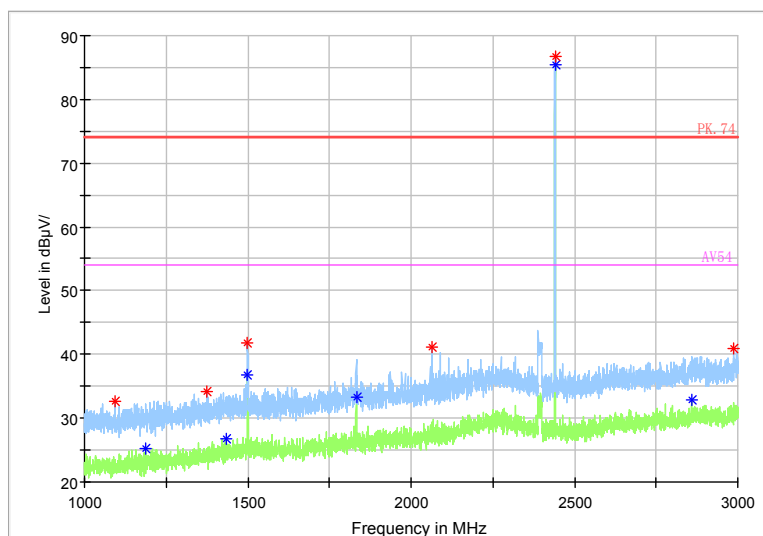


Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: 8DPSK

Full Spectrum

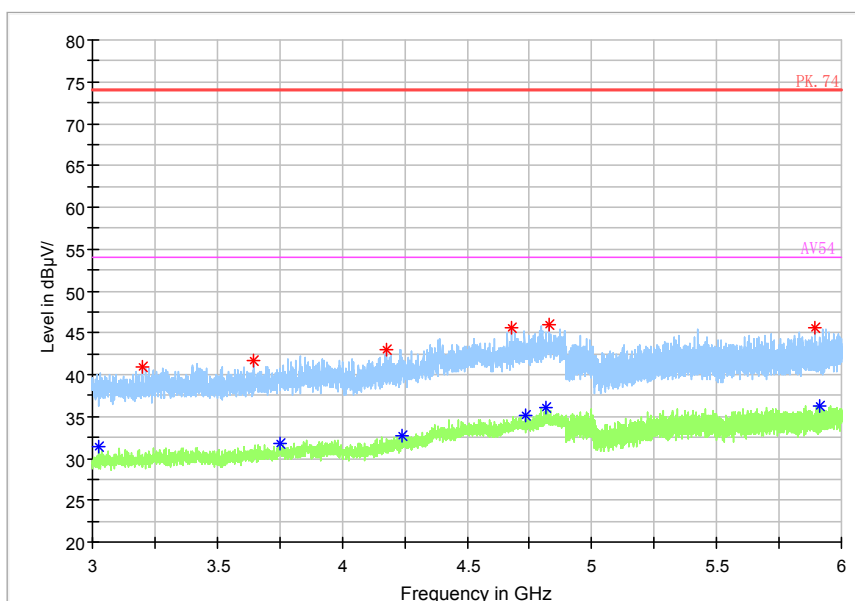


Frequency Range: 3GHz- 6GHz
Detector: Av mode and PK mode
Modulation type: 8DPSK

Full Spectrum

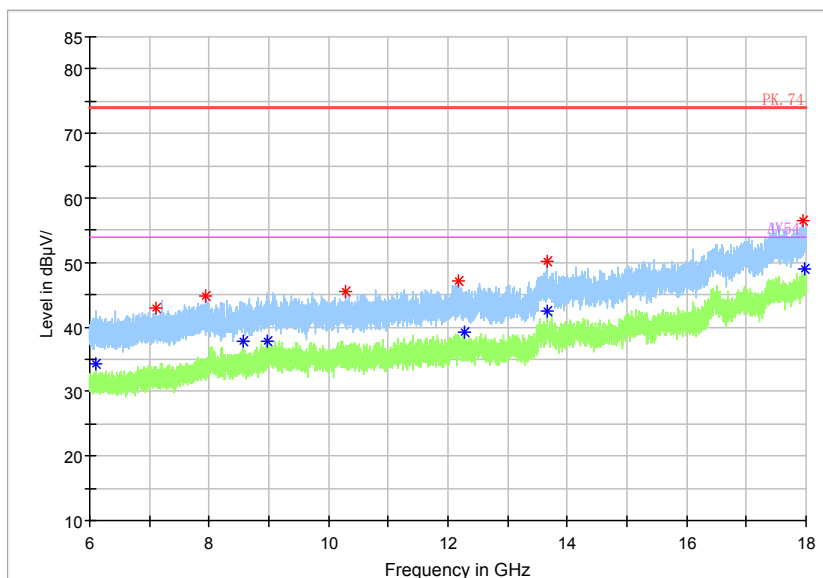


Frequency Range: 6GHz-18GHz
Detector: Av mode and PK mode
Modulation type: 8DPSK

Full Spectrum

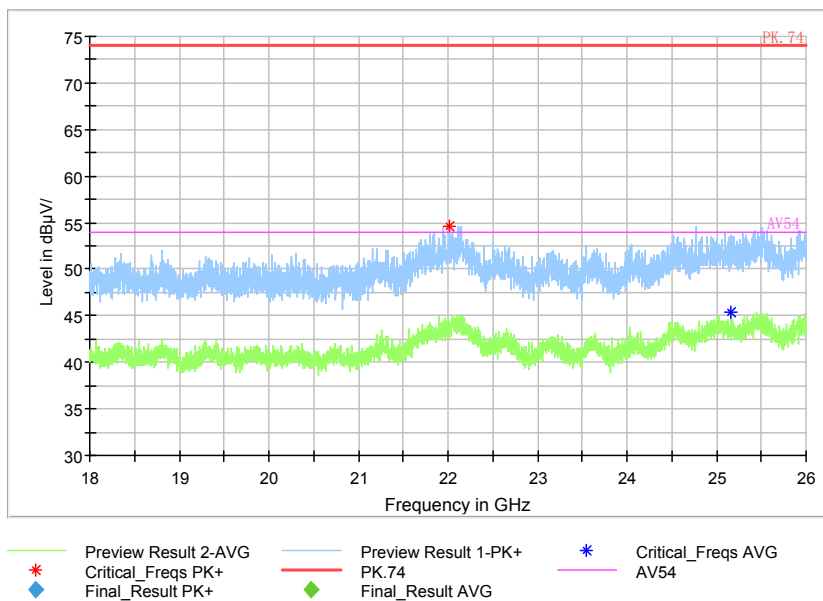


Frequency Range: 18GHz-25GHz
Detector: Av mode and PK mode
Modulation type: 8DPSK

Carrier frequency (MHz): 2480
Channel No.:78

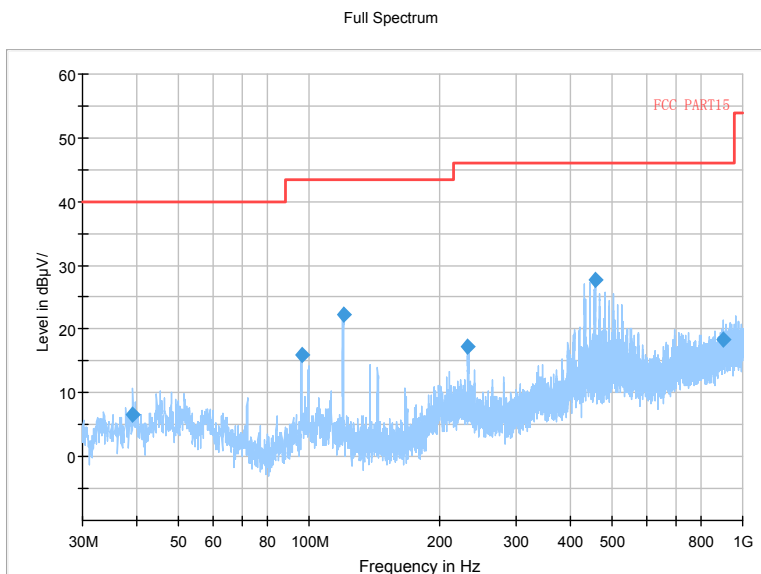


Frequency Range: 30MHz-1000MHz
Detector: QP mode
Modulation type: GFSK

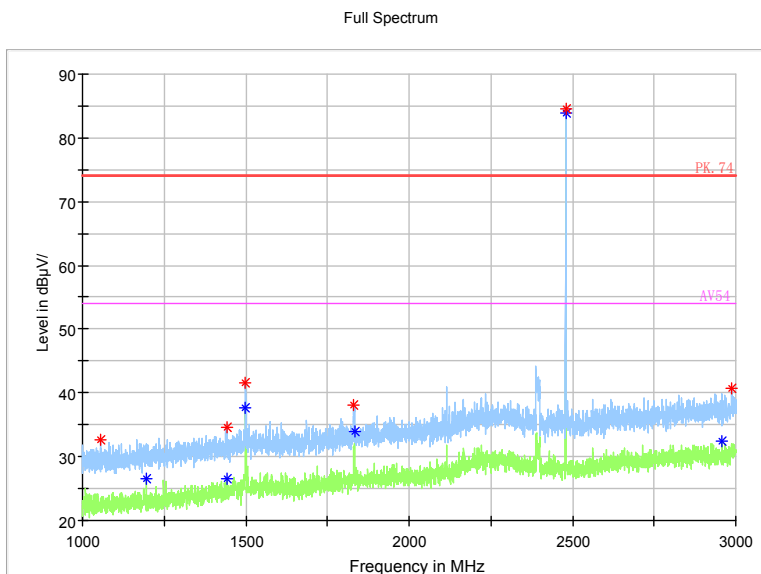


Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: GFSK

Full Spectrum

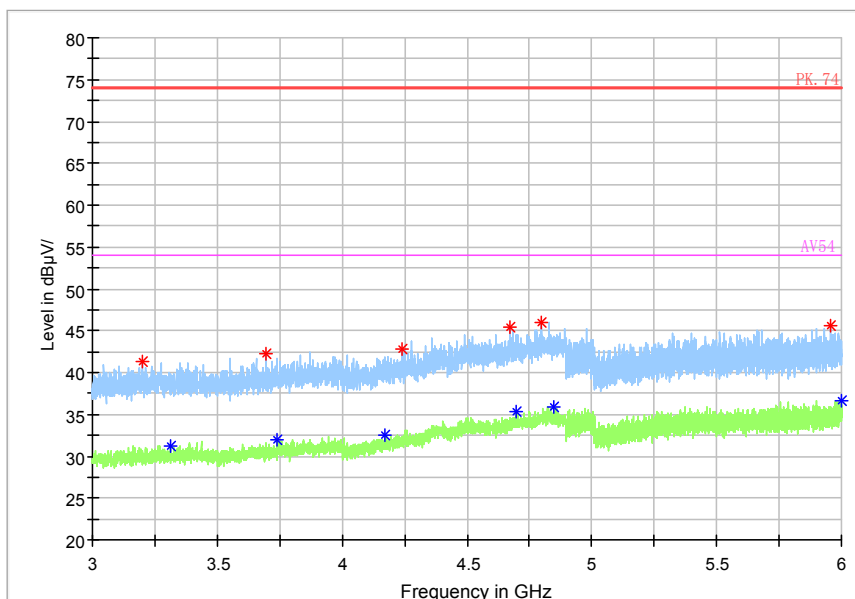


Frequency Range: 3GHz- 6GHz
Detector: Av mode and PK mode
Modulation type: GFSK

Full Spectrum

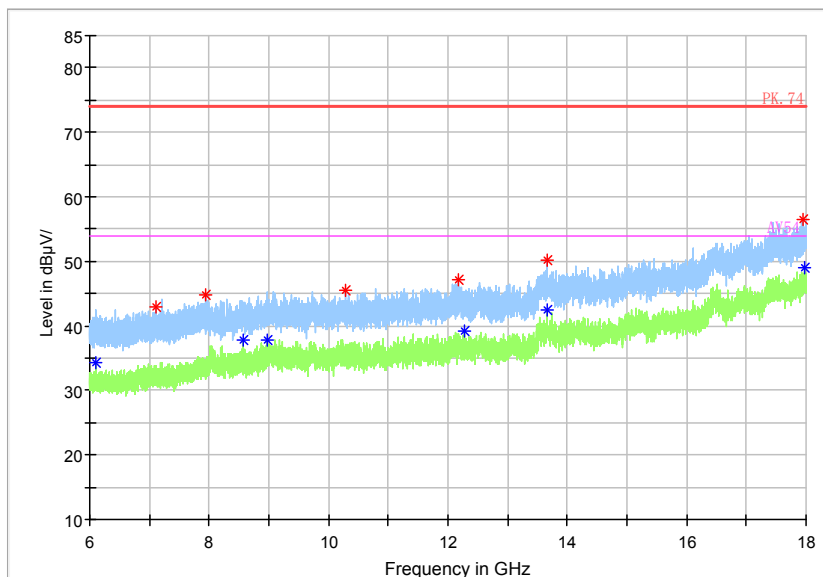


Frequency Range: 3GHz- 18GHz
Detector: Av mode and PK mode
Modulation type: GFSK

Full Spectrum

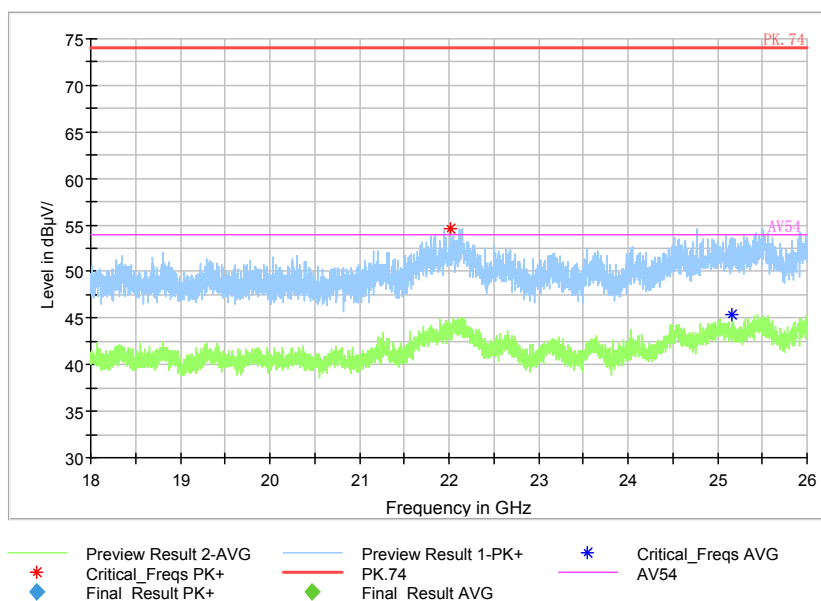


Frequency Range: 18GHz-25GHz
Detector: Av mode and PK mode
Modulation type: GFSK

Full Spectrum

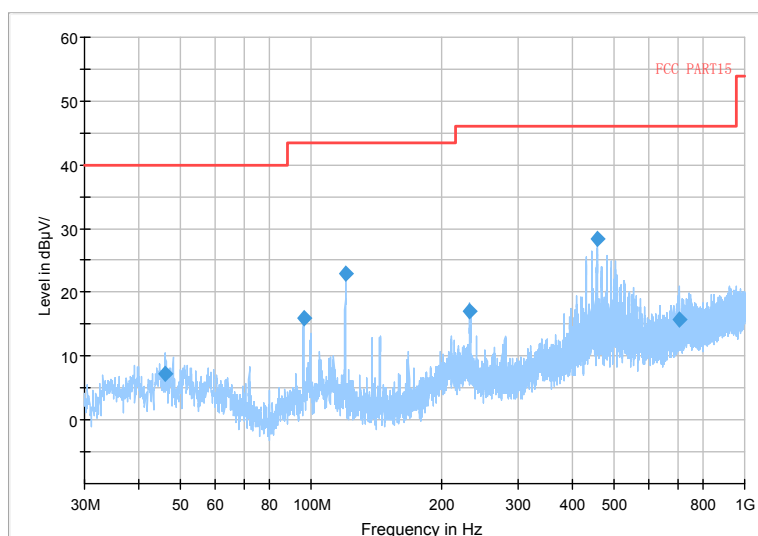


Frequency Range: 30MHz-1000 MHz
Detector: QP mode
Modulation type: $\pi/4$ DQPSK

Full Spectrum

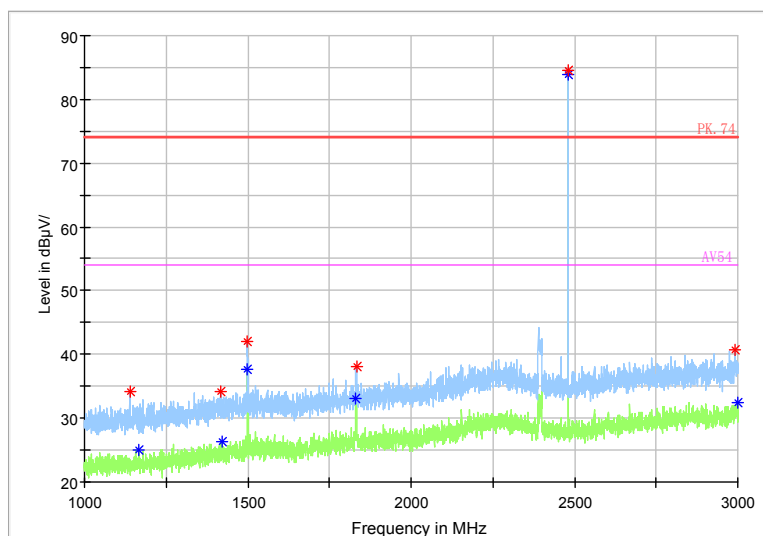


Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: $\pi/4$ DQPSK

Full Spectrum

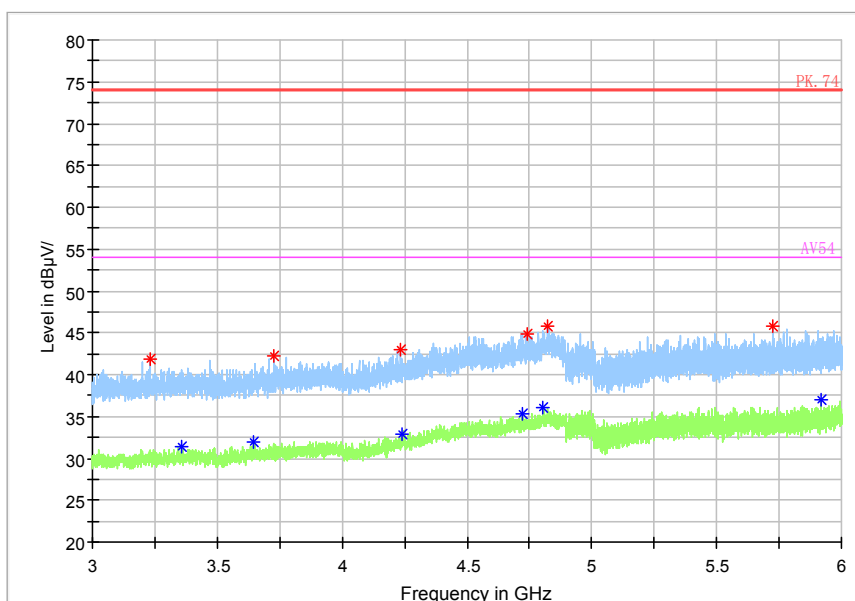


Frequency Range: 3GHz- 6GHz
Detector: Av mode and PK mode
Modulation type: $\pi/4$ DQPSK

Full Spectrum

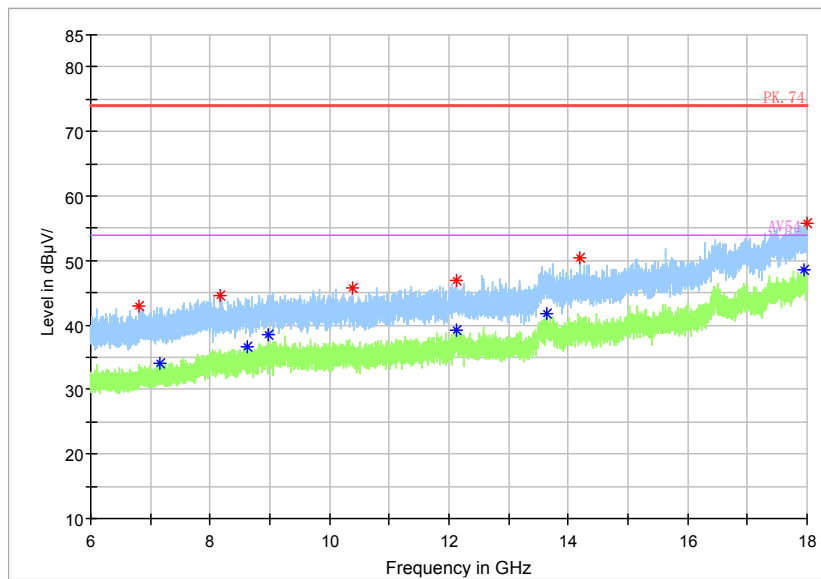


Frequency Range: 6GHz-18GHz
Detector: Av mode and PK mode
Modulation type: $\pi/4$ DQPSK

Full Spectrum

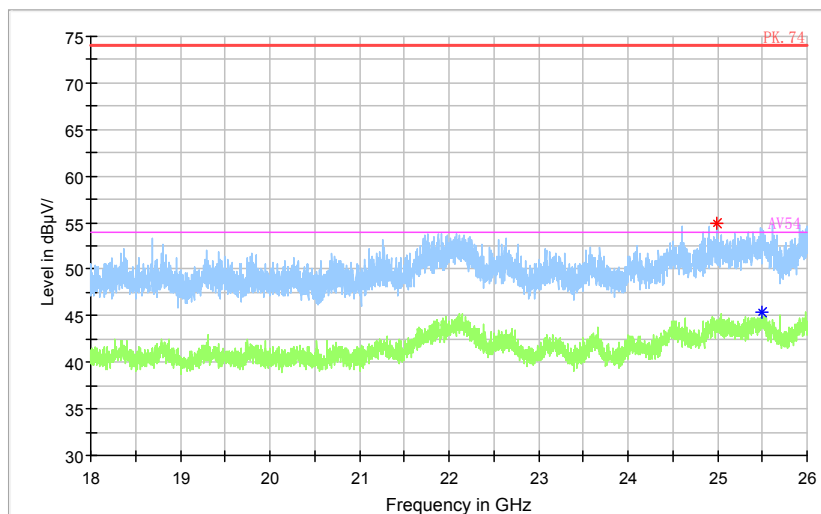


* Preview Result 2-AVG
* Critical_Freqs PK+
◆ Final_Result PK+
 — Preview Result 1-PK+
— PK.74
◆ Final_Result AVG
 * Critical_Freqs AVG
— AV54

Frequency Range: 18GHz-25GHz
Detector: Av mode and PK mode
Modulation type: $\pi/4$ DQPSK

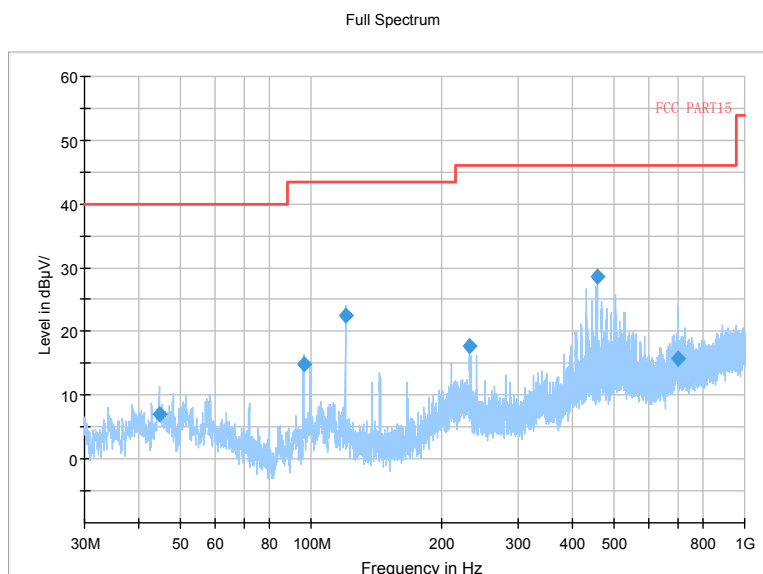


Frequency Range: 30MHz-1000 MHz
Detector: QP mode
Modulation type: 8DPSK

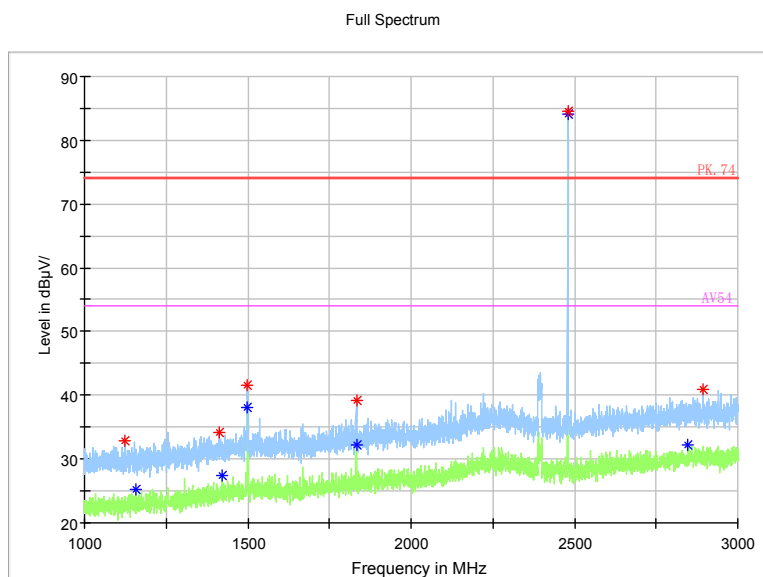


Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: 8DPSK

Full Spectrum

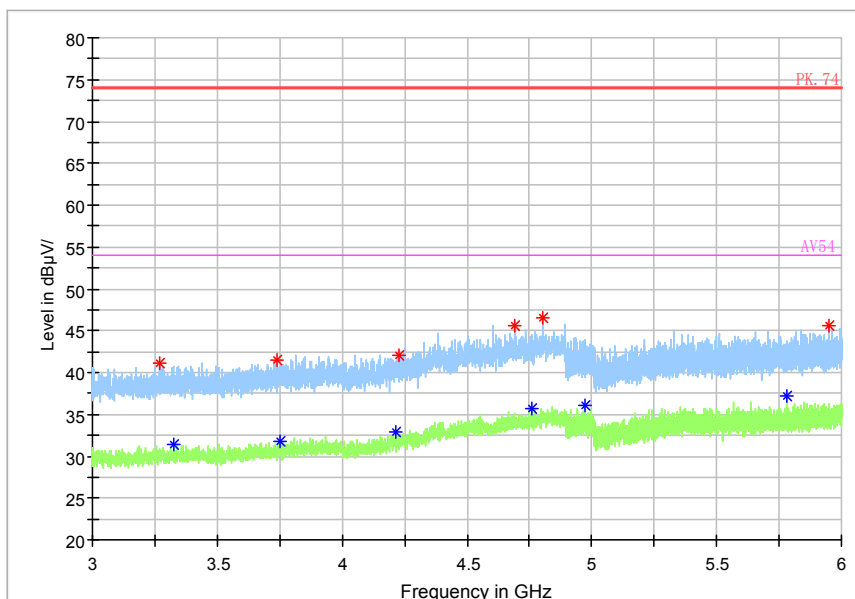


Frequency Range: 3GHz- 6GHz
Detector: Av mode and PK mode
Modulation type: 8DPSK

Full Spectrum

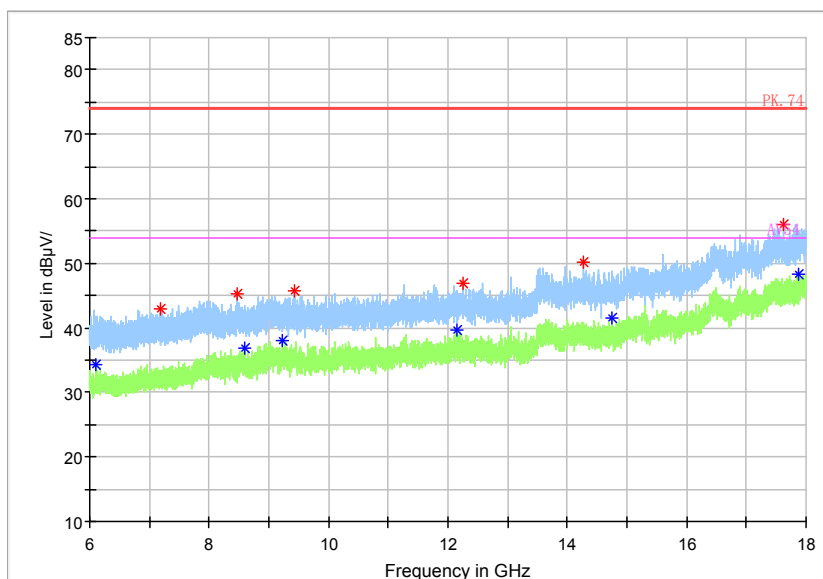

Frequency Range: 6GHz-18GHz
Detector: Av mode and PK mode
Modulation type: 8DPSK


Full Spectrum

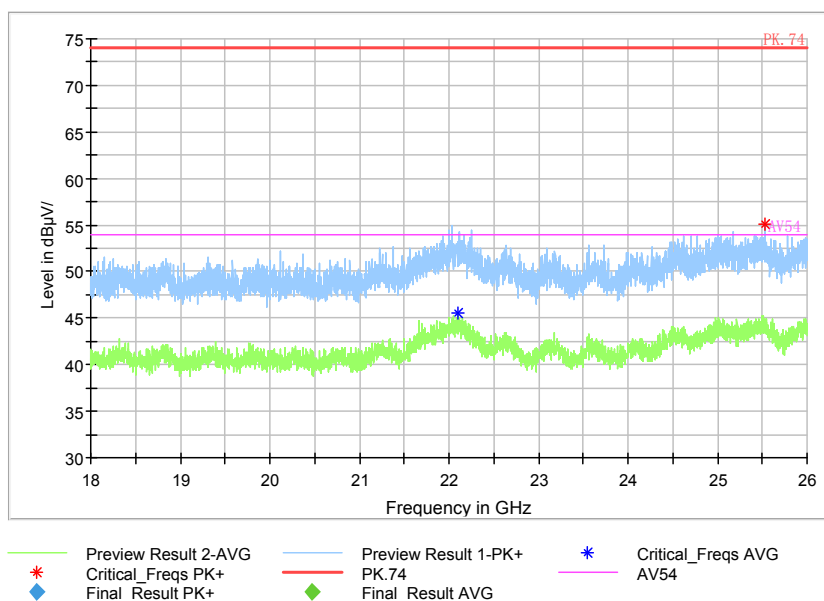

Frequency Range: 18GHz-25GHz
Detector: Av mode and PK mode
Modulation type: 8DPSK


For Left side headphone:
Carrier frequency (MHz): 2402
Channel No.:0

Full Spectrum

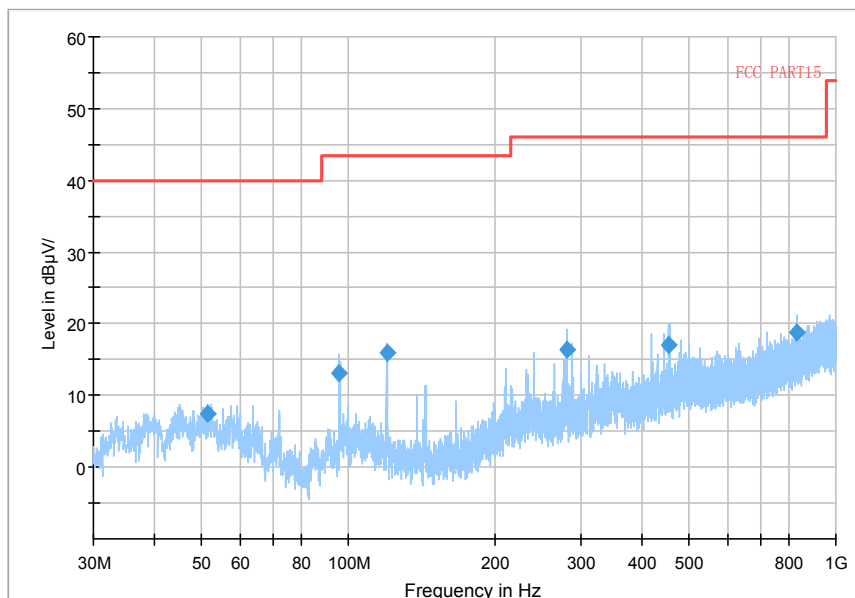


Frequency Range: 30MHz-1000MHz
Detector: QP mode
Modulation type: GFSK

Full Spectrum

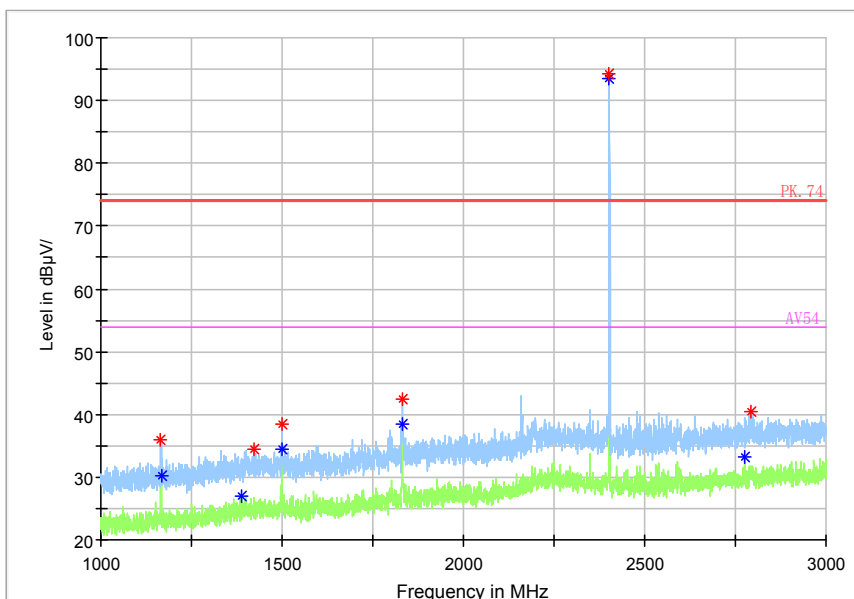


Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: GFSK

Full Spectrum

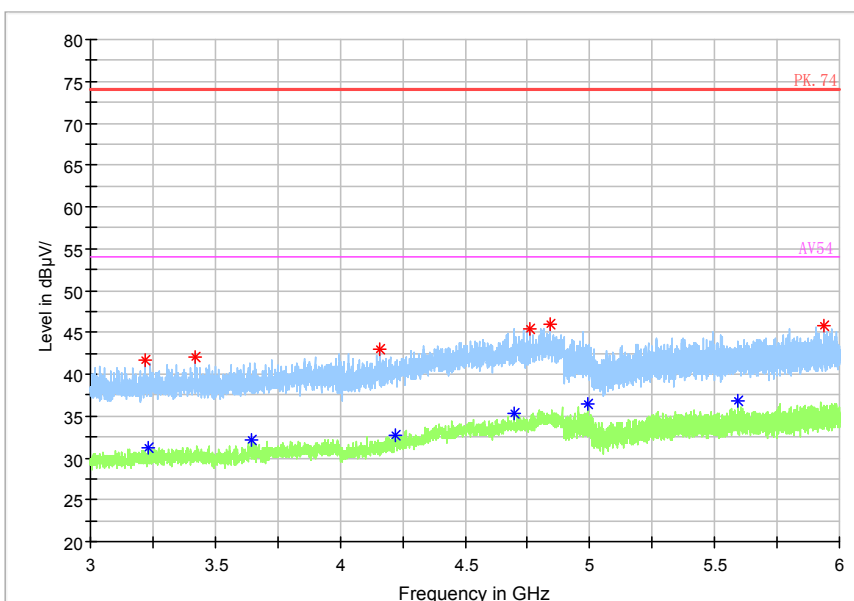


Frequency Range: 3GHz- 6GHz
Detector: Av mode and PK mode
Modulation type: GFSK

Full Spectrum

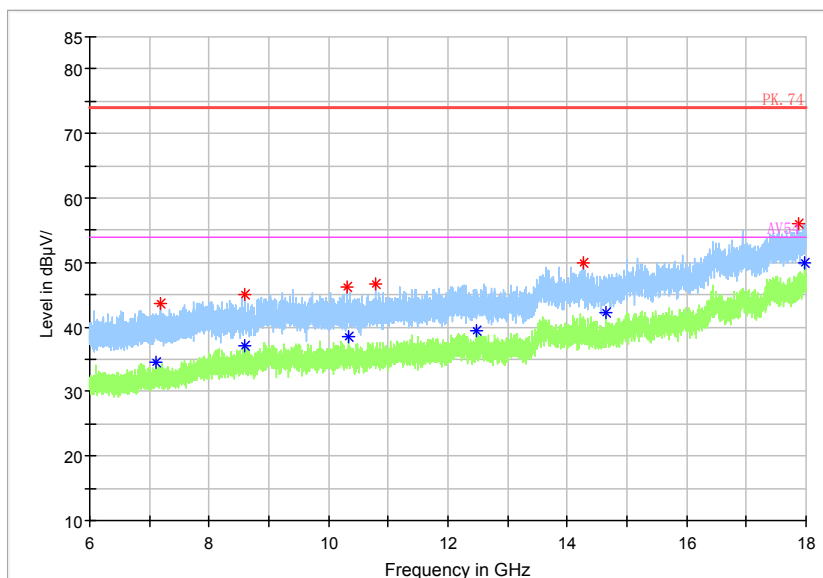

Frequency Range: 3GHz- 18GHz
Detector: Av mode and PK mode
Modulation type: GFSK

Full Spectrum

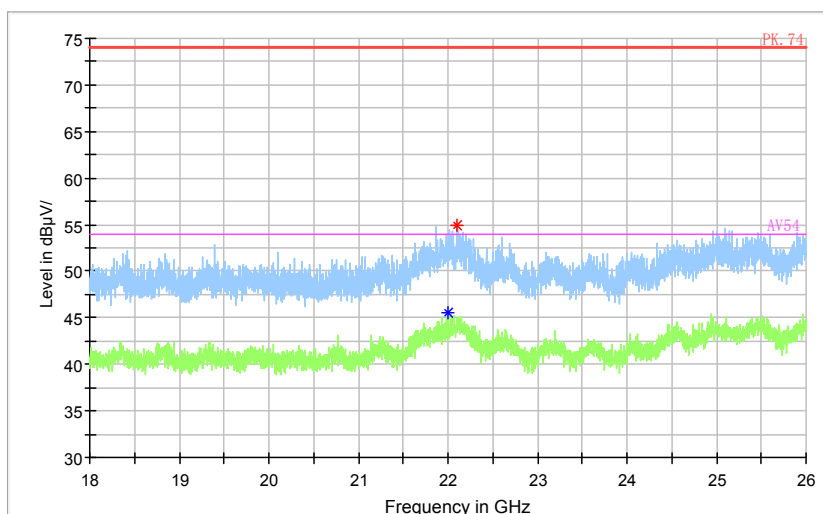

— Preview Result 2-AVG — Preview Result 1-PK+ * Critical_Freqs AVG
* Critical_Freqs PK+ — PK.74 — AV54
♦ Final_Result PK+ ♦ Final_Result AVG

Frequency Range: 18GHz-25GHz
Detector: Av mode and PK mode
Modulation type: GFSK


AC Power line Conducted Emission

A "reference path loss" Corr.(dB) is established and the $L_{\text{cable}} + \text{ATT} + \text{VDF}$ is the attenuation of "reference path loss", and including the cable loss, the attenuation of the attenuator, the voltage division factor of AMN.

The measurement results are obtained as described below:

$$P_{\text{result}} = P_{\text{mea}} + \text{Corr. (dB)}$$

Sample calculation: $(35.95 \text{ dB}\mu\text{V}) = (6.25 \text{ dB}\mu\text{V}) + (29.7 \text{ dB})$, the corresponding frequency is 0.312043MHz.

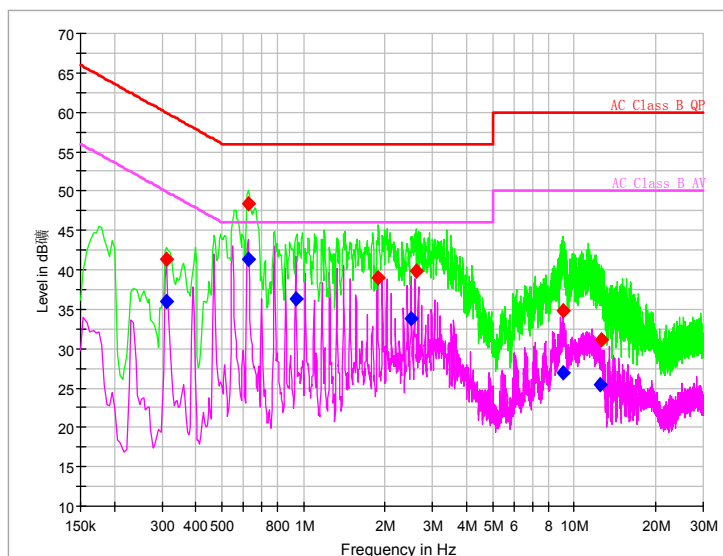

L+N Line

MEASUREMENT RESULT:

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)	Pmea Quasi Peak (dBμV)	Pmea Average (dBμV)
0.312043	---	35.95	49.92	13.96	L1	29.7	---	6.25
0.312043	41.27	---	59.92	18.64	L1	29.7	11.57	---
0.623336	---	41.35	46.00	4.65	L1	29.7	---	11.6
0.623336	48.38	---	56.00	7.62	L1	29.7	18.68	---
0.938893	---	36.33	46.00	9.67	L1	29.8	---	6.53
1.894093	38.96	---	56.00	17.04	L1	29.8	9.16	---
2.499621	---	33.72	46.00	12.28	L1	29.8	---	3.92
2.597700	39.84	---	56.00	16.16	L1	29.8	10.04	---
9.122057	34.77	---	60.00	25.23	N	29.9	4.87	---
9.130586	---	26.85	50.00	23.15	L1	29.9	---	-3.05
12.469521	---	25.39	50.00	24.61	L1	30.0	---	-4.61
12.614507	31.10	---	60.00	28.90	L1	30.0	1.1	---

---End of Test Report---