

01_HAC RF_GSM850_GSM Voice_Ch128_E

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 824.2 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4062; ConvF(1, 1, 1); Calibrated: 2022/12/23
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch128/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 59.48 V/m; Power Drift = -0.07 dB

Applied MIF = 3.63 dB

RF audio interference level = 37.05 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 35.6 dBV/m	Grid 2 M4 37.05 dBV/m	Grid 3 M4 36.99 dBV/m
Grid 4 M4 35.63 dBV/m	Grid 5 M4 36.95 dBV/m	Grid 6 M4 36.88 dBV/m
Grid 7 M4 35.54 dBV/m	Grid 8 M4 36.34 dBV/m	Grid 9 M4 36.12 dBV/m

Cursor:

Total = 37.05 dBV/m

E Category: M4

Location: -5.5, -19.5, 7.7 mm

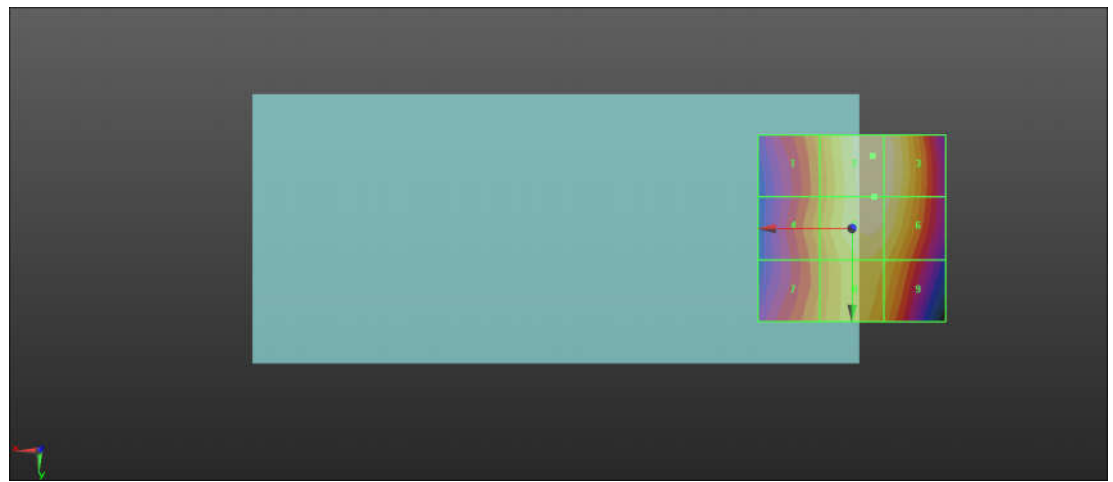

0 dB = 71.17 V/m = 37.05 dBV/m

02_HAC RF_GSM850_GSM Voice_Ch189_E

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 836.4 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4062; ConvF(1, 1, 1); Calibrated: 2022/12/23
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch189/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 63.34 V/m; Power Drift = -0.01 dB

Applied MIF = 3.63 dB

RF audio interference level = 37.61 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 36.05 dBV/m	Grid 2 M4 37.61 dBV/m	Grid 3 M4 37.58 dBV/m
Grid 4 M4 36.11 dBV/m	Grid 5 M4 37.47 dBV/m	Grid 6 M4 37.43 dBV/m
Grid 7 M4 36.11 dBV/m	Grid 8 M4 36.75 dBV/m	Grid 9 M4 36.49 dBV/m

Cursor:

Total = 37.61 dBV/m

E Category: M4

Location: -7, -18.5, 7.7 mm

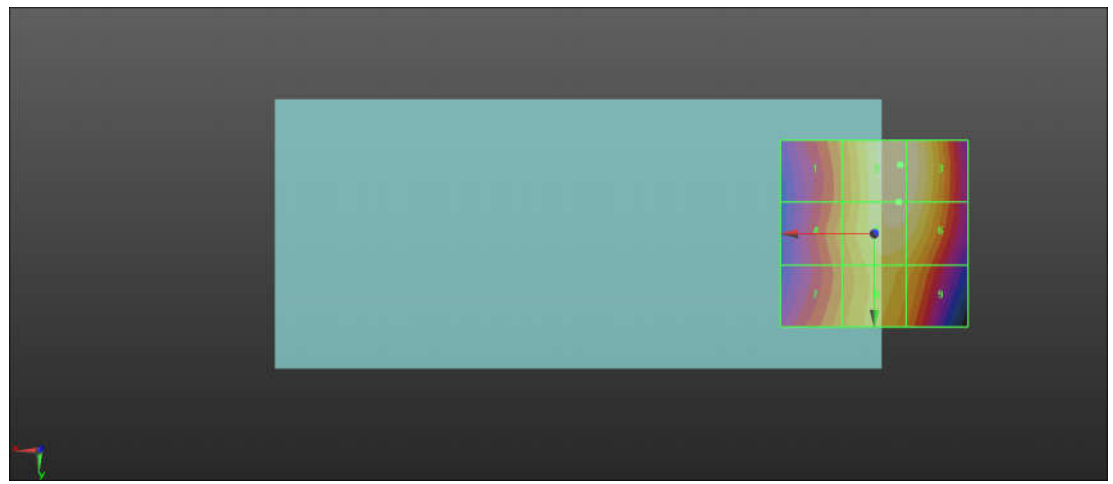

0 dB = 75.91 V/m = 37.61 dBV/m

03_HAC RF_GSM850_GSM Voice_Ch251_E

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 848.8 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4062; ConvF(1, 1, 1); Calibrated: 2022/12/23
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch251/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 66.40 V/m; Power Drift = -0.03 dB

Applied MIF = 3.63 dB

RF audio interference level = 37.73 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 36.35 dBV/m	Grid 2 M4 37.73 dBV/m	Grid 3 M4 37.68 dBV/m
Grid 4 M4 36.49 dBV/m	Grid 5 M4 37.6 dBV/m	Grid 6 M4 37.52 dBV/m
Grid 7 M4 36.58 dBV/m	Grid 8 M4 37.06 dBV/m	Grid 9 M4 36.71 dBV/m

Cursor:

Total = 37.73 dBV/m

E Category: M4

Location: -6, -19, 7.7 mm

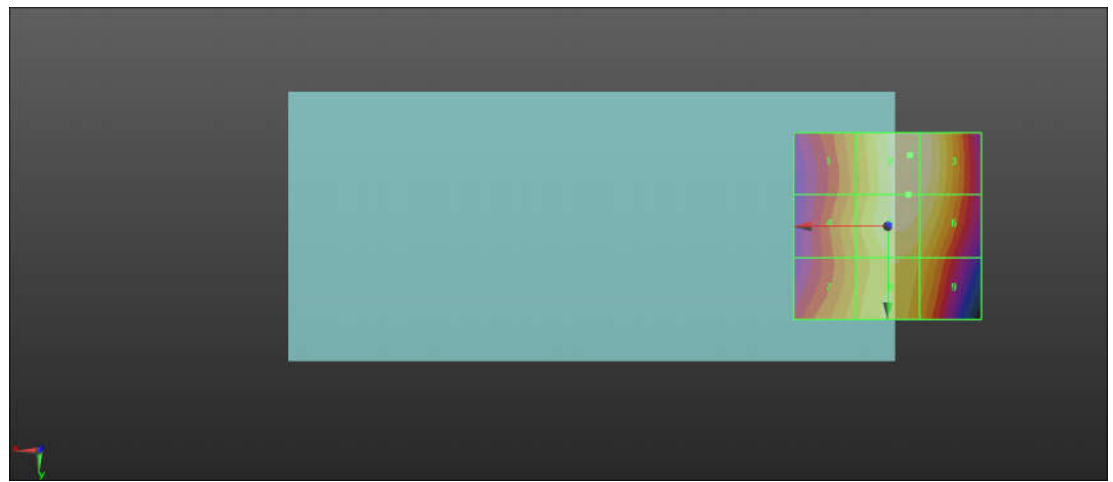

0 dB = 76.98 V/m = 37.73 dBV/m

04_HAC RF_GSM1900_GSM Voice_Ch512_E

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 1850.2 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4062; ConvF(1, 1, 1); Calibrated: 2022/12/23
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch512/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 25.62 V/m; Power Drift = -0.02 dB

Applied MIF = 3.63 dB

RF audio interference level = 32.17 dBV/m

Emission category: M3

MIF scaled E-field


Grid 1 M4 28.76 dBV/m	Grid 2 M4 28.42 dBV/m	Grid 3 M4 28.36 dBV/m
Grid 4 M4 28.74 dBV/m	Grid 5 M3 30.81 dBV/m	Grid 6 M3 30.63 dBV/m
Grid 7 M3 30.78 dBV/m	Grid 8 M3 32.17 dBV/m	Grid 9 M3 31.69 dBV/m

Cursor:

Total = 32.17 dBV/m

E Category: M3

Location: -2, 25, 7.7 mm

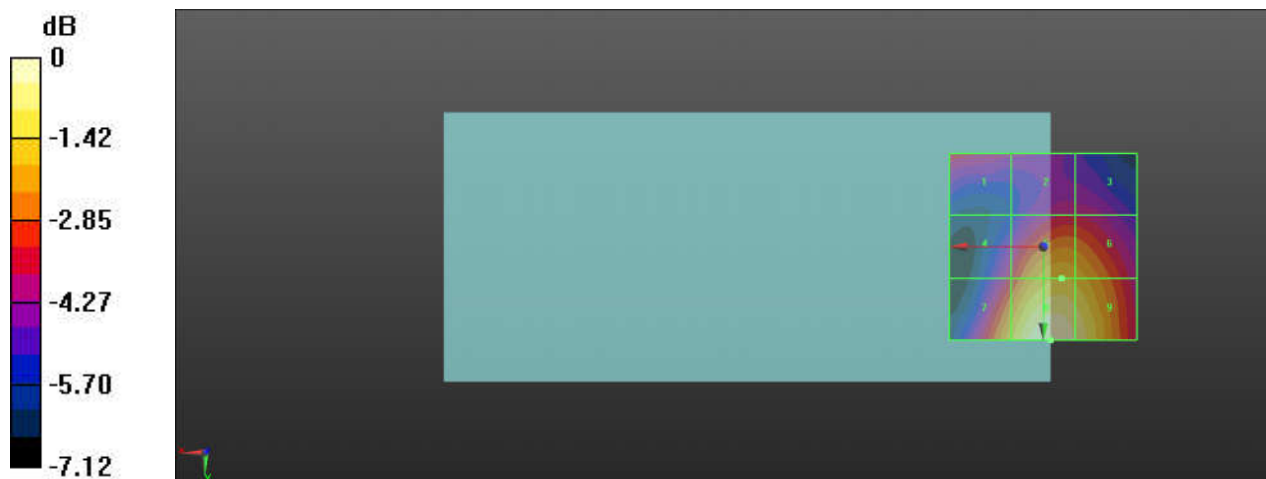

05_HAC RF_GSM1900_GSM Voice_Ch661_E

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4062; ConvF(1, 1, 1); Calibrated: 2022/12/23
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch661/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 23.90 V/m; Power Drift = -0.11 dB

Applied MIF = 3.63 dB

RF audio interference level = 31.10 dBV/m

Emission category: M3

MIF scaled E-field




Grid 1 M4 28.57 dBV/m	Grid 2 M4 28.29 dBV/m	Grid 3 M4 28.29 dBV/m
Grid 4 M4 27.69 dBV/m	Grid 5 M3 30.05 dBV/m	Grid 6 M4 29.98 dBV/m
Grid 7 M4 29.38 dBV/m	Grid 8 M3 31.1 dBV/m	Grid 9 M3 30.82 dBV/m

Cursor:

Total = 31.10 dBV/m

E Category: M3

Location: -2, 25, 7.7 mm

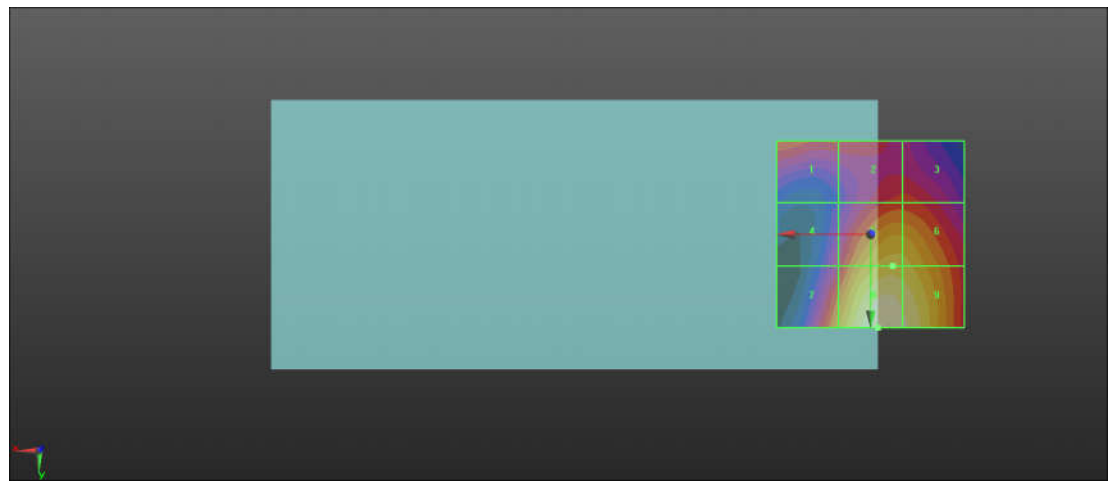

0 dB = 35.87 V/m = 31.09 dBV/m

06_HAC RF_GSM1900_GSM Voice_Ch810_E

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 1909.8 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4062; ConvF(1, 1, 1); Calibrated: 2022/12/23
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch810/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 24.83 V/m; Power Drift = 0.11 dB

Applied MIF = 3.63 dB

RF audio interference level = 31.36 dBV/m

Emission category: M3

MIF scaled E-field



Grid 1 M4 29.38 dBV/m	Grid 2 M4 28.89 dBV/m	Grid 3 M4 28.88 dBV/m
Grid 4 M4 28.11 dBV/m	Grid 5 M3 30.41 dBV/m	Grid 6 M3 30.37 dBV/m
Grid 7 M4 29.65 dBV/m	Grid 8 M3 31.36 dBV/m	Grid 9 M3 31.01 dBV/m

Cursor:

Total = 31.36 dBV/m

E Category: M3

Location: -3, 25, 7.7 mm

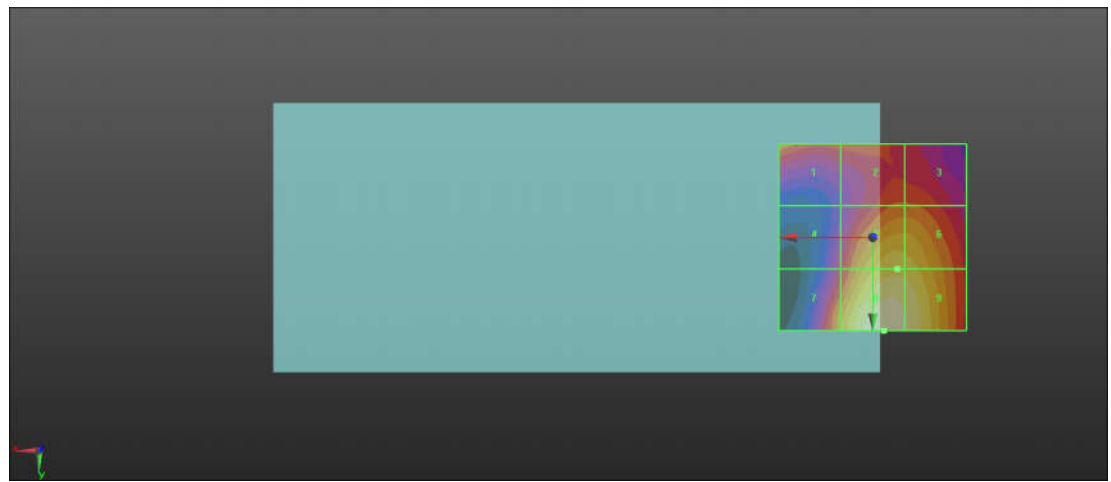

0 dB = 36.97 V/m = 31.36 dBV/m

07_HAC RF_LTE Band 38_20M_QPSK_1RB_49Offset_Ch37850_E

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);

Frequency: 2580 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4062; ConvF(1, 1, 1); Calibrated: 2022/12/23

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch37850/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 13.10 V/m; Power Drift = 0.05 dB

Applied MIF = -1.44 dB

RF audio interference level = 20.32 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 18.88 dBV/m	Grid 2 M4 18.8 dBV/m	Grid 3 M4 18.6 dBV/m
Grid 4 M4 19.01 dBV/m	Grid 5 M4 19.46 dBV/m	Grid 6 M4 19.39 dBV/m
Grid 7 M4 19.1 dBV/m	Grid 8 M4 20.32 dBV/m	Grid 9 M4 20.04 dBV/m

Cursor:

Total = 20.32 dBV/m

E Category: M4

Location: -5, 25, 7.7 mm

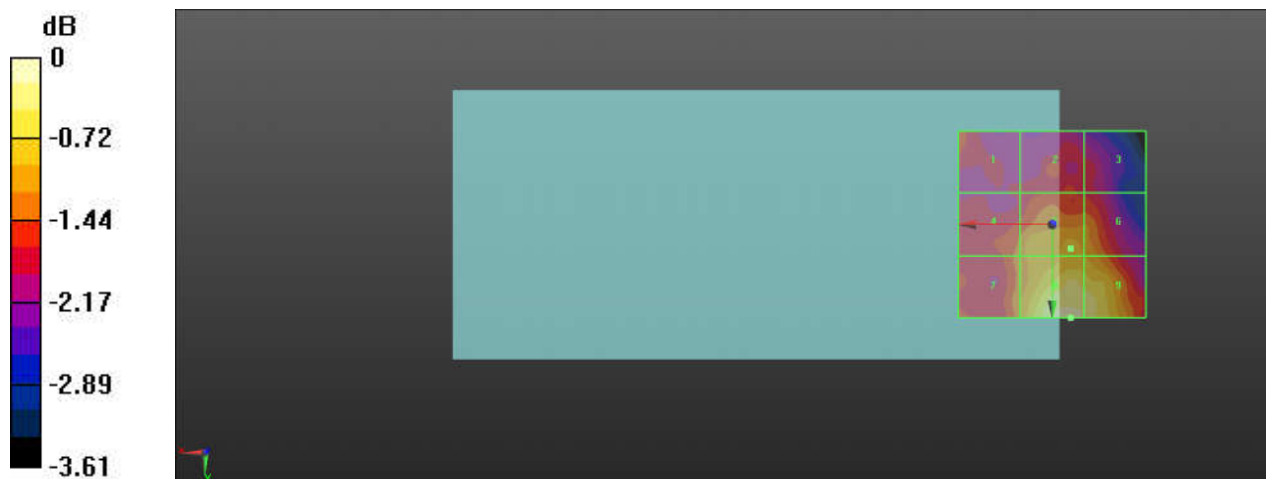

0 dB = 10.38 V/m = 20.32 dBV/m

08_HAC RF_LTE Band 38_20M_QPSK_1RB_49Offset_Ch38000_E

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);

Frequency: 2595 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4062; ConvF(1, 1, 1); Calibrated: 2022/12/23

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch38000/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 11.33 V/m; Power Drift = 0.09 dB

Applied MIF = -1.44 dB

RF audio interference level = 19.94 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 18.33 dBV/m	Grid 2 M4 18.47 dBV/m	Grid 3 M4 17.98 dBV/m
Grid 4 M4 18.58 dBV/m	Grid 5 M4 18.81 dBV/m	Grid 6 M4 18.63 dBV/m
Grid 7 M4 18.94 dBV/m	Grid 8 M4 19.94 dBV/m	Grid 9 M4 19.75 dBV/m

Cursor:

Total = 19.94 dBV/m

E Category: M4

Location: -4, 25, 7.7 mm

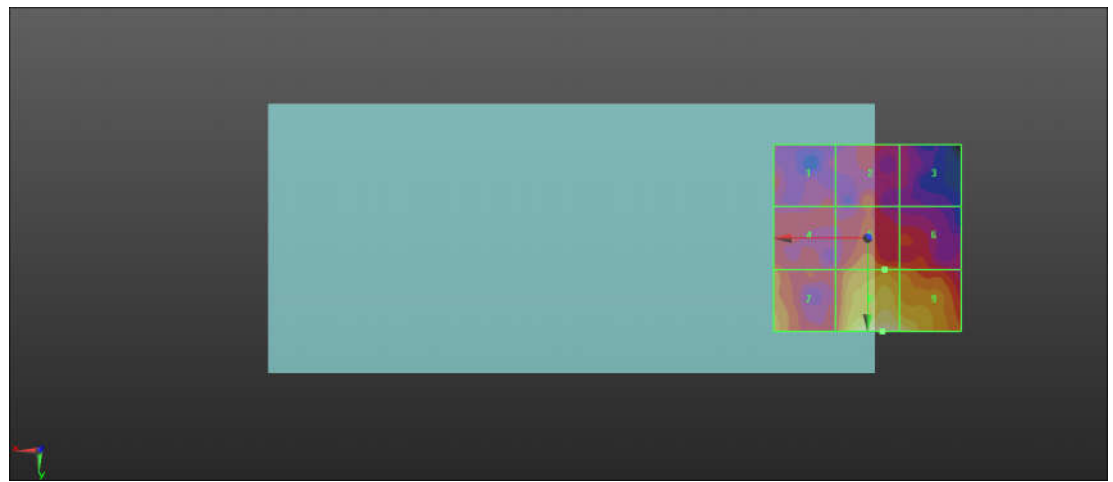

0 dB = 9.929 V/m = 19.94 dBV/m

09_HAC RF_LTE Band 38_20M_QPSK_1RB_49Offset_Ch38150_E

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);

Frequency: 2610 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4062; ConvF(1, 1, 1); Calibrated: 2022/12/23

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch38150/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 10.70 V/m; Power Drift = 0.03 dB

Applied MIF = -1.44 dB

RF audio interference level = 19.39 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 18.31 dBV/m	Grid 2 M4 18.4 dBV/m	Grid 3 M4 18.25 dBV/m
Grid 4 M4 18.49 dBV/m	Grid 5 M4 18.59 dBV/m	Grid 6 M4 18.59 dBV/m
Grid 7 M4 18.86 dBV/m	Grid 8 M4 19.39 dBV/m	Grid 9 M4 19.34 dBV/m

Cursor:

Total = 19.39 dBV/m

E Category: M4

Location: -6, 25, 7.7 mm

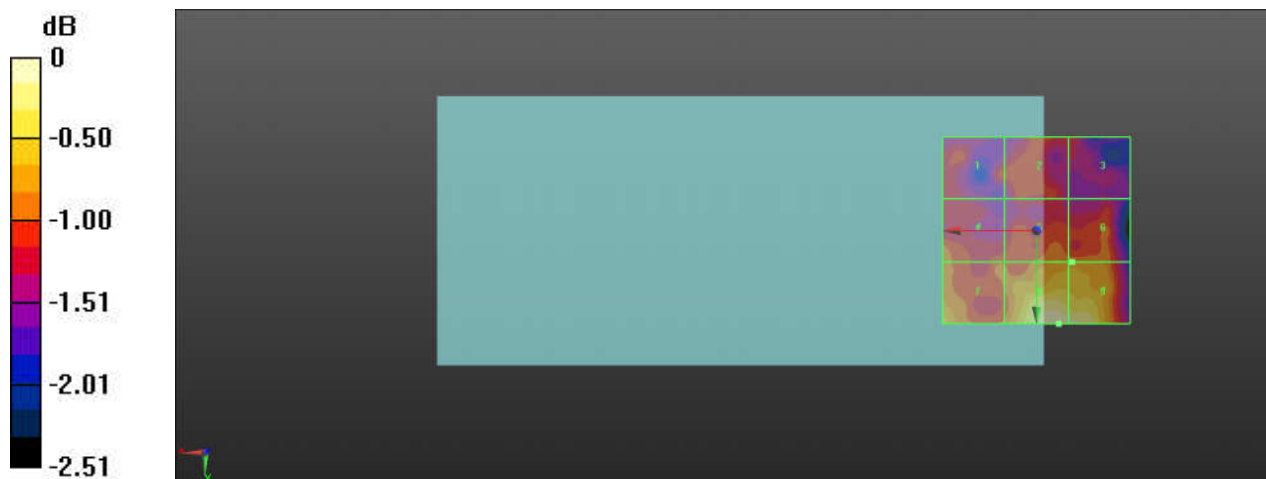

0 dB = 9.317 V/m = 19.39 dBV/m

10_HAC RF_WLAN2.4GHz_802.11g 6M_Ch1_E

Communication System: UID 10077 - CAB, IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps); Frequency: 2412 MHz; Duty Cycle: 1:12.5777

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4062; ConvF(1, 1, 1); Calibrated: 2022/12/23
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch1/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 52.39 V/m; Power Drift = -0.12 dB

Applied MIF = 0.12 dB

RF audio interference level = 33.22 dBV/m

Emission category: M3

MIF scaled E-field



Grid 1 M4 29.54 dBV/m	Grid 2 M3 30.45 dBV/m	Grid 3 M3 30.16 dBV/m
Grid 4 M3 32.16 dBV/m	Grid 5 M3 32.52 dBV/m	Grid 6 M3 31.71 dBV/m
Grid 7 M3 33.09 dBV/m	Grid 8 M3 33.22 dBV/m	Grid 9 M3 31.78 dBV/m

Cursor:

Total = 33.22 dBV/m

E Category: M3

Location: 5.5, 25, 7.7 mm

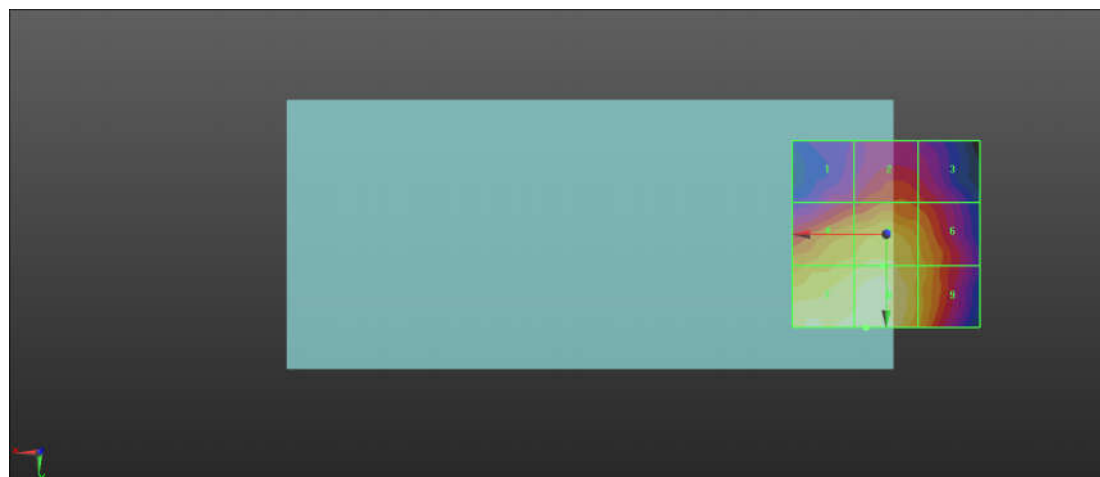

0 dB = 45.84 V/m = 33.22 dBV/m

11_HAC RF_WLAN2.4GHz_802.11g 6M_Ch6_E

Communication System: UID 10077 - CAB, IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps); Frequency: 2437 MHz; Duty Cycle: 1:12.5777

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4062; ConvF(1, 1, 1); Calibrated: 2022/12/23
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch6/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 58.86 V/m; Power Drift = -0.11 dB

Applied MIF = 0.12 dB

RF audio interference level = 33.82 dBV/m

Emission category: M3

MIF scaled E-field



Grid 1 M3 30.37 dBV/m	Grid 2 M3 31.11 dBV/m	Grid 3 M3 30.89 dBV/m
Grid 4 M3 32.75 dBV/m	Grid 5 M3 33.09 dBV/m	Grid 6 M3 32.41 dBV/m
Grid 7 M3 33.63 dBV/m	Grid 8 M3 33.82 dBV/m	Grid 9 M3 32.37 dBV/m

Cursor:

Total = 33.82 dBV/m

E Category: M3

Location: 5.5, 24.5, 7.7 mm

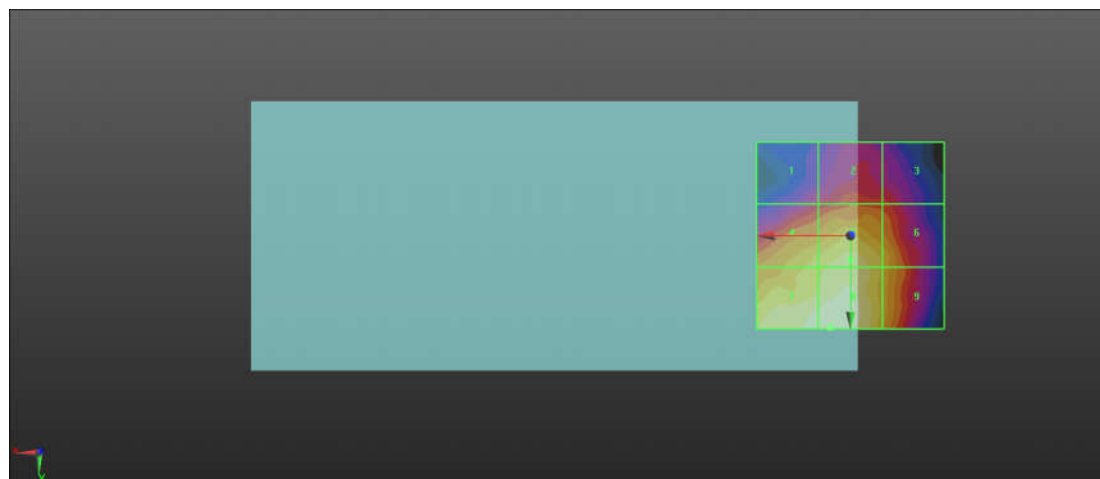

0 dB = 49.10 V/m = 33.82 dBV/m

12_HAC RF_WLAN2.4GHz_802.11g 6M_Ch6_E

Communication System: UID 10077 - CAB, IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps); Frequency: 2437 MHz; Duty Cycle: 1:12.5777

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4062; ConvF(1, 1, 1); Calibrated: 2022/12/23
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch6/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 53.18 V/m; Power Drift = -0.07 dB

Applied MIF = 0.12 dB

RF audio interference level = 33.59 dBV/m

Emission category: M3

MIF scaled E-field



Grid 1 M4 29.69 dBV/m	Grid 2 M3 30.67 dBV/m	Grid 3 M3 30.25 dBV/m
Grid 4 M3 32.04 dBV/m	Grid 5 M3 32.56 dBV/m	Grid 6 M3 31.88 dBV/m
Grid 7 M3 33.36 dBV/m	Grid 8 M3 33.59 dBV/m	Grid 9 M3 32.1 dBV/m

Cursor:

Total = 33.59 dBV/m

E Category: M3

Location: 2.5, 25, 7.7 mm

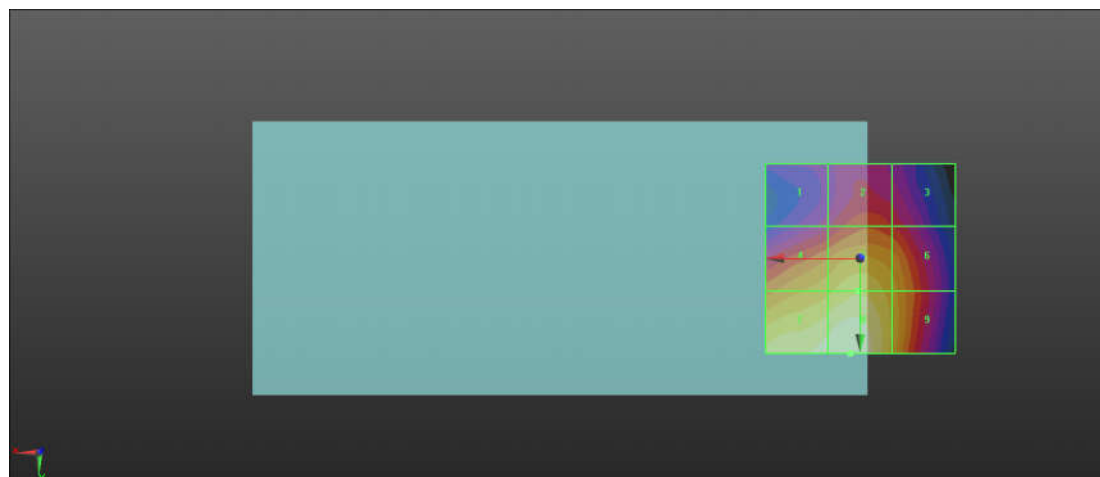

0 dB = 47.84 V/m = 33.59 dBV/m

13_HAC RF_WLAN2.4GHz_802.11g 6M_Ch11_E

Communication System: UID 10077 - CAB, IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps); Frequency: 2462 MHz; Duty Cycle: 1:12.5777

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EF3DV3 - SN4062; ConvF(1, 1, 1); Calibrated: 2022/12/23
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch11/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 54.85 V/m; Power Drift = -0.17 dB

Applied MIF = 0.12 dB

RF audio interference level = 33.44 dBV/m

Emission category: M3

MIF scaled E-field



Grid 1 M4 29.87 dBV/m	Grid 2 M3 30.92 dBV/m	Grid 3 M3 30.34 dBV/m
Grid 4 M3 32.36 dBV/m	Grid 5 M3 32.65 dBV/m	Grid 6 M3 31.82 dBV/m
Grid 7 M3 33.14 dBV/m	Grid 8 M3 33.44 dBV/m	Grid 9 M3 32.01 dBV/m

Cursor:

Total = 33.44 dBV/m

E Category: M3

Location: 5, 24.5, 7.7 mm

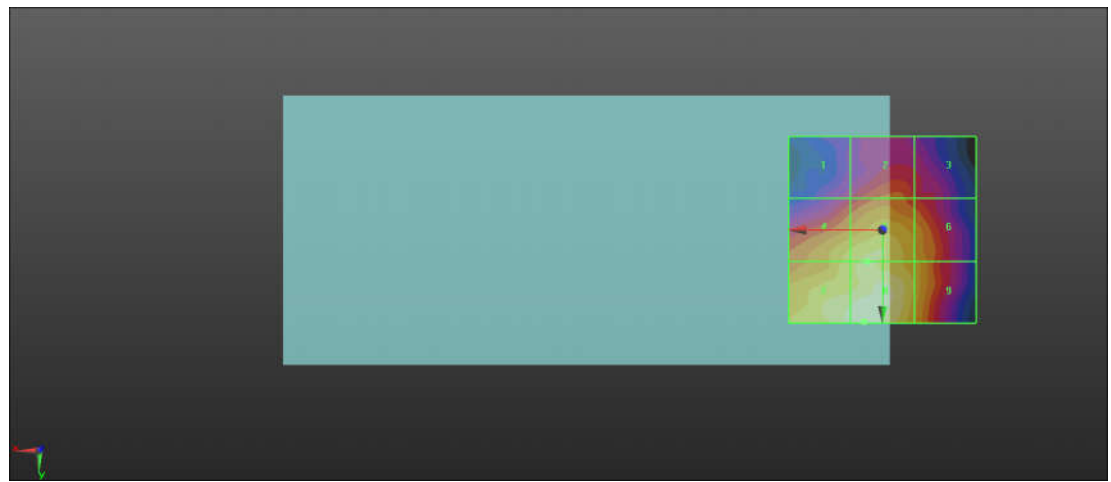

0 dB = 47.01 V/m = 33.44 dBV/m